

# Exploring the limits of decoder-only models trained on public speech recognition corpora

Ankit Gupta\*

George Saon

Brian Kingsbury

IBM Research

## Abstract

The emergence of industrial-scale speech recognition (ASR) models such as Whisper and USM, trained on 1M hours of weakly labelled and 12M hours of audio only proprietary data respectively, has led to a stronger need for large scale public ASR corpora and competitive open source pipelines. Unlike the said models, large language models are typically based on Transformer decoders, and it remains unclear if decoder-only models trained on public data alone can deliver competitive performance. In this work, we investigate factors such as choice of training datasets and modeling components necessary for obtaining the best performance using public English ASR corpora alone. Our **Decoder-Only Transformer for ASR (DOTA)** model comprehensively outperforms the encoder-decoder open source replication of Whisper (OWSM) on nearly all English ASR benchmarks and outperforms Whisper large-v3 on 7 out of 15 test sets. We release our codebase and model checkpoints under permissive license.

## 1 Introduction

Attention-based models (Vaswani et al., 2017) have been successful across many areas of machine learning (Jumper et al., 2021; Kondratyuk et al., 2023). In particular, large language models (LLMs) comprising decoder-only Transformers pre-trained on large amounts of unlabelled text have become the standard in natural language processing, exhibiting impressive amounts of linguistic and world knowledge (Jiang et al., 2024).

In contrast to LLMs, the best performing ASR models are typically based on Conformers (Gulati et al., 2020) trained with a connectionist temporal classification (Graves et al., 2006) or RNN transducer (Graves, 2012) objective. This method has been highly successful and is employed in nearly

all the best performing ASR models (Kuchaiev et al., 2019) such as USM (Zhang et al., 2023) which also serves as the speech encoder of Gemini v1 (Google-Gemini-Team, 2023). However, as these methods use a monotonic inductive bias specific to ASR, it is natural to investigate if Transformers trained to autoregressively generate text can deliver competitive performance. This was answered with the introduction of Whisper, a Transformer encoder-decoder model that is highly competitive with the best performing CTC-Conformer and RNN-T-Conformer pipelines on several speech recognition and translation benchmarks across multiple languages (Radford et al., 2023).

Whisper (large-v3) is trained on 1M hours of proprietary speech-text data and 4M hours of pseudo-labelled audio, so it remains to be answered whether similar performance could be achieved via public ASR data alone. Unlike Whisper, which is an encoder-decoder model, most LLMs are decoder-only, and it is natural to investigate the performance of decoder-only models. The OWSM model (Peng et al., 2023) is a step towards this direction and comprises a Whisper-style encoder-decoder model trained on a compilation of public multilingual ASR corpora. However, as OWSM models are encoder-decoder Transformers trained using an additional CTC-based loss, it remains to be answered if conventional Transformer decoder training, similar to that for LLMs (Brown et al., 2020), suffices for competitive performance.

In this work we investigate the performance of Transformer decoders and prefix LMs (Raffel et al., 2020) as well as the individual utility of public English ASR datasets by combining them into a large 93K hour paired speech-text corpus. Unlike OWSM, we train decoder-only models solely using cross-entropy loss. We train models varying over a wide range of hyperparameters such as 1) model size, 2) bidirectionality over audio frames, 3) downsampling rate of audio frames, 4) audio

\* ankitgupta.iitkanpur@gmail.com, gsaon@us.ibm.com, bedk@us.ibm.com

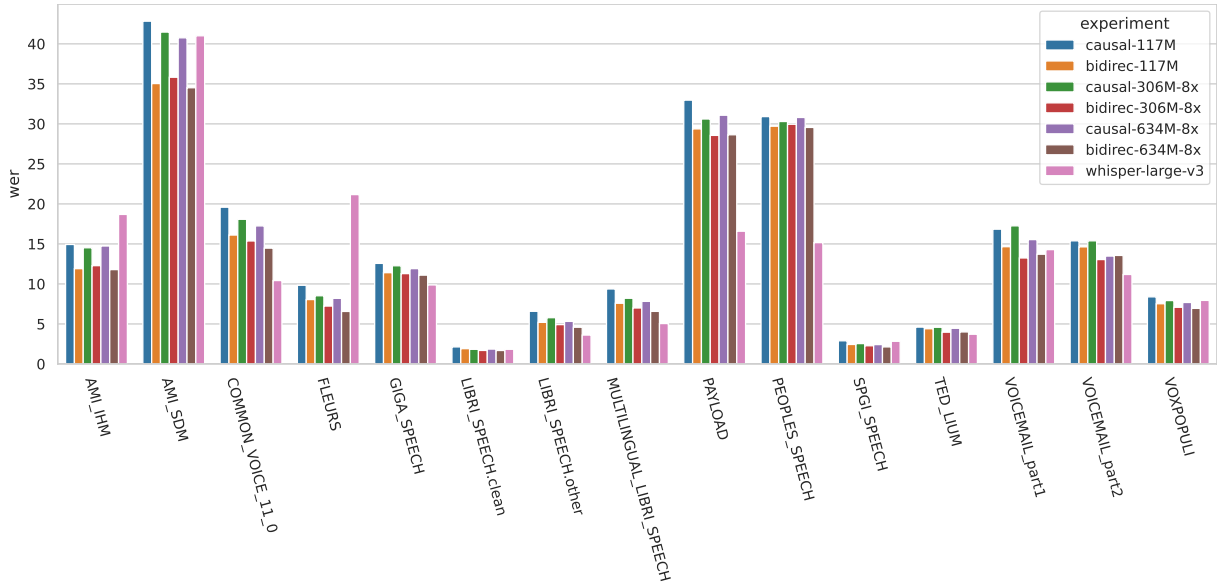


Figure 1: Word error rates of DOTA models compared to Whisper on English test sets.

augmentation and, 5) the datasets included in the training set. In addition, we also evaluate the performance of the trained models at low audio bitrates using recent neural codecs such as DAC (Kumar et al., 2023).

We find that our best **Decoder-Only Transformer** for ASR (DOTA) model outperforms Whisper large-v3 on 7 out of 15 test sets (Figure 1), and OWSM medium-v3.1 on nearly all test sets, while having fewer than half as many parameters as Whisper. Additionally, our best DOTA model uses twice the audio frame downsampling rate versus OWSM, making it faster.

We have open-sourced our codebase and trained models at <https://github.com/ag1988/mel-asr>.

## 2 Method

### 2.1 Data Preparation

To create a large-scale supervised ASR corpus we downloaded all major public English ASR datasets and organized them into a common format. Audio was resampled to 16kHz and stored as single-channel signed 16-bit integers in HDF5 format for memory-mapped access. Our training data consists of MultilingualLibriSpeech (English) (Pratap et al., 2020), PeoplesSpeech (Galvez et al., 2021), GigaSpeech (Chen et al., 2021), SPGISpeech (O’Neill et al., 2021), CommonVoice 11.0 (Ardila et al., 2020), LibriSpeech (Panayotov et al., 2015), Fisher (Godfrey et al., 1992), TedLium 3 (Hernandez et al.,

2018), AMI (Carletta, 2007), FLEURS (English) (Conneau et al., 2022), VoxPopuli (English) (Wang et al., 2021), LJ Speech (Ito and Johnson, 2017), VoiceMail (Padmanabhan et al., 1998), VCTK (Yamagishi et al., 2019). This resulted in 93K hours of speech-text pairs (top row of Table 3).

**Text Processing** We normalized the transcripts using Whisper’s EnglishTextNormalizer module which converts text to lower case, removes punctuation and applies several other case-by-case transformations (see (Radford et al., 2023) for further details). We further remove newline character ‘\n’ and insert space between consecutive digits (e.g. 21  $\mapsto$  2 1). We then tokenize the text using bert-base-uncased tokenizer (Devlin et al., 2019). Text inputs to the model are truncated to 146 tokens.

### 2.2 Audio Processing

The audio input to the model is a 30sec waveform consisting of 480K floats. Shorter instances are 0-padded to this length and longer waveforms were truncated. Log-mel spectrograms were computed using window size of 25ms and hop size 10ms using 80 mel bins. This resulted in 3000 audio frames per instance. For efficiency, we stacked every 4 frames into a single frame in the 117M model resulting in 750 audio frames. In the wider 306M and 634M models, we stacked every 8 (or 12) frames into a single frame further reducing the number of frames to 375 (or 250) (Table 1).

Table 1: Configurations of our DOTA models in Table 2. Feed-forward dimension is  $4\times$  the model dimension and audio inputs are 30sec long. Audio frame rate for the model is the reciprocal of time shift.

model	params (M)	layers	dimension	attention heads	embedding dim	time shift (ms)	vocab size
DOTA 117M	117	16	768	12	128	40	30522
DOTA 306M	306	24	1024	16	128	80	30522
DOTA 634M-8x	634	32	1280	20	128	80	30522
DOTA 634M-12x	634	32	1280	20	128	120	30522
OWSM medium v3.1	1020	18	1024	16	1024	40	50K
Whisper medium	769	24	1024	16	1024	20	51865
Whisper large v3	1550	32	1280	20	1280	20	51866

**Audio Augmentation** To make the model more robust to out of distribution instances we applied each of the following augmentations to the audio waveforms during training

- with probability (w.p.)  $1e-3$  we applied speed augmentation with a factor sampled uniformly from  $[0.9, 1.1]$ .
- w.p. 0.2 tempo augmentation with a factor sampled uniformly from  $[0.9, 1.1]$ .
- single-pole low pass filter w.p.  $1e-3$
- reverberation w.p.  $1e-3$
- given a partially formed training instance, we randomly concatenated the next sample from the same dataset to it w.p.  $p = 0.25$  or else 0-padded it w.p.  $1 - p$ , applying this process repeatedly until the length of the partially formed instance was at least 30sec, allowing us to explore the full 30sec input limit and preventing the model from overfitting to instances mostly containing trailing silence.

### 2.3 Model

In this work, we are interested in exploring the limits of Transformer decoder-only architectures inspired by their success as language models (Jiang et al., 2024). Our models comprise a single decoder stack with a causal attention mask. The input to the model is a sequence of audio frames followed by text token embeddings. Each of these vectors are mapped to the model dimension using linear projections. Each frame attends to itself and the frames on its left. However, for the prefix LMs (denoted by “bidirec”) we allow audio frames to attend to the audio frames on their right as well. For simplicity, we used sinusoidal positional embeddings.

### 2.4 Training

Our models are trained for 1M steps with a batch size of 128 using AdamW optimizer with moment scales  $\beta_1 = 0.9$ ,  $\beta_2 = 0.99$ . The peak learning

rate was  $2e-4$  linearly warmed up over 1K steps and decayed to 0 using cosine schedule. Weight decay of 0.1 was used but was not applied to biases and layer norm parameters. Training was performed in bfloat16 precision and the gradients were clipped to norm 1.0. We did not use early stopping and used the final checkpoint in all evaluations. The largest DOTA models, bidirec-634M-12x and bidirec-634M-8x, were trained on 8 40GiB A100’s for 85 and 120 hours respectively. During training, all datasets except MultilingualLibriSpeech, PeoplesSpeech, GigaSpeech, SPGISpeech and LibriSpeech, were upsampled by  $2\times$  to account for the large differences in the dataset sizes.

We experimented with various model and training configurations as shown in Table 2 with the corresponding model sizes in Table 1.

## 3 Speech Recognition Performance

To evaluate the performance of the trained models, we performed inference on the test and training sets using greedy decoding and computed the word error rates (WER) as shown in Table 2 and Table 3. Due to the large sizes of training sets, we randomly sampled 24K instances for the training sets of size larger than this amount. During evaluation we did not perform any augmentations listed in §2.2 and for all evaluated models removed instances where the reference transcript contained more than 145 tokens. This removal did not affect the evaluation on the test sets.

As shown in Table 2, our DOTA models are competitive with the best performing ASR models such as Whisper, while having significantly fewer parameters. Concretely, our best model DOTA bidirec-634M-8x outperforms Whisper large-v3 on 7 out of 15 test sets despite the latter being trained on  $10\times$  more data. Moreover, our bidirec-634M-8x model outperforms OWSM on all the test sets on which its authors reported results with the exception of CommonVoice (En).

Table 2: ASR performance (WER) on English test sets. *Notation*: “bidirec”: prefix LM where causal attention mask is not used across audio frames allowing past audio frames to view future audio frames, “no-people”: PeoplesSpeech was excluded from training set, “no-mls”: MultilingualLibriSpeech was excluded from training set, “eval DAC 6kbps”: test set audio was compressed via 16kHz 6kbps DAC. Whisper v3 uses 1M hours of weakly-labelled data and 4M hours of pseudo-labelled audio, OWSM uses 180K hours of public multilingual data and DOTA models use 93K hours of public English data. OWSM results are reported directly from (Peng et al., 2024) whereas the Whisper results are computed using the official repository. DOTA uses greedy decoding.

Model	MultilingualLibriSpeech <sub>en</sub>	PeoplesSpeech	GigaSpeech	SPGISpeech	CommonVoice 11.0 <sub>en</sub>	LibriSpeech <sub>test-clean</sub>	LibriSpeech <sub>test-other</sub>	TED-LIUM3	AMI-IHM	AMI-SDM	VoxPopuli <sub>en</sub>	Fluent <sub>en</sub>	Voicemail <sub>part1</sub>	Voicemail <sub>part2</sub>	Payload (internal)
DOTA causal-117M	9.4	30.9	12.6	2.9	19.6	2.1	6.6	4.6	14.9	42.8	8.4	9.8	16.8	15.4	33.0
DOTA causal-117M-no-augmentation	9.2	30.8	12.4	3.0	19.1	2.3	6.5	4.6	12.9	39.7	8.2	9.9	18.6	22.1	33.9
DOTA causal-117M-no-people	9.2	31.4	12.6	2.9	19.2	2.1	6.2	4.9	19.1	46.9	9.0	9.2	16.9	15.9	33.0
DOTA causal-117M-no-people-no-mls	12.5	30.9	13.0	3.0	21.1	3.0	9.0	5.4	18.6	45.1	10.2	10.5	18.1	15.9	36.0
DOTA bidirec-117M	7.6	29.7	11.4	2.4	16.1	1.9	5.2	4.4	11.9	35.0	7.5	8.0	14.7	14.6	29.4
DOTA bidirec-117M (eval DAC 6kbps)	8.4	32.4	12.2	3.0	18.1	2.1	6.1	4.6	16.0	50.7	7.8	8.2	15.3	14.4	31.4
DOTA causal-306M-8x	8.2	30.3	12.3	2.5	18.1	1.8	5.8	4.6	14.5	41.5	7.9	8.5	17.3	15.4	30.6
DOTA bidirec-306M-8x	7.0	30.0	11.3	2.3	15.4	1.7	4.9	4.0	12.3	35.8	7.1	7.2	13.2	13.0	28.6
DOTA causal-634M-8x	7.8	30.8	11.9	2.4	17.2	1.9	5.3	4.5	14.7	40.8	7.7	8.2	15.5	13.5	31.1
DOTA bidirec-634M-8x	6.6	29.6	11.1	2.1	14.5	1.7	4.6	4.0	<b>11.8</b>	<b>34.5</b>	<b>6.9</b>	6.6	13.7	13.6	28.6
DOTA bidirec-634M-8x (eval DAC 6kbps)	7.2	31.3	11.5	2.5	16.2	1.9	5.1	4.1	14.7	49.0	7.1	7.2	14.0	12.8	30.0
DOTA bidirec-634M-12x	6.8	29.8	11.4	2.2	15.3	<b>1.7</b>	4.7	4.0	12.6	35.9	7.2	7.1	<b>12.7</b>	12.7	32.5
OWSM v3.1 medium (1.02B)	7.1				12.6	2.4	5.0	5.1			8.4	9.0			
Whisper large v2 (1550M)	6.8	18.0	10.5	3.9	10.6	2.6	4.9	4.1	19.4	41.8	7.6	13.8	15.6	12.1	19.3
Whisper large v3 (1550M)	<b>5.0</b>	<b>15.2</b>	<b>9.9</b>	2.8	<b>10.4</b>	1.8	<b>3.6</b>	3.7	18.7	41.0	7.9	21.2	14.3	<b>11.2</b>	<b>16.6</b>
Whisper large v3 (eval DAC 6kbps)	5.2	16.0	10.0	2.9	11.1	1.9	4.1	<b>3.6</b>	16.2	38.0	6.8	<b>4.1</b>	15.0	12.1	17.3

**Bidirectionality** Comparing the performance of the “causal” DOTA models vs the corresponding prefix LMs (“bidirec”) we find that bidirectionality over audio frames is critical to high performance across model scales. Surprisingly, even the smallest prefix LM DOTA bidirec-117M outperforms a significantly larger causal model DOTA causal-634M-8x.

**Dataset ablation** Our baseline causal model causal-117M is trained on 93K hours of paired data. To determine the utility of the largest components of our training data viz. MultilingualLibriSpeech (MLS) and PeoplesSpeech of sizes 41K hours and 29K hours respectively we trained two analogous variants after ablating these datasets. As shown in Table 2, excluding PeoplesSpeech (causal-117M-no-people) did not result in significant degradation on most test sets with the exception of AMI test sets containing meeting recordings. However, further excluding MLS (causal-117M-no-people-no-mls) resulted in a significant degradation w.r.t. the baseline model.

**Augmentation** We trained a variant causal-117M-no-augmentation of our baseline causal model without using the augmentations described in §2.2 and found their performance to be similar on the test sets.

**Performance on training sets** The performance on the training sets is summarized in Table 3. As our models are trained on these sets, the errors rates are low on most training sets with the exception of the “dirty” splits of PeoplesSpeech. However, compared to our DOTA models, Whisper reports significantly higher error rates with performance gaps as large as 10 on Fisher (telephony) and 25 on AMI-SDM (microphone).

**Audio at low bitrate** We also directly evaluated our trained models after encoding the audio via recent neural audio codecs such as DAC (Kumar et al., 2023) which have reported significantly better performance at lower bitrates compared to commonly used codecs such as Opus. We used the 16kHz 6kbps version of DAC and include the results in Table 2. For our DOTA models, we observe significant degradation on test sets such as AMI

Table 3: WER computed over at most 24K samples chosen randomly from each training set.

	Multilingual LibriSpeech.en	PeoplesSpeech.clean	PeoplesSpeech.clean.sa	PeoplesSpeech.dirty	PeoplesSpeech.dirty.sa	Gigaspeech	SPGISpeech	CommonVoice.11.0.en	Fisher	LibriSpeech.clean.100	LibriSpeech.clean.360	LibriSpeech.other.300	TED-LIUM3	AMI-HM	AMI-SDM	VoxPopuli.en	Fleurs.en_us	VoiceMail.part1	VoiceMail.part2	LISSpeech	VCTK
dataset size (hours)	41K	6K	1K	22K	2K	10K	5K	1.5K	2K	100	360	500	453	78	77	522	7	15	15	23	82
DOTA causal-117M	2.6	5.9	5.6	17.9	17.7	3.5	2.4	5.3	8.6	1.5	1.6	2.2	3.8	8.1	32.3	5.5	5.0	7.0	8.1	0.9	0.5
DOTA causal-117M-no-augment	2.7	5.8	5.5	17.7	17.4	4.0	2.6	7.6	9.6	1.6	1.7	2.3	4.5	9.3	33.0	5.9	6.0	8.9	10.0	1.1	0.7
DOTA causal-117M-no-people	2.3	10.1	9.3	24.7	24.0	3.0	2.1	3.4	7.3	1.2	1.3	1.8	3.3	9.6	34.7	5.2	3.9	5.4	6.6	1.7	0.3
DOTA causal-117M-no-people/mls	4.9	10.4	9.6	25.1	24.4	2.1	1.6	1.3	3.9	1.4	1.5	2.1	1.9	6.3	24.6	3.5	2.1	2.6	3.7	1.7	0.1
DOTA bidirec-117M	2.4	5.6	5.2	17.2	16.7	3.0	2.1	4.7	7.9	1.3	1.4	1.8	3.3	5.8	24.0	5.2	4.7	6.2	7.3	0.7	0.4
DOTA causal-306M-8x	2.2	5.6	5.2	16.9	16.5	2.7	1.9	2.8	6.6	1.1	1.1	1.6	2.7	5.0	24.9	4.5	3.4	4.6	5.6	0.6	0.2
DOTA bidirec-306M-8x	2.1	5.4	5.0	16.4	16.0	2.5	1.8	3.1	6.9	1.1	1.1	1.5	2.7	4.1	19.9	4.4	3.4	4.4	5.6	0.5	0.2
DOTA causal-634M-8x	2.0	5.2	4.9	16.3	15.9	2.1	1.6	1.6	5.0	0.9	0.9	1.3	2.0	3.8	20.5	3.6	2.5	3.0	4.5	0.4	0.1
DOTA bidirec-634M-8x	2.0	5.1	4.6	15.8	15.3	2.1	1.6	1.7	5.1	0.9	1.0	1.2	1.9	2.1	13.9	3.5	2.5	2.9	4.2	0.4	0.1
DOTA bidirec-634M-12x	1.9	5.2	4.7	16.1	15.6	2.2	1.6	1.9	5.4	0.9	1.0	1.2	2.2	2.6	15.8	3.7	2.5	3.1	4.6	0.3	0.1
Whisper large v3	2.3	9.6	9.5	23.8	23.1	4.3	2.9	6.3	15.1	1.6	1.6	2.0	5.1	20.0	41.4	7.4	4.6	9.9	10.8	1.7	1.2

(meetings) highlighting the importance of exposing the codec to diverse modalities during training. However, we observe no such degradations in case of Whisper pointing to the possibility of Whisper being exposed to low bitrate audio during training which was not the case for our DOTA models. This is an interesting development as it is significantly easier to scale up dataset sizes at lower bitrates due to the smaller download size and disk footprint. In the future, we plan on mixing in lower bitrate audio while training DOTA models.

## References

- R. Ardila, M. Branson, K. Davis, M. Henretty, M. Kohler, J. Meyer, R. Morais, L. Saunders, F. M. Tyers, and G. Weber. 2020. Common voice: A massively-multilingual speech corpus. In *Proceedings of the 12th Conference on Language Resources and Evaluation (LREC 2020)*, pages 4211–4215.
- Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. 2020. *Language models are few-shot learners*. In *Advances in Neural Information Processing Systems 33: Annual Conference on Neural Information Processing Systems 2020, NeurIPS 2020, December 6-12, 2020, virtual*.
- Jean Carletta. 2007. Unleashing the killer corpus: Experiences in creating the multi-everything ami meeting corpus. *Language Resources and Evaluation*, 41:181–190.
- Guoguo Chen, Shuzhou Chai, Guan-Bo Wang, Jiayu Du, Weiqiang Zhang, Chao Weng, Dan Su, Daniel Povey, Jan Trmal, Junbo Zhang, Mingjie Jin, Sanjeev Khudanpur, Shinji Watanabe, Shuaijiang Zhao, Wei Zou, Xiangang Li, Xuchen Yao, Yongqing Wang, Yujun Wang, Zhao You, and Zhiyong Yan. 2021. Gigaspeech: An evolving, multi-domain asr corpus with 10,000 hours of transcribed audio. In *Proc. Interspeech 2021*.
- Alexis Conneau, Min Ma, Simran Khanuja, Yu Zhang, Vera Axelrod, Siddharth Dalmia, Jason Riesa, Clara Rivera, and Ankur Bapna. 2022. Fleurs: Few-shot learning evaluation of universal representations of speech. *arXiv preprint arXiv:2205.12446*.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. *BERT: Pre-training of deep bidirectional transformers for language understanding*. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota. Association for Computational Linguistics.
- Daniel Galvez, Greg Diamos, Juan Ciro, Juan Felipe Cerón, Keith Achorn, Anjali Gopi, David Kanter, Maximilian Lam, Mark Mazumder, and Vijay Janapa Reddi. 2021. *The people’s speech: A large-scale diverse english speech recognition dataset for commercial usage*. *CoRR*, abs/2111.09344.
- J.J. Godfrey, E.C. Holliman, and J. McDaniel. 1992. Switchboard: telephone speech corpus for research and development. In *[Proceedings] ICASSP-92: 1992 IEEE International Conference on Acoustics, Speech, and Signal Processing*, volume 1, pages 517–520 vol.1.
- Google-Gemini-Team. 2023. Gemini: A family of highly capable multimodal models. *ArXiv*, abs/2312.11805.

- Alex Graves. 2012. Sequence transduction with recurrent neural networks. *ArXiv*, abs/1211.3711.
- Alex Graves, Santiago Fernández, Faustino J. Gomez, and Jürgen Schmidhuber. 2006. Connectionist temporal classification: labelling unsegmented sequence data with recurrent neural networks. *Proceedings of the 23rd international conference on Machine learning*.
- Anmol Gulati, James Qin, Chung-Cheng Chiu, Niki Parmar, Yu Zhang, Jiahui Yu, Wei Han, Shibo Wang, Zhengdong Zhang, Yonghui Wu, and Ruoming Pang. 2020. Conformer: Convolution-augmented transformer for speech recognition. In *INTERSPEECH*.
- François Hernandez, Vincent Nguyen, Sahar Ghannay, Natalia Tomashenko, and Yannick Estève. 2018. Tedlium 3: Twice as much data and corpus repartition for experiments on speaker adaptation. In *Speech and Computer*, pages 198–208. Springer International Publishing.
- Keith Ito and Linda Johnson. 2017. The lj speech dataset. <https://keithito.com/LJ-Speech-Dataset/>.
- Albert Q. Jiang, Alexandre Sablayrolles, Antoine Roux, Arthur Mensch, Blanche Savary, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Emma Bou Hanna, Florian Bressand, Gianna Lengyel, Guillaume Bour, Guillaume Lample, Léo Renard Lavaud, Lucile Saulnier, Marie-Anne Lachaux, Pierre Stock, Sandeep Subramanian, Sophia Yang, Szymon Antoniak, Teven Le Scao, Théophile Gervet, Thibaut Lavril, Thomas Wang, Timothée Lacroix, and William El Sayed. 2024. Mixtral of experts. *ArXiv*, abs/2401.04088.
- John M. Jumper, Richard Evans, Alexander Pritzel, Tim Green, Michael Figurnov, Olaf Ronneberger, Kathryn Tunyasuvunakool, Russ Bates, Augustin Zidek, Anna Potapenko, Alex Bridgland, Clemens Meyer, Simon A A Kohl, Andy Ballard, Andrew Cowie, Bernardino Romera-Paredes, Stanislav Nikolov, Rishub Jain, Jonas Adler, Trevor Back, Stig Petersen, David A. Reiman, Ellen Clancy, Michal Zielinski, Martin Steinegger, Michalina Pacholska, Tamas Berghammer, Sebastian Bodenstern, David Silver, Oriol Vinyals, Andrew W. Senior, Koray Kavukcuoglu, Pushmeet Kohli, and Demis Hassabis. 2021. Highly accurate protein structure prediction with alphafold. *Nature*, 596:583 – 589.
- D. Kondratyuk, Lijun Yu, Xiuye Gu, Jos’e Lezama, Jonathan Huang, Rachel Hornung, Hartwig Adam, Hassan Akbari, Yair Alon, Vighnesh Birodkar, Yong Cheng, Ming-Chang Chiu, Josh Dillon, Irfan Essa, Agrim Gupta, Meera Hahn, Anja Hauth, David Hendon, Alonso Martinez, David C. Minnen, David A. Ross, Grant Schindler, Mikhail Sirotenko, Kihyuk Sohn, Krishna Somandepalli, Huisheng Wang, Jimmy Yan, Ming Yang, Xuan Yang, Bryan Seybold, and Lu Jiang. 2023. Videopoet: A large language model for zero-shot video generation. *ArXiv*, abs/2312.14125.
- Oleksii Kuchaiev, Jason Li, Huyen Nguyen, Oleksii Hrinchuk, Ryan Leary, Boris Ginsburg, Samuel Kriman, Stanislav Beliaev, Vitaly Lavrukhin, Jack Cook, Patrice Castonguay, Mariya Popova, Jocelyn Huang, and Jonathan M. Cohen. 2019. Nemo: a toolkit for building ai applications using neural modules. *ArXiv*, abs/1909.09577.
- Rithesh Kumar, Prem Seetharaman, Alejandro Luebs, Ishaan Kumar, and Kundan Kumar. 2023. High-fidelity audio compression with improved rvqgan. In *Advances in Neural Information Processing Systems (NeurIPS)*.
- Patrick K. O’Neill, Vitaly Lavrukhin, Somshubra Majumdar, Vahid Noroozi, Yuekai Zhang, Oleksii Kuchaiev, Jagadeesh Balam, Yuliya Dovzhenko, Keenan Freyberg, Michael D. Shulman, Boris Ginsburg, Shinji Watanabe, and Georg Kucsko. 2021. SPGISpeech: 5,000 hours of transcribed financial audio for fully formatted end-to-end speech recognition. *arXiv e-prints*.
- M. Padmanabhan, E. Eide, B. Ramabhadran, G. Ramaswamy, and L.R. Bahl. 1998. Speech recognition performance on a voicemail transcription task. volume 2, pages 913 – 916 vol.2.
- Vassil Panayotov, Guoguo Chen, Daniel Povey, and Sanjeev Khudanpur. 2015. Librispeech: an asr corpus based on public domain audio books. In *Acoustics, Speech and Signal Processing (ICASSP), 2015 IEEE International Conference on*, pages 5206–5210. IEEE.
- Yifan Peng, Jinchuan Tian, William Chen, Siddhant Arora, Brian Yan, Yui Sudo, Muhammad Shakeel, Kwanghee Choi, Jiatong Shi, Xuankai Chang, Jee weon Jung, and Shinji Watanabe. 2024. Owsm v3.1: Better and faster open whisper-style speech models based on e-branchformer.
- Yifan Peng, Jinchuan Tian, Brian Yan, Dan Berrebbi, Xuankai Chang, Xinjian Li, Jiatong Shi, Siddhant Arora, William Chen, Roshan Sharma, Wangyoo Zhang, Yui Sudo, Muhammad Haroon Shakeel, Jee weon Jung, Soumi Maiti, and Shinji Watanabe. 2023. Reproducing whisper-style training using an open-source toolkit and publicly available data. In *Proceedings of the IEEE Workshop on Automatic Speech Recognition and Understanding (ASRU)*.
- Vineel Pratap, Qiantong Xu, Anuroop Sriram, Gabriel Synnaeve, and Ronan Collobert. 2020. Mls: A large-scale multilingual dataset for speech research. *ArXiv*, abs/2012.03411.
- Alec Radford, Jong Wook Kim, Tao Xu, Greg Brockman, Christine McLeavey, and Ilya Sutskever. 2023. Robust speech recognition via large-scale weak supervision. In *International Conference on Machine Learning*, pages 28492–28518. PMLR.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou,

- Wei Li, and Peter J. Liu. 2020. [Exploring the limits of transfer learning with a unified text-to-text transformer](#). *J. Mach. Learn. Res.*, 21:140:1–140:67.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. 2017. [Attention is all you need](#). In *Advances in Neural Information Processing Systems 30: Annual Conference on Neural Information Processing Systems 2017, December 4-9, 2017, Long Beach, CA, USA*, pages 5998–6008.
- Changhan Wang, Morgane Riviere, Ann Lee, Anne Wu, Chaitanya Talnikar, Daniel Haziza, Mary Williamson, Juan Pino, and Emmanuel Dupoux. 2021. [VoxPopuli: A large-scale multilingual speech corpus for representation learning, semi-supervised learning and interpretation](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 993–1003, Online. Association for Computational Linguistics.
- Junichi Yamagishi, Christophe Veaux, and Kirsten Macdonald. 2019. CSTR VCTK Corpus: English multi-speaker corpus for CSTR voice cloning toolkit (version 0.92).
- Yu Zhang, Wei Han, James Qin, Yongqiang Wang, Ankur Bapna, Zhehuai Chen, Nanxin Chen, Bo Li, Vera Axelrod, Gary Wang, Zhong Meng, Ke Hu, Andrew Rosenberg, Rohit Prabhavalkar, Daniel S. Park, Parisa Haghani, Jason Riesa, Ginger Perng, Hagen Soltau, Trevor Strohman, Bhuvana Ramabhadran, Tara N. Sainath, Pedro J. Moreno, Chung-Cheng Chiu, Johan Schalkwyk, Francoise Beaufays, and Yonghui Wu. 2023. [Google usm: Scaling automatic speech recognition beyond 100 languages](#). *ArXiv*, abs/2303.01037.