A Unified Framework for Gradient-based Clustering of Distributed Data

Aleksandar Armacki¹, Dragana Bajović², Dušan Jakovetić³, and Soummya Kar¹

¹Carnegie Mellon University, Pittsburgh, PA, USA, {aarmacki,soummyak}@andrew.cmu.edu
²Faculty of Technical Sciences, University of Novi Sad, Novi Sad, Serbia, dbajovic@uns.ac.rs
³Faculty of Sciences, University of Novi Sad, Novi Sad, Serbia, dusan.jakovetic@dmi.uns.ac.rs

Abstract

We develop a family of distributed clustering algorithms that work over networks of users. In the proposed scenario, users contain a local dataset and communicate only with their immediate neighbours, with the aim of finding a clustering of the full, joint data. The proposed family, termed Distributed Gradient Clustering (DGC- \mathcal{F}_{ρ}), is parametrized by $\rho \geq 1$, controlling the proximity of users' center estimates, with \mathcal{F} determining the clustering loss. Specialized to popular clustering losses like K-means and Huber loss, DGC- \mathcal{F}_{ρ} gives rise to novel distributed clustering algorithms DGC-KM_{ρ} and DGC-HL_{ρ}, while a novel clustering loss based on the logistic function leads to DGC-LL_{ρ}. We provide a unified analysis and establish several strong results, under mild assumptions. First, the sequence of centers generated by the methods converges to a well-defined notion of fixed point, under any center initialization and value of ρ . Second, as ρ increases, the family of fixed points produced by DGC- \mathcal{F}_{ρ} converges to a notion of consensus fixed points. We show that consensus fixed points of DGC- \mathcal{F}_{ρ} are equivalent to fixed points of gradient clustering over the full data, guaranteeing a clustering of the full data is produced. For the special case of Bregman losses, we show that our fixed points converge to the set of Lloyd points. Numerical experiments on real data confirm our theoretical findings and demonstrate strong performance of the methods.

1 Introduction

Clustering is an unsupervized learning problem, where the goal is to group the data based on a similarity criteria, without having any prior knowledge of the underlying distribution or the true number of groups, e.g., Xu and Wunsch (2005); Jain (2010). Clustering is applied across a wide range of problems and domains, such as marketing research, text classification, anomaly detection, and biomedical applications, e.g., Arabie and Hubert (1996); Dhillon et al. (2003); Chandola et al. (2009); Xu and Wunsch (2010); Pediredla and Seelamantula (2011). Clustering can be hard or soft, with hard clustering assigning each sample to only one cluster, while soft clustering outputs the probability of a point belonging to each cluster. We are



Figure 1: An example of client-server and peer-to-peer setups in distributed learning. Vertices represents users and edges represent communication links.

interested in hard clustering. Formally, for a given dataset $\mathcal{D} = \{y_1, \ldots, y_N\} \subset \mathbb{R}^d$, the hard clustering problem of partitioning \mathcal{D} into K disjoint clusters is given by

$$\min_{\mathbf{x}\in\mathbb{R}^{Kd},C\in\mathcal{C}_{K,\mathcal{D}}}H(\mathbf{x},C) = \sum_{k\in[K]}\sum_{r\in C(k)}w_rf(x(k),y_r),\tag{1}$$

where $\mathbf{x} = \begin{bmatrix} x(1)^\top & \dots & x(K)^\top \end{bmatrix}^\top$ is the vector stacking the K centers $x(k) \in \mathbb{R}^d$, $\mathcal{C}_{K,\mathcal{D}}$ is the set of all K-partitions of \mathcal{D} , i.e., $C \in \mathcal{C}_{K,\mathcal{D}}$ is a K-tuple $C = (C(1), \dots, C(K))$, with each C(k) being a subset of \mathcal{D}^1 , such that $C(k) \cap C(l) = \emptyset$ and $\bigcup_{k \in [K]} C(k) = \mathcal{D}$, $w_r \in (0, 1)$ is a fixed weight associated with sample r, such that $\sum_{r \in [N]} w_r = 1$, and $f : \mathbb{R}^d \times \mathbb{R}^d \mapsto [0, \infty)$ a loss function. For example, setting f to be the squared Euclidean norm, one recovers the renowned K-means clustering problem, e.g., Lloyd (1982); Awasthi and Balcan (2016). In general, the problem (1) is highly non-convex and NP-hard, see, e.g., Selim and Ismail (1984); Megiddo and Supowit (1984); Vattani (2009); Awasthi et al. (2015). As such, the best one can hope for is reaching a stationary point of (1), with various schemes guaranteeing convergence to stationary points, e.g., MacQueen (1967); Lloyd (1982); Banerjee et al. (2005); Pediredla and Seelamantula (2011); Armacki et al. (2022a).

Distributed learning is a paradigm attracting great interest recently, as it offers many benefits, like privacy, as users' data is stored locally, only exchanging model parameters, e.g., McMahan et al. (2017). Another benefit is decreased computation and storage burden, as data is handled locally, making it easier to parse smaller chunks of data, e.g., Yang (2013); Jakovetić et al. (2020). For example, it is estimated that in 2024 around 147 zetabytes of data will be produced worldwide, a growth of over a 100% compared to the amount in 2020 Taylor (2021). Such rapid increase in the amount of data often renders storing and processing the data at a single location impossible, making distributed algorithms essential. Communicationwise, distributed algorithms are client-server, e.g., McMahan et al. (2017); Li et al. (2020); Kairouz et al. (2021) or peer-to-peer, e.g., Kar et al. (2012); Sayed (2014); Vlaski et al. (2023). Compared to client-server, peer-to-peer methods have no coordinator and users communicate directly. Since no single point of failure exists, peer-to-peer methods are more resilient to unreliable or adversarial users, e.g., Tsianos et al. (2012); Sundaram and Gharesifard (2019); Yu and Kar (2023). Figure 1 visualizes the client-server and peer-to-peer communication setups. We study the peer-to-peer setup and will use the term "distributed" to refer to it.

The distributed setting presents a unique challenge for clustering, as users store their data locally, making it difficult to produce a clustering of the full, joint dataset. Many recent

¹In a slight abuse of notation, we will also use \mathcal{D} to denote the set of indices of the data, i.e., $\mathcal{D} = [N]$.

Table 1: Comparison of clustering algorithms. \checkmark means a condition is satisfied and \checkmark otherwise. Peer-to-peer and Beyond KM refer to whether an algorithm works in peer-to-peer networks and provides methods beyond *K*-means clustering. Storage and communication costs are computed per user. \mathcal{D}_i and \mathcal{N}_i are the dataset and neighbourhood of user i, $\mathcal{D} = \bigcup_{i \in [m]} \mathcal{D}_i$ the full data, m the number of users, d the data dimension, T the number of iterations for which an algorithm is run, B the number of center updates per iteration (see Sections 2, 3 for definitions).

Method	Communication Cost	Storage Cost	Peer-to-peer	Beyond KM
Forero et al. (2011)	TKd	$((\mathcal{N}_i +1)K+ \mathcal{D}_i)d+ \mathcal{D}_i $	v	Xţ
KAR AND SWENSON (2019)	TKd	$(K + \mathcal{D}_i)d + \mathcal{D}_i $	✓	×
Armacki et al. $(2022a)$	‡	$(K + \mathcal{D})d + \mathcal{D} $	×	✓
DGC- \mathcal{F} (This paper)	BTKd	$(K + \mathcal{D}_i)d + \mathcal{D}_i $	\checkmark	~

[†] While Forero et al. (2011) provide methods for soft clustering, only a K-means version is made for hard clustering. [‡] The method from Armacki et al. (2022a) is centralized, hence communication cost measurements do not apply.

works focus on the client-server setting, e.g., Li and Guo (2018); Alguliyev et al. (2021); Dafir et al. (2021); Dennis et al. (2021); Qiao et al. (2023); Huang et al. (2023). In comparison, peer-to-peer clustering has been studied in proportionally much smaller body of work. In this paper we develop a unified approach for peer-to-peer (hard) clustering. We do so by first proposing a general clustering problem that can be solved in a distributed manner and gives rise to distributed versions of popular (centralized) clustering problems, such as K-means, e.g., Lloyd (1982) and Huber loss clustering, e.g., Pediredla and Seelamantula (2011). Next, we develop a method that solves the general problem, provably converges, results in novel clustering algorithms when applied to specific losses and produces a clustering of the full data in peer-to-peer networks. Our method is general, easy to implement and exhibits strong theoretical and practical performance (see Sections 3-5).

Literature review. Peer-to-peer clustering methods have been proposed in Datta et al. (2009); Forero et al. (2011); Balcan et al. (2013); Oliva et al. (2013); Qin et al. (2017); Kar and Swenson (2019); Yu et al. (2021). Datta et al. (2009) propose approximate K-means algorithms for both peer-to-peer and client-server networks, with a theoretical study limited to the client-server case. Forero et al. (2011); Qin et al. (2017); Yu et al. (2021) study soft and hard K-means. Only the method in Forero et al. (2011), built on the Alternating Directions Method of Multipliers (ADMM) framework, provably converges. Balcan et al. (2013) study the K-means and K-medians problems and propose methods with provable guarantees. Oliva et al. (2013) study K-means in the special case were users have a single sample. Kar and Swenson (2019) propose a parametric family of K-means methods with provable guarantees. It is worth mentioning Armacki et al. (2022a), who propose a general framework for gradientbased clustering in centralized setting. Our work can be seen as the distributed counterpart of their method, with important differences discussed in Section 3. Note that the literature of distributed hard clustering is lacking in methods beyond K-means, as the efforts almost exclusively focus on designing variants of K-means. It is well known in the centralized literature that, in applications where different properties, such as robustness to outliers, are desired, methods beyond K-means are required, e.g., Pediredla and Seelamantula (2011); Arora et al. (1998); Banerjee et al. (2005). While Balcan et al. (2013) provide a distributed K-median method, their approach is built on the idea of designing a coreset, e.g., Har-Peled and Mazumdar (2004), i.e., creating a set that approximates the full data and use it for training. The construction of coreset is costly, as it requires running involved approximation algorithms and

users communicating subsets of data. As such, the methods in Balcan et al. (2013) can incur high communication and storage costs, as the size of the coreset scales with the number of users m and desired approximation quality². Moreover, their approach requires users to share the local data, which can make them reluctant to participate, due to privacy concerns. Works Forero et al. (2011); Kar and Swenson (2019); Armacki et al. (2022a) are closest to ours, as they provide iterative methods with strong theoretical guarantees, that only exchange local center estimates. We provide a comparison with these methods in Table 1, highlighting key³ algorithmic features, i.e., communication and storage cost, if they work in distributed setting and if they provide clustering beyond K-means. We can see from Table 1 that our proposed method has the better or comparable communication and storage cost (B can be set to 1), while being the only method that simultaneously works in peer-to-peer networks and supports costs beyond K-means.

Another line of work related to ours is that of first-order methods for distributed optimization, e.g., Nedić and Ozdaglar (2009); Nedić et al. (2017); Shi et al. (2015); Lorenzo and Scutari (2016); Jakovetić et al. (2014, 2018); Xin et al. (2020, 2022a,b); Swenson et al. (2022). As the framework proposed in this paper is gradient-based and used to solve a distributed optimization problem (see Sections 2, 3), it is related to first-order distributed optimization methods, with some key differences. First, we consider the specific problem of clustering, which, apart from Kar and Swenson (2019)⁴, has not been studied in the context of first-order methods. Second, due to optimizing over both centers and clusters (see Sections 2, 3), the problem considered in this paper is a combined distributed continuous (centers) and discrete (clusters) problem and the analysis techniques used in classical distributed optimization are not applicable, with a novel convergence analysis derived.

Contributions. Our contributions are as follows.

- We propose a general approach for clustering data over peer-to-peer networks, dubbed DGC- \mathcal{F}_{ρ} . Our approach encompasses smooth, convex loss functions and general distance metrics, such as *K*-means, Huber or logistic loss and Euclidean and Mahalanobis distance. DGC- \mathcal{F}_{ρ} works over any connected communication graph and users only exchange center estimates, with data staying private.
- We establish convergence guarantees in the following regimes. For fixed ρ , we show that DGC- \mathcal{F}_{ρ} converges to aptly defined fixed points under any center initialization, making it amenable to initialization schemes like K-means++, while the clusters converge in finite time. As ρ grows, we show that fixed points of DGC- \mathcal{F}_{ρ} converge to the set of aptly defined consensus fixed points.
- We show that as $\rho \to \infty$, the cluster center estimates attain consensus, thus guaranteeing that clusters converge to a clustering of the full data, for ρ large enough. In the case of Bregman losses, we show that these limiting consensus fixed points reduce to the classical notion of Lloyd fixed points associated with hard clustering. No assumptions are made on users' data similarity, with data across users possibly highly heterogeneous.

²In particular, the size of coreset is $\mathcal{O}(\frac{1}{\epsilon^4}(Kd + \log \frac{1}{\gamma}) + mK \log \frac{mK}{\gamma})$, where $\gamma \in (0, 1)$ and $\epsilon > 0$ are the success probability (i.e., with probability $1 - \gamma$) and approximation quality.

³While computation cost is a key feature, all the methods from Table 1 perform similar operations and incur similar computation costs. For that reason, we chose to omit computation from Table 1.

⁴The analysis in Kar and Swenson (2019) is tailored to the method proposed therein, oblivious to the fact that it is a first-order method. As we discuss in Section 3, their method is a special case of ours, applied to the K-means cost, with varying step-sizes.

• We verify the performance of our methods on real data, with our Huber loss based method outperforming the *K*-means based one on many tasks, demonstrating the benefits of a general family. Our methods also outperform the two baselines, centralized and local clustering⁵ showing the benefits of clustering over distributed data, such as less sensitivity to initialization, as well as the benefits of collaboration over local clustering in isolation.

Paper organization. The rest of the paper is organized as follows. Section 2 introduces the problem consider in the paper. Section 3 outlines the proposed family of methods. Section 4 presents the main results. Section 5 provides numerical results. Section 6 concludes the paper. Appendix contains additional details and proofs. We introduce the notation in the remainder of this section.

Notation. The spaces of real numbers and *d*-dimensional vectors are denoted by \mathbb{R} and \mathbb{R}^d . The set of non-negative integers is denoted by \mathbb{N} . The set of integers up to and including M is denoted by $[M] = \{1, \ldots, M\}$. For a set A, \overline{A} denotes the closure of A, while |A| denotes the number of elements of A. We use $\langle \cdot, \cdot \rangle$ and $\|\cdot\|$ to denote the Euclidean inner product and the induced vector/matrix norm. $\nabla_x f(x, y)$ denotes the gradient of f with respect to x. We use 1_d and I_d to denote the d-dimensional vector of ones and $d \times d$ identity matrix. \otimes denotes the Kronecker product, A^{\top} denotes transposition and $\lambda_{\max}(A)$ denotes the largest eigenvalue of A. $\mathcal{O}(\cdot)$ is the "big O", i.e., $a_n = \mathcal{O}(b_n)$ implies there exist C > 0 and $n_0 \in \mathbb{N}$, such that $a_n \leq Cb_n$, for all $n \geq n_0$, for $a_n, b_n \geq 0$. Superscripts denote the iteration counter, subscripts denote the user, while the value in the brackets corresponds to the particular center/cluster, e.g., $x_i^t(k)$ stands for the k-th center of user i, at iteration t.

2 Problem formulation

Consider a network of m > 1 users connected over a graph G = (V, E), where V = [m] is the set of vertices (i.e., users), E is the set of (undirected) edges connecting them, such that $\{i, j\} \in E$ if and only if users i and j can communicate. Let $\mathcal{D}_i = \{y_{i,1}, \ldots, y_{i,N_i}\}$ be the local data of user i, with $\sum_{i \in [m]} N_i = N$, and $w_{i,r} \in (0, 1)$ the weight associated with the r-th point of the i-th user, with $\sum_{i \in [m]} \sum_{r \in [N_i]} w_{i,r} = 1$. In this setup, (1) is equivalent to

$$\min_{\substack{\mathbf{x}_i \in \mathbb{R}^{Kd}, C_i \in \mathcal{C}_{K, \mathcal{D}_i} \\ \text{subject to } \mathbf{x}_1 = \dots = \mathbf{x}_m}} \sum_{i \in [m]} \sum_{k \in [K]} \sum_{r \in C_i(k)} w_{i, r} f(x_i(k), y_{i, r}), \tag{2}$$

where C_{K,\mathcal{D}_i} is the set of *K*-partitions of \mathcal{D}_i . Formulation (2) ensures that a clustering of the joint dataset is produced, by synchronizing the center estimates across users via the constraint $\mathbf{x}_1 = \ldots = \mathbf{x}_m$, i.e., enforcing that the centers are the same across all users. For (2) to be well defined and solvable in distributed fashion, we assume the following.

Assumption 1. The dataset \mathcal{D} has at least K distinct samples.

Remark 1. Assumption 1 requires the full data to have at least K distinct points, which is natural, as we aim to find K clusters. No assumptions are made on users' local data.

Assumption 2. The graph G = (V, E) is connected.

⁵Centralized and local clustering refer to methods working on full data and only on local data in isolation, see Section 5.

Remark 2. Assumption 2 ensures that the problem (2) can be solved in a distributed fashion, by peer-to-peer communication only. It is a standard in distributed literature, see, e.g., Vlaski et al. (2023) and references therein.

Note that (2) is a constrained problem, requiring either global synchronization of users' center estimates, or an involved primal-dual scheme, e.g., Forero et al. (2011), to be solved. To make it amenable to a simple first-order approach and local communication, consider the relaxation

$$\min_{\substack{\mathbf{x}\in\mathbb{R}^{Kmd},\\C\in\mathcal{C}_{m,K,\mathcal{D}}}} J_{\rho}(\mathbf{x},C) = \sum_{i\in[m]} \sum_{k\in[K]} \left[\frac{1}{2} \sum_{j\in\mathcal{N}_{i}} \|x_{i}(k) - x_{j}(k)\|^{2} + \frac{1}{\rho} \sum_{r\in C_{i}(k)} w_{i,r} f(x_{i}(k), y_{i,r}) \right],$$
(3)

where $C_{m,K,\mathcal{D}}$ is the set of all clusterings of the data, i.e., for $C \in C_{m,K,\mathcal{D}}$, we have $C = (C_1, \ldots, C_m)$, with $C_i \in C_{K,\mathcal{D}_i}$, $\mathcal{N}_i = \{j \in V : \{i, j\} \in E\}$ is the set of neighbours of user *i* (not including *i*), while $\rho \geq 1$ is a tunable parameter. The formulation (3) relaxes (2), by considering an unconstrained problem that penalizes the difference of centers among neighbouring users and controls the trade-off between center estimation and center proximity via ρ . A similar relaxation was considered in Kar and Swenson (2019), for the special case of $f(x,y) = ||x - y||^2$. The formulation (3) is very general and includes a myriad of clustering loss functions, with some examples below.

Example 1. Distributed Bregman clustering: if the loss in (3) is a Bregman distance Bregman (1967), $f(x,y) = \psi(y) - \psi(x) - \langle \nabla \psi(x), y - x \rangle$, with $\psi : \mathbb{R}^d \to \mathbb{R}$ strictly convex and differentiable, we get a novel problem formulation of distributed Bregman clustering. For the special case $f(x,y) = ||x - y||^2$, we recover the distributed K-means formulation from Kar and Swenson (2019).

Example 2. Distributed Huber loss clustering: if the loss in (3) is the Huber loss Huber (1964), $f(x,y) = \phi_{\delta}(||x-y||)$, where $\phi_{\delta} : \mathbb{R} \mapsto [0,\infty)$, for some $\delta > 0$, is given by

$$\phi_{\delta}(x) = \begin{cases} \frac{x^2}{2}, & |x| \le \delta\\ \delta |x| - \frac{\delta^2}{2}, & |x| > \delta \end{cases}, \tag{4}$$

we get a novel formulation of distributed Huber clustering.

Example 3. Distributed logistic clustering: if the loss in (3) is the logistic loss, i.e., $f(x, y) = \log(1 + \exp(||x - y||^2))$, we get a novel problem of distributed logistic clustering.

Example 4. Distributed fair clustering: if the loss in (3) is the "fair" loss $f(x, y) = h_{\gamma}(||x-y||)$, where $h_{\gamma}(x) = 2\gamma^2 (x^2/\gamma - \log(1 + x^2/\gamma))$, for $\gamma > 0$, e.g., Rabbat et al. (2005), we get a novel problem of distributed fair clustering.

Note that all formulations are novel, from the perspective of distributed clustering. While Bregman and Huber loss clustering are popular clustering methods in the centralized setting, e.g., Banerjee et al. (2005); Pediredla and Seelamantula (2011); Armacki et al. (2022a), to the best of our knowledge, losses like logistic and fair loss have not been considered previously, even in the centralized literature.

Next, using the graph Laplacian matrix L = D - A, where $D, A \in \mathbb{R}^{m \times m}$ are the degree and adjacency matrices, see, e.g., Chung (1997); Cvetkovic et al. (1997), and letting $\mathbf{x} = \begin{bmatrix} \mathbf{x}_1^\top & \dots & \mathbf{x}_m^\top \end{bmatrix}^\top \in \mathbb{R}^{Kmd}$ be the vector stacking users' center estimates $\mathbf{x}_i \in \mathbb{R}^{Kd}$, we can represent (3) as

$$\min_{\mathbf{x}\in\mathbb{R}^{Kmd},C\in\mathcal{C}_{m,K,\mathcal{D}}} J_{\rho}(\mathbf{x},C) = 1/\rho J(\mathbf{x},C) + 1/2\langle \mathbf{x},\mathbf{Lx}\rangle,$$
(5)

where $J(\mathbf{x}, C) = \sum_{i \in [m]} H(\mathbf{x}_i, C_i)$, with $\mathbf{L} = L \otimes I_{Kd}$. In order to solve (5), we make the following assumptions.

Assumption 3. The loss f is coercive, convex and β -smooth with respect to the first argument, *i.e.*, for all $x, y, z \in \mathbb{R}^d$, we have $\lim_{\|x\|\to\infty} f(x, y) = \infty$, and

$$f(z,y) + \langle \nabla f(z,y), x - z \rangle \le f(x,y) \le f(z,y) + \langle \nabla f(z,y), x - z \rangle + \frac{\beta}{2} ||x - z||^2.$$

Remark 3. Assumption 3 ensures the loss function is well-behaved. Coercivity ensures center estimates stay close to the dataset \mathcal{D} , by not allowing them to grow arbitrarily large. Convexity and smoothness are standard assumptions for gradient-based methods, see, e.g., Nesterov (2018).

3 Proposed family of methods

In this section we describe the DGC- \mathcal{F}_{ρ} family of methods proposed to solve the general distributed clustering problem (5). During training users maintain their current center and cluster estimates. The algorithm starts with users choosing their initial center estimates $\mathbf{x}_{i}^{0} \in \mathbb{R}^{Kd}, i \in [m]$. At iteration $t \geq 0$, each user $i \in [m]$ first forms the clusters, by finding a $k \in [K]$ for each $r \in \mathcal{D}_{i}$, such that

$$g(x_i^t(k), y_{i,r}) \le g(x_i^t(l), y_{i,r}), \text{ for all } l \ne k,$$
(6)

and assigns $y_{i,r}$ to $C_i^{t+1}(k)$. Here, $g : \mathbb{R}^d \times \mathbb{R}^d \mapsto [0, \infty)$ is a distance function, related to the loss f (see Assumptions 4, 5 ahead). Next, the centers are updated, by performing $B \ge 1$ updates, i.e., for $b = 0, \ldots, B - 1$

$$x_{i}^{t,b+1}(k) = x_{i}^{t,b}(k) - \alpha \left(\underbrace{\sum_{j \in \mathcal{N}_{i}} \left[x_{i}^{t,b}(k) - x_{j}^{t,b}(k)\right]}_{\text{consensus}} + \underbrace{\frac{1}{\rho} \sum_{r \in C_{i}^{t+1}(k)} w_{i,r} \nabla_{x} f\left(x_{i}^{t,b}(k), y_{i,r}\right)}_{\text{innovation}}\right), \quad (7)$$

where $x_i^{t,0}(k) = x_i^t(k)$ and $\alpha > 0$ is a sufficiently small fixed step-size. Finally, the new center is $x_i^{t+1}(k) = x_i^{t,B}(k)$, and the steps are repeated. The procedure is summarized in Algorithm 1. The center initialization performed at the outset of training can be done in an arbitrary manner, i.e., each user is allowed to initialize their own centers and no synchronization is required. This allows for significant flexibility and implementing initialization algorithms, like distributed K-means++, e.g., Yu et al. (2021). Steps 2-5 in Algorithm 1 outline the cluster update steps, while Steps 7-10 outline the center update steps, using the consensus + innovation framework Kar et al. (2012); Kar and Moura (2013). Note that DGC- \mathcal{F}_{ρ} uses different functions for cluster assignment and center updates. We assume the following on the relationship between functions g and f.

Algorithm 1 DGC- \mathcal{F}_{ρ}

Require: Step-size $\alpha > 0$, penalty parameter $\rho \ge 1$, number of rounds $T \ge 1$, number of local iterations $B \ge 1$, initial centers $\mathbf{x}_i^0 = \begin{bmatrix} x_i^0(1)^\top & \dots & x_i^0(K)^\top \end{bmatrix}^\top \in \mathbb{R}^{Kd}, i \in [m]$. 1: for each user $i \in [m]$ in parallel, in round $\mathbf{t} = 0, 1, \dots, T-1$ do:

2: Set $C_i^{t+1}(k) \leftarrow \emptyset$, for all $k \in [K]$; 3: for each $r \in [N_i]$ do:

- 4: Find $k \in [K]$ such that, for all $l \in [K]$: $g(x_i^t(k), y_{i,r}) \le g(x_i^t(l), y_{i,r});$
- 5: Update the cluster: $C_i^{t+1}(k) \leftarrow C_i^{t+1}(k) \cup \{r\};$
- 6: Set $x_i^{t,0}(k) \leftarrow x_i^t(k);$
- 7: for all clusters k ∈ [K] in parallel and local updates b = 0,..., B − 1 do:
 8: Exchange the current center estimates x_i^{t,b}(k) and x_i^{t,b}(k) with neighbours j ∈ N_i;

9:
$$x_i^{t,b+1}(k) \leftarrow x_i^{t,b}(k) - \alpha \left(\frac{1}{\rho} \sum_{r \in C_i^{t+1}(k)} \nabla_x f(x_i^{t,b}(k), y_{i,r}) + \sum_{j \in \mathcal{N}_i} [x_i^{t,b}(k) - x_j^{t,b}(k)]\right);$$

- 10: Set $x_i^{t+1}(k) \leftarrow x_i^{t,B}(k)$, for all $k \in [K]$;
- 11: Return $(\mathbf{x}_i^T, C_i^T), i \in [m].$

Assumption 4. The distance function g is a metric, i.e., for all $x, y, z \in \mathbb{R}^d$:

- 1. $g(x,y) \ge 0$ and g(x,y) = 0 if and only if x = y;
- 2. g(x, y) = g(y, x);
- 3. $g(x, y) \le g(x, z) + g(z, y)$.

Assumption 5. The loss f preserves the ordering with respect to g, i.e., for all $x, y, z \in \mathbb{R}^d$

$$f(x,y) < f(z,y)$$
 if $g(x,y) < g(z,y)$ and $f(x,y) = f(z,y)$ if $g(x,y) = g(z,y)$.

Remark 4. Assumption 4 requires g to be a well-behaved distance function, while Assumption 5 ensures that the cluster update step (6) does not increase the cost J_{ρ} .

Example 5. For g(x, y) = ||x - y|| being the Euclidean distance, losses $f_1(x, y) = \frac{1}{2}g(x, y)^2$, $f_2(x, y) = \phi_{\delta}(g(x, y))$, $f_3(x, y) = \log(1 + \exp(g(x, y)^2))$, $f_4(x, y) = h_{\gamma}(g(x, y))$ satisfy Assumptions 4, 5 and recover Examples 1-4. For $g(x, y) = \sqrt{\langle x - y, A(x - y) \rangle}$ being a Mahalanobis distance, with A positive definite, the losses $f_1 - f_4$ again satisfy Assumptions 4, 5 and give rise to novel Mahalanobis distance distributed clustering methods.

By specializing f and g, we get instances of DGC- \mathcal{F}_{ρ} . For example, for g(x, y) = ||x - y||, $f(x, y) = \frac{1}{2}||x - y||^2$, we get the DGC-KM_{ρ} algorithm, with center update given by

$$x_{i}^{t,b+1}(k) = \left(1 - \alpha \left[\frac{1}{\rho} \sum_{r \in C_{i}^{t+1}(k)} w_{i,r} + |\mathcal{N}_{i}|\right]\right) x_{i}^{t,b}(k) + \frac{\alpha}{\rho} \sum_{r \in C_{i}^{t+1}(k)} w_{i,r} y_{i,r} + \alpha \sum_{j \in \mathcal{N}_{i}} x_{j}^{t,b}(k).$$
(8)

For g(x,y) = ||x - y||, with $f(x,y) = \phi_{\delta}(||x - y||)$, we get the DGC-HL_{ρ} algorithm, with the

center update equation

$$x_{i}^{t,b+1}(k) = \left(1 - \alpha \left[\frac{1}{\rho} \sum_{r \in C_{i,n}^{t+1}(k)} w_{i,r} + \frac{1}{\rho} \sum_{r \in C_{i,f}^{t+1}(k)} \frac{\delta w_{i,r}}{\|x_{i}^{t,b}(k) - y_{i,r}\|} + |\mathcal{N}_{i}|\right]\right) x_{i}^{t,b}(k) + \frac{\alpha}{\rho} \left(\sum_{r \in C_{i,n}^{t+1}(k)} w_{i,r}y_{i,r} + \sum_{r \in C_{i,f}^{t+1}(k)} \frac{\delta w_{i,r}y_{i,r}}{\|x_{i}^{t,b}(k) - y_{i,r}\|}\right) + \alpha \sum_{j \in \mathcal{N}_{i}} x_{j}^{t,b}(k),$$
(9)

where $C_{i,n}^{t+1}(k) = \{r \in C_i^{t+1}(k) : ||x_i^{t,b}(k) - y_{i,r}|| \le \delta\}$ the set of points *near* the current center, with $C_{i,f}^{t+1}(k) = \{r \in C_i^{t+1}(k) : ||x_i^{t,b}(k) - y_{i,r}|| > \delta\}$ the set of points *far* from the current center. For g(x, y) = ||x - y||, with $f(x, y) = \log(1 + \exp(||x - y||^2))$, we get the DGC-LL_{ρ} algorithm, with the center update equation

$$x_{i}^{t,b+1}(k) = \left(1 - \alpha \left[\frac{1}{\rho} \sum_{r \in C_{i}^{t+1}(k)} \frac{2w_{i,r}}{1 + \exp(-\|x_{i}^{t,b}(k) - y_{i,r}\|^{2})} + |\mathcal{N}_{i}|\right]\right) x_{i}^{t,b}(k) + \frac{\alpha}{\rho} \sum_{r \in C_{i}^{t+1}(k)} \frac{2w_{i,r}}{1 + \exp(-\|x_{i}^{t,b}(k) - y_{i,r}\|^{2})} y_{i,r} + \alpha \sum_{j \in \mathcal{N}_{i}} x_{j}^{t,b}(k).$$

$$(10)$$

 $DGC-KM_{\rho}$, $DGC-HL_{\rho}$ and $DGC-LL_{\rho}$ represents distributed algorithms for K-means, Huber and logistic clustering, respectively. If $w_{i,r} = \frac{1}{N}$ for all $i \in [m], r \in [N_i]$, we can see from (8) that DGC-KM_{ρ} assigns uniform weight to each sample, while DGC-HL_{ρ} and DGC-LL_{ρ} assign non-uniform weights. As such, DGC-KM_{ρ} is well suited to applications where each sample is important and caries equal weight. On the other hand, we can see from (9) that DGC- HL_{ρ} separates the data from cluster $C_i^{t+1}(k)$ into two groups: nearby points in $C_{i,n}^{t+1}(k)$, and faraway points in $C_{i,f}^{t+1}(k)$. Nearby points are again assigned uniformed weight, with faraway points assigned the weight $\delta/||x_i^{t,b}(k)-y_{i,r}|| \in (0,1)$, that decays as $y_{i,r}$ gets farther away from the center. As such, DGC-HL_{ρ} is well-suited to applications where robustness to outliers is desired, as it assigns a decreasing weight to points farther away from the center, i.e., the perceived outliers. Next, we can see from (10) that DGC-LL_{ρ} assigns non-uniform weights to all points, given by $2/(1+\exp(-\|x_i^{t,b}(k)-y_{i,r}\|^2)) \in [1,2)$, which increases as $y_{i,r}$ gets farther away from the center. As such, DGC-LL $_{\rho}$ can be seen as a fairness promoting algorithm, that aims to exploit information from the whole system by giving higher weight to faraway points, and is well-suited to applications where faraway points, i.e., outliers, carry rare and important information.

Remark 5. Communication takes place in step 8 of Algorithm 1 and is performed $B \ge 1$ times per iteration, taking the total number of communication rounds to BT. Compared to Forero et al. (2011); Kar and Swenson (2019), where the number of communication rounds is T, our algorithm communicates more by a factor of B, if B > 1.

Remark 6. Each user is required to store its center estimates, local data and labels, taking the storage cost to $(K + |\mathcal{D}_i|)d + |\mathcal{D}_i|$, with Kar and Swenson (2019) incurring the same cost. Forero et al. (2011) additionally require storing neighbours' center estimates, increasing the storage cost by $|\mathcal{N}_i|Kd$, which can be a significant, e.g., in dense networks (i.e., large $|\mathcal{N}_i|$) or high dimensions (i.e., large d). **Remark 7.** The main computation cost is incurred in cluster and center update steps 2-5 and 7-10. Cluster update requires finding the closest center for each sample and the cost of it is the same as in any clustering algorithm. The cost in center update comes from computing the gradient of f in (7). Compared to Forero et al. (2011); Kar and Swenson (2019), our cost is again higher by a factor of B, if B > 1.

Remark 8. Increasing B results in the center update more closely approximating the argmin step, i.e., $\mathbf{x}^{t+1} \approx \arg \min_{\mathbf{x} \in \mathbb{R}^{K_{md}}} J_{\rho}(\mathbf{x}, C^{t+1})$. As we show in Appendix B (see proofs of Lemmas 2, 7), this results in faster decrease in the cost J_{ρ} and faster convergence of centers. However, increasing B incurs higher computation and communication cost. This trade-off is explored numerically in Section 5.

There are three major differences between DGC- \mathcal{F}_{ρ} and centralized gradient clustering from Armacki et al. (2022a). First, the center update (7) incorporates the consensus part, as otherwise, users would be performing the centralized gradient clustering on their local data, without collaboration. Second, users can perform multiple center updates per iteration, while the centralized method performs only one. This is important, as more updates allow DGC- \mathcal{F}_{ρ} to mimic the argmin step, akin to, e.g., Lloyd's algorithm. Finally, centers are updated even when the corresponding clusters are empty, which is not the case for the centralized method. These differences result in distinct algorithm dynamics, additional challenges in convergence analysis in Section 4.2, as well as a novel consensus analysis in Section 4.4.

The method in Kar and Swenson (2019) is a special case of DGC- \mathcal{F}_{ρ} , designed for the squared Euclidean loss and a user, cluster and time varying step-size $\alpha_i^t(k) = \alpha/(|C_i^{t+1}(k)|/\rho + |\mathcal{N}_i|)$, with $\alpha < \min_{i \in [m]} |\mathcal{N}_i|/(\max_{i \in [m]} N_i/\rho + \lambda_{\max}(L))$. DGC- \mathcal{F}_{ρ} is much more general, encompassing a variety of clustering algorithms outlined in this section and allowing multiple center updates per round. Additionally, DGC- \mathcal{F}_{ρ} is easier to implement, as it uses the same fixed step-size for all users⁶.

4 Main results

In this section we present the main results. Section 4.1 defines fixed points, a key concept in our analysis. Section 4.2 presents convergence guarantees of DGC- \mathcal{F}_{ρ} , establishing convergence of centers to a fixed point and convergence of clusters in finite time. Section 4.3 presents a closed-form expressions for fixed points, when the loss f is a Bregman distance. Section 4.4 studies the behaviour of fixed points as $\rho \to \infty$, establishing consensus of centers and convergence of clusters to a clustering of the full data for finite ρ . We drop the subscript in gradients, e.g., $\nabla J(\mathbf{x}, C) \equiv \nabla_{\mathbf{x}} J(\mathbf{x}, C)$. The proofs from this section can be found in Appendix B.

4.1 Setting up the analysis

In this section we define key concepts used in the analysis.

Definition 1. Let $\mathbf{x} \in \mathbb{R}^{Kmd}$ be cluster centers. We say that $U_{\mathbf{x}} \subset \mathcal{C}_{m,K,\mathcal{D}}$ is the set of optimal clusterings with respect to \mathbf{x} , if for all clusterings $C \in U_{\mathbf{x}}$, (6) is satisfied.

⁶Our step-size requires knowledge of the penalty ρ , smoothness β and $\lambda_{\max}(L)$, see Section 4. If the cost is K-means, with weights $w_{i,r} = 1$, it can be shown that $\beta = \max_{i \in [m]} N_i$, which is similar to α used in the step-size in Kar and Swenson (2019). In that sense, the step-size in our algorithm requires shared knowledge of the same parameters as in Kar and Swenson (2019) and can be achieved by any gossip algorithm, e.g., Dimakis et al. (2010), at the expense of a few extra communication rounds.

Definition 2. The pair $(\mathbf{x}^{\star}, C^{\star})$ is a fixed point of DGC- \mathcal{F}_{ρ} , if:

1.
$$C^{\star} \in U_{\mathbf{x}};$$

2.
$$\nabla J_{\rho}(\mathbf{x}^{\star}, C^{\star}) = 0.$$

Remark 9. Definition 2 requires (\mathbf{x}^*, C^*) to be a stationary point of J_{ρ} , i.e., the clusters C^* to be optimal with respect to \mathbf{x}^* , and \mathbf{x}^* to be optimal with respect to $J_{\rho}(\mathbf{x}, C^*)$. As such, it is not possible to further improve the clustering, nor the centers at a fixed point. Recalling that J_{ρ} is non-convex, reaching a fixed point is the best we can do.

Definition 3. The set $\overline{U}_{\mathbf{x}} \subset \mathcal{C}_{m,K,\mathcal{D}}$ is the set of clusterings, such that:

1.
$$\overline{U}_{\mathbf{x}} \subseteq U_{\mathbf{x}};$$

2. $\nabla J_{\rho}(\mathbf{x}, C) = 0$, for all $C \in \overline{U}_{\mathbf{x}}$.

By Definitions 2 and 3, **x** can be a fixed point if and only if $\overline{U}_{\mathbf{x}} \neq \emptyset$. As such, we will call **x** a fixed point if $\overline{U}_{\mathbf{x}} \neq \emptyset$.

4.2 Convergence to fixed points

In this section we show that centers produced by DGC- \mathcal{F}_{ρ} are guaranteed to converge to a fixed point. Recalling Remark 9, this is, in general, the best one can achieve.

Theorem 1. Let Assumptions 1-5 hold. For the step-size $\alpha < 1/(\beta/\rho + \lambda_{\max}(L))$, any initialization $\mathbf{x}^0 \in \mathbb{R}^{Kmd}$ and $\rho \ge 1$, the sequence of centers $\{\mathbf{x}^t\}_{t\in\mathbb{N}}$ generated by DGC- \mathcal{F}_{ρ} converges to a fixed point, i.e., a \mathbf{x}^* such that $\overline{U}_{\mathbf{x}^*} \neq \emptyset$. Moreover, the clusters converge in finite time, i.e., there exists a $t_0 > 0$ such that $U_{\mathbf{x}^t} \subset U_{\mathbf{x}^*}$, for all $t \ge t_0$.

Theorem 1 states that the sequence of centers generated by DGC- \mathcal{F}_{ρ} is guaranteed to converge to a fixed point, for any center initialization. This is a strong result, which provides great flexibility, in the sense that no synchronization of users' initial centers is needed beforehand. While the convergence of centers is asymptotic in nature, Theorem 1 guarantees that clusters converge in finite time. This result is of great importance, as in practice, we are often interested only in the clustering of the data. In that sense, this result guarantees that a solution will be provided in finite time.

In order to prove Theorem 1, a series of lemmas are introduced, similarly to Armacki et al. (2022a). However, due to the problem being distributed and the algorithmic differences discussed in Section 3, the majority of proofs from Armacki et al. (2022a) are not directly applicable. The next result characterizes the behaviour of the distributed cost J_{ρ} .

Lemma 1. For each fixed clustering $C \in C_{m,K,\mathcal{D}}$, the function J_{ρ} is convex and $\beta_{L,\rho}$ -smooth, with $\beta_{L,\rho} = \beta/\rho + \lambda_{\max}(L)$.

Prior to stating the next result, note that the center update (7) can be represented compactly as

$$\mathbf{x}^{t,b+1} = \mathbf{x}^{t,b} - \alpha \nabla J_{\rho}(\mathbf{x}^{t,b}, C^{t+1}) = \mathbf{x}^{t,b} - \alpha \left(\frac{1}{\rho} \nabla J(\mathbf{x}^{t,b}, C^{t+1}) + \mathbf{L}\mathbf{x}^{t,b}\right),$$
(11)

where $\nabla J(\mathbf{x}^{t,b}, C^{t+1}) \in \mathbb{R}^{Kmd}$ is the vector stacking of the gradients of H with respect to \mathbf{x}_i , whose *i*-th block, for any $i \in [m]$, is given by

$$\left[\nabla J(\mathbf{x}^{t,b}, C^{t+1})\right]_i = \nabla H(\mathbf{x}_i^{t,b}, C_i^{t+1}) \in \mathbb{R}^{Kd}.$$
(12)

We next prove that DGC- \mathcal{F}_{ρ} generates a non-increasing sequence of values of J_{ρ} .

Lemma 2. For the sequence $\{(\mathbf{x}^t, C^t)\}_{t \in \mathbb{N}}$, generated by Algorithm 1, with $\alpha < \frac{1}{\beta_{L,\rho}}$, the resulting sequence of costs $\{J_{\rho}(\mathbf{x}^t, C^t)\}_{t \in \mathbb{N}}$ is non-increasing.

The next result states that if two cluster centers are sufficiently close, their set of optimal clusterings match. The proof can be found in Kar and Swenson (2019); Armacki et al. (2022a).

Lemma 3. There exists an $\epsilon_* > 0$, such that, for any $\mathbf{x}, \mathbf{x}' \in \mathbb{R}^{Kmd}$ satisfying $\max_{i \in [m], k \in [K]} g(x_i(k), x'_i(k)) < \epsilon_*$, we have $U_{\mathbf{x}'} \subset U_{\mathbf{x}}$.

The next result shows that any convergent subsequence of $\{\mathbf{x}^t\}_{t\in\mathbb{N}}$ converges to a fixed point.

Lemma 4. Let $\{\mathbf{x}^t\}_{t\in\mathbb{N}}$ be a sequence generated by DGC- \mathcal{F}_{ρ} , with $\alpha < \frac{1}{\beta_{L,\rho}}$. Then, any convergent subsequence converges to a fixed point.

The next lemma shows that the clusters converge in finite time. The proof follows the same reasoning as the one in Armacki et al. (2022a), and is omitted for brevity.

Lemma 5. For any convergent subsequence $\{\mathbf{x}^{t_s}\}_{s\in\mathbb{N}}$ of $\{\mathbf{x}^t\}_{t\in\mathbb{N}}$, generated by DGC- \mathcal{F}_{ρ} , there exists a $s_0 \in \mathbb{N}$, such that, for all $s \geq s_0$, $C^{t_s+1} \in \overline{U}_{\mathbf{x}^{\star}}$, where $\mathbf{x}^{\star} = \lim_{s \to \infty} \mathbf{x}^{t_s}$.

The following lemma shows that the generated sequence of cluster centers stays bounded.

Lemma 6. The sequence of centers $\{\mathbf{x}^t\}_{t\in\mathbb{N}}$ generated by DGC- \mathcal{F}_{ρ} stays bounded, i.e., there exists a $M_{\rho} > 0$, such that $\|\mathbf{x}^t\| \leq M_{\rho}$, for all $t \in \mathbb{N}$.

The next lemma shows that, if a point in the sequence of centers is sufficiently close to a fixed point, then all the subsequent points remain in the neighborhood of the fixed point.

Lemma 7. Let $\{\mathbf{x}^t\}_{t\in\mathbb{N}}$ be the sequence of centers generated by DGC- \mathcal{F}_{ρ} , with the step-size satisfying $\alpha < \frac{1}{\beta_{L,\rho}}$. Let $\mathbf{x}^* \in \mathbb{R}^{Kmd}$ be a fixed point, in the sense of Definition 2. Then, there exists an $\epsilon^* > 0$, for which, for all $\epsilon \in (0, \epsilon^*)$, there exists a $t_{\epsilon} \in \mathbb{N}$, such that, if $\|\mathbf{x}^{t_0} - \mathbf{x}^*\| \leq \epsilon$, for some $t_0 > t_{\epsilon}$, then $\|\mathbf{x}^t - \mathbf{x}^*\| \leq \epsilon$, for all $t \geq t_0$.

We are now ready to prove our main result.

Proof of Theorem 1. By Lemma 2 and the fact that the corresponding sequence of costs $\{J_{\rho}(\mathbf{x}^{t}, C^{t})\}_{t\in\mathbb{N}}$ is nonnegative, the monotone convergence theorem states that this sequence converges to some $J_{\rho}^{\star} \geq 0$. On the other hand, by Bolzano-Weierstrass theorem and Lemma 6, the sequence $\{\mathbf{x}^{t}\}_{t\in\mathbb{N}}$ has a convergent subsequence, $\{\mathbf{x}^{t_s}\}_{s\in\mathbb{N}}$, with some $\mathbf{x}^{\star} \in \mathbb{R}^{Kmd}$ as its limit. From the continuity of J_{ρ} and convergence of \mathbf{x}^{t_s} , we can then conclude that $J_{\rho}^{\star} = \lim_{s\to\infty} J_{\rho}(\mathbf{x}^{t_s}, C^{t_s}) = J(\mathbf{x}^{\star}, C^{\star})$. Lemma 4 then implies that \mathbf{x}^{\star} is a fixed point. Finally, Lemmas 5 and 7 imply the convergence of the full sequence, i.e., $\lim_{t\to\infty} \mathbf{x}^t = \mathbf{x}^{\star}$. Convergence of clusters in finite time is implied by Lemmas 3,5.

4.3 Fixed point analysis - Bregman clustering

In this section we provide closed-form expressions for fixed points of DGC- \mathcal{F}_{ρ} , when the loss is Bregman, i.e., $f(x,y) = \psi(y) - \psi(x) - \langle \nabla \psi(x), y - x \rangle$, with ψ strictly convex. To apply DGC- \mathcal{F}_{ρ} , we require a distance g satisfying Assumptions 4, 5. As noted in Armacki et al. (2022a), it is possible to find such g for many Bregman distances, via Chen et al. (2008); Acharyya et al. (2013), which state that a class of Bregman distances are squares of distance metris. Some examples of such Bregman distances are given in Appendix B. We make the following assumption on the Bregman inducing function ψ .

Assumption 6. ψ is strictly convex, twice differentiable and induces a Bregman distance that is a square of a metric.

Lemma 8. Let f(x, y) be a Bregman distance, with ψ satisfying Assumption 6. Then, any fixed point (\mathbf{x}^*, C^*) of DGC- \mathcal{F}_{ρ} satisfies, for all $i \in [m], k \in [K]$

$$x_{i}^{\star}(k) = P_{i,k}^{-1} \Big(\frac{1}{\rho} \nabla^{2} \psi(x_{i}^{\star}(k)) \sum_{r \in C_{i}^{\star}(k)} w_{i,r} y_{i,r} + \sum_{j \in \mathcal{N}_{i}} x_{j}^{\star}(k) \Big),$$

where $P_{i,k} = \frac{1}{\rho} \nabla^2 \psi(x_i^{\star}(k)) \sum_{r \in C_i^{\star}(k)} w_{i,r} + |\mathcal{N}_i| I_{d \times d}.$

Remark 10. If $f(x, y) = \frac{1}{2} ||x - y||^2$ (i.e., *K*-means clustering), it can be shown that $\psi(x) = \frac{1}{2} ||x||^2$, e.g., Banerjee et al. (2005). In that case $\nabla^2 \psi(x) \equiv I_{d \times d}$, hence fixed points of DGC-KM satisfy, for any $i \in [m]$, $k \in [K]$

$$x_{i}^{\star}(k) = \frac{1/\rho \sum_{r \in C_{i}^{\star}(k)} w_{i,r} y_{i,r} + \sum_{j \in \mathcal{N}_{i}} x_{j}^{\star}(k)}{1/\rho \sum_{r \in C_{i}^{\star}(k)} w_{i,r} + |\mathcal{N}_{i}|}.$$

This is consistent with the fixed points of the method from Kar and Swenson (2019), termed generalized Lloyd minima.

4.4 Consensus and fixed points

In this section we study the behaviour of the sequences of fixed points generated by DGC- \mathcal{F}_{ρ} . Note that fixed points of DGC- \mathcal{F}_{ρ} depend on ρ , i.e., $\mathbf{x} \equiv \mathbf{x}_{\rho}$, for each fixed point \mathbf{x} of DGC- \mathcal{F}_{ρ} . As such, we are interested in the behaviour of the family of fixed points $\{\mathbf{x}_{\rho}\}_{\rho\geq 1}$ of DGC- \mathcal{F}_{ρ} , as $\rho \to \infty$. To start, we state the assumption used in this section.

Assumption 7. The distance function g is the Euclidean distance and the gradient of f is of the form $\nabla f(x,y) = \gamma(x-y)$, where $\gamma \equiv \gamma(x,y) > 0$ may depend on x and y.

We show in Appendix B that Assumption 7 is satisfied for K-means, Huber and logistic losses. The next result shows fixed points of DGC- \mathcal{F}_{ρ} remain in $\overline{co}(\mathcal{D}, \mathbf{x}^0)^7$, for each ρ .

Lemma 9. Let Assumption 7 hold. Then for any $\rho \geq 1$, fixed points \mathbf{x}_{ρ} of DGC- \mathcal{F}_{ρ} satisfy $x_{i,\rho}(k) \in \overline{co}(\mathcal{D}, \mathbf{x}^0)$, for all i, k, where $\mathbf{x}^0 \in \mathbb{R}^{Kmd}$ is the center initialization.

Next, we define an important concepts used in the analysis.

⁷We use the shorthand notation $\overline{co}(\mathcal{D}, \mathbf{x}^0)$ to denote the convex hull of the data \mathcal{D} and initial centers $x_i^0(k)$, $i \in [m], k \in [K]$.

Definition 4. The point $\overline{\mathbf{x}} \in \mathbb{R}^{Kmd}$ is a consensus fixed point, if:

- 1. $\overline{\mathbf{x}}_1 = \ldots = \overline{\mathbf{x}}_m;$
- 2. there exists a $\overline{C} \in U_{\overline{\mathbf{x}}}$, such that $\mathbf{1}^{\top} \nabla J(\overline{\mathbf{x}}, \overline{C}) = 0$, where $\mathbf{1} = \mathbf{1}_m \otimes I_{Kd}$.

Remark 11. Consensus fixed points are not fixed points per Definition 2, as they do not have to satisfy $\nabla J(\overline{\mathbf{x}}, \overline{C}) = 0$.

We can write any consensus fixed point as $\overline{\mathbf{x}} = \mathbf{1}_m \otimes \mathbf{x}$, where $\mathbf{x} \in \mathbb{R}^{Kd}$ is the vector stacking of K centers. From point 2) in Definition 4 and the definition of ∇J , we get

$$\mathbf{1}^{\top} \nabla J(\overline{\mathbf{x}}, \overline{C}) = \sum_{i \in [m]} \nabla H(\mathbf{x}, \overline{C}_i) = 0.$$
(13)

If we define $C = (C(1), \ldots, C(K))$, where $C(k) = \bigcup_{i \in [m]} \overline{C}_i(k)$, it follows from (13) that, for all $k \in [K]$

$$\sum_{r \in C(k)} w_{i,r} \nabla f(x(k), y_{i,r}) = \sum_{i \in [m]} \sum_{r \in \overline{C}_i(k)} w_{i,r} \nabla f(x(k), y_{i,r})$$
$$= [\mathbf{1}^\top \nabla J(\overline{\mathbf{x}}, \overline{C})]_k = 0, \tag{14}$$

i.e., (\mathbf{x}, C) is a stationary point of the centralized problem (1). The converse holds as well, i.e., any stationary point (\mathbf{x}, C) of (1) induces a consensus fixed point $(\overline{\mathbf{x}}, \overline{C})$, where $\overline{\mathbf{x}} = 1_m \otimes \mathbf{x}$ and $\overline{C} = (\overline{C}_1, \ldots, \overline{C}_m)$, with $\overline{C}_i(k) = C(k) \cap \mathcal{D}_i$. As such, our aim is to find consensus fixed points, ensuring that a clustering of the full data is produced.

Remark 12. Specializing (14) to K-means cost, any consensus fixed point $(\overline{\mathbf{x}}, \overline{C})$, with $\overline{\mathbf{x}} = 1_m \otimes \mathbf{x}$ satisfies

$$x(k) = \frac{1}{W_k} \sum_{i \in [m]} \sum_{r \in \overline{C}_i(k)} w_{i,r} y_{i,r} = \frac{1}{W_k} \sum_{r \in C(k)} w_{i,r} y_{i,r},$$

where $W_k = \sum_{i \in [m]} \sum_{r \in \overline{C}_i(k)} w_{i,r}$ and $C(k) = \bigcup_{i \in [m]} \overline{C}_i(k)$, *i.e.*, consensus fixed points correspond to means of global clusters, also known as Lloyd points.

The next result shows that centers of consensus fixed points, whose joint clusters are non-empty, belong to $\overline{co}(\mathcal{D})$.

Lemma 10. Let $(\overline{\mathbf{x}}, \overline{C})$ be a consensus fixed point, $\overline{\mathbf{x}} = \mathbf{1} \otimes \mathbf{x}$. Then $x(k) \in \overline{co}(\mathcal{D})$, for all k that $\bigcup_{i \in [m]} \overline{C}_i(k) \neq \emptyset$.

Centers whose corresponding clusters are empty do not contribute to the cost or the gradient. As such, they can be freely assigned and we can always choose a center that belongs to $\overline{co}(\mathcal{D})$. Define

 $\mathcal{X} = \big\{ \overline{\mathbf{x}} \in \mathbb{R}^{Kmd} : \overline{\mathbf{x}} = \mathbf{1}_m \otimes \mathbf{x} \text{ is a consensus fixed point and } x(k) \in \overline{co}(\mathcal{D}), \text{ for all } k \in [K] \big\}.$

It then follows from Lemma 10 that $\mathcal{X} \neq \emptyset$. The next result shows that consensus is achieved at a rate $\mathcal{O}\left(\frac{1}{\rho}\right)$.

Lemma 11. Let Assumption 7 be satisfied, $\{\mathbf{x}_{\rho}\}_{\rho \geq 1}$ be a family of fixed points generated by DGC- \mathcal{F}_{ρ} and denote by $R = \max_{\mathbf{x} \in \overline{co}(\mathcal{D}, \mathbf{x}^0)} \|\mathbf{x}\|$. Then, we have $\|\mathbf{L}\mathbf{x}_{\rho}\| \leq \frac{2m\beta R}{\rho}$.

We are now ready to state the main result of this section.

Theorem 2. Let Assumption 7 hold and $\{\mathbf{x}_{\rho}\}_{\rho\geq 1}$ be a family of fixed points generated by DGC- \mathcal{F}_{ρ} . Then, the sequence converges to the set \mathcal{X} , i.e., $\lim_{\rho\to\infty} d(\mathbf{x}_{\rho}, \mathcal{X}) = 0$, where $d(\mathbf{x}, \mathcal{X}) = \inf_{\mathbf{y}\in\mathcal{X}} \|\mathbf{x}-\mathbf{y}\|$. Moreover, the clusters converge for finite ρ , i.e., there exists a $\rho_0 > 0$ such that $U_{\mathbf{x}_{\rho}} \subset U_{\overline{\mathbf{x}}}$, for all $\rho \geq \rho_0$, and some $\overline{\mathbf{x}} \in \mathcal{X}$.

Theorem 2 states that center consensus is achieved asymptotically, while Lemma 11 shows that consensus is achieved at a rate $\|\mathbf{Lx}_{\rho}\| = \mathcal{O}(1/\rho)$. We verify it numerically in Section 5. Moreover, clusters converge for a finite ρ , which implies that we are guaranteed to produce a clustering of the full data for a finite value of ρ . While higher values of ρ guarantee consensus, increasing ρ results in slower convergence of DGC- \mathcal{F}_{ρ} , as it takes more time to optimize the clustering cost J, which we verify in Appendix C. Similar observations were made in Kar and Swenson (2019). As such, ρ offers an inherent trade-off between convergence speed and producing a clustering of the full data. In applications where convergence speed is paramount, moderate values of ρ are apt, otherwise Theorem 2 and Lemma 11 suggest choosing large ρ to guarantee a clustering of the joint data.

5 Numerical results

In this section we present numerical results. Experiments are implemented in python, averaged across 10 runs. We assume uniform weights, i.e., $w_{i,r} = \frac{1}{N}$. For Huber loss we set $\delta = 5$. We use Iris Fisher (1936), MNIST Lecun et al. (1998) and CIFAR10 Krizhevsky (2009) data. In particular, we use the full Iris data, the first seven digits of MNIST and three and eight classes of CIFAR, dubbed CIFAR3 and CIFAR8, for a total of $K = \{3, 7, 3, 8\}$ classes for Iris, MNIST, CIFAR3 and CIFAR8. In all experiments we use a network of m = 10 users, communicating over a ring graph. Each user is assigned $N_i = \{15, 700, 300, 800\}$ samples for Iris, MNIST, CIFAR3 and CIFAR8, split equally among each class. For a full description of the data and additional results, see Appendix C.

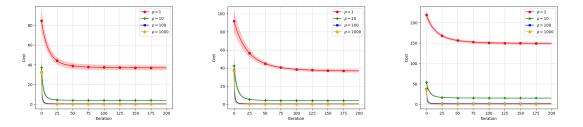


Figure 2: Behaviour of J_{ρ} for different ρ and B = 1. The figures present DGC-KM_{ρ}, DGC-HL_{ρ} and DGC-LL_{ρ}, left to right.

The first set of experiments, using Iris data, aim to verify our theory. We evaluate the cost J_{ρ} for different values of ρ and B, and consensus for different values of ρ . Consensus is measured via maximum center distance among users, i.e., $\max_{i,j\in[m]} \|\mathbf{x}_i - \mathbf{x}_j\|$. Users initialize their centers by choosing a random sample from each class of their local data. The results are presented in Figures 2, 3 and Table 2.

Figures 2 and 3 present the cost J_{ρ} per iteration. Figure 2 shows the cost for different values of ρ and B = 1, while Figure 3 shows the cost for different values of B and $\rho = 10$. The

	$\rho = 1$	$\rho = 10$	$\rho = 10^2$	$\rho = 10^3$
$DGC-KM_{\rho}$	1.16	$3.3 imes 10^{-1}$	$4.7 imes 10^{-2}$	
$\mathrm{DGC-HL}_{\rho}$	1.17	$3.1 imes 10^{-1}$	$4.8 imes 10^{-2}$	
$\mathrm{DGC}\text{-}\mathrm{LL}_{\rho}$	1.23	4.3×10^{-1}	$6.1 imes 10^{-2}$	8×10^{-3}

Table 2: Effect of ρ on maximum center distance, with B = 1.

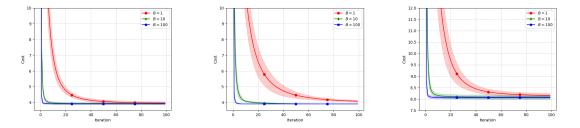


Figure 3: Behaviour of J_{ρ} for different B and $\rho = 10$. The figures present DGC-KM₁₀, DGC-HL₁₀ and DGC-LL₁₀, left to right.

Table 3: Clustering accuracy. We use B=1, with $\rho=10$ on MNIST and $\rho=100$ on both CIFAR3 and CIFAR8 data.

	Sklearn KM++	CGC-KM	LGC-KM	$\mathrm{DGC}\text{-}\mathrm{KM}_{\rho}$	$\mathrm{DGC}\text{-}\mathrm{HL}_{\rho}$	$\mathrm{DGC}\text{-}\mathrm{LL}_{\rho}$
MNIST CIFAR3	$\begin{array}{c} 73.68 \pm 0.16\% \\ 50.55 \pm 0.43\% \end{array}$	$50.06 \pm 0.41\%$			$\begin{array}{c} {\bf 74.36 \pm 1.30\%} \\ {49.14 \pm 4.23\%} \end{array}$	$46.02 \pm 3.61\%$
CIFAR8	$21.19 \pm 0.09\%$	$21.42 \pm 0.32\%$	$16.71 \pm 0.46\%$	$20.92 \pm 0.41\%$	${f 21.54 \pm 0.88\%}$	$20.62 \pm 0.45\%$

solid line represents the average performance, with the shaded region showing the standard deviation. As predicted in Lemma 2, the cost is decreasing in each iteration (Figure 2) and larger B leads to faster convergence (Figure 3). Table 2 presents the maximum center distance across users after T = 500 iterations, with B = 1. As predicted in Lemma 11, the maximum center distance for all three algorithms is of the order $\mathcal{O}(1/\rho)$.

Table 4: Clustering accuracy on Iris data.

	K-means	HUBER	Logistic
CGC	$88.8\pm0.3\%$	$84.7\pm13.3\%$	$88.9\pm0.3\%$
LGC	$89.6\pm3.3\%$	$89.7\pm2.1\%$	$89.0\pm1.8\%$
DGC	$91.1 \pm 0.8\%$	$91.2 \pm 0.8\%$	$91.0 \pm 0.3\%$

Next, we study the clustering quality of our methods on Iris data. We set $\rho = 10$ and B = 1 for all methods. We measure the clustering quality by comparing the labels produced by clustering with the true labels, i.e., *accuracy*. We benchmark the performance of DGC with: 1) CGC - centralized gradient clustering from Armacki et al. (2022a) that has access to the full dataset; 2) LGC - gradient clustering from Armacki et al. (2022a) performed on users' local data in isolation. For DGC and LGC, we report the average accuracy across all users. We use the same loss function for all methods, i.e., if we evaluate the performance of DGC-KM, we benchmark it with CGC and LGC using the K-means cost. All methods run for T = 500 iterations. DGC and LGC are given the same initialization, as was done in the previous experiments. CGC initializes by choosing a point from each class uniformly at random, from the full data. The results are presented in Table 4. We can see that DGC outperforms both CGC and LGC. Compared to LGC, our approach shows the benefits of collaboration and access to more data. Next, both DGC and LGC outperform CGC, which can be explained by the fact that for Iris, local datasets are representative of the full data, and, moreover it is easier to find good initialization on smaller datasets. This is in line with observation from Forero et al. (2011), who noted that distributed algorithms are less sensitive to initialization.

Finally, to test the performance of DGC on larger datasets, we perform experiments on MNIST and CIFAR data. We again measure the performance using accuracy, and evaluate DGC-KM_{ρ}, DGC-HL_{ρ} and DGC-LL_{ρ}, with B = 1 and $\rho = 10$ for MNIST, while $\rho = 100$ for CIFAR. To benchmark the performance, we use CGC and LGC with K-means cost, as well as python's centralized scikit-learn Pedregosa et al. (2011) implementation of K-means. DGC, LGC and CGC are again initialized by randomly assigning a sample from each class, while scikit-learn implementation uses the more powerful K-means++ initialization. We run DGC, LGC and CGC for T = 4000 iterations, while scikit-learn K-means is used with default settings. The results are presented in Table 3. DGC-HL performs the best on MNIST and CIFAR8 data, showing the benefit of distributed clustering beyond K-means. DGC-KM performs the best on CIFAR3, outperforming both centralized K-means methods, even the scikit-learn version with the strong K-means++ initialization, further demonstrating the superior robustness to initialization of distributed methods. Finally, the purely local method LGC consistently performs the poorest, highlighting the necessity for collaboration.

6 Conclusion

We study clustering over distributed data, where users have access to their local dataset, with the goal of obtaining a clustering of the full data. We design a family of clustering algorithms applicable to a wide range of clustering problems. Theoretical studies show that the sequence of centers generated by DGC- \mathcal{F}_{ρ} converges to fixed points and that, as ρ increases, we are guaranteed to produce a clustering of the full data. We confirm our results numerically and demonstrate strong performance across a set of scenarios. Future ideas include using group lasso regularizer, known to achieve consensus for finite ρ Hallac et al. (2015); Sun et al. (2021); Armacki et al. (2022b), studying statistical consistency and cluster recovery Pollard (1981); Kumar and Kannan (2010); Awasthi and Sheffet (2012); Dennis et al. (2021); Ghosh et al. (2020); Armacki et al. (2024).

Bibliography

- Acharyya, S., Banerjee, A., and Boley, D. (2013). Bregman divergences and triangle inequality. In Proceedings of the 2013 SIAM International Conference on Data Mining, pages 476–484. SIAM. (Cited on page 13.)
- Alguliyev, R. M., Aliguliyev, R. M., and Sukhostat, L. V. (2021). Parallel batch k-means for big data clustering. *Computers & Industrial Engineering*, 152:107023. (Cited on page 3.)
- Arabie, P. and Hubert, L. (1996). Advances in cluster analysis relevant to marketing research. In Gaul, W. and Pfeifer, D., editors, *From Data to Knowledge*, pages 3–19, Berlin, Heidelberg. Springer Berlin Heidelberg. (Cited on page 1.)
- Armacki, A., Bajovic, D., Jakovetic, D., and Kar, S. (2022a). Gradient based clustering. In Chaudhuri, K., Jegelka, S., Song, L., Szepesvari, C., Niu, G., and Sabato, S., editors, *Proceedings of the 39th International Conference on Machine Learning*, volume 162 of *Proceedings of Machine Learning Research*, pages 929–947. PMLR. (Cited on pages 2, 3, 4, 6, 10, 11, 12, 13, 17, and 30.)
- Armacki, A., Bajovic, D., Jakovetic, D., and Kar, S. (2022b). Personalized federated learning via convex clustering. In 2022 IEEE International Smart Cities Conference (ISC2), pages 1–7. (Cited on page 18.)
- Armacki, A., Bajović, D., Jakovetić, D., and Kar, S. (2024). A one-shot framework for distributed clustered learning in heterogeneous environments. *IEEE Transactions on Signal Processing*, 72:636–651. (Cited on page 18.)
- Arora, S., Raghavan, P., and Rao, S. (1998). Approximation schemes for euclidean k-medians and related problems. In *Proceedings of the Thirtieth Annual ACM Symposium on Theory* of Computing, STOC '98, page 106–113, Dallas, Texas, USA. Association for Computing Machinery. (Cited on page 3.)
- Awasthi, P. and Balcan, M.-F. (2016). Foundations for center-based clustering: worst-case approximations and modern developments. In Henning, C., Meila, M., Murtagh, F., and Rocci, R., editors, *Handbook of cluster analysis*, pages 67–100. Chapman and Hall/CRC, 1st edition. (Cited on page 2.)

- Awasthi, P., Charikar, M., Krishnaswamy, R., and Sinop, A. K. (2015). The hardness of approximation of euclidean k-means. arXiv preprint arXiv:1502.03316. (Cited on page 2.)
- Awasthi, P. and Sheffet, O. (2012). Improved spectral-norm bounds for clustering. In Gupta, A., Jansen, K., Rolim, J., and Servedio, R., editors, *Approximation, Randomization, and Combinatorial Optimization. Algorithms and Techniques*, pages 37–49, Berlin, Heidelberg. Springer Berlin Heidelberg. (Cited on page 18.)
- Balcan, M.-F. F., Ehrlich, S., and Liang, Y. (2013). Distributed k-means and k-median clustering on general topologies. In Burges, C., Bottou, L., Welling, M., Ghahramani, Z., and Weinberger, K., editors, Advances in Neural Information Processing Systems, volume 26. Curran Associates, Inc. (Cited on pages 3 and 4.)
- Banerjee, A., Merugu, S., Dhillon, I. S., and Ghosh, J. (2005). Clustering with bregman divergences. *Journal of Machine Learning Research*, 6(58):1705–1749. (Cited on pages 2, 3, 6, and 13.)
- Bregman, L. (1967). The relaxation method of finding the common point of convex sets and its application to the solution of problems in convex programming. USSR Computational Mathematics and Mathematical Physics, 7(3):200–217. (Cited on page 6.)
- Chandola, V., Banerjee, A., and Kumar, V. (2009). Anomaly detection: A survey. ACM Comput. Surv., 41(3). (Cited on page 1.)
- Chen, P., Chen, Y., and Rao, M. (2008). Metrics defined by Bregman Divergences. *Commu*nications in Mathematical Sciences, 6(4):915 – 926. (Cited on page 13.)
- Chung, F. R. (1997). *Spectral graph theory*, volume 92. American Mathematical Soc. (Cited on pages 7 and 28.)
- Cvetkovic, D., Rowlinson, P., and Simic, S. (1997). Eigenspaces of Graphs. Encyclopedia of Mathematics and its Applications. Cambridge University Press. (Cited on pages 7 and 28.)
- Dafir, Z., Lamari, Y., and Slaoui, S. C. (2021). A survey on parallel clustering algorithms for big data. Artificial Intelligence Review, 54:2411–2443. (Cited on page 3.)
- Datta, S., Giannella, C., and Kargupta, H. (2009). Approximate distributed k-means clustering over a peer-to-peer network. *IEEE Transactions on Knowledge and Data Engineering*, 21(10):1372–1388. (Cited on page 3.)
- Dennis, D. K., Li, T., and Smith, V. (2021). Heterogeneity for the win: One-shot federated clustering. In Meila, M. and Zhang, T., editors, *Proceedings of the 38th International Conference on Machine Learning*, volume 139 of *Proceedings of Machine Learning Research*, pages 2611–2620. PMLR. (Cited on pages 3 and 18.)
- Dhillon, I. S., Mallela, S., and Kumar, R. (2003). A divisive information-theoretic feature clustering algorithm for text classification. *Journal of Machine Learning Research (JMLR)*, 3:1265–1287. (Cited on page 1.)
- Dimakis, A. G., Kar, S., Moura, J. M. F., Rabbat, M. G., and Scaglione, A. (2010). Gossip algorithms for distributed signal processing. *Proceedings of the IEEE*, 98(11):1847–1864. (Cited on page 10.)

- Fisher, R. A. (1936). The use of multiple measurements in taxonomic problems. Annals of Eugenics, 7(2):179–188. (Cited on pages 15 and 34.)
- Forero, P. A., Cano, A., and Giannakis, G. B. (2011). Distributed clustering using wireless sensor networks. *IEEE Journal of Selected Topics in Signal Processing*, 5(4):707–724. (Cited on pages 3, 4, 6, 9, 10, and 17.)
- Ghosh, A., Chung, J., Yin, D., and Ramchandran, K. (2020). An efficient framework for clustered federated learning. In Larochelle, H., Ranzato, M., Hadsell, R., Balcan, M., and Lin, H., editors, *Advances in Neural Information Processing Systems*, volume 33, pages 19586–19597. Curran Associates, Inc. (Cited on page 18.)
- Hallac, D., Leskovec, J., and Boyd, S. (2015). Network lasso: Clustering and optimization in large graphs. In *Proceedings of the 21th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, KDD '15, page 387–396, New York, NY, USA. Association for Computing Machinery. (Cited on page 18.)
- Har-Peled, S. and Mazumdar, S. (2004). On coresets for k-means and k-median clustering. In Proceedings of the Thirty-Sixth Annual ACM Symposium on Theory of Computing, STOC '04, page 291–300, New York, NY, USA. Association for Computing Machinery. (Cited on page 3.)
- Huang, J., Feng, Q., Huang, Z., Xu, J., and Wang, J. (2023). Fast algorithms for distributed k-clustering with outliers. In Krause, A., Brunskill, E., Cho, K., Engelhardt, B., Sabato, S., and Scarlett, J., editors, *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pages 13845–13868. PMLR. (Cited on page 3.)
- Huber, P. J. (1964). Robust Estimation of a Location Parameter. *The Annals of Mathematical Statistics*, 35(1):73 101. (Cited on page 6.)
- Jain, A. K. (2010). Data clustering: 50 years beyond k-means. Pattern Recognition Letters, 31(8):651–666. Award winning papers from the 19th International Conference on Pattern Recognition (ICPR). (Cited on page 1.)
- Jakovetić, D., Bajović, D., Sahu, A. K., and Kar, S. (2018). Convergence rates for distributed stochastic optimization over random networks. In 2018 IEEE Conference on Decision and Control (CDC), pages 4238–4245. (Cited on page 4.)
- Jakovetić, D., Bajović, D., Xavier, J., and Moura, J. M. F. (2020). Primal-dual methods for large-scale and distributed convex optimization and data analytics. *Proceedings of the IEEE*, 108(11):1923–1938. (Cited on page 2.)
- Jakovetić, D., Xavier, J., and Moura, J. M. F. (2014). Fast distributed gradient methods. *IEEE Transactions on Automatic Control*, 59(5):1131–1146. (Cited on page 4.)
- Kairouz, P., McMahan, H. B., Avent, B., Bellet, A., Bennis, M., Bhagoji, A. N., Bonawitz, K., Charles, Z., Cormode, G., Cummings, R., D'Oliveira, R. G. L., Eichner, H., Rouayheb, S. E., Evans, D., Gardner, J., Garrett, Z., Gascón, A., Ghazi, B., Gibbons, P. B., Gruteser, M., Harchaoui, Z., He, C., He, L., Huo, Z., Hutchinson, B., Hsu, J., Jaggi, M., Javidi, T., Joshi, G., Khodak, M., Konecný, J., Korolova, A., Koushanfar, F., Koyejo, S., Lepoint, T.,

Liu, Y., Mittal, P., Mohri, M., Nock, R., Özgür, A., Pagh, R., Qi, H., Ramage, D., Raskar, R., Raykova, M., Song, D., Song, W., Stich, S. U., Sun, Z., Suresh, A. T., Tramèr, F., Vepakomma, P., Wang, J., Xiong, L., Xu, Z., Yang, Q., Yu, F. X., Yu, H., and Zhao, S. (2021). Advances and open problems in federated learning. *Foundations and Trends® in Machine Learning*, 14(1–2):1–210. (Cited on page 2.)

- Kar, S. and Moura, J. M. (2013). Consensus + innovations distributed inference over networks: cooperation and sensing in networked systems. *IEEE Signal Processing Magazine*, 30(3):99– 109. (Cited on page 7.)
- Kar, S., Moura, J. M. F., and Ramanan, K. (2012). Distributed parameter estimation in sensor networks: Nonlinear observation models and imperfect communication. *IEEE Transactions* on Information Theory, 58(6):3575–3605. (Cited on pages 2 and 7.)
- Kar, S. and Swenson, B. (2019). Clustering with distributed data. arXiv preprint arXiv:1901.00214. (Cited on pages 3, 4, 6, 9, 10, 12, 13, 15, and 35.)
- Krizhevsky, A. (2009). Learning multiple layers of features from tiny images. Technical Report TR-2009, University of Toronto. (Cited on pages 15 and 34.)
- Kumar, A. and Kannan, R. (2010). Clustering with spectral norm and the k-means algorithm. In 2010 IEEE 51st Annual Symposium on Foundations of Computer Science, pages 299–308. (Cited on page 18.)
- Lecun, Y., Bottou, L., Bengio, Y., and Haffner, P. (1998). Gradient-based learning applied to document recognition. *Proceedings of the IEEE*, 86(11):2278–2324. (Cited on pages 15 and 34.)
- Li, S. and Guo, X. (2018). Distributed k-clustering for data with heavy noise. In Bengio, S., Wallach, H., Larochelle, H., Grauman, K., Cesa-Bianchi, N., and Garnett, R., editors, *Advances in Neural Information Processing Systems*, volume 31. Curran Associates, Inc. (Cited on page 3.)
- Li, T., Sahu, A. K., Talwalkar, A., and Smith, V. (2020). Federated learning: Challenges, methods, and future directions. *IEEE Signal Processing Magazine*, 37(3):50–60. (Cited on page 2.)
- Lloyd, S. (1982). Least squares quantization in PCM. *IEEE Transactions on Information Theory*, 28(2):129–137. (Cited on pages 2 and 3.)
- Lorenzo, P. D. and Scutari, G. (2016). Next: In-network nonconvex optimization. IEEE Transactions on Signal and Information Processing over Networks, 2(2):120–136. (Cited on page 4.)
- MacQueen, J. (1967). Some methods for classification and analysis of multivariate observations. In 5-th Berkeley Symposium on Mathematical Statistics and Probability, volume 1, pages 281–297. University of California Press. (Cited on page 2.)
- McMahan, B., Moore, E., Ramage, D., Hampson, S., and Arcas, B. A. y. (2017). Communication-Efficient Learning of Deep Networks from Decentralized Data. In Singh,

A. and Zhu, J., editors, *Proceedings of the 20th International Conference on Artificial Intelligence and Statistics*, volume 54 of *Proceedings of Machine Learning Research*, pages 1273–1282. PMLR. (Cited on page 2.)

- Megiddo, N. and Supowit, K. J. (1984). On the complexity of some common geometric location problems. *SIAM Journal on Computing*, 13(1):182–196. (Cited on page 2.)
- Nedić, A., Olshevsky, A., and Shi, W. (2017). Achieving geometric convergence for distributed optimization over time-varying graphs. SIAM Journal on Optimization, 27(4):2597–2633. (Cited on page 4.)
- Nedić, A. and Ozdaglar, A. (2009). Distributed subgradient methods for multi-agent optimization. *IEEE Transactions on Automatic Control*, 54(1):48–61. (Cited on page 4.)
- Nesterov, Y. (2018). Lectures on Convex Optimization. Springer Publishing Company, Incorporated, 2nd edition. (Cited on pages 7, 25, and 30.)
- Oliva, G., Setola, R., and Hadjicostis, C. N. (2013). Distributed k-means algorithm. arXiv preprint arXiv:1312.4176. (Cited on page 3.)
- Pediredla, A. K. and Seelamantula, C. S. (2011). A Huber-loss-driven clustering technique and its application to robust cell detection in confocal microscopy images. In 2011 7th International Symposium on Image and Signal Processing and Analysis (ISPA), pages 501– 506. (Cited on pages 1, 2, 3, and 6.)
- Pedregosa, F., Varoquaux, G., Gramfort, A., Michel, V., Thirion, B., Grisel, O., Blondel, M., Prettenhofer, P., Weiss, R., Dubourg, V., Vanderplas, J., Passos, A., Cournapeau, D., Brucher, M., Perrot, M., and Duchesnay, E. (2011). Scikit-learn: Machine learning in Python. Journal of Machine Learning Research, 12:2825–2830. (Cited on page 17.)
- Pollard, D. (1981). Strong consistency of k-means clustering. The Annals of Statistics, 9(1):135–140. (Cited on page 18.)
- Qiao, D., Ding, C., and Fan, J. (2023). Federated spectral clustering via secure similarity reconstruction. In *Thirty-seventh Conference on Neural Information Processing Systems*. (Cited on page 3.)
- Qin, J., Fu, W., Gao, H., and Zheng, W. X. (2017). Distributed k -means algorithm and fuzzy c -means algorithm for sensor networks based on multiagent consensus theory. *IEEE Transactions on Cybernetics*, 47(3):772–783. (Cited on page 3.)
- Rabbat, M., Nowak, R., and Bucklew, J. (2005). Generalized consensus computation in networked systems with erasure links. In *IEEE 6th Workshop on Signal Processing Advances* in Wireless Communications, 2005., pages 1088–1092. (Cited on page 6.)
- Sayed, A. H. (2014). Adaptive networks. *Proceedings of the IEEE*, 102(4):460–497. (Cited on page 2.)
- Selim, S. Z. and Ismail, M. A. (1984). K-means-type algorithms: A generalized convergence theorem and characterization of local optimality. *IEEE Transactions on Pattern Analysis* and Machine Intelligence, PAMI-6(1):81–87. (Cited on page 2.)

- Shi, W., Ling, Q., Wu, G., and Yin, W. (2015). Extra: An exact first-order algorithm for decentralized consensus optimization. SIAM Journal on Optimization, 25(2):944–966. (Cited on page 4.)
- Sun, D., Toh, K.-C., and Yuan, Y. (2021). Convex clustering: Model, theoretical guarantee and efficient algorithm. J. Mach. Learn. Res., 22(1). (Cited on page 18.)
- Sundaram, S. and Gharesifard, B. (2019). Distributed optimization under adversarial nodes. *IEEE Transactions on Automatic Control*, 64(3):1063–1076. (Cited on page 2.)
- Swenson, B., Murray, R., Poor, H. V., and Kar, S. (2022). Distributed stochastic gradient descent: Nonconvexity, nonsmoothness, and convergence to local minima. J. Mach. Learn. Res., 23(1). (Cited on page 4.)
- Taylor, P. (2021). Volume of data/information created, captured, copied, and consumed worldwide from 2010 to 2020, with forecasts from 2021 to 2025 (in zettabytes). Technical report, IDC & Statista. (Cited on page 2.)
- Tsianos, K. I., Lawlor, S., and Rabbat, M. G. (2012). Consensus-based distributed optimization: Practical issues and applications in large-scale machine learning. In 2012 50th Annual Allerton Conference on Communication, Control, and Computing (Allerton), pages 1543–1550. (Cited on page 2.)
- Vattani, A. (2009). The hardness of k-means clustering in the plane. https://cseweb.ucsd.edu/ avattani/papers/kmeans_hardness.pdf. (Cited on page 2.)
- Vlaski, S., Kar, S., Sayed, A. H., and Moura, J. M. (2023). Networked signal and information processing: Learning by multiagent systems. *IEEE Signal Processing Magazine*, 40(5):92– 105. (Cited on pages 2 and 6.)
- Xin, R., Khan, U. A., and Kar, S. (2022a). Fast decentralized nonconvex finite-sum optimization with recursive variance reduction. SIAM Journal on Optimization, 32(1):1–28. (Cited on page 4.)
- Xin, R., Khan, U. A., and Kar, S. (2022b). A fast randomized incremental gradient method for decentralized nonconvex optimization. *IEEE Transactions on Automatic Control*, 67(10):5150–5165. (Cited on page 4.)
- Xin, R., Pu, S., Nedić, A., and Khan, U. A. (2020). A general framework for decentralized optimization with first-order methods. *Proceedings of the IEEE*, 108(11):1869–1889. (Cited on page 4.)
- Xu, R. and Wunsch, D. (2005). Survey of clustering algorithms. *IEEE Transactions on Neural Networks*, 16(3):645–678. (Cited on page 1.)
- Xu, R. and Wunsch, D. C. (2010). Clustering algorithms in biomedical research: A review. *IEEE Reviews in Biomedical Engineering*, 3:120–154. (Cited on page 1.)
- Yang, T. (2013). Trading computation for communication: Distributed stochastic dual coordinate ascent. In Burges, C., Bottou, L., Welling, M., Ghahramani, Z., and Weinberger, K., editors, Advances in Neural Information Processing Systems, volume 26. Curran Associates, Inc. (Cited on page 2.)

- Yu, H., Chen, H., Zhao, S., and Shi, Q. (2021). Distributed soft clustering algorithm for iot based on finite time average consensus. *IEEE Internet of Things Journal*, 8(21):16096– 16107. (Cited on pages 3 and 7.)
- Yu, S. and Kar, S. (2023). Secure distributed optimization under gradient attacks. *IEEE Transactions on Signal Processing*, 71:1802–1816. (Cited on page 2.)

A Introduction

The Appendix provides additional materials and results omitted from the main body of the paper. Appendix B contains the proofs omitted from the main body. Appendix C provides additional numerical results.

B Missing proofs

In this section we provide the proofs omitted from the main body. Subsection B.1 provides proofs from Section 4.2, Subsection B.2 provides proofs from Section 4.3, while Subsection B.3 provides proofs omitted from Section 4.4.

B.1 Proofs from Section 4.2

Proof of Lemma 1. Recall the clustering cost J_{ρ} from (3). Since at least one cluster is nonempty at each user, it readily follows that J_{ρ} is convex, as a sum of convex functions. Next, we know from (5) that we can represent the gradient of J_{ρ} compactly as $\nabla J_{\rho}(\mathbf{x}, C) = \frac{1}{\rho} \nabla J(\mathbf{x}, C) + \mathbf{L}\mathbf{x}$. Therefore, for each $\mathbf{x}, \mathbf{z} \in \mathbb{R}^{Kmd}$, we have

$$\begin{aligned} \|\nabla J_{\rho}(\mathbf{x}, C) - \nabla J_{\rho}(\mathbf{z}, C)\| &\leq 1/\rho \|\nabla J(\mathbf{x}, C) - \nabla J(\mathbf{z}, C)\| + \|\mathbf{L}(\mathbf{x} - \mathbf{z})\| \\ &\leq 1/\rho \|\nabla J(\mathbf{x}, C) - \nabla J(\mathbf{z}, C)\| + \lambda_{\max}(\mathbf{L})\|\mathbf{x} - \mathbf{z}\|, \end{aligned}$$
(15)

where $\lambda_{\max}(\mathbf{L})$ is the largest eigenvalue of \mathbf{L} . We now look at $\|\nabla J(\mathbf{x}, C) - \nabla J(\mathbf{z}, C)\|$. First note that, for each $i \in [m]$ and $k \in [K]$, the *i*, *k*-th component of $\nabla J(\mathbf{x}, C) \in \mathbb{R}^{Kmd}$ is given by $[\nabla J(\mathbf{x}, C)]_{i,k} = \sum_{r \in C_i(k)} w_{i,r} \nabla f(x_i(k), y_{i,r})$. It then follows that

$$\begin{aligned} \|\nabla J(\mathbf{x}, C) - \nabla J(\mathbf{z}, C)\|^{2} &= \sum_{i \in [m]} \sum_{k \in [K]} \|[\nabla J(\mathbf{x}, C) - \nabla J(\mathbf{z}, C)]_{i,k}\|^{2} \\ &= \sum_{i \in [m]} \sum_{k \in [K]} \left\| \sum_{r \in C_{i}(k)} w_{i,r} \left[\nabla f(x_{i}(k), y_{i,r}) - \nabla f(z_{i}(k), y_{i,r}) \right] \right\|^{2} \\ &\stackrel{(a)}{\leq} \sum_{i \in [m]} \sum_{k \in [K]} \sum_{r \in C_{i}(k)} \frac{w_{i,r}}{\widetilde{w}_{i,k}} \left\| \widetilde{w}_{i,k} \left[\nabla f(x_{i}(k), y_{i,r}) - \nabla f(z_{i}(k), y_{i,r}) \right] \right\|^{2} \\ &\stackrel{(b)}{\leq} \beta^{2} \sum_{i \in [m]} \sum_{k \in [K]} \widetilde{w}_{i,k}^{2} \|x_{i}(k) - z_{i}(k)\|^{2} \overset{(c)}{\leq} \beta^{2} \|\mathbf{x} - \mathbf{z}\|^{2}, \end{aligned}$$

where $\widetilde{w}_{i,k} = \sum_{r \in C_i(k)} w_{i,r}$, (a) follows from Jensen's inequality, (b) follows from β -smoothness of f, while (c) follows from the fact that $\widetilde{w}_{i,k} < 1$. Using the properties of the Kronecker product, it can be shown that $\lambda_{\max}(\mathbf{L}) = \lambda_{\max}(L)$, i.e., the largest eigenvalue of $\mathbf{L} \in \mathbb{R}^{Kmd \times Kmd}$ corresponds to the largest eigenvalue of $L \in \mathbb{R}^{m \times m}$. Plugging everything back in (15) yields

$$\|\nabla J_{\rho}(\mathbf{x}, C) - \nabla J_{\rho}(\mathbf{z}, C)\| \leq \beta/\rho \|\mathbf{x} - \mathbf{z}\| + \lambda_{\max}(L) \|\mathbf{x} - \mathbf{z}\| = \beta_{L,\rho} \|\mathbf{x} - \mathbf{z}\|.$$

It can be shown that convexity and $\beta_{L,\rho}$ -Lipschitz continuous gradients together imply $\beta_{L,\rho}$ -smoothness, see, e.g., Nesterov (2018). This completes the proof.

Proof of Lemma 2. First, note that (6) together with Assumption 5 implies that the clustering reassignment step decreases the cost since, at every time $t \ge 1$ and user $i \in [m]$,

$$H(\mathbf{x}_{i}^{t}, C_{i}^{t+1}) = \sum_{k \in [K]} \sum_{y \in C_{i}^{t+1}(k)} w_{y} f\left(x_{i}^{t}(k), y\right) \leq \sum_{k \in [K]} \sum_{y \in C_{i}^{t}(k)} w_{y} f\left(x_{i}^{t}(k), y\right) = H(\mathbf{x}_{i}^{t}, C_{i}^{t}),$$

while the consensus part, $\langle \mathbf{x}^t, \mathbf{L}\mathbf{x}^t \rangle$, remains unchanged. This readily implies that

$$J_{\rho}(\mathbf{x}^{t}, C^{t+1}) = \frac{1}{\rho} J(\mathbf{x}^{t}, C^{t+1}) + \frac{1}{2} \langle \mathbf{x}^{t}, \mathbf{L}\mathbf{x}^{t} \rangle \leq \frac{1}{\rho} J(\mathbf{x}^{t}, C^{t}) + \frac{1}{2} \langle \mathbf{x}^{t}, \mathbf{L}\mathbf{x}^{t} \rangle = J_{\rho}(\mathbf{x}^{t}, C^{t}).$$
(16)

Next, from Lemma 1 we have that, for any $t \ge 0^8$ and $b = 0, \ldots, B - 1$,

$$J_{\rho}(\mathbf{x}^{t,b+1}, C^{t+1}) \le J_{\rho}(\mathbf{x}^{t,b}, C^{t+1}) + \left\langle \nabla J_{\rho}(\mathbf{x}^{t,b}, C^{t+1}), \mathbf{x}^{t,b+1} - \mathbf{x}^{t,b} \right\rangle + \frac{\beta_{L,\rho}}{2} \|\mathbf{x}^{t,b+1} - \mathbf{x}^{t,b}\|^{2}.$$

Using (11), we get

$$J_{\rho}(\mathbf{x}^{t,b+1}, C^{t+1}) \le J_{\rho}(\mathbf{x}^{t,b}, C^{t+1}) - c(\alpha) \|\nabla J_{\rho}(\mathbf{x}^{t,b}, C^{t+1})\|^{2},$$
(17)

where $c(\alpha) = \alpha \left(1 - \frac{\alpha \beta_{L,\rho}}{2}\right)$. Applying (17) recursively, and recalling that $\mathbf{x}^{t+1} = \mathbf{x}^{t,B}$, $\mathbf{x}^t = \mathbf{x}^{t,0}$, we get that, for any time $t \ge 0$

$$J_{\rho}(\mathbf{x}^{t+1}, C^{t+1}) \le J_{\rho}(\mathbf{x}^{t}, C^{t+1}) - c(\alpha) \sum_{b=0}^{B-1} \|\nabla J_{\rho}(\mathbf{x}^{t,b}, C^{t+1})\|^{2}.$$
 (18)

Choosing $\alpha < \frac{1}{\beta_{L,\rho}}$ guarantees that $c(\alpha) > 0$, which readily implies

$$J_{\rho}(\mathbf{x}^{t+1}, C^{t+1}) \le J_{\rho}(\mathbf{x}^{t}, C^{t+1}).$$
(19)

Finally, combining (16) and (19), we get that, for any $t \ge 1$,

$$J_{\rho}(\mathbf{x}^{t+1}, C^{t+1}) \le J_{\rho}(\mathbf{x}^{t}, C^{t+1}) \le J_{\rho}(\mathbf{x}^{t}, C^{t}),$$

which completes the proof.

Remark 13. We can see the benefit of performing B rounds of center update in equation (18), where a higher value of B leads to a stronger decrease in the cost function J_{ρ} .

Proof of Lemma 4. Let $\{\mathbf{x}^{t_s}\}_{s\in\mathbb{N}}$ be a convergent subsequence of $\{\mathbf{x}^t\}_{t\in\mathbb{N}}$. Let $\mathbf{x}^{\star}\in\mathbb{R}^{Kmd}$ be its limit point and assume the contrary, that \mathbf{x}^{\star} is not a fixed point. By Definition 2, this implies $\|\nabla J_{\rho}(\mathbf{x}^{\star}, C)\| > 0$, for all $C \in U_{\mathbf{x}^{\star}}$ As the number of possible clusterings is finite, we define

$$\epsilon_1 = \min_{C \in U_{\mathbf{x}^*}} \|\nabla J_{\rho}(\mathbf{x}^*, C)\| > 0.$$
(20)

Next, from the continuity of g, we know that, for any $\epsilon > 0$, there exists a $\delta > 0$, such that, for any $x, x' \in \mathbb{R}^d$, for which $||x - x'|| \leq \delta$, we have $g(x, x') < \epsilon$. Choose $\epsilon_* > 0$ from Lemma 3.

⁸Note that, starting from the center initialization \mathbf{x}^0 , we first update the clusters to obtain C^1 . From there, we perform E center updates to obtain \mathbf{x}^1 , hence for the center update step, the counter starts from t = 0. This is different for the cluster update step, as we do not have a clustering at time t = 0, so cost decrease with respect to cluster update only starts from iteration t = 1.

From $\lim_{s\to\infty} \mathbf{x}^{t_s} = \mathbf{x}^*$, we know that, for any fixed $\delta > 0$, there exists a sufficiently large $s_0 \in \mathbb{N}$, such that, for all $i \in [m]$, $k \in [K]$ and all $s \geq s_0$, $||x_i^{t_s}(k) - x_i^*(k)|| < \delta$. From the previous discussion, it then readily follows that there exists a $\delta_* > 0$ and a sufficiently large $s_0 \in \mathbb{N}$, such that $g(x_i^{t_s}(k), x_i^*(k)) < \epsilon_*$, for all $i \in [m]$, $k \in [K]$ and $s \geq s_0$. Per Lemma 3, we then have $C_{\mathbf{x}^{t_s+1}} \in U_{\mathbf{x}^{t_s}} \subset U_{\mathbf{x}^*}$, for all $s \geq s_0$. From (20), it follows that, for all $s \geq s_0$,

$$\|\nabla J_{\rho}(\mathbf{x}^{\star}, C^{t_s+1})\| \ge \epsilon_1.$$
(21)

Next, using (18), we have

$$J_{\rho}(\mathbf{x}^{t+1}, C^{t+1}) \leq J_{\rho}(\mathbf{x}^{t}, C^{t}) - c(\alpha) \sum_{b=0}^{B-1} \|\nabla J_{\rho}(\mathbf{x}^{t,b}, C^{t+1})\|^{2}$$

$$\leq \ldots \leq J_{\rho}(\mathbf{x}^{0}, C^{1}) - c(\alpha) \sum_{s=0}^{t} \sum_{b=0}^{B-1} \|\nabla J_{\rho}(\mathbf{x}^{s,e}, C^{s+1})\|^{2}.$$

Rearranging, we get

$$c(\alpha) \sum_{s=0}^{t} \sum_{b=0}^{B-1} \|\nabla J_{\rho}(\mathbf{x}^{s,e}, C_{s+1})\|^2 \le J_{\rho}(\mathbf{x}^0, C^1).$$
(22)

Additionally, note that

$$\sum_{j=0}^{s(t)} \|\nabla J_{\rho}(\mathbf{x}^{t_j}, C^{t_j+1})\|^2 \le \sum_{j=0}^{s(t)} \sum_{b=0}^{B-1} \|\nabla J_{\rho}(\mathbf{x}^{t_j, e}, C^{t_j+1})\|^2 \le \sum_{j=0}^{t} \sum_{b=0}^{B-1} \|\nabla J_{\rho}(\mathbf{x}^j, C^{j+1})\|^2, \quad (23)$$

where $s(t) = \sup\{j : t_j \le t\}$. Combining (22) and (23), we get

$$c(\alpha) \sum_{j=0}^{s(t)} \|\nabla J_{\rho}(\mathbf{x}^{t_j}, C^{t_j+1})\|^2 \le J_{\rho}(\mathbf{x}^0, C^1).$$
(24)

Since the term on the right hand side of (24) is finite and independent of t, we can take the limit as t goes to infinity, to obtain

$$c(\alpha) \sum_{j=0}^{\infty} \|\nabla J_{\rho}(\mathbf{x}^{t_j}, C^{t_j+1})\|^2 < \infty,$$

$$(25)$$

where we use the fact that $\lim_{t\to\infty} s(t) = \infty$. The inequality (25) implies that $\lim_{s\to\infty} \|\nabla J_{\rho}(\mathbf{x}^{t_s}, C^{t_s+1})\|^2 = 0$. Next, fix an $\epsilon > 0$. By the definition of limits, there exists a $s_1 \in \mathbb{N}$, such that, for all $s \geq s_1$, $\|\nabla J_{\rho}(\mathbf{x}^{t_s}, C^{t_s+1})\| < \epsilon$. On the other hand, from $\lim_{s\to\infty} \mathbf{x}^{t_s} = \mathbf{x}^*$, we know that there exists a $s_2 \in \mathbb{N}$, such that $\|\mathbf{x}^{t_s} - \mathbf{x}^*\| < \epsilon$, for all $s \geq s_2$. As $C_{\mathbf{x}^{t_s+1}} \in U_{\mathbf{x}^{t_s}} \subset U_{\mathbf{x}^*}$, for all $s \geq s_0$, we then have, for any $s \geq \max\{s_0, s_1, s_2\}$,

$$\begin{aligned} \|\nabla J_{\rho}(\mathbf{x}^{\star}, C^{t_{s}+1})\| &\leq \|\nabla J_{\rho}(\mathbf{x}^{\star}, C^{t_{s}+1}) - \nabla J_{\rho}(\mathbf{x}^{t_{s}}, C^{t_{s}+1})\| + \|\nabla J_{\rho}(\mathbf{x}^{t_{s}}, C^{t_{s}+1})\| \\ &\leq \beta_{L,\rho} \|\mathbf{x}^{\star} - \mathbf{x}^{t_{s}}\| + \epsilon < (\beta_{L,\rho} + 1)\epsilon, \end{aligned}$$

where we used the Lipschitz continuity of gradients of J_{ρ} in the second inequality. As $\epsilon > 0$ was arbitrarily chosen, we can conclude that

$$\lim_{s \to \infty} \|\nabla J_{\rho}(\mathbf{x}^{\star}, C^{t_s+1})\| = 0, \tag{26}$$

which clearly contradicts (21). Hence, it follows that \mathbf{x}^* is a fixed point, i.e., there exists a clustering $C \in U_{\mathbf{x}^*}$, such that $\nabla J_{\rho}(\mathbf{x}^*, C) = 0$.

Proof of Lemma 6. By Lemma 2, we know that

$$\dots \leq J_{\rho}(\mathbf{x}^t, C^{t+1}) \leq \dots \leq J_{\rho}(\mathbf{x}^1, C^1) \leq J_{\rho}(\mathbf{x}^0, C^1) < \infty.$$
(27)

Next, suppose the contrary, that the sequence of centers $\{\mathbf{x}^t\}_{t\in\mathbb{N}}$ is unbounded. This implies the existence of a user $i \in [m]$, cluster $k \in [K]$, and a subsequence $t_s, s \in \mathbb{N}$, such that $\lim_{s\to\infty} \|x_i^{t_s}(k)\| = \infty$. From Assumption 2, if consensus for the k-th cluster is not reached, i.e., if there exists a $j \in [m]$ such that $\lim_{s\to\infty} \|x_i^{t_s}(k) - x_j^{t_s}(k)\| > 0$, then clearly $\lim_{s\to\infty} \langle \mathbf{x}^{t_s}, \mathbf{L}\mathbf{x}^{t_s} \rangle \to \infty$, which implies $J_{\rho}(\mathbf{x}^{t_s}, C^{t_s}) \to \infty$, contradicting (27). Therefore, it must be that $\lim_{s\to\infty} \|x_i^{t_s}(k)\| = 0$, for all $j \in [m]$. For each $s \in \mathbb{N}$, let

Therefore, it must be that $\lim_{s\to\infty} ||x_i^{t_s}(k) - x_j^{t_s}(k)|| = 0$, for all $j \in [m]$. For each $s \in \mathbb{N}$, let $\overline{t}_s = \max\{t \leq t_s : \text{ there exists a } j \in [m] \text{ such that } C_j^t(k) \neq \emptyset\}$, i.e., \overline{t}_s is the largest element in the sequence prior to t_s , such that the k-th cluster of at least one user is non-empty. We then have the following possibilities:

- 1. If $\overline{t}_s = t_s$, then $x_j^{t_s}(k) = x_j^{\overline{t}_s}(k)$, for all $j \in [m]$.
- 2. If $\bar{t}_s < t_s$, then, recalling the update rule (7), for all $j \in [m]$, we have

$$\begin{split} x_j^{t_s}(k) &= x_j^{t_s-1,B-1}(k) - \alpha \sum_{l \in \mathcal{N}_j} \left(x_j^{t_s-1,B-1}(k) - x_l^{t_s-1,B-1}(k) \right) \\ &= x_j^{t_s-1,B-2}(k) - \alpha \sum_{l \in \mathcal{N}_j} \left(x_j^{t_s-1,B-1}(k) - x_l^{t_s-1,B-1}(k) + x_j^{t_s-1,B-2}(k) - x_l^{t_s-1,B-2}(k) \right) \\ &= \dots = x_j^{t_s-1}(k) - \alpha \sum_{b=0}^{B-1} \sum_{l \in \mathcal{N}_j} \left(x_j^{t_s-1,b}(k) - x_l^{t_s-1,b}(k) \right) \\ &= \dots = x_j^{\bar{t}_s}(k) - \alpha \sum_{r=1}^{B-1} \sum_{b=0}^{B-1} \sum_{l \in \mathcal{N}_j} \left(x_j^{t_s-r,b}(k) - x_l^{t_s-r,b}(k) \right) . \end{split}$$

By the definition of \bar{t}_s , if $\bar{t}_s < t_s$, it follows that, for the k-th center, the algorithm only performs $B(t_s - \bar{t}_s)$ consensus steps between times \bar{t}_s and t_s , i.e., only diffuses the k-th center estimates $x_i^{\bar{t}_s}(k), j \in [m]$, across the network⁹.

From 1. and 2. we can readily conclude that $x_j^{t_s}(k)$ only depends on the k-th center estimates at time \bar{t}_s , $x_l^{\bar{t}_s}(k)$, $l \in [m]$, for all users. From the preceding discussion, the facts that $\lim_{s\to\infty} \|x_i^{t_s}(k)\| = \infty$ and $\lim_{s\to\infty} \|x_i^{t_s}(k)\| = 0$, for all $j \in [m]$, we can readily conclude that $\|x_j^{\bar{t}_s}(k)\| \to \infty$, for all $j \in [m]$. For a center $\mathbf{x} \in \mathbb{R}^{Kmd}$ and clustering C, define

$$H_k(\mathbf{x}, C) = \sum_{j \in [m]} \sum_{r \in C_j(k)} w_{j,r} f(x_j(k), y_{j,r}),$$

i.e., for a given center and clustering, H_k defines the cost associated with the k-th cluster across all the users. Combining the facts that $||x_i^{\bar{t}_s}(k)|| \to \infty$, for all $j \in [m]$, and that for

⁹To be more precise, since the algorithm performs $E(t_s - \bar{t}_s)$ consensus steps, the diffusion is performed across the $E(t_s - \bar{t}_s)$ -hop neighbours. For a vertex *i*, the set of *K*-hop neighbours of *i* is the set of vertices that can be reached from *i* by traversing at most *K* edges, see, e.g., Chung (1997); Cvetkovic et al. (1997).

every $s \in \mathbb{N}$, there exists a $j \in [m]$, such that $C_{i}^{\overline{t}_{s}}(k) \neq \emptyset$, with Assumption 3, we get

$$\lim_{s \to \infty} H_k\left(\mathbf{x}^{\bar{t}_s}, C^{\bar{t}_s}\right) = \lim_{s \to \infty} \sum_{j \in [m]} \sum_{r \in C_j^{\bar{t}_s}(k)} w_{j,r} f(x_j^{\bar{t}_s}(k), y_{j,r}) = \infty.$$

It is easy to see that unboundness of H_k implies unboundedness of J_{ρ} , i.e., we have $\lim_{s\to\infty} J_{\rho}(\mathbf{x}^{\bar{t}_s}, C^{\bar{t}_s}) = \infty$, clearly contradicting (27). Therefore, the desired claim follows. \Box

Proof of Lemma 7. Recall that, by Lemma 2, the sequence of costs $\{J_{\rho}(\mathbf{x}^{t}, C^{t})\}_{t\in\mathbb{N}}$ is non-increasing. Moreover, since $J_{\rho} \geq 0$, we know that the limit of the sequence of costs exists and is finite. Let

$$J_{\rho}^{\star} = \lim_{t \to \infty} J_{\rho}(\mathbf{x}^t, C^t).$$
(28)

By assumption, $\overline{U}_{\mathbf{x}^*} \neq \emptyset$. From the definition of $\overline{U}_{\mathbf{x}^*}$, for all $C \in U_{\mathbf{x}^*} \setminus \overline{U}_{\mathbf{x}^*}$ we have

$$\|\nabla J_{\rho}(\mathbf{x}^{\star}, C)\| > 0.$$
⁽²⁹⁾

As $U_{\mathbf{x}^{\star}}$ is a finite set, we can define $\epsilon_1 = \min_{C \in U_{\mathbf{x}^{\star}} \setminus \overline{U}_{\mathbf{x}^{\star}}} \|\nabla J_{\rho}(\mathbf{x}^{\star}, C)\| > 0$. Let $\epsilon_* > 0$ be such that Lemma 3 holds. From the continuity of g, we know that there exists a $\delta_* > 0$, such that, for all $\mathbf{x} \in \mathbb{R}^{Kmd}$, $i \in [m], k \in [K]$,

$$\|\mathbf{x} - \mathbf{x}^{\star}\| < \delta_{*} \implies g(x_{i}(k), x_{i}^{\star}(k)) < \epsilon_{*}.$$
(30)

Define

$$\epsilon^{\star} = \min\left\{\delta_{\star}, \frac{\epsilon_1}{\beta_{L,\rho}}\right\}.$$
(31)

For an arbitrary $\epsilon \in (0, \epsilon^*)$, let $t_0 \in \mathbb{N}$ be such that, for all $t \geq t_0$,

$$J_{\rho}(\mathbf{x}^{t}, C^{t}) \leq J_{\rho}^{\star} + \frac{c(\alpha)}{2} (\epsilon_{1} - \beta_{L,\rho} \epsilon)^{2}, \qquad (32)$$

with $c(\alpha)$ defined as in Lemma 2. Note that such a choice of t_0 is possible, from (28) and the fact that $(\epsilon_1 - \beta_{L,\rho}\epsilon)^2 > 0$. Our goal now is to show that, for a fixed $\epsilon \in (0, \epsilon^*)$, if for some t such that $t \ge t_0$ and $\|\mathbf{x}^t - \mathbf{x}^*\| < \epsilon$, then $\|\mathbf{x}^{t+1} - \mathbf{x}^*\| < \epsilon$.

First note that, if $t \geq t_0$ and $\|\mathbf{x}^t - \mathbf{x}^*\| < \epsilon$, it holds that $C^{t+1} \in \overline{U}_{\mathbf{x}^*}$. To see this, assume the contrary, $\|\mathbf{x}^t - \mathbf{x}^*\| < \epsilon$ and $C^{t+1} \notin \overline{U}_{\mathbf{x}^*}$. It follows from (31) that $\|\mathbf{x}^t - \mathbf{x}^*\| < \delta_*$. From (30) and Lemma 3, we then have $U_{\mathbf{x}^t} \subset U_{\mathbf{x}^*}$, and hence, $C^{t+1} \in U_{\mathbf{x}^*}$. Using Lipschitz continuity of gradients of J_{ρ} , we get

$$\|\nabla J_{\rho}(\mathbf{x}^{t}, C^{t+1}) - \nabla J_{\rho}(\mathbf{x}^{\star}, C^{t+1})\| \leq \beta_{L,\rho} \|\mathbf{x}^{t} - \mathbf{x}^{\star}\| \leq \beta_{L,\rho} \epsilon.$$
(33)

As $C^{t+1} \notin \overline{U}_{\mathbf{x}^{\star}}$, from (29), we have

$$\|\nabla J_{\rho}(\mathbf{x}^{\star}, C^{t+1})\| \ge \epsilon_1. \tag{34}$$

Applying the triangle inequality, (33) and (34), we get

$$\|\nabla J_{\rho}(\mathbf{x}^{t}, C^{t+1})\| \ge \epsilon_{1} - \beta_{L,\rho}\epsilon.$$
(35)

Note that by (31), the right-hand side of (35) is positive. Combining (18), (32), (35), we get

$$J_{\rho}(\mathbf{x}^{t+1}, C^{t+1}) \leq J_{\rho}(\mathbf{x}^{t}, C^{t}) - c(\alpha) \|\nabla J_{\rho}(\mathbf{x}^{t}, C^{t+1})\|^{2} \leq J_{\rho}^{\star} + \frac{c(\alpha)}{2} (\epsilon_{1} - \beta_{L,\rho}\epsilon)^{2} - c(\alpha) \|\nabla J_{\rho}(\mathbf{x}^{t}, C^{t+1})\|^{2} \leq J_{\rho}^{\star} + \frac{c(\alpha)}{2} (\epsilon_{1} - \beta_{L,\rho}\epsilon)^{2} - c(\alpha) (\epsilon_{1} - \beta_{L,\rho}\epsilon)^{2} < J_{\rho}^{\star},$$

which is a contradiction. Hence, $C^{t+1} \in \overline{U}_{\mathbf{x}^{\star}}$. Next, it can be shown that convexity and $\beta_{L,\rho}$ -smoothness of J_{ρ} together imply $\beta_{L,\rho}$ -co-coercivity of J_{ρ} , i.e., for each fixed clustering $C \in \mathcal{C}_{m,K,\mathcal{D}}$ and $\mathbf{x}, \mathbf{z} \in \mathbb{R}^{Kmd}$, we have

$$\langle \nabla J_{\rho}(\mathbf{x}, C) - \nabla J_{\rho}(\mathbf{z}, C), \mathbf{x} - \mathbf{z} \rangle \ge \frac{1}{\beta_{L,\rho}} \| \nabla J_{\rho}(\mathbf{x}, C) - \nabla J_{\rho}(\mathbf{z}, C) \|^{2}.$$

For a formal account of this result, see, e.g., Nesterov (2018). Combining this fact with the update rule (11), and the fact that $C^{t+1} \in \overline{U}_{\mathbf{x}^*}$, we have

$$\begin{aligned} \|\mathbf{x}^{t+1} - \mathbf{x}^{\star}\|^{2} &= \|\mathbf{x}^{t,B-1} - \alpha \nabla J_{\rho}(\mathbf{x}^{t,B-1}, C^{t+1}) - \mathbf{x}^{\star}\|^{2} \\ &= \|\mathbf{x}^{t,B-1} - \mathbf{x}^{\star}\|^{2} + \alpha^{2} \|\nabla J_{\rho}(\mathbf{x}^{t,B-1}, C^{t+1})\|^{2} - 2\alpha \langle \nabla J_{\rho}(\mathbf{x}^{t,B-1}, C^{t+1}), \mathbf{x}^{t} - \mathbf{x}^{\star} \rangle \\ &\leq \|\mathbf{x}^{t,B-1} - \mathbf{x}^{\star}\|^{2} - \alpha \left(\frac{1}{\beta_{L,\rho}} - \alpha\right) \|\nabla J_{\rho}(\mathbf{x}^{t,B-1}, C^{t+1})\|^{2}. \end{aligned}$$

Repeating the argument recursively and recalling that $\mathbf{x}^{t,0} = \mathbf{x}^t$, we get

$$\|\mathbf{x}^{t+1} - \mathbf{x}^{\star}\|^{2} \le \|\mathbf{x}^{t} - \mathbf{x}^{\star}\|^{2} - \alpha \left(\frac{1}{\beta_{L,\rho}} - \alpha\right) \sum_{b=0}^{B-1} \|\nabla J_{\rho}(\mathbf{x}^{t,b}, C^{t+1})\| \le \|\mathbf{x}^{t} - \mathbf{x}^{\star}\|^{2} < \epsilon^{2}.$$
 (36)

where second inequality follows from the step-size choice $\alpha < \frac{1}{\beta_{L,\rho}}$. Therefore, we have shown that $\|\mathbf{x}^t - \mathbf{x}^\star\| < \epsilon$ implies $\|\mathbf{x}^{t+1} - \mathbf{x}^\star\| < \epsilon$. The same result holds for all s > t inductively. \Box

Remark 14. We can again see the benefit of performing B rounds of center update in (36), where higher values of B lead to stronger decrease in distance of centers from a fixed point.

B.2 Proofs from Section 4.3

Example of Bregman distances that are squares of metrics. For the squared Euclidean norm $f(x, y) = ||x-y||^2$, we have $g(x, y) = \sqrt{f(x, y)} = ||x-y||$. Similarly, for the Mahalanobislike Bregman distance $f(x, y) = ||x - y||_A^2$, for a positive definite matrix A, we have $g(x, y) = \sqrt{f(x, y)} = ||x - y||_A$. For further examples, see Armacki et al. (2022a).

Proof of Lemma 4. By Definition 2, we know that $(\mathbf{x}^{\star}, C^{\star})$ must satisfy

$$0 = \nabla J_{\rho}(\mathbf{x}^{\star}, C^{\star}) = \frac{1}{\rho} J(\mathbf{x}^{\star}, C^{\star}) + \mathbf{L}\mathbf{x}^{\star}.$$
(37)

By the definition of $J(\mathbf{x}^{\star}, C^{\star})$ and **L**, it is not hard to see that, for each $i \in [m]$, the k-th component of the gradient of $J_{\rho}(\mathbf{x}^{\star}, C^{\star})$, for any $k \in [K]$, is given by

$$[\nabla J(\mathbf{x}^{\star}, C^{\star})]_{i,k} = \frac{1}{\rho} \sum_{r \in C_i^{\star}(k)} w_{i,r} \nabla f(x_i^{\star}(k), y_{i,r}) + \sum_{j \in \mathcal{N}_i} (x_i^{\star}(k) - x_j^{\star}(k)).$$
(38)

Using the definition of Bregman divergence, we have

$$\nabla_x f(x,y) = -\nabla\psi(x) + \nabla\psi(x) + \nabla^2\psi(x)(x-y) = \nabla^2\psi(x)(x-y).$$
(39)

Combining (37), (38) and (39), for any $i \in [m]$ and $k \in [K]$, we get

$$\frac{1}{\rho} \sum_{r \in C_i^{\star}(k)} w_{i,r} \nabla^2 \psi(x_i^{\star}(k)) (x_i^{\star}(k) - y_{i,r}) + \sum_{j \in \mathcal{N}_i} (x_i^{\star}(k) - x_j^{\star}(k)) = 0 \iff \left(\frac{1}{\rho} \nabla^2 \psi(x_i^{\star}(k)) \sum_{r \in C_i^{\star}(k)} w_{i,r} + |\mathcal{N}_i| I_{d \times d} \right) x_i^{\star}(k) = \frac{1}{\rho} \sum_{r \in C_i^{\star}(k)} w_{i,r} y_{i,r} + \sum_{j \in \mathcal{N}_i} x_j^{\star}(k). \quad (40)$$

According to Assumption 6, the matrix $P_{i,k} = \frac{1}{\rho} \nabla^2 \psi(x_i^{\star}(k)) \sum_{r \in C_i^{\star}(k)} w_{i,r} + |\mathcal{N}_i| I_{d \times d}$ is positive definite, and hence invertible. Multiplying both sides of (40) with $P_{i,k}^{-1}$ completes the proof.

B.3 Proofs from Section 4.4

Lemma 12. Assumption 7 is satisfied for K-means, Huber and logistic loss functions.

Proof. For $f(x,y) = \frac{1}{2} ||x - y||^2$, we have $\nabla f(x,y) = x - y$, i.e., $\gamma(x,y) = 1$. For $f(x,y) = \phi_{\delta}(||x - y||)$, we have

$$\nabla f(x,y) = \begin{cases} x - y, & \|x - y\| \le \delta\\ \frac{\delta(x - y)}{\|x - y\|}, & \|x - y\| > \delta \end{cases}$$

i.e.,

$$\gamma(x,y) = \begin{cases} 1, & \|x-y\| \le \delta\\ \frac{\delta}{\|x-y\|}, & \|x-y\| > \delta \end{cases}$$

Finally, for $f(x,y) = \log(1 + \exp(g(x,y)^2))$, we have $\nabla f(x,y) = \frac{2(x-y)}{1 + \exp(-\|x-y\|^2)}$, i.e., $\gamma(x,y) = \frac{2}{1 + \exp(-\|x-y\|^2)}$, which completes the proof.

Proof of Lemma 9. We will show a stronger result, namely, that for each fixed ρ , the sequence of centers $\{\mathbf{x}^t\}_{t\in\mathbb{N}}$ generated by DGC- \mathcal{F}_{ρ} stays in $co(\mathcal{D}, \mathbf{x}^0)$. We prove the claim by induction. Clearly, for each $i \in [m]$ and $k \in [K]$, we have $x_i^0(k) \in co(\mathcal{D}, \mathbf{x}^0)$.

Next, assume that, for some t > 0 and each $i \in [m]$ and $k \in [K]$, we have $x_i^t(k) \in co(\mathcal{D}, \mathbf{x}^0)$. Recalling the update equation (7), using Assumption 7 and the fact that $x_i^{t,0}(k) = x_i^t(k)$, it follows that, for each $i \in [m]$ and $k \in [K]$

$$\begin{aligned} x_{i}^{t,1}(k) &= x_{i}^{t}(k) - \alpha \bigg(\sum_{j \in \mathcal{N}_{i}} \left[x_{i}^{t}(k) - x_{j}^{t}(k) \right] + \frac{1}{\rho} \sum_{r \in C_{i}^{t+1}(k)} w_{i,r} \gamma_{i,r}^{t}(k) (x_{i}^{t}(k) - y_{i,r}) \bigg) \\ &= \bigg(1 - \alpha \big(|\mathcal{N}_{i}| + \frac{1}{\rho} \sum_{r \in C_{i}^{t+1}(k)} w_{i,r} \gamma_{i,r}^{t}(k) \big) \bigg) x_{i}^{t}(k) + \alpha \sum_{j \in \mathcal{N}_{i}} x_{j}^{t}(k) + \frac{\alpha}{\rho} \sum_{r \in C_{i}^{t+1}(k)} w_{i,r} \gamma_{i,r}^{t}(k) y_{i,r}, \end{aligned}$$

$$(41)$$

where we use $\gamma_{i,r}^t(k)$ as a shorthand notation for $\gamma(x_i^t(k), y_{i,r})$. It can be readily seen that (41) is a convex combination of $x_i^t(k), x_j^t(k)$ and $y_{i,r}, j \in \mathcal{N}_i, r \in C_i^{t+1}(k)$, for $\alpha < \frac{1}{\frac{1}{1/\rho \sum_{r \in C_i^{t+1}} w_{i,r} \gamma_{i,r}^t(k) + |\mathcal{N}_i|}$.

It is easy to see that $|\mathcal{N}_i| \leq \lambda_{\max}(L)$ and, using the results from Lemma 12, it can be shown that $\gamma(x, y) \leq \beta$, for all three loss functions (*K*-means, Huber and logistic), where we recall that β is the smoothness parameter. Finally, recalling that our step-size satisfies $\alpha < \frac{1}{\beta/\rho + \lambda_{\max}(L)} \leq \frac{1}{1/\rho \sum_{r \in C_i^{t+1}} w_{i,r} \gamma_{i,r}^t(k) + |\mathcal{N}_i|}$, it readily follows from (41) that $x_i^{t,1}(k)$ is a convex combination of elements from $co(\mathcal{D}, \mathbf{x}^0)$, by induction hypothesis. Using the same arguments, we can easily show that $x_i^{t,b}(k) \in co(\mathcal{D}, \mathbf{x}^0)$, for all $i \in [m]$, $k \in [K]$ and $b = 2, \ldots, B - 1$. Since $\mathbf{x}^{t+1} = \mathbf{x}^{t,B}$, it follows that $x_i^{t+1}(k) = x_i^{t,B}(k) \in co(\mathcal{D}, \mathbf{x}^0)$, which completes the induction proof.

Note that the set $\overline{co}(\mathcal{D}, \mathbf{x}^0)$ is closed, it readily follows that the limit points of sequences generated by DGC- \mathcal{F}_{ρ} stay in $\overline{co}(\mathcal{D}, \mathbf{x}^0)$. According to Theorem 1, the limit points are the fixed points, which completes the proof.

Proof of Lemma 10. Assume the contrary, that there exists a cluster $k \in [K]$ such that $C(k) \neq \emptyset$ and $x(k) \notin \overline{co}(\mathcal{D})$. Define $\widetilde{x}(k)$ to be the projection of x(k) onto $\overline{co}(C(k))$, with respect to the Euclidean distance, i.e., $\widetilde{x}(k) = \arg\min_{y \in \overline{co}(C(k))} ||x(k) - y||$. Note that the projection is well defined, as the distance metric is induced by an inner product and $\overline{co}(C(k))$ is a non-empty, closed, convex set. By Assumption 5, for all $r \in C(k)$, we have

$$g(\widetilde{x}(k), y_{i,r}) \leq g(x(k), y_{i,r}) \implies f(\widetilde{x}(k), y_{i,r}) \leq f(x(k), y_{i,r}),$$

where we used the fact that $\tilde{x}(k)$ is the projection of x(k) onto $\overline{co}(C(k))$.

If for all $r \in C(k)$ we have $\|\widetilde{x}(k) - y_{i,r}\| = \|x(k) - y_{i,r}\|$, it readily follows that $\|\widetilde{x}(k) - \widetilde{y}\| = \|x(k) - \widetilde{y}\|$, for all $\widetilde{y} \in co(C(k))$. If $\widetilde{x}(k) \in co(C(k))$, it then follows that $\|x(k) - \widetilde{x}(k)\| = \|\widetilde{x}(k) - \widetilde{x}(k)\| = 0$, implying that $x(k) \in co(C(k))$, which can not be, as $co(C(k)) \subseteq \overline{co}(\mathcal{D})$ and $x(k) \notin \overline{co}(\mathcal{D})$. Similarly, if $\widetilde{x}(k) \in \partial co(C(k))$, where $\partial co(C(k))$ denotes the boundary of co(C(k)), by definition of boundary, there exists a sequence $\{\widetilde{y}_n\}_{n\in\mathbb{N}} \subset co(C(k))$ that converges to $\widetilde{x}(k)$. From the fact that $\|\widetilde{x}(k) - \widetilde{y}_n\| = \|x(k) - \widetilde{y}_n\|$, for all $n \in \mathbb{N}$, we have $\lim_{n\to\infty} \|x(k) - \widetilde{y}_n\| = \lim_{n\to\infty} \|\widetilde{x}(k) - \widetilde{y}_n\| = 0$, resulting in $x(k) \in \partial co(C(k))$, which again can not be.

Therefore, there must exist a $r \in C(k)$ such that $\|\widetilde{x}(k) - y_{i,r}\| < \|x(k) - y_{i,r}\|$, implying that $f(\widetilde{x}(k), y_{i,r}) < f(x(k), y_{i,r})$. As such, we have

$$\sum_{e \in C(k)} w_{i,r} f(\widetilde{x}(k), y_{i,r}) < \sum_{r \in C(k)} w_{i,r} f(x(k), y_{i,r}).$$

Defining $\widehat{\mathbf{x}} = [\widehat{x}(1)^\top \dots \widehat{x}(K)^\top]^\top$, where $\widehat{x}(l) = x(l)$ for all $l \neq k$ and $\widehat{x}(k) = \widetilde{x}(k)$, it can be readily observed that

$$H(\widehat{\mathbf{x}}, C) < H(\mathbf{x}, C),\tag{42}$$

where H is the centralized cost from (1). From the convexity of f (Assumption 3) and Definition 4, it readily follows that a consensus fixed point must satisfy $\mathbf{x} \in \arg\min_{\mathbf{y} \in \mathbb{R}^{Kd}} H(\mathbf{y}, C)$, which is clearly violated in (42). Therefore, the claim follows.

Prior to proving Lemma 11, consider the function $F_c(\mathbf{x}) = J(\mathbf{x}, C)$, where C is a fixed clustering of the dataset \mathcal{D} into K clusters. From the finiteness of \mathcal{D} , we know that there is a finite number of distinct partitions and hence a finite number of distinct functions $F_c(\mathbf{x})$, while from Assumption 3 it follows that all functions $F_c(x)$ are coercive. This in turns implies the existence of a global minimizer of $F_c(\mathbf{x})$, i.e., a point $\mathbf{z}_c \in \mathbb{R}^{Kmd}$, such that $F_c(\mathbf{z}_c) =$ $\min_{\mathbf{x}\in\mathbb{R}^{Kmd}} F_c(\mathbf{x})$. It can readily be seen that, if some of the partitions of the clustering C are empty, we can set the corresponding centers to be any value without changing the minimum, e.g., if $C_i(k) = \emptyset$, the point $\mathbf{z}'_c \in \mathbb{R}^{Kmd}$, given by $z'_{c,j}(l) = z_{c,j}(l)$, for all $l \in [K]$ and $j \neq i$, and

$$z'_{c,i}(l) = \begin{cases} z_{c,i}(l), & l \neq k \\ 0, & l = k \end{cases},$$

then $\mathbf{z}'_c = \arg\min_{\mathbf{x}\in\mathbb{R}^{Kmd}} F_c(\mathbf{x})$. Recall that $\mathcal{C}_{K,\mathcal{D}}$ denotes the set of all K-partitions of the full dataset \mathcal{D} . Combining this with the coercivity of F and the finiteness of \mathcal{D} , it readily follows that, for each $C \in \mathcal{C}_{K,\mathcal{D}}$, we can find a minimizer $\mathbf{z}'_c = \arg\min_{\mathbf{x}\in\mathbb{R}^{Kmd}} F_c(\mathbf{x})$, such that $\max_{C\in\mathcal{C}_{K,\mathcal{D}}} \|\mathbf{z}'_c\| < \infty$. Moreover, Lemma 10 guarantees an even stronger result, that we can find \mathbf{z}'_c such that $\mathbf{z}'_c = \arg\min_{\mathbf{x}\in\mathbb{R}^{Kmd}} F_c(\mathbf{x})$ and $z'(k) \in \overline{co}(\mathcal{D})$, for each $k \in [K]$. Since $\overline{co}(\mathcal{D}) \subset \overline{co}(\mathcal{D}, \mathbf{x}^0)$ and $\overline{co}(\mathcal{D}, \mathbf{x}^0)$ is a compact set (follows from finiteness of \mathcal{D}), there exits a finite R, such that $R = \max_{\mathbf{x}\in\overline{co}(\mathcal{D},\mathbf{x}^0)} \|\mathbf{x}\|$.

Proof of Lemma 11. Recall that the cost function (5). By definition, we know that, for any $C_{\rho} \in \overline{U}_{\mathbf{x}_{\rho}}$

$$\nabla J_{\rho}(\mathbf{x}_{\rho}, C_{\rho}) = 0 \iff L\mathbf{x}_{\rho} = -\frac{1}{\rho} \nabla J(\mathbf{x}_{\rho}, C_{\rho}).$$
(43)

Consider the function $F_{\rho}(\mathbf{x}) = J(\mathbf{x}, C_{\rho})$. From the discussion preceding Lemma 11 and the fact that $\overline{U}_{\mathbf{x}_{\rho}} \subset \mathcal{C}_{m,K,\mathcal{D}}$ is a finite set, it readily follows that, for each $\rho \geq 1$, we can obtain a sequence of global minima \mathbf{z}_{ρ} of the functions F_{ρ} , such that $\mathbf{z}_{\rho} \in \overline{co}(\mathcal{D})$. From (43) and Assumption 7, it follows that

$$\|L\mathbf{x}_{\rho}\| = \frac{1}{\rho} \|\nabla F_{\rho}(\mathbf{x}_{\rho})\| = \frac{1}{\rho} \|\nabla F_{\rho}(\mathbf{x}_{\rho}) - \nabla F_{\rho}(\mathbf{z}_{\rho})\| \le \frac{m\beta}{\rho} \|\mathbf{x}_{\rho} - \mathbf{z}_{\rho}\| \le \frac{2m\beta R}{\rho},$$

which is what we wanted to show.

Proof of Theorem 2. From Lemma 11, we know that $\{\mathbf{x}_{\rho}\}$ achieves consensus as $\rho \to \infty$, i.e., there exists a point $\mathbf{x} \in \mathbb{R}^{Kd}$ such that $\lim_{\rho \to \infty} \mathbf{x}_{i,\rho} = \mathbf{x}$, for all $i \in [m]$. Define $\overline{\mathbf{x}} = \mathbf{1}_m \otimes \mathbf{x} \in \mathbb{R}^{Kmd}$ and note that it satisfies the point 1) in Definition 4. To prove point 2), it remains to show that there exists a clustering $C \in U_{\overline{\mathbf{x}}}$, such that $\mathbf{1}^\top \nabla J(\overline{\mathbf{x}}, C) = 0$. To that end, assume the contrary, that for any $C \in U_{\overline{\mathbf{x}}}$

$$\|\mathbf{1}^{\top} \nabla J(\overline{\mathbf{x}}, C)\| > 0.$$

As the number of possible clusterings is finite, we know that there exists an $\epsilon > 0$, such that

$$\min_{C \in U_{\overline{\mathbf{x}}}} \| \mathbf{1}^\top \nabla J(\overline{\mathbf{x}}, C) \| = \epsilon > 0.$$
(44)

Next, note that from $\overline{\mathbf{x}} = \lim_{\rho \to \infty} \mathbf{x}_{\rho}$, and Lemma 3, there exists a $\rho_0 \ge 1$, such that $U_{\mathbf{x}_{\rho}} \subseteq U_{\overline{\mathbf{x}}}$, for all $\rho \ge \rho_0$. As \mathbf{x}_{ρ} is a fixed point of J_{ρ} , we know that, for some $C_{\rho} \in U_{\mathbf{x}_{\rho}}$

$$0 = \rho \nabla J_{\rho}(\mathbf{x}_{\rho}, C_{\rho}) = \nabla J(\mathbf{x}_{\rho}, C_{\rho}) + \rho \mathbf{L} \mathbf{x}_{\rho},$$

which readily implies

$$\nabla J(\overline{\mathbf{x}}, C_{\rho}) = \nabla J(\overline{\mathbf{x}}, C_{\rho}) - \nabla J(\mathbf{x}_{\rho}, C_{\rho}) - \rho \mathbf{L} \mathbf{x}_{\rho}.$$

Using the fact that $\mathbf{1}^{\top}\mathbf{L} = 0$, we get

$$\mathbf{1}^{\top} \nabla J(\overline{\mathbf{x}}, C_{\rho}) = \mathbf{1}^{\top} \left(\nabla J(\overline{\mathbf{x}}, C_{\rho}) - \nabla J(\mathbf{x}_{\rho}, C_{\rho}) \right).$$

Taking the norm and using the smoothness of J with respect to the first variable, we get

$$\|\mathbf{1}^{\top}\nabla J(\overline{\mathbf{x}}, C_{\rho})\| \leq \sqrt{m} \|\nabla J(\overline{\mathbf{x}}, C_{\rho}) - \nabla J(\mathbf{x}_{\rho}, C_{\rho})\| \leq m^{3/2}\beta \|\overline{\mathbf{x}} - \mathbf{x}_{\rho}\|.$$

Since $\|\mathbf{x}_{\rho} - \overline{\mathbf{x}}\| \to 0$ and $C_{\rho} \in U_{\overline{\mathbf{x}}}$, for all $\rho \ge \rho_0$, it follows that $\|\mathbf{1}^{\top} \nabla J(\overline{\mathbf{x}}, C_{\rho})\| \to 0$, contradicting (44). Hence, $\overline{\mathbf{x}}$ is a consensus fixed point. Convergence of clusters for a finite value of ρ is now a direct consequence of the fact that $\mathbf{x}_{\rho} \to \overline{\mathbf{x}}$ and Lemma 3.

C Additional experiments

In this section we provide additional numerical experiments. To begin, we provide a detailed description of the datasets.

We use Iris Fisher (1936), MNIST Lecun et al. (1998) and CIFAR10 Krizhevsky (2009) data. Iris consists of K = 3 classes, with N = 150 samples evenly split among the classes and d = 4 features. MNIST and CIFAR10 consist of ten classes each, from which we create smaller subsets. In particular, we use the first seven digits of MNIST and create two CIFAR datasets with three (CIFAR3) and eight (CIFAR8) classes, for a total $K = \{7, 3, 8\}$ classes for MNIST, CIFAR3 and CIFAR8. We randomly select a thousand samples per class, for a total of $N = \{7000, 3000, 8000\}$ samples for MNIST, CIFAR3 and CIFAR8. The number of features of MNIST and CIFAR data, corresponding to pixels of the images, is $d = \{784, 3072\}$. We normalize the data, dividing all the pixels by the highest value, so that each pixel belongs to [0, 1]. In all experiments we use a network of m = 10 users, communicating over a ring graph, which is visualized in Figure 4. Each user is assigned an equal number of samples from each class, so that each user contains $N_i = \{15, 700, 300, 800\}$ samples for Iris, MNIST, CIFAR3 and CIFAR8, respectively.




Figure 4: Ten users communicating over a ring graph, with each user having exactly two neighbours.

Next, we study the effects of B and ρ on accuracy. The setup is the same as in Section 5 and we run the methods for T = 500 iterations. The results are presented in Tables 5 and 6. Table 5 shows the accuracy of our methods for different values of ρ , with B = 1. We can see that the accuracy is typically the largest for $\rho = 1$, which can be explained by the fact that for Iris data local datasets seem to be representative of the global data and for $\rho = 1$ the users strike the best balance between finding good clusters and collaborating. Table 6 shows the accuracy of our methods for different values of B, with $\rho = 10$. We can see that the accuracy is unaffected by different values of B. Combined with the experiments from Section 5, this implies that larger B should be chosen when convergence speed is a priority, while smaller B should be chosen when communication or computation are constrained. In either case, the accuracy shouldn't be affected significantly.

	$\rho = 1$	$\rho = 10$	$\rho = 100$	$\rho = 1000$
$DGC-KM_{\rho}$	$91.53 \pm 2.17\%$	$91.13 \pm 0.85\%$	$89.73 \pm 0.53\%$	$91.93 \pm 0.96\%$
DGC-HL_{ρ}	$91.86 \pm 1.26\%$	$91.20 \pm 0.78\%$	$90.00 \pm 0.89\%$	$91.80 \pm 1.39\%$
$\mathrm{DGC}\text{-}\mathrm{LL}_{ ho}$	$90.73 \pm 2.12\%$	$91.00 \pm 0.45\%$	$89.00 \pm 0.33\%$	$90.67 \pm 1.23\%$

Table 5: Effect of ρ on accuracy, with B = 1.

Table 6: Effect of B on accuracy, with $\rho = 10$.

	B = 1	B = 10	B = 100
$\mathrm{DGC}\text{-}\mathrm{KM}_{10}$	$90.8\pm0.9\%$	$90.8\pm0.9\%$	$90.6\pm0.6\%$
$DGC-HL_{10}$	$90.6\pm0.5\%$	$90.8\pm0.3\%$	$90.7\pm0.2\%$
$\mathrm{DGC}\text{-}\mathrm{LL}_{10}$	$90.6\pm0.6\%$	$90.7\pm0.5\%$	$90.6\pm0.3\%$

The last set of experiments studies the effects of ρ on convergence speed. We run our algorithms for T = 1000 iterations, computing the cost J_{ρ} in each iteration, denoted by J_{ρ}^{t} . To normalize the data, we then subtract the final value, i.e., we plot $J_{r}ho^{t} - J_{\rho}^{T}$, as we know that the cost is decreased in each iteration. We call the quantity $J_{r}ho^{t} - J_{\rho}^{T}$ normalized cost, and use it as the performance metric. The results are presented in Figure 5. We can see that the normalized cost converges slower for larger values of ρ , as discussed in Section 4 and as noted by Kar and Swenson (2019).

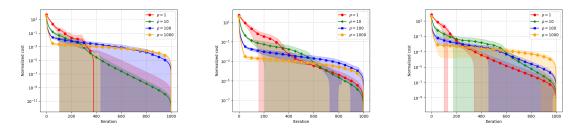


Figure 5: Behaviour of $J_{\rho}^{t} - J_{\rho}^{T}$ for different ρ and B = 1. The figures present DGC-KM_{ρ}, DGC-HL_{ρ} and DGC-LL_{ρ}, left to right.