

# An Effective Branch-and-Bound Algorithm with New Bounding Methods for the Maximum $s$ -Bundle Problem

Jinghui Xue<sup>1\*</sup>, Jiongzhi Zheng<sup>1\*</sup>, Mingming Jin<sup>1</sup>, Kun He<sup>1†</sup>

<sup>1</sup>School of Computer Science and Technology, Huazhong University of Science and Technology, China

## Abstract

The Maximum  $s$ -Bundle Problem (MBP) addresses the task of identifying a maximum  $s$ -bundle in a given graph. A graph  $G = (V, E)$  is called an  $s$ -bundle if its vertex connectivity is at least  $|V| - s$ , where the vertex connectivity equals the minimum number of vertices whose deletion yields a disconnected or trivial graph. MBP is NP-hard and holds relevance in numerous real-world scenarios emphasizing the vertex connectivity. Exact algorithms for MBP mainly follow the branch-and-bound (BnB) framework, whose performance heavily depends on the quality of the upper bound on the cardinality of a maximum  $s$ -bundle and the initial lower bound with graph reduction. In this work, we introduce a novel Partition-based Upper Bound (PUB) that leverages the graph partitioning technique to achieve a tighter upper bound compared to existing ones. To increase the lower bound, we propose to do short random walks on a clique to generate larger initial solutions. Then, we propose a new BnB algorithm that uses the initial lower bound and PUB in preprocessing for graph reduction, and uses PUB in the BnB search process for branch pruning. Extensive experiments with diverse  $s$  values demonstrate the significant progress of our algorithm over state-of-the-art BnB MBP algorithms. Moreover, our initial lower bound can also be generalized to other relaxation clique problems.

## 1 Introduction

The extraction of structured subgraphs within a graph is a critical task with numerous applications. One notable category among these is the clique model, which represents a thoroughly investigated subgraph structure. In an undirected graph, a clique constitutes a subset of vertices that induces a complete subgraph. However, in real-world scenarios like biological networks [Yu *et al.*, 2006] and social networks [Balasundaram *et al.*, 2011], dense subgraphs do not always need

complete connectivity but allow some missing edges. Consequently, various types of relaxations and adaptations of the clique structure have been introduced, such as the quasi-clique [Brunato *et al.*, 2007],  $s$ -plex [Balasundaram *et al.*, 2011],  $s$ -defective clique [Yu *et al.*, 2006], and  $s$ -bundle [Pattillo *et al.*, 2013], where  $s$  is usually a small integer, offering diverse solutions for practical applications across various domains.

A graph  $G = (V, E)$  is termed an  $s$ -bundle if its vertex connectivity is at least  $|V| - s$ . Here, vertex connectivity refers to the minimum number of vertices whose removal results in a disconnected or trivial graph containing at most 1 vertex. The  $s$ -bundle structure frequently occurs in various network applications, notably in scenarios emphasizing the vertex connectivity. This is evident in the extraction of large and robustly connected subgroups in social networks [Pattillo *et al.*, 2013; Veremyev *et al.*, 2014]. However, recent prevailing of analyzing relaxation cliques focuses on the assessment of missing edges, such as the  $s$ -plex and  $s$ -defective clique models [Chang *et al.*, 2022; Wang *et al.*, 2022; Zheng *et al.*, 2023; Jiang *et al.*, 2023; Wang *et al.*, 2023; Gao *et al.*, 2022; Jin *et al.*, 2023], and there has been rather few exploration on  $s$ -bundle that highlights the vertex connectivity [Gschwind *et al.*, 2018; Zhou *et al.*, 2022; Hu *et al.*, 2023]. Thus, we attempt to bridge the gap and address the Maximum  $s$ -Bundle Problem (MBP), which aims to find an  $s$ -bundle with the maximum number of vertices in a graph.

MBP is NP-hard [Gschwind *et al.*, 2018] and computationally challenging. Several exact algorithms based on the branch-and-bound (BnB) framework [Li and Quan, 2010; McCreesh *et al.*, 2017] have been proposed for MBP. One is the generic Russian doll search (RDS) algorithm [Verfaillie *et al.*, 1996; Gschwind *et al.*, 2018], designed for diverse relaxed clique problems including MBP, and the other is a state-of-the-art algorithm called MSB [Zhou *et al.*, 2022], which introduces novel upper bounds and reduction rules, and incorporates a multi-branching rule within the BnB framework.

BnB algorithms for the clique and relaxation clique problems usually maintain a progressively growing partial solution  $S$  and the corresponding candidate set  $C$  in each branching node. The algorithms calculate an upper bound  $UB$  on the maximum size of feasible solutions containing  $S$ . The branching node can be pruned if  $UB$  does not surpass the best solution found so far, which is referred to as the lower

\*The first two authors contribute equally.

†Corresponding author. Email: brooklet60@hust.edu.cn.

bound. Consequently, the effectiveness of the algorithm is significantly influenced by the quality of the upper bound as well as the initial lower bound.

MSB [Zhou *et al.*, 2022] introduces an upper bound by dividing the graph into independent sets, where no edge exists for any pairwise vertices. MSB claims that an independent set can only contribute at most  $s$  vertices for an  $s$ -bundle, yet we found such a claim is conservative. Actually, considering the special property of  $s$ -bundle regarding the vertex connectivity, we find that a graph called  $s$ -component, where the size of its largest connected subgraph is no more than  $s$ , can only contribute at most  $s$  vertices for an  $s$ -bundle. We relax the restriction of the independent set and allow each set to contain more vertices, resulting in a tighter upper bound.

Based on the above observation, we propose a new Partition-based Upper Bound (PUB) for MBP, which can help the BnB algorithm prune the branching nodes more efficiently. We further propose a new preprocessing method with a new reduction rule based on the PUB for reducing the input graph and a construction heuristic based on the short random walks [Pearson, 1905] to calculate high-quality initial lower bound. Combining the above methods, we propose a new algorithm called  $s$ -Component Partition-based algorithm (SCP) for MBP. Our main contributions are as follows:

- We propose a new Partition-based Upper Bound (PUB) for MBP, which can help obtain a tighter upper bound on the  $s$ -bundle size. The PUB is used during the BnB searching process to prune the branching nodes and within the preprocessing for graph reduction.
- We propose a new construction heuristic based on short random walks to have a high-quality initial lower bound than the general greedy construction heuristic based on vertex degrees. We also demonstrate its generality by applying it to  $s$ -defective clique problems.
- By employing our proposed upper bound and construction heuristic, we propose a new BnB algorithm for the MBP. Extensive experiments across various  $s$  values and diverse datasets show the superiority of our algorithm over existing baselines.

## 2 Preliminaries

### 2.1 Definitions

Let  $G = (V, E)$  be an undirected graph, where  $V$  is the set of vertices and  $E$  the set of edges,  $n = |V|$  and  $m = |E|$  are the number of vertices and edges, respectively. The (vertex) connectivity of graph  $G$ , denoted as  $\kappa(G)$ , is defined as the minimum number of vertices whose removal will result in a disconnected graph or a trivial graph with at most one vertex. For  $S \subseteq V$ , the induced subgraph  $G[S]$  is called an  $s$ -bundle if  $\kappa(G[S]) \geq |S| - s$  where  $s$  is a positive integer. It is evident that a 1-bundle is a clique.

The set of neighbors of a vertex  $v$  in  $G$ , *i.e.*, adjacent vertices, is denoted as  $N_G(v)$ , and  $|N_G(v)|$  indicates the degree of vertex  $v$  in  $G$ . The common neighbor of two vertices  $u$  and  $v$  is defined as  $N_G(u, v) = N_G(u) \cap N_G(v)$ . We further define closed neighbors  $N_G[v] = N_G(v) \cup \{v\}$  and  $N_G[u, v] = N_G(u, v) \cup \{u, v\}$ .

To better describe our proposed upper bound, we define a new structure called  $s$ -component as follows.

**Definition 1** ( $s$ -component). *An  $s$ -component is a graph where the largest connected subgraph contains at most  $s$  vertices.*

### 2.2 Prerequisites

This subsection introduces several lemmas that are widely used and highly useful in solving MBP.

**Lemma 1.** *If  $S \subseteq V$  can induce an  $s$ -bundle in  $G = (V, E)$ , then for any  $\mathcal{P} \subseteq S$ ,  $\mathcal{P}$  can still induce an  $s$ -bundle.*

Lemma 1 can be inferred by the hereditary property of graph theory [Pattillo *et al.*, 2013] and is useful for calculating the upper bound of the size of the maximum  $s$ -bundle in  $G$ .

**Lemma 2.** *If  $G = (V, E)$  is an  $s$ -bundle, then  $|N_G(v)| \geq |V| - s$  for any vertex  $v \in V$ , termed the degree-bound.*

Lemma 2 can be proved easily by contradiction [Zhou *et al.*, 2022]. It generally asserts that an  $s$ -bundle allows the absence of at most  $s - 1$  edges for each vertex. Otherwise, removing all neighbors of a vertex with more than  $s - 1$  non-neighbors can make the graph disconnected or trivial.

### 2.3 Identifying an $s$ -Bundle

The determination of whether a graph  $G$  qualifies as an  $s$ -bundle stands as a pivotal task in solving MBP. Here we introduce an existing method [Gschwind *et al.*, 2018; Zhou *et al.*, 2022] for this purpose.

For an undirected graph  $G = (V, E)$ , to determine whether  $\kappa(G) \geq n - s$ , a directed flow graph  $H = (U, A)$  needs to be constructed. For each vertex  $u \in V$ , two copies, denoted as  $u'$  and  $u''$ , are created, and an arc  $(u', u'')$  is established in  $H$ . Additionally, for every edge  $(u, v) \in E$ , two arcs  $(u'', v')$  and  $(v'', u')$  are generated in  $H$ . The capacity of each arc within  $H$  is set to 1. Consequently, the vertex connectivity  $\kappa_G(u, v)$  of two non-adjacent vertices  $u$  and  $v$  in  $G$  equals to the maximum  $(u'', v')$ -flow within  $H$ , and we have  $\kappa(G) = \min_{\{u, v\} \in E} \kappa_G(u, v)$ . If  $\kappa(G) \geq |V| - s$  holds, then  $V$  is an  $s$ -bundle. Note that  $G$  is trivially an  $s$ -bundle for  $s \geq |V|$ , or  $G$  is trivially not an  $s$ -bundle for  $s < |V|$  if it is disconnected.

According to the above method, assessing whether an undirected graph  $G = (V, E)$  is an  $s$ -bundle necessitates a time complexity of  $O(mn^4)$  when we use the Dinic maxflow algorithm [Dinic, 1970] with complexity of  $O(mn^2)$  to determine each pairwise maximum flow. Additionally, determining whether a vertex can be added to the current  $s$ -bundle involves a time complexity of  $O(mn^3)$ . Despite that the time complexity is still in polynomial time, the duration required to ascertain whether a vertex set's induced subgraph is an  $s$ -bundle is substantial. Hence, the graph reduction method to minimize the scale of the problem and the upper bound method to prune the search tree size are crucial.

## 3 Partition-based Upper Bound

This section introduces our proposed Partition-based Upper Bound (PUB). We first present the main idea and definition

of PUB and then give an example for illustration. In the end, we introduce our proposed Partition-Bound algorithm for calculating the PUB.

### 3.1 Partition-based Bounding Rule

We first briefly review the core upper bound used in the state-of-the-art BnB algorithm of MSB [Zhou *et al.*, 2022], which is based on graph coloring and denoted as the color-bound. Given a graph  $G = (V, E)$ , the color-bound divides  $V$  into  $k$  disjoint independent sets  $I_1, \dots, I_k$  by graph coloring techniques. Then, each independent set  $I_i$  ( $1 \leq i \leq k$ ) can provide at most  $\min\{|I_i|, s\}$  vertices for an  $s$ -bundle according to Lemma 2, and  $\sum_{i=1}^k \min\{|I_i|, s\}$  is the color-bound of the size of the maximum  $s$ -bundle in  $G$  based on Lemma 1.


We observe that the color-bound still remains space for improvement. Although an independent set  $I$  ( $|I| > s$ ) can only contribute at most  $s$  vertices, due to the relaxation property of  $s$ -bundle, the restriction of independent set can also be relaxed. Consequently, we consider the relaxation property of the problem and propose a partition-based new upper bound.

**Lemma 3.** *Given  $s$ , suppose graph  $G = (V, E)$  can be partitioned into  $k$  disjoint  $s$ -components,  $\mathcal{P}_1^s = (V_1, E_1), \dots, \mathcal{P}_k^s = (V_k, E_k)$ . Then, each  $s$ -component  $\mathcal{P}_i^s$  ( $1 \leq i \leq k$ ) can provide at most  $\min\{|V_i|, s\}$  vertices for an  $s$ -bundle. Then  $PUB(G, s) = \sum_{i=1}^k \min\{|V_i|, s\}$  is an upper bound on the size of the maximum  $s$ -bundle in  $G$ .*

*Proof.* For each  $s$ -component  $\mathcal{P}_i^s$  ( $1 \leq i \leq k$ ), if  $|V_i| \leq s$ ,  $V_i$  can provide at most  $|V_i|$  vertices for an  $s$ -bundle. If  $|V_i| > s$ , since the size of the largest connected subgraph in  $\mathcal{P}_i^s$  is at most  $s$ , any subgraph  $G'$  of  $\mathcal{P}_i^s$  with more than  $s$  vertices is disconnected, so we have  $\kappa(G') = 0 < |G'| - s$ ,  $G'$  is not an  $s$ -bundle, and the largest  $s$ -bundle in  $\mathcal{P}_i^s$  contains at most  $s$  vertices. Therefore, each  $s$ -component  $\mathcal{P}_i^s$  can provide at most  $\min\{|V_i|, s\}$  vertices for an  $s$ -bundle. Suppose  $G[F]$  ( $F \subseteq V$ ) is an  $s$ -bundle, then  $F$  can be partitioned into  $k$  disjoint set  $F = \{F \cap V_1, \dots, F \cap V_k\}$ . According to Lemma 1,  $G[F \cap V_i]$  ( $1 \leq i \leq k$ ) is also an  $s$ -bundle. Thus, we have  $|F| = \sum_{i=1}^k |F \cap V_i| \geq \sum_{i=1}^k \min\{|V_i|, s\}$ .  $\square$

Lemma 3 presents the conception of our proposed PUB, which is somewhat tight because a graph that is not an  $s$ -component must contain a connected subgraph with more than  $s$  vertices, which is an  $s$ -bundle with more than  $s$  vertices. The PUB enables the expansion of a maximal independent set (*i.e.*, not contained by any other independent set) into a maximal  $s$ -component. In other words, when compared to the color-bound approach, PUB requires no more sets to partition the graph. It is evident that PUB provides a more restrictive and efficient bound than the color-bound. Moreover, an independent set can be regarded as a special 1-component, which fits well with the 1-bundle (*i.e.*, clique), and our defined  $s$ -component is tailored for the  $s$ -bundle.

We provide an example to show how the color-bound and PUB are calculated. The task is to calculate an upper bound on the size of the maximum 3-bundle in the graph  $G$  shown in Figure 1. In Figure 1(a), the color-bound divides  $G$  into 5 disjoint independent sets,  $I_1 = \{v_0, v_5\}$ ,  $I_2 = \{v_1, v_6\}$ ,  $I_3 = \{v_2, v_7\}$ ,  $I_4 = \{v_3\}$  and

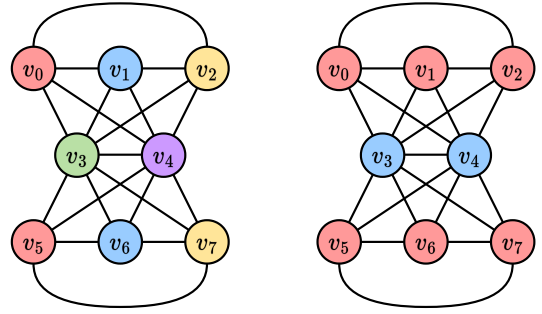

(a) Partition of color-bound (b) Partition of PUB  
Figure 1: Partitions for the maximum 3-bundle problem.

---

#### Algorithm 1: Partition-Bound( $G, s$ )

---

**Input:** Graph  $G = (V, E)$ , positive integer  $s$   
**Output:**  $PUB(G, s)$

- 1 initialize the upper bound  $UB \leftarrow 0$ ;
- 2 **while**  $V$  is not empty **do**
- 3      $I \leftarrow \emptyset, V' \leftarrow V$ ;
- 4     **while**  $V'$  is not empty **do**
- 5         select a vertex  $u$  in  $V'$ ;
- 6          $V' \leftarrow V' \setminus N_G[u], V \leftarrow V \setminus \{u\}$ ;
- 7          $I \leftarrow I \cup \{u\}$ ;
- 8     **for**  $u \in V$  **do**
- 9         **if**  $G[I \cup \{u\}]$  remains an  $s$ -component **then**
- 10              $V \leftarrow V \setminus \{u\}, I \leftarrow I \cup \{u\}$ ;
- 11      $UB \leftarrow UB + \min\{|I|, s\}$ ;
- 12 **return**  $UB$ ;

---

$I_5 = \{v_4\}$ , the color-bound is  $\sum_{i=1}^5 \min\{|I_i|, 3\} = 8$ . However, the PUB can expand  $G[I_1]$  and  $G[I_4]$  to 3-components. Then,  $G$  can be divided into 2 disjoint 3-components as Figure 1(b),  $\mathcal{P}_1^3 = (V_1, E_1)$  and  $\mathcal{P}_2^3 = (V_2, E_2)$ , where  $V_1 = \{v_0, v_1, v_2, v_5, v_6, v_7\}$  and  $V_2 = \{v_3, v_4\}$ , and we have  $PUB(G, 3) = \sum_{i=1}^2 \min\{|V_i|, 3\} = 5$ . In fact, the size of the maximum 3-bundle in  $G$  is exactly 5. The maximum 3-bundles include the graph induced by  $\{v_0, v_1, v_2, v_3, v_4\}$  and the graph induced by  $\{v_0, v_1, v_3, v_4, v_6\}$ .

### 3.2 Calculation of the PUB

We propose a Partition-Bound algorithm to divide the given graph into  $s$ -components and calculate the PUB, which is outlined in Algorithm 1. The algorithm first initializes the upper bound  $UB$  (line 1) and then iteratively partitions the input graph  $G$  into  $s$ -components in a greedy manner to calculate the PUB (lines 2-11). For constructing each  $s$ -component, we first find a maximal independent set  $I$  within the remaining vertex set  $V$  (lines 3-7). Subsequently, for each remaining vertex  $u \in V$ , we identify if adding this vertex to  $I$  still preserves that  $G[I \cup \{u\}]$  is an  $s$ -component. If so,  $u$  will be added to  $I$  (lines 8-10). Finally, according to the PUB, we append  $\min\{|I|, s\}$  to  $UB$  (line 11). Note that we do not construct the  $s$ -component directly but try to enlarge a maximal independent set, which can usually lead to a larger  $s$ -

component and make our PUB tighter than the color-bound.

Our approach employs the Disjoint Set Union method [Tarjan, 1979] to efficiently assess whether the insertion of a vertex preserves an  $s$ -component. By employing the method, the average time complexity for each query and merge operation is  $O(\alpha(n))$ , where  $O(\alpha(n))$  represents the inverse of the Ackermann function, and can be considered as a constant time complexity [Fredman and Saks, 1989]. Moreover, the time complexity of Algorithm 1 is dominated by the process of constructing the maximal  $s$ -component (lines 9-10), which needs to traverse each vertex  $u \in V$  and query all its neighbors. Thus, its time complexity is  $O(D|V|^2)$ , where  $D$  is the maximum degree of vertices in  $G$ .

## 4 The Proposed SCP Algorithm

### 4.1 Main Framework

The main framework of our SCP algorithm is outlined in Algorithm 2. Initially, SCP calls the `GenerateLB` function to construct an initial  $s$ -bundle whose size is the initial lower bound  $LB$  of maximum  $s$ -bundle (line 1). With the initial  $LB$  value, the `Reduce` function is called to do graph reduction by removing vertices and edges that must not be in the maximum  $s$ -bundle (line 2), and the reduced graph is passed to the `BnB` function to identify the maximum  $s$ -bundle (line 3). During the BnB process,  $LB$  will be updated whenever a larger  $s$ -bundle is discovered. Upon the completion of traversing the entire search tree by the `BnB` function, the final  $LB$  value is returned as the size of the maximum  $s$ -bundle in  $G$ .

### 4.2 Lower Bound Initialization

The initial lower bound plays an important role in our BnB algorithm. A tighter lower bound can help reduce more vertices during preprocessing and prune more branching nodes in the BnB stage. The `GenerateLB` function in SCP constructs a maximal  $s$ -bundle and regards its size as the initial lower bound. The algorithm first constructs a maximal clique in the input graph  $G$  by iteratively adding a vertex with the largest degree and removing its non-neighbors from  $G$ . Then, we use the random walk technique [Pearson, 1905], which is widely used for detecting dense communities in social networks, to expand the maximal clique to a maximal  $s$ -bundle. Specifically, we iteratively employ a three-step lazy random walk and expand the  $s$ -bundle by moving a node with the highest value from the candidate set. The lazy random walk assigns unit weight to each vertex inside the current  $s$ -bundle and at each step it spreads half of the node weights to the neighbors.

The `GenerateLB` function with such lazy random walk can help the algorithm obtain a high-quality lower bound. Furthermore, experimental findings reveal that the random walk outperforms the greedy construction of the maximal  $s$ -bundle based on vertex degree. This superiority extends to a broader applicability, including generalizations for other relaxation clique problems.

### 4.3 Preprocessing

Preprocessing is important in addressing massive sparse graphs. Given the initial lower bound  $LB$ , we can remove vertices and edges that must not be in any  $s$ -bundle with a size

---

#### Algorithm 2: SCP( $G, s$ )

---

**Input:** Graph  $G = (V, E)$ , positive integer  $s$   
**Output:** Size of the maximum  $s$ -bundle in  $G$

- 1  $LB \leftarrow \text{GenerateLB}(G, s)$ ;
- 2  $G \leftarrow \text{Reduce}(G, s, LB)$ ;
- 3  $LB \leftarrow \text{BnB}(G, s, \emptyset, V, LB)$ ;
- 4 **return**  $LB$ ;

---



---

#### Algorithm 3: Reduce( $G, s, LB$ )

---

**Input:** Graph  $G = (V, E)$ , positive integer  $s$ , lower bound  $LB$   
**Output:** Reduced graph  $G$

- 1 **while** *true* **do**
- 2      $G' \leftarrow \text{remove\_vertex\_with\_Rule1}(G, s, LB)$  ;
- 3      $G' \leftarrow \text{remove\_edge\_with\_Rule2}(G', s, LB)$  ;
- 4     **if**  $G'$  and  $G$  is the same **then break**;
- 5     **else**  $G \leftarrow G'$ ;
- 6  $G \leftarrow \text{remove\_vertex\_with\_Rule3}(G, s, LB)$  ;
- 7 **while** *true* **do**
- 8      $G' \leftarrow \text{remove\_edge\_with\_Rule2}(G, s, LB)$  ;
- 9      $G' \leftarrow \text{remove\_vertex\_with\_Rule1}(G', s, LB)$  ;
- 10    **if**  $G'$  and  $G$  is the same **then break**;
- 11    **else**  $G \leftarrow G'$ ;
- 12 **return**  $G$ ;

---

larger than  $LB$ . In this subsection, we first introduce some rules for identifying the removable vertices. The first two rules are based on the degree-bound introduced in Lemma 2.

**Rule 1.** Remove vertex  $v$  from  $G$  if it meets the condition  $|N_G(v)| \leq LB - s$ .

**Rule 2.** Remove edge  $(u, v)$  from  $G$  if it meets the condition  $|N_G(u, v)| \leq LB - 2s$ .

Rules 1 and 2 are straightforward since each vertex in an  $s$ -bundle has at most  $s - 1$  non-neighbors in the  $s$ -bundle. Based on our proposed PUB, we further propose a new rule as follows.

**Rule 3.** Remove vertex  $v$  from  $G$  if it meets the condition  $\text{PUB}(G[N_G(v)], s) \leq LB - s$ .

*Proof.*  $\text{PUB}(G[N_G(v)], s)$  is an upper bound of the size of the maximum  $s$ -bundle in  $G[N_G(v)]$ , and an  $s$ -bundle containing  $v$  can contain up to  $s - 1$  non-neighbors of  $v$  according to Lemma 2. Then, according to Lemma 1,  $\text{PUB}(G[N_G(v)], s) + s$  is an upper bound of the maximum  $s$ -bundle containing  $v$ .  $\square$

Algorithm 3 depicts the procedure of the `Reduce` function that represents the preprocessing method. Since Rules 1 and 2 are computationally efficient, we first use them to quickly remove vertices that are simple to identify (lines 1-5) and then use Rule 3 to focus on the ones that are difficult to identify (line 6). After reducing the graph by Rule 3, we further apply Rules 2 and 1 alternatively until the graph cannot be further reduced. Actually, PUB can also be used for reducing each

edge  $(u, v)$  satisfying that  $PUB(G[N_G(u, v)], s) \leq LB - 2s$ . We did not implement it since identifying the PUB  $|E|$  times is heavily time-consuming.

#### 4.4 The Branch-and-Bound Process

The BnB process in our SCP algorithm is shown in Algorithm 4, where  $S$  represents the set of vertices in the current growing  $s$ -bundle and  $C$  is the corresponding candidate vertex set of  $S$ . Initially, the algorithm updates the best solution found so far (line 1) and applies Rule 1 together with the following rules derived from the degree-bound to reduce the candidate set (line 2). Actually, both Rule 4 and Rule 5 are removing vertices from the candidate set that cannot remain an  $s$ -bundle if added to  $S$ .

**Rule 4.** Remove vertex  $u \in C$  from  $C$  if it meets the condition  $|N_{G[S \cup \{u\}]}(u)| \leq |S| - s$ .

**Rule 5.** For each vertex  $v \in S$  satisfying that  $|N_{G[S]}(v)| = |S| - s$ , remove vertex  $u \in C$  that is not adjacent to  $v$ .

Then, our proposed PUB is used to try to prune the current branching node (line 3), and the branching rules in MSB [Zhou *et al.*, 2022] are used in our algorithm to decide the subsequent branching nodes. The algorithm explores branches based on a special vertex  $u_p$  that has the minimum degree in  $G[S \cup C]$  (line 4).

When graph  $G[S \cup C]$  is clearly not an  $s$ -bundle (lines 5-19), if  $u_p \notin S$ , the algorithm generates a branch that removes  $u_p$  from  $C$  (line 7) and then moves  $u_p$  from  $C$  to  $S$  (line 8). Once  $u_p$  is added to  $S$ , indicating that at most  $t = s - 1 - |S \setminus N_{G'}[u_p]|$  of its non-neighbors can be added to  $S$  (line 9). Thereafter, a multi-branching method with  $t + 1$  branches is used to branch on its non-neighbors  $\{v_1, \dots, v_c\}$  and prune some branches in advance, which executes in an incremental manner (lines 10-19). Specifically, the branches contains one branch that removes  $v_1$  from  $C$  (lines 13-14),  $t - 1$  branches that adds the first  $i - 1$  ( $i \in \{2, \dots, t\}$ ) non-neighbors of  $u_p$  from  $C$  to  $S$  and further removes the  $i$ -th non-neighbor of  $u_p$  from  $C$  (lines 15-17), and one branch that moves the first  $t$  non-neighbors of  $u_p$  from  $C$  to  $S$  and further removes all its non-neighbors from  $C$  (lines 18-19).

When graph  $G[S \cup C]$  is possibly an  $s$ -bundle (lines 20-25), we first updates the LB if it is an  $s$ -bundle (lines 21-22). Otherwise, we find a vertex  $u \in C$  with the minimum degree in  $G[S \cup C]$  (line 23), and use the binary branching method to branch on vertex  $u$  (lines 24-25).

## 5 Experimental Results

In this section, we first introduce the benchmarks and algorithms (also called solvers) used in experiments, then present and analyze the experimental results. All the algorithms are implemented in C++ and run on a server using an AMD EPYC 7742 CPU, running Ubuntu 18.04 Linux operation system. The cut-off time for each instance is 3,600 seconds, following the settings in the MSB algorithm [Zhou *et al.*, 2022].

### 5.1 Benchmark Datasets

We evaluate the algorithms on four public datasets that are widely used in studies related to the clique and various relax-

---

#### Algorithm 4: BnB( $G, s, S, C, LB$ )

---

**Input:** Graph  $G = (V, E)$ , positive integer  $s$ , set of vertices in the current solution  $S$ , candidate set  $C$ , lower bound  $LB$

**Output:** Size of the maximum  $s$ -bundle in  $G$

```

1 if  $|S| > LB$  then  $LB \leftarrow |S|$ ;
2 Reducing  $C$  with Rules 1, 4, and 5;
3 if  $PUB(G[S \cup C], s) \leq LB$  then return  $LB$ ;
4  $G' \leftarrow G[S \cup C]$ ,  $u_p \leftarrow \arg \min_{v \in S \cup C} |N_{G'}(v)|$ ;
5 if  $|N_{G'}(u_p)| < |S \cup C| - s$  then
6   if  $u_p \notin S$  then
7      $LB \leftarrow \text{BnB}(G, s, S, C \setminus \{u_p\}, LB)$ ;
8      $S \leftarrow S \cup \{u_p\}$ ,  $C \leftarrow C \setminus \{u_p\}$ ;
9    $t \leftarrow s - 1 - |S \setminus N_{G'}[u_p]|$ ;
10   $c \leftarrow |C \setminus N_{G'}(u_p)|$ ;
11   $\{v_1, \dots, v_c\} \leftarrow C \setminus N_{G'}(u_p)$ ;
12  for  $i \in \{1, \dots, t + 1\}$  do
13    if  $i = 1$  then
14       $LB \leftarrow \text{BnB}(G, s, S, C \setminus \{v_1\}, LB)$ ;
15    else if  $2 \leq i \leq t$  then
16       $LB \leftarrow \text{BnB}(G, s, S \cup \{v_1, \dots, v_{i-1}\},$ 
17         $C \setminus \{v_1, \dots, v_i\}, LB)$ ;
18    else if  $i = t + 1$  then
19       $LB \leftarrow \text{BnB}(G, s, S \cup \{v_1, \dots, v_t\}, C \cap$ 
20         $N_{G'}(u_p)\}, LB)$ ;
21 else
22   if  $G'$  is an  $s$ -bundle then
23      $LB \leftarrow |S \cup C|$ , return  $LB$ ;
24    $u \leftarrow \arg \min_{u \in C} |N_{G'}(u)|$ ;
25    $LB \leftarrow \text{BnB}(G, s, S, C \setminus \{u\}, LB)$ ;
26    $LB \leftarrow \text{BnB}(G, s, S \cup \{u\}, C \setminus \{u\}, LB)$ ;
26 return  $LB$ ;

```

---

ation clique problems, including the Facebook<sup>1</sup> dataset that contains 114 massive sparse graphs derived from Facebook social networks, the Realworld<sup>2</sup> dataset that contains 102 massive sparse graphs from the Network Data Repository [Rossi and Ahmed, 2015] (the extremely sparse and simple “scc” graphs are removed), the DIMACS10<sup>3</sup> dataset that contains 82 graphs with up to  $1.05 \times 10^6$  vertices from the 10th DIMACS implementation challenge and is used in MSB [Zhou *et al.*, 2022], and the DIMACS2<sup>4</sup> dataset that contains 80 dense graphs with up to 4,000 vertices from the 2nd DIMACS implementation challenge and is also used in MSB.

For each graph, we generate eight MBP instances with  $s = 2, 3, 4, 5, 6, 8, 10, 15$ . Therefore, there are a total of  $8 \times (114 + 102 + 82 + 80) = 3024$  MBP instances.

<sup>1</sup><https://networkrepository.com/socfb.php>

<sup>2</sup><http://lcs.ios.ac.cn/%7Ecaisw/Resource/realworld%20graphs.tar.gz>

<sup>3</sup><https://www.cc.gatech.edu/dimacs10/downloads.shtml>

<sup>4</sup><http://archive.dimacs.rutgers.edu/pub/challenge/graph/benchmarks/clique/>

$s$	Facebook (114)			RealWorld (102)			DIMACS10 (82)			DIMACS2 (80)		
	MSB	RDS	SCP	MSB	RDS	SCP	MSB	RDS	SCP	MSB	RDS	SCP
2	15	32	<b>64</b>	35	27	<b>58</b>	14	6	<b>28</b>	14	<b>18</b>	17
3	6	2	<b>43</b>	34	15	<b>52</b>	14	3	<b>22</b>	9	<b>13</b>	9
4	4	0	<b>32</b>	32	7	<b>48</b>	14	2	<b>22</b>	9	9	<b>10</b>
5	4	0	<b>26</b>	31	4	<b>47</b>	14	1	<b>24</b>	9	8	<b>10</b>
6	4	0	<b>25</b>	31	4	<b>44</b>	13	1	<b>22</b>	10	6	<b>11</b>
8	6	0	<b>21</b>	30	2	<b>43</b>	12	1	<b>21</b>	10	3	<b>11</b>
10	5	0	<b>22</b>	29	1	<b>42</b>	13	1	<b>20</b>	8	3	<b>9</b>
15	8	0	<b>16</b>	24	0	<b>37</b>	8	0	<b>16</b>	7	3	<b>7</b>
Total	52	34	<b>249</b>	246	60	<b>371</b>	102	15	<b>175</b>	76	63	<b>84</b>

Table 1: Summary of the results of MSB, RDS, and SCP on the number of instances solved within a cut-off time of 3600s across four benchmarks. The best results appear in bold.

Instance	$ V $	$ E $	$s = 2$								$s = 8$							
			SCP				MSB		RDS		SCP				MSB		RDS	
			$ V' $	$ E' $	Tree	Time	Tree	Time	Tree	Time	$ V' $	$ E' $	Tree	Time	Tree	Time	Tree	Time
socfb-BU10	19700	637528	5605	121757	<b>44.36</b>	<b>520.3</b>	NA	NA	NA	NA	5414	137711	<b>105.2</b>	<b>553.9</b>	397.9	3555	NA	NA
socfb-Cal65	11247	351358	1288	33884	<b>9.192</b>	<b>101.2</b>	101.3	868.8	NA	NA	1841	50983	<b>33.00</b>	<b>116.6</b>	214.8	782	NA	NA
socfb-UCF52	14940	428989	5241	185956	<b>80.27</b>	<b>770.0</b>	421.4	2050	NA	NA	5195	203128	<b>296.5</b>	<b>1029</b>	500.6	2063	NA	NA
socfb-UCSB37	14917	482215	810	27649	<b>6.518</b>	<b>102.7</b>	280.4	2817	NA	NA	627	21724	<b>5.193</b>	<b>58.89</b>	292.8	1955	NA	NA
socfb-wosn-friends	63731	817900	5425	132570	<b>483.1</b>	<b>1911</b>	NA	NA	NA	NA	3698	98791	<b>1439</b>	<b>1914</b>	NA	NA	NA	NA
ca-dblp-2010	226413	716460	455	13491	<b>0.574</b>	<b>272.9</b>	NA	NA	NA	NA	844	21716	<b>2.327</b>	<b>327.6</b>	NA	NA	NA	NA
ca-dblp-2012	317080	1049866	216	11592	<b>0.106</b>	<b>448.6</b>	NA	NA	NA	NA	216	11592	<b>0.160</b>	<b>396.0</b>	NA	NA	NA	NA
socfb-OR	63392	816886	5425	132570	<b>483.1</b>	<b>1663</b>	NA	NA	NA	NA	3698	98791	<b>1439</b>	<b>1339</b>	NA	NA	NA	NA
socfb-Penn94	41536	1362220	6021	162390	<b>30.20</b>	<b>1528</b>	NA	NA	NA	NA	4054	117357	<b>57.35</b>	<b>771.1</b>	NA	NA	NA	NA
web-BerkStan	12305	19500	8816	16011	<b>41.98</b>	<b>8.958</b>	59.52	370.3	NA	NA	8816	16011	<b>109.2</b>	<b>26.98</b>	167.9	460.9	NA	NA
bio-pdb1HY5	36417	36417	189	4341	<b>0.322</b>	<b>0.750</b>	8.889	2.936	NA	NA	60	1632	<b>10.76</b>	<b>2.699</b>	498.4	28.65	NA	NA
chesapeake	39	170	12	43	<b>0.026</b>	<b>0.001</b>	0.177	<b>0.001</b>	0.803	0.004	26	119	<b>0.087</b>	<b>0.002</b>	0.293	0.004	14556	151.1
delanay_n12	4096	12264	4096	12264	<b>16.51</b>	<b>4.610</b>	17.6	16.13	5567	580.2	4046	12114	<b>24.89</b>	<b>3.782</b>	27.08	16.57	NA	NA
fe-sphere	16386	49152	16386	49152	<b>23.85</b>	<b>11.46</b>	179.6	909.8	NA	NA	16386	49152	<b>331.6</b>	<b>62.56</b>	332.6	883.1	NA	NA
rgg_n_2_17_s0	131070	728753	135	936	<b>0.219</b>	<b>22.51</b>	NA	NA	NA	NA	654	4643	<b>2.082</b>	<b>43.87</b>	NA	NA	NA	NA
c-fat200-1	200	1534	90	729	<b>0.001</b>	<b>0.011</b>	0.704	0.019	3.757	0.031	200	1534	<b>28.63</b>	<b>0.954</b>	32.23	0.976	NA	NA
c-fat200-5	200	8473	116	4147	<b>0.148</b>	0.147	2.164	<b>0.049</b>	2.565	0.083	200	8473	<b>1720</b>	<b>75.78</b>	1724	81.74	NA	NA
c-fat500-1	500	4459	140	1351	<b>0.294</b>	<b>0.035</b>	1.669	0.117	19.84	0.301	500	4459	<b>350.0</b>	<b>17.88</b>	396.0	18.55	NA	NA
c-fat500-10	500	46627	252	19719	<b>0.318</b>	1.961	8.193	<b>0.647</b>	10.37	1.471	500	46627	<b>1783</b>	<b>332.9</b>	1786	373.9	NA	NA
hamming6-4	64	704	64	480	5.455	0.041	NA	NA	<b>4.569</b>	<b>0.024</b>	64	480	<b>68.40</b>	<b>0.667</b>	NA	NA	NA	NA

Table 2: Detailed results of MSB, RDS and SCP on 40 representative MBP instances from four benchmarks with  $s = 2$  and  $s = 8$ . For each benchmark of Facebook, RealWorld, DIMACS10, and DIMACS2, we select 5 graphs as ordered and grouped in the table. The search tree size is in  $10^3$ , and the time is in seconds. The best results appear in bold.

## 5.2 Solvers

To assess the performance of our proposed SCP algorithm, we select the state-of-the-art BnB MBP algorithm called MSB [Zhou *et al.*, 2022] and the advanced and generic algorithm called RDS [Gschwind *et al.*, 2018] as our baselines. To evaluate the effect of components in our SCP algorithm, we also generate four variant algorithms. Details of all the algorithms in our experiments are summarized below.

- **MSB**: A BnB MBP algorithm with a coloring-based upper bound and multi-branching method<sup>5</sup>.
- **RDS**: A basic BnB algorithm with a binary branching rule as its main framework for various relaxation clique problems, including MBP. It shows good performance on instances based on dense DIMACS2 graphs with small  $s$  values. The implemented version from [Zhou *et al.*, 2022] is utilized<sup>5</sup>.
- **SCP**: An implementation of our algorithm
- **SCP<sub>pre</sub><sup>-</sup>**: A variant of SCP without preprocessing.
- **SCP<sub>randwalk</sub><sup>-</sup>**: A variant of SCP that replaces the random walk method with the general greedy construction method, which prefers the vertex most connected to the current solution.


- **SCP<sub>color</sub><sup>+</sup>**: A variant of SCP that replaces the PUB in both the preprocessing and the BnB stages with the color-bound in MSB.
- **SCP<sub>expand</sub><sup>-</sup>**: A variant of SCP that does not expand independent sets into  $s$ -components. Instead, it starts with an empty  $s$ -component and sequentially traverses each vertex and try to add it to the  $s$ -component.

## 5.3 Performance Comparison

We first conduct a comprehensive comparison of SCP, MBS, and RDS across all four benchmarks to assess their overall performance. The results are summarized in Table 1, providing the number of instances successfully solved by each algorithm within the given cut-off time. The instances are categorized based on the  $s$  values for each benchmark.

The results reveal that SCP significantly outperforms the baseline algorithms, particularly excelling on instances associated with sparse and large graphs. Notably, the RDS algorithm that lacks an upper bound and adheres to simple binary branching rules, experiences a substantial increase in the search tree size with growing  $s$  values and graph sizes. It fails to solve most instances within the cut-off time when  $s > 3$ . Meanwhile, MSB faces challenges due to the lack of a tight enough upper bound and preprocessing method, and such limitation is particularly evident on sparse graphs. With the benefits of our effective PUB, SCP exhibits an excellent

<sup>5</sup><https://github.com/joey001/max-s-bundle>

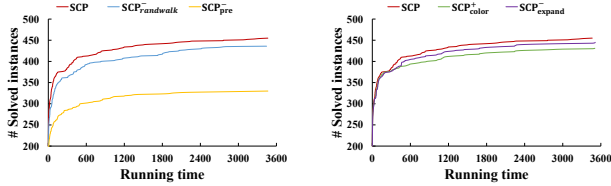

(a) Ablation for preprocessing (b) Ablation for bounds

Figure 2: Ablation studies on the RealWorld and DIMACS2 benchmarks.

performance across various benchmarks and  $s$  values. As a result, SCP solves 9%, 50%, and 70% more instances than MSB in the DIMACS2, RealWorld, and DIMACS10 benchmarks, respectively. Notably, SCP successfully solves four times more instances than MSB in the Facebook benchmark, indicating a significant improvement.

We further provide detailed results for SCP, MSB, and RDS in solving 20 representative instances from four benchmarks for  $s = 2$  and  $s = 8$ , as outlined in Table 2. The presented results include the number of vertices (column  $|V|$ ) and edges (column  $|E|$ ) for each original graph, along with the corresponding number of vertices (column  $|V'|$ ) and edges (column  $|E'|$ ) after the reduction by our preprocessing method. Additionally, the running time in seconds (column *Time*) and the sizes of their entire search trees in  $10^3$  (column *Tree*) required to solve the instances are also provided. The symbol ‘NA’ indicates that the algorithm cannot solve the instance within the given cut-off time.

The results show that when solving massive sparse graphs (with more than 40,000 vertices) the preprocessing method in PUB significantly reduces the graph size, enabling our SCP to successfully solve them. In contrast, RSB and MSB fail to solve these instances within the given cut-off time. For dense graphs, such as the DIMACS2 graphs c-fat200-1, c-fat500-1, and hamming6-4, preprocessing does not reduce any vertices or edges when  $s = 8$ . Nevertheless, the BnB process based on PUB can still help SCP solve these instances with much shorter running time as compared to the cut-off time. Consequently, both the search tree sizes and running time of SCP are orders of magnitude smaller than those of MSB and RSB, demonstrating the superior performance of SCP in solving instances with both small and large  $s$  values.

#### 5.4 Ablation Study

We perform ablation studies by comparing SCP against its four variants grouped in two sets:  $SCP^-_{\text{randwalk}}$  and  $SCP^-_{\text{pre}}$ , aiming to assess the effectiveness of the random walk method and the preprocessing method;  $SCP^+_{\text{color}}$  and  $SCP^-_{\text{expand}}$ , aiming to assess the effectiveness of the PUB. We compare the algorithms on two typical benchmarks, DIMACS2 and RealWorld, which contain dense and massive sparse graphs, respectively, and we collect instances with all the eight  $s$  values ( $s = 2, 3, \dots, 15$  as in Table 1). The results are shown in Figure 2, illustrating the evolution in the number of instances solved by each algorithm observed over the duration of running time (in seconds).

Benchmark	Metric	$s$					
		2	3	4	6	8	10
DIMACS2 (80)	$Num_{inc}$	67	67	69	71	73	74
	$LB_{inc}$	1.00	1.60	1.83	2.58	3.34	3.96
RealWorld (102)	$Num_{inc}$	52	53	55	59	59	60
	$LB_{inc}$	1.00	1.55	1.62	2.24	2.71	3.17

Table 3: Improvements over KDBB’s lower bounds.

In general, SCP yields better performance than the four variants. Figure 2(a) clearly demonstrates the significant impact of preprocessing, and the employed construction heuristic based on random walk shows better performance than the traditional greedy construction method. Results in Figure 2(b) indicate that the PUB is more effective than the color-bound in reducing the graph and pruning the branches, and our method of expanding each independent set into a maximal  $s$ -component is more effective than finding the maximal  $s$ -component directly in obtaining tighter upper bounds.

#### 5.5 Generalization of our Lower Bound Method

To evaluate the generalization capability of our construction heuristic based on short random walks, we apply our method to generate the initial lower bound for the KDBB algorithm [Gao *et al.*, 2022], a recent BnB algorithm for another practical relaxation clique problem, the Maximum  $s$ -Defective Clique Problem (MDCP). KDBB also uses a greedy construction heuristic guided by the vertex degree. We compare the methods in MDCP instances with various  $s$  values on DIMACS2 and RealWorld benchmarks. The results are summarized in Table 1, where  $Num_{inc}$  indicates the number of instances that our short random walk method obtains a higher lower bound, and  $LB_{inc}$  indicates the average increment on lower bounds.

The results show that our method demonstrates the ability to enhance the initial lower bounds in most instances. Furthermore, with the increase of  $s$ , both the number of improved instances and the increments on lower bounds witness significant augmentation. Importantly, for over 95% of the tested instances, the running time of the random walk is less than 1 second, rendering it negligible in the BnB algorithm. We further leverage the improved lower bounds to enhance the efficiency of the KDBB algorithm, and the results are detailed in the Appendix.

## 6 Conclusion

This paper addressed the NP-hard Maximum  $s$ -Bundle Problem (MBP), a relaxation of the maximum clique problem. We proposed a Partition-based Upper Bound (PUB) by considering the relaxation property of  $s$ -bundle, and a heuristic based on short random walks to generate high-quality initial lower bound. We thereby proposed a new branch and bound (BnB) algorithm that uses PUB in both preprocessing and BnB process, as well as the new initial lower bound. Comprehensive experiments employing various values of  $s$  demonstrate that our algorithm consistently surpasses existing BnB algorithms. It exhibits superior performance and exceptional robustness across both dense and sparse graphs, resulting in significantly reduced search tree sizes and shorter overall running times. We also apply the idea of our random



walk-based initialization to another relaxation clique problem and demonstrate its generic performance. In our future work, we will consider fully utilizing the relaxation property of graphs to address various relaxation clique problems.

## References

- [Balasundaram *et al.*, 2011] Balabhaskar Balasundaram, Sergiy Butenko, and Illya V. Hicks. Clique relaxations in social network analysis: The maximum  $k$ -plex problem. *Operations Research*, 59(1):133–142, 2011.
- [Brunato *et al.*, 2007] Mauro Brunato, Holger H. Hoos, and Roberto Battiti. On effectively finding maximal quasi-cliques in graphs. In *Proceedings of the 2nd International Conference on Learning and Intelligent Optimization*, volume 5313, pages 41–55, 2007.
- [Chang *et al.*, 2022] Lijun Chang, Mouyi Xu, and Darren Strash. Efficient maximum  $k$ -plex computation over large sparse graphs. *Proceedings of the VLDB Endowment*, 16(2):127–139, 2022.
- [Dinic, 1970] Efm A. Dinic. Algorithm for solution of a problem of maximum flow in a network with power estimation, soviet math. *Soviet Math*, 11:1277–1280, 1970.
- [Fredman and Saks, 1989] Michael Fredman and Michael Saks. The cell probe complexity of dynamic data structures. In *Proceedings of the twenty-first annual ACM symposium on Theory of computing*, pages 345–354, 1989.
- [Gao *et al.*, 2022] Jian Gao, Zhenghang Xu, Ruizhi Li, and Minghao Yin. An exact algorithm with new upper bounds for the maximum  $k$ -defective clique problem in massive sparse graphs. In *Proceedings of the 36th AAAI Conference on Artificial Intelligence, the 34th Conference on Innovative Applications of Artificial Intelligence, and the 12th Symposium on Educational Advances in Artificial Intelligence*, pages 10174–10183, 2022.
- [Gschwind *et al.*, 2018] Timo Gschwind, Stefan Irnich, and Isabel Podlinski. Maximum weight relaxed cliques and Russian doll search revisited. *Discrete Applied Mathematics*, 234:131–138, 2018.
- [Hu *et al.*, 2023] Shan Hu, Yi Zhou, Mingyu Xiao, Zhang-Hua Fu, and Zhipeng Lü. Listing maximal  $k$ -relaxed-vertex connected components from large graphs. *Information Sciences*, 620:67–83, 2023.
- [Jiang *et al.*, 2023] Hua Jiang, Fusheng Xu, Zhifei Zheng, Bowen Wang, and Wei Zhou. A refined upper bound and inprocessing for the maximum  $k$ -plex problem. In *Proceedings of the 32nd International Joint Conference on Artificial Intelligence*, 2023.
- [Jin *et al.*, 2023] Mingming Jin, Jiongzhi Zheng, and Kun He. KD-Club: An efficient exact algorithm with new coloring-based upper bound for the maximum  $k$ -defective clique problem. *arXiv preprint arXiv:2308.07235*, 2023.
- [Li and Quan, 2010] Chu Min Li and Zhe Quan. An efficient branch-and-bound algorithm based on maxsat for the maximum clique problem. In *Proceedings of the 24th AAAI Conference on Artificial Intelligence*, 2010.
- [McCreech *et al.*, 2017] Ciaran McCreech, Patrick Prosser, and James Trimble. A partitioning algorithm for maximum common subgraph problems. In *Proceedings of the 26th International Joint Conference on Artificial Intelligence*, pages 712–719, 2017.
- [Pattillo *et al.*, 2013] Jeffrey Pattillo, Nataly Youssef, and Sergiy Butenko. On clique relaxation models in network analysis. *European Journal of Operational Research*, 226(1):9–18, 2013.
- [Pearson, 1905] Karl Pearson. The problem of the random walk. *Nature*, 72(1865):294–294, 1905.
- [Rossi and Ahmed, 2015] Ryan A. Rossi and Nesreen K. Ahmed. The network data repository with interactive graph analytics and visualization. In *Proceedings of the 29th AAAI Conference on Artificial Intelligence*, pages 4292–4293, 2015.
- [Tarjan, 1979] Robert Endre Tarjan. A class of algorithms which require nonlinear time to maintain disjoint sets. *Journal of computer and system sciences*, 18(2):110–127, 1979.
- [Veremyev *et al.*, 2014] Alexander Veremyev, Oleg A Prokopyev, Vladimir Boginski, and Eduardo L Pasiliao. Finding maximum subgraphs with relatively large vertex connectivity. *European Journal of Operational Research*, 239(2):349–362, 2014.
- [Verfaillie *et al.*, 1996] Gérard Verfaillie, Michel Lemaître, and Thomas Schiex. Russian doll search for solving constraint optimization problems. In *Proceedings of the 13th National Conference on Artificial Intelligence and the 8th Innovative Applications of Artificial Intelligence Conference*, pages 181–187, 1996.
- [Wang *et al.*, 2022] Zhengren Wang, Yi Zhou, Mingyu Xiao, and Bakhadyr Khoussainov. Listing maximal  $k$ -plexes in large real-world graphs. In *Proceedings of the 22th ACM Web Conference*, pages 1517–1527, 2022.
- [Wang *et al.*, 2023] Zhengren Wang, Yi Zhou, Chunyu Luo, and Mingyu Xiao. A fast maximum  $k$ -plex algorithm parameterized by the degeneracy gap. In *Proceedings of the 32nd International Joint Conference on Artificial Intelligence*, 2023.
- [Yu *et al.*, 2006] Haiyuan Yu, Alberto Paccanaro, Valery Trifonov, and Mark Gerstein. Predicting interactions in protein networks by completing defective cliques. *Bioinformatics*, 22(7):823–829, 2006.
- [Zheng *et al.*, 2023] Jiongzhi Zheng, Mingming Jin, and Kun He. Two new upper bounds for the maximum  $k$ -plex problem. *arXiv preprint arXiv:2301.07300*, 2023.
- [Zhou *et al.*, 2022] Yi Zhou, Weibo Lin, Jin-Kao Hao, Mingyu Xiao, and Yan Jin. An effective branch-and-bound algorithm for the maximum  $s$ -bundle problem. *European Journal of Operational Research*, 297(1):27–39, 2022.



## Appendix of “An Effective Branch-and-Bound Algorithm with New Bounding Methods for the Maximum $s$ -Bundle Problem”

In Section 5.5 of the main text, we show that our method of generating the initial lower bound (LB) can also be used to boost the initial lower bound of another relaxation clique problem, the Maximum  $s$ -Defective Clique Problem (MDCP) [Yu *et al.*, 2006; Gao *et al.*, 2022]. Here we further apply our lower bound method based on short random walks [Pearson, 1905] to typical exact algorithms for MDCP, to show that our new lower bound could actually boost the algorithm performance. The KDBB algorithm [Gao *et al.*, 2022] is the state-of-the-art BnB algorithm for MDCP, which uses a greedy construction heuristic guided by the vertex degree to generate the initial LB. We replace the construction heuristic in KDBB with our short random walks-based heuristic and denote the resulting algorithm as  $\text{KDBB}_{LB}^+$ .

We compare  $\text{KDBB}_{LB}^+$  with KDBB in the RealWorld<sup>6</sup> and DIMACS2<sup>7</sup> benchmarks, which contain massive sparse and dense graphs, respectively, with  $s = 2$  and  $s = 8$ . The cut-off time is set to 3,600 seconds. The detailed comparison results are summarized in Tables 4 and 5, where columns  $V$  and  $E$  indicate the number of vertices and edges in the original graph, respectively, columns  $V'$  and  $E'$  indicate the number of vertices and edges in the reduced graph after the preprocessing stage in the algorithm, respectively, column  $LB$  indicates the initial LB obtained by the algorithm, and column *Time* indicates the running time in seconds to solve the instance. The symbol ‘NA’ indicates that the algorithm cannot solve the instance within the given cut-off time. Note that our method has never made the initial LB worse in the tested instances. In the tables, we only provide the results of instances solved by at least one algorithm within the cut-off time, and at the same time  $\text{KDBB}_{LB}^+$  obtains a larger initial LB than KDBB, when  $s = 2$  or  $s = 8$ .

Experimental results indicate that, for the DIMACS2 benchmark shown in Table 5, although the initial LB in  $\text{KDBB}_{LB}^+$  has exhibited enhancements, especially when  $s = 8$ , it is hard to reduce vertices and edges in dense graphs. Therefore, the overall graph size remains largely unaffected in the majority of computational scenarios, and the running time for solving the instances of the two algorithms is close. Conversely, for the RealWorld benchmark detailed in Table 4, the improvements in the initial LB by our method demonstrate a notable reduction in graph size, consequently enhancing the algorithm efficiency in most instances. For example, when  $s = 2$ , the algorithm’s efficiency experiences a substantial boost owing to a significant reduction in ca-CSphd. Furthermore, when  $s = 8$ , KDBB fails to solve ia-wiki-Talk within the cut-off time, whereas  $\text{KDBB}_{LB}^+$  can solve it successfully. The results demonstrate again the excellent performance and generalization capability of our LB method, espe-

cially on sparse graphs which is prevalent in the real world.

<sup>6</sup><http://lcs.ios.ac.cn/%7Ecaisw/Resource/realworld%20graphs.tar.gz>

<sup>7</sup><http://archive.dimacs.rutgers.edu/pub/challenge/graph/benchmarks/clique/>

Instance	V	E	s = 2								s = 8							
			KDBB				KDBB <sup>+</sup> <sub>LB</sub>				KDBB				KDBB <sup>+</sup> <sub>LB</sub>			
			LB	V'	E'	Time	LB	V'	E'	Time	LB	V'	E'	Time	LB	V'	E'	Time
bio-celegans	453	2025	9	32	203	0.001	<b>10</b>	<b>18</b>	<b>98</b>	<b>0.000</b>	9	453	2025	0.406	<b>11</b>	<b>424</b>	<b>1923</b>	<b>0.241</b>
bio-diseaseome	516	1188	11	21	100	0.000	11	21	100	0.000	11	282	822	0.03	<b>12</b>	<b>222</b>	<b>689</b>	<b>0.014</b>
bio-dmela	7393	25569	7	22	66	0.008	<b>8</b>	<b>7</b>	<b>21</b>	<b>0.006</b>	7	NA	NA	NA	<b>9</b>	NA	NA	NA
bio-yeast	1458	1948	6	12	29	0.000	<b>7</b>	<b>0</b>	<b>0</b>	<b>0.000</b>	6	1458	1948	12.87	<b>7</b>	1458	1948	12.57
ca-CondMat	17903	196972	26	0	0	0.004	26	0	0	<b>0.002</b>	26	84	987	0.006	<b>27</b>	<b>51</b>	<b>619</b>	<b>0.002</b>
ca-CSphd	1882	1740	3	1882	1740	343.7	<b>4</b>	<b>15</b>	<b>20</b>	<b>0.000</b>	3	1882	1740	55.57	<b>5</b>	1882	1740	<b>54.11</b>
ca-Erdos992	6100	7515	8	11	46	0.001	<b>9</b>	<b>0</b>	<b>0</b>	<b>0.000</b>	8	6100	7515	876.6	<b>10</b>	<b>921</b>	<b>2305</b>	<b>0.938</b>
ca-GrQc	4158	13422	44	46	1030	0.003	<b>45</b>	<b>0</b>	<b>0</b>	<b>0.000</b>	44	46	1030	<b>0.002</b>	<b>46</b>	0	0	0.003
ca-netscience	379	914	9	25	92	0.000	9	25	92	0.000	9	379	914	0.076	<b>10</b>	<b>351</b>	<b>877</b>	<b>0.059</b>
ia-email-EU	32430	54397	12	87	1154	0.027	<b>13</b>	<b>32</b>	<b>339</b>	<b>0.019</b>	12	1070	11020	5.427	<b>15</b>	<b>331</b>	<b>4465</b>	<b>0.387</b>
ia-email-univ	1133	5451	12	6	15	0.001	12	6	15	<b>0.000</b>	12	341	1562	0.054	<b>13</b>	<b>163</b>	<b>751</b>	<b>0.01</b>
ia-enron-large	33696	180811	18	524	14829	2.164	<b>19</b>	<b>425</b>	<b>11329</b>	<b>1.075</b>	18	1736	45994	49.29	<b>22</b>	<b>769</b>	<b>21837</b>	<b>11.11</b>
ia-enron-only	143	623	8	18	106	0.001	<b>9</b>	<b>16</b>	<b>90</b>	<b>0.000</b>	8	143	623	0.07	<b>11</b>	<b>98</b>	<b>458</b>	<b>0.007</b>
ia-fb-messages	1266	6451	5	227	967	0.019	<b>6</b>	<b>24</b>	<b>59</b>	<b>0.001</b>	5	1266	6451	<b>2797</b>	<b>7</b>	1266	6451	31.49
ia-infect-dublin	410	2765	15	19	162	0.001	<b>16</b>	<b>18</b>	<b>149</b>	0.001	15	168	1276	0.02	<b>18</b>	<b>81</b>	<b>622</b>	<b>0.003</b>
ia-infect-hyper	113	2196	15	77	1501	0.126	<b>16</b>	<b>68</b>	<b>1290</b>	<b>0.080</b>	15	108	2117	0.537	<b>18</b>	<b>92</b>	<b>1844</b>	<b>0.486</b>
ia-reality	6809	7680	5	57	169	0.001	<b>6</b>	<b>9</b>	<b>26</b>	0.001	5	6809	7680	2107	<b>7</b>	6809	7680	<b>2078</b>
ia-wiki-Talk	92117	3607759	13	958	40110	<b>820.6</b>	<b>14</b>	<b>819</b>	<b>34337</b>	861.2	13	NA	NA	NA	<b>16</b>	<b>1619</b>	<b>61292</b>	<b>3290</b>
inf-power	4941	6594	6	25	59	0.001	6	25	59	0.001	6	4941	6594	745.5	<b>8</b>	4941	6594	<b>722.8</b>
rec-amazon	91813	125704	5	12643	21020	2307	5	12643	21020	<b>2264</b>	5	NA	NA	NA	<b>6</b>	NA	NA	NA
rt-retweet	96	117	4	19	27	0.000	<b>5</b>	<b>0</b>	<b>0</b>	0.000	4	96	117	0.015	<b>6</b>	96	117	<b>0.014</b>
rt-twitter-copen	761	1029	4	154	289	0.008	<b>5</b>	<b>22</b>	<b>47</b>	<b>0.000</b>	4	761	1029	1.993	<b>6</b>	761	1029	<b>1.957</b>
sc-shipsec1	140385	1707759	24	240	2760	2.717	24	240	2760	<b>1.744</b>	24	8020	130505	944.6	<b>25</b>	<b>6274</b>	<b>89762</b>	<b>233.3</b>
soc-brightkite	56739	212945	36	172	5982	1.494	<b>37</b>	<b>165</b>	<b>5666</b>	<b>1.240</b>	36	215	8013	2.282	<b>40</b>	<b>178</b>	<b>6373</b>	<b>1.71</b>
soc-dolphins	62	159	5	28	65	0.000	<b>6</b>	<b>11</b>	<b>24</b>	0.000	5	62	159	0.014	<b>7</b>	62	159	0.014
soc-douban	154908	327162	11	21	161	0.730	<b>12</b>	<b>17</b>	<b>114</b>	<b>0.613</b>	11	2801	11064	27.35	<b>14</b>	<b>83</b>	<b>474</b>	<b>0.958</b>
soc-epinions	26588	100120	16	193	3301	0.151	<b>17</b>	<b>138</b>	<b>2242</b>	<b>0.109</b>	16	617	11005	2.193	<b>19</b>	<b>294</b>	<b>5843</b>	<b>1.038</b>
socfb-Berkeley13	22900	852419	37	848	26786	5.728	<b>38</b>	<b>776</b>	<b>24537</b>	<b>4.540</b>	37	1500	46070	22.51	<b>41</b>	<b>1018</b>	<b>32385</b>	<b>9.341</b>
socfb-CMU	6621	249959	44	56	1492	0.444	<b>45</b>	<b>56</b>	<b>1492</b>	<b>0.397</b>	44	297	8363	0.564	<b>47</b>	<b>119</b>	<b>3398</b>	<b>0.449</b>
socfb-Duke14	9885	506437	30	1327	50634	<b>404.4</b>	<b>31</b>	<b>1189</b>	<b>45732</b>	426.4	30	2698	99887	1302	<b>33</b>	<b>1760</b>	<b>65836</b>	<b>1220</b>
socfb-Indiana	29732	1305757	44	1540	54558	16.48	<b>45</b>	<b>1225</b>	<b>43354</b>	<b>11.72</b>	44	2566	92410	88.17	<b>48</b>	<b>1860</b>	<b>65862</b>	<b>34.72</b>
socfb-MIT	6402	251230	29	1033	32448	7.059	<b>30</b>	<b>877</b>	<b>27732</b>	<b>5.168</b>	29	1657	60575	43.96	<b>33</b>	<b>1167</b>	<b>38982</b>	<b>17.38</b>
socfb-OR	63392	816886	25	1132	27730	6.887	<b>26</b>	<b>858</b>	<b>20832</b>	<b>4.683</b>	25	3464	85574	166.3	<b>29</b>	<b>1877</b>	<b>45300</b>	<b>32.73</b>
socfb-Penn94	41536	1362220	38	609	17020	3.861	<b>39</b>	<b>487</b>	<b>13697</b>	<b>3.422</b>	38	1889	51910	22.22	<b>42</b>	<b>1106</b>	<b>29325</b>	<b>6.789</b>
socfb-Stanford3	11586	568309	48	151	5288	3.194	<b>49</b>	<b>148</b>	<b>5125</b>	<b>3.181</b>	48	562	21246	6.657	<b>52</b>	<b>223</b>	<b>7577</b>	<b>3.852</b>
socfb-Texas84	36364	1590651	48	897	39618	72.82	<b>49</b>	<b>799</b>	<b>35691</b>	<b>68.15</b>	48	1416	61781	328.2	<b>51</b>	<b>1192</b>	<b>51695</b>	<b>291.1</b>
socfb-UCLA	20453	747604	51	136	4367	1.448	<b>52</b>	<b>130</b>	<b>4043</b>	<b>1.233</b>	51	303	10178	1.809	<b>55</b>	<b>143</b>	<b>4743</b>	<b>1.467</b>
socfb-UConn	17206	604867	48	211	6883	0.973	<b>49</b>	<b>144</b>	<b>4818</b>	<b>0.775</b>	48	301	10108	1.454	<b>52</b>	<b>271</b>	<b>8589</b>	<b>1.059</b>
socfb-UCSB37	14917	482215	51	290	10008	1.756	<b>52</b>	<b>170</b>	<b>6551</b>	<b>1.528</b>	51	532	18362	3.668	<b>55</b>	<b>320</b>	<b>11603</b>	<b>2.593</b>
socfb-UF	35111	1465654	51	1568	73133	77.78	<b>52</b>	<b>1526</b>	<b>70410</b>	<b>65.60</b>	51	2010	93977	121.7	<b>55</b>	<b>1717</b>	<b>80359</b>	<b>81.98</b>
socfb-Ullinois	30795	1264421	54	565	23799	12.18	<b>55</b>	<b>406</b>	<b>17969</b>	<b>10.58</b>	54	676	30508	18.92	<b>58</b>	<b>602</b>	<b>26096</b>	<b>12.67</b>
socfb-Wisconsin87	23831	835946	33	875	27116	6.475	<b>34</b>	<b>778</b>	<b>23966</b>	<b>5.216</b>	33	1863	57527	38.56	<b>37</b>	<b>1057</b>	<b>33002</b>	<b>11.64</b>
soc-gowalla	196591	950327	29	32	489	2.132	<b>30</b>	<b>30</b>	<b>434</b>	<b>1.706</b>	29	368	10656	3.306	<b>32</b>	<b>103</b>	<b>2189</b>	<b>2.283</b>
soc-karate	34	78	5	12	25	0.000	<b>6</b>	<b>6</b>	<b>14</b>	0.000	5	34	78	0.003	<b>7</b>	34	78	<b>0.002</b>
soc-slashdot	70068	358647	23	201	7947	30.08	<b>24</b>	<b>189</b>	<b>7506</b>	<b>28.60</b>	23	306	10976	43.18	<b>27</b>	<b>231</b>	<b>9068</b>	<b>37.07</b>
soc-wiki-Vote	889	2914	6	93	444	0.005	<b>7</b>	<b>27</b>	<b>132</b>	<b>0.001</b>	6	889	2914	28.11	<b>9</b>	889	2914	<b>22.89</b>
tech-as-caida2007	26475	53381	16	30	359	0.009	<b>17</b>	<b>27</b>	<b>304</b>	<b>0.005</b>	16	137	2063	0.129	<b>18</b>	<b>78</b>	<b>1251</b>	<b>0.104</b>
tech-internet-as	40164	85123	16	22	219	0.018	<b>17</b>	<b>22</b>	<b>219</b>	<b>0.009</b>	16	232	3258	0.176	<b>19</b>	<b>71</b>	<b>1150</b>	<b>0.053</b>
tech-p2p-gnutella	62561	147878	4	4343	5388	104.3	<b>5</b>	<b>57</b>	<b>90</b>	<b>0.278</b>	4	NA	NA	NA	<b>6</b>	NA	NA	NA
tech-RL-caida	190914	607610	17	112	1788	0.973	<b>18</b>	<b>58</b>	<b>1016</b>	<b>0.735</b>	17	636	9037	12.8	<b>21</b>	<b>203</b>	<b>3371</b>	<b>4.34</b>
tech-routers-rf	2113	6632	16	30	321	0.001	<b>17</b>	<b>21</b>	<b>194</b>	<b>0.000</b>	16	128	1097	0.014	<b>18</b>	<b>91</b>	<b>826</b>	<b>0.009</b>
tech-WHOIS	7476	56943	47	255	15277	<b>48.95</b>	<b>48</b>	<b>250</b>	<b>14918</b>	52.90	47	278	16755	95.99	<b>51</b>	<b>262</b>	<b>15751</b>	<b>79.06</b>
web-google	1299	2773	18	19	170	0.000	<b>19</b>	<b>0</b>	<b>0</b>	<b>0.000</b>	18	115	796	<b>0.002</b>	<b>19</b>	<b>93</b>	<b>686</b>	0.003
web-polblogs	643	2280	9	30	253	0.003	<b>10</b>	<b>23</b>	<b>177</b>	<b>0.002</b>	9	643	2280	0.564	<b>12</b>	<b>122</b>	<b>768</b>	<b>0.031</b>
web-sk-2005	121422	334419	82	248	10123	0.071	<b>83</b>	<b>246</b>	<b>9963</b>	<b>0.013</b>	82	250	10279	0.096	<b>83</b>	<b>250</b>	<b>10279</b>	<b>0.042</b>
web-spam	4767	37375	20	108	2282	0.167	<b>21</b>	<b>91</b>	<b>1783</b>	<b>0.158</b>	20	220	4805	7.249	<b>21</b>	<b>198</b>	<b>4350</b>	<b>7.205</b>

Table 4: Detailed results of KDBB and KDBB<sup>+</sup><sub>LB</sub> in RealWorld benchmark with s = 2 and s = 8. Better results appear in bold.

Instance	V	E	s = 2								s = 8							
			KDBB				KDBB <sup>+</sup> <sub>LB</sub>				KDBB				KDBB <sup>+</sup> <sub>LB</sub>			
			LB	V'	E'	Time	LB	V'	E'	Time	LB	V'	E'	Time	LB	V'	E'	Time
brock200-2.col	200	9876	10	200	9876	<b>1206</b>	<b>11</b>	200	9876	1245	22	NA	NA	NA	<b>25</b>	NA	NA	NA
c-fat200-1.col	200	1534	12	100	809	<b>0.004</b>	12	100	809	0.005	8	200	1534	0.038	<b>11</b>	200	1534	<b>0.032</b>
c-fat200-2.col	200	3235	24	46	650	<b>0.002</b>	24	46	650	0.003	34	200	3235	0.042	<b>38</b>	200	3235	<b>0.039</b>
c-fat200-5.col	200	8473	58	172	6527	<b>0.018</b>	58	172	6527	0.020	22	200	8473	<b>0.057</b>	<b>26</b>	200	8473	0.059
c-fat500-1.col	500	4459	14	152	1465	0.012	14	152	1465	<b>0.010</b>	46	500	4459					