
NeRCC: Nested-Regression Coded Computing for Resilient Distributed Prediction Serving Systems

Parsa Moradi¹ Mohammad Ali Maddah-Ali¹

Abstract

Resilience against stragglers is a critical element of prediction serving systems, tasked with executing inferences on input data for a pre-trained machine-learning model. In this paper, we propose NeRCC, as a general straggler-resistant framework for approximate coded computing. NeRCC includes three layers: (1) encoding regression and sampling, which generates coded data points, as a combination of original data points, (2) computing, in which a cluster of workers run inference on the coded data points, (3) decoding regression and sampling, which approximately recovers the predictions of the original data points from the available predictions on the coded data points. We argue that the overall objective of the framework reveals an underlying interconnection between two regression models in the encoding and decoding layers. We propose a solution to the nested regressions problem by summarizing their dependence on two regularization terms that are jointly optimized. Our extensive experiments on different datasets and various machine learning models, including LeNet5, RepVGG, and Vision Transformer (ViT), demonstrate that NeRCC accurately approximates the original predictions in a wide range of stragglers, outperforming the state-of-the-art by up to 23%.

1. Introduction

Prediction serving systems are infrastructures, designed to deliver the predictions of pre-trained machine learning models for new input data points. These systems ensure efficiency and scalability by distributing input data across multiple workers, each running an instance of the model. One of the primary challenges raised in these distributed computing systems is the presence of slow-performing workers,

commonly referred to as stragglers. In such instances, the prediction serving system must wait for all workers to respond, thereby impacting the overall latency of the process.

To address this issue, these systems often employ the strategy of replicating input data points, sending the same data points to multiple workers (Suresh et al., 2015; Shah et al., 2015). However, this replication introduces significant overhead and inefficiency to the system. Recently, coded computing methods have been introduced that significantly reduce system overhead and offer efficient resilience to stragglers (Lee et al., 2017; Kosaian et al., 2018; Narra et al., 2019; Yu et al., 2019). However, these methods have been originally limited to exact matrix multiplication and polynomial computation and require a large number of workers. Another line of research has extended coded computing to more general computations, allowing for the relaxation of result precision to approximation (Kosaian et al., 2019; So et al., 2020; Jahani-Nezhad & Maddah-Ali, 2022). This approach is utilized to reduce the overhead and latency of prediction-serving systems (Kosaian et al., 2019; Dinh & Lee, 2021; Jahani-Nezhad & Maddah-Ali, 2022; Soleymani et al., 2022). In this approach, a master node in the system computes a set of coded data points, each as a combination of all input data. Subsequently, each coded data is sent to individual workers, where the worker runs the model on the assigned coded data point and forwards the predictions back to the master node. The coding scheme is designed to ensure that even if some workers are stragglers, the master node can still recover (or decode) the approximation of the model’s predictions for the original data with relatively small errors. In (Kosaian et al., 2019), ParM, as a model-specific approach, is introduced, wherein a parity model is trained on coded data to precisely predict the coded output, enhancing straggler tolerance. However, this approach faces scalability challenges, as a new parity model needs to be trained for each new model. Furthermore, it only tolerates one single straggler, and the experimental results are reported for a small number of workers. Inspired by rational interpolation (Berrut, 1988), (Jahani-Nezhad & Maddah-Ali, 2022) proposed a model-agnostic and numerically stable framework known as BACC for general computations, and successfully employed it to train neural networks on a cluster of workers, while tolerating a larger number of

¹Department of Electrical and Computer Engineering, University of Minnesota, Minneapolis, USA. Correspondence to: Mohammad Ali Maddah-Ali <maddah@umn.edu>.

stragglers. Building on BACC framework, (Soleymani et al., 2022) introduced `ApproxIFER` scheme, as a straggler resistance and Byzantine-robust prediction serving system. BACC framework is designed based on numerically stable *exact* interpolation, using pole-free rational interpolations. While the BACC framework is designed for approximate computing, it does not prioritize the accuracy of the prediction for the input data points; instead, it places unnecessary emphasis on the exactness of the interpolations.

In this paper, we introduce *Nested-Regression Coded Computing* (NeRCC), a general and straggler-resistant framework for approximate distributed coded computing, employed in prediction serving systems. This framework consists of three layers: (1) encoding regression and sampling, generating coded data points by running a regression on input data points, and sampling from the resulting regression function. (2) Computing, where each worker runs the trained machine learning model on one of the coded data points, (3) decoding regression and sampling, generating the approximate prediction by running a regression on available predictions on the coded data points. We argue that the estimation error of the prediction system can be upper-bounded by the summation of two interconnected terms: one reflecting the training error of the encoding regression and the other representing the generalization error of the decoding regression. The coupling between these nested regressions complicates their design and analysis. To take this coupling into account, and still leverage the established science of regression models, we formulate the problem as two regression tasks, summarizing their interdependence in two regularization terms. However, the weight of the regularizing terms is optimized jointly.

We extensively evaluate the performance of NeRCC for a wide range of straggler numbers and various machine learning models. These models include LeNet5 (LeCun et al., 1998), with 1024-dimensional inputs and 10-dimensional outputs, having 6×10^4 parameters; RepVGG (Ding et al., 2021) with 3072-dimensional inputs, 10-dimensional outputs, and 26 million parameters; and Vision Transformer (ViT) (Dosovitskiy et al., 2020) with 150528-dimensional inputs, 1000-dimensional outputs, and 80 million parameters. Our results demonstrate that the proposed framework consistently outperforms the state of the art in all different scenarios. This improvement is reflected in enhanced accuracy and a notable reduction in the mean square error of approximate models, achieving up to 6% and 23% respectively, compared to the Berrut interpolation approaches.

2. Method

2.1. Notations

Throughout this paper, uppercase and lowercase bold letters denote matrices and vectors, respectively. Coded vectors and matrices are indicated by a \sim sign, as in $\tilde{\mathbf{x}}, \tilde{\mathbf{A}}$. The i -th element of a vector \mathbf{x} is denoted as x_i , and the (i_1, i_2, \dots, i_d) -th element of a d -dimensional matrix \mathbf{A} is represented by A_{i_1, i_2, \dots, i_d} . Additionally, x_j^i represents the j -th element of the i -th vector in the set $\{\mathbf{x}_k\}_{k=1}^n$. The set $\{1, 2, \dots, n\}$ is denoted as $[n]$. The symbol $|S|$ denotes the cardinality of the set S . The k -th derivative function of the one-dimensional function $f(\cdot)$ is denoted by $f^{(k)}(\cdot)$.

2.2. Problem Setting

Consider a master node and a set of N workers. The master node is provided with a set of K data points $\{\mathbf{x}_k\}_{k=1}^K \in \mathbb{R}^d$ to compute $\{\mathbf{f}(\mathbf{x}_k)\}_{k=1}^K$ using a cluster of N worker nodes. Here, $\mathbf{f} : \mathbb{R}^d \rightarrow \mathbb{R}^m$ represents an arbitrary function, and K, d , and m are integers. In prediction serving systems, the function $\mathbf{f}(\mathbf{x})$ represents a pre-trained machine learning model, for example, a deep neural network model, where $\mathbf{f}(\mathbf{x})$ is the inference process for a given input \mathbf{x} . A naive approach is to assign these computations to the workers to execute them. The challenge is that some of the worker nodes may act as stragglers and not finish their tasks within the required deadline. A promising approach for the master node to mitigate this problem is to use coding in its computation. In this approach, the master node offloads some (linear) combination of the initial data points, rather than raw data points, to the worker nodes, collects their prediction results, and then decodes the predictions of the original data from the predictions on the (linear) combinations. The goal of the master node is to approximately compute $\hat{\mathbf{f}}(\mathbf{x}_k) \approx \mathbf{f}(\mathbf{x}_k)$ at the data points $\{\mathbf{x}_k\}_{k=1}^K$, even if some of the worker nodes appear to be stragglers.

2.2.1. PROPOSED FRAMEWORK

Here we propose a general straggler-resistant framework for distributed coded computing. This framework has two layers of regressions and a computing layer, where the computing layer is sandwiched between two regression layers. This framework is motivated by BACC scheme (Jahani-Nezhad & Maddah-Ali, 2022), and includes it as a special case. This scheme is based on the following steps:

1. **Encoding regression:** The master node fits a regression function $\mathbf{u}_{\text{enc}} : \mathbb{R} \rightarrow \mathbb{R}^d$ at points $\{(\alpha_k, \mathbf{x}_k)\}_{k=1}^K$ for distinct ordered values $\alpha_1 < \alpha_2 < \dots < \alpha_K \in \mathbb{R}$. Then, it computes the encoding function $\mathbf{u}_{\text{enc}}(\cdot)$ on a set of distinct ordered values $\{\beta_n\}_{n=1}^N$ where $\beta_1 < \beta_2 < \dots < \beta_N \in \mathbb{R}$, with $k \in [K]$ and $n \in [N]$. Subsequently, the master node sends $\tilde{\mathbf{x}}_n = \mathbf{u}_{\text{enc}}(\beta_n) \in \mathbb{R}^d$

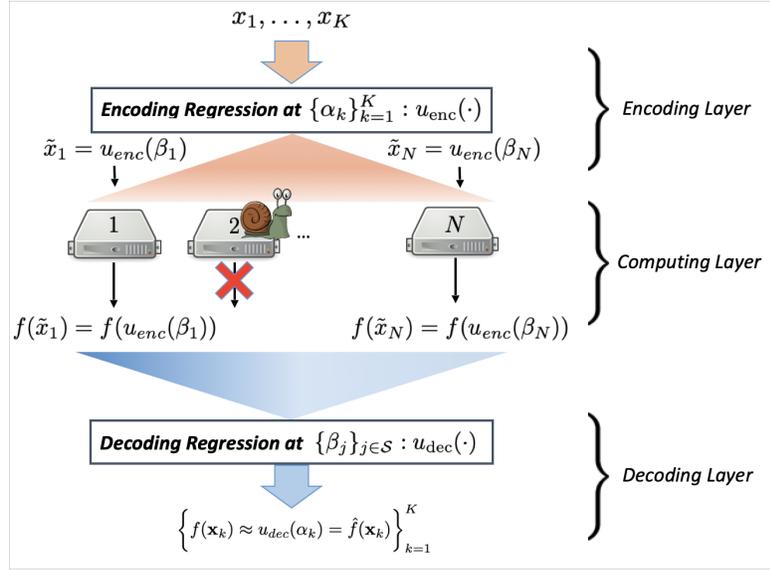


Figure 1. NeRCC framework. It consists of a computing layer sandwiched between two regression layers.

to worker n . It is noteworthy that each coded point $\tilde{\mathbf{x}}_n$ is a linear combination of all initial points $\{\mathbf{x}_k\}_{k=1}^K$.

2. **Computing at worker nodes:** Each worker n computes $\mathbf{f}(\tilde{\mathbf{x}}_n) = \mathbf{f}(\mathbf{u}_{\text{enc}}(\beta_n))$ on its given input for $n \in [N]$ and returns the result to the master node.
3. **Decoding regression:** The master node receives the results $\mathbf{f}(\tilde{\mathbf{x}}_j)_{j \in \mathcal{S}}$, where \mathcal{S} represents a set of non-straggler worker nodes. Next, it fits a decoding regression function $\mathbf{u}_{\text{dec}} : \mathbb{R} \rightarrow \mathbb{R}^m$ at points $(\beta_s, \mathbf{f}(\tilde{\mathbf{x}}_j))_{j \in \mathcal{S}} = (\beta_s, \mathbf{f}(\mathbf{u}_{\text{enc}}(\beta_j)))_{j \in \mathcal{S}}$. Finally, using the function $\mathbf{u}_{\text{dec}}(\cdot)$, the master node can compute $\hat{\mathbf{f}}(\mathbf{x}_k) := \mathbf{u}_{\text{dec}}(\alpha_k)$ as an approximation of $\mathbf{f}(\mathbf{x}_k)$ for $k \in [K]$. Recall that $\mathbf{u}_{\text{dec}}(\alpha_k) \approx \mathbf{f}(\mathbf{u}_{\text{enc}}(\alpha_k)) \approx \mathbf{f}(\mathbf{x}_k)$.

The effectiveness of approximate coded computing frameworks in addressing the straggler issue relies on the fact that each worker receives a coded point, which is a combination of all original data points. With a well-designed framework, we anticipate that the master node will be capable of recovering an approximation of the function output at the initial points from the prediction results of non-straggler workers.

Additionally, it is crucial point that the encoding and decoding regressions must be efficient. This is because the overall computation on the master node, including developing the encoding and decoding functions, and calculating those regression functions at points $\{\beta_j\}_{j \in \mathcal{S}}$ and $\{\alpha_k\}_{k=1}^K$, must be less than the scenario where the master node computes $\{\mathbf{f}(\mathbf{x}_k)\}_{k=1}^K$ all by itself. Otherwise, adopting this framework would not yield benefits for the master node.

This general framework is motivated by Lagrange (Yu et al., 2019) and Berrut (Jahani-Nezhad & Maddah-Ali, 2022) coded computing approaches and encompasses them as a special case. Lagrange-coded computing (Yu et al., 2019) is designed for exact polynomial computation, limited to polynomial encoding and decoding functions. In that scheme, the number of worker nodes needed grows with the degree of the polynomial multiplied by the number of data points, posing a scalability challenge for the entire scheme. These methods use fixed $\mathbf{u}_{\text{enc}}(\cdot)$ and $\mathbf{u}_{\text{dec}}(\cdot)$ as Lagrange polynomial interpolation functions. On the other hand, Berrut-coded computing approaches (Jahani-Nezhad & Maddah-Ali, 2022) employ rational interpolation functions with desired numerical properties for $\mathbf{u}_{\text{enc}}(\cdot)$ and $\mathbf{u}_{\text{dec}}(\cdot)$. They can recover highly accurate approximations of $\mathbf{f}(\mathbf{x}_k)_{k=1}^K$ for an arbitrary function $\mathbf{f}(\cdot)$ even in the presence of straggler workers. However, in the Berrut interpolation framework, the coupling of encoding and decoding regressions, as well as the end-to-end objective, is not considered.

2.3. Objective

As depicted in Figure 1, the NeRCC framework consists of a computing layer where an arbitrary function $\mathbf{f}(\cdot)$ is applied to the coded points $\{\tilde{\mathbf{x}}_n\}_{n=1}^N = \{\mathbf{u}_{\text{enc}}(\beta_n)\}_{n=1}^N$. This layer is sandwiched between two regression models. The overall performance of the scheme is measured by the following objective function:

$$L = \sum_{k=1}^K \ell(\hat{\mathbf{f}}(\mathbf{x}_k), \mathbf{f}(\mathbf{x}_k)) = \sum_{k=1}^K \ell(\mathbf{u}_{\text{dec}}(\alpha_k), \mathbf{f}(\mathbf{x}_k)), \quad (1)$$

where $\ell : \mathbb{R}^m \times \mathbb{R}^m \rightarrow \mathbb{R}^+$ is a distance function that measures the distance between a pair of points. Utilizing the triangle inequality, an upper bound for the objective function (1) can be derived:

$$L \leq \sum_{k=1}^K \underbrace{\ell(\mathbf{u}_{\text{dec}}(\alpha_k), \mathbf{f}(\mathbf{u}_{\text{enc}}(\alpha_k)))}_{\text{(Term 1)}} + \sum_{k=1}^K \underbrace{\ell(\mathbf{f}(\mathbf{u}_{\text{enc}}(\alpha_k)), \mathbf{f}(\mathbf{x}_k))}_{\text{(Term 2)}}. \quad (2)$$

The right-hand side of the inequality (2) reveals the underlying interplay between the encoding and decoding regression models of NeRCC scheme, which is represented by two terms. The first term represents *the generalization error of decoding regression* and the second term acts as a proxy for *the training error of encoding regression*. In what follows, we elaborate on each term:

- **Term 1 – The generalization error of the decoding regression:** Recall that the master node fits a regression model at a set of points denoted as $\{(\beta_j, \mathbf{f}(\mathbf{u}_{\text{enc}}(\beta_j)))\}_{j \in \mathcal{S}}$. The first term on the right-hand side of (2) represents the computation loss of the decoding regression model on points $\{\alpha_k\}_{k=1}^K$, which are distinct from $\{\beta_j\}_{j \in \mathcal{S}}$. Thus, it corresponds to the *generalization error* of the regression model.

Let us review two results on the generalization error for non-parametric regression.

Consider a function $g : [0, 1] \rightarrow \mathbb{R}$, where $g(\cdot) \in \Sigma(\gamma, J)$, for an integer $\gamma \geq 1$ and a positive number J . The set $\Sigma(\gamma, J)$, known as the Hölder class, denotes the set of functions that are $\gamma - 1$ times differentiable, and the $\gamma - 1$ derivative of $g(\cdot)$ is J -Lipschitz continuous. Now, consider a regression model that constructs the regression function $\hat{g}(\cdot)$ using n noisy samples of a function $g(\cdot)$. In (Tsybakov, 2009, p. 50), it is demonstrated that for a local polynomial estimator with bandwidth δ representing the smoothness of the regression function, for every $x_0 \in [0, 1]$, the generalization error is upper-bounded as:

$$\mathbb{E}(\|g(x_0) - \hat{g}(x_0)\|_2^2) \leq J^2 C_1 \delta^{2\gamma} + \frac{C_2}{n\delta}, \quad (3)$$

where C_1 and C_2 are two constants (for more details, refer to (Tsybakov, 2009, p. 50)). The inequality (3) illustrates how the smoothness of the function $g(\cdot)$ (characterized by J) and the smoothness of the regression function (indicated by the bandwidth parameter δ) impact the generalization error.

Let us assume that $g(\cdot) \in \mathbb{W}_2^s[a, b]$, containing all functions for which the set $\{g^{(i)}(\cdot)\}_{i=0}^{s-1}$ is absolutely continuous and $\int_a^b (g^{(s)}(t))^2 dt < \infty$.

Then, (Ragozin, 1983, p. 14) established if we have n samples of g and use r -th order smoothing spline as a regression model, equipped with a smoothing parameter λ , to derive $\hat{g}(\cdot)$ as estimation of $g(\cdot)$, then for any $x_0 \in [a, b]$, we have

$$\|g(x_0) - \hat{g}(x_0)\|_2^2 \leq Q(\{\{x_i\}_{i=1}^n, \lambda, r, m, a, b\}) \times \int_a^b (g^{(s)}(t))^2 dt. \quad (4)$$

To see the detailed formula of $Q(\cdot)$, refer to (Ragozin, 1983, p. 14). Again, the above formula implies that the generalization error is a function of the smoothness of function $g(\cdot)$, represented by $\int_a^b (g^{(s)}(t))^2 dt$ and smoothness of the regression function, represented by λ .

Observation One: Since, in the decoding regression, the model is developed to estimate $\mathbf{f}(\mathbf{u}_{\text{enc}}(\cdot))$, the generalization error of the decoding regression depends on the derivatives of $\mathbf{f}(\mathbf{u}_{\text{enc}}(\cdot))$, which itself relies on the derivatives of both $\mathbf{u}_{\text{enc}}(\cdot)$ and $\mathbf{f}(\cdot)$, following the chain rule. As a result, the two terms in (2) are inherently interconnected.

- **Term 2 - A proxy to the training error of the encoding regression:** For simplicity of exposition, let's consider the mean square error (MSE) as the loss function $\ell(\cdot, \cdot)$. Using Taylor expansion, we can rewrite the second term as:

$$\begin{aligned} & \sum_{k=1}^K \|\mathbf{f}(\mathbf{u}_{\text{enc}}(\alpha_k)) - \mathbf{f}(\mathbf{x}_k)\|_2^2 \\ & \approx \sum_{k=1}^K \|(\mathbf{u}_{\text{enc}}(\alpha_k) - \mathbf{x}_k)^T \nabla \mathbf{f}(\mathbf{x}_k)\|_2^2 \\ & \leq \|\nabla \mathbf{f}\|_\infty^2 \sum_{k=1}^K \|\mathbf{u}_{\text{enc}}(\alpha_k) - \mathbf{x}_k\|_2^2, \end{aligned} \quad (5)$$

where $\|\nabla \mathbf{f}\|_\infty$ represents the maximum absolute value of all elements in $\nabla \mathbf{f}(\cdot)$ over the set $\{\mathbf{x}_k\}_{k=1}^K$. We note that $\sum_{k=1}^K \|\mathbf{u}_{\text{enc}}(\alpha_k) - \mathbf{x}_k\|_2^2$ is the training error of the encoding regression. Thus the end-to-end loss (1), depends on the training error of the encoding regression, multiplied by $\|\nabla \mathbf{f}\|_\infty$.

Observation Two: Unlike decoding regression, where the emphasis lies on generalization error, for encoding regression, the training error holds great significance and it is magnified by the factor of $\|\nabla \mathbf{f}\|_\infty$ in the end-to-end loss (1).

Considering observations one and two, we deduce that, in the input regression, both the training error and the smoothness of $\mathbf{u}_{\text{enc}}(\cdot)$ play significant roles. However, given that

$\|\nabla f\|_\infty$ tends to be large, especially in the case that the function is a deep neural network, prioritizing the reduction of the training error becomes more crucial.

2.3.1. PROPOSED REGRESSION MODEL

As discussed, the generalization error of decoding regression depends on both its smoothness and the smoothness of encoding regression. We summarize these two smoothness factors as two distinct regularization terms, namely λ_{enc} and λ_{dec} , which should be optimized jointly. Taking all into account, we propose the following pair of optimization statements to achieve encoding and decoding regression functions:

$$\mathbf{u}_{\text{enc}} = \arg \min_{\mathbf{u} \in \mathbb{W}_2^2[a,b]} \sum_{k=1}^K \|\mathbf{x}_k - \mathbf{u}(\alpha_k)\|_2^2 + \lambda_{\text{enc}} \int_a^b \|\mathbf{u}^{(2)}(t)\|_2^2 dt \quad (6)$$

$$\mathbf{u}_{\text{dec}} = \arg \min_{\mathbf{u} \in \mathbb{W}_2^2[a,b]} \sum_{j \in S} \|\tilde{\mathbf{x}}_j - \mathbf{u}(\beta_j)\|_2^2 + \lambda_{\text{dec}} \int_a^b \|\mathbf{u}^{(2)}(t)\|_2^2 dt \quad (7)$$

where $a < b$ are arbitrary real numbers and $\mathbb{W}_2^2[a, b]$ containing all functions $g(\cdot)$ for which $g(\cdot)$ and $g'(\cdot)$ are absolutely continuous and $\int_a^b (g''(t))^2 dt < \infty$. Both (6) and (7) consist of two terms. The first term is the sum of squared errors at the initial points, and the second term measures the smoothness of the function up to the second derivative. The parameters λ_{dec} and λ_{enc} control the weight of the smoothing term in each optimization problem: As the $\lambda_{\text{enc}} \rightarrow 0$ ($\lambda_{\text{dec}} \rightarrow 0$), the estimation becomes closer to having an exact value at the input points. On the other hand, as $\lambda_{\text{enc}} \rightarrow \infty$ ($\lambda_{\text{dec}} \rightarrow \infty$), the objective returns the smoothest function with the minimum square error, resembling the best quadratic polynomial with the minimum square error.

Unlike Berrut schemes, which predominantly rely on (1) exact interpolation at input points and (2) numerically stable rational interpolation, we relax the exactness constraint. Instead, we put much more weight emphasis on the smoothness of the regression functions, as we have demonstrated its pivotal role in the end-to-end loss.

2.3.2. SMOOTHING SPLINE

The regression models proposed in (6) and (7) have been extensively studied in the literature. It can be demonstrated that the solution to the optimization problem is unique and equals to the **natural cubic smoothing spline** with knots at $\{\alpha_k\}_{k=1}^K$ and $\{\beta_j\}_{j \in S}$, respectively (Green & Silverman, 1993; Wahba, 1975; De Boor, 2001). In the limit where $\lambda_{\text{enc}} \rightarrow 0$ ($\lambda_{\text{dec}} \rightarrow 0$), the optimal function becomes a nat-

ural spline precisely passing through the data points. Conversely, as $\lambda_{\text{enc}} \rightarrow \infty$ ($\lambda_{\text{dec}} \rightarrow \infty$), the encoding (decoding) regression function converges to the best polynomial of degree three.

More precisely, given n knots at $\{x_i\}_{i=1}^n$ and their corresponding function values $\{f(x_i)\}_{i=1}^n$, the smoothing spline model with smoothing parameter λ estimates $\hat{f}(x) = \sum_{i=1}^n \theta_i \eta_i(x)$, where the set of functions $\{\eta_i(\cdot)\}_{i=1}^n$ are predefined basis functions, and $\{\theta_i\}_{i=1}^n$ are the model coefficients. The coefficients of the smoothing spline are computed from the following statement:

$$\hat{\theta} = (\mathbf{M}^T \mathbf{M} + \lambda \mathbf{\Omega})^{-1} \mathbf{M}^T \mathbf{y}, \quad (8)$$

where $\mathbf{y} = (f(x_1), \dots, f(x_n))$ and $\mathbf{M}, \mathbf{\Omega} \in \mathbb{R}^{n \times n}$ are defined as follow:

$$\mathbf{M}_{ij} = \eta_j(x_i) \quad \text{and} \quad \mathbf{\Omega}_{ij} = \int_a^b \eta_i''(t) \eta_j''(t) dt \quad (9)$$

The regression function in the smoothing spline method is a linear model. Prediction on new points, as well as deriving the fitted coefficients, can be computed in $\mathcal{O}(K \cdot d)$ operations in the encoding layer and $\mathcal{O}(|S| \cdot m)$ operations in the decoding layer using B-spline basis functions (De Boor & De Boor, 1978; De Boor, 2001; Hu & Schumaker, 1986; Eilers & Marx, 1996). Consequently, the computational complexity of the proposed scheme is on par with Berrut rational interpolation (Jahani-Nezhad & Maddah-Ali, 2022).

3. Experimental Results

In this section, we extensively evaluate the proposed scheme across various scenarios. Our assessments involve examining multiple deep neural networks as the prediction model and exploring the impact of different numbers of stragglers.

3.1. Experimental Setup

We evaluate the performance of the NeRCC scheme in three different model architectures:

1. **Shallow Neural Network:** We choose LeNet5 (LeCun et al., 1998) architecture that has two convolution layers and three fully connected layers, totaling 6×10^4 parameters. We train the network on MNIST (LeCun et al., 2010) dataset. The dataset consists of 32×32 grayscale images, and the network output is a ten-dimensional vector from the last softmax layer, determining the soft label associated with each class.
2. **Deep Neural Network with low-dimensional output:** In this case, we evaluate the proposed scheme when the function is a deep neural network trained on color images in CIFAR-10 (Krizhevsky et al., 2009) dataset.

Table 1. Comparison of different frameworks in terms of mean square error (MSE) and relative accuracy (RelAcc).

(N, K, S)	LENET5 (200, 50, 40)		REPVGG (200, 50, 80)		ViT (200, 50, 60)	
	MSE	RELACC	MSE	RELACC	MSE	RELACC
BACC	1.06 ± 0.31	0.99 ± 0.01	2.09 ± 0.21	0.87 ± 0.03	0.99 ± 0.156	0.80 ± 0.07
NeRCC ^{Ag}	0.83 ± 0.27	0.998 ± 0.006	2.08 ± 0.30	0.89 ± 0.03	0.99 ± 0.2	0.82 ± 0.07
NeRCC	0.82 ± 0.27	0.998 ± 0.006	1.87 ± 0.17	0.90 ± 0.02	0.84 ± 0.12	0.82 ± 0.06

We use the recently introduced RepVGG (Ding et al., 2021) network with around 26 million parameters which was trained on the CIFAR-10¹. The computation function in this scenario is $f : \mathbb{R}^{3072} \rightarrow \mathbb{R}^{10}$, where the input dimension is $32 \times 32 \times 3$, representing a random sample from the CIFAR-10 dataset, and the output is the class soft label predicted by the network.

3. **Deep Neural Network with high-dimensional output:** Finally, we demonstrate the performance of the NeRCC scheme in a scenario where the input and output of the computing function are high-dimensional, and the function is a relatively large neural network. We consider the Vision Transformer (ViT) (Dosovitskiy et al., 2020) as one of the state-of-the-art base neural networks in computer vision for our prediction model, with more than 80 million parameters (in the base version). The network was trained and fine-tuned on the ImageNet-1K dataset (Deng et al., 2009)².

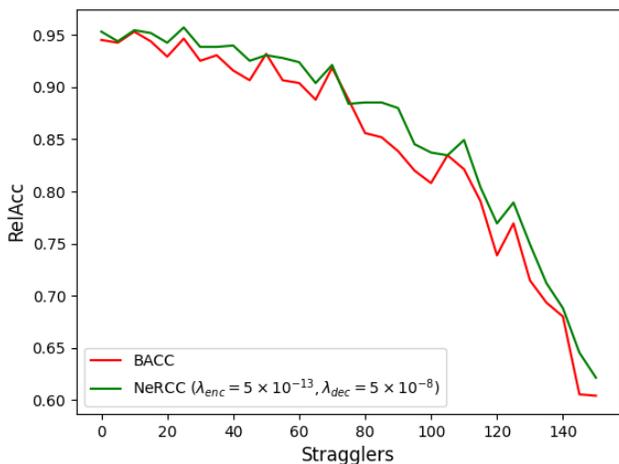


Figure 2. The relative accuracy of BACC and NeRCC over a wide range of straggler numbers for $(N, K) = (200, 50)$ and RepVGG architecture.

¹The pretrained weights can be found at <https://github.com/chenafo/pytorch-cifar-models>

²We use the official PyTorch pre-trained ViT network from https://github.com/google-research/vision_transformer

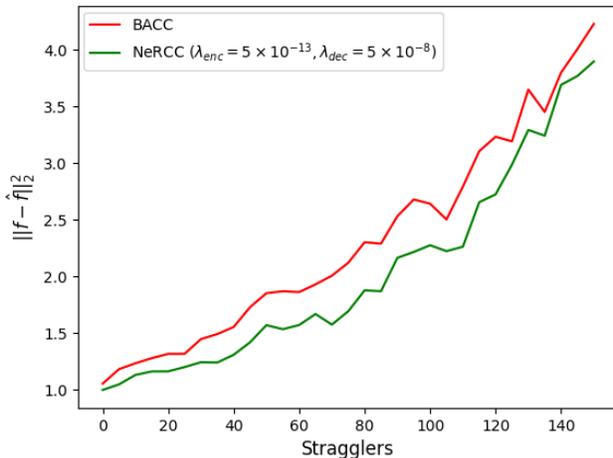


Figure 3. Reconstruction mean square error of BACC and NeRCC across a wider range of straggler numbers for $(N, K) = (200, 50)$ and RepVGG architecture.

Hyper-parameters: The entire encoding and decoding process is the same for different functions, as we adhere to a non-parametric approach. The sole hyper-parameters involved are the two smoothing parameters $(\lambda_{enc}, \lambda_{dec})$.

Interpolation Points: We choose $\{\alpha_i\}_{i=1}^K = \cos\left(\frac{(2k-1)\pi}{2K}\right)$ and $\{\beta_n\}_{n=1}^N = \cos\left(\frac{(n-1)\pi}{N-1}\right)$ as Chebyshev points of the first and second kind, respectively, following the suggestions in (Jahani-Nezhad & Maddah-Ali, 2022).

Baseline: We compare NeRCC with the Berrut approximate coded computing (BACC) framework for distributed computing as a main baseline, introduced by (Jahani-Nezhad & Maddah-Ali, 2022). The BACC framework is used in (Jahani-Nezhad & Maddah-Ali, 2022) for training neural networks and in (Soleymani et al., 2022) for inference.

In addition, we evaluate the performance of the proposed scheme when both smoothing parameters are zero, $(\lambda_{enc}, \lambda_{dec}) = (0, 0)$, namely NeRCC^{Ag}, to be irrespective of the machine learning model. We call it NeRCC^{Ag} because it makes the entire process the same for all machine learning models. Thus, it is a **model-agnostic** approach.

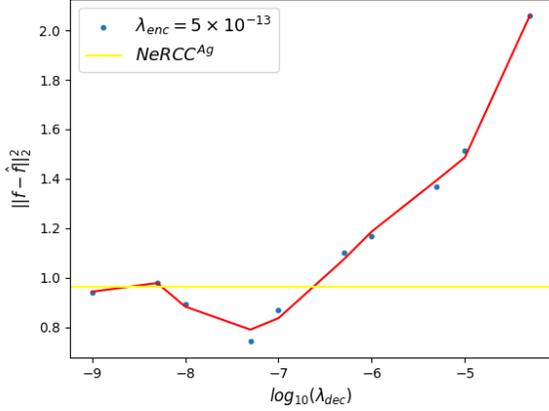


Figure 4. MSE of reconstruction for different values of λ_{dec} in RepVGG architecture trained on CIFAR10 dataset. The yellow line indicates the MSE of NeRCC^{Ag} framework.

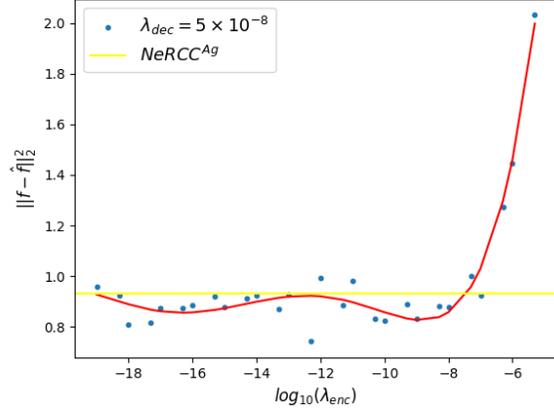


Figure 5. MSE of reconstruction for different values of λ_{enc} in RepVGG architecture trained on CIFAR10 dataset. The yellow line indicates the MSE of NeRCC^{Ag} framework.

Evaluation Metrics: We use relative accuracy (RelAcc) and mean square error (MSE) as the evaluation metrics. The relative accuracy corresponds to the ratio of the base model prediction accuracy to the accuracy of the estimated model over initial data points $\{\mathbf{x}_k\}_{k=1}^K$. The mean square error is equal to $E(\|\mathbf{f}(\mathbf{x}) - \hat{\mathbf{f}}(\mathbf{x})\|_2^2) \approx \frac{1}{K} \sum_{k=1}^K \|\mathbf{f}(\mathbf{x}_k) - \hat{\mathbf{f}}(\mathbf{x}_k)\|_2^2$.

3.2. Performance Evaluation

Table 1 presents a comparison between BACC and our proposed NeRCC scheme. Presenting both metrics side by side provides a comprehensive view of the performance evaluation. Table 1 shows that MSE of NeRCC is significantly less than BACC scheme in all architectures. In addition, the RelAcc of NeRCC is comparable to BACC. This is mainly because accuracy is computed from quantized function outputs. the MSE metric reveals a notable improvement in NeRCC. Table 1 indicates an average 22%, 11%, and 15% improvement in mean square error for LeNet, RepVGG, and ViT architectures, respectively.

In the subsequent analysis, we evaluate the performance of NeRCC compared to BACC for a diverse range of stragglers. For a constant number of stragglers, we execute BACC and NeRCC approaches with the same set of input data points multiple times and record the average RelAcc and average MSE metrics. Figures 2 and 3 present the performance of both schemes on the RepVGG architecture for RelAcc and MSE metrics, respectively (refer to Figure 6 in Appendix A.1 for complete results). As illustrated in Figure 6, the proposed scheme consistently outperforms BACC across nearly all values for the number of stragglers, emphasizing the significance of regression model smoothness.

3.3. Smoothness effect

We further investigate the effect of NeRCC *smoothness parameters* on the final results. By fixing λ_{enc} (λ_{dec}), we examine how the MSE changes as λ_{dec} (λ_{enc}) varies. Figures 5 and 4 depict the results for the RepVGG architecture and the configuration $(N, K, |\mathcal{S}|) = (200, 50, 20)$. The yellow line shows the MSE of NeRCC^{Ag}. As depicted in both figures, increasing the smoothing parameter from zero initially reduces the overall mean square error, followed by a rapid exponential increase. This indicates that there is an optimal non-zero smoothness level

Furthermore, we analyze the performance of NeRCC^{Ag} against NeRCC and BACC. The results are presented in Figure 7 in Appendix A.2. NeRCC hyper-parameters are optimized for 40, 50, and 60 stragglers in the LeNet, RepVGG, and ViT architectures, respectively. Next, we compare the performance of those tuned NeRCC with NeRCC^{Ag} and BACC for a wide range of straggler numbers. As depicted in Figure 7, the MSE of NeRCC outperforms both NeRCC^{Ag} and BACC in higher straggler regimes. However, in low straggler regimes, where there is sufficient data redundancy in our coded samples (the values of $\{\beta_n\}_{n=1}^N$ and $\{\alpha_k\}_{k=1}^K$ ensure a satisfactory number of β_n around each α_k), NeRCC^{Ag} has both smoothness and accuracy advantages over the other two approaches. We noted that the NeRCC^{Ag} outperforms BACC in all model architectures and for different numbers of stragglers. Recall that NeRCC^{Ag} is a model-agnostic approach.

3.4. Coded points

We also compare the coded points $\{\tilde{\mathbf{x}}_n\}_{n=1}^N$ sent to the workers in NeRCC and BACC schemes. The results, shown in Figure 8 in Appendix A.3, demonstrate that BACC coded samples exhibit high-frequency noise which causes the scheme to approximate original prediction worse than NeRCC.

4. Related Works

Mitigating stragglers or slow workers is one of the main challenges of distributed computing systems, such as prediction serving systems, and has been extensively studied in recent years. Traditional approaches rely on repetition, as seen in works such as (Zaharia et al., 2008; Dean & Barroso, 2013), where a worker’s task is reassigned to another worker only if its progress rate in completing that task falls below a certain threshold. In recent years, coding-based techniques, termed coded computing, have emerged as a promising approach to enhancing the efficiency of distributed computing systems. These methods offer significant improvements in latency and overhead by mitigating the impact of stragglers (Lee et al., 2017; Kosaian et al., 2018; Yu et al., 2019; Narra et al., 2019; Wang et al., 2019a;b). In the coded computing approach, each node is given a combination of inputs, rather than the raw data, to process. The objective is to design the code in such a way that the results can be recovered from any set of available results on coded data while ignoring the results of stragglers. Initially, coded computing approaches were designed to exploit the structure of computations, limiting their applications to highly structured tasks like matrix multiplication and polynomial computation. The other disadvantage is that the required number of workers becomes prohibitively large. Some effort has been made to extend those ideas to include non-polynomials by approximating the function with polynomials (So et al., 2020). Still, the scope of this approach is very limited. Subsequently, learning-based methods have been introduced to reduce the number of necessary workers required to mitigate stragglers (Kosaian et al., 2019; 2020; Dinh & Lee, 2021). However, these models need to train a specific neural network for each computing function. In addition, that approach offers resistance to only a very small number of stragglers. More recently, a numerically stable, model-agnostic, and straggler-resilient method based on Berrut rational interpolation and approximate estimation of the original function at the input data points was introduced by (Jahani-Nezhad & Maddah-Ali, 2022). In the scheme of (Jahani-Nezhad & Maddah-Ali, 2022) the main effort was to choose a pole-free rational function that exactly interpolation at initial data points to have exact and numerically stable interpolation. The approach employed in this paper is based on assessing the end-to-end performance to derive design criteria that place value on the smoothness of the decoding and encoding

functions in an intriguing manner.

5. Conclusion

In this paper, we have introduced NeRCC, a general and resilient coded computing framework for prediction serving systems. Our framework consists of two regression layers and a central computing layer, sandwiched between the two regression layers. In contrast to all existing coded computing schemes, where the primary focus is on exact interpolation, we prioritize the final accuracy of recovering original predictions as our main objective. We have stated that the overall objective reveals an underlying interplay between encoding and decoding regression, and we have proposed a technique to solve the mentioned coupled regression problem. Our experiments on MNIST, CIFAR-10, and ImageNet-1K datasets, using various model architectures such as LeNet, RepVGG, and ViT, show that NeRCC and its model-agnostic version (NeRCC^{Ag}) outperform the state-of-the-art (BACC) in a wide range of straggler numbers, as well as different metrics, by up to 23%.

References

- Berrut, J.-P. Rational functions for guaranteed and experimentally well-conditioned global interpolation. *Computers & Mathematics with Applications*, 15(1):1–16, 1988.
- De Boor, C. Calculation of the smoothing spline with weighted roughness measure. *Mathematical Models and Methods in Applied Sciences*, 11(01):33–41, 2001.
- De Boor, C. and De Boor, C. *A practical guide to splines*, volume 27. springer-verlag New York, 1978.
- Dean, J. and Barroso, L. A. The tail at scale. *Communications of the ACM*, 56(2):74–80, 2013.
- Deng, J., Dong, W., Socher, R., Li, L.-J., Li, K., and Fei-Fei, L. Imagenet: A large-scale hierarchical image database. In *2009 IEEE conference on computer vision and pattern recognition*, pp. 248–255. Ieee, 2009.
- Ding, X., Zhang, X., Ma, N., Han, J., Ding, G., and Sun, J. Repvgg: Making VGG-style convnets great again. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 13733–13742, 2021.
- Dinh, T. and Lee, K. Coded-invet for resilient prediction serving systems. In *International Conference on Machine Learning*, pp. 2749–2759. PMLR, 2021.
- Dosovitskiy, A., Beyer, L., Kolesnikov, A., Weissenborn, D., Zhai, X., Unterthiner, T., Dehghani, M., Minderer, M., Heigold, G., Gelly, S., et al. An image is worth 16x16 words: Transformers for image recognition at scale. *arXiv preprint arXiv:2010.11929*, 2020.

- Eilers, P. H. and Marx, B. D. Flexible smoothing with b-splines and penalties. *Statistical science*, 11(2):89–121, 1996.
- Green, P. J. and Silverman, B. W. *Nonparametric regression and generalized linear models: a roughness penalty approach*. Crc Press, 1993.
- Hu, C. L. and Schumaker, L. L. Complete spline smoothing. *Numerische Mathematik*, 49:1–10, 1986.
- Jahani-Nezhad, T. and Maddah-Ali, M. A. Berrut approximated coded computing: Straggler resistance beyond polynomial computing. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 45(1):111–122, 2022.
- Kosaian, J., Rashmi, K., and Venkataraman, S. Learning a code: Machine learning for approximate non-linear coded computation. *arXiv preprint arXiv:1806.01259*, 2018.
- Kosaian, J., Rashmi, K., and Venkataraman, S. Parity models: A general framework for coding-based resilience in ml inference. *arXiv preprint arXiv:1905.00863*, 2019.
- Kosaian, J., Rashmi, K., and Venkataraman, S. Learning-based coded computation. *IEEE Journal on Selected Areas in Information Theory*, 1(1):227–236, 2020.
- Krizhevsky, A., Hinton, G., et al. Learning multiple layers of features from tiny images. 2009.
- LeCun, Y., Bottou, L., Bengio, Y., and Haffner, P. Gradient-based learning applied to document recognition. *Proceedings of the IEEE*, 86(11):2278–2324, 1998.
- LeCun, Y., Cortes, C., Burges, C., et al. MNIST handwritten digit database, 2010.
- Lee, K., Lam, M., Pedarsani, R., Papailiopoulos, D., and Ramchandran, K. Speeding up distributed machine learning using codes. *IEEE Transactions on Information Theory*, 64(3):1514–1529, 2017.
- Narra, K., Lin, Z., Kiamari, M., Avestimehr, S., and Annavaram, M. Distributed matrix multiplication using speed adaptive coding. *arXiv preprint arXiv:1904.07098*, 2019.
- Ragozin, D. L. Error bounds for derivative estimates based on spline smoothing of exact or noisy data. *Journal of approximation theory*, 37(4):335–355, 1983.
- Shah, N. B., Lee, K., and Ramchandran, K. When do redundant requests reduce latency? *IEEE Transactions on Communications*, 64(2):715–722, 2015.
- So, J., Guler, B., and Avestimehr, S. A scalable approach for privacy-preserving collaborative machine learning. *Advances in Neural Information Processing Systems*, 33: 8054–8066, 2020.
- Soleymani, M., Ali, R. E., Mahdavi, H., and Avestimehr, A. S. ApproxIFER: A model-agnostic approach to resilient and robust prediction serving systems. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 36, pp. 8342–8350, 2022.
- Suresh, L., Canini, M., Schmid, S., and Feldmann, A. C3: Cutting tail latency in cloud data stores via adaptive replica selection. In *12th USENIX Symposium on Networked Systems Design and Implementation (NSDI 15)*, pp. 513–527, 2015.
- Tsybakov, A. B. A. B. *Introduction to nonparametric estimation*. Springer series in statistics. Springer, New York, english ed. edition, 2009. ISBN 0387790527.
- Wahba, G. Smoothing noisy data with spline functions. *Numerische mathematik*, 24(5):383–393, 1975.
- Wang, H., Charles, Z., and Papailiopoulos, D. Erasurehead: Distributed gradient descent without delays using approximate gradient coding. *arXiv preprint arXiv:1901.09671*, 2019a.
- Wang, S., Liu, J., and Shroff, N. Fundamental limits of approximate gradient coding. *Proceedings of the ACM on Measurement and Analysis of Computing Systems*, 3(3):1–22, 2019b.
- Yu, Q., Li, S., Raviv, N., Kalan, S. M. M., Soltanolkotabi, M., and Avestimehr, S. A. Lagrange coded computing: Optimal design for resiliency, security, and privacy. In *The 22nd International Conference on Artificial Intelligence and Statistics*, pp. 1215–1225. PMLR, 2019.
- Zaharia, M., Konwinski, A., Joseph, A. D., Katz, R. H., and Stoica, I. Improving mapreduce performance in heterogeneous environments. In *OsdI*, volume 8, pp. 7, 2008.

A. Appendix

A.1. Performance comparison

As depicted in Figure 6, the NeRCC scheme consistently outperforms the BACC scheme across a wide range of straggler numbers, for different model architecture, and in terms of both MSE and RelAcc metrics.

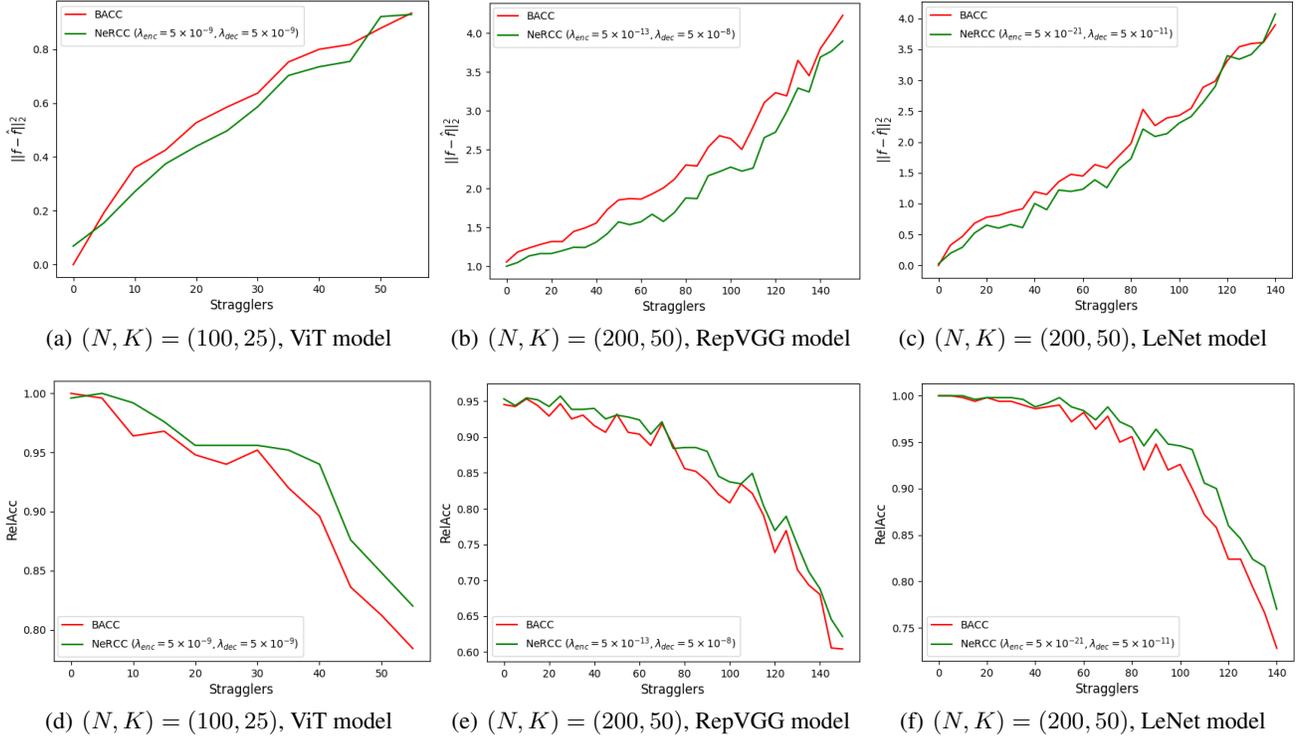


Figure 6. Performance comparison of straggler resistance between BACC and NeRCC frameworks across all scenarios and metrics. The difference for MSE as a metric is illustrated in Figures 6(a) to 6(c), while the comparison of the relative accuracy is depicted in Figures 6(d) to 6(f).

A.2. Smoothing Effect

Figure 7 illustrates the impact of using smoothing parameters in NeRCC and presents the overall performance comparison between NeRCC and its model-agnostic version, NeRCC^{Ag}, along with the BACC framework. It is evident that for less complex functions like LeNet, both NeRCC and NeRCC^{Ag} yield the same results. However, for more complex functions such as ViT and RepVGG, while NeRCC^{Ag} performs better in scenarios with a lower number of stragglers (benefiting from data point redundancy), it notably falls behind NeRCC in higher straggler regimes.

A.3. Coded samples

Figures 8(b) and 8(c) display coded samples generated by BACC and NeRCC, respectively, derived from the same initial data points depicted in Figure 8(a). These samples are presented for the MNIST dataset with parameters $(N, K) = (70, 30)$. From the figures, it is apparent (Specifically in paired ones that are shown with the same color) that while both schemes' coded samples are a weighted combination of multiple initial samples, BACC's coded samples exhibit high-frequency noise. This observation suggests that NeRCC regression functions produce more refined coded samples without any disruptive noise.



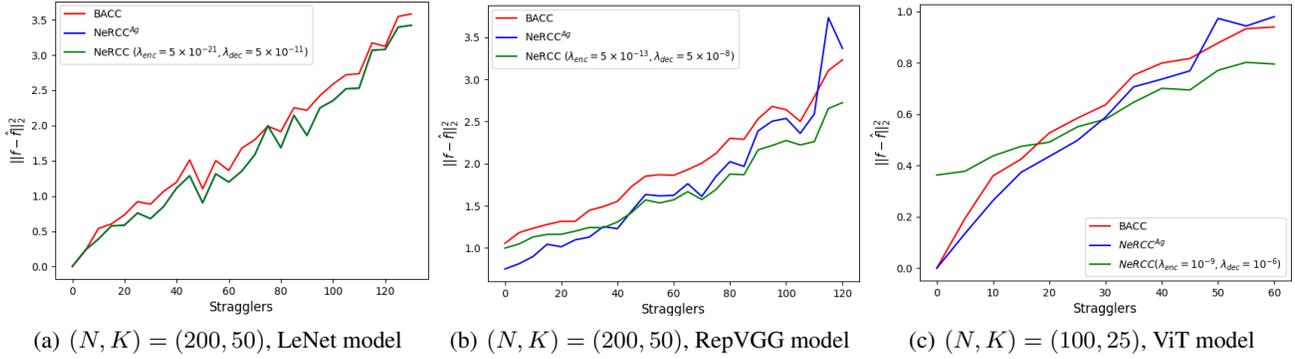


Figure 7. Comparison of Mean square error for NeRCC^{Ag} and NeRCC, BACC over different number of stragglers for 7(a) LeNet, 7(b) RepVGG, and 7(c) ViT networks as the machine learning models.

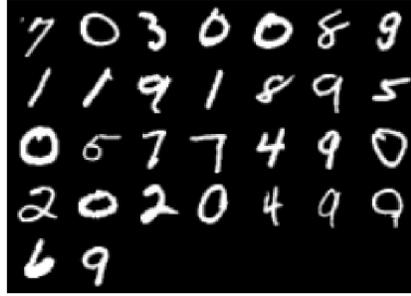

(a) Initial inputs

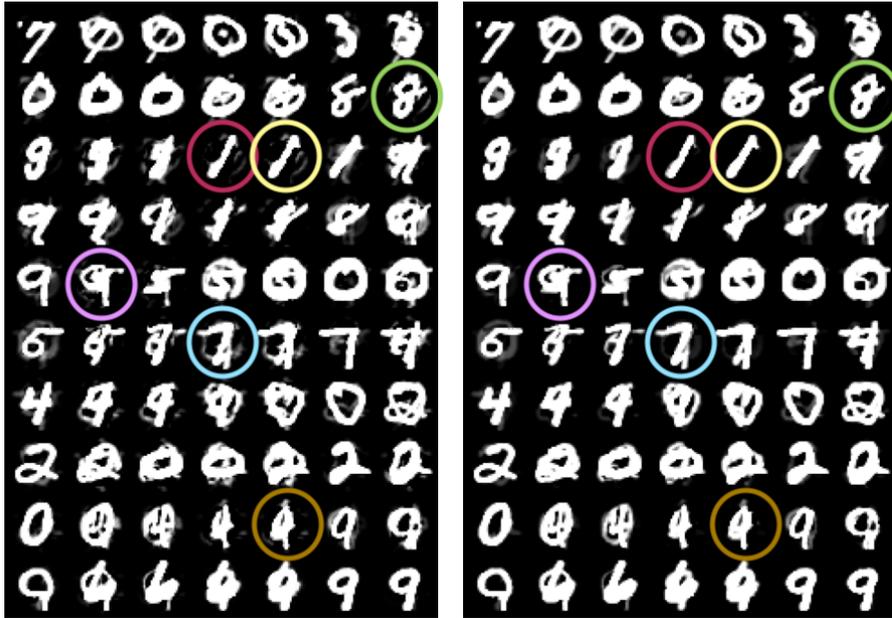

(b) BACC coded samples

(c) NeRCC coded samples

Figure 8. Comparison of coded samples between BACC and NeRCC frameworks. Figure 8(a) represents the initial data points $\{\mathbf{x}_k\}_{k=1}^K$ for $K = 30$. Figures 8(b) and 8(c) display $N = 70$ coded samples $\{\tilde{\mathbf{x}}_n\}_{n=1}^N$ from BACC and NeRCC, respectively. Samples with clear differences are highlighted with the same color.