

Fundamental Problems on Bounded-Treewidth Graphs: The Real Source of Hardness

Bariş Can Esmer* Jacob Focke* Dániel Marx* Paweł Rzażewski†

Abstract

It is known for many algorithmic problems that if a tree decomposition of width t is given in the input, then the problem can be solved with exponential dependence on t . A line of research initiated by Lokshantov, Marx, and Saurabh [SODA 2011] produced lower bounds showing that in many cases known algorithms already achieve the best possible exponential dependence on t , assuming the Strong Exponential-Time Hypothesis (SETH). The main message of this paper is showing that the same lower bounds can already be obtained in a much more restricted setting: informally, a graph consisting of a block of t vertices connected to components of constant size already has the same hardness as a general tree decomposition of width t .

Formally, a (σ, δ) -hub is a set Q of vertices such that every component of Q has size at most σ and is adjacent to at most δ vertices of Q . We explore if the known tight lower bounds parameterized by the width of the given tree decomposition remain valid if we parameterize by the size of the given hub.

- For every $\varepsilon > 0$, there are $\sigma, \delta > 0$ such that INDEPENDENT SET (equivalently VERTEX COVER) cannot be solved in time $(2 - \varepsilon)^p \cdot n$, even if a (σ, δ) -hub of size p is given in the input, assuming the SETH. This matches the earlier tight lower bounds parameterized by width of the tree decomposition. Similar tight bounds are obtained for ODD CYCLE TRANSVERSAL, MAX CUT, q -COLORING, and edge/vertex deletions versions of q -COLORING.
- For every $\varepsilon > 0$, there are $\sigma, \delta > 0$ such that Δ -PARTITION cannot be solved in time $(2 - \varepsilon)^p \cdot n$, even if a (σ, δ) -hub of size p is given in the input, assuming the Set Cover Conjecture (SCC). In fact, we prove that this statement is *equivalent* to the SCC, thus it is unlikely that this could be proved assuming the SETH.
- For DOMINATING SET, we can prove a non-tight lower bound ruling out $(2 - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$ algorithms, assuming *either* the SETH or the SCC, but this does not match the $3^p \cdot n^{\mathcal{O}(1)}$ upper bound.

Thus our results reveal that, for many problems, the research on lower bounds on the dependence on tree width was never really about tree decompositions, but the real source of hardness comes from a much *simpler* structure.

Additionally, we study if the same lower bounds can be obtained if σ and δ are fixed universal constants (not depending on ε). We show that lower bounds of this form are possible for MAX CUT and the edge-deletion version of q -COLORING, under the Max 3-Sat Hypothesis (M3SH). However, no such lower bounds are possible for INDEPENDENT SET, ODD CYCLE TRANSVERSAL, and the vertex-deletion version of q -COLORING: better than brute force algorithms are possible for every fixed (σ, δ) .

*CISPA Helmholtz Center for Information Security. The first author is also affiliated with the Saarbrücken Graduate School of Computer Science, Saarland Informatics Campus, Germany. Research of the third author is supported by the European Research Council (ERC) consolidator grant No. 725978 SYSTEMATICGRAPH.

†Warsaw University of Technology, Faculty of Mathematics and Information Science and University of Warsaw, Institute of Informatics, pawel.rzazewski@pw.edu.pl.

Contents

1	Introduction	1
2	Technical Overview	6
2.1	q -Coloring	6
2.2	Vertex Deletion to q -Coloring.	7
2.3	Edge Deletion to q -Coloring	8
2.4	Covering, Packing, and Partitioning	10
2.5	Triangle Partition and Triangle Packing	11
3	Preliminaries	14
4	q-COLORING	16
5	Vertex Deletion to q-COLORING	18
5.1	Hardness for for q -COLORINGVD	18
5.2	Simple Algorithm for q -COLORINGVD	28
6	Edge Deletion to q-COLORING	28
6.1	MAX CSP — Hardness under M3SH	29
6.2	Realizing Relations	32
6.3	Hardness for MAX CUT	35
6.4	Hardness for q -COLORINGED	37
6.5	Simple Algorithm for q -COLORINGED	40
7	LIST-q-COLORING and LIST-q-COLORINGVD with gadgets of constant degree faster than brute force	41
7.1	Faster algorithm for LIST- q -COLORING	41
7.2	Faster algorithm for LIST- q -COLORINGVD	42
8	Equivalent Hypotheses: Set Covering/Packing/Partitioning	46
8.1	Basic Reductions	46
8.2	Structured Families of Sets	49
8.3	Reductions Based on Structured Families	52
9	Δ-PACKING and Δ-PARTITION	55
9.1	Reducing SET PARTITION to Δ -PARTITION	55
9.2	Reducing Δ -PACKING to SET PACKING	58
10	Dominating Set	62
	References	64

1 Introduction

Starting with the work of Lokshtanov, Marx, and Saurabh [24], there is a line of research devoted to giving lower bounds on how the running time of parameterized algorithms can depend on treewidth (or more precisely, on the width of a given tree decomposition) [4, 7, 8, 11–13, 19, 28, 29, 32, 33]. The goal of this paper is to revisit the fundamental results from [24] to point out that previous work could have considered a *simpler* parameter to obtain *stronger* lower bounds in a more uniform way. Thus, in a sense, this line of research was never really about treewidth; a fact that future work should take into account.

Suppose we want to solve some algorithmic problem on a graph G given with a tree decomposition of width t . For many NP-hard problems, standard dynamic program techniques or meta theorems such as Courcelle’s Theorem [5] show that the problem can be solved in time $f(t) \cdot n^{\mathcal{O}(1)}$ for some computable function f [10, Chapter 7]. In many cases, the running time is actually $c^t \cdot n^{\mathcal{O}(1)}$ for some constant $c > 1$, where it is an obvious goal to make the constant as small as possible. A line of work started by Lokshtanov, Marx, and Saurabh [24] provides tight conditional lower bounds for many problems with known $c^t \cdot n^{\mathcal{O}(1)}$ -time algorithms. The lower bounds are based on the Strong Exponential-Time Hypothesis, formulated by Impagliazzo, Paturi, and Zane [16, 17].

Strong Exponential-Time Hypothesis (SETH). *There is no $\varepsilon > 0$ such that for every k , every n -variable instance of k -SAT can be solved in time $(2 - \varepsilon)^n \cdot n^{\mathcal{O}(1)}$.*

The goal of these results is to provide evidence that the base c of the exponent in the best known $c^t \cdot n^{\mathcal{O}(1)}$ -time algorithm is optimal: if a $(c - \varepsilon)^t \cdot n^{\mathcal{O}(1)}$ -time algorithm exists for any $\varepsilon > 0$, then SETH fails. The following theorem summarizes the basic results obtained by Lokshtanov, Marx, and Saurabh [24].

Theorem 1.1 ([24]). *If there exists an $\varepsilon > 0$ such that*

1. INDEPENDENT SET *can be solved in time $(2 - \varepsilon)^t \cdot n^{\mathcal{O}(1)}$, or*
2. DOMINATING SET *can be solved in time $(3 - \varepsilon)^t \cdot n^{\mathcal{O}(1)}$, or*
3. MAX CUT *can be solved in time $(2 - \varepsilon)^t \cdot n^{\mathcal{O}(1)}$, or*
4. ODD CYCLE TRANSVERSAL *can be solved in time $(3 - \varepsilon)^t \cdot n^{\mathcal{O}(1)}$, or*
5. q -COLORING *can be solved in time $(q - \varepsilon)^t \cdot n^{\mathcal{O}(1)}$ for some $q \geq 3$, or*
6. TRIANGLE PARTITION *can be solved in time $(2 - \varepsilon)^t \cdot n^{\mathcal{O}(1)}$,*

on input an n -vertex graph G together with a tree decomposition of width at most t , then the SETH fails.

Already in [24] it is pointed out that many of the lower bounds remain true even in the more restricted setting where the input is not a tree decomposition, but a path decomposition. This raises the following natural questions:

- How much further can we restrict the input and still obtain the same lower bounds?
- What is the *real* structural source of hardness in these results?

In this paper, we show that many of these lower bounds remain true in a much more restricted setting where a block of p vertices is connected to constant-size components. Additionally, we

demonstrate that our results are very close to being best possible, as further restrictions of the structure of the graphs allow better algorithms.

We say that a set Q of vertices is a (σ, δ) -hub of G if every component of $G - Q$ has at most σ vertices and each such component is adjacent to at most δ vertices of Q in G ¹. Our goal is to prove lower bounds parameterized by the size of a (σ, δ) -hub given in the input, where σ and δ are treated as constants. One can observe that a (σ, δ) -hub of size p in G can be easily turned into a tree decomposition of width less than $p + \sigma$, hence the treewidth of G is at most $p + \sigma$. Therefore, any lower bound parameterized by the size p of hub immediately implies a lower bound parameterized by the width of the given tree decomposition. We systematically go through the list of problems investigated by Lokshtanov, Marx, and Saurabh [24], to see if the same lower bound can be obtained with this parameterization. Our results show that, in most cases, the results remain valid under parameterization by hub size. However, new insights, techniques and arguments are needed; in particular, we require different complexity assumptions for some of the statements.

Coloring problems and relatives. Let us first consider the q -COLORING problem: given a graph G , the task is to find a coloring of the vertices of G with q colors such that adjacent vertices receive different colors. Given a (σ, δ) -hub Q of size p , we can try all possible q -colorings on Q and check if they can be extended to every component of $G - Q$. Assuming σ and δ are constants, this leads to a $q^p \cdot n^{\mathcal{O}(1)}$ algorithm. Our first result shows that this is essentially best possible, assuming the SETH; note that this result immediately implies Theorem 1.1(5).

Theorem 1.2. *Let $q \geq 3$ be an integer.*

1. *For every $\sigma, \delta \geq 1$, q -COLORING on n -vertex graphs can be solved in time $q^p \cdot n^{\mathcal{O}(1)}$ if a (σ, δ) -hub of size p is given in the input.*
2. *For every $\varepsilon > 0$, there exist integers $\sigma, \delta \geq 1$ such that if there is an algorithm solving in time $(q - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$ every n -vertex instance of q -COLORING given with a (σ, δ) -hub of size at most p , then the SETH fails.*

The q -COLORINGED problem is an edge-deletion optimization version of q -COLORING: given a graph G , the task is to find a set X of edges of minimum size such that $G \setminus X$ has a q -coloring. We show that $q^p \cdot n^{\mathcal{O}(1)}$ running time is essentially optimal for this problem as well.

Theorem 1.3. *Let $q \geq 2$ be an integer.*

1. *For every $\sigma, \delta \geq 1$, q -COLORINGED on n -vertex graphs can be solved in time $q^p \cdot n^{\mathcal{O}(1)}$ if a (σ, δ) -hub of size p is given in the input.*
2. *For every $\varepsilon > 0$, there exist integers $\sigma, \delta \geq 1$ such that if there is an algorithm solving in time $(q - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$ every n -vertex instance of q -COLORINGED given with a (σ, δ) -hub of size at most p , then the SETH fails.*

¹This notion is related to *component order connectivity*, which is the size of the smallest set Q of vertices such that deleting Q leaves components of size not larger than some predefined constant σ [1, 3, 6, 14, 20, 22, 25, 27, 34, 35, 38]. Our definition has the additional constraint on the neighborhood size of each component. As we often refer to the set Q itself (not only its smallest possible size) and we want to make the constants σ, δ explicit, the terminology (σ, δ) -hub is grammatically more convenient than trying to express the same using component order connectivity.

For $q \geq 3$, the lower bound of Theorem 1.2 for q -COLORING immediately implies the same lower bound for the more general problem q -COLORINGED. Observe that for $q = 2$, the q -COLORINGED problem is equivalent to the MAX CUT problem: deleting the minimum number of edges to make the graph bipartite is equivalent to finding a bipartition with the maximum number of edges going between the two classes. Thus the lower bound for MAX CUT is needed to complete the proof of Theorem 1.3.

Let us consider now the vertex-deletion version q -COLORINGVD, where given a graph G , the task is to find a set X of vertices of minimum size such that $G - X$ has a q -coloring (equivalently, we want to find a partial q -coloring on the maximum number of vertices). For this problem, a brute force approach would need to consider $(q+1)^p$ possibilities on a (σ, δ) -hub of size p : each vertex can receive either one of the q colors, or be deleted.

Theorem 1.4. *Let $q \geq 1$ be an integer.*

1. *For every $\sigma, \delta \geq 1$, q -COLORINGVD on n -vertex graphs can be solved in time $(q+1)^p \cdot n^{\mathcal{O}(1)}$ if a (σ, δ) -hub of size p is given in the input.*
2. *For every $\varepsilon > 0$, there exist integers $\sigma, \delta \geq 1$ such that if there is an algorithm solving in time $(q+1-\varepsilon)^p \cdot n^{\mathcal{O}(1)}$ every n -vertex instance of q -COLORINGVD given with a (σ, δ) -hub of size at most p , then the SETH fails.*

Observe that VERTEX COVER is equivalent to 1-COLORINGVD and ODD CYCLE TRANSVERSAL is equivalent to 2-COLORINGVD. Furthermore, INDEPENDENT SET and VERTEX COVER have the same time complexity (due to the well-known fact that minimum size of a vertex cover plus the maximum size of an independent set is always equal to the number of vertices). Thus the definition of q -COLORINGVD gives a convenient unified formulation that includes these fundamental problems.

Packing problems. Given a graph G , the TRIANGLE PARTITION (denoted by Δ -PARTITION for short) problem asks for a partition of the vertex set into triangles. TRIANGLE PACKING (denoted by Δ -PACKING) is the more general problem where the task is to find a maximum-size collection of vertex-disjoint triangles. Given a tree decomposition of width t , Theorem 1.1(6) shows that $2^t \cdot n^{\mathcal{O}(1)}$ is essentially the best possible running time. It seems that the same lower bound holds when parameterizing by the size of a hub, but the source of hardness is somehow different. Instead of assuming the SETH, we prove this lower bound under the *Set Cover Conjecture (SCC)* [9, 10]. In the d -SET COVER problem, we are given a universe U of size n and a collection \mathcal{F} of subsets of U , each with size at most d . The task is to find a minimum-size collection of sets whose union covers the universe.

Set Cover Conjecture (SCC). *For all $\varepsilon > 0$, there exists $d \geq 1$ such that there is no algorithm that solves every $\leq d$ -SET COVER instance (U, \mathcal{F}) in time $(2 - \varepsilon)^n \cdot n^{\mathcal{O}(1)}$ where $n = |U|$.*

We actually show that the lower bounds for Δ -PARTITION/ Δ -PACKING are *equivalent* to the SCC.

Theorem 1.5. *The following three statements are equivalent:*

- *The SCC is true.*

- For every $\varepsilon > 0$, there are $\sigma, \delta > 0$ such that Δ -PARTITION on an n -vertex graph cannot be solved in time $(2 - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$, even if the input contains a (σ, δ) -hub of size p .
- For every $\varepsilon > 0$, there are $\sigma, \delta > 0$ such that Δ -PACKING on an n -vertex graph cannot be solved in time $(2 - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$, even if the input contains a (σ, δ) -hub of size p .

Ideally, one would like to prove lower bounds under the more established conjecture: the SETH. However, Theorem 1.5 shows that it is no shortcoming of our technique that we prove the lower bound based on the SCC instead. If we proved statement 2 or 3 under the SETH, then this would prove that the SETH implies the SCC, resolving a longstanding open question.

Dominating Set. Given an n -vertex graph with a tree decomposition of width t , a minimum dominating set can be computed in time $3^t \cdot n^{\mathcal{O}(1)}$ using an algorithm based on fast subset convolution [36,37]. By Theorem 1.1 (2), this running time cannot be improved to $(3 - \varepsilon)^t \cdot n^{\mathcal{O}(1)}$ for any $\varepsilon > 0$, assuming the SETH. Can we get a $(3 - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$ algorithm if a hub of size p is given in the input? We currently have no answer to this question. In fact, we do not even have a good guess whether or not such algorithms should be possible. What we do have are two very simple weaker results that rule out $(2 - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$ algorithms, with one proof based on the SETH and the other proof based on the SCC.

Theorem 1.6. *For every $\varepsilon > 0$, there are $\sigma, \delta > 0$ such that DOMINATING SET on an n -vertex graph with a (σ, δ) -hub of size p given in the input cannot be solved in time $(2 - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$, unless both the SETH and the SCC fail.*

Theorem 1.6 suggests that, if there is no $(3 - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$ time algorithm for DOMINATING SET, then perhaps the matching lower bound needs a complexity assumption that is stronger than both the SETH and the SCC.

Universal constants for σ and δ ? The lower bounds in Theorems 1.2–1.6 are stated in a somewhat technical form: “for every $\varepsilon > 0$, there are σ and δ such that...”. The statements would be simpler and more intuitive if they were formulated in a setting where σ and δ are universal constants, say, 100. Can we prove statements that show, for example, that there is no $(2 - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$ algorithm, where p is the size of a $(100, 100)$ -hub given in the input?

The answer to this question is complicated. For the vertex-deletion problem q -COLORINGVD (which includes VERTEX COVER and ODD CYCLE TRANSVERSAL) there are actually better than brute force algorithms for fixed constant values of σ and δ .

Theorem 1.7. *For every $q \geq 3$ and $\sigma, \delta > 0$, there exists $\varepsilon > 0$ with the following property: every instance (G, L) of q -COLORINGVD with n vertices, given with a (σ, δ) -hub of size p , can be solved in time $(q + 1 - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$.*

Thus Theorem 1.7 explains why the formulation of Theorem 1.4 needs to quantify over σ and δ , and cannot be stated for a fixed pair (σ, δ) .

On the other hand, for the edge-deletion problem q -COLORINGED (which includes MAX CUT), we can prove stronger lower bounds where σ and δ are universal constants. However, we need a complexity assumption different from the SETH.

An instance of MAX 3-SAT is a CNF formula φ with at most three literals in each clause. We ask for the minimum number of clauses that need to be deleted in order to obtain a satisfiable formula. Equivalently, we look for a valuation of the variables which violates the

minimum number of clauses. Clearly, an instance of MAX 3-SAT with n variables can be solved in time $2^n \cdot n^{\mathcal{O}(1)}$ by exhaustive search. It is a notorious problem whether this running time can be significantly improved, i.e., whether there exists an $\varepsilon > 0$ such that every n -variable instance of MAX 3-SAT can be solved in time $(2 - \varepsilon)^n$.

Max 3-Sat Hypothesis (M3SH). *There is no $\varepsilon > 0$ such that every n -variable instance of MAX 3-SAT can be solved in time $(2 - \varepsilon)^n \cdot n^{\mathcal{O}(1)}$.*

Under this assumption, we can prove a lower bound where $\delta = 6$ and σ is a constant (depending only on q).

Theorem 1.8. *For every $q \geq 2$ there is an integer σ such that the following holds. For every $\varepsilon > 0$, no algorithm solves every n -vertex instance of q -COLORINGED that is given with a $(\sigma, 6)$ -hub of size p , in time $(q - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$, unless the M3SH fails.*

For the case $q = 2$ we even show a slight improvement over Theorem 6.3 — in this case it suffices to consider instances with a constant σ and $\delta = 4$.

For Δ -PARTITION, we do not know if the lower bound of Theorem 1.5, ruling out $(2 - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$ running time under the SCC, remains valid for some fixed universal σ and δ independent of ε . Note that the proof of Theorem 1.5 provides a reduction from Δ -PARTITION to d -SET PACKING for some d . It is known that d -SET PACKING over a universe of size n can be solved in time $(2 - \varepsilon)^n \cdot (n + m)^{\mathcal{O}(1)}$ with some $\varepsilon > 0$ depending on d [2, 21, 31]. However, our reduction from Δ -PARTITION to d -SET PACKING chooses d in a way that it cannot be used to reduce the case of a fixed σ and δ to a d -SET PACKING problem with fixed d . It seems that we would need to understand if certain generalizations of d -SET PACKING can also be solved in time $(2 - \varepsilon)^n \cdot (n + m)^{\mathcal{O}(1)}$ for fixed d . The simplest such problem would be the generalization of d -SET PACKING where the sets in the input are partitioned into pairs and the solution is allowed to use at most one set from each pair.

Discussion. Given the amount of attention to algorithms on tree decompositions and the number of nontrivial techniques that were developed to achieve the best known algorithms, it is a natural question to ask if these algorithms are optimal. Even though understanding treewidth is a very natural motivation for this line of research, the actual results turned out to be less related to treewidth than one would assume initially: the lower bounds remain valid even under more restricted conditions. Already the first paper on this topic [24] states the lower bounds in a stronger form, as parameterized by pathwidth or by feedback vertex set number (both of which are bounded below by treewidth). Some other results considered parameters such as the size of a set Q where every component of $G - Q$ is a path [18] or has bounded treewidth [15]. However, our results show that none of these lower bounds got to the fundamental reason why known algorithms on bounded-treewidth graphs cannot be improved: Theorems 1.2–1.5 highlight that these algorithms are best possible already if we consider a much more restricted problem setting where constant-sized gadgets are attached to a set of hub vertices. Moreover, Theorems 1.2 and 1.4 are likely to be best possible: as we have seen, for coloring and its vertex-deletion generalizations, σ and δ cannot be made a constant independent from ε (Theorem 1.7). Therefore, one additional conceptual message of our results is understanding where the hardness of solving problems on bounded-treewidth graphs really stems from, by reaching the arguably most restricted setting in which the lower bounds hold.

The success of Theorems 1.2–1.4 (for coloring problems and relatives) suggests that possibly all the treewidth optimality results could be revisited and the same methodology could be used to strengthen to parameterization by hub size. But the story is more complicated than that. For example, for Δ -PACKING, the ground truth appears to be that the lower bound parameterized by width of the tree decomposition can be strengthened to a lower bound parameterized by hub size. However, proving the lower bound parameterized by hub size requires a different proof technique, and we can do it only by assuming the SCC — and for all we know this is an assumption orthogonal to the SETH. In fact, we showed that the lower bound for Δ -PACKING is equivalent to the SCC, making it unlikely that a simple proof based on the SETH exists. For DOMINATING SET, we currently do not know how to obtain tight bounds, highlighting that it is far from granted that all results parameterized by width of tree decomposition can be easily turned into lower bounds parameterized by hub size.

Another important aspect of our results is the delicate way they have to be formulated, with the values of σ and δ depending on ε . Theorem 1.8 shows that in some cases it is possible to prove a stronger bound where σ and δ are universal constants, but this comes at a cost of choosing a different complexity assumption (M3SH). Thus, there is a tradeoff between the choice of the complexity assumption and the strength of the lower bound. In general, it seems that the choice of complexity assumption can play a crucial role in these kind of lower bounds parameterized by hub size. This has to be contrasted with the case of parameterization by the width of the tree decomposition, where the known lower bounds are obtained from the SETH (or its counting version).

It would be natural to try to obtain lower bounds parameterized by hub size for other algorithmic problems as well. The lower bounds obtained in this paper for various fundamental problems can serve as a starting point for such further results. Concerning the problems studied in this paper, we leave two main open questions:

- For DOMINATING SET, can we improve the lower bound of Theorem 1.6 to rule out $(3 - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$ algorithms, under some reasonable assumption? Or is there perhaps an algorithm beating this bound?
- For Δ -PARTITION/ Δ -PACKING, can we improve the lower bound of Theorem 1.5 such that σ and δ are universal constants? Or is it true perhaps that for every fixed σ and δ , there is an algorithm solving these problems in time $(2 - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$ for some $\varepsilon > 0$?

2 Technical Overview

In this section, we overview some of the most important technical ideas in our results.

2.1 q -Coloring

The algorithmic statement in Theorem 1.2 is easily obtained via a simple branching procedure. For the hardness part, we use a lower bound of Lampis [23] for constraint satisfaction problems (CSP) as a starting point: for any $\varepsilon > 0$ and integer d , there is an integer r such that there is no algorithm solving CSP on n variables of domain size d and r -ary constraints in time $(d - \varepsilon)^n$. Therefore, to prove Theorem 1.2 (2), we give a reduction that, given an n -variable CSP instance where the variables are over $[q]$ and the arity of constraints is some constant r , creates an instance of q -COLORING having a hub of size roughly n .

First, we introduce a set of n main vertices in the hub, representing the variables of the CSP instance. We would like to represent each r -ary constraint with a gadget that is attached to a set S of r vertices. We will first allow our gadgets to use lists that specify to which colors certain vertices are allowed to be mapped. In a second step we then remove these lists.

A bit more formally, we say that an r -ary q -gadget is a graph J together with a list assignment $L: V(J) \rightarrow 2^{[q]}$ and r distinguished vertices $\mathbf{x} = (z_1, \dots, z_r)$ from J . The vertices z_1, \dots, z_r are called *portals*. A *list coloring* of (J, L) is an assignment $\varphi: V(J) \rightarrow [q]$ that respects the lists L , i.e., with $\varphi(v) \in L(v)$ for all $v \in V(J)$.

A construction by Jaffke and Jansen [18] gives a gadget that enforces that a set of vertices forbids one prescribed coloring. We use this statement to construct a gadget that extends precisely the set of colorings that are allowed according to some relation.

Proposition 2.1. *Let $q \geq 3$ and $r \geq 1$ be integers, and let $R \subseteq [q]^r$ be a relation. Then there exists an r -ary q -gadget $\mathcal{F} = (F, L, (z_1, \dots, z_r))$ such that*

- *the list of every vertex is contained in $[q]$,*
- *for each $i \in r$, it holds that $L(z_i) = [q]$,*
- *$\{z_1, \dots, z_r\}$ is an independent set,*
- *for any $\psi: \{z_1, \dots, z_r\} \rightarrow [q]$, coloring vertices z_1, \dots, z_r according to ψ can be extended to a list coloring of (F, L) if and only if $(\psi(z_1), \dots, \psi(z_r)) \in R$.*

Then, by introducing one gadget per constraint and attaching it to the vertices of the hub, from the q^n possible behaviors of the hub vertices, only those can be extended to the gadgets that correspond to a satisfying assignment of the CSP instance. Note that gadgets are allowed to use lists and they model the relational constraints using list colorings. So the final step to obtain a reduction to q -COLORING is to remove these lists. This can be done using a standard construction, where a central clique of size q is used to model the q colors, and a vertex v of the graph is adjacent to the i th vertex of the clique, whenever $i \notin L(v)$.

2.2 Vertex Deletion to q -Coloring.

Similarly to q -COLORING, the algorithmic statement in Theorem 1.4 is easily obtained via a simple branching procedure. However, for q -COLORINGVD, we need to consider $q + 1$ possibilities at each vertex: assigning to it one of the q colors, or deleting it. This leads to the running time $(q + 1)^p \cdot n^{\mathcal{O}(1)}$. The hardness proof is also similar, but this time we have to give a reduction that, given an n -variable CSP instance where the variables are over $[q + 1]$ and the arity of constraints is some constant r , creates an instance of q -COLORINGVD having a hub of size roughly n . Intuitively, we are using deletion as the $(q + 1)$ -st color: the $(q + 1)^n$ possibilities for these vertices in the q -COLORINGVD problem (coloring with q colors + deletion) correspond to the $(q + 1)^n$ possible assignments of the CSP instance. To enforce this interpretation, we attach to these vertices small gadgets representing each constraint. We attach a large number of copies of each such gadget, which means that it makes no sense for an optimum solution to delete vertices from these gadgets and hence deletions occur only in the hub. This means that we can treat the vertices of the gadgets as “undeletable”.

We would like to use again the construction from Proposition 2.1 to create gadgets that enforce that a set of vertices has one of the prescribed colorings/deletions. A gadget can force the deletion of a vertex if its neighbors are colored using all q colors. However, there is a fundamental limitation of this technique: deleting a vertex is always better than coloring it.

That is, a gadget cannot really force a set S of vertices to the color “red”: from the viewpoint of the gadget, deleting some of them and coloring the rest red is equally good. In other words, it is not true that every relation $R \subseteq [q + 1]^r$ can be represented by a gadget that allows only these combinations of q colors + deletion on a set S of r vertices.

To get around this limitation, we use a grouping technique to have control over how many vertices are deleted. Let us divide the n variables into $M = n/b$ blocks B_1, \dots, B_M of size b each. Let us guess the number f_i of variables in B_i that receive the value $q + 1$ in a hypothetical solution; that is, we expect f_i deletions in block B_i of central vertices. Instead of just attaching a gadget to a set S of at most r vertices, now each gadget is attached to the at most r blocks containing S . Besides ensuring a combination of values on S that satisfies the constraint, the gadget also ensures that each block B_i it is attached to has at least the guessed number f_i of deletions. This way, if we have a solution with exactly $\sum_{i=1}^M f_i$ deletions, then we know that it has exactly f_i deletions in the i -th block. Therefore, if a gadget forces the deletion of f_i vertices of B_i and forces a coloring on the remaining vertices of B_i , then we know that that block has exactly this behavior in the solution.

2.3 Edge Deletion to q -Coloring

Let us turn our attention to the edge-deletion version now. Similarly to the vertex-deletion version, the algorithmic results are simple, thus we discuss only the hardness proofs here. As starting point for all our reductions, we use a CSP problem with domain size q that naturally generalizes MAX 3-SAT: the task is to find an assignment of variables that satisfies the maximum number of constraints. For $q = 2$, the hardness of this problem follows from the SETH and the M3SH. For $q \geq 3$, we prove a new tight lower bound based on M3SH.

For $q \geq 3$, the lower bound of Theorem 1.3 (hardness of q -COLORINGED under the SETH) already follows from our result for *finding a q -coloring without deletions* (Theorem 1.2). So, in order to complete the proof of Theorem 1.3, we give a reduction from the CSP problem with $q = 2$ to 2-COLORINGED (i.e, MAX CUT), which shows hardness under SETH. As the gadgets of Proposition 2.1 work only for $q \geq 3$, we need to design new gadgets using only 2 colors for this case.

The same reduction can be used to establish the lower bound from Theorem 1.8 (hardness of q -COLORINGED under the M3SH) in the $q = 2$ case. For the $q \geq 3$ case, we present a reduction from the CSP problem with domain size q to q -COLORINGED. Here we can once again use the gadgets from Proposition 2.1.

In all cases, as the gadgets we design may use lists, we establish respective lower bounds for the list coloring problem on the way. In a second step, we then show how to remove the lists.

Max CSP — Hardness under the M3SH For some positive integers d and r , we define MAX (d,r) -CSP: Given v variables over a q -element domain and a set of n relational constraints of arity 3, the task is to find an assignment of the variables such that the maximum number of constraints are satisfied. The problem can be solved in time $q^v \cdot n^{\mathcal{O}(1)}$ by brute force. For $q = 2$, the problem is clearly a generalization of MAX 3-SAT, hence the M3SH immediately implies that there is no $(q - \varepsilon)^v \cdot n^{\mathcal{O}(1)}$ algorithm for any $\varepsilon > 0$. We show that the M3SH actually implies this for any $q \geq 2$. This might also be a helpful tool for future work.

Theorem 2.2. *For $d \geq 2$ and any $r \geq 3$, there is no algorithm solving every n -variable instance of MAX (d,r) -CSP in time $(d - \varepsilon)^n \cdot n^{\mathcal{O}(1)}$ for $\varepsilon > 0$, unless the M3SH fails.*

In order to show Theorem 2.2, if q is a power of 2, then a simple grouping argument works: for example, if $q = 2^4 = 16$, then each variable of the CSP instance can represent 4 variables of the MAX 3-SAT instance, and hence it is clear that a $(q - \varepsilon)^v$ algorithm would imply a $(2 - \varepsilon)^{4v}$ algorithm for a MAX 3-SAT instance with $4v$ variables.

The argument is not that simple if q is not a power of 2, say $q = 15$. Then a variable of that CSP instance cannot represent all 16 possibilities of 4 variables of the MAX 3-SAT instance, and using it to represent only 3 variables would be wasteful. We cannot use the usual trick of grouping the CSP variables such that each group together represents a group of MAX 3-SAT variables: then each constraint representing a clause would need to involve not only 3 variables, but 3 blocks of variables, making δ larger than 3. Instead, for each block of 4 variables of the MAX 3-SAT instance, we randomly choose 15 out of the 16 possible assignments, and use a single variable of the CSP instance to represent these possibilities. An optimum solution of a $4v$ -variable MAX 3-SAT instance “survives” this random selection with probability $(15/16)^v$. Thus a $(15 - \varepsilon)^v \cdot n^{\mathcal{O}(1)}$ time algorithm for the CSP problem would give a randomized $(16/15)^v \cdot (15 - \varepsilon)^v \cdot n^{\mathcal{O}(1)} = (16 - \varepsilon')^v \cdot n^{\mathcal{O}(1)} = (2 - \varepsilon'')^{4v} \cdot n^{\mathcal{O}(1)}$ time algorithm for MAX 3-SAT, violating (a randomized version of) the M3SH. Furthermore, we show in Section 6.1 that the argument can be derandomized using the logarithmic integrality gap between integer and fractional covers in hypergraphs.

Realizing Relations using Lists Recall that an r -ary q -gadget is a graph with lists in $[q]$ and r specified portal vertices. For our hardness proofs, we reduce from MAX (q,r) -CSP, and we use gadgets to “model” the relations in $[q]^r$. We say that an r -ary q -gadget *realizes* a relation $R \in [q]^r$ if there is an integer k such that (1) for each $\mathbf{d} \in R$, if the portals are colored according to \mathbf{d} , then it requires precisely k edge deletions to extend this to a full list coloring of the gadget, and (2) extending a state that is *not* in R requires strictly more than k edge deletions. We say that such a gadget 1-realizes R , if for each state outside of R it takes precisely $k + 1$ edge deletions to extend this state. So, this is a stronger notion in the sense that now the violation cost is the same for all tuples outside of R . Moreover, with a 1-realizer in hand, by identifying copies of this gadget with the same portal vertices one can freely adjust the precise violation cost — this works as long as the portals form an independent set and therefore no multiedges are introduced in the copying process.

For our treatment of the case $q \geq 3$, we again use Proposition 2.1 to show that arbitrary relations over a domain of size q can be realized. As Proposition 2.1 is for the decision problem without deletions, it does not help for the case $q = 2$, i.e., for MAX CUT/2-COLORING. In this case, we need a different approach to show that every relation over a domain of size 2 can be realized. For 2-COLORING, a single edge is essentially a “Not Equals”-gadget as the endpoints have to take different colors or otherwise the edge needs to be deleted. Starting from this, we show how to model OR-relations of any arity. With these building blocks we then obtain the following result.

Theorem 2.3. *For each $r \geq 1$, and $R \subseteq [2]^r$, there is an r -ary 2-gadget that 1-realizes R .*

Removing the Lists Note that gadgets may use lists and therefore, on the way, we first obtain the following lower bounds for the respective list coloring problems.

Theorem 2.4. *For every $q \geq 2$ and $\varepsilon > 0$, there are integers σ and δ such that if an algorithm solves in time $(q - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$ every n -vertex instance of LIST- q -COLORINGED that is given with a (σ, δ) -hub of size p , then the SETH fails.*

Theorem 2.5. *For every $q \geq 2$, there is a constant σ_q such that, for every $\varepsilon > 0$, if an algorithm solves in time $(q - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$ every n -vertex instance of LIST- q -COLORINGED that is given with a $(\sigma_q, 3)$ -hub of size p , then the M3SH fails.*

In a second step, we show how to remove the lists by adding some additional object of size roughly q (a central vertex or a q -clique for $q = 2$ or $q \geq 3$, respectively). This addition is then considered to be part of the hub, thereby increasing the size of the hub by some constant. However, this modification means that for the other gadgets the number of neighbors in the hub increases slightly. This is irrelevant for the SETH-based lower bound, but it leads to a slight increase in the universal constant δ that we obtain for our M3SH-based lower bounds for the coloring problems without lists.

2.4 Covering, Packing, and Partitioning

Theorem 1.5 gives lower bounds for Δ -PARTITION and Δ -PACKING based on the Set Cover Conjecture. This hypothesis was formulated in terms of the d -SET COVER problem. For our purposes, it is convenient to consider slightly different covering/partitioning problems. To facilitate our reductions and as a tool for future reductions of this type, we establish equivalences between eight different covering type problems. Before we make this more formal in Theorem 2.6, let us briefly introduce the corresponding problems.

First, we use $=d$ -SET COVER and $\leq d$ -SET COVER to distinguish between the problem for which the sets have size exactly d or at most d , respectively. For Δ -PARTITION, it is more natural to start a reduction from the partitioning problems $=d$ -SET PARTITION or $\leq d$ -SET PARTITION, in which the task is to find pairwise disjoint sets that cover the universe. The $\leq d$ -SET PARTITION problem can be considered as a decision problem. However, we can also consider the corresponding optimization problem in which the task is to minimize the number of selected sets, and we use $\leq d$ -SET PARTITION (#SETS) to denote this problem. Further variants are the optimization problems $=d$ -SET PACKING (#SETS) and $\leq d$ -SET PACKING (#SETS), in which we need to select the maximum number of pairwise disjoint sets. For $\leq d$ -SET PACKING, an equally natural goal is to maximize the total size of the selected sets (for $=d$ -SET PACKING, this is of course equivalent to maximizing the number of selected sets). So we use $\leq d$ -SET PACKING (UNION) to denote the packing problem in which the union/total size of the selected sets is maximized.

Given the large number of variants of d -SET COVER, one may wonder how they are related to each other. In particular, does the SCC imply lower bounds for these variants? There are obvious reductions between some of these problems (e.g., from $=d$ -SET COVER to $\leq d$ -SET COVER) and there are also reductions that are not so straightforward. We fully clarify this question by showing that choosing *any* of these problems in the definition of the SCC leads to an equivalent statement. Thus in our proofs to follow we can choose whichever form is most convenient for us. Knowing this equivalence could prove useful for future work as well.

Theorem 2.6. *Suppose that for one of the problems below, it is true that for every $\varepsilon > 0$, there is an integer d such that the problem cannot be solved in time $(2 - \varepsilon)^n \cdot n^{\mathcal{O}(1)}$, where n is the size of the universe. Then this holds for all the other problems as well. In particular, any of these statements is equivalent to the SCC.*

1. $=d$ -SET COVER
2. $=d$ -SET PARTITION

3. $=d$ -SET PACKING (#SETS)
4. $\leq d$ -SET COVER
5. $\leq d$ -SET PARTITION
6. $\leq d$ -SET PARTITION (#SETS)
7. $\leq d$ -SET PACKING (#SETS)
8. $\leq d$ -SET PACKING (UNION)

To make the statements about relationships between the problems from the list in Theorem 2.6 more concise, it will be convenient to introduce some shorthand notation. Let $\mathbb{A} = \{A_d\}_{d \geq 1}$ and $\mathbb{B} = \{B_d\}_{d \geq 1}$ be two families of problems where A_d and B_d belong to the list in Theorem 2.6. To shorten notation, we speak of an n -element instance if the universe U of an instance has size n . We say that \mathbb{A} is 2^n -hard if the following lower bound holds

For each $\varepsilon > 0$ there is some $d \geq 1$ such that no algorithm solves A_d on all n -element instances in time $(2 - \varepsilon)^n \cdot n^{\mathcal{O}(1)}$.

Using this language, the SCC states that $\{\leq d$ -SET COVER $\}_{d \geq 1}$ is 2^n -hard. To establish Theorem 2.6, we show reductions, stating that if \mathcal{A} is 2^n -hard then \mathcal{B} is 2^n -hard as well. Spelled out this means:

Suppose for each $\varepsilon > 0$ there is some $d \geq 1$ such that no algorithm solves A_d on all n -element instances in time $(2 - \varepsilon)^n \cdot n^{\mathcal{O}(1)}$.

Then, for each $\varepsilon > 0$ there is some $d' \geq 1$ such that no algorithm solves $B_{d'}$ on all n -element instances in time $(2 - \varepsilon)^n \cdot n^{\mathcal{O}(1)}$.

This shows that this is really a relationship between two classes of problems, and not necessarily a relationship between A_d and B_d for the same value d . To make this distinction explicit, we write $=*$ -SET COVER if we refer to the class of problems $\{=d$ -SET COVER $\}_{d \geq 1}$. We use analogous notation for the other problems on the list. For example, a simple observation is that if $=*$ -SET COVER is 2^n -hard then so is $\leq*$ -SET COVER as the latter is a generalization of the former. The reductions we use to prove Theorem 2.6 are illustrated in Figure 1.

2.5 Triangle Partition and Triangle Packing

Now let us discuss the proof of Theorem 1.5 that can be found in Section 9. The proof consists of two main steps: (1) a reduction from $=*$ -SET PARTITION to Δ -PARTITION, and (2) a reduction from Δ -PACKING to $\leq*$ -SET PACKING (#SETS) (see Figure 2). Recall that by Theorem 2.6, assuming the SCC, all of $=*$ -SET PARTITION, $\leq*$ -SET PACKING (#SETS), and $\leq*$ -SET COVER are 2^n -hard. Finally, Δ -PARTITION trivially reduces to Δ -PACKING, so indeed, the statements in Theorem 1.5 are equivalent.

Reducing SET PARTITION to Δ -PARTITION. We start with step (1), i.e., reducing an instance (U, \mathcal{F}) of $=d$ -SET PARTITION to an equivalent instance G of Δ -PARTITION. With a simple technical trick we can ensure that d is divisible by 3.

The main building block used in the reduction is the so-called Δ -eq gadget. For fixed d , it is a graph with d designated vertices called *portals*. The gadget essentially has exactly two triangle packings that cover all non-portal vertices:

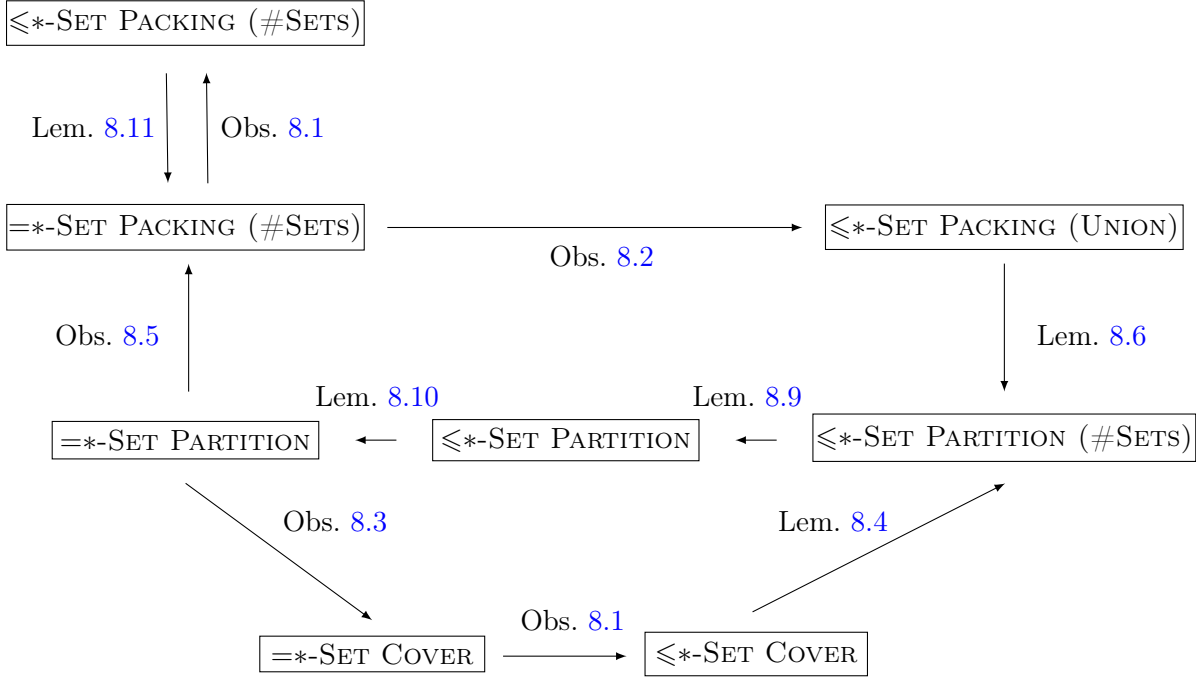


Figure 1: An overview of the proof of Theorem 2.6. An arrow from \mathcal{A} to \mathcal{B} indicates an implication stating that if \mathcal{A} is 2^n -hard then \mathcal{B} is 2^n -hard as well.

- one that also covers *all portals* (i.e., is actually a triangle partition), and
- one that covers *no portal*.

Now the construction of G is simple: we introduce the set Q containing one vertex for each element of U , and for each set $S \in \mathcal{F}$ we introduce a copy of the Δ -eq gadget whose portals represent elements of S and are identified with corresponding vertices from Q . It is straightforward to verify that there is $\mathcal{F}' \subseteq \mathcal{F}$ that partitions U if and only if G has a triangle partition: the sets from \mathcal{F}' correspond to Δ -eq gadgets whose non-portal vertices are covered in the first way. Note that Q is a (σ, d) -hub of G , where σ is the number of vertices of the Δ -eq gadget, i.e., is a constant that depends only on d .

Reducing Δ -PACKING to SET PACKING. Now let us consider a graph G given with a (σ, δ) -hub Q of size p , and an integer t . We will show that a hypothetical fast algorithm for $\leq d$ -SET PACKING ($\#SETS$) can be used to determine whether G has a triangle packing of size at least t .

For simplicity of exposition, assume that G has no triangles contained in Q ; dealing with such triangles is not difficult but would complicate the notation. We say that a component C of $G - Q$ is *active* in some triangle packing Π if there is a triangle in Π that intersects both C and Q . Note that for any triangle packing there are at most p active components.

We would like to guess components that are active for some (unknown) solution Π . However, this results in too many branches. We deal with it by employing color-coding and reducing the problem to its auxiliary *precolored variant*. Suppose for a moment that we are



Figure 2: An overview of the reductions in the proof of Theorem 1.5. The two dashed arrows refer to 2^n -hardness reductions from Theorem 2.6. To establish these two connections, note that we actually utilize all reductions shown in Figure 1, except for the simple Observations 8.1 and 8.5. The arrows annotated with (1) and (2) denote the reductions proved in Section 9.

given a coloring ψ of components of $G - Q$ into p/c colors, where c is a large constant, with a promise that at most c components in each color are active in Π .

For a color $i \in [p/c]$, let \mathcal{C}_i denote the set of components of $G - Q$ colored i by ψ . The *contribution* of the color i to Π is the number of triangles that intersect vertices in components from \mathcal{C}_i . Note that the size of Π is the sum of contributions of all color (since we assumed that there are no triangles contained in Q). What can be said about the contribution of i ? Certainly picking a maximum triangle packing in the graph consisting only of components from \mathcal{C}_i is a lower bound. Let X_i denote the number of triangles in such a triangle packing and note that X_i can be computed in polynomial time as each component of $G - Q$ is of constant size. Moreover, for each active component $C \in \mathcal{C}_i$, there are at most σ triangles that intersect both C and Q (as each of them has to use a distinct vertex from C). As, by the promise on ψ , there are at most c active components in \mathcal{C}_i , we observe that the contribution of i is at most $X_i + c\sigma$. We exhaustively guess the contribution of each color by guessing the offset q_i against X_i ; it gives a constant number of options per color. We reject guesses where the total contribution of all colors, i.e., the number of all triangles packed, is less than t .

For each color i , we enumerate all sets $S \subseteq Q$ that are candidates for these vertices of Q that form triangles with vertices from components of \mathcal{C}_i ; call such sets *i -valid*. An *i -valid* set S must satisfy the following two conditions. First, the size of S is at most $2c\sigma$, as there are at most $c\sigma$ vertices in active components from \mathcal{C}_i and each such vertex belongs to a triangle with at most two vertices from Q . Second, there exists a triangle packing Π_S in the graph induced by S together with components of \mathcal{C}_i such that

- at most c elements from \mathcal{C}_i are active in Π_S (this follows from the promise on ψ), and
- the number of triangles in Π_S is at least $X_i + q_i$ (by our guess of q_i).

It is not difficult to verify that *i -valid* sets can be enumerated in polynomial time, where the degree of the polynomial depends on c and σ .

Now we are ready to construct an instance $(U, \mathcal{F}, p/c)$ of $\leq d$ -SET PACKING ($\#SETS$). The universe U is $Q \cup \{a_i \mid i \in [p/c]\}$, i.e., it consists of the hub of G and one extra vertex per color. For each *i -valid* set S , we include in \mathcal{F} the set $S \cup \{a_i\}$. Again, one can verify that \mathcal{F} contains p/c pairwise disjoint sets if and only if G has a packing of t triangles that agree both with ψ and with the guessed values of q_i 's.

By adjusting c , we can ensure that the whole algorithm works in time $(2 - \varepsilon')^p \cdot |V(G)|^{\mathcal{O}(1)}$, for some $\varepsilon' > 0$, provided that we have a fast algorithm for $\leq d$ -SET PACKING (#SETS).

The only thing left is to argue how we obtain the coloring ψ satisfying the promise. Here we use *splitters* introduced by Naor, Schulman, and Srinivasan [30]. Informally, a splitter is a family of colorings of a “large set” \mathcal{X} , such that for each “small subset” $\mathcal{Y} \subseteq \mathcal{X}$ there is a coloring that splits \mathcal{Y} evenly. In our setting, the “large set” \mathcal{X} is the set of all components of $G - Q$ and the “small subset” \mathcal{Y} is the set of all active components with respect to some fixed (but unknown) solution; recall that there are at most p such active components. Since our colorings use p/c colors, we are sure that there is some ψ for which at most $\frac{p}{p/c} = c$ components in each color are active. Calling the result of Naor, Schulman, and Srinivasan [30], we can find a small splitter Ψ , and then just exhaustively try every coloring $\psi \in \Psi$. Again, carefully adjusting the constants, we can ensure that the overall running time is $(2 - \varepsilon)^p \cdot |V(G)|^{\mathcal{O}(1)}$, for some $\varepsilon > 0$.

3 Preliminaries

For an integer k , by $[k]$ we denote $\{1, \dots, k\}$. For a set X , by 2^X we denote the family of all subsets of X .

Graph theory. Let G be a graph. By $V(G)$ and $E(G)$ we denote, respectively, the vertex set and the edge set of G . Let $X \subseteq V(G)$, by $G[X]$ we denote the graph induced by X . By $G - X$ we denote the graph obtained from G by removing all vertices in X along with incident edges, i.e., $G[V(G) \setminus X]$. For a set $X \subseteq E(G)$, by $G \setminus X$ we denote the graph obtained by removing all edges in X , i.e., $(V(G), E(G) \setminus X)$. A vertex is *isolated* if its neighborhood is empty.

Treewidth and (σ, δ) -hubs. Consider a graph with a (σ, δ) -hub Q of size p . Introducing a bag that contains Q that is the center of a star whose leaves are $Q \cup C_i$ for each connected component C_i of $G - Q$. Then this is a tree decomposition of G of width at most $p + \sigma - 1$. We state this observation formally.

Observation 3.1. *For some $\sigma, \delta \geq 1$, let G be a graph given with a (σ, δ) -hub of size p . One can obtain a tree decomposition of width less than $p + \sigma$ in time polynomial in the size of G .*

Variants of (list) colorings. In Section 1, we defined the q -COLORING problem as well as its vertex and edge deletion variant. We also use a generalization of vertex colorings that include lists. Formally, the LIST- q -COLORING problem takes as input a graph G together with a *list* function $L : V(G) \rightarrow 2^{[q]}$. The task is then to compute a q -coloring $\varphi : V(G) \rightarrow [q]$ that respects lists L , i.e., with $\varphi(v) \in L(v)$ for all $v \in V(G)$. We say that such an assignment φ is a *proper list coloring* of (G, L) .

We also use the corresponding vertex and edge deletion variant. In the LIST- q -COLORINGVD (resp. LIST- q -COLORINGED) problem we ask for a smallest set X of *vertices* (resp. *edges*) such that $G - X$ (resp. $G \setminus X$) admits a proper list coloring that respects the lists L .

Note that LIST- q -COLORINGVD and LIST- q -COLORINGED are optimization problems. Sometimes it will be convenient to consider their corresponding decisions versions, when we are additionally given an integer k and we ask whether the instance graph can be modified into

a yes-instance of by removing at most k vertices/edges. In general, we will show algorithms for the optimization version, and lower bounds for the decision version.

Gadgets. Let J be a graph together with a list assignment $L: V(J) \rightarrow 2^{[q]}$ and r distinguished vertices $\mathbf{x} = (x_1, \dots, x_r)$ from J . Then we refer to the tuple $\mathcal{J} = (J, L, \mathbf{x})$ as an r -ary q -gadget. We might not specify r nor q in case they are clear from the context. The vertices x_1, \dots, x_r are called *portals*.

Definitions for Set Covering, Partitioning, and Packing Problems. For reference and to be clear about the distinctions between the different problems that appear in Section 8, we now list all their definitions.

= d -SET COVER

Input: A set U of elements, a set family $\mathcal{F} \subseteq 2^U$ where each set has size exactly d such that $U = \bigcup \mathcal{F}$, an integer t .

Question: Is there a collection of at most t sets from \mathcal{F} whose union is U ?

$\leq d$ -SET COVER

Input: A set U of elements, a set family $\mathcal{F} \subseteq 2^U$ where each set has size at most d such that $U = \bigcup \mathcal{F}$, an integer t .

Question: Is there a collection of at most t sets from \mathcal{F} whose union is U ?

= d -SET PARTITION

Input: A set U of elements, a set family $\mathcal{F} \subseteq 2^U$ where each set has size exactly d such that $U = \bigcup \mathcal{F}$.

Question: Is there a collection of $(|U|/d)$ sets from \mathcal{F} that is a partition of U ?

$\leq d$ -SET PARTITION

Input: A set U of elements, a set family $\mathcal{F} \subseteq 2^U$ where each set has size at most d such that $U = \bigcup \mathcal{F}$.

Question: Is there a collection of sets from \mathcal{F} that is a partition of U ?

$\leq d$ -SET PARTITION (#SETS)

Input: A set U of elements, a set family $\mathcal{F} \subseteq 2^U$ where each set has size at most d such that $U = \bigcup \mathcal{F}$, an integer t .

Question: Is there a collection of at most t sets from \mathcal{F} that is a partition of U ?

= d -SET PACKING (#SETS)

Input: A set U of elements, a set family $\mathcal{F} \subseteq 2^U$ where each set has size exactly d , an integer t .

Question: Is there a collection of at least t sets from \mathcal{F} that are pairwise disjoint?

$\leq d$ -SET PACKING (#SETS)

Input: A set U of elements, a set family $\mathcal{F} \subseteq 2^U$ where each set has size at most d , an integer t .

Question: Is there a collection of at least t sets from \mathcal{F} that are pairwise disjoint?

$\leq d$ -SET PACKING (UNION)

Input: A set U of elements, a set family $\mathcal{F} \subseteq 2^U$ where each set has size at most d , an integer t .

Question: Is there a collection of sets from \mathcal{F} that are pairwise disjoint and whose union has size at least t ?

4 q -COLORING

The goal of this section is to show Theorem 1.2. Its algorithmic part is very simple: Exhaustively enumerate all possible q -colorings of the hub Q ; this results in q^p branches. Then, for each component C of $G - Q$, we check whether the coloring of the neighbors in C can be extended to a proper coloring of C . Note that this can be performed by brute-force, as the number of vertices in C is at most σ , i.e., a constant. As the number of such components C is at most n , the overall running time is $q^p \cdot n^{\mathcal{O}(1)}$.

The hardness part of Theorem 1.2 is restated in the following theorem.

Theorem 4.1. *For every $q \geq 3$ and $\varepsilon > 0$, there are integers σ and δ such that no algorithm solves every n -vertex instance of q -COLORING, given with a (σ, δ) -hub of size p , in time $(q - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$, unless the SETH fails.*

The proof uses the following constraint satisfaction problem as a starting point. For integers d and r , an instance of (d, r) -CSP is a pair $(\mathcal{V}, \mathcal{C})$, where \mathcal{V} is the set of *variables* and \mathcal{C} is the set of *constraints*. Each constraint C involves a sequence of variables, whose length, called the *arity* of C , is at most r . The constraint C enforces some relation $R_C \subseteq [d]^{\text{arity}(C)}$ on the variables involved. We ask for a mapping $\mathcal{V} \rightarrow [d]$ which *satisfies* every constraint, i.e., the sequence of images of variables involved in $C \in \mathcal{C}$ belongs to R_C .

Lampis showed the following lower bound for (d, r) -CSP.

Theorem 4.2 (Lampis [23]). *For every $d \geq 2$ and ε there exists r , such that there is no algorithm solving every N -variable instance of (d, r) -CSP in time $(d - \varepsilon)^N \cdot N^{\mathcal{O}(1)}$, unless the SETH fails.*

Before we proceed to the proof of Theorem 4.1, let us recall following lemma by Jaffke and Jansen [18, Lemma 14] which will be a crucial tool used to build gadgets (defined in Section 3).

Lemma 4.3 (Jaffke, Jansen [18]). *Let $q \geq 3$ and $r \geq 1$ be integers, For any $\mathbf{c} \in [q]^r$ there exists an r -ary gadget $\mathcal{F}_{\mathbf{c}} = (F_{\mathbf{c}}, L, (x_1, x_2, \dots, x_r))$, where lists L are contained in $[q]$, such that for every $\mathbf{d} = (d_1, \dots, d_r) \in [q]^r$ there exists a proper list coloring φ of $F_{\mathbf{c}}$ in which for all i it holds that $\varphi(x_i) \neq d_i$ if and only if $\mathbf{d} \neq \mathbf{c}$.*

The following statement is a consequence of Lemma 4.3.

Proposition 2.1. *Let $q \geq 3$ and $r \geq 1$ be integers, and let $R \subseteq [q]^r$ be a relation. Then there exists an r -ary q -gadget $\mathcal{F} = (F, L, (z_1, \dots, z_r))$ such that*

- the list of every vertex is contained in $[q]$,
- for each $i \in r$, it holds that $L(z_i) = [q]$,
- $\{z_1, \dots, z_r\}$ is an independent set,
- for any $\psi : \{z_1, \dots, z_r\} \rightarrow [q]$, coloring vertices z_1, \dots, z_r according to ψ can be extended to a list coloring of (F, L) if and only if $(\psi(z_1), \dots, \psi(z_r)) \in R$.

Proof. We start the construction with introducing an independent set $Z = \{z_1, \dots, z_r\}$ and we set $L(z_i) := [q]$ for every $i \in [r]$.

Let $\bar{R} := [q]^r \setminus R$ and consider $\bar{c} \in \bar{R}$. We call Lemma 4.3 to obtain a gadget $\mathcal{F}_{\bar{c}} = (F_{\bar{c}}, L, (x_1, \dots, x_r))$. For each $i \in [r]$, we make x_i adjacent to z_i . We repeat this for every $\bar{c} \in \bar{R}$. This concludes the construction of \mathcal{F} .

Consider a coloring $\psi : Z \rightarrow [q]$ such that $(\psi(z_1), \dots, \psi(z_r)) \in R$. Consider $\bar{c} \in \bar{R}$. We need to show that ψ can be extended to a coloring of $F_{\bar{c}}$. Note that $(\psi(z_1), \dots, \psi(z_r)) \neq \bar{c}$ as $\bar{c} \notin R$. Thus by Lemma 4.3 called for $(d_1, \dots, d_r) = (\psi(z_1), \dots, \psi(z_r))$ we note that there exists a proper list coloring of $F_{\bar{c}}$ such that the color of each x_i is different than $\psi(z_i)$. This is the sought-for coloring of $F_{\bar{c}}$.

Consider a coloring $\psi : Z \rightarrow [q]$ such that $\bar{c} := (\psi(z_1), \dots, \psi(z_r)) \notin R$. For contradiction, suppose that there exists a proper list coloring φ of F that extends ψ . Consider the gadget $\mathcal{F}_{\bar{c}} = (F_{\bar{c}}, L, (x_1, \dots, x_r))$. Clearly, for all $i \in [r]$, it holds that $\varphi(x_i) \neq \psi(z_i)$. However, the existence of such a coloring contradicts Lemma 4.3. \square

Now we are ready to prove Theorem 4.1.

Proof of Theorem 4.1. Let $q \geq 3$ and $\varepsilon > 0$. For contradiction, suppose that for every σ, δ there is an algorithm that solves every n -vertex instance of q -COLORING, given with a (σ, δ) -hub of size p , in time $(q - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$.

Let r be the value given by Theorem 4.2 for $d = q$ and ε . Consider an instance $\mathcal{I} = (\mathcal{V}, \mathcal{C})$ of (q, r) -CSP and let $n := |\mathcal{V}|$. Note that without loss of generality we may assume that every constraint in \mathcal{C} has at least one satisfying assignment. Furthermore, we may assume that there are no two constraints with exactly the same set of vertices: otherwise we can replace all such constraints C_1, C_2, \dots, C_m with a single one whose set of satisfying assignments is the intersection of the sets of satisfying assignments of C_1, C_2, \dots, C_m . Note that this means that $|\mathcal{C}| \leq n^r$.

Defining an equivalent instance of LIST- q -COLORING. As the first step, we will define an instance (G', L) of LIST- q -COLORING.

We start with introducing an independent set $Y = \{y(v) \mid v \in \mathcal{V}\}$ and each vertex from Y has list $[q]$. The vertex $y(v)$ is meant to represent v , i.e., the coloring of $y(v)$ corresponds to the valuation of v .

Now consider a constraint $C \in \mathcal{C}$. Let v_1, v_2, \dots, v_ℓ be the variables of C , where $\ell := \text{arity}(C) \leq r$. Let R_C be the relation enforced by C on V_C . We call Proposition 2.1 for R_C to obtain an ℓ -ary gadget

$$\mathcal{F}(C) = (F(C), L, (z_1, \dots, z_\ell)).$$

The list of every vertex is contained in $[q]$, and the interface vertices are pairwise non-adjacent and have lists $[q]$. For each $i \in [\ell]$, we identify z_i with $y(v_i)$. We repeat this for every $C \in \mathcal{C}$. This completes the construction of (G', L) .

It is straightforward to verify that (G', L) is a yes-instance of LIST- q -COLORING if and only if \mathcal{I} is satisfiable. Indeed, the coloring of vertices from Y exactly corresponds to the valuation of variables of \mathcal{I} . For each $C \in \mathcal{C}$, a coloring of the interfaces of the gadget $\mathcal{F}(C)$ introduced for C can be extended to a list coloring of the whole gadget if and only if the coloring of interfaces corresponds to an assignment of variables that satisfies C .

Defining an equivalent instance of q -COLORING. The modification of (G', L) into an equivalent instance of q -COLORING is standard. We introduce a clique on vertices a_1, a_2, \dots, a_q . For each $u \in V(G')$ and each $i \in [q]$, we add an edge ua_i if and only if $i \notin L(u)$.

Again, it is straightforward to verify that this construction simulates the lists in L . Indeed, if φ is a proper q -coloring of G , then by symmetry we may assume that $\varphi(a_i) = i$ for every $i \in [q]$. Thus, for any vertex $u \in V(G') \cap V(G)$ such that $i \notin L(i)$, we have that $\varphi(u) \neq i$.

Structure of G . The graph G' has $n + q + |\mathcal{C}| \cdot h(q, r) = \mathcal{O}(n^r)$ vertices, where $h(q, r)$ is the size of the largest gadget given by Proposition 2.1. Note that q is a constant and r is also a constant (depending on q and ε).

Now consider the set $Q = Y \cup \{a_1, a_2, \dots, a_q\}$, clearly $|Y| = n + q$. Note that every component of $G - Y$ is (a subgraph of) one of the gadgets given by Proposition 2.1, i.e., its size is at most $h(q, r)$. Furthermore, each such component is adjacent to at most $r + q$ vertices from Q . Thus Q is a (σ, δ) -hub, where $\sigma := h(q, r)$ and $\delta := r + q$ are constants depending only on q and ε .

Running time. Note that calling our hypothetical algorithm for q -COLORING on G' we can solve \mathcal{I} in time

$$(q - \varepsilon)^{|Q|} \cdot |V(G')|^{\mathcal{O}(1)} = (q - \varepsilon)^n \cdot n^{\mathcal{O}(1)},$$

which, by Theorem 4.2, contradicts the SETH. \square

5 Vertex Deletion to q -COLORING

In this section we prove Theorem 1.4. The algorithmic part is simple and it is covered in Section 5.2. The main work is showing the lower bound, and this is done in form of Theorem 5.1 in Section 5.1.

5.1 Hardness for q -COLORINGVD

We prove the following lower bound for q -COLORINGVD, which is identical to Theorem 1.4(2)

Theorem 5.1. *For every $q \geq 1$ and $\varepsilon > 0$, there exist integers $\sigma, \delta \geq 1$ such that if there is an algorithm solving in time $(q + 1 - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$ every n -vertex instance of q -COLORINGVD given with a (σ, δ) -hub of size at most p , then the SETH fails.*

To that end, we start by showing that solving (d, r) -CSP for certain structured instances is still hard. Let us define what we mean by structured.

Definition 5.2. For all $d, r, b, N \in \mathbb{N}$ and $\mathbf{f}: \left[\frac{N}{b}\right] \rightarrow \{0, \dots, b\}$, an N -variable instance $(\mathcal{V}, \mathcal{C})$ of (d, r) -CSP is called (b, \mathbf{f}) -structured if the following holds

- N is divisible by b and \mathcal{V} is partitioned into $\frac{N}{b}$ blocks $V_1, \dots, V_{N/b}$, each of size b .
- the scope of each constraint $C \in \mathcal{C}$ includes, for each i , either all or none of the variables from the block V_i .
- There are two types of constraints, i.e., $\mathcal{C} = \mathcal{C}^{\text{sign}} \cup \mathcal{C}^{\text{sat}}$ such that
 - $\mathcal{C}^{\text{sign}}$ contains a constraint C_i for each $i \in \left[\frac{N}{b}\right]$. The constraint C_i makes sure that exactly f_i variables from V_i are set to d .

- For each $C \in \mathcal{C}^{\text{sat}}$, if the scope of C contains V_i , then exactly f_i variables of V_i are set to d . Furthermore, no two constraints $C, C' \in \mathcal{C}^{\text{sat}}$ have exactly the same set of variables.

Note that the last property of \mathcal{C}^{sat} implies that $|\mathcal{C}^{\text{sat}}| \leq N^r$ and thus $|\mathcal{C}| \leq N/b + N^r$. The astute reader might wonder why we need $\mathcal{C}^{\text{sign}}$, as these constraints are already implied by \mathcal{C}^{sat} . However, their special structure will be exploited in our reduction.

Lemma 5.3. *For all $N, d \in \mathbb{N}$ and $\varepsilon > 0$, there exists $b, r \in \mathbb{N}$ such that there is no algorithm solving every (b, \mathbf{f}) -structured N -variable $(d, b \cdot r)$ -CSP instance where $\mathbf{f}: [\frac{N}{b}] \rightarrow \{0, \dots, b\}$, in time $(d - \varepsilon)^N \cdot N^{\mathcal{O}(1)}$, unless the SETH fails.*

Proof. Let $d \in \mathbb{N}$ and $\varepsilon \in \mathbb{R}_{>0}$. Let r be the value in the Theorem 4.2 for d and ε . Let b be the smallest integer such that $(b+1)^{1/b} < 1 + \varepsilon/d$; note that b is a constant (again, depending on d and ε).

Let $\mathcal{I} = (\mathcal{V}, \mathcal{C})$ be an N -variable instance of (d, r) -CSP. We assume that there is some fixed total order on the set \mathcal{V} . We can further assume that the number N of variables is divisible by b , as otherwise we can add at most $b - 1$ dummy variables. Then we partition \mathcal{V} into $M = N/b$ blocks V_1, \dots, V_M , each of size b .

Let $r' = b \cdot r$; note that r' depends on d and ε . Now we will construct a family \mathbf{I} of instances of (d, r') -CSP, such that \mathcal{I} is satisfiable if and only if at least one instance in \mathbf{I} is satisfiable.

Construction of \mathbf{I} . For an assignment $\varphi : \mathcal{V} \rightarrow [d]$, its *signature* is the vector $\mathbf{f} = (f_1, \dots, f_M) \in \{0, \dots, b\}^M$, where for each $i \in [M]$ the value of f_i is the number of variables from V_i mapped by φ to d . Note that the number of possible signatures is at most

$$(b+1)^M = (b+1)^{N/b} = \left((b+1)^{1/b}\right)^N < (1 + \varepsilon/d)^N. \quad (1)$$

Consider one such signature $\mathbf{f} = (f_1, \dots, f_M)$. We include into \mathbf{I} the instance $\mathcal{I}_{\mathbf{f}} = (\mathcal{V}, \mathcal{C}_{\mathbf{f}})$ of (d, r') -CSP defined as follows. The set of constraints $\mathcal{C}_{\mathbf{f}}$ will be partitioned into two subsets, denoted by $\mathcal{C}_{\mathbf{f}}^{\text{sign}}$ and $\mathcal{C}_{\mathbf{f}}^{\text{sat}}$.

First, for each block V_i , we add to $\mathcal{C}_{\mathbf{f}}^{\text{sign}}$ the constraint $C_{\mathbf{f}}^i$ including all variables from V_i , which is satisfied if and only if exactly f_i variables from V_i have value d .

Then, for each constraint $C \in \mathcal{C}$, let $C_{\mathbf{f}}$ be the constraint involving all variables in all blocks intersected by C such that $C_{\mathbf{f}}$ is satisfied by some assignment if and only if:

- its projection to the variables from C satisfies C ,
- for each block V_i involved in $C_{\mathbf{f}}$, exactly f_i variables from V_i are mapped to d .

We include each such constraint $C_{\mathbf{f}}$ in $\mathcal{C}_{\mathbf{f}}^{\text{sat}}$. Now, if $\mathcal{C}_{\mathbf{f}}^{\text{sat}}$ contains several constraints C_1, \dots, C_p with exactly the same set of variables, we replace them with a single constraint whose corresponding relation is the intersection of the relations forced by C_1, \dots, C_p . This completes the definition of $\mathcal{I}_{\mathbf{f}}$.

Note that each constraint from $\mathcal{C}_{\mathbf{f}}$ has arity at most $r' = b \cdot r$ and thus $\mathcal{I}_{\mathbf{f}}$ is an N -variable instance of (d, r') -CSP. Moreover, since b divides N and by the definition of $\mathcal{C}_{\mathbf{f}}$, we observe that $\mathcal{I}_{\mathbf{f}}$ is (b, \mathbf{f}) -structured. Intuitively, constraints in $\mathcal{C}_{\mathbf{f}}^{\text{sign}}$ make sure that a solution has the correct signature, and constraints in $\mathcal{C}_{\mathbf{f}}^{\text{sat}}$ make sure that it satisfies \mathcal{I} .

Equivalence of instances. First, observe that $\mathcal{I}_{\mathbf{f}}$ is satisfiable if and only if \mathcal{I} is satisfied by some assignment with signature \mathbf{f} . Consequently, since \mathbf{I} contains the instance $\mathcal{I}_{\mathbf{f}}$ for every possible signature \mathbf{f} , we conclude that \mathcal{I} is satisfiable if and only if \mathbf{I} contains a satisfiable instance.

Running time. Now let us estimate the running time. For each signature \mathbf{f} , the construction of $\mathcal{I}_{\mathbf{f}}$ takes polynomial time. Suppose there exists an algorithm solving every (b, \mathbf{f}) -structured N -variable instance of $(d, b \cdot r)$ -CSP, where $\mathbf{f}: \left[\frac{N}{b}\right] \rightarrow \{0, \dots, b\}$, in time $(d - \varepsilon)^N \cdot N^{\mathcal{O}(1)}$. Then, given any N -variable instance \mathcal{I} of (d, r) -CSP, we can construct $\mathcal{I}_{\mathbf{f}}$ for all possible signatures \mathbf{f} , where each $\mathcal{I}_{\mathbf{f}}$ can be solved in time $(d - \varepsilon)^N \cdot N^{\mathcal{O}(1)}$. By (1), the number of possible signatures is at most $(1 + \varepsilon/d)^N$. Consequently, \mathcal{I} can be solved in time

$$\left(1 + \frac{\varepsilon}{d}\right)^N \cdot (d - \varepsilon)^N \cdot N^{\mathcal{O}(1)} = \left(d - \frac{\varepsilon^2}{d}\right)^N \cdot N^{\mathcal{O}(1)} = (d - \varepsilon')^N \cdot N^{\mathcal{O}(1)},$$

where $\varepsilon' := \varepsilon^2/d$. By Theorem 4.2, this is not possible unless the SETH fails. \square

In the following, we will show lower bounds for the *decision* variant of the q -COLORINGVD problem. We assume that, along with the instance, we are given an integer k and we ask whether the optimum solution (i.e., the set of vertices to delete) has size at most k . Clearly, such a lower bound implies the lower bound for the optimization version, as k can be assumed to be bounded by the number of vertices of the instance.

It turns out that the characteristics of the problem differ between the cases $q \in \{1, 2\}$ and $q \geq 3$: this is because q -COLORING is polynomial-time solvable in the former case and NP-hard in the latter one. The proof of our lower bound is split into Lemmas 5.4 and 5.5.

Lemma 5.4. *For $q \in \{1, 2\}$ and $\varepsilon > 0$, there exist $\sigma, \delta > 0$ depending on q and ε such that there is no algorithm solving all n -vertex instances of q -COLORINGVD given with a (σ, δ) -hub of size at most p , in time $(q + 1 - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$, unless the SETH fails.*

Proof. Let $q \in \{1, 2\}$ and $\varepsilon > 0$. Let b and r be the values given by Lemma 5.3 for $d := q + 1$ and ε .

Suppose for a contradiction that for all constant $\sigma, \delta \in \mathbb{N}$, there exists an algorithm solving all n -vertex instances of q -COLORINGVD, given with a (σ, δ) -hub of size at most p , in time $(q + 1 - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$.

Consider a (b, \mathbf{f}) -structured N -variable $(d, b \cdot r)$ -CSP instance $\mathcal{I} = (\mathcal{V}, \mathcal{C})$, where $\mathbf{f}: \left[\frac{N}{b}\right] \rightarrow \{0, \dots, b\}$. We will define an instance (G, k) of q -COLORINGVD that is equivalent to \mathcal{I} , and solving it with the hypothetical algorithm mentioned before, would allow us to solve \mathcal{I} in time $(d - \varepsilon)^N \cdot N^{\mathcal{O}(1)}$. By Lemma 5.3 this contradicts the SETH.

Note that without loss of generality we may assume that every constraint in \mathcal{C} has at least one satisfying assignment, as otherwise \mathcal{I} is clearly a no-instance.

Construction of (G, k) . We start by introducing the set $Y = \bigcup_{v \in \mathcal{V}} \{y(v)\}$ of *variable vertices*. For each $v \in \mathcal{V}$, the vertex $y(v)$ represents the variable v . The intended meaning is that coloring $y(v)$ with a color $c \in [q]$ corresponds to assigning the value c to v . Deleting $y(v)$ then corresponds to assigning the value $q + 1$ to v .

Consider a constraint $C \in \mathcal{C}$. Let V_C be the set of variables involved in C and let R_C be the relation enforced by C on V_C . Let ℓ_C be the size of R_C , i.e., the number of valuations of V_C that satisfy C ; recall that $\ell_C \geq 1$. We will create a gadget gadget_C representing C .

We introduce a clique clique_C with vertices $\bigcup_{\mathbf{r} \in R} \{x(\mathbf{r})\}$, where $x(\mathbf{r})$ corresponds to the assignment \mathbf{r} .

In the case of $q = 2$, for each edge $x(\mathbf{r})x(\mathbf{r}')$ of clique_C , we add two additional vertices and connect them both to $x(\mathbf{r})$ and $x(\mathbf{r}')$.

Next, we add edges between the vertices of clique_C and Y . Consider $\mathbf{r} \in R$. For $q = 1$ and all $v \in V_C$, we connect $x(\mathbf{r})$ and $y(v)$ if \mathbf{r} sets v to 2. For $q = 2$ and for all $v \in V_C$ we proceed as follows:

- if \mathbf{r} sets v to 1, we connect $x(\mathbf{r})$ and $y(v)$,
- if \mathbf{r} sets v to 2, then we introduce a two-edge path with endvertices $x(\mathbf{r})$ and $y(v)$,
- and finally, if \mathbf{r} sets v to 3, we introduce both an edge and a two-edge path between $x(\mathbf{r})$ and $y(v)$.

This completes the description of gadget_C . Now, for each $C \in \mathcal{C}$, we introduce $N + 1$ copies of the gadget. The j -th copy will be denoted by $\text{gadget}_C^{(j)}$, and we will use the same convention when referring to the vertices of that copy. Finally, if $q = 2$, we introduce a single “global” vertex h and make it adjacent to every vertex $\text{clique}_C^{(i)}$, for all $C \in \mathcal{C}$ and $i \in [N + 1]$. Let G be the resulting graph. By Y' we denote the set of vertices that are *not* in any $\text{gadget}_C^{(i)}$ for $C \in \mathcal{C}$ and $i \in [N + 1]$, i.e., $Y' = Y$ if $q = 1$, and $Y' = Y \cup \{h\}$ if $q = 2$.

Let us define

$$k' := \sum_{i=1}^{N/b} f_i \quad \text{and} \quad k := (N + 1) \cdot \left(\sum_{C \in \mathcal{C}} (\ell_C - 1) \right) + k'.$$

This completes the definition of the instance (G, k) of q -COLORINGVD.

Equivalence of instances. We will now show that \mathcal{I} is satisfiable if and only if G becomes q -colorable after deleting at most k vertices.

Suppose that there exists a satisfying assignment $\psi: \mathcal{V} \rightarrow [q + 1]$. We will find a set X of size at most k such that $G - X$ is q -colorable. Note that for $q = 1$ this means that X is a vertex cover, while for $q = 2$ this means that X is an odd cycle transversal.

For all $v \in \mathcal{V}$, the vertex $y(v)$ is included in X if and only if $\psi(v) = q + 1$. Furthermore, for $q = 2$, the vertex h is not included in X . Since \mathcal{I} is (b, \mathbf{f}) -structured, this means that $|X \cap Y'| = k'$.

Consider a constraint $C \in \mathcal{C}$. As ψ satisfies C , we obtain that ψ restricted to V_C corresponds to some element of R_C , say \mathbf{r} . Now consider $j \in [N + 1]$ and the gadget $\text{gadget}_C^{(j)}$. We include in X all vertices from $\text{clique}_C^{(j)}$, except the vertex $x(\mathbf{r})^{(j)}$. In total, we obtain that

$$|X \setminus Y'| = (N + 1) \cdot \left(\sum_{C \in \mathcal{C}} (\ell_C - 1) \right) = k - k'.$$

Summing up, we have $|X| = k$. It is straightforward to verify that for $q = 1$, the set X is a vertex cover of G , i.e., the graph $G - X$ has a proper 1-coloring. Similarly, for $q = 2$, the set X is an odd cycle transversal: To see this, we can define a proper 2-coloring of $G - X$ as follows. For each $v \in \mathcal{V}$, if $\psi(v) \in \{1, 2\}$, then we color $y(v)$ with the color $\psi(v)$. The vertex h receives color 1, and the remaining vertices from $\text{clique}_C^{(i)}$, for $C \in \mathcal{C}$ and $i \in [N + 1]$, receive

color 2. The vertices introduced for edges of $\text{clique}_C^{(i)}$ receive color 1. Finally, the endvertices of two-edge paths joining vertices from Y with the vertices from $\text{clique}_C^{(i)}$ are all colored 2, so we can color the middle vertices with color 1.

Summing up, there exists a set of vertices of size k whose removal from G results in a graph that is q -colorable. Thus (G, k) is a yes instance of q -COLORINGVD.

Now suppose that there exists a set $X \subseteq V(G)$ of size at most k and a proper q -coloring φ of $G - X$. We claim that for each constraint $C \in \mathcal{C}$ and $j \in [N + 1]$ the following two properties hold:

- (P1) At least $\ell_C - 1$ vertices from $\text{gadget}_C^{(j)}$ belong to X .
- (P2) If exactly $\ell_C - 1$ vertices from $\text{gadget}_C^{(j)}$ belong to X , then all of them belong to $\text{clique}_C^{(j)}$.

For $q = 1$, the properties are clear: any vertex cover of a clique with ℓ_C vertices must contain at least $\ell_C - 1$ vertices. Furthermore, property (P2) follows trivially, as $\text{gadget}_C^{(j)}$ contains no vertices that are not in $\text{clique}_C^{(j)}$.

Now consider the case $q = 2$ and let us first argue about property (P1). For contradiction suppose that X contains at most $\ell_C - 2$ vertices from $\text{gadget}_C^{(j)}$; in particular there are two vertices from $\text{clique}_C^{(j)}$ that are not in X . On the other hand, X must contain at least $\ell_C - 2$ vertices from $\text{clique}_C^{(j)}$ as otherwise $G - X$ has a triangle and thus is not bipartite. Therefore no other vertices from $\text{gadget}_C^{(j)}$ are included in X . However, recall that for every edge of $\text{clique}_C^{(j)}$ we introduced two vertices adjacent with both endpoints of this edge. Thus $G - X$ contains a triangle, a contradiction.

Now let us argue about (P2). For contradiction suppose that X contains $\ell_C - 1$ vertices from $\text{gadget}_C^{(j)}$, but only at most $\ell_C - 2$ of them are in $\text{clique}_C^{(j)}$. Repeating the argument from the previous paragraph, this means that exactly $\ell_C - 2$ vertices from $\text{clique}_C^{(j)}$ are in X . Since X might contain at most one of the vertices adjacent to both vertices from $\text{clique}_C^{(j)} - X$, we conclude that $G - X$ contains a triangle, a contradiction.

Note that property (P1) implies that $|X \setminus Y'| \geq (N + 1) \cdot (\sum_{C \in \mathcal{C}} (\ell_C - 1)) = k - k'$.

Without loss of generality we can assume that for each $C \in \mathcal{C}$ and every vertex x of gadget_C , either the copy of x in each $\text{gadget}_C^{(j)}$ is included in X , or none of them. Furthermore, for $q = 2$, the coloring φ restricted to each copy of gadget_C (after removing X) is exactly the same. Indeed, otherwise we can pick a copy whose intersection with X is the smallest and use this solution (i.e., vertices in X and the q -coloring of the remaining vertices) on all other copies, obtaining another solution with at most the same number of deleted vertices. Notice that if for some $C' \in \mathcal{C}$, the set X contains more than $\ell_{C'} - 1$ vertices from each copy of $\text{gadget}_{C'}$, then

$$|X| = |X \setminus Y'| + |X \cap Y'| \geq (N + 1) \cdot \left(\sum_{C \in \mathcal{C}} (\ell_C - 1) \right) + (N + 1) + |X \cap Y'| = k - k' + (N + 1) > k,$$

a contradiction. Thus, for each $C \in \mathcal{C}$ and each $j \in [N + 1]$, the set X contains exactly $\ell_C - 1$ vertices from $\text{gadget}_C^{(j)}$ and, by property (P2), all these vertices belong to $\text{clique}_C^{(j)}$. In particular this implies that $|X \setminus Y'| = k - k'$.

Finally, we set the valuation $\psi: \mathcal{V} \rightarrow [q + 1]$ according to the coloring of vertices in Y : $v \in \mathcal{V}$ is assigned the value $i \in [q]$ if $y(v) \notin X$ and $\varphi(v) = i$, and it is assigned the value $q + 1$ if $y(v) \in X$.

We claim that ψ satisfies all constraints in \mathcal{C} . First, let us consider a constraint $C \in \mathcal{C}^{\text{sign}}$ corresponding to block V_i for $i \in [N/b]$. Consider a copy $\text{gadget}_C^{(j)}$ of gadget_C ; recall that the solution (i.e., the intersection with X and the coloring of the remaining vertices) is the same for each copy. Since $\ell_C - 1$ vertices were deleted from $\text{clique}_C^{(j)}$, there is a unique vertex x in $\text{clique}_C^{(j)} - X$. Let $\mathbf{r} \in R_C$ be the assignment corresponding to x . Since $C \in \mathcal{C}^{\text{sign}}$, exactly f_i variables have the value $q + 1$ in \mathbf{r} . Note that for each such variable $v \in V_i$, the vertex $y(v)$ must be included in X . Indeed, if $q = 1$, then $y(v)x$ is an edge of G . If $q = 2$, then $y(v)$ and x are contained in a triangle whose third vertex is not in X . Thus, for each $i \in [N/b]$, at least f_i vertices from $\{x(v) \mid v \in V_i\}$ must be included in X . Since $\sum_{i=1}^{N/b} f_i = k'$ and $|X \setminus Y'| = k - k'$, we conclude that $|X \cap Y'| = k'$. Consequently, for each $i \in [N/b]$ exactly f_i vertices from $\{x(v) \mid v \in V_i\}$ are in X . This implies that exactly f_i variables from V_i are mapped to $q + 1$ and thus C is satisfied. Furthermore, we have that in case $q = 2$ the vertex h does not belong to X . Without loss of generality we may assume that in this case we have $\varphi(h) = 1$ (otherwise we can switch colors 1 and 2 in φ).

Now consider $C \in \mathcal{C}^{\text{sat}}$ and again let $\mathbf{r} \in R_C$ be the assignment corresponding to the unique vertex x of $\text{clique}_C^{(1)} - X$. By the argument in the previous paragraph we observe that for each $v \in V_C$ we have $\psi(v) = q + 1$ whenever \mathbf{r} maps v to $q + 1$. In particular, if $q = 1$, this shows that C is satisfied. So consider the case that $q = 2$, we need to argue that values 1 and 2 are assigned according to \mathbf{r} . As $\varphi(h) = 1$, we have that $\varphi(x) = 2$. Note that for every $v \in V_C$ such that \mathbf{r} maps v to 1 we have an edge joining x and $y(v)$, and thus $\varphi(y(v)) = 1$. Similarly, every $v \in V_C$ such that \mathbf{r} maps v to 2 is joined with x with a two-edge path whose middle vertex is not in X , so we have $\varphi(y(v)) = 2$. Consequently, all variables from V_C are assigned according to \mathbf{r} and thus C is satisfied.

Summing up, indeed (G, k) is a yes-instance of q -COLORINGVD if and only if \mathcal{I} is satisfiable.

Structure of the instance. Let us bound the number of vertices of G . We will only consider the case that $q = 2$, the case of $q = 1$ is similar but simpler. We have

$$\begin{aligned} |V(G)| &\leq |Y'| + (N + 1) \cdot \sum_{C \in \mathcal{C}} \left((\ell_C - 1) \cdot 2 + \binom{\ell_C - 1}{2} \cdot 2 \right) \\ &\leq (N + 1) + (N + 1) \cdot (N/b + N^{br}) (2d^{br} + d^{2br}) = N^{\mathcal{O}(1)}, \end{aligned}$$

as $|\mathcal{C}| = |\mathcal{C}^{\text{sat}}| + |\mathcal{C}^{\text{sign}}| \leq N/b + N^{br}$, $\ell_C \leq d^{br}$, and d, b, r are constants.

Define $Q := Y'$, we clearly have $Q = N + 1$. Note that connected components of $G - Q$ are precisely copies of gadget_C for $C \in \mathcal{C}$. The number of vertices of each such component is at most $\sigma := (\ell_C - 1) \cdot 2 + \binom{\ell_C - 1}{2} \cdot 2 \leq d^{2br}$, and each such gadget is connected to at most $\delta := br + 1$ vertices of Q . Thus Q is a (σ, δ) -hub, where σ and δ depend only on d, b, r , which in turn depend only on q and ε .

Running time. The construction of the instance (G, k) takes time polynomial in N . Also, G has a (σ, δ) -hub of size at most $p := N + 1$. Using the hypothetical algorithm that solves all n -vertex instances of q -COLORINGVD instances with a (σ, δ) -hub of size at most p in time $(q + 1 - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$, we get an algorithm that solves \mathcal{I} in time

$$(q + 1 - \varepsilon)^p \cdot n^{\mathcal{O}(1)} = (q + 1 - \varepsilon)^N \cdot N^{\mathcal{O}(1)}$$

which, by Lemma 5.3, contradicts the SETH. \square

Now let us move to the proof of our lower bound for q -COLORINGVD for $q \geq 3$.

Lemma 5.5. *For $q \geq 3$ and $\varepsilon > 0$, there exist $\sigma, \delta > 0$ depending on q and ε such that there is no algorithm solving all n -vertex instances of q -COLORINGVD given with a (σ, δ) -hub of size at most p , in time $(q + 1 - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$, unless the SETH fails.*

Proof. Let b and r be the values given by Lemma 5.3 for $d = q + 1$ and ε . Consider an N -variable (b, \mathbf{f}) -structured $(q + 1, b \cdot r)$ -CSP instance \mathcal{I} with variables \mathcal{V} and constraints \mathcal{C} , for some $\mathbf{f}: \left[\frac{N}{b}\right] \rightarrow \{0, \dots, b\}$ and $N \in \mathbb{N}$. Again we may assume that each constraint has at least one satisfying assignment.

Auxiliary relations. For a tuple

$$\mathbf{z} = (z_{1,1}, \dots, z_{1,q}, z_{2,1}, \dots, z_{2,q}, \dots, z_{b,1}, \dots, z_{b,q}) \in [q]^{bq},$$

by $\text{Rainbow}(\mathbf{z})$ we denote the set of those i for which $\{z_{i,1}, \dots, z_{i,q}\} = [q]$. For $j \in \{0, \dots, b\}$, we define $\text{Rb}_j \subseteq [q]^{bq}$ consisting of all tuples \mathbf{z} such that $|\text{Rainbow}(\mathbf{z})| = j$. The important property is that Rb_j is invariant under permutations of the domain.

For each $i \in [q + 1]$ we define a q -element vector $\gamma(i)$:

- if $i = 1$, then $\gamma(i) = (2, 2, 3, \dots, q)$,
- if $i \in [2, q]$, then $\gamma(i) = (1, 1, 2, \dots, i - 1, i + 1, \dots, q)$,
- if $i = q + 1$, then $\gamma(i) = (1, 2, \dots, q)$.

The crux is that if $i \leq q$, then the set of values appearing in $\gamma(i)$ is exactly $[q] \setminus \{i\}$, and if $i = q + 1$, then the set of values appearing in $\gamma(i)$ is exactly $[q]$.

Now consider a relation $R \subseteq [q + 1]^\ell$. Let $\text{Force}(R) \subseteq [q]^{q\ell}$ be the relation defined as follows. For each $(a_1, a_2, \dots, a_\ell) \in R$, we add to $\text{Force}(R)$ the ℓq -element sequence $(\gamma(a_1), \gamma(a_2), \dots, \gamma(a_\ell))$ over $[q]$.

Now we can proceed to our reduction.

Intermediate step: an instance of the list variant. Let us first construct an instance of the *list* variant of q -COLORINGVD, i.e., a triple (G', L, k) , where G' is a graph whose every vertex u is equipped with a list $L(u) \subseteq [q]$ of admissible colors (the option of deleting a vertex is always available). We want to decide whether one can obtain a yes-instance of list q -coloring by deleting at most $k := \sum_{i=1}^{N/b} f_i$ vertices from G' .

We start by introducing the set $Y = \bigcup_{v \in \mathcal{V}} \{y(v)\}$ of vertices, each with list $[q]$. For each $v \in \mathcal{V}$, the vertex $y(v)$ represents the variable v . The intended meaning is that coloring $y(v)$ with a color $c \in [q]$ corresponds to assigning the value c to v . Deleting $y(v)$ then corresponds to assigning the value $q + 1$ to v .

Consider a constraint $C \in \mathcal{C}^{\text{sign}}$ related to the block V_i . We call Proposition 2.1 for Rb_{f_i} — here is where we use the fact that $q \geq 3$ — to obtain a bq -ary gadget

$$\mathcal{F}(C) = (F(C), L, (z_{1,1}, \dots, z_{1,q}, z_{2,1}, \dots, z_{2,q}, \dots, z_{b,1}, \dots, z_{b,q})),$$

with all lists contained in $[q]$ and interface vertices forming an independent set. If v is the j -th variable in V_i , we make vertices $z_{j,1}, \dots, z_{j,q}$ adjacent to $y(v)$. We repeat the above step $N + 1$ times, i.e., for each $i \in [N/b]$ we introduce $N + 1$ copies of the gadget $\mathcal{F}(C)$.

Now consider a constraint $C \in \mathcal{C}^{\text{sat}}$. We proceed similarly as in the previous case. Denote the arity of C_f by ℓ (where $\ell \leq r'$) and let $R \subseteq [q+1]^{r'}$ be the relation enforced by C (i.e., the set of satisfying assignments).

We call Proposition 2.1 for the relation $\text{Force}(R)$ to obtain an ℓq -ary gadget

$$\mathcal{F}(C) = (F(C), L, (z_{1,1}, z_{1,2}, \dots, z_{1,q}, z_{2,1}, \dots, z_{2,q}, \dots, z_{\ell,1}, \dots, z_{\ell,q})),$$

with all lists contained in $[q]$. If v is the j -th variable of C , we make the vertices $z_{i,1}, \dots, z_{i,q}$ adjacent to $y(v)$.

This completes the construction of (G', L, k) .

Equivalence of instances. We claim that (G', L, k) is a yes-instance of the list variant of q -COLORINGVD if and only if \mathcal{I} is satisfiable.

First, suppose that there exists a satisfying assignment $\varphi : \mathcal{V} \rightarrow [q+1]$ of \mathcal{I} . We assign colors to vertices of Y as described above: for $v \in \mathcal{V}$, if $\varphi(v) \leq q$, then we color $y(v)$ with color $\varphi(v)$. If $\varphi(v) = q+1$, then the vertex $y(v)$ is deleted.

Since all constraints in $\mathcal{C}^{\text{sign}}$ are satisfied, we note that we delete exactly f_i variables from each block V_i , and thus in total we delete $k = \sum_{i=1}^{N/b} f_i$ vertices from Y . Thus we need to argue that the coloring of the remaining vertices of Y can be extended to the coloring of all gadgets, without deleting any further vertices.

Consider a constraint $C \in \mathcal{C}^{\text{sign}}$ related to the block V_i and a copy of the gadget $\mathcal{F}(C)$ with the portals $z_{1,1}, \dots, z_{1,q}, \dots, z_{b,1}, \dots, z_{b,q}$. Let $j \in [b]$ and v be the j -th variable of C . We color the vertices $z_{j,1}, \dots, z_{j,q}$ so that the vector of colors appearing on these vertices is $\gamma(\varphi(v))$. Note that by the definition of γ , the color of $y(v)$ does not appear on its neighbors. Finally, by the definition of Rb_{f_i} , we can extend this coloring of the portals of the gadget to the coloring of the whole gadget, without deleting any vertices from it.

For constraints $C \in \mathcal{C}^{\text{sat}}$ we proceed in a similar way. Let R be the relation enforced by C on its variables. Consider the gadget $\mathcal{F}(C)$ introduced for C and let $z_{1,1}, \dots, z_{\ell,q}$ be its portals, where $\ell = \text{arity}(C)$. For each j , the vertices $z_{j,1}, \dots, z_{j,q}$ receive the vector of colors $\gamma(\varphi(v))$, where v is the j -th variable involved in C . Now the coloring of portals of the gadget is in $\text{Force}(R)$, so it can be extended to the coloring of the whole gadget without removing any additional vertices.

Now suppose that there is a set $X \subseteq V(G)$ of size at most k and a proper list coloring ψ of $G' - X$. Note that we can safely assume that, for any $C \in \mathcal{C}^{\text{sign}}$, all $N+1$ copies of $F(C)$ receive exactly the same coloring. Indeed, if this is not the case, we can recolor all copies in the same way as the one in which there are the fewest deleted vertices, obtaining another solution to the problem. As $N+1 > N \geq \sum_{i=1}^{N/b} f_i = k$, we conclude that for all $i \in [N/b]$, no vertex from $F(C)$ is deleted.

We set the valuation of variables of \mathcal{I} according to the coloring of Y . Consider a variable $v \in \mathcal{V}$. If $y(v) \notin X$, we set the value of v to $\psi(y(v))$, and otherwise we set the value of v to $q+1$. Note that at most $|X| \leq k$ variables were mapped to $q+1$. We claim that this valuation satisfies all constraints of \mathcal{I} .

First, consider a constraint $C \in \mathcal{C}^{\text{sign}}$ related to the block V_i , and a copy of $\mathcal{F}(C)$ introduced for C . Recall that no vertex from the gadget was deleted, thus the coloring of the portals of the gadget must respect the relation Rb_{f_i} . In other words, for f_i variables v of C it holds that all colors from $[q]$ appear in the neighborhood of $y(v)$. This means that such a vertex $y(v)$

must be deleted. Consequently, for each $i \in [N/b]$, the set X contains at least f_i vertices $y(v)$ for $v \in V_i$.

Summing up, we conclude that $|X| = k$ and that all the deleted vertices are in Y . Furthermore, exactly f_i vertices corresponding to variables from V_i are deleted, which means that C is satisfied by our valuation.

Now consider a constraint $C \in \mathcal{C}^{\text{sat}}$ of arity ℓ . Consider the gadget $\mathcal{F}(C)$ introduced for C and denote its portals by $\mathbf{z} = (z_{1,1}, \dots, z_{\ell,q})$. Recall that by the previous argument no vertex from the gadget is deleted. Thus the coloring of the portals of the gadget belongs to $\text{Force}(R)$, where R is the relation enforced by C . Let $(a_1, \dots, a_p) \in R$ be such that $(\gamma(a_1), \dots, \gamma(a_p))$ is the coloring of the portals of the gadget.

Let v be the j -th variable of C and let i be such that $v \in V_i$. Recall that all variables from V_i appear in C .

By the definition of γ , if $a_j = q + 1$, then $j \in \text{Rainbow}(\mathbf{z})$ and so $y(v)$ is certainly in X . Consequently, the value of the variable v was set to $q + 1$. Now consider the case that $a_j \leq q$, say $a_j = c$. Then either $\psi(y(v)) = c$ (and thus v gets the value c) or $y(v) \in X$. However, recall that by the definition of C , for exactly f_i variables from V_i their index appears in $\text{Rainbow}(\mathbf{z})$. Note that this is *not* ensured by any relation in $\mathcal{C}^{\text{sign}}$ and this is why $C \in \mathcal{C}^{\text{sat}}$ still needs to check consistency with \mathbf{f} .

On the other hand, exactly f_i vertices from $\bigcup_{v' \in V_i} \{y(v')\}$ are in X . Thus $y(v)$ is not in X and therefore the value of v is set to c . Summing up, the valuation of the variables of C is exactly (a_1, \dots, a_p) , which means that C is satisfied.

Let us point out the special structure of the constraints in $\mathcal{C}^{\text{sign}}$ was not used yet and so far we could have obtained the same outcome by introducing $N + 1$ copies of each gadget related to a constraint in \mathcal{C}^{sat} .

Construction of (G, k) . Now let us modify the instance (G', L, k) into an equivalent instance (G, k) of q -COLORINGVD.

For a graph \tilde{G} with lists $\tilde{L} : V(\tilde{G}) \rightarrow 2^{[q]}$ and a set $V' \subseteq V(\tilde{G})$, by *simulating lists of V' by K* we denote the following operation. We introduce a clique K with vertices c_1, \dots, c_q , and for every vertex u of \tilde{G} and every $i \in [q]$, we make u adjacent to c_i if and only if $i \notin \tilde{L}(u)$.

The typical way of turning an instance of list q -coloring to an equivalent instance of q -coloring is to introduce a “global” q -clique K and simulate lists of all vertices of the graph with K ; recall e.g., the proof of Theorem 4.1. However, in the vertex deletion variant this is no longer that simple, as we have to prevent deleting vertices from this central clique. Note that we cannot make them undeletable by introducing (say roughly the size of G) many copies of the clique and connecting them in an appropriate way, as this would create an instance without a (σ, δ) -hub for constant σ, δ .

Let us discuss how to modify (G', L, k) into (G, k) . Note that the vertices from Y already have lists $[q]$ so they do not have to be simulated. For each constraint $C \in \mathcal{C}^{\text{sign}}$ and for each copy of the gadget $\mathcal{F}(C)$ introduced for C , we introduce a private q -clique and simulate the lists of all vertices of the gadget by this clique.

Next we introduce a single q -clique K , and the lists of all the remaining vertices, i.e., the vertices from the gadgets $\mathcal{F}(C)$ introduced for $C \in \mathcal{C}^{\text{sat}}$, are simulated by K . This completes the construction of G .

Observe that K is meant to “synchronize” the colorings of the gadgets $\mathcal{F}(C)$ for $C \in \mathcal{C}^{\text{sat}}$. However, the colorings of the gadgets $\mathcal{F}(C)$ for $C \in \mathcal{C}^{\text{sign}}$ are not synchronized, i.e., each clique

introduced for these gadgets might receive a different permutation of colors.

Let us argue that (G', L, k) is a yes-instance of the list variant of q -COLORINGVD if and only if (G, k) is a yes-instance of q -COLORINGVD.

First suppose that there is a set $X \subseteq V(G')$ of size at most k and a proper q -coloring ψ of $G' - X$ that respects lists L . Note that we can delete from G exactly the same vertices X , and use exactly the same coloring ψ on the remaining vertices from $V(G) \cap V(G')$, and then extend this partial coloring to the additionally introduced q -cliques according to the description of the operation of simulating lists.

On the other hand, suppose that there is a set $X \subseteq V(G)$ of size at most k and a proper q -coloring ψ of $G - X$. We aim to show that ψ respects lists L on vertices from $V(G) \cap V(G')$.

Similarly as we did in the previous paragraph when analyzing the properties of (G', L, k) we observe that no vertex from any gadget introduced for $C \in \mathcal{C}^{\text{sign}}$, along with its private q -clique, was deleted. Indeed, this is because there are $N + 1$ copies of each gadget. Consider $i \in [N/b]$ and the constraint $C \in \mathcal{C}^{\text{sign}}$ introduced for the block V_i . Next, recall that the relation Rb_{f_i} enforced by C is invariant to permuting the set of colors. Consequently, simulating lists by a local copy of K_q is sufficient to ensure that the coloring ψ of the vertices of the gadget satisfies lists L . This is exactly the point where we use the special structure of constraints in $\mathcal{C}^{\text{sign}}$.

Now, similarly as in the previous case, we can argue that $X \subseteq Y$. Consequently, the vertices from K , i.e., the common copy of K_q introduced for all gadgets $\mathcal{F}(C)$ for $C \in \mathcal{C}^{\text{sat}}$, are not deleted. Thus they simulate the lists of all vertices within the gadgets, i.e., the coloring ψ respects lists L .

Structure of G . The number of vertices of G is at most (below $h_1(\cdot), h_2(\cdot)$ are some functions)

$$\begin{aligned} n &= |Y| + |K| + \sum_{C \in \mathcal{C}^{\text{sign}}} (|V(F(C))| + q) \cdot (N + 1) + \sum_{C \in \mathcal{C}^{\text{sat}}} |V(F(C))| \\ &\leq N + q + N \cdot (h_1(b, q) + q) \cdot (N + 1) + |C| \cdot h_2(b, q, r) \\ &\leq N + q + N(N + 1) \cdot (h_1(b, q) + q) + N^r \cdot h_2(b, q, r) \\ &= \mathcal{O}(N^{r+1}) = N^{\mathcal{O}(1)}, \end{aligned}$$

as q, b, r are constants.

Set $Q = Y \cup K$, note that $|Q| = N + q$. There are two types of components of $G - Q$: (i) (subgraphs of) copies of the gadgets $F(C)$ introduced for $C \in \mathcal{C}^{\text{sign}}$, including the local q -clique, or (ii) (subgraphs of) copies of the gadgets $F(C)$ introduced for $C \in \mathcal{C}^{\text{sat}}$. Using the notation from the formula above, the components of type (i) have size at most $h_1(b, q) + q$ and each of them attaches to b vertices from Q , and the components of type (ii) have size at most $h_2(b, q, r)$ and each of them attaches to at most $br + q$ vertices from Q . Since r depends on q and ε , we conclude that Q is a (σ, δ) -hub for some σ, δ depending only on q and ε .

Running time. Now let us estimate the running time. The construction of (G, k) takes polynomial time. Furthermore, G has a (σ, δ) -hub of size at most $p := N + \mathcal{O}(1)$. This implies that if there is an algorithm solving all n -vertex instances of q -COLORINGVD with a (σ, δ) -hub of size at most p in time $(q + 1 - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$, then we get an algorithm solving all N -variable

(b, \mathbf{f}) -structured instances of $(q + 1, b \cdot r)$ -CSP in time

$$(q + 1 - \varepsilon)^p \cdot n^{\mathcal{O}(1)} = (q + 1 - \varepsilon)^N \cdot N^{\mathcal{O}(1)},$$

which, by Lemma 5.3, contradicts the SETH. \square

Now, Theorem 5.1 follows from combining Lemma 5.4 and Lemma 5.5.

5.2 Simple Algorithm for q -COLORINGVD

The following algorithm solves the q -COLORINGVD problem for $q \geq 1$, which also includes the VERTEX COVER problem for $q = 1$ and ODD CYCLE TRANSVERSAL for $q = 2$. It is worth noting that this algorithm can be modified to use treewidth as the parameter.

Theorem 5.6. *For all integers $q, \sigma, \delta \geq 1$, every n -vertex instance of q -COLORINGVD can be solved in time $(q + 1)^p \cdot n^{\mathcal{O}(1)}$ if a (σ, δ) -hub of size p is given in the input.*

Proof. As input to q -COLORINGVD, consider a graph G with n vertices, given along with a (σ, δ) -hub Q of size p . We exhaustively guess the set $X \subseteq Q$ of hub vertices that are deleted and a q -coloring f of $Q - X$. This results in at most $(q + 1)^p$ branches.

Now, for each component C of $G - X$, we compute the minimum number of vertices to be deleted from C , so that the remaining vertices admit a proper q -coloring that extends f . We output the coloring with the fewest vertices deleted in total (i.e., from Q and from the components of $G - Q$).

Recall that each component C of $G - Q$ is of size at most σ , i.e., a constant. Thus, the optimum extension of the coloring $Q - X$ to C can be computed in constant time. Since the number of components C is at most n , we conclude that the running time of each branch is bounded by polynomial. Summing up, the overall running time is $(q + 1)^p \cdot n^{\mathcal{O}(1)}$. \square

6 Edge Deletion to q -COLORING

Now let us move to the edge-deletion counterpart of q -COLORINGVD. The goal of this section is to prove Theorems 1.3 and 1.8.

The algorithmic part Theorem 1.3(1) is again simple and stated in Section 6.5 for completeness. For the hardness result Theorem 1.3(2), the case $q \geq 3$ already follows from our result Theorem 1.2 for the decision problem. However, the case $q = 2$ (i.e., the result for MAX CUT) is the missing piece, and so it remains to show the following hardness result.

Theorem 6.1. *For every $\varepsilon > 0$, there are integers σ and δ such that no algorithm solves every n -vertex instance of MAX CUT that is given with a (σ, δ) -hub of size p , in time $(2 - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$, unless the SETH fails.*

Our second main result covered in this section, Theorem 1.8, states that under the M3SH the lower bound from Theorem 1.3 holds even for universal constants σ and δ , i.e., for σ and δ that no longer depend on ε . For the case of MAX CUT, we show that constant σ and $\delta = 4$ suffice.

Theorem 6.2. *There is an integer σ such that, for every $\varepsilon > 0$, no algorithm solves every n -vertex instance of MAX CUT that is given with a $(\sigma, 4)$ -hub of size p , in time $(2 - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$, unless the M3SH fails.*

For $q \geq 3$, the respective lower bound for q -COLORINGED can be obtained for constant σ and $\delta = 6$.

Theorem 6.3. *For every $q \geq 3$ there is an integer σ such that the following holds. For every $\varepsilon > 0$, no algorithm solves every n -vertex instance of q -COLORINGED that is given with a $(\sigma, 6)$ -hub of size p , in time $(q - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$, unless the M3SH fails.*

The combination of Theorems 6.2 and 6.3 gives Theorem 1.8.

This section is structured as follows. First, in Section 6.1, we establish a lower bound for MAX-CSP (Theorem 2.2) based on the M3SH. This will be the starting point for our M3SH-based lower bounds. Second, in order to bridge from the coloring problems to MAX-CSP we show how to model arbitrary relations with the coloring problems via gadget constructions. For $q \geq 3$ we can rely on the previously established Proposition 2.1. For $q = 2$, we have to do some additional work, and this is done in Section 6.2. Third, in Section 6.3, we consider the case $q = 2$ — here we show Theorems 6.1 and 6.2 in a unified proof. Finally, in Section 6.4, we treat the case $q \geq 3$ and show Theorem 6.3. In both Section 6.3 and Section 6.4, we show intermediate results for the LIST- q -COLORINGED problem. In fact, we first show the following results for list colorings, and subsequently show how to remove the lists in the reductions.

Theorem 2.4. *For every $q \geq 2$ and $\varepsilon > 0$, there are integers σ and δ such that if an algorithm solves in time $(q - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$ every n -vertex instance of LIST- q -COLORINGED that is given with a (σ, δ) -hub of size p , then the SETH fails.*

Theorem 2.5. *For every $q \geq 2$, there is a constant σ_q such that, for every $\varepsilon > 0$, if an algorithm solves in time $(q - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$ every n -vertex instance of LIST- q -COLORINGED that is given with a $(\sigma_q, 3)$ -hub of size p , then the M3SH fails.*

6.1 MAX CSP — Hardness under M3SH

Let us introduce a constraint-deletion variant of (d, r) -CSP. An instance of MAX (d, r) -CSP is the same as in (d, r) -CSP and we ask for a smallest possible number of constraints that need to be deleted in order to obtain a yes-instance of (d, r) -CSP.

Clearly, using a brute-force approach we can solve an n -variable instance of MAX (d, r) -CSP in time $d^n \cdot n^{\mathcal{O}(1)}$. Let us explore the consequences of M3SH to the complexity of MAX (d, r) -CSP. Clearly, MAX 3-SAT is a special case of MAX $(2, 3)$ -CSP, which means that there is no $\varepsilon > 0$ such that for any $r \geq 3$, MAX $(2, r)$ -CSP with n variables can be solved in time $(2 - \varepsilon)^n \cdot n^{\mathcal{O}(1)}$, unless the M3SH fails.

Theorem 6.4. *For $p \geq 1$ and any $r \geq 3$, there is no algorithm solving every n -variable instance of MAX $(2^p, r)$ -CSP in time $(2^p - \varepsilon)^n \cdot n^{\mathcal{O}(1)}$, for $\varepsilon > 0$, unless the M3SH fails.*

Proof. Note that it is sufficient to prove the lower bound for $r = 3$. Consider an instance I_1 of MAX 3-SAT with variables V and the set of clauses C , where $|V| = n$. By introducing fewer than p dummy variables, we can assume that n is divisible by p . Let $N = n/p$. We partition V into N blocks of size p . Denote these blocks by V_1, V_2, \dots, V_N .

Now we are going to create an instance I_2 of MAX $(2^p, 3)$ -CSP. For each $i \in [N]$, we introduce a new variable x_i . We bijectively map each possible valuation of variables in V_i to one of 2^p possible values of x_i .

Now consider a clause C of the MAX 3-SAT instance, involving variables v, v', v'' , such that $v \in V_i, v' \in V_{i'}$, and $v'' \in V_{i''}$. We introduce a constraint involving variables $x_i, x_{i'}$, and

$x_{i''}$, which is satisfied by exactly those values that correspond to valuations that satisfy C . We repeat this step for every clause C ; note that the arity of each constraint is at most 3.

It is clear that the created instance I_2 of MAX $(2^p, 3)$ -CSP is equivalent to the original instance I_1 of MAX 3-SAT. Now let us argue about the running time. For contradiction, suppose we can solve I_2 in time $(2^p - \varepsilon)^N \cdot N^{\mathcal{O}(1)}$ for some $\varepsilon > 0$, i.e., $(2^p)^{\delta N} \cdot N^{\mathcal{O}(1)}$ for some $\delta < 1$ depending on p and ε . This means that I_1 can be solved in time $(2^p)^{\delta N} \cdot N^{\mathcal{O}(1)} = 2^{\delta n} \cdot n^{\mathcal{O}(1)} = (2 - \varepsilon')^n \cdot n^{\mathcal{O}(1)}$ for some $\varepsilon' > 0$. This contradicts the M3SH. \square

Lemma 6.5. *Let $d \geq 3$ and let d' and p be integers such that $d' = 2^p$ and $d \leq d'$. If there is $\varepsilon > 0$ such that every n -variable instance of MAX $(d, 3)$ -CSP can be solved in time $(d - \varepsilon)^n \cdot n^{\mathcal{O}(1)}$, then there is $\varepsilon' > 0$ depending on d and ε such that every n -variable instance of MAX $(d', 3)$ -CSP can be solved in randomized time $(d' - \varepsilon')^n \cdot n^{\mathcal{O}(1)}$.*

Proof. Consider an instance I_1 of MAX $(d', 3)$ -CSP with n variables. Let φ be the (unknown) optimum solution, i.e., the one that violates the minimum number of constraints; let this number be k .

For each variable of I_1 independently, uniformly at random we discard $d' - d$ possible valuations. More precisely, for each variable v we select a subset $D(v) \subset [d']$ of size d and set it as the domain of v . We modify each constraint to be satisfied by only these valuations that for each variable v pick a value from $D(v)$; note that it is possible that some constraints become not satisfiable at all. This way we have created an instance I_2 of MAX $(d, 3)$ -CSP.

Note that, while in I_2 we only consider a subset of the valuations of I_1 the fact whether some clause is violated or not is preserved. In particular, if φ satisfies the domains of all variables in I_2 , then it is an optimal solution of I_2 .

Note that the probability that φ satisfies all domains is $\left(\frac{d}{d'}\right)^n$. Thus, using standard calculations we observe that if we repeat our random experiment $\left(\frac{d'}{d}\right)^n$ times, then the success probability is constant.

So the algorithm is as follows: we randomly create $\left(\frac{d'}{d}\right)^n$ instances of MAX $(d, 3)$ -CSP by discarding some valuations as previously described, and each of them is solved with our hypothetical algorithm. We return the best of found solutions; with constant probability this solution will be an optimal solution for I_1 .

Let us compute the running time (below $\delta, \delta' < 1$ and $\varepsilon' > 0$ are some constants depending on d and ε):

$$\left(\frac{d'}{d}\right)^n \cdot (d - \varepsilon)^n \cdot n^{\mathcal{O}(1)} = \left(\frac{d'}{d}\right)^n \cdot d^{\delta n} \cdot n^{\mathcal{O}(1)} = d'^{\delta' n} \cdot n^{\mathcal{O}(1)} = (d' - \varepsilon')^n \cdot n^{\mathcal{O}(1)}.$$

We remark that we can make the success probability arbitrarily close to 1 by adding more iterations of sampling, which results in a blow-up in the running time by a constant factor. \square

Now let us discuss how to derandomize the argument in Lemma 6.5. Instead of repeated random sampling, we want to enumerate a family \mathcal{F} , such that

- each set in \mathcal{F} is of the form $D_1 \times \dots \times D_n$, where each D_i is a d -element subset of $[d']$,
- the union of all sets in \mathcal{F} covers $[d']^n$, and
- \mathcal{F} can be enumerated in time roughly $\left(\frac{d'}{d}\right)^n$.

Then we could replace the random sampling step by testing each member of \mathcal{F} separately.

Notice that the idea above is actually about finding a small (approximate) solution to a certain SET COVER instance. Recall that an instance of SET COVER consists of a universe U and a family \mathcal{S} of subsets of U , for which we can assume without loss of generality that $\bigcup_{S \in \mathcal{S}} S = U$. The task is to find a minimum-sized family $\mathcal{S}' \subseteq \mathcal{S}$ such that $\bigcup_{S \in \mathcal{S}'} S = U$.

For integers $d' \geq d$ and n , by $\mathcal{S}(d', d, n)$ we denote the family consisting of sets of the form $D_1 \times D_2 \times \dots \times D_n$, for all possible choices of $D_1, \dots, D_n \in \binom{[d']}{d}$. Thus, in this notation, our task is to look for a small subfamily of $\mathcal{S}(d', d, n)$ which covers $[d']^n$.

Lemma 6.6. *For every $n > 1$ and $d' \geq d$, the SET COVER instance $([d']^n, \mathcal{S}(d', d, n))$ has a solution of size $\left(\frac{d'}{d}\right)^n \cdot n^{\mathcal{O}(1)}$.*

Proof. For an instance (U, \mathcal{S}) of SET COVER, a *fractional solution* is a function $f : \mathcal{S} \rightarrow [0, 1]$, such that for every $u \in U$ we have $\sum_{S \in \mathcal{S}} f(S) \geq 1$. The weight of a fractional solution is $\sum_{S \in \mathcal{S}} f(S)$.

We claim that $([d']^n, \mathcal{S}(d', d, n))$ admits a fractional solution of weight at most $\left(\frac{d'}{d}\right)^n$. Indeed, set $f(S) = \left(\frac{d'-1}{d-1}\right)^{-n}$ for every $S \in \mathcal{S}(d', d, n)$. First, note that each element of $[d']^n$ is covered by exactly $\left(\frac{d'-1}{d-1}\right)^n$ sets in $\mathcal{S}(d', d, n)$, so indeed f is a fractional solution. Its weight is

$$\sum_{S \in \mathcal{S}(d', d, n)} f(S) = \left(\frac{\binom{d'}{d}}{\binom{d'-1}{d-1}}\right)^n = \left(\frac{d'}{d}\right)^n.$$

Next, we recall a well-known fact that the integrality gap for SET COVER is bounded by a logarithmic function of the size of the universe [26]. This, combined with the observation from the previous paragraph, implies that $([d']^n, \mathcal{S}(d', d, n))$ has an integral solution of size $\left(\frac{d'}{d}\right)^n \cdot n^{\mathcal{O}(1)}$. \square

Note that Lemma 6.6 is not sufficient for our derandomization procedure, as we need to be able to find this solution efficiently.

Lemma 6.7. *Let $\delta > 0$ and $d' \geq d \geq 2$ be constants. For every n , there is a family $\mathcal{F} \subseteq \mathcal{S}(d', d, n)$ of size at most $\left(\frac{d'}{d} + \delta\right)^n$ that covers $[d']^n$ and can be enumerated in time $\mathcal{O}(|\mathcal{F}|)$.*

Proof. In what follows we assume that n is sufficiently large, as otherwise we can find the optimum solution using brute force. The exact lower bound on n depends on d, d' , and δ and follows from the reasoning below.

Let c be the constant hidden in the $\mathcal{O}(\cdot)$ -notation in Lemma 6.6, i.e., such that for every n , the instance $([d']^n, \mathcal{S}(d', d, n))$ has an integral solution of size at most $\left(\frac{d'}{d}\right)^n \cdot n^c$. Let m be the minimum integer such that $m^{c/m} < 1 + \delta d/d'$. Note that m depends only on δ, d , and d' , as c is an absolute constant.

For simplicity let us assume that m divides n ; the argument below can be easily modified to the general case by making the last block smaller. Let \mathcal{F}' be the family given by Lemma 6.6 for $([d']^m, \mathcal{S}(d', d, m))$; note that we can compute it by brute force as m is a constant. We observe that the family

$$\mathcal{F} = \underbrace{\mathcal{F}' \times \mathcal{F}' \times \dots \times \mathcal{F}'}_{n/m \text{ times}}$$

covers $[d']^n$.

Let us estimate the size of \mathcal{F} . It is upper-bounded by

$$|\mathcal{F}'|^{n/m} \leq \left(\left(\frac{d'}{d} \right)^m \cdot m^c \right)^{n/m} = \left(\frac{d'}{d} \right)^n \cdot (m^{c/m})^n < \left(\frac{d'}{d} \right)^n \cdot \left(1 + \frac{d\delta}{d'} \right)^n = \left(\frac{d'}{d} + \delta \right)^n.$$

Clearly the family \mathcal{F} can be enumerated in time proportional to its size. \square

We can now prove Theorem 2.2, which we restate for convenience.

Theorem 2.2. *For $d \geq 2$ and any $r \geq 3$, there is no algorithm solving every n -variable instance of MAX (d,r) -CSP in time $(d - \varepsilon)^n \cdot n^{\mathcal{O}(1)}$ for $\varepsilon > 0$, unless the M3SH fails.*

Proof. If d is a power of 2, then the result follows already from Theorem 6.4. So assume that d is not a power of 2, and let d' be the smallest power of 2 which is greater than d . We reduce from MAX (d',r) -CSP consider an instance with n variables.

For contradiction, suppose that there is some $\varepsilon > 0$ and some algorithm solving every n -variable instance of MAX (d,r) -CSP in time $(d - \varepsilon)^n \cdot n^{\mathcal{O}(1)}$. Let $\delta := \frac{\varepsilon d'}{d^2}$ and let \mathcal{F} be the family given by Lemma 6.7 for this value of δ . We proceed similarly as in the proof of Lemma 6.5: for each set in \mathcal{F} we construct a corresponding instance of MAX (d,r) -CSP and solve it using our hypothetical algorithm. As \mathcal{F} covers $[d']^n$, we know that for some set in \mathcal{F} we will find the optimum solution for the original instance.

Let us estimate the running time:

$$\mathcal{O} \left(\left(\frac{d'}{d} + \delta \right)^n \right) + \left(\frac{d'}{d} + \delta \right)^n \cdot (d - \varepsilon)^n \cdot n^{\mathcal{O}(1)} = \left(d' + \delta d - \varepsilon \frac{d'}{d} - \varepsilon \delta \right)^n \cdot n^{\mathcal{O}(1)} = \left(d' - \frac{\varepsilon^2 d'}{d^2} \right)^n \cdot n^{\mathcal{O}(1)}.$$

By Theorem 6.4, this contradicts the M3SH. \square

6.2 Realizing Relations

We start by defining what it means for a gadget to realize a relation. Recall from the definition in Section 3 that a gadget may use lists.

Definition 6.8 (Realizing a relation). For some positive integer q and r , let $R \subseteq [q]^r$. Consider some r -ary q -gadget $\mathcal{J} = (J, L, \mathbf{x})$, and some $\mathbf{d} \in [q]^r$. By $\text{cost}_{\text{ed}}(\mathcal{J}, \mathbf{d})$ we denote the size of a minimum set of edges X that ensure that there is a proper list q -coloring φ of $(J \setminus X, L)$ with $\varphi(\mathbf{x}) = \mathbf{d}$. Then \mathcal{J} realizes the relation R if there is an integer k such that, for each $\mathbf{d} \in [q]^r$, $\text{cost}_{\text{ed}}(\mathcal{J}, \mathbf{d}) = k$ if $\mathbf{d} \in R$, and $\text{cost}_{\text{ed}}(\mathcal{J}, \mathbf{d}) > k$, otherwise. We say that \mathcal{J} ω -realizes R for some integer $\omega \geq 1$ if additionally, for each $\mathbf{d} \notin R$ we have $\text{cost}_{\text{ed}}(\mathcal{J}, \mathbf{d}) = k + \omega$.

Lemma 6.9. *For each $r \geq 1$ and $R \subseteq [2]^r$ there is an r -ary 2-gadget that realizes R .*

Proof. First note that a single edge $x_1 x_2$ whose endpoints have each have a list $L(x_1) = L(x_2) = \{1, 2\}$ enforces that its endpoints are mapped to different colors. So essentially this is a gadget that realizes the relation $\text{NEQ} = \{(1, 2), (2, 1)\}$.

For an integer $p \geq 2$, by OR_p we denote the relation $[2]^p \setminus \{2^p\}$ (the intuition behind the notation is clear when we interpret 1 as *true* and 2 as *false*).

Claim 6.9.1. *There exists a gadget $\mathcal{J}_{\text{OR}_2}$ whose portals are pairwise non-adjacent that 2-realizes OR_2 .*

Proof of Claim. We start the construction of the gadget with a 5-cycle with consecutive vertices v_1, v_2, v_3, v_4, v_5 . We set the list of v_5 to $\{2\}$; the lists of v_i for $i \in [4]$ are $\{1, 2\}$. The portals of the created gadget $\mathcal{J}_{\text{OR}_2}$ are v_1 and v_4 , see also Figure 3a.

It is straightforward to verify that for $\mathbf{d} \in \text{OR}_2$ precisely one edge has to be deleted and hence $\text{cost}_{\text{ed}}(\mathcal{J}_{\text{OR}_2}, \mathbf{d}) = 5\alpha + 1$, while for $(2, 2)$ we have to delete precisely three edges and hence $\text{cost}_{\text{ed}}(\mathcal{J}_{\text{OR}_2}, (2, 2)) = 5\alpha + 3$. \triangleleft

Claim 6.9.2. *For every fixed integer $\omega \geq 1$ there exists a gadget $\mathcal{J}_{\text{OR}_2}^\omega$ whose portals are pairwise non-adjacent that 2ω -realizes OR_2 .*

Proof of Claim. We introduce ω copies of the gadget $\mathcal{J}_{\text{OR}_2}$ from Claim 6.9.1, let the portals of the i -th copy be x_i, y_i . We identify all x_i into a new vertex x and all y_i into a new vertex y ; note that the portals of $\mathcal{J}_{\text{OR}_2}$ are non-adjacent so this step does not introduce multiple edges. The obtained graph with x and y as portals is our gadget $\mathcal{J}_{\text{OR}_2}^\omega$.

For $\mathbf{d} \in \text{OR}_2$, let $\text{cost}_{\text{ed}}(\mathcal{J}_{\text{OR}_2}, \mathbf{d}) = \alpha'$. It is straightforward to observe that for $\mathbf{d} \in \text{OR}_2$ we have $\text{cost}_{\text{ed}}(\mathcal{J}_{\text{OR}_2}^\omega, \mathbf{d}) = \omega\alpha'$, and for $\bar{\mathbf{d}} \notin \text{OR}_2$ we have $\text{cost}_{\text{ed}}(\mathcal{J}_{\text{OR}_2}^\omega, \bar{\mathbf{d}}) = \omega \cdot (\alpha' + 2) = \omega\alpha' + 2\omega$. \triangleleft

Claim 6.9.3. *For every $p \geq 3$, there exists a gadget $\mathcal{J}_{\text{OR}_p}$ realizing OR_p whose portals are pairwise non-adjacent.*

Proof of Claim. Let ω be an integer whose value will be specified later.

We introduce three pairwise disjoint sets of vertices $X := \bigcup_{i=1}^p \{x_i\}$, $Y := \bigcup_{i=1}^p \{y_i\}$, and $Z := \bigcup_{i=1}^p \{z_i\}$. For each $i \in [p]$ we add a copy of $\mathcal{J}_{\text{OR}_2}^\omega$ with portals identified with x_i and y_i , and another copy with portals identified with y_i and z_i . Next, for all distinct i, j , we add a copy of $\mathcal{J}_{\text{OR}_2}^\omega$ with portals identified with z_i, z_j .

Next, we add a new vertex u with list $\{1\}$ that is adjacent to every vertex in $X \cup Y \cup Z$. This completes the construction of the gadget. Its portals are y_1, \dots, y_p . A schematic picture of the construction for $p = 3$ is depicted in Figure 3b.


We say that a copy of $\mathcal{J}_{\text{OR}_2}^\omega$ is satisfied if the mapping of its portals satisfies OR_2 . Imagine that ω is sufficiently large so that every copy of $\mathcal{J}_{\text{OR}_2}^\omega$ must be satisfied. Because of the universal vertex u , we have to delete one additional edge for every vertex in $X \cup Y \cup Z$ that is mapped to 1. Intuitively, we want to map as many of these vertices as possible to 2. Since all copies of $\mathcal{J}_{\text{OR}_2}^\omega$ must be satisfied, at most $p + 1$ vertices from $X \cup Y \cup Z$ can be mapped to 2: precisely one vertex from each pair $\{x_i, y_i\}$ is mapped to 2, and potentially one vertex from the set Z . The maximum number of 2s is only possible if at least one vertex from Y is mapped to 1. In other words, this happens if and only if the mapping of portals of $\mathcal{J}_{\text{OR}_p}$ satisfies OR_p .

For $\mathbf{d} \in \text{OR}_2$, let $\text{cost}_{\text{ed}}(\mathcal{J}_{\text{OR}_2}, \mathbf{d}) = \alpha'$. If $\mathbf{d} \in \text{OR}_p$, then $\text{cost}_{\text{ed}}(\mathcal{J}_{\text{OR}_p}, \mathbf{d}) = \alpha''$, where $\alpha'' := (2p - 1) + \alpha' \cdot \binom{p}{2} + 2p$. By setting $\omega = \alpha'' + 1$ we ensure that we cannot afford making even one copy of $\mathcal{J}_{\text{OR}_2}^\omega$ unsatisfied. \triangleleft


For an integer $p \geq 2$, and $\mathbf{d} \in [2]^p$, by $R_{\neq \mathbf{d}}$ we denote the relation $[2]^p \setminus \{\mathbf{d}\}$.

Claim 6.9.4. *For every $p \geq 2$ and every $\mathbf{d} \in [2]^p$ there exists a gadget $\mathcal{J}_{R_{\neq \mathbf{d}}}$ realizing $R_{\neq \mathbf{d}}$ whose portals are non-adjacent.*

Proof of Claim. Let $\mathbf{d} = (d_1, \dots, d_p)$. Introduce a copy of $\mathcal{J}_{\text{OR}_p}$ given by Claim 6.9.3. Let its portals be x_1, \dots, x_p . Let $I = \{i \in [p] \mid d_i = 1\}$. For each $i \in I$, introduce a vertex y_i that is adjacent only to x_i .



(a) The gadget realizing OR_2 constructed in Claim 6.9.1.



(b) The gadget realizing OR_3 constructed in Claim 6.9.3.

Figure 3: Gadgets constructed in the proof of Lemma 6.9. Black lines correspond to edges, and red lines denote copies of $\mathcal{J}_{\text{OR}_2}^\omega$. Blue vertices are portals.

This completes the construction of $\mathcal{J}_{R \neq \bar{\mathbf{d}}}$. For $i \in [p]$, its i -th portal is x_i (if $i \notin I$) or y_i (if $i \in I$). It is straightforward to verify that $\mathcal{J}_{R \neq \bar{\mathbf{d}}}$ satisfies all required properties. \triangleleft

Finally, we show that using previously obtained gadgets we can realize any relation R .

Claim 6.9.5. *For every $p \geq 2$ and every $R \subseteq [2]^p$, there exists a gadget \mathcal{J}_R realizing R whose portals are non-adjacent.*

Proof of Claim. We start with introducing vertices x_1, \dots, x_p , which will be the portals of our gadget. For each $\bar{\mathbf{d}} \in \{a, b\}^p \setminus R$ we call Claim 6.9.4 to obtain $\mathcal{J}_{R \neq \bar{\mathbf{d}}}$ and identify the respective portals of the gadget with x_1, x_2, \dots, x_p . It is straightforward to verify that such a gadget indeed realizes R . \triangleleft

This completes the proof. \square

We strengthen the previous result by balancing out the violation costs.

Theorem 2.3. *For each $r \geq 1$, and $R \subseteq [2]^r$, there is an r -ary 2-gadget that 1-realizes R .*

Proof. Let $\bar{R} := [2]^r \setminus R$, and let $\bar{\mathbf{d}}_1, \dots, \bar{\mathbf{d}}_{|\bar{R}|}$ be an enumeration of the elements of \bar{R} .

We define a relation R' in $[2]^r \times [2]^{|\bar{R}|}$ as follows: A tuple $(x_1, \dots, x_r, y_1, \dots, y_{|\bar{R}|})$ is in R' if and only if one of the following holds:

1. $(x_1, \dots, x_r) \in R$ and $y_i = 1$ for all $i \in [|\bar{R}|]$, or
2. for some $i \in [|\bar{R}|]$, $(x_1, \dots, x_r) = \bar{\mathbf{d}}_i$, $y_i = 2$, and $y_j = 1$ for all $j \neq i$.

According to Lemma 6.9, there is a gadget \mathcal{J} that realizes R' . Let Z_1, \dots, Z_r be the portals of \mathcal{J} that belong to the respective entries x_1, \dots, x_r , and let $z_1, \dots, z_{|\bar{R}|}$ be those that belong to $y_1, \dots, y_{|\bar{R}|}$, respectively. By definition of a realization, there is some integer α such that for each $\mathbf{d} \in R'$, we have $\text{cost}_{\text{ed}}(\mathcal{J}, \mathbf{d}) = \alpha$.

We modify \mathcal{J} to form a new gadget \mathcal{J}' by attaching to each portal z_i a new vertex v_i with list $L(v_i) = \{2\}$. Now interpret this modified gadget \mathcal{J}' as a gadget with portals Z_1, \dots, Z_r . We claim that \mathcal{J}' 1-realizes R : Whenever Z_1, \dots, Z_r are mapped to a state in R , mapping all of the z_i s to 1 requires only α edge deletions in \mathcal{J} and no further edge deletions outside as the v_i 's can be mapped to 2. However, if Z_1, \dots, Z_r are in a state $\bar{\mathbf{d}}_i \in \bar{R}$ then α edge deletions are required in \mathcal{J} , and they are sufficient if z_i is mapped to 2. However, this requires one more

edge deletion between z_i and v_i , both of which are mapped to 2. At the same time $\alpha + 1$ edge deletions are sufficient to extend a state $\bar{\mathbf{d}}_i$, so all violations of R have the same cost $\alpha + 1$.

So we have shown that \mathcal{J}' 1-realizes R . Note that, according to Lemma 6.9, the portals of \mathcal{J} are non-adjacent. Consequently, so are the portals of \mathcal{J}' . Thus, we can introduce ω copies of \mathcal{J}' on the same set of portals Z_1, \dots, Z_r to obtain a gadget that ω -realizes R . \square

6.3 Hardness for MAX CUT

We now consider the problem MAX CUT, and our goal is to prove Theorems 6.1 and 6.2. To this end we first show respective results for the list version of MAX CUT, that is, we show Theorems 2.4 and 2.5 for the case $q = 2$. We do this in a unified proof that only in the end plugs in two different assumptions based on the SETH or the M3SH, respectively. Afterwards we show how to model the lists using the nonlist version to obtain Theorems 6.1 and 6.2.

Proof of Theorems 2.4 and 2.5 for $q = 2$. Consider an instance \mathcal{I} of the decision version of MAX $(2,r)$ -CSP with N variables \mathcal{V} , clauses $\mathcal{C} = \{C_1, \dots, C_m\}$, and clause deletion budget $z \leq m$ for the number of clauses that can be violated. For each clause C_i in \mathcal{C} let R_i be the corresponding relation of arity $r_i \leq r$.

An instance of LIST-2-COLORINGED. We define an instance (G, L) of LIST-2-COLORINGED. We consider its decision version and also define a corresponding edge deletion budget z' . For each variable $v \in \mathcal{V}$, the graph G contains a vertex $y(v)$ with $L(v) = \{1, 2\}$. Let $Y = \{y(v) \mid v \in \mathcal{V}\}$. Let us consider each R_i as a relation in $[2]^{r_i}$. From Theorem 2.3, we know that for each relation R_i there is a gadget \mathcal{J}_i that 1-realizes R_i . Note that by the definition of realization these gadgets may use lists. Let α_i be the required edge deletions within \mathcal{J}_i for a state that satisfies R_i , i.e., for each $\mathbf{d} \in R_i$ we have $\text{cost}_{\text{ed}}(\mathcal{J}_i, \mathbf{d}) = \alpha_i$. (By the definition of realizing, α_i does not depend on \mathbf{d} .) Since \mathcal{J}_i is a 1-realizer, each state outside of R_i requires $\alpha_i + 1$ edge deletions within \mathcal{J}_i . Also note that we can compute α_i in constant time. For each $i \in [m]$, the graph G contains the gadget J_i , where the portals of J_i are those vertices $y(v_1), y(v_2), y(v_3)$ for which (v_1, v_2, v_3) is the scope of R_i . We set $z' := z + \sum_{i=1}^m \alpha_i$.

Equivalence of instances. Suppose there is a satisfying assignment $f: \mathcal{V} \rightarrow \{0, 1\}$ that violates at most z clauses from \mathcal{C} . Consider the assignment h that maps $y(v)$ to 1 whenever $f(v) = 1$, and that maps $y(v)$ to 2 whenever $f(v) = 0$. By construction, in order to ensure that h can be extended to a list 2-coloring, it suffices to make $\alpha_i + 1$ edge deletions in each gadget \mathcal{J}_i for which C_i is violated by f , and α_i edge deletions for each of the remaining gadgets. Thus, it suffices to make a total of z' edge deletions. The reverse direction is also straight-forward.

Structure of the constructed instance. The gadgets \mathcal{J}_i as well as the integers α_i depend only on the arity k of the relations. Consequently, for fixed k , the size of G is $|Y| + \mathcal{O}(1) = N^{\mathcal{O}(1)}$. Let $Q = Y$. Each connected component of $G - Q$ is a subgraph of a gadget \mathcal{J}_i and has k neighbors in Q (k portals of \mathcal{J}_i). Thus, the size of such a component depends only on k and consequently Q is a (σ, k) -hub of size $N + 1$ for some σ depending only on k .

Runtime. As the size of G is polynomial in N , the hypothetical algorithm for LIST-2-COLORINGED would require $(2 - \varepsilon)^{(N+1)} \cdot N^{\mathcal{O}(1)} = (2 - \varepsilon)^N \cdot N^{\mathcal{O}(1)}$ time to solve MAX $(2,r)$ -CSP on instance

\mathcal{I} . Note that MAX $(2,r)$ -CSP with zero deletion budget clearly generalizes the decision problem r -SAT. Thus, the hypothetical algorithm contradicts the SETH for some r depending on ε (and consequently for some σ and δ depending on ε). Moreover, according to Theorem 2.2, the hypothetical algorithm also contradicts the M3SH even for $k = 3$ (and consequently for some universal constant σ and $\delta = 3$) to prove Theorems 2.4 and 2.5 for $q = 2$. \square

We will now continue the previous reduction by removing the lists in the constructed instance of LIST-2-COLORINGED to obtain a result for MAX CUT.

Proof of Theorems 6.1 and 6.2. As in the proof of Theorems 2.4 and 2.5 for $q = 2$, consider an instance \mathcal{I} of the decision version of MAX $(2,r)$ -CSP with N variables \mathcal{V} , and then consider the equivalent instance (G, L, z') of the decision version of LIST-2-COLORINGED.

Constructing the instance of MAX CUT. Let us adjust the instance (G, L, z') to an equivalent instance $(G^*, |E(G^*)| - z')$ of the decision version of MAX CUT. Since all vertices in Y have list $\{1, 2\}$, each vertex with list $\{1\}$ or list $\{2\}$ is part of some gadget \mathcal{J}_i . To construct the graph G^* , we add a new vertex A to the graph G . For each vertex v of G that has a list $L(v) = \{1\}$, we introduce a set of $\alpha_i + \omega + 1$ (parallel) 3-vertex paths from v to A (each such path contains the vertex v , one inner vertex, and the vertex A). Similarly, for each vertex v of G in \mathcal{J}_i that has a list $L(v) = \{2\}$, we introduce $\alpha_i + 2$ (parallel) 4-vertex paths from v to A . This finishes the definition of G^* .

Equivalence of instances. To show that the two instances are equivalent, first assume that there is a set X of at most z' edges such that there is a 2-coloring φ of $G \setminus X$ that respects the lists in L . Then φ can be extended to a 2-coloring of $G^* \setminus X$ with $\varphi(A) = 1$. This ensures that all of the introduced 3-vertex paths have endpoints that are mapped to 1, and all 4-vertex paths have endpoints that are mapped to different colors — and consequently all of these paths can be 2-colored without further edge deletions. If we interpret the two color classes as the two different parts of a cut, this gives a cut of size $|E(G^*)| - |X| \geq |E(G^*)| - z'$.

In the opposite direction, suppose that there is a cut of size at least $|E(G^*)| - z'$. Let X be the at most z' non-cut edges. Then there exists a 2-coloring φ of $G^* \setminus X$ (mapping vertices on one side of the cut to 1, and the other side to 2). Without loss of generality, by renaming the colors, we can assume that $h(A) = 1$. Suppose that for some vertex v , $\varphi(v) \notin L(v)$, say $\varphi(v) = 2$ but $L(v) = \{1\}$ (the other case is analogous). As $L(v) \neq \{1, 2\}$ the vertex v is part of some gadget \mathcal{J}_i . Consequently, X must contain at least one edge from each of the 3-vertex-paths connecting v and A . This gives a total of $\alpha_i + 2$ such edge deletions. However, it only requires a set F of at most $\alpha_i + 1$ edge deletions on \mathcal{J}_i to ensure that the mapping $\varphi(Y)$ can be extended to a 2-coloring of $\mathcal{J}_i \setminus F$. Moreover, in this case φ satisfies the lists L on the vertices of \mathcal{J}_i , which means that any 4-vertex paths that connects some vertex v of \mathcal{J}_i to A can be 2-colored without further edge deletions. Summarizing, this shows that there exists a 2-coloring that respects the lists L and requires at most z' edge deletions.

Structure of the constructed instance. Recall that the gadgets \mathcal{J}_i as well as the integers α_i depend only on the arity k of the relations of \mathcal{I} . Consequently, for fixed k , the size of G^* is $|Y| + \mathcal{O}(1) = N^{\mathcal{O}(1)}$. Let $Q = Y \cup \{A\}$. Each connected component of $G^* - Q$ is a subgraph of a gadget \mathcal{J}_i together with at most $\alpha_i + 2$ pending paths per vertex of \mathcal{J}_i . Note that each of these components has at most $k + 1$ neighbors in Q (k portals of \mathcal{J}_i plus the vertex A). Thus,

the size of such a component depends only on k and consequently Q is a $(\sigma, k + 1)$ -hub of size $N + 1$ for some σ depending only on k .

Runtime. As the size of G^* is polynomial in N , the hypothetical algorithm for MAX CUT would require $(2 - \varepsilon)^{(N+1)} \cdot N^{\mathcal{O}(1)} = (2 - \varepsilon)^N \cdot N^{\mathcal{O}(1)}$ time to solve MAX $(2, r)$ -CSP on instance \mathcal{I} . Recall that MAX $(2, r)$ -CSP with zero deletion budget generalizes the decision problem r -SAT. Thus, the hypothetical algorithm contradicts the SETH for some r depending on ε (and consequently for some σ and δ depending on ε). Moreover, according to Theorem 2.2, the hypothetical algorithm also contradicts the M3SH even for $k = 3$, which implies that Q as defined in the previous paragraph is a $(\sigma, 4)$ -hub for constant σ . This proves Theorems 6.1 and 6.2. \square

6.4 Hardness for q -COLORINGED

Now we consider the problem q -COLORINGED for $q \geq 3$, and our goal is to prove Theorem 6.3. Again, we first show respective results for the list coloring, that is, now we show Theorems 2.4 and 2.5 for the case $q \geq 3$, which also finishes the proofs of these two results. As before (but using different gadgets), we show how to remove the lists to obtain Theorem 6.3, as desired.

Proof of Theorems 2.4 and 2.5 for $q \geq 3$. With Theorem 2.2 in mind, for some fixed $r \geq 3$, let $\mathcal{I} = (\mathcal{V}, \mathcal{C})$ be an instance of the decision version of MAX (q, r) -CSP with N variables and deletion budget $z \leq |\mathcal{C}|$.

An instance of LIST- q -COLORINGED. We now define an instance (G, L, z') of the decision version of LIST- q -COLORINGED. For each variable $v \in \mathcal{V}$ we introduce a variable vertex $y(v)$. Let $Y = \{y(v) \mid v \in \mathcal{V}\}$. For a constraint in \mathcal{C} , let $R \subseteq [q]^\ell$ be the corresponding relation of arity $\ell \leq r$, and let $(v_1, v_2, \dots, v_\ell) \in \mathcal{V}^\ell$ be the scope of R .

According to Proposition 2.1, for every $\mathbf{d} = (d_1, d_2, \dots, d_\ell) \in [q]^\ell$, there is an ℓ -ary gadget $\mathcal{J}_{\mathbf{d}} = (J, L, \{z_1, z_2, \dots, z_\ell\})$ with lists L contained in $[q]$ such that any q -coloring ψ of the vertices z_1, z_2, \dots, z_ℓ can be extended to a list q -coloring of $\mathcal{J}_{\mathbf{d}}$ if and only if $(\psi(z_1), \psi(z_2), \dots, \psi(z_\ell)) \neq \mathbf{d}$. Let $\gamma_{\mathbf{d}} \geq 1$ be the minimum number of edge deletions in $\mathcal{J}_{\mathbf{d}}$ that are required to extend \mathbf{d} to a proper list coloring of this gadget; note that $\gamma_{\mathbf{d}}$ can be computed in constant time as the number of vertices in J is bounded by a function of ℓ and q , i.e., a constant.

Let $P := \prod_{\ell=1}^r \prod_{\mathbf{p} \in [q]^\ell} \gamma_{\mathbf{p}}$. Note that P depends only on q and r . For each vector \mathbf{d} of $\ell \leq r$ elements from $[q]$ with $\mathbf{d} \notin R$, we introduce $P/\gamma_{\mathbf{d}}$ copies of $\mathcal{J}_{\mathbf{d}}$ to balance out the different violation costs for different \mathbf{d} (and different R), and we identify the respective portals z_1, z_2, \dots, z_ℓ of each of these copies with the variable vertices $y(v_1), y(v_2), \dots, y(v_\ell)$. Let \mathcal{J}_R be the union of the copies of all the gadgets $\mathcal{J}_{\mathbf{d}}$ that we introduced for this constraint (over all vectors \mathbf{d}). We repeat this process for each constraint in \mathcal{C} . This forms the graph G together with the lists L . Finally, we set $z' = P \cdot z$.

Equivalence of instances. Suppose there is a set of constraints $\mathcal{C}' \subseteq \mathcal{C}$ with $|\mathcal{C}'| \leq z$ such that there is a satisfying assignment $f: \mathcal{V} \rightarrow [q]$ for $(\mathcal{V}, \mathcal{C} \setminus \mathcal{C}')$. Consider the coloring φ of Y with $\varphi(y(v)) = f(v)$ for each $v \in \mathcal{V}$. Consider a constraint in \mathcal{C} with the corresponding relation R and scope $(v_1, v_2, \dots, v_\ell) \in \mathcal{V}^\ell$. If f satisfies \mathcal{C} then φ can be extended to a proper list coloring of all the gadgets in \mathcal{J}_R (with zero required additional edge deletions). However,

if f violates \mathcal{C} then $\mathbf{d} := (\varphi(v_1), \varphi(v_2), \dots, \varphi(v_\ell))$ is not in R and consequently extending φ to a proper list coloring of $\mathcal{J}_{\mathbf{d}}$ requires $\gamma_{\mathbf{d}}$ edge deletions for each copy of $\mathcal{J}_{\mathbf{d}}$, for a total of P required edge deletions. Thus, φ can be extended to a proper list coloring of $G \setminus X$ where X is a set of $P \cdot |\mathcal{C}'| \leq P \cdot z = z'$ edges (where we use the fact that P is independent of R).

Now suppose there is a minimum-size set of edges X with $|X| \leq z'$ such that $G \setminus X$ has a proper list q -coloring. Assume that φ is such a coloring. Consider some gadget $\mathcal{J}_{\mathbf{d}}$ that is part of G . Let $\mathbf{d} = (d_1, d_2, \dots, d_\ell)$ and without loss of generality let $(y(v_1), y(v_2), \dots, y(v_\ell))$ be the portals of $\mathcal{J}_{\mathbf{d}}$. If $(\varphi(y(v_1)), \varphi(y(v_2)), \dots, \varphi(y(v_\ell))) \neq \mathbf{d}$ then X does not contain any edges of $\mathcal{J}_{\mathbf{d}}$ (because of the minimality of X), whereas otherwise X has to contain precisely $\gamma_{\mathbf{d}}$ edges from $\mathcal{J}_{\mathbf{d}}$, and this holds for each of the $P/\gamma_{\mathbf{d}}$ copies of $\mathcal{J}_{\mathbf{d}}$. Thus, $|X|$ is a multiple of P and the assignment f with $f(v) := \varphi(y(v))$ satisfies all but $|X|/P \leq z$ constraints in \mathcal{C} .

Structure of the constructed instance. The size of the gadgets $\mathcal{J}_{\mathbf{d}}$ and the violation costs $\gamma_{\mathbf{d}}$ are upper-bounded by some function in q and r . Consequently, the size of at most P copies of the gadget $\mathcal{J}_{\mathbf{d}}$ is upper-bounded by some function $h(q, r)$. We can assume that no two constraints have scopes of variables such that one scope completely contains the other. So we can assume that there are at most $(N + 1)^r$ different constraints in \mathcal{C} . Consequently, the size of G is at most $|Y| + (N + 1)^r \cdot h(q, r) = N^{\mathcal{O}(1)}$. Let $Q = Y$. Then each component of $G - Q$ is a subgraph of a gadget of the form $\mathcal{J}_{\mathbf{d}}$. Hence the size of such a component depends only on q and r , and each component has at most r neighbors in Q (the portals of $\mathcal{J}_{\mathbf{d}}$). Therefore, the set S is a (σ, r) -hub of size N for some σ depending only on q and r .

Runtime. As the size of G is polynomial in N , the hypothetical algorithm for LIST- q -COLORINGED would require $(q - \varepsilon)^N \cdot N^{\mathcal{O}(1)}$ time to solve MAX (q, r) -CSP on instance \mathcal{I} . This contradicts the SETH for some r depending on ε according to Theorem 4.2. It also contradicts the M3SH even for $r = 3$ according to Theorem 2.2, which means that the set Q as defined in the previous paragraph is a $(\sigma, 3)$ -hub. This proves Theorems 2.4 and 2.5 for $q \geq 3$. \square

We will now continue the previous reduction by removing the lists in the constructed instance of LIST- q -COLORINGED.

Proof of Theorem 6.3. For $q \geq 3$, consider an instance $\mathcal{I} = (\mathcal{V}, \mathcal{C})$ of the decision version of MAX (q, r) -CSP with N variables \mathcal{V} and deletion budget z , and then consider the equivalent instance (G, L, z') of LIST- q -COLORINGED constructed in the proof of Theorems 2.4 and 2.5 for $q \geq 3$.

Constructing the instance of q -COLORINGED. We modify the instance (G, L, z') into an equivalent instance (G^*, z') of q -COLORINGED. Note that for each vertex in Y the corresponding list is $[q]$, so we only have to take care of lists of vertices that are non-portal vertices of some gadget of the form $\mathcal{J}_{\mathbf{d}}$, for some $\mathbf{d} = (d_1, d_2, \dots, d_\ell) \in [q]^\ell$. Let $\gamma_{\mathbf{d}} \geq 1$ be the minimum number of edge deletions in $\mathcal{J}_{\mathbf{d}}$ that are required to extend the state \mathbf{d} of the portals to a proper list coloring of this gadget.

The high-level idea is to simulate lists using a copy of the q -clique, similarly as in the proof of Theorem 5.1. However, again we need to be careful as deleting edges incident to this clique (either inside the clique or joining the clique with vertices of G) could destroy the structure of solutions.

We first introduce q new vertices k_1, \dots, k_q . They will be used as a “global copy of a q -clique” Now we would like to turn $\{k_1, \dots, k_q\}$ into a clique whose edges cannot be deleted. As we cannot do it directly, instead of edges we will introduce many copies of gadgets that behave “like an edge.” More specifically, for each distinct $i, j \in [q]$, where $i < j$, we introduce $z' + 1$ copies of the following *inequality gadget*. We introduce a new $(q - 1)$ -clique $K_{i,j}$ and make it fully adjacent to k_i (i.e., the set $V(K_{i,j}) \cup \{k_i\}$ induces a q -clique in G^*). Next, we introduce a new vertex $x_{i,j}$ and make it fully adjacent to $K_{i,j}$ (i.e., the set $V(K_{i,j}) \cup \{x_{i,j}\}$ induces a q -clique in G^*). Note that this enforces that in any proper q -coloring, the color of $x_{i,j}$ is the same as the color of k_i , and no further constraints are introduced. Finally, we make $x_{i,j}$ adjacent to k_j , so that the color of k_j must be different than the color of k_i .

Now consider some $\mathbf{d} = (d_1, d_2, \dots, d_\ell) \in [q]^\ell$ and a copy of a gadget $\mathcal{J}_{\mathbf{d}}$. We introduce $\gamma_{\mathbf{d}} + 1$ “private” q -cliques $C_{\mathbf{d}}^p$ with vertex labels c_1^p, \dots, c_q^p (for $p \in [\gamma_{\mathbf{d}} + 1]$). For $i \in [\ell]$, and for each $p \in [\gamma_{\mathbf{d}} + 1]$, we introduce an edge between k_{d_i} and each vertex of $C_{\mathbf{d}}^p$ with the exception of $c_{d_i}^p$. Then, for each vertex v of $\mathcal{J}_{\mathbf{d}}$ and $j \notin L(v)$ and for each $p \in [\gamma_{\mathbf{d}} + 1]$, we introduce an edge between v and c_j^p . This completes the construction of G^* .

Equivalence of instances. Now let us show that the two instances are indeed equivalent. Suppose there is a proper list coloring ψ of $G \setminus X$ for some set of edges X from G . We claim that there is an extension φ of ψ that is a proper q -coloring of $G^* \setminus X$. To this end, we need to show how to extend ψ to the cliques of the form $C_{\mathbf{d}}^p$, to the vertices k_1, \dots, k_q , and to inequality gadgets. For a clique of the form $C_{\mathbf{d}}^p$ we color the corresponding vertices c_1^p, \dots, c_q^p by setting $\varphi(c_i^p) = i$. For each $i \in [q]$, we set $\varphi(k_i) = i$. For each $i, j \in [q]$ and each copy of the inequality gadget, we color $K_{i,j}$ arbitrarily using colors $[q] \setminus \{i\}$ and $x_{i,j}$ receives the color i . Observe that a vertex k_i is never adjacent to a vertex c_i^p with the same index i . Moreover, a vertex c_i^p is only adjacent to some vertex v in $\mathcal{J}_{\mathbf{d}}$ if $i \notin L(v)$. Hence φ is a proper coloring of $G^* \setminus X$ if ψ is a proper list coloring of $G \setminus X$.

For the other direction let φ be a proper q -coloring of $G^* \setminus X$ for some minimum-size set of edges X from G^* with $|X| \leq z'$. Note that since for each pair of $i, j \in [q]$ we introduced $z' + 1$ copies of the inequality gadget between k_i and k_j , there is always one copy that is not affected by X . Thus we can assume that vertices k_1, \dots, k_q receive pairwise distinct colors. By permuting colors we can assume that for each $i \in [q]$ we have $\varphi(k_i) = i$.

Now consider some $\mathbf{d} = (d_1, \dots, d_\ell)$ and a copy of $\mathcal{J}_{\mathbf{d}} = (J, L, \{z_1, \dots, z_\ell\})$. Let X' denote those edges from X that have at least one endvertex in J or in some clique of the form $C_{\mathbf{d}}^p$ introduced for $\mathcal{J}_{\mathbf{d}}$. We aim to understand where X' lies.

Claim 6.9.1. *Let π be some permutation of $[q]$ and let $\mathcal{J}_{\mathbf{d}}^\pi = (J, L^\pi, \{z_1, \dots, z_\ell\})$, where for each vertex v of J , $L^\pi(v) := \{\pi(i) \mid i \in L(v)\}$. Let $\psi: \{z_1, \dots, z_\ell\} \rightarrow [q]$ be a coloring of $\mathbf{z} = \{z_1, \dots, z_\ell\}$. Then*

- *If $\psi(\mathbf{z}) \neq \pi(\mathbf{d})$ then ψ can be extended to a proper list coloring of $\mathcal{J}_{\mathbf{d}}^\pi$.*
- *If $\psi(\mathbf{z}) = \pi(\mathbf{d})$ then $\gamma_{\mathbf{d}}$ edge deletions are required and sufficient to extend ψ to a proper list coloring of $\mathcal{J}_{\mathbf{d}}^\pi$.*

Proof of Claim. This follows directly from the properties of $\mathcal{J}_{\mathbf{d}}$ according to Proposition 2.1, if to each coloring of $\mathcal{J}_{\mathbf{d}}$ we apply the permutation π . ◁

Note that Claim 6.9.1 implies that regardless of the coloring of z_1, \dots, z_ℓ , we can make the copy of $\mathcal{J}_{\mathbf{d}}$ q -colorable by removing at most $\gamma_{\mathbf{d}}$ edges from this gadget (i.e., with both

endvertices in J). In particular, this means that we can safely assume that $|X'| \leq \gamma_{\mathbf{d}}$ (otherwise we can obtain another, better solution). Since we introduced $\gamma_{\mathbf{d}} + 1$ local cliques $C_{\mathbf{d}}^p$ for $J_{\mathbf{d}}$, there is always at least one such clique whose vertices are not incident with any edge from X' . Since all local cliques have the same neighborhood, we can safely assume that the edges from X' are not incident to any of these cliques. In particular, all edges from X' have both endvertices in J , i.e., they are present in G .

Furthermore, again, without loss of generality, we can assume that the corresponding vertices of each clique $C_{\mathbf{d}}^p$ receive the same color in φ , i.e., for all $p, p' \in [\gamma_{\mathbf{d}}]$ and $i \in [q]$ we have $\varphi(c_i^p) = \varphi(c_i^{p'})$. Since the colors of vertices of $C_{\mathbf{d}}^p$ are pairwise distinct, we conclude that there is a permutation π of $[q]$ such that $\varphi(c_i^p) = \pi(i)$, for every i, p . Summing up, we observe that the lists enforced by the local cliques on the vertices of $J_{\mathbf{d}}$ are L^π , where the definition of L^π is as in Claim 6.9.1. Note that this implies that without loss of generality we may assume that X contains either 0 (if $\varphi(\mathbf{z}) \neq \pi(\mathbf{d})$) or $\gamma_{\mathbf{d}}$ (if $\varphi(\mathbf{z}) = \pi(\mathbf{d})$) edges from J – otherwise we could obtain a better solution. Furthermore, observe that the edges joining $\{k_1, \dots, k_q\}$ with vertices from the local cliques imply that for each d_i we have $\pi(d_i) = d_i$. Consequently, $|X \cap E(J)| = 0$ if $\varphi(\mathbf{z}) \neq \mathbf{d}$ and $|X \cap E(J)| = \gamma_{\mathbf{d}}$ if $\varphi(\mathbf{z}) = \mathbf{d}$.

But now, by the definition of $\mathcal{J}_{\mathbf{d}}$ and $\gamma_{\mathbf{d}}$, we can remove $|X \cap E(J)|$ edges from J and properly color all non-portal vertices in a way that this coloring respects lists L . Repeating this argument for each copy of $J_{\mathbf{d}}$, we conclude that $G \setminus X$ admits a proper q -coloring that respects lists L .

Structure of the constructed instance. The size of at most P copies of the gadget $\mathcal{J}_{\mathbf{d}}$ together with P copies of a clique of size q is upper-bounded by some function $h(q, r)$. We can assume that there are at most $(N + 1)^r$ different constraints in \mathcal{C} . Further, note that $w = z' + 1 = P \cdot z + 1 \leq P \cdot (N + 1)^r \in N^{\mathcal{O}(1)}$. Consequently, the size of G^* is at most $|Y| + (N + 1)^r \cdot h(q, r) + (w + 1) \cdot q^3 = N^{\mathcal{O}(1)}$. Let $Q = Y \cup \{k_1, \dots, k_q\}$. Then each component of $G^* - Q$ is of one of two forms. The first possibility is that it is a subgraph of a gadget of the form $\mathcal{J}_{\mathbf{d}}$ together with the corresponding cliques $C_{\mathbf{d}}^1, \dots, C_{\mathbf{d}}^{\gamma_{\mathbf{d}}+1}$, in which case the size of such a component depends only on q and r , and the component has at most $3 + r$ neighbors in Q , three in Y , and r in $\{k_1, \dots, k_q\}$. The second possibility is that such a component is an inequality gadget, i.e., it consists of q vertices and attaches to two vertices of Q . Therefore, the set Q is a $(\sigma, 3 + r)$ -hub of size $N + q$ for some σ depending only on q .

Runtime. As the size of G^* is polynomial in N , the hypothetical algorithm for q -COLORINGED would require $(q - \varepsilon)^{(N+q)} \cdot N^{\mathcal{O}(1)} = (q - \varepsilon)^N \cdot N^{\mathcal{O}(1)}$ time to solve MAX (q, r) -CSP on instance \mathcal{I} . This contradicts the M3SH even for $r = 3$ according to Theorem 2.2, which implies that the set Q defined in the previous paragraph is a $(\sigma, 6)$ -hub. This proves Theorem 6.3. \square

6.5 Simple Algorithm for q -COLORINGED

The following algorithm solves the q -COLORINGED problem for $q \geq 2$, which also includes the MAX CUT problem for $q = 2$. It is worth noting that this algorithm can be modified to use treewidth as the parameter.

Theorem 6.10. *For all integers $q \geq 2$ and $\sigma, \delta \geq 1$, every n -vertex instance of q -COLORINGED can be solved in time $q^p \cdot n^{\mathcal{O}(1)}$ if a (σ, δ) -hub of size p is given in the input.*

Proof. As input to q -COLORINGED, consider a graph G with n vertices, given along with a (σ, δ) -hub Q of size p .

We start by guessing the coloring of Q . Let $f: Q \rightarrow [q]$ denote this coloring. Consider now a component G' of $G \setminus Q$, and let O denote the graph induced by the vertices of G' and their neighbors in Q . Since G' has constant size and is adjacent to constantly many vertices in Q , we can determine in constant time the minimum number of edges to delete from O , such that the remaining graph admits a q -coloring.

The number of components in $G \setminus Q$ is bounded above by a polynomial in n , and therefore, in polynomial time, we can find the optimum solution that agrees with X and f . Moreover, since there is always an (X, f) corresponding to the optimal solution, an algorithm that tries all possible X and f gives the correct output. The running time of such an algorithm is upper bounded by $q^p \cdot n^{\mathcal{O}(1)}$. □

7 LIST- q -COLORING and LIST- q -COLORINGVD with gadgets of constant degree faster than brute force

Recall that, assuming the SETH, we proved lower bounds for q -COLORING, q -COLORINGVD, and q -COLORINGED, parameterized by the size of a (σ, δ) -hub of the instance graph G , where σ and δ are constants depending on $\varepsilon > 0$. In all cases, we were able to exclude an algorithm with running time $(f(q) - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$, for any $\varepsilon > 0$, where $f(q)$ is a function of q (i.e., either q or $q+1$), p is the size of a (σ, δ) -hub, and n is the number of vertices of G . Furthermore, assuming the M3SH, we have a somewhat stronger lower bound for q -COLORINGED where σ and δ are absolute (and small) constants independent of ε . For q -COLORING and q -COLORINGVD, we have only a weaker form of the lower bound, where the values of σ and δ depend on ε .

In this section, we show that these latter lower bounds cannot be strengthened so that σ and δ are absolute constants; in fact, we prove that already δ on its own cannot be an absolute constant. Specifically, we prove the following algorithmic results that hold even for the respective coloring problems with lists.

Theorem 7.1. *For every $q \geq 3$ and every constant δ there exists ε with the following property: For every constant σ , every instance (G, L) of LIST- q -COLORING with n vertices, given with a (σ, δ) -hub of size p , can be solved in time $(q - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$.*

Theorem 7.2. *For every $q \geq 3$ and every constant δ there exists ε with the following property: For every constant σ , every instance (G, L) of LIST- q -COLORINGVD with n vertices, given with a (σ, δ) -hub of size p , can be solved in time $(q + 1 - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$.*

7.1 Faster algorithm for LIST- q -COLORING

As a warm-up, let us start with Theorem 7.1, whose proof is quite straightforward.

Proof of Theorem 7.1. Let X be a (σ, δ) -hub of G . If X is a constant-size set, we can guess its coloring exhaustively, and then adjust the lists of the neighbors of vertices in X as follows. If $x \in X$ is guessed to be colored with color i , then i can be removed from lists of all vertices in the neighborhood of X . After that we can safely remove X from the graph, obtaining an equivalent instance, which can be solved in polynomial time as its every component is of constant size. Thus from now on assume that $|X| = p$ is sufficiently large.

We first check if there is a vertex with an empty list; if so, we immediately reject the instance. Then we check whether there exists a component A of $G - X$ with no neighbor in X . If such an A exist, we solve the instance $G[A]$ of LIST- q -COLORING: it can be done in constant time as $|A| \leq \sigma$. If it is a yes-instance, then we can proceed with the equivalent instance $G - A$; it is a no-instance, then (G, L) is a no-instance and we reject it.

Consider a component A of $G - X$, and let $\Gamma(A)$ denote its neighborhood in X ; recall that we can assume that $\Gamma(A) \neq \emptyset$. Let $r = |\Gamma(A)|$ and recall that $1 \leq r \leq \delta$.

Let \mathcal{F} be the set of all colorings of $\Gamma(A)$ with q colors, respecting lists L , that can be extended to a proper list coloring of $G[A \cup \Gamma(A)]$. Note that $|\mathcal{F}| \leq q^r$ and \mathcal{F} can be computed in constant time as $|A \cup \Gamma(A)| \leq \delta + \sigma$. If $|\mathcal{F}| = q^r$, then *every* coloring of $\Gamma(A)$ can be extended to the vertices of A . Thus we can remove A from G , obtaining an equivalent instance. So assume that $|\mathcal{F}| \leq q^r - 1$.

We exhaustively guess a coloring of $\Gamma(A)$ that belongs to \mathcal{F} . In each branch we adjust the lists of the neighbors of vertices in $\Gamma(A)$ as previously, and then remove $A \cup \Gamma(A)$ from the graph, obtaining an equivalent instance.

The number of leaves in the recursion tree, measured as the function of p , is upper-bounded by the recursive formula

$$T(p) \leq (q^r - 1) \cdot T(p - r).$$

Proceeding by induction we can show that

$$T(p) \leq (q^r - 1)^{p/r} \cdot (q^\delta - 1)^{(p-r)/\delta} \leq (q^\delta - 1)^{p/\delta},$$

where the last inequality can be verified by a standard yet quite tedious calculation.

As every node in the recursion tree is processed in polynomial time, the total running time is bounded by $T(p) \cdot n^{\mathcal{O}(1)} \leq (q^\delta - 1)^{p/\delta} \cdot n^{\mathcal{O}(1)}$. Now Theorem 7.1 follows by observing that $(q^\delta - 1)^{1/\delta} < q$. \square

7.2 Faster algorithm for LIST- q -COLORINGVD

Now let us proceed to the LIST- q -COLORINGVD problem. It will be more convenient to reduce it to a certain auxiliary variant of CSP. Before we formally define it, let us introduce some more notation.

Let X be a set and let q be a positive integer. By $\mathcal{F}_{X,q}^\times$ we denote the set of all functions $f: X \rightarrow [q] \cup \{\times\}$, where \times is a special symbol. For a function $f \in \mathcal{F}_{X,q}^\times$, we let $\|f\|$ denote $|f^{-1}(\times)|$.

We define a binary relation \preceq on $\mathcal{F}_{X,q}^\times$ as follows: for all $f, f' \in \mathcal{F}_{X,q}^\times$, we say that $f' \preceq f$ if for all $x \in X$ either $f(x) = f'(x)$, or $f(x) = \times$. In other words, f was obtained from f' by mapping some (possibly empty) subset of elements of X to \times . Note that $(\mathcal{F}_{X,q}^\times, \preceq)$ is a partially ordered set and its unique maximum element is f_X^\times , where $f_X^\times \in \mathcal{F}_{X,q}^\times$ is the function that maps every element of X to \times . We write $f' \prec f$ if $f' \preceq f$ and $f' \neq f$.

For constants q, r , an instance of (q, r) -CSP-WITH-WILDCARD is a triple $(\mathcal{V}, \mathcal{C}, \text{cost})$, where

- \mathcal{V} is the set of variables, each with domain $[q] \cup \{\times\}$,
- \mathcal{C} is a multiset of subsets of \mathcal{V} , each of size at most r ,
- cost is a function that maps each pair (C, f) where $C \in \mathcal{C}, f \in \mathcal{F}_{C,q}^\times$ to a non-negative integer and satisfies the following:

(wildcard property) For all $C \in \mathcal{C}$ and all $f, f' \in \mathcal{F}_{C,q}^\times$, if $f' \preceq f$, then it holds that $\text{cost}(C, f) \leq \text{cost}(C, f')$.

The aim of (q, r) -CSP-WITH-WILDCARD is to find an assignment $\varphi: \mathcal{V} \rightarrow [q] \cup \{\times\}$, minimizing the total cost defined as follows:

$$\text{total-cost}(\varphi) = \|\varphi\| + \sum_{C \in \mathcal{C}} \text{cost}(C, \varphi|_C).$$

It is fairly straightforward to reduce an instance of LIST- q -COLORINGVD with a (σ, δ) -hub of size p to an instance of (q, δ) -CSP-WITH-WILDCARD with p variables.

Lemma 7.3. *Let σ, δ be constants. For an instance (G, L) of LIST- q -COLORINGVD, given with a (σ, δ) -hub of size p , in polynomial time we can compute an instance $(\mathcal{V}, \mathcal{C}, \text{cost})$ of (q, δ) -CSP-WITH-WILDCARD with p variables, such that the values of optimum solutions of both instances are equal.*

Proof. Without loss of generality assume that G is connected. Let X be a (σ, δ) -hub of G , and let us enumerate the vertices of X as $\{x_1, x_2, \dots, x_p\}$. Recall that we can safely assume that for each x_j , the set $L(x_j)$ is non-empty, and clearly $|L(x_j)| \leq q$. For each $j \in [p]$, let ρ_j be an arbitrary surjective function from $[q]$ to $L(x_j)$.

The set \mathcal{V} has p elements v_1, \dots, v_p , each with domain $[q] \cup \{\times\}$. For each $i \in [p]$, the variable v_i represents x_i . Assigning the value $j \in [q]$ to v_i corresponds to mapping x_i to $\rho_i(j)$, while assigning \times to v_i corresponds to deleting x_i .

Now consider a component A of $G - X$, and let $\Gamma(A)$ denote its neighborhood in X . Recall that $|\Gamma(A)| \leq \delta$. We add the set $C = \{v_i \mid x_i \in \Gamma(A)\}$ to \mathcal{C} . Finally, for every $f \in \mathcal{F}_{C,q}^\times$, we set $\text{cost}(C, f)$ to be the minimum number of vertices from A that need to be deleted so that the mapping of $\Gamma(A)$ corresponding to f (i.e., if $f(v_i) = j \in [q]$, then x_i is mapped to $\rho_i(j)$, and if $f(v_i) = \times$, then x_i is deleted) can be extended to a proper list coloring of the subgraph of G induced by the non-deleted vertices from $A \cup \Gamma(A)$.

It is possible that there is more than one component of $G - X$ with exactly the same neighborhood in X . In this situation \mathcal{C} contains multiple copies of C (recall that it is defined to be a multiset) and the values of the cost function of each copy correspond to a distinct component of $G - X$.

It is clear that the created instance of (q, δ) -CSP-WITH-WILDCARD is equivalent to the original instance (G, L) of LIST- q -COLORINGVD, i.e., the optimal solutions have the same value.

Finally, let us argue that $(\mathcal{V}, \mathcal{C}, \text{cost})$ can indeed be computed in polynomial time. Observe that the number of components of $G - X$ is $\mathcal{O}(|V(G)|)$. Furthermore, for each such component A there are at most $(q + 1)^\delta$ assignments of variables corresponding the vertices of $\Gamma(A)$. Finally, for each component A and each assignment f we can compute the minimum cost of extending f to $G[A \cup \Gamma(A)]$ in constant time, as the size of A is at most σ , i.e., a constant. \square

Clearly a brute-force approach to solving an instance (q, r) -CSP-WITH-WILDCARD with n variables requires time $(q + 1)^n \cdot n^{\mathcal{O}(1)}$. Indeed, we enumerate all possible assignments $\varphi: \mathcal{V} \rightarrow [q] \cup \{\times\}$, for each of them we compute $\text{total-cost}(\varphi)$, and we return the assignment whose total cost is minimum. In the next theorem we show that actually we can solve the problem faster.

Theorem 7.4. *Let q, r be constants. Any n -variable instance of (q, r) -CSP-WITH-WILDCARD can be solved in time $((q+1)^r - 1)^{n/r} \cdot n^{\mathcal{O}(1)}$.*

Proof. Let $(\mathcal{V}, \mathcal{C}, \text{cost})$ denote an instance of (q, r) -CSP-WITH-WILDCARD. Consider $C \in \mathcal{C}$. Recall that $f_C^\times \in \mathcal{F}_{C,q}^\times$ is the function mapping every element of C to \times . By the wildcard property we observe that $\text{cost}(C, f_C^\times) = \min_{f \in \mathcal{F}_{C,q}^\times} \text{cost}(C, f)$. For brevity, we denote $\text{cost}(C, f_C^\times)$ by $c_\times(C)$.

Claim 7.4.1. *For each $C \in \mathcal{C}$ one of the following holds:*

- a) *for all $f \in \mathcal{F}_{C,q}^\times$ it holds that $\text{cost}(C, f) = c_\times(C)$, or*
- b) *there exist $f, f' \in \mathcal{F}_{C,q}^\times$ such that $f' \prec f$ and $\text{cost}(C, f) + \|f\| \leq \text{cost}(C, f') + \|f'\|$.*

Proof of Claim. Suppose that a) does not hold and let $f' \in \mathcal{F}_{C,q}^\times$ be such that $\text{cost}(C, f') \geq c_\times(C) + 1$ and $\|f'\|$ is maximum possible. Note that by the definition of $c_\times(C)$ we know that $f' \neq f_C^\times$, i.e., there exists $v \in C$ such that $f'(v) \neq \times$. Let f be obtained from f' by mapping v to \times . Note that $f' \prec f$. Clearly $\|f\| = \|f'\| + 1$ and, by the maximality of f' , we have $\text{cost}(C, f) = c_\times(C)$. Thus we have

$$\text{cost}(C, f) + \|f\| = c_\times(C) + \|f'\| + 1 \leq \text{cost}(C, f') + \|f'\|,$$

which completes the proof of claim. ◁

Claim 7.4.2. *Let C, f, f' satisfy property b) in Claim 7.4.1. Then there exists an optimum solution φ for $(\mathcal{V}, \mathcal{C}, \text{cost})$ such that $\varphi|_C \neq f'$.*

Proof of Claim. Let φ' be an optimum solution for $(\mathcal{V}, \mathcal{C}, \text{cost})$. If $\varphi'|_C \neq f'$, we are done, so suppose otherwise. Define $\varphi: \mathcal{V} \rightarrow [q] \cup \{\times\}$ as follows:

$$\varphi(v) = \begin{cases} \varphi'(v) & \text{if } v \notin C, \\ f(v) & \text{if } v \in C. \end{cases}$$

Note that as $\varphi'|_C = f' \prec f$, we have $\varphi' \prec \varphi$. Let us compute the total cost of φ .

$$\begin{aligned} \text{total-cost}(\varphi) &= \|\varphi\| + \sum_{C' \in \mathcal{C}} \text{cost}(C', \varphi|_{C'}) \\ &= |\varphi^{-1}(\times) \setminus C| + |\varphi^{-1}(\times) \cap C| + \text{cost}(C, \varphi|_C) + \sum_{C' \in \mathcal{C} \setminus \{C\}} \text{cost}(C', \varphi|_{C'}) \\ &\stackrel{(1)}{=} |\varphi'^{-1}(\times) \setminus C| + \|f\| + \text{cost}(C, f) + \sum_{C' \in \mathcal{C} \setminus \{C\}} \text{cost}(C', \varphi|_{C'}) \\ &\stackrel{(2)}{\leq} |\varphi'^{-1}(\times) \setminus C| + \|f\| + \text{cost}(C, f) + \sum_{C' \in \mathcal{C} \setminus \{C\}} \text{cost}(C', \varphi'|_{C'}) \\ &\stackrel{(3)}{\leq} |\varphi'^{-1}(\times) \setminus C| + \|f'\| + \text{cost}(C, f') + \sum_{C' \in \mathcal{C} \setminus \{C\}} \text{cost}(C', \varphi'|_{C'}) \\ &= \|\varphi'\| + \sum_{C' \in \mathcal{C}} \text{cost}(C', \varphi'|_{C'}) = \text{total-cost}(\varphi'). \end{aligned}$$

where step (1) follows as $\varphi'|_{\mathcal{V}\setminus C} = \varphi|_{\mathcal{V}\setminus C}$, step (2) follows from the wildcard property, and step (3) follows from the properties of C, f, f' given by Claim 7.4.1 b). Since φ' is an optimal solution and thus its total cost is minimum possible, we conclude that $\text{total-cost}(\varphi) = \text{total-cost}(\varphi')$ and thus φ is also an optimal solution. \triangleleft

In the beginning of (each recursive call of) our algorithm, we exhaustively apply the following two reduction rules. First, if there is some $v \in \mathcal{V} \setminus \bigcup_{C \in \mathcal{C}} C$, then we remove it from \mathcal{V} . Note that an optimal solution for the reduced instance can be extended to an optimal solution for the original one by mapping v to any element of $[q]$. Second, if there are $C, C' \in \mathcal{C}$ such that $C' \subseteq C$, we can obtain an equivalent instance by removing C' from \mathcal{C} and, for each $g \in \mathcal{F}_{C',q}^X$, increasing the value of $\text{cost}(C, g)$ by $\text{cost}(C', g|_{C'})$. After applying the second reduction rule exhaustively we can assume that the sets in \mathcal{C} are pairwise incomparable. It is clear that the reduction rules can be applied in polynomial time.

Now we are ready to describe our algorithm. If $n = |\mathcal{V}| \leq r$, we solve the problem in constant time by brute force in constant time, as q and r are constants. Otherwise, pick any $C \in \mathcal{C}$ and denote $|C|$ by r' . Clearly $r' \leq r$. Consider two possibilities given by Claim 7.4.1. If possibility a) applies to C , then notice that we can safely remove C from \mathcal{C} . Indeed, an optimal solution of $(\mathcal{V}, \mathcal{C} \setminus \{C\}, \text{cost}|_{\mathcal{C} \setminus \{C\}})$ is also an optimal solution of $(\mathcal{V}, \mathcal{C}, \text{cost})$ and the total cost of this solution in the latter instance is equal to its total cost in the former instance plus $c_{\times}(C)$. So assume that possibility b) applies and let f, f' be as in Claim 7.4.1 b).

We guess the valuation of variables from C , considering all possibilities except for f' . By Claim 7.4.2 we know that it is safe to ignore f' as there is always an optimum solution whose valuation restricted to C is not f' .

This results in $(q+1)^{r'} - 1$ branches. Consider one such branch corresponding to a valuation $\tilde{f} \in \mathcal{F}_{C,q}^X$. The instance considered in this branch is $(\mathcal{V}', \mathcal{C}', \text{cost}')$, defined as follows. The set \mathcal{V}' of variables is $\mathcal{V} \setminus C$; note that it is non-empty as $|C| \leq r$ and $n > r$. The set \mathcal{C}' is defined as $\mathcal{C}' := \{\tilde{C} \cap \mathcal{V}' \mid \tilde{C} \in \mathcal{C}\}$. Note that $\emptyset \notin \mathcal{C}'$, since otherwise the second reduction rule could have been applied. For each $C' \in \mathcal{C}'$ and for each $g \in \mathcal{F}_{C',q}^X$ we set

$$\text{cost}'(C', g) = \sum_{\substack{\tilde{C} \in \mathcal{C} \\ \tilde{C} \cap \mathcal{V}' = C'}} \text{cost}(\tilde{C}, (g \cup \tilde{f})|_{\tilde{C}}),$$

where by $g \cup \tilde{f}$ we denote the valuation obtained by assigning the values of variables from C according to \tilde{f} , and the values of variables from C' according to g ; note that these sets are disjoint. Since we aim to solve $(\mathcal{V}, \mathcal{C}, \text{cost})$, the value of an optimum solution found for $(\mathcal{V}', \mathcal{C}', \text{cost}')$ must be increased by $\|\tilde{f}\|$. It is straightforward to verify that the above recursive procedure is correct. Now let us argue about the running time.

Since the local computation at each recursive call can be performed in polynomial time, in order to bound the time complexity we need to estimate the number of leaves in the recursion tree. Let $T(n)$ denote this value for an instance with n variables. We aim to show that $T(n) \leq ((q+1)^r - 1)^{n/r}$.

If $n \leq r$, then $T(n) = 1 \leq ((q+1)^r - 1)^{n/r}$. Suppose now that $n > r$ and for every $n' < n$ we have $T(n') \leq ((q+1)^r - 1)^{n'/r}$. We obtain the following recursive inequality:

$$T(n) \leq \left((q+1)^{r'} - 1 \right) \cdot T(n - r').$$

Applying the inductive assumption, we get that

$$T(n) \leq \left((q+1)^{r'} - 1 \right) \cdot \left((q+1)^r - 1 \right)^{(n-r')/r} \leq \left((q+1)^r - 1 \right)^{n/r},$$

similarly as in the proof of Theorem 7.1. Summing up, the total running time is bounded by $T(n) \cdot n^{\mathcal{O}(1)} \leq ((q+1)^r - 1)^{n/r} \cdot n^{\mathcal{O}(1)}$. \square

Now Theorem 7.2 follows by combining Lemma 7.3 with Theorem 7.4 and observing that $((q+1)^r - 1)^{1/r} < q+1$.

8 Equivalent Hypotheses: Set Covering/Packing/Partitioning

In this section we prove Theorem 2.6.

Recall that the Set Cover Conjecture (SCC) asserts that for all $\varepsilon > 0$, there exists $d \geq 1$ such that there is no algorithm that solves every $\leq d$ -SET COVER instance (U, \mathcal{F}) in time $(2 - \varepsilon)^{|U|} \cdot |U|^{\mathcal{O}(1)}$ [9].

We show that, for a whole list of problems, similar lower bound statements are actually all equivalent to the SCC. The respective problems were informally introduced in the introduction, Section 1. Formally, they are defined in Section 3. At a high level, we consider covering, packing and partition problems and distinguish between problem variants, where every set of the family has size exactly d or at most d , and we also consider (whenever it makes sense) whether the number of selected sets or the size of their union is maximized.

All discussed problems can be solved in time $2^n \cdot n^{\mathcal{O}(1)}$, where n is the size of the universe, by quite straightforward dynamic programming. We now show that these problems are all equivalent to the SCC in the following sense: a *faster than standard dynamic programming* algorithm for any of those problems violates the SCC. Similarly, if the SCC fails, then there is a *faster than standard dynamic programming* algorithm for each of the problems in the list.

Theorem 2.6. *Suppose that for one of the problems below, it is true that for every $\varepsilon > 0$, there is an integer d such that the problem cannot be solved in time $(2 - \varepsilon)^n \cdot n^{\mathcal{O}(1)}$, where n is the size of the universe. Then this holds for all the other problems as well. In particular, any of these statements is equivalent to the SCC.*

1. $=d$ -SET COVER
2. $=d$ -SET PARTITION
3. $=d$ -SET PACKING (#SETS)
4. $\leq d$ -SET COVER
5. $\leq d$ -SET PARTITION
6. $\leq d$ -SET PARTITION (#SETS)
7. $\leq d$ -SET PACKING (#SETS)
8. $\leq d$ -SET PACKING (UNION)

Figure 1 gives an overview of the reductions that we prove in order to show Theorem 2.6.

8.1 Basic Reductions

Recall from Section 2.4 that we say that a problem class $\mathcal{A} = \{A_d \mid d \geq 1\}$ (such as \leq^* -SET COVER) is 2^n -hard if the following statement holds.

For each $\varepsilon > 0$, there is some $d \geq 1$ such that no algorithm solves A_d on all n -element instances in time $(2 - \varepsilon)^n \cdot n^{\mathcal{O}(1)}$.

Let $\mathcal{B} = \{B_d \mid d \geq 1\}$ be another problem class. In the following sections we prove many reductions of the form “If \mathcal{A} is 2^n -hard then \mathcal{B} is 2^n -hard”. We will usually prove the contrapositive statement:

Suppose for some $\varepsilon > 0$ it holds that for every $d \geq 1$, there is an algorithm that solves B_d on n -element instances in time $(2 - \varepsilon)^n \cdot n^{\mathcal{O}(1)}$.

Then there exists $\varepsilon' > 0$ such that for every $d \geq 1$, there is an algorithm that solves A_d on n -element instances in time $(2 - \varepsilon')^n \cdot n^{\mathcal{O}(1)}$.

As $\leq d$ -SET COVER (resp., $\leq d$ -SET PACKING (#SETS)) is more general than $=d$ -SET COVER (resp., $=d$ -SET PACKING (#SETS)), we immediately observe the following.

Observation 8.1. *If $=*$ -SET COVER is 2^n -hard, then $\leq*$ -SET COVER is 2^n -hard; and if $=*$ -SET PACKING (#SETS) is 2^n -hard, then $\leq*$ -SET PACKING (#SETS) is 2^n -hard.*

Similarly, since t disjoint sets of size d cover exactly $t \cdot d$ elements, $\leq d$ -SET PACKING (UNION) problem is a generalization of $=d$ -SET PACKING (#SETS).

Observation 8.2. *If $=*$ -SET PACKING (#SETS) is 2^n -hard, then $\leq*$ -SET PACKING (UNION) is 2^n -hard.*

Next, we observe that $=d$ -SET PARTITION can be easily reduced to $=d$ -SET COVER. Now consider a set family \mathcal{F} over the universe U such that each set in \mathcal{F} has size d . We observe that each set partition of (U, \mathcal{F}) is a set cover of size n/d , and vice versa each set cover of size n/d can only contain disjoint sets, and is therefore a set partition. Thus, $=d$ -SET COVER can be used to solve $=d$ -SET PARTITION.

Observation 8.3. *If $=*$ -SET PARTITION is 2^n -hard, then $=*$ -SET COVER is 2^n -hard.*

Another simple argument gives the following.

Lemma 8.4. *If $\leq*$ -SET COVER is 2^n -hard, then $\leq*$ -SET PARTITION (#SETS) is 2^n -hard..*

Proof. Given a $\leq d$ -SET COVER instance (U, \mathcal{F}, t) , create a $\leq d$ -SET PARTITION (#SETS) instance (U, \mathcal{F}', t) where $\mathcal{F}' := \{A \mid A \neq \emptyset, A \subseteq S, S \in \mathcal{F}\}$.

First, suppose U has a cover $\mathcal{S} = \{S_1, \dots, S_r\} \subseteq \mathcal{F}$ of size $r \leq t$. Without loss of generality we can assume that it is inclusion-wise minimal, i.e., for every $i \in [r]$ there exists $u \in S_i$ that is not covered by $\mathcal{S} \setminus S_i$.

Define sets A_1, \dots, A_r as follows. We set $A_1 = S_1$. Then, for $i \geq 2$, we set $A_i = S_i \setminus \bigcup_{j < i} A_j$. It is straightforward to see that $(\bigcup_{1 \leq i \leq r} A_i) = (\bigcup_{1 \leq i \leq r} S_i)$. Furthermore, the sets A_1, \dots, A_r are pairwise disjoint, and they are nonempty by minimality of \mathcal{S} . Since for $1 \leq i \leq r$, A_i is a subset of S_i at the end of the algorithm described above, we have $\{A_1, \dots, A_r\} \subseteq \mathcal{F}'$. Consequently, this set is a partition of U of size $r \leq t$.

Second, suppose that U has a partition $\mathcal{S}' \subseteq \mathcal{F}'$ of size $r \leq t$. Since each set in \mathcal{F}' is a subset of some set in \mathcal{F} , there is a corresponding set cover \mathcal{S} of U of size $r \leq t$. \square

Let U be some universe and \mathcal{F} a family of size- d subsets of U . Clearly, (U, \mathcal{F}) has a set partition if and only if it has a set packing of size (at least) $|U|/d$. So we obtain the following observation.

Observation 8.5. *If $\leq^* \text{-SET PARTITION}$ is 2^n -hard, then $\leq^* \text{-SET PACKING} (\# \text{SETS})$ is 2^n -hard.*

In order to prove the following reduction we again use the trick that we also employed to show Lemma 5.3. Namely, we split the universe of the instance into blocks and then guess the number of unused elements for each block.

Lemma 8.6. *If $\leq^* \text{-SET PACKING (UNION)}$ is 2^n -hard, then $\leq^* \text{-SET PARTITION} (\# \text{SETS})$ is 2^n -hard.*

Proof. Let (U, \mathcal{F}, t) be an instance of $\leq d \text{-SET PACKING (UNION)}$. Let $n = |U|$. Let b be the smallest integer such that $(2b + 2)^{1/b} < (1 + \varepsilon/2)$. This choice will become clear later on. Without loss of generality, we assume that n is divisible by b (as otherwise we can add at most $b - 1$ dummy elements that are in none of the sets from \mathcal{F}). We split the elements from U into pairwise disjoint blocks $U_1, \dots, U_{n/b}$ of size b each.

Suppose we are given an integer $x_i \in \{0, \dots, b\}$ for each block U_i that specifies how many elements of this block are *not* covered in a hypothetical $\leq d \text{-SET PACKING (UNION)}$ solution. We refer to the vector $\mathbf{x} = (x_1, \dots, x_{n/b})$ as the signature of this solution. Note that each solution has precisely one signature.

Consider the following algorithm:

1. Define the set $U' = U \cup \{a_i \mid i \in [n/b]\}$, where a_i is a new element introduced for each block.
2. Iterate over all possible signatures. For each such signature \mathbf{x} , build a new set system $\mathcal{F}_{\mathbf{x}}$ that contains all sets from \mathcal{F} and, in addition, for each i and each set $S \subseteq U_i$ of size x_i , the set $S \cup \{a_i\}$.
3. For $d' = b + 1$, run the assumed algorithm for $\leq d' \text{-SET PARTITION}$ on the instance $(U', \mathcal{F}_{\mathbf{x}}, t + n/b)$.

First note that by the fact that a set $S \cup \{a_i\}$ has size $x_i + 1 \leq b + 1 = d'$, $(U', \mathcal{F}_{\mathbf{x}}, t + n/b)$ is, in fact, an instance of $\leq d' \text{-SET PARTITION} (\# \text{SETS})$. The idea is that for each block U_i , a partition of U' contains precisely one set that contains the new element a_i . This set holds all elements that are not covered by a corresponding packing of sets from \mathcal{F} with signature \mathbf{x} . Hence the partition corresponding to such a packing contains one additional set per block. So it is straight-forward that above algorithm solves $\leq d \text{-SET PACKING (UNION)}$.

Let $n' = |U'| = n + n/b$. There are at most $(b + 1)^{n/b}$ different signatures; and for each signature the algorithm for $\leq d' \text{-SET PARTITION}$ takes time $(2 - \varepsilon)^{n'} \cdot n'^{\mathcal{O}(1)}$. Thus the total runtime is bounded by

$$\begin{aligned}
(b + 1)^{n/b} \cdot (2 - \varepsilon)^{n'} \cdot n'^{\mathcal{O}(1)} &\leq (b + 1)^{n/b} \cdot (2 - \varepsilon)^{n + n/b} n^{\mathcal{O}(1)} \\
&\leq (2b + 2)^{n/b} \cdot (2 - \varepsilon)^n \cdot n^{\mathcal{O}(1)} \\
&\leq (1 + \varepsilon/2)^n \cdot (2 - \varepsilon)^n \cdot n^{\mathcal{O}(1)} \\
&= (2 - \varepsilon^2/2)^n \cdot n^{\mathcal{O}(1)}.
\end{aligned}$$

For $\varepsilon' = \varepsilon^2/2$ this gives the correct runtime. □

8.2 Structured Families of Sets

Several subsequent reductions use similar ideas. Therefore we introduce some notation and prove a few technical lemmas to avoid redundancy as much as possible. Let U be a set of n elements and $\mathcal{F} \subseteq 2^U$ be a set family where each set has size at most d .

Let $(\mathcal{F}_1, \dots, \mathcal{F}_d)$ be the partition of \mathcal{F} according to set size, i.e., let \mathcal{F}_i contain all size- i sets of \mathcal{F} . We now define a vector that represents a guess of how many sets of each size are chosen (in some solution). Let $\mathbf{r} = (r_1, \dots, r_d) \in \{0, \dots, \binom{n}{d}\}^d$ satisfy

1. $\sum_{i=1}^d r_i \leq n$, and
2. $r_i \leq |\mathcal{F}_i|$.

We say that \mathbf{r} is an \mathcal{F} -signature and define $w(\mathbf{r}) = \sum_{i=1}^d r_i$ to be the *weight* of \mathbf{r} . For a packing/partition $\mathcal{S} \subseteq \mathcal{F}$ of U , we say that \mathcal{S} respects \mathbf{r} if \mathcal{S} contains exactly r_i sets from \mathcal{F}_i .

Intuitively, our aim is to modify (U, \mathcal{F}) such that all sets have the same size while preserving the original packings/partitions. To this end, for each \mathcal{F} -signature \mathbf{r} and integer $c \geq 1$, we will define a new set system $(U_{\mathbf{r}}, \mathcal{F}_{\mathbf{r}})$ such that every set in $\mathcal{F}_{\mathbf{r}}$ has size $(c \cdot d! + 1)$. Moreover, we will show that there is a one-to-one relationship between the packings (partitions) of (U, \mathcal{F}) that respect \mathbf{r} , and packings (partitions) of $(U_{\mathbf{r}}, \mathcal{F}_{\mathbf{r}})$. We say that $(U_{\mathbf{r}}, \mathcal{F}_{\mathbf{r}})$ is the (c, \mathbf{r}) -join of (U, \mathcal{F}) .

The idea is to merge, for each $i \in [d]$, selections of $a_i := \frac{c \cdot d!}{i}$ disjoint sets from \mathcal{F}_i to obtain new sets of size $a_i \cdot i = \frac{c \cdot d!}{i} \cdot i = c \cdot d!$ (now the same size for all i). A selection of r_i/a_i of these new sets then corresponds to a selection of r_i of the original sets. In order to avoid divisibility issues, we introduce some dummy sets and work with the vector $\mathbf{s} = (s_1, \dots, s_d) \in \mathbb{Z}_{\geq 0}^d$ with

$$\mathbf{s}_i := \left\lceil \frac{r_i}{a_i} \right\rceil \cdot a_i \quad (\text{for } i \in [d]),$$

So, coming from r_i , s_i is the next-largest integer that is divisible by a_i .

For $I_{\mathbf{r}} := \{i \in [d] \mid r_i \neq 0\}$, and an index $i \in I_{\mathbf{r}}$, we define $[s_i - r_i]$ new sets of dummy elements of size i each:

$$\mathcal{A}_j^{\mathbf{r}, i} := \{a_1^{i, j}, \dots, a_i^{i, j}\} \quad \text{for } j \in [s_i - r_i].$$

We assume that the sets $\mathcal{A}_j^{\mathbf{r}, i}$ are all disjoint sets of new elements (outside of U). For a given signature \mathbf{r} , define the set of dummy elements

$$N_{\mathbf{r}} := \bigcup_{i \in I_{\mathbf{r}}} \bigcup_{j \in [s_i - r_i]} \mathcal{A}_j^{\mathbf{r}, i}.$$

Note that

$$|N_{\mathbf{r}}| = \left| \bigcup_{i \in I_{\mathbf{r}}} \bigcup_{j \in [s_i - r_i]} \mathcal{A}_j^{\mathbf{r}, i} \right| \leq d \cdot c \cdot d! = \mathcal{O}(1) \quad (2)$$

since $|I_{\mathbf{r}}| \leq d$ and $\mathbf{s}_i - \mathbf{r}_i \leq a_i$.

For each $i \in I_{\mathbf{r}}$, the idea is to extend the part \mathcal{F}_i by the new size- i sets

$$\mathcal{F}_{\text{add}}^{\mathbf{r}, i} := \{\mathcal{A}_j^{\mathbf{r}, i} \mid j \in [s_i - r_i]\}.$$

Then, for each $i \in I_{\mathbf{r}}$, we consider the sets that can be obtained as a union of a_i pairwise disjoint sets from $\mathcal{F}_i \cup \mathcal{F}_{\text{add}}^{\mathbf{r},i}$, formally,

$$\mathcal{G}_i^{\mathbf{r}} := \left\{ \bigcup_{j \in [a_i]} V_j \mid V_1, \dots, V_{a_i} \text{ are pairwise disjoint sets from } \mathcal{F}_i \cup \mathcal{F}_{\text{add}}^{\mathbf{r},i} \right\}.$$

Crucially, for each $i \in I_{\mathbf{r}}$ and set $X \in \mathcal{G}_i^{\mathbf{r}}$, it holds that $|X| = a_i \cdot i = \frac{c \cdot d!}{i} \cdot i = c \cdot d!$. Ultimately, the idea is that all of these sets X will form a new collection of sets whose elements now all have the same size.

As previously mentioned, for each i , we are ultimately interested in selections of precisely $r'_i := \frac{\mathbf{r}_i}{a_i}$ of the new size- a_i sets. To ensure that no more than r'_i sets are picked, we introduce r'_i new elements $E_i := \{e_1^i, \dots, e_{r'_i}^i\}$, and extend each set in our new collection of sets $\mathcal{G}_i^{\mathbf{r}}$ by one of these elements as follows:

For each $i \in I_{\mathbf{r}}$, let

$$\mathcal{Z}_i^{\mathbf{r}} := \left\{ \{e\} \cup X \mid e \in E_i, X \in \mathcal{G}_i^{\mathbf{r}} \right\}.$$

With this modification, each selection of disjoint sets from $\mathcal{Z}_i^{\mathbf{r}}$ has size at most $|E_i| = r'_i$. Let $\mathcal{E}_{\mathbf{r}} := \bigcup_{i \in [d]} E_i$ and let $\alpha_{\mathbf{r}} := \sum_{i \in I_{\mathbf{r}}} r'_i$ be the target number of sets that we aim to select from the new collection of sets.

We finish the definition of the (c, \mathbf{r}) -join $(U_{\mathbf{r}}, \mathcal{F}_{\mathbf{r}})$ by setting

$$\mathcal{F}_{\mathbf{r}} := \bigcup_{i \in I_{\mathbf{r}}} \mathcal{Z}_i^{\mathbf{r}}, \quad \text{and} \quad U_{\mathbf{r}} := U \cup N_{\mathbf{r}} \cup \mathcal{E}_{\mathbf{r}}.$$

For the bound on the size of this new instance, we observe that

$$|\mathcal{E}_{\mathbf{r}}| = \sum_{i \in I_{\mathbf{r}}} r'_i = \sum_{i=1}^d \left\lceil \frac{\mathbf{r}_i}{a_i} \right\rceil \leq d + \sum_{i=1}^d \frac{\mathbf{r}_i}{a_i} = d + \sum_{i=1}^d \frac{\mathbf{r}_i \cdot i}{c \cdot d!} \leq d + \sum_{i=1}^d \frac{\mathbf{r}_i}{c(d-1)!} \leq d + \frac{n}{c(d-1)!},$$

where the last step follows because \mathbf{r} is an \mathcal{F} -signature. Moreover, each set in $\mathcal{F}_{\mathbf{r}}$ has size $c \cdot d! + 1$ and consequently

$$|U_{\mathbf{r}}| = |U| + |N_{\mathbf{r}}| + |\mathcal{E}_{\mathbf{r}}| = n + \mathcal{O}(1) + d + \frac{n}{c \cdot (d-1)!} = n + \frac{n}{c \cdot (d-1)!} + \mathcal{O}(1). \quad (3)$$

Next we show that these structured instances preserve packings and partitions.

Lemma 8.7. *Let \mathcal{F} be a collection of subsets of a universe U , each with size at most d . Let $c \geq 1$ be an integer. For each \mathcal{F} -signature \mathbf{r} , the following two statements are equivalent*

1. U has a packing $\mathcal{S} \subseteq \mathcal{F}$ such that $|\mathcal{S} \cap \mathcal{F}_i| = \mathbf{r}_i$ for $i \in [d]$.
2. $U_{\mathbf{r}}$ has a packing $\mathcal{S}_{\mathbf{r}} \subseteq \mathcal{F}_{\mathbf{r}}$ of size $\alpha_{\mathbf{r}}$ such that $(N_{\mathbf{r}} \cup \mathcal{E}_{\mathbf{r}}) \subseteq \mathcal{S}_{\mathbf{r}}$.

Moreover, it holds that

$$\left(\bigcup_{A \in \mathcal{S}_{\mathbf{r}}} A \right) \setminus (N_{\mathbf{r}} \cup \mathcal{E}_{\mathbf{r}}) = \left(\bigcup_{A \in \mathcal{S}} A \right).$$

Proof. Let \mathbf{r} be an \mathcal{F} -signature.

First direction: 1. implies 2. Suppose U has a packing $\mathcal{S} \subseteq \mathcal{F}$ with $|\mathcal{S} \cap \mathcal{F}_i| = \mathbf{r}_i$ for $i \in [d]$. For $i \in [d]$, we set $\mathcal{S}_i := \mathcal{S} \cap \mathcal{F}_i$ and $\mathbf{s}_i := \left\lceil \frac{\mathbf{r}_i}{a_i} \right\rceil \cdot a_i$. Let I be the set of indices i for which \mathcal{S}_i is nonempty. For $i \in I$, consider the set $\mathcal{S}_i \cup \mathcal{F}_{\text{add}}^{\mathbf{r},i}$ and observe that its size is equal to \mathbf{s}_i because $|\mathcal{F}_{\text{add}}^{\mathbf{r},i}| = \mathbf{s}_i - \mathbf{r}_i$. Then, for each $i \in I$, partition $\mathcal{S}_i \cup \mathcal{F}_{\text{add}}^{\mathbf{r},i}$ into groups of size a_i to define new sets of size $a_i \cdot i = c \cdot d!$. Here we use the fact that the sets in $\mathcal{S}_i \cup \mathcal{F}_{\text{add}}^{\mathbf{r},i}$ are pairwise disjoint. Let $D_1^i, \dots, D_{\mathbf{s}_i}^i$ be an enumeration of the sets in $\mathcal{S}_i \cup \mathcal{F}_{\text{add}}^{\mathbf{r},i}$. To group the sets, we set

$$\mathcal{S}'_i := \left\{ D_{(j-1) \cdot a_i + 1}^i \cup \dots \cup D_{j \cdot a_i}^i \mid j \in [\mathbf{s}_i / a_i] \right\}.$$

Observe that each set in \mathcal{S}'_i has size $a_i \cdot i = c \cdot d!$, $|\mathcal{S}'_i| = \frac{\mathbf{s}_i}{a_i} = \left\lceil \frac{\mathbf{r}_i}{a_i} \right\rceil$, $\mathcal{S}'_i \subseteq \mathcal{G}_i^{\mathbf{r}}$, and importantly that sets in \mathcal{S}'_i are pairwise disjoint. Moreover,

$$\bigcup_{A \in \mathcal{S}'_i} A = \bigcup_{A \in (\mathcal{S}_i \cup \mathcal{F}_{\text{add}}^{\mathbf{r},i})} A. \quad (4)$$

Then we add to each set in \mathcal{S}'_i some distinct element from E_i . Note that this operation is well-defined since $|E_i| = |\mathcal{S}'_i| = \left\lceil \frac{\mathbf{r}_i}{a_i} \right\rceil$. Explicitly, for an enumeration $T_1, \dots, T_{\left\lceil \frac{\mathbf{r}_i}{a_i} \right\rceil}$ of the sets in \mathcal{S}'_i , let

$$\mathcal{T}_i := \left\{ \{e_j^i\} \cup T_j \mid 1 \leq j \leq \left\lceil \frac{\mathbf{r}_i}{a_i} \right\rceil \right\}.$$

It follows that each element of \mathcal{T}_i has size $c \cdot d! + 1$, $|\mathcal{T}_i| = \left\lceil \frac{\mathbf{r}_i}{a_i} \right\rceil$, $\mathcal{T}_i \subseteq \mathcal{Z}_i^{(\mathbf{r})}$, and importantly that sets in \mathcal{T}_i are pairwise disjoint. Moreover,

$$\bigcup_{A \in \mathcal{T}_i} A = E_i \cup \left(\bigcup_{A \in \mathcal{S}'_i} A \right). \quad (5)$$

By (4) and (5), it follows that $\mathcal{S}_{\mathbf{r}} := \bigcup_{i \in I} \mathcal{T}_i$ satisfies

1. $\mathcal{S}_{\mathbf{r}} \subseteq \mathcal{F}_{\mathbf{r}}$,
2. sets in $\mathcal{S}_{\mathbf{r}}$ are pairwise disjoint,
3. the union of the sets in $\mathcal{S}_{\mathbf{r}}$ is

$$\bigcup_{A \in \mathcal{S}_{\mathbf{r}}} A = \bigcup_{i \in I} \bigcup_{A \in \mathcal{T}_i} A = \left(\bigcup_{A \in \mathcal{S}} A \right) \cup N_{\mathbf{r}} \cup \mathcal{E}_{\mathbf{r}}.$$

This implies that $\mathcal{S}_{\mathbf{r}} \subseteq \mathcal{F}_{\mathbf{r}}$ is a packing of $U_{\mathbf{r}}$. Finally, the size of $\mathcal{S}_{\mathbf{r}}$ is

$$|\mathcal{S}_{\mathbf{r}}| = \sum_{i \in I} |\mathcal{T}_i| = \sum_{i \in I} \left\lceil \frac{\mathbf{r}_i}{a_i} \right\rceil = \sum_{i=1}^d \left\lceil \frac{\mathbf{r}_i}{a_i} \right\rceil = \alpha_{\mathbf{r}}.$$

Second direction: 2. implies 1. Now suppose that $U_{\mathbf{r}}$ has a packing $\mathcal{S}_{\mathbf{r}} \subseteq \mathcal{F}_{\mathbf{r}}$ of size $\alpha_{\mathbf{r}}$ such that $(N_{\mathbf{r}} \cup \mathcal{E}_{\mathbf{r}}) \subseteq \mathcal{S}_{\mathbf{r}}$. Let $I_{\mathbf{r}} := \{i \in [d] \mid r_i \neq 0\}$. Observe that for $i \in I_{\mathbf{r}}$, $|\mathcal{S}_{\mathbf{r}} \cap \mathcal{Z}_i^{\mathbf{r}}| \leq \left\lceil \frac{r_i}{a_i} \right\rceil$ because each set in $\mathcal{Z}_i^{\mathbf{r}}$ contains an element of E_i . However, this implies that $\mathcal{S}_{\mathbf{r}} \cap \mathcal{Z}_i^{\mathbf{r}}$ has exactly $r'_i := \left\lceil \frac{r_i}{a_i} \right\rceil$ elements as $|\mathcal{S}_{\mathbf{r}}| = \alpha_{\mathbf{r}}$.

So, for each $i \in I_{\mathbf{r}}$, there are pairwise disjoint sets $X_1^i, \dots, X_{r'_i}^i \in \mathcal{G}_i^{\mathbf{r}}$ such that

$$\mathcal{S}_{\mathbf{r}} \cap \mathcal{Z}_i^{\mathbf{r}} = \left\{ \{e_j^i\} \cup X_j^i \mid j \in [r'_i] \right\}.$$

Furthermore, by definition of the set $\mathcal{G}_i^{\mathbf{r}}$, each X_j^i is a union of a_i disjoint sets of size i that belong to the set $\mathcal{F}_i \cup \mathcal{F}_{\text{add}}^{\mathbf{r},i}$. Let $\kappa(X_j^i)$ denote these a_i sets. For each $i \in I_{\mathbf{r}}$, let $\mathcal{S}_i = \{A \mid A \in \kappa(X_j^i), j \in [r'_i]\}$. Then we have $\mathcal{S}_i \subseteq \mathcal{F}_i \cup \mathcal{F}_{\text{add}}^{\mathbf{r},i}$, $|\mathcal{S}_i| = \left\lceil \frac{r_i}{a_i} \right\rceil \cdot a_i = \mathbf{s}_i$, and the sets in \mathcal{S}_i are pairwise disjoint. Recall that $\mathcal{S}_{\mathbf{r}}$ has the property that $(N_{\mathbf{r}} \cup \mathcal{E}_{\mathbf{r}}) \subset \mathcal{S}_{\mathbf{r}}$. Therefore, for each $i \in I_{\mathbf{r}}$ it holds that $\mathcal{F}_{\text{add}}^{\mathbf{r},i} \subseteq \mathcal{S}_i$. Since $|\mathcal{F}_{\text{add}}^{\mathbf{r},i}| = \mathbf{s}_i - \mathbf{r}_i$, it also holds that

$$|\mathcal{S}_i \setminus \mathcal{F}_{\text{add}}^{\mathbf{r},i}| = |\mathcal{S}_i| - |\mathcal{F}_{\text{add}}^{\mathbf{r},i}| = \mathbf{s}_i - (\mathbf{s}_i - \mathbf{r}_i) = \mathbf{r}_i.$$

Finally, for $\mathcal{S} := \bigcup_{i \in I_{\mathbf{r}}} (\mathcal{S}_i \setminus \mathcal{F}_{\text{add}}^{\mathbf{r},i})$, it follows that

$$|\mathcal{S} \cap \mathcal{F}_i| = |\mathcal{S}_i \setminus \mathcal{F}_{\text{add}}^{\mathbf{r},i}| = \mathbf{r}_i.$$

Furthermore, it is straightforward to verify that $(\bigcup_{A \in \mathcal{S}} A) = (\bigcup_{A \in \mathcal{S}_{\mathbf{r}}} A) \setminus (N_{\mathbf{r}} \cup \mathcal{E}_{\mathbf{r}})$. The combination of this observation and the fact that $\mathcal{S}_{\mathbf{r}}$ is a packing of $U_{\mathbf{r}}$ implies that \mathcal{S} is a packing of U . \square

Note that the assertion in Lemma 8.7 remains valid when considering partitions instead of packings. This is a consequence of $U_{\mathbf{r}} = U \cup N_{\mathbf{r}} \cup \mathcal{E}_{\mathbf{r}}$ and the second part of Lemma 8.7.

Corollary 8.8. *Let \mathcal{F} be a collection of subsets of a universe U , each with size at most d . Let $c \geq 1$ be an integer. For each \mathcal{F} -signature \mathbf{r} , the following two statements are equivalent*

1. U has a partition $\mathcal{S} \subseteq \mathcal{F}$ such that $|\mathcal{S} \cap \mathcal{F}_i| = \mathbf{r}_i$ for $i \in [d]$.
2. $U_{\mathbf{r}}$ has a partition $\mathcal{S}_{\mathbf{r}} \subseteq \mathcal{F}_{\mathbf{r}}$.

8.3 Reductions Based on Structured Families

Lemma 8.9. *If $\leq^* \text{-SET PARTITION} (\# \text{SETS})$ is 2^n -hard, then $\leq^* \text{-SET PARTITION}$ is 2^n -hard.*

Proof. Let (U, \mathcal{F}, t) be an n -element instance of $\leq d \text{-SET PARTITION} (\# \text{SETS})$ for some $d \geq 1$ and let c be the smallest integer such that $(2 - \varepsilon)^{\frac{1}{c \cdot (d-1)!}} < (1 + \frac{\varepsilon}{2})$. Moreover, let \mathcal{B} be an algorithm that solves $\leq h \text{-SET PARTITION}$ for $h := (c \cdot d! + 1)$ in time $(2 - \varepsilon)^n \cdot n^{\mathcal{O}(1)}$. Finally define $\varepsilon' := \frac{\varepsilon^2}{2}$.

Algorithm for $\leq d$ -SET PARTITION (#SETS) and its correctness. Given an instance (U, \mathcal{F}, t) of $\leq d$ -SET PARTITION (#SETS), the algorithm starts by guessing an F -signature \mathbf{r} such that $w(\mathbf{r}) \leq t$. For each such \mathbf{r} , the algorithm constructs the (c, \mathbf{r}) -join of (U, \mathcal{F}) , denoted by $(U_{\mathbf{r}}, \mathcal{F}_{\mathbf{r}})$. Note that each set in $\mathcal{F}_{\mathbf{r}}$ has size $(c \cdot d! + 1) = h$, hence $(U_{\mathbf{r}}, \mathcal{F}_{\mathbf{r}})$ is an instance of $\leq h$ -SET PARTITION. Finally, the algorithm returns YES if any of the calls $\mathcal{B}(U_{\mathbf{r}}, \mathcal{F}_{\mathbf{r}})$ returns YES, otherwise it returns NO.

To establish the correctness of the algorithm, assume that (U, \mathcal{F}, t) is a YES-instance. Then U has a partition $\mathcal{S} \subseteq \mathcal{F}$ of size at most t . Construct the \mathcal{F} -signature \mathbf{r} by defining the coordinate $\mathbf{r}_i := |\mathcal{S} \cap \mathcal{F}_i|$ for $1 \leq i \leq d$ and observe that $w(\mathbf{r}) = |\mathcal{S}| \leq t$. By definition, \mathcal{S} satisfies Item 1 in Corollary 8.8 for this specific \mathcal{F} -signature \mathbf{r} , therefore it holds that $U_{\mathbf{r}}$ has a partition $\mathcal{S}_{\mathbf{r}} \subseteq \mathcal{F}_{\mathbf{r}}$. Therefore, $\mathcal{B}(U_{\mathbf{r}}, \mathcal{F}_{\mathbf{r}})$ and in turn the algorithm defined above returns YES.

On the other hand, if (U, \mathcal{F}, t) is a NO-instance, then U has no partition $\mathcal{S} \subseteq \mathcal{F}$ of size at most t . Therefore for any \mathcal{F} -signature \mathbf{r} guessed by the algorithm, Item 1 in Corollary 8.8 will not hold. This implies that Item 2 does not hold as well. As a result $\mathcal{B}(U_{\mathbf{r}}, \mathcal{F}_{\mathbf{r}})$ returns NO. All in all, the algorithm described above returns NO as well.

Running time. The number of \mathcal{F} -signatures is at most $\binom{n}{d}^d \leq n^{d^2} = n^{\mathcal{O}(1)}$. Constructing the instance $(U_{\mathbf{r}}, \mathcal{F}_{\mathbf{r}})$ takes polynomial time in n . Therefore, the total running time is

$$\begin{aligned} n^{\mathcal{O}(1)} \cdot \max_{\mathcal{F}\text{-signature } \mathbf{r}} (2 - \varepsilon)^{|U_{\mathbf{r}}|} &= n^{\mathcal{O}(1)} \cdot (2 - \varepsilon)^{n + \frac{n}{c \cdot (d-1)!}} \\ &= n^{\mathcal{O}(1)} \cdot (2 - \varepsilon)^n \cdot \left(1 + \frac{\varepsilon}{2}\right)^n \\ &= n^{\mathcal{O}(1)} \cdot \left(2 - \frac{\varepsilon^2}{2}\right)^n \\ &= n^{\mathcal{O}(1)} \cdot (2 - \varepsilon')^n \end{aligned}$$

where the first equality holds by (3) and the second equality holds because of the definition of c . \square

Lemma 8.10. *If $\leq *$ -SET PARTITION is 2^n -hard, then $=*$ -SET PARTITION is 2^n -hard.*

Proof. Let $d \geq 1$ and (U, \mathcal{F}) be an instance of $\leq d$ -SET PARTITION. Moreover, let c be the smallest integer such that $(2 - \varepsilon)^{\frac{1}{c \cdot (d-1)!}} < \left(1 + \frac{\varepsilon}{2}\right)$ and \mathcal{B} be an algorithm that solves $=h$ -SET PARTITION for $h := (c \cdot d! + 1)$ in time $(2 - \varepsilon)^n \cdot n^{\mathcal{O}(1)}$. Finally define $\varepsilon' := \frac{\varepsilon^2}{2}$.

Algorithm for $\leq d$ -SET PARTITION and its correctness. Given an instance (U, \mathcal{F}) of $\leq d$ -SET PARTITION, the algorithm starts with guessing an F -signature \mathbf{r} . For each such \mathbf{r} , the algorithm constructs the (c, \mathbf{r}) -join of (U, \mathcal{F}) , denoted by $(U_{\mathbf{r}}, \mathcal{F}_{\mathbf{r}})$. Note that each set in $\mathcal{F}_{\mathbf{r}}$ has size $(c \cdot d! + 1) = h$, hence $(U_{\mathbf{r}}, \mathcal{F}_{\mathbf{r}})$ is an instance of $=h$ -SET PARTITION. Finally, the algorithm returns YES if any of the calls $\mathcal{B}(U_{\mathbf{r}}, \mathcal{F}_{\mathbf{r}})$ returns YES, otherwise it returns NO.

To show that the algorithm is correct, assume that (U, \mathcal{F}) is a YES-instance. Then U has a partition $\mathcal{S} \subseteq \mathcal{F}$. Construct the \mathcal{F} -signature \mathbf{r} by defining $\mathbf{r}_i := |\mathcal{S} \cap \mathcal{F}_i|$ for $1 \leq i \leq d$. By definition, \mathcal{S} satisfies Item 1 in Corollary 8.8 for this specific \mathcal{F} -signature \mathbf{r} , therefore it holds that $U_{\mathbf{r}}$ has a partition $\mathcal{S}_{\mathbf{r}} \subseteq \mathcal{F}_{\mathbf{r}}$. Therefore $\mathcal{B}(U_{\mathbf{r}}, \mathcal{F}_{\mathbf{r}})$ and in turn the algorithm defined above returns YES.

On the other hand, if (U, \mathcal{F}) is a NO-instance, then U has no partition \mathcal{S} such that $\mathcal{S} \subseteq \mathcal{F}$. Therefore for any \mathcal{F} -signature \mathbf{r} the algorithm tries, Item 1 in Corollary 8.8 will not hold.

This implies that Item 2 does not hold as well, consequently $\mathcal{B}(U_{\mathbf{r}}, \mathcal{F}_{\mathbf{r}})$ returns NO. Hence, the algorithm described above returns NO.

Running time. The number of \mathcal{F} -signatures is at most $\binom{n}{d}^d \leq n^{d^2} = n^{\mathcal{O}(1)}$. Constructing the instance $(U_{\mathbf{r}}, \mathcal{F}_{\mathbf{r}})$ takes polynomial time in n as well. Therefore, the whole running time becomes

$$\begin{aligned} n^{\mathcal{O}(1)} \cdot \max_{\mathcal{F}\text{-signature } \mathbf{r}} (2 - \varepsilon)^{|U_{\mathbf{r}}|} &= n^{\mathcal{O}(1)} \cdot (2 - \varepsilon)^{n + \frac{n}{c \cdot (d-1)!}} \\ &= n^{\mathcal{O}(1)} \cdot (2 - \varepsilon)^n \cdot \left(1 + \frac{\varepsilon}{2}\right)^n \\ &= n^{\mathcal{O}(1)} \cdot \left(2 - \frac{\varepsilon^2}{2}\right)^n \\ &= n^{\mathcal{O}(1)} \cdot (2 - \varepsilon')^n \end{aligned}$$

where the first equality holds by (3) and the second equality holds because of the definition of c . \square

Lemma 8.11. *If $\leq d$ -SET PACKING ($\#$ SETS) is 2^n -hard, then $=*$ -SET PACKING ($\#$ SETS) is 2^n -hard.*

Proof. Let (U, \mathcal{F}, t) be an instance of $\leq d$ -SET PACKING ($\#$ SETS) for some $d \geq 1$ and let c be the smallest integer such that $(2 - \varepsilon)^{\frac{1}{c \cdot (d-1)!}} < (1 + \frac{\varepsilon}{2})$. Moreover, let \mathcal{B} be an algorithm that solves $=h$ -SET PACKING ($\#$ SETS) for $h := (c \cdot d! + 1)$ in time $(2 - \varepsilon)^n \cdot n^{\mathcal{O}(1)}$. Finally define $\varepsilon' := \frac{\varepsilon^2}{2}$.

Algorithm for $\leq d$ -SET PACKING ($\#$ SETS) and its correctness. Given an instance (U, \mathcal{F}, t) of $\leq d$ -SET PACKING ($\#$ SETS), the algorithm starts with guessing an F -signature \mathbf{r} of weight at least t . For each such \mathbf{r} , the algorithm constructs the (c, \mathbf{r}) -join of (U, \mathcal{F}) , denoted by $(U_{\mathbf{r}}, \mathcal{F}_{\mathbf{r}})$. Note that each set in $\mathcal{F}_{\mathbf{r}}$ has size $(c \cdot d! + 1) = h$, hence $(U_{\mathbf{r}}, \mathcal{F}_{\mathbf{r}}, \alpha_{\mathbf{r}})$ is an instance of $=h$ -SET PACKING ($\#$ SETS). Finally, the algorithm returns YES if any of the calls $\mathcal{B}(U_{\mathbf{r}}, \mathcal{F}_{\mathbf{r}}, \alpha_{\mathbf{r}})$ returns YES, otherwise it returns NO.

To show that the algorithm is correct, assume that (U, \mathcal{F}, t) is a YES-instance. Then U has a packing $\mathcal{S} \subseteq \mathcal{F}$ of size at least t . Construct the \mathcal{F} -signature \mathbf{r} by defining $r_i := |\mathcal{S} \cap \mathcal{F}_i|$ for $1 \leq i \leq d$ and observe that $w(\mathbf{r}) = |\mathcal{S}| \geq t$. By definition, \mathcal{S} satisfies Item 1 in Lemma 8.7 for this specific \mathcal{F} -signature \mathbf{r} , therefore it holds that $U_{\mathbf{r}}$ has a packing $\mathcal{S}_{\mathbf{r}} \subseteq \mathcal{F}_{\mathbf{r}}$ of size $\alpha_{\mathbf{r}}$. Therefore $\mathcal{B}(U_{\mathbf{r}}, \mathcal{F}_{\mathbf{r}}, \alpha_{\mathbf{r}})$ and in turn the algorithm defined above returns YES.

On the other hand, if (U, \mathcal{F}, t) is a NO-instance, then U has no packing $\mathcal{S} \subseteq \mathcal{F}$ of size at least t . Therefore for any \mathcal{F} -signature \mathbf{r} the algorithm tries, Item 1 in Lemma 8.7 will not hold. This implies that Item 1 does not hold as well, consequently $\mathcal{B}(U_{\mathbf{r}}, \mathcal{F}_{\mathbf{r}}, \alpha_{\mathbf{r}})$ returns NO. Hence, the algorithm described above returns NO.

Running time. The number of \mathcal{F} -signatures is at most $\binom{n}{d}^d \leq n^{d^2} = n^{\mathcal{O}(1)}$. Constructing the instance $(U_{\mathbf{r}}, \mathcal{F}_{\mathbf{r}}, \alpha_{\mathbf{r}})$ takes polynomial time in n as well. Therefore, the whole running

time becomes

$$\begin{aligned}
n^{\mathcal{O}(1)} \cdot \max_{\mathcal{F}\text{-signature } \mathbf{r}} (2 - \varepsilon)^{|U_{\mathbf{r}}|} &= n^{\mathcal{O}(1)} \cdot (2 - \varepsilon)^{n + \frac{n}{c \cdot (d-1)!}} \\
&= n^{\mathcal{O}(1)} \cdot (2 - \varepsilon)^n \cdot \left(1 + \frac{\varepsilon}{2}\right)^n \\
&= n^{\mathcal{O}(1)} \cdot \left(2 - \frac{\varepsilon^2}{2}\right)^n \\
&= n^{\mathcal{O}(1)} \cdot (2 - \varepsilon')^n
\end{aligned}$$

where the first equality holds by (3) and the second equality holds because of the definition of c . \square

9 Δ -PACKING and Δ -PARTITION

In this section we give the proof of Theorem 1.5. In Theorem 9.3 we show that a *fast* algorithm for Δ -PARTITION violates the SCC, where the technical details will be discussed in Section 9.1. Similarly, in Section 9.2 we prove Theorem 9.4, which shows that if the SCC fails, then there exists a *fast* algorithm for Δ -PACKING problem. All in all, since Δ -PACKING problem is a generalization of Δ -PARTITION, Theorems 9.3 and 9.4 together imply that Theorem 1.5 holds.

9.1 Reducing SET PARTITION to Δ -PARTITION

To proceed, we require a technical result asserting that we can assume the value of d in $=d$ -SET PARTITION to be divisible by 3.

Lemma 9.1. *Suppose for some $\varepsilon > 0$ it holds that, for every $d \geq 1$ there is an algorithm that solves every n -element instance of $=(3 \cdot d)$ -SET PARTITION in time $(2 - \varepsilon)^n \cdot n^{\mathcal{O}(1)}$. Then for every $d \geq 1$ there is an algorithm that solves every n -element instance of $=d$ -SET PARTITION in time $(2 - \varepsilon)^n \cdot n^{\mathcal{O}(1)}$.*

Proof. Let (U, \mathcal{F}) be an n -element instance of $=d$ -SET PARTITION for some $d \geq 1$. Note that we can assume that d divides n . Moreover, let \mathcal{B} be an algorithm that solves $=h$ -SET PARTITION for $h := 3 \cdot d$ in time $(2 - \varepsilon)^n \cdot n^{\mathcal{O}(1)}$.

The algorithm is very similar to the ones given in Lemmas 8.9 to 8.11. Given an instance (U, \mathcal{F}) of $=d$ -SET PARTITION, let $0 \leq s \leq 2$ denote the integer $\frac{n}{d}$ modulo 3. The algorithm constructs $\tilde{\mathcal{F}}$ by incorporating $(3 - s)$ pairwise disjoint sets of size d , each of which is also disjoint from U , into the existing set \mathcal{F} . Let \mathcal{A} denote the newly introduced sets and define $R := \bigcup \mathcal{A}$. The new universe U' is equal to $U \cup R$, i.e., it has $n + d(3 - s) \leq n + 3d$ elements. Finally, the algorithm constructs \mathcal{F}' by adding the union of all pairwise disjoint sets A, B , and C where $A, B, C \in \tilde{\mathcal{F}}$. Observe that each set in \mathcal{F}' has size equal to $3 \cdot d$. In the end, the algorithm returns YES if $\mathcal{B}(U', \mathcal{F}')$ returns YES.

To show that the algorithm is correct, assume that (U, \mathcal{F}) is a YES-instance. Then, U has a partition $\mathcal{S} \subseteq \mathcal{F}$. Observe that the size of $\mathcal{S} \cup \mathcal{A}$ is equal to 0 modulo 3 since $|\mathcal{A}| = 3 - s$. Group the sets in $\mathcal{S} \cup \mathcal{A}$ into groups of size 3 and take the union of the sets in each group. Let \mathcal{S}' be the resulting set. It is easy to verify that $\mathcal{S}' \subseteq \mathcal{F}'$ and the union of the sets in \mathcal{S}' is equal to $U \cup R = U'$. Hence (U', \mathcal{F}') is also a YES-instance and the algorithm returns YES.

Similarly, if (U, \mathcal{F}) is a no instance, meaning that U has no partition $\mathcal{S} \subseteq \mathcal{F}$, adding sets disjoint from those in \mathcal{F} does not create a set system where the universe can be partitioned. Hence, since $\mathcal{B}(U', \mathcal{F}')$ returns NO, our algorithm returns NO as well.

Constructing the instance (U', \mathcal{F}') takes polynomial time in n . Therefore, the whole running time becomes

$$n^{\mathcal{O}(1)} \cdot (2 - \varepsilon)^{|U'|} = n^{\mathcal{O}(1)} \cdot (2 - \varepsilon)^{n+3 \cdot d} = n^{\mathcal{O}(1)} \cdot (2 - \varepsilon)^n.$$

□

The following corollary can be easily deduced from Theorem 2.6 and Lemma 9.1.

Corollary 9.2. *For all $\varepsilon > 0$, there exists $d \geq 1$ such that there is no algorithm that solves every n -element instance of $(3 \cdot d)$ -SET PARTITION in time $(2 - \varepsilon)^n \cdot n^{\mathcal{O}(1)}$, unless the SCC fails.*

Theorem 9.3. *For all $\varepsilon > 0$, there exists $\sigma, \delta \geq 1$ such that there is no algorithm that solves every n -vertex instance of Δ -PARTITION given with a (σ, δ) -hub of size at most p in time $(2 - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$, unless the SCC fails.*

Proof. Suppose there exists $\varepsilon > 0$ such that for all $\sigma, \delta \geq 1$ there exists an algorithm that solves every n -vertex Δ -PARTITION instance given with a (σ, δ) -hub of size at most p in time $(2 - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$. Fix arbitrary $d \geq 1$ and denote $r = 3 \times d$. Consider an instance (U, \mathcal{F}) of r -SET PARTITION, where $U = [n]$. In the following, we will describe an algorithm that solves (U, \mathcal{F}) in time $(2 - \varepsilon)^n \cdot n^{\mathcal{O}(1)}$, which will contradict the SCC by Corollary 9.2.

Equality Gadget. A Δ -eq gadget is a graph with a set of designated vertices called *portals* that has exactly two triangle packings that cover all non-portal vertices:

- one that also covers all portals (i.e., it is a triangle partition in the gadget), and
- one that covers no portal.

A Δ -eq gadget behaves similarly to gadgets that we introduced for variants of q -COLORING, but this time for the Δ -PARTITION problem. When constructing an instance G of Δ -PARTITION, only the portal vertices of the gadget will have neighbors outside the gadget. Consequently, in any triangle packing of G , all portals of the Δ -eq gadget will be in the same state: either they are all covered by triangles contained inside the gadget, or none of them is covered by such a triangle. This explains why we use the name *equality gadget*.

Now let us show how to construct a Δ -eq gadget Z with r portals and $4r$ vertices in total; see Figure 4. Introduce four sets of vertices $P = \{p_0, \dots, p_{r-1}\}$, $Q = \{q_0, \dots, q_{r-1}\}$, $A = \{a_0, \dots, a_{r-1}\}$, and $B = \{b_0, \dots, b_{r-1}\}$. All arithmetic iterations on indices of these vertices are performed modulo r .

The vertices from A and B form a cycle with consecutive vertices $a_1, b_1, a_2, b_2, \dots, a_r, b_r$. Then, for each $i \in [r]$, we create a triangle on vertices a_i, b_i, p_i ; let \mathbb{P}_1 denote the set of such triangles. Similarly, for each $i \in [r]$, we create a triangle q_i, b_i, a_{i+1} ; let \mathbb{P}_2 denote set of these triangles. Finally, for each $i \in [\frac{r}{3} - 1]$, we create a triangle on vertices $q_{3i+1}, q_{3i+2}, q_{3i+3}$; call the set of these triangles \mathbb{P}_3 . This completes the construction of Z and P is the set of portal vertices.

Let us argue that Z indeed has the property of a Δ -eq gadget. Let \mathcal{P} be a triangle packing in Z that covers all non-portal vertices, i.e., $A \cup B \cup Q$. Suppose \mathcal{P} contains a triangle from

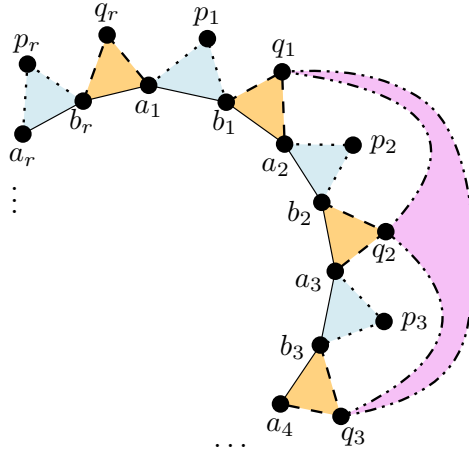


Figure 4: The construction of the Δ -eq gadget with r portal vertices. The blue, orange, and violet triangles, with dotted, dashed, and dotted-dashed edges respectively, belong to \mathbb{P}_1 , \mathbb{P}_2 , and \mathbb{P}_3 respectively.

\mathbb{P}_1 , say, p_i, a_i, b_i for $1 \leq i \leq r$. In that case, since \mathcal{P} covers a_{i+1} , it must also contain the triangle $p_{i+1}, a_{i+1}, b_{i+1}$. By induction, it is easy to show that \mathcal{P} should include all triangles in \mathbb{P}_1 . The remaining vertices, i.e., Q must be covered by the triangles in \mathbb{P}_3 . Therefore, in this case all the portal vertices of Z are covered by \mathcal{P} .

Assume now that \mathcal{P} has no triangle from \mathbb{P}_1 . In particular, no portal vertices are covered by \mathcal{P} . We need to argue that such \mathcal{P} exists and is unique. Note that in order to cover all non-portal vertices, \mathcal{P} must contain all the triangles in \mathbb{P}_2 . Hence the constructed graph is indeed a Δ -eq gadget.

Construction of the graph G . Given a $=r$ -SET PARTITION instance (U, \mathcal{F}) , let us create an instance G of Δ -PARTITION as follows. First, create n vertices $V_U = \{v_1, \dots, v_n\}$, where each v_i corresponds to $i \in U$. Then, for each $S \in \mathcal{F}$, create a Δ -eq gadget, denoted by Δ -eq(S), with r portal vertices, and identify the portal vertices of Δ -eq(S) with corresponding vertices of V_U . Let G be the resulting graph obtained by applying these operations. Note that G has $\mathcal{O}(n^r)$ vertices and V_U is a (σ, δ) -hub of G of size n , where $\sigma = 4r$ and $\delta = r$.

Equivalence of instances. Suppose U has a partition $\mathcal{S} \subseteq \mathcal{F}$. For each $S \in \mathcal{S}$, define $V_S = \{v_i \mid i \in S\}$. Note that since \mathcal{S} is a partition of U , sets V_S form a partition of the vertices V_U . For $S \in \mathcal{S}$, let \mathcal{T}_S be a triangle partition of Δ -eq(S) which covers all its portal vertices, i.e., V_S ; it exists by the definition of Δ -eq gadget. For $S \in \mathcal{F} \setminus \mathcal{S}$, let \mathcal{T}_S be a triangle partition of Δ -eq(S) which covers no portal vertices; again, it exists by the definition of Δ -eq gadget. Note that $\bigcup_{S \in \mathcal{F}} \mathcal{T}_S$ is a triangle partition of the whole graph G .

Now, suppose G has a triangle partition \mathcal{T} . Let us call a copy Δ -eq(S) of the Δ -eq gadget in G *active* if there is no triangle that intersects the gadget, but it not contained in the gadget. Recall that this means that each portal of Δ -eq(S) is a part of some triangle not contained in Δ -eq(S). Define $\mathcal{S} = \{S \in \mathcal{F} \mid \Delta$ -eq(S) is active $\}$. With a similar reasoning as in the previous paragraph, it is straightforward to verify that \mathcal{S} is a partition of U . Summing up, (U, \mathcal{F}) is a YES-instance of $(3 \cdot d)$ -SET PARTITION if and only if G is a YES-instance of Δ -PACKING.

Running Time. Building the graph G takes time polynomial time in n . Moreover, as mentioned before, G has $\mathcal{O}(n^r)$ vertices and V_U is a $(4r, r)$ -hub of G of size n . Therefore, the assumed algorithm for $=r$ -SET PARTITION, one can solve the instance (U, \mathcal{F}) in time

$$(2 - \varepsilon)^{|V_U|} \cdot |V(G)|^{\mathcal{O}(1)} = (2 - \varepsilon)^n \cdot n^{\mathcal{O}(1)}.$$

This completes the proof. \square

9.2 Reducing Δ -PACKING to SET PACKING

The goal of this section is to prove Theorem 9.4.

Theorem 9.4. *Suppose the SCC fails. Then there exists $\varepsilon > 0$ such that, for all $\sigma, \delta \geq 1$, there is an algorithm that solves every n -vertex instance of Δ -PACKING given with a (σ, δ) -hub of size p in time $(2 - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$.*

In order to simplify the description of the proof, we split it into two steps. First, we show how we can use a fast algorithm for $\leq d$ -SET PACKING ($\#$ SETS) to solve an auxiliary variant of the problem called c -PRECOLORED- Δ -PACKING. Then, we use some color-coding idea to show how an algorithm for c -PRECOLORED- Δ -PACKING can be used to solve Δ -PACKING.

Let us start with some definitions and notation. Let G be a graph and $Q \subseteq V(G)$. Let \mathcal{C} denote the set of components of $G - Q$ and let \mathcal{D} denote the set of triangles of G that are contained in Q . Let Π be a collection of pairwise vertex-disjoint triangles in G . We say that $C \in \mathcal{C}$ is *active* (with respect to Π) if there is a triangle in Π that intersects both C and Q . A triangle in \mathcal{D} is *active* if it belongs to Π .

For a function $\psi : \mathcal{C} \cup \mathcal{D} \rightarrow \mathbb{N}$, by \mathcal{C}_i (resp., \mathcal{D}_i) we denote $\mathcal{C} \cap \psi^{-1}(i)$ (resp., $\mathcal{D} \cap \psi^{-1}(i)$).

For a constant c , an instance of c -PRECOLORED- Δ -PACKING is a quadruple (G, t, Q, ψ) , where G is graph, t is an integer, Q is a subset of $V(G)$, and ψ is a function that maps elements of $\mathcal{C} \cup \mathcal{D}$ to numbers in $\{1, \dots, \lceil |Q|/c \rceil\}$ (here \mathcal{C} and \mathcal{D} are defined as in the previous paragraph). We call the numbers in the codomain of ψ *colors* and call ψ a *coloring*; we emphasize that this is an arbitrary coloring and has no correctness criterion. We ask whether G admits a packing of at least t triangles such that, for each color i , at most c elements of $\mathcal{C}_i \cup \mathcal{D}_i$ are active (the sets \mathcal{C}_i and \mathcal{D}_i are defined with respect to ψ).

Lemma 9.5. *Suppose there is $\varepsilon' > 0$ such that for all d , $\leq d$ -SET PACKING ($\#$ SETS) with n -element universe can be solved in time $(2 - \varepsilon')^n \cdot n^{\mathcal{O}(1)}$.*

Then there is $\varepsilon'' > 0$ such that for every $\sigma, \delta \geq 1$ there is c_0 depending only on ε'' and σ , so that for every $c \geq c_0$, every instance (G, t, Q, ψ) of c -PRECOLORED- Δ -PACKING, where Q is a (σ, δ) -hub of size p , can be solved in time $(2 - \varepsilon'')^p \cdot |V(G)|^{\mathcal{O}(1)}$.

Proof. Let σ, δ be fixed constants. Without loss of generality assume that $\sigma \geq 2$. Let

$$\varepsilon'' = \varepsilon'/4 \tag{6}$$

and let c_0 be the smallest integer that satisfies both

$$(c_0\sigma + 1)^{1/c_0} \leq (1 + \varepsilon'') \tag{7}$$

$$(2 - \varepsilon')^{1/c_0} \leq (1 + \varepsilon''); \tag{8}$$

and pick any $c \geq c_0$; clearly c satisfies these inequalities too. This choice will become clear later in the proof. Note that ε'' depends only on ε' and c_0 depends only on ε' and σ .

Let (G, t, Q, ψ) be an instance of c -PRECOLORED- Δ -PACKING, where Q is a (σ, δ) -hub of size p . By introducing at most $c - 1$ isolated vertices to Q , we can assume that c divides p ; note that these dummy vertices contribute to the running time only by a constant factor. We will use the assumed algorithm for $\leq d$ -SET PACKING (#SETS) for $d = 2c\sigma + 1$ to solve (G, t, Q, ψ) in time $(2 - \varepsilon'')^p \cdot |V(G)|^{\mathcal{O}(1)}$.

Let $\ell = p/c$ denote the number of colors used by ψ . The sets \mathcal{C}, \mathcal{D} and $\mathcal{C}_i, \mathcal{D}_i$ over all $i \in [\ell]$ are defined as previously.

Fix some (unknown) optimum solution Π , i.e., a largest triangle packing in G that has at most c active elements in each color. A *contribution* of a component $C \in \mathcal{C}$ is the number of triangles in Π that intersect C (they can either be contained in C , or have some vertices in C and some in Q). The contribution of a triangle in \mathcal{D} is 1 if this triangle is in Π and 0 otherwise. A contribution of a color $i \in [\ell]$ is the total contribution of all elements in $\mathcal{C}_i \cup \mathcal{D}_i$.

In the algorithm, for each color i , we would like to exhaustively guess the contribution of this color. However, the numbers involved might be very large, as \mathcal{C}_i might contain many components. Thus we are going to do this indirectly.

Fix a color $i \in [\ell]$. Let X_i be the number of triangles of a maximum triangle packing of the graph induced by the components in \mathcal{C}_i . Note that X_i can be computed in time linear in $|V(G)|$ as each component in \mathcal{C}_i has size at most σ and there are at most $|V(G)|$ such components. A maximum triangle packing can be obtained as the union of maximum triangle packings of the individual components.

Note that the contribution of the color i is at least X_i and at most $X_i + c\sigma$. Indeed, on one hand, we can pick X_i triangles that are contained in the components in \mathcal{C}_i , without interfering with any object of any other color. On the other hand, each active triangle in \mathcal{D}_i contributes 1 to the sum, while each of at most σ vertices of each active component in \mathcal{C}_i can be present in at most one triangle intersecting Q . Since there are at most c active objects, we get the upper bound.

So, instead of guessing the contribution of each color $i \in [\ell]$ directly, we guess the offset q_i of this value against X_i . Formally, the algorithm iterates over all tuples of the form $\mathbf{q} = (q_1, \dots, q_\ell) \in \{0, \dots, c\sigma\}^\ell$ that satisfy $\sum_{i \in [\ell]} (X_i + q_i) \geq t$. Note that if no such tuple exists, the discussion above yields that (G, t, Q, ψ) is a NO-instance. Observe that the number of choices for \mathbf{q} is at most

$$(c\sigma + 1)^\ell = (c\sigma + 1)^{p/c} \stackrel{(7)}{\leq} (1 + \varepsilon'')^p. \quad (9)$$

Fix one such tuple $\mathbf{q} = (q_1, \dots, q_\ell)$ and consider a color $i \in [\ell]$. We say that a subset $S \subseteq Q$ of vertices from the hub is *i -valid* if it has size at most $2c\sigma$ and the graph induced by S together with the components in \mathcal{C}_i has a triangle packing Π_S with the following properties:

- at most c elements of $\mathcal{D}_i \cup \mathcal{C}_i$ are active w.r.t. Π_S ,
- all triangles of Π_S contained in Q are in \mathcal{D}_i ,
- the number of triangles in Π_S is at least $X_i + q_i$.

Intuitively, a set S is *i -valid* if it is compatible with the choice of q_i . The size bound comes from the fact that each active triangle in \mathcal{D}_i uses three vertices from Q , while the triangles intersecting each active component from \mathcal{C}_i intersect at most 2σ vertices of Q . As $\sigma \geq 2$ and there are at most c active elements in $\mathcal{D}_i \cup \mathcal{C}_i$, the bound follows.

Claim 9.5.1. *For each color i and offset q_i , the i -valid sets can be enumerated in time polynomial in $|V(G)|$.*

Proof of Claim. There are at most $\mathcal{O}(p^{2c\sigma}) = |V(G)|^{\mathcal{O}(1)}$ subsets of Q of size at most $2c\sigma$. As each such candidate set S is of constant size, in polynomial time we can enumerate all possible triangle packings in which every triangle intersects S . Furthermore, in polynomial time, each such packing can be extended in an optimal way by picking triangles contained in \mathcal{C}_i ; this is possible as each component in \mathcal{C}_i is of constant size. It is straightforward to verify that S is i -valid if and only if any of the packings obtained that way satisfies the conditions for Π_S . \triangleleft

For each tuple \mathbf{q} , we can now define an instance $(U, \mathcal{F}_{\mathbf{q}}, \ell)$ of $\leq d$ -SET PACKING (#SETS) as follows. The universe U of the instance consists of all vertices in the hub Q together with a distinct element a_i per each color $i \in [\ell]$, so in total $|U| = p + \ell = p + p/c$. The set system $\mathcal{F}_{\mathbf{q}}$ contains, for each color $i \in [\ell]$ and for each i -valid set $S \subseteq Q$, the set $S \cup \{a_i\}$. Note that each set in $\mathcal{F}_{\mathbf{q}}$ is of size at most $d = 2c\sigma + 1$, and the instance can be constructed in time polynomial in $|V(G)|$. The algorithm iterates over all such instances and executes the previously-mentioned algorithm for $\leq d$ -SET PACKING (#SETS) on each of these instances. If in any of the calls we obtain a positive answer, we report that (G, t, Q, ψ) is a YES-instance, and otherwise we reject it.

Correctness The correctness of the algorithm follows from the following two claims.

Claim 9.5.2. *If there is \mathbf{q} for which $(U, \mathcal{F}_{\mathbf{q}}, \ell)$ is a YES-instance of $\leq d$ -SET PACKING (#SETS), then (G, t, Q, ψ) is a YES-instance of c -PRECOLORED- Δ -PACKING.*

Proof of Claim. Let $\mathcal{F}^* \subseteq \mathcal{F}_{\mathbf{q}}$ be a family ℓ pairwise disjoint sets. Since each set in $\mathcal{F}_{\mathbf{q}}$ contains one of the elements $\{a_1, \dots, a_\ell\}$, the solution \mathcal{F}^* contains, for each color i , precisely one set of the form $S_i \cup \{a_i\}$. Note that S_i may be empty. For each such set, let Π_{S_i} be a triangle packing defined as above. We claim that $\bigcup_{i \in [\ell]} \Pi_{S_i}$ is a triangle packing that witnesses that (G, t, Q, ψ) is a YES-instance.

Clearly the triangles within one set Π_{S_i} are pairwise disjoint. Now consider two triangles from distinct sets, say Π_i and Π_j . As sets of components \mathcal{C}_i and \mathcal{C}_j are pairwise disjoint, these two triangles may overlap only on Q , which means that $S_i \cap S_j \neq \emptyset$. However, this is not possible as sets in \mathcal{F} are pairwise disjoint.

Next, by the conditions in the definition of i -valid set, we observe that at most c elements from $\mathcal{C}_i \cup \mathcal{D}_i$ are active. Finally, the total number of triangles is at least $\sum_{i \in [\ell]} (X_i + q_i)$ which is at least t by the choice of \mathbf{q} . \triangleleft

Claim 9.5.3. *If (G, t, Q, ψ) is a YES-instance of c -PRECOLORED- Δ -PACKING, then there is \mathbf{q} for which $(U, \mathcal{F}_{\mathbf{q}}, \ell)$ is a YES-instance of $\leq d$ -SET PACKING (#SETS).*

Proof of Claim. Suppose there exists a triangle packing Π of G of size at least t , that has at most c active elements of each color. Fix color $i \in [\ell]$ and let Π_i be the subfamily of Π consisting of triangles that either are in \mathcal{D}_i , or intersect \mathcal{C}_i . Clearly the sets Π_i over all $i \in [\ell]$ form a partition of Π . Recall that we safely assume that $X_i \leq |\Pi_i| \leq X_i + c\sigma$. Define $q_i := |\Pi_i| - X_i$. Note that $\mathbf{q} = (q_1, \dots, q_\ell)$ is one of the tuples considered by our algorithm.

For $i \in [\ell]$, let $S_i \subseteq Q$ be the set consisting of vertices of triangles in Π_i . The packing Π_i is a witness that S_i is an i -valid set (with respect to \mathbf{q}). Furthermore, sets $S_i \cup \{a_i\}$ are pairwise disjoint. Thus, $(U, \mathcal{F}_{\mathbf{q}}, \ell)$ is a YES-instance of $\leq d$ -SET PACKING (#SETS). \triangleleft

Runtime The algorithm iterates over all possible choices of \mathbf{q} , for each choice it builds an instance $(U, \mathcal{F}_{\mathbf{q}})$ in polynomial time, and then calls the assumed algorithm for $\leq d$ -SET PACKING ($\#\text{SETS}$). As $|U|$ and $|\mathcal{F}_{\mathbf{q}}|$ are bounded by a polynomial function of $|V(G)|$, and by (9), the total running time is bounded by

$$\begin{aligned} & (1 + \varepsilon'')^p \cdot (2 - \varepsilon')^{|U|} \cdot |V(G)|^{\mathcal{O}(1)} \leq (1 + \mu)^p \cdot (2 - \varepsilon')^{p(1+1/c)} \cdot |V(G)|^{\mathcal{O}(1)} \\ & \leq \left((1 + \varepsilon'') \cdot (2 - \varepsilon') \cdot (2 - \varepsilon')^{1/c} \right)^p \cdot |V(G)|^{\mathcal{O}(1)} \stackrel{(8)}{\leq} ((1 + \varepsilon'')^2 \cdot (2 - \varepsilon'))^p \cdot |V(G)|^{\mathcal{O}(1)} \\ & \stackrel{(6)}{\leq} (2 - \varepsilon'')^p \cdot |V(G)|^{\mathcal{O}(1)}, \end{aligned}$$

as claimed. This completes the proof. \square

Now let us argue that we can reduce solving Δ -PACKING (where the instance is given with a hub) to c -PRECOLORED- Δ -PACKING for suitably chosen c .

In this reduction we use some color coding idea. We will use the so-called *splitters*. For integers N, p , and ℓ with $N \geq p$, an (N, p, ℓ) -*splitter* Ψ is a family of functions from $[N]$ to $[\ell]$ such that, for each subset S of $[N]$ with size $|S| = p$, there is an $\psi \in \Psi$ that assigns colors from $[\ell]$ as evenly distributed as possible to the elements of S — formally, for $(p \bmod \ell)$ colors $j \in [\ell]$ it holds that $|\psi^{-1}(j)| = \lceil p/\ell \rceil$, and for the remaining colors we have $|\psi^{-1}(j)| = \lfloor p/\ell \rfloor$. The methods of constructing splitters were introduced by Naor, Schulman, and Srinivasan [30].

Theorem 9.6 ([30, Theorem 3 (ii)]). *Let $\ell = \omega(p)$ and let $f(p, \ell) = (2\pi p/\ell)^{\ell/2} e^{\ell^2/(12p)}$. An (N, p, ℓ) -splitter of size $s = \mathcal{O}(f(p, \ell)^{1+o(1)} \log N)$ can be computed in time polynomial in s and N . Here the $o(1)$ in the exponent is for ℓ/\sqrt{p} going to infinity.*

Corollary 9.7. *For every $\varepsilon > 0$ there is c_1 such that for each N, p with $p \leq N$, $c \geq c_1$, an $(N, p, \lceil p/c \rceil)$ -splitter can be computed (and iterated over) in time $(1 + \varepsilon)^p \cdot N^{\mathcal{O}(1)}$.*

Proof. Let c_1 be the smallest integer such that $(2\pi c_1)^{4/c_1} \leq (1 + \varepsilon)$. Choose $N, p \leq N$, and $c \geq c_1$. Note that $\ell := \lceil p/c \rceil = \omega(\sqrt{p})$. Thus, by Theorem 9.6, there is an (N, p, ℓ) -splitter of size $s = \mathcal{O}(f(p, \ell)^{1+o(1)} \log N)$ that can be computed in time polynomial in N and s , where $f(p, \ell) = (2\pi p/\ell)^{\ell/2} e^{\ell^2/(12p)}$. The $o(1)$ in the exponent is for $\ell/\sqrt{p} = \lceil p/c \rceil/\sqrt{p}$ going to infinity, i.e., it is for p going to infinity. If p is smaller than some constant the size of the splitter is trivially $\mathcal{O}(\log N)$. So we can assume that p is sufficiently large such that $f(p, \ell)^{1+o(1)} \leq f(p, \ell)^2$ and $p > c$. Since $p > c$ we have $\lceil p/c \rceil \leq 2p/c$. Then

$$f(p, \ell) = (2\pi p/\ell)^{\ell/2} e^{\ell^2/(12p)} \leq (2\pi c)^{p/c} e^{4p^2/(12pc^2)} \leq (2\pi c)^{2p/c}.$$

Using the fact that $(2\pi c)^{4/c} \leq (1 + \varepsilon)$, it follows that

$$f(p, \ell)^{1+o(1)} \leq f(p, \ell)^2 \leq (2\pi c)^{4p/c} \leq (1 + \varepsilon)^p.$$

So we can compute an (N, p, ℓ) -splitter and then iterate over its members in time $(1 + \varepsilon)^p \cdot N^{\mathcal{O}(1)}$. \square

Let us proceed to the proof of the following result.

Lemma 9.8. *Suppose there is $\varepsilon'' > 0$ such that for every $\sigma, \delta \geq 1$ there is c_0 depending only on ε'' and σ , so that for every $c \geq c_0$, every instance (G, t, Q, ψ) of c -PRECOLORED- Δ -PACKING, where Q is a (σ, δ) -hub of size p , can be solved in time $(2 - \varepsilon'')^p \cdot |V(G)|^{\mathcal{O}(1)}$.*

Then there is $\varepsilon > 0$ such that for every $\sigma, \delta \geq 1$, every n -vertex instance of Δ -PACKING given with a (σ, δ) -hub of size p can be solved in time $(2 - \varepsilon)^p \cdot n^{\mathcal{O}(1)}$.

Proof. Define $\varepsilon = \varepsilon''/3$. Let c_0 be as in the assumption of the lemma, and let c_1 be as in Corollary 9.7 (for ε). Let $c = \max(c_0, c_1)$.

Fix σ and δ , and consider an n -vertex instance (G, t) of Δ -PACKING, given with a (σ, δ) -hub Q of size p . Again, by adding at most $c - 1$ isolated vertices to the hub, we can assume that c divides p . Define $\ell = p/c$. Let \mathcal{C} be the set of components of $G - Q$, and let \mathcal{D} be the set of triangles contained in Q . Define $N = |\mathcal{C} + \mathcal{D}| = \mathcal{O}(n^3)$.

Let Ψ be the (N, p, ℓ) -splitter given by Corollary 9.7 for N, p, c . We claim that (G, t) is a YES-instance of Δ -PACKING if and only if there exists $\psi \in \Psi$ such that (G, t, Q, ψ) is a YES-instance of c -PRECOLORED- Δ -PACKING.

The backwards implication is trivial; let us show the forward one. Suppose there is a triangle packing Π in G , consisting of at least t triangles. Let \mathcal{C}^* and \mathcal{D}^* be the elements of \mathcal{C} and \mathcal{D} , respectively, that are active with respect to Π . Notice that $|\mathcal{C}^* \cup \mathcal{D}^*| \leq p$. Indeed, each active element of $\mathcal{C} \cup \mathcal{D}$ uses at least one vertex of Q and these vertices are pairwise distinct. Let S be a subset of $\mathcal{D} \cup \mathcal{C}$ of size exactly p that contains $\mathcal{C}^* \cup \mathcal{D}^*$.

We interpret elements from Ψ as functions from $\mathcal{C} + \mathcal{D}$ (recall that $|\mathcal{C} + \mathcal{D}| = N$) to $[\ell] = [p/c]$. By the definition of the splitter, there is $\psi \in \Psi$ in which each color appears exactly $\frac{p}{p/c} = c$ times on elements of S . Thus, for each color i there are at most c active elements of $\mathcal{D} \cup \mathcal{C}$. Consequently, (G, t, Q, ψ) is a YES-instance of c -PRECOLORED- Δ -PACKING.

Now the algorithm is simple. First, it uses Corollary 9.7 to compute Ψ . Then it iterates over all $\psi \in \Psi$, and calls the assumed algorithm for the instance (G, t, Q, ψ) of c -PRECOLORED- Δ -PACKING. If any the calls succeeds, the algorithm reports a YES-instance, and otherwise it reports a NO-instance. The correctness follows from the reasoning above.

The running time is determined by the number of elements of Ψ times the time needed to call the algorithm for each instance of c -PRECOLORED- Δ -PACKING, thus it is bounded by

$$(1 + \varepsilon)^p \cdot (2 - \varepsilon'')^p \cdot n^{\mathcal{O}(1)} = (2 - \varepsilon'' + 2\varepsilon''/3 - \varepsilon''^2/3)^p \cdot n^{\mathcal{O}(1)} \leq (2 - \varepsilon)^p \cdot n^{\mathcal{O}(1)},$$

as claimed. This completes the proof. \square

Now Theorem 9.4 follows directly from the combination of Theorem 2.6, Lemma 9.5, and Lemma 9.8.

10 Dominating Set

In this section we turn our attention to DOMINATING SET parameterized by the hub size. We show two quite simple reductions that exclude an algorithm with running time $(2 - \varepsilon)^p \cdot |V(G)|^{\mathcal{O}(1)}$ (where the instance G is given with a hub of size p) under two complexity assumptions: the SETH and the SCC.

Theorem 10.1. *For every $\varepsilon > 0$ there exists δ such that the DOMINATING SET problem on n -vertex instances given with a $(3, \delta)$ -hub of size p cannot be solved in time $(2 - \varepsilon)^p \cdot |V(G)|^{\mathcal{O}(1)}$, unless the SCC fails.*

Proof. Assume the SCC. Given some $\varepsilon > 0$, let d be the constant given by the SCC for this ε . We reduce from $\leq d$ -SET COVER, let (U, \mathcal{F}) be an instance where $|U| = n$ and $|\mathcal{F}| = m$. We start the construction of the instance G of DOMINATING SET with introducing a set Y which contains a vertex y_i for every $i \in U$. Next, for every set $F \in \mathcal{F}$, we proceed as follows. We introduce a three-vertex path with consecutive vertices a_F, b_F, c_F . Then we add an edge $a_F y_i$

if and only if $i \in F$. Denote $A = \{a_F \mid F \in \mathcal{F}\}$, $B = \{b_F \mid F \in \mathcal{F}\}$, and $C = \{c_F \mid F \in \mathcal{F}\}$. This completes the construction of G .

Note that this construction can be performed in time polynomial in n (recall that d is a constant and thus m is polynomial in n) and the constructed graph has $n + 3m = \mathcal{O}(n^d)$ vertices. Furthermore, the set Y is a $(3, d)$ -hub of size n .

We claim that G has a dominating set of size at most $k + m$ if and only if \mathcal{F} contains at most k sets that cover U .

First, suppose that there is a subfamily $\mathcal{F}' \subseteq \mathcal{F}$ of size at most k such that $U = \bigcup \mathcal{F}'$. Define $X = B \cup \{a_F \mid F \in \mathcal{F}'\}$. Clearly X is of size $k + m$. Let us show that it is a dominating set.

Notice that for each $F \in \mathcal{F}$, the vertices a_F, b_F, c_F are dominated by $b_F \in X$. Now consider any $y_i \in Y$. As \mathcal{F}' covers U , there is $F \in \mathcal{F}'$ such that $i \in F$. This means that $a_F \in X$ and y_i is dominated by a_F .

For the other direction, suppose that G has a dominating set X of size at most $k + m$. We claim that we can assume that $B \subseteq X \subseteq A \cup B$. Indeed, consider $F \in \mathcal{F}$. Notice that in order to dominate c_F , the set X must contain at least one of b_F, c_F . However, if it contains c_F , we can obtain a solution of at most the same size by replacing c_F with b_F (if $b_F \notin X$) or removing c_F (otherwise). Thus we may assume that $B \subseteq X$ and $C \cap X = \emptyset$. Now, for contradiction, suppose that there is $y_i \in Y \cap X$. The vertex y_i can only dominate itself or some set of vertices in A . However, $B \subseteq X$ already dominates all vertices in A . Hence, $X \setminus \{y_i\}$ dominates every vertex of G , except possibly y_i . So consider any $F \in \mathcal{F}$ such that $i \in F$; recall that such F exists as $U = \bigcup \mathcal{F}$. Then the set $X \setminus \{y_i\} \cup \{a_F\}$ is a dominating set of size at most $|X|$.

Define $\mathcal{F}' = \{F \mid a_F \in X\}$; clearly $|\mathcal{F}'| \leq k$. We claim that $\bigcup \mathcal{F}' = U$. Suppose there is $i \in U$ that is not in $\bigcup \mathcal{F}'$. However, this means that y_i is not dominated by X , a contradiction.

Summing up, a hypothetical algorithm that solves DOMINATING SET on G in time $(2 - \varepsilon)^n \cdot |V(G)|^{\mathcal{O}(1)}$ can be used to solve the instance (U, \mathcal{F}) of $\leq d$ -SET COVER in time $(2 - \varepsilon)^n \cdot n^{\mathcal{O}(1)}$, contradicting the SCC. \square

In the $\leq d$ -HITTING SET problem the instance is a pair (U, \mathcal{F}) , where U is a set called the *universe* and \mathcal{F} is a family of subsets of U , each of size at most d . We ask for a minimum *hitting set*, i.e., a minimum-sized subset of U that intersects every element of \mathcal{F} .

Theorem 10.2 (Cygan et al. [9]). *For every $\varepsilon > 0$ there exists d such that the $\leq d$ -HITTING SET with universe of size n cannot be solved in time $(2 - \varepsilon)^n \cdot n^{\mathcal{O}(1)}$, unless the SETH fails.*

With an argument similar to the proof of Theorem 10.1, we can show the following result.

Theorem 10.3. *For every $\varepsilon > 0$ there exists δ such that the DOMINATING SET problem on n -vertex instances given with a $(2, \delta)$ -hub of size p cannot be solved in time $(2 - \varepsilon)^p \cdot |V(G)|^{\mathcal{O}(1)}$, unless the SETH fails.*

Proof. Let $\varepsilon > 0$ and let d be the constant given for that ε by Theorem 10.2. We reduce from $\leq d$ -HITTING SET. Let (U, \mathcal{F}) be a corresponding instance with $|U| = n$.

We construct G as follows. First, we introduce three sets $Y = \{y_i \mid i \in U\}$, $A = \{a_i \mid i \in U\}$, and $B = \{b_i \mid i \in U\}$. For each $i \in U$ we add edges $y_i a_i$ and $a_i b_i$. Next, for each $F \in \mathcal{F}$, we add a vertex z_F . We add the edge $y_i z_F$ if and only if $i \in F$. This completes the construction of G . Note that $|V(G)| = \mathcal{O}(n^d)$ and Y is a $(2, d)$ -hub.

We claim that G has a dominating set of size at most $n + k$ if and only if (U, \mathcal{F}) admits a hitting set of size at most k . Let $U' \subseteq U$ be a hitting set of size at most k . We define

$X = A \cup \{y_i \mid i \in U'\}$. Clearly X dominates $X \cup A \cup B$. Suppose that there is some z_F which is not adjacent to any vertex in X . This means that F does not intersect U' , a contradiction.

Now suppose that G has a dominating set X of size at most $n + k$. Similarly as in the proof of Theorem 10.1 we can assume that $A \subseteq X \subseteq A \cup Y$. Define $U' = \{i \mid y_i \in X\}$; clearly $|U'| \leq k$. We claim that U' is a hitting set. Indeed, if there is some $F \in \mathcal{F}$ which is not intersected by U' , its corresponding vertex z_F is not dominated by X .

Thus a hypothetical algorithm that solves DOMINATING SET on G in time $(2 - \varepsilon)^n \cdot |V(G)|^{\mathcal{O}(1)}$ can be used to solve the instance (U, \mathcal{F}) of $\leq d$ -HITTING SET in time $(2 - \varepsilon)^n \cdot n^{\mathcal{O}(1)}$. By Theorem 10.2, this contradicts the SETH. \square

References

- [1] Jørgen Bang-Jensen, Eduard Eiben, Gregory Z. Gutin, Magnus Wahlström, and Anders Yeo. Component order connectivity in directed graphs. *Algorithmica*, 84(9):2767–2784, 2022. doi:10.1007/s00453-022-01004-z.
- [2] Andreas Björklund. Exact Covers via Determinants. In Jean-Yves Marion and Thomas Schwentick, editors, *27th International Symposium on Theoretical Aspects of Computer Science*, volume 5 of *Leibniz International Proceedings in Informatics (LIPIcs)*, pages 95–106, Dagstuhl, Germany, 2010. Schloss Dagstuhl – Leibniz-Zentrum für Informatik. URL: <https://drops.dagstuhl.de/entities/document/10.4230/LIPIcs.STACS.2010.2447>, doi:10.4230/LIPIcs.STACS.2010.2447.
- [3] F. Boesch, D. Gross, and C. Suffel. Component order connectivity. In *Proceedings of the Twenty-ninth Southeastern International Conference on Combinatorics, Graph Theory and Computing (Boca Raton, FL, 1998)*, volume 131, pages 145–155, 1998.
- [4] Glencora Borradaile and Hung Le. Optimal dynamic program for r -domination problems over tree decompositions. In Jiong Guo and Danny Hermelin, editors, *11th International Symposium on Parameterized and Exact Computation, IPEC 2016, August 24–26, 2016, Aarhus, Denmark*, volume 63 of *LIPIcs*, pages 8:1–8:23. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2016. doi:10.4230/LIPIcs.IPEC.2016.8.
- [5] Bruno Courcelle. The monadic second-order logic of graphs. i. recognizable sets of finite graphs. *Inf. Comput.*, 85(1):12–75, 1990. doi:10.1016/0890-5401(90)90043-H.
- [6] Christophe Crespelle, Pål Grønås Drange, Fedor V. Fomin, and Petr A. Golovach. A survey of parameterized algorithms and the complexity of edge modification. *Comput. Sci. Rev.*, 48:100556, 2023. doi:10.1016/j.cosrev.2023.100556.
- [7] Radu Curticapean, Nathan Lindzey, and Jesper Nederlof. A tight lower bound for counting Hamiltonian cycles via matrix rank. In Artur Czumaj, editor, *Proceedings of the Twenty-Ninth Annual ACM-SIAM Symposium on Discrete Algorithms, SODA 2018, New Orleans, LA, USA, January 7–10, 2018*, pages 1080–1099. SIAM, 2018. doi:10.1137/1.9781611975031.70.
- [8] Radu Curticapean and Dániel Marx. Tight conditional lower bounds for counting perfect matchings on graphs of bounded treewidth, cliquewidth, and genus. In Robert

- Krauthgamer, editor, *Proceedings of the Twenty-Seventh Annual ACM-SIAM Symposium on Discrete Algorithms, SODA 2016, Arlington, VA, USA, January 10-12, 2016*, pages 1650–1669. SIAM, 2016. doi:[10.1137/1.9781611974331.ch113](https://doi.org/10.1137/1.9781611974331.ch113).
- [9] Marek Cygan, Holger Dell, Daniel Lokshtanov, Dániel Marx, Jesper Nederlof, Yoshio Okamoto, Ramamohan Paturi, Saket Saurabh, and Magnus Wahlström. On Problems as Hard as CNF-SAT. *ACM Transactions on Algorithms*, 12(3):41:1–41:24, May 2016. doi:[10.1145/2925416](https://doi.org/10.1145/2925416).
- [10] Marek Cygan, Fedor V. Fomin, Lukasz Kowalik, Daniel Lokshtanov, Dániel Marx, Marcin Pilipczuk, Michal Pilipczuk, and Saket Saurabh. *Parameterized Algorithms*. Springer, 2015. doi:[10.1007/978-3-319-21275-3](https://doi.org/10.1007/978-3-319-21275-3).
- [11] László Egri, Dániel Marx, and Paweł Rzażewski. Finding list homomorphisms from bounded-treewidth graphs to reflexive graphs: a complete complexity characterization. In Rolf Niedermeier and Brigitte Vallée, editors, *35th Symposium on Theoretical Aspects of Computer Science, STACS 2018, February 28 to March 3, 2018, Caen, France*, volume 96 of *LIPICs*, pages 27:1–27:15. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2018. doi:[10.4230/LIPICs.STACS.2018.27](https://doi.org/10.4230/LIPICs.STACS.2018.27).
- [12] Jacob Focke, Dániel Marx, Fionn Mc Inerney, Daniel Neuen, Govind S. Sankar, Philipp Schepper, and Philip Wellnitz. Tight complexity bounds for counting generalized dominating sets in bounded-treewidth graphs. In Nikhil Bansal and Viswanath Nagarajan, editors, *Proceedings of the 2023 ACM-SIAM Symposium on Discrete Algorithms, SODA 2023, Florence, Italy, January 22-25, 2023*, pages 3664–3683. SIAM, 2023. doi:[10.1137/1.9781611977554.ch140](https://doi.org/10.1137/1.9781611977554.ch140).
- [13] Jacob Focke, Dániel Marx, and Paweł Rzażewski. Counting list homomorphisms from graphs of bounded treewidth: tight complexity bounds. In Joseph (Seffi) Naor and Niv Buchbinder, editors, *Proceedings of the 2022 ACM-SIAM Symposium on Discrete Algorithms, SODA 2022, Virtual Conference / Alexandria, VA, USA, January 9 - 12, 2022*, pages 431–458. SIAM, 2022. doi:[10.1137/1.9781611977073.22](https://doi.org/10.1137/1.9781611977073.22).
- [14] Daniel Gross, L. William Kazmierczak, John T. Saccoman, Charles L. Suffel, and Antonius Suhartomo. On component order edge connectivity of a complete bipartite graph. *Ars Comb.*, 112:433–448, 2013.
- [15] Falko Hegerfeld and Stefan Kratsch. Towards exact structural thresholds for parameterized complexity. In Holger Dell and Jesper Nederlof, editors, *17th International Symposium on Parameterized and Exact Computation, IPEC 2022, September 7-9, 2022, Potsdam, Germany*, volume 249 of *LIPICs*, pages 17:1–17:20. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2022. doi:[10.4230/LIPICs.IPEC.2022.17](https://doi.org/10.4230/LIPICs.IPEC.2022.17).
- [16] Russell Impagliazzo and Ramamohan Paturi. On the complexity of k -SAT. *J. Comput. Syst. Sci.*, 62(2):367–375, 2001. doi:[10.1006/jcss.2000.1727](https://doi.org/10.1006/jcss.2000.1727).
- [17] Russell Impagliazzo, Ramamohan Paturi, and Francis Zane. Which problems have strongly exponential complexity? *J. Comput. Syst. Sci.*, 63(4):512–530, 2001. doi:[10.1006/jcss.2001.1774](https://doi.org/10.1006/jcss.2001.1774).

- [18] Lars Jaffke and Bart M. P. Jansen. Fine-grained parameterized complexity analysis of graph coloring problems. In Dimitris Fotakis, Aris Pagourtzis, and Vangelis Th. Paschos, editors, *Algorithms and Complexity - 10th International Conference, CIAC 2017, Athens, Greece, May 24-26, 2017, Proceedings*, volume 10236 of *Lecture Notes in Computer Science*, pages 345–356, 2017. doi:10.1007/978-3-319-57586-5_29.
- [19] Ioannis Katsikarelis, Michael Lampis, and Vangelis Th. Paschos. Structural parameters, tight bounds, and approximation for (k, r) -center. *Discret. Appl. Math.*, 264:90–117, 2019. doi:10.1016/j.dam.2018.11.002.
- [20] Lawrence William Kazmierczak. *On the relationship between connectivity and component order connectivity*. ProQuest LLC, Ann Arbor, MI, 2003. Thesis (Ph.D.)—Stevens Institute of Technology. URL: http://gateway.proquest.com/openurl?url_ver=Z39.88-2004&rft_val_fmt=info:ofi/fmt:kev:mtx:dissertation&res_dat=xri:pqdiss&rft_dat=xri:pqdiss:3088817.
- [21] Mikko Koivisto. Partitioning into sets of bounded cardinality. In Jianer Chen and Fedor V. Fomin, editors, *Parameterized and Exact Computation, 4th International Workshop, IWPEC 2009, Copenhagen, Denmark, September 10-11, 2009, Revised Selected Papers*, volume 5917 of *Lecture Notes in Computer Science*, pages 258–263. Springer, 2009. doi:10.1007/978-3-642-11269-0_21.
- [22] Mithilesh Kumar and Daniel Lokshtanov. A 2lk kernel for l-component order connectivity. In Jiong Guo and Danny Hermelin, editors, *11th International Symposium on Parameterized and Exact Computation, IPEC 2016, August 24-26, 2016, Aarhus, Denmark*, volume 63 of *LIPICs*, pages 20:1–20:14. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2016. doi:10.4230/LIPICs.IPEC.2016.20.
- [23] Michael Lampis. Finer tight bounds for coloring on clique-width. *SIAM J. Discret. Math.*, 34(3):1538–1558, 2020. doi:10.1137/19M1280326.
- [24] Daniel Lokshtanov, Dániel Marx, and Saket Saurabh. Known algorithms on graphs of bounded treewidth are probably optimal. *ACM Trans. Algorithms*, 14(2):13:1–13:30, 2018. doi:10.1145/3170442.
- [25] Daniel Lokshtanov, Pranabendu Misra, M. S. Ramanujan, Saket Saurabh, and Meirav Zehavi. Fpt-approximation for FPT problems. In Dániel Marx, editor, *Proceedings of the 2021 ACM-SIAM Symposium on Discrete Algorithms, SODA 2021, Virtual Conference, January 10 - 13, 2021*, pages 199–218. SIAM, 2021. doi:10.1137/1.9781611976465.14.
- [26] L. Lovász. On the ratio of optimal integral and fractional covers. *Discrete Mathematics*, 13(4):383–390, 1975. URL: <https://www.sciencedirect.com/science/article/pii/0012365X75900588>, doi:https://doi.org/10.1016/0012-365X(75)90058-8.
- [27] Dániel Marx, Pranabendu Misra, Daniel Neuen, and Prafullkumar Tale. A framework for parameterized subexponential algorithms for generalized cycle hitting problems on planar graphs. In *Proceedings of the 2022 Annual ACM-SIAM Symposium on Discrete Algorithms (SODA)*, pages 2085–2127. [Society for Industrial and Applied Mathematics (SIAM)], Philadelphia, PA, 2022. doi:10.1137/1.9781611977073.83.

- [28] Dániel Marx, Govind S. Sankar, and Philipp Schepper. Degrees and gaps: Tight complexity results of general factor problems parameterized by treewidth and cutwidth. In Nikhil Bansal, Emanuela Merelli, and James Worrell, editors, *48th International Colloquium on Automata, Languages, and Programming, ICALP 2021, July 12-16, 2021, Glasgow, Scotland (Virtual Conference)*, volume 198 of *LIPICs*, pages 95:1–95:20. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2021. doi:[10.4230/LIPICs.ICALP.2021.95](https://doi.org/10.4230/LIPICs.ICALP.2021.95).
- [29] Dániel Marx, Govind S. Sankar, and Philipp Schepper. Anti-factor is FPT parameterized by treewidth and list size (but counting is hard). In Holger Dell and Jesper Nederlof, editors, *17th International Symposium on Parameterized and Exact Computation, IPEC 2022, September 7-9, 2022, Potsdam, Germany*, volume 249 of *LIPICs*, pages 22:1–22:23. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2022. doi:[10.4230/LIPICs.IPEC.2022.22](https://doi.org/10.4230/LIPICs.IPEC.2022.22).
- [30] Moni Naor, Leonard J. Schulman, and Aravind Srinivasan. Splitters and near-optimal derandomization. In *36th Annual Symposium on Foundations of Computer Science, Milwaukee, Wisconsin, USA, 23-25 October 1995*, pages 182–191. IEEE Computer Society, 1995. doi:[10.1109/SFCS.1995.492475](https://doi.org/10.1109/SFCS.1995.492475).
- [31] Jesper Nederlof. Finding Large Set Covers Faster via the Representation Method. In Piotr Sankowski and Christos Zaroliagis, editors, *24th Annual European Symposium on Algorithms (ESA 2016)*, volume 57 of *Leibniz International Proceedings in Informatics (LIPIcs)*, pages 69:1–69:15, Dagstuhl, Germany, 2016. Schloss Dagstuhl – Leibniz-Zentrum für Informatik. URL: <https://drops.dagstuhl.de/entities/document/10.4230/LIPICs.ESA.2016.69>, doi:[10.4230/LIPICs.ESA.2016.69](https://doi.org/10.4230/LIPICs.ESA.2016.69).
- [32] Karolina Okrasa, Marta Piecyk, and Paweł Rzażewski. Full complexity classification of the list homomorphism problem for bounded-treewidth graphs. In Fabrizio Grandoni, Grzegorz Herman, and Peter Sanders, editors, *28th Annual European Symposium on Algorithms, ESA 2020, September 7-9, 2020, Pisa, Italy (Virtual Conference)*, volume 173 of *LIPICs*, pages 74:1–74:24. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2020. doi:[10.4230/LIPICs.ESA.2020.74](https://doi.org/10.4230/LIPICs.ESA.2020.74).
- [33] Karolina Okrasa and Paweł Rzażewski. Fine-grained complexity of the graph homomorphism problem for bounded-treewidth graphs. *SIAM J. Comput.*, 50(2):487–508, 2021. doi:[10.1137/20M1320146](https://doi.org/10.1137/20M1320146).
- [34] Masataka Shirahashi and Naoyuki Kamiyama. Kernelization algorithms for a generalization of the component order connectivity problem. *J. Oper. Res. Soc. Japan*, 66(2):112–129, 2023.
- [35] Dekel Tsur. Faster parameterized algorithms for two vertex deletion problems. *Theoretical Computer Science*, 940:112–123, 2023. URL: <https://www.sciencedirect.com/science/article/pii/S0304397522006569>, doi:<https://doi.org/10.1016/j.tcs.2022.10.044>.
- [36] Johan M. M. van Rooij. Fast algorithms for join operations on tree decompositions. In Fedor V. Fomin, Stefan Kratsch, and Erik Jan van Leeuwen, editors, *Treewidth, Kernels, and Algorithms - Essays Dedicated to Hans L. Bodlaender on the Occasion of His 60th*

Birthday, volume 12160 of *Lecture Notes in Computer Science*, pages 262–297. Springer, 2020. doi:10.1007/978-3-030-42071-0_18.

- [37] Johan M. M. van Rooij, Hans L. Bodlaender, and Peter Rossmanith. Dynamic programming on tree decompositions using generalised fast subset convolution. In Amos Fiat and Peter Sanders, editors, *Algorithms - ESA 2009, 17th Annual European Symposium, Copenhagen, Denmark, September 7-9, 2009. Proceedings*, volume 5757 of *Lecture Notes in Computer Science*, pages 566–577. Springer, 2009. doi:10.1007/978-3-642-04128-0_51.
- [38] M. Yatauro. Component order connectivity and vertex degrees. *Congr. Numer.*, 220:195–205, 2014.