

Modeling Balanced Explicit and Implicit Relations with Contrastive Learning for Knowledge Concept Recommendation in MOOCs

Hengnian Gu
guhn546@nenu.edu.cn
Northeast Normal University
Changchun, Jilin, China

Pan Xie
jlrtvu@jlrtvu.cn
Jilin Open University
Changchun, Jilin, China

Zhiyi Duan
duanzy17@mails.jlu.edu.cn
Northeast Normal University
Changchun, Jilin, China

Dongdai Zhou*
ddzhou@nenu.edu.cn
Northeast Normal University
Changchun, Jilin, China

ABSTRACT

The knowledge concept recommendation in Massive Open Online Courses (MOOCs) is a significant issue that has garnered widespread attention. Existing methods primarily rely on the explicit relations between users and knowledge concepts on the MOOC platforms for recommendation. However, there are numerous implicit relations (e.g., shared interests or same knowledge levels between users) generated within the users' learning activities on the MOOC platforms. Existing methods fail to consider these implicit relations, and these relations themselves are difficult to learn and represent, causing poor performance in knowledge concept recommendation and an inability to meet users' personalized needs. To address this issue, we propose a novel framework based on contrastive learning, which can represent and balance the explicit and implicit relations for knowledge concept recommendation in MOOCs (CL-KCRec). Specifically, we first construct a MOOCs heterogeneous information network (HIN) by modeling the data from the MOOC platforms. Then, we utilize a relation-updated graph convolutional network and stacked multi-channel graph neural network to represent the explicit and implicit relations in the HIN, respectively. Considering that the quantity of explicit relations is relatively fewer compared to implicit relations in MOOCs, we propose a contrastive learning with prototypical graph to enhance the representations of both relations to capture their fruitful inherent relational knowledge, which can guide the propagation of students' preferences within the HIN. Based on these enhanced representations, to ensure the balanced contribution of both towards the final recommendation, we propose a dual-head attention mechanism for balanced fusion. Experimental results demonstrate that CL-KCRec outperforms several state-of-the-art baselines on real-world datasets in terms of HR, NDCG and MRR.

KEYWORDS

Knowledge concept recommendation, Explicit and implicit Relations, Contrastive learning, Attention mechanism

1 INTRODUCTION

In recent years, the online learning industry has experienced rapid growth [20], which is becoming an integral part of the modern education system. Among these, massive open online courses (MOOCs), as a representative of this transformation, are becoming a popular educational mode worldwide[8]. Although the number of new users on the various MOOC platforms continues to rise, a primary problem remains the low course completion rate[38]. Many users struggle to complete all the knowledge concepts in a course, which leads to inefficiency or even dropout. For example, a course about triangles might cover various knowledge concepts such as sides, angles, auxiliary lines, the Pythagorean theorem, etc. Hence, it is crucial to capture personalized user interests and then recommend specific knowledge concepts in MOOCs.

Existing methods for knowledge concept recommendation in MOOCs utilize the direct interactions between users, knowledge concepts, etc, which we refer to as **explicit relations**. [8] proposes an end-to-end graph neural network based approach with attention mechanism to capture the various relations in MOOCs. However, there are not only explicit relations in users' learning activities, but also numerous indirect interactions like latent social connections, shared interests, similar knowledge levels, etc, which we refer to as **implicit relations**. As shown in Figure 1, besides observing explicit relations, such as users learning courses and watching videos, we can also discover many inherent implicit relations. For instance, if both user₁ and user₂ choose to learn the same course₁, they might share common interests. Furthermore, if user₁ watched video₁ but clicked only on knowledge concept₁, then knowledge concept₂ might be his next focus or something he needs to supplement. Ignoring these implicit relations will undoubtedly impact the effectiveness of knowledge concept recommendation.

Consequently, it is a significant challenge to thoroughly represent and leverage implicit relations in enhancing the knowledge concept recommendation, as illustrated by the following three challenges. First, a user's history in MOOCs mainly describes explicit relations. It is crucial to automatically represent the inherent implicit relations based on these explicit relations. In other words, it is a significant difficulty that mining useful connections as implicit relations from the vast space of combinations of multi-type entities

*Corresponding author.

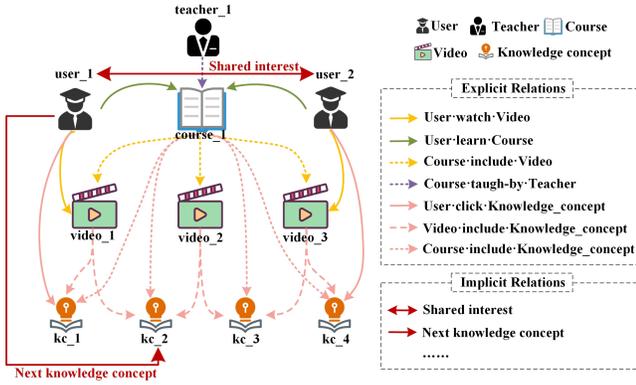


Figure 1: A comprehensive view of explicit and implicit relations in MOOCs.

and relation types in MOOCs, while excluding some noisy connections. Second, explicit relations are obviously fewer in number than implicit relations, while implicit relations are also more complex than explicit ones during the actual learning process, which brings the challenge of effectively guiding the propagation of students’ preferences. It is necessary to enhance the representations of both types of relations. This will capture their inherent relational knowledge. Third, it is essential to balance the contributions of the explicit and implicit relations in the knowledge concept recommendation task.

To address this issue, we propose a novel framework, **CL-KCRec**. First, we construct a MOOCs heterogeneous information network using data from the MOOC platforms. Then, we propose an explicit relation learning module based on relation-updated GCN, and an implicit relation learning module based on a stacked multi-channel GNN, which represents multi-hop relations through a soft attention selection mechanism. We also propose a contrastive learning with prototypical graph to enhance the representations of both relations, and propose a dual-head attention mechanism for balancing the contributions of them. Experimental results demonstrate that CL-KCRec outperforms several state-of-the-art baselines on real-world datasets in terms of HR, NDCG and MRR.

2 RELATED WORK

This work is mainly relevant to knowledge concept recommendation in MOOCs and contrastive learning for recommender systems.

2.1 Knowledge Concept Recommendation

Knowledge concept recommendation is an essential component of personalized learning in MOOCs. Existing methods can be primarily categorized into three types: collaborative filtering (CF)-based methods [23, 28], heterogeneous information network (HIN)-based methods [8, 29] and reinforcement learning (RL)-based methods [7, 11, 17]. CF-based methods, which take into account users’ historical interactions, have achieved success in traditional recommendation strategies. [23] introduces the core concepts of collaborative filtering and design rating systems for recommendation. HIN-based methods incorporate users’ historical interactions into a HIN and

optimize the representations for recommendation. [8] is a state-of-the-art method that employs an attention-based graph convolutional network, which utilizes meta-paths to obtain the representation of nodes for knowledge concept recommendation in MOOCs. RL-based methods apply reinforcement learning for recommendation to adaptively update the strategy during long-term interaction. [7] proposes the reinforced strategy that can recommend the items with substantial long-term benefits.

2.2 Contrastive Learning for Recommendation

Recently, contrastive learning has received widespread attention for its ability to provide powerful self-supervised signals in various fields, such as natural language processing [5, 16] and computer vision [3]. By contrasting positive and negative samples from different views, contrasting learning can learn high-quality and discriminative representations, ensuring sample balance within specific scenarios or tasks. Some studies have attempted to apply the contrastive learning approach to recommendation tasks [19, 30, 31]. [32] proposes a contrastive learning framework for KG-enhanced recommendation. [1] proposes heterogeneous information network Contrastive Learning. [14, 18] propose a prototypical contrastive learning of unsupervised representations. To adapt the contrastive learning into our work, we propose a novel contrastive learning approach based on prototypical graphs to enhance the representations of users and knowledge concepts for the knowledge concept recommendation in MOOCs.

3 PRELIMINARIES

In this section, we introduce the definitions involved in our work.

Task Description. Given a target user with corresponding interactive data in MOOCs (refers to the direct interactions between a user and the MOOCs platform, such as clicking on a knowledge concept or watching a video), the goal is to calculate the user’s interest score for a series of knowledge concepts and generate a recommended list of the top N knowledge concepts. More formally, given the interactive data, denoted as u_i , a predict function f is learned and utilized to generate a recommendation list of knowledge concepts, where each concept is denoted as k_j , for $f : u_i \rightarrow \{k_j\}_{j=1}^N$.

Definition 1: Heterogeneous information network (HIN). In this work, we denote the HIN as $\mathcal{G} = (\mathcal{V}, \mathcal{E})$, consisting of the node set \mathcal{V} and the edge set \mathcal{E} . Each node $v_i \in \mathcal{V}$ is associated with a node type mapping function $f_v : \mathcal{V} \rightarrow \mathcal{T}^v$ and each edge is associated with an edge type mapping function $f_e : \mathcal{E} \rightarrow \mathcal{T}^e$, where \mathcal{T}^v denotes the number of node types and \mathcal{T}^e denotes the number of edge types. The HIN can be represented by a collection of adjacency matrices $\mathbf{A} = \{\mathbf{A}_t\}_{t=1}^{\mathcal{T}^e}$, where $\mathbf{A}_t \in \mathbb{R}^{|\mathcal{V}| \times |\mathcal{V}|}$ denotes an adjacency matrix where $\mathbf{A}_t[i, j]$ is non-zero if there exists a t -th type edge from node v_j to node v_i .

Definition 2: Explicit Relations in HIN (ER). We define the edges between a specific entity and all of its single-hop neighbor nodes as the explicit relations of that entity. As shown in Figure 2(a), the user_1 has various explicit relations with the knowledge concept_1, the course_1, and the video_1, respectively.

Definition 3: Implicit Relations in HIN (IR). We define the implicit relations as the complex multi-hop relations involving multiple entities and their associated explicit relations. As shown in

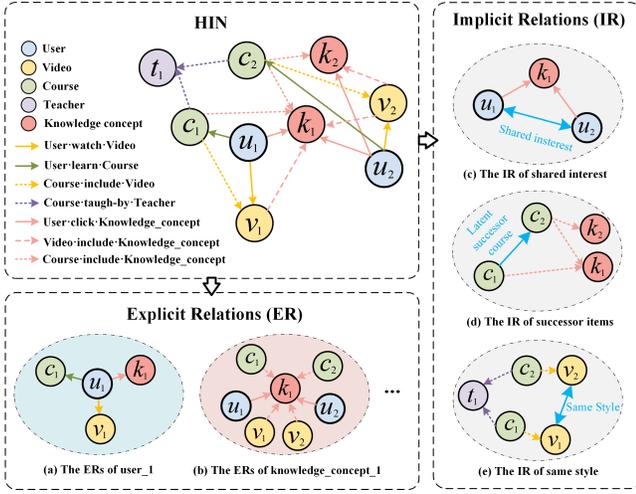


Figure 2: The Explicit and Implicit Relations in HIN.

Figure 2(c), both user₁ and user₂ clicked on knowledge_concept₁. This suggests that they might share a common interest, which could be valuable for knowledge concept recommendation. Obviously, some of these implicit relations are simple and interpretable, while others are complex and harder to explain but remain crucial for recommendation. The implicit relation learning method we propose could effectively address this issue.

Definition 4: Prototypical Graph. For the explicit relations, We denote the prototypical graph as $\mathcal{G}_{er} = (\mathcal{V}_{er}, \mathcal{E}_{er})$, consisting of the node set \mathcal{V}_{er} and edge set \mathcal{E}_{er} . The nodes in \mathcal{V}_{er} consist of a target node within the HIN and the prototypes derived from clustering nodes that share the same type as the target node. Fully connect the target node with the prototypes to form the edge set \mathcal{E}_{er} . Analogously, we denote the prototypical graph for the implicit relations \mathcal{G}_{ir} .

4 CL-KCREC

The architecture of our proposed knowledge concept recommendation framework, **CL-KCREC**, is shown in Figure 3. Each component module will be presented in detail in the following sections.

4.1 Construction of HIN

We model the data from platforms as a HIN (shown in Figure 3(b)) that consists of five types of nodes: users (**U**), knowledge concepts (**K**), courses (**C**), videos (**V**), and teachers (**T**). These nodes are connected via seven types of edges, which are represented as the following adjacency matrices:

- \mathbf{A}^{UK} : *user-click-knowledge_concept* matrix, where each element indicates whether a user clicked a knowledge concept.
- \mathbf{A}^{UV} : *user-watch-video* matrix, where each element indicates whether a user watched a video.
- \mathbf{A}^{UC} : *user-learn-course* matrix, where each element indicates whether a user learned a course.
- \mathbf{A}^{VK} : *video-include-knowledge_concept* matrix, where each element indicates whether a knowledge concept is included in a video.

- \mathbf{A}^{CK} : *course-include-knowledge_concept* matrix, where each element indicates whether a knowledge concept is involved in a course.
- \mathbf{A}^{CV} : *course-include-video* matrix, where each element indicates whether a course includes a video.
- \mathbf{A}^{CT} : *course-taught-by-teacher* matrix, where each element indicates whether a course is taught by a teacher.

After constructing the HIN, we feed it into subsequent modules to represent both explicit and implicit relations, respectively.

4.2 Explicit Relation Learning

In this section, we leverage the knowledge graph embedding techniques to jointly embed nodes and their explicit relations within HIN, as shown in Figure 3(c).

4.2.1 Multi-Relational Representations. To learn the representation in HIN with various explicit relations, we first need to represent these relations. To alleviate the over-parameterization issue in graph representation learning, we draw inspiration from the variant of the basic decomposition approach[24, 26]. We use a linear combination of a set of basis vectors to represent each explicit relation instead of defining a separate embedding vector. Hence, the initial representation of an explicit relation r is given as:

$$\mathbf{z}_r = \sum_{b=1}^{\mathcal{B}} \alpha_{br} \mathbf{c}_b \quad (1)$$

where $\mathbf{z}_r \in \mathbb{R}^{d_1}$ denotes the representation of r -th explicit relation. $\mathbf{c}_b \in \mathcal{C}$ denotes b -th basis vector where $\mathcal{C} = \{\mathbf{c}_1, \mathbf{c}_2, \dots, \mathbf{c}_B\}$. α_{br} is a learnable scalar weight.

4.2.2 Relation-Updated GCN. The original GCN update equation is given by:

$$\mathbf{h}_{v_i} = \text{fagg}(\sum_{(v_j, r) \in \mathcal{N}_{(v_i)}} \mathbf{W}_r \mathbf{h}_{v_j}) \quad (2)$$

where $\mathcal{N}_{(v_i)}$ represents the neighbors nodes that have explicit relations with v_i , and \mathbf{W}_r denotes the learnable parameters. To incorporate the explicit relation representation \mathbf{z}_r into GCN, the entity-relation composition operation[26] is used, which is given as:

$$\mathbf{x}_{v_i} = \varphi(\mathbf{x}_{v_j}, \mathbf{z}_r) \quad (3)$$

where φ is a composition operator for which we adopt the non-parameterized operation of circular-correlation as proposed by[21]. v_j , r , and v_i denote the head node, explicit relation and tail node. $\mathbf{x}_{v_i}, \mathbf{x}_{v_j} \in \mathbb{R}^{d_0}$ denote the initial representation of nodes by BERT[13] with their auxiliary information (refers to the description of a node in HIN, such a course named ‘‘Computer Networks’’, which has an attribute called ‘‘about’’, containing a description of the course). The equation of the relation-updated GCN is given as:

$$\mathbf{h}_{v_i|er} = \text{fagg}(\sum_{(v_j, r) \in \mathcal{N}_{(v_i)}} \mathbf{W}_r \varphi(\mathbf{x}_{v_j}, \mathbf{z}_r)) \quad (4)$$

where $\mathbf{h}_{v_i|er}$ denotes the representation of node v_i updated by explicit relations. The representation \mathbf{z}_r is also transformed as follows:

$$\mathbf{h}_r = \mathbf{W}_{rel} \mathbf{z}_r \quad (5)$$

where $\mathbf{W}_{rel} \in \mathbb{R}^{d_1 \times d_0}$ represents a learnable transformation matrix. Consequently, we extend Eq.(4) to the l layers. Let $\mathbf{h}_{v_i|er}^{(l)}$ denote

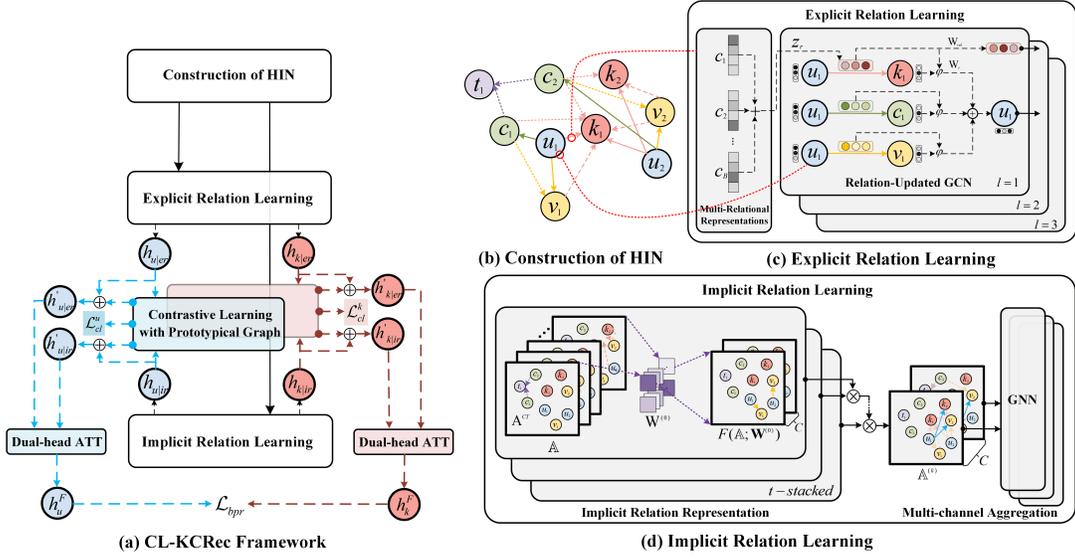


Figure 3: The overall architecture of CL-KCRec.

the final representation of node v_i , which is given as:

$$\mathbf{h}_{v_i|er}^{(l)} = f_{agg} \left(\sum_{(v_j,r) \in \mathcal{N}(v_i)} \mathbf{W}_r^{(l-1)} \varphi(\mathbf{h}_{v_j|er}^{(l-1)}, \mathbf{h}_r^{(l-1)}) \right) \quad (6)$$

Similarly, let $\mathbf{h}_r^{(l)} = \mathbf{W}_{rel}^{(l-1)} \mathbf{h}_r^{(l-1)}$ denote the representation of the explicit relation r after l layers, $\mathbf{h}_{v_i|er}^{(0)}$ and $\mathbf{h}_r^{(0)}$ respectively correspond to the initial representations of the node x_{v_i} and the explicit relation z_r .

4.3 Implicit Relationship Learning

In this section, we propose a stacked multi-channel GNN to represent implicit relations in HIN, as shown in Figure 3(d).

4.3.1 Implicit Relation Representation. Each $\mathbf{A} \in \mathbb{A}$ represents a graph structure corresponding to a specific explicit relation in HIN. Inspired by [35], we use a soft attention selection mechanism to automatically select the new graph structure to represent the multi-hop relation, that is, the implicit relation. Specially, the 1×1 convolution with the weights from *softmax* function is used as:

$$F(\mathbb{A}; \mathbf{W}) = \text{conv}_{1 \times 1}(\mathbb{A}; \text{softmax}(\mathbf{W})) = \sum_{i=1}^{|\mathcal{T}^e|} \alpha_i \mathbf{A}_i \quad (7)$$

where $\mathbf{W} \in \mathbb{R}^{1 \times 1 \times |\mathcal{T}^e|}$ denotes the learnable parameter matrix. The soft selection from different explicit relations is realized by the convex combination of adjacency matrices as $\alpha \cdot \mathbb{A}$ [2]. Then, we stack this operation over t layers to get the t soft-selected adjacency matrices. By conducting matrix multiplication on them in a layer-sequential manner, we obtain a new adjacency matrix that represents the t -hops implicit relation as:

$$\mathbf{A}^{(t)} = (\mathbb{D}^{(t)})^{-1} \mathbf{A}^{(t-1)} F(\mathbb{A}; \mathbf{W}^{(t)}) \quad (8)$$

where $\mathbf{A}^{(0)} = F(\mathbb{A}; \mathbf{W}^{(0)})$ and $\mathbb{D}^{(t)}$ represents a degree matrix to normalize $\mathbf{A}^{(t)}$ to ensure numerical stability. Hence, we represent an implicit relation from HIN with an arbitrary maximum length

of $(t+1)$ -hops, which is expressed as a new graph structure and represented as the adjacency matrix \mathbf{A}_{ir} :

$$\mathbf{A}_{ir} = \left(\sum_{i_0=1}^{|\mathcal{T}^e|} \alpha_{i_0}^{(0)} \mathbf{A}_{i_0} \right) \cdot \left(\sum_{i_1=1}^{|\mathcal{T}^e|} \alpha_{i_1}^{(1)} \mathbf{A}_{i_1} \right) \cdots \left(\sum_{i_t=1}^{|\mathcal{T}^e|} \alpha_{i_t}^{(t)} \mathbf{A}_{i_t} \right) \quad (9)$$

4.3.2 Multi-channel Aggregation. Considering that users in MOOCs may be influenced by multiple implicit relations simultaneously, we extend Eq.(8). The original equation can only represent a single implicit relation at a time; we modify it to support the simultaneous generation of multiple implicit relations by setting the convolution filter channels to C :

$$\mathbf{A}^{(t)} = (\mathbb{D}^{(t)})^{-1} \mathbf{A}^{(t-1)} F(\mathbb{A}; \mathbf{W}^{(t)}) \quad (10)$$

where $\mathbf{A}^{(t-1)} F(\mathbb{A}; \mathbf{W}^{(t)}) = \|\|_{c=1}^C (\mathbf{A}_c^{(t-1)} F(\mathbb{A}; \mathbf{W}^{(t,c)}))$. C denotes the number of channels, and $\mathbb{D}^{(t)}$ represents a set of degree tensors. Each channel of the output tensor $\mathbf{A}^{(t)}$ is fed into l GNN layers to update the representations of nodes:

$$\mathbf{h}_{v_i|ir}^{(l)} = f_{agg} \left(\|\|_{c=1}^C \sigma(\hat{\mathbf{D}}_c^{-1} \hat{\mathbf{A}}_c^{(t)} \mathbf{h}_{v_i|ir}^{(l-1)} \mathbf{W}^{(l-1)}) \right) \quad (11)$$

where $\mathbf{h}_{v_i|ir}^{(l)}$ denotes the final representation of node v_i at the l -th GNN layer. $\mathbf{W}^{(l)} \in \mathbb{R}^{d^{(l)} \times d^{(l+1)}}$ represents a learnable weight matrix. $\mathbf{h}_{v_i|ir}^{(0)} = \mathbf{x}_{v_i}$ denotes the initial representation.

4.4 Contrastive Learning with Prototypical Graph

As the issue has been described in Introduction, the quantity of explicit relations is obviously fewer than that of implicit relations. Hence, after obtaining the node representations with explicit and implicit relations, to maximize the effectiveness of these two representations in recommendation, we propose a contrastive learning with prototypical graph approach to enhance the representations aimed at capturing both explicit and implicit knowledge feature,

which can guide the propagation of students' preferences. The architecture is shown in Figure 4. For convenience, we denote the *original representations* of the user nodes obtained as $\mathbf{h}_{u|er}$ and $\mathbf{h}_{u|ir}$, and the knowledge concept nodes as $\mathbf{h}_{k|er}$ and $\mathbf{h}_{k|ir}$.

4.4.1 Prototypes Generation. We perform clustering method to cluster the users' *original representations* with explicit relations $\mathbf{h}_{u|er} = \{\mathbf{h}_{u_i|er}\}_{i=1}^{N_u}$ (where N_u denotes the number of users.) to generate n clusters as prototypes $\mathcal{C} = \{\mathbf{c}_i\}_{i=1}^n$, collectively representing the embedding space of explicit relations. Here, a prototype[14] is defined as *a representative embedding for a group of semantically similar instances*.

4.4.2 Prototypical Graph Generation. For the original representation $\mathbf{h}_{u_i|er}$ of the user u_i (where we set the sample number with the size of mini-batch at each training epoch, considering the limitation of computational cost and memory), we treat it and all the prototypes \mathcal{C} as nodes $\mathcal{V}_{u_i|er} = [\mathbf{h}_{u_i|er}, \mathbf{c}_1, \mathbf{c}_2, \dots, \mathbf{c}_n]$ in the prototypical graph, and then fully connect these nodes $\mathcal{E}_{u_i|er}$ to get the adjacency matrix $\mathbf{A}_{u_i|er} \in \mathbb{R}^{(n+1) \times (n+1)}$ of the prototypical graph. Ultimately, the prototypical graph can be represented as $\mathcal{G}_{u_i|er} = (\mathcal{V}_{u_i|er}, \mathcal{E}_{u_i|er})$. Analogously, we can generate the prototypical graph $\mathcal{G}_{u_i|ir}$ with implicit relations, as well as $\mathcal{G}_{k_j|er}$ and $\mathcal{G}_{k_j|ir}$ for knowledge concept k_j .

4.4.3 Graph Attention Networks. The prototypical graph $\mathcal{G}_{u_i|er}$ of user u_i is input into the graph attention network (GAT)[27]. Then, we obtain the *enhanced representation* $\mathbf{z}_{u_i|er}$ of user u_i :

$$\mathbf{z}_{u_i|er} = f(\text{GAT}(\mathcal{V}_{u_i|er}, \mathcal{E}_{u_i|er})) \quad (12)$$

4.4.4 InfoNCE-based Contrastive Loss. We propose to model the original and enhanced representation with InfoNCE-based contrastive learning loss. Specifically, for explicit relations, the enhanced $\mathbf{z}_{u|er}$ are considered as the *positive* samples for the *anchor* $\mathbf{h}_{u|er}$, while the enhanced $\mathbf{z}_{u|ir}$ are considered as the *negative* samples. Conversely, for implicit relations, the augmented $\mathbf{z}_{u|ir}$ are considered as the *positive* samples for the *anchor* $\mathbf{h}_{u|ir}$, and the augmented $\mathbf{z}_{u|er}$ are considered as the *negative* samples, as follows:

$$\begin{aligned} \mathcal{L}_1 &= \sum_{i=1}^{N_u} -\log \frac{\exp(s(\mathbf{h}_{u_i|er}, \mathbf{z}_{u_i|er})/\tau)}{\sum_{j=1}^{N_u} \exp(s(\mathbf{h}_{u_i|er}, \mathbf{z}_{u_j|ir})/\tau)} \\ \mathcal{L}_2 &= \sum_{i=1}^{N_u} -\log \frac{\exp(s(\mathbf{h}_{u_i|ir}, \mathbf{z}_{u_i|ir})/\tau)}{\sum_{j=1}^{N_u} \exp(s(\mathbf{h}_{u_i|ir}, \mathbf{z}_{u_j|er})/\tau)} \\ \mathcal{L}_{cl}^u &= \mathcal{L}_1 + \mathcal{L}_2 \end{aligned} \quad (13)$$

where $s(\cdot)$ represents the similarity function, which can be either an inner product or cosine similarity (we adopt the latter). τ represents the temperature coefficient. Analogously, we can derive the loss \mathcal{L}_{cl}^k for the knowledge concepts perspective. The combined contrastive loss is expressed as:

$$\mathcal{L}_{cl} = \alpha_u * \mathcal{L}_{cl}^u + \alpha_k * \mathcal{L}_{cl}^k \quad (14)$$

where α_u and α_k represent two hyperparameters.

4.5 Fusion and Optimization

We adopt a dual-head attention mechanism to fuse the enhanced representations, which are situated in separate vector spaces respective to their corresponding explicit or implicit relations by contrastive learning with prototypical graph, into a unified high dimensional vector space to balance their contributions for knowledge concept recommendation task.

4.5.1 Dual-head Attention Fusion. we concatenate the optimized original and enhanced representations of users to get the output representations:

$$\begin{aligned} \mathbf{h}'_{u|er} &= \mathbf{h}_{u|er} \oplus \mathbf{z}_{u|er} \\ \mathbf{h}'_{u|ir} &= \mathbf{h}_{u|ir} \oplus \mathbf{z}_{u|ir} \end{aligned} \quad (15)$$

where \oplus denotes the concatenation operation. Similarly, we can obtain the output representations of knowledge concepts $\mathbf{h}'_{k|er}$ and $\mathbf{h}'_{k|ir}$. Afterward, we map the representations into the same vector space, then fuse them using cross-modal attention as follows:

$$\begin{aligned} \hat{\mathbf{h}}_{u|er} &= \mathbf{W}_v \tanh(\mathbf{W}_e \mathbf{h}'_{u|er} + \mathbf{b}_e) + \mathbf{b}_v \\ \hat{\mathbf{h}}_{u|ir} &= \mathbf{W}_v \tanh(\mathbf{W}_i \mathbf{h}'_{u|ir} + \mathbf{b}_i) + \mathbf{b}_v \\ \boldsymbol{\alpha}_{u|er} &= \mathbf{W}_s \tanh(\mathbf{W}_e \mathbf{h}'_{u|er} + \mathbf{b}_e) + \mathbf{b}_s \\ \boldsymbol{\alpha}_{u|ir} &= \mathbf{W}_s \tanh(\mathbf{W}_i \mathbf{h}'_{u|ir} + \mathbf{b}_i) + \mathbf{b}_s \\ \tilde{\alpha}_{u|er}, \tilde{\alpha}_{u|ir} &= \text{softmax}(\boldsymbol{\alpha}_{u|er}, \boldsymbol{\alpha}_{u|ir}) \\ \mathbf{h}_u^F &= \tilde{\alpha}_{u|er} \cdot \hat{\mathbf{h}}_{u|er} + \tilde{\alpha}_{u|ir} \cdot \hat{\mathbf{h}}_{u|ir} \end{aligned} \quad (16)$$

where \mathbf{h}_u^F is the fused representation. We use shared weights \mathbf{W}_v and bias \mathbf{b}_v to map the representations from their respective vector space into a unified high-dimensional vector space, while using shared attention weights \mathbf{W}_s and biases \mathbf{b}_s to align the attention coefficients. Similarly, we can obtain the fused representation vector of the knowledge concepts \mathbf{h}_k^F .

4.5.2 Optimization Objectives. In our work, we employ the dot-product to forecast $\hat{y}_{u_i, k_j} = \mathbf{h}_{u_i}^{F T} \cdot \mathbf{h}_{k_j}^F$ to forecast the interaction likelihood between user u_i and knowledge concept k_j . $\hat{y}_{u_i, k_j} \in \mathbb{R}$ denotes the score that indicates the likelihood of user u_i interacting with knowledge concept k_j . A larger value of \hat{y}_{u_i, k_j} indicates a higher probability of interaction. We use the Bayesian Personalized Ranking (BPR) pairwise loss function [22]. Specifically, each training sample is prepared with a user u_i , a positive knowledge concept k_j^+ with which the user has interacted, and a negative knowledge point k_l^- with which the user has not interacted. For each training sample, we maximize the prediction score as follows:

$$\mathcal{L}_{bpr} = \sum_{(u_i, k_j^+, k_l^-) \in \mathcal{O}} -\ln(\sigma(\hat{y}_{u_i, k_j^+} - \hat{y}_{u_i, k_l^-})) + \lambda \|\Theta\|^2 \quad (17)$$

where $\ln(\cdot)$ and $\sigma(\cdot)$ denote the logarithm function and the sigmoid function. λ denotes the hyperparameter for the weight of the regularization term. Combining the BPR loss function and the prototypical graph contrastive learning loss, the overall loss function for CL-KCRec is presented as follows:

$$\mathcal{L} = \mathcal{L}_{bpr} + \beta * \mathcal{L}_{cl} \quad (18)$$

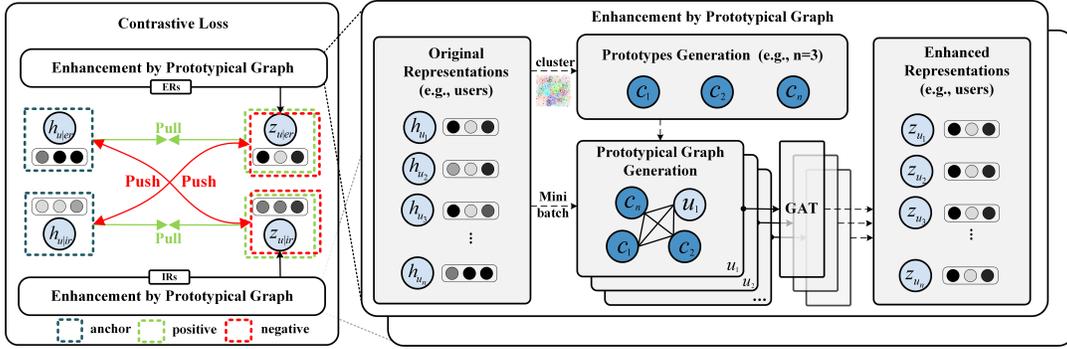


Figure 4: The architecture of Contrastive Learning with Prototypical Graph Module.

4.6 Model Complexity Analysis

We give detailed analysis on the time complexity to measure the efficiency of our CL-KCRec model to measure the efficiency. The explicit relation learning module employs a combination of basis vectors to represent any relational embedding, which takes $O((|\mathcal{T}^e|d_1 + |\mathcal{E}|) \times d_1 \times L_{er})$ time. The implicit relation learning module alleviates the computational bottleneck caused by multiplication of huge adjacency matrices by obtaining equivalent features through a sequence of feature transformations using differently constructed adjacency matrices [36], which takes $O(|\mathbb{A}| \times T \times d_0 \times L_{ir} \times C)$ time. In the contrastive learning with prototypical graph, $O(((n+1)^2 + N_u + N_k) \times d \times b_{min})$ time complexity is incurred in each mini-batch to calculate the InfoNCE loss, which balances both the explicit and implicit features. d_0 , d_1 and d denote the embedding dimension. L_{er} and L_{ir} denote the number of Layers in both relations learning module. T denotes the number of layers stacked for soft-selection. n denotes the number of prototypes. N_u and N_k represent the number of users and knowledge concepts. Overall, it is evident that compared to [1], the time complexity of our model is on the same level. Furthermore, we have also made other efforts like exploring the use of parallel computing measures to help make our model more practically applicable. And the efficiency analysis experiment is provided in the Appendix A.4.

5 EXPERIMENTS

In this section, we evaluate our CL-KCRec in comparison to the baselines. We also analyze the impact of key modules and the robustness of the model. Our experiments are designed primarily to address the following research questions:

- **RQ1:** How does CL-KCRec compare to the baselines?
- **RQ2:** Is it beneficial for the key modules to boost the performance of knowledge concept recommendation in MOOCs?
- **RQ3:** Is our CL-KCRec also proficient in showing strong generalization and robustness on other recommendation tasks and datasets?
- **RQ4:** How do hyperparameters impact model performance?

5.1 Experimental Settings

Datasets. We conducted experiments on the real-world dataset MOOCube[33], which is constructed from actual student learning behavior data on the *XuetangX*¹ platform. Specially, we select student behaviors that were recorded between January 1st, 2018 and June 30th, 2019 as the dataset used in this work (named as MOOCube1819). The detailed data statistics are provided in the Appendix A.1.1. Moreover, we used March 31st, 2019, as the dividing point, with the earlier part as the training set and the latter part as the test set. Each positive instance in the test set is paired with 99 randomly sampled negative instances, and the output of prediction score is calculated based on these 100 samples (1 positive and 99 negatives)[9].

Evaluation Metrics. We adopt three widely used evaluation metrics to evaluate the recommendation performance: *HR@K* (Hit Ratio of top-K items), *NDCG@K* (Normalized Discounted Cumulative Gain) and *MRR* (Mean Reciprocal Rank)[8]. Specifically, we set *K* to 5, 10, and 20.

Baseline Methods. To evaluate the performance of our CL-KCRec, we compare it against a range of baseline models for recommendations, including FISM[12], NeuMF[10], NAIS[9], HERec[25], ACKRec[8], MHCN[34], KGCL[32], and HGCL[1]. In addition, for representation in Heterogeneous Information Networks (HIN), we select baselines such as *metapath2vec*[4], *HIN2vec*[6], *HetGNN*[37], and *CoNR*[15]. To ensure a fair comparison, all baseline models employed the same recommendation module, with optimization and evaluation conducted as described in Section 4.5.2. The details of the baselines and implementation can be found in the Appendix A.2 and A.3, respectively.

5.2 Performance Comparison (RQ1)

Table 1 displays the performance of all the baselines on the MOOCube1819 for knowledge concept recommendation tasks. We summarize the following observations and conclusions. Our CL-KCRec consistently outperforms state-of-the-art benchmarks, demonstrating significant improvements in performance metrics. We attribute this performance improvement primarily to: (1) Our CL-KCRec represents not only the explicit relations but also the implicit ones to capture users’ interests more accurately. (2) The contrastive

¹<https://www.xuetangx.com/>

Table 1: Performance comparison of baselines on the MOOC-Cube1819 dataset

	H@5	H@10	H@20	N@5	N@10	N@20	MRR
NeuMF	0.2470	0.4843	0.6757	0.2238	0.2391	0.2755	0.2054
FISM	0.2595	0.4892	0.6886	0.2382	0.2456	0.3047	0.2121
NAIS	0.2756	0.5022	0.7011	0.2591	0.2647	0.3231	0.2436
HERec	0.3957	0.5875	0.7660	0.3051	0.3599	0.4008	0.2901
ACKRec	0.4566	0.6287	0.8159	0.3570	0.4114	0.4548	0.3490
MHCN	0.4421	0.6293	0.8205	0.3568	0.4045	0.4542	0.3413
KGCL	0.4584	0.6428	0.8288	0.3597	0.4129	0.4610	0.3454
HGCL	0.4657	0.6572	0.8364	0.3624	0.4201	0.4705	0.3598
metapath2vec	0.3190	0.5314	0.7252	0.2736	0.2912	0.3462	0.2673
HIN2vec	0.3370	0.5551	0.7449	0.2944	0.3191	0.3789	0.2880
HetGNN	0.4208	0.6022	0.7927	0.3313	0.3985	0.4241	0.3244
CoNR	0.4593	0.6462	0.8315	0.3778	0.4188	0.4668	0.3687
CL-KCRec	0.5136	0.6751	0.8417	0.4163	0.4313	0.5163	0.4032

Table 2: Ablation study on key components of CL-KCREC.

	H@5	H@10	H@20	N@5	N@10	N@20	MRR
<i>w/-er</i>	0.4762	0.6217	0.7996	0.3648	0.3697	0.4859	0.3738
<i>w/-ir</i>	0.4987	0.6431	0.8255	0.3965	0.3991	0.5088	0.3862
<i>w/o-cl</i>	0.5002	0.6598	0.8267	0.3987	0.4046	0.5100	0.3937
<i>w/o-att</i> w/\oplus	0.5108	0.6689	0.8392	0.4147	0.4278	0.5109	0.3989
<i>w/o-att</i> $w/+$	0.5086	0.6610	0.8321	0.4078	0.4193	0.5067	0.3944
CL-KCRec	0.5136	0.6751	0.8417	0.4163	0.4313	0.5136	0.4032

learning with prototypical graph can enhance the representation, capturing both explicit and implicit relational knowledge, which can guide the propagation of students’ preferences. (3) The dual-head attention mechanism can significantly fuse the enhanced representations to balance their contributions for knowledge concept recommendation task.

5.3 Ablation Study (RQ2)

We conduct ablation study to validate the significance and benefits of each module. *w/-er* and *w/-ir*: We consider either the explicit or implicit relations in the HIN. *w/o-cl*: In this variant, we do not include the contrastive learning module. *w/o-att*: In this variant, we do not include the dual-head attention mechanism. Instead, we directly utilize them for recommendation after processing through either vector concatenation w/\oplus or addition $w/+$ methods.

The performance of our CL-KCRec and the compared variants are presented in Table 2. The performance of CL-KCRec is superior to both *w/-er* and *w/-ir*, reflecting that relying solely on either explicit or implicit relation is inadequate. *w/o-cl* performs worse than CL-KCRec, which demonstrates that by enhancing representations through contrastive learning, it can address the issue caused by the quantitative disparity between explicit and implicit relations, where the inherent relational knowledge struggles to effectively guide the propagation of interests among students. The performance of *w/o-att* (with w/\oplus and $w/+$) are inferior compared to CL-KCRec, which further implies the necessity of the dual-head attention mechanism for recommendation.

5.4 Generalization and Robustness Analysis (RQ3)

This work primarily focuses on the knowledge concept recommendation in MOOCs. To validate the generalization of our CL-KCRec for other recommendation tasks and its robustness across different datasets, we conducted further experimental verification. We adopt two more widely used datasets from different domains, consisting of Yelp Datasets² from business domain and Douban Movie Datasets³ from movie domain, as shown in Appendix A.1.2. And Table 3 displays the performance of all compared methods on these two datasets for item recommendation. Compared with the baselines, our CL-KCRec still demonstrates significant performance advantages, proving its excellent generalization capability and robustness across other domain recommendation tasks and datasets.

5.5 Hyperparameter Analysis (RQ4)

We further perform parameter sensitivity analysis to show the impact of key parameters. The results are presented in Figure 5. Based on the results, we make the following conclusions. *Relation Basis Vectors*. The number of basis vectors that used for representing the explicit relations \mathcal{B} is selected from 5 to 20. We observe that the performance of the model initially increases and then stabilizes. The value of \mathcal{B} at which it stabilizes varies across different datasets: for the MOOCube1819 dataset, $\mathcal{B} = 15$; while for the DMovie and Yelp datasets, $\mathcal{B} = 10$. *Implicit Relation Hops*. The number of the implicit relation hops t is selected from 2 to 5. It can be seen that our model achieves optimal performance and remains stable when the hops of implicit relations are 4 and 5. This further indicates that in HIN, deeper implicit relations include more complex semantics, thereby enhancing recommendation performance. *The number of prototypes*. The number of clusters is chosen from 5 to 50. We observe that based on the scale of nodes across different datasets, the optimal number of prototypes varies. To achieve the best recommendation performances, the optimal number of prototypes for the MOOCube1819 dataset is 10, while for the DMovie and Yelp datasets, it’s 40.

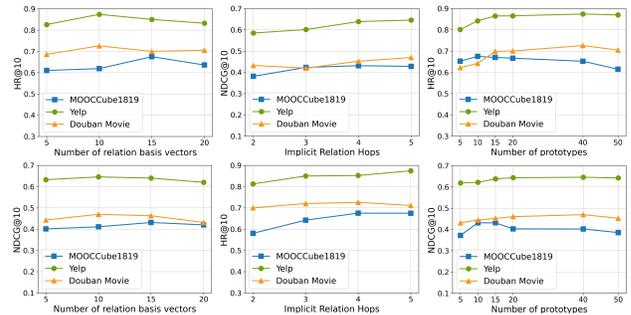


Figure 5: Hyperparameter study of the CL-KCRec.

²<https://www.yelp.com/dataset>

³<http://movie.douban.com>

Table 3: Performance comparison of baselines on different datasets

Datasets	Yelp							Douban Movie						
	H@5	H@10	H@20	N@5	N@10	N@20	MRR	H@5	H@10	H@20	N@5	N@10	N@20	MRR
HERec	0.6264	0.7854	0.8663	0.4362	0.4825	0.5321	0.4301	0.4451	0.6172	0.7512	0.3248	0.3781	0.4188	0.3004
ACKRec	0.6522	0.8046	0.8957	0.4631	0.5137	0.5426	0.4789	0.4829	0.6489	0.7685	0.3825	0.4096	0.4531	0.3521
MHCN	0.6547	0.8314	0.8864	0.5232	0.5823	0.6154	0.4776	0.4767	0.6457	0.7763	0.3966	0.4172	0.4526	0.3648
KGCL	0.6875	0.8547	0.9004	0.5589	0.6219	0.6410	0.5051	0.5134	0.6974	0.7885	0.4034	0.4326	0.4877	0.3764
HGCL	0.6983	0.8656	0.9217	0.5751	0.6382	0.6438	0.5398	0.5441	0.7205	0.8078	0.4299	0.4615	0.4973	0.3922
CL-KCRec	0.7078	0.8742	0.9254	0.5842	0.6455	0.6602	0.5427	0.5631	0.7259	0.8103	0.4335	0.4697	0.5011	0.4035

5.6 Case Study

In this section, we conduct one case to demonstrate the effectiveness of our proposed framework **CL-KCRec**. We randomly selected user:10843058 and obtained three recommended list without IRs, with IRs and with CL-KCRec, respectively. As shown in Figure 6, based on the click histories and their enrollment in course:30240184, there might be implicit connections, such as shared interests or similar knowledge levels, between user:10843058 and user:10196388. When user:10843058’s actual next-clicked knowledge concept *Resistor* (highlighted in dark blue), is observed, it is recommended at the 3rd rank (highlighted in dark green) in list(b). This represents a significant improvement from its 8th rank in list(a). Furthermore, related knowledge concepts such as *logic symbol*, *coil*, and *current* are recommended more frequently. This demonstrates that implicit relations play a crucial role. In list(c), when using our CL-KCRec, the *Resistor* is ranked at the 2nd position, and related concepts are recommended more prominently.

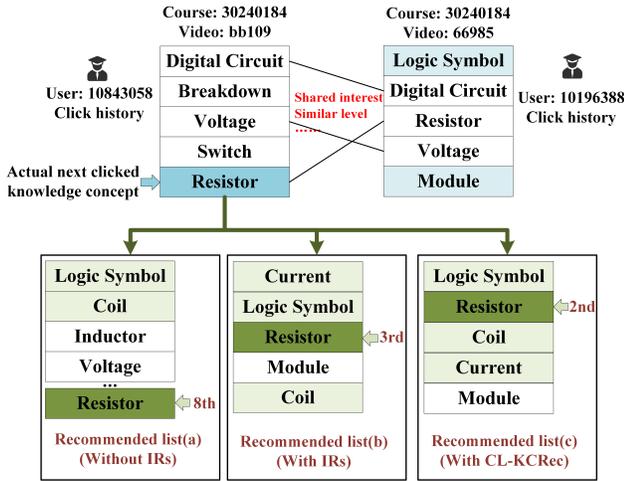


Figure 6: The case study of CL-KCRec.

6 CONCLUSION

In this work, our proposed CL-KCRec framework explores a novel approach based on contrastive learning for the knowledge concept recommendation in MOOCs. It can automatically represent implicit relations within the MOOCs heterogeneous information network.

Furthermore, the contrastive learning with prototypical graph can address the challenge of effectively guiding the propagation of students’ preferences, which is caused by the quantitative disparity between explicit and implicit relations. The dual-head attention mechanism can address the imbalanced contributions of these relations for knowledge concept recommendation in MOOCs. This work emphasizes the significant role of implicit relations in knowledge concept recommendation, contributing to the enhancement of the quality of personalized learning services in MOOCs. Extensive experiments on multiple real-world datasets have demonstrated that CL-KCRec outperforms various state-of-the-art methods.

ACKNOWLEDGMENTS

This work was supported by the National Natural Science Foundation of China, Grant No.61977015.

REFERENCES

- [1] Mengru Chen, Chao Huang, Lianghao Xia, Wei Wei, Yong Xu, and Ronghua Luo. 2023. Heterogeneous graph contrastive learning for recommendation. In *Proceedings of the Sixteenth ACM International Conference on Web Search and Data Mining (Singapore, Singapore) (WSDM '23)*. Association for Computing Machinery, New York, NY, USA, 544–552. <https://doi.org/10.1145/3539597.3570484>
- [2] Yunpeng Chen, Yannis Kalantidis, Jianshu Li, Shuicheng Yan, and Jiashi Feng. 2018. A²-nets: Double attention networks. *Advances in neural information processing systems* 31 (2018), 350–359. <https://proceedings.neurips.cc/paper/2018/hash/e165421110ba03099a1c0393373c5b43-Abstract.html>
- [3] Yu Deng, Jiaolong Yang, Dong Chen, Fang Wen, and Xin Tong. 2020. Disentangled and controllable face image generation via 3d imitative-contrastive learning. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition (Seattle, WA, USA) (CVPR '20)*. IEEE, New York, NY, USA, 5154–5163. <https://doi.org/10.1109/CVPR42600.2020.00520>
- [4] Yuxiao Dong, Nitesh V Chawla, and Ananthram Swami. 2017. metapath2vec: Scalable representation learning for heterogeneous networks. In *Proceedings of the 23rd ACM SIGKDD international conference on knowledge discovery and data mining (Halifax, NS, Canada) (KDD '17)*. ACM, New York, NY, USA, 135–144. <https://doi.org/10.1145/3097983.3098036>
- [5] Hao Fu, Shaojun Zhou, Qihong Yang, Junjie Tang, Guiquan Liu, Kaikui Liu, and Xiaolong Li. 2021. LRC-BERT: latent-representation contrastive knowledge distillation for natural language understanding. In *Proceedings of the AAAI Conference on Artificial Intelligence (Virtual Event) (AAAI '21, Vol. 35)*. AAAI, Menlo Park, CA, USA, 12830–12838. <https://doi.org/10.1609/AAAI.V35I14.17518>
- [6] Tao-yang Fu, Wang-Chien Lee, and Zhen Lei. 2017. Hin2vec: Explore meta-paths in heterogeneous information networks for representation learning. In *Proceedings of the 2017 ACM on Conference on Information and Knowledge Management (Singapore, Singapore) (CIKM '17)*. ACM, New York, NY, USA, 1797–1806. <https://doi.org/10.1145/3132847.3132953>
- [7] Jibing Gong, Yao Wan, Ye Liu, Xuewen Li, Yi Zhao, Cheng Wang, Yuting Lin, Xiaohan Fang, Wenzheng Feng, Jingyi Zhang, et al. 2023. Reinforced moocs concept recommendation in heterogeneous information networks. *ACM Transactions on the Web* 17, 3 (2023), 1–27. <https://doi.org/10.1145/3580510>
- [8] Jibing Gong, Shen Wang, Jinlong Wang, Wenzheng Feng, Hao Peng, Jie Tang, and Philip S Yu. 2020. Attentional graph convolutional networks for knowledge concept recommendation in moocs in a heterogeneous view. In *Proceedings of the 43rd international ACM SIGIR conference on research and development in*

- information retrieval (Virtual Event, China) (SIGIR '20). ACM, New York, NY, USA, 79–88. <https://doi.org/10.1145/3397271.3401057>
- [9] Xiangnan He, Zhankui He, Jingkuan Song, Zhenguang Liu, Yu-Gang Jiang, and Tat-Seng Chua. 2018. NAIS: Neural attentive item similarity model for recommendation. *IEEE Transactions on Knowledge and Data Engineering* 30, 12 (2018), 2354–2366. <https://doi.org/10.1109/TKDE.2018.2831682>
- [10] Xiangnan He, Lizi Liao, Hanwang Zhang, Liqiang Nie, Xia Hu, and Tat-Seng Chua. 2017. Neural collaborative filtering. In *Proceedings of the 26th international conference on world wide web (Perth, Australia) (WWW '17)*. International World Wide Web Conferences Steering Committee, Republic and Canton of Geneva, CHE, 173–182. <https://doi.org/10.1145/3038912.3052569>
- [11] Lu Jiang, Kunpeng Liu, Yibin Wang, Dongjie Wang, Pengyang Wang, Yanjie Fu, and Minghao Yin. 2023. Reinforced Explainable Knowledge Concept Recommendation in MOOCs. *ACM Transactions on Intelligent Systems and Technology* 14, 3 (2023), 1–20. <https://doi.org/10.1145/3579991>
- [12] Santosh Kabbur, Xia Ning, and George Karypis. 2013. Fism: factored item similarity models for top-n recommender systems. In *Proceedings of the 19th ACM SIGKDD international conference on Knowledge discovery and data mining (Chicago, Illinois, USA) (KDD '13)*. ACM, New York, NY, USA, 659–667. <https://doi.org/10.1145/2487575.2487589>
- [13] Jacob Devlin Ming-Wei Chang Kenton and Lee Kristina Toutanova. 2019. Bert: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (NAACL-HLT '19)*. ACL, Stroudsburg, PA, USA, 4171–4186. <https://doi.org/10.18653/v1/N19-1423>
- [14] Junnan Li, Pan Zhou, Caiming Xiong, and Steven Hoi. 2021. Prototypical Contrastive Learning of Unsupervised Representations. In *International Conference on Learning Representations (Virtual Event, Austria) (ICLR '21)*. OpenReview.net, Online, 9 pages. <https://openreview.net/forum?id=KmykpuSrijc>
- [15] Weimin Li, Lin Ni, Jianjia Wang, and Can Wang. 2022. Collaborative representation learning for nodes and relations via heterogeneous graph neural network. *Knowledge-Based Systems* 255 (2022), 109673. <https://doi.org/10.1016/j.knsys.2022.109673>
- [16] Bin Liang, Qinlin Zhu, Xiang Li, Min Yang, Lin Gui, Yulan He, and Ruifeng Xu. 2022. Jointcl: a joint contrastive learning framework for zero-shot stance detection. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (ACL '22, Vol. 1)*. ACL, Dublin, Ireland, 81–91. <https://doi.org/10.18653/v1/2022.acl-long.7>
- [17] Zibo Liang, Lan Mu, Jie Chen, and Qing Xie. 2023. Graph path fusion and reinforcement reasoning for recommendation in MOOCs. *Education and Information Technologies* 28, 1 (2023), 525–545. <https://doi.org/10.1007/s10639-022-11178-2>
- [18] Shuai Lin, Chen Liu, Pan Zhou, Zi-Yuan Hu, Shuoqia Wang, Ruihui Zhao, Yefeng Zheng, Liang Lin, Eric Xing, and Xiaodan Liang. 2022. Prototypical graph contrastive learning. *IEEE Transactions on Neural Networks and Learning Systems* 35 (2022), 2747–2758. <https://doi.org/10.1109/TNNLS.2022.3191086>
- [19] Xiaoling Long, Chao Huang, Yong Xu, Huance Xu, Peng Dai, Lianghao Xia, and Liefeng Bo. 2021. Social recommendation with self-supervised metagraph informax network. In *Proceedings of the 30th ACM International Conference on Information & Knowledge Management (Virtual Event, Queensland, Australia) (CIKM '21)*. ACM, New York, NY, USA, 1160–1169. <https://doi.org/10.1145/3459637.3482480>
- [20] Luis Miguel Lázaro Lorente, Ana Ancheta Arrabal, and Cristina Pulido-Montes. 2020. The right to education and ict during covid-19: An international perspective. *Sustainability* 12, 21 (2020), 9091. <https://doi.org/10.3390/su12219091>
- [21] Maximilian Nickel, Lorenzo Rosasco, and Tomaso Poggio. 2016. Holographic embeddings of knowledge graphs. In *Proceedings of the AAAI conference on artificial intelligence (Phoenix, Arizona, USA) (AAAI '16)*. AAAI, Menlo Park, CA, USA, 1955–1961. <https://doi.org/10.1609/AAAI.V30I1.10314>
- [22] Steffen Rendle, Christoph Freudenthaler, Zeno Gantner, and Lars Schmidt-Thieme. 2009. BPR: Bayesian personalized ranking from implicit feedback. In *Proceedings of the Twenty-Fifth Conference on Uncertainty in Artificial Intelligence (Montreal, QC, Canada) (UAI '09)*. AUAI, Online, 452–461. https://www.auai.org/uai2009/papers/UAI2009_0139_48141db02b9f0b02bc7158819ebfa2c7.pdf
- [23] J Ben Schafer, Dan Frankowski, Jon Herlocker, and Shilad Sen. 2007. Collaborative filtering recommender systems. In *The adaptive web: methods and strategies of web personalization*. Lecture Notes in Computer Science, Vol. 4321. Springer, Berlin, Germany, 291–324. https://doi.org/10.1007/978-3-540-72079-9_9
- [24] Michael Schlichtkrull, Thomas N Kipf, Peter Bloem, Rianne Van Den Berg, Ivan Titov, and Max Welling. 2018. Modeling relational data with graph convolutional networks. In *The Semantic Web: 15th International Conference (ISWC '18, Vol. 10843)*. Springer, Berlin, Germany, 593–607. https://doi.org/10.1007/978-3-319-93417-4_38
- [25] Chuan Shi, Binbin Hu, Wayne Xin Zhao, and S Yu Philip. 2018. Heterogeneous information network embedding for recommendation. *IEEE Transactions on Knowledge and Data Engineering* 31, 2 (2018), 357–370. <https://doi.org/10.1109/TKDE.2018.2833443>
- [26] Shikhar Vashishth, Soumya Sanyal, Vikram Nitin, and Partha Talukdar. 2020. Composition-based Multi-Relational Graph Convolutional Networks. In *8th International Conference on Learning Representations (ICLR '20)*. OpenReview.net, Online, 8 pages. https://openreview.net/forum?id=BylA_C4tPr
- [27] Petar Veličković, Guillem Cucurull, Arantxa Casanova, Adriana Romero, Pietro Liò, and Yoshua Bengio. 2018. Graph Attention Networks. In *International Conference on Learning Representations (Vancouver, Canada) (ICLR '18)*. OpenReview.net, Online, 9 pages. <https://openreview.net/forum?id=rjXmpikCZ>
- [28] Xiang Wang, Xiangnan He, Meng Wang, Fuli Feng, and Tat-Seng Chua. 2019. Neural graph collaborative filtering. In *Proceedings of the 42nd international ACM SIGIR conference on Research and development in Information Retrieval (Paris, France) (SIGIR '19)*. ACM, New York, NY, USA, 165–174. <https://doi.org/10.1145/3331184.3331267>
- [29] Xinhua Wang, Linzhao Jia, Lei Guo, and Fangai Liu. 2023. Multi-aspect heterogeneous information network for MOOC knowledge concept recommendation. *Applied Intelligence* 53, 10 (2023), 11951–11965. <https://doi.org/10.1007/s10489-022-04025-x>
- [30] Wei Wei, Chao Huang, Lianghao Xia, Yong Xu, Jiashu Zhao, and Dawei Yin. 2022. Contrastive meta learning with behavior multiplicity for recommendation. In *Proceedings of the fifteenth ACM international conference on web search and data mining (Virtual Event, AZ, USA) (WSDM '22)*. ACM, New York, NY, USA, 1120–1128. <https://doi.org/10.1145/3488560.3498527>
- [31] Jiancan Wu, Xiang Wang, Fuli Feng, Xiangnan He, Liang Chen, Jianxun Lian, and Xing Xie. 2021. Self-supervised graph learning for recommendation. In *Proceedings of the 44th international ACM SIGIR conference on research and development in information retrieval (Virtual Event, Canada.) (SIGIR '21)*. ACM, New York, NY, USA, 726–735. <https://doi.org/10.1145/3404835.3462862>
- [32] Yuhao Yang, Chao Huang, Lianghao Xia, and Chenliang Li. 2022. Knowledge graph contrastive learning for recommendation. In *Proceedings of the 45th International ACM SIGIR Conference on Research and Development in Information Retrieval (Madrid, Spain) (SIGIR '22)*. ACM, New York, NY, USA, 1434–1443. <https://doi.org/10.1145/3477495.3532009>
- [33] Jifan Yu, Gan Luo, Tong Xiao, Qingyang Zhong, Yuquan Wang, Wenzheng Feng, Junyi Luo, Chenyu Wang, Lei Hou, Juanzi Li, et al. 2020. MOOCube: a large-scale data repository for NLP applications in MOOCs. In *Proceedings of the 58th annual meeting of the association for computational linguistics (ACL '20)*. ACL, Stroudsburg, PA, USA, 3135–3142. <https://doi.org/10.18653/v1/2020.acl-main.285>
- [34] Junliang Yu, Hongzhi Yin, Jundong Li, Qingyong Wang, Nguyen Quoc Viet Hung, and Xiangliang Zhang. 2021. Self-supervised multi-channel hypergraph convolutional network for social recommendation. In *Proceedings of the web conference 2021 (Ljubljana, Slovenia) (WWW '21)*. ACM, New York, NY, USA, 413–424. <https://doi.org/10.1145/3442381.3449844>
- [35] Seongjun Yun, Minbyul Jeong, Raehyun Kim, Jaewoo Kang, and Hyunwoo J Kim. 2019. Graph transformer networks. *Advances in neural information processing systems* 32 (2019), 11960–11970. <https://proceedings.neurips.cc/paper/2019/hash/9d63484abb47c97640154d40595a3bb-Abstract.html>
- [36] Seongjun Yun, Minbyul Jeong, Sungdong Yoo, Seunghun Lee, S Yi Sean, Raehyun Kim, Jaewoo Kang, and Hyunwoo J Kim. 2022. Graph Transformer Networks: Learning meta-path graphs to improve GNNs. *Neural Networks* 153 (2022), 104–119. <https://doi.org/10.1016/j.neunet.2022.05.026>
- [37] Chuxu Zhang, Dongjin Song, Chao Huang, Ananthram Swami, and Nitesh V Chawla. 2019. Heterogeneous graph neural network. In *Proceedings of the 25th ACM SIGKDD international conference on knowledge discovery & data mining (Anchorage, AK, USA) (KDD '19)*. ACM, New York, NY, USA, 793–803. <https://doi.org/10.1145/3292500.3330961>
- [38] Han Zhang, Maosong Sun, Xiaochen Wang, Zhengyang Song, Jie Tang, and Jimeng Sun. 2017. Smart jump: Automated navigation suggestion for videos in moocs. In *Proceedings of the 26th international conference on world wide web companion (Perth, Australia) (WWW '17)*. International World Wide Web Conferences Steering Committee, Republic and Canton of Geneva, CHE, 331–339. <https://doi.org/10.1145/3041021.3054166>

A SUPPLEMENT

In the supplement, we provide details of all datasets and baselines used in the experiments, as well as implementation details and efficiency analysis.

A.1 Dataset Details

A.1.1 MOOCube1819 Dataset. Table 4 displays the details of the MOOCube1819 dataset.

Table 4: Statistics of the MOOCCube1819 dataset

Dataset	MOOCCube1819	
# Entities	# U ser	2,204
	# K nowledge concept	1,522
	# C ourse	706
	# V ideo	1,661
	# T eacher	1,738
# Relationships	# U-K (user-click-knowledge-concept)	928,476
	# U-V (user-watch-video)	4,142
	# U-C (user-learn-course)	25,956
	# V-K (video-include-knowledge-concept)	27,610
	# C-K (course-include-knowledge-concept)	142,654
	# C-V (course-include-video)	4,838
	# C-T (course-taught-by-teacher)	4,364

A.1.2 *Yelp and Douban Movie Datasets.* Table 5 displays the details of the Yelp and Douban Movie datasets.

Table 5: Statistics of Yelp and Douban Movie Datasets

Datasets	Yelp		Douban Movie	
# Entities	# User	16,018	# User	13,224
	# Business	14,192	# Movie	12,498
	# Compliment	11	# Group	2,747
	# City	47	# Director	2,358
	# Category	511	# Actor	6,251
# Relationships			# Type	38
	# User-Business	194,552	# User-Movie	1,007,399
	# User-User	156,090	# User-User	4,085
	# User-Compliment	76,555	# User-Group	568,783
	# Business-City	13,970	# Movie-Director	11,245
	# Business-Category	39,927	# Movie-Actor	33,051
			# Movie-Type	27,443

A.2 Baseline Details

The detailed description of the baselines is as follows:

- FISM[12]: This is an item-to-item collaborative filtering approach that generates recommendation.
- NeuMF[10]: It uses a multi-layer perceptron to determine the probability of recommending a knowledge concept.
- NAIS[9]: It is a collaborative filtering approach which employs an attention mechanism.
- metapath2vec[4]: This is a classical heterogeneous representation method by random walk and skip-gram.
- HIN2vec[6]: This is a model which can learn latent vectors of nodes and meta-paths simultaneously in HIN.
- HERec[25]: This is a approach to HIN-based recommendation that utilizes HIN embedding with meta-paths.

- ACKRec[8]: This is an end-to-end approach designed for knowledge concept recommendation in MOOCs.
- HetGNN[37]: It learns heterogeneous node embeddings by aggregating type-based node features and neighboring node.
- MHCN[34] It uses a multi-channel hypergraph convolutional network to consider global relationships.
- KGCL[32]: This is a contrastive learning framework for KG-enhanced recommendation.
- CoNR[15]: It learns both node and relation representations by a two-step attention mechanism and relation encoder.
- HGCL[1]: It utilizes heterogeneous relational semantics with contrastive self-supervised learning for recommendation.

A.3 Implementation Details

For a fair comparison, CL-KCRec is optimized with Adam for parameter learning. In the model implementation, the batch size is searched from {1024, 2048, 4096, 8192}. The initial dimension size of node d_0 in HIN is searched from the range of {16, 32, 64, 128}. The learning rate is searched from { $2e-2$, $3e-2$, $3.5e-2$, $5e-2$ }. For each baseline, all other hyperparameters are set the same as the suggestions from the original settings in their papers. Other hyperparameters are set as follows. The number of the basis vectors for representing explicit relations is tuned from the range of {5, 10, 15, 20}; the number of hops n for implicit relation representation is tuned from the range of {2, 3, 4, 5}; the number of clusters is searched from {5, 10, 15, 20, 40, 50}; the mini-batch size is set to 8; the temperature τ is tuned in {0.3, 0.5, 0.6}; the coefficient λ of L2 regularization is set to $1e-4$, and the coefficient β of the combined contrastive loss is tuned in {0.2, 0.25, 0.3, 0.35, 0.55}.

A.4 Efficiency Analysis

We measure the inference time of CL-KCRec and some baselines in the Table 6. We define inference time as the time for inferencing one batch. The result is obtained by averaging the inference time over all batches on the validation set.

Table 6: Inference time(ms/batch)

	HetGNN	ACKRec	CoNR	HGCL	CL-KCRec
MOOCCube1819	580	121	693	867	945
Yelp	702	263	947	1.1k	1.3k
Douban Movie	855	280	1.2k	1.7k	2.1k

The results show that our model keeps the inference time within a reasonable range, while it also achieves commendable performance.