

Sequence graphs realizations and ambiguity in language models¹

Sammy Khalife^a, Yann Ponty^b, Laurent Bulteau^c

^a*Johns Hopkins University, Department of Applied Mathematics and Statistics,*
^b*LIX, CNRS, Ecole Polytechnique, Institut Polytechnique de Paris, 91128 Palaiseau,*
France,
^c*LIGM, CNRS, Universite Gustave Eiffel, 77454 Marne-la-Vallee,*

Abstract

Several popular language models represent local contexts in an input text x as bags of words. Such representations are naturally encoded by a sequence graph whose vertices are the distinct words occurring in x , with edges representing the (ordered) co-occurrence of two words within a sliding window of size w . However, this compressed representation is not generally bijective, and may introduce some degree of ambiguity. Some sequence graphs may admit several realizations as a sequence, while others may not admit any realization.

In this paper, we study the realizability and ambiguity of sequence graphs from a combinatorial and computational point of view. We consider the existence and enumeration of realizations of a sequence graph under multiple settings: window size w , presence/absence of graph orientation, and presence/absence of weights (multiplicities). When $w = 2$, we provide polynomial time algorithms for realizability and enumeration in all cases except the undirected/weighted setting, where we show the #P-hardness of enumeration. For $w \geq 3$, we prove hardness of all variants, even when w is considered as a constant, with the notable exception of the undirected/unweighted case for which we propose an XP algorithms for both (realizability and enumeration) problems, tight due to a corresponding W[1]-hardness result. We conclude with an integer program formulation to solve the realizability problem, and with dynamic programming to solve the enumeration problem. This work leaves open the membership to NP for both problems, a non-trivial question due to the existence of minimum realizations having exponential size on the instance encoding.

Keywords: Graphs, Sequences, Combinatorics, Inverse problem, Complexity class

¹A preliminary version of this work has been published in COCOON 21.

1. Introduction

A common challenge in data science is the choice of a vector or matrix representation, called *embeddings*, for a sequence of words from a vocabulary. Selecting and computing the right embedding poses a central problem for the application of machine learning techniques. In particular, embeddings of words and textual documents representations are essential for several tasks in natural language processing, including document classification [15], role labelling [12], and named entity recognition [9]. Models based on pointwise mutual information, or *Graph-Of-Words* (GOW) [6, 13, 10] supplement the content of bag-of-words with statistics of co-occurrences within a *window* of fixed size w , thus mitigating the degree of ambiguity. Several models [8, 11, 1, 14] also use the same type of information and constitute strong baselines for natural language processing.

While these representations are more precise than the traditional bag-of-words, sometimes referred to as *Parikh vectors* in the literature, they still induce some level of ambiguity, *i.e.* a given graph can represent several sequences (see Figure 1 and 2 for illustrations). Our study aims at quantifying this level of ambiguity, seen as an algorithmic problem.

1.1. Definitions and problem statement

In the following, p is a positive integer and $[p]$ is a shorthand for $\{1, \dots, p\}$. Let $x = x_1, x_2, \dots, x_p$ be a finite sequence over a vocabulary X . Without loss of generality, we suppose that $X = \{v_1, \dots, v_n\}$. In these conditions:


Definition 1. $G = (V, E)$ is the sequence graph (or w -sequence graph) of the sequence x with window size $w \in \mathbb{N}^+$ ($w > 0$) if and only if $V = \{v \in X \mid \exists i \in [p], v = x_i\}$, and

$$(u, v) \in E \iff \exists (k, k') \in [p]^2 \quad 0 < |k - k'| \leq w - 1, \quad u = x_k, \quad v = x_{k'} \quad (1)$$


A sequence graph G is endowed with a weight matrix $\Pi(G) = (\pi_{ij})$ such that

$$\pi_{ij} = \text{Card} \{(k, k') \in [p]^2 \mid 0 < |k - k'| \leq w - 1, \quad x_k = i \text{ and } x_{k'} = j\} \quad (2)$$

For digraphs, the inequalities in Statements (1) and (2) are replaced with $k < k' \leq k + w - 1$. We say that x is a w -realization of G (or a realization if there is no ambiguity), if G is the graph of sequence x with window size w .




(a) Unambiguous graph ($w = 3$)




(b) Ambiguous graph ($w = 2$)


Figure 1: Sequence digraphs (or directed *graphs-of-words*) built for the sentence “Linux is not UNIX but Linux” using window sizes $w = 3$ (a) and $w = 2$ respectively (b). In the second case, the sequence graph is ambiguous, since any circular permutation of the words admits the same representation.

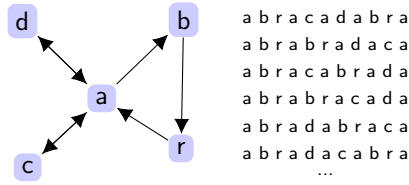


(a) $w = 2$, G has 30 realizations

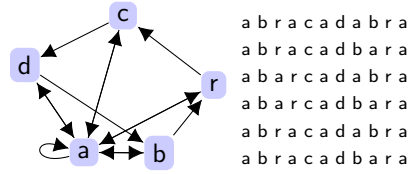

(b) $w = 3$, G has 6 realizations

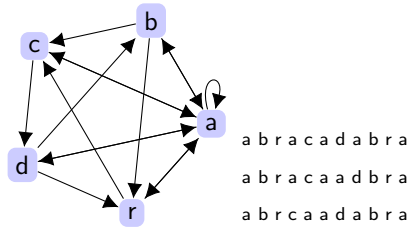

(c) $w = 4$, G has 3 realizations

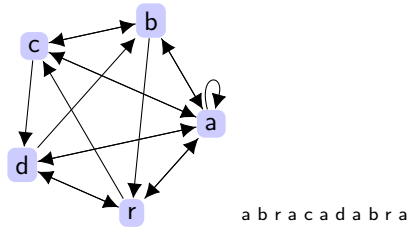

(d) $w = 5$, G has one realization

Figure 2: Sequence digraphs (or directed *graphs-of-words*) built for the sentence “a b r a c a d a b r a” using window sizes 2 (a), 3 (b), 4 (c) and 5 (d).

Given w , the graph of a sequence x is unique. The natural integers π_{ij} represent the number of co-occurrences of i and j in all windows of size w . An algorithm to construct a weighted sequence digraph is presented in Algorithm 1; the other cases (unweighted, undirected) are obtained similarly. In the unweighted case, the map thus defined from the sequence set X^* to the graph set \mathcal{G} is referred to as $\phi_w : X^* \rightarrow \mathcal{G}, x \mapsto G_w(x)$. Based on these definitions, we consider the following problems:

Problem 1 (Weighted-REALIZABILITY (W-REALIZABILITY)).

Input: Graph G (directed or undirected), weight matrix Π , window size w

Output: True if (G, Π) is the w -sequence graph of some sequence x , False otherwise.

Problem 2 (Unweighted-REALIZABILITY (U-REALIZABILITY)).

Input: Graph G (directed or undirected), window size w

Output: True if G is the w -sequence graph of some sequence x , False otherwise.

We denote D -REALIZABILITY (resp. G -) the restricted version of REALIZABILITY where the input graph G is directed (resp. undirected), and W -REALIZABILITY (resp. U -) the restricted version of REALIZABILITY where the input graph G is weighted (resp. unweighted), possibly in combination with the D - or G -variants. We write REALIZABILITY $_w$ for the case where w is a fixed positive integer. We also consider the variants of W -REALIZABILITY, denoted GW -REALIZABILITY and DW -REALIZABILITY where the input graph is restricted to be respectively undirected and directed. We define GU -REALIZABILITY and DU -REALIZABILITY similarly. Finally, we write $(GW$ -, DW -, ...)REALIZABILITY $_w$ for the case where w is a fixed positive integer.

Problem 3 (Unweighted-NUMREALIZATIONS (U-NUMREALIZATIONS)).

Input: Graph G (directed or undirected), window size w

Output: The number of **realizations** of G , i.e. preimages of G through ϕ_w such that $|\{x \in X^* \mid \phi_w(x) = G\}|$ is finite, or $+\infty$ otherwise.

Problem 4 (Weighted-NUMREALIZATIONS (W-NUMREALIZATIONS)).

Input: Graph G (directed or undirected), weight matrix Π , window size w

Output: The number of **realizations** of G in the weighted sense.

Similarly, we use the same prefix for the directed or undirected versions of (D -, G -, i.e. DU - for directed and unweighted). We also denote NUMREALIZATIONS $_w$ for the case where w is a fixed positive integer. Note that NUMREALIZATIONS generalizes the previous one, as REALIZABILITY can be solved by testing the nullity of the number of suitable realization computed by NUMREALIZATIONS.

DW Directed weighted	DU Directed unweighted
GW Undirected weighted	GU Undirected unweighted

1.2. Related work

Sequence graphs encode the information of several co-occurrences based models [1, 11]. To the best of our knowledge, the ambiguity and realizability questions addressed in this work were never addressed by prior work in computational linguistics. It may seem that the inverse problems we are considering in this work are similar to the *Universal Reconstruction of a String* [5], which consists in determining the set of strings of a fixed length having as many distinct letters as possible, satisfying substrings equations of the form: $s[q_1 \dots q_p] = s[q'_1 \dots q'_p], \dots, s[r_1 \dots r_m] = s[r'_1 \dots r'_m]$ (here, $s[q_1 \dots q_p]$ refers to the substring $s_{q_1} \dots s_{q_p}$). The increasing indices q_i 's, q'_i 's, \dots , r_i 's and r'_i 's, as well as the length of s are given as input. The problem is to find a string s

Algorithm 1 Construction of Π associated to a weighted sequence digraph

Parameters: Window size $w \geq 2$ **Input:** Sequence x of length $p \geq 1$ of integers**Output:** Weighted adjacency matrix Π

- 1: $r (\leq p) \leftarrow$ number of distinct integers in x
 - 2: Initiate $\Pi = (\pi_{i,j})$ to an $r \times r$ matrix of zeros
 - 3: **for** $i = 1 \rightarrow p - 1$ **do**
 - 4: **for** $j = i + 1 \rightarrow \min(i + w - 1, p)$ **do**
 - 5: $\pi_{x_i, x_j} \leftarrow \pi_{x_i, x_j} + 1$
 - 6: **end for**
 - 7: **end for**
 - 8: **return** Π
-

verifying these set of constraints, with a maximum number of distinct letters. We shall see that these problems are actually very different, and in particular, our complexity results imply the absence of reduction to the Universal Reconstruction of a String, which can be solved in linear time.

Furthermore, some similarities exist with another inverse problem studied in the Distance Geometry (DG) literature. The input of a DG instance consists of a set of pairwise distances between points, having unknown positions in a d -dimensional space. A DG problem then consists in determining a set of positions for the points (if they exist), satisfying the distance constraints. Since a position is fully characterized from $d + 1$ neighbors, the problem can be solved by finding a sequential order in the points, such that the assignment of a point is always by at least $d + 1$ among its neighbors [7] (called *linear ordering*). Therefore, finding a linear ordering shares some level of similarity with our inverse problems since a realization for a window $w = d + 2$ also represents a linear ordering of its nodes, in which $w - 1 = d + 1$ of the neighbors have lower value with respect to the order. However, linear ordering in DG to solve our problems is insufficient. First, each element of the sequence x is associated with a unique vertex. This is not the case we investigate here, since a symbol can be repeated several times, but only one vertex is created in the graph. This implies that the vertex associated to the i^{th} element ($i \geq w$) of x can have less than $w - 1$ distinct neighbors in its predecessors in x . Second, DG graphs are essentially undirected, and loops are not considered, since an element is at distance 0 from itself.

The remaining of the article is organized as follows. In Section 2 we present our main theoretical results. Full proofs are given in Sections 3 ($w = 2$) and 4 ($w \geq 3$). In Section 5, we propose an integer program and a dynamic programming algorithm to respectively recognize a sequence graph and count its realizations. Finally, in Section 6 we conclude with a short discussion and a first step towards an answer to the belonging of our problems to NP, by proving the existence of graphs whose minimal realizations have exponential size.

2. Theoretical results

In this section, we present our main theoretical results in Subsections 2.1 and 2.2. Full proofs are given in Sections 3 and 4 respectively.

2.1. A complete characterization of 2-sequence graphs

A graph has a 2-realization when there exists a path visiting every vertex and covering all of its edges (at least once for the unweighted case and exactly π_e for the edge e in the weighted case). This characterization enables relatively simple characterization and algorithmic treatment, leading to the results summarized in Table 1. The additional definitions are given below.

Table 1: Complexity for various instances of our problems ($w = 2$)

Data Instance	NUMREALIZATIONS ₂		REALIZABILITY ₂	
	Complexity	#Sequences	Complexity	Characterization
GU	P	$\{0, +\infty\}$	P	G connected
GW	#P-hard	$\{0, 1\} \cup 2\mathbb{N}^*$	P	$\psi(G)$ is (semi-)Eulerian
DU	P	$\{0, 1, +\infty\}$	P	G is a simple step
DW	P	\mathbb{N} (BEST Theorem)	P	$\psi(G)$ is (semi-)Eulerian

Definition 2 ($\psi(G)$). Let (G, Π) be a weighted graph (directed or undirected). $\psi(G)$ is the multigraph with the same vertices as G and with π_{ij} edges between i and j .

Definition 3 ((semi-)Eulerian). We say that a path is (semi-)Eulerian if it visits all edges of the graph exactly once, and a graph is (semi-)Eulerian if it admits a (semi-)Eulerian path. A (semi-)Eulerian path with identical endpoints is an Eulerian cycle, otherwise it is a semi-Eulerian path, and this distinction extends to Eulerian and semi-Eulerian graphs (here this distinction is only made in Proposition 7).

Definition 4 ($R(G), R^+(G)$). Let $G = (V, E)$ be a digraph. $R(G)$ is the Directed Acyclic Graph (DAG) such that: *i*) every strongly connected components of G is associated to a unique node in $R(G)$, and *ii*) two strongly connected components $u \neq v$ in G form an edge (u, v) in $R(G)$, provided there exists an edge $(x, y) \in E$ such that $x \in u$ and $y \in v$.

$R^+(G)$ is the weighted DAG, such that: *i*) $R^+(G)$ has the same vertices and edges as $R(G)$ and *ii*) the weight of an edge in $R^+(G)$ is the number of distinct edges between two strongly connected components in G .

Definition 5 (simple step graph). Let G be a digraph. G is said to be a simple step graph if and only if $R^+(G)$ is a directed path and the weights of all of its edges are equal to 1.




Figure 3: Illustration of the definition of a simple step graph. The graph in (a) has a single strongly connected component. The graph in (b) has two strongly connected components connected with two distinct arcs $((1,3)$ and $(2,4))$, so they form a weight-2 arc in $R^+(G)$.

2.2. Main complexity results for $w \geq 3$

In this subsection we present the remaining complexity results, which are summarized in Theorem 1 and Table 2. We first show that $\text{GU-REALIZABILITY}_w \in P$ for any integer $w \geq 3$. Besides, for GU , the number of realizations of a graph G is either 0 (not realizable), 1 or $+\infty$ (realizable in both cases). These three cases can be tested in polynomial time using our algorithm (presented in Section 4), showing that $\text{GU-NUMREALIZATIONS}_w \in P$, for any integer $w \geq 3$. All proofs of the following statements are given in Section 4.

Theorem 1. *For any integer $w \geq 3$, all variations of NUMREALIZATIONS_w and REALIZABILITY_w are NP-hard, except GU . Besides, NUMREALIZATIONS , REALIZABILITY are para-NP-hard for all variations, except GU , in which case they are both W[1]-hard and XP.*

Table 2: Complexity for various instances of our problems ($w \geq 3$). We remind that a para-NP-hard problem does not admit any XP algorithm unless $P=NP$.

Variation	Constant $w, w \geq 3$		Parameter w	
	NUMREALIZATIONS_w Complexity	REALIZABILITY_w Complexity	NUMREALIZATIONS Complexity	REALIZABILITY Complexity
GU	P	P	W[1]-hard; XP	W[1]-hard; XP
GW	NP-hard	NP-hard	para-NP-hard	para-NP-hard
DU	NP-hard	NP-hard	para-NP-hard	para-NP-hard
DW	NP-hard	NP-hard	para-NP-hard	para-NP-hard

In the following, CLIQUE is the problem which takes as input an undirected graph G and should return the maximal size of a clique in G .

Proposition 1. *CLIQUE admits a polynomial time parameterized reduction to GU-REALIZABILITY .*

Corollary 1. *GU-REALIZABILITY is W[1]-hard for parameter w .*

3. The Special Case of 2-Sequence Graphs ($w = 2$)

In this section we present the proofs of the results gathered in Table 1. Apart from the GU variant, we use direct reductions to standard well-known problems

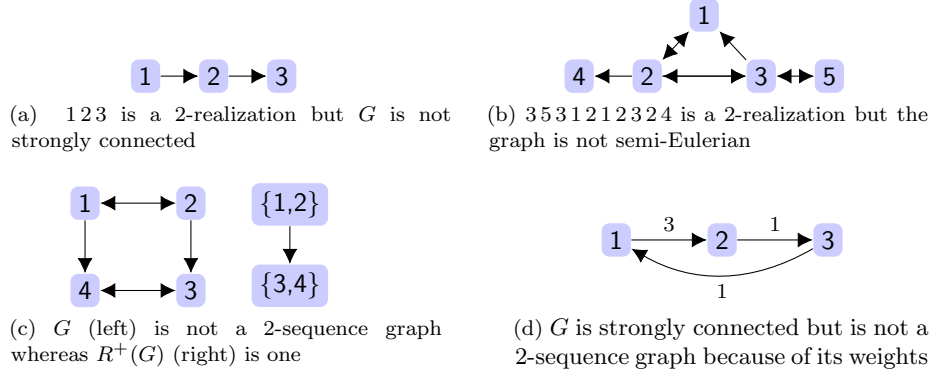


Figure 4: Some special cases for $w = 2$, acting as counterexamples for variations of Propositions 2 to 6.

in graph theory. The **DU** variant can be treated with a reduction to simple step graphs (cf. Definitions 4 and 5). The weighted cases (**GW** and **DW**) are treated with direct reductions to the problem of existence and counting Eulerian cycles or semi-Eulerian paths in a graph.

3.1. The unweighted variants: **GU** and **DU**

The following three propositions follow immediately from the definitions:

Proposition 2. *If $G = (V, E)$ is unweighted and undirected, with $|V| > 1$, the following are equivalent:*

- (i) G is connected
- (ii) G has a 2-realization
- (iii) G admits an infinite number of 2-realizations.

In these conditions, a 2-realization can start and end at any vertex.

The previous characterization is wrong for strongly connected digraphs. A counterexample is depicted in Fig. 4a. However, strong connectivity remains a sufficient condition:

Proposition 3. *Let $G = (V, E)$ a unweighted digraph. If G is strongly connected then G has a 2-realization. A 2-realization can start or end at any given vertex of G .*

Proposition 4. *Let $G = (V, E)$ an unweighted digraph. If G is Eulerian or semi-Eulerian, then G has a 2-realization.*

Again the converse of Prop. 4 does not hold as depicted in Fig. 4b. As a start, it is natural to consider directed acyclic graphs (DAGs):

Proposition 5. Let $G = (V, E)$ be a DAG. G is a 2-sequence graph if and only if G is a directed path, i.e each node has at most one child and at most one parent. In this case, G has a unique 2-realization.

Proof. If G is directed path, since G is finite, it admits a source node. Therefore a 2-realization is obtained by simply going through all vertices from the source node. This is obviously the only one.

Conversely, let us suppose G is a 2-sequence graph and is not a directed path, then we show that it contains a cycle. Indeed, there exists a vertex s having either two children, or two parents. In the first case, denote c_1 and c_2 for the two distinct children of s . Then there exists a walk going through both (s, c_1) and (s, c_2) : G has a cycle. Similarly, if s has two parents p_1 and p_2 , then any two realization yields a walk through both (p_1, v) and (p_2, v) , and thus a cycle. \square

Proposition 6. Let $G = (V, E)$ be a digraph. If G is a 2-sequence graph then $R(G)$ is a 2-sequence graph.

Proof. Let G be a 2-sequence graph, and let us suppose that $R(G)$ is not a 2-sequence graph. Since $R(G)$ is a (weakly) connected DAG, then using Proposition 5, it cannot be a directed path, so $R(G)$ has either a node having two children or two parents. We now treat the case in which $R(G)$ has a node with two children (the other case can be treated similarly). Let S be a node of $R(G)$ having at least 2 distinct children C_1 and C_2 . This means that there exist $s_1, s_2 \in S$ and $v_1 \in C_1, v_2 \in C_2$ such that $(s_1, v_1) \in E$ and $(s_2, v_2) \in E$. Consider now the 2-realization of G , assuming without loss of generality that (s_1, v_1) is realized before (s_2, v_2) . Then there exists a path between v_1 and s_2 in G , which implies that v_1 belongs to the same component as s_1 and s_2 : a contradiction. \square

The converse of Proposition 6 does not hold as depicted in Figures 4c.

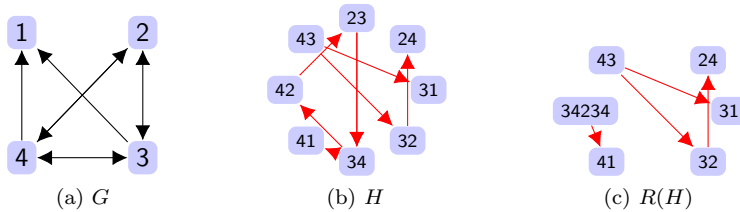


Figure 5: Procedure to find a 3-realization (DU variant). The walk 34234, 41 in $R(H)$ gives the 3-realization: 342341

Theorem 2. Let $G = (V, E)$ be an unweighted digraph. G is a 2-sequence graph if and only if it is a simple step graph.

Proof. If G is a 2-sequence graph, $R(G)$ is a 2-sequence graph using Proposition 6. Therefore, Proposition 5 implies that $R(G)$ and $R^+(G)$ are directed

paths. Moreover, if $R^+(G)$ has an edge with weight greater than 1, then there would be more than one edge between two strongly connected components C_1 and C_2 . All these edges go in the same direction otherwise $C_1 \cup C_2$ would form a strongly connected component. This is a contradiction since any 2-realization would have to go from C_1 to C_2 and then come back to C_1 (or conversely), which would make $C_1 \cup C_2$ a strongly connected component.

Conversely, let us suppose $R^+(G)$ is a directed path and its weights are equal to one. By definition, there exists a list of sets of vertices $\mathcal{P} = (x_1, \dots, x_p)$ such that:

- (i) the entries of \mathcal{P} form a partition of $V(G)$, i.e. $x_i \subset V(G)$ with $|x_i| \geq 1$, $\bigcup_{i \in \{1, \dots, p\}} x_i = V(G)$ and for any $i \neq j$, $x_i \cap x_j = \emptyset$.
- (ii) For any $i \in \{1, \dots, p-1\}$, there exists a unique element of $x_i \times x_{i+1}$ which is an edge of G .

We construct a 2-realization y for G by means of the following procedure.

Base case: x_1 is a strongly connected component of G , we initialize y with any 2-realizations of x_1 (which exists by Proposition 3).

For $i \in \{1, \dots, p-1\}$: There exists only one edge between a vertex of x_i and a vertex of x_{i+1} say $e = (v, w)$. By construction, all the edges of $G[x_i]$ have already been added to y . Suppose at the previous step the last vertex added is $z \in x_i$. In case $z \neq v$, we first add all vertices of a walk starting at z and ending on v . Then, consider a walk starting at w and which visits every edge of x_{i+1} (again the existence is such walk follows from Proposition 3). We add all vertices of this walk after w .

The process stops when $i = p-1$, and all edges of G are covered by y . \square

An immediate consequence of Theorem 2 is the existence of a polynomial time algorithm to decide if an unweighted digraph is a 2-sequence graph; because verifying that a digraph is a simple step is in P. Another consequence of Theorem 2 is the following:

Corollary 2. *Let G be an unweighted digraph. The possible numbers of 2-realizations for G are only 0, 1 and $+\infty$. Moreover, G admits a unique 2-realization if and only if G is a directed path.*

Proof. First, if G is a DAG, then by Proposition 5 it has either zero or a unique 2-realization (the latter case applies if and only if it is a directed path). Otherwise, assume that G has a cycle $u_0 u_1 \dots u_\ell = u_0$ (possibly with $\ell = 1$ in case of self-loops) and admits a 2-realization y . Then y has at least one occurrence of u_0 , and a strictly longer 2-realization y' can be obtained by inserting $u_0 \dots u_{\ell-1}$ just before any occurrence of u_0 . Therefore G has infinitely many 2-realizations. \square

3.2. The weighted variants: **GW** and **DW**

The weighted case cannot be treated similarly due to the weight constraints implying that a weighted graph has a finite number of realizations. A counterexample is depicted in Figure 4d.

Theorem 3. *If G is a weighted graph (possibly directed), with $\Pi(G)$ a $n \times n$ matrix of natural integers, then: G is 2-realizable if and only if $\psi(G)$ is connected and (semi-)Eulerian.*

This theorem follows from the following stronger result, that also relates the number of 2-realizations to the number of (semi-)Eulerian paths of $\psi(G)$.

Lemma 1. *Let $G = (V, E)$ a weighted 2-sequence graph (possibly oriented). Let \mathcal{E} be the set of (semi-)Eulerian paths of $\psi(G)$ and \mathcal{S} be the set of 2-realizations of G . Then*

$$|\mathcal{E}| = |\mathcal{S}| \prod_{e \in E} \pi_e!$$

Proof. First note that (semi-)Eulerian paths of $\psi(G)$ (writing h for the number of edges in $\psi(G)$) can be characterized by a pair $(u_0 u_1 \dots u_h, e_1 \dots e_h)$ where each u_i is a vertex of G , $e_1 \dots e_h$ is a permutation of the edges of $\psi(G)$, and $e_i = (u_{i-1}, u_i)$ (directed case) or $e_i = \{u_{i-1}, u_i\}$ (undirected case). Note that $u_0 u_1 \dots u_h$ is a 2-realization of G , and that, conversely, a (semi-)Eulerian path can be obtained from any $u_0 u_1 \dots u_h$ by taking e_i to be one copy of (u_{i-1}, u_i) or $e_i = \{u_{i-1}, u_i\}$ for each i (the path indeed goes through all π_{uv} copies of each edge between u and v in $\psi(G)$ by definition of weighted 2-realizations).

Consider the map:

$$\begin{aligned} f : \mathcal{E} &\longrightarrow \mathcal{S} \\ (u_0 u_1 \dots u_h, e_1 \dots e_h) &\mapsto (u_0 u_1 \dots u_h) \end{aligned} \tag{3}$$

We have already noted that f is surjective, however it is not necessarily injective (visiting multiple copies of the same edge in different orders give the same 2-realization but with different (semi-)Eulerian paths). An element $x \in \mathcal{E}$ can be thought of a list of edges of G , each appearing π_e times, since each edge $\psi(G)$ is obtained by copying π_e times every edge of G . Therefore this map is not injective, as soon as there is one $\pi_e > 0$, because one can permute the corresponding edges in the (semi-)Eulerian path, and the corresponding 2-sequence is the same.

We thus consider the following relation \mathcal{R} on \mathcal{E} : For two (semi-)Eulerian paths P_1 and P_2 , $P_1 \mathcal{R} P_2 \iff P_1$ can be obtained from P_2 by permuting edges of $\psi(G)$ that are copies of the same edge in G . \mathcal{R} is an equivalence relation because it is symmetric, transitive and reflexive. Let \mathcal{E}/\mathcal{R} be \mathcal{E} quotiented by \mathcal{R} . We have $P_1 \mathcal{R} P_2 \iff f(P_1) = f(P_2)$ (equivalently, P_1 and P_2 yield the same sequence of vertices), so $|\mathcal{S}|$ is the number of equivalence classes of \mathcal{R} , or equivalently, $|\mathcal{E}/\mathcal{R}|$. Note that each equivalence class of \mathcal{R} has cardinality $\prod_{e \in E} \pi_e!$ (number of permutations which are product of permutations with disjoint supports, where each support has size π_e). Therefore $|\mathcal{S}| = |\mathcal{E}/\mathcal{R}| = |\mathcal{E}| (\prod_{e \in E} \pi_e)^{-1}$. \square

On the one hand, counting the number of (semi-)Eulerian paths in a undirected graph is a $\#P$ -complete problem [2]. Since $G \mapsto \psi(G)$ is bijective, counting the number of 2-realizations is also $\#P$ -complete. On the other hand, count-

ing (semi-)Eulerian paths of a weighted digraph is in P, and can be derived using the following proposition:

Proposition 7. *Let $G = (V, E)$ be a weighted digraph, with $\Pi(G) \in \mathcal{M}_d(\mathbb{N})$. Then, if $\deg(v)$ is the indegree of a vertex v , the number p_2 of 2-realizations is given by*

$$\text{-If } \psi(G) \text{ is Eulerian, } p_2 = \frac{t(\psi(G))}{\prod_{e \in E} \pi_e!} \prod_{v \in V} (\deg_{\psi(G)}(\psi(v)) - 1)! \quad (4)$$

where $t(G)$ is the number of spanning trees of a graph G . If L is the Laplacian matrix of G , then $t(G)$ can be expressed as

$$t(G) = \prod_{\substack{\lambda_i \in Sp(L) \\ \lambda_i \neq 0}} \lambda_i$$

- If $\psi(G)$ is semi-Eulerian, make it Eulerian by adding one arc (u, v) between the two vertices with unbalanced degrees (u is the one with the least outdegree, v has the least indegree). Then apply Formula 4 to $\tilde{\psi}(G) := \psi(G) + (u, v)$, and divide the output by the number of vertices $|V|$.

Proof. The case of $\psi(G)$ being Eulerian is a direct consequence of Lemma 1, BEST Theorem [3] and Matrix Tree Theorem [4].

When $\psi(G)$ is semi-Eulerian, this follows from the fact that $\psi(G)$ is semi-Eulerian if and only if $\psi(G) + (u, v)$ is Eulerian where: u is the the vertex whose outdegree is less than its indegree, and v is the vertex whose indegree is less than its outdegree. In that case, the number of semi-Eulerian paths of $\psi(G)$ is exactly the number of Eulerian paths of $\psi(G) + (u, v)$ divided by $|\psi(G)| = |V|$ (since for one semi-Eulerian path in $\psi(G)$ there are exactly $|V|$ Eulerian paths in $\psi(G) + (u, v)$). \square

To use Formula 4 with the initial inputs of our problem, note that $\deg_{\psi(G)}(\psi(v)) = \sum_{n \in V} \pi_{nv}$.

4. General Case with Arbitrary Window Size ($w \geq 3$)

The characterization of general sequence graphs differs from the one of 2-sequence graphs, as shows the counterexample in Figure 6a: the depicted graph has no self-edge so there must be at least one clique of size 3. Similarly, Figure 6b depicts a counterexample for directed graphs: G does not have loops, so if it had a 3-realization, such sequence must be of the form $\{1 2 3 1 \dots, 1 3 2 1 \dots, 2 3 1 2 \dots, 3 2 1 3 \dots, 2 1 3 2 \dots\}$ but then $(3, 1)$ would form an edge.

4.1. A polynomial time algorithm for GU-REALIZABILITY $_w$

We first introduce a couple of definitions and notations for the gadgets used in our polynomial time algorithm to solve GU-REALIZABILITY $_w$.




Figure 6: Counterexamples for $w = 3$

Definition 6. Let $G = (V, E)$ be an undirected graph. $H(G)$ is the directed graph defined as:

$$V(H(G)) = \{(u, v) : u \in V(G), v \in V(G), \{u, v\} \in E(G)\}$$

and $e = (v_1, v_2)$, $f = (v_3, v_4)$ are adjacent in $H(G)$ if and only if:

$$v_2 = v_3 \text{ and } \{v_1, v_4\} \in E \quad (5)$$

When there is no ambiguity on the graph G considered, $H(G)$ will simply be referred to as H . In the following, $u_{i,j}$ is a shorthand for the pair (u_i, u_j) and $u_{1:k}$ for the k -tuple (u_1, \dots, u_k) . Let $E^{(0)} := E$, and for any $k \geq 1$:

$$E^{(k)} := \{u_{1:(k+1)} \in V^{k+1} \mid u_{1:k} \in E^{(k-1)}, u_{2:(k+1)} \in E^{(k-1)} \wedge \{u_1, u_{k+1}\} \in E\} \quad (6)$$

In the description above, V^k simply refers to the cartesian product $V \times \dots \times V$ (k times). Then, $H^{(k)}$ is by definition the gadget $H^{(k)} := (E^{(k)}, E^{(k+1)})$.

Remark 1. Each element of $E^{(k)}$ is a $(k+1)$ tuple representing a pair of elements $(u_{1:k}, v_{1:k})$ of V^k verifying $u_{2:k} = v_{1:(k-1)}$ and $\{u_1, v_k\} \in E$. By definition, a walk P in $H(G)$ is always of the form:

$$P = (t_1, t_2), \dots, (t_{p-1}, t_p) \text{ s.t } \forall i \in \{1, \dots, p-1\}, (t_i, t_{i+1}) \in E \quad (7)$$

It is clear that if $H(G)$ is a 2-graph, then G is a 3-graph since there is a walk going through all edges of $H(G)$. The converse is not true in general as depicted in Figure 5. By recursively merging some of the pairs of vertices, we thereby construct a sequence of gadgets $H^{(k)}$ that are convenient to decide if $G = (V, E)$ has a w -realization in the general unweighted case. In that regard, Proposition 8 states a correspondence between w -realizations of G , and walks on $H^{(w-2)}$. However, the number of vertices and edges of $H^{(k)}$ can increase exponentially with respect to k (the complete graph is an example).

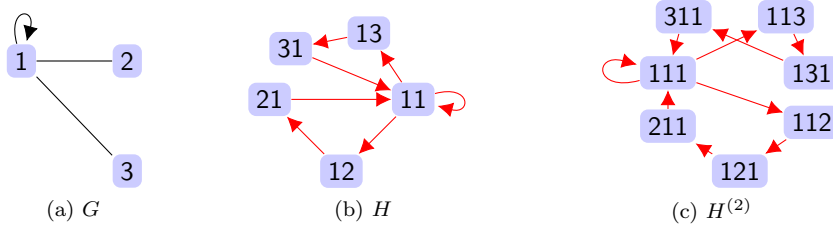


Figure 7: Example of construction of the gadgets H and $H^{(2)}$.

Definition 7. Let u be a vertex of $H^{(k)}$ for $k \in \mathbb{N}$, $u = (u_1, \dots, u_k, u_{k+1})$. The sequence u_1, \dots, u_{k+1} is the **authentic** sequence of u . We call an **authentic sequence** of a walk on $H^{(k)}$: $P = (x_1, \dots, x_{k+1}), (x_2, \dots, x_{k+2}), \dots, (x_v, \dots, x_{v+k})$ the sequence x_1, x_2, \dots, x_{v+k} .

Proposition 8. Let $x = x_1, \dots, x_p$ be a w -realization of a graph (or digraph) $G = (V, E)$. If $w \leq p$, then x is an authentic sequence of a walk of length $p - w + 1$ on $H^{(w-2)}$.

Proof. If P is a walk on $H^{(w-2)}$, let $P[i]$ be the i -th element of P , $P[i] \in H^{(w-2)}$: $P[i] = (P[i]_1, \dots, P[i]_{w-1})$. Let $x = x_1, \dots, x_p$ be a w -realization of G .

We here suppose that $w \leq p$ (which we can always do), and show the following property by induction on k :

$\forall k \in \{w-1, \dots, p\}$, \exists walk P on $H^{(w-2)}$ such that :

$$x_{1:k} = P[1]_1, P[2]_1, \dots, P[k - (w-1)]_1, P[k+1 - (w-1)]_{1:(w-1)}$$

- Base case: $k = w-1$. $x_{1:w-1}$ is the authentic sequence of $P = P[1] = x_{1:w-1} \in H^{(w-2)}$.
- Induction step: let us suppose the property is verified for $k \in \{w-1, \dots, p-1\}$, i.e there exists a walk P on $H^{(w-2)}$ such that:

$$x_{1:k} = P[1]_1, P[2]_1, \dots, P[k - (w-1)]_1, P[k+1 - (w-1)]_{1:(w-1)}$$

Since x is a w -realization, all the elements at distance at most w are edges of G :

$$\forall i \in \{k+1 - (w-1), \dots, k\}, \forall j \in \{i+1, \dots, \min\{k+1, i+w-1\}\} : (x_i, x_j) \in E$$

This means in particular that $x_{k+1-(w-1)}, \dots, x_{k+1} \in H^{(w-2)}$.

Let $P[k+2 - (w-1)]_{1:(w-1)} = x_{k+1-(w-1)}, \dots, x_{k+1}$. From the induction assumption: $\forall i \in \{1, \dots, k - (w-1)\}$, $P[i]_1 = x_i$. This ensures that:

$$x_{1:(k+1)} = P[1]_1, P[2]_1, \dots, P[k+1 - (w-1)]_1, P[k+2 - (w-1)]_{1:(w-1)}$$

which ends the induction and the proof. \square

Proposition 9. Let $w \in \mathbb{N}^+$ be any positive integer. GU-REALIZABILITY $_w$ is in P .

Proof. The case for $w = 1$ is trivial, and $w = 2$ has been treated. For $w \geq 3$, an algorithm is obtained by going through all the connected components of $H^{(w-2)}$. Let C_1, \dots, C_m the connected components of $H^{(w-2)}$. On the one hand, it is possible to compute them in polynomial time. On the other hand, one can construct walks covering all of their respective edges in polynomial time (for instance iteratively using shortest paths). Let W_1, \dots, W_m such walks and X_1, \dots, X_m their respective admissible sequences.




Figure 8: Illustration of the reduction for Proposition 1. The source graph G has vertices $\{u, v, x, y\}$ with the solid edges. Vertices a and b and dashed edges are added in the reduction. A realization follows a path visiting both vertices a and b : the first w vertices of the transition between a and b (highlighted in red) must form a clique in the graph, yielding a $(w - 1)$ -clique in the original graph.

Using Proposition 8, G is a w -sequence graph if and only if there exists a walk \tilde{W}_{i_0} on some C_{i_0} creating exactly the edges of G . However, \tilde{W}_{i_0} creates more edges than any walk on C_{i_0} by construction. In conclusion, the assertion: $\exists i \in \{1, \dots, m\}, \phi_w(X_i) = G$ is a characterization of G being a w -sequence graph. This assertion is decidable in polynomial time since for all i , $\phi_w(X_i)$ is computable in polynomial time (cf. Algorithm 1). \square

Remark 2. For digraphs, the analogue of the aforementioned procedure would consist in enumerating all paths in the DAG $R(H^{(w-2)})$. However, the number of those paths can be exponential, even if the initial graph is a sequence graph.

Remark 3. Proposition 9 provides a polynomial time algorithm for $GU\text{-REALIZABILITY}_w$. If x_1, \dots, x_c are vertices of a strongly component C of $H^{(w-2)}$, one may wonder in which order should the attributes of the vertices be considered to form a new attribute x_C . This order is not important, as long as the walk visits every edge in the component. Moreover, it is possible to reconstruct all admissible sequences from walks on $R(H^{(w-2)})$.

Proposition 1. $CLIQUE$ admits a polynomial time parameterized reduction to $GU\text{-REALIZABILITY}$.

Proof. Let $G = (V, E)$ be a simple graph. Let G' be a graph constructed from G adding two nodes a and b with loops, such that a and b are connected to each vertex of G . Let k be a positive integer and $w = k + 1$. We will show that G has a k -clique if and only if G' is $((k + 1) = w)$ -realizable.

First, let us suppose that G has a k -clique. Let C be an arbitrary sequence of the vertices of one of its k -cliques. Let $v_1, \dots, v_{|V|}$ be the vertices of G and $\{u_1, u'_1\}, \dots, \{u_{|E|}, u'_{|E|}\}$ be its edges. We write A (resp. B) for the string containing w successive copies of a (resp. b). Then, the following sequence is a w -realization of G' :

$$A u_1 u'_1 A u_2 u'_2 A \dots A u_{|E|} u'_{|E|} A \quad C \quad B v_1 B v_2 B \dots B v_{|V|}$$

Now let us suppose that G' is w -realizable and let $x = x_1, \dots, x_p$ be a w -realization of G' . Without loss of generality, we can suppose a appears before b in x . Let i_b be the index of the first appearance of b and let i_a be the largest index of the appearance of a before i_b . Then $i_b - i_a \geq w$, otherwise there would be an edge between a and b . Furthermore, since G is simple, there cannot be two repetitions of a vertex in the sequence $x_{i_a+1}, \dots, x_{i_a+w-1}$. Due to the definition of a sequence graph, all vertices $\{x_{i_a+1}, \dots, x_{i_a+w-1}\}$ are connected, forming a clique in G of size $w - 1 = k$, which ends the proof. \square

4.2. NP-Hardness Reductions

We prove in this section our three NP-hardness for any constant window size (at least 3).

Proposition 10. *DU-Realizable $_w$, GW-Realizable $_w$, and DW-Realizable $_w$ are all NP-hard for any $w \geq 3$.*

We prove each case directly or indirectly by reduction from restricted versions of HAMILTONIAN PATH. We first verify the NP-hardness of these variants (see Lemma 2). We then focus on the unweighted case (see Lemma 4), for which we introduce an intermediate variant with *optional* arcs. Finally for the weighted cases, we use the same reduction for both directed and undirected cases (simply ignoring arc orientations in the latter case, see Lemma 5).

All our NP-hardness reductions are from Hamiltonian Path, where we require that the input graph contains up to two degree-one vertices. More formally, we reduce from the following intermediate problem:

Hamiltonian Variants The following is a folklore result, which we include here for completeness.

Lemma 2. *Hamiltonian Path is NP-hard even with either of the following two restrictions:*

HP1 the input graph has no self-loop, is directed and has a source vertex s (i.e. with in-degree 0)

HP2 the input graph has no self-loop, is undirected and has two degree-1 vertices s and t .

Proof. The first reduction is from Hamiltonian Cycle in directed graphs: pick any vertex v and duplicate it into v_1, v_2 . Each arc (v, u) becomes (v_1, u) and each arc (u, v) becomes (u, v_2) . Then any cycle in the original graph is equivalent to a path in the new graph from v_1 to v_2 .

The second reduction is from Hamiltonian Cycle in undirected graphs: pick any vertex v and duplicate it into v_1, v_2 . Each edge $\{u, v\}$ becomes two edges $\{u, v_1\}$ and $\{u, v_2\}$. Add pending vertices s and t connected to v_1 and v_2 respectively. Then any cycle in the original graph is equivalent to a path in the new graph with $\{s, v_1\}$ at one end and $\{t, v_2\}$ at the other. \square

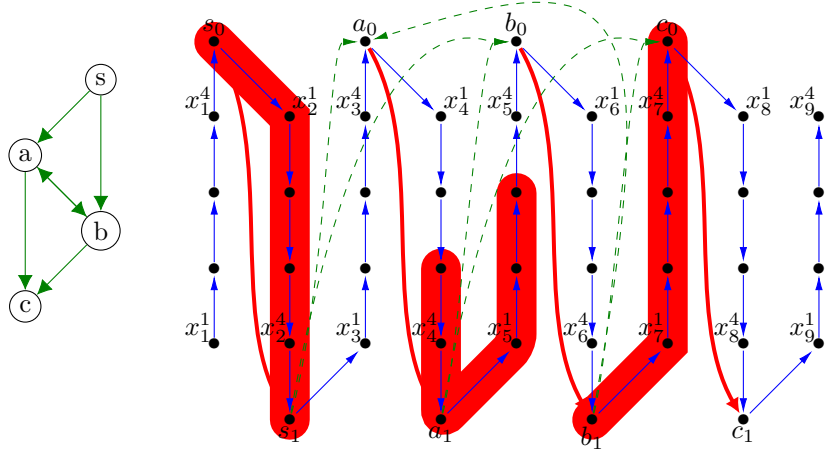


Figure 9: Left: an instance G of Hamiltonian Path with a source vertex s and solution (s, a, b, c) . Right: the corresponding instance G' of $\text{OptionalRealizable}_6$. Heavy (red) arcs are compulsory, light (blue) arcs are a solution path in the graph, dashed (green) arcs are optional arcs issued from the input graph. Other optional arcs are not depicted. Three size-6 windows are overlined: A window using v_0 and v_1 realizes the compulsory arc for vertex v , other windows with $w - 1$ separator vertices x_p^i help structure the whole sequence.

Reduction for DU-Realizable

In the directed and unweighted setting, we use the following intermediate generalization which allows *some* arcs to be ignored in the realization. For convenience in the final reduction, we further assume that the first $w - 1$ elements of the sequence are given in input.

Problem 5. $\text{OptionalRealizable}_w$

Input: directed unweighted graph $D = (V, A)$ without self-loops, a subset $A_c \subseteq A$ of compulsory arcs, a starting sequence $P = (s_1, \dots, s_{w-1})$ of $w - 1$ distinguished vertices of V .

Question: Is there a sequence S , starting with P , such that the graph of S with window size w contains only arcs in A and (at least) all arcs in A_c ?

Lemma 3. For any fixed $w \geq 3$, $\text{OptionalRealizable}_w$ is NP-hard.

Proof. By reduction from HAMILTONIAN PATH (see Lemma 2, HP1). Given a directed graph $G = (V, A)$ with a source vertex s and no self-loop, build an instance of $\text{OptionalRealizable}_w$ with directed unweighted graph $G' = (V', A')$, compulsory arcs A'_c and starting sequence P as follows (see Figure 9 for an example).

We introduce vertices denoted v_0, v_1 for each vertex v of the original graph, as well as a grid of vertices x_p^i for each $1 \leq p \leq 2n + 1, 1 \leq i \leq w - 2$. The

overall vertex set is thus

$$V' = \left(\bigcup_{v \in V} \{v_0, v_1\} \right) \cup \{x_p^i \mid 1 \leq p \leq 2n+1, 1 \leq i \leq w-2\}$$

The set of compulsory arcs is $A'_c = \{(v_0, v_1) \mid v \in V\}$. We further introduce the following optional arcs:

- arcs (u_1, v_0) for each (u, v) in A
- arcs $(x_{2p-1}^i, v_0), (v_0, x_{2p}^i), (x_{2p}^i, v_1), (v_1, x_{2p+1}^i)$ for each $v \in V, 1 \leq p \leq n, 1 \leq i \leq w-2$.
- arcs (x_p^i, x_p^j) for $i < j$ and $1 \leq p \leq 2n+1$; and (x_p^i, x_{p+1}^j) for $j \leq i$ and $1 \leq p \leq 2n$

The starting sequence is defined as $P = (x_1^1, \dots, x_1^{w-2}, s_0)$. Note that the resulting graph has no self-loop.

Claim: (G', P, A'_c) is a yes-instance for $\text{OptionalRealizable}_w \Leftrightarrow G$ admits a Hamiltonian path

\Leftarrow Let v^p be the p -th vertex of V in the Hamiltonian path (and v_0^p, v_1^p be the corresponding vertices in G'). Without loss of generality, since s has degree 1, $v^1 = s$. For $1 \leq p \leq n$, let X^p be the sequence $x_{2p-1}^1 \dots x_{2p-1}^{w-2} v_0^p x_{2p}^1 \dots x_{2p}^{w-2} v_1^p$. Let $X^{n+1} = x_{2n}^1 \dots x_{2n}^{w-2}$, and S be the concatenation $X^1 \dots X^{n+1}$. By construction S starts with P . Further, for each compulsory arc (v_0, v_1) , if $v = v^p$, then compulsory arc (v_0, v_1) is realized in subsequence X^p . Finally, it can be checked that the graph of S contains only arcs of A' . Indeed, the sequence uses the following arcs: (v_0, v_1) for each v (which are compulsory arcs), arcs (v_1^p, v_0^{p+1}) for each arc (v^p, v^{p+1}) of the Hamiltonian path, so $(v^p, v^{p+1}) \in A$ and $(v_1^p, v_0^{p+1}) \in A'$, arcs with an endpoint v_i and an endpoint x_p^j (which satisfy the parity conditions so they belong to A'), and finally arcs of the form (x_i^p, x_j^q) , either with $q = p$ (in which case $i < j$) or with $q = p+1$ (in which case by the window size we have $j \leq i$): both kinds are also in A' .

\Rightarrow Consider a sequence S , an occurrence of x_p^i in S for some $1 \leq i \leq w-2, 1 \leq p \leq 2n$ (note that $p \neq n+1$), and let S' be the subsequence of S containing the $w-1$ characters following x_p^i . Let $T = x_p^{i+1} \dots x_p^{w-2}$ and $U = x_{p+1}^1 \dots x_{p+1}^i$ (note that T is possibly empty). T and U are seen both as strings and as sets of vertices. The out-neighborhood of x_p^i contains all vertices of $T \cup U$, as well as all vertices v_q for $v \in V$, where $q = 0$ if p is odd and $q = 1$ if p is even. Since there are $w-2$ vertices in $T \cup U$, and no vertex has a self-loop, then by the pigeon-hole principle string S' must contain at least one vertex $v_q, v \in V$. Since there are no arc (v_q, v'_q) for $v, v' \in V$, S' contains exactly one vertex v_q , thus it also contains all vertices of $T \cup U$. Based on the direction of the arcs in $T \cup U \cup \{v_q\}$, it follows that $S' = T \cdot v_q \cdot U$.

Let X_p be the string $x_p^1 \dots x_p^{w-2}$. From the arguments above, and the fact that S starts with X_1 (since P uses vertices of X_1), there exist indices $i_1, j_1, \dots, i_n, j_n$ such that

$$S = X_1 v_{i_1}^0 X_2 v_{j_1}^1 X_3 v_{i_2}^0 X_4 v_{j_3}^1 X_5 \dots X_{2n+1}$$

From the window size w , there must exist an arc $(v_{i_p}^0, v_{j_p}^1)$ for each p , so by construction $i_p = j_p$. Furthermore, these arcs are compulsory for each vertex v^0 , so (i_1, \dots, i_n) is a permutation of $\{1, \dots, n\}$. Finally, there also exist an arc $(v_{j_p}^1, v_{i_{p+1}}^0)$ in G' , so there exists an arc $(v_{i_p}, v_{i_{p+1}})$ in G . Thus, $(v_{i_1}, \dots, v_{i_n})$ is a Hamiltonian path in G . \square

We can now prove that DU-Realizable_w is NP-hard by reduction from $\text{OptionalRealizable}_w$.

Lemma 4. *For any fixed $w \geq 3$, DU-Realizable_w is NP-hard.*

Proof. Assume that we are given a directed unweighted graph $G = (V, A)$, a subset $A_c \subseteq A$ of compulsory arcs (let $A_o = A \setminus A_c$ be the set of optional arcs), and a starting sequence $P = (s_1 \dots s_{w-1})$ of vertices of V . The following reduction is illustrated in Figure 10.

Let $m = |A_o|$, write $A_o = \{(u_1, v_1), \dots, (u_m, v_m)\}$. Create G' by adding $w(m+1) + m$ separator vertices: $w(m+1)$ vertices y_p^i with $1 \leq p \leq m+1$ and $1 \leq i \leq w$, and m vertices z_p for $1 \leq p \leq m$. Build the strings

$$Z = \left(\prod_{p=1}^m (y_p^1 \dots y_p^w u_p z_p v_p) \right) y_{m+1}^1 \dots y_{m+1}^w$$

$$Z' = Z s_1 \dots s_{w-1}$$

The arc set can be concisely defined as follows : take the set A and insert all arcs realized by Z' involving at least one separator vertex to G' . In details, the additional arcs are the following (where indices i, j, p necessarily satisfy $1 \leq i \leq w$, $1 \leq j \leq w$ and $1 \leq p \leq m$):

- (y_p^i, y_p^j) for $i < j$ and (y_p^i, y_{p+1}^j) for $j \leq i - 4$,
- (y_{m+1}^i, y_{m+1}^j) for $i < j$ and (y_{m+1}^i, s_j) for $j < i$,
- (y_p^i, u_p) for $2 \leq i$ and (u_p, y_{p+1}^j) for $i \leq w - 3$,
- (y_p^i, z_p) for $3 \leq i$ and (z_p, y_{p+1}^i) for $i \leq w - 2$,
- (y_p^i, v_p) for $4 \leq i$ and (v_p, y_{p+1}^j) for $i \leq w - 1$,
- (u_p, z_p) and (z_p, v_p) .

Claim: G has a realization with optional arcs $\Leftrightarrow G'$ has a realization

\Rightarrow Build a realization for G' by concatenating Z with the realization for G starting with $s_1 \dots s_{w-1}$. All optional arcs of G' are realized in Z , all compulsory arcs of G' are realized in the suffix (the realization of G), and all arcs involving a separator are realized in Z' . No forbidden arc is realized.

\Leftarrow Let S be a realization of G' . We prove by induction on q , for $1 \leq q \leq |Z|$, that (i) S and Z' have the same prefix of length $-(q+w-1)$ and (ii) any separator in $Z[1, \dots, q]$ may only appear in $S[1, \dots, q]$.

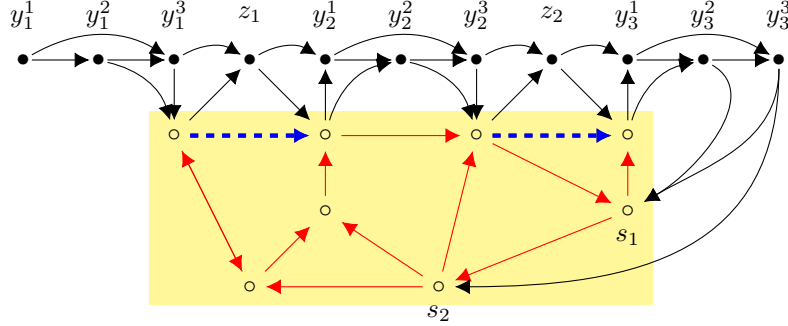


Figure 10: Reduction from $\text{OptionalRealizable}_w$ to DU-Realizable_w with $w = 3$. The input instance is the highlighted graph with white vertices (including two optional dashed blue arcs), as well as the starting sequence (s_1, s_2) . The reduction adds the black vertices y_p^i and z_p , and the corresponding black and grey arcs. Any solution is thus forced to first realize all optional arcs, and then realize the rest of the graph starting with s_1, s_2 , and including all compulsory arcs and, as needed, some of the optional arcs again.

For $q = 1$, this is obtained by the fact that $Z[1] = y_1^1$ has in-degree 0 in G' (so S starts with y_1^1) and its out-neighborhood forms a size- $(w - 1)$ tournament corresponding to $Z[2..w]$, so the length- w prefix of S is $Z[1..w]$. Consider now $1 < q \leq |Z|$. By induction S and Z' have the same prefix of length- $(q + w - 2)$, and separators up to position $q - 1$ in Z do not have any other occurrence in S . Let $q' = q$ if $S[q]$ is a separator (case A), and $q' = q + 1$ otherwise (case B). In both cases, $S[q']$ is a separator, its in-neighborhood contains at least one separator $Z[q - 1]$ or $Z[q - 2]$, so in particular vertex $S[q']$ may not have any other occurrence in the sequence (otherwise $Z[q - 1]$ and/or $Z[q - 2]$ would also have two occurrences). Furthermore, the out-neighborhood of $S[q']$ is $N = \{Z'[q' + 1], \dots, Z'[q' + w - 1]\}$ without self-loops, so $S[q' + 1, \dots, q' + w - 1]$ is a permutation of N . In case A, $w - 2$ vertices of N are already accounted for (by induction) in $S[q' + 1, \dots, q' + w - 2]$, so the remaining vertex $Z'[q' + w - 1]$ must be in position $q' + w - 1$ in S . In case B, elements of N are all in Z , so they form a tournament and, again, the next $w - 1$ positions in S and Z' must be equal.

Overall, we have $S = ZS'$ with the following properties: the length- $(w - 1)$ prefix of S' is the starting sequence P , and no separator appears in S' . Thus S' realizes only arcs from G . Moreover no compulsory arc of G is realized in Z , nor with one vertex in Z and one in S' (since such arcs start with a separator), so all compulsory arcs are realized in S' . Overall, G is a yes-instance of $\text{OptionalRealizable}_w$ with sequence S' . \square

Now, let us prove that GW-Realizable_w and DW-Realizable_w are NP-hard for all $w \geq 3$, by reduction from Hamiltonian Path (see Lemma 2, HP2). We focus on the directed case first, the undirected case will simply use the underlying graph introduced in this reduction.

Lemma 5. For any fixed $w \geq 3$, $DW\text{-Realizable}_w$ and $GW\text{-Realizable}_w$ are NP-hard.

Proof. **Reduction for DW-Realizable**

Given $G = (V, E)$ with degree-1 vertices s and t , write d_u for the degree of each vertex $u \in V$, and $k = w - 2$ (note that $k \geq 1$ since we chose $w \geq 3$). We write $\delta_s^{in} = d_s$ and $\delta_u^{in} = d_u - 1$ for $u \in V \setminus \{s\}$; and $\delta_t^{out} = d_t$ and $\delta_u^{out} = d_u - 1$ for $u \in V \setminus \{t\}$ (δ_u^{in} and δ_u^{out} can be seen as the remaining in- and out-degree in the oriented graph where edges are replaced by double arcs after removing an Hamiltonian $s - t$ path). We write $\delta_u = \delta_u^{in} + \delta_u^{out}$. Build a directed weighted graph $G' = (V', A)$ as follows. For each $u \in V$, add u and a new vertex denoted u' to V' . Create additional dummy vertices s_0, s'_0, a and b . The overall vertex set is thus $V' := \{a, b, s_0, s'_0\} \cup \bigcup_{u \in V} \{u, u'\}$. The arcs of A are given in Figure 11, as the union of the start gadget, the queue gadget, and the vertex and edge gadgets respectively for each vertex and edge of G .

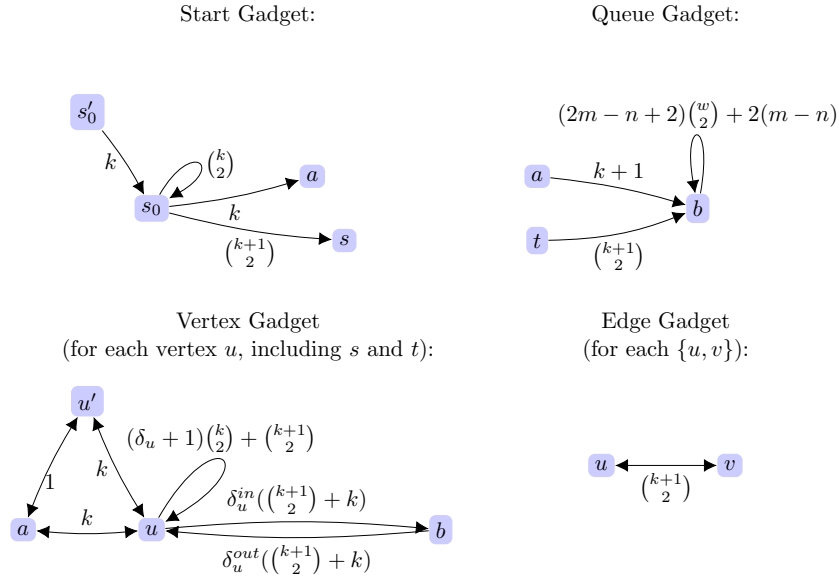


Figure 11: Subgraphs used in the reduction from Hamiltonian Path to $DW\text{-Realizable}_3$. Weights on double arcs apply to both directions. Note that arcs (t, b) appear in two different gadgets, so their weights should be summed up.

Reduction for GW-Realizable

Build the directed graph G' as above, and let G'_u be the undirected version of G' : remove arc orientations, for $u \neq v$ the weight of $\{u, v\}$ is the sum of the weight of (u, v) and (v, u) in G' (the weight of loops is unchanged).

We prove the following three claims:

- (i) G Hamiltonian $\Rightarrow G'$ has a realization

- (ii) G' has a realization $\Rightarrow G'_u$ has a realization
- (iii) G'_u has a realization $\Rightarrow G$ is Hamiltonian

Proof of Claim (i). Assume that G has a Hamiltonian path and denote its vertices as u_1, u_2, \dots, u_n according to their positions along the path (wlog., $u_1 = s$ and $u_n = t$). We suppose that G has m edges (over its n vertices). Let $(v_1, w_1), \dots, (v_{m'}, w_{m'})$ be the pairs of adjacent vertices in G that are not consecutive vertices of the Hamiltonian path (formally, it corresponds to the set $\bigcup_{\{u,v\} \in E} \{(u,v), (v,u)\} \setminus \{(u_i, u_{i+1}) \mid 1 \leq i < n\}$). Note that there are $m' = 2m - (n - 1)$ such pairs. We now show that the sequence S defined as follows is a realization of G .

$$\begin{aligned}
S &:= S_{init} S_{path} S_{queue} \quad \text{with} \\
S_{init} &:= s'_0 s_0^k \\
S_{path} &:= a s^k s' s^k a u_2^k u'_2 u_2^k a \dots a u_{n-1}^k u'_{n-1} u_{n-1}^k a t^k t' t^k a \\
S_{queue} &:= b^w v_1^k b w_1^k b^w v_2^k b w_2^k \dots b^w v_{m-n}^k b w_{m-n}^k b^w
\end{aligned}$$

Note that a sequence of the form $x^k a y^k$ yields $\binom{k}{2}$ loops for x , $\binom{k}{2}$ loops for y , as well as $\binom{k}{2}$ arcs (x, y) (indeed, there are $1 + 2 + \dots + w - 2 = \binom{k}{2}$ such arcs). A sequence of the form $b x^k b^w$ yields in particular an arc (b, x) of weight k and arc (x, b) of weight $\binom{w}{2}$.

We verify for each gadget that all arcs are indeed realized with the correct weight. Indeed, the start gadget corresponds exactly to arcs in S_{init} or overlapping S_{init} and S_{path} . Regarding the vertex gadget for $u \in V$, S_{path} realizes all arcs involving two distinct vertices among a, u, u' . S_{path} also yields $\binom{k}{2} + \binom{k+1}{2}$ self-loops for u , and S_{queue} yields the remaining $\delta_u \binom{k}{2}$ self-loops (since each vertex appears δ_u times there). S_{queue} also realizes all arcs between u and b . For an edge gadget $\{u, v\}$ if (u, v) (resp. (v, u)) is part of the Hamiltonian path, then the arc is realized in S_{path} , otherwise it is realized in S_{queue} . Finally, the arcs in the queue gadget are realized either in S_{queue} , either as overlapping arcs between S_{path} and S_{queue} . □

Proof of Claim (ii). Clearly, any realization for G' is a realization for G'_u . □

Proof of Claim (iii). Pick a realization S of G'_u . Define the weight of a vertex in G_u as the sum of the weights of its incident edges (counting loops twice). From the construction, we obtain the following weights for a selection of vertices:

- s'_0 has weight $w - 1$
- u' has weight $2(w - 1)$ for $u \in V$
- a has weight $2(n + 1)(w - 1)$

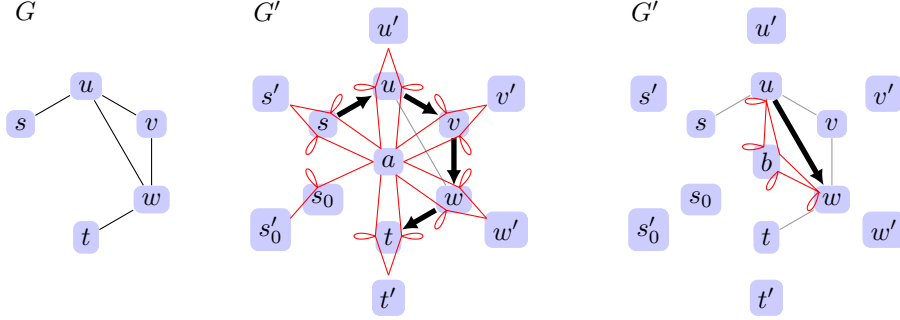


Figure 12: Reduction from **Hamiltonian Path** to **DW-Realizable**. Left: the input graph G with degree-one vertices s and t (and Hamiltonian Path (s, u, v, w, t)). Each edge becomes two arcs (in each direction) in the edge gadgets of the resulting graph G' . Center: the first part of the path realizing most edges of G' (in particular those involving vertex a), following the Hamiltonian path. In particular, bold arcs from the input graph are realized. Right: the remaining arcs (such as (u, w) , but also (w, u) , (u, s) , (v, u) , etc.) are realized using a succession of round-trips with vertex b . Self-loops represent iterations of $k = w - 2$ or w occurrences.

From the weight of s'_0 , it follows that this vertex must be an endpoint of S (wlog, S starts with s'_0). It follows that for any other vertex v with weight $2i(w - 1)$, v must have exactly i occurrences in S (in general it can be either i or $i + 1$, but if v has $i + 1$ occurrences it must be both the first and last character of S , i.e. $v = s'_0$: a contradiction). Thus each u' occurs once and a occurs $n + 1$ times in S .

Each u' occurs once, so order vertices of V according to their occurrence in S (i.e. $V = \{u_1, \dots, u_n\}$ with u'_1 appearing before u'_2 , etc.). For each i , the neighborhood of u'_i in S contains a twice, one a on each side (since there is no (a, a) loop). Other neighbors of u'_i may only be occurrences of u_i , so each u'_i belongs to a factor, denoted X_i , of the form $au_i^*u'_i u_i^*a$. Two consecutive factors X_i, X_{i+1} may overlap by at most one character (a), and if they do, then there exists an arc (u_i, u_{i+1}) in A , hence an edge $\{u_i, u_{i+1}\}$ (since $w \geq 3$) in E . There are n such factors X_{u_i} , and only $n + 1$ occurrences of a , so all a s except extreme ones belong to the overlap of two consecutive X_i s, and there exists an edge $\{u_i, u_{i+1}\}$ for each i . Thus (u_1, \dots, u_n) is a Hamiltonian path of G . \square

All together, claims (i), (ii) and (iii) show the correctness of the reductions for both **GW-Realizable** and **DW-Realizable** since they yield :

G is Hamiltonian $\Leftrightarrow G'$ has a realization

G is Hamiltonian $\Leftrightarrow G'_u$ has a realization \square

5. Effective general algorithms

5.1. REALIZABILITY_w Linear integer programming formulation

Let $G = (V, E)$ be a graph with integer weights $\pi_{u,v}$ with $(u, v) \in E$. In this model, we represent a sequence x over the alphabet $\{1, \dots, n\}$, as a $(0 - 1)$ matrix

$X \in \mathbb{M}_{n,p}(\{0,1\})$ encoding the sequence x :

$$X_{i,j} = \begin{cases} 1 & \text{if } x_j = i \\ 0 & \text{otherwise} \end{cases}$$

We represent the set of sequences over the alphabet $\{1, \dots, n\}$ by the $(0-1)$ matrices such that $\forall j \in \{1, \dots, p\}, \sum_{i=1}^n X_{i,j} = 1$.

Given a window size w , a unit of π_{v_1, v_2} corresponds to the appearance of two elements v_1, v_2 at a distance $i \in \{1, \dots, w-1\}$ in the sequence. Now, let us consider a fixed distance i , and a starting index $j \in \{1, \dots, p-i\}$, we use an intermediary variable $y_j^e(i) \in \{0,1\}$ (where e refers to (v_1, v_2) to simplify the notations) to model the presence of such appearance using the constraint:

$$X_{v_1, j} X_{v_2, j+i} = y_j^e(i) \quad (8)$$

Then, the Boolean variable $y_j^e(i)$ is equal to 1 when v_1 is located at position j and v_2 at position $j+i$. We linearise Equation 8 as:

$$\begin{aligned} -X_{v_1, j} + y_j^e(i) &\leq 0 \\ -X_{v_2, j+i} + y_j^e(i) &\leq 0 \\ X_{v_1, j} + X_{v_2, j+i} - y_j^e(i) &\leq 1 \end{aligned} \quad (9)$$

Each slack variable $y_k^e(i)$ is attributed to an edge e , a relative distance $i \in \{1, \dots, w-1\}$ and a starting position $k \in \{1, \dots, p-i\}$. Given our constraint formulation, every slack variable is attributed 3 constraints. For a digraph, the number of possible pair positions for a unit of π_{v_1, v_2} is given by:

$$C = \sum_{i=1}^{w-1} (p-i) = p(w-1) - \frac{w(w-1)}{2} = (w-1)\left(p - \frac{w}{2}\right)$$

Therefore, in our model, C corresponds to the number of slack variables attributed to constraints for an edge of the graph.

On the contrary, the absence of an edge $e = (v_1, v_2)$, corresponding to $\pi_e = 0$, can be modeled for a distance $i \in \{1, \dots, w-1\}$ and a starting position $j \in \{1, \dots, p-i\}$ as:

$$X_{v_1, j} + X_{v_2, j+i} \leq 1$$

Then, REALIZABILITY $_w$ can be formulated as a linear integer program:

$$\min_{X \in \{0,1\}^{p \times n}, y \in \{0,1\}^{|E| \times C}} \sum_{e \in E} \sum_{i \in \{1, \dots, w-1\}} y_1^e(i) + \dots + y_{p-i}^e(i)$$

under the constraints

$$\forall j \in \{1, \dots, p\} \quad \sum_{i=1}^n X_{i,j} = 1$$

$$\begin{array}{l}
\forall e = (v_1, v_2) \in E \\
\forall e' = (v'_1, v'_2) \notin E \\
\forall i \in \{1, \dots, w-1\}
\end{array}
\left\{ \begin{array}{ll}
-X_{v_1,1} & + y_1^e(i) \leq 0 \\
& - X_{v_2,1+i} + y_1^e(i) \leq 0 \\
X_{v_1,1} + X_{v_2,1+i} - y_1^e(i) \leq 1 & X_{v'_1,1} + X_{v'_2,1+i} \leq 1 \\
& \vdots & \vdots \\
-X_{v_1,p-i} & + y_{p-i}^e(i) \leq 0 \\
& - X_{v_2,p} + y_{p-i}^e(i) \leq 0 \\
X_{v_1,p-i} + X_{v_2,p} - y_{p-i}^e(i) \leq 1 & X_{v'_1,p-i} + X_{v'_2,p} \leq 1
\end{array} \right.$$

and $\forall e \in E \quad \sum_{i \in \{1, \dots, w-1\}} y_1^e(i) + \dots + y_{p-i}^e(i) \geq \pi_e$

If the objective function reaches $\sum_{e \in E} \pi_e$ at its minimum then the output of $\text{REALIZABILITY}_w(G, \Pi)$ is True, and False otherwise.

5.2. NUMREALIZATIONS_w Dynamic programming formulation

We did not present a way to count realizations in the general case. We present in this subsection a method based on dynamic programming valid for all cases.

Let V^* be the set of sequences taking values in V . The recursion proceeds by extending a partial sequence, initially set to be empty, keeping track of represented edges along the way. Namely, consider $N_w[\Pi, p, \mathbf{u}]$ to be the number of w -realizations of length p for the graph $G = (V, E)$, respecting a weight matrix $\Pi = (\pi_{ij})_{i,j \in V^2}$, preceded by a sequence of nodes $\mathbf{u} := (u_1, \dots, u_{|\mathbf{u}|}) \in V^*$. It can be shown that, for all $\forall p \geq 1$, $\Pi \in \mathbb{N}^{|V^2|}$ and for \mathbf{u} of length at most w , $N_w[\Pi, p, \mathbf{u}]$ obeys the following formula, using the notations of Section 4:

$$N_w[\Pi, p, \mathbf{u}] = \sum_{v \in V} \begin{cases} N_w[\Pi'_{(\mathbf{u}, v)}, p-1, (u_1, \dots, u_{|\mathbf{u}|}, v)] & \text{if } |\mathbf{u}| < w-1 \\ N_w[\Pi'_{(\mathbf{u}, v)}, p-1, (u_2, \dots, u_{w-1}, v)] & \text{if } |\mathbf{u}| = w-1 \end{cases} \quad (10)$$

with $\Pi'_{(\mathbf{u}, v)} := (\pi_{ij} - |\{k \in [1, |\mathbf{u}|] \mid (u_k, v) = (i, j)\}|)_{(i,j) \in V^2}$. The base case of this recurrence corresponds to $p = 0$, and is defined as

$$\forall \Pi, N_w[\Pi, 0, \mathbf{u}] = \begin{cases} 1 & \text{if } \Pi = (0)_{(i,j) \in V^2} \\ 0 & \text{otherwise.} \end{cases} \quad (11)$$

The total number of realizations is then found in $N_w[\Pi, p, \varepsilon]$, *i.e.* setting \mathbf{u} to the empty prefix ε , allowing the sequence to start from any node.

The recurrence can be computed in $\mathcal{O}(|V|^w \times \prod_{i,j \in V^2} (\pi_{i,j} + 1))$ time using memoization, for p the sequence length. The complexity can be refined by noting that:

$$\sum_{i,j \in V^2} \pi_{i,j} \leq w \times p$$

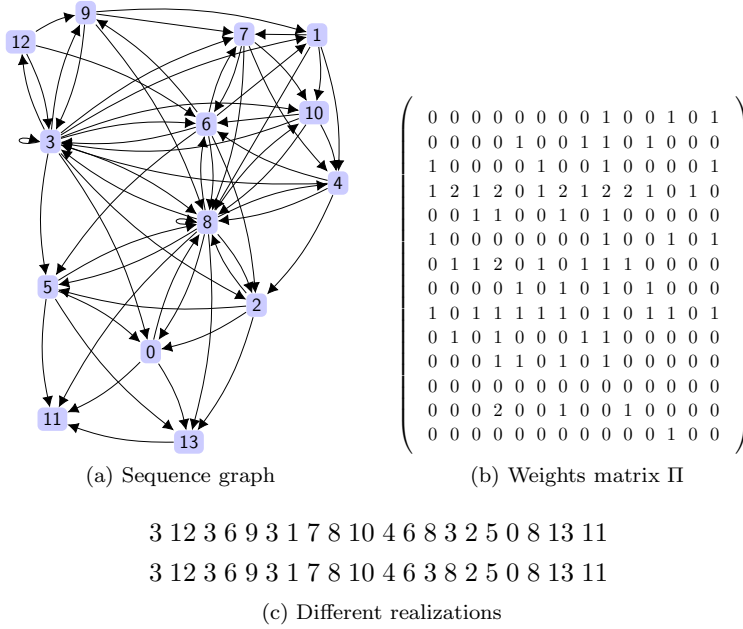


Figure 13: Example of realizations in the **DW** variant, as obtained using our dynamic programming algorithm: (a) a 5-sequence graph on $|V| = 14$ (vertices are labelled with integers from 0 to 13). (b) the corresponding weight matrix Π of size 14×14 . (c) two possible realizations of length $p = 20$.

To investigate the worst case scenario, we can consider the optimisation problem:

$$\max_{\Pi} \prod_{i,j \in V^2} (\pi_{i,j} + 1) \text{ such that } \sum_{i,j} \pi_{i,j} = wp. \quad (12)$$

This problem is equivalent to maximizing a product under a budget constraint. When $n^2 \geq w \times p$, which is the case in practice, the maximum is reached for a Boolean matrix $\Pi = (\pi_{i,j}) \in \{0, 1\}^{|V|^2}$. This property can be deduced from the inequality:

$$a < b - 1 \implies ab < (a + 1)(b - 1)$$

It follows that, in the worst-case scenario, $\prod_{i,j \in V^2} (\pi_{i,j} + 1) \in \mathcal{O}(2^{wp})$, giving an overall complexity of $\mathcal{O}(|V|^{w2^{wp}})$. Thus, despite the apparently high complexity of our algorithm, it is still possible to compute $N_w[\Pi, p, u_{1:w}]$ for “reasonable” values of p and w . Indeed, succinct experiments showed that the table could be computed in less than a minute for values up to $|V| = 20$, $p = 100$ and $w = 3$. See Figure 13 for an instance and the resulting sequences obtained by our algorithm.

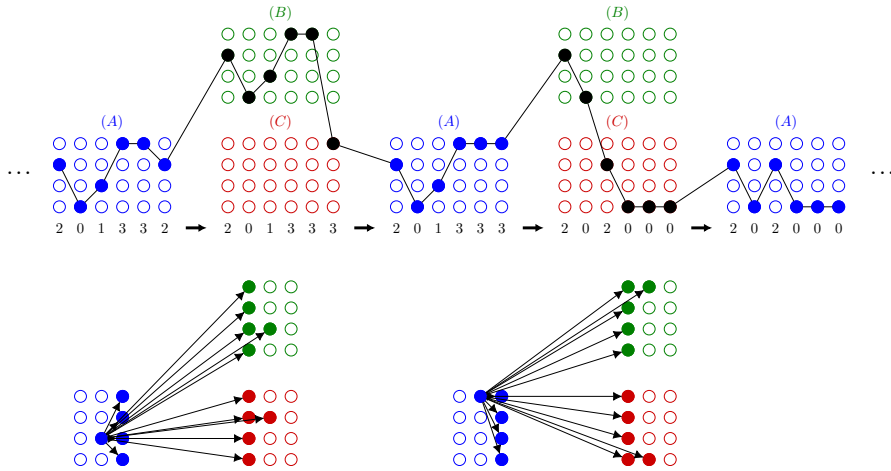


Figure 14: Illustration of the construction in Proposition 11 for a graph with an exponentially long realization, with $n = 4$ and $k = 6$. Top: a fragment of the path, starting with the substring $a_{1,2}a_{2,0}a_{3,1}a_{4,3}a_{5,3}a_{6,2}$: in a correct realization, such a fragment (with value $(2, 0, 1, 3, 3, 2)$) must be followed by the highlighted vertices with successive values $(2, 0, 1, 3, 3, 3)$ and $(2, 0, 2, 0, 0, 0)$. Vertices are drawn multiple times, to avoid overlappings in the drawing, but there are indeed only $n \times k$ vertices in each of A , B and C . This counting behavior must be repeated from $(0, 0, 0, 0, 0, 0)$ to $(3, 3, 3, 3, 3, 3)$, yielding a path of length at least 4^6 . Bottom: example of arcs outgoing from two A vertices that enforce this behavior. Each vertex in A is connected to a single vertex in the corresponding column in each of B and C , where B is used to keep the same value and C is used to increment a column.

6. Discussion and open problems

In this study, we presented a new series of inverse problems related to the ambiguity of popular representations in text mining and natural language processing. We characterized their complexity class, except the belonging in NP for $w \geq 3$. Given a sequence, computing its graph representation can be done in $O(d^2 + p)$, if p is the length of the sequence and d the size of the vocabulary. However, this does not prove that REALIZABILITY nor NUMREALIZATIONS are in NP, because the said realization could be exponentially large with respect to the number of vertices or the window size. Although we cannot settle this question in general, we prove this situation occurs in the directed case (DU and DW), for which some graphs have minimal realizations whose length scales exponentially with the window size. This is formally stated in Proposition 11 for DU-REALIZABILITY.

Proposition 11. *For any positive integers n and k , there exists a graph of size $3kn + 1$ such that any DU-realization with a window of size $k + 1$ has length at least $2kn^k$.*

Proof. See Figure 14 for an example. Our construction uses three sets of vertices A , B and C of size $k \times n$ each (vertices are labelled respectively $a_{i,j}$, $b_{i,j}$ and $c_{i,j}$ with $1 \leq i \leq k$ and $0 \leq j < n$), plus an additional *start* vertex s . The

column of a vertex in $A \cup B \cup C$ is its first index, the *value* is its second index, the *rank* of a vertex v is an integer in $\mathbb{Z}/2k\mathbb{Z}$ equal to the column of v if $v \in A$ and to its column plus k if $v \in B \cup C$. Vertex s has column, value and rank 0. Given a k -tuple $T = (j_1, \dots, j_k)$ with values in $[0, n-1]$, the *successor* of T is the k -tuple $T' = (0, \dots, 0, j_x + 1, j_{x+1}, \dots, j_k)$ where x is the smallest index such that $j_x < n-1$, i.e. all n^k such tuples form a path from $(0, \dots, 0)$ to $(n-1, \dots, n-1)$.

We build a DAG on vertex set $A \cup B \cup C \cup \{s\}$ with the following arcs. Vertex s has outgoing arcs to each of $a_{i,0}$ for all i . Each vertex $a_{i,j}$ with $1 \leq i \leq k$ and $0 \leq j < n$ has an outgoing arc to each $a_{i',j'}$ with $i' > i$, to each $b_{i',j'}$ with $i' < i$, to $b_{i,j}$ and to $c_{i,j+1 \bmod n}$. Each vertex $b_{i,j}$ and each $c_{i,j}$ with $1 \leq i \leq k$ and $0 \leq j < n$ has an outgoing arc to each $b_{i',j'}$ with $i' > i$, to each $a_{i',j'}$ with $i' < i$ and to $a_{i,j}$. Finally, for $i < k$, each $c_{i,0}$ is connected to $c_{i+1,j}$ for all $0 \leq j < n$.

Let S be a realization of G with window size $k+1$. Clearly S necessarily starts with s (the only vertex with in-degree 0). Let $1 \leq p \leq |S| - k$. Consider the substring $S' = S[p \dots p+k]$. Note that by construction a vertex of rank r only has outgoing arcs to vertices with rank $r+i$ with $0 < i \leq k$. In particular, two vertices of the same rank cannot be in S' . Thus, let r be the rank of $S[p]$, then all other vertices of S' have rank in $[r+1, r+k]$. In particular, the second vertex $S[p+1]$ in S' has out-going arcs to $k-1$ vertices with ranks among $[r+1, r+k]$, which is only true for vertices of rank $r-1, r$, or $r+1$. Thus $S[p+1]$ has necessarily rank $r+1$. Hence, since $S[1] = s$ has rank 0, then $S[i]$ has rank $i-1$ for $1 \leq i \leq |S| - k$. In particular, $S[1, \dots, k+1] = sa_{0,0} \dots a_{k,0}$.

Let $a_{i,j} \in A$ and p such that $S[p] = a_{i,j}$. Then $S[p+k]$ is one of $b_{i,j}, c_{i,j+1}$. For $S[p] = b_{i,j} \in B$ or $S[p] = c_{i,j} \in C$ then $S[p+k] = a_{i,j}$. Thus, in most cases, the value of $S[p]$ and $S[p+k]$ are equal, except in the following cases: $S[p] = a_{i,j}$ and $S[p+k] = c_{i,j+1}$. Then by the incoming arcs of $c_{i,j+1}$, necessarily $S[p+k-i'] = c_{i-i',n}$ for all $0 < i' \leq i$. $S[p] = c_{i,n}$ and $S[p+k] = a_{i,0}$. Let p be a position such that $S[p]$ has rank 1, let $T = (j_1, \dots, j_k)$ be the tuple of values of $S[p] \dots S[p+k-1]$, let T' be the tuple of values of $S[p+k] \dots S[p+2k-1]$, and T'' be the tuple of values of $S[p+2k] \dots S[p+2k-1]$. Then if $S[p+k] \dots S[p+2k-1]$ does not contain any vertex in C , then $T = T' = T''$. Otherwise, let x be the first index such that $j_x < n-1$, then $T' = (0, \dots, 0, j_x + 1, j_{x+1}, \dots, j_k)$, and $T'' = T'$ is the successor of T .

To conclude, S contains $a_{0,0} \dots a_{k,0}$, i.e. a substring with tuple of values $(0, \dots, 0)$. It also contains $c_{k,0}$, which has only incoming arcs from $a_{k,n-1}$ and from each $c_{i,0}$ with $i < k$, thus S also contains $a_{1,n-1} \dots a_{k,n-1} c_{1,0} \dots c_{k,0}$, hence S contains the tuple $(n-1, \dots, n-1)$. Since S must use consecutive tuples according to the successor relation, it must contain substrings with rank 1 to k with each tuple from $(0, \dots, 0)$ to $(n-1, \dots, n-1)$, i.e. it has length at least $(2k)n^k$.

Note that the above proof does not guarantee the actual *existence* of such a realization. However, the construction can be adapted to this end, by providing an exponential-length sequence using only arcs from the DAG (starting with $sa_{1,0} \dots a_{k,0}$ and ending with $a_{1,n-1} \dots a_{k,n-1}$), and filtering out those edges that are not realized. Thus, any sequence realizing the resulting graph still

requires an exponential length, and the graph is realizable by construction. \square

Remark 4. *The existence of instances with exponentially large DW-realizations is due to encoding of the input, and the length p of the realization. By definition, the length of DW-realization of an instance (G, Π) depends linearly on the sum of the coefficients of Π , whereas the encoding of the entries of Π can be done logarithmically with respect to the values of Π .*

Acknowledgments

The authors wish to express their gratitude to Guillaume Fertin and an anonymous reviewer of an earlier version of this manuscript, for their valuable suggestions and constructive criticisms.

References

- [1] Arora, S., Li, Y., Liang, Y., Ma, T., Risteski, A.: A latent variable model approach to pmi-based word embeddings. *Transactions of the Association for Computational Linguistics* **4**, 385–399 (2016)
- [2] Brightwell, G.R., Winkler, P.: Counting eulerian circuits is# p-complete. In: *ALLENEX/ANALCO*. pp. 259–262. Citeseer (2005)
- [3] de Bruijn, N.G., van Aardenne-Ehrenfest, T.: Circuits and trees in oriented linear graphs. *Simon Stevin* **28**, 203–217 (1951)
- [4] Chaiken, S.: A combinatorial proof of the all minors matrix tree theorem. *SIAM Journal on Algebraic Discrete Methods* **3**(3), 319–329 (1982)
- [5] Gawrychowski, P., Kociumaka, T., Radoszewski, J., Rytter, W., Waleń, T.: Universal reconstruction of a string. *Theoretical Computer Science* **812**, 174–186 (2020)
- [6] Gibert, J., Valveny, E., Bunke, H.: Dimensionality reduction for graph of words embedding. In: *International Workshop on Graph-Based Representations in Pattern Recognition*. pp. 22–31. Springer (2011)
- [7] Liberti, L., Lavor, C., Maculan, N., Mucherino, A.: Euclidean distance geometry and applications. *Siam Review* **56**(1), 3–69 (2014)
- [8] Mikolov, T., Chen, K., Corrado, G., Dean, J.: Efficient estimation of word representations in vector space. *arXiv preprint arXiv:1301.3781* (2013)
- [9] Nadeau, D., Sekine, S.: A survey of named entity recognition and classification. *Linguisticae Investigationes* **30**(1), 3–26 (2007)
- [10] Peng, H., Li, J., He, Y., Liu, Y., Bao, M., Wang, L., Song, Y., Yang, Q.: Large-scale hierarchical text classification with recursively regularized deep graph-cnn. In: *Proceedings of the 2018 World Wide Web Conference*. pp. 1063–1072 (2018)

- [11] Pennington, J., Socher, R., Manning, C.: Glove: Global vectors for word representation. In: Proceedings of the 2014 conference on empirical methods in natural language processing (EMNLP). pp. 1532–1543 (2014)
- [12] Roth, M., Woodsend, K.: Composition of word representations improves semantic role labelling. In: Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP). pp. 407–413 (2014)
- [13] Rousseau, F., Kiagias, E., Vazirgiannis, M.: Text categorization as a graph classification problem. In: Proceedings of the 53rd Annual Meeting of the ACL and the 7th IJCNLP (Volume 1: Long Papers). pp. 1702–1712 (2015)
- [14] Sanjeev, A., Yingyu, L., Tengyu, M.: A simple but tough-to-beat baseline for sentence embeddings. Proceedings of ICLR (2017)
- [15] Skianis, K., Malliaros, F., Vazirgiannis, M.: Fusing document, collection and label graph-based representations with word embeddings for text classification. In: Proceedings of the Twelfth Workshop on Graph-Based Methods for Natural Language Processing (TextGraphs-12). pp. 49–58 (2018)