On Computability of Computable Problems

Asad Khaliq

E-mail address: asadmalik@giki.edu.pk

Faculty of Electrical Engineering, GIK Institute of Engineering Sciences and Technology.

KPK, Topi, 23640, Pakistan.

Abstract: Computational problems are classified into computable and uncomputable problems. If there exists an effective procedure (algorithm) to compute a problem then the problem is computable otherwise it is uncomputable. Turing machines can execute any algorithm therefore every computable problem is Turing computable. Cardinality of Turing machines and computable problems is equal-both are countably infinite. In this paper we introduce new type of problems by constructing a transform technique and applying it on some computable problems. The transformed problems can be computable of uncomputable.

Key Words: Turing machine, Transform, Stipulation machine, Computability

1 Introduction

Discovery of paradoxes during attempts to axiomatize Mathematics played important role in foundational crisis of Mathematics in late 19th and early 20th century. There were three major schools of thought to deal with this crisis, i.e., intuitionism, logisim, and formalism. Main opinions about this foundational crisis were turned into Mathematical research projects. David Hilbert, one of the most notable formalists, presented one such project that is known as Hilbert's program [1].Entscheidungsproblem, a decision problem of first order logic, was posed by David Hilbert and Wilhelm Ackermann in 1928 [2]. Entscheidungsproblem is about finding an effective procedure (algorithm) by which, given any expression M in the notation of the system, it can be determined whether or not M is provable in the system. Alan Turing and Alonzo Church, in 1930's, independently proved that Entscheidungsproblem is unsolvable [3, 4]. To capture the notion of effective procedures, Alan Turing and Alonzo Church developed Turing machines and λ -calculus, respectively. General recursive functions and Post machines are some other formal notions of effective procedures that were also presented in 1930's [5, 6]. Lambda calculus, Turing machines, and other notions of effective procedures are equivalent in their computational powers because they can simulate each other [7, 8]. Only Turing machines are briefly described here because of their relevance to this work.

A Turing machine consists of a finite set of states (control unit), a read-write head, and an infinite tape. A simple schematic of single tape Turing machine is shown in Fig. 1. At each step a Turing machine reads the alphabet from tape cell that is under read-write head, changes its state, writes an alphabet on the tape cell that is under read-write head, and moves the tape head to the left (L) or to the right (R). If Q is finite set of states and Γ represents finite set of tape alphabets then we can write transition function (δ) of single tape Turing machine in following way.

$$\delta:Q\times\Gamma\longrightarrow Q\times\Gamma\times\{L,R\}$$

Unit time is required to execute one complete transition of transition function δ . This unit time is same for every single transition of a transition function. If a problem is computable for given input then Turing machine halts in some finite time and outputs right answer. Now we construct a transform technique and apply it on some computable problems, and then we explain computability of the transformed problems.

2 Construction of Transform

Suppose there is a deterministic Turing machine D_R . The unit time that D_R takes to complete one transition of its transition function is represented by T_t , and the time T_t is constant and same for every Turing machine mentioned in this paper. Turing machine D_R computes a partially computable function R. Suppose, for a given input y, the Turing machine D_R requires N_R number of steps to compute R(y). If R(y) is computable then N_R is some finite number. For input y, the partially computable function R can be either computable or uncomputable. Total time required to compute R(y) by D_R for input y is represented by f(R).

$$f(R) = N_R T_t \tag{1}$$

With input y, there are two possible outcomes for partially computable function R, either R(y) is a computable (if D_R computes R(y) and halts) or R(y) is uncomputable (if D_R loops forever). We can state these two possibilities in term of f(R) in following way. For given input y

I. If R(y) is computable then f(R) has finite value

II. If f(R) has infinite value (i.e., $N_R \to \infty$) then R(y) is uncomputable

There is another a function P and it is a total computable. If P is total computable function then f(P) has some finite value for every input.

$$f(P) = N_P T_t \tag{2}$$

Suppose we have a variable F such that $f(P, F) = N_P T_t F_P$ and $1 \leq F_P < \infty$. If $M_P = 1/F_P$ then $f(P, M) = N_P T_t/M_P$ and $0 < M_P \leq 1$. This variable M will be explained as we move forward in construction of this transform. The behaviour of (3), when $M_P = 1$ and $M_P \to 0$, is represented in (4) and (5), respectively.

$$f(P,M) = \frac{N_P T_t}{M_P} \tag{3}$$

$$\lim_{M_P=1} f(P, M) = f(P) \tag{4}$$

$$\lim_{M_P \to 0} f(P, M) \to \infty \tag{5}$$

The new function f(P, M) represents time required to compute function P(m) for given input and M.Given that P is computable function and P(m) is new function, we can summarise (4) and (5) in following way.

For given input

- I. If $M_P = 1$ then f(P, M) = f(P); consequently, P(m) is a computable function
- II. If $M_P \to 0$ then $f(P, M) \to \infty$; consequently, P(m) is an uncomputable function

In (3), if $M_P = 1 - 2^{-X_P}$ and $0 < M_P \le 1$ then $X_P = -\log_2(1 - M_P)$ and $0 < X_p \le \infty$. After replacing M_P with $1 - 2^{-X_P}$ in (3) we get (6). For any given input, P is computable and computability of P(x) depends on x, and in computation they require time f(P) and f(P, X), respectively.

$$f(P,X) = \frac{N_P T_t}{1 - 2^{-X_P}}$$
(6)

$$\lim_{X_P=\infty} f(P, X) = f(P) \tag{7}$$

$$\lim_{X_P \to 0} f(P, X) \to \infty \tag{8}$$

If it is given that P is computable function but computability of P(x) depends on value of x then we can summarise (7 and 8) in following way.

For given input

I. If $X_p = \infty$ then f(P, X) = f(P); consequently, P(x) is a computable function II. If $X_p \to 0$ then $f(P, X) \to \infty$; consequently, P(x) is an uncomputable function

We can implement partially computable and computable (partially computable and total) functions through Turing machines. For a given input, there always exists a Turing machine M_1 that can compute task Y if there exists a computable function for Y. We can materialize the mathematical formulations presented in (6,7 and 8) through a realizable computational scheme that consists of Stipulation machine and Turing machine. Stipulation machine is a realizable computational object, just like Turing machines. Stipulation machine interacts with a Turing machine through some mutually binding set of rules (*postulates*).

2.1 Stipulation machine

Suppose, there is a Turing machine M_1 that computes some problem Y, and M_1 is connected to Stipulation machine. A simple schematic of interconnection between Turing machine and Stipulation machine is shown in Fig.2. There are eight postulates that describe the interactions between Turing machine and Stipulation machine. I. Stipulation machine writes input on the space specified for input in Turing machine M_1 , and there is one and only space for input in M_1 . II. Stipulation machine writes only those inputs that M_1 can decide, i.e., M_1 is total Turing machine for the Stipulation machine. III.Stipulation machine rewrites input in Turing machine M_1 after every fixed time interval T_Y . IV.Length of every recurring input is equal to input length of first input in a computation. V. No two consecutive inputs of Turing machine M_1 can be identical in a computation. VI. When Turing machine M_1 halts the Stipulation machine gets this information. VII. When Stipulation machine receives halting signal, it stops rewriting input on Turing machine M_1 for current computation. VIII. We can write input in M_1 only through Stipulation machine when it is connected to Stipulation machine.

The time T_Y is characteristic of Stipulation machine and $0 < T_Y \leq \infty$, and $T_Y = \infty$ means Stipulation machine does not rewrite input in a computation. If there is a Turing machine M_1 that is connected with Stipulation machine then it is represented by $M_1(t)$, and $\langle M_1(t) \rangle = \langle M_1 \rangle$. Just like Turing machines, Stipulation machines is also a realizable object. Therefore, we can construct the computational scheme that is based on the eight postulates and interactions presented in Fig.2.It is important to note that Turing machine has only one place for input when it is connected to Stipulation machine and that place is accessible to Stipulation machine.

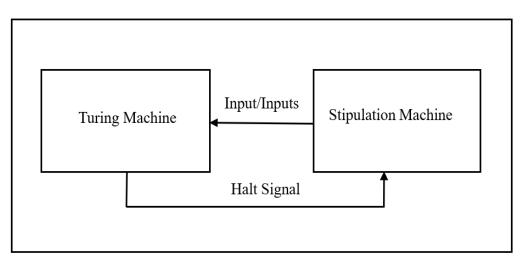


Figure 1: Flow of interactions between Turing machine and Stipulation machine

2.2 Computation by a Turing machine P_r and $P_r(t)$

There is a Turing machine P_r that computes sum of input binary strings twice, it accepts if sums are *even and equal* in both computations, it rejects if sums are *odd and equal* in both computations, and it computes again from the start if sums in both computations is not identical (*even and equal* or *odd and equal*).Suppose there is set A and $a \in A$, and P_r decides for every input a.

$$A = \{110 + 101010, 1100 + 100, 1010 + 110, 100 + 10, 1101110 + 10, \ldots\}$$

We give an input string a (e.g., 1100+10110) to P_r . The Turing machine P_r decides and halts when given input is from A, i.e., $P_r(a)$ is decidable. Now, we transform P_r into $P_r(t)$ by connected it to Stipulation machine and give input a through Stipulation machine. In case of $P_r(t)$ with input from A, the behaviour of the decidability is quite different when T_{P_r} is relatively large and T_{P_r} is relatively small. In following two cases we analyse the decidability of $P_r(t)$ with input from A and $0 < T_{P_r} \leq \infty$; particularly, when $T_{P_r} \to 0$ and $T_{P_r} = \infty$.

Case I. Decidability of $P_r(t)$ with input a and relatively large T_{P_r} .

Stipulation machine writes input string a on Turing machine $P_r(t)$, the Turing machine $P_r(t)$ decides and halts on input a in time less than T_{P_r} , Stipulation machines receives halts signal from $P_r(t)$ and does not rewrite input. If T_{P_r} is relatively large then there is no difference between P_r and $P_r(t)$, i.e., both $P_r(a)$ and $P_r(t)(a)$ decide and halt.

With $T_{P_r} = \infty$ and input a, for all $a \in A$, both $P_r(a)$ and $P_r(t)(a)$ are decidable. There is no difference between P_r and $P_r(t)$ when $T_{P_r} = \infty$. Therefore, $P_r(t) = P_r$ when $T_{P_r} = \infty$.

Case II. Decidability of $P_r(t)$ with input a and $T_{P_r} \to 0$.

If T_{P_r} is relatively too small then inputs of $P_r(t)$ change too quickly.Now, the time T_{P_r} is relatively so small that Stipulation machine rewrites input on $P_r(t)$ far before $P_r(t)$ decides and halts on an input.Consequently, $P_r(t)$ carries out computation on **some parts** of each recurring input in **some order**. The transitions that $P_r(t)$ takes depends on its transition function, current configuration and those **some parts** of recurring inputs. Those **some parts** and **some order** make $P_r(t)$ to take transitions that it would take if input is some unknown string f, and length and composition of f depends on T_{P_r} . The arbitrary string f may not be element of set A.

$$L_2 = \{ \langle P_r(t), f \rangle | \text{ Turing machine } P_r(t) \text{ decides } f \}$$

The language L_2 is undecidable because decidability of a Turing machine on an arbitrary string is undecidable. So, the decidability of $P_r(t)(a)$ depends on T_{P_r} . If T_{P_r} is relatively large then $P_r(t)(a)$ is decidable but if T_{P_r} is too small (i.e., $T_{P_r} \to 0$) then $P_r(t)(a)$ is undecidable.

Only end points of T_{P_r} (i.e., $T_{P_r} \to 0$ and $T_{P_r} = \infty$) are considered here but T_{P_r} can have any value on interval $(0 \ \infty]$ and it is discussed in next section (Section 3). The time P_r takes to decide a in $P_r(a)$ is represented by $f(P_r)$, and the time $P_r(t)$ takes to recognize a in $P_r(t)(a)$ is represented by $f(P_r, T)$. Following mathematical expression can represent the conclusions of case I and II.

$$f(P_r, T) = \frac{N_{P_r} T_t}{1 - 2^{-T_{P_r}}}$$
(9)

$$\lim_{T_{P_r}=\infty} f(P_r, T) = f(P_r)$$
(10)

$$\lim_{T_{P_r} \to 0} f(P_r, T) \to \infty \tag{11}$$

Given that $P_r(a)$ is decidable

I. If $T_{P_r} = \infty$ then $f(P_r, T) = f(P_r)$; consequently, $P_r(t)(a)$ is decidable

II. If $T_{P_r} \to 0$ then $f(P_r, T) \to \infty$; consequently, $P_r(t)(a)$ is undecidable

Stipulation machine and Turing machine are realizable computational objects. Therefore, Stipulation machines and Turing machines can be designed to experimentally validate this transform.Now we construct and describe some examples where a problem $P(\psi)$ is computable for input ψ , and we transform $P(\psi)$ into $P(t)(\psi)$. The problem P can be a decision or a function problem.

2.3 Examples of Transformed Problems

The problem P_1 is to evaluate a 3-SAT (e.g., 12) twice for a given input n_{Φ} , if both answers are yes then accept, if both answers are no then reject; and if both answers are not same then start evaluating again and continue until we have two consecutive same answers. If P_1 is decidable for given input n_{Φ} then it will remain decidable if we compute it for any number of times instead of two times-because we will have same answer (yes or no) irrespective how many time we evaluate a formula on a given input. We transform P_1 into $P_1(t)$, and variation time of Stipulation machine for $P_1(t)$ is represented by T_{P_1} . In computation of $P_1(t)(n_{\Phi})$, we give input n_{Φ} to the Turing machine through stipulation machine.

$$\Phi = (x_1 \lor \overline{x_5} \lor x_7) \land (\overline{x_2} \lor \overline{x_4} \lor x_8) \land (\overline{x_2} \lor \overline{x_3} \lor x_6)$$
(12)

$$\Phi_d = (x_1(t) \lor \overline{x_5(t)} \lor x_7(t)) \land (\overline{x_2(t)} \lor \overline{x_4(t)} \lor x_8(t)) \land (\overline{x_2(t)} \lor \overline{x_3(t)} \lor x_6(t))$$
(13)

$$f(P_1, T) = \frac{N_{P_1} T_t}{1 - 2^{-T_{P_1}}} \tag{14}$$

$$\lim_{T_{P_1} = \infty} f(P_1, T) = f(P_1)$$
(15)

$$\lim_{T_{P_1} \to 0} f(P_1, T) \to \infty \tag{16}$$

Given that $P_1(n_{\Phi})$ is decidable

I. If $T_{P_1} = \infty$ then $f(P_1, T) = f(P_1)$; consequently, $P_1(t)(n_{\Phi})$ is decidable problem II. If $T_{P_1} \to 0$ then $f(P_1, T) \to \infty$; consequently, $P_1(t)(n_{\Phi})$ is undecidable problem

Even when $P_1(t)(n_{\Phi})$ is decidable for every recurring input n_{Φ} but $P_1(t)$ may never halt if T_{P_1} is too small. Through this transform technique, we can map a decidable decision problem into a decidable problem or an undecidable problem. Suppose there are two $n \times n$ non-zero matrices A, and B such that AB = C. The problem P_2 is to compute C four times for given A and B, if in all four answers $c_{11}c_{1n} \geq c_{nn}c_{n1}$ then accept, if in all four answers $c_{11}c_{1n} < c_{nn}c_{n1}$ then reject; and if all four answers are not same then compute C again from start and continue until we have four consecutive same answers. We transform P_2 into $P_2(t)$, and variation time of Stipulation machine for $P_2(t)$ is represented by T_{P_2} . In computation of $P_2(t)(A, B)$, we give input (A, B) to the Turing machine through stipulation machine. Decidability of transformed problem $P_2(t)(A, B)$ depends on T_{P_2} .

| a_{11} | a_{12} | a_{13} | • • • | a_{1n} | | b_{11} | b_{12} | b_{13} | ••• | b_{1n} | | c_{11} | c_{12} | c_{13} | ••• | c_{1n} | |
|----------|----------|----------|-------|----------|---|----------|----------|----------|-----|----------|---|----------|----------|----------|-----|----------|--|
| a_{21} | a_{22} | a_{23} | • • • | a_{2n} | | b_{21} | b_{22} | b_{23} | ••• | b_{2n} | | c_{21} | c_{22} | c_{23} | ••• | c_{2n} | |
| a_{31} | a_{32} | a_{33} | ••• | a_{3n} | × | b_{31} | b_{32} | b_{33} | ••• | b_{3n} | = | c_{31} | c_{32} | c_{33} | ••• | c_{3n} | |
| 1 : | ÷ | ÷ | ۰. | : | | : | ÷ | ÷ | ۰. | ÷ | | : | ÷ | ÷ | ۰. | : | |
| a_{n1} | a_{n2} | a_{n3} | ••• | a_{nn} | | b_{n1} | b_{n2} | b_{n3} | ••• | b_{nn} | | c_{n1} | c_{n2} | c_{n3} | ••• | c_{nn} | |

$$f(P_2, T) = \frac{N_{P_2} T_t}{1 - 2^{-T_{P_2}}} \tag{17}$$

$$\lim_{T_{P_2} \to \infty} f(P_2, T) = f(P_2) \tag{18}$$

$$\lim_{T_{P_2} \to 0} f(P_2, T) \to \infty \tag{19}$$

Given that $P_2(A, B)$ decidable

I. If $T_{P_2} = \infty$ then $f(P_2, T) = f(P_2)$; consequently, $P_2(t)(A, B)$ is decidable II. If $T_{P_3} \to 0$ then $f(P_3, T) \to \infty$; consequently, $P_3(t)(A, B)$ is undecidable

Suppose there are two $n \times n$ matrices A and B, and both matrices have integer entries. The problem P_3 is to compute AB thrice, and in all three computations, if AB = I then accept, if $AB \neq I$ then reject; and if all three answers are not same then compute AB again from start and continue until we have three consecutive same answers. We transform P_3 into $P_3(t)$, and variation time of Stipulation machine for $P_3(t)$ is represented by T_{P_3} . In computation of $P_3(t)(A, B)$, we give input (A, B) to the Turing machine through stipulation machine. Decidability of $P_3(t)(A, B)$ depends on variation time T_{P_3} .

$$A = \begin{bmatrix} a_{11} & a_{12} & a_{13} & \cdots & a_{1n} \\ a_{21} & a_{22} & a_{23} & \cdots & a_{2n} \\ a_{31} & a_{32} & a_{33} & \cdots & a_{3n} \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ a_{n1} & a_{n2} & a_{n3} & \cdots & a_{nn} \end{bmatrix} \qquad B = \begin{bmatrix} b_{11} & b_{12} & b_{13} & \cdots & b_{1n} \\ b_{21} & b_{22} & b_{23} & \cdots & b_{2n} \\ b_{31} & b_{32} & b_{33} & \cdots & b_{3n} \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ b_{n1} & b_{n2} & b_{n3} & \cdots & b_{nn} \end{bmatrix}$$
$$\begin{bmatrix} a_{11} & a_{12} & a_{13} & \cdots & a_{1n} \\ a_{21} & a_{22} & a_{23} & \cdots & a_{2n} \\ a_{31} & a_{32} & a_{33} & \cdots & a_{3n} \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ a_{n1} & a_{n2} & a_{n3} & \cdots & a_{nn} \end{bmatrix} \times \begin{bmatrix} b_{11} & b_{12} & b_{13} & \cdots & b_{1n} \\ b_{21} & b_{22} & b_{23} & \cdots & b_{2n} \\ b_{31} & b_{32} & b_{33} & \cdots & b_{3n} \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ b_{n1} & b_{n2} & b_{n3} & \cdots & b_{nn} \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & \cdots & 0 \\ 0 & 1 & 0 & \cdots & 0 \\ 0 & 0 & 1 & \cdots & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & 0 & \cdots & 1 \end{bmatrix}$$
$$f(P_3, T) = \frac{N_{P_3}T_t}{1 - 2^{-T_{P_3}}}$$
(20)

$$\lim_{T_{P_3} = \infty} f(P_3, T) = f(P_3)$$
(21)

$$\lim_{T_{P_3} \to 0} f(P_3, T) \to \infty$$
(22)

Given that $P_3(A, B)$ is decidable

I. If $T_{P_3} = \infty$ then $f(P_3, T) = f(P_3)$; consequently, $P_3(t)(A, B)$ is decidable II. If $T_{P_2} \to 0$ then $f(P_2, T) \to \infty$; consequently, $P_3(t)(A, B)$ is undecidable

So far, we have applied this transform technique on decidable decision problems, but we can also apply it on computable functions problems. Suppose there is some binary string u. The problem P_4 is to compute the number of ones in u for K times for some $K \in \mathbb{N}$, if number of ones are equal in each count then output the result and halt, and if number of ones in each count are not equal then start counting again and continue until we have equal number of ones in all K counts and output the count. We transform P_4 into $P_4(t)$, and variation time of Stipulation machine for $P_4(t)$ is represented by T_{P_4} . Given that the problem $P_4(u)$ is computable, and we give input u to $P_4(t)$ through Stipulation machine for computation of $P_4(t)(u)$. Just like in any other transformed problem the value of time T_{P_4} plays decisive role in computability of $P_4(t)(u)$.

$$f(P_4, T) = \frac{N_{P_4} T_t}{1 - 2^{-T_{P_4}}}$$
(23)

$$\lim_{T_{P_4} = \infty} f(P_4, T) = f(P_4)$$
(24)

$$\lim_{T_{P_4} \to 0} f(P_4, T) \to \infty \tag{25}$$

Given that $P_4(u)$ computable

I. If $T_{P_4} = \infty$ then $f(P_4, T) = f(P_4)$; consequently, $P_4(t)(u)$ is computable II. If $T_{P_4} \to 0$ then $f(P_4, T) \to \infty$; consequently, $P_4(t)(u)$ is uncomputable

Suppose there is an $m \times n$ matrix A with $a_{ij} \in \mathbb{N}$, and A is invertible matrix. The problem P_5 is to compute A^{-1} , prove $AA^{-1} = I$ and halt, and if $AA^{-1} \neq I$ then start again and continue until $AA^{-1} = I$ for some invertible matrix A. The problem P_5 is a computable when input is A. We transform P_5 into $P_5(t)$, and variation time of Stipulation machine for $P_5(t)$ is represented by T_{P_5} . For input A the problem $P_5(A)$ is computable, and we give A to $P_5(t)$ through Stipulation machine in computation of $P_5(t)(A)$.

$$A = \begin{bmatrix} a_{11} & a_{12} & a_{13} & \cdots & a_{1n} \\ a_{21} & a_{22} & a_{23} & \cdots & a_{2n} \\ a_{31} & a_{32} & a_{33} & \cdots & a_{3n} \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ a_{m1} & a_{m2} & a_{m3} & \cdots & a_{mn} \end{bmatrix}$$
(26)

$$A(t) = \begin{bmatrix} a_{11}(t) & a_{12}(t) & a_{13}(t) & \cdots & a_{1n}(t) \\ a_{21}(t) & a_{22}(t) & a_{23}(t) & \cdots & a_{2n}(t) \\ a_{31}(t) & a_{32}(t) & a_{33}(t) & \cdots & a_{3n}(t) \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ a_{m1}(t) & a_{m2}(t) & a_{m3}(t) & \cdots & a_{mn}(t) \end{bmatrix}$$
(27)

$$f(P_5,T) = \frac{N_{P_5}T_t}{1 - 2^{-T_{P_5}}}$$
(28)

$$\lim_{T_{P_5} = \infty} f(P_5, T) = f(P_5)$$
(29)

$$\lim_{T_{P_5} \to 0} f(P_5, T) \to \infty \tag{30}$$

Given that $P_5(A)$ computable

- I. If $T_{P_5} = \infty$ then $f(P_5, T) = f(P_5)$; consequently, $P_5(t)(A)$ is computable II. If $T_{P_5} \to 0$ then $f(P_5, T) \to \infty$; consequently, $P_5(t)(A)$ is uncomputable

Suppose there is an $n \times n$ matrix Q with $q_{ij} \in \mathbb{N}$, and rank of Q is n. The problem P_6 is to compute inverse of input matrix and then inverse of inverse matrix, if double inverse matrix is identical to input matrix then halt otherwise compute this task again from start on input matrix. The problem P_6 is computable if input is Q because $(Q^{-1})^{-1} = Q$. We transform P_6 into $P_6(t)$, and variation time of Stipulation machine for $P_6(t)$ is represented by T_{P_6} . There is Q for which $P_6(Q)$ is computable, and then we give Q to $P_6(t)$ through Stipulation machine for computation of $P_6(t)(Q)$.

$$Q = \begin{bmatrix} q_{11} & q_{12} & q_{13} & \cdots & q_{1n} \\ q_{21} & q_{22} & q_{23} & \cdots & q_{2n} \\ q_{31} & q_{32} & q_{33} & \cdots & q_{3n} \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ q_{n1} & q_{n2} & q_{n3} & \cdots & q_{nn} \end{bmatrix}$$

Given that $P_6(Q)$ computable

I. If $T_{P_6} = \infty$ then $f(P_6, T) = f(P_6)$; consequently, $P_6(t)(Q)$ is computable II. If $T_{P_6} \to 0$ then $f(P_6, T) \to \infty$; consequently, $P_6(t)(Q)$ is uncomputable

Suppose there is a problem $P(\psi)$ and it is computable with input ψ . We transform this computable problem $P(\psi)$ into $P(t)(\psi)$ through a transform that will be represented by f(Z,T); and transformed problem $P(t)(\psi)$ can be computable or uncomputable, depending on time T_P .

$$P(\psi) \text{ (Computable)} \xrightarrow{f(Z,T) \ Transform} P(t)(\psi) \text{ (Computable if } T_P = \infty)$$

The time $T_P \in (0 \infty]$ but we have discussed only two cases, i.e., $T_P = \infty$ and $T_P \to 0$. Stipulation machine can have any value of T_P on interval $(0 \infty]$. Now we discuss the behaviour of f(Z,T) transform when T_P can have any possible value on interval $(0 \infty]$ for transformed problem $P(t)(\psi)$.

$$P(\psi) \text{ (Computable)} \underbrace{\frac{f(Z,T) \ Transform}_{P(t)(\psi)}}_{P(t)(\psi)} \underbrace{\frac{f(Z,T) \ Transform}_{P(t)(\psi)}}_{P(t)(\psi)}}_{P(t)(\psi)} \underbrace{\frac{f(Z,T) \ Transform}_{P(t)(\psi)}}_{P(t)(\psi)}}_{P(t)(\psi)} \underbrace{\frac{f(Z,T) \ Transform}_{P(t)(\psi)}}_{P(t)(\psi)}}_{P(t)(\psi)} \underbrace{\frac{f(Z,T) \ Transform}_{P(t)(\psi)}}_{P(t)(\psi)}}_{P(t)(\psi)}_{P(t)(\psi)}}_{P(t)(\psi)}$$

3 Normalization of f(Z,T) Transform

Suppose there is problem P that is computable with input ψ , and $\psi \in \Psi$ and $L(P) = \Psi$. We apply f(Z,T) transform on $P(\psi)$ and get $P(t)(\psi)$. Normalization of the transformed problem $P(t)(\psi)$ is defined in following way.

$$f(P,T) = \frac{N_P T_t}{1 - 2^{-T_P}}$$
(31)

$$f_n(P,T) = \frac{f(P,T)}{\frac{T_P}{1-2^{-T_P}}}$$
(32)

$$f_n(P,T) = \frac{N_P T_t}{T_P} \tag{33}$$

Because $P(\psi)$ is computable problem and $0 < T_P \leq \infty$ therefore $0 \leq f_n(P,T) < \infty$. The problem $P(t)(\psi)$ is computable if $0 \leq f_n(P,T) < 1$ because $P(t)(\psi)$ halts before Stipulation machine rewrites input. If $N_P T_t > T_P$ then $f_n(P,T) > 1$ i.e., input of P(t) varies before $P(t)(\psi)$ gets computed and P(t) halts. According to postulate \mathbf{V} , no two consecutive inputs of P(t) can identical in a computation. If $f_n(P,T) > 1$ then Stipulation machine rewrites input on P(t) before P(t) decides and halts on input ψ . Consequently, P(t) carries out computation on **some parts** of each recurring input in **some order**. Those **some parts** and **some order** make arbitrary string ψ_f of some arbitrary length, and composition of ψ_f depends on T_P . The arbitrary string ψ_f may not be in set Ψ . Computation of P(t) on an arbitrary string ψ_f is uncomputable. Therefore, if $f_n(P,T) > 1$ then $P(t)(\psi)$ is not computable but if $0 \leq f_n(P,T) < 1$ then $P(t)(\psi)$ is computable. Normalization line for $P(t)(\psi)$ is shown in Fig.3.

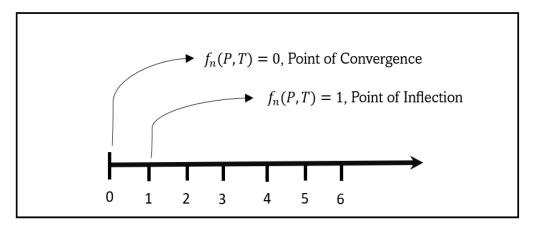


Figure 2: Normalization line of f(Z,T) Transform

Point of inflection and point of convergence are two important points on normalization line. If $f_n(P,T) = 0$ then transformed problem $P(t)(\psi)$ exist at point of convergence and f(P,T) = f(P) when $f_n(P,T) = 0$. If $f_n(P,T) = 1$ then transformed problem $P(t)(\psi)$ exist at point of inflection. The point where $f_n(P,T) = 1$ is very critical point for computability of problem $P(t)(\psi)$. A small change can make $P(t)(\psi)$ move in-between computable-uncomputable when $f_n(P,T)$ exists around point of inflection. If $P(\psi)$ requires N_P steps and $P(t)(\psi)$ exists around point of inflection, then slight change in N_P (e.g., $N_P - n$ or $N_P + n$ for some $n \ge 1$) or T_P can change the computability of $P(t)(\psi)$. In computation of $P(t)(\psi)$, if $f_n(P,T) < 1$ then Turing machine carries out computation on input string (ψ) but if $f_n(P,T) > 1$ then Turing machine carries out computation on some arbitrary string that is composed of some input strings from Ψ . We can also represent normalization line of $P(t)(\psi)$ in following way.

$$P(\psi) \text{ (Computable)} \xrightarrow{f(Z,T) \ Transform} P(t)(\psi) \text{ (If } T_P = \infty \text{ then } f_n(P,T) = 0)$$

$$P(t)(\psi) (0 < f_n(P,T) < 1)$$

$$P(t)(\psi) (f_n(P,T) = 1 \text{ for some } T_P)$$

$$P(t)(\psi) (f_n(P,T) > 1)$$

$$P(t)(\psi) (\text{If } T_P \to 0 \text{ then } f_n(P,T) \to \infty)$$

The f(Z,T) transformed problems that exist just before or immediately after point of inflection are very helpful in analysing the computational characteristics of different variants of Turing machines. If cardinality of all f(Z,T) transformed problems is higher than cardinality of Turing machines then there must exist f(Z,T) transformed problems that are uncomputable.

4 Cardinality of f(Z,T) Transformed Problems

The f(Z,T) transform is applied to only computable function (or decidable languages) and it produces transformed problems. Suppose there is a language L_C and it has only finite number of strings in it, and $l_C \in L_C$. There is a Turing machine P_C that can decide L_C , i.e., $L(P_C) = L_C$ and P_C halts on all inputs. We want to know the cardinality of f(Z,T) transformed problems if we apply f(Z,T) transform on L_C . We change P_C into $P_C(t)$ and input is from L_C through stipulation machine. If $0 < T_{P_C} \le \infty$ and then $|T_{P_C}| = \aleph_0$, and if $|T_{P_C}| = \aleph_0$ then f(Z,T) transform produces infinite number of transformed problems in the form of $P_C(t)(l_C)$ for $T_{P_C}(1)$, $P_C(t)(l_C)$ for $T_{P_C}(2)$, $P_C(t)(l_C)$ for $T_{P_C}(3)$, $P_C(t)(l_C)$ for $T_{P_C}(4)$, ..., $P_C(t)(l_C)$ for $T_{P_C}(\infty)$, and $T_{P_C} = \{T_{P_C}(1), T_{P_C}(2), T_{P_C}(3), \ldots, T_{P_C}(\infty)\}$. The cardinality of f(Z, T) transformed problems is countably infinite when we apply f(Z,T) transform on a decidable language that has only finite number of strings in it, e.g., language L_C .

$$L_{C} = \{ l_{C(1)}, \ l_{C(2)}, \ l_{C(3)}, \ l_{C(4)}, \ l_{C(5)}, \ \dots, \ l_{C(128)} \}$$

$$P_{C}(t)(l_{C}) \text{ for } T_{P_{C}}(1)$$

$$P_{C}(t)(l_{C}) \text{ for } T_{P_{C}}(2)$$

$$P_{C}(t)(l_{C}) \text{ for } T_{P_{C}}(3)$$

f(Z,T) Transform

 $P_C(l_C)$ (Decidable)

 $P_C(t)(l_C)$ for $T_{P_C}(\infty)$ Suppose there is a language L_D and cardinality of L_D is \aleph_0 , and $l_D \in L_D$. There exist a Turing machine P_D that can decide L_D , i.e., and $L(P_D) = L_D$ and P_D halts on all inputs.We want to know the cardinality of f(Z,T) transformed problems if we apply f(Z,T) transform on L_D . We change P_D into $P_D(t)$ and input is from L_D through stipulation machine. If $|T_{P_D}| = \aleph_0$ then f(Z,T) transform produces $\aleph_0^{\aleph_0}$ number of combinations, and each combination is f(Z,T)transformed language. There are uncountable number of f(Z,T) transformed languages.

$$L_D = \{ l_{D(1)}, \ l_{D(2)}, \ l_{D(3)}, \ l_{D(4)}, \ l_{D(5)} \ \dots \}$$

Suppose there is a language L_E and cardinality of L_E is \aleph_0 , and we apply f(Z,T) transform on L_E . If n represents string number in L_E and $0 < T_E \leq \infty$ then Table 1. represents f(Z,T)transformed L_E . If P_E is decider of L_E and $l_E \in L_E$ then $P_E(t)(l_E) = P_E(l_E)$ for $T_E = \infty$ and $l_E(n \infty) = L_E$. Therefore, it can be stated that the Language L_E is subset of f(Z,T) transformed L_E , and left most column of of following table represents language L_E .

| | | Table I. | (\mathbf{Z},\mathbf{I}) II | instormed | | or Langua | $5^{\circ} L_{E}$ | | |
|--------------------------|------------------|-----------------|------------------------------|------------------|-----------------|------------------|-------------------|---|----------------------|
| $n \backslash T_{\rm E}$ | 1 | 2 | 3 | 4 | 5 | 6 | 7 | | ∞ |
| 1 | $l_{E}(1,1)$ | $l_E(1,2)$ | $l_{E}(1,3)$ | $l_E(1,4)$ | $l_E(1,5)$ | $l_E(1, 6)$ | $l_{E}(1,7)$ | | $l_E(1,\infty)$ |
| 2 | $l_E(2,1)$ | $l_E(2,2)$ | $l_E(2,3)$ | $l_E(2,4)$ | $l_E(2,5)$ | $l_E(2,6)$ | $l_E(2,7)$ | | $l_E(2,\infty)$ |
| 3 | $l_{E}(3,1)$ | $l_E(3,2)$ | $l_{E}(3,3)$ | $l_{E}(3, 4)$ | $l_{E}(3,5)$ | $l_E(3, 6)$ | $l_{E}(3,7)$ | | $l_E(3,\infty)$ |
| 4 | $l_{E}(4,1)$ | $l_E(4,2)$ | $l_{E}(4,3)$ | $l_{E}(4,4)$ | $l_E(4,5)$ | $l_E(4,6)$ | $l_E(4,7)$ | | $l_E(4,\infty)$ |
| 5 | $l_{E}(5,1)$ | $l_{E}(5,2)$ | $l_{E}(5,3)$ | $l_{E}(5,4)$ | $l_{E}(5,5)$ | $l_E(5,6)$ | $l_{E}(5,7)$ | | $l_E(5,\infty)$ |
| 6 | $l_{E}(6,1)$ | $l_E(6,2)$ | $l_{E}(6,3)$ | $l_{E}(6,4)$ | $l_{E}(6,5)$ | $l_E(6, 6)$ | $l_{E}(6,7)$ | | $l_E(6,\infty)$ |
| 7 | $l_E(7,1)$ | $l_E(7,2)$ | $l_{E}(7,3)$ | $l_E(7,4)$ | $l_E(7,5)$ | $l_E(7,6)$ | $l_E(7,7)$ | | $l_E(7,\infty)$ |
| : | | | | • | | | • | · | |
| ∞ | $l_E(\infty, 1)$ | $l_E(\infty,2)$ | $l_E(\infty,3)$ | $l_E(\infty, 4)$ | $l_E(\infty,5)$ | $l_E(\infty, 6)$ | $l_E(\infty,7)$ | | $l_E(\infty,\infty)$ |

Table 1: f(Z,T) Transformed Problems for Language L_{F}

Cardinality of Turing machines is countably infinite and cardinality of f(Z,T) transformed languages is uncountable, and this difference of cardinalities implies the existence of f(Z,T)transformed problems that are uncomputable by Turing machines.

5 Mathematical Formulations of f(Z,T) Transform

During construction of f(Z,T) transform we assumed that $W_P = 1 - 2^{-T_P}$ in (3). But if we assume that $W_P = 1 - 2^{-T_P/c}$ and c is some positive constant then we get (34 and 35) after replacing $1 - 2^{-T_P}$ with $1 - 2^{-T_P/c}$ in (6 and 32).

$$f(P,T) = \frac{N_P T_t}{1 - 2^{-T_P/c}}$$
(34)

$$f_n(P,T) = \frac{N_P T_t}{T_P} \tag{35}$$

If constant $c = N_P T_t$ and we replace the value of c with $N_P T_t$ in (34) then we get (36). We can describe computability of every f(Z,T) Transformed problem through (35 and 36). There are four possible outcomes when we try to compute any f(Z,T) transformed problems by a Turing machine (or by a Turing complete model of computation).

$$f(P,T) = \frac{N_P T_t}{1 - 2^{-(T_P/N_P T_t)}}$$
(36)

| Case I. | If $f_n(P,T) = 0$ then $f(P,T) = f(P)$ |
|-----------|--|
| Case II. | If $0 < f_n(P,T) < 1$ then $f(P) < f(P,T) < 2f(P)$ |
| Case III. | If $f_n(P,T) = 1$ then $f(P,T) = 2f(P)$ |
| Case IV. | If $f_n(P,T) > 1$ then $f(P,T) > 2f(P)$ |

We apply f(Z,T) transform only on computable problems, and transformed problems can be computable (case I and II) or uncomputable (case IV), and sometime the computability of the transformed problem is highly sensitive toward choice of computational scheme(case III). If $T_P = 1/F_P$ and $T_t = 1/F_t$ then we can represent normalisation of transformed problem through frequencies in following way.

$$f_n(P,F) = \frac{N_P F_P}{F_t}$$

There are two frequencies in $f_n(P, F)$, i.e., F_t and F_P . The frequency F_t is related to clock speed of Turing machine and F_P describes the frequency of recurring inputs. If frequency of recurring inputs is higher than certain threshold frequency then computable problem turns into uncomputable problem. It is helpful to describe normalization through frequencies if transformed problems involve measuring some frequencies.

6 Summary

In this paper we develop a transform technique and apply it on some decidable language, and show that cardinality of transformed languages is uncountable. There are countably infinite Turing machines but uncountable number of transformed languages, and this difference in cardinality implies the existence of transformed problems that are not computable. Furthermore, we present a realizable computational scheme that can demonstrate f(Z,T) transform, and this scheme consists of Turing machine and Stipulation machine. Through f(Z,T) transform, quite unexpectedly, we will be able to formalize some important natural phenomena. We will present experimental validation of this transform in future work, and those experiments will be designed and executed in such a way that it shall be easy to reproduce them.

References

- [1] José Ferreirós. The crisis in the foundations of mathematics. The Princeton companion to mathematics, pages 142–156, 2008.
- [2] David Hilbert and Wilhelm Ackermann. *Principles of mathematical logic*, volume 69. American Mathematical Society, 2022.
- [3] Paul Bernays. Alonzo church. an unsolvable problem of elementary number theory. american journal of mathematics, vol. 58 (1936), pp. 345–363. The Journal of Symbolic Logic, 1(2):73–74, 1936.
- [4] Alan Mathison Turing et al. On computable numbers, with an application to the entscheidungsproblem. J. of Math, 58(345-363):5, 1936.
- [5] K Gödel. On undecidable propositions of formal mathematical systems," notes by stephen c. Kleene and Barkely Rosser on Lectures at the Institute for Advanced Study, Princeton, NJ, 1934.
- [6] L Emil. Post, finite combinatory processes, formulation 1. The Journal of Symbolic Logic, 1(3):103-105, 1936.
- [7] C Stephen. Kleene. λ -definability and recursiveness. Duke Mathematical Journal, 2:340–353, 1936.
- [8] S. Barry Cooper and Jan Van Leeuwen. Systems of logic based on ordinals. In S. Barry Cooper and Jan Van Leeuwen, editors, *Alan Turing: His Work and Impact*, pages 145–210. Elsevier, Boston, 2013.