

arXiv:2402.09595v2 [cs.LO] 1 Mar 2024

Correctly Communicating Software: Distributed, Asynchronous, and Beyond

(extended version)

BAS VAN DEN HEUVEL

Amsterdam & Groningen, The Netherlands, 2024



university of
 groningen

The work in this book has been carried out at University of Groningen as part of the doctoral studies of the author.



IPA Dissertation Series No. 2024-03

The work in this thesis has been carried out under the auspices of the research school IPA (Institute for Programming Research and Algorithms).



UNIFYING
C•RRECTNESS FOR
C•MMUNICATING
S•FTWARE

The work in this thesis has been supported by the Dutch Research Council (NWO) under project No. 016.Vidi.189.046 (Unifying Correctness for Communicating Software).

Typeset with \LaTeX

Printed by Ridder Print, The Netherlands

Cover designed by Tijmen Zwaan

Copyright © Bas van den Heuvel, 2024



university of
 groningen

Correctly communicating software

Distributed, asynchronous, and beyond

PhD thesis

to obtain the degree of PhD at the
 University of Groningen
 on the authority of the
 Rector Magnificus Prof. J.M.A. Scherpen
 and in accordance with
 the decision by the College of Deans.

This thesis will be defended in public on

Tuesday 2 April 2024 at 12.45 hours

by

Bas van den Heuvel

born on 8 February 1993

Supervisors

Prof. J.A. Pérez Parra

Prof. G.R. Renardel de Lavalette

Assessment Committee

Prof. M. Huisman

Prof. A. Lazovik

Prof. N. Yoshida

ABSTRACT

Much of the software we use in everyday life consists of *distributed* components (running on separate cores or even computers) that collaborate through *communication* (by exchanging messages). It is crucial to develop robust methods that can give reliable guarantees about the behavior of such message-passing software. With a focus on *session types* as *communication protocols* and their foundations in logic, this thesis revolves around the following question:

How can we push the boundaries of the logical foundations of session types (binary and multiparty), extending their expressiveness and applicability, while preserving fundamental correctness properties?

In this context, this thesis studies several intertwined aspects of message-passing.

- **Network Topology and Asynchronous Communication.** Deadlock-freedom is a notoriously hard problem, but session types can be enhanced to restrict component connections to guarantee deadlock-freedom. This thesis studies the effects of *asynchronous communication* (non-simultaneous sending/receiving) on deadlock-freedom.
- **Non-determinism.** Non-deterministic choices model how programs may follow different paths of execution (e.g., under external influence). This thesis explores and compares non-deterministic choice constructs with fine-grained semantics, with enhanced session types that maintain the expected correctness properties.
- **Ownership.** Session types have a foundation in *linear logic*, a logic with fine-grained resource control in terms of *number of uses*. This thesis develops an alternative logical foundation and accompanying variant of the pi-calculus based on *the logic of bunched implications*, similar to linear logic but with a focus on *ownership* of resources.
- **Functions.** Thus far, all models of message-passing are concurrent and process-based, but there are also such models for sequential, functional programming. This thesis presents several functional models of message-passing, and guarantees correctness through translation into the process-based models discussed above.
- **Multiparty Session Types (MPSTs): Asynchronous and Distributed.** MPSTs describe protocols between multiple components; they are practical, but correctness guarantees are complex. This thesis analyzes MPSTs implemented as distributed, asynchronously communicating networks by reduction to the binary session types discussed so far.

Knowing exactly how a program is implemented (as assumed in the topics above) is not always practically feasible. This thesis adapts the approach above to use MPSTs to *monitor* the behavior of programs with unknown specification, maintaining some correctness guarantees for asynchronous and distributed implementations of MPSTs.

SUMMARY FOR NON-EXPERTS

We rely on software in every aspect of our everyday lives, so it is crucial that this software functions reliably. The majority of software consists of smaller pieces of software that cooperate by communicating. Reliable communication is therefore imperative to the reliability of software. Ideally, software is guaranteed to function correctly by construction; this contrasts common practice, where software is (non-exhaustively) tested for potential problems, or problems are even encountered only when it is in use.

This dissertation develops techniques that ensure that software communicates correctly by construction. The main component herein is *communication protocols* that describe precisely what is expected of the communication of pieces of software. These protocols are then used to guide the development of correctly communicating software.

The approach is mathematical, taking heavy inspiration from logical reasoning. Logic provides precise techniques to reason about the communication resources of software, that make guaranteeing correctness straightforward. However, this straightforwardness comes with limitations: the techniques are restricted in the communication patterns they support. An example restriction is that when more than two pieces of software need to communicate, they can only do so through a single point of connection. In practice, pieces of software can communicate with each other directly, without such limitations.

Hence, the theme of this dissertation is *pushing the boundaries of logic reasoning for communicating software*. The goal is getting closer to reliable communication by construction for realistic software. As such, the thesis develops new and improves existing techniques based on logic, while maintaining correctness guarantees.

SAMENVATTING VOOR NON-EXPERTS

In elk aspect van ons dagelijks leven leunen wij op software, dus is het cruciaal dat deze software betrouwbaar is. Het merendeel van software bestaat uit kleinere stukken die samenwerken door te communiceren. Betrouwbare communicatie is daarom onmisbaar voor het correct functioneren van software. Idealiter wordt de correcte werking van software gegarandeerd door diens constructie; echter, in de praktijk wordt software (onvolledig) getest op mogelijke problemen of worden problemen zelfs pas ontdekt tijdens gebruik van de software.

In deze dissertatie worden technieken ontwikkeld die verzekeren dat software correct communiceert vanuit constructie. Het hoofdbestandsdeel hierin is *communicatieprotocollen* die precies beschrijven wat er wordt verwacht van de communicatie van stukken software. Deze protocollen worden vervolgens gebruikt als leidraad in de ontwikkeling van software die correct communiceert.

De aanpak is wiskundig en zwaar geïnspireerd door logisch redeneren. Logica bevat precieze technieken voor het redeneren over communicatiemiddelen van software, die het garanderen van correctheid vereenvoudigen. Deze eenvoud komt echter met tekortkomingen: de technieken zijn gelimiteerd in de ondersteunde communicatiepatronen. Een voorbeeld is de beperking dat wanneer meer dan twee stukken software moeten communiceren, zij dit alleen kunnen doen via een enkel verbindingspunt. In de praktijk kunnen stukken software direct met elkaar communiceren, zonder zulke beperkingen.

Derhalve is het thema van deze dissertatie het *verleggen van de grenzen van logisch redeneren voor communicerende software*. Het doel is dichter bij betrouwbare communicatie vanuit constructie voor realistische software komen. Hiertoe ontwikkelt en verbetert deze dissertatie nieuwe en bestaande technieken gebaseerd op logica, terwijl correctheidsgaranties worden behouden.

CONTENTS

Abstract	v
Summary for Non-experts	vii
Samenvatting voor Non-experts	ix
Contents	xi
1 Introduction	1
1.1 Context	1
1.2 Contributions	7
1.3 Thesis Outline and Derived Publications	29
<hr/>	
I Binary Session Types for Message-passing Processes	31
2 Message-passing Concurrency: The π-calculus	33
2.1 Syntax	34
2.2 Semantics	35
2.3 Session Type System	36
2.4 Synchronous versus Asynchronous Communication	40
2.5 Extensions of $\text{BASE}\pi$	41
3 Cyclic Networks and Asynchronous Communication	43
3.1 Introduction	43
3.2 Example: Milner's Cyclic Scheduler in APCP	45
3.3 APCP: Asynchronous Priority-based Classical Processes	47
3.4 Related Work	70
3.5 Closing Remarks	72
4 Non-determinism	73
4.1 Introduction	73
4.2 A Typed π -calculus with Non-deterministic Choice	75
4.3 An Eager Semantics for $s\pi^+$	85
4.4 Related Work	88
4.5 Conclusions	89
5 A Bunch of Sessions	91
5.1 Introduction	91
5.2 The Calculus πBI	95
5.3 Meta-theoretical Properties	107

5.4	Related Work	110
5.5	Concluding Remarks and Future Perspectives	111
<hr/>		
II	Message-passing Functions as Processes	113
6	Cyclic Thread Configurations and Asynchronous Communication	115
6.1	Introduction	115
6.2	A Bookshop Scenario in $LAST^n$	116
6.3	An Intermezzo: From APCP to $LAST$	118
6.4	$LAST^n$ and a Faithful Translation into APCP	135
6.5	Related Work	161
6.6	Closing Remarks	162
7	Bunched Functions as Processes	165
7.1	Introduction	165
7.2	The $\alpha\lambda$ -calculus.	166
7.3	πBI : a Summary.	168
7.4	Translating the $\alpha\lambda$ -calculus into πBI	176
7.5	Related Work	181
7.6	Conclusions.	181
<hr/>		
III	Multiparty Session Types: Distributed and Asynchronous	182
8	The Global and Local Perspective: Relative Types	185
8.1	Introduction	185
8.2	The Global Perspective	187
8.3	The Local Perspective.	188
8.4	Relative Projection and Well-formedness	189
8.5	Comparing Well-formedness	192
8.6	Related Work	195
8.7	Conclusions.	195
9	Binary Session Types for Distributed Multiparty Session	197
9.1	Introduction	197
9.2	APCP: a Summary	202
9.3	Global Types and Relative Types: a Summary	212
9.4	Analyzing Global Types using Routers.	217
9.5	Routers in Action	234
9.6	Related Work	239
9.7	Conclusions.	240

10 Monitors for Blackbox Implementations of Multiparty Session Types	243
10.1 Introduction	243
10.2 Networks of Monitored Blackboxes	246
10.3 Monitors for Blackboxes Synthesized from Global Types	250
10.4 Properties of Correct Monitored Blackboxes	254
10.5 Conclusion	261
<hr/>	
11 Conclusions	263
<hr/>	
Bibliography	265
Glossary	284
<hr/>	
Acknowledgments	285
<hr/>	
A Proofs for Chapter 2	289
B Proofs for Chapter 3	291
B.1 Subject Reduction.	291
B.2 Deadlock-freedom	292
B.3 Reactivity	294
C Appendices for Chapter 4	297
C.1 Proof of Type Preservation	297
C.2 Proof of Deadlock-freedom	310
C.3 Proof of Bisimilarity Result	318
D Proofs for Chapter 5	321
D.1 Auxiliary Results	321
D.2 Type Preservation	322
D.3 Deadlock-freedom	326
D.4 Weak Normalization	329
E Appendices for Chapter 6	335
E.1 Self-contained Definition of LAST ⁿ and its Type System.	335
E.2 Type Preservation	335
E.3 Translation: Type Preservation	346
E.4 Operational Correspondence	348
F Appendices for Chapter 7	365
F.1 Full Translation	365
F.2 Operation Correspondence: Proofs	367

G Proofs for Chapter 9	379
G.1 Proofs for Section 9.4.3	379
G.2 Proofs for Section 9.4.4	402
H Appendices for Chapter 10	415
H.1 The Running Example from [Boc+17]	415
H.2 A Toolkit for Monitoring Networks of Blackboxes in Practice	417
H.3 Relative Types with Locations	418
H.4 Proof of Soundness	425
H.5 Proof of Transparency.	433

1

INTRODUCTION

Let me start off bluntly, by giving the shortest summary of my dissertation I can possibly give: it is about communicating software, how such communication can be described by protocols, and how we can use such protocols to guarantee that communicating software behaves as intended. In this introduction, I unpack the components of the summary, to provide a gentle but detailed overview of my contributions.

In Section 1.1, I put this rather terse summary of my thesis gently into context, ending the section with a research question to which my dissertation gives a (partial) answer. Then, in Section 1.2, I give an overview of the methods used to answer this question. I then go through the topics addressed in this dissertation, motivating each topic with context and identifying precise research questions. Finally, in Section 1.3, I summarize the outline of the parts and chapters in this thesis, along with references to the publications that are derived from the research presented here.

1.1. CONTEXT

It is very hard to imagine our lives without computers. Are there even aspects of human life on Earth that are not touched by computers at all? Even if you are not reading this dissertation on a computer, I can assure you that several computers were involved in putting it together.

Clearly, it is of utmost importance that computers are reliable. You would appreciate your microwave not to overheat, or your digital life-support to never skip a heart beat. But how can we be sure that computers are indeed reliable? This is a complex task, with many aspects.

Reliable software. As of the day of writing, most to all software is made by humans. Software architects, engineers, and programmers write and debug countless lines of code to create the firmware, operating systems, and applications we use in our everyday lives. It is no surprise (or shame!) that these people make the occasional error, introducing bugs into software eventually leading to unpleasant user experiences and even fatal crashes.

Finding bugs in the source code of software is thus an essential step in making software reliable. In practice, many bugs are found by thorough testing, i.e., by running software under predetermined circumstances and checking that the result is as expected. However, testing is by no means a guarantee for reliability: it is impossible to test all possible ways software can fail. A more thorough approach is to exhaustively analyze a program's source code and determine whether all possible paths of execution will lead to an expected outcome; a salient approach herein is by means of *types*.

Types. Commonly, programs are sequences of *operations* on *data*. For these programs to function well, such operations make certain assumptions about the *data*. For example, when an operation is to divide by two, it expects its input to be a number and not a string; the behavior of the operation on anything else than a number would be undefined and lead to unexpected outcomes.

To ensure that the outcome of such programs is as expected, we can assign types to data and operations. Let me briefly illustrate the key idea of such types. Suppose we are writing a program that takes as input a string, and is expected to return an integer representing the length of the string. The program stores the input as a variable `input`, and the program has access to an operation called `len`; the program thus returns `len(input)`. In our program, we expect the input to be a string, so we assign it the corresponding type `input : str`. The `len`-operation expects as input a string, in which case it returns an integer; its type is thus `len : str → int`. Thus, the type of the operation applied to our variables results in an integer `len(input) : int`. Equipped with these types, a compiler or execution environment can warn or abort when our program is given anything else than a string as input, and guarantee that the output is an integer when it is given a string.

Types are a main theme in my thesis, though as we will see, I will not be focusing on types for data and operations. This is because in this dissertation, the focus is on software that employs *concurrency*.

Concurrency as a way to better exploit modern hardware. Informally, concurrency is the principle that things can happen in arbitrary order, or even simultaneously. There are many ways to employ concurrency in software. The most well-known application of concurrency is when a computer has a processor with multiple cores: independent parts of a program can run concurrently (in parallel) on different cores; this way, programs can perform their computations significantly faster than if they were executed sequentially. A more ubiquitous though less obvious application of concurrency is in *distributed systems*, which provide a context for the better part of this thesis.

Distributed systems. Distributed systems consist of multiple programs that do not necessarily run on the same computer but work together to achieve a task. Many of the applications on your smartphone work in this way: they employ several services that run in “the cloud” to perform small tasks. For example, the widget you may have on your home screen does not measure the weather and collect the news itself: it requests this information from weather and news services.

In distributed systems, programs collaborate by exchanging messages. Such messages contain, e.g., requests to perform a specific task, or their results. This form of concurrency is therefore referred to as *message-passing concurrency*; it is the main subject of this thesis.

Message-passing concurrency. In message-passing concurrency, programs collaborate by exchanging messages. Such messages can carry data, for example a user's login credentials. Messages can also be used to coordinate on choices: for example, one program chooses an operation and the other programs should respond accordingly.

What contributes to reliability in message-passing concurrency? There are many aspects. On the network level, reliability means that every message reaches its destination unaltered and that programs do not change location unannounced or disappear altogether. On the program level, reliability means that message-exchange is safe (e.g., programs do not try to simultaneously send each other messages) and that programs respond to the messages they receive as expected.

In this thesis, I abstract away from concerns about network reliability, and focus on the reliability of message-passing in programs. In particular, the focus is on how the exchange of messages can be captured by *communication protocols* and how these protocols can help to guarantee the reliability of message-passing programs.

Message-passing protocols. Communication protocols describe sequences of message exchanges. Such exchanges usually describe the kind of data exchanged, but also moments of choice: protocol branches where the message determines how to proceed.

These protocols can be used to describe interactions between message-passing programs, but also—and perhaps more useful—to *prescribe* a behavior to programs. That is, the protocols declare how a program is expected to behave, and so the protocol can be used to *verify* the behavior of a program.

To describe more clearly the relation between protocols and verification, let me elaborate on what I mean by the behavior of message-passing programs. In message-passing, a program runs in parallel with other programs. The program is connected to other programs via channels, over which messages can be exchanged. The message-passing behavior of this program then comprises how and when it sends and receives messages over these channels. A communication protocol can then prescribe message-passing behavior to a program, be it for one specific channel or for all channels at once.

This way, communication protocols are used as *behavioral types* for message-passing programs. This is a widely used approach to verification in message-passing concurrency. An especially prominent branch of research focuses on behavioral types called *session types*.

Session types. Originally introduced by Honda *et al.* [Hon93; HVK98], session types denote sequences of messages and branches prescribing message-passing behavior to programs. Because they describe protocols for specific channels, so between two programs, they are often referred to as *binary session types*. Later, I discuss the generalization of binary session types as multiparty session types.

Let us consider an example protocol, which prescribes a program to offer a choice between two branches. In the first branch, labeled `login`, the program should receive an integer and then make a choice between two alternatives. If the program chooses success, the protocol ends; if the program chooses failure, the protocol starts over from the beginning. In the second branch, labeled `quit`, the protocol simply ends. We can write this protocol formally as the following session type:

$$S \triangleq \mu X. \&\{\text{login}.\?(int).\oplus\{\text{success}.\text{end}, \text{failure}.X\}, \text{quit}.\text{end}\} \quad (1.1)$$

As the protocol may repeat, it starts with a recursive definition $\mu X \dots$, and contains a recursive call X that indicates a jump to the corresponding recursive definition. The branch is denoted $\&\{\text{login} \dots, \text{quit} \dots\}$, where the labels prefix session types that prescribe behavior for each branch. Reception is denoted $\?(T)$, where T is the type of the value to be received. To prescribe a choice, we use selection, denoted $\oplus\{\dots\}$; again, the branches contain labels that prefix corresponding session types. Whenever the protocol should end, we use `end`.

Session types are very useful for verifying the behavior of message-passing programs. Key to the power of session types for verification is the notion of *duality*. Duality says that if a program at one end of a channel behaves according to a given binary session type, then the program at the other end of the channel should show a complementary behavior: if the original type describes a send, the dual describes a receive, and so forth.

Let us consider the dual of S (1.1). This protocol prescribes a program to choose between two alternatives. If the program chooses `login`, it should send an integer and offer a choice between two alternatives: case success ends the protocol, and case failure repeats it; if the program chooses `quit`, the protocol ends. Indeed, this protocol is complementary to that described by S . Formally, we can write the dual of S , denoted \bar{S} , as follows:

$$\bar{S} = \mu X. \oplus\{\text{login}.\!(int).\&\{\text{success}.\text{end}, \text{failure}.X\}, \text{quit}.\text{end}\}$$

The only new notation here is $\!(T)$, which denotes sending a value of type T .

Duality is the cornerstone of session type theory, as it is instrumental in proving that *communication is safe* in message-passing programs. Communication safety is one of the important correctness properties of message-passing concurrency, discussed next.

Correctness properties for message-passing. In general, we want to verify that programs are *correct*. But what is correct? What are the correctness properties we are after? In sequential programming, correctness focuses on the input-output behavior of the program (i.e., given a certain input, the output of the program is as expected), but this does not necessarily apply to message-passing programs.

The main correctness property of message-passing programs is *protocol conformance*, often referred to also as *protocol fidelity*. It means that, given a protocol (e.g., a binary session type) for a specific channel, a message-passing program correctly implements the sequence of communications specified by the protocol.

The next major correctness property is *communication safety*. It means that programs at either end of a channel do not exhibit conflicting communications on that channel, i.e., communication errors. For example, if both programs simultaneously send something, then

the messages will “run into each other”, leading to unexpected behavior. Communication safety then signifies the absence of communication errors. This property often follows directly from using session types, relying on duality as explained above.

Another important property is *deadlock-freedom*. A deadlock occurs when connected programs are waiting for each other, without a possibility to resolve. For example, consider three programs P , Q , and R . Program P is ready to send something to Q , while Q is ready to send something to R , and R is ready to send something to P . Under the assumption that communication is synchronous, i.e., that a send can only take place once the receiving program is ready to receive (I will elaborate on this later), this situation signifies a deadlock: all the programs are stuck waiting for each other. Deadlock-freedom then means that situations leading to deadlocks never occur. This property is a major challenge in this thesis, much more so than protocol fidelity and communication safety. As such, I will elaborate further on it later in this introduction.

Logical foundations for session-typed message-passing. It is a challenging task to design (session) type systems for message-passing that guarantee correctness properties by typing directly. It is then only natural to look to existing solutions to similar problems in different areas as inspiration. Logic is an important such inspiration for correctness in programming.

As observed by Curry [Cur34] and Howard [How80], intuitionistic logic serves as a deep logical foundation for sequential programming. To be precise, the logic is isomorphic to the simply typed λ -calculus: propositions as types, natural deduction as type inference, and proof normalization as β -reduction. As such, properties of intuitionistic logic transfer to the simply typed λ -calculus. For example, from the strong normalization property of intuitionistic logic we know that well-typed λ -calculus terms are strongly normalizing as well, i.e., every well-typed term can be executed to reach a final state where there is no more computation to be done (see, e.g., [Gir89]).

Linear logic, introduced by Girard [Gir87], is a logic of resources. That is, linear logic features a precise management of resources governed by the principle of *linearity*: each resource must be used exactly once. This means that, unlike in common logics such as classical and intuitionistic logic, linear logic does not allow duplication (contraction) and discarding (weakening) of resources.

Many thought that a correspondence in the style of Curry-Howard could be found between linear logic and concurrent programming, though early attempts were unsatisfactory (e.g., by Abramsky [Abr93]). It took over two decades since the conception of linear logic for a satisfactory answer to be found: Caires and Pfenning [CP10] discovered that linear logic is very suitable as a logical foundation for the session-typed π -calculus. They found the isomorphism in dual intuitionistic linear logic [BP96]: propositions serve as session types, sequent calculus derivations as typing inferences, and cut-reduction as communication. Not much later, Wadler [Wad12; Wad14] showed a similar correspondence with the original classical linear logic.

The works by Caires and Pfenning and by Wadler are generally accepted as canonical Curry-Howard interpretations of linear logic, and have inspired a magnitude of follow-up work. The main reason is that session type systems derived from linear logic precisely identify message-passing programs that are deadlock-free. We will explore this in more depth later.

Research Question I-1. *How can we reconcile asynchronous communication, deadlock-freedom for cyclically connected processes, and linear logic foundations for session types?*

Research Question I-2. *How can we increase commitment in non-deterministic choices, while retaining correctness properties induced by linear logic foundations for session types?*

Research Question I-3. *Can BI serve as an alternative logical foundation for session types, and if so, what correctness guarantees does this bring?*

Research Question II-1. *Can we exploit APCP's asynchronous message-passing and cyclic connections in sequential programming, while retaining correctness properties?*

Research Question II-2. *Can πBI faithfully represent the $\alpha\lambda$ -calculus on a low level of abstraction, and can we exploit πBI 's correctness properties in the $\alpha\lambda$ -calculus?*

Research Question III-1. *Can we define a method for obtaining local perspectives from global types that induces a class of well-formed global types featuring communication patterns not supported before?*

Research Question III-2. *Can we leverage on binary session types to guarantee protocol conformance and deadlock-freedom for distributed (model) implementations of MPSTs?*

Research Question III-3. *Can we dynamically verify distributed blackbox implementations of MPSTs, and what correctness properties can we guarantee therein?*

Figure 1.1 | Research questions.

1.1.1. ENCOMPASSING RESEARCH QUESTION

Hopefully, at this point I have managed to convince you of the ubiquity of communicating software and the need for guaranteeing its correctness. I have introduced a theoretical approach to this problem by considering abstractions of communicating software as message-passing programs, and to capturing their interactions as communication protocols called session types. This dissertation includes a broad range of topics, each approaching the correctness of message-passing programs using session types from different angles.

Nonetheless, every topic has a common starting point: logical foundations for session-typed message-passing. As discussed above, session typing has deep foundations in linear logic. These foundational connections induce precise patterns of message-passing for which the correctness properties discussed above hold straightforwardly. Yet, there are many patterns of message-passing outside of these logical foundations that still enjoy those correctness properties. As will be a theme in this thesis, these logical foundations do not account for, e.g., practical aspects of message-passing such as asynchronous communication, resource management, and the way programs can be connected.

Hence, the following research question covers the encompassing theme of my thesis:

Encompassing Research Question. *How can we push the boundaries of the logical foundations of session types (binary and multiparty), extending their expressiveness and applicability, while preserving fundamental correctness properties?*

In Figure 1.1, I break this down into eight more precise research questions. Being precise, these research questions contain terminology not yet introduced. The next section discusses

the contributions presented in my dissertation, and how they address the research questions in Figure 1.1. In this section, all the terminology becomes clear.

1.2. CONTRIBUTIONS

Thus far, I have (intentionally) been vague about what constitutes a “program”. There are many ways to define a program, but ultimately it boils down to context: for what purpose are you working with programs? In my dissertation, I work with two specific notions of message-passing programs.

In Section 1.2.1, I shall introduce the process-based approach. In this approach, processes interact through message-passing without details about internal computation, i.e., processes are abstract representations of programs by focusing solely on their message-passing behavior. Here, I introduce Chapters 3 to 5 in Part I, which build on this process-based approach and address Research Questions I-1 to I-3 in Figure 1.1, respectively.

In Section 1.2.2, I introduce a functional approach. In this approach, we consider functional programs whose behavior is precisely defined, and consider how we can use message-passing to derive a deeper understanding of their behavior. Chapters 6 and 7 build on this approach in Part II and address Research Questions II-1 and II-2 in Figure 1.1, respectively.

In Section 1.2.3, I introduce Part III, which contains chapters on multiparty session types. These Chapters 8 to 10 address Research Questions III-1 to III-3 in Figure 1.1, respectively.

1.2.1. BINARY SESSION TYPES AND MESSAGE-PASSING PROCESSES (PART I)

The context I have introduced is that of message-passing concurrency, and the usage of session types as communication protocols to verify several correctness aspects therein. It thus makes sense to give a definition of program that focuses on message-passing.

As the research presented in this thesis is of theoretical nature, I will define *mathematical models* of message-passing programs. This gives us the tools to precisely define the behavior of such programs, and to formally prove properties of them. Many such formalisms already exist; instead of re-inventing the wheel, I base my definitions on such prior works.

The π -calculus. The mathematical model of message-passing which most of this thesis leans on is the π -calculus. Originally introduced by Milner *et al.* [Mil89; MPW92], the π -calculus is a *process calculus* focused entirely on message-passing. In the π -calculus, processes run in parallel and communicate by exchanging messages on dedicated channels.

We consider an example of message exchange on a channel:

$$P_1 \triangleq (\nu xy)(\bar{x} \triangleleft \text{helloWorld}; \mathbf{0} \mid y \triangleright \text{helloWorld}; \mathbf{0}) \quad (1.2)$$

The process P_1 contains two parallel subprocesses, separated by ‘|’. These subprocesses can communicate because they are connected by a channel, indicated by the restriction ‘ (νxy) ’ wrapping the parallel composition. This way, the subprocesses have access to the channel’s endpoints x and y . The left subprocess sends on x a label `helloWorld` (denoted $\bar{x} \triangleleft \dots$). The continuation of this send, indicated by ‘;’, is $\mathbf{0}$, which indicates that the subprocess is done.

1

The right subprocess receives on y the same label (denoted $y \triangleright \dots$), and also continues with $\mathbf{0}$. This way, the subprocesses communicate by exchanging the label `helloWorld`.

The behavior of π -calculus processes is then defined in terms of a *reduction semantics* that defines how parallel subprocesses that do complementary message exchanges on connected endpoints synchronize. In the case of P_1 (1.2), the send on x and the receive on y can synchronize. Afterwards, both subprocesses transition to $\mathbf{0}$:

$$P_1 \rightarrow (\nu xy)(\mathbf{0} \mid \mathbf{0})$$

Since the endpoints x and y are no longer used, the channel can be garbage collected. Moreover, the two inactive subprocesses can be merged into one. This clean-up is often done implicitly, resulting in the following reduction:

$$P_1 \rightarrow \mathbf{0} \tag{1.3}$$

Channel mobility. The π -calculus can express much more interesting forms of message-passing than exchanging labels. The distinctive feature of the π -calculus is *channel mobility*: the exchange of channel endpoints themselves, influencing the way processes are connected.

The following example is similar to P_1 (1.2). However, before exchanging the message, the subprocesses exchange a channel, changing their connections.

$$P_2 \triangleq (\nu xy)((\nu zw)(\bar{z}[u]; [u \leftrightarrow x] \mid w(v); \bar{v} \triangleleft \text{helloWorld}; \mathbf{0}) \mid y \triangleright \text{helloWorld}; \mathbf{0}) \tag{1.4}$$

Process P_2 consists of two subprocesses, connected on a channel with endpoints x and y . The right subprocess expects to receive a label `helloWorld`. However, the left subprocess is further divided into two parallel subprocesses, connected on a channel with endpoints z and w . In a nutshell, the left sub-subprocess has access to the endpoint x , but sends it to the right sub-subprocess which proceeds to send the label `helloWorld` on it. This is implemented in the left sub-subprocess by sending on z a new endpoint u (denoted $\bar{z}[u]$), after which u is linked to x by means of a forwarder $[u \leftrightarrow x]$ that passes any messages incoming on u to x and vice versa. In the right sub-subprocess an endpoint v is received on w , after which the label is sent on v .

Unlike in P_1 (1.2), in P_2 (1.4) we cannot synchronize on x and y , as there is no send on x available. We first need to resolve the communication on endpoints z and w . The left subprocess sends a new name u , so this creates a new channel; the endpoints z and w are no longer used, so this channel can be garbage collected:

$$P_2 \rightarrow (\nu xy)((\nu uv)([u \leftrightarrow x] \mid \bar{v} \triangleleft \text{helloWorld}; \mathbf{0}) \mid y \triangleright \text{helloWorld}; \mathbf{0})$$

Still, a synchronization on x and y is not possible. Instead, we can eliminate the forwarder $[u \leftrightarrow x]$. The forwarder connects x to u , and u is connected to v through a channel, so we can simply do all the message exchanges that were on v before on x directly:

$$\rightarrow (\nu xy)(\bar{x} \triangleleft \text{helloWorld}; \mathbf{0} \mid y \triangleright \text{helloWorld}; \mathbf{0}) = P_1$$

Hence, eventually we reach P_1 (1.2), which reduces as before (1.3).

Branching. Another important element of the π -calculus is branching: a process *branches* on a choice between a set of labeled alternatives on one channel endpoint, and the process on the opposite endpoint *selects* an alternative by sending one of the offered labels. This way, the branching process can prepare different behaviors depending on the received label.

The following example illustrates how a process can branch to different behaviors:

$$P_3 \triangleq x \triangleright \{\text{send} : \bar{x}[z]; \mathbf{0}, \text{quit} : \mathbf{0}\} \quad (1.5)$$

Process P_3 offers on x a choice between behaviors labeled send and quit. The behavior of the send-branch is to send a fresh channel z on x , while the behavior in the quit-branch ends.

Now consider the following processes, that we intend to connect to P_3 (1.5). Each process selects a different behavior, and thus they behave differently after the selection.

$$Q_1 \triangleq \bar{y} \triangleleft \text{send}; y(w); \mathbf{0}$$

$$Q_2 \triangleq \bar{y} \triangleleft \text{quit}; \mathbf{0}$$

Process Q_1 selects on y send and receives on y , whereas Q_2 selects on y quit and ends. This way, we can connect either process with P_3 (1.5), i.e., as $(\mathbf{v}xy)(P_3 | Q_1)$ or as $(\mathbf{v}xy)(P_3 | Q_2)$.

Session types and the π -calculus. I have already anticipated the usefulness of session types as communication protocols in message-passing concurrency. Indeed, session types are widely used to verify the behavior of π -calculus processes on channels. Given a channel (i.e., two connected endpoints), a sequence of communications on that channel is referred to as a *session*. The behavior of a process on an endpoint can thus be ascribed a session type.

Consider the following process, where subprocesses create and exchange a new channel to communicate on:

$$P_4 \triangleq (\mathbf{v}xy)(\bar{x}[z]; z(u); \mathbf{0} | y(w); \bar{w}[v]; \mathbf{0})$$

In process P_4 , the left subprocess sends on x a fresh channel z , on which it receives. Recall the notation of session types introduced on Page 4. Hence, in the left subprocess we can ascribe to x the session type $!(?end.end).end$: on x we send an endpoint typed $?end.end$. In the right subprocess of P_4 , we receive on y a channel w on which we send. So, here we ascribe to y the session type $?(!end.end).end$. This session type is the dual of the type ascribed to x in the left subprocess. Hence, the left and right subprocesses describe complementary behaviors on x and y , and thus their exchanges on x and y are *safe*.

Session typing also prevents branching from leading to unexpected behavior. This anticipates an aspect of branching that will be important in Section 1.2.3: what if a process that branches on x also uses endpoints other than x for communications? For example, the following process branches on an endpoint w to define different behaviors on another endpoint y :

$$P_5 \triangleq (\mathbf{v}xy)(x(v); \mathbf{0} | w \triangleright \{\text{send} : \bar{y}[u]; \mathbf{0}, \text{quit} : \mathbf{0}\}) \quad (1.6)$$

In process P_5 , endpoints x and y form a channel, and the left subprocess receives on x . The right subprocess branches on another endpoint w . In the send-branch, it sends on x , but

in the quit-branch it immediately ends. If the right subprocess receives on w the label `send`, the communication between x and y proceeds as expected. However, if the right subprocess were to receive on w the label `quit`, the receive on x in the left subprocess is left without a corresponding `send`: the exchanges on x and y are not guaranteed to be safe.

To guarantee safety for branching, session typing requires that a process' behavior on endpoints other than the branching endpoint has the same type across all branches. This way, process P_5 (1.6) is not considered well-typed, avoiding unsafe branching: the behavior of the right subprocess on y in the `send`-branch is `!(end).end`, but `end` in the `quit`-branch.

By assigning session types to the endpoints of processes, session typing guarantees protocol fidelity. Requiring that connected endpoints should be typed dually and that endpoints should be typed consistently across branches is what guarantees communication safety. However, as we will see, session types do not guarantee deadlock-freedom by themselves.

Session types and deadlock. Consider the following process, where two subprocesses communicate on two different channels:

$$P_6 \triangleq (\mathbf{v}xy)(\mathbf{v}zw)(\bar{x}[u]; z(v); \mathbf{0} \mid \bar{w}[v']; y(u'); \mathbf{0}) \quad (1.7)$$

This process connects endpoint x to y and z to w , so these endpoints should be assigned pairwise dual session types. Indeed, in the left subprocess x is typed `!(end).end` and z is typed `?(end).end`, and in the right subprocess y is typed `?(end).end` and w is typed `!(end).end`. Hence, the communications in V are deemed safe.

However, process P_6 (1.7) is clearly not deadlock-free: the `send` on x has to wait for the corresponding receive on y , but it is blocked by the `send` on w which has to wait for the receive on z , itself blocked by the `send` on x . In other words, P_6 is well-typed but deadlocked.

The above is a canonical example of deadlock caused by circular dependencies: x depends on y , y depends on w , w depends on z , z depends on x , and so on. In fact, at the level of abstraction of the π -calculus, circular dependencies are the only source of deadlock. It thus seems that if we have a type system that excludes circular dependencies, then typing does guarantee deadlock-freedom. A prominent approach is rooted in deep connections between session-typed message-passing concurrency and *linear logic* [CP10; Wad12].

Linear logic and deadlock-freedom. As hinted to before, linear logic is an important foundation for session type systems that guarantee deadlock-freedom by typing. To see why, let us be a bit more formal regarding session typing for the π -calculus.

When typing a process, we use *typing judgments*, denoted $\vdash P \blacktriangleright \Gamma$. Here Γ is a *typing context*: a list of *typing assignments* $x : A$, denoting that endpoint x is assigned the session type A . This way, $\vdash P \blacktriangleright \Gamma$ says that the endpoints used in P (that are not connected by restriction) are typed according to Γ . The typing judgment of a process is obtained by means of typing inference, following typing rules.

Note that we use a non-standard notation for our typing judgments, as opposed to the more common notation $\Gamma \vdash P$. This is because this notation can be confusing for readers unfamiliar with session type systems: from a logic point of view as well as a traditional typing point of view, a judgment $\Gamma \vdash P$ can be interpreted to mean “from the facts in Γ , we derive

that P holds,” which is not in line with the intended meaning of the judgment. Instead, we write $\vdash P \blacktriangleright \Gamma$ to be interpreted as “we derive that P is well-typed according to Γ .”

Let us consider a pair of typing rules that are traditionally used for session types. These are the rules for parallel composition and restriction (endpoint connection), respectively. Remember that we write \bar{A} to denote the dual of A .

$$\frac{[\text{PAR}] \quad \vdash P \blacktriangleright \Gamma \quad \vdash Q \blacktriangleright \Delta}{\vdash P | Q \blacktriangleright \Gamma, \Delta} \qquad \frac{[\text{RES}] \quad \vdash P \blacktriangleright \Gamma, x : A, y : \bar{A}}{\vdash (\nu xy)P \blacktriangleright \Gamma}$$

Thus, Rule [PAR] places two processes in parallel and combines their (disjoint) typing contexts. Rule [RES] requires two endpoints of dual types, and connects them thus removing them from the typing context. These are the rules that are necessary to type the endpoint connections in process P_6 (1.7), i.e., they do not exclude the circular dependencies that cause deadlock.

Now consider the following typing rule, inspired by linear logic’s Rule [CUT]:

$$\frac{[\text{CUT}] \quad \vdash P \blacktriangleright \Gamma, x : A \quad \vdash Q \blacktriangleright \Delta, y : \bar{A}}{\vdash (\nu xy)(P | Q) \blacktriangleright \Gamma, \Delta}$$

This rule combines Rules [PAR] and [RES] into one. It places two processes in parallel, connecting them on *exactly one* pair of endpoints. Further connections between P and Q are not possible, as there are no rules to connect endpoints in Γ, Δ .

Session type systems based on linear logic replace Rules [PAR] and [RES] by Rule [CUT]. As a consequence, these type systems guarantee deadlock-freedom by typing. In a nutshell, this holds because Rule [CUT] is the only way to connect processes: it is impossible to cyclically connect processes thus ruling out circular dependencies. This way, the deadlocked process P_6 (1.7) is not considered well-typed in these type systems.

A base presentation of the π -calculus. The π -calculus can take some effort to get used to. Because it is an important backbone of this thesis, I include Chapter 2 to allow the reader to familiarize themselves with the π -calculus and the kind of session types used in this thesis. The chapter introduces a variant of the session-typed π -calculus called $\text{BASE}\pi$, that is “distraction-free” (i.e., $\text{BASE}\pi$ focuses on the core of message-passing and session types). This $\text{BASE}\pi$ can be seen as a basis for the other variants of the π -calculus introduced in this dissertation. The chapter explains how $\text{BASE}\pi$ relates to those other variants.

1.2.1.1. DEADLOCK-FREEDOM IN CYCLICALLY CONNECTED PROCESSES

The interpretation of linear logic’s Rule [CUT] guarantees deadlock-freedom by typing, with a fairly straightforward proof following linear logic’s *cut-reduction* principle. However, this approach is an *overestimation*: a large class of deadlock-free processes is not typable using Rule [CUT].

Consider the following process, which is an adaptation of process P_6 (1.7) where the send and receive in the right subprocess are swapped in order:

$$P_7 \triangleq (\nu xy)(\nu zw)(\bar{x}[u]; z(v); \mathbf{0} | y(u'); \bar{w}[v']; \mathbf{0}) \quad (1.8)$$

1

Just like P_6 , process P_7 is a cyclically connected process. However, this time P_7 is not deadlock: first the communication between x and y can take place, and then the communication between z and w . Yet, P_7 cannot be typed using Rule [CUT]. The question is then: how do we design a session type system that considers P_7 well-typed, while guaranteeing deadlock-freedom for all well-typed processes (excluding, e.g., P_6 (1.7))?

Even before the discovery by Caires and Pfenning of using linear logic's Rule [CUT] to guarantee deadlock-freedom, Kobayashi [Kob06] introduced a session type system that answers precisely this question. In his approach, session types are enriched with annotations. Side-conditions on these annotations in typing rules guarantee deadlock-freedom for cyclically connected processes. The general idea of the annotations and side-conditions is that they can only be satisfied when the process is free from circular dependencies.

Based on Wadler's interpretation of classical linear logic as CP (Classical Processes) [Wad14] and Kobayashi's approach to deadlock-freedom [Kob06], Dardha and Gay [DG18] presented PCP (Priority-based CP). Their work reconciles session type theory's Curry-Howard foundations in linear logic with Kobayashi's more expressive approach.

Dardha and Gay refer to the annotations on types as *priorities*, as they are numbers that indicate a global ordering on communications. The idea is that the types of communications that block other communications can only be annotated with lower priority than the priority annotations of the blocked communications. Duality is then extended to dictate that priority annotations on complementary communications should coincide. This way, the *local* ordering of communications is transferred between parallel processes when connecting endpoints, imposing a *global* ordering of communications. As long as the ordering is satisfiable, the process is guaranteed to be free from circular dependencies, and thus deadlock-free.

Let us reconsider process P_6 (1.7). Recall:

$$P_6 = (\mathbf{v}xy)(\mathbf{v}zw)(\bar{x}[u]; z(v); \mathbf{0} \mid \bar{w}[v']; y(u'); \mathbf{0})$$

Let us list the session types assigned to endpoints in the left and right subprocesses of P_6 , this time including priority annotations (end does not entail a communication and so does not require an annotation):

$$x : !^\circ(\text{end}).\text{end} \quad z : ?^\pi(\text{end}).\text{end} \quad w : !^\rho(\text{end}).\text{end} \quad y : ?^\gamma(\text{end}).\text{end}$$

Here \circ, π, ρ, γ are variables representing numbers. The order in which the associated endpoints are used determines conditions on the relation between these numbers, that may or may not be satisfiable. Since the send on x blocks the receive on z , and the send on w blocks the receive on y , we have the following conditions on these priorities:

$$\circ < \pi \qquad \rho < \gamma$$

Finally, since x and y should be typed dually, we require $\circ = \gamma$. Similarly, we need $\pi = \rho$. In the end, we have the following condition on priorities:

$$\circ < \pi < \circ$$

This condition is clearly unsatisfiable. Hence, we have detected the circular dependency in P_6 and consider it ill-typed.

To contrast, let us reconsider process P_7 (1.8). We deemed P_7 ill-typed using Rule [CUT], yet it is deadlock-free. Recall:

$$P_7 = (\mathbf{v}xy)(\mathbf{v}zw)(\bar{x}[u]; z(v); \mathbf{0} \mid y(u'); \bar{w}[v']; \mathbf{0})$$

We assign the same session types and priorities to the endpoints in the subprocesses of P_7 as we did for P_6 above. Yet, because the receive on y is now blocking the send on w (instead of the other way around), we no longer require that $\pi < \circ$, and hence only require that $\circ < \pi$. Clearly, this condition is indeed satisfiable, and thus we deem P_7 free from circular dependencies and well-typed, i.e., deadlock-free.

The influence of synchronous versus asynchronous communication. Thus far, I have only considered *synchronous* communication, under which sends block whatever process they prefix until their corresponding receives are ready and communication has taken place (and similarly for selections/branches). Its counterpart, *asynchronous* communication, is an important theme in practice and in this thesis. Under asynchronous communication, sends and selections do not block the processes they prefix.

Consider the following example, where two subprocesses are prefixed by a send:

$$P_8 \triangleq \bar{z}[u]; (\mathbf{v}xy)(\bar{x}[z]; \mathbf{0} \mid y(w); \mathbf{0})$$

Process P_8 is stuck under synchronous communication, because there is no corresponding receive for the send on z , so it blocks the communication between x and y . In contrast, under asynchronous communication, the send on z is non-blocking, so the communication between x and y can take place:

$$P_8 \rightarrow \bar{z}[u]; \mathbf{0}$$

Being the standard mode of communication in practice, asynchrony is an important aspect of message-passing concurrency. This leads me to the following research question:

Research Question I-1. *How can we reconcile asynchronous communication, deadlock-freedom for cyclically connected processes, and linear logic foundations for session types?*

In Chapter 3, I describe my answer to this question.

More precisely, I adapt Dardha and Gay's PCP [DG18] to the asynchronous setting to define APCP (Asynchronous PCP). Let us once again recall process P_6 (1.7):

$$P_6 = (\mathbf{v}xy)(\mathbf{v}zw)(\bar{x}[u]; z(v); \mathbf{0} \mid \bar{w}[v']; y(u'); \mathbf{0})$$

Under asynchronous communication, P_6 is not deadlocked: neither of the sends are blocking, so communications can take place. To see how APCP adapts PCP's priority analysis to guarantee deadlock-freedom including, e.g., P_6 , let us recall its session type assignments:

$$x : !^\circ(\text{end}).\text{end} \quad z : ?^\pi(\text{end}).\text{end} \quad w : !^\pi(\text{end}).\text{end} \quad y : ?^\circ(\text{end}).\text{end}$$

Since sends are non-blocking in APCP, they do not influence the local ordering of communications. Therefore, the priority conditions $\circ < \pi$ and $\pi < \circ$ that should hold in PCP are

unnecessary in APCP. Hence, all priority conditions (of which there are none) are satisfiable, so this time P_6 is consider free from circular dependencies and well-typed: P_6 is deadlock-free under asynchronous communication.

APCP shows that asynchrony enables more deadlock-free communication patterns, compared to, e.g., PCP's synchrony. APCP and its cyclically connected processes with asynchronous communication will also appear in Chapters 3 and 6, where they are used as a basis for the analysis of sequential programming and multiparty session types, respectively, both discussed later in this introduction.

1.2.1.2. NON-DETERMINISM

The aspects of message-passing concurrency discussed above in Section 1.2.1.1 are important and fundamental. Another important and fundamental aspect of message-passing concurrency is *non-determinism*. The form of branching in the π -calculus discussed above is *deterministic*, in that the exact choice that will be made will always be hard-coded in the processes. Traditionally, the π -calculus also features non-deterministic choices, where the outcome of the choice is left unspecified. Non-deterministic choices encode real-world scenarios, where a program's environment influences the program's behavior. This way, we can model, e.g., user interaction or internet connections that might fail.

Consider the following example, where one subprocess non-deterministically makes a selection on another subprocess' branch:

$$P_9 \triangleq (\mathbf{v}xy)(x \triangleright \{\text{left} : \mathbf{0}, \text{right} : \mathbf{0}\} \mid (\bar{y} \triangleleft \text{left}; \mathbf{0} + \bar{y} \triangleleft \text{right}; \mathbf{0})) \quad (1.9)$$

The left subprocess of P_9 offers on x a choice between branches labeled left and right. Unlike before, the right subprocess does not hard-code a selection on y ; instead, it offers a non-deterministic choice, denoted '+', between selecting left and right. As a result, the behavior of P_9 is to either communicate the label left or right.

This form of non-deterministic choice is difficult to reconcile with the linear logic foundations of the session-typed π -calculus. This is because linear logic is strict in the linear treatment of resources. In contrast, non-determinism might lead to the discarding of resources, similar to how unsafe deterministic branches might discard resources. For example, let us adapt process P_5 (1.6) with non-determinism:

$$P'_5 \triangleq (\mathbf{v}xy)(x(v); \mathbf{0} \mid (\bar{y}[u]; \mathbf{0} + \mathbf{0}))$$

The right subprocess of P'_5 might or might not send on y ; the outcome is non-deterministic. However, the left subprocess of P'_5 always intends to receive on x . Hence, the non-deterministic choice in P'_5 might lead to unexpected, unsafe behavior.

Another issue in reconciling non-determinism with logical foundations is the lack of *confluence*. Confluence means that different paths of computation always end in the same result. For example, resolving addition is confluent: we have $3 + 1 + 4 = 4 + 4 = 8$ but also $3 + 1 + 4 = 3 + 5 = 8$. On the contrary, non-deterministic choice in the π -calculus is not confluent. For example, consider an adaptation of process P_9 (1.9) where the branching subprocess makes a different selection on a new endpoint z in each branch:

$$P_{10} \triangleq (\mathbf{v}xy)(x \triangleright \{\text{left} : \bar{z} \triangleleft \text{left}; \mathbf{0}, \text{right} : \bar{z} \triangleleft \text{right}; \mathbf{0}\} \mid (\bar{y} \triangleleft \text{left}; \mathbf{0} + \bar{y} \triangleleft \text{right}; \mathbf{0})) \quad (1.10)$$

In the left subprocess of P_{10} , the label received on x determines the label sent on z . But this all depends on the non-deterministic choice in the right subprocess on which label is sent on y . Hence, the non-deterministic choice in the right subprocess leads to different outcomes, breaking confluence:

$$P_{10} \rightarrow \bar{z} \triangleleft \text{left}; \mathbf{0} \quad \text{or} \quad P_{10} \rightarrow \bar{z} \triangleleft \text{right}; \mathbf{0} \quad (1.11)$$

To reconcile non-determinism with confluence and Curry-Howard interpretations of linear logic as session type systems for the π -calculus, Caires and Pérez [CP17] introduced a new non-deterministic (internal) choice operator that does not *commit* to a choice: $P \oplus Q$. This way, if $P \rightarrow P'$ and $Q \rightarrow Q'$, then $P \oplus Q \rightarrow P' \oplus Q'$: both branches behave independently. Let us further adapt process P_{10} (1.10) to illustrate the effect of this new operator:

$$\begin{aligned} P_{11} &\triangleq (\nu xy)(x \triangleright \{\text{left} : \bar{z} \triangleleft \text{left}; \mathbf{0}, \text{right} : \bar{z} \triangleleft \text{right}; \mathbf{0}\} \mid (\bar{y} \triangleleft \text{left}; \mathbf{0} \oplus \bar{y} \triangleleft \text{right}; \mathbf{0})) \\ &\rightarrow \bar{z} \triangleleft \text{left} \oplus \bar{z} \triangleleft \text{right} \end{aligned}$$

Thus, the non-deterministic choice in the right subprocess of P_{11} does not commit to a choice; instead, after the communication of the label between x and y , which label to send on z remains a non-deterministic choice.

Although Caires and Pérez's non-deterministic choice operator maintains strong ties with linear logic foundations through confluence, it arguably is not an adequate representation of real-world non-determinism. In practice, e.g., communication channels may randomly and unrecoverably fail, or a user may select an operation that is supposed to have a different outcome than another operation. That is, realistic non-determinism favors *commitment* over confluence. This leads me to the following research question:

Research Question I-2. *How can we increase commitment in non-deterministic choices, while retaining correctness properties induced by linear logic foundations for session types?*

In Chapter 4, I propose an approach to answer this question.

To be precise, my answer is the design of a session-typed π -calculus $s\pi^+$ with a new operator for non-deterministic choice, denoted ' $\#$ '. The calculus $s\pi^+$ is equipped with two different semantics that explore the tension between confluence and commitment.

Opposed to Caires and Pérez's \oplus which sits at the extreme of confluence, $s\pi^+$ has a so-called *eager* semantics that sits at the extreme of commitment. This way, the new operator $\#$ behaves similarly to the traditional non-deterministic choice $+$. That is, given

$$P_{12} \triangleq (\nu xy)(x \triangleright \{\text{left} : \bar{z} \triangleleft \text{left}; \mathbf{0}, \text{right} : \bar{z} \triangleleft \text{right}; \mathbf{0}\} \mid (\bar{y} \triangleleft \text{left}; \mathbf{0} \# \bar{y} \triangleleft \text{right}; \mathbf{0})), \quad (1.12)$$

compare the following to (1.11):

$$P_{12} \rightarrow \bar{z} \triangleleft \text{left}; \mathbf{0} \quad \text{or} \quad P_{12} \rightarrow \bar{z} \triangleleft \text{right}; \mathbf{0} \quad (1.13)$$

Perhaps more interesting is $s\pi^+$'s so-called *lazy* semantics that sits right between confluence and commitment. To be more precise, the lazy semantics postpones commitment

1

until truly necessary, i.e., until a choice has to be made. For example, consider the following extension of P_{12} (1.12) where the selections on y are now prefixed by a send:

$$P_{13} \triangleq (\mathbf{v}xy)(x(u); x \triangleright \{\text{left} : \bar{z} \triangleleft \text{left}; \mathbf{0}, \text{right} : \bar{z} \triangleleft \text{right}\} \\ | (\bar{y}[w]; \bar{y} \triangleleft \text{left}; \mathbf{0} \# \bar{y}[w]; \bar{y} \triangleleft \text{right}))$$

Notice that both branches of the non-deterministic choice in the right subprocess of P_{13} start with a send on y . Hence, the lazy semantics postpones choosing a branch, resulting in $P_{13} \rightarrow P_{12}$. Since in P_{12} there is an actual choice, the lazy semantics commits as in (1.13). Compare this to how the eager semantics immediately picks a branch in P_{14} :

$$P_{14} \rightarrow (\mathbf{v}xy)(x \triangleright \{\text{left} : \bar{z} \triangleleft \text{left}; \mathbf{0}, \text{right} : \bar{z} \triangleleft \text{right}; \mathbf{0}\} | \bar{y} \triangleleft \text{left})$$

or

$$P_{14} \rightarrow (\mathbf{v}xy)(x \triangleright \{\text{left} : \bar{z} \triangleleft \text{left}; \mathbf{0}, \text{right} : \bar{z} \triangleleft \text{right}; \mathbf{0}\} | \bar{y} \triangleleft \text{right})$$

Hence, under the eager semantics the initial communication on x and y determines later choices, whereas under the lazy semantics these choices are left open.

Under both eager and lazy semantics, $\mathfrak{s}\pi^+$ guarantees protocol fidelity, communication safety, and deadlock-freedom by typing. Chapter 4 also briefly discusses a faithful translation of a λ -calculus with non-determinism, as well as interesting formal comparisons between the eager and lazy semantics.

1.2.1.3. ALTERNATIVE LOGICAL FOUNDATIONS: BUNCHED IMPLICATIONS

The logical foundations of session types in linear logic due to Caires and Pfenning [CP10] are an important theme in this dissertation. Its fine-grained control of linear resources (that must be used exactly once) fits very well with the ideas behind session types for the π -calculus. Many follow-up works have established the robustness of this Curry-Howard isomorphism (see, e.g., [Wad14; DeY+12; Pér+14; BP17]).

However, linear logic is not the only logic that is suitable for reasoning about resources for concurrent programming. In particular, O’Hearn and Pym’s logic of bunched implications (BI) [OP99] is another substructural logic with fine-grained resource control. Instead of a focus on *number-of-uses* as in linearity, BI focuses on *ownership* and the *provenance* (i.e., origin) of resources. Nonetheless, the inference systems of BI and linear logic are rather similar. Hence, this leads me to the next research question:

Research Question I-3. *Can BI serve as an alternative logical foundation for session types, and if so, what correctness guarantees does this bring?*

Chapter 5 gives an answer to this question by presenting πBI , a variant of the π -calculus with a Curry-Howard interpretation of BI as session type system. To give an overview of the design of πBI , let me give some more context about the logic BI.

Linear logic has one connective for each way of building propositions: one conjunction, one implication, and so forth. In contrast, BI has two connectives for each way of building

propositions, that can be freely combined: additive and multiplicative. For example, BI has two forms of conjunction: ‘ \wedge ’ (additive) and ‘ $*$ ’ (multiplicative).

Linear logic propositions all follow the same structural principles: linearity dictates that resources may not be contracted (duplicated) or weakened (discarded). The case for BI is more complicated: additive and multiplicative connectives follow different structural principles, i.e., additively combined resources may be contracted and weakened, but multiplicatively combined resources may not. This leads to the fine-grained control of ownership and provenance of resources, though at this point it will probably not be clear how this translates to session types and message-passing.

The connectives (additive and multiplicative) of BI are very similar to those of linear logic, and so are their associated inference rules. It is thus unsurprising that the interpretation of BI’s inference rules for connectives as session typing rules is very similar to the interpretation of linear logic’s inference rules. The true challenge in designing π BI was how to interpret the structural rules for the contraction and weakening of additively combined resources.

The result is a new construct called “spawn”. Spawn is related to programming principles for resource aliasing and pointers. It allows processes to safely duplicate and discard sessions.

As an example of session duplication, consider the following process that receives on two endpoints: $y_1(v); y_2(w); \mathbf{0}$. Now suppose we only have a process available that sends on a single endpoint: $\bar{x}[z]; \mathbf{0}$. We can use the spawn construct to connect both endpoints of the former process to the single endpoint of the latter by contracting the two endpoints into one:

$$\rho[y \mapsto y_1, y_2]; y_1(v); y_2(w); \mathbf{0}.$$

This process is prefixed with the spawn construct ‘ $\rho[\dots]$ ’, which in this case says that y will be used twice, as y_1 and as y_2 . Now we can connect the single endpoint y to x ; the result is that the spawn construct requests two copies of the send on x :

$$\begin{aligned} & (\mathbf{v}xy)(\bar{x}[z]; \mathbf{0} \mid \rho[y \mapsto y_1, y_2]; y_1(v); y_2(w); \mathbf{0}) \\ \rightarrow & (\mathbf{v}x_1y_1)(\bar{x}_1[z_1]; \mathbf{0} \mid (\mathbf{v}x_2y_2)(\bar{x}_2[z_2]; \mathbf{0} \mid y_1(v); y_2(w); \mathbf{0})) \end{aligned}$$

Thus, the send on x is copied twice, renamed and connected appropriately.

To illustrate the discarding of sessions, let us recall process P_5 (1.6):

$$P_5 = (\mathbf{v}xy)(x(v); \mathbf{0} \mid w \triangleright \{\text{send} : \bar{y}[u]; \mathbf{0}, \text{quit} : \mathbf{0}\})$$

This process is considered unsafe, because the send on y , expected by the receive on x , may not be available. The quit-branch in the right subprocess of P_5 can be seen as the discarding of the session on x and y . Hence, we can use the spawn construct to make a safe version of P_5 , this time pointing y to nothing to weaken it, denoted $\rho[y \mapsto \emptyset]; \mathbf{0}$. As a result, if the quit-branch is taken, the receive on x is discarded:

$$\begin{aligned} & (\mathbf{v}zw)(\bar{z} \triangleleft \text{quit}; \mathbf{0} \mid (\mathbf{v}xy)(x(v); \mathbf{0} \mid w \triangleright \{\text{send}; \bar{y}[u]; \mathbf{0}, \text{quit} : \rho[y \mapsto \emptyset]; \mathbf{0}\})) \\ \rightarrow & (\mathbf{v}xy)(x(v); \mathbf{0} \mid \rho[y \mapsto \emptyset]; \mathbf{0}) \\ \rightarrow & \mathbf{0} \end{aligned}$$

Thus, adding the spawn construct to P_5 makes the process safe.

Duplicating and discarding processes requires care: if we duplicate/discard a session provided by a process that relies on further sessions, those sessions become unsafe. Consider the following example, where the right subprocess requests two copies of the left subprocess, which relies on further sessions:

$$\begin{aligned} & (\mathbf{v}xy)(\bar{u} \triangleleft \ell; \bar{x}[z]; \mathbf{0} \mid \rho[y \mapsto y_1, y_2]; y_1(v); y_2(w); \mathbf{0}) \\ \rightarrow & (\mathbf{v}x_1y_1)(\bar{u} \triangleleft \ell; \bar{x}_1[z_1]; \mathbf{0} \mid (\mathbf{v}x_2y_2)(\bar{u} \triangleleft \ell; \bar{x}_1[z_2]; \mathbf{0} \mid y_1(v); y_2(w); \mathbf{0})) \end{aligned}$$

Where initially there was one selection on u , there are now two. The initial process would need to connect u to an endpoint doing a single branch, so after the duplication this session becomes unsafe. The solution is so-called *spawn propagation*: we create a new spawn construct that further duplicates/discards sessions on which the duplicated/discarded process relies. This way, we make the example above safe by propagating the spawn:

$$\begin{aligned} & (\mathbf{v}xy)(\bar{u} \triangleleft \ell; \bar{x}[z]; \mathbf{0} \mid \rho[y \mapsto y_1, y_2]; y_1(v); y_2(w); \mathbf{0}) \\ \rightarrow & \rho[u \mapsto u_1, u_2]; (\mathbf{v}x_1y_1)(\bar{u}_1 \triangleleft \ell; \bar{x}_1[z_1]; \mathbf{0} \mid (\mathbf{v}x_2y_2)(\bar{u}_2 \triangleleft \ell; \bar{x}_1[z_2]; \mathbf{0} \mid y_1(v); y_2(w); \mathbf{0})) \end{aligned}$$

Hence, if we initially connect u to an endpoint doing a single branch, the propagated spawn will duplicate the connected process, making the session safe.

The calculus πBI enjoys the correctness properties we desire: session fidelity, communication safety, and deadlock-freedom. In the case of πBI , deadlock-freedom is guaranteed because it uses the BI Rule [CUT] (cf. the discussion of the linear logic Rule [CUT] in the introduction of Section 1.2.1). Additionally, πBI is weakly normalizing, meaning that any well-typed process with all endpoints connected can always complete all its communications until it is done.

1.2.2. BINARY SESSION TYPES AND FUNCTIONAL PROGRAMMING (PART II)

The abstraction of message-passing programs introduced in Section 1.2.1 might feel somewhat foreign for those used to real-world programming languages. In this section I introduce Part II, which discusses message-passing aspects of “functional” or “sequential” programming. In particular, I will discuss variants of the well-known λ -calculus.

The λ -calculus is a simple calculus of *functions*. For example, the term $(\lambda x.x) y$ denotes a function that takes a parameter x , (denoted $\lambda x\dots$) and returns it, and applies it to the variable y . As a result, we substitute the functions’ parameter x for y and return the function’s body:

$$(\lambda x.x) y \rightarrow y.$$

As is the case for the π -calculus, the λ -calculus can be extended with constructs to model all sorts of programming features. Traditionally, extensions of the λ -calculus have been used as prototype programming languages to illustrate the features of newly introduced programming formalisms. A (faithful) translation from the extended λ -calculus into the new formalism then shows that its features are suitable for integration in real programming.

The idea of a λ -calculus as a prototype programming language has always been a tradition in the line of work based on the π -calculus, already starting at the conception of the π -calculus

by Milner *et al.* [MPW92]. This way, a (faithful) translation from a λ -calculus to a π -calculus serves as the ultimate *litmus test* of the capabilities of the π -calculus.

1.2.2.1. ASYNCHRONOUS MESSAGE-PASSING AND CYCLICALLY CONNECTED THREADS

The λ -calculus does not have to be limited to sequential computation. In particular, there are many works that incorporate (session-typed) message-passing in functional programming formalisms, a line of work starting with [GVR03; VRG04; NT04; VGR06; GV07]. The first account is by Gay and Vasconcelos [GV10]. They introduced a λ -calculus, referred to in this thesis as LAST, with threads that are executed concurrently and communicate through message-passing over channels.

Message-passing in LAST is asynchronous: sends and selects place messages in buffers without blocking their continuations, and receives and branches read these messages from the buffers. Moreover, message-passing in LAST is typed with linear session types. As a result, well-typed LAST terms enjoy session fidelity and communication safety, but not deadlock-freedom as threads may be connected cyclically and there is no mechanism to detect and reject circular dependencies (cf. Section 1.2.1).

In his account of classical linear logic as a Curry-Howard foundation for the session-typed π -calculus CP, Wadler introduced a variant of LAST called GV (for Good Variation) [Wad12; Wad14]. GV features synchronous communication, and, based on linear logic's Rule [CUT], does not permit cyclically connected threads. This way, GV served as a litmus test for Wadler's CP through a typed translation from the former to the latter.

Many works followed suit, accompanying new session-typed variants of the π -calculus with variants of LAST and providing a translation. In particular, Kokke and Dardha designed PGV (Priority GV) [KD21a], based on Dardha and Gay's PCP [DG18] (discussed in Section 1.2.1.1). PGV extends Wadler's GV with cyclically connected threads, and adds priority annotations and conditions to its session type system. This way, well-typed PGV terms are free from circular dependencies and thus deadlock-free.

Given the step from PCP to APCP (from synchronous to asynchronous message-passing) described in Section 1.2.1.1, it is only natural to wonder whether something similar can be done from PGV. This leads me to my next research question:

Research Question II-1. *Can we exploit APCP's asynchronous message-passing and cyclic connections in sequential programming, while retaining correctness properties?*

The answer to this question is detailed in Chapter 6. However, the answer does not entirely follow the step from PCP to APCP as you might expect, i.e., a calculus APGV (Asynchronous PGV). Instead, the result is the calculus LASTⁿ (call-by-name LAST).

Besides not having priority annotations in its session type system (something I will come back to soon), LASTⁿ adopts a different semantics than PGV and its predecessors. To make this more precise, let me digress into the usual strategies for function application in the λ -calculus: call-by-value and call-by-name. Under call-by-value semantics (\rightarrow_v), functions may only be applied once its parameters are fully evaluated; for example:

$$(\lambda x.x) ((\lambda y.y) z) \rightarrow_v (\lambda x.x) z \rightarrow_v z$$

That is, the right function application needs to be evaluated before applying the left function. In contrast, under call-by-name semantics (\rightarrow_N), a function's parameters may not be evaluated until they have been substituted into the function's body; for example:

$$(\lambda x.x) ((\lambda y.y) z) \rightarrow_N (\lambda y.y) z \rightarrow_N z$$

That is, the left function needs to be applied before evaluating the right function application.

Where PGV and its predecessors adopt call-by-value semantics, LAST^n adopts call-by-name semantics; this explains the name “ LAST^n ”: it is a call-by-name variant of LAST. The reason for this important design decision is rooted in a desire for a strong connection with APCP as stated in Research Question II-1; I will get back to this after discussing message-passing in LAST^n .

Inspired by LAST, LAST^n features threads that communicate on channel endpoints connected by message buffers. In the following, two threads exchange a term on a channel:

$$(\mathbf{v}x[\epsilon]y)(\text{send}(M, x) \parallel \text{recv } y) \rightarrow (\mathbf{v}x[M]y)(x \parallel \text{recv } y) \rightarrow (\mathbf{v}x[\epsilon]y)(x \parallel (M, y))$$

Here are two parallel threads (separated by ‘ \parallel ’). The endpoints x and y are connected by a buffer (denoted $(\mathbf{v}x[\dots]y)$) that is empty (denoted ϵ). The left thread sends on x some term M , which ends up in the buffer. In a following step, the right thread receives M on y .

As I mentioned before, the session type system of LAST^n does not include priorities (as in PGV). Hence, LAST^n ensures session fidelity and communication safety by typing, but permits circular dependencies and so does not guarantee deadlock-freedom. This was a conscious design decision: a faithful translation from LAST^n to APCP allows us to leverage APCP's priorities to recover deadlock-freedom for LAST^n indirectly, while keeping LAST^n and its type system relatively uncomplicated.

The design of LAST^n and its call-by-name semantics are directly inspired by a translation from LAST^n to APCP. The translation is faithful in that it *preserves typing* and is *operationally correct*. The former means that the types of a source term are themselves translated to APCP types, albeit without priority annotations. The latter is an important property of translations coined by Gorla [Gor10] that signifies that the behavior of translated processes concurs precisely with the behavior of their source terms.

Thus, the translation from LAST^n to APCP preserves typing modulo priority annotations. Yet, it is possible to annotate the types of translated APCP processes with priorities. If the associated conditions on priorities are satisfiable, then the translated APCP processes are deadlock-free. The operational correctness of the translation then allows us to infer that the source LAST^n terms of these processes are also deadlock-free. Hence, deadlock-freedom does hold for the subset of LAST^n terms that translate to APCP processes with satisfiable priority annotations. There is strong evidence that such an approach to deadlock-freedom would not be possible if LAST^n had call-by-value semantics; hence, the call-by-name semantics.

1.2.2.2. BUNCHED FUNCTIONS: A LITMUS TEST FOR πBI

The message-passing calculus πBI (described in Section 1.2.1.3) is not the first Curry-Howard interpretation of BI. Hinted at in O’Hearn and Pym’s first introduction of BI [OP99], O’Hearn introduces the $\alpha\lambda$ -calculus [OHe03]. The $\alpha\lambda$ -calculus is a variant of the λ -calculus derived

from BI's natural deduction system, where propositions are functional types, proofs are terms, and proof normalization is β -reduction (i.e., function application and variable substitution).

The $\alpha\lambda$ -calculus is a simple calculus with only function abstraction and application. However, what sets the $\alpha\lambda$ -calculus apart is that it has two kinds of functions. Consider:

$$\lambda x. \alpha f. (f @ x) @ x \quad (1.14)$$

Here, $\lambda x \dots$ denotes a “linear” function and $\alpha f \dots$ an “unrestricted” one; the @-symbol denotes application of an unrestricted function. O’Hearn [OHe03] calls this example “unusual”. Indeed, especially to those familiar with variants of the λ -calculus with linearity, it is: the argument of a linear function ‘ x ’ is used twice.

However, the example above only seems unusual under the interpretation of linearity that says that resources must be used exactly once. Hence, the quotation marks around “linear” above: in the $\alpha\lambda$ -calculus, the restriction of linear functions is not on how many times their arguments may be used, but on that they may not be applied to duplicated arguments. To contrast, consider the following example:

$$\alpha f. \lambda x. (x f) f$$

Here, the “linear” and the “unrestricted” functions have swapped places compared to the example above (1.14). Under the usual interpretation of linearity, this example is fine: the argument ‘ x ’ of the linear function is used exactly once. However, it cannot be typed in the $\alpha\lambda$ -calculus, because the linear function is applied to a duplicated resource ‘ f ’.

These examples show that the $\alpha\lambda$ -calculus is a useful prototyping language for illustrating BI’s approach to fine-grained resource management. Hence, the $\alpha\lambda$ -calculus would be an excellent candidate for a translation to π BI. As discussed in the introduction to Section 1.2.2, such a translation would serve as a litmus test for the design and capabilities of π BI, especially because the $\alpha\lambda$ -calculus has not been designed with translations to π BI in mind. This leads me to the next research question:

Research Question II-2. *Can π BI faithfully represent the $\alpha\lambda$ -calculus on a low level of abstraction, and can we exploit π BI’s correctness properties in the $\alpha\lambda$ -calculus?*

Chapter 7 answers this question positively, by means of a typed translation from the $\alpha\lambda$ -calculus to π BI. The translation is rather straightforward: it follows canonical translations of proofs in natural deduction into sequent calculi (cf., e.g., [Pym13, Section 6.3]), very similar to the well-known translations from variants of the λ -calculus to variants of the π -calculus by Milner [Mil92], Sangiorgi and Walker [SW03], and Wadler [Wad14].

The challenging part of the translation is handling the contraction (duplication) and weakening (discarding) of variables. Without it, the translation would not really be a litmus test for π BI. Indeed, in π BI, contraction and weakening are interpreted with the spawn-construct. So, the real litmus test here is whether contraction and weakening in the $\alpha\lambda$ -calculus translates faithfully to applications of spawn in π BI. Fortunately, the result is uncomplicatedly positive.

The translation presented in Chapter 7 is faithful. This means that it satisfies two important properties. Firstly, the translation preserves typing: translated π BI processes are

typed identically to their respective source $\alpha\lambda$ -calculus terms (compare this to the translation introduced in Section 1.2.2.1, where LAST^n types are translated to suitable ACP types). Secondly, the translation is operationally correct, i.e., the behavior of translated processes concurs precisely with that of their respective source terms.

1.2.3. MULTIPARTY SESSION TYPES (PART III)

Thus far, I have talked about *binary* session types, that describe communication protocols between pairs of participants. In practice, distributed systems often comprise multiple components, whose interactions are more intertwined than faithfully representable by binary protocols. Hence, Part III of my dissertation concerns *multiparty session types* (MPSTs).

Introduced by Honda *et al.* [HYC08; HYC16], MPST is a theory for communication protocols with two *or more* participants. Such protocols are usually expressed as *global types*, describing the interactions between participants *from a vantage point*.

Let us consider a variant of the well-known example called “The Two-buyer Protocol”; it describes how Alice (a) and Bob (b) together buy a book from Seller (s). First, a sends to s the book’s title. Then, s sends to a and b the book’s price. Finally, b sends to s a choice between buying the book or quitting, after which the protocol ends. We can formalize this protocol as the following global type:

$$G_{2b} \triangleq a!s(\text{title}(\text{str})).s!a(\text{price}(\text{int})).s!b(\text{price}(\text{int})).b!s\{\text{buy.end}, \text{quit.end}\} \quad (1.15)$$

Here, $a!s(\dots)$ denotes that a sends to s a messages. Messages are of the form $\text{label}(\text{type})$: they carry a label and a value of the given type. Another form of message is choice, denoted $b!s\{\dots\}$, where b sends to s either of the given labels, and the protocol proceeds accordingly. The type end denotes the end of the protocol.

As originally intended by Honda *et al.*, MPSTs are designed to verify protocol conformance in practical settings, where the roles of protocol participants are implemented *distributedly* across networks of components that communicate *asynchronously*. Here, distributed means that the theory makes no assumptions about how exactly components are connected: whether they communicate directly in pairs or through a centralized unit of control does not matter. Moreover, asynchrony means that it should be possible to establish protocol conformance without requiring components to wait for their messages to be received.

1.2.3.1. A RELATIVE PERSPECTIVE OF MULTIPARTY SESSION TYPES

A significant benefit of the distributed and asynchronous nature of MPSTs is that correctness verification is *compositional*: the correctness of the whole network of components can be guaranteed by verifying the correctness of each component separately. Let me refer to a component implementing/modeling the role of a specific protocol participant’s role as simply a “participant”.

To verify the behavior of a participant we need to focus on their precise contributions in the overall protocol. Using global types directly make this an overly complicated task, as they contain “noise” from other participants. It therefore makes sense to instead work with a protocol that provides a perspective of the overall protocol that is *local* to the participant.

Honda *et al.* [HYC08; HYC16] obtain such a local perspective by a *local projection* of a global type onto a participant, resulting in a *local type*. For example, the projection of G_{2b} (1.15) onto participant a is as follows:

$$a!s(\text{title}(\text{str})).a?s(\text{price}(\text{int})).\text{end}$$

Here, ‘?’ denotes receiving. The role of a in G_{2b} is thus to send to s a book’s title, then to receive from s the book’s price, and then their role in the protocol ends.

Local projection gets more complicated as protocols get more interesting. Consider the following adaptation of G_{2b} (1.15), where b informs a of their choice after informing s :

$$G'_{2b} \triangleq a!s(\text{title}(\text{str})).s!a(\text{price}(\text{int})).s!b(\text{price}(\text{int})).b!s \left\{ \begin{array}{l} \text{buy.}b!a(\text{buy}).\text{end}, \\ \text{quit.}b!a(\text{quit}).\text{end} \end{array} \right\} \quad (1.16)$$

The local projection of G'_{2b} onto a requires care, because the label they are supposed to receive from b at the end of the protocol depends on the message sent by b to s before. That is, a ’s protocol depends on a choice outside of their protocol, referred to as a *non-local* choice.

Honda *et al.*’s local projection cannot deal with global types such as G'_{2b} , because it requires the projections of the branches of non-local choices to be indistinguishable; this de facto rules out any non-local choices. To support more interesting protocols, Yoshida *et al.* [Yos+10] introduced a variant of local projection with an operator that *merges* the branches of non-local choices as long as they all are receives from the same participants. Using merge, the local projection of G'_{2b} onto a is as follows:

$$a!s(\text{title}(\text{str})).a?s(\text{price}(\text{int})).a?b\{\text{buy.}\text{end}, \text{quit.}\text{end}\}$$

This local type is quite sensible: a can be ready to receive buy or quit, independent of which label b sent to s before.

Let us now consider a perhaps even more interesting adaptation of G_{2b} (1.15), where a sends their address to s when b chooses to buy:

$$G''_{2b} \triangleq a!s(\text{title}(\text{str})).s!a(\text{price}(\text{int})).s!b(\text{price}(\text{int})).b!s \left\{ \begin{array}{l} \text{buy.}a!s(\text{addr}(\text{str})).\text{end}, \\ \text{quit.}\text{end} \end{array} \right\} \quad (1.17)$$

This time, merge cannot resolve b ’s non-local choice in a ’s protocol, since it cannot reconcile a send and the end of the protocol. This is unfortunate, because G''_{2b} represents a protocol that is very useful in practice.

It is apparent that global types can express protocols that cannot be handled by MPST theories based on local projection (with or without merge). Hence, such theories rely on *well-formed* global types, defined by local projectability onto all participants. A large portion of the literature on MPSTs accepts the class of well-formed global types induced by local projection with merge as the standard, even though this class does not include practical protocol such as G''_{2b} (1.17).

Scalas and Yoshida argue to reprimand this lack of expressivity by getting rid of global types and only working with local types (and their compatibility) directly [SY19]. Their solution allows for the verification of a much wider range of multiparty interactions, but their severance with global types may not be of interest for distributed implementations of multiparty protocols in practice. This leads me to my next research question:

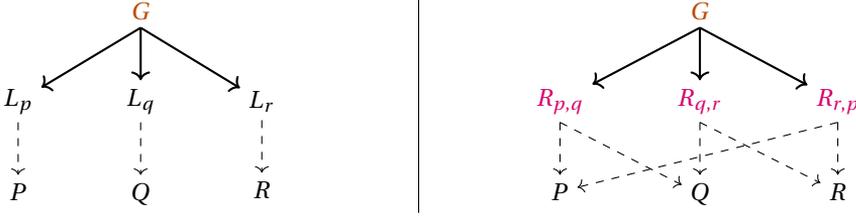


Figure 1.2 | Local projection (left) and relative projection (right) of global type G onto its participants p, q, r , implemented by processes P, Q, R , respectively.

Research Question III-1. *Can we define a method for obtaining local perspectives from global types that induces a class of well-formed global types featuring communication patterns not supported before?*

Chapter 8 answers this question by introducing a new local perspective of global types: instead of individual participants' protocols, it considers protocols between *pairs* of participants. Such protocols are represented by so-called *relative types*, which are obtained from global types through *relative projection*. Figure 1.2 compares how local and relative projection decompose a global type with three participants, and how the resulting types are used to verify the behavior of three processes implementing the roles of the global type's participants.

A major advantage of relative types is their direct compatibility with binary session types, in contrast to local types which need another level of projection to be compatible. However, the distinctive feature of relative types is their explicit treatment of non-local choices as *dependencies*. That is, if a global type contains a non-local choice, relative projection will encode the non-local choice as a dependency message in the relative type.

To illustrate relative types and their explicit dependency messages, let us consider the relative projection of G''_{2b} (1.17) onto a and s (i.e., the protocol representing the interactions in G''_{2b} between participants a and s):

$$a!s(\text{title}(\text{str})).s!a(\text{title}(\text{str})).(s?b)!a \left\{ \begin{array}{l} \text{buy}.a!s(\text{addr}(\text{str})).\text{end}, \\ \text{quit}.\text{end} \end{array} \right\}$$

Here, ' $(s?b)!a$ ' denotes that s receives from b a choice between labels *buy* and *quit*, and that s needs to forward the received choice to a . This way, a becomes aware of the branch of the non-local choice by b in which they are, allowing them to proceed correctly according to the global protocol.

Chapter 8 then defines a new class of well-formed global types based on relative projection. This class includes G_{2b} (1.15), G'_{2b} (1.16), and G''_{2b} (1.17). However, there are global types that are well-formed under local projection that are not well-formed under relative projection, though Chapter 8 discusses how such protocols can be fixed for relative projection to support them. The final two contributions of my dissertation, introduced next, rely heavily on the theory of relative projection defined in Chapter 8.

1.2.3.2. ANALYZING DISTRIBUTED IMPLEMENTATIONS OF MULTIPARTY SESSION TYPES

Studying how MPSTs can be used in the verification of model implementations of protocols is important for bringing MPSTs closer to practical application. The literature on this subject is vast, with approaches from many angles. The most salient approach is based on variants of the π -calculus with type systems that use global and local types directly, such as in Honda *et al.*'s initial development of MPSTs [HYC08; HYC16].

Type systems tailored for MPSTs usually guarantee deadlock-freedom by typing, as global types do not induce communication patterns that can deadlock. This is a major advantage of this approach, but there are downsides. First and foremost, proving correctness guarantees for such systems is a complex task, as it requires reasoning on global and local levels at the same time. As a result, extending existing systems with practical features such as error handling is quite an endeavor. Second, MPSTs are intended for distributed systems, but such type systems often abstract away from network configuration. This makes it unclear how lower level aspects of network configuration may affect correctness guarantees.

Another approach is to connect MPSTs with binary session types. If done correctly, this enables the use of a vast range of binary session type systems with a multitude of features and correctness guarantees for the analysis of model implementations of multiparty protocols. The idea, coined by Caires and Pérez [CP16] and by Carbone *et al.* [Car+15; Car+16; Car+17], is to translate local types to binary session types. This makes it possible to use binary session type systems to guarantee correctness properties of models of protocol participants. Moreover, meta-theoretical results guarantee that the entire system conforms to the global protocol.

The approaches by Caires and Pérez [CP16] and Carbone *et al.* [Car+15; Car+16; Car+17] have a caveat that is pivotal to their practical applicability. Both works rely on binary session type systems derived from linear logic, which do not allow processes to be cyclically connected (which indirectly guarantees deadlock-freedom, cf. Section 1.2.1.1). Then, the only way to compose processes modeling protocol participants is to connect them all to an additional process that forwards messages between the participants. Such an additional process (called *medium* in [CP16] and *arbiter* in [Car+15; Car+16; Car+17]) can be generated from a global type, ensuring that it distributes messages correctly.

Requiring an additional process to connect the participants and “orchestrate” their interaction defines the distributedness of multiparty systems, while it is essential for implementations of MPSTs and real-world multiparty systems to be distributed systems. Hence, it is important to come up with solutions that leverage binary session types while preserving distributedness. Moreover, important correctness features such as deadlock-freedom and protocol conformance should be supported. This leads me to the next research question:

Research Question III-2. *Can we leverage on binary session types to guarantee protocol conformance and deadlock-freedom for distributed (model) implementations of MPSTs?*

Chapter 9 argues that APCP (introduced in Section 1.2.1.1) is up to the task: it guarantees deadlock-freedom for cyclically connected, thus enabling the analysis of distributed model implementations of MPSTs. Using APCP overcomes another shortcoming of [CP16; Car+15; Car+16; Car+17]: their systems rely on synchronous communication, whereas APCP's asynchronous communication preserves the asynchrony inherent in MPSTs and real-world

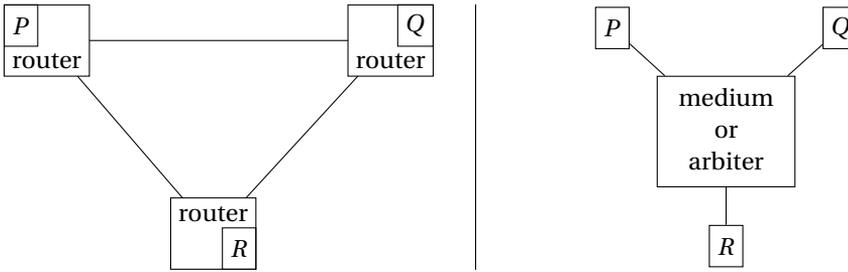


Figure 1.3 | Given processes P , Q , and R implementing the roles of c , s , and a , respectively, of some protocol G_{auth} , the protocol can be realized as a choreography of routed implementations (our approach, left) and as an orchestration of implementations, with a medium or arbiter process (previous works, right).

distributed systems. In fact, solving the shortcomings of these prior works was a major motivation for the development of APCP.

The move to APCP as modeling system introduces an important challenge. Connecting processes that model protocol participants in a distributed fashion means connecting each pair of processes directly. Hence, the local types of MPSTs, that describe one participant's message exchanges as one protocol, are insufficient as binary session types: we need protocols that describe message exchanges between pairs of participants.

Scalas *et al.* [Sca+17] introduce another layer of projection, called *partial projection* that projects local types onto binary session types that represent such protocols between pairs of participants. However, partial projection relies on complex operations (another form of the merge operator discussed in Section 1.2.3.1) to support interesting global protocols. As it turns out, these multiple layers of projection and merge are incompatible with the approach based on APCP, so another form of projection is needed.

This is where relative types and relative projection, introduced in Section 1.2.3.1, come in. By encoding non-local choices in global protocols as dependency messages, relative projection evades a need for operators such as merge while still supporting interesting global types. The design of relative projection was highly motivated by the analysis in Chapter 9.

Chapter 9 then sets up a framework for the analysis of distributed models of MPSTs in APCP, relying on relative projection for processes typing. Were we to use no dependency messages in relative types, this is enough: deadlock-freedom and protocol conformance hold when process models of participants are connected directly to each other. However, we need to include dependency messages to support interesting protocols, and this requires care. Dependencies require participants to forward choices received/sent on one channel on other channels, but using only types does not guarantee that the forwarded choices are correct.

The framework's solution is a form of distributed orchestration: it includes orchestrators as in [CP16; Car+15; Car+16; Car+17], though not centralized in one process, but distributed among local orchestrators called *routers* at each process. Routers are processes that are synthesized from global types, using relative projection to detect dependencies. They forward messages between a participant's process and the rest of the network, forwarding choices as dependency messages when necessary. Figure 1.3 illustrates how our approach with distributed routers compares to approaches that use centralized orchestrators.

Through meta-theoretical results, the framework guarantees important correctness properties for model implementations of MPSTs in APCP. First, because routers are well-typed, if participant processes are well-typed as well, then their composition as a distributed system is well-typed as a whole and thus deadlock-free. Second, such distributed systems conform to the protocol specified by the governing global type. Third, the framework generalizes the existing centralized solutions [CP16; Car+15; Car+16; Car+17], as witnessed by a behavioral equivalence of systems with a centralized orchestrator and with distributed routers. Finally, Chapter 9 includes a series of examples that illustrate the compatibility of the analysis framework with features of APCP such as interleaving and delegation, under which processes can exchange roles within multiparty protocols.

1.2.3.3. RUNTIME VERIFICATION OF BLACKBOX IMPLEMENTATIONS OF MULTIPARTY SESSION TYPES

Most of the chapters introduced so far are about *static verification*. That is, these chapters introduce models of systems that can be verified by inspecting their specification: they predict a program's behavior by looking at the actions they specify along with their types.

In practice, having access to the specifications and types of all the components of a system is a rather strong assumption. Often, systems appeal to third-party components, whose specifications are not publically available, or whose publically available specifications are incomplete or outdated. Alternatively, components may be specified in a plethora of languages—some typed, some untyped. This way, developing a unified approach to verification—necessary for the verification of the system as a whole—is a complex task and often very specific to the system under scrutiny.

It is thus essential to develop and research techniques for *dynamic verification* [CR03]. In dynamic verification, the behavior of programs is inspected *as it is executed*; in other words, the execution of the program is *observed*. Generally, dynamic verification does not provide as strong guarantees as static verification does, because behavior observed in the past does not give any guarantees about behavior in the future. Hence, dynamic verification can be seen as a more *passive* form of verification, where the observed behavior is compared against what is expected of a system, and unexpected behavior is reported. Once unexpected behavior has been observed, one can repair or roll back the behavior on the fly, or it might warrant a (more costly) static inspection of the program to find the source of the flaw.

The dynamic verification of distributed systems is an active field of research (for a survey, see [FPS18]). In context of my dissertation, it is natural to try to bring MPSTs into the mix, and this has been done before. To motivate my contributions, let me briefly discuss the state of the art, in particular the work by Bocchi *et al.* [Che+12; Boc+13; Boc+17].

Bocchi *et al.*'s framework considers the dynamic verification of systems consisting of components that implement the roles of participants of global types. Their global types are more than representations of multiparty protocols, as they include *assertions* about the values that are exchanged. Dynamic verification is implemented by equipping each component with a *monitor*: a finite state machine (FSM) that accepts sequences of incoming and outgoing messages; when an unexpected message is observed, the monitor simply drops it. In their work, Bocchi *et al.* use local types, projected from the global type, as monitors;

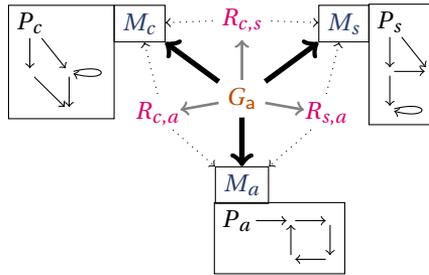


Figure 1.4 | Monitoring setup based on the global type (multiparty protocol) G_a . Each protocol participant has a blackbox (an LTS), attached to a monitor (e.g. P_c and M_c). The monitors are synthesized from G_a (thick arrows). Relative types (e.g. $R_{c,s}$) obtained by projection from G_a (thin gray arrows) are used in this synthesis (dotted arrows).

hence, they monitor protocol conformance. Their system then guarantees *safety*—monitored components never behave unexpectedly (as monitors drop unexpected messages)—and *transparency*—monitors do not interfere with (expected) messages.

Bocchi *et al.* are able to give such strong guarantees because the components they dynamically verify are typed π -calculus processes (similar to those in [HYC08; HYC16]); that is, they mix dynamic and static verification. The question is then to what extent their approach is applicable to *blackbox components* (or simply *blackboxes*). A blackbox is a program whose specification is unknown but whose behavior is observable, e.g., a third-party, closed-source program. This leads me to my final research question:

Research Question III-3. *Can we dynamically verify distributed blackbox implementations of MPSTs, and what correctness properties can we guarantee therein?*

My answer to this question is presented in Chapter 10. This chapter presents a framework for the dynamic verification of *networks of monitored blackboxes*. Blackboxes are processes with unknown specification but observable behavior in the form of a labeled transition system (LTS), with minimal assumptions. Each blackbox is equipped with a monitor (i.e., a FSM), forming a monitored blackboxes. The monitored blackboxes then form a network, in which they communicate asynchronously through buffers.

This framework is in many ways a dynamic adaption of the static verification in Chapter 9 (introduced in Section 1.2.3.2). Blackboxes implement the roles of the participants of global types, and their monitors are synthesized from global types using relative projection, using an algorithm that is very similar to the synthesis of routers discussed in Chapter 9. Hence, similar to the monitors of Bocchi *et al.* [Che+12; Boc+13; Boc+17], these monitors verify the protocol conformance of blackboxes. Figure 1.4 illustrates our approach.

Besides components being blackboxes, the framework in Chapter 10 has another major difference with Bocchi *et al.*'s: instead of ignoring unexpected messages, monitors signal errors when they encounter unexpected messages. These error signal propagate through the entire network, thus stopping execution upon protocol violations. A correctness guarantee such as Bocchi *et al.*'s safety (absence of protocol violations) is thus out of the question.

To confirm that a monitored blackbox conforms to its part in the global protocol (i.e., to relative projections from a global type), Chapter 10 defines *satisfaction*. Satisfaction is a fine-grained, dynamic correctness property, that thoroughly inspects the behavior of a monitored blackbox and compares it to its protocol specification divided among relative types. Then, when a monitored blackbox satisfies the protocol, we are sure that its monitor will never signal an error (i.e., a protocol violation).

When all monitored blackboxes in a network satisfy their part of the global protocol, the network as a whole conforms to the protocol. More precisely, any interactions that occur in the network follow the interactions prescribed by the governing global type. This important correctness guarantee is called *soundness*.

Soundness shows that satisfaction defines a *compositional* method of verifying the protocol conformance of networks of monitored blackboxes. That is, overall conformance follows from the conformance of individual components, which can be checked in isolation, i.e., without needing to run any other components. This is especially useful when different parties develop their components separately (and they might not want to share their specifications).

The other property proved in Chapter 10 is transparency, similar to Bocchi *et al.*'s. Transparency means that monitors interfere minimally with the blackboxes they observe. Like soundness, transparency leans on satisfaction: clearly, a protocol violation leading to an error signal alters the blackboxes behavior.

As mentioned before, the framework presented in Chapter 10 leverages the relative types and projections introduced in Section 1.2.3.1. Though dealing with the involved dependency messages complicates satisfaction, soundness and transparency, this approach enables the framework to support a wide range of practical multiparty protocols (different from those supported by Bocchi *et al.* [Che+12; Boc+13; Boc+17]).

1.3. THESIS OUTLINE AND DERIVED PUBLICATIONS

Starting at Page 43, the contributions in this thesis are organized as follows:

Part I “Thesis Outline and Derived Publications” (Section 1.2.1).

Chapter 3 “Cyclic Networks and Asynchronous Communication”.

Chapter 4 “Non-determinism”.

Chapter 5 “A Bunch of Sessions”.

Part II “Concluding Remarks and Future Perspectives” (Section 1.2.2).

Chapter 6 “Cyclic Thread Configurations and Asynchronous Communication”.

Chapter 7 “Bunched Functions as Processes”.

Part III “Conclusions” (Section 1.2.3).

Chapter 8 “The Global and Local Perspective: Relative Types”.

Chapter 9 “Binary Session Types for Distributed Multiparty Session”.

1 Chapter 10 “Monitors for Blackbox Implementations of Multiparty Session Types”.

References from all chapters are collected on Page 265. Chapter 2 serves as a gentle introduction to the session-typed π -calculus, that can be safely skipped by those familiar; each chapter is self-contained. Starting at Page 289, for a complete and self-contained dissertation, appendices include detailed definitions and proofs.

The chapters in this dissertation are derived from publications, as follows; note that some chapters are derived from multiple publications:

- Chapters 3 and 8 to 10 are derived from the following journal paper (a further development of [HP21a; HP20]):
Bas van den Heuvel and Jorge A. Pérez. “A Decentralized Analysis of Multiparty Protocols”. In: *Science of Computer Programming* (June 30, 2022), p. 102840. ISSN: 0167-6423. DOI: 10.1016/j.scico.2022.102840. URL: <https://www.sciencedirect.com/science/article/pii/S0167642322000739> (visited on 08/18/2022).
- Chapters 3, 6 and 9 are derived from a journal paper with Jorge A. Pérez under submission (superseding [HP20]); the following is a preprint:
Bas van den Heuvel and Jorge A. Pérez. *Asynchronous Session-Based Concurrency: Deadlock-freedom in Cyclic Process Networks*. Jan. 22, 2024. DOI: 10.48550/arXiv.2111.13091. arXiv: 2111.13091 [cs]. URL: <http://arxiv.org/abs/2111.13091> (visited on 02/12/2024). preprint.
- Chapter 4 is derived from the following conference paper:
Bas van den Heuvel et al. “Typed Non-determinism in Functional and Concurrent Calculi”. In: *Programming Languages and Systems*. Ed. by Chung-Kil Hur. Lecture Notes in Computer Science. Singapore: Springer Nature, 2023, pp. 112–132. ISBN: 978-981-9983-11-7. DOI: 10.1007/978-981-99-8311-7_6.
- Chapters 5 and 7 are derived from the following conference paper:
Dan Frumin et al. “A Bunch of Sessions: A Propositions-as-Sessions Interpretation of Bunched Implications in Channel-Based Concurrency”. In: *Proceedings of the ACM on Programming Languages* 6 (OOPSLA2 Oct. 31, 2022), 155:841–155:869. DOI: 10.1145/3563318. URL: <https://doi.org/10.1145/3563318> (visited on 11/01/2022).
- Chapters 8 and 10 are derived from the following conference paper:
Bas van den Heuvel, Jorge A. Pérez, and Rares A. Dobre. “Monitoring Blackbox Implementations of Multiparty Session Protocols”. In: *Runtime Verification*. Ed. by Panagiotis Katsaros and Laura Nenzi. Lecture Notes in Computer Science. Cham: Springer Nature Switzerland, 2023, pp. 66–85. ISBN: 978-3-031-44267-4. DOI: 10.1007/978-3-031-44267-4_4.

I

BINARY SESSION TYPES FOR MESSAGE-PASSING PROCESSES

2

MESSAGE-PASSING CONCURRENCY: THE π -CALCULUS

The chapters presented in this thesis all concern fundamental properties of message-passing concurrency. To this end, each chapter analyzes mathematical models of message-passing. A salient approach therein is the π -calculus, which (almost) every chapter uses in some form.

The π -calculus is a well-known process calculus that focusses on message-passing, originally introduced by Milner *et al.* [Mil89; MPW92]. In the π -calculus, parallel processes communicate by exchanging messages on channels. A prominent feature is that such messages can be channels themselves, effectively changing the way processes are connected when channels are exchanged.

There are many variants of the π -calculus, each targeting a different specific aspect of message-passing. In this chapter, I present $\text{BASE}\pi$, a base variant of the π -calculus that is common to all variants of the π -calculus in this thesis. Each chapter then details how $\text{BASE}\pi$ is extended to form a variant of the π -calculus that is especially suitable for the topic therein.

An important aspect of $\text{BASE}\pi$ is mode of communication. A synchronous mode of communication means that a process sending a message can only continue after that message has been received. In contrast, under an asynchronous mode of communication sending is non-blocking, in that a sending process can continue even before its message has been received [HT91; HT92; Bou92]. Some chapters in this thesis rely on synchronous communication, while others require asynchronous communication. In principle, $\text{BASE}\pi$ features synchronous communication. However, it has been designed in such a way that asynchronous communication can easily be modelled. This way, $\text{BASE}\pi$ is a good basis for all variants of the π -calculus in this thesis.

In Sections 2.1 and 2.2, I present the syntax and semantics of $\text{BASE}\pi$, respectively: how processes are constructed and how they behave. In Section 2.3, I present a type system for $\text{BASE}\pi$; types are a common approach to correctness guarantees in this thesis. Finally, in Section 2.4, I discuss how $\text{BASE}\pi$ can be restricted to enforce synchronous or asynchronous communication.

2.1. SYNTAX

The main protagonists of $\text{BASE}\pi$ are *names*, denoted a, b, \dots, x, y, \dots . Names represent *end-points* of channels. Processes, denoted P, Q, \dots , are defined as sequences of *communications* on names: sends and receives, selections and branches, and closes and waits. In fact, processes are *parallel compositions* of such sequences. Processes also include *scoped restrictions* (simply, restrictions), which indicate pairs of names that together form a communication channel (i.e., the names are the opposite endpoints of the channel). As we will see, connecting names to form channels is what enables communication.

In $\text{BASE}\pi$, all names are used *linearly*: each name is used for exactly one communication. Linearity is a useful property when using typing to guarantee correctness properties, as we will see in Section 2.3 and the other chapters of this thesis.

Linear names are nonetheless part of *sessions*, ordered sequences of communications. In order to implement sessions using linear, one-shot names, $\text{BASE}\pi$ employs *dyadic* communication. That is, besides a message, outputs carry a *continuation* name; after the message and continuation are received, the session continues on the continuation name.

Definition 2.1.1 (Syntax for $\text{BASE}\pi$).

$P, Q ::= x[a, b]; P$	<i>send</i>	$x(y, x'); P$	<i>receive</i>
$x[b] \triangleleft \ell; P$	<i>select</i>	$x(x') \triangleright \{i.P_i\}_{i \in I}$	<i>branch</i>
$x[]$	<i>close</i>	$x(); P$	<i>wait</i>
$P Q$	<i>parallel</i>	$(\mathbf{v}x.y)P$	<i>restriction</i>
$\mathbf{0}$	<i>inaction</i>	$[x \leftrightarrow y]$	<i>forwarder</i>

Let us discuss each constructor in Definition 2.1.1:

- A send $x[a, b]; P$ sends along name x two names a and b , and continues as P thereafter. A receive $x(y, x'); P$ receives along x and continues as P ; the received names y and x' are placeholder names used in P , and they will be substituted for the actual names received. A receive $x(y, x'); P$ binds y and x' in P .
- A select $x[b] \triangleleft \ell; P$ sends along x some *label* ℓ along with a name b , and continues as P thereafter; the label represents a choice among a set of alternatives. A branch $x(x') \triangleright \{i.P_i\}_{i \in I}$ receives along x a label $i \in I$ along with x' , continuing as P_i ; again, x' is a placeholder that will be substituted for upon reception. A branch $x(x') \triangleright \{i.P_i\}_{i \in I}$ binds x' in P_i for every $i \in I$.
- A close $x[]$ ends the session on name x ; it thus has no continuation. A wait $x(); P$ waits for the session on x to close and continues as P thereafter.
- Parallel composition is denoted $P | Q$. Restriction is denoted $(\mathbf{v}x.y)P$, connecting the names x and y in P . Restriction $(\mathbf{v}x.y)P$ binds x and y in P .
- Inaction $\mathbf{0}$ denotes a process that has nothing to do.
- A forwarder $[x \leftrightarrow y]$ denotes a bidirectional link between names x and y , effectively forwarding all inputs on x to y and vice versa.

In the following, I often write “output” to denote either a send, a select, or a close. I write $\text{fn}(P)$ to denote the free names of P , i.e., the names of P that are not bound. Substitution of names, denoted $P\{y/x\}$, is defined as replacing all free occurrences of x in P with y . I write $P\{y_1/x_1, \dots, y_n/x_n\}$ to denote $P\{y_1/x_1\} \dots \{y_n/x_n\}$.

2.2. SEMANTICS

There are several ways to define semantics for the π -calculus, for example as a Labeled Transition System. Here, I present a *reduction semantics* for $\text{BASE}\pi$. A reduction step represents two parallel processes performing complementary communications (such as a send and a receive) on connected names; such a step is often referred to as a *synchronization*.

Rules for reduction, given in Definition 2.2.2, require specific shapes of processes. However, processes may not always fit such shapes. In such cases, the process can be rearranged to fit the shapes required by reduction rules, without affecting the overall behavior of the process. This rearrangement is called *structural congruence*, meaning that the rules for rearrangement can be applied inside any context induced by the syntax of processes.

Definition 2.2.1 (Structural Congruence (\equiv) for $\text{BASE}\pi$). *Structural congruence for $\text{BASE}\pi$, denoted $P \equiv Q$, is defined by the following rules and closed under all contexts induced by the syntax in Definition 2.1.1:*

$$\begin{array}{c}
 \frac{[\text{CONG-ALPHA}]}{P \equiv_{\alpha} Q} \quad \frac{[\text{CONG-PAR-UNIT}]}{P \mid \mathbf{0} \equiv P} \quad \frac{[\text{CONG-PAR-COMM}]}{P \mid Q \equiv Q \mid P} \quad \frac{[\text{CONG-PAR-ASSOC}]}{P \mid (Q \mid R) \equiv (P \mid Q) \mid R} \\
 \\
 \frac{[\text{CONG-SCOPE}]}{P \mid (\mathbf{v}x)y.Q \equiv (\mathbf{v}x)y.(P \mid Q)} \quad \frac{[\text{CONG-RES-COMM}]}{(\mathbf{v}xy)(\mathbf{v}zw)P \equiv (\mathbf{v}zw)(\mathbf{v}xy)P} \quad \frac{[\text{CONG-RES-SYMM}]}{(\mathbf{v}xy)P \equiv (\mathbf{v}yx)P} \\
 \\
 \frac{[\text{CONG-FWD-SYMM}]}{[x \leftrightarrow y] \equiv [y \leftrightarrow x]} \quad \frac{[\text{CONG-RES-FWD}]}{(\mathbf{v}xy)[x \leftrightarrow y] \equiv \mathbf{0}}
 \end{array}$$

Let us discuss each rule in Definition 2.2.1:

- Rule [CONG-ALPHA] defines α -equivalent processes (i.e., processes that are equal up to renaming of bound names) as structurally congruent.
- Rule [CONG-PAR-UNIT] defines $\mathbf{0}$ as the unit of parallel composition. Rules [CONG-PAR-COMM] and [CONG-PAR-ASSOC] define parallel composition as commutative and associative, respectively.
- Rule [CONG-SCOPE] allows extending the scope of a restriction, as long as this does not bind any free names. Rules [CONG-RES-COMM] and [CONG-RES-SYMM] define restriction as commutative and symmetric, respectively.
- Rule [CONG-FWD-SYMM] defines forwarders as symmetric. Rule [CONG-RES-FWD] says that a forwarder with both names bound together is the same as inaction.

I now define reduction:

Definition 2.2.2 (Reduction (\rightarrow) for $\text{BASE}\pi$). *Reduction for $\text{BASE}\pi$ is a relation between processes, denoted $P \rightarrow Q$. It is defined by the following rules:*

2

$$\begin{array}{c}
\frac{[\text{RED-SEND-RECV}]}{(\mathbf{v}xy)(x[a, b]; P \mid y(z, y'); Q) \rightarrow P \mid Q\{a/z, b/y'\}} \\
\\
\frac{[\text{RED-SEL-BRA}]}{(\mathbf{v}xy)(x[b] \triangleleft j; P \mid y(y') \triangleright \{i.Q_i\}_{i \in I}) \rightarrow P \mid Q_j\{b/y'\}} \quad \frac{[\text{RED-CLOSE-WAIT}]}{(\mathbf{v}xy)(x[] \mid y(); Q) \rightarrow Q} \\
\\
\frac{[\text{RED-FWD}]}{x, y \neq z \quad \frac{(\mathbf{v}xy)([x \rightarrow z] \mid Q) \rightarrow Q\{z/y\}}{(\mathbf{v}xy)([x \rightarrow z] \mid Q) \rightarrow Q\{z/y\}}} \quad \frac{[\text{RED-CONG}]}{P \equiv P' \quad P' \rightarrow Q' \quad Q' \equiv Q \quad \frac{P \rightarrow Q}{P \rightarrow Q}} \\
\\
\frac{[\text{RED-RES}]}{P \rightarrow Q \quad \frac{P \rightarrow Q}{(\mathbf{v}xy)P \rightarrow (\mathbf{v}xy)Q}} \quad \frac{[\text{RED-PAR}]}{P \rightarrow Q \quad \frac{P \rightarrow Q}{P \mid R \rightarrow Q \mid R}}
\end{array}$$

I write \rightarrow^* to denote the reflexive, transitive closure of \rightarrow .

Let us discuss each rule in Definition 2.2.2:

- Rule [RED-SEND-RECV] synchronizes a send and a receive on names connected by restriction. Rule [RED-SEL-BRA] synchronizes a selection and a branch on similarly connected names. Rule [RED-CLOSE-WAIT] similarly synchronizes a close and a wait. In each case, the received placeholder names are substituted for the sent names. Moreover, the restriction is removed, as the involved names will no longer be used (as per linearity).
- Rule [RED-FWD] “shortcuts” a forwarder when one of its names is connected to a parallel process by restriction. It effectively substitutes the connected name for the forwarder’s other name.
- Rules [RED-CONG], [RED-RES], and [RED-PAR] close reduction under structural congruence, restriction, and parallel composition, respectively.

2.3. SESSION TYPE SYSTEM

As mentioned in Section 2.1, the linear names of $\text{BASE}\pi$ are part of sessions, ordered sequences of communications. It is then a natural choice to statically analyze $\text{BASE}\pi$ processes using *session types*. Session types, introduced originally by Honda *et al.* [Hon93; HVK98; THK94], represent communication protocols on names as sequences of communications.

Every chapter in this thesis uses session types in some way. Many of these chapters are inspired by a Curry-Howard correspondence between linear logic [Gir87] and session types for

the π -calculus, introduced by Caires and Pfenning [CP10] and Wadler [Wad12]. In summary, the correspondence connects session types and linear logic propositions, typing derivations and sequent calculus derivations, and reduction semantics and cut-reduction. Because linear logic is a recurring theme in this thesis, I present session types in the form of linear logic propositions. On the other hand, the type system I present here does not correspond to a linear logic sequent calculus, but rather is closer to the original session type systems for the π -calculus by Honda and others [Hon93; HVK98; THK94]. I will discuss the Curry-Howard correspondence between linear logic and session types in more detail in Part I.

The general idea of the session type system for $\text{BASE}\pi$ I present here is that the free names of a process are assigned session types. These session types then prescribe how the process should behave on those names. Session types for $\text{BASE}\pi$, in the form of linear logic propositions, are defined as follows:

Definition 2.3.1 (Session Types for $\text{BASE}\pi$).

$$\begin{array}{l|l|l} A, B ::= A \otimes B & (\textit{send}) & | A \wp B & (\textit{receive}) \\ | \oplus_{i \in I} A & (\textit{select}) & | \&_{i \in I} A & (\textit{branch}) \\ | \mathbf{1} & (\textit{close}) & | \perp & (\textit{wait}) \end{array}$$

Let us discuss the constructors in Definition 2.3.1:

- The type $A \otimes B$ is assigned to a name on which a name of type A is sent, along with a continuation name of type B . Dually, the type $A \wp B$ is assigned to a name on which a name of type A is received, along with a continuation name of type B . As we will see, these types are assigned to processes that send and receive, respectively.
- The type $\oplus_{i \in I} A_i$ is assigned to a name on which a label $i \in I$ is sent, along with a continuation name of type A_i . Dually, the type $\&_{i \in I} A_i$ is assigned to a name on which a label $i \in I$ is received, along with a continuation name of type A_i . As we will see, these types are assigned to processes that select and branch, respectively.
- The type $\mathbf{1}$ is assigned to a name on which the session is closed. Dually, the type \perp is assigned to a name on which the closing of the session is awaited. As we will see, these types are assigned to processes that close and wait, respectively.

Additionally, each of these types may also be assigned to forwarders.

The description above mentions *dual* types. Duality is the cornerstone of session types. The idea is that opposite names of a channel should be assigned dual types. This makes sure that the names are not simultaneously used for conflicting communications, e.g., sending on both names at the same time. Duality is defined as follows:

Definition 2.3.2 (Duality). *Duality for session types, denoted $\overline{}$, is defined as follows:*

$$\begin{array}{lll} \overline{\mathbf{1}} \triangleq \perp & \overline{A \otimes B} \triangleq \overline{A} \wp \overline{B} & \overline{\oplus_{i \in I} A_i} \triangleq \&_{i \in I} \overline{A_i} \\ \overline{\perp} \triangleq \mathbf{1} & \overline{A \wp B} \triangleq \overline{A} \otimes \overline{B} & \overline{\&_{i \in I} A_i} \triangleq \oplus_{i \in I} \overline{A_i} \end{array}$$

Clearly, duality is an involution: $\overline{\overline{A}} = A$ for any session type A .

To type a process, each of its free names is assigned a session type, denoted $x : A$. A process is then assigned a typing context Δ consisting of such assignments, denoted as the typing judgment $\vdash P \blacktriangleright \Delta$. Writing $x : A, y : B$ implicitly assumes that $x \neq y$, which straightforwardly extends to typing contexts. Typing is implicitly closed under exchange, i.e., $\Delta_1, x : A, y : B, \Delta_2 = \Delta_1, y : B, x : A, \Delta_2$. The type system for $\text{BASE}\pi$ is then defined by the following rules:

Definition 2.3.3 (Type System for $\text{BASE}\pi$).

$$\begin{array}{c}
\text{[TYP-SEND]} \\
\frac{\vdash P \blacktriangleright \Delta}{\vdash x[a, b]; P \blacktriangleright \Delta, x : A \otimes B, a : \overline{A}, b : \overline{B}} \\
\\
\text{[TYP-RECV]} \\
\frac{\vdash P \blacktriangleright \Delta, y : A, x' : B}{\vdash x(y, x'); P \blacktriangleright \Delta, x : A \wp B} \\
\\
\text{[TYP-SEL]} \\
\frac{\vdash P \blacktriangleright \Delta \quad j \in I}{\vdash x[b] \triangleleft j; P \blacktriangleright \Delta, x : \oplus_{i \in I} A_i, b : \overline{A}_j} \\
\text{[TYP-BRA]} \\
\frac{\forall i \in I. \vdash P_i \blacktriangleright \Delta, x' : A_i}{\vdash x(x') \triangleright \{i.P_i\}_{i \in I} \blacktriangleright \Delta, x : \&_{i \in I} A_i} \\
\text{[TYP-CLOSE]} \\
\frac{}{\vdash x[] \blacktriangleright x : \mathbf{1}} \\
\\
\text{[TYP-WAIT]} \\
\frac{\vdash P \blacktriangleright \Delta}{\vdash x(); P \blacktriangleright \Delta, x : \perp} \\
\text{[TYP-PAR]} \\
\frac{\vdash P \blacktriangleright \Delta_1 \quad \vdash Q \blacktriangleright \Delta_2}{\vdash P | Q \blacktriangleright \Delta_1, \Delta_2} \\
\text{[TYP-RES]} \\
\frac{\vdash P \blacktriangleright \Delta, x : A, y : \overline{A}}{\vdash (\nu x y) P \blacktriangleright \Delta} \\
\text{[TYP-INACT]} \\
\frac{}{\vdash \mathbf{0} \blacktriangleright \emptyset} \\
\\
\text{[TYP-FWD]} \\
\frac{}{\vdash [x \leftrightarrow y] \blacktriangleright x : A, y : \overline{A}}
\end{array}$$

Let us discuss each rule in Definition 2.3.3:

- Rule [TYP-SEND] types a send $x[a, b]; P$ by assigning to x the type $A \otimes B$, to a the type \overline{A} , and to b the type \overline{B} ; P may be arbitrarily typed. It may seem counterintuitive that the types assigned to a and b are dual to the types assigned to x . However, consider that $\overline{A \otimes B} = \overline{A} \wp \overline{B}$: the receiving name of the channel of which x is part is expecting to receive names of types \overline{A} and \overline{B} .
- Rule [TYP-RECV] types a receive $x(y, x'); P$ by assigning to x the type $A \wp B$. It requires that in P the name y is assigned the type A , and x' the type B .
- Rule [TYP-SEL] types a selection $x[b] \triangleleft j; P$ by assigning to x the type $\oplus_{i \in I} A_i$ with $j \in I$, and to b the type \overline{A}_j ; P may be arbitrarily typed. Rule [TYP-BRA] types a branch $x(x') \triangleright \{i.P_i\}_{i \in I}$ by assigning to x the type $\&_{i \in I} A_i$. It requires that, for every $i \in I$, in P_i the name x' is assigned the type A_i .
- Rule [TYP-CLOSE] types a close $x[]$ by assigning to x the type $\mathbf{1}$; no other assignments may appear in the typing context. Rule [TYP-WAIT] types a wait $x(); P$ by assigning to x the type \perp ; P may be arbitrarily typed.
- Rule [TYP-PAR] types the parallel composition of two typed processes. Rule [TYP-RES] types a restriction $(\nu x y) P$ by requiring that the names x and y are assigned dual types.

- Rule [TYP-INACT] types inaction $\mathbf{0}$ with an empty typing context. Rule [TYP-FWD] types a forwarder $[x \leftrightarrow y]$ by assigning to x and y dual types.

It may not seem entirely clear how the rules in Definition 2.3.3 type sessions, i.e., ordered sequences of communications. This will become clearer in Section 2.4, where I discuss synchronous versus asynchronous modes of communication that determine the method of implementing session using the rules in Definition 2.3.3.

The foundation of correctness guarantees from type systems is *type preservation*. Type preservation means that typing is preserved as processes transform, under structural congruences (Theorem 2.3.4) and under reduction (Theorem 2.3.5). A direct consequence of type preservation is that well-typed $\text{BASE}\pi$ processes satisfy *protocol fidelity* (they correctly implement their assigned session types) and *communication safety* (there are no message mismatches). Proofs are detailed in Appendix A.

Theorem 2.3.4 (Subject Congruence). *If $\vdash P \triangleright \Delta$ and $P \equiv Q$, then $\vdash Q \triangleright \Delta$.*

Proof (Sketch). By induction on the derivation of $P \equiv Q$. The inductive cases, which apply congruence under contexts, follow from the IH straightforwardly. The base cases correspond to the axioms in Definition 2.2.1. In each case, apply inversion to derive the typing of subprocesses and consequently the typing of the structurally congruent process. \square

Theorem 2.3.5 (Subject Reduction). *If $\vdash P \triangleright \Delta$ and $P \rightarrow Q$, then $\vdash Q \triangleright \Delta$.*

Proof (Sketch). By induction on the derivation of $P \rightarrow Q$. The cases correspond to the rules in Definition 2.2.2. In each case, apply inversion to derive the typing of subprocesses and consequently the typing of the reduced process, in some cases appealing to the IH and Theorem 2.3.4. \square

Another important correctness aspect that is desirable to be guaranteed by typing is *deadlock-freedom* (processes do not get stuck waiting to receive messages from each other). $\text{BASE}\pi$ does not guarantee this property.

Example 2.3.6. Consider the following process:

$$\begin{aligned} Q_1 &\triangleq (\mathbf{v}ab)x[a, b]; (\mathbf{v}cd)z[c, d]; \mathbf{0} \\ Q_2 &\triangleq w(v, w'); y(u, y'); ([v \leftrightarrow w'] \mid [u \leftrightarrow y']) \\ P &\triangleq (\mathbf{v}xy)(\mathbf{v}zw)(Q_1 \mid Q_2) \end{aligned}$$

Clearly, P is deadlocked. Q_1 tries to send on x , but the corresponding receive on y in Q_2 is blocked by the receive on w . In turn, this receive on w is connected to a send on z , which is blocked by the send on x in Q_1 .

Nonetheless, P is well-typed:

$$\begin{array}{c}
\frac{}{\vdash \mathbf{0} \triangleright \emptyset} \\
\frac{}{\vdash z[c, d]; \mathbf{0} \triangleright z : B \otimes \bar{B}, c : \bar{B}, d : B} \\
\frac{}{\vdash (\mathbf{v}cd)z[c, d]; \mathbf{0} \triangleright z : B \otimes \bar{B}} \\
\frac{}{\vdash x[a, b]; (\mathbf{v}cd)z[c, d]; \mathbf{0} \triangleright x : A \otimes \bar{A}, a : \bar{A}, b : A, z : B \otimes \bar{B}} \\
\frac{}{\vdash \underbrace{(\mathbf{v}ab)x[a, b]; (\mathbf{v}cd)z[c, d]; \mathbf{0} \triangleright x : A \otimes \bar{A}, z : B \otimes \bar{B}}_{Q_1}} \\
\frac{}{\vdash [v \leftrightarrow w'] \triangleright v : \bar{B}, w' : B} \quad \frac{}{\vdash [u \leftrightarrow y'] \triangleright u : \bar{A}, y' : A} \\
\frac{}{\vdash [v \leftrightarrow w'] | [u \leftrightarrow y'] \triangleright v : \bar{B}, w' : B, u : \bar{A}, y' : A} \\
\frac{}{\vdash y(u, y'); ([v \leftrightarrow w'] | [u \leftrightarrow y']) \triangleright y : \bar{A} \wp A, v : \bar{B}, w' : B} \\
\frac{}{\vdash \underbrace{w(v, w'); y(u, y'); ([v \leftrightarrow w'] | [u \leftrightarrow y']) \triangleright w : \bar{B} \wp B, y : \bar{A} \wp A}_{Q_2}} \\
\frac{}{\vdash Q_1 \triangleright x : A \otimes \bar{A}, z : B \otimes \bar{B}} \quad \frac{}{\vdash Q_2 \triangleright w : \bar{B} \wp B, y : \bar{A} \wp A} \\
\frac{}{\vdash Q_1 | Q_2 \triangleright x : A \otimes \bar{A}, z : B \otimes \bar{B}, w : \bar{B} \wp B, y : \bar{A} \wp A} \\
\frac{}{\vdash (\mathbf{v}zw)(Q_1 | Q_2) \triangleright x : A \otimes \bar{A}, y : \bar{A} \wp A} \\
\frac{}{\vdash (\mathbf{v}xy)(\mathbf{v}zw)(Q_1 | Q_2) \triangleright \emptyset}
\end{array}$$

▽

The chapters in Part I extend and restrict $\text{BASE}\pi$ in such a way that deadlock-freedom is guaranteed by typing.

2.4. SYNCHRONOUS VERSUS ASYNCHRONOUS COMMUNICATION

As mentioned in the introduction to this chapter, the mode of communication of $\text{BASE}\pi$ is synchronous: when a process sends a message, it needs to wait for the message to be received. Typically, the continuation of an output's session is implemented in the output's continuation process. $\text{BASE}\pi$ supports this style of implementing sessions, though it does not enforce it:

$$\begin{array}{ll}
\vdash (\mathbf{v}bx')x[a, b]; P \triangleright \Delta, x : A \otimes B, a : \bar{A} & \text{where } \vdash P \triangleright \Delta, x' : B \\
\vdash (\mathbf{v}bx')x[b] \triangleleft j; P \triangleright \Delta, x : \oplus_{i \in I} A_i & \text{where } \vdash P \triangleright \Delta, x' : A_j
\end{array}$$

Because $\text{BASE}\pi$ does not enforce that the continuations of outputs' sessions are implemented in their continuation processes, $\text{BASE}\pi$ straightforwardly supports asynchronous communication. The idea is that an output session's continuation is implemented in parallel to the output, bound to the output's continuation name by restriction:

$$\begin{array}{ll}
\vdash (\mathbf{v}bx')(x[a, b]; \mathbf{0} | P) \triangleright \Delta, x : A \otimes B, a : \bar{A} & \text{where } \vdash P \triangleright \Delta, x' : B \\
\vdash (\mathbf{v}bx')(x[b] \triangleleft j; \mathbf{0} | P) \triangleright \Delta, x : \oplus_{i \in I} A_i & \text{where } \vdash P \triangleright \Delta, x' : A_j
\end{array}$$

To enforce asynchronous communication, one can restrict the continuations of outputs to always be $\mathbf{0}$. Omitting the trailing $\mathbf{0}$ of outputs, I can then derive the following typing rules for asynchronous output:

$$\begin{array}{c} \frac{[\text{TYP-SEND-ASYNC}]}{\vdash x[a, b] \blacktriangleright x : A \otimes B, a : \bar{A}, b : \bar{B}} \quad \triangleq \quad \frac{\overline{\vdash \mathbf{0} \blacktriangleright \emptyset}}{\vdash x[a, b]; \mathbf{0} \blacktriangleright x : A \otimes B, a : \bar{A}, b : \bar{B}} \\ \\ \frac{[\text{TYP-SEL-ASYNC}]}{\vdash x[b] \blacktriangleleft j \blacktriangleright x : \oplus_{i \in I} A_i, b : \bar{A}_j} \quad \triangleq \quad \frac{\overline{\vdash \mathbf{0} \blacktriangleright \emptyset} \quad j \in I}{\vdash x[b] \blacktriangleleft j; \mathbf{0} \blacktriangleright x : \oplus_{i \in I} A_i, b : \bar{A}_j} \end{array}$$

Roughly speaking, this approach to sessions with asynchronous communication is equivalent to extending $\text{BASE}\pi$ with ordered message buffers [DeY+12]: outputs place their messages in buffers to unblock their continuations, and inputs will retrieve messages from buffers.

2.5. EXTENSIONS OF $\text{BASE}\pi$

Here, I give a brief overview of how the rest of the chapters in Part I extend $\text{BASE}\pi$.

- Chapter 3 introduces APCP. Its process language restricts to asynchronous communication (as described in Section 2.4), makes the closing of sessions implicit, and adds tail-recursion. Its type system conflates $\text{BASE}\pi$'s $\mathbf{1}$ and \perp to \bullet , and adds tail-recursive types. To guarantee deadlock-freedom, APCP adds priority annotations to its types and type system. Section 3.3.6 additionally describes how to integrate explicit closing (with types $\mathbf{1}$ and \perp) and servers and clients (i.e., unrestricted sessions to be used any number of types).
- Chapter 4 introduces $s\pi^+$. Its process language restricts to synchronous communication, and adds constructs for non-determinism: non-deterministic choice and prefixes for session that may not be available. Its type system only adds a typing rule for non-deterministic choice, and modalities for sessions that may not be available. To guarantee deadlock-freedom, $s\pi^+$ replaces Rule [TYP-RES] with linear logic's Rule [CUT]: this forbids cyclically connected processes, thus preventing circular dependencies and hence deadlocks.
- Chapter 5 introduces πBI . Its process language restricts to synchronous communication, and adds the spawn construct. Its type system is based on the logic of bunched implications (BI), rather than linear logic. Besides significant differences in structural rules (i.e., how resource duplication and discarding is handled), the type system of πBI uses *two-sided sequents* derived from BI. The types in πBI are similar to those in $\text{BASE}\pi$, but each connective has a left- and a right-rule, describing how to *use* and *provide* behavior, respectively. The πBI deadlock-freedom guarantee follows that of $s\pi^+$ described above, as BI also has a Rule [CUT].

3

CYCLIC NETWORKS AND ASYNCHRONOUS COMMUNICATION

This chapter studies new ways of combining message-passing processes with cyclic connections and asynchronous communication. The setting is that of session type systems derived from linear logic, and a main aim is to maintain deadlock-freedom by typing. It thus answers the following research question, introduced in Section 1.2.1.1:

Research Question I-1. *How can we reconcile asynchronous communication, deadlock-freedom for cyclically connected processes, and linear logic foundations for session types?*

3.1. INTRODUCTION

Modern software systems often comprise independent components that coordinate by exchanging messages. The π -calculus [MPW92; Mil89] is a mature formalism for specifying and reasoning about message-passing processes; in particular, it offers a rigorous foundation for designing *type systems* that statically enforce communication correctness. A well-known approach in this line is *session types* [Hon93; HVK98; YV07], which specify the structure of the two-party communication protocols implemented by the channels of a process. In this chapter, we are interested in session types as a governing discipline in concurrent and functional paradigms, in conjunction with two important aspects of message-passing concurrency, namely the *network topologies* formed by interacting processes and the underlying discipline of *asynchronous communication*.

The study of session types has gained a considerable impulse after the discovery by Caires and Pfenning [CP10] and Wadler [Wad12] of Curry-Howard correspondences between session types and linear logic [Gir87]. The present work is motivated by (and develops further) two salient features of type systems derived from these correspondences, namely (i) their remarkably effective approach to establishing the *deadlock-freedom* property for processes,

and (ii) their clear connections with *functional calculi* with concurrency. These two aspects form the central themes of this chapter, and we discuss them in order.

Deadlock-freedom. Curry-Howard approaches to session types induce a very precise form of interaction between parallel processes: they interpret the [CUT]-rule of linear logic as the interaction of two processes on *exactly one channel*. While this design elegantly rules out the insidious circular dependencies that lead to deadlocks, there is a catch: typable processes cannot be connected to form *cyclic* network topologies—only tree-shaped networks are allowed. Hence, type systems based upon Curry-Howard foundations reject whole classes of process networks that are cyclic but deadlock-free [DP15; DP22]. This includes important concurrency patterns, such as those exemplified by Milner’s cyclic scheduler [Mil89].

The problem of designing type systems that rule out circular dependencies and deadlocks while allowing for cyclic topologies has received considerable attention. Works by Kobayashi and others have developed advanced solutions; see, e.g., [Kob06; Pad14; DG18]. In a nutshell, these works exploit orderings based on priority annotations on types to detect and avoid circular dependencies. Dardha and Gay [DG18] have shown how to incorporate this priority-based approach in the realm of session type systems based on linear logic; it boils down to replacing the [CUT]-rule with a [CYCLE]-rule and adding priority checks in other selected typing rules. Their work thus extends the class of typable processes to cover cyclic network topologies, while retaining strong ties with linear logic.

Unfortunately, none of the methods proposed until now consider *session types with asynchronous communication*. Addressing asynchronous communication is of clear practical relevance: it is the standard in most distributed systems and web-based applications nowadays. In a process calculi setting, asynchronous communication means that output prefixes are non-blocking [HT91; HT92; Bou92], and that exchanged messages implicitly or explicitly reside in an auxiliary structure, such as a buffer or a queue [BPV08]. In the context of session types, asynchrony moreover means that the ordering of messages *within a session* should be respected, but messages from *different sessions* need not be ordered [KYH11].

To address this gap, in the first part of the chapter we define a new session-typed asynchronous π -calculus, APCP (*Asynchronous Priority-based Classical Processes*), for which we develop its fundamental meta-theoretical results. The design of APCP builds upon insights developed in several prior works:

- Advanced type systems that exploit annotations on types to enforce deadlock-freedom of cyclic process networks, already mentioned;
- Dardha and Gay’s PCP (Priority-based Classical Processes) [DG18], also already mentioned, which incorporates into Wadler’s CP [Wad12] (Classical Processes; derived from classical linear logic) Padovani’s simplification of Kobayashi’s type annotations [Pad14].
- DeYoung *et al.*’s asynchronous semantics for session communication, extending the correspondence between intuitionistic linear logic and session types [DeY+12].

Our calculus APCP combines these semantics for asynchronous communication with PCP’s priority-based type system. The design of APCP uncovers fundamental properties of type

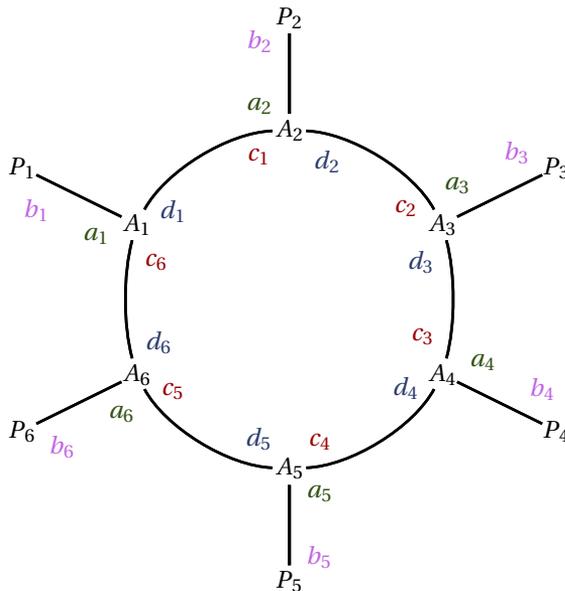


Figure 3.1 | Milner's cyclic scheduler with 6 workers. Lines denote channels connecting processes on the indicated names.

systems for asynchronous communication. A particular insight is the following: because outputs are non-blocking, APCP simplifies priority management while preserving deadlock-freedom. Additionally, as an orthogonal feature, APCP increases expressivity by supporting tail-recursion without compromising deadlock-freedom. We motivate these features of APCP by discussing Milner's cyclic scheduler in Section 3.2.

In summary, in this chapter I discuss the process calculus APCP, its associated type system, and its essential meta-theoretical properties: type preservation (Theorem 3.3.25) and deadlock-freedom (Theorem 3.3.32).

Organization. In Section 3.2, we motivate APCP by introducing Milner's cyclic scheduler. Section 3.3 defines the language of APCP processes and its type system, establishes its properties, and revisits Milner's cyclic scheduler from a typed perspective. Section 3.4 discusses related work and Section 3.5 draws conclusions. Appendix B collects omitted proofs.

3.2. EXAMPLE: MILNER'S CYCLIC SCHEDULER IN APCP

We motivate APCP by considering Milner's cyclic scheduler [Mil89], a recursive process that relies on a cyclic network and asynchronous communications; it is inspired by Dardha and Gay [DG18], who use PCP to type a synchronous, non-recursive version of the scheduler.

The scheduler, informally. The scheduler consists of $n \geq 1$ worker processes P_i (the workers, for short), each attached to a partial scheduler A_i . The partial schedulers connect to each

other in a ring structure, together forming the cyclic scheduler. Connections consist of pairs of endpoints; we further refer to these endpoints by the names that represent them.

The scheduler then lets the workers perform their tasks in rounds, each new round triggered by the leading partial scheduler A_1 (the *leader*) once each worker finishes their previous task. We refer to the non-leading partial schedulers A_{i+1} for $1 \leq i < n$ as the *followers*.

Figure 3.1 illustrates the process network of Milner's cyclic scheduler with 6 workers ($n = 6$). Each partial scheduler A_i has a name a_i to connect with the worker P_i 's name b_i . The leader A_1 has a name c_n to connect with A_n and a name d_1 to connect with A_2 (or with A_1 if $n = 1$; we further elide this case for brevity). Each follower A_{i+1} has a name c_i to connect with A_i and a name d_{i+1} to connect with A_{i+2} (or with A_1 if $i + 1 = n$; we also elide this case).

In each round, each follower A_{i+1} awaits a start signal from A_i , and then asynchronously signals P_{i+1} and A_{i+2} to start. After awaiting acknowledgment from P_{i+1} and a next round signal from A_i , the follower then signals next round to A_{i+2} . The leader A_1 , which starts each round of tasks, signals A_2 and P_1 to start, and, after awaiting acknowledgment from P_1 , signals a next round to A_2 . Then, the leader awaits A_n 's start and next round signals. It is crucial that A_1 does not await A_n 's start signal before starting P_1 , as the leader would otherwise not be able to initiate rounds of tasks.

Syntax of APCP. Before formally specifying the scheduler, we briefly introduce the syntax of APCP, and how asynchronous communication works; Section 3.3 gives formal definitions.

Let us write $a, b, c, \dots, x, y, z, \dots$ to denote names. We write $x[a, b]$ and $y(w, z); P$ to denote processes for sending and receiving, respectively. The names a and w stand for the payloads (i.e., the names that represent the value being transmitted), whereas b and z stand for *continuations*, i.e., the names on which the rest of the session should be performed. This *continuation-passing style* for asynchronous communication is required to ensure the correct ordering of messages within a session. A communication redex in APCP is thus of the form $(\nu xy)(x[a, b] | y(w, z); P)$: the restriction (νxy) serves to declare that x and y are dual names of the same channel, and $\cdot | \cdot$ denotes parallel composition. This process reduces to $P\{a/w, b/z\}$: P 's names w and z are substituted for by a and b , respectively. Notice how, since the send is a standalone process, it cannot block any other communications in the process.

The communication of labels ℓ, ℓ', \dots follows the same principle: the process $x[b] \triangleleft \ell$ denotes the output of a label ℓ on x , and the process $y(z) \triangleright \ell; P$ blocks until a label ℓ is received on y before continuing as P ; here again, b and z are continuation names that are sent and received together with ℓ . Finally, process $\mu X(\tilde{x}); P$ denotes a recursive definition. Here, P has access to the names in \tilde{x} and may contain recursive calls $X(\tilde{y})$ to indicate a repetition of P . Upon such a recursive call $X(\tilde{y})$, the names in \tilde{y} are assigned to \tilde{x} in the next round of P .

The scheduler in APCP. We now formally specify the partial schedulers. Because each sent label requires a restriction to bind the selection's continuation name to the rest of the session, these processes may look rather complicated. For example, (part of) the leader is specified as follows (where d'_1, a''_1 are used in the omitted remainder):

$$A_1 \triangleq \mu X(a_1, c_n, d_1); (\nu a d'_1)(d_1[a] \triangleleft \text{start} | (\nu b a'_1)(a_1[b] \triangleleft \text{start} | a'_1(a''_1) \triangleright \text{ack}; \dots))$$

To improve readability, we rely on the notation $\bar{x} \triangleleft \ell \cdot P$, which is syntactic sugar that elides the continuation name involved (cf. Notation 3.3.2); our use of the floating dot ‘ \cdot ’ is intended to stress that the communication of ℓ along x does not block any further prefixes in P , and the overline ‘ $\bar{}$ ’ to indicate that there is a hidden restriction. Similarly, the notation $x \triangleright \ell; P$ elides the continuation name in receiving labels, though it remains blocking hence the ‘ \triangleright ’.

The leader and followers are then specified as follows:

$$\begin{aligned}
 A_1 &\triangleq \mu X(a_1, c_n, d_1); \bar{d}_1 \triangleleft \text{start} \cdot \bar{a}_1 \triangleleft \text{start} \cdot a_1 \triangleright \text{ack}; \bar{d}_1 \triangleleft \text{next} \cdot \\
 &\quad c_n \triangleright \text{start}; c_n \triangleright \text{next}; X(a_1, c_n, d_1) \\
 A_{i+1} &\triangleq \mu X(a_{i+1}, c_i, d_{i+1}); c_i \triangleright \text{start}; \bar{a}_{i+1} \triangleleft \text{start} \cdot \bar{d}_{i+1} \triangleleft \text{start} \cdot a_{i+1} \triangleright \text{ack}; \quad \forall 1 \leq i < n \\
 &\quad c_i \triangleright \text{next}; \bar{d}_{i+1} \triangleleft \text{next} \cdot X(a_{i+1}, c_i, d_{i+1})
 \end{aligned}$$

Assuming that each worker P_i is specified such that it behaves as expected on the name b_i , we formally specify the scheduler as a ring of partial schedulers connected to workers:

$$\text{Sched}_n \triangleq (\nu c_1 d_1) \dots (\nu c_n d_n) ((\nu a_1 b_1)(A_1 | P_1) | \dots | (\nu a_n b_n)(A_n | P_n))$$

We return to this example in Section 3.3.5, where we type check the scheduler using APCP to show that it is deadlock-free (which is not obvious from its process definition).

3.3. APCP: ASYNCHRONOUS PRIORITY-BASED CLASSICAL PROCESSES

In this section, we define APCP, a session-typed π -calculus in which processes communicate asynchronously on connected channel endpoints. We further refer to endpoints by the names that represent them. As already discussed, the output of messages (names and labels) is non-blocking, and explicit continuations ensure the ordering of messages within a session. In our type system, names are assigned types that specify two-party protocols, in the style of binary session types [Hon93], following the Curry-Howard correspondences between linear logic and session types [CP10; Wad12].

APCP combines the salient features of Dardha and Gay’s PCP [DG18] with DeYoung *et al.*’s semantics for asynchronous communication [DeY+12]. Recursion—not present in the works by Dardha and Gay and DeYoung *et al.*—is an orthogonal feature, with syntax inspired by the work of Toninho *et al.* [TCP14].

As in PCP, types in APCP rely on *priority* annotations, which enable cyclic connections while ruling out circular dependencies between sessions. A key insight of our work is that asynchrony significantly improves priority management: while PCP’s outputs are blocking and thus require priority checks, the non-blocking outputs of APCP do not need priority checks. This effectively reduces priority checks by half (see Remark 3.3.16).

Properties of well-typed APCP processes are *type preservation* (Theorem 3.3.25) and *deadlock-freedom* (Theorem 3.3.32). This includes cyclically connected processes, which priority-annotated types guarantee free from circular dependencies that may cause deadlock.

3.3.1. THE PROCESS LANGUAGE

We write $a, b, c, \dots, x, y, z, \dots$ to denote (channel) *names* (also known as *names*); by convention we use the early letters of the alphabet for the objects of output-like prefixes. Also, we write $\tilde{x}, \tilde{y}, \tilde{z}, \dots$ to denote sequences of names. In APCP, communication is *asynchronous* (cf. [HT91; HT92; Bou92]) and *dyadic*: each communication involves the transmission of a pair of names, a message name and a continuation name. With a slight abuse of notation, we sometimes write $x_i \in \tilde{x}$ to refer to a specific element in the sequence \tilde{x} . Also, we write i, j, k, \dots to denote *labels* for choices and I, J, K, \dots to denote sets of labels. We write X, Y, \dots to denote *recursion variables*, and P, Q, \dots to denote processes.

Definition 3.3.1 (APCP Syntax). *The syntax of APCP processes is as follows:*

$P, Q ::= x[a, b]$	<i>send</i>	$x(y, z); P$	<i>receive</i>
$x[b] \triangleleft \ell$	<i>selection</i>	$x(z) \triangleright \{i : P_i\}_{i \in I}$	<i>branch</i>
$(\mathbf{v}xy)P$	<i>restriction</i>	$P Q$	<i>parallel</i>
$\mathbf{0}$	<i>inaction</i>	$[x \leftrightarrow y]$	<i>forwarder</i>
$\mu X(\tilde{z}); P$	<i>recursive definition</i>	$X\langle \tilde{z} \rangle$	<i>recursive call</i>

The send $x[a, b]$ sends along x a message name a and a continuation name b . The receive $x(y, z); P$ blocks until on x a message and continuation name are received (referred to in P as the placeholders y and z , respectively), binding y and z in P . The selection $x[b] \triangleleft i$ sends along x a label i and a continuation name b . The branch $x(z) \triangleright \{i : P_i\}_{i \in I}$ blocks until it receives on x a label $i \in I$ and a continuation name (referred to in P_i as the placeholder z), binding z in each P_i . In the rest of this chapter, we refer to sends, receives, selections, and branches—including their continuations, if any—as *prefixes*. We refer to sends and selections collectively as *outputs*, and to receives and branches as *inputs*.

Restriction $(\mathbf{v}xy)P$ binds x and y in P , thus declaring them as the two names of a channel and enabling communication, as in [Vas12]. The process $P | Q$ denotes the parallel composition of P and Q . The process $\mathbf{0}$ denotes inaction. The forwarder $[x \leftrightarrow y]$ is a primitive copycat process that links together x and y . We say a forwarder $[x \leftrightarrow y]$ in P is *independent* if P does not bind x and y together through restriction (and *dependent* if it does). The process $\mu X(\tilde{z}); P$ denotes a recursive definition, binding occurrences of X in P ; the names \tilde{z} form a context for P . Then P may contain recursive calls $X\langle \tilde{z} \rangle$ that indicate a repetition of P , providing the names \tilde{z} as context. We only consider contractive recursion, disallowing processes with subexpressions of the form $\mu X_1(\tilde{z}); \dots; \mu X_n(\tilde{z}); X_1\langle \tilde{z} \rangle$.

Names and recursion variables are free unless otherwise stated (i.e., unless they are bound somehow). We write $\text{fn}(P)$ and $\text{frv}(P)$ for the sets of free names and free recursion variables of P , respectively, and $\text{bn}(P)$ for the set of bound names of P . Also, we write $P\{x/y\}$ to denote the capture-avoiding substitution of the free occurrences of y in P for x . Notation $P\{\mu X(y_1, \dots, y_n); P'\}/X\langle y_1, \dots, y_n \rangle$ denotes the substitution of occurrences of recursive calls $X\langle y_1, \dots, y_n \rangle$ in P with the recursive definition $\mu X(y_1, \dots, y_n); P'$, which we call *unfolding recursion*. We write sequences of substitutions $P\{x_1/y_1\} \dots \{x_n/y_n\}$ as $P\{x_1/y_1, \dots, x_n/y_n\}$.

Except for asynchrony and recursion, there are minor differences with respect to the languages of Dardha and Gay [DG18] and DeYoung *et al.* [DeY+12]. Unlike Dardha and Gay's,

our syntax does not include empty send and receive prefixes that explicitly close channels; this simplifies the type system. We also do not include the operator for replicated servers, denoted $!x(y); P$, which is present in [DG18; DeY+12]. Although replication can be handled without difficulties, we omit it here; we prefer focusing on recursion, because it fits well with the examples we consider. See Section 3.3.6 for further discussion.

A convenient notation. In a send $x[a, b]$, both a and b are free; they can be bound to a continuation process using parallel composition and restriction, as in

$$(\mathbf{v}y)(\mathbf{v}bz)(x[a, b] | P_{y,z}).$$

The same applies to selection $x[b] \triangleleft i$. We introduce useful notations that elide the restrictions and continuation names:

Notation 3.3.2 (Derivable Bound Communication). *We use the following syntactic sugar:*

$$\begin{aligned} \bar{x}[y] \cdot P &:= (\mathbf{v}ya)(\mathbf{v}zb)(x[a, b] | P\{z/x\}) & \bar{x} \triangleleft \ell \cdot P &:= (\mathbf{v}zb)(x[b] \triangleleft \ell | P\{z/x\}) \\ x(y); P &:= x(y, z); P\{z/x\} & x \triangleright \{i : P_i\}_{i \in I} &:= x(z) \triangleright \{i : P_i\{z/x\}\}_{i \in I} \end{aligned}$$

Note the use of ‘ \cdot ’ instead of ‘ $;$ ’ in sending and selection to stress that they are non-blocking.

Operational semantics. We define a reduction relation for processes ($P \rightarrow Q$) that formalizes how complementary outputs/inputs on connected names may synchronize. As usual for π -calculi, reduction relies on *structural congruence* ($P \equiv Q$), which relates processes with minor syntactic differences.

Definition 3.3.3 (Structural Congruence (\equiv) for APCP). *Structural congruence for APCP, denoted $P \equiv Q$, is the smallest congruence on the syntax of processes (Definition 3.3.1) satisfying the following axioms:*

$$\begin{array}{c} \frac{[\text{CONG-ALPHA}]}{P \equiv_{\alpha} Q} \quad \frac{[\text{CONG-PAR-UNIT}]}{P | \mathbf{0} \equiv P} \quad \frac{[\text{CONG-PAR-COMM}]}{P | Q \equiv Q | P} \quad \frac{[\text{CONG-PAR-ASSOC}]}{P | (Q | R) \equiv (P | Q) | R} \\ \\ \frac{[\text{CONG-SCOPE}]}{P | (\mathbf{v}xy)Q \equiv (\mathbf{v}xy)(P | Q)} \quad \frac{[\text{CONG-RES-COMM}]}{(\mathbf{v}xy)(\mathbf{v}zw)P \equiv (\mathbf{v}zw)(\mathbf{v}xy)P} \quad \frac{[\text{CONG-RES-SYMM}]}{(\mathbf{v}xy)P \equiv (\mathbf{v}yx)P} \\ \\ \frac{[\text{CONG-RES-INACT}]}{(\mathbf{v}xy)\mathbf{0} \equiv \mathbf{0}} \quad \frac{[\text{CONG-FWD-SYMM}]}{[x \leftrightarrow y] \equiv [y \leftrightarrow x]} \quad \frac{[\text{CONG-RES-FWD}]}{(\mathbf{v}xy)[x \leftrightarrow y] \equiv \mathbf{0}} \\ \\ \frac{[\text{CONG-UNFOLD}]}{\mu X(x_1, \dots, x_n); P \equiv P\{\mu X(y_1, \dots, y_n); P\{y_1/x_1, \dots, y_n/x_n\} / X\langle y_1, \dots, y_n \rangle\}} \end{array}$$

Structural congruence defines the following properties for processes. Processes are equivalent up to α -equivalence (Rule [CONG-ALPHA]). Parallel composition is associative (Rule [CONG-PAR-ASSOC]) and commutative (Rule [CONG-PAR-COMM]), with unit $\mathbf{0}$ (Rule [CONG-PAR-UNIT]).

A parallel process may be moved into or out of a restriction as long as the bound channels do not occur free in the moved process (Rule [CONG-SCOPE]): this is *scope inclusion* and *scope extrusion*, respectively. Restrictions on inactive processes may be dropped (Rule [CONG-RES-INACT]), and the order of names in restrictions and of consecutive restrictions does not matter (Rules [CONG-RES-SYMM] and [CONG-RES-COMM], respectively). Forwarders are symmetric (Rule [CONG-FWD-SYMM]), and equivalent to inaction if both names are bound together through restriction (Rule [CONG-RES-FWD]). Finally, a recursive definition is equivalent to its unfolding (Rule [CONG-UNFOLD]), replacing any recursive calls with copies of the recursive definition, where the recursive definition's contextual names are pairwise substituted for by the call's names.

As we will see next, the semantics of APCP is closed under structural congruence. This means that processes are *equi-recursive*; however, APCP's typing discipline (described Section 3.3.2) treats recursive types as *iso-recursive* (see, e.g., Pierce [Pie02]).

We now define the reduction relation $P \rightarrow Q$.

Definition 3.3.4 (Reduction (\rightarrow) for APCP). *Reduction for APCP is a relation between processes, denoted $P \rightarrow Q$. It is defined by the following rules:*

$$\begin{array}{c}
 \text{[RED-SEND-RECV]} \\
 \hline
 (\mathbf{v}xy)(x[a, b] \mid y(z, y'); Q) \rightarrow Q\{a/z, b/y'\} \\
 \\
 \begin{array}{cc}
 \text{[RED-SEL-BRA]} & \text{[RED-FWD]} \\
 \hline
 \frac{j \in I}{(\mathbf{v}xy)(x[b] \triangleleft j \mid y(y') \triangleright \{i : Q_i\}_{i \in I}) \rightarrow Q_j\{b/y'\}} & \frac{x, y \neq z}{(\mathbf{v}xy)([x \leftrightarrow z] \mid P) \rightarrow P\{z/y\}} \\
 \\
 \begin{array}{ccc}
 \text{[RED-CONG]} & \text{[RED-RES]} & \text{[RED-PAR]} \\
 \hline
 \frac{P \equiv P' \quad P' \rightarrow Q' \quad Q' \equiv Q}{P \rightarrow Q} & \frac{P \rightarrow Q}{(\mathbf{v}xy)P \rightarrow (\mathbf{v}xy)Q} & \frac{P \rightarrow Q}{P \mid R \rightarrow Q \mid R}
 \end{array}
 \end{array}
 \end{array}$$

We write \rightarrow^* for the reflexive, transitive closure of \rightarrow .

Rule [RED-SEND-RECV] synchronizes a send and a receive on connected names and substitutes the message and continuation names. Rule [RED-SEL-BRA] synchronizes a selection and a branch: the received label determines the continuation process, substituting the continuation name appropriately. Rule [RED-FWD] implements the forwarder as a substitution. Rules [RED-CONG], [RED-RES], and [RED-PAR] close reduction under structural congruence, restriction, and parallel composition, respectively.

Notice how sends and selections output free names. This is different from the works by Dardha and Gay [DG18] and DeYoung *et al.* [DeY+12], where, following an internal mobility discipline [Bor98], communication involves bound names only. As we show in the next subsection, this kind of *bound output* is derivable in APCP (cf. Notation 3.3.2 and Theorem 3.3.17).

Example 3.3.5. To illustrate the preservation of order *within* a session and the asynchrony *between* different sessions, we consider the following process:

$$\begin{aligned}
 P \triangleq (\mathbf{v}zu) & \left((\mathbf{v}xy) \left((\mathbf{v}ax') (x[v_1, a] \mid x'[v_2, b]) \right. \right. \\
 & \quad \left. \left. \mid (\mathbf{v}cz') (z[v_3, c] \mid y(w_1, y'); y'(w_2, y'')) \right) \right) \\
 & \quad \mid u(w_3, u'); R)
 \end{aligned}$$

The process P defines two consecutive sends on a session from x to y , and an asynchronous send on a session from z to u . Two reductions are possible from P :

$$P \rightarrow (\mathbf{v}zu)((\mathbf{v}ax')(x'[v_2, b] | (\mathbf{v}cz')(z[v_3, c] | a(w_2, y''); Q\{v_1/w_1\})) | u(w_3, u'); R) \quad (3.1)$$

$$P \rightarrow (\mathbf{v}cz')((\mathbf{v}xy)((\mathbf{v}ax')(x[v_1, a] | x'[v_2, b]) | y(w_1, y'); y'(w_2, y''); Q) | R\{v_3/w_3, c/u'\}) \quad (3.2)$$

The reduction (3.1) entails the synchronization of the send on x and the receive on y ; afterwards, the send on x' is connected to the receive on a that prefixes Q . The reduction (3.2) entails the synchronization of the send on z and the receive on u , connecting Q and R on a new session between z' and c . Note that from P there is no reduction involving the send on x' , since x' is connected to the continuation name of the send on x and is thus not (yet) paired with a dual receive.

Using the sugared syntax from Notation 3.3.2, we can write

$$P = (\mathbf{v}zu)((\mathbf{v}xy)(\bar{x}[v_1] \cdot \bar{x}[v_2] \cdot \mathbf{0} | \bar{z}[v_3] \cdot y(w_1); y(w_2); Q') | u(w_3); R')$$

where $Q' \triangleq Q\{y/y''\}$ and $R' \triangleq R\{u/u'\}$.

The following diagram illustrates all the possible reduction paths from P ; horizontal reductions concern the session between x and y , and diagonal reductions concern the session between z and u :

$$\begin{array}{c} P \rightarrow P_1 \rightarrow P_3 \\ \searrow P_2 \rightarrow P_4 \rightarrow P_5 \end{array}$$

where processes P_1, P_2, P_3, P_4 , and P_5 are as follows:

$$P_1 \triangleq (\mathbf{v}zu)((\mathbf{v}xy)(\bar{x}[v_2] \cdot \mathbf{0} | \bar{z}[v_3] \cdot y(w_2); Q'\{v_1/w_1\}) | u(w_3); R')$$

$$P_2 \triangleq (\mathbf{v}xy)(\bar{x}[v_1] \cdot \bar{x}[v_2] \cdot \mathbf{0} | y(w_1); y(w_2); Q') | R'\{v_3/w_3\}$$

$$P_3 \triangleq (\mathbf{v}zu)(\bar{z}[v_3] \cdot Q'\{v_1/w_1, v_2/w_2\} | u(w_3); R')$$

$$P_4 \triangleq (\mathbf{v}xy)(\bar{x}[v_2] \cdot \mathbf{0} | y(w_2); Q'\{v_1/w_1\}) | R'\{v_3/w_3\}$$

$$P_5 \triangleq Q'\{v_1/w_1, v_2/w_2\} | R'\{v_3/w_3\} \quad \nabla$$

Presentations of reduction for session-typed π -calculi derived from the Curry-Howard interpretations of linear logic often include rules that correspond to *commuting conversions* in linear logic (cf. [CP10; Wad12; DG18; DeY+12]), which allow rewriting processes in which a way that blocking communications on free names are “pulled out” of restrictions. Commuting conversions can be easily included for APCP (cf. [HP21a]), but we do not include them here for two reasons. First, while Dardha and Gay [DG18] rely on commuting conversions to prove deadlock-freedom, as discussed in detail in Section 3.3.3 the proof of deadlock-freedom for APCP takes a different approach that does not require commuting conversions. Second, although considering commuting conversions would arguably lead to a stronger Curry-Howard correspondence with linear logic, the transformations they induce on processes appear rather unrealistic from a message-passing perspective.

3.3.2. THE TYPE SYSTEM

APCP types processes by assigning binary session types to names. Following Curry-Howard interpretations, we present session types as linear logic propositions (cf., e.g., Caires *et al.* [CPT16], Wadler [Wad12], Caires and Pérez [CP17], and Dardha and Gay [DG18]). We extend these propositions with recursion and *priority* annotations on connectives. Intuitively, prefixes typed with lower priority should not be blocked by those with higher priority.

We write \circ, π, ρ, \dots to denote priorities, and ω to denote the ultimate priority that is greater than all other priorities and cannot be increased further. That is, for every $\circ \in \mathbb{N}$, we have $\omega > \circ$ and $\omega + \circ = \omega$.

Definition 3.3.6 (Session Types for APCP). *The following grammar defines the syntax of session types A, B . Let $\circ \in \mathbb{N}$.*

$$A, B ::= A \otimes^\circ B \mid A \wp^\circ B \mid \oplus^\circ \{i : A\}_{i \in I} \mid \&^\circ \{i : A\}_{i \in I} \mid \bullet \mid \mu X. A \mid X$$

A name of type $A \otimes^\circ B$ (resp. $A \wp^\circ B$) first sends (resp. receives) a name of type A and then behaves as B . A name of type $\oplus^\circ \{i : A_i\}_{i \in I}$ selects a label $i \in I$ and then behaves as A_i . A name of type $\&^\circ \{i : A_i\}_{i \in I}$ offers a choice: after receiving a label $i \in I$, the name behaves as A_i . A name of type \bullet is closed; it does not require a priority, as closed names do not exhibit behavior and thus are non-blocking.

Unlike Caires and Pfenning [CP10] and Dardha and Gay [DG18], APCP does not associate any behavior with closed sessions (i.e., no closing synchronizations). Moreover, as we will see, APCP's type system allows arbitrary parallel composition. Atkey *et al.* [ALM16] have shown that, in presence of arbitrary parallel composition (i.e., linear logic's Rule [MIX] that combines sequents arbitrarily, usually interpreted as session typing rule for arbitrary parallel composition), the dual propositions $\mathbf{1}$ and \perp (usually associated with complementary communications for closing sessions) are equivalent. Hence, since in APCP session closing is silent, we follow Caires [Cai14] in conflating the types $\mathbf{1}$ and \perp to the single, self-dual type \bullet for closed sessions.

Type $\mu X. A$ denotes a recursive type, in which A may contain occurrences of the recursion variable X . As customary, μ is a binder: it induces the standard notions of α -equivalence, substitution (denoted $A\{B/X\}$), and free recursion variables (denoted $\text{frv}(A)$). We work with tail-recursive, contractive types, disallowing types of the form $\mu X_1 \dots \mu X_n. X_1$ and $\mu X. X \otimes^\circ A$. Recursive types are treated iso-recursively: there will be an explicit typing rule that unfolds recursive types, and recursive types are not equal to their unfolding. We postpone formalizing the unfolding of recursive types, as it requires additional definitions to ensure consistency of priorities upon unfolding.

Duality, the cornerstone notion of session types and linear logic, ensures that the two names of a channel have matching prefixes. Furthermore, dual types must have matching priority annotations. The following inductive definition of duality suffices for our tail-recursive types (cf. Gay *et al.* [GTV20]).

Definition 3.3.7 (Duality). *The dual of session type A , denoted \bar{A} , is defined inductively as follows:*

$$\begin{array}{lll} \overline{A \otimes^\circ B} \triangleq \bar{A} \wp^\circ \bar{B} & \overline{\oplus^\circ \{i : A_i\}_{i \in I}} \triangleq \&^\circ \{i : \bar{A}_i\}_{i \in I} & \bar{\bullet} \triangleq \bullet & \overline{\mu X.A} \triangleq \mu X.\bar{A} \\ \overline{A \wp^\circ B} \triangleq \bar{A} \otimes^\circ \bar{B} & \overline{\&^\circ \{i : A_i\}_{i \in I}} \triangleq \oplus^\circ \{i : \bar{A}_i\}_{i \in I} & & \bar{X} \triangleq X \end{array}$$

The priority of a type is determined by the priority of the type's outermost connective:

Definition 3.3.8 (Priorities). *For session type A , $\text{pr}(A)$ denotes its priority:*

$$\begin{array}{ll} \text{pr}(A \otimes^\circ B) \triangleq \text{pr}(A \wp^\circ B) \triangleq \circ & \text{pr}(\mu X.A) \triangleq \text{pr}(A) \\ \text{pr}(\oplus^\circ \{i : A_i\}_{i \in I}) \triangleq \text{pr}(\&^\circ \{i : A_i\}_{i \in I}) \triangleq \circ & \text{pr}(\bullet) \triangleq \text{pr}(X) \triangleq \omega \end{array}$$

The priority of \bullet and X is ω : they denote the “final”, non-blocking part of protocols. Although \otimes and \oplus also denote non-blocking prefixes, they do block their continuation until they are received. Hence, their priority is not constant.

We now turn to formalizing the unfolding of recursive types. Recall the intuition that prefixes typed with lower priority should not be blocked by those with higher priority. Based on this rationale, we observe that the unfolding of the recursive type $\mu X.A$ should not result in $A\{\mu X.A/X\}$, as usual, but that the priorities of the unfolded type should be *increased*.

Example 3.3.9. Consider the recursive type $\mu X.A \wp^0 X$. If we unfold this type without increasing the priority, we would obtain $A \wp^0 (\mu X.A \wp^0 X)$, a type in which the priorities no longer determine a global ordering between the two receives. By increasing the priority in the unfolded type as in, e.g., $A \wp^0 (\mu X.A \wp^1 X)$, a global ordering is preserved. ∇

We make this intuition precise by defining the *lift* of priorities in types:

Definition 3.3.10 (Lift). *For proposition A and $t \in \mathbb{N}$, we define $\uparrow^t A$ as the lift operation:*

$$\begin{array}{lll} \uparrow^t(A \otimes^\circ B) \triangleq (\uparrow^t A) \otimes^{\circ+t} (\uparrow^t B) & \uparrow^t(\oplus^\circ \{i : A_i\}_{i \in I}) \triangleq \oplus^{\circ+t} \{i : \uparrow^t A_i\}_{i \in I} & \uparrow^t \bullet \triangleq \bullet \\ \uparrow^t(A \wp^\circ B) \triangleq (\uparrow^t A) \wp^{\circ+t} (\uparrow^t B) & \uparrow^t(\&^\circ \{i : A_i\}_{i \in I}) \triangleq \&^{\circ+t} \{i : \uparrow^t A_i\}_{i \in I} & \\ \uparrow^t(\mu X.A) \triangleq \mu X.(\uparrow^t A) & \uparrow^t X \triangleq X & \end{array}$$

Henceforth, the unfolding of $\mu X.A$ is $A\{\mu X.(\uparrow^t A)/X\}$, denoted $\text{unfold}^t(\mu X.A)$, where $t \in \mathbb{N}$ depends on the highest priority of the types occurring in a typing context. We recall that we do not consider types to be equi-recursive: recursive types are not equal to their unfolding. Recursive types can only be unfolded by typing rules, discussed next.

We now define the top priority of a type, i.e., the highest priority appearing in a type:

Definition 3.3.11 (Top Priority). *For session type A , $\text{top}(A)$ denotes its top priority:*

$$\begin{array}{ll} \text{top}(A \otimes^\circ B) \triangleq \text{top}(A \wp^\circ B) \triangleq \max(\text{top}(A), \text{top}(B), \circ) & \\ \text{top}(\oplus^\circ \{i : A_i\}_{i \in I}) \triangleq \text{top}(\&^\circ \{i : A_i\}_{i \in I}) \triangleq \max(\max_{i \in I}(\text{top}(A_i)), \circ) & \\ \text{top}(\mu X.A) \triangleq \text{top}(A) & \text{top}(\bullet) \triangleq \text{top}(X) \triangleq 0 \end{array}$$

Notice how the top priority of \bullet and X is 0, in contrast to their priority (as given by Definition 3.3.8): they do not contribute to the increase in priority for unfolding recursive types.

Typing rules. The typing rules of APCP ensure that communications with lower priority are not blocked by those with higher priority (cf. Dardha and Gay [DG18]). To this end, they enforce the following laws:

1. Sends and selections with priority \circ must have continuations/payloads with priority strictly larger than \circ ;
2. A communication with priority \circ must be prefixed only by receives and branches with priority strictly smaller than \circ ;
3. Dual communications leading to a synchronization must have equal priorities (cf. Definition 3.3.7).

Judgments are of the form $\Omega \vdash P \blacktriangleright \Gamma$, where:

- P is a process;
- Γ is a context that assigns types to channels ($x : A$);
- Ω is a context that assigns tuples of types to recursion variables ($X : (A, B, \dots)$).

A judgment $\Omega \vdash P \blacktriangleright \Gamma$ then means that P can be typed in accordance with the type assignments for names recorded in Γ and the recursion variables in Ω . Intuitively, the latter context ensures that types concur between the context names of recursive definitions and calls. Both contexts Γ and Ω obey *exchange*: assignments may be silently reordered. Γ is *linear*, disallowing *weakening* (i.e., all assignments must be used; with the exception of names typed \bullet) and *contraction* (i.e., assignments may not be duplicated). Ω allows weakening and contraction, because a recursive definition may be called *zero or more* times.

The empty context is written \emptyset . In writing $\Gamma, x : A$ we assume that $x \notin \text{dom}(\Gamma)$ (and similarly for Ω). We write $\uparrow^t \Gamma$ to denote the component-wise extension of lift (Definition 3.3.10) to typing contexts. Also, we write $\text{pr}(\Gamma)$ to denote the least of the priorities of all types in Γ (Definition 3.3.8). An assignment $\tilde{z} : \tilde{A}$ means $z_1 : A_1, \dots, z_k : A_k$. We define the top priority of a sequence of types $\text{top}(\tilde{A})$ as $\max_{A_i \in \tilde{A}}(\text{top}(A_i))$.

Figure 3.2 (top) gives the typing rules. We describe the typing rules from a *bottom-up* perspective. Rule [TYP-SEND] types a send; this rule does not have premises to provide a continuation process, leaving the free names to be bound to a continuation process using Rules [TYP-PAR] and [TYP-RES] (discussed hereafter). Similarly, Rule [TYP-SEL] types an unbound selection. Both rules require that the priority of the subject is lower than the priorities of both objects (continuation and payload)—this enforces Law 1. Rules [TYP-RECV] and [TYP-BRA] type receives and branches, respectively. In both cases, the used name's priority must be lower than the priorities of the other types in the continuation's typing—this enforces Law 2.

Rule [TYP-PAR] types the parallel composition of two processes that do not share assignments on the same names. Rule [TYP-RES] types a restriction, where the two restricted names must be of dual type and thus have matching priority—this enforces Law 3. Rule [TYP-END] silently removes a closed name from the typing context. Rule [TYP-INACT] types an inactive process with no names. Rule [TYP-FWD] types forwarding between names of dual type—this also enforces Law 3.

$$\begin{array}{c}
\frac{[\text{TYP-SEND}] \quad \circ < \text{pr}(A), \text{pr}(B)}{\Omega \vdash x[y, z] \blacktriangleright x : A \otimes^\circ B, y : \bar{A}, z : \bar{B}} \qquad \frac{[\text{TYP-RECV}] \quad \Omega \vdash P \blacktriangleright \Gamma, y : A, z : B \quad \circ < \text{pr}(\Gamma)}{\Omega \vdash x(y, z); P \blacktriangleright \Gamma, x : A \wp^\circ B} \\
\\
\frac{[\text{TYP-SEL}] \quad j \in I \quad \circ < \text{pr}(A_j)}{\Omega \vdash x[z] \triangleleft j \blacktriangleright x : \oplus^\circ \{i : A_i\}_{i \in I}, z : \bar{A}_j} \qquad \frac{[\text{TYP-BRA}] \quad \forall i \in I. \Omega \vdash P_i \blacktriangleright \Gamma, z : A_i \quad \circ < \text{pr}(\Gamma)}{\Omega \vdash x(z) \triangleright \{i : P_i\}_{i \in I} \blacktriangleright \Gamma, x : \&^\circ \{i : A_i\}_{i \in I}} \\
\\
\frac{[\text{TYP-END}] \quad \Omega \vdash P \blacktriangleright \Gamma}{\Omega \vdash P \blacktriangleright \Gamma, x : \bullet} \qquad \frac{[\text{TYP-PAR}] \quad \Omega \vdash P \blacktriangleright \Gamma \quad \Omega \vdash Q \blacktriangleright \Delta}{\Omega \vdash P | Q \blacktriangleright \Gamma, \Delta} \qquad \frac{[\text{TYP-RES}] \quad \Omega \vdash P \blacktriangleright \Gamma, x : A, y : \bar{A}}{\Omega \vdash (\mathbf{v}xy)P \blacktriangleright \Gamma} \qquad \frac{[\text{TYP-INACT}] \quad}{\Omega \vdash \mathbf{0} \blacktriangleright \emptyset} \\
\\
\frac{[\text{TYP-FWD}] \quad}{\Omega \vdash [x \leftrightarrow y] \blacktriangleright x : \bar{A}, y : A} \\
\\
\frac{[\text{TYP-REC}] \quad \Omega, X : \tilde{A} \vdash P \blacktriangleright \tilde{z} : \tilde{U} \quad t \in \mathbb{N} \triangleright \text{top}(\tilde{A}) \quad \forall U_i \in \tilde{U}. U_i = \text{unfold}^t(\mu X. A_i)}{\Omega \vdash \mu X(\tilde{z}); P \blacktriangleright \tilde{z} : \overline{\mu X. \tilde{A}}} \\
\\
\frac{[\text{TYP-VAR}] \quad t \in \mathbb{N} \quad \forall U_i \in \tilde{U}. U_i = \mu X. \uparrow^t A_i}{\Omega, X : \tilde{A} \vdash X(\tilde{z}) \blacktriangleright \tilde{z} : \tilde{U}} \\
\\
\hdashline
\frac{[\text{TYP-SEND}\star] \quad \Omega \vdash P \blacktriangleright \Gamma, y : A, x : B \quad \circ < \text{pr}(A), \text{pr}(B)}{\Omega \vdash \bar{x}[y] \cdot P \blacktriangleright \Gamma, x : A \otimes^\circ B} \qquad \frac{[\text{TYP-SEL}\star] \quad \Omega \vdash P \blacktriangleright \Gamma, x : A_j \quad j \in I \quad \circ < \text{pr}(A_j)}{\Omega \vdash \bar{x} \triangleleft j \cdot P \blacktriangleright \Gamma, x : \oplus^\circ \{i : A_i\}_{i \in I}} \\
\\
\frac{[\text{TYP-LIFT}] \quad \Omega \vdash P \blacktriangleright \Gamma \quad t \in \mathbb{N}}{\Omega \vdash P \blacktriangleright \uparrow^t \Gamma}
\end{array}$$

Figure 3.2 | The typing rules of APCP (top) and derivable rules (bottom).

Example 3.3.12. To illustrate the typing rules discussed so far, we recall process P from Example 3.3.5:

$$\begin{aligned}
P = (\mathbf{v}zu) & \left((\mathbf{v}xy) \left((\mathbf{v}ax') (x[v_1, a] \mid x'[v_2, b]) \right. \right. \\
& \quad \left. \left. \mid (\mathbf{v}cz') (z[v_3, c] \mid y(w_1, y'); y'(w_2, y''); Q) \right) \right. \\
& \quad \left. \mid u(w_3, u'); R \right)
\end{aligned}$$

We give the typing of the two consecutive sends on x (omitting the context Ω):

$$\begin{array}{c}
\frac{\circ < \text{pr}(A_1), \pi}{\vdash x[v_1, a] \blacktriangleright x : \overline{A_1} \otimes^\circ \overline{A_2} \otimes^\pi \overline{B}, \quad v_1 : \overline{A_1}, a : \overline{A_2} \otimes^\pi \overline{B}} \text{[TYP-SEND]} \quad \frac{\pi < \text{pr}(A_2), \text{pr}(B)}{\vdash x'[v_2, b] \blacktriangleright x' : \overline{A_2} \otimes^\pi \overline{B}, \quad v_2 : \overline{A_2}, b : \overline{B}} \text{[TYP-SEND]} \\
\frac{}{\vdash x[v_1, a] \mid x'[v_2, b] \blacktriangleright v_1 : \overline{A_1}, v_2 : \overline{A_2}, b : \overline{B}, x : \overline{A_1} \otimes^\circ \overline{A_2} \otimes^\pi \overline{B}, \quad a : \overline{A_2} \otimes^\pi \overline{B}, x' : \overline{A_2} \otimes^\pi \overline{B}} \text{[TYP-PAR]} \\
\frac{}{\vdash (\mathbf{v}ax')(x[v_1, a] \mid x'[v_2, b]) \blacktriangleright v_1 : \overline{A_1}, v_2 : \overline{A_2}, b : \overline{B}, x : \overline{A_1} \otimes^\circ \overline{A_2} \otimes^\pi \overline{B}} \text{[TYP-RES]}
\end{array}$$

3

As discussed before, this typing leaves the (free) names v_1 , v_2 , and b to be accounted for by the context.

Now let us derive the typing of the consecutive receives on y , i.e., of the subprocess $y(w_1, y'); y'(w_2, y''); Q$. Because x and y are dual names in P , the type of y should be dual to the type of x above:

$$\frac{\frac{\vdash Q \blacktriangleright \Gamma, w_1 : \overline{A_1}, w_2 : \overline{A_2}, y'' : \overline{B} \quad \pi < \text{pr}(\Gamma, w_1 : \overline{A_1})}{\vdash y'(w_2, y''); Q \blacktriangleright \Gamma, w_1 : \overline{A_1}, y' : \overline{A_2} \wp^\pi \overline{B}} \text{[TYP-RECV]} \quad \circ < \text{pr}(\Gamma)}{\vdash y(w_1, y'); y'(w_2, y''); Q \blacktriangleright \Gamma, y : \overline{A_1} \wp^\circ \overline{A_2} \wp^\pi \overline{B}} \text{[TYP-RECV]}$$

These two derivations tell us that $\circ < \pi < \text{pr}(A_1), \text{pr}(A_2), \text{pr}(B), \text{pr}(\Gamma)$. This way, the type system ensures that none of the sessions in Q can be connected to sessions that block the sends on x, x' , which may leave the door open for a deadlock otherwise. ∇

Note that a single application of Rule [TYP-PAR] followed by Rule [TYP-RES] coincides with the usual Rule [CUT] in type systems based on linear logic [CP10; Wad12]. Without priority annotations and conditions, Rules [TYP-PAR] and [TYP-RES] give rise to deadlocks, though their restriction to Rule [CUT] would prevent this:

Example 3.3.13. Consider the following process, arguably the paradigmatic example of a deadlock:

$$Q \triangleq (\mathbf{v}xy)(\mathbf{v}zw)(x(u); \bar{z}[u'] \cdot \mathbf{0} \mid w(v); \bar{y}[v'] \cdot \mathbf{0})$$

Without priorities (and priority checks), this process can be typed using Rules [TYP-PAR] and [TYP-RES]:

$$\frac{\frac{\frac{\overline{\vdash \mathbf{0} \blacktriangleright \emptyset} \text{[TYP-INACT]}}{\vdash \mathbf{0} \blacktriangleright z : \bullet, x : \bullet, u : \bullet, u' : \bullet} \text{[TYP-END]}^4}{\vdash \bar{z}[u'] \cdot \mathbf{0} \blacktriangleright z : \bullet \otimes \bullet, x : \bullet, u : \bullet} \text{[TYP-SEND*]} \quad \frac{\frac{\overline{\vdash \mathbf{0} \blacktriangleright \emptyset} \text{[TYP-INACT]}}{\vdash \mathbf{0} \blacktriangleright w : \bullet, y : \bullet, v : \bullet, v' : \bullet} \text{[TYP-END]}^4}{\vdash \bar{y}[v'] \cdot \mathbf{0} \blacktriangleright w : \bullet, y : \bullet \otimes \bullet, v : \bullet} \text{[TYP-SEND*]}}{\vdash x(u); \bar{z}[u'] \cdot \mathbf{0} \blacktriangleright z : \bullet \otimes \bullet, x : \bullet \wp \bullet \quad \vdash w(v); \bar{y}[v'] \cdot \mathbf{0} \blacktriangleright w : \bullet \otimes \bullet, y : \bullet \wp \bullet} \text{[TYP-REC]}}{\vdash Q \blacktriangleright \emptyset} \text{[TYP-PAR]+ [TYP-RES]}^2$$

On the other hand, were we to restrict parallel composition and restriction to Rule [CUT], Q would not be typable: Rule [CUT] can only type one of the restrictions, not both. With priorities, Q would not be typable either, due to the requirements induced by Rule [TYP-RECV]: (i) the priority \circ of the input on x is smaller than the priority π of the send on z (left-hand side

above), and (ii) the priority π of the input on w is smaller than the priority \circ of the send on y (right-hand side above). Clearly, these requirements combined are unsatisfiable. ∇

Rules [TYP-REC] and [TYP-VAR] type recursive processes, where the former types recursive definitions and the latter types recursive calls. A naive Rule [TYP-REC] would require a name typed $\mu X.A$ at the recursive definition to be typed simply A in the recursive body. The associated naive Rule [TYP-VAR] would then require all names to be typed X , using the recursive context to make sure that the number of names concurs between recursive definition and call. However, as the following example shows, such a combination of rules discards priority annotations to a point where it is possible to type processes that deadlock:

Example 3.3.14. Consider the processes

$$\begin{aligned} P &\triangleq \mu X(x, y); \bar{x}[a] \cdot x(b); \bar{y}[c] \cdot y(d); X\langle y, x \rangle, \\ Q &\triangleq \mu X(u, v); u(a); \bar{u}[b] \cdot v(c); \bar{v}[d] \cdot X\langle u, v \rangle. \end{aligned}$$

Notice how the recursive call in P swaps x and y . Let us see what happens if we unfold the recursion in P and Q :

$$\begin{aligned} P &\equiv \bar{x}[a] \cdot x(b); \bar{y}[c] \cdot y(d); \mu X(y, x); \bar{y}[a] \cdot y(b); \bar{x}[c] \cdot x(d); X\langle x, y \rangle \\ Q &\equiv u(a); \bar{u}[b] \cdot v(c); \bar{v}[d] \cdot \mu X(u, v); u(a); \bar{u}[b] \cdot v(c); \bar{v}[d] \cdot X\langle u, v \rangle \end{aligned}$$

If we connect these processes on the names x and u and on y and v , we can see that the second recursive definition of this process contains a deadlock: the second receive on y is blocking the second send on x , while the second receive on u (waiting for the second send on x) is blocking the second send on v (for which the second receive on y is waiting).

Yet, P is typable using the naive typing rules described above:

$$\frac{\frac{\frac{X : 2 \vdash X\langle y, x \rangle \blacktriangleright x : X, y : X}{\dots}}{X : 2 \vdash \bar{x}[a] \cdot x(b); \bar{y}[c] \cdot y(d); X\langle y, x \rangle \blacktriangleright x : \bullet \otimes^0 \bullet \wp^1 X, y : \bullet \otimes^2 \bullet \wp^3 X}}{\emptyset \vdash \mu X(x, y); \bar{x}[a] \cdot x(b); \bar{y}[c] \cdot y(d); X\langle y, x \rangle \blacktriangleright x : \mu X. \bullet \otimes^0 \bullet \wp^1 X, y : \mu X. \bullet \otimes^2 \bullet \wp^3 X}}{\text{[TYP-REC-NAIVE]}} \text{[TYP-VAR-NAIVE]}$$

Thus, these naive rules prevent deadlock-freedom by typing. ∇

The solution is for Rule [TYP-REC] to unfold all types. While unfolding, the priorities in these types are lifted by a common value, denoted t in the rule, that must be greater than the top priority occurring in the original types (cf. Definition 3.3.11). This makes sure that any priority requirements that come up in the typing of the recursive body of the process remain valid. The recursive context is used to record the bodies of the original folded types. Rule [TYP-REC] then requires that the types of names are recursive on the recursion variable used for the call. It checks that the bodies of the types concur with the types recorded in the recursive context, up to a lift by a common value t (i.e., the lifter used in the application of Rule [TYP-REC]).

Example 3.3.15. To see how the unfolding of types and the common lifter in Rule [TYP-REC] prevents P from Example 3.3.14 from being typable, let us find a typing derivation for P :

$$\begin{array}{c}
\frac{X : (\bullet \otimes^0 \bullet \wp^1 X, \bullet \otimes^2 \bullet \wp^3 X) \vdash X \langle y, x \rangle}{\triangleright x : \mu X. \uparrow^t (\bullet \otimes^0 \bullet \wp^1 X), y : \mu X. \uparrow^t (\bullet \otimes^2 \bullet \wp^3 X)} \text{ [TYP-VAR]} \\
\hline
\frac{X : (\bullet \otimes^0 \bullet \wp^1 X, \bullet \otimes^2 \bullet \wp^3 X) \vdash \bar{x}[a] \cdot x(b); \bar{y}[c] \cdot y(d); X \langle y, x \rangle}{\triangleright x : \bullet \otimes^0 \bullet \wp^1 (\mu X. \uparrow^t (\bullet \otimes^0 \bullet \wp^1 X)), \\ \triangleright y : \bullet \otimes^2 \bullet \wp^3 (\mu X. \uparrow^t (\bullet \otimes^2 \bullet \wp^3 X))} \dots \\
\hline
\frac{\dots}{\emptyset \vdash \mu X(x, y); \bar{x}[a] \cdot x(b); \bar{y}[c] \cdot y(d); X \langle y, x \rangle \triangleright x : \mu X. \bullet \otimes^0 \bullet \wp^1 X, y : \mu X. \bullet \otimes^2 \bullet \wp^3 X} \text{ [TYP-REC]}
\end{array}$$

The application of Rule [TYP-VAR] at the top here is invalid: it is impossible to find a lifter t that matches the priorities in the type of x with those in the second type assigned to X , while simultaneously doing the same for the type of y and the first type assigned to X . However, if the call were $X \langle x, y \rangle$, the application of Rule [TYP-VAR] would be valid. ∇

Remark 3.3.16 (Comparison to PCP). Consider the typing rules for sending and selection in PCP, in which both are blocking prefixes and do not involve continuation-passing. Note that PCP does not have recursion, and we thus omit the recursive context Ω .

$$\begin{array}{c}
\text{[TYP-SEND-PCP]} \\
\frac{\vdash P \blacktriangleright \Gamma, y : A, x : B \quad \circ < \text{pr}(\Gamma)}{\vdash \bar{x}[y]; P \blacktriangleright \Gamma, x : A \otimes^\circ B} \\
\text{[TYP-SEL-PCP]} \\
\frac{\vdash P \blacktriangleright \Gamma, x : A_j \quad j \in I \quad \circ < \text{pr}(\Gamma)}{\vdash \bar{x} \triangleleft j; P \blacktriangleright \Gamma, x : \otimes^\circ \{i : A_i\}_{i \in I}}
\end{array}$$

These rules are similar to the Rules [TYP-SEND*] and [TYP-SEL*] in Figure 3.2 for the sugared syntax introduced in Notation 3.3.2; the differences are twofold. First, the semicolons ‘;’ indicate that sends and selections are indeed blocking. Second, the rules compare the priority of the send/selection to the priorities in the context, whereas our rules compare this priority to the priorities of the continuation of the send/selection. ∇

As anticipated, the binding of sends and selections to continuation processes (Notation 3.3.2) is derivable in APCP. The corresponding typing rules in Figure 3.2 (bottom) are admissible using Rules [TYP-PAR] and [TYP-RES]. It is not necessary to include rules for the sugared receive and branching in Notation 3.3.2, because they rely on α -renaming only. Figure 3.2 (bottom) also includes an admissible Rule [TYP-LIFT] that lifts a process’ priorities.

Theorem 3.3.17. *Rules [TYP-SEND*] and [TYP-SEL*] in Figure 3.2 (bottom) are derivable, and Rule [TYP-LIFT] in Figure 3.2 (bottom) is admissible.*

Proof (Sketch). We show the derivability of Rules [TYP-SEND*] and [TYP-SEL*] by giving their derivations in Figure 3.3 (omitting the recursive context Ω). Rule [TYP-LIFT] is admissible, because $\Omega \vdash P \blacktriangleright \Gamma$ implies $\Omega \vdash P \blacktriangleright \uparrow^t \Gamma$ (cf. Dardha and Gay [DG18]), by simply increasing all priorities in the derivation of P by t . \square

Theorem 3.3.17 highlights how APCP’s asynchrony uncovers a more primitive, lower-level view of message-passing. In the next subsection we discuss deadlock-freedom, which follows

$$\begin{array}{c}
\frac{[\text{TYP-SEND*}]}{\frac{\vdash P \blacktriangleright \Gamma, y : A, x : B \quad \circ < \text{pr}(A), \text{pr}(B)}{\vdash \bar{x}[y] \cdot P \blacktriangleright \Gamma, x : A \otimes^\circ B}} \\
\Rightarrow \\
\frac{\frac{\frac{\frac{\frac{\frac{\frac{\vdash x[a, b] \blacktriangleright x : A \otimes^\circ B, a : \bar{A}, b : \bar{B}}{\vdash x[a, b] | P\{z/x\} \blacktriangleright \Gamma, y : A, z : B} \quad \vdash P\{z/x\} \blacktriangleright \Gamma, y : A, z : B} \quad \vdash x[a, b] | P\{z/x\} \blacktriangleright \Gamma, x : A \otimes^\circ B, y : A, a : \bar{A}, z : B, b : \bar{B}}{\vdash (\mathbf{v}y a)(\mathbf{v}z b)(x[a, b] | P\{z/x\}) \blacktriangleright \Gamma, x : A \otimes^\circ B} \quad 2 \times [\text{TYP-RES}]}{\bar{x}[y] \cdot P \text{ (cf. Notation 3.3.2)}} \quad [\text{TYP-SEND}]}{\vdash x[a, b] | P\{z/x\} \blacktriangleright \Gamma, x : A \otimes^\circ B, y : A, a : \bar{A}, z : B, b : \bar{B}} \quad [\text{TYP-PAR}]} \\
\frac{[\text{TYP-SEL*}]}{\frac{\vdash P \blacktriangleright \Gamma, x : A_j \quad j \in I \quad \circ < \text{pr}(A_j)}{\vdash \bar{x} \triangleleft j \cdot P \blacktriangleright \Gamma, x : \oplus^\circ \{i : A_i\}_{i \in I}} \\
\Rightarrow \\
\frac{\frac{\frac{\frac{\frac{\frac{\frac{\vdash x[b] \triangleleft j \blacktriangleright x : \oplus^\circ \{i : A_i\}_{i \in I}, b : \bar{A}_j}{\vdash x[b] \triangleleft j | P\{z/x\} \blacktriangleright \Gamma, x : \oplus^\circ \{i : A_i\}_{i \in I}, z : A_j, b : \bar{A}_j} \quad \vdash P\{z/x\} \blacktriangleright \Gamma, z : A_j} \quad \vdash x[b] \triangleleft j | P\{z/x\} \blacktriangleright \Gamma, x : \oplus^\circ \{i : A_i\}_{i \in I}, z : A_j, b : \bar{A}_j} \quad \vdash (\mathbf{v}z b)(x[b] \triangleleft j | P\{z/x\}) \blacktriangleright \Gamma, x : \oplus^\circ \{i : A_i\}_{i \in I}} \quad [\text{TYP-RES}]}{\bar{x} \triangleleft j \cdot P \text{ (cf. Notation 3.3.2)}} \quad [\text{TYP-SEL}]}{\vdash x[b] \triangleleft j \blacktriangleright x : \oplus^\circ \{i : A_i\}_{i \in I}, b : \bar{A}_j} \quad [\text{TYP-PAR}]}
\end{array}$$

Figure 3.3 | Proof that Rules [TYP-SEND*] and [TYP-SEL*] are derivable (cf. Theorem 3.3.17).

from a correspondence between reduction and the transformation of typing derivations to eliminate applications of Rule [TYP-RES]. In the case of APCP, this requires care: binding sends and selections to continuation processes leads to applications of Rule [TYP-RES] that do not immediately correspond to reductions.

*Remark 3.3.18 (Comparison To DeYoung *et al.*).* Our rules for sending and selection are axiomatic, whereas DeYoung *et al.*'s are in the form of Rules [TYP-SEND*] and [TYP-SEL*], even though their sends and selections are parallel atomic prefixes as well [DeY+12]. While our type system is based on classical linear logic (with single-sided judgments), their type system is based on *intuitionistic* linear logic. As a result, their typing judgments are two-sided, restriction involves a single name, and there are two rules (right and left) per connective. This way, for instance, their right rules for sending and selection are as follows (again omitting the recursive context Ω for a lack of recursion):

$$\frac{[\text{TYP-SEND-R}]}{\frac{\Gamma \vdash P \blacktriangleright y : A \quad \Delta \vdash Q \blacktriangleright x' : B}{\Gamma, \Delta \vdash (\mathbf{v}y)(\mathbf{v}x')(x[y, x'] | P | Q) \blacktriangleright x : A \otimes B}} \quad \frac{[\text{TYP-SEL-R}]}{\frac{\Gamma \vdash P \blacktriangleright x' : A_j \quad j \in I}{\Gamma \vdash (\mathbf{v}x')(x[x'] \triangleleft j | P) \blacktriangleright x : \oplus \{i : A_i\}_{i \in I}} \quad \nabla}$$

The following result is important: it shows that the type system of APCP is complete with respect to types, i.e., every syntactical type has a well-typed process.

Proposition 3.3.19. *Given a type A , there exists $\Omega \vdash P \blacktriangleright x : A$.*

Proof (Sketch). By constructing P from the structure of A . To this end, we define characteristic processes: a function $\text{char}^x(A)$ that constructs a process that performs the behavior described by A on the name x .

3

$$\begin{aligned}
\text{char}^x(A \otimes^\circ B) &\triangleq \bar{x}[y] \cdot (\text{char}^y(A) \mid \text{char}^x(B)) & \text{char}^x(\bullet) &\triangleq \mathbf{0} \\
\text{char}^x(A \wp^\circ B) &\triangleq x(y); (\text{char}^y(A) \mid \text{char}^x(B)) & \text{char}^x(\mu X.A) &\triangleq \mu X(x); \text{char}^x(A) \\
\text{char}^x(\oplus^\circ \{i : A_i\}_{i \in I}) &\triangleq \bar{x} \langle j \cdot \text{char}^x(A_j) \text{ (any } j \in I) & \text{char}^x(X) &\triangleq X \langle x \rangle \\
\text{char}^x(\&^\circ \{i : A_i\}_{i \in I}) &\triangleq x \triangleright \{i : \text{char}^x(A_i)\}_{i \in I}
\end{aligned}$$

For finite types, it is obvious that $\emptyset \vdash \text{char}^x(A) \blacktriangleright x : A$. For simplicity, we omit details about recursive types, which require unfolding. For closed, recursive types, the thesis is obvious as well: $\emptyset \vdash \text{char}^x(\mu X.A) \blacktriangleright x : \mu X.A$. \square

3.3.3. TYPE PRESERVATION AND DEADLOCK-FREEDOM

Well-typed processes satisfy protocol fidelity, communication safety, and deadlock-freedom. The former two of these properties follow from *type preservation*, which ensures that APCP's semantics preserves typing. In contrast to Caires and Pfenning [CP10] and Wadler [Wad12], where type preservation corresponds to the elimination of (top-level) applications of Rule [CUT], in APCP it corresponds to the elimination of (top-level) applications of Rule [TYPE-RES]. Proofs are detailed in Appendix B.

APCP's semantics consists of reduction and structural congruence. Since the former relies on the latter, we first need to show type preservation for structural congruence, i.e., *subject congruence*. The structural congruence rule that unfolds recursive definitions requires care, because the types of the unfolded process are also unfolded:

Example 3.3.20. Consider the following typed recursive definition:

$$\emptyset \vdash \mu X(x, y); x(a); y(b); X \langle x, y \rangle \blacktriangleright x : \mu X. \bullet \wp^0 X, y : \mu X. \bullet \wp^1 X$$

Figure 3.4 illustrates an attempt at typing the unfolding of this process. Clearly, the typing of the unfolded process is not the same as the initial type, but they are equal up to unfolding of types. Note that the application of Rule [TYP-REC] unfolds the types with a common lifter of 4, because it needs to be larger than the top priority in the types before unfolding which is 3. ∇

Hence, type preservation holds *up to unfolding*. To formalize this, we define the relation $(\vdash P \blacktriangleright \Gamma) \simeq \Gamma'$, which says that Γ and Γ' are equal up to (un)folding of recursive types consistent with the typing of P under Γ :

$$\begin{array}{c}
\frac{}{X : (\bullet \wp^2 X, \bullet \wp^3 X) \vdash X \langle x, y \rangle \blacktriangleright x : \mu X. \bullet \wp^6 X, y : \mu X. \bullet \wp^7 X} \text{[TYP-VAR]} \\
\frac{}{\frac{}{X : (\bullet \wp^2 X, \bullet \wp^3 X) \vdash X \langle x, y \rangle \blacktriangleright x : \mu X. \bullet \wp^6 X, y : \mu X. \bullet \wp^7 X, b' : \bullet} \text{[TYP-END]} \\
\frac{}{X : (\bullet \wp^2 X, \bullet \wp^3 X) \vdash y(b'); X \langle x, y \rangle \blacktriangleright x : \mu X. \bullet \wp^6 X, y : \bullet \wp^3 \mu X. \bullet \wp^7 X} \text{[TYP-REC]} \\
\frac{}{X : (\bullet \wp^2 X, \bullet \wp^3 X) \vdash y(b'); X \langle x, y \rangle \blacktriangleright x : \mu X. \bullet \wp^6 X, y : \bullet \wp^3 \mu X. \bullet \wp^7 X, a' : \bullet} \text{[TYP-END]} \\
\frac{}{X : (\bullet \wp^2 X, \bullet \wp^3 X) \vdash x(a'); y(b'); X \langle x, y \rangle \blacktriangleright x : \underbrace{\bullet \wp^2 \mu X. \bullet \wp^6 X}_{\text{unfold}^4(\mu X. \bullet \wp^2 X)}, y : \underbrace{\bullet \wp^3 \mu X. \bullet \wp^7 X}_{\text{unfold}^4(\mu X. \bullet \wp^3 X)}} \text{[TYP-REC]} \\
\frac{}{\emptyset \vdash \mu X(x, y); x(a'); y(b'); X \langle x, y \rangle \blacktriangleright x : \mu X. \bullet \wp^2 X, y : \mu X. \bullet \wp^3 X} \text{[TYP-REC]} \\
\frac{}{\emptyset \vdash \mu X(x, y); x(a'); y(b'); X \langle x, y \rangle \blacktriangleright x : \mu X. \bullet \wp^2 X, y : \mu X. \bullet \wp^3 X, b : \bullet} \text{[TYP-END]} \\
\frac{}{\emptyset \vdash y(b); \mu X(x, y); x(a'); y(b'); X \langle x, y \rangle \blacktriangleright x : \mu X. \bullet \wp^2 X, y : \bullet \wp^1 \mu X. \bullet \wp^3 X} \text{[TYP-REC]} \\
\frac{}{\emptyset \vdash y(b); \mu X(x, y); x(a'); y(b'); X \langle x, y \rangle \blacktriangleright x : \mu X. \bullet \wp^2 X, y : \bullet \wp^1 \mu X. \bullet \wp^3 X, a : \bullet} \text{[TYP-END]} \\
\frac{}{\emptyset \vdash x(a); y(b); \mu X(x, y); x(a'); y(b'); X \langle x, y \rangle \blacktriangleright x : \underbrace{\bullet \wp^0 \mu X. \bullet \wp^2 X}_{\text{unfold}^2(\mu X. \bullet \wp^0 X)}, y : \underbrace{\bullet \wp^1 \mu X. \bullet \wp^3 X}_{\text{unfold}^2(\mu X. \bullet \wp^1 X)}} \text{[TYP-REC]}
\end{array}$$

Figure 3.4 | Attempt at a typing derivation (cf. Example 3.3.20).

Definition 3.3.21. We define an asymmetric relation between a typed process $(\Omega \vdash P \blacktriangleright \Gamma)$ and a typing context Γ' , denoted $(\Omega \vdash P \blacktriangleright \Gamma) \lesssim \Gamma'$. The relation is defined by the inference rules in Figure 3.5, where each rule implicitly requires that $\Omega \vdash P \blacktriangleright \Gamma$ is a valid typing derivation by the rules in Figure 3.2.

We write $(\Omega \vdash P \blacktriangleright \Gamma) \cong (\Omega' \vdash Q \blacktriangleright \Gamma')$ if $(\Omega \vdash P \blacktriangleright \Gamma) \lesssim \Gamma'$ and $(\Omega' \vdash Q \blacktriangleright \Gamma') \lesssim \Gamma$.

The most important rules of Figure 3.5 are Rules [UNF-UNF] and [UNF-FOLD] (above the line), as they relate unfolding and folding; the other rule (below the line) follow the typing rules in Figure 3.2. Note that the rules in Figure 3.5 require no priority requirements, as they are covered by the implicit validity of the derivation of $\Omega \vdash P \blacktriangleright \Gamma$.

Proposition 3.3.22 (Transitivity of \cong). *If (i) $(\Omega_1 \vdash P_1 \blacktriangleright \Gamma_1) \cong (\Omega_2 \vdash P_2 \blacktriangleright \Gamma_2)$ and (ii) $(\Omega_2 \vdash P_2 \blacktriangleright \Gamma_2) \cong (\Omega_3 \vdash P_3 \blacktriangleright \Gamma_3)$, then $(\Omega_1 \vdash P_1 \blacktriangleright \Gamma_1) \cong (\Omega_3 \vdash P_3 \blacktriangleright \Gamma_3)$.*

Proof (Sketch). Since \cong is reflexive by definition, it suffices to show that (i) $(\Omega_1 \vdash P_1 \blacktriangleright \Gamma_1) \lesssim \Gamma_2$ and (ii) $(\Omega_2 \vdash P_2 \blacktriangleright \Gamma_2) \lesssim \Gamma_3$ imply $(\Omega_1 \vdash P_1 \blacktriangleright \Gamma_1) \lesssim \Gamma_3$. Assumptions (i) and (ii) relate $\Gamma_1, \Gamma_2, \Gamma_3$ by applications of Rules [UNF-FOLD] and [UNF-UNF]. Clearly, the relation between Γ_1 and Γ_3 can then be derived directly by combining the applications of these rules. \square

Subject congruence additionally requires the following property of typing derivations involving recursion variables:

$$\frac{[\text{UNF-FOLD}] \quad (\Omega \vdash P\{\{\mu X(\tilde{y}); P\{\tilde{y}/\tilde{z}\}\}/X\langle\tilde{y}\rangle\} \blacktriangleright \tilde{z} : \tilde{U}) \lesssim \tilde{z} : \tilde{U}' \quad \forall U'_i \in \tilde{U}'; U'_i = \text{unfold}^t(\mu X.A'_i)}{(\Omega \vdash P\{\{\mu X(\tilde{y}); P\{\tilde{y}/\tilde{z}\}\}/X\langle\tilde{y}\rangle\} \blacktriangleright \tilde{z} : \tilde{U}) \lesssim \tilde{z} : \widetilde{\mu X.A'}}$$

$$\frac{[\text{UNF-UNF}] \quad (\Omega \vdash \mu X(\tilde{z}); P \blacktriangleright \tilde{z} : \widetilde{\mu X.A}) \lesssim \tilde{z} : \widetilde{\mu X.A'} \quad \forall U'_i \in \tilde{U}'; U'_i = \text{unfold}^t(\mu X.A'_i)}{(\Omega \vdash \mu X(\tilde{z}); P \blacktriangleright \tilde{z} : \widetilde{\mu X.A}) \lesssim \tilde{z} : \tilde{U}'}$$

$$\frac{[\text{UNF-SEND}]}{(\Omega \vdash x[y, z] \blacktriangleright x : A \otimes B, y : \bar{A}, z : \bar{B}) \lesssim x : A \otimes B, y : \bar{A}, z : \bar{B}}$$

$$\frac{[\text{UNF-RECV}] \quad (\Omega \vdash P \blacktriangleright \Gamma, y : A, z : B) \lesssim \Gamma', y : A', z : B'}{(\Omega \vdash x(y, z); P \blacktriangleright \Gamma, x : A \wp B) \lesssim \Gamma', x : A' \wp B'}$$

$$\frac{[\text{UNF-SEL}]}{(\Omega \vdash x[z] \triangleleft j \blacktriangleright x : \oplus^{\circ}\{i : A_i\}_{i \in I}, z : \bar{A}_j) \lesssim x : \oplus^{\circ}\{i : A_i\}_{i \in I}, z : \bar{A}_j}$$

$$\frac{[\text{UNF-BRA}] \quad \forall i \in I. (\Omega \vdash P_i \blacktriangleright \Gamma, z : A_i) \lesssim \Gamma', z : A'_i}{(\Omega \vdash x(z) \triangleright \{i : P_i\}_{i \in I} \blacktriangleright \Gamma, x : \&^{\circ}\{i : A_i\}_{i \in I}) \lesssim \Gamma', x : \&^{\circ}\{i : A'_i\}_{i \in I}}$$

$$\frac{[\text{UNF-END}] \quad (\Omega \vdash P \blacktriangleright \Gamma) \lesssim \Gamma'}{(\Omega \vdash P \blacktriangleright \Gamma, x : \bullet) \lesssim \Gamma', x : \bullet}$$

$$\frac{[\text{UNF-PAR}] \quad (\Omega \vdash P \blacktriangleright \Gamma) \lesssim \Gamma' \quad (\Omega \vdash Q \blacktriangleright \Delta) \lesssim \Delta'}{(\Omega \vdash P | Q \blacktriangleright \Gamma, \Delta) \lesssim \Gamma', \Delta'}$$

$$\frac{[\text{UNF-RES}] \quad (\Omega \vdash P \blacktriangleright \Gamma, x : A, y : \bar{A}) \lesssim \Gamma', x : A', y : \bar{A}'}{(\Omega \vdash (\nu x)P \blacktriangleright \Gamma) \lesssim \Gamma'}$$

$$\frac{[\text{UNF-INACT}]}{(\Omega \vdash \mathbf{0} \blacktriangleright \emptyset) \lesssim \emptyset}$$

$$\frac{[\text{UNF-FWD}]}{(\Omega \vdash [x \leftrightarrow y] \blacktriangleright x : \bar{A}, y : A) \lesssim x : \bar{A}, y : A}$$

$$\frac{[\text{UNF-REC}] \quad (\Omega, X : \bar{A} \vdash P \blacktriangleright \tilde{z} : \tilde{U}) \lesssim \tilde{z} : \tilde{U}'}{(\Omega \vdash \mu X(\tilde{z}); P \blacktriangleright \tilde{z} : \widetilde{\mu X.A}) \lesssim \tilde{z} : \widetilde{\mu X.A'}}$$

$$\frac{[\text{UNF-VAR}]}{(\Omega, X : \bar{A} \vdash X\langle\tilde{z}\rangle \blacktriangleright \tilde{z} : \tilde{U}) \lesssim \tilde{z} : \tilde{U}}$$

Figure 3.5 | Inference rules for Definition 3.3.21.

$$\begin{array}{c}
\frac{\frac{\frac{}{\vdash x[a, b] \blacktriangleright x : A \otimes^\circ B, a : \bar{A}, b : \bar{B}} \text{[TYP-SEND]}}{\vdash P \blacktriangleright \Gamma, z : \bar{A}, y' : \bar{B}} \text{[TYP-RECV]}}{\vdash y(z, y'); P \blacktriangleright \Gamma, y : \bar{A} \wp^\circ \bar{B}} \text{[TYP-PAR]+[TYP-RES]}}{\vdash (\nu xy)(x[a, b] \mid y(z, y'); P) \blacktriangleright \Gamma, a : \bar{A}, b : \bar{B}} \\
\rightarrow \\
\vdash P\{a/z, b/y'\} \blacktriangleright \Gamma, a : \bar{A}, b : \bar{B}
\end{array}$$

Figure 3.6 | Example of subject reduction (cf. Theorem 3.3.25) in Rule [RED-SEND-RECV]. The well-typedness of the process before reduction allows us to infer its typing derivation, also giving us the typing of P . Typing the process after reduction is then a matter of inductively substituting names in the typing derivation of P .

Proposition 3.3.23. *Suppose given a process P and a derivation π of $\Omega, X : (A_l)_{l \in L} \vdash P \blacktriangleright \Gamma$. In every step in π , the assignment $X : (A_l)_{l \in L}$ in the recursive context is not modified nor removed, and no other assignments on the recursion variable X are added.*

Proof (Sketch). By induction on the height of the derivation π : no typing rule eliminates assignments from the recursive context, and no typing rule changes the types assigned to a recursion variable in the recursive context. Moreover, in our type system, any rule adding an assignment to a context implicitly assumes that the newly introduced name or recursion variable is not in the context yet. Hence, an assignment on X cannot be added by any rule. \square

Now we can state and prove subject congruence, up to the relation in Definition 3.3.21:

Theorem 3.3.24 (Subject Congruence). *If $\Omega \vdash P \blacktriangleright \Gamma$ and $P \equiv Q$, then there exists Γ' such that $\Omega \vdash Q \blacktriangleright \Gamma'$ and $(\Omega \vdash P \blacktriangleright \Gamma) \cong (\Omega \vdash Q \blacktriangleright \Gamma')$.*

Proof (Sketch). By induction on the derivation of $P \equiv Q$. The inductive cases induced by process contexts follow from the IH straightforwardly. Base cases, induced by the axioms in Definition 3.3.3, are straightforward with $\Gamma' = \Gamma$, except for (un)folding recursion. In the case of unfolding, we derive the typing of the unfolded process by substituting relevant applications of Rule [TYP-VAR] by copies of the entire recursive definition, appropriately renamed and weakened. The resulting process is typed under Γ' . Hence, we need to show the relation between the original and the derived typing following Definition 3.3.21. This is straightforward since Γ' is simply an unfolding of Γ . The case of folding is analogous. \square

Now we can prove that reduction preserves typing, i.e., *subject reduction*:

Theorem 3.3.25 (Subject Reduction). *If $\Omega \vdash P \blacktriangleright \Gamma$ and $P \rightarrow Q$, then there exists Γ' such that $\Omega \vdash Q \blacktriangleright \Gamma'$ and $(\Omega \vdash P \blacktriangleright \Gamma) \cong (\Omega \vdash Q \blacktriangleright \Gamma')$.*

Proof (Sketch). By induction on the derivation of $P \rightarrow Q$ (Definition 3.3.4), we find a Γ' such that $\Omega \vdash Q \blacktriangleright \Gamma'$ and $(\Omega \vdash P \blacktriangleright \Gamma) \cong (\Omega \vdash Q \blacktriangleright \Gamma')$.

The cases of Rules [RED-RES] and [RED-PAR] follow directly from the IH. Consider, e.g., $(\nu xy)(P \mid R) \rightarrow (\nu xy)(Q \mid R)$ derived from $P \rightarrow Q$. By inversion of typing on the process before

reduction, e.g., $\Omega \vdash P \blacktriangleright \Gamma, x : A$. Then, by the IH, $(\Omega \vdash P \blacktriangleright \Gamma, x : A) \cong (\Omega \vdash Q \blacktriangleright \Gamma', x : A')$. The thesis then follows from an application of Rules [UNF-PAR] and [UNF-RES].

The case of Rule [RED-CONG] follows from the IH and subject congruence (Theorem 3.3.24). To be precise, the rule says that (i) $P \equiv P'$, (ii) $P' \rightarrow Q'$, and (iii) $Q' \equiv Q$ imply $P \rightarrow Q$. By Theorem 3.3.24 (subject congruence) on assumptions (i) and (iii), we have $(\Omega \vdash P \blacktriangleright \Gamma) \cong (\Omega \vdash P' \blacktriangleright \Gamma')$ and $(\Omega' \vdash Q' \blacktriangleright \Delta') \cong (\Omega' \vdash Q \blacktriangleright \Delta)$. Also, by the IH on assumption (ii), $(\Omega \vdash P' \blacktriangleright \Gamma') \cong (\Omega' \vdash Q' \blacktriangleright \Delta')$ where $\Omega = \Omega'$. Then, by Proposition 3.3.22 (transitivity of \cong), $(\Omega \vdash P \blacktriangleright \Gamma) \cong (\Omega \vdash Q \blacktriangleright \Delta)$, proving the thesis.

Key cases are Rules [RED-SEND-RECV], [RED-SEL-BRA], and [RED-FWD]. Figure 3.6 shows the representative instance of Rule [RED-SEND-RECV], and an example where Rules [RED-RES], [RED-PAR], and [RED-CONG] are used. \square

Protocol fidelity ensures that processes respect their intended (session) protocols. Communication safety ensures the absence of communication errors and mismatches in processes. Correct typability gives a static guarantee that a process conforms to its ascribed session protocols; type preservation gives a dynamic guarantee. Because session types describe the intended protocols and error-free exchanges, type preservation entails both protocol fidelity and communication safety. For a detailed account, we refer the curious reader to the early work by Honda *et al.* [HVK98], which defines error processes and shows by contradiction that well-typed processes do not reduce to an error.

In what follows, we consider a process to be deadlocked if it is not the inactive process and cannot reduce. Our deadlock-freedom result for APCP adapts that for PCP [DG18]. The equivalent of our Rule [TYP-RES] in PCP is Rule [CYCLE]. Deadlock-freedom for PCP involves three steps to eliminate applications of Rule [CYCLE]:

1. First, [CYCLE]-elimination states that we can remove all applications of [CYCLE] in a typing derivation without affecting the derivation's assumptions and conclusion.
2. Only the removal of *top-level* applications of [CYCLE] captures the intended process semantics; the removal of other applications of [CYCLE] corresponds to reductions behind prefixes, which is not allowed [Wad12; DG18]. Therefore, the second step is *top-level deadlock-freedom* (referred to here as *progress*), which states that a process with a top-level application of [CYCLE] reduces until there are no top-level applications of [CYCLE] left. This step requires commuting conversions: a process with a top-level application of [CYCLE] may not have reductions ready, so commuting conversions are used to remove top-level applications of [CYCLE] by blocking them with communications.
3. Third, deadlock-freedom follows for processes typable under empty contexts.

Here, we adapt and address [TYP-RES]-elimination and progress in one proof.

As mentioned before, binding APCP's asynchronous sends and selections to continuations involves additional, low-level uses of [TYP-RES], which we cannot eliminate through process reduction. Therefore, we establish progress for *live processes* (Theorem 3.3.30). A process is live if it is equivalent to a restriction on *active names* that perform unguarded communications. This way, e.g., in $x[y, z]$ the name x is active, but y and z are not. We additionally need a notion of *evaluation context*, under which reducible forwarders may occur.

Definition 3.3.26 (Active Names). *The set of active names of P , denoted $\text{an}(P)$, contains the (free) names that are used for non-blocked communications (send, receive, selection, branch):*

$$\begin{array}{lll}
\text{an}(x[y, z]) \triangleq \{x\} & \text{an}(x(y, z); P) \triangleq \{x\} & \text{an}(\mathbf{0}) \triangleq \emptyset \\
\text{an}(x[z] \triangleleft \ell) \triangleq \{x\} & \text{an}(x(z) \triangleright \{i : P_i\}_{i \in I}) \triangleq \{x\} & \text{an}([x \leftrightarrow y]) \triangleq \emptyset \\
\text{an}(P | Q) \triangleq \text{an}(P) \cup \text{an}(Q) & \text{an}(\mu X(\bar{x}); P) \triangleq \text{an}(P) & \\
\text{an}((\mathbf{v}xy)P) \triangleq \text{an}(P) \setminus \{x, y\} & \text{an}(X(\bar{x})) \triangleq \emptyset &
\end{array}$$

Definition 3.3.27 (Evaluation Context). *Evaluation contexts (\mathcal{E}) have the following grammar:*

$$\mathcal{E} ::= [\cdot] \mid \mathcal{E} | P \mid (\mathbf{v}xy)\mathcal{E} \mid \mu X(\bar{x}); \mathcal{E}$$

We write $\mathcal{E}[P]$ to denote the process obtained by replacing the hole $[\cdot]$ in \mathcal{E} by P .

Definition 3.3.28 (Live Process). *A process P is live, denoted $\text{live}(P)$, if*

1. *there are names x, y and process P' such that $P \equiv (\mathbf{v}xy)P'$ with $x, y \in \text{an}(P')$, or*
2. *there are names x, y, z and process P' such that $P \equiv \mathcal{E}[(\mathbf{v}yz)([x \leftrightarrow y] | P')]$ and $z \neq x$ (i.e., the forwarder is independent).*

We additionally need to account for recursion: as recursive definitions do not directly entail reductions, we must fully unfold them before eliminating applications of [TYP-RES]:

Lemma 3.3.29 (Unfolding). *If $\Omega \vdash P \blacktriangleright \Gamma$, then there is a process P^* such that $P^* \equiv P$ and P^* is not of the form $\mu X(\bar{z}); Q$.*

Dardha and Gay's progress result concerns a sequence of reduction steps that reaches a process that is not live anymore [DG18]. In our case, progress concerns a single reduction step only, because recursive processes might stay live across reductions forever. Moreover, because of our definition of liveness, we do not need commuting conversions for this step.

Theorem 3.3.30 (Progress). *If $\emptyset \vdash P \blacktriangleright \Gamma$ and $\text{live}(P)$, then there is a process Q such that $P \rightarrow Q$.*

Proof (Sketch). After unfolding P , from Liveness (Definition 3.3.28) we can infer the shape of P . A reduction from Definition 3.3.4 then follows straightforwardly. \square

Our deadlock-freedom result concerns processes typable under empty contexts (as in, e.g., Caires and Pfenning [CP10] and Dardha and Gay [DG18]). We first need a lemma which ensures that non-live processes typable under empty contexts do not contain prefixes (sends/receives/selections/branches) or independent forwarders (whose endpoints are not bound together using restriction). This lemma is in fact the crux of our deadlock-freedom result, as it relies on the priority checks induced by our typing system:

Lemma 3.3.31. *If $\emptyset \vdash P \blacktriangleright \emptyset$ and P is not live, then P has no prefixes or independent forwarders.*

Proof (Sketch). By contradiction. We consider $P \equiv P^* = (\mathbf{v}x_i x'_i)_{i \in I} \prod_{j \in J} P_j$ where, for every $j \in J$, P_j is a prefix or forwarder (i.e., every P_j can be seen as an atomic *thread*). We then apply induction on the size of J . In the base case ($J = \emptyset$), the contradiction is immediate. In the inductive case, we pick P_j such that its foremost prefix/forwarder has the least priority of all threads. We then consider all the possible foremost prefixes/forwarders of P_j , and in each case rely on the assumption that P is not live to derive contradictory priority requirements. \square

We now state our deadlock-freedom result:

3

Theorem 3.3.32 (Deadlock-freedom). *If $\emptyset \vdash P \blacktriangleright \emptyset$, then either $P \equiv \mathbf{0}$ or $P \rightarrow Q$ for some Q .*

Proof (Sketch). If P is live, from progress (Theorem 3.3.30) it follows that $P \rightarrow Q$. Otherwise, it follows from Lemma 3.3.31 that $P \equiv \mathbf{0}$. \square

3.3.4. REACTIVITY

Processes typable under empty contexts are not only deadlock-free, they are *reactive*, in the following sense: for each name in the process, we can eventually observe a reduction involving that name. To formalize this property, we define *labeled reductions*, which expose details about communications:

Definition 3.3.33 (Labeled Reductions). *Consider the labels*

$$\alpha ::= [x \leftrightarrow y] \mid x) y : a \mid x) y : \ell \quad (\text{forwarding, send/receive, selection/branching})$$

where each label has subjects x and y . The following rules define labeled reductions $P \xrightarrow{\alpha} Q$:

$$\begin{array}{c} \text{[LRED-SEND-RECV]} \\ \hline (\mathbf{v}xy)(x[a, b] \mid y(v, z); P) \xrightarrow{x)y:a} P\{a/v, b/z\} \\ \\ \text{[LRED-SEL-BRA]} \quad \quad \quad \text{[LRED-FWD]} \\ \hline \begin{array}{c} j \in I \\ (\mathbf{v}xy)(x[b] \triangleleft j \mid y(z) \triangleright \{i : P_i\}_{i \in I}) \xrightarrow{x)y:j} P_j\{b/z\} \end{array} \quad \quad \quad (\mathbf{v}yz)([x \leftrightarrow y] \mid P) \xrightarrow{[x \leftrightarrow y]} P\{x/z\} \\ \\ \text{[LRED-CONG]} \quad \quad \quad \text{[LRED-RES]} \quad \quad \quad \text{[LRED-PAR]} \\ \hline \begin{array}{ccc} P \equiv P' & P' \xrightarrow{\alpha} Q' & Q' \equiv Q \\ \hline P \xrightarrow{\alpha} Q \end{array} & \quad \quad \quad \begin{array}{c} P \xrightarrow{\alpha} Q \\ \hline (\mathbf{v}xy)P \xrightarrow{\alpha} (\mathbf{v}xy)Q \end{array} & \quad \quad \quad \begin{array}{c} P \xrightarrow{\alpha} Q \\ \hline P \mid R \xrightarrow{\alpha} Q \mid R \end{array} \end{array}$$

Proposition 3.3.34. *For any P and P' , $P \rightarrow P'$ if and only if there exists a label α such that $P \xrightarrow{\alpha} P'$.*

Our reactivity result states that all processes typable under empty contexts have a finite reduction sequence (denoted \rightarrow^*) that enables a labeled reduction involving a *pending* name—it is the subject of a communication and is not bound by an input (see below). Clearly, the typed process may have other reduction sequences, not necessarily finite.

Definition 3.3.35 (Pending Names). *Given a process P , we define the set of pending names of P , denoted $\text{pn}(P)$, as follows:*

$$\begin{array}{lll}
\text{pn}(x[y, z]) \triangleq \{x\} & \text{pn}(x(y, z); P) \triangleq \{x\} \cup (\text{pn}(P) \setminus \{y, z\}) \\
\text{pn}(x[z] \triangleleft \ell) \triangleq \{x\} & \text{pn}(x(z) \triangleright \{i : P_i\}_{i \in I}) \triangleq \{x\} \cup (\bigcup_{i \in I} \text{pn}(P_i) \setminus \{z\}) \\
\text{pn}(P | Q) \triangleq \text{pn}(P) \cup \text{pn}(Q) & \text{pn}(\mu X(\bar{x}); P) \triangleq \text{pn}(P) & \text{pn}(\mathbf{0}) \triangleq \emptyset \\
\text{pn}(\mathbf{v}xy)P \triangleq \text{pn}(P) & \text{pn}(X\langle \bar{x} \rangle) \triangleq \emptyset & \text{pn}([x \leftrightarrow y]) \triangleq \{x, y\}
\end{array}$$

Note that the proof of reactivity below does not rely on deadlock-freedom: suppose we are observing a blocked pending communication in a process with a parallel recursive definition; deadlock-freedom ensures a reduction from the recursive definition which would not unblock the pending communication we are observing. Instead, the proof relies on a priority analysis (similar to the one in the proof of Lemma 3.3.31) to unblock pending communications.

Theorem 3.3.36 (Reactivity). *Suppose given a process $\phi \vdash P \blacktriangleright \phi$. Then, for every $x \in \text{pn}(P)$ there exists a process P' such that $P \rightarrow^* P'$ and $P' \xrightarrow{\alpha} Q$, for some process Q and label α with subject x .*

Proof (Sketch). The prefix on x is connected to some parallel dual prefix on y in P . Similar to the reasoning in the proof of Lemma 3.3.31, we can find a finite chain of inputs blocking this communication on y . We then inductively reduce P to eventually unblock the dual prefix on y and show the required labeled reduction. \square

3.3.5. TYPING MILNER'S CYCLIC SCHEDULER

Here we show that our specification of Milner's cyclic scheduler from Section 3.2 is typable in APCP, and thus deadlock-free (cf. Theorem 3.3.32). Let us recall the process definitions of the leader and followers, omitting braces ' $\{ \dots \}$ ' for branches with one option:

$$\begin{array}{l}
A_1 \triangleq \mu X(a_1, c_n, d_1); \overline{d_1} \triangleleft \text{start} \cdot \overline{a_1} \triangleleft \text{start} \cdot a_1 \triangleright \text{ack}; \overline{d_1} \triangleleft \text{next} \cdot \\
\quad c_n \triangleright \text{start}; c_n \triangleright \text{next}; X\langle a_1, c_n, d_1 \rangle \\
A_{i+1} \triangleq \mu X(a_{i+1}, c_i, d_{i+1}); c_i \triangleright \text{start}; \overline{a_{i+1}} \triangleleft \text{start} \cdot \overline{d_{i+1}} \triangleleft \text{start} \cdot a_{i+1} \triangleright \text{ack}; \quad \forall 1 \leq i < n \\
\quad c_i \triangleright \text{next}; \overline{d_{i+1}} \triangleleft \text{next} \cdot X\langle a_{i+1}, c_i, d_{i+1} \rangle
\end{array}$$

Figure 3.7 gives the typing derivation of A_1 , omitting processes from judgments, with the following priority requirements:

$$t_1 > \max(\circ_1, \kappa_1, \pi_n, \rho_n, \pi_1, \rho_1) \quad (3.3)$$

$$\pi_1 < \rho_1 \quad (3.4)$$

$$\circ_1 < \kappa_1 \quad (3.5)$$

$$\kappa_1 < \pi_n, \rho_1 \quad (3.6)$$

$$\rho_1 < \pi_1 + t_1 \quad (3.7)$$

$$\pi_n < \circ_1 + t_1, \pi_1 + t_1 \quad (3.8)$$

$$\rho_n < \circ_1 + t_1, \pi_1 + t_1 \quad (3.9)$$

$$\begin{array}{c}
\frac{}{X : (T_{a_1}, T_{c_n}, T_{d_1}) \vdash a_1 : \mu X.(\uparrow^{t_1} T_{a_1}), c_n : \mu X.(\uparrow^{t_1} T_{c_n}), \quad (3.9)} \text{[TYP-VAR]} \\
\quad d_1 : \mu X.(\uparrow^{t_1} T_{d_1}) \\
\frac{}{X : T_X \vdash a_1 : \mu X.(\uparrow^{t_1} T_{a_1}), c_n : \&^{\rho_n} \{\text{next} : \mu X.(\uparrow^{t_1} T_{c_n})\}, \quad (3.8)} \text{[TYP-BRA]} \\
\quad d_1 : \mu X.(\uparrow^{t_1} T_{d_1}) \\
\frac{}{X : T_X \vdash a_1 : \mu X.(\uparrow^{t_1} T_{a_1}), c_n : \&^{\pi_n} \{\text{start} : \&^{\rho_n} \{\text{next} : \mu X.(\uparrow^{t_1} T_{c_n})\}\}, \quad (3.7)} \text{[TYP-BRA]} \\
\quad d_1 : \mu X.(\uparrow^{t_1} T_{d_1}) \\
\frac{}{X : T_X \vdash a_1 : \mu X.(\uparrow^{t_1} T_{a_1}), c_n : \&^{\pi_n} \{\text{start} : \&^{\rho_n} \{\text{next} : \mu X.(\uparrow^{t_1} T_{c_n})\}\}, \quad (3.6)} \text{[TYP-SEL*]} \\
\quad d_1 : \oplus^{\rho_1} \{\text{next} : \mu X.(\uparrow^{t_1} T_{d_1})\} \\
\frac{}{X : T_X \vdash a_1 : \&^{\kappa_1} \{\text{ack} : \mu X.(\uparrow^{t_1} T_{a_1})\}, \quad (3.5)} \text{[TYP-BRA]} \\
\quad c_n : \&^{\pi_n} \{\text{start} : \&^{\rho_n} \{\text{next} : \mu X.(\uparrow^{t_1} T_{c_n})\}\}, \\
\quad d_1 : \oplus^{\rho_1} \{\text{next} : \mu X.(\uparrow^{t_1} T_{d_1})\} \\
\frac{}{X : T_X \vdash a_1 : \oplus^{\circ_1} \{\text{start} : \&^{\kappa_1} \{\text{ack} : \mu X.(\uparrow^{t_1} T_{a_1})\}\}, \quad (3.4)} \text{[TYP-SEL*]} \\
\quad c_n : \&^{\pi_n} \{\text{start} : \&^{\rho_n} \{\text{next} : \mu X.(\uparrow^{t_1} T_{c_n})\}\}, \\
\quad d_1 : \oplus^{\rho_1} \{\text{next} : \mu X.(\uparrow^{t_1} T_{d_1})\} \\
\frac{}{X : (T_{a_1}, T_{c_n}, T_{d_1}) \vdash a_1 : \oplus^{\circ_1} \{\text{start} : \&^{\kappa_1} \{\text{ack} : \mu X.(\uparrow^{t_1} T_{a_1})\}\}, \quad (3.3)} \text{[TYP-SEL*]} \\
\quad \underbrace{c_n}_{T_X} : \&^{\pi_n} \{\text{start} : \&^{\rho_n} \{\text{next} : \mu X.(\uparrow^{t_1} T_{c_n})\}\}, \\
\quad d_1 : \oplus^{\pi_1} \{\text{start} : \oplus^{\rho_1} \{\text{next} : \mu X.(\uparrow^{t_1} T_{d_1})\}\} \\
\frac{}{\emptyset \vdash a_1 : \mu X. \underbrace{\oplus^{\circ_1} \{\text{start} : \&^{\kappa_1} \{\text{ack} : X\}\}}_{T_{a_1}}, c_n : \mu X. \underbrace{\&^{\pi_n} \{\text{start} : \&^{\rho_n} \{\text{next} : X\}\}}_{T_{c_n}}, \quad (3.2)} \text{[TYP-REC]} \\
\quad d_1 : \mu X. \underbrace{\oplus^{\pi_1} \{\text{start} : \oplus^{\rho_1} \{\text{next} : X\}\}}_{T_{d_1}}
\end{array}$$

Figure 3.7 | Typing derivation of the leader scheduler A_1 of Milner's cyclic scheduler (processes omitted).

Each process A_{i+1} for $0 \leq i < n$ —thus including the leader—is typable as follows, assuming c_i is c_n for $i = 0$:

$$\begin{array}{l}
\emptyset \vdash A_{i+1} \blacktriangleright a_{i+1} : \mu X. \oplus^{\circ_{i+1}} \{\text{start} : \&^{\kappa_{i+1}} \{\text{ack} : X\}\}, c_i : \mu X. \&^{\pi_i} \{\text{start} : \&^{\rho_i} \{\text{next} : X\}\}, \\
\quad d_{i+1} : \mu X. \oplus^{\pi_{i+1}} \{\text{start} : \oplus^{\rho_{i+1}} \{\text{next} : X\}\}
\end{array}$$

For each $1 \leq i \leq n$, the types for c_i and d_i are duals and are thus assigned equal priorities.

The priority requirements in the typing derivation of each A_i are satisfiable. The derivations of these processes have the following constraints:

- For A_1 we require the inequalities listed above;
- For each $1 \leq i < n$, for A_{i+1} we require $\pi_i < \circ_{i+1}, \pi_{i+1}, \circ_{i+1} < \kappa_{i+1}, \pi_{i+1} < \rho_{i+1}, \kappa_{i+1} < \rho_i, \rho_{i+1}, \rho_i < \circ_{i+1} + t_{i+1}, \rho_{i+1}$, and $\rho_{i+1} < \pi_{i+1} + t_{i+1}$.

We can satisfy these requirements by assigning $\pi_i := i, \circ_i := i + 1, \kappa_i := i + 2$, and $\rho_i := i + 4$ for each $1 \leq i \leq n$, except with $\pi_n := n + 3$ (to satisfy (3.6) for $1 \leq n < 4$). For the application of [TYP-REC], each derivation also requires a common lifter $t_{i+1} > \max(\circ_{i+1}, \kappa_{i+1}, \pi_i, \rho_i, \pi_{i+1}, \rho_{i+1})$

$$\begin{array}{c}
\frac{[\text{TYP-CLOSE}]}{\Omega \vdash x[] \blacktriangleright x : \mathbf{1}^\circ} \qquad \frac{[\text{TYP-WAIT}]}{\Omega \vdash P \blacktriangleright \Gamma \quad \circ < \text{pr}(\Gamma)} \qquad \frac{[\text{TYP-CLI}]}{\Omega \vdash ?x[y] \blacktriangleright x : ?^\circ A, y : \bar{A}} \\
\\
\frac{[\text{TYP-SRV}]}{\Omega \vdash P \blacktriangleright ?\Gamma, y : A \quad \circ < \text{pr}(?\Gamma)} \qquad \frac{[\text{TYP-CLI*}]}{\Omega \vdash P \blacktriangleright \Gamma, y : A \quad \circ < \text{pr}(A)} \\
\Omega \vdash !x(y); P \blacktriangleright ?\Gamma, x : !^\circ A \qquad \Omega \vdash ?\bar{x}[y] \cdot P \blacktriangleright \Gamma, x : ?^\circ A \\
\\
\frac{[\text{TYP-WEAKEN}]}{\Omega \vdash P \blacktriangleright \Gamma} \qquad \frac{[\text{TYP-CONTRACT}]}{\Omega \vdash P \blacktriangleright \Gamma, x : ?^\circ A, x' : ?^k A \quad \pi = \min(\circ, k)} \\
\Omega \vdash P \blacktriangleright \Gamma, x : ?^\circ A \qquad \Omega \vdash P\{x/x'\} \blacktriangleright \Gamma, x : ?^\pi A \\
\hline
\frac{[\text{RED-CLOSE-WAIT}]}{(\mathbf{v}xy)(x[] | y()); P \rightarrow P} \qquad \frac{[\text{RED-CLI-SRV}]}{(\mathbf{v}xy)(?x[a] | !y(v); P | Q) \rightarrow P\{a/v\} | (\mathbf{v}xy)(!y(v); P | Q)}
\end{array}$$

Figure 3.8 | Typing rules (top) and reductions (bottom) for explicit closing and replicated servers.

for $0 \leq i < n$. The priority requirements involving t_{i+1} always require the priority lifted by t_{i+1} to be higher than the priority not lifted by t_{i+1} , so the common lifter requirement easily satisfies these requirements.

Recall from Section 3.2:

$$\text{Sched}_n \triangleq (\mathbf{v}c_1 d_1) \dots (\mathbf{v}c_n d_n) ((\mathbf{v}a_1 b_1)(A_1 | P_1) | \dots | (\mathbf{v}a_n b_n)(A_n | P_n))$$

Assuming given workers

$$\emptyset \vdash P_i \blacktriangleright b_i : \mu X. \&^{\circ_i} \{\text{start} : \oplus^{k_i} \{\text{ack} : X\}\}$$

for each $1 \leq i \leq n$, we have $\emptyset \vdash \text{Sched}_n \blacktriangleright \emptyset$. Hence, it follows from Theorem 3.3.32 that Sched_n is deadlock-free for each $n \geq 1$.

3.3.6. EXTENSIONS: EXPLICIT SESSION CLOSING AND REPLICATED SERVERS

As already mentioned, our presentation of APCP does not include explicit closing and replicated servers. Here, we briefly discuss what APCP would look like with these constructs.

Explicit closing is useful in programming to be sure that all resources are cleaned up correctly. There are several ways of integrating explicit closing in a calculus like APCP. Following, e.g., [CP10; Wad12], here we achieve explicit closing by adding closes (empty sends) $x[]$ and waits (empty receives) $x(); P$ to the syntax in Definition 3.3.1. We also add the Rule [RED-CLOSE-WAIT] to Definition 3.3.4. At the level of types, we replace the conflated type \bullet with $\mathbf{1}^\circ$ and \perp° , associated to closes and waits, respectively. Note that we do need priority annotations on types for closed names now, because wait is blocking and thus requires priority checks.

In the type system in Figure 3.2 (top), we replace Rule [TYP-END] with Rules [TYPE-CLOSE] and [TYP-WAIT] in Figure 3.8 (top).

For replicated servers, we add (asynchronous) client requests $?x[y]$ and servers $!x(y); P$, with types $?^\circ A$ and $!^\circ A$, respectively. We include syntactic sugar for binding client requests to continuations as in Notation 3.3.2: $?x[y] \cdot P := (\nu ya)(?x[a] | P)$. Rule [RED-CLI-SRV] is in Figure 3.8 (bottom): it connects a client and a server and spawns a copy of the server. Also, we add a structural congruence rule to clean up unused servers: $(\nu xz)(!x(y); P) \equiv \mathbf{0}$. In the type system, we add Rules [TYP-CLI], [TYP-SRV], [TYP-WEAKEN], and [TYP-CONTRACT] in Figure 3.8 (top); the former two are for typing client requests and servers, respectively, and the latter two are for connecting to a server without requests and for multiple requests, respectively. In Rule [TYP-SRV], $? \Gamma$ means that every type in Γ is of the form $?^\circ A$. Figure 3.8 (top) also includes a derivable Rule [TYP-CLI*] which types the syntactic sugar for bound client requests.

3

3.4. RELATED WORK

Closely related work on the theme of the chapter (deadlock-freedom by typing) has been already discussed throughout the chapter. Here we comment on other related literature.

Asynchronous communication. Asynchronous communication has a longstanding history in process algebras (see, e.g., [BKT85; HJH90; BKP92]). The first accounts of asynchronous communication for the π -calculus were developed independently by Honda and Tokoro [HT91; HT92] and by Boudol [Bou92]. Palamidessi [Pal03] shows that the synchronous π -calculus is strictly more expressive than its asynchronous variant, due to *mixed choices*: non-deterministic choices involving both inputs and outputs. Beauxis *et al.* [BPV08] study the exact form of asynchronous communication modeled by the asynchronous π -calculus; they examine communication mediated by different mechanisms (bags, stacks, queues) in the synchronous π -calculus, and prove that bags lead to the strongest operational correspondence with the asynchronous π -calculus.

As discussed already, asynchrony is a relevant phenomenon in session π -calculi; the communication structures delineated by sessions strongly influence the expected ordering of messages. The expressiveness gap between asynchronous and synchronous communication shown by Palamidessi in the untyped setting does not hold in this context, since session-typed π -calculi consider only deterministic choices and do not account for mixed choices. A notable exception is the work on *mixed sessions* by Casal *et al.* [Vas+20; CMV22], which does not address deadlock-freedom. Nevertheless, fundamental differences between mixed choices in untyped and session-typed settings remain, as established by Peters and Yoshida [PY22].

In the context of session types, the first formal theory of asynchronous communication for the π -calculus is by Kouzapas *et al.* [KYH11], using a buffered semantics. Their focus is on the behavioral theory induced by asynchrony and the program transformations it enables. Follow-up work [Kou+16] goes beyond to consider asynchronous communication in combination with constructs for event-driven programming, and develops a corresponding type system and behavioral theory. Unlike our work, these two works do not consider deadlock-freedom for asynchronous session processes.

DeYoung *et al.* [DeY+12] give the first connection between linear logic and a session-typed π -calculus with asynchronous communication using a continuation-passing semantics, and show that this semantics is equivalent to a buffered semantics. As mentioned before, APCP's semantics is based on this work, except that our typing rules for sending and selection are axiomatic and that we consider recursion. On a similar line, Jia *et al.* [JGP16] consider a session-typed language with asynchronous communication; their focus is on the dynamic monitoring of session behaviors, not on deadlock-freedom. Both these works are based on the correspondence with intuitionistic linear logic, which restricts the kind of process networks allowed by typing. Pruiksma and Pfenning [PP19; PP21] derive a “propositions-as-sessions” type system from adjoint logic, which combines several logics with different structural rules through modalities [Ree09; Pru+18]. Their process language features asynchronous communication with continuation-passing and their type system treats asynchronous, non-blocking outputs via axiomatic typing rules, similar to Rules [TYP-SEND] and [TYP-SEL] in Figure 3.2.

Padovani's linear type system for the asynchronous π -calculus [Pad14] has been already mentioned in the context of deadlock-freedom for cyclic process networks. His language is different from APCP, as it lacks session constructs and does not have continuation-passing baked into the type system. While it should be possible to encode sessions in his typed framework (using communication of pairs to model continuation-passing), it seems unclear how to transfer the analysis of deadlock-freedom from this setting to a language such as APCP via such a translation.

Deadlock-freedom for cyclic process networks. We have already discussed the related works by Kobayashi [Kob06], Padovani [Pad14], and Dardha and Gay [DG18]. The work of Kobayashi and Laneve [KL17] is related to APCP in that it addresses deadlock-freedom for *unbounded* process networks. Toninho and Yoshida's work [TY18] addresses deadlock-freedom for cyclic process networks by generating global types from binary types. The work by Balzer, Toninho and Pfenning [BP17; BTP19] is also worth mentioning: it guarantees deadlock-freedom for processes with shared, mutable resources by means of manifest sharing, i.e., explicitly acquiring and releasing access to resources.

Other applications of APCP. In the introduction we mentioned one salient aspects of Curry-Howard correspondences for session types, namely analysis of deadlock-freedom. In this chapter we have addressed this aspect directly. Yet another highlight of the logical correspondences is their suitability for the analysis of *multiparty protocols*. In separate work [HP22] (cf. Chapter 3), we have devised a methodology for the analysis of multiparty session types (MPST) based on APCP [HYC16]. In the multiparty context, two or more participants interact following a common protocol. APCP is well-suited for the analysis of process implementations of MPST, which rely on asynchrony and recursion. In our analysis, multiple separate processes implement the roles of one or more participants of a multiparty protocol. The support for cyclic process networks in APCP allows us to connect these implementations with each other directly, without requiring an additional process (as used in similar prior works [CP16; Car+15; Car+16]). The asynchrony in APCP captures the asynchronous nature of MPST, and APCP's recursion enables an expressive class of supported protocols. This way, our methodology unlocks the transfer of (static) analysis of deadlock-freedom and protocol

conformance from APCP to distributed implementations of MPST. The key ideas underlying the methodology in [HP22] can be applied to the *run-time* verification of such distributed implementations, as recently shown in [HPD23].

3.5. CLOSING REMARKS

In this chapter, we have presented two contributions to the challenging issue of ensuring deadlock-free, message-passing interactions in a session-typed setting. Our *first contribution* is APCP: a typed framework for deadlock-free cyclic process networks with asynchronous communication and recursion. The design of APCP and its type system has a solid basis, with tight ties to logic (“propositions as sessions”): our syntax, semantics and type system harmoniously integrate insights separately presented in prior works for different typed variants of the π -calculus.

The step from synchronous communication (as in PCP [DG18]) to asynchronous communication (in APCP) is significant. In combination with cyclic process networks, asynchronous communication enables checking a larger class of deadlock-free processes: processes that under synchronous communication would be deadlocked due to blocking outputs may be deadlock-free in APCP (see, e.g., Example 3.3.5). Perhaps more significantly, asynchronous communication simplifies the priority management involved in the detection of cyclic dependencies (cf. Remark 3.3.16).

We validated APCP’s design and expressiveness: as a classic example of modeling realistic concurrency patterns, we formalized Milner’s cyclic scheduler [Mil89] and analyzed its deadlock-freedom.

In future work, it would be insightful to explore how to accommodate APCP’s support for priorities into a process language with inductive and coinductive types (least and greatest fixed points, respectively), such as the one studied by Rocha and Caires [RC23].

4

NON-DETERMINISM

This chapter studies non-determinism in message-passing processes. Though this is not a new theme in general, it has not been thoroughly studied in context of session type systems derived from linear logic. The aim is to introduce expressive forms of non-deterministic choice, while retaining correctness guarantees inherited from linear logic such as deadlock-freedom. Hence, this chapter attempts to answer the following research question, introduced in Section 1.2.1.2:

Research Question I-2. *How can we increase commitment in non-deterministic choices, while retaining correctness properties induced by linear logic foundations for session types?*

This chapter is the result of a collaboration between myself and Joseph W. N. Paulus, Daniele Nantes-Sobrinho, and Jorge A. Pérez. Here, I focus on the parts of our publication (to appear) to which I contributed most significantly: the design of $s\pi^+$, its two semantics, and its meta-theoretical results (type preservation and deadlock-freedom for both semantics, and a formal comparison of the semantics). The publication contains additional contributions: a resource λ -calculus where elements are fetched from bags non-deterministically, a translation from this calculus into $s\pi^+$, and operational correspondence results for this translation under both semantics; these contributions are mainly due to Joseph W. N. Paulus, who will include them in their own dissertation.

4.1. INTRODUCTION

In this chapter, we present new formulations of typed programming calculi with *non-determinism*. Non-determinism is a classical ingredient of models of computation, which brings flexibility and generality in specifications. In process calculi such as CCS and the π -calculus, one source of non-determinism is choice, which is typically *non-confluent*: that is, given $P + Q$, we have either $P + Q \rightarrow P$ or $P + Q \rightarrow Q$. Thus, committing to a branch entails discarding the rest.

We are interested in non-determinism as a way of increasing the expressivity of typed calculi in which resource control is based on *linearity*. The interplay between non-determinism and linearity is delicate: a careless discarding of branches can jeopardize resources meant to be used exactly once. We consider the π -calculus, a general computational model in which concurrency, higher-order computation, and objects can be suitably expressed [SW03]. We focus on variants of the π -calculus with *session types*, in which linear logic principles ensure communication correctness [Hon93; HVK98]. Here, the resources are names that perform session protocols; they can be *unrestricted* (used multiple times) and *linear* (used exactly once). To properly control resources, non-confluent non-determinism is confined to unrestricted names; linear names can only perform deterministic choices.

In this context, looking into *confluent* forms of non-determinism can be appealing. Intuitively, such formulations allow all branches to proceed independently: given $P_1 \rightarrow Q_1$ and $P_2 \rightarrow Q_2$, then $P_1 + P_2 \rightarrow Q_1 + P_2$ and $P_1 + P_2 \rightarrow P_1 + Q_2$. Because confluent non-determinism does not discard branches, it is compatible with a resource-conscious view of computation.

Confluent non-determinism has been studied mostly in the functional setting; it is present, e.g., in Pagani and Ronchi della Rocca's resource λ -calculus [PR10] and in Ehrhard and Regnier's differential λ -calculus [ER03]. In [PR10], non-determinism resides in the application of a term M to a *bag* of available resources C ; a β -reduction applies M to a resource *non-deterministically fetched* from C . Confluent non-deterministic choice is also present in the session-typed π -calculus by Caires and Pérez [CP17], where it expresses a choice between different implementations of the same session protocols, which are all *non-deterministically available*—they may be available but may also *fail*. In their work, a Curry-Howard correspondence between linear logic and session types ('*propositions-as-sessions*' [CP10; Wad12]) ensures confluence, protocol fidelity, and deadlock-freedom. Paulus et al. [PNP21] relate functional and concurrent calculi with confluent non-determinism: they give a translation of a resource λ -calculus into the session π -calculus from [CP17], in the style of Milner's '*functions-as-processes*' [Mil90].

Although results involving confluent non-determinism are most significant, usual (non-confluent) non-determinism remains of undiscussed convenience in formal modeling; consider, e.g., specifications of distributed protocols [BH03; NFM03] in which commitment is essential. Indeed, non-confluent non-deterministic choice is commonplace in verification frameworks such as mCRL2 [GM14]. It is also relevant in functional calculi; a well-known framework is De'Liguoro and Piperno's (untyped) non-deterministic λ -calculus [DP95] (see also [Dez96] and references therein).

Motivating example. To illustrate the distinction between confluent and non-confluent non-determinism, we consider an example adapted from [CP17]: a movie server that offers a choice between buying a movie or watching its trailer. In $s\pi^+$, the typed π -calculus that we present here, this server can be specified as follows:

$$\text{Server}_s = s \triangleright \left\{ \begin{array}{l} \text{buy} : s(\text{title}); s(\text{paym}); \bar{s}[\text{movie}]; s[] \\ \text{peek} : s(\text{title}); \bar{s}[\text{trailer}]; s[] \end{array} \right\} \begin{array}{l} \text{--Server}_s^{\text{buy}} \\ \text{--Server}_s^{\text{peek}} \end{array}$$

where $s(-)$ and $\bar{s}[-]$ denote receive and send prefixes on a name s , respectively, and 'movie' and 'trailer' denote references to primitive data. Also, the free names of a process are

denoted with subscripts. Process Server_s offers a choice on s ($s \triangleright \{-\}$) between labels buy and peek . If buy is received, process $\text{Server}_s^{\text{buy}}$ is launched: it receives the movie's title and a payment method, sends the movie, and closes the session on s ($s()$). If peek is received, it proceeds as $\text{Server}_s^{\text{peek}}$: the server receives the title, sends the trailer, and closes the session.

Using the non-deterministic choice operator of $s\pi^+$, denoted ' \sharp ', we can specify the process Alice_s , a client interested in the movie 'Jaws' but undecided about buying the film or just watching its trailer for free:

$$\begin{aligned} \text{Alice}_s \triangleq & \bar{s} \triangleleft \text{buy}; \quad \bar{s}[\text{Jaws}]; \bar{s}[\text{mcard}]; s(\text{movie}); s(); \mathbf{0} & - \text{Alice}_s^{\text{buy}} \\ & \sharp \bar{s} \triangleleft \text{peek}; \quad \bar{s}[\text{Jaws}]; s(\text{trailer}); s(); \mathbf{0} & - \text{Alice}_s^{\text{peek}} \end{aligned}$$

If Alice_s selects on s the label buy ($\bar{s} \triangleleft \text{buy}$), process $\text{Alice}_s^{\text{buy}}$ is launched: she sends title and payment method, receives the movie, waits for the session to close ($s()$), and then terminates ($\mathbf{0}$). If she selects peek , she proceeds as $\text{Alice}_s^{\text{peek}}$: she sends a title, receives the trailer, waits for the session to close, and terminates. Process $\text{Sys} \triangleq (\nu s)(\text{Server}_s | \text{Alice}_s)$ denotes the composition of client and server, connected along s . Our semantics for $s\pi^+$, denoted \rightsquigarrow , enforces non-confluent non-determinism, as Sys has two reductions to separate processes, as expected:

$$\text{Sys} \rightsquigarrow (\nu s)(\text{Server}_s^{\text{buy}} | \text{Alice}_s^{\text{buy}}) \quad \text{and} \quad \text{Sys} \rightsquigarrow (\nu s)(\text{Server}_s^{\text{peek}} | \text{Alice}_s^{\text{peek}})$$

In contrast, the confluent non-deterministic choice from [CP17], denoted ' \oplus ', behaves differently: in the confluent semantics, Sys reduces to a *single* process including *both alternatives*, i.e., $\text{Sys} \rightarrow (\nu s)(\text{Server}_s^{\text{buy}} | \text{Alice}_s^{\text{buy}}) \oplus (\nu s)(\text{Server}_s^{\text{peek}} | \text{Alice}_s^{\text{peek}})$.

Contributions. We study new concurrent calculi with usual (non-confluent) forms of non-determinism. Framed in the typed (resource-conscious) setting, we strive for definitions that do not exert a too drastic discarding of branches (as in the non-confluent case) but also that do not exhibit a lack of commitment (as in the confluent case). Concretely, we present $s\pi^+$, a variant of the session-typed π -calculus in [CP17], now with non-confluent non-deterministic choice. Its *lazy* semantics adapts to the typed setting the usual semantics of non-deterministic choice in the untyped π -calculus [SW03]. Well-typed processes enjoy type preservation and deadlock-freedom (Theorems 4.2.10 and 4.2.11).

Section 4.2 introduces $s\pi^+$ and its meta-theoretical properties. Section 4.3 discusses an alternative, eager semantics for $s\pi^+$ that is closer the traditional semantics of the π -calculus, and compares it to the lazy semantics presented in Section 4.2. Section 4.4 discusses related work, and Section 4.5 draws conclusions.

4.2. A TYPED π -CALCULUS WITH NON-DETERMINISTIC CHOICE

We introduce $s\pi^+$, a session-typed π -calculus with non-deterministic choice. Following [CP17], session types express protocols to be executed along channels. These protocols

$P, Q ::= \mathbf{0}$	inaction		$[x \leftrightarrow y]$	forwarder
$(\mathbf{v}x)(P Q)$	connect		$P \# Q$	non-determinism
$\bar{x}[y]; (P Q)$	send		$x(y); P$	receive
$\bar{x} \triangleleft \ell; P$	select		$x \triangleright \{i : P\}_{i \in I}$	branch
$?\bar{x}[y]; P$	client request		$!x(y); P$	server
$x[]$	close		$x(); P$	wait
$x \triangleright \text{some}_{w_1, \dots, w_n}; P$	expect		$\bar{x} \triangleleft \text{some}; P$	available
$P Q$	parallel		$\bar{x} \triangleleft \text{none}$	unavailable

$\frac{[CONG-ALPHA]}{P \equiv_{\alpha} Q}$	$\frac{[CONG-FWD-SYMM]}{[x \leftrightarrow y] \equiv [y \leftrightarrow x]}$	$\frac{[CONG-PAR-UNIT]}{P \mathbf{0} \equiv P}$	$\frac{[CONG-PAR-ASSOC]}{P (Q R) \equiv (P Q) R}$
$\frac{[CONG-PAR-COMM]}{P Q \equiv Q P}$	$\frac{[CONG-CONN-SYMM]}{(\mathbf{v}x)(P Q) \equiv (\mathbf{v}x)(Q P)}$	$\frac{[CONG-CONN-PAR]}{x \notin \text{fn}(Q)}$	$\frac{(\mathbf{v}x)((P Q) R) \equiv (\mathbf{v}x)(P R) Q}{}$
$\frac{[CONG-CONN-CONN]}{x \notin \text{fn}(Q) \quad y \notin \text{fn}(R)}$	$\frac{(\mathbf{v}x)((\mathbf{v}y)(P Q) R) \equiv (\mathbf{v}y)((\mathbf{v}x)(P R) Q)}{}$	$\frac{[CONG-ND-REFL]}{P \# P \equiv P}$	$\frac{[CONG-ND-SYMM]}{P \# Q \equiv Q \# P}$
$\frac{[CONG-ND-ASSOC]}{(P \# Q) \# R \equiv P \# (Q \# R)}$	$\frac{[CONG-SRV]}{x \notin \text{fn}(Q)}$	$\frac{(\mathbf{v}x)(!x(y); P Q) \equiv Q}{}$	

Figure 4.1 | Syntax (top) and structural congruence (bottom) for $\mathfrak{s}\pi^+$.

can be *non-deterministic*: sessions may succeed but also fail. The novelty in $\mathfrak{s}\pi^+$ is the non-deterministic choice operator ' $P \# Q$ ', whose *lazily committing semantics* is compatible with linearity. Key properties of well-typed processes are *type preservation* and *deadlock-freedom*.

4.2.1. SYNTAX AND SEMANTICS

We use P, Q, \dots to denote processes, and x, y, z, \dots to denote *names* representing channels. Figure 4.1 (top) gives the syntax of processes. $P\{y/z\}$ denotes the capture-avoiding substitution of y for z in P . Process $\mathbf{0}$ denotes inaction, and $[x \leftrightarrow y]$ is a forwarder: a bidirectional link between x and y . Parallel composition appears in two forms: while the process $P | Q$ denotes communication-free concurrency, process $(\mathbf{v}x)(P | Q)$ uses restriction to express that P and Q implement complementary (session) behaviors on x and do not share any other names.

Process $P \# Q$ denotes the non-deterministic choice between P and Q : intuitively, if one choice can perform a synchronization, the other option may be discarded if it cannot. Since $\#$ is associative, we often omit parentheses. Also, we write $\prod_{i \in I} P_i$ for the non-deterministic

choice between each P_i for $i \in I$.

Our output construct integrates parallel composition and restriction: process $\bar{x}[y]; (P \mid Q)$ sends a fresh name y along x and then continues as $P \mid Q$. The type system will ensure that behaviors on y and x are implemented by P and Q , respectively, which do not share any names—this separation defines communication-free concurrency and is key to ensuring deadlock-freedom. The input process $x(y); P$ receives a name z along x and continues as $P\{z/y\}$, which does not require the separation present in the output case (as x and y are implemented separately as per the corresponding output). Process $x \triangleright \{i : P_i\}_{i \in I}$ denotes a branch with labeled choices indexed by the finite set I : it awaits a choice on x with continuation P_j for each $j \in I$. The process $\bar{x} \triangleleft \ell; P$ selects on x the choice labeled ℓ before continuing as P . The server process $!x(y); P$ accepts requests from clients, receiving a name z along x to spawn $P\{z/y\}$; the server process remains available for further client requests. A client request $?x[y]; P$ sends a fresh name y along x and continues as P . Processes $x[]$ and $x(); P$ are dual actions for closing the session on x .

The remaining constructs define non-deterministic sessions which may provide a protocol or fail, following [CP17]. Process $\bar{x} \triangleleft \text{some}; P$ confirms the availability of a session on x and continues as P . Process $\bar{x} \triangleleft \text{none}$ signals the failure to provide the session on x . Process $x \triangleright \text{some}_{w_1, \dots, w_n}; P$ specifies a dependency on a non-deterministic session on x . This process can either (i) synchronize with an action $\bar{x} \triangleleft \text{some}$ and continue as P , or (ii) synchronize with an action $\bar{x} \triangleleft \text{none}$, discard P , and propagate the failure on x to w_1, \dots, w_n (which implement sessions in P).

Name y is bound in $(\nu y)(P \mid Q)$, $\bar{x}[y]; (P \mid Q)$, and $x(y); P$. We write $\text{fn}(P)$ and $\text{bn}(P)$ for the free and bound names of P , respectively, and $\text{fln}(P)$ and $\text{fbn}(P)$ for the free linear/non-linear (for client requests and servers) names of P , respectively; note that $\text{fbn}(P) = \text{fn}(P) \setminus \text{fln}(P)$. We adopt Barendregt's convention. To reduce eye strain, in writing $x \triangleright \text{some}$ we freely combine names and sets of names. This way, e.g., we write $x \triangleright \text{some}_{y, \text{fn}(P), \text{fn}(Q)}$ rather than $x \triangleright \text{some}_{\{y\} \cup \text{fn}(P) \cup \text{fn}(Q)}$.

Structural congruence. Reduction defines the steps that a process performs on its own. It relies on *structural congruence* (\equiv), the least congruence relation on processes induced by the rules in Figure 4.1 (bottom). Like the syntax of processes, the definition of \equiv is aligned with the type system (defined next), such that \equiv preserves typing (subject congruence, cf. Theorem 4.2.10). In the output $\bar{x}[y]; (P \mid Q)$ the type system will ensure that P provides behavior for y and Q for x . Had we defined the syntax of output simply as $\bar{x}[y]; P'$, we would have that $\bar{x}[y]; (P \mid Q) \equiv \bar{x}[y]; (Q \mid P)$: on the right-hand-side, the behaviors of x and y are provided on the wrong sides of the parallel composition, making the process ill-typed. By baking the parallel composition into the syntax of output, the expected symmetry of parallel composition does not apply under the output prefix, but only inside the parallel components of an output. Note that $(\nu x)(P \mid Q)$ also bakes in a parallel composition, but symmetry under restriction should hold; we therefore include an explicit rule for it. However, associativity of parallel composition should and does not hold directly under restriction. We also have a rule for scope extrusion of independent parallel compositions and restrictions, and a rule for removing unused servers. Differently from [CP17], we do not allow distributing non-deterministic choice over parallel and restriction. As shown in Section 4.3, the position of a non-deterministic choice in a

process determines how it may commit, so changing its position affects commitment.

Reduction: intuitions and prerequisites. Barring non-deterministic choice, our reduction rules arise as directed interpretations of proof transformations in the underlying linear logic. We follow Caires and Pfenning [CP10] and Wadler [Wad12] in interpreting cut-elimination in linear logic as synchronization in $s\pi^+$.

Before delving into our reduction rules (Figure 4.2), it may be helpful to consider the usual reduction axiom for the (untyped) π -calculus (e.g., [MPW92; SW03]):

$$(\bar{x}[z]; P_1 + M_1) | (x(y); P_2 + M_2) \rightarrow P_1 | P_2\{z/y\} \quad (4.1)$$

This axiom captures the interaction of two (binary) choices: it integrates the commitment of choice in synchronization; after the reduction step, the two branches not involved in the synchronization, M_1 and M_2 , are discarded. Our semantics of $s\pi^+$ is defined similarly: when a prefix within a branch of a choice synchronizes with its dual, that branch reduces and the entire process commits to it.

The key question at this point is: when and to which branches should we commit? In (4.1), a communication commits to a single branch. Here, we define a *lazy semantics* that minimizes commitment as much as possible.

The intuitive idea is that multiple branches of a choice may contain the same prefix, and so all these branches represent possibilities for synchronization (“possible branches”). Other branches with different prefixes denote different possibilities (“impossible branches”). When one synchronization is chosen, the possible branches are maintained while the impossible ones are discarded.

Example 4.2.1. To distinguish possible and impossible branches, consider:

$$P \triangleq (\mathbf{v}s)\{s\triangleright \{\text{buy} : \dots, \text{peek} : \dots\} | (\bar{s}\triangleleft \text{buy}; \dots \# \bar{s}\triangleleft \text{buy}; \dots \# \bar{s}\triangleleft \text{peek}; \dots)\}$$

The branch construct (case) provides the context for the non-deterministic choice. When the case synchronizes on the ‘buy’ label, the two branches prefixed by ‘ $\bar{s}\triangleleft \text{buy}$ ’ are possible, whereas the branch prefixed by ‘ $\bar{s}\triangleleft \text{peek}$ ’ becomes impossible, and can be discarded. The converse occurs when the ‘peek’ label is selected. ∇

To formalize these intuitions, our lazy semantics (Figure 4.2) relies on some auxiliary definitions. First, we define contexts.

Definition 4.2.2. We define ND-contexts $(\mathcal{N}, \mathcal{M})$ as follows:

$$\mathcal{N}, \mathcal{M} ::= [\cdot] | \mathcal{N} | P | (\mathbf{v}x)(\mathcal{N} | P) | \mathcal{N} \# P$$

The process obtained by replacing $[\cdot]$ in \mathcal{N} with P is denoted $\mathcal{N}[P]$. We refer to ND-contexts that do not use the clause ‘ $\mathcal{N} \# P$ ’ as D-contexts, denoted \mathcal{C}, \mathcal{D} .

Using D-contexts, we can express that, e.g., $\prod_{i \in I} C_i[x[]]$ and $\prod_{j \in J} D_j[x(); Q_j]$ should match. To account for reductions with impossible branches, we define a precongruence on processes, denoted \geq_S , where the parameter S denotes the subject(s) of the prefix in the possible

branches. Our semantics is then closed under \geq_S . Hence, e.g., anticipating a reduction on x , the possible branch $C_1[x(y); P]$ can be extended with an impossible branch to form $C_1[x(y); P] \# C_2[z0; Q]$.

Before defining \geq_S (Definition 4.2.4), we first define prefixes (and their subjects). Below, we write \bar{x} to denote a finite tuple of names x_1, \dots, x_k .

Definition 4.2.3. *Prefixes are defined as follows:*

$$\alpha, \beta ::= \bar{x}[y] \mid x(y) \mid \bar{x} \triangleleft \ell \mid x \triangleright \mid ?\bar{x}[y] \mid !x(y) \mid x[] \mid x0 \mid \bar{x} \triangleleft \text{some} \mid \bar{x} \triangleleft \text{none} \mid x \triangleright \text{some}_{\bar{w}} \mid [x \leftrightarrow y]$$

The subjects of α , denoted $\text{sub}(\alpha)$, are $\{x\}$ or $\{x, y\}$ in case of $[x \leftrightarrow y]$. By abuse of notation, we write $\alpha; P$ even when α takes no continuation or multiple (as in, e.g., $[x \leftrightarrow y]$ and $\bar{x}[y]$).

Definition 4.2.4. *Let $\triangleright \triangleleft$ denote the least relation on prefixes (Definition 4.2.3) defined by: (i) $\bar{x}[y] \triangleright \triangleleft \bar{x}[z]$, (ii) $x(y) \triangleright \triangleleft x(z)$, and (iii) $\alpha \triangleright \triangleleft \alpha$ otherwise.*

Given non-empty $S \subseteq \{x, y\}$, the precongruence $P \geq_S Q$ holds when both conditions hold:

1. $S = \{x\}$ implies
 $P = \left(\#_{i \in I} C_i[\alpha_i; P_i] \right) \# \left(\#_{j \in J} C_j[\beta_j; Q_j] \right)$ and $Q = \#_{i \in I} C_i[\alpha_i; P_i]$, where
 (i) $\forall i, i' \in I. \alpha_i \triangleright \triangleleft \alpha_{i'}$ and $\text{sub}(\alpha_i) = \{x\}$, and
 (ii) $\forall i \in I. \forall j \in J. \alpha_i \not\triangleright \triangleleft \beta_j \wedge x \in \text{fn}(\beta_j; Q_j)$;
2. $S = \{x, y\}$ implies
 $P = \left(\#_{i \in I} C_i[[x \leftrightarrow y]] \right) \# \left(\#_{j \in J} C_j[[x \leftrightarrow z_j]] \right) \# \left(\#_{k \in K} C_k[\alpha_k; P_k] \right)$
 and $Q = \#_{i \in I} C_i[[x \leftrightarrow y]]$, where
 (i) $\forall j \in J. z_j \neq y$, and (ii) $\forall k \in K. x \in \text{fn}(\alpha_k; P_k) \wedge \forall z. \alpha_k \not\triangleright \triangleleft [x \leftrightarrow z]$.

Intuitively, while the relation $\triangleright \triangleleft$ allows us to equate output/input prefixes with the same subject (but different object), the rest of Definition 4.2.4 accounts for two kinds of reduction: (i) due to synchronizations (Item 1), in which case S is a singleton, and (ii) due to forwarding (Item 2), in which case S contains the two names involved. In both cases, S is used to discard “impossible” branches.

Example 4.2.5. Recall process P from Example 4.2.1. To derive a synchronization with the ‘buy’ alternative of the case, we can use \geq_S to discard the ‘peek’ alternative:

$$\bar{s} \triangleleft \text{buy}; \dots \# \bar{s} \triangleleft \text{buy}; \dots \# \bar{s} \triangleleft \text{peek}; \dots \geq_s \bar{s} \triangleleft \text{buy}; \dots \# \bar{s} \triangleleft \text{buy}; \dots \quad \nabla$$

Reduction rules. Figure 4.2 gives the rules for the lazy semantics, denoted \rightsquigarrow_S , where the set S contains the names involved in the interaction. We omit the curly braces in this annotation; this way, e.g., we write ‘ $\rightsquigarrow_{x,y}$ ’ instead of ‘ $\rightsquigarrow_{\{x,y\}}$ ’. Also, we write \rightsquigarrow_S^k to denote a sequence of $k \geq 0$ reductions.

The first six rules in Figure 4.2 formalize forwarding and communication: they are defined on choices containing different D-contexts (cf. Definition 4.2.2), each with the same prefix but possibly different continuations; these rules preserve the non-deterministic choices. Rule [RED-LAZY-FWD] fixes S to the forwarder’s two names, and the other rules fix S to the

$$\begin{array}{c}
\text{[RED-LAZY-FWD]} \\
\hline
(\mathbf{v}x)(\prod_{i \in I} C_i[x \leftrightarrow y] \mid Q) \rightsquigarrow_{x,y} \prod_{i \in I} C_i[Q\{y/x\}] \\
\\
\text{[RED-LAZY-SEND-RECV]} \\
\hline
(\mathbf{v}x)(\prod_{i \in I} C_i[\bar{x}[y_i]; (P_i \mid Q_i)] \mid \prod_{j \in J} \mathcal{D}_j[x(z); R_j]) \\
\rightsquigarrow_x \prod_{i \in I} C_i \left[(\mathbf{v}x)(Q_i \mid (\mathbf{v}w)(P_i\{w/y_i\} \mid \prod_{j \in J} \mathcal{D}_j[R_j\{w/z\}])) \right] \\
\\
\text{[RED-LAZY-SEL-BRA]} \\
\hline
\begin{array}{c}
k' \in K \\
(\mathbf{v}x)(\prod_{i \in I} C_i[\bar{x} \triangleleft k'; P_i] \mid \prod_{j \in J} \mathcal{D}_j[x \triangleright \{k : Q^k\}_{k \in K}]) \rightsquigarrow_x (\mathbf{v}x)(\prod_{i \in I} C_i[P_i] \mid \prod_{j \in J} \mathcal{D}_j[Q_j^{k'}])
\end{array} \\
\\
\text{[RED-LAZY-CLI-SRV]} \\
\hline
(\mathbf{v}x)(\prod_{i \in I} C_i[? \bar{x}[y_i]; P_i] \mid \prod_{j \in J} \mathcal{D}_j[!x(z); Q_j]) \\
\rightsquigarrow_x \prod_{j \in J} \mathcal{D}_j \left[(\mathbf{v}x)(\prod_{i \in I} C_i[P_i\{w/z\}] \mid Q_j\{w/z\}) \mid !x(z); Q_j \right] \\
\\
\text{[RED-LAZY-CLOSE-WAIT]} \\
\hline
(\mathbf{v}x)(\prod_{i \in I} C_i[x[]] \mid \prod_{j \in J} \mathcal{D}_j[x0; Q_j]) \rightsquigarrow_x \prod_{i \in I} C_i[\mathbf{0}] \mid \prod_{j \in J} \mathcal{D}_j[Q_j] \\
\\
\text{[RED-LAZY-SOME]} \\
\hline
(\mathbf{v}x)(\prod_{i \in I} C_i[\bar{x} \triangleleft \text{some}; P_i] \mid \prod_{j \in J} \mathcal{D}_j[x \triangleright \text{some}_{w_1, \dots, w_n}; Q_j]) \\
\rightsquigarrow_x (\mathbf{v}x)(\prod_{i \in I} C_i[P_i] \mid \prod_{j \in J} \mathcal{D}_j[Q_j]) \\
\\
\text{[RED-LAZY-NONE]} \\
\hline
(\mathbf{v}x)(\prod_{i \in I} C_i[\bar{x} \triangleleft \text{none}] \mid \prod_{j \in J} \mathcal{D}_j[x \triangleright \text{some}_{w_1, \dots, w_n}; Q_j]) \\
\rightsquigarrow_x (\mathbf{v}x)(\prod_{i \in I} C_i[\mathbf{0}] \mid \prod_{j \in J} \mathcal{D}_j[\bar{w} \triangleleft \text{none}_1 \mid \dots \mid \bar{w} \triangleleft \text{none}_n]) \\
\\
\text{[RED-LAZY-PRECONG]} \\
\hline
\begin{array}{c}
x \in S \quad P \succeq_S P' \quad Q \succeq_S Q' \quad (\mathbf{v}x)(P' \mid Q') \rightsquigarrow_S R \\
(\mathbf{v}x)(P \mid Q) \rightsquigarrow_S R
\end{array} \\
\\
\text{[RED-LAZY-SCOPE]} \qquad \text{[RED-LAZY-CONG]} \\
\hline
\begin{array}{c}
(\mathbf{v}x)(P \mid \mathcal{X}[C[Q_1] \# C[Q_2]]) \rightsquigarrow_S R \\
(\mathbf{v}x)(P \mid \mathcal{X}[C[Q_1] \# Q_2]) \rightsquigarrow_S R
\end{array} \qquad \begin{array}{c}
P \equiv P' \quad P' \rightsquigarrow_S Q' \quad Q' \equiv Q \\
P \rightsquigarrow_S Q
\end{array} \\
\\
\text{[RED-LAZY-CONN]} \qquad \text{[RED-LAZY-PAR]} \qquad \text{[RED-LAZY-ND]} \\
\hline
\begin{array}{c}
P \rightsquigarrow_S P' \\
(\mathbf{v}x)(P \mid Q) \rightsquigarrow_S (\mathbf{v}x)(P' \mid Q)
\end{array} \qquad \begin{array}{c}
P \rightsquigarrow_S P' \\
P \mid Q \rightsquigarrow_S P' \mid Q
\end{array} \qquad \begin{array}{c}
P \rightsquigarrow_S P' \\
P \# Q \rightsquigarrow_S P' \# Q
\end{array}
\end{array}$$

Figure 4.2 | Lazy reduction semantics for $s\pi^+$.

one involved name. In particular, Rule [RED-LAZY-SEND-RECV] formalizes name exchange: it involves multiple senders and multiple receivers (grouped in choices indexed by I and J , respectively). Because they proceed in lock-step, reduction leads to substitutions involving the same (fresh) name w ; also, the scopes of the choice and the contexts enclosing the senders is extended.

Rule [RED-LAZY-PRECONG] can be used to derive a synchronization that discards groups of choices. Rule [RED-LAZY-SCOPE] allows inferring reductions when non-deterministic choices are not top-level: e.g.,

$$(\mathbf{v}x)(x[] | (\mathbf{v}y)((x0; Q_1 \# x0; Q_2) | R)) \rightsquigarrow_x (\mathbf{v}y)(Q_1 | R) \# (\mathbf{v}y)(Q_2 | R).$$

The last four rules formalize that reduction is closed under structural congruence, restriction, parallel composition, and non-deterministic choice.

As mentioned earlier, a key motivation for our work is to have non-deterministic choices that effectively enforce commitment, without a too drastic discarding of alternatives. Next we illustrate this intended form of *gradual commitment*.

Example 4.2.6. Consider the following variant of the movie server introduced in Section 4.1, where the handling of the payment is now modeled as a branch:

$$\text{NewServer}_s \triangleq s(\text{title}); s \triangleright \left\{ \begin{array}{l} \text{buy} : s \triangleright \left\{ \begin{array}{l} \text{card} : s(\text{info}); \bar{s}[\text{movie}]; s[] \\ \text{cash} : \bar{s}[\text{movie}]; s[] \end{array} \right\} \\ \text{peek} : \bar{s}[\text{trailer}]; s[] \end{array} \right\}$$

Consider a client, Eve, who cannot decide between buying ‘Oppenheimer’ or watching its trailer. In the former case, she has two options for payment method:

$$\text{Eve}_s \triangleq \bar{s}[\text{Oppenheimer}]; \left(\begin{array}{l} \bar{s} \triangleleft \text{buy}; \bar{s} \triangleleft \text{card}; \bar{s}[\text{visa}]; s(\text{movie}); s0; \mathbf{0} \\ \# \bar{s} \triangleleft \text{buy}; \bar{s} \triangleleft \text{cash}; s(\text{movie}); s0; \mathbf{0} \\ \# \bar{s} \triangleleft \text{peek}; s(\text{link}); s0; \mathbf{0} \end{array} \right)$$

Let $\text{Sys}^* \triangleq (\mathbf{v}s)(\text{NewServer}_s | \text{Eve}_s)$. After sending the movie’s title, Eve’s choice (buying or watching the trailer) enables gradual commitment. We have:

$$\text{Sys}^* \rightsquigarrow_s^2 (\mathbf{v}s)(s \triangleright \{\text{card} : \dots, \text{cash} : \dots\} | (\bar{s} \triangleleft \text{card}; \dots \# \bar{s} \triangleleft \text{cash}; \dots)) =: \text{Sys}_1^*$$

$$\text{and} \quad \text{Sys}^* \rightsquigarrow_s^2 (\mathbf{v}s)(\bar{s}[\text{trailer}]; \dots | s(\text{trailer}); \dots) =: \text{Sys}_2^*$$

Process Sys_1^* represents the situation in which Eve has selected buy, in which case the third alternative ($\bar{s} \triangleleft \text{peek}; \dots$) can be discarded as an impossible branch. Process Sys_2^* represents the dual situation, in which Eve selects pick and the two alternatives prefixed by ‘ $\bar{s} \triangleleft \text{buy}$ ’ are impossible branches. From Sys_1^* , the selection of payment method completes the commitment to one alternative:

$$\text{Sys}_1^* \rightsquigarrow_s (\mathbf{v}s)(s(\text{info}); \dots | \bar{s}[\text{visa}]; \dots) \text{ and } \text{Sys}_1^* \rightsquigarrow_s (\mathbf{v}s)(\bar{s}[\text{movie}]; \dots | s(\text{movie}); \dots) \quad \nabla$$

In Section 4.3, we discuss an alternative *eager* semantics that commits to a single branch upon communication, as in (4.1).

4.2.2. RESOURCE CONTROL FOR $s\pi^+$ VIA SESSION TYPES

We define a session type system for $s\pi^+$, following ‘propositions-as-sessions’ [CP10; Wad12]. As already mentioned, in a session type system, resources are names that perform protocols: the *type assignment* $x : A$ says that x should conform to the protocol specified by the session type A . We give the syntax of types:

$$A, B ::= \mathbf{1} \mid \perp \mid A \otimes B \mid A \wp B \mid \oplus\{i : A_i\}_{i \in I} \mid \&\{i : A_i\}_{i \in I} \mid ?A \mid !A \mid \&A \mid \oplus A$$

The units $\mathbf{1}$ and \perp type closed sessions. We use $A \otimes B$ to type a name that first outputs a name of type A and then proceeds as specified by B . Similarly, $A \wp B$ types a name that inputs a name of type A before proceeding as specified by B . Types $\oplus\{i : A_i\}_{i \in I}$ and $\&\{i : A_i\}_{i \in I}$ are assigned to names that can select and offer a labeled choice, respectively. Type $?A$ is assigned to a name that performs a request for a session of type A , and type $!A$ is assigned to a name that offers a server of type A : the modalities ‘?’ and ‘!’ define *non-linear* (i.e., persistent) types. Finally, $\&A$ is the type of a name that *may produce* a behavior of type A , or fail; dually, $\oplus A$ types a name that *may consume* a behavior of type A .

For any type A we denote its *dual* as \bar{A} . Intuitively, we use dual types to avoid communication errors: the type at one end of a channel is the dual of the type at the opposite end. Duality is an involution, defined as follows:

$$\begin{array}{llllll} \bar{\mathbf{1}} \triangleq \perp & \overline{A \otimes B} \triangleq \bar{A} \wp \bar{B} & \overline{\oplus\{i : A_i\}_{i \in I}} \triangleq \&\{i : \bar{A}_i\}_{i \in I} & \overline{?A} \triangleq !A & \overline{\&A} \triangleq \oplus \bar{A} \\ \overline{\perp} \triangleq \mathbf{1} & \overline{A \wp B} \triangleq \bar{A} \otimes \bar{B} & \overline{\&\{i : A_i\}_{i \in I}} \triangleq \oplus\{i : \bar{A}_i\}_{i \in I} & \overline{!A} \triangleq ?A & \overline{\oplus A} \triangleq \&\bar{A} \end{array}$$

Judgments are of the form $\vdash P \blacktriangleright \Gamma$, where P is a process and Γ is a context, a collection of type assignments. In writing $\Gamma, x : A$, we assume $x \notin \text{dom}(\Gamma)$. We write $\text{dom}(\Gamma)$ to denote the set of names appearing in Γ . Letting $\diamond \in \{?, \oplus\}$, we write $\diamond \Gamma$ to denote that, for every $x : A \in \Gamma$, there exists A' such that $A = \diamond A'$.

Figure 4.3 gives the typing rules: they correspond to the rules in Curry-Howard interpretations of classical linear logic as session types (cf. Wadler [Wad12]), with the rules for $\&A$ and $\oplus A$ extracted from [CP17], and the additional Rule [TYP-ND] for non-confluent non-deterministic choice, which modifies the confluent rule in [CP17].

Most rules follow [Wad12], so we focus on those related to non-determinism. Rule [TYP-SOME] types a process with a name whose behavior can be provided, while Rule [TYP-NONE] types a name whose behavior cannot. Rule [TYP-SOME-IN] types a process with a name x whose behavior may not be available. If the behavior is not available, all the sessions in the process must be canceled; hence, the rule requires all names to be typed under $\&A$.

Rule [TYP-ND] types our new non-deterministic choice operator; the branches must be typable under the same typing context. Hence, all branches denote the same sessions, which may be implemented differently. In context of a synchronization, branches that are kept are able to synchronize, whereas the discarded branches are not; nonetheless, the remaining branches still represent different implementations of the same sessions. Compared to the rule for non-determinism in [CP17], we do not require processes to be typable under $\&A$.

$$\begin{array}{c}
\text{[TYP-CUT]} \\
\frac{\frac{}{\vdash P \blacktriangleright \Gamma, x : A} \quad \frac{}{\vdash Q \blacktriangleright \Delta, x : \bar{A}}}{\vdash (\nu x)(P | Q) \blacktriangleright \Gamma, \Delta} \\
\text{[TYP-PAR]} \\
\frac{\frac{}{\vdash P \blacktriangleright \Gamma} \quad \frac{}{\vdash Q \blacktriangleright \Delta}}{\vdash P | Q \blacktriangleright \Gamma, \Delta} \\
\text{[TYP-ND]} \\
\frac{\frac{}{\vdash P \blacktriangleright \Gamma} \quad \frac{}{\vdash Q \blacktriangleright \Gamma}}{\vdash P \# Q \blacktriangleright \Gamma} \\
\text{[TYP-INACT]} \\
\frac{}{\vdash \mathbf{0} \blacktriangleright \emptyset} \\
\text{[TYP-FWD]} \\
\frac{}{\vdash [x \leftrightarrow y] \blacktriangleright x : A, y : \bar{A}} \\
\text{[TYP-CLOSE]} \\
\frac{}{\vdash x[] \blacktriangleright x : \mathbf{1}} \\
\text{[TYP-WAIT]} \\
\frac{\frac{}{\vdash P \blacktriangleright \Gamma}}{\vdash x(); P \blacktriangleright \Gamma, x : \perp} \\
\text{[TYP-SEND]} \\
\frac{\frac{}{\vdash P \blacktriangleright \Gamma, y : A} \quad \frac{}{\vdash Q \blacktriangleright \Delta, x : B}}{\vdash \bar{x}[y]; (P | Q) \blacktriangleright \Gamma, \Delta, x : A \otimes B} \\
\text{[TYP-RECV]} \\
\frac{\frac{}{\vdash P \blacktriangleright \Gamma, y : A, x : B}}{\vdash x(y); P \blacktriangleright \Gamma, x : A \wp B} \\
\text{[TYP-SEL]} \\
\frac{\frac{}{\vdash P \blacktriangleright \Gamma, x : A_j} \quad j \in I}{\vdash \bar{x} \triangleleft j; P \blacktriangleright \Gamma, x : \oplus \{i : A_i\}_{i \in I}} \\
\text{[TYP-BRA]} \\
\frac{\forall i \in I. \frac{}{\vdash P_i \blacktriangleright \Gamma, x : A_i}}{\vdash x \triangleright \{i : P_i\}_{i \in I} \blacktriangleright \Gamma, x : \& \{i : A_i\}_{i \in I}} \\
\text{[TYP-SOME]} \\
\frac{\frac{}{\vdash P \blacktriangleright \Gamma, x : A}}{\vdash \bar{x} \triangleleft \text{some}; P \blacktriangleright \Gamma, x : \& A} \\
\text{[TYP-NONE]} \\
\frac{}{\vdash \bar{x} \triangleleft \text{none} \blacktriangleright x : \& A} \\
\text{[TYP-SOME-IN]} \\
\frac{\frac{}{\vdash P \blacktriangleright \& \Gamma, ?\Delta, x : A}}{\vdash x \triangleright \text{some}_{\text{dom}(\Gamma)}; P \blacktriangleright \& \Gamma, ?\Delta, x : \oplus A} \\
\text{[TYP-CLI]} \\
\frac{\frac{}{\vdash P \blacktriangleright \Gamma, y : A}}{\vdash ?\bar{x}[y]; P \blacktriangleright \Gamma, x : ?A} \\
\text{[TYP-SRV]} \\
\frac{\frac{}{\vdash P \blacktriangleright ?\Gamma, y : A}}{\vdash !x(y); P \blacktriangleright ?\Gamma, x : !A} \\
\text{[TYP-WEAKEN]} \\
\frac{\frac{}{\vdash P \blacktriangleright \Gamma}}{\vdash P \blacktriangleright \Gamma, x : ?A} \\
\text{[TYP-CONTRACT]} \\
\frac{\frac{}{\vdash P \blacktriangleright \Gamma, x : ?A, x' : ?A}}{\vdash P \{x/x'\} \blacktriangleright \Gamma, x : ?A}
\end{array}$$

Figure 4.3 | Typing rules for $s\pi^+$.

Example 4.2.7. Recall that, in Example 4.2.6, Eve_s has two options for payment method:

$$\text{Eve}_s \triangleq \bar{s}[\text{Oppenheimer}]; \left(\begin{array}{l} \bar{s} \triangleleft \text{buy}; \bar{s} \triangleleft \text{card}; \bar{s}[\text{visa}]; s(\text{movie}); s(); \mathbf{0} \\ \# \bar{s} \triangleleft \text{buy}; \bar{s} \triangleleft \text{cash}; s(\text{movie}); s(); \mathbf{0} \\ \# \bar{s} \triangleleft \text{peek}; s(\text{link}); s(); \mathbf{0} \end{array} \right)$$

However, the branches of the non-deterministic choice in Eve_s are three different implementations of the same session: all three sessions on s are typable

$$\oplus \{ \text{buy} : \oplus \{ \text{card} : C \otimes M \wp \perp, \text{cash} : M \wp \perp \}, \text{peek} : L \wp \perp \}$$

(where C, M, L are primitive, self-dual data types). ▽

Example 4.2.8 (Unavailable Movies). Consider the following variant of the movie server introduced in Section 4.1. This server lets a client buy a movie, but the movie may not be

available. We model this scenario using non-deterministic choice and non-deterministically available sessions:

$$\vdash \text{BuyServ}_s \triangleq s(\text{title}); (\bar{s} \triangleleft \text{none} \# \bar{s} \triangleleft \text{some}; s(\text{paym}); \bar{s}[\text{movie}]; s[]) \blacktriangleright s : T \wp (\&(\text{P} \wp \text{M} \otimes \mathbf{1})),$$

where T, P, M denote primitive, self-dual data-types. We now define a client Ada who buys a movie for Charles; Ada can only forward the movie to Charles if it is actually available:

$$\vdash \text{Ada}_{s,u} \triangleq \bar{s}[\text{Barbie}]; s \triangleright \text{some}_u; \bar{s}[\text{visa}]; s(\text{movie}); s(); \bar{u} \triangleleft \text{some}; \bar{u}[\text{movie}]; u[] \\ \blacktriangleright s : T \otimes (\oplus(\text{P} \otimes \text{M} \wp \perp)), u : \&(\text{M} \otimes \mathbf{1})$$

$$\vdash \text{Charles}_u \triangleq u \triangleright \text{some}; u(\text{movie}); u(); \mathbf{0} \blacktriangleright u : \oplus(\text{M} \wp \mathbf{1})$$

Let $\text{BuySys} \triangleq (\mathbf{v} s)(\text{BuyServ}_s \mid (\mathbf{v} u)(\text{Ada}_{s,u} \mid \text{Charles}_u))$. Depending on whether the server has the movie “Barbie” available, we have the following reductions:

$$\text{BuySys} \rightsquigarrow_s^2 (\mathbf{v} u)(\bar{u} \triangleleft \text{none} \mid \text{Charles}_u) \quad \text{or} \quad \text{BuySys} \rightsquigarrow_s^5 (\mathbf{v} u)(\bar{u} \triangleleft \text{some}; \dots \mid \text{Charles}_u) \quad \nabla$$

Example 4.2.9 (An Unreliable Service). Imagine a service S that makes two selections but may fail before each of them. It can be assigned the session type:

$$A \triangleq \&\oplus\{l : \&\oplus\{l : A_1, l' : A_2\}, l' : \&\oplus\{l : A_3, l' : A_4\}\}$$

where A_1, \dots, A_4 denote different protocols.

Consider a process C such that $\vdash C \blacktriangleright x : \bar{A}, w : A$, i.e., C provides a session of type A on name w . A possible implementation for C follows: it is defined as a non-deterministic choice between two different possibilities: (a) relying on S to provide w , risking a full-on crash, or (b) providing w without relying on S .

$$C \triangleq x \triangleright \text{some}_w; \bar{w} \triangleleft \text{some}; x \triangleright \{l : \bar{w} \triangleleft l; C_1, l' : \bar{w} \triangleleft l'; C_1\} \\ \# (\bar{w} \triangleleft \text{some}; (\bar{w} \triangleleft l; D_1 \# \bar{w} \triangleleft l'; D_1) \mid x \triangleright \text{some}; x \triangleright \{l : D_2, l' : D_2\})$$

$$C_1 \triangleq x \triangleright \text{some}_w; \bar{w} \triangleleft \text{some}; x \triangleright \{l : \bar{w} \triangleleft l; x(); w[], l' : \bar{w} \triangleleft l'; x(); w[]\}$$

$$D_1 \triangleq \bar{w} \triangleleft \text{some}; (\bar{w} \triangleleft l; w[] \# \bar{w} \triangleleft l'; w[]) \quad D_2 \triangleq x \triangleright \text{some}; x \triangleright \{l : x(); \mathbf{0}, l' : x(); \mathbf{0}\}$$

where, for simplicity, we assume $A_i = \mathbf{1}$ ($i \in \{1, \dots, 4\}$).

In process C , the “risky” alternative appears in the left branch, and relies on process C_1 : sessions on x and w occur intertwined, with each action on w performing the dual behavior of x ; e.g., a branching on x is followed by a selection on w . The “safe” alternative appears in the right branch: this is a very different design, as the behavior along w and x is separately implemented by D_1 and D_2 , respectively. In this case, since C gets no input from S in this case, D_2 makes its selections non-deterministically. Thus, despite their different implementations, risky and safe branches have the same types (i.e., realize the same sessions). ∇

4.2.3. CORRECTNESS PROPERTIES

As expected, our type system does not ensure confluence, but it does satisfy *session fidelity* and *communication safety*. These are essential correctness properties: the former states that

processes correctly follow their ascribed session protocols, and the latter that no communication errors and mismatches occur. Both properties follow directly from the fact that typing is consistent across structural congruence and reduction. See Appendix C.1 for details.

Theorem 4.2.10 (Type Preservation). *If $\vdash P \blacktriangleright \Gamma$, then both $P \equiv Q$ and $P \rightsquigarrow_S Q$ (for any Q and S) imply $\vdash Q \blacktriangleright \Gamma$.*

Proof (Sketch). By induction on the derivation of $P \equiv Q$ or $P \rightsquigarrow_S Q$. In each case, we apply induction on the derivation of $\vdash P \blacktriangleright \Gamma$. Then, by inversion we discover the exact typing of P and derive the typing of Q . \square

Another important, if often elusive, property in session types is *deadlock-freedom*, which ensures that processes can reduce as long as they are not inactive. Our type system satisfies deadlock-freedom for processes with fully connected names, i.e., typable under the empty context. See Appendix C.2 for details.

Theorem 4.2.11 (Deadlock-freedom). *If $\vdash P \blacktriangleright \emptyset$ and $P \neq \mathbf{0}$, then there are Q and S such that $P \rightsquigarrow_S Q$.*

Proof (Sketch). In Section 4.3, we define an *eager* semantics for $s\pi^+$. For this semantics, we prove deadlock-freedom in a fairly standard way (such as in [CP17]). We transfer deadlock-freedom from the eager semantics to the lazy semantics by showing that a reduction under the eager semantics implies a reduction under the lazy semantics. \square

4.3. AN EAGER SEMANTICS FOR $s\pi^+$

Let us consider a variant of $s\pi^+$ in which syntax, typing, and structural congruence are as in Section 4.2, but with an *eagerly committing* semantics. The idea is simple: we fully commit to a non-deterministic choice once a prefix synchronizes.

4.3.1. THE SEMANTICS

Figure 4.4 gives the eager reduction semantics, denoted \longrightarrow . This semantics implements full commitment of non-deterministic choices by committing ND-contexts to D-contexts:

Definition 4.3.1. *The commitment of an ND-context \mathcal{N} , denoted $\langle \mathcal{N} \rangle$, is defined as follows:*

$$\langle [\cdot] \rangle \triangleq [\cdot] \quad \langle \mathcal{N} | P \rangle \triangleq \langle \mathcal{N} \rangle | P \quad \langle (\nu x)(\mathcal{N} | P) \rangle \triangleq (\nu x)(\langle \mathcal{N} \rangle | P) \quad \langle \mathcal{N} \# P \rangle \triangleq \langle \mathcal{N} \rangle$$

Proposition 4.3.2. *For any ND-context \mathcal{N} , the context $\langle \mathcal{N} \rangle$ is a D-context.*

Just as $s\pi^+$ with lazy semantics, $s\pi^+$ with \longrightarrow satisfies type preservation and deadlock-freedom. See Appendices C.1.2 and C.2.1 for details.

Theorem 4.3.3 (Type Preservation: Eager Semantics). *If $\vdash P \blacktriangleright \Gamma$, then both $P \equiv Q$ and $P \longrightarrow Q$ imply $\vdash Q \blacktriangleright \Gamma$.*

$$\begin{array}{c}
\text{[RED-EAGER-FWD]} \\
\hline
(\mathbf{v}x)(\mathcal{N}[x \leftrightarrow y] \mid Q) \longrightarrow (\mathcal{N})[Q\{y/x\}] \\
\\
\text{[RED-EAGER-CLOSE-WAIT]} \\
\hline
(\mathbf{v}x)(\mathcal{N}[x[] \mid \mathcal{N}'[x0; Q]) \longrightarrow (\mathcal{N})[\mathbf{0} \mid (\mathcal{N}')[Q]] \\
\\
\text{[RED-EAGER-SEND-REC]} \\
\hline
(\mathbf{v}x)(\mathcal{N}[\bar{x}[y]; (P \mid Q)] \mid \mathcal{N}'[x(z); R]) \longrightarrow (\mathcal{N})[(\mathbf{v}x)(Q \mid (\mathbf{v}y)(P \mid (\mathcal{N}')[R\{y/z\}])] \\
\\
\text{[RED-EAGER-SEL-BRA]} \\
\hline
\frac{k' \in K}{(\mathbf{v}x)(\mathcal{N}[\bar{x} \triangleleft k'; P] \mid \mathcal{N}'[x \triangleright \{k : Q^k\}_{k \in K}]) \longrightarrow (\mathbf{v}x)((\mathcal{N})[P] \mid (\mathcal{N}')[Q^{k'}])} \\
\\
\text{[RED-EAGER-CLI-SRV]} \\
\hline
(\mathbf{v}x)(\mathcal{N}[\bar{x}[?x[y]; P] \mid \mathcal{N}'[!x(z); Q]) \longrightarrow (\mathcal{N}')[(\mathbf{v}x)((\mathbf{v}y)((\mathcal{N})[P] \mid Q\{y/z\}) \mid !x(z); Q)] \\
\\
\text{[RED-EAGER-SOME]} \\
\hline
(\mathbf{v}x)(\mathcal{N}[\bar{x} \triangleleft \text{some}; P] \mid \mathcal{N}'[x \triangleright \text{some}_{w_1, \dots, w_n}; Q]) \longrightarrow (\mathbf{v}x)((\mathcal{N})[P] \mid (\mathcal{N}')[Q]) \\
\\
\text{[RED-EAGER-NONE]} \\
\hline
(\mathbf{v}x)(\mathcal{N}[\bar{x} \triangleleft \text{none}] \mid \mathcal{N}'[x \triangleright \text{some}_{w_1, \dots, w_n}; Q]) \longrightarrow (\mathcal{N})[\mathbf{0}] \mid (\mathcal{N}')[\bar{w} \triangleleft \text{none}_1 \mid \dots \mid \bar{w} \triangleleft \text{none}_n] \\
\\
\text{[RED-EAGER-CONG]} \quad \text{[RED-EAGER-CONN]} \quad \text{[RED-EAGER-PAR]} \\
\hline
\frac{P \equiv P' \quad P' \longrightarrow Q' \quad Q' \equiv Q}{P \longrightarrow Q} \quad \frac{P \longrightarrow P'}{(\mathbf{v}x)(P \mid Q) \longrightarrow (\mathbf{v}x)(P' \mid Q)} \quad \frac{P \longrightarrow P'}{P \mid Q \longrightarrow P' \mid Q} \\
\\
\text{[RED-EAGER-ND]} \\
\hline
\frac{P \longrightarrow P'}{P \# Q \longrightarrow P' \# Q}
\end{array}$$

Figure 4.4 | Eager reduction semantics for $s\pi^+$.

Proof (Sketch). If $P \equiv Q$, the thesis follows directly from Theorem 4.2.10. If $P \longrightarrow Q$, we apply induction on the derivation of the reduction. In each case, we show that the commitment of ND-contexts (Definition 4.3.1) preserves typing. \square

Theorem 4.3.4 (Deadlock-freedom: Eager Semantics). *If $P \vdash \emptyset$ and $P \neq \mathbf{0}$, then there is R such that $P \longrightarrow R$.*

Proof (Sketch). First, we write P in such a way that we can access all its unblocked prefixes. We inductively show that there must be at least one pair of such prefixes that are connected by a restriction. Hence, these prefixes are duals and thus the process can reduce. \square

4.3.2. COMPARING LAZY AND EAGER SEMANTICS

We now compare \rightsquigarrow and \longrightarrow by resorting to *behavioral equivalences*. We define a simple behavioral notion of equivalence on $s\pi^+$ processes, parametric in \rightsquigarrow or \longrightarrow ; then, we prove that there are classes of processes that are equal with respect to \rightsquigarrow , but incomparable with respect to \longrightarrow (Theorem 4.3.8). A key ingredient is the following notion of observable:

Definition 4.3.5. *A process P has a ready-prefix α , denoted $P \downarrow_\alpha$, if and only if there exist \mathcal{N}, P' such that $P \equiv \mathcal{N}[\alpha; P']$.*

We may now define:

Definition 4.3.6 (Ready-Prefix Bisimilarity). *A relation \mathbb{B} on $s\pi^+$ processes is a (strong) ready-prefix bisimulation with respect to \rightsquigarrow if and only if, for every $(P, Q) \in \mathbb{B}$,*

1. *For every P' such that $P \rightsquigarrow P'$, there exists Q' such that $Q \rightsquigarrow Q'$ and $(P', Q') \in \mathbb{B}$;*
2. *For every Q' such that $Q \rightsquigarrow Q'$, there exists P' such that $P \rightsquigarrow P'$ and $(P', Q') \in \mathbb{B}$;*
3. *For every $\alpha \triangleright \beta$, $P \downarrow_\alpha$ if and only if $Q \downarrow_\beta$.*

P and Q are ready-prefix bisimilar with respect to \rightsquigarrow , denoted $P \sim_{\mathbb{L}} Q$, if there exists a relation \mathbb{B} that is a ready-prefix bisimulation with respect to \rightsquigarrow such that $(P, Q) \in \mathbb{B}$.

A ready-prefix bisimulation with respect to \longrightarrow is defined by replacing every occurrence of ' \rightsquigarrow ' by ' \longrightarrow ' in the definition above. We write $P \sim_{\mathbb{E}} Q$ if P and Q are ready-prefix bisimilar with respect to \longrightarrow .

Ready-prefix bisimulation can highlight a subtle but significant difference between the behavior induced by our lazy and eager semantics. To demonstrate this, we consider session-typed implementations of a vending machine.

Example 4.3.7 (Two Vending Machines). Consider vending machines VM_1 and VM_2 consisting of three parts: (1) an interface, which interacts with the user to send money and choose between coffee (c) and tea (t); (2) a brewer, which produces either beverage; (3) a system, which collects the money and forwards the user's choice to the brewer. A $s\pi^+$ specification follows (below € and $\text{€}2$ stand for names):

$$\begin{aligned}
VM_1 &\triangleq (\mathbf{v}x)(IF_1 \mid (\mathbf{v}y)(\text{Brewer} \mid \text{System})) \\
VM_2 &\triangleq (\mathbf{v}x)(IF_2 \mid (\mathbf{v}y)(\text{Brewer} \mid \text{System})) \\
IF_1 &\triangleq \bar{x}[\text{€}2]; (\text{€}2[] \mid (\bar{x} \triangleleft c; x[] \# \bar{x} \triangleleft t; x[])) \\
IF_2 &\triangleq \bar{x}[\text{€}2]; (\text{€}2[] \mid \bar{x} \triangleleft c; x[] \# \bar{x}[\text{€}2]; (\text{€}2[] \mid \bar{x} \triangleleft t; x[])) \\
\text{System} &\triangleq x(\text{€}); x \triangleright \begin{cases} c: \bar{y} \triangleleft c; x0; \text{€}0; y[], \\ t: \bar{y} \triangleleft t; x0; \text{€}0; y[] \end{cases} \\
\text{Brewer} &\triangleq y \triangleright \{c: y0; \text{Brew}_c, t: y0; \text{Brew}_t\}
\end{aligned}$$

where $\vdash \text{Brew}_c \blacktriangleright \emptyset$, $\vdash \text{Brew}_t \blacktriangleright \emptyset$, such that $\vdash VM_1 \blacktriangleright \emptyset$, $\vdash VM_2 \blacktriangleright \emptyset$.

We give two implementations of the interface: IF_1 sends the money and then chooses coffee or tea; IF_2 chooses sending the money and then requesting coffee, or sending the money and then requesting tea. Then, IF_1 and IF_2 result in two different vending machines, VM_1 and VM_2 .

We have $VM_1 \not\sim_E VM_2$: the eager semantics distinguishes between the implementations; e.g., IF_1 has a single money slot, a button for coffee, and another button for tea, whereas IF_2 has two money slots, one for coffee, and another for tea. In contrast, under the lazy semantics, these machines are indistinguishable: $VM_1 \sim_L VM_2$. ∇

Example 4.3.7 highlights a difference in behavior between \rightsquigarrow and \longrightarrow when a moment of choice is subtly altered. The following theorem captures this distinction (see Appendix C.3):

Theorem 4.3.8. *Take $\vdash R \equiv \mathcal{N}[\alpha_1; (P \# Q)] \blacktriangleright \emptyset$ and $\vdash S \equiv \mathcal{N}[\alpha_2; P \# \alpha_3; Q] \blacktriangleright \emptyset$, where $\alpha_1 \triangleright \triangleleft \alpha_2 \triangleright \triangleleft \alpha_3$ and $\alpha_1, \alpha_2, \alpha_3$ require a continuation. Suppose that $P \not\sim_L Q$ and $P \not\sim_E Q$. Then (i) $R \sim_L S$ but (ii) $R \not\sim_E S$.*

4

4.4. RELATED WORK

A central theme in our chapter is the expressivity of non-deterministic choice in the π -calculus, a relevant line of work pursued by Palamidessi [Pal03], Nestmann [Nes00], Peters [Pet12], among others. These works study the expressivity of forms of choice (e.g., mixed, separate) and their connection with (a)synchronous communication, sticking to the usual semantics for non-determinism (cf. (4.1)). In contrast, we study how to express commitment within a typed setting.

Integrating non-determinism within session types is non-trivial, as carelessly discarding branches would break linearity (and typability). The work by Caires and Pérez [CP17], already mentioned, develops a confluent semantics by requiring that non-determinism is only used inside the monad $\&A$; our non-confluent semantics drops this requirement. This allows us to consider non-deterministic choices not possible in [CP17], such as, e.g., selections of different labels. We stress that linearity is not jeopardized: the branches of ' $\#$ ' do not represent *different sessions*, but *different implementations* of the same sessions.

Atkey et al. [ALM16] and Kokke et al. [KMW20] extend 'propositions-as-sessions' with non-determinism. Their approaches are very different (conflation of the additives and bounded linear logic, respectively) and support non-determinism for *unrestricted names only*. This is a major difference: Examples 4.2.1, 4.2.5 and 4.2.9 can only be supported in [ALM16; KMW20] by dropping linearity, which is important there. Rocha and Caires also consider non-determinism, relying on confluence in [RC21] and on unrestricted names in [RC23].

Casal et al. [CMV22; Vas+20] develop a type system for *mixed sessions* (sessions with mixed choices), which does not ensure deadlock-freedom. Deadlock-freedom by typing is hard, especially when session names can be passed around (delegation), as in \mathfrak{S}^+ ; an advantage of 'propositions-as-sessions' is that deadlock-freedom follows directly from the link between cut-elimination and process communication.

4.5. CONCLUSIONS

We studied the interplay between resource control and non-determinism in typed concurrent calculi. The interplay is subtle and non-trivial: committing non-determinism is at odds with linearity-based resource control.

We introduced $s\pi^+$, a calculus with non-determinism, with a type system for resource control. Inspired by the untyped π -calculus, non-determinism in $s\pi^+$ is lazy and explicit, with session types defined following ‘propositions-as-sessions’ [CP17]. We defined an alternative eager semantics for $s\pi^+$, and compared it with the lazy semantics.

5

A BUNCH OF SESSIONS

This chapter studies alternative logical foundations for session-typed message-passing processes. In particular, it proposes a Curry-Howard interpretation of the logic of bunched implications as a session type system. The aim is to reconcile the message-passing features obtained from this interpretation with practical concerns, as well as maintaining correctness guarantees such as deadlock-freedom. This chapter thus addresses the following research question, introduced in Section 1.2.1.3:

Research Question I-3. *Can BI serve as an alternative logical foundation for session types, and if so, what correctness guarantees does this bring?*

This chapter is the result of a collaboration between myself and Dan Frumin, Emanuele D’Osualdo, and Jorge A. Pérez. Here, I focus on the parts of our publication [Fru+22] to which I contributed most significantly: the design of π BI and its meta-theoretical results (type preservation, deadlock-freedom, and weak normalization). The publication contains additional contributions: a denotational semantics to derive behavior equivalence and provenance tracking (omitted as a whole), and a translation from the $\alpha\lambda$ -calculus into π BI (Chapter 7).

5.1. INTRODUCTION

In this chapter, we investigate a new point in the design space of session type systems for message-passing concurrent programs. We identify the *logic of bunched implications* (BI) of O’Hearn and Pym [OP99] as a fruitful basis for an interpretation of the logic as a concurrent programming language, in the style of *propositions-as-sessions* [CP10; Wad12]. This leads to a treatment of *non-linear resources* that is radically different from existing approaches based on Girard’s linear logic (LL) [Gir87; BP96]. We propose π BI, the first concurrent interpretation of BI, and we study the behavioral properties enforced by typing, laying the meta-theoretical foundations needed.

Session types for message-passing concurrency. Writing concurrent programs is notoriously hard, as bugs might be caused by subtle undesired interactions between processes. Statically enforcing the absence of bugs while allowing expressive concurrency patterns is important but difficult. In the context of message-passing concurrency, type systems based on *session types* provide an effective approach. Session type systems enforce a communication structure between processes and channels, with the intent of (statically) ruling out races (as in, e.g., two threads sending messages over the same channel at the same time) and other undesirable behaviors, like deadlocks. This communication structure is formulated at the type level. For example, the session type $T = !\text{int}.\text{?str}!\text{bool}.\text{end}$ (written in the syntax of Vasconcelos [Vas12]) describes a protocol that first outputs an integer ($!\text{int}$), then inputs a string (?str), and finally outputs a boolean ($!\text{bool}$). In session-based concurrency, types are assigned to channel names; this way, e.g., the assignment $x : T$ dictates that the communications on channel x must adhere to the protocol described by T .

The fundamental idea behind session types is that an assumption such as $x : T$ is like a *resource* that can be consumed and produced. For example, sending an integer on the channel x consumes $x : !\text{int}.\text{?string}!\text{bool}.\text{end}$ and produces a new resource $x : \text{?string}!\text{bool}.\text{end}$, representing the expected continuation of the protocol. Then, the coordinated use of channels requires a strict discipline on how resources can be consumed and produced: it is unwise to allow multiple processes to access the same resource $x : T$, otherwise simultaneous concurrent outputs by different processes on the same channel will render the protocol invalid. The type system is thus designed to enforce that some resources, like those associated with channels, are *linear*: they are consumed *exactly once*. By enforcing linearity of these resources, session type systems ensure that well-typed programs conform to the protocols encoded as types, and satisfy important correctness properties, such as deadlock-freedom.

5

Propositions-as-sessions. A central theme in this thesis is how logical foundations can effectively inform the design of expressive type disciplines for programs. In the realm of functional programming languages, such logical foundations have long been understood via type systems obtained through strong Curry-Howard correspondences with known logical proof systems (e.g., the correspondence between the simply-typed λ -calculus and intuitionistic propositional logic). For concurrent languages, on the other hand, such correspondences have been more elusive. Indeed, although the original works on session types by Honda *et al.* [Hon93; HVK98] feature an unmistakable influence of LL in their formulation, the central question of establishing firm logical foundations for session types remained open until relatively recently. The first breakthroughs were the logical correspondences based on the concurrent languages πDILL [CP10] and CP [Wad12] (based on intuitionistic LL and classical LL, respectively). These works define a bidirectional correspondence, in the style of Curry-Howard, which allows us to interpret propositions as session types (protocols), proofs as π -calculus processes, and $[\text{CUT}]$ -elimination as process communication. These correspondences are often collectively referred to as *propositions-as-sessions*.

Intensely studied in the last decade, the line of work on propositions-as-sessions provides a principled justification to a linear typing discipline. These correspondences also clarify our understanding of the status of *non-linear* resources, which do not obey resource consumption considerations. Non-linear resources, such as mutable references, client/server channels, and

shared databases, are commonplace in practical programs and systems. Disciplining non-linear resources is challenging, because there is a tension between flexibility and correctness: ideally, one would like to increase the range of (typable) programs that can be written, while ensuring that such programs treat non-linear resources consistently.

LL allows for a controlled treatment of non-linear resources through the modality $!A$. Within propositions-as-sessions, the idea is that a session of type $!A$ represents a server providing a session of type A to its clients, and the server itself can be duplicated or dropped. Those features—being able to replicate or drop a session—are achieved through the usage of *structural rules* in the sequent calculus, specifically the rules of contraction and weakening, which are restricted to propositions of the form $!A$. A series of recent works have explored quite varied ways of going beyond this treatment of non-linear resources: they have put forward concepts such as *manifest sharing* [BP17; BTP19], dedicated frameworks such as *client-server logic* [QKB21], and specific constructs for non-deterministic, fail-prone channels [CP17].

The logic of bunched implications. At their heart, the aforementioned works propose different ways of treating non-linear resources through modalities. Relaxing linearity through a modality allows a clean separation between the worlds of linear and non-linear resources. This approach relies on rules that act as “interfaces” between the two worlds, allowing conversions between linear and non-linear types only under controlled circumstances.

However, modalities are not the only way in which substructural logics can integrate non-linear resources. A very prominent alternative is provided by the logic of bunched implications (BI) of O’Hearn and Pym [OP99]. BI embeds the pure linear core of LL as multiplicative conjunction $*$ and implication $-*$, but extends it by introducing additive conjunction \wedge and implication \rightarrow , which are treated non-linearly. BI can thus be thought of as enabling the free combination of linear and non-linear resources in a single coherent logic.

The result is a logic which admits an interpretation of linearity that is enticingly different from LL. Conceptually, LL admits a “number of uses” interpretation, where types can specify *how many times a resource should be used*: exactly once for linear resources, any number of times for $!A$ resources. On the contrary, BI admits an “ownership” interpretation [POY04], which focuses on *who has access to which resources*.

The ownership interpretation has positioned BI as the logic of choice for program logics for reasoning about stateful and concurrent programs, under the umbrella of (Concurrent) Separation Logic (see, e.g., the surveys by O’Hearn and Brookes [OHe19; BO16]). While separation logic has received significant attention, the same cannot be said about type-theoretic interpretations of BI as a type system for concurrency. To our knowledge, the only type-theoretic investigation into the (proof theory of) BI has been the $\alpha\lambda$ -calculus [OHe03]—a λ -calculus arising from the natural deduction presentation of BI—and its variations [Atk04; CPR08]. The $\alpha\lambda$ -calculus and its connections to the work presented in this chapter are further explored in Chapter 7.

The key idea. Here we propose π BI: the first process calculus for the propositions-as-sessions and processes-as-proofs interpretation of BI, based on its sequent calculus formulation. The result is an expressive concurrent calculus with a new mechanism to handle non-linear resources, which satisfies important behavioral properties, derived from a tight

correspondence with BI's proof theory. The central novelty of π BI is a process interpretation of the structural rules, which closely follows the proof theory of BI.

Consider the case of contraction/duplication. Given a session $x : A$, how can we duplicate it into sessions $x_1 : A$ and $x_2 : A$? The difficulty here is that after duplication, the two assumptions might be used differently and asynchronously. We conclude that the actual process implementing those sessions in the current evaluation context needs to be duplicated, such that two independent processes can provide the duplicated sessions. This “on demand non-local replication” of a process in the evaluation context is not something supported natively by the π -calculus. We propose a new process construct, a prefix dubbed *spawn*, which achieves this.

We illustrate the spawn prefix with a simple example. Let P and Q be two processes, with P providing a service on the channel x , and Q requiring two copies of the service. The spawn prefix $\rho[x \mapsto x_1, x_2]$ denotes a request to the environment to duplicate the service on x into copies on the new channels x_1 and x_2 . Then, $\rho[x \mapsto x_1, x_2]; Q$ is a process that first performs the request and then behaves as Q . The composition of these processes is denoted $(\mathbf{v}x)(P \mid \rho[x \mapsto x_1, x_2]; Q)$, where ‘ \mid ’ and ‘ $(\mathbf{v}x)$ ’ stand for parallel composition and restriction on x , respectively.

In the reduction semantics of π BI, obtained from the proof theory of BI, the composed process reduces as follows:

$$(\mathbf{v}x)(P \mid \rho[x \mapsto x_1, x_2]; Q) \rightarrow (\mathbf{v}x_1)(P\{x_1/x\} \mid (\mathbf{v}x_2)(P\{x_2/x\} \mid Q))$$

This way, the duplication request leads to the composition of two copies of P (each with an appropriate substitution $\{x_i/x\}$) with the process Q on channels x_1 and x_2 , as desired.

The behavior of the spawn prefix is determined by the context in which it is executed and it communicates with the run-time system to achieve contraction or weakening. This mechanism reminds us of horizontal scaling in cloud computing, with the spawn prefix playing the role of middleware: it requests the runtime environment to scale up/down a particular resource. For example, a load balancer might determine that in a certain situation the execution environment has to provide an additional snapshot of a Docker container, and route part of the environment's requests to it.

As we will see, spawn reductions involve the propagation of the effects of duplicating processes (such as P above); we give the full definition and illustrate it further in Section 5.2.

Contributions. As mentioned, the spawn prefix provides a direct interpretation of the structural rules in the design of the type system, adopting BI as the underlying logic. The resulting system is significantly expressive and yet different from systems derived from propositions-as-sessions, which is not so surprising. As logics, BI and LL are *incomparable*: there are provable formulas of LL that are not provable in BI, and vice versa. As such, an immediate question is whether π BI satisfies the expected meta-theoretical properties for session-typed processes: *type preservation* and *deadlock-freedom*. The key difficulty is that the semantics of the spawn prefix is fundamentally *non-local*—it depends on its execution context. The main contribution of this chapter is that we show that type preservation and deadlock-freedom hold for π BI; moreover, we prove *weak normalization*, which further justifies the semantics of spawn prefixes.

$P, Q, R ::= \bar{x}[y]; (P \mid Q)$	send	$x(y); P$	receive
$x[]$	close	$x(); P$	wait
$\bar{x} \triangleleft \text{inl}; P$	left selection	$x \triangleright \{\text{inl} : P, \text{inr} : Q\}$	branch
$\bar{x} \triangleleft \text{inr}; P$	right selection	$[x \leftrightarrow y]$	forwarder
$(\mathbf{v}x)(P \mid Q)$	restriction + parallel	$\rho[\sigma]; P$	spawn

Figure 5.1 | Syntax of πBI processes.

Outline. The rest of the chapter is organized as follows. Section 5.2 presents the syntax, semantics, and type system of πBI , and illustrates its expressivity. In Section 5.3, we establish key meta-theoretical properties of typable processes: type preservation, deadlock freedom, and weak normalization. We discuss further related work in Section 5.4 and conclude in Section 5.5. The omitted technical details can be found in Appendix D.

5.2. THE CALCULUS πBI

In this section we formally introduce πBI , a π -calculus with constructs for session-based concurrency [Hon93; HVK98] and our new spawn prefix. We first describe syntax and dynamics (reduction semantics), and then present its associated type system, based on the sequent calculus for BI. Following πDILL [CP10; CPT16], our type system for πBI admits a “provide/use” reading for typable processes, whereby a specific channel *provides* a session by *using* zero or more other sessions.

Notation. We assume an enumerable set of *names* $a, b, c, \dots, x, y, z \in \text{Name}$ to denote channels. We make use of finite partial functions $f: A \xrightarrow{\text{fin}} B$. We write $f(x) = \perp$ if f is not defined on x . We define $\text{dom}(f) = \{x \in A \mid f(x) \neq \perp\}$. We write $[a_1 \mapsto b_1; \dots; a_n \mapsto b_n]$ to denote a map, and \emptyset for the empty map. We will also use set comprehensions for finite functions, e.g., $[a \mapsto b \mid a \in \{1, 2\}, b = a^2]$. For a finite partial function f and a set X , we write $f \setminus X$ for the function that coincides with f except for being undefined on X . We write $\mathbb{P}(A)$ to denote the powerset of set A .

5.2.1. PROCESS SYNTAX

The syntax of πBI processes is given in Figure 5.1. The structure and conventions of process calculi based on Curry-Howard correspondences are typically based on implicit expectations of how the components of a system are organized—an expectation that is ultimately verified by typing. The idea is that interaction is grouped into a *session*, the sequence of interactions along a single channel. As hinted at above, a process P should *provide* a session at some specific channel $x \in \text{fn}(P)$, and there is always a single *user* of the session exchanging messages with P along x . To provide a session, a process can make use of sessions on other channels. Most constructs are standard and reflect these expectations:

- *Receive/Send*: A process $x(y);P$ receives a channel y from the session at x and proceeds as P , continuing the session at x .

A process $\bar{x}[y];(P|Q)$ sends a *fresh* channel y over the session at x ; the process P provides the new session at y , while Q continues the session at x .

- *Labeled choice (selection and branching)*: The processes $\bar{x} \triangleleft \text{inl}; P$ and $\bar{x} \triangleleft \text{inr}; P$ select left/right labels over the session at x , respectively. The dual process $x \triangleright \{\text{inl}; P; \text{inr}; Q\}$ offers these left/right options, which trigger continuation P or Q , respectively.
- *Explicit session closing*: The end of a session is expected to be explicitly closed by a final handshake between the dual prefixes $x[]$ and $x()$; P (empty send/receive, respectively).
- *Structured parallel composition*: Parallel composition, in keeping with πDILL [CPT16], is used jointly with restriction. In a process $(\nu x)(P|Q)$ a new session is created at x , provided by P with Q as its only user. To improve readability, we sometimes annotate the parallel operator with the name of the associated restriction, and write $(\nu x)(P|_x Q)$.
- *Forwarders*: A process $[x \leftrightarrow y]$ provides a session at x as a copycat of the session at y .

5

The key novel construct of πBI is the *spawn prefix* $\rho[\sigma];P$. It is parametrized by what we call a *spawn binding* σ . Spawn bindings, formally defined below, are a unification and generalization of prefixes like $\rho[x \mapsto x_1, x_2]$ (copy the session at x to x_1 and x_2) but also $\rho[x \mapsto \emptyset]$ (drop the session at x). Indeed, in addition to allowing the simultaneous mapping of more than one name x , we allow names to be mapped to sets of names, encompassing the nullary and binary cases above.

Definition 5.2.1 (Spawn Binding). *A finite partial function $\sigma : \text{Name} \xrightarrow{\text{fin}} \mathbb{P}(\text{Name})$ is a spawn binding if:*

- $\forall x, y \in \text{dom}(\sigma). x \neq y \implies \sigma(x) \cap \sigma(y) = \emptyset$, and
- $\forall x \in \text{dom}(\sigma). \text{dom}(\sigma) \cap \sigma(x) = \emptyset$.

We define the restrictions of σ to be the set $\text{restr}(\sigma) = \bigcup_{x \in \text{dom}(\sigma)} \sigma(x)$. We omit redundant delimiters in spawn prefixes, e.g., we write $\rho[x \mapsto x_1, x_2; y \mapsto y_1]$ for $\rho[[x \mapsto \{x_1, x_2\}; y \mapsto \{y_1\}]$.

Given two spawn bindings σ_1 and σ_2 we say they are independent, written $\sigma_1 \not\# \sigma_2$, if $\text{dom}(\sigma_1) \cap \text{dom}(\sigma_2) = \emptyset$, $\text{dom}(\sigma_1) \cap \text{restr}(\sigma_2) = \emptyset$, $\text{restr}(\sigma_1) \cap \text{restr}(\sigma_2) = \emptyset$, and $\text{dom}(\sigma_2) \cap \text{restr}(\sigma_1) = \emptyset$.

Free and bound names. Except for the new spawn construct, the notion of free and bound names is standard: the processes $\bar{x}[y];(P|Q)$, $x(y);P$, and $(\nu y);(P|Q)$ all bind y . For the spawn prefix, the situation is a bit different. Given a set of names X , a spawn $\rho[x \mapsto X];P$ signals to the context that P will use $n = |X|$ times the session at x . The names in X indicate the new names that P will use instead of x . As such, these new names are bound in P by the spawn prefix, whereas the original name x is free in P . Formally, $\text{fn}(\rho[\sigma];P) = (\text{fn}(P) \setminus \text{restr}(\sigma)) \cup \text{dom}(\sigma)$.

We implicitly identify processes up to α -conversion and we adopt Barendregt's variable convention: all bound names are different, and bound names are different from free names.

$$\begin{array}{c}
\text{[CONG-ASSOC-L]} \\
\frac{x \notin \text{fn}(Q) \quad y \notin \text{fn}(P)}{(\mathbf{v}x)(P |_x (\mathbf{v}y)(Q |_y R)) \equiv (\mathbf{v}y)(Q |_y (\mathbf{v}x)(P |_x R))} \\
\\
\text{[CONG-ASSOC-R]} \qquad \qquad \qquad \text{[CONG-SPAWN-SWAP]} \\
\frac{x \notin \text{fn}(R) \quad y \notin \text{fn}(P)}{(\mathbf{v}x)(P |_x (\mathbf{v}y)(Q |_y R)) \equiv (\mathbf{v}y)((\mathbf{v}x)(P |_x Q) |_y R)} \qquad \frac{\sigma_1 \not\equiv \sigma_2}{\rho[\sigma_1]; \rho[\sigma_2]; Q \equiv \rho[\sigma_2]; \rho[\sigma_1]; Q}
\end{array}$$

Figure 5.2 | Structural congruence.

Structural congruence. As usual, we define a congruence that identifies processes up to inconsequential syntactical differences. *Structural congruence*, denoted \equiv , is the smallest congruence satisfying the rules in Figure 5.2: the orders of parallel compositions and independent spawn prefixes do not matter (Rules [CONG-ASSOC-R], [CONG-ASSOC-L], and [CONG-SPAWN-SWAP], respectively).

Our structural congruence is a bit more fine-grained than is usual for the π -calculus. This is guided by the desire to make typing consistent under structural congruence. Typing will enforce the expectations of process structure alluded to before, so our congruence needs to preserve them. For example, in a process $\bar{x}[y]; (P | Q)$ we expect P to provide the new session at y and Q to continue the session at x . Admitting commutativity of parallel would break this expectation. Similarly, in the composition of processes $(\mathbf{v}x)(P | Q)$ it is important that P provides the session that governs x , and that Q dually uses the session at x . This choice of structural congruence simplifies the technical development and makes the correspondence between logic and type theory sharper.

5.2.2. REDUCTION SEMANTICS

The operational semantics of π BI is defined in terms of a reduction relation, denoted \rightarrow , which combines the usual reductions of the π -calculus with reductions for spawn prefixes. As usual, we shall write \rightarrow^* to denote the reflexive, transitive closure of \rightarrow , and $P \not\rightarrow$ when P cannot reduce.

Figure 5.3 gives the reduction rules. The first seven rules describe interactions along a channel. Rules [RED-RECV-SEND] and [RED-SEND-RECV] describe the exchange of channel y along x . The resulting process contains an explicit restriction for y with P_2 out of scope, reflecting the expectation that P_1 is the provider of the new session at y . Rules [RED-WAIT-CLOSE] and [RED-CLOSE-WAIT] describe the closing of a session at x . Rule [RED-SEL-BRA] shows how a branch offered on x can be selected by sending inl or inr . Finally, Rules [RED-FWD-R] and [RED-FWD-L] explain the elimination of a forwarder connected by restriction in terms of a substitution.

The next four rules of Figure 5.3 define the semantics of spawn. The crucial rule is Rule [RED-SPAWN], which we explain by example.

$$\begin{array}{c}
\frac{[\text{RED-RECV-SEND}]}{(\mathbf{v}x)(x(y); Q \mid_x \bar{x}[y]; (P_1 \mid P_2)) \rightarrow (\mathbf{v}x)((\mathbf{v}y)(P_1 \mid_y Q) \mid_x P_2)} \qquad \frac{[\text{RED-WAIT-CLOSE}]}{(\mathbf{v}x)(x(); Q \mid_x x[]) \rightarrow Q} \\
\frac{[\text{RED-SEND-RECV}]}{(\mathbf{v}x)(\bar{x}[y]; (P_1 \mid P_2) \mid_x x(y); Q) \rightarrow (\mathbf{v}x)(P_2 \mid_x (\mathbf{v}y)(P_1 \mid_y Q))} \qquad \frac{[\text{RED-CLOSE-WAIT}]}{(\mathbf{v}x)(x[] \mid_x x(); Q) \rightarrow Q} \\
\frac{[\text{RED-SEL-BRA}]}{(\mathbf{v}x)(\bar{x} \triangleleft \ell; P \mid_x x \triangleright \{\text{inl} : Q_{\text{inl}}, \text{inr} : Q_{\text{inr}}\}) \rightarrow (\mathbf{v}x)(P \mid_x Q_\ell)} \qquad \frac{[\text{RED-FWD-R}]}{(\mathbf{v}x)(P \mid_x [y \leftrightarrow x]) \rightarrow P\{y/x\}} \\
\frac{[\text{RED-FWD-L}]}{(\mathbf{v}x)([x \leftrightarrow y] \mid_x P) \rightarrow P\{y/x\}} \\
\frac{[\text{RED-SPAWN}]}{\sigma(x) = \{x_1, \dots, x_n\} \quad \sigma' = ((\sigma \setminus \{x\}) \cup [z \mapsto \{z_1, \dots, z_n\} \mid z \in \text{fn}(P) \setminus \{x\}])}{(\mathbf{v}x)(P \mid_x \rho[\sigma]; Q) \rightarrow \rho[\sigma']; (\mathbf{v}x_1)(P^{(1)} \mid_{x_1} \dots (\mathbf{v}x_n)(P^{(n)} \mid_{x_n} Q) \dots)} \\
\frac{[\text{RED-SPAWN-R}]}{x \notin \text{dom}(\sigma)} \quad \frac{[\text{RED-SPAWN-L}]}{x \notin \text{dom}(\sigma)} \\
\frac{(\mathbf{v}x)(P \mid_x \rho[\sigma]; Q) \rightarrow \rho[\sigma]; (\mathbf{v}x)(P \mid_x Q)}{(\mathbf{v}x)(\rho[\sigma]; P \mid_x Q) \rightarrow \rho[\sigma]; (\mathbf{v}x)(P \mid_x Q)} \\
\frac{[\text{RED-SPAWN-MERGE}]}{\rho[\sigma_1]; \rho[\sigma_2]; P \rightarrow \rho[\sigma_1 \times \sigma_2]; P} \\
\mathcal{K} ::= [\cdot] \mid \rho[\sigma]; \mathcal{K} \qquad \frac{[\text{RED-EVAL-CTX}]}{P \rightarrow Q} \qquad \frac{[\text{RED-CONG}]}{P \equiv P' \quad P' \rightarrow Q' \quad Q' \equiv Q} \\
\mid (\mathbf{v}x)(P \mid_x \mathcal{K}) \qquad \frac{\mathcal{K}[P] \rightarrow \mathcal{K}[Q]}{P \rightarrow Q}
\end{array}$$

Figure 5.3 | Reduction rules for π BI.

Example 5.2.2. Consider a process P that provides a session on channel x . Another process Q provides a session on v by relying *twice* on the session provided by P , on channels x_1 and x_2 . Concrete examples are $P \triangleq x[]$ and $Q \triangleq x_1(); x_2(); v[]$. Now consider the following process:

$$R \triangleq (\mathbf{v}x)(z(); P \mid_x \rho[x \mapsto x_1, x_2]; Q)$$

In R , the process P is blocked waiting for the session on z to close. By Rule [RED-SPAWN],

$$R \rightarrow \rho[z \mapsto z_1, z_2]; (\mathbf{v}x_1)(z_1(); P\{x_1/x\} \mid_{x_1} (\mathbf{v}x_2)(z_2(); P\{x_1/x\} \mid_{x_2} Q))$$

The result is two copies of P , providing their sessions on x_1 and x_2 instead of on x . Since we are also copying the closing prefixes on z , an additional spawn is generated, but now on z : it

signals to the environment that two copies of the process providing the session on z should be created and that they should provide its session on z_1 and z_2 . ∇

In the example above, the channel z is a free name of the process that is copied by the spawn reduction. Generally, a copied process may rely on arbitrarily many sessions on the free names of the process, and all the processes providing these sessions will have to be copied as well. To handle the general case, Rule [RED-SPAWN] uses the following definition.

Definition 5.2.3 (Indexed Renaming). *Given a process P with $\text{fn}(P) = \{a, b, \dots, z\}$, we define $P^{(i)}$ to be the process P where every free name is replaced by a fresh copy of the name indexed by i . Formally, assuming $a_i, b_i, \dots, z_i \notin \text{fn}(P)$, $P^{(i)} \triangleq P\{a_i / a, b_i / b, \dots, z_i / z\}$.*

Note that Rule [RED-SPAWN] uniformly handles the case where a session is not used at all.

Example 5.2.4. Consider again P from Example 5.2.2 that provides a session on x . This time, the process Q' (adapted from Example 5.2.2) provides a session on v *without* relying on the session provided by P (i.e., simply $Q' \triangleq v[]$). Now consider the following process, obtained by replacing the spawn prefix and Q in R from Example 5.2.2:

$$R' \triangleq (\mathbf{v}x)(z(); P|_x \rho[x \mapsto \emptyset]; Q')$$

By Rule [RED-SPAWN], $R' \rightarrow \rho[z \mapsto \emptyset]; Q'$. In this case, P is dropped. Since the empty receive on z is also dropped, an additional spawn is generated to signal to the environment that the process providing the session on z should be dropped as well. ∇

Rules [RED-SPAWN-R], [RED-SPAWN-L], and [RED-SPAWN-MERGE] show how the spawn prefix interacts with independent process compositions and with other spawn prefixes, respectively. Rules [RED-SPAWN-R] and [RED-SPAWN-L] are forms of scope extrusion: spawn prefixes can “bubble up” past restrictions that do not capture their bindings, possibly enabling interactions of the spawn with processes in the outer context. Rule [RED-SPAWN-MERGE] describes how two consecutive spawn prefixes can be combined into a single spawn, by merging the spawn bindings, denoted \times , as follows.

Definition 5.2.5 (Merge). *Let $\sigma[X] \triangleq \bigcup\{\sigma(x) \mid x \in X \cap \text{dom}(\sigma)\}$. The merge of two spawn bindings σ_1, σ_2 , written $\sigma_1 \times \sigma_2$, is defined as:*

$$(\sigma_1 \times \sigma_2)(x) \triangleq \begin{cases} \sigma_2[\sigma_1(x)] \cup (\sigma_1(x) \setminus \text{dom}(\sigma_2)) & \text{if } x \in \text{dom}(\sigma_1) \\ \sigma_2(x) & \text{if } x \notin \text{dom}(\sigma_1) \cup \text{restr}(\sigma_1) \\ \perp & \text{otherwise} \end{cases}$$

Note that the merge of two independent spawn bindings is just disjoint union (as functions), and \emptyset is the neutral element for \times . Merge is associative: $(\sigma_1 \times (\sigma_2 \times \sigma_3)) = ((\sigma_1 \times \sigma_2) \times \sigma_3)$.

The idea behind the merge operation $\sigma_1 \times \sigma_2$ is to “connect” the outputs of σ_1 to the inputs of σ_2 , similarly to composition of relations. However, names that are irrelevant for σ_1 should still be subject to the mapping of σ_2 , unless they are captured by the restrictions of σ_1 . For example:

$$\left[\begin{array}{l} x \mapsto \emptyset, \\ y \mapsto \{y_1, y_2, y_3\} \end{array} \right] \times \left[\begin{array}{l} y_2 \mapsto \emptyset, \\ y_3 \mapsto \{y_4, y_5\}, \\ z \mapsto z_1 \end{array} \right] = \left[\begin{array}{l} x \mapsto \emptyset, \\ y \mapsto \{y_1, y_4, y_5\}, \\ z \mapsto z_1 \end{array} \right]$$

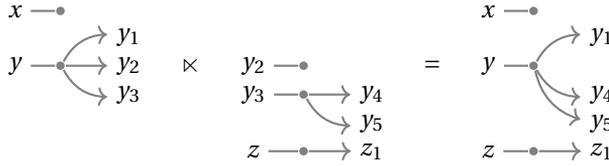


Figure 5.4 | Graphical illustration of merge (Definition 5.2.5).

Figure 5.4 graphically illustrates this. Note how x and z are both in the domain of the result, and how the mapping to y_1 is preserved by the merge, although it is not in the restrictions of the second binding.

The last two rules in Figure 5.3 are purely structural. Rule [RED-EVAL-CTX] closes reduction under *evaluation contexts*, denoted \mathcal{K} , consisting of spawn prefixes and structured parallel compositions (cf. Figure 5.3 for its definition). Rule [RED-CONG] closes reduction under structural congruence.

5

5.2.3. TYPING

The π BI type system is based on the BI sequent calculus, and follows the approach of π DILL: propositions are interpreted as session types, where the context governs the *use* of available channels and the conclusion governs the process' behavior on the *provided* channel. As such, the type system of π BI uses judgments of the form $\Delta \vdash P \blacktriangleright x : A$, where the process P provides the session A on channel x , while using the sessions provided by the typing context Δ .

Figure 5.5 also gives the type system for π BI. We organize them in four groups: the first six rules type communication primitives with multiplicative types, and the next six rules with additive types; the following three rules type branching primitives using disjunction; the final four rules type forwarding, structured parallel composition, and the structural rules.

One key design choice of our typing rules is that the processes in the multiplicative and the additive groups of rules are the same. For example, the same send can be typed with $A * B$ or with $A \wedge B$. Their difference lays purely in the way they manage their available resources, possibly enabling or restricting the use of Rule [TYP-STRUCT] in other parts of the derivation.

Rules for multiplicative constructs. The type $A * B$ is assigned to a session that sends a name of type A and continues as B . Rule [TYP-SEP-R] states that to *provide* a session of type $A * B$ on x , a process must send on x a new name y and continue with a process providing a session of type A on y in parallel with a process providing the continuation session B on x . Rule [TYP-SEP-L] describes how to *use* a session of type $A * B$ on x : a process must receive on x a new name y which is to be used for the session of type A , after which the process must provide the continuation session B on x .

Rules [TYP-WAND-R] and [TYP-WAND-L] describe the type $A \multimap B$. These rules are dual to the rules for $A * B$: providing $A \multimap B$ requires a receive, and using it requires a send.

Types, bunches, and contexts:

$$\begin{array}{ll}
 A, B, C ::= \mathbf{1}_m \mid A * B \mid A \multimap B & \text{multiplicatives} \\
 \mid \mathbf{1}_a \mid A \wedge B \mid A \rightarrow B \mid A \vee B & \text{additives} \\
 \Delta, \Theta ::= \emptyset_m \mid \emptyset_a \mid x : A \mid \Delta, \Delta \mid \Delta; \Delta & \text{bunches} \\
 \Gamma ::= [\] \mid \Delta, \Gamma \mid \Delta; \Gamma \mid \Gamma, \Delta \mid \Gamma; \Delta & \text{bunched contexts}
 \end{array}$$

Typing:

$$\begin{array}{c}
 \frac{[\text{TYP-SEP-R}] \quad \Delta_1 \vdash P_1 \blacktriangleright y : A \quad \Delta_2 \vdash P_2 \blacktriangleright x : B}{\Delta_1, \Delta_2 \vdash \bar{x}[y]; (P_1 \mid P_2) \blacktriangleright x : A * B} \qquad \frac{[\text{TYP-SEP-L}] \quad \Gamma[x : B, y : A] \vdash P \blacktriangleright z : C}{\Gamma[x : A * B] \vdash x(y); P \blacktriangleright z : C} \\
 \\
 \frac{[\text{TYP-WAND-R}] \quad \Delta, y : A \vdash P \blacktriangleright x : B}{\Delta \vdash x(y); P \blacktriangleright x : A \multimap B} \qquad \frac{[\text{TYP-WAND-L}] \quad \Delta \vdash P_1 \blacktriangleright y : A \quad \Gamma[x : B] \vdash P_2 \blacktriangleright z : C}{\Gamma[\Delta, x : A \multimap B] \vdash \bar{x}[y]; (P_1 \mid P_2) \blacktriangleright z : C} \qquad \frac{[\text{TYP-EMP-R}] \quad \emptyset_m \vdash x[] \blacktriangleright x : \mathbf{1}_m}{\emptyset_m \vdash x[] \blacktriangleright x : \mathbf{1}_m} \\
 \\
 \frac{[\text{TYP-EMP-L}] \quad \Gamma[\emptyset_m] \vdash P \blacktriangleright z : C}{\Gamma[x : \mathbf{1}_m] \vdash x(); P \blacktriangleright z : C} \qquad \frac{[\text{TYP-CONJ-R}] \quad \Delta_1 \vdash P_1 \blacktriangleright y : A \quad \Delta_2 \vdash P_2 \blacktriangleright x : B}{\Delta_1; \Delta_2 \vdash \bar{x}[y]; (P_1 \mid P_2) \blacktriangleright x : A \wedge B} \\
 \\
 \frac{[\text{TYP-CONJ-L}] \quad \Gamma[x : B; y : A] \vdash P \blacktriangleright z : C}{\Gamma[x : A \wedge B] \vdash x(y); P \blacktriangleright z : C} \qquad \frac{[\text{TYP-IMPL-R}] \quad \Delta; y : A \vdash P \blacktriangleright x : B}{\Delta \vdash x(y); P \blacktriangleright x : A \rightarrow B} \\
 \\
 \frac{[\text{TYP-IMPL-L}] \quad \Delta \vdash P_1 \blacktriangleright y : A \quad \Gamma[x : B] \vdash P_2 \blacktriangleright z : C}{\Gamma[\Delta; x : A \rightarrow B] \vdash \bar{x}[y]; (P_1 \mid P_2) \blacktriangleright z : C} \qquad \frac{[\text{TYP-TRUE-R}] \quad \emptyset_a \vdash x[] \blacktriangleright x : \mathbf{1}_a}{\emptyset_a \vdash x[] \blacktriangleright x : \mathbf{1}_a} \qquad \frac{[\text{TYP-TRUE-L}] \quad \Gamma[\emptyset_a] \vdash P \blacktriangleright z : C}{\Gamma[x : \mathbf{1}_a] \vdash x(); P \blacktriangleright z : C} \\
 \\
 \frac{[\text{TYP-DISJ-R-INL}] \quad \Delta \vdash P \blacktriangleright x : A}{\Delta \vdash \bar{x} \triangleleft \text{inl}; P \blacktriangleright x : A \vee B} \qquad \frac{[\text{TYP-DISJ-L-INL}] \quad \Delta \vdash P \blacktriangleright x : B}{\Delta \vdash \bar{x} \triangleleft \text{inr}; P \blacktriangleright x : A \vee B} \qquad \frac{[\text{TYP-FWD}] \quad y : A \vdash [x \leftrightarrow y] \blacktriangleright x : A}{y : A \vdash [x \leftrightarrow y] \blacktriangleright x : A} \\
 \\
 \frac{[\text{TYP-CUT}] \quad \Delta \vdash P \blacktriangleright x : A \quad \Gamma[x : A] \vdash Q \blacktriangleright x : C}{\Gamma[\Delta] \vdash (\nu x)(P \mid Q) \blacktriangleright z : C} \qquad \frac{[\text{TYP-STRUCT}] \quad \Delta_2 \vdash P \blacktriangleright z : C \quad \sigma : \Delta_1 \rightsquigarrow \Delta_2}{\Delta_1 \vdash \rho[\sigma]; P \blacktriangleright z : C} \\
 \\
 \frac{[\text{TYP-BUNCH-EQUIV}] \quad \Delta_2 \vdash P \blacktriangleright z : C \quad \Delta_2 \equiv \Delta_1}{\Delta_1 \vdash P \blacktriangleright z : C}
 \end{array}$$

Spawn binding:

$$\begin{array}{c}
 \frac{[\text{SPAWN-CONTRACT}] \quad \overline{x \mapsto \{x_1, \dots, x_n\} \mid x \in \Delta} : \Gamma[\Delta] \rightsquigarrow \Gamma[\Delta^{(1)}; \dots; \Delta^{(n)}]}{x \mapsto \{x_1, \dots, x_n\} \mid x \in \Delta : \Gamma[\Delta] \rightsquigarrow \Gamma[\Delta^{(1)}; \dots; \Delta^{(n)}]} \qquad \frac{[\text{SPAWN-WEAKEN}] \quad \overline{x \mapsto \emptyset \mid x \in \Delta_1} : \Gamma[\Delta_1; \Delta_2] \rightsquigarrow \Gamma[\Delta_2]}{x \mapsto \emptyset \mid x \in \Delta_1 : \Gamma[\Delta_1; \Delta_2] \rightsquigarrow \Gamma[\Delta_2]} \\
 \\
 \frac{[\text{SPAWN-MERGE}] \quad \sigma_1 : \Delta_1 \rightsquigarrow \Delta_2 \quad \sigma_2 : \Delta_2 \rightsquigarrow \Delta_3}{(\sigma_1 \times \sigma_2) : \Delta_1 \rightsquigarrow \Delta_3}
 \end{array}$$

Figure 5.5 | Types, typing rules and spawn binding rules for πBI .

$$\begin{array}{c}
\text{[TYP-WEAKEN]} \\
\frac{\Gamma[\Delta_2] \vdash P \blacktriangleright z : C \quad \sigma = [x \mapsto \emptyset \mid x \in \Delta_1]}{\Gamma[\Delta_1; \Delta_2] \vdash \rho[\sigma]; P \blacktriangleright z : C} \\
\\
\text{[TYP-CONTRACT]} \\
\frac{\Gamma[\Delta^{(1)}; \Delta^{(2)}] \vdash P \blacktriangleright z : C \quad \sigma = [x \mapsto x_1, x_2 \mid x \in \Delta]}{\Gamma[\Delta] \vdash \rho[\sigma]; P \blacktriangleright z : C}
\end{array}$$

Figure 5.6 | Usual presentations of weakening and contraction for BI sequent calculi.

Rule [TYP-EMP-R] states how to close a session of type $\mathbf{1}_m$ using an empty send, followed by termination. The dual Rule [TYP-EMP-L] uses the empty receive. Note that Rule [TYP-EMP-R] requires the context to be \emptyset_m , effectively forcing processes to consume all the sessions they use before terminating.

5

Rules for additive constructs. As already mentioned, the rules for sessions of additive type are identical to the ones for multiplicative types, except that the latter (de)composes bunches using ‘,’ while the former uses ‘;’. In particular, the process interpretation of the rules is identical for both counterparts. The difference has effect elsewhere, where the choice between ‘;’ and ‘,’ affects the possibility of using Rule [TYP-STRUCT] (explained last).

Rules for disjunction. Disjunction types branching. To provide on x a session of type $A \vee B$, the process must select inl/inr on x and continues by providing A/B , respectively. Using a session of type $A \vee B$ on x requires a branch on x , where the left branch uses x as A and the right branch as B . Curiously, there is no dual construct for disjunction in BI, meaning that there is no way to type a selection on a channel that is being used, or a branch on a channel that is being provided. There is no canonical way of adding such a dual construct; there are however extensions of BI that incorporate one—see, e.g., [Doc19; Pym13; Bro12; BC10; BV15].

Forwarders, cut, and structural rules. Rule [TYP-FWD] types the forwarder $[x \leftrightarrow y]$ as providing a session of type A on x as a copycat of a session of the same type on y in the context. Rule [TYP-CUT] connects processes P and Q along the channel x : P must *provide* a session of type A on x , whereas Q must *use* the session of the same type on the same channel.

Rule [TYP-BUNCH-EQUIV] closes typing under bunch equivalence (cf. Section 7.2.3). Rule [TYP-STRUCT] extends indexed renaming (Definition 5.2.3) to bunches as follows.

Definition 5.2.6 (Indexed Bunch Renaming). *Let Δ be a bunch with $\text{fn}(\Delta) = \{a, b, \dots, z\}$. Assuming $a_i, b_i, \dots, z_i \notin \text{fn}(\Delta)$, we define $\Delta^{(i)} \triangleq \Delta\{a_i/a, b_i/b, \dots, z_i/z\}$, where $\Delta\theta$ is the bunch obtained by applying the substitution θ to all the leaves of Δ .*

Rule [TYP-STRUCT] subsumes and generalizes the two structural rules of weakening and contraction. To unpack the meaning of the rule, Figure 5.6 gives rules for weakening and

contraction as usually presented for BI sequent calculi. Rule [TYP-WEAKEN] discards the unused resources in Δ_1 . The process interpretation is a spawn that terminates the providers of sessions on channels in Δ_1 . Rule [TYP-CONTRACT] allows the duplication of the resources in Δ . These resources need to be renamed to keep the names unique, hence the substitutions $\Delta^{(1)}$ and $\Delta^{(2)}$ in the premise. The process interpretation is again a spawn prefix that generates two indexed variants of each name in Δ , representing the duplicated resources. For both rules, it is crucial that the affected bunches are combined using ‘;’.

Both Rule [TYP-WEAKEN] and [TYP-CONTRACT] transform bunches according to the spawn binding of the involved names. The idea behind Rule [TYP-STRUCT] is to generalize weakening and contraction, and allow more general spawn bindings. As such, the rule combines in a single application a number of consecutive or independent applications of Rule [TYP-WEAKEN] and [TYP-CONTRACT].

To relate spawn bindings and their corresponding transformations of bunches, we define a *spawn binding typing* judgment $\sigma: \Delta_1 \rightsquigarrow \Delta_2$; the bottom of Figure 5.5 gives their rules. The idea is to consider a binding σ as the merge of a sequence of bindings $\sigma = \sigma_1 \times \dots \times \sigma_k$, where each σ_i is either a weakening or a contraction binding. The weakening and contraction bindings are typed using Rules [SPAWN-WEAKEN] and [SPAWN-CONTRACT]. In case of contraction, when $n = 2$ we get pure contraction, when $n > 2$ it might represent a number of consecutive contractions applied to the same bunch; the corner case when $n = 1$ just renames the variables in the bunch, and might arise as the by-product of a contraction and a weakening (partially) canceling each other out.

Rules [SPAWN-WEAKEN] and [SPAWN-CONTRACT] combined with Rule [TYP-STRUCT] offer a justification of the specialized Rules [TYP-WEAKEN] and [TYP-CONTRACT], respectively. In the former case, the justification is direct. The latter case holds for $n = 2$, i.e., for pure contraction.

We wrap up the explanation of Rule [TYP-STRUCT] by giving an example typing derivation.

Example 5.2.7. Consider the following process, with contraction and weakening in one:

$$P \triangleq (\mathbf{v}x)(z0; Q \mid_x (\mathbf{v}y)(y[] \mid_y \rho[x \mapsto x_1, x_2; y \mapsto \emptyset]; R))$$

This process is well-typed, assuming $\Delta \vdash Q \blacktriangleright x: A$ and $\Gamma[x_1: A; x_2: A] \vdash R \blacktriangleright v: B$, as follows:

$$\begin{array}{c}
\frac{\frac{\frac{}{[x \mapsto x_1, x_2]: \Gamma[x: A; y: \mathbf{1}_a]}{\rightsquigarrow \Gamma[x_1: A; x_2: A; y: \mathbf{1}_a]}}{\frac{}{[y \mapsto \emptyset]: \Gamma[x_1: A; x_2: A; y: \mathbf{1}_a]}{\rightsquigarrow \Gamma[x_1: A; x_2: A]}}{([\mapsto x_1, x_2] \times [y \mapsto \emptyset]): \Gamma[x: A; y: \mathbf{1}_a] \rightsquigarrow \Gamma[x_1: A; x_2: A]} \quad (5.1)}{\frac{\frac{\Delta \vdash Q \blacktriangleright x: A}{\Delta, \emptyset_m \vdash Q \blacktriangleright x: A}}{\Delta, z: \mathbf{1}_m \vdash z0; Q \blacktriangleright x: A}}{\frac{\frac{\frac{\Gamma[x_1: A; x_2: A] \vdash R \blacktriangleright v: B \quad (5.1)}{\Gamma[x: A; y: \mathbf{1}_a] \vdash \rho[x \mapsto x_1, x_2; y \mapsto \emptyset]; R \blacktriangleright v: B}}{\emptyset_a \vdash y[] \blacktriangleright y: \mathbf{1}_a}}{\Gamma[x: A; \emptyset_a] \vdash (\mathbf{v}y)(y[] \mid_y \rho[x \mapsto x_1, x_2; y \mapsto \emptyset]; R) \blacktriangleright v: B}}{\Gamma[x: A] \vdash (\mathbf{v}y)(y[] \mid_y \rho[x \mapsto x_1, x_2; y \mapsto \emptyset]; R) \blacktriangleright v: B}}{\Gamma[\Delta, z: \mathbf{1}_m] \vdash P \blacktriangleright v: B}
\end{array}$$

Notice how the spawn binding must be split into a contracting and a weakening spawn binding to justify the transformation of the bunch. ∇

It is worth noticing that the typing judgment $\sigma : \Delta_1 \rightsquigarrow \Delta_2$ is not uniquely determined from σ and Δ_1 . Hence, there is not always a unique derivation tree for a given judgment. To recover unique typing, it should be sufficient to annotate all bindings with their respective types, including the σ in the spawn prefixes.

Empty spawn. We briefly discuss a corner case: according to the typing rules for spawn bindings, we can type the empty spawn $\rho[\emptyset]$. It is tempting to add a structural congruence or reduction that removes it, since an empty spawn does not do much operationally: an empty spawn can only propagate along cuts and silently merge into other spawns. However, adding a reduction such as $\rho[\emptyset]; P \rightarrow P$ will cause complications because the empty spawn prefix, though operationally vacuous, can influence the typing. An example is the following application of weakening:

$$\frac{\Gamma[\emptyset_a] \vdash P \blacktriangleright x : A}{\Gamma[\emptyset_m] \vdash \rho[\emptyset]; P \blacktriangleright x : A}$$

Thus, such a reduction might slightly change the typing of a process across reductions, disproving type preservation. This would unnecessarily complicate the system and, arguably, would not be in line with the Curry-Howard correspondence.

The empty spawn prefixes are but a minor annoyance: reductions can still happen behind spawn prefixes. We do have to take extra care of the empty spawn when we show deadlock-freeness in Section 5.3.1 and weak normalization in Section 5.3.2. Next, we discuss additional examples.

5

5.2.4. EXAMPLES AND COMPARISONS

The π BI calculus is expressive enough to represent many useful concurrency patterns. Here we show three significant examples and contrast π BI's approach to related calculi. Below we write $P \rightarrow^k Q$ to mean that P reduces to Q in $k \geq 1$ consecutive steps.

Server and clients. Recall from Example 5.2.2 the process $R = (\nu x)(z(); P \mid \rho[x \mapsto x_1, x_2]; Q)$. We can interpret $z(); P$ as a server providing a service on x while relying on another server providing a service on z , and the spawn as a request for two copies of the server to be used in Q on x_1 and x_2 .

In π DILL and CP, servers and clients are expressed using replicated receives $!x(y); P$, which upon receiving a channel y replicates P to provide its session on y . A client must then explicitly request a copy of the server by sending a fresh channel over x . The π DILL analog of R would then be $R' \triangleq (\nu u)(!u(x); ?\bar{z}[z']; z'(); P \mid ?\bar{u}[x_1]; ?\bar{u}[x_2]; Q)$. In general, π DILL's servers and clients can be expressed in π BI by removing the replicated receives (i.e., $!x(y); P$ becomes $P\{x/y\}$) and replacing request sends with spawns (i.e., $?\bar{x}[x_1]; Q$ becomes $\rho[x \mapsto x_1, x_2]; Q\{x_2/x\}$).

There is a crucial difference in the two models of servers: in π DILL, the server itself is responsible for creating a new instance of the session it provides, and thus needs to make sure that the sessions on which the new instance depends are themselves provided by servers. In π BI the responsibility for duplication lies with the client; the server does not need to make special arrangements to allow for duplication, and its dependencies are duplicated on-the-fly by the spawn semantics.

The on-the-fly nature of spawn propagation makes the server/clients pattern more concurrent in πBI than in πDILL . Suppose we connect R to a process providing z . The communication on z can take place before the spawn reduction, such that the spawn no longer needs to propagate to z :

$$(\mathbf{v}z)(z[] | R) \rightarrow (\mathbf{v}x)(P | \rho[x \mapsto x_1, x_2]; Q).$$

This is not possible in πDILL : the replicated receive is blocking the communication on z .

Failures. An important aspect of (distributed) programming is coping with failure. For example, consider $P \triangleq x(y); x0; \bar{z}[w]; ([w \mapsto y] | z0; v[])$, i.e., a process that receives a channel y over x and forwards it over z . Suppose that the process providing x is unreliable, and might not be able to send the channel y . This provider process indicates availability by a selection on x : left means availability and right means the converse. We can then embed P in a branch on x , where the right branch propagates the failure to forward a channel by means of spawn: $P' \triangleq x \triangleright \{ \text{inl} : P; \text{inr} : x0; \rho[z \mapsto \emptyset]; v[] \}$. Let $z(q); R$ denote the process providing z , which expects to receive a channel. Indeed, in the following the behavior on x is available:

$$\begin{aligned} & (\mathbf{v}z) \left(z(q); R | (\mathbf{v}x) (\bar{x} \triangleleft \text{inl}; \bar{x}[u]; (u[] | x[] | P')) \right) \\ & \rightarrow^3 (\mathbf{v}z) \left(z(q); R | (\mathbf{v}u) (u[] | \bar{z}[w]; ([w \mapsto u] | z0; v[])) \right) \\ & \rightarrow^3 (\mathbf{v}u) (u[] | (\mathbf{v}z) (R\{u/q\} | z0; v[])) \end{aligned}$$

In contrast, in the following example the behavior on x is not available:

$$(\mathbf{v}z) (z(q); R | (\mathbf{v}x) (\bar{x} \triangleleft \text{inr}; x[] | P')) \rightarrow^2 (\mathbf{v}z) (z(q); R | \rho[z \mapsto \emptyset]; v[]) \rightarrow \rho[\emptyset]; v[]$$

The principle sketched in this example is inspired by the framework by Caires and Pérez [CP17], which supports communication primitives for non-deterministically (un)available behavior via a Curry-Howard interpretation of classical LL with dedicated modalities.

Interaction between session delegation and spawn. Session delegation (also known as higher-order session communication) is the mechanism that enables the exchange of channels themselves over channels, dynamically changing the communication topology. In πBI , delegation interacts with spawn, in that changing process connections influences the propagation of spawn. Let $P \triangleq (\mathbf{v}x) (\bar{x}[y]; (y[] | x[] | (\mathbf{v}z) (x(w); x0; w0; z[] | \rho[z \mapsto \emptyset]; v[])))$. From P , we could either reduce the spawn prefix or synchronize on x . If we first reduce the spawn, the spawn propagates to x :

$$P \rightarrow (\mathbf{v}x) (\bar{x}[y]; (y[] | x[] | \rho[x \mapsto \emptyset]; v[])).$$

However, if we first synchronize on x , the spawn propagates to the delegated channel y :

$$P \rightarrow^2 (\mathbf{v}y) (y[] | (\mathbf{v}z) (y0; z[] | \rho[z \mapsto \emptyset]; v[])) \rightarrow (\mathbf{v}y) (y[] | \rho[y \mapsto \emptyset]; v[]).$$

Incomparability with π DILL. As shown by O’Hearn [OHe03], DILL and BI are incomparable. Examining two canonical distinguishing examples can shed some light on the fundamental differences of the two logics, and their interpretations as session type systems.

As we remarked in Section 5.1, DILL admits a “number of uses” interpretation, where linear resources have to be used exactly once. This interpretation is not supported by BI (cf. the example in Section 1.2.2.2):

In π BI, it is possible to receive linearly (i.e., with \multimap) a session and use it twice. The process $P \triangleq z(a); z(y); \rho[a \mapsto a_1, a_2]; \bar{y}[a'_1]; ([a'_1 \leftrightarrow a_1] | \bar{y}[a'_2]); ([a'_2 \leftrightarrow a_2] | [z \leftrightarrow y])$ can be typed as providing a session $A \multimap (A \rightarrow A \rightarrow B) \rightarrow B$ on x :

$$\begin{array}{c}
 \frac{}{a_1 : A \vdash [a'_1 \leftrightarrow a_1] \blacktriangleright a'_1 : A} \quad \frac{a_2 : A \vdash [a'_2 \leftrightarrow a_2] \blacktriangleright a'_2 : A \quad y : B \vdash [z \leftrightarrow y] \blacktriangleright z : B}{a_2 : A; y : A \rightarrow B \vdash \bar{y}[a'_2]; ([a'_2 \leftrightarrow a_2] | [z \leftrightarrow y]) \blacktriangleright z : B} \\
 \frac{a_1 : A; a_2 : A; y : A \rightarrow A \rightarrow B \vdash \bar{y}[a'_1]; ([a'_1 \leftrightarrow a_1] | \bar{y}[a'_2]; \dots) \blacktriangleright z : B}{a : A; y : A \rightarrow A \rightarrow B \vdash \rho[a \mapsto a_1, a_2]; (\bar{y}[a'_1]; \dots) \blacktriangleright z : B} \\
 \frac{a : A \vdash z(y); \rho[a \mapsto a_1, a_2]; \dots \blacktriangleright z : (A \rightarrow A \rightarrow B) \rightarrow B}{\varnothing_m \vdash z(a); z(y); \rho[a \mapsto a_1, a_2]; \dots \blacktriangleright z : A \multimap (A \rightarrow A \rightarrow B) \rightarrow B}
 \end{array}$$

5

The process receives a single session of type A over z through linear receive. The session on y anticipates A twice, but allows these two A -typed sessions to share a common origin. The process can thus spawn two copies of $a : A$ and use them to interact with y .

The corresponding LL proposition $A \multimap (A \rightarrow A \rightarrow B) \rightarrow B$ is not derivable: LL forbids using twice a resource obtained through linear receive. However, the notion of linearity in π BI has a more subtle reading: it restricts the origin of sessions. Above, the use of \rightarrow allows the duplication of the session at a into its copies a_1 and a_2 ; this information about the “origin” of a_1 and a_2 is recorded in the bunch by the use of ‘;’.

On the other hand, there are types provable in DILL that are not provable in BI. A simple example is $A \multimap B \vdash A \rightarrow B$, converting an implication from linear to non-linear. A “number of uses” interpretation of the conversion makes sense: $A \multimap B$ promises to use A exactly once to produce B ; $A \rightarrow B$ declares to produce B using A an unspecified number of times, including exactly once. The corresponding judgment $A \multimap B \vdash A \rightarrow B$ is not provable in BI (and usable as typing derivation in π BI). Intuitively, this is because $A \rightarrow B$ allows A to be obtained with resources which share their origin with the resource $A \multimap B$; however, $A \multimap B$ can only be applied to resources that do not share its own origin.

The meaning of multiplicative and additive types. A natural question arises: if the process interpretation of multiplicatives and additives coincides, what is the difference in the types representing behaviorally? The following example addresses the difference between linear and non-linear connectives; in the publication derived from this thesis [Fru+22] we formally elucidate this difference by giving a denotational semantics which allows tracking the *origin* of sessions.

Assume an opaque base type \mathbb{D} of data. The type of a stylized database could be $\text{DB} \triangleq (\mathbb{D} \rightarrow \text{DB}) \wedge (\mathbb{D} \wedge \text{DB})$ where the first conjunct can receive some new data to overwrite the contents of the database (the ‘put’ operation), and the second would provide the current

data stored in it (the ‘get’ operation). This is a recursive type, which is not currently supported by our calculus; for the purposes of this discussion, it is enough to consider some finite unfolding of the type (terminated with $\mathbf{1}_a$).

Just by looking at the type DB , we can identify possible interactions with the database. A typical usage pattern of a resource $\text{db} : \text{DB}$ would be to receive the ‘put’ and the ‘get’ components and weaken the one we are not intending to use in the current step. Imagine we want to put some $d : \mathbb{D}$: then we would weaken the ‘get’, and send d over $\text{put} : (\mathbb{D} \rightarrow \text{DB})$ to obtain a continuation of type DB that represents the updated database.

A second pattern of usage afforded by πBI is to use contraction to spawn independent snapshots of the database. For example, using contraction we can obtain, from $\text{db} : \text{DB}$, a copy $\text{db}' : \text{DB}$. From then on, the two copies can be mutated independently without interference.

Now consider two different πBI processes, P_a and P_m , with judgments:

$$\text{db}_1 : \text{DB}; \text{db}_2 : \text{DB} \vdash P_a \blacktriangleright z : C \qquad \text{db}_1 : \text{DB}, \text{db}_2 : \text{DB} \vdash P_m \blacktriangleright z : C$$

P_a has access to two databases that are allowed to “overlap” since they are aggregated by a ‘;’. In contrast, P_m has access to two non-overlapping databases. Here, “overlapping” has a subtle meaning: it refers to the *provenance* of the data in the two databases, rather than the stored value itself. More concretely, imagine we interact, in both cases, with db_1 by weakening the ‘get’, and with db_2 by weakening the ‘put’ (and the continuation of ‘get’):

$$\text{put}_1 : \mathbb{D} \rightarrow \text{DB}; d : \mathbb{D} \vdash P'_a \blacktriangleright z : C \qquad \text{put}_1 : \mathbb{D} \rightarrow \text{DB}, d : \mathbb{D} \vdash P'_m \blacktriangleright z : C$$

Process P'_a is now allowed to send d on channel put_1 , updating the database’s value to d , thus inducing a flow of information from db_2 to db_1 . This flow is however forbidden in the case of P'_m : the data sent through put_1 needs to be obtained from a resource that is separated with it by ‘;’ as per Rule [TYP-IMPL-L]. The fact that d is separated using ‘,’ fundamentally forbids it to flow into put_1 .

Now suppose $C = \mathbb{D} * \mathbb{D}$ and take DB to be the 1-unfolding of the recursive definition. The typing of P_m ensures that the two data values sent on the channel z would come one from db_1 and the other from db_2 ; the combinations where two values taken from the same database are sent on z are disallowed by typing.

5.3. META-THEORETICAL PROPERTIES

A distinguishing feature of the propositions-as-sessions approach is that the main meta-theoretical properties of session-typed processes (e.g., type preservation and deadlock-freedom) follow immediately from the cut elimination property in the underlying logic. In this section we show that πBI satisfies these properties, which serves to validate the appropriateness of our interpretation. We consider type preservation and deadlock-freedom, but also *weak normalization*. Appendix D gives additional properties and detailed proofs.

5.3.1. TYPE PRESERVATION AND DEADLOCK-FREEDOM

Essential correctness properties in session-based concurrency are that (i) processes correctly implement the sessions specified by its types (session fidelity) and (ii) there are no com-

munication errors or mismatches (communication safety). Both these properties follow from the *type preservation* property, which ensures that typing is consistent across structural congruence and reduction.

Theorem 5.3.1 (Type Preservation). *Assume $\Delta \vdash P \blacktriangleright x : C$. If $P \equiv Q$ or $P \rightarrow Q$, then $\Delta \vdash Q \blacktriangleright x : C$.*

Proof (Sketch). As a consequence of the tight correspondence between π BI and the proof theory of BI: structural congruence and reduction correspond to proof equivalences and (principal) cut reductions in the BI sequent calculus (see Appendix D.2 for details). \square

Another important correctness property is *deadlock-freedom*: the guarantee that processes never get stuck waiting on pending communications. In general, deadlock-freedom holds for well-typed π BI processes where all names are bound, except for the provided name, which must be used only to close a session. Any process satisfying these typing conditions can then either reduce, or it is *inactive*: only the closing of the session on the provided name is left, possibly prefixed by an empty spawn. Because of bunches, a process with all names bound but one is typable in more ways than just under an empty typing context:

5

Definition 5.3.2 (Empty Bunch). *An empty bunch Σ is a bunch such that $\text{fn}(\Sigma) = \emptyset$. Equivalently, a bunch is empty if each of its leaves is \emptyset_m or \emptyset_a .*

Theorem 5.3.3 (Deadlock-freedom). *Given an empty bunch Σ , if $\Sigma \vdash P \blacktriangleright z : A$ with $A \in \{\mathbf{1}_m, \mathbf{1}_a\}$, then either (i) $P \equiv z[]$, or (ii) $P \equiv \rho[\emptyset]; z[]$, or (iii) there exists S such that $P \rightarrow S$.*

Proof (Sketch). The π BI interpretation of Rule [TYP-CUT] combines restriction and parallel, ensuring that parallel processes never share more than one channel and thus preventing processes such as $(\nu x)(\nu y)(y0; x[] \mid x0; y[])$ where the subprocesses are stuck waiting for each other. The proof follows from a property that we call *progress*, which ensures that processes of a given syntactical shape can reduce. This reduces the proof to showing that processes typable under empty bunches are in the right syntactical shape to invoke progress. \square

The property stated above is an important feature of π BI derived from its logical origin. Although weak by itself, the progress property in the proof of deadlock-freedom is useful in providing a reduction strategy for practical implementations of π BI.

5.3.2. WEAK NORMALIZATION

We now turn our attention to proving that our calculus is weakly normalizing. That is, for every process P there exists some process Q such that $P \rightarrow^* Q \not\rightarrow$. In the publication derived from this chapter [Fru+22], this result is of independent interest, as it is used to show soundness of denotational semantics. We outline the main ideas; details are given in Appendix D.4.

Given a process P , what kind of reductions can P make, and can we come up with some kind of measure that would strictly decrease and disallow infinite reduction sequences? If we did not have the spawn prefix, then the answer to this problem would be simple: each reduction is an instance of communication (or a forwarder reduction), which decreases the total number of communication prefixes in the process. However, in presence of spawn,

counting the total number of prefixes does not work. For example, consider the following reduction, where $\text{fn}(R) = \{x, y\}$,

$$(\mathbf{v}x)(R \mid \rho[x \mapsto x_1, x_2]; Q) \rightarrow \rho[y \mapsto y_1, y_2]; (\mathbf{v}x_1)(R^{(1)} \mid (\mathbf{v}x_2)(R^{(2)} \mid Q)). \quad (5.2)$$

In this reduction, the prefixes in the sub-process R get duplicated, so the total number of prefixes increases. What has also changed is that the spawn prefix $\rho[x \mapsto x_1, x_2]$ turned into the prefix $\rho[y \mapsto y_1, y_2]$ with a larger scope. As a result, the communication prefixes in Q went from being guarded directly by $\rho[x \mapsto x_1, x_2]$, to being guarded by a prefix $\rho[y \mapsto y_1, y_2]$, with the latter prefix being “smaller” in the sense that it is closer to the top-level of the process.

Furthermore, if the reduction (5.2) occurs in some context \mathcal{K} , then we can use Rules [RED-SPAWN-R] and [RED-SPAWN-L] to actually propagate the spawn prefix to the top-level:

$$\begin{aligned} \mathcal{K}[(\mathbf{v}x)(R \mid \rho[x \mapsto x_1, x_2]; Q)] &\rightarrow \mathcal{K}[\rho[y \mapsto y_1, y_2]; (\mathbf{v}x_1)(R^{(1)} \mid (\mathbf{v}x_2)(R^{(2)} \mid Q))] \\ &\rightarrow^* \rho[y \mapsto y_1, y_2]; \mathcal{K}[(\mathbf{v}x_1)(R^{(1)} \mid (\mathbf{v}x_2)(R^{(2)} \mid Q))], \end{aligned} \quad (5.3)$$

assuming \mathcal{K} has no other spawn prefixes that would interfere with $\rho[y \mapsto y_1, y_2]$.

Following this observation, the trick is to stratify the number of prefixes at each ρ -depth, which is the number of spawn prefixes behind which the said prefix occurs. So, if we examine the previous reduction sequence (5.3) and ignore the top-level spawn prefix, the communication prefixes in Q went from being at depth $n + 1$ to being at depth n . While the number of prefixes at depth n has increased, the number of prefixes at depth $n + 1$ has decreased. This suggests that we should consider a progress measure that aggregates the number of prefixes, giving more weight to prefixes at greater ρ -depths.

Our reduction strategy for weak normalization is then as follows. If a process can perform a communication reduction or a forwarder reduction, then we do exactly that reduction. If a process can only perform a reduction that involves a spawn prefix, then we

1. select an (active) spawn prefix with the least depth;
2. perform the spawn reduction;
3. propagate the newly created spawn prefix to the very top-level, merging it with other spawn prefixes along the way.

To show that this reduction strategy terminates, we adopt a measuring function that assigns to each process P a finite mapping $\mu(P): \mathbb{N} \rightarrow \mathbb{N}$ assigning to each number n the number of communication prefixes at depth n and above. In order to handle the special case of a top-level prefix, the measure function simply skips it, i.e. $\mu(\rho[\sigma]; P) = \mu(P)$. We then define an ordering $<$ on such mappings which prioritizes the number of prefixes at greater depths, and show that it is well-founded.

Then, we argue that each clause of our reduction strategy strictly decreases the measure. Since the relation $<$ is well-founded, it guarantees that our strategy terminates. If we perform a communication reduction, then the number of communication prefixes at a given depth decreases, which strictly decreases the measure. If we perform a spawn reduction, then the number of prefixes at some depth $n + 1$ might decrease, but the number of prefixes at depth

n might increase, because of the propagated spawn prefix. In this case, we keep propagating the spawn prefix to the top-level as much as possible, to be skipped by the measure function at the top-level (possibly merging it with an existing top-level spawn). In both cases, the maximal prefix depth of the process decreases, which results in a strictly decreased measure.

Theorem 5.3.4 (Weak Normalization). *If $\Delta \vdash P \blacktriangleright z : A$ is a typed process, then P is weakly normalizing, i.e., there exists some Q such that $P \rightarrow^* Q \nrightarrow$.*

Theorem 5.3.4 captures the fact that, starting from a process P , different reductions may apply, or that there might be multiple spawns that can be brought to the top-most level.

Strictly speaking, we do not require well-typedness assumptions for establishing weak normalization; this property is enforced by the reduction semantics. This is a pleasant consequence of our design for the syntax of processes, which already incorporates some of the structure imposed by typing; this structure is then preserved via the correspondence between commuting conversions and reductions. As such, even the untyped processes are “well-scoped” in the sense that they conform to the tree-like structure typical of session-based interpretations of intuitionistic logics.

5

Theorem 5.3.4 is related to cut-elimination in BI, but the two theorems are not equivalent. The main discrepancy lies in the fact that not all cut-reductions in BI correspond to reductions of π BI processes; process reductions correspond to reductions of cuts which are not guarded by an input or an output prefix. Consecutively, we cannot directly adopt the usual cut-elimination procedure for BI [AQ12] for the purposes of showing weak normalization.

5.4. RELATED WORK

We have already discussed some of the most closely related works, and we have given some comparisons with previous works by means of examples in Section 5.2.4. Here we discuss other related literature along several dimensions.

BI and process calculi. To our knowledge, the work of Anderson and Pym [AP16] is the only prior work that connects BI with process calculi. Their technical approach and results are very different from ours. They introduce a process calculus (a synchronous CCS) with an explicit representation of (bunched) resources, in which processes and resources evolve hand-in-hand. Rather than a typed framework for processes or an interpretation in the style of propositions-as-types, they use a logic related to BI to specify rich properties of processes, in the style of Hennessy-Milner logic.

BI and Curry-Howard correspondence. The works of O’Hearn [OHe03] and Pym [Pym13] are, to our knowledge, the only prior investigations into (non-concurrent) Curry-Howard correspondences based on BI. These works were later extended to cover polymorphism [CPR08] and store with strong update [BO06]. An extension λ_{sep} of an affine version of the $\alpha\lambda$ -calculus with a more fine-grained notion of separation was studied by Atkey [Atk04; Atk06].

Previous works on propositions-as-sessions. Starting with the works by Caires and Pfenning [CP10] and Wadler [Wad12], the line of work on propositions-as-sessions has exclusively relied on (variants of) LL, which is incomparable to BI; this immediately separates those prior works from our novel approach based on BI.

Our work adapts to the BI setting key design principles in [CP10; Wad12]: the interpretation of multiplicative conjunction as output, linear implication as input, and the interpretation of ‘cut’ as the coalescing of restriction and parallel composition. Those works use input-guarded replication to accommodate non-linear sessions, typed with the modality !A; in contrast, π BI handles structural principles directly with the new spawn prefix.

Our adaptation is novel and non-trivial, and cannot be derived from prior interpretations based on LL. Still, certain aspects of π BI bear high-level similarities with elements from those interpretations. The semantics of our spawn prefix borrows inspiration from the treatment of aliases in Pruiksmā and Pfenning’s interpretation of asynchronous binary sessions based on adjoint logic, in which structural rules are controlled via modalities [PP21]. Thanks to spawn binders (Definition 5.2.1), our semantics explicitly handles duplication and disposal of services; this is similar in spirit to the syntax and semantics of replicated servers in HCP, an interpretation based on a hypersequent presentation of classical LL [KMP19]. The behavioral theory of HCP consists of a labeled transition semantics for processes, a denotational semantics for processes, and a full abstraction result. The work of Qian, Kavvos, and Birkedal [QKB21] extends linear logic with coexponentials with the aim of capturing client-server interactions not expressible in preceding interpretations of linear logic. Precise comparisons between the expressivity of such interactions and the connection patterns enabled by our spawn prefix remains to be determined. Concerning failures, as discussed in Section 5.2.4, the work of Fowler *et al.* [Fow+19] develops a linear functional language with asynchronous communication and support for failure handling, closely related to Wadler’s CP.

5.5. CONCLUDING REMARKS AND FUTURE PERSPECTIVES

In this chapter we present a fresh look at logical foundations for message-passing concurrency. We have cast the essential principles of propositions-as-sessions, initially developed upon LL, in the unexplored context of BI. We introduced the typed process calculus π BI, explored its operational and type-theoretical contents, illustrated its expressiveness, and established the meta-theoretical framework needed to study the behavioral consequences of the BI typing discipline for concurrency.

Our results unlock a number of enticing future directions. First, because π BI targets binary session types (between two parties) with synchronous communication, it would be interesting to study variants of π BI with multiparty, asynchronous communication [HYC16; SY19]. An asynchronous version of π BI could be defined by following the work of DeYoung *et al.* [DeY+12] to maximize concurrency. Also, the works [Car+15; Car+16; CP16] already provide insights on how to exploit π BI to analyze multiparty protocols.

Second, variations and extensions of BI could provide new insights. For example, the !A modality is not incompatible with BI, and can be added to obtain a type $!A \simeq A * \dots * A$. The intuitive interpretation is that the provider of !A can create an instance of A from scratch, thus

not sharing its origin with the other instances. This new type would seem incomparable with the corresponding modality of LL, which makes it interesting to study what interpretations could admit.

II

MESSAGE-PASSING FUNCTIONS AS PROCESSES

6

CYCLIC THREAD CONFIGURATIONS AND ASYNCHRONOUS COMMUNICATION

This chapter studies message-passing in functional programming. The focus is on cyclic connections between threads and asynchronous communication. The aim is to exploit prior knowledge on these aspects on the level of message-passing processes in APCP. By building strong ties between these worlds of functional programming and processes, this chapter transfers correctness results from the latter to the former. It thus provides an answer to the following research question, introduced in Section 1.2.2.1:

Research Question II-1. *Can we exploit APCP's asynchronous message-passing and cyclic connections in sequential programming, while retaining correctness properties?*

This chapter includes a self-contained summary of APCP (Section 6.3.3). Omitted details and proofs can be found in the chapter dedicated to APCP (Chapter 3).

6.1. INTRODUCTION

Society relies heavily on software consisting of distributed components that cooperate by asynchronously exchanging messages. It is vital that such software functions as intended and without error. In this context, we study *session types*: behavioral types that represent communication protocols used in the static verification of message-passing software.

Session types are paradigm-independent, in the sense that they can be accommodated on top of programming models and languages in different paradigms—concurrent, object-oriented, and functional. In the functional setting, a milestone is the asynchronous concurrent λ -calculus with sessions by Gay and Vasconcelos [GV10], which in the following

we call LAST (Linear Asynchronous Session Types). LAST is a call-by-value calculus with buffered channels governed by sessions, whose type system ensures that well-typed configurations (collections of threads) respect their ascribed protocols (protocol fidelity) but does not guarantee deadlock-freedom, i.e., it permits cyclic configurations with circular dependencies.

LAST has been brought back to the spotlight through Wadler’s work on GV (Good Variation), a synchronous variant of LAST without cyclic configurations. Terms in GV are guaranteed to be deadlock-free via a (typed) translation into CP [Wad12]. Subsequently, Kokke and Dardha formulated PGV (Priority-based GV), an extension of GV that strictly augments the class of deadlock-free computations with cyclic configurations by leveraging priorities [KD21a; KD21b], following Padovani and Novara [PN15].

In this chapter, we study asynchronous, deadlock-free communication with support for cyclic topologies in the setting of a prototypical functional programming language. We present LAST^n , a new call-by-name variant of LAST. Notably, communication in LAST^n is asynchronous—a feature not accounted for by GV and PGV.

We equip LAST^n with a deliberately simple type system, with functional and session types, which ensures type preservation/protocol fidelity but not deadlock-freedom (just like the type system for LAST). To address this gap, we develop a way of soundly transferring the deadlock-freedom property from APCP to LAST^n . This transference of results hinges on a translation of LAST^n programs into APCP processes, in the style for Milner’s seminal work [Mil90; Mil92]. The translation clarifies the role of APCP as an abstract model for asynchronous, functional concurrency; it satisfies in particular a tight form of *operational correspondence* that follows the well-known formulation by Gorla [Gor10]. This way, we can ensure that a (class of) well-typed LAST^n programs with cyclic configurations satisfies deadlock-freedom. While the development of LAST^n is of interest in itself (it improves over GV and PGV, as just discussed), it is also a significant test for APCP, its expressiveness and meta-theoretical results.

In summary, in this chapter I discuss the functional calculus LAST^n , its associated type system, and a translation of LAST^n into APCP that enjoys operational correspondence properties (Theorems 6.4.10 and 6.4.11) and transfers from APCP to LAST^n a form of deadlock-freedom (Theorem 6.4.14).

Organization. In Section 6.2, I motivate LAST^n by example. Section 6.3 recalls LAST and its type system, as proposed in [GV10], and briefly discusses the issue of devising an operationally correct translation into APCP. Building upon this background, Section 6.4 presents LAST^n as a call-by-name variant of LAST, develops its meta-theoretical results, and gives a correct translation of LAST^n into APCP. Section 6.5 discusses related work and Section 6.6 draws conclusions. Appendix E collects omitted definitions and proofs for LAST^n .

6.2. A BOOKSHOP SCENARIO IN LAST^n

Our new calculus LAST^n is a call-by-name variant of Gay and Vasconcelos’ LAST [GV10] with linear resources. We briefly motivate the design of LAST^n by adapting the running example of [GV10], which involves a mother interacting with a bookshop to buy a book for her son.

First, we define a term representing the shop. The shop has an endpoint s on which it

communicates with a client. First, the shop receives a book title and then offers a choice between buying the book or only accessing its blurb (the text on the book's back cover). If the client decides to buy, the shop receives credit card information and sends the book to the client. Otherwise, if the client requests the blurb, the shop sends its text. In LASTⁿ, we can define this shop as follows:

$$\text{Shop}_s \triangleq \text{let } (title, s_1) = \text{recv } s \text{ in} \\ \text{case } s_1 \text{ of } \{\text{buy} : \lambda s_2. \text{let } (card, s_3) = \text{recv } s_2 \text{ in} \\ \quad \text{let } s_4 = \text{send book}(title) s_3 \text{ in} \\ \quad \text{close } s_4; 0, \\ \text{blurb} : \lambda s_2. \text{let } s_3 = \text{send blurb}(title) s_2 \text{ in} \\ \quad \text{close } s_3; 0\}$$

The functional behavior of LASTⁿ is standard, so we only explain the message-passing components in the above term:

- ‘`recv s`’ waits for a message to be ready on s , and returns a pair containing the message and an endpoint on which to continue the session.
- ‘`case of {...}`’ waits for a label to be ready on s , determining a continuation. Continuations are defined as abstractions, which will be applied to the session's continuation once the label has been received.
- ‘`send M s`’ buffers the message M on endpoint s , which can be received asynchronously on a connected endpoint.
- ‘`close s; M`’ waits until the session on the endpoint s can be closed.

Next, we define a term abstracting the son's behavior. Term $\text{Son}_{s', m'}$, given below, has an endpoint s' on which he communicates with the shop, and an endpoint m' for communication with his mother. The son sends a book title to the shop, and then selects to buy. Notation ‘`select ℓ s`’ denotes the buffering of the label ℓ on endpoint s , to be received asynchronously on a connected endpoint. After this selection, to let his mother pay for him, the son proceeds to send the shop's endpoint to his mother. Finally, he receives the book from his mother, and returns it as a result of the computations.

$$\text{Son}_{s', m'} \triangleq \text{let } s'_1 = \text{send "Dune"} s' \text{ in} \\ \text{let } s'_2 = \text{select buy } s'_1 \text{ in} \\ \text{let } m'_1 = \text{send } s'_2 m' \text{ in} \\ \text{let } (book, m'_2) = \text{recv } m'_1 \text{ in} \\ \text{close } m'_2; book$$

Finally, we define the mother, who has an endpoint m to communicate with her son. She receives the shop endpoint from her son, and then sends her credit card information to the

shop. She then receives the book from the shop, and sends it to her son.

$$\begin{aligned} \text{Mother}_m &\triangleq \text{let } (x, m_1) = \text{recv } m \text{ in} \\ &\quad \text{let } x_1 = \text{send visa } x \text{ in} \\ &\quad \text{let } (\text{book}, x_2) = \text{recv } x_1 \text{ in} \\ &\quad \text{let } m_2 = \text{send book } m_1 \text{ in} \\ &\quad \text{close } m_2; \text{close } x_2; () \end{aligned}$$

Now, we only have to compose these terms together, connecting all the endpoints appropriately. This is achieved by term `Sys` below, which relies on two additional constructs.

- ‘`new`’ creates a channel, and returns the channel’s pair of endpoints; asynchronous communication is achieved by connecting the endpoints through an ordered buffer.
- ‘`spawn M; N`’ launches `M` as a *thread*, running concurrently to the continuation `N`.

Concretely, we have:

$$\begin{aligned} \text{Sys} &\triangleq \text{let } (s, s') = \text{new in spawn Shop}_s; \\ &\quad \text{let } (m, m') = \text{new in spawn Mother}_m; \\ &\quad \text{Son}_{s', m'} \end{aligned}$$

6

Note that the son cannot be spawned, as he returns the result of the computation (the book). In Sections 6.3 and 6.4 we will discuss the behavior and typing of these terms.

6.3. AN INTERMEZZO: FROM APCP TO LAST

As attested by its expressivity and meta-theoretical results (Theorems 6.3.13 and 6.3.15), APCP provides a convenient framework for analyzing asynchronous message-passing between cyclically connected processes. In particular, APCP provides a firm basis for designing languages with session-typed concurrency, asynchronous communication, and cyclic structures. Ideally, we would like to faithfully compile any such language into APCP, in order to transfer its correctness guarantees.

As discussed in the introduction, we look for answers in the realm of functional programming, in the form of variants of the λ -calculus with session-typed, message-passing concurrency. In this context, Gay and Vasconcelos’s LAST [GV10] appears nicely positioned: LAST is a call-by-value language in which programs consist of threads that are cyclically connected on channels that provide asynchronous message-passing (through buffers). The calculus LAST has spawned several variants that connect message-passing processes with message-passing functions, as we set out to do here. Most notably, Walder [Wad12; Wad14] introduced GV, a variant of LAST with synchronous communication and non-cyclic thread connections, and gave a translation into his CP (the synchronous ancestor of APCP, without cyclic connections). Subsequently, in the same spirit, Kokke and Dardha [KD21a] presented PGV, a variant of GV with cyclic connections, and a translation from Dardha and Gay’s PCP (the synchronous ancestor of APCP [DG18]).

Hence, LAST is a natural choice for a core programming language that can be studied via a translation into APCP. Notice that both GV and PGV enjoy deadlock-freedom by typing, whereas LAST does not. This strengthens our motivation for designing a translation into APCP, as transferring the deadlock-freedom property from APCP to LAST would address a significant gap. To our knowledge, such a *translational* approach to ensuring deadlock-freedom for LAST programs has not been achieved before.

In this section we gently recall LAST and gradually introduce the key ingredients for its translation into APCP. For presentational purposes, we find it useful to present a variant of LAST that is more convenient towards a translation, denoted LAST^{*} (Section 6.3.1). The type system for LAST^{*}, described in Section 6.3.2, closely follows the one for LAST in [GV10]. Then, after briefly recalling APCP and its meta-theoretical properties in Section 6.3.3, we discuss in Section 6.3.4 the potential design of a translation from LAST^{*} into APCP. We purposefully use the word “potential”: we seek a translation that is *faithful*, i.e., that preserves and reflects behaviors in a precise sense. Given this focus, we shall argue that the call-by-value semantics of LAST^{*} is not well-suited for inducing a faithful translation. As such, this section serves as motivation for introducing LASTⁿ, a variant of LAST based on a call-by-name semantics that enjoys a faithful translation into APCP and admits the translational approach to the deadlock-freedom property (Section 6.4).

6.3.1. THE SYNTAX AND SEMANTICS OF LAST^{*}

In LAST^{*}, programs consist of two layers: while *terms* (M, N, \dots) define the behavior of threads, *configurations* (C, D, \dots) are obtained by composing threads in parallel, so as to enable their interaction by exchanging messages on buffered channels. Before detailing these syntactic elements (and their semantics), we point out the differences between LAST and LAST^{*}. While in LAST endpoints are created by synchronization on shared names, LAST^{*} features a dedicated construct for endpoint creation (denoted `new`). Also, thread creation in LAST^{*} involves an explicit continuation, not present in LAST. Moreover, in LAST buffers run next to threads, whereas they are integrated in endpoint restrictions in LAST^{*}. Finally, for simplicity, LAST^{*} accounts linear sessions only.

Terms. Figure 6.1 (top) gives the term syntax for LAST^{*}. The functional behavior of terms is defined by standard λ -calculus constructs for variables x , the unit value $()$, abstraction $\lambda x.M$ and application $M N$, and pair construction (M, N) and deconstruction $\text{let } (x, y) = M \text{ in } N$. As usual, to improve readability, we often write $\text{let } x = M \text{ in } N$ to denote $(\lambda x.N) M$.

The remaining constructs define the thread and message-passing behavior of terms; their exact semantics will be defined for configurations, so we briefly describe them here. Construct `new` creates a new buffered channel with two endpoints (referred to with variables). Construct `spawn M; N` spawns a thread running M and continues as N . Constructs `send NM` and `recv M` denote sending and receiving messages along M once it has reduced to a variable referring to a buffer endpoint, respectively; that is, sending entails placing the message N at the end of the buffer, and receiving entails taking a message from the start of the buffer (if there). Constructs `select ℓ M` and `case M of $\{i : N_i\}_{i \in I}$` denote selecting and offering labels along M once it has reduced to an endpoint variable, respectively; that is, selection entails

Terms (M, N, L) , values (v) , and reduction contexts (\mathcal{R}) :

M, N, L				
$::= x$	variable	new		create new channel
$()$	unit value	spawn $M; N$		spawn M in parallel to N
$\lambda x.M$	abstraction	(M, N)		pair construction
$M N$	application	let $(x, y) = M$ in N		pair deconstruction
send $M N$	send M along N	select ℓM		select label ℓ along M
recv M	receive along M	case M of $\{i : N\}_{i \in I}$		offer labels in I along M
$v ::= x \mid \lambda x.M \mid (v, v) \mid ()$				
$\mathcal{R} ::= [\cdot] \mid \mathcal{R} M \mid v \mathcal{R} \mid (\mathcal{R}, M) \mid (M, \mathcal{R}) \mid \text{let } (x, y) = \mathcal{R} \text{ in } M$				
spawn $\mathcal{R}; M$ send $M \mathcal{R}$ recv \mathcal{R} select $\ell \mathcal{R}$ case \mathcal{R} of $\{i : M\}_{i \in I}$				

Term reduction (\rightarrow_M) :

$$\begin{array}{c}
 \frac{[\text{RED-LAM}]}{(\lambda x.M) v \rightarrow_M M\{v/x\}} \qquad \frac{[\text{RED-PAIR}]}{\text{let } (x, y) = (v_1, v_2) \text{ in } M \rightarrow_M M\{v_1/x, v_2/y\}} \\
 \\
 \frac{[\text{RED-LIFT}]}{\mathcal{R}[M] \rightarrow_M \mathcal{R}[N]} \qquad \frac{M \rightarrow_M N}{\mathcal{R}[M] \rightarrow_M \mathcal{R}[N]}
 \end{array}$$

6

Figure 6.1 | The LAST* term language.

placing the label ℓ at the end of the buffer, and offering entails taking a label $j \in I$ from the start of the buffer (if there) and continuing in the corresponding branch N_j .

Following [GV10], the term reduction semantics of LAST* employs a call-by-value (CbV) approach; Figure 6.1 (center) defines values v , i.e., terms that cannot further reduce on their own: variables, abstractions, pairs, and the unit value. Figure 6.1 (center) also defines reduction contexts \mathcal{R} that define under which positions subterms may reduce. Finally, Figure 6.1 (bottom) defines term reduction (\rightarrow_M) . Rule [RED-LAM] reduces an abstraction applied to a value; the substitution of a value v for a (free) variable x is denoted $\{v/x\}$, as usual. Rule [RED-PAIR] reduces the pair deconstruction of a pair of values to two substitutions. Rule [RED-LIFT] closes term reduction under reduction contexts.

Example 6.3.1. The following term behavior illustrate the CbV semantics of LAST*:

$$(\lambda x.x (\lambda y.y)) ((\lambda w.w) (\lambda z.z)) \rightarrow_M (\lambda x.x (\lambda y.y)) (\lambda z.z) \rightarrow_M (\lambda z.z) (\lambda y.y) \rightarrow_M \lambda y.y \quad \nabla$$

We will illustrate the message-passing behavior of LAST* after introducing configurations.

Configurations. Functional calculi such as LAST* have a clear distinction between the static and dynamic parts of their languages: a LAST* program starts as a closed functions (the static part) and evolves into several threads operating in parallel and communicating through

Markers (ϕ), messages (m, n), configurations (C, D, E), thread contexts (\mathcal{F}), configuration contexts (\mathcal{G}):

$$\begin{aligned} \phi &::= \blacklozenge \mid \lozenge & m, n &::= v \mid \ell \\ C, D, E &::= \phi M \mid (\mathbf{v}x[\vec{m}]y)C \mid C \parallel D \\ \mathcal{F} &::= \phi \mathcal{R} & \mathcal{G} &::= [\cdot] \mid \mathcal{G} \parallel C \mid (\mathbf{v}x[\vec{m}]y)\mathcal{G} \end{aligned}$$

.....

Structural congruence for configurations ($\equiv_{\mathcal{C}}$):

$$\begin{array}{c} \frac{[\text{SC-RES-SWAP}]}{(\mathbf{v}x[e]y)C \equiv_{\mathcal{C}} (\mathbf{v}y[e]x)C} \quad \frac{[\text{SC-RES-COMM}]}{(\mathbf{v}x[\vec{m}]y)(\mathbf{v}z[\vec{n}]w)C \equiv_{\mathcal{C}} (\mathbf{v}z[\vec{n}]w)(\mathbf{v}x[\vec{m}]y)C} \\ \\ \frac{[\text{SC-RES-EXT}]}{x, y \notin \text{fv}(C) \quad \frac{}{(\mathbf{v}x[\vec{m}]y)(C \parallel D) \equiv_{\mathcal{C}} C \parallel (\mathbf{v}x[\vec{m}]y)D}} \quad \frac{[\text{SC-PAR-COMM}]}{C \parallel D \equiv_{\mathcal{C}} D \parallel C} \quad \frac{[\text{SC-PAR-ASSOC}]}{C \parallel (D \parallel E) \equiv_{\mathcal{C}} (C \parallel D) \parallel E} \end{array}$$

.....

Configuration reduction ($\rightarrow_{\mathcal{C}}$):

$$\begin{array}{c} \frac{[\text{RED-NEW}]}{\mathcal{F}[\text{new}] \rightarrow_{\mathcal{C}} (\mathbf{v}x[e]y)(\mathcal{F}[(x, y)])} \quad \frac{[\text{RED-SPAWN}]}{\mathcal{F}[\text{spawn } M; N] \rightarrow_{\mathcal{C}} \mathcal{F}[N] \parallel \lozenge M} \\ \\ \frac{[\text{RED-SEND}]}{(\mathbf{v}x[\vec{m}]y)(\mathcal{F}[\text{send } v x] \parallel C) \rightarrow_{\mathcal{C}} (\mathbf{v}x[v, \vec{m}]y)(\mathcal{F}[x] \parallel C)} \\ \\ \frac{[\text{RED-RECV}]}{(\mathbf{v}x[\vec{m}, v]y)(\mathcal{F}[\text{recv } y] \parallel C) \rightarrow_{\mathcal{C}} (\mathbf{v}x[\vec{m}]y)(\mathcal{F}[(v, y)] \parallel C)} \\ \\ \frac{[\text{RED-SELECT}]}{(\mathbf{v}x[\vec{m}]y)(\mathcal{F}[\text{select } \ell x] \parallel C) \rightarrow_{\mathcal{C}} (\mathbf{v}x[\ell, \vec{m}]y)(\mathcal{F}[x] \parallel C)} \\ \\ \frac{[\text{RED-CASE}]}{j \in I \quad \frac{}{(\mathbf{v}x[\vec{m}, j]y)(\mathcal{F}[\text{case } y \text{ of } \{i : M_i\}_{i \in I}] \parallel C) \rightarrow_{\mathcal{C}} (\mathbf{v}x[\vec{m}]y)(\mathcal{F}[M_j y] \parallel C)}} \\ \\ \frac{[\text{RED-RES-NIL}]}{x, y \notin \text{fv}(C) \quad \frac{}{(\mathbf{v}x[e]y)C \rightarrow_{\mathcal{C}} C}} \quad \frac{[\text{RED-PAR-NIL}]}{C \parallel \lozenge 0 \rightarrow_{\mathcal{C}} C} \quad \frac{[\text{RED-LIFT-C}]}{C \rightarrow_{\mathcal{C}} C' \quad \frac{}{\mathcal{G}[C] \rightarrow_{\mathcal{C}} \mathcal{G}[C']}} \quad \frac{[\text{RED-LIFT-M}]}{M \rightarrow_{\mathcal{M}} M' \quad \frac{}{\mathcal{F}[M] \rightarrow_{\mathcal{C}} \mathcal{F}[M']}} \\ \\ \frac{[\text{RED-CONF-LIFT-SC}]}{C \equiv_{\mathcal{C}} C' \quad C' \rightarrow_{\mathcal{C}} D' \quad D' \equiv_{\mathcal{C}} D \quad \frac{}{C \rightarrow_{\mathcal{C}} D}} \end{array}$$

Figure 6.2 | The LAST* configuration language: syntax and semantics.

message-passing (the dynamic part). We refer to the static and dynamic parts of LAST* as terms and configurations, respectively. In general, one writes a LAST* program as a single main thread containing a term that spawns and connects child threads. To contrast, process calculi such as APCP blur the lines between such static and dynamic parts, as APCP “programs” are immediately written as configurations of parallel subprocesses connected on channels.

Figure 6.2 gives the configuration syntax for LAST*. Given a term M , the configuration ϕM denotes a corresponding thread, where the marker ϕ is useful to distinguish the main thread \blacklozenge from child threads \lozenge —this distinction will be useful for typing. Buffered channels are denoted $(\nu x(\bar{m})y)C$. Here, C has access to the endpoints x and y . The buffer itself $x(\bar{m})y$ is an ordered sequence of messages (values and labels, denoted \bar{m}) sent on x and to be received on y . This means that C may send/select on x and receive/offer on y . Once the buffer is empty (i.e., $\bar{m} = \epsilon$), x and y may switch roles. Configuration $C \parallel D$ denotes the parallel composition of C and D . Figure 6.2 (top) also defines thread contexts \mathcal{F} as term reduction contexts inside threads, and configuration contexts \mathcal{G} .

The reduction semantics for configurations is defined on specific arrangements of buffers and threads. To ensure such arrangements, we define a structural congruence for configurations (\equiv_c), the least congruence on configurations satisfying the rules in Figure 6.2 (center). Rule [SC-RES-SWAP] swaps the direction of buffered channels and thus the input/output roles of the channel’s endpoints. Rule [SC-RES-COMM] defines commutativity of buffered channels. Rule [SC-RES-EXT] defines scope extrusion/inclusion for buffered channels. Rules [SC-PAR-COMM] and [SC-PAR-ASSOC] define commutativity and associativity for parallel composition.

Figure 6.2 (bottom) gives the reduction semantics for configurations (\rightarrow_c). It defines how terms in threads interact with each other by exchanging messages through buffered channels. Rule [RED-NEW] reduces a **new** construct in a thread by creating a new buffered channel and returning the endpoints x and y . Rule [RED-SPAWN] reduces a **spawn** construct in a thread by creating a new child thread. Rule [RED-SEND] reduces a **send** by placing the value at the end of the enclosing buffer and returning the endpoint. Dually, Rule [RED-RECV] reduces a **recv** by retrieving the value at the start of the enclosing buffer and returning it along with the endpoint. Rule [RED-SELECT] reduces a **select** by placing the label at the end of the enclosing buffer and returning the endpoint. Dually, Rule [RED-CASE] reduces a **case** by retrieving the label at the start of the enclosing buffer and applying the label’s corresponding continuation to the endpoint. Rule [RED-RES-NIL] garbage collects buffers that are no longer used, and Rule [RED-PAR-NIL] garbage collects child threads that have reduced to unit. Rules [RED-LIFT-C] and [RED-LIFT-M] close configuration reduction under configuration contexts and enable terms in threads to reduce, respectively. Rule [RED-CONF-LIFT-SC] closes configuration reduction under structural congruence.

Example 6.3.2 (The Bookshop Scenario, Revisited). We illustrate the message-passing behavior of LAST* by considering the bookshop example from Section 6.2. Note that LAST* does not have **close**-constructs: we will motivate them in Section 6.4; here, for simplicity, we consider the system in Section 6.2 without these constructs.

First, let us explore how the system sets up some channels and threads:

$$\begin{aligned}
\blacklozenge \text{Sys} &= \blacklozenge \text{let } (s, s') = \text{new in spawn Shop}_s; \text{let } (m, m') = \text{new in spawn Mother}_m; \text{Son}_{s', m'} \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}y[\epsilon]y') (\blacklozenge \text{let } (s, s') = (y, y') \text{ in spawn Shop}_s; \\
&\quad \text{let } (m, m') = \text{new in spawn Mother}_m; \text{Son}_{s', m'}) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}y[\epsilon]y') (\blacklozenge \text{spawn Shop}_y; \text{let } (m, m') = \text{new in spawn Mother}_m; \text{Son}_{y', m'}) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}y[\epsilon]y') (\blacklozenge \text{let } (m, m') = \text{new in spawn Mother}_m; \text{Son}_{y', m'} \parallel \blacklozenge \text{Shop}_y) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}y[\epsilon]y') ((\mathbf{v}z[\epsilon]z') (\blacklozenge \text{let } (m, m') = (z, z') \text{ in spawn Mother}_m; \text{Son}_{y', m'}) \parallel \blacklozenge \text{Shop}_y) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}y[\epsilon]y') ((\mathbf{v}z[\epsilon]z') (\blacklozenge \text{spawn Mother}_z; \text{Son}_{y', z'}) \parallel \blacklozenge \text{Shop}_y) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}y[\epsilon]y') ((\mathbf{v}z[\epsilon]z') (\blacklozenge \text{Son}_{y', z'} \parallel \blacklozenge \text{Mother}_z) \parallel \blacklozenge \text{Shop}_y)
\end{aligned}$$

Next, let us see how the son sends the book title and his choice to buy to the shop, and then his connection with the shop to his mother, without waiting for his messages to be received:

$$\begin{aligned}
&\equiv_{\mathbf{c}} (\mathbf{v}y'[\epsilon]y) ((\mathbf{v}z[\epsilon]z') (\blacklozenge \text{let } s'_1 = \text{send "Dune"} y' \text{ in } \dots \parallel \blacklozenge \text{Mother}_z) \parallel \blacklozenge \text{Shop}_y) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}y'["\text{Dune}"]y) ((\mathbf{v}z[\epsilon]z') (\blacklozenge \text{let } s'_1 = y' \text{ in } \dots \parallel \blacklozenge \text{Mother}_z) \parallel \blacklozenge \text{Shop}_y) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}y'["\text{Dune}"]y) ((\mathbf{v}z[\epsilon]z') (\blacklozenge \text{let } s'_2 = \text{select buy } y' \text{ in } \dots \parallel \blacklozenge \text{Mother}_z) \parallel \blacklozenge \text{Shop}_y) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}y'[\text{buy}, "\text{Dune}"]y) ((\mathbf{v}z[\epsilon]z') (\blacklozenge \text{let } s'_2 = y' \text{ in } \dots \parallel \blacklozenge \text{Mother}_z) \parallel \blacklozenge \text{Shop}_y) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}y'[\text{buy}, "\text{Dune}"]y) ((\mathbf{v}z[\epsilon]z') (\blacklozenge \text{let } m'_1 = \text{send } y' z' \text{ in } \dots \parallel \blacklozenge \text{Mother}_z) \parallel \blacklozenge \text{Shop}_y) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}y'[\text{buy}, "\text{Dune}"]y) ((\mathbf{v}z'[y']z) (\blacklozenge \text{let } m'_1 = z' \text{ in } \dots \parallel \blacklozenge \text{Mother}_z) \parallel \blacklozenge \text{Shop}_y) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}y'[\text{buy}, "\text{Dune}"]y) ((\mathbf{v}z'[y']z) (\blacklozenge \text{let } (\text{book}, m'_2) = \text{recv } z' \text{ in } \text{book} \parallel \blacklozenge \text{Mother}_z) \\
&\quad \parallel \blacklozenge \text{Shop}_y)
\end{aligned}$$

Now, we see the mother receive the shop's connection and send her credit card information:

$$\begin{aligned}
&= (\mathbf{v}y'[\text{buy}, "\text{Dune}"]y) ((\mathbf{v}z'[y']z) (\blacklozenge \text{let } (\text{book}, m'_2) = \text{recv } z' \text{ in } \text{book} \\
&\quad \parallel \blacklozenge \text{let } (x, m_1) = \text{recv } z \text{ in } \dots) \parallel \blacklozenge \text{Shop}_y) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}y'[\text{buy}, "\text{Dune}"]y) ((\mathbf{v}z[\epsilon]z') (\blacklozenge \text{let } (\text{book}, m'_2) = \text{recv } z' \text{ in } \text{book} \\
&\quad \parallel \blacklozenge \text{let } (x, m_1) = (y', z) \text{ in } \dots) \parallel \blacklozenge \text{Shop}_y) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}y'[\text{buy}, "\text{Dune}"]y) ((\mathbf{v}z[\epsilon]z') (\blacklozenge \text{let } (\text{book}, m'_2) = \text{recv } z' \text{ in } \text{book} \\
&\quad \parallel \blacklozenge \text{let } x_1 = \text{send } \text{visa } y' \text{ in } \dots) \parallel \blacklozenge \text{Shop}_y) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}y'[\text{visa}, \text{buy}, "\text{Dune}"]y) ((\mathbf{v}z[\epsilon]z') (\blacklozenge \text{let } (\text{book}, m'_2) = \text{recv } z' \text{ in } \text{book} \\
&\quad \parallel \blacklozenge \text{let } x_1 = y' \text{ in } \dots) \parallel \blacklozenge \text{Shop}_y) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}y'[\text{visa}, \text{buy}, "\text{Dune}"]y) ((\mathbf{v}z[\epsilon]z') (\blacklozenge \text{let } (\text{book}, m'_2) = \text{recv } z' \text{ in } \text{book} \\
&\quad \parallel \blacklozenge \text{let } (\text{book}, x_2) = \text{recv } y' \text{ in } \dots) \parallel \blacklozenge \text{Shop}_y)
\end{aligned}$$

Finally, the sequence of reductions in Figure 6.3 shows how the shop reads messages and sends the book, and how the mother forwards it to her son. ∇

$$\begin{aligned}
&= (\mathbf{v}y'[\text{visa}, \text{buy}, \text{"Dune"}]y)((\mathbf{v}z[\epsilon]z')(\blacklozenge \text{let } (book, m'_2) = \text{recv } z' \text{ in } book \\
&\quad \parallel \blacklozenge \text{let } (book, x_2) = \text{recv } y' \text{ in } \dots) \\
&\quad \parallel \blacklozenge \text{let } (title, s_1) = \text{recv } y \text{ in } \dots) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}y'[\text{visa}, \text{buy}]y)((\mathbf{v}z[\epsilon]z')(\blacklozenge \text{let } (book, m'_2) = \text{recv } z' \text{ in } book \\
&\quad \parallel \blacklozenge \text{let } (book, x_2) = \text{recv } y' \text{ in } \dots) \\
&\quad \parallel \blacklozenge \text{let } (title, s_1) = (\text{"Dune"}, y) \text{ in } \dots) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}y'[\text{visa}, \text{buy}]y)((\mathbf{v}z[\epsilon]z')(\blacklozenge \text{let } (book, m'_2) = \text{recv } z' \text{ in } book \\
&\quad \parallel \blacklozenge \text{let } (book, x_2) = \text{recv } y' \text{ in } \dots) \parallel \blacklozenge \text{case } y \text{ of } \{\dots\}) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}y'[\text{visa}]y)((\mathbf{v}z[\epsilon]z')(\blacklozenge \text{let } (book, m'_2) = \text{recv } z' \text{ in } book \\
&\quad \parallel \blacklozenge \text{let } (book, x_2) = \text{recv } y' \text{ in } \dots) \parallel \blacklozenge (\lambda s_2 \dots) y) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}y'[\text{visa}]y)((\mathbf{v}z[\epsilon]z')(\blacklozenge \text{let } (book, m'_2) = \text{recv } z' \text{ in } book \\
&\quad \parallel \blacklozenge \text{let } (book, x_2) = \text{recv } y' \text{ in } \dots) \\
&\quad \parallel \blacklozenge \text{let } (card, s_3) = \text{recv } y \text{ in } \dots) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}y[\epsilon]y')((\mathbf{v}z[\epsilon]z')(\blacklozenge \text{let } (book, m'_2) = \text{recv } z' \text{ in } book \\
&\quad \parallel \blacklozenge \text{let } (book, x_2) = \text{recv } y' \text{ in } \dots) \\
&\quad \parallel \blacklozenge \text{let } (card, s_3) = (\text{visa}, y) \text{ in } \dots) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}y[\epsilon]y')((\mathbf{v}z[\epsilon]z')(\blacklozenge \text{let } (book, m'_2) = \text{recv } z' \text{ in } book \\
&\quad \parallel \blacklozenge \text{let } (book, x_2) = \text{recv } y' \text{ in } \dots) \\
&\quad \parallel \blacklozenge \text{let } s_4 = \text{send } book(\text{"Dune"}) y \text{ in } 0) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}y[\text{book}(\text{"Dune"})]y')((\mathbf{v}z[\epsilon]z')(\blacklozenge \text{let } (book, m'_2) = \text{recv } z' \text{ in } book \\
&\quad \parallel \blacklozenge \text{let } (book, x_2) = \text{recv } y' \text{ in } \dots) \\
&\quad \parallel \blacklozenge \text{let } s_4 = y \text{ in } 0) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}y[\text{book}(\text{"Dune"})]y')((\mathbf{v}z[\epsilon]z')(\blacklozenge \text{let } (book, m'_2) = \text{recv } z' \text{ in } book \\
&\quad \parallel \blacklozenge \text{let } (book, x_2) = \text{recv } y' \text{ in } \dots) \parallel \blacklozenge 0) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}y[\text{book}(\text{"Dune"})]y')((\mathbf{v}z[\epsilon]z')(\blacklozenge \text{let } (book, m'_2) = \text{recv } z' \text{ in } book \\
&\quad \parallel \blacklozenge \text{let } (book, x_2) = \text{recv } y' \text{ in } \dots)) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}y[\epsilon]y')((\mathbf{v}z[\epsilon]z')(\blacklozenge \text{let } (book, m'_2) = \text{recv } z' \text{ in } book \\
&\quad \parallel \blacklozenge \text{let } (book, x_2) = (\text{book}(\text{"Dune"}), y') \text{ in } \dots)) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}y[\epsilon]y')((\mathbf{v}z[\epsilon]z')(\blacklozenge \text{let } (book, m'_2) = \text{recv } z' \text{ in } book \\
&\quad \parallel \blacklozenge \text{let } m_2 = \text{send } book(\text{"Dune"}) z \text{ in } 0)) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}z[\epsilon]z')(\blacklozenge \text{let } (book, m'_2) = \text{recv } z' \text{ in } book \parallel \blacklozenge \text{let } m_2 = \text{send } book(\text{"Dune"}) z \text{ in } 0) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}z[\text{book}(\text{"Dune"})]z')(\blacklozenge \text{let } (book, m'_2) = \text{recv } z' \text{ in } book \parallel \blacklozenge \text{let } m_2 = z \text{ in } 0) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}z[\text{book}(\text{"Dune"})]z')(\blacklozenge \text{let } (book, m'_2) = \text{recv } z' \text{ in } book \parallel \blacklozenge 0) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}z[\text{book}(\text{"Dune"})]z')(\blacklozenge \text{let } (book, m'_2) = \text{recv } z' \text{ in } book) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}z[\epsilon]z')(\blacklozenge \text{let } (book, m'_2) = (\text{book}(\text{"Dune"}), z') \text{ in } book) \\
&\rightarrow_{\mathbf{c}} (\mathbf{v}z[\epsilon]z')(\blacklozenge \text{book}(\text{"Dune"})) \rightarrow_{\mathbf{c}} \blacklozenge \text{book}(\text{"Dune"})
\end{aligned}$$

Figure 6.3 | Reduction sequence from Example 6.3.2

6.3.2. THE TYPE SYSTEM OF LAST*

LAST* includes functional types for functions and pairs and session types for communication. The syntax and meaning of functional types (T, U) and session types (S) are as follows:

$$\begin{array}{l}
 T, U ::= T \times U \quad \text{pair} \mid T \multimap U \quad \text{function} \mid \mathbf{1} \quad \text{unit} \mid S \quad \text{session} \\
 S ::= !T.S \quad \text{send} \mid ?T.S \quad \text{receive} \mid \oplus\{i : T\}_{i \in I} \quad \text{select} \mid \&\{i : T\}_{i \in I} \quad \text{branch} \\
 \mid \text{end}
 \end{array}$$

Session type duality (\bar{S}) is defined as usual; note that only the continuations, and not the messages, of send and receive types are dualized.

$$\overline{!T.S} = ?T.\bar{S} \quad \overline{?T.S} = !T.\bar{S} \quad \overline{\oplus\{i : S_i\}_{i \in I}} = \&\{i : \bar{S}_i\}_{i \in I} \quad \overline{\&\{i : S_i\}_{i \in I}} = \oplus\{i : \bar{S}_i\}_{i \in I} \quad \overline{\text{end}} = \text{end}$$

The type system for LAST* has three layers: typing for terms, for buffers, and for configurations. Typing for terms uses judgments of the form

$$\Gamma \vdash_M M : T$$

which decrees that M has a behavior described by T using the typing context Γ , which is defined as a list of variable-type assignments $x : T$.

Figure 6.4 (top) gives the typing rules for terms. Rules often combine typing contexts Γ and Δ to form Γ, Δ ; this implicitly assumes that the domains of Γ and Δ are disjoint. We briefly comment on them:

- Rules [TYP-VAR], [TYP-ABS], [TYP-APP], [TYP-UNIT], [TYP-PAIR], and [TYP-SPLIT] are standard typing rules for functional terms.
- Rule [TYP-NEW] types the **new** construct as a pair of dual session types.
- Rule [TYP-SPAWN] takes a term M of type $\mathbf{1}$ and a term N of type T to type the **spawn** construct as T ; as we will see in the typing of configurations, child threads must be typed $\mathbf{1}$, which explains the type of M .
- Rule [TYP-END] allows weakening typing contexts with **end**-typed variables, as closed sessions are not used.
- Rule [TYP-SEND] takes a term M of type T and a term N of type $!T.S$ to type a **send** of M along N as the continuation type S . Dually, Rule [TYP-RECV] takes a term M of type $?T.S$ to type a **recv** along M as a pair of the message's payload type and continuation $T \times S$.
- Rule [TYP-SEL] takes a term M of type $\oplus\{i : S_i\}_{i \in I}$ to type the selection of some $j \in I$ along M as the continuation S_j . Rule [TYP-CASE] takes a term M of type $\&\{i : S_i\}_{i \in I}$ and for every $i \in I$ a term N_i typed $S_i \multimap U$ (i.e., a function from the label i 's continuation type S_i to some common but arbitrary type U) to type a **case** along M as U .

$$\begin{array}{c}
\text{[TYP-VAR]} \\
\frac{}{x : T \vdash_M x : T} \\
\\
\text{[TYP-ABS]} \\
\frac{\Gamma, x : T \vdash_M M : U}{\Gamma \vdash_M \lambda x. M : T \multimap U} \\
\\
\text{[TYP-APP]} \\
\frac{\Gamma \vdash_M M : T \multimap U \quad \Delta \vdash_M N : T}{\Gamma, \Delta \vdash_M M N : U} \\
\\
\text{[TYP-UNIT]} \\
\frac{}{\emptyset \vdash_M () : \mathbf{1}} \\
\\
\text{[TYP-PAIR]} \\
\frac{\Gamma \vdash_M M : T \quad \Delta \vdash_M N : U}{\Gamma, \Delta \vdash_M (M, N) : T \times U} \\
\\
\text{[TYP-SPLIT]} \\
\frac{\Gamma \vdash_M M : T \times T' \quad \Delta, x : T, y : T' \vdash_M N : U}{\Gamma, \Delta \vdash_M \text{let } (x, y) = M \text{ in } N : U} \\
\\
\text{[TYP-NEW]} \\
\frac{}{\emptyset \vdash_M \text{new} : S \times \bar{S}} \\
\\
\text{[TYP-SPAWN]} \\
\frac{\Gamma \vdash_M M : \mathbf{1} \quad \Delta \vdash_M N : T}{\Gamma, \Delta \vdash_M \text{spawn } M ; N : T} \\
\\
\text{[TYP-END]} \\
\frac{\Gamma \vdash_M M : T}{\Gamma, x : \text{end} \vdash_M M : T} \\
\\
\text{[TYP-SEND]} \\
\frac{\Gamma \vdash_M M : T \quad \Delta \vdash_M N : !T.S}{\Gamma, \Delta \vdash_M \text{send } M N : S} \\
\\
\text{[TYP-RECV]} \\
\frac{\Gamma \vdash_M M : ?T.S}{\Gamma \vdash_M \text{recv } M : T \times S} \\
\\
\text{[TYP-SEL]} \\
\frac{\Gamma \vdash_M M : \oplus \{i : S_i\}_{i \in I} \quad j \in I}{\Gamma \vdash_M \text{select } j M : S_j} \\
\\
\text{[TYP-CASE]} \\
\frac{\Gamma \vdash_M M : \& \{i : S_i\}_{i \in I} \quad \forall i \in I. \Delta \vdash_M N_i : S_i \multimap U}{\Gamma, \Delta \vdash_M \text{case } M \text{ of } \{i : N_i\}_{i \in I} : U} \\
\\
\text{[TYP-BUF]} \\
\frac{}{\emptyset \vdash_B [c] : S' > S'} \\
\\
\text{[TYP-BUF-SEND]} \\
\frac{\Gamma \vdash_M M : T \quad \Delta \vdash_B [\vec{m}] : S' > S}{\Gamma, \Delta \vdash_B [\vec{m}, M] : S' > !T.S} \\
\\
\text{[TYP-BUF-SEL]} \\
\frac{\Gamma \vdash_B [\vec{m}] : S' > S_j \quad j \in I}{\Gamma \vdash_B [\vec{m}, j] : S' > \oplus \{i : S_i\}_{i \in I}} \\
\\
\text{[TYP-MAIN]} \\
\frac{\Gamma \vdash_M M : \hat{T}}{\Gamma \vdash_C \blacklozenge M : \hat{T}} \\
\\
\text{[TYP-CHILD]} \\
\frac{\Gamma \vdash_M M : \mathbf{1}}{\Gamma \vdash_C \blacklozenge M : \mathbf{1}} \\
\\
\text{[TYP-PAR]} \\
\frac{\Gamma \vdash_C^{\phi_1} C : T_1 \quad \Delta \vdash_C^{\phi_2} D : T_2 \quad \{T_1, T_2\} \setminus \{T\} = \{\mathbf{1}\}}{\Gamma, \Delta \vdash_C^{\phi_1 + \phi_2} C \parallel D : T} \\
\\
\text{[TYP-RES]} \\
\frac{\Gamma \vdash_B [\vec{m}] : S' > S \quad \Delta, x : S' \vdash_C^\phi C : T \quad \Gamma', y : \bar{S} = \Gamma, \Delta}{\Gamma' \vdash_C^\phi (\mathbf{v}x[\vec{m}]y)C : T}
\end{array}$$

Figure 6.4 | LAST* typing rules for terms (top), buffers (center), and configurations (bottom).

Example 6.3.3. To illustrate the typing rules, let us derive the typing of term $\text{Son}_{s', m'}$ from Section 6.2. As in Example 6.3.2, we omit the `close` construct. To type the sugared terms $\text{let } x = M \text{ in } N$ we use a sugared Rule [TYP-LET] derivable from Rules [TYP-ABS] and [TYP-APP]. We consider **Str** (string), **B** (book), and **P** (payment) to be primitive non-linear types that can

be weakened/contracted at will and are self-dual. Below, $S = !P.?B.end$ and $S' = ?B.end$.

$$\begin{array}{c}
 \frac{\frac{\frac{}{m'_1 : ?B.end \vdash_M m'_1 : ?B.end} [\text{TYP-VAR}]}{m'_1 : ?B.end \vdash_M \text{recv } m'_1 : \text{Book} \times \text{end}} [\text{TYP-RECV}]}{m'_1 : ?B.end \vdash_M \text{let } (book, m'_2) = \text{recv } m'_1 \text{ in } book : B} [\text{TYP-SPLIT}]}{\frac{\frac{\frac{}{book : B \vdash_M book : B} [\text{TYP-VAR}]}{book : B, m'_2 : \text{end} \vdash_M book : B} [\text{TYP-END}]}{m'_1 : ?B.end \vdash_M \text{let } (book, m'_2) = \text{recv } m'_1 \text{ in } book : B} [\text{TYP-SPLIT}]}{m'_1 : ?B.end \vdash_M \text{let } (book, m'_2) = \text{recv } m'_1 \text{ in } book : B} (6.1)} \\
 \\
 \frac{\frac{\frac{}{s'_2 : S \vdash_M s'_2 : S} [\text{TYP-VAR}]}{s'_2 : S, m' : !S.?B.end \vdash_M \text{send } s'_2 \text{ } m' : ?B.end} [\text{TYP-SEND}]}{s'_2 : S, m' : !S.?B.end \vdash_M \text{let } m'_1 = \text{send } s'_2 \text{ } m' \text{ in } \dots : B} [\text{TYP-LET}]}{\frac{\frac{}{s' : ?Str.\{\text{buy} : S, \text{blurb} : S'\}} \vdash_M \text{Son}_{s', m'} : B} \dots} {s' : ?Str.\{\text{buy} : S, \text{blurb} : S'\}, m' : !S.?B.end \vdash_M \text{Son}_{s', m'} : B} (6.1)}
 \end{array}$$

Similarly, the typings of the shop and the mother are as follows:

$$\begin{array}{c}
 s : ?Str.\{\text{buy} : \bar{S}, \text{blurb} : \bar{S}'\} \vdash_M \text{Shop}_s : \mathbf{1} \\
 m : ?S.!B.end \vdash_M \text{Mother}_m : \mathbf{1}
 \end{array}$$

As such, the types of s, s' and m, m' are pairwise dual. Hence, the entire system is typed simply

$$\emptyset \vdash_M \text{Sys} : B. \quad \nabla$$

The typing for buffered channels uses judgments of the form

$$\Gamma \vdash_B [\bar{m}] : S' > S$$

The difference between S' and S is determined by the messages in the buffer \bar{m} : S denotes a sequence of sends and selections corresponding to the values and labels in \bar{m} , after which the type continues as S' . Thus, S denotes the type of a buffered channel's output endpoint before it sent the messages in \bar{m} , and S' denotes this endpoint's current type. This way, \bar{S} signifies the type of the buffered channel's input endpoint, corresponding to a sequence of receives and offers corresponding to the values and labels in \bar{m} .

Figure 6.4 (center) gives the three typing rules for buffers. The typing context Γ is used in the typing of the values in the buffer. Rule [TYP-BUF] types an empty buffer; as such, $S' = S$. Rule [TYP-BUF-SEND] takes a value v of type T and a buffer typed $S' > S$ to insert v at the start of the buffer now typed $S' > !T.S$. Rule [TYP-BUF-SEL] takes a buffer typed $S' > S_j$ (for some $j \in I$) to insert j at the start of the buffer, now typed as $S' > \{\text{!}i : S_i\}_{i \in I}$.

Typing for configurations uses judgments of the form

$$\Gamma \vdash_C^\phi C : T$$

where the marker ϕ indicates whether C contains the main thread ($\phi = \blacklozenge$) or only child threads ($\phi = \diamond$). When composing configurations marked ϕ_1 and ϕ_2 , we compute a new marker $\phi_1 + \phi_2$, as follows:

$$\blacklozenge + \diamond \triangleq \blacklozenge + \blacklozenge \triangleq \blacklozenge \quad \diamond + \diamond \triangleq \diamond \quad (\blacklozenge + \blacklozenge \text{ is undefined})$$

Figure 6.4 (bottom) gives the typing rules for configurations. Rule [TYP-MAIN] takes a term of non-session type (denoted \hat{T}) and turns it into a main thread. Rule [TYP-CHILD] takes a term of type $\mathbf{1}$ and turns it into a child thread. Rule [TYP-PAR] composes two configurations typed T_1 and T_2 in parallel; the rule requires one of the configurations to be typed $\mathbf{1}$ and uses the other configuration's type to type the composition. Note that if both configurations contain a main thread, the sum of their markers is undefined, and the rule cannot be applied. Rule [TYP-RES] types a configuration under a buffered channel with output endpoint x and input endpoint y . The rule uses typing for buffers to type the buffer $S' > S$. As such, the configuration should use x of type S' . Since S is the type of x before it sent the messages already in the buffer, y should be of type \bar{S} . Note that y may be used in the configuration, but may also appear in a message in the buffer.

6.3.3. APCP: A SUMMARY

We briefly summarize the session-typed process calculus APCP (Asynchronous Priority-based Classical Processes). We introduce its syntax, semantics, and type system. APCP supports tail-recursion, but since LAST^* does not we omit it. We also summarize results: type preservation (Theorem 6.3.13) and deadlock-freedom (Theorem 6.3.15). Chapter 3 discusses all details of APCP.

6

Syntax. We write $a, b, c, \dots, x, y, z, \dots$ to denote (channel) *names* (also known as *names*); by convention we use the early letters of the alphabet for the objects of output-like prefixes. Also, we write $\tilde{x}, \tilde{y}, \tilde{z}, \dots$ to denote sequences of names. In APCP, communication is *asynchronous* (cf. [HT91; HT92; Bou92]) and *dyadic*: each communication involves the transmission of a pair of names, a message name and a continuation name. With a slight abuse of notation, we sometimes write $x_i \in \tilde{x}$ to refer to a specific element in the sequence \tilde{x} . Also, we write i, j, k, \dots to denote *labels* for choices and I, J, K, \dots to denote sets of labels. We write P, Q, \dots to denote processes.

Definition 6.3.4 (APCP Syntax). *The syntax of APCP processes is as follows:*

$P, Q ::= x[a, b]$	<i>send</i>	$x(y, z); P$	<i>receive</i>
$x[b] < \ell$	<i>selection</i>	$x(z) \triangleright \{i : P\}_{i \in I}$	<i>branch</i>
$(\nu xy)P$	<i>restriction</i>	$P \mid Q$	<i>parallel</i>
$\mathbf{0}$	<i>inaction</i>	$[x \leftrightarrow y]$	<i>forwarder</i>

The send $x[a, b]$ sends along x a message name a and a continuation name b . The receive $x(y, z); P$ blocks until on x a message and continuation name are received (referred to in P as the placeholders y and z , respectively), binding y and z in P . The selection $x[b] < i$ sends along x a label i and a continuation name b . The branch $x(z) \triangleright \{i : P_i\}_{i \in I}$ blocks until it receives on x a label $i \in I$ and a continuation name (referred to in P_i as the placeholder z), binding z in each P_i . In the rest of this chapter, we refer to sends, receives, selections, and branches—including their continuations, if any—as *prefixes*. We refer to sends and selections collectively as *outputs*, and to receives and branches as *inputs*.

Restriction $(\mathbf{v}xy)P$ binds x and y in P , thus declaring them as the two names of a channel and enabling communication, as in [Vas12]. The process $P \mid Q$ denotes the parallel composition of P and Q . The process $\mathbf{0}$ denotes inaction. The forwarder $[x \leftrightarrow y]$ is a primitive copycat process that links together x and y . We say a forwarder $[x \leftrightarrow y]$ in P is *independent* if P does not bind x and y together through restriction (and *dependent* if it does).

Names are free unless otherwise stated (i.e., unless they are bound somehow). We write $\text{fn}(P)$ for the sets of free names of P , and $\text{bn}(P)$ for the set of bound names of P . Also, we write $P\{x/y\}$ to denote the capture-avoiding substitution of the free occurrences of y in P for x . We write sequences of substitutions $P\{x_1/y_1\} \dots \{x_n/y_n\}$ as $P\{x_1/y_1, \dots, x_n/y_n\}$.

Notation 6.3.5 (Derivable Bound Communication). *We use the following syntactic sugar:*

$$\begin{aligned} \bar{x}[y] \cdot P &:= (\mathbf{v}ya)(\mathbf{v}zb)(x[a, b] \mid P\{z/x\}) & \bar{x} \triangleleft \ell \cdot P &:= (\mathbf{v}zb)(x[b] \triangleleft \ell \mid P\{z/x\}) \\ x(y); P &:= x(y, z); P\{z/x\} & x \triangleright \{i : P_i\}_{i \in I} &:= x(z) \triangleright \{i : P_i\{z/x\}\}_{i \in I} \end{aligned}$$

Operational semantics. We define a reduction relation for processes ($P \rightarrow Q$) that formalizes how complementary outputs/inputs on connected names may synchronize. As usual for π -calculi, reduction relies on *structural congruence* ($P \equiv Q$), which relates processes with minor syntactic differences.

Definition 6.3.6 (Structural Congruence (\equiv) for APCP). *Structural congruence for APCP, denoted $P \equiv Q$, is the smallest congruence on the syntax of processes satisfying the following axioms:*

$$\begin{array}{c} \frac{[\text{CONG-ALPHA}]}{P \equiv_{\alpha} Q} \quad \frac{[\text{CONG-PAR-UNIT}]}{P \mid \mathbf{0} \equiv P} \quad \frac{[\text{CONG-PAR-COMM}]}{P \mid Q \equiv Q \mid P} \quad \frac{[\text{CONG-PAR-ASSOC}]}{P \mid (Q \mid R) \equiv (P \mid Q) \mid R} \\ \\ \frac{[\text{CONG-SCOPE}]}{P \mid (\mathbf{v}xy)Q \equiv (\mathbf{v}xy)(P \mid Q)} \quad \frac{[\text{CONG-RES-COMM}]}{(\mathbf{v}xy)(\mathbf{v}zw)P \equiv (\mathbf{v}zw)(\mathbf{v}xy)P} \quad \frac{[\text{CONG-RES-SYMM}]}{(\mathbf{v}xy)P \equiv (\mathbf{v}yx)P} \\ \\ \frac{[\text{CONG-RES-INACT}]}{(\mathbf{v}xy)\mathbf{0} \equiv \mathbf{0}} \quad \frac{[\text{CONG-FWD-SYMM}]}{[x \leftrightarrow y] \equiv [y \leftrightarrow x]} \quad \frac{[\text{CONG-RES-FWD}]}{(\mathbf{v}xy)[x \leftrightarrow y] \equiv \mathbf{0}} \end{array}$$

Structural congruence defines the following properties for processes. Processes are equivalent up to α -equivalence (Rule [CONG-ALPHA]). Parallel composition is associative (Rule [CONG-PAR-ASSOC]) and commutative (Rule [CONG-PAR-COMM]), with unit $\mathbf{0}$ (Rule [CONG-PAR-UNIT]). A parallel process may be moved into or out of a restriction as long as the bound channels do not occur free in the moved process (Rule [CONG-SCOPE]): this is *scope inclusion* and *scope extrusion*, respectively. Restrictions on inactive processes may be dropped (Rule [CONG-RES-INACT]), and the order of names in restrictions and of consecutive restrictions does not matter (Rules [CONG-RES-SYMM] and [CONG-RES-COMM], respectively). Forwarders are symmetric (Rule [CONG-FWD-SYMM]), and equivalent to inaction if both names are bound together through restriction (Rule [CONG-RES-FWD]). As we will see next, the semantics of APCP is closed under structural congruence.

We now define the reduction relation $P \rightarrow Q$.

Definition 6.3.7 (Reduction (\rightarrow) for ACP). *Reduction for ACP is a relation between processes, denoted $P \rightarrow Q$. It is defined by the following rules:*

$$\begin{array}{c}
\frac{[\text{RED-SEND-RECV}]}{(\mathbf{v}xy)(x[a, b] \mid y(z, y'); Q) \rightarrow Q\{a/z, b/y'\}} \\
\\
\frac{[\text{RED-SEL-BRA}]}{(\mathbf{v}xy)(x[b] \triangleleft j \mid y(y') \triangleright \{i : Q_i\}_{i \in I}) \rightarrow Q_j\{b/y'\}} \quad \frac{[\text{RED-FWD}]}{(\mathbf{v}xy)([x \leftrightarrow z] \mid P) \rightarrow P\{z/y\}} \\
\\
\frac{[\text{RED-CONG}]}{P \equiv P' \quad P' \rightarrow Q' \quad Q' \equiv Q}{P \rightarrow Q} \quad \frac{[\text{RED-RES}]}{(\mathbf{v}xy)P \rightarrow (\mathbf{v}xy)Q} \quad \frac{[\text{RED-PAR}]}{P \mid R \rightarrow Q \mid R}
\end{array}$$

We write \rightarrow^* for the reflexive, transitive closure of \rightarrow .

Rule [RED-SEND-RECV] synchronizes a send and a receive on connected names and substitutes the message and continuation names. Rule [RED-SEL-BRA] synchronizes a selection and a branch: the received label determines the continuation process, substituting the continuation name appropriately. Rule [RED-FWD] implements the forwarder as a substitution. Rules [RED-CONG], [RED-RES], and [RED-PAR] close reduction under structural congruence, restriction, and parallel composition, respectively.

6

Type system. ACP types processes by assigning binary session types to names. We write \circ, π, ρ, \dots to denote priorities, and ω to denote the ultimate priority that is greater than all other priorities and cannot be increased further. That is, for every $\circ \in \mathbb{N}$, we have $\omega > \circ$ and $\omega + \circ = \omega$.

Definition 6.3.8 (Session Types for ACP). *The following grammar defines the syntax of session types A, B . Let $\circ \in \mathbb{N}$.*

$$A, B ::= A \otimes^\circ B \mid A \wp^\circ B \mid \oplus^\circ \{i : A_i\}_{i \in I} \mid \&^\circ \{i : A_i\}_{i \in I} \mid \bullet$$

A name of type $A \otimes^\circ B$ (resp. $A \wp^\circ B$) first sends (resp. receives) a name of type A and then behaves as B . A name of type $\oplus^\circ \{i : A_i\}_{i \in I}$ selects a label $i \in I$ and then behaves as A_i . A name of type $\&^\circ \{i : A_i\}_{i \in I}$ offers a choice: after receiving a label $i \in I$, the name behaves as A_i . A name of type \bullet is closed; it does not require a priority, as closed names do not exhibit behavior and thus are non-blocking.

Definition 6.3.9 (Duality). *The dual of session type A , denoted \bar{A} , is defined inductively as follows:*

$$\begin{array}{lcl} \overline{A \otimes B} \triangleq \bar{A} \wp^\circ \bar{B} & \overline{\oplus^\circ \{i : A_i\}_{i \in I}} \triangleq \&^\circ \{i : \bar{A}_i\}_{i \in I} & \bar{\cdot} \triangleq \bullet \\ \overline{A \wp^\circ B} \triangleq \bar{A} \otimes \bar{B} & \overline{\&^\circ \{i : A_i\}_{i \in I}} \triangleq \oplus^\circ \{i : \bar{A}_i\}_{i \in I} & \end{array}$$

The priority of a type is determined by the priority of the type's outermost connective:

Definition 6.3.10 (Priorities). *For session type A , $\text{pr}(A)$ denotes its priority:*

$$\begin{array}{l} \text{pr}(A \otimes B) \triangleq \text{pr}(A \wp^\circ B) \triangleq \circ \qquad \text{pr}(\bullet) \triangleq \omega \\ \text{pr}(\oplus^\circ \{i : A_i\}_{i \in I}) \triangleq \text{pr}(\&^\circ \{i : A_i\}_{i \in I}) \triangleq \circ \end{array}$$

The typing rules of APCP ensure that communications with lower priority are not blocked by those with higher priority (cf. Dardha and Gay [DG18]). To this end, they enforce the following laws:

1. Sends and selections with priority \circ must have continuations/payloads with priority strictly larger than \circ ;
2. A communication with priority \circ must be prefixed only by receives and branches with priority strictly smaller than \circ ;
3. Dual communications leading to a synchronization must have equal priorities (cf. Definition 6.3.9).

Judgments are of the form $\vdash P \blacktriangleright \Gamma$, where:

- P is a process;
- Γ is a context that assigns types to channels $(x : A)$ and allows no weakening and contraction;

The empty context is written \emptyset . In writing $\Gamma, x : A$ we assume that $x \notin \text{dom}(\Gamma)$. We write $\text{pr}(\Gamma)$ to denote the least of the priorities of all types in Γ (Definition 6.3.10). An assignment $\bar{z} : \bar{A}$ means $z_1 : A_1, \dots, z_k : A_k$.

Figure 6.5 (top) gives the typing rules. We describe the typing rules from a *bottom-up* perspective. Rule [TYP-SEND] types a send; this rule does not have premises to provide a continuation process, leaving the free names to be bound to a continuation process using Rules [TYP-PAR] and [TYP-RES] (discussed hereafter). Similarly, Rule [TYP-SEL] types an unbound selection. Both rules require that the priority of the subject is lower than the priorities of both objects (continuation and payload)—this enforces Law 17. Rules [TYP-RECV] and [TYP-BRA] type receives and branches, respectively. In both cases, the used name's priority must be lower than the priorities of the other types in the continuation's typing—this enforces Law 18.

Rule [TYP-PAR] types the parallel composition of two processes that do not share assignments on the same names. Rule [TYP-RES] types a restriction, where the two restricted names must be of dual type and thus have matching priority—this enforces Law 19. Rule [TYP-END]

$$\begin{array}{c}
\frac{[\text{TYP-SEND}]}{\frac{\circ < \text{pr}(A), \text{pr}(B)}{\vdash x[y, z] \blacktriangleright x : A \otimes^\circ B, y : \overline{A}, z : \overline{B}}} \\
\frac{[\text{TYP-RECV}]}{\frac{\vdash P \blacktriangleright \Gamma, y : A, z : B \quad \circ < \text{pr}(\Gamma)}{\vdash x(y, z); P \blacktriangleright \Gamma, x : A \wp^\circ B}} \\
\frac{[\text{TYP-SEL}]}{\frac{j \in I \quad \circ < \text{pr}(A_j)}{\vdash x[z] \triangleleft j \blacktriangleright x : \oplus^\circ \{i : A_i\}_{i \in I}, z : \overline{A_j}}} \\
\frac{[\text{TYP-BRA}]}{\frac{\forall i \in I. \vdash P_i \blacktriangleright \Gamma, z : A_i \quad \circ < \text{pr}(\Gamma)}{\vdash x(z) \triangleright \{i : P_i\}_{i \in I} \blacktriangleright \Gamma, x : \&^\circ \{i : A_i\}_{i \in I}}} \\
\frac{[\text{TYP-END}]}{\frac{\vdash P \blacktriangleright \Gamma}{\vdash P \blacktriangleright \Gamma, x : \bullet}} \quad \frac{[\text{TYP-PAR}]}{\frac{\vdash P \blacktriangleright \Gamma \quad \vdash Q \blacktriangleright \Delta}{\vdash P | Q \blacktriangleright \Gamma, \Delta}} \quad \frac{[\text{TYP-RES}]}{\frac{\vdash P \blacktriangleright \Gamma, x : A, y : \overline{A}}{\vdash (\mathbf{v}xy)P \blacktriangleright \Gamma}} \quad \frac{[\text{TYP-INACT}]}{\frac{}{\vdash \mathbf{0} \blacktriangleright \emptyset}} \\
\frac{[\text{TYP-FWD}]}{\frac{}{\vdash [x \leftrightarrow y] \blacktriangleright x : \overline{A}, y : A}}
\end{array}$$

$$\begin{array}{c}
\frac{[\text{TYP-SEND}\star]}{\frac{\vdash P \blacktriangleright \Gamma, y : A, x : B \quad \circ < \text{pr}(A), \text{pr}(B)}{\vdash \overline{x}[y] \cdot P \blacktriangleright \Gamma, x : A \otimes^\circ B}} \quad \frac{[\text{TYP-SEL}\star]}{\frac{\vdash P \blacktriangleright \Gamma, x : A_j \quad j \in I \quad \circ < \text{pr}(A_j)}{\vdash \overline{x} \triangleleft j \cdot P \blacktriangleright \Gamma, x : \oplus^\circ \{i : A_i\}_{i \in I}}}
\end{array}$$

6

Figure 6.5 | The typing rules of APCP (top) and derivable rules (bottom).

silently removes a closed name from the typing context. Rule [TYP-INACT] types an inactive process with no names. Rule [TYP-FWD] types forwarding between names of dual type—this also enforces Law 19.

Example 6.3.11. To illustrate the typing rules discussed so far, consider the following process P :

$$\begin{aligned}
P = & (\mathbf{v}zu) \left((\mathbf{v}xy) \left((\mathbf{v}ax') (x[v_1, a] | x'[v_2, b]) \right. \right. \\
& \quad \left. \left. | (\mathbf{v}cz') (z[v_3, c] | y(w_1, y'); y'(w_2, y''); Q) \right) \right. \\
& \quad \left. | u(w_3, u'); R \right)
\end{aligned}$$

We give the typing of the two consecutive sends on x :

$$\frac{\frac{\frac{\circ < \text{pr}(A_1), \pi}{\vdash x[v_1, a] \blacktriangleright x : \overline{A_1} \otimes^\circ \overline{A_2} \otimes^\pi B, \quad v_1 : \overline{A_1}, a : \overline{A_2} \otimes^\pi B} [\text{TYP-SEND}]}{\frac{\frac{\frac{\pi < \text{pr}(A_2), \text{pr}(B)}{\vdash x'[v_2, b] \blacktriangleright x' : \overline{A_2} \otimes^\pi B, \quad v_2 : \overline{A_2}, b : \overline{B}} [\text{TYP-SEND}]}{\vdash x[v_1, a] | x'[v_2, b] \blacktriangleright v_1 : \overline{A_1}, v_2 : \overline{A_2}, b : \overline{B}, x : \overline{A_1} \otimes^\circ \overline{A_2} \otimes^\pi B, \quad a : \overline{A_2} \otimes^\pi B, x' : \overline{A_2} \otimes^\pi B} [\text{TYP-PAR}]}{\vdash (\mathbf{v}ax') (x[v_1, a] | x'[v_2, b]) \blacktriangleright v_1 : \overline{A_1}, v_2 : \overline{A_2}, b : \overline{B}, x : \overline{A_1} \otimes^\circ \overline{A_2} \otimes^\pi B} [\text{TYP-RES}]}$$

As discussed before, this typing leaves the (free) names v_1 , v_2 , and b to be accounted for by the context.

Now let us derive the typing of the consecutive receives on y , i.e., of the subprocess $y(w_1, y'); y'(w_2, y''); Q$. Because x and y are dual names in P , the type of y should be dual to the type of x above:

$$\frac{\frac{\frac{\vdash Q \blacktriangleright \Gamma, w_1 : \overline{A_1}, w_2 : \overline{A_2}, y'' : \overline{B}}{\vdash y'(w_2, y''); Q \blacktriangleright \Gamma, w_1 : \overline{A_1}, y' : \overline{A_2} \wp^\pi \overline{B}} \text{ [TYP-RECV]}}{\vdash y(w_1, y'); y'(w_2, y''); Q \blacktriangleright \Gamma, y : \overline{A_1} \wp^\circ \overline{A_2} \wp^\pi \overline{B}} \circ < \text{pr}(\Gamma) \text{ [TYP-RECV]}}{\pi < \text{pr}(\Gamma, w_1 : \overline{A_1})} \nabla$$

These two derivations tell us that $\circ < \pi < \text{pr}(A_1), \text{pr}(A_2), \text{pr}(B), \text{pr}(\Gamma)$. This way, the type system ensures that none of the sessions in Q can be connected to sessions that block the sends on x, x' , which may leave the door open for a deadlock otherwise. In Section 6.4.3, Example 6.4.15 illustrates such a situation in the context of LAST^n and how the type system catches it. ∇

The binding of sends and selections to continuation processes (Notation 6.3.5) is derivable in APCP. Figure 6.5 (bottom) also includes an admissible Rule [TYP-LIFT] that lifts a process' priorities.

Theorem 6.3.12. *Rules [TYP-SEND*] and [TYP-SEL*] in Figure 6.5 (bottom) are derivable.*

Results. Well-typed processes satisfy protocol fidelity, communication safety, and deadlock-freedom. The former two of these properties follow from *type preservation*, which ensures that APCP's semantics preserves typing.

Theorem 6.3.13 (Type Preservation for APCP). *If $\vdash P \blacktriangleright \Gamma$ and $P \equiv Q$ or $P \rightarrow Q$, then $\vdash Q \blacktriangleright \Gamma$.*

The following notion of evaluation context will be useful in Section 6.4.2.

Definition 6.3.14 (Evaluation Context). *Evaluation contexts (\mathcal{E}) have the following grammar:*

$$\mathcal{E} ::= [\cdot] \mid \mathcal{E} \mid P \mid (\nu xy)\mathcal{E}$$

We write $\mathcal{E}[P]$ to denote the process obtained by replacing the hole $[\cdot]$ in \mathcal{E} by P .

Our deadlock-freedom result concerns processes typable under empty contexts (as in, e.g., Caires and Pfenning [CP10] and Dardha and Gay [DG18]).

Theorem 6.3.15 (Deadlock-freedom for APCP). *If $\vdash P \blacktriangleright \emptyset$, then either $P \equiv \mathbf{0}$ or $P \rightarrow Q$ for some Q .*

6.3.4. TOWARDS A FAITHFUL TRANSLATION OF LAST^* INTO APCP

As already discussed, we are interested in faithfully translating LAST^* into APCP. We first discuss what we mean precisely by 'faithful'. Then, we consider some existing translations of (variants of) the λ -calculus with call-by-value semantics into (variants of) the π -calculus; we briefly discuss their status with respect to our definition of faithfulness.

Faithfulness. We shall aim for correct translations in the sense of Gorla [Gor10], a well-established set of criteria whereby faithful translations should satisfy *operational correspondence*, a criterion that is divided into *completeness* and *soundness* properties. Intuitively, completeness says that the target language can do *enough* to represent the behavior of the source language, whereas soundness says that the target language does not do *too much*. Alternatively, one may see completeness and soundness as properties that ensure that reduction steps are *preserved* and *reflected* by the translation, respectively.

We formulate these requirements in the specific setting of LAST* and APCP, by considering a translation of configurations into processes, denoted ‘ $\llbracket \cdot \rrbracket z$ ’, where, as usual, z denotes a name on which the resulting process exhibits the behavior of the source term:

Completeness. If $C \rightarrow_c D$, then $\llbracket C \rrbracket z \rightarrow^* \llbracket D \rrbracket z$.

Soundness. If $\llbracket C \rrbracket z \rightarrow^* Q$, then there exists D such that $C \rightarrow_c^* D$ and $Q \rightarrow^* \llbracket D \rrbracket z$.

Existing Translations are not Sound. We are not aware of translations of λ -calculi with call-by-value semantics into the π -calculus that satisfy soundness as stated above. To illustrate the problem, let us consider the well-known translation by Milner [Mil90; Mil92]. This is a translation into a π -calculus with synchronous communication, while we seek a translation into APCP, which is asynchronous. This discrepancy is not crucial: the unsound reductions we will show next are not enabled by the asynchrony of APCP (i.e., they are also enabled in synchronous processes).

It actually suffices to consider Milner’s translation of variables and applications. By adapting this to APCP, we obtain the translations given next. Below, we write ‘ $_$ ’ to denote a fresh name of type \bullet ; when sending names denoted ‘ $_$ ’, we omit binders ‘ $(\mathbf{v}_)$ ’.

$$\begin{aligned} \llbracket x \rrbracket z &\triangleq (\mathbf{v}ab)(z[_, a] \mid b(_, c); x[_, c]) \\ \llbracket M N \rrbracket z &\triangleq (\mathbf{v}ab)(\mathbf{v}cd)(a(_, e); (\mathbf{v}fg)(e[_, f] \mid c(_, h); g[h, z]) \mid \llbracket M \rrbracket b \mid \llbracket N \rrbracket d) \end{aligned}$$

Consider the very simple term $x y$, which cannot reduce. Yet, its translation $\llbracket x y \rrbracket z$ does reduce, as shown next (each step underlines the send and receive that synchronize):

$$\begin{aligned} \llbracket x y \rrbracket z &= (\mathbf{v}a_1 b_1)(\mathbf{v}c_1 d_1)(\underline{a_1(_, e_1)}; (\mathbf{v}f_1 g_1)(e_1[_, f_1] \mid c_1(_, h_1); g_1[h_1, z]) \\ &\quad \mid (\mathbf{v}a_2 b_2)(\underline{b_1[_, a_2]} \mid b_2(_, c_2); x[_, c_2]) \\ &\quad \mid (\mathbf{v}a_3 b_3)(\underline{d_1[_, a_3]} \mid b_3(_, c_3); y[_, c_3])) \\ &\rightarrow (\mathbf{v}c_1 d_1)(\mathbf{v}a_2 b_2)((\mathbf{v}f_1 g_1)(\underline{a_2[_, f_1]} \mid c_1(_, h_1); g_1[h_1, z]) \\ &\quad \mid \underline{b_2(_, c_2)}; x[_, c_2] \\ &\quad \mid (\mathbf{v}a_3 b_3)(\underline{d_1[_, a_3]} \mid b_3(_, c_3); y[_, c_3])) \\ &\rightarrow (\mathbf{v}c_1 d_1)(\mathbf{v}f_1 g_1)(\underline{c_1(_, h_1)}; g_1[h_1, z] \\ &\quad \mid \underline{x[_, f_1]} \\ &\quad \mid (\mathbf{v}a_3 b_3)(\underline{d_1[_, a_3]} \mid b_3(_, c_3); y[_, c_3])) \\ &\rightarrow (\mathbf{v}f_1 g_1)(\mathbf{v}a_3 b_3)(g_1[a_3, z] \mid \underline{x[_, f_1]} \mid b_3(_, c_3); y[_, c_3]) \not\rightarrow \end{aligned}$$

It is clear that this final term, which cannot reduce any further, cannot be reconciled with any source LAST* term. Hence, the translation is unsound.

Besides Milner's, other translations of λ -calculi with call-by-value semantics into (variants of) the π -calculus have been proposed by Lindley and Morris' [LM15] (a precise formalization of Walder's [Wad12; Wad14]) and by Vasconcelos' [Vas00]. The most significant difference between them is how they translate variables: Milner uses sends; Lindley and Morris use forwarders; Vasconcelos uses substitutions. None of them satisfy soundness as defined above, although Vasconcelos' enjoys a weaker form of soundness up to barbed congruence.

By examining these three translations, we observe that the call-by-value semantics is overly contextual, in the sense that determining whether a subterm may reduce depends on the context. This way, e.g., Rule [RED-LAM] (Figure 6.1) only applies to abstractions applied to values. The semantic rules for the π -calculus are much less contextual, so translations require additional machinery to prevent unwanted reductions. We are not aware of translations of call-by-value λ -calculi into π that are sound, which in our view suggests that such a sound translation may not exist.

Based on this discussion, we conclude that the call-by-value semantics of LAST^{*} does not lend itself for a faithful representation in APCP. To address this issue, in the next section we will propose a variant of LAST with a call-by-name semantics. This variant, denoted LASTⁿ, will admit a faithful (i.e., sound and complete) translation into APCP.

6.4. LASTⁿ AND A FAITHFUL TRANSLATION INTO APCP

Here we present LASTⁿ, a call-by-name variant of LAST. Our presentation proceeds gradually, based on the presentation we gave for LAST^{*} (Section 6.3). We then give a typed translation of LASTⁿ into APCP, and prove that it is faithful as discussed in Section 6.3.4. Finally, we show how the translation can help us identify a fragment of deadlock-free LASTⁿ programs.

6

6.4.1. THE LANGUAGE OF LASTⁿ

To define LASTⁿ, we modify the semantics of LAST^{*}. We only need to change the definitions of reduction contexts and term reduction in Figure 6.1. The crux is that call-by-name semantics applies abstractions more eagerly, and not only when arguments are values. For the reader's convenience, Appendix E.1 contains a full, self-contained definition of the language and type system of LASTⁿ.

To be precise, term reduction changes Rules [RED-LAM] and [RED-PAIR] as follows:

$$\frac{[\text{RED-LAM}]}{(\lambda x.M) \underline{N} \rightarrow_{\mathbb{M}} M\{\underline{N}/x\}} \quad \frac{[\text{RED-PAIR}]}{\text{let } (x, y) = (\underline{N}_1, \underline{N}_2) \text{ in } M \rightarrow_{\mathbb{M}} M\{\underline{N}_1/x, \underline{N}_2/y\}}$$

Above, we underline modified parts: instead of requiring values, the rules allow arbitrary terms. Moreover, to enforce the eager application of these rules, we remove from the definition of reduction contexts the clauses $v \mathcal{R}$, (\mathcal{R}, M) , and (M, \mathcal{R}) . That is, LASTⁿ disallows terms in parameter positions to reduce.

Example 6.4.1. We consider the term from Example 6.3.1, now using the call-by-name semantics of LASTⁿ:

$$(\lambda x.x (\lambda y.y)) ((\lambda w.w) (\lambda z.z)) \rightarrow_{\mathbb{M}} ((\lambda w.w) (\lambda z.z)) (\lambda y.y) \rightarrow_{\mathbb{M}} (\lambda z.z) (\lambda y.y) \rightarrow_{\mathbb{M}} \lambda y.y$$

Notice that the function on x is applied *before* evaluating its parameter as in Example 6.3.1. ∇

As is to be expected, there are subtle differences between the semantics of LAST^n and APCP. In order to deal with these discrepancies, while enabling the desired completeness and soundness results, we enrich LAST^n with *explicit substitutions* and *closed sessions*.

Explicit substitutions. Term reductions [RED-LAM] and [RED-PAIR] substitute variables for terms, regardless of the position of these variables. To mimic this in APCP, we would have to be able to substitute the translations of variables for translations of terms. Although this is possible when those variables occur in reduction contexts, there is no mechanism for representing this in APCP when they occur in different contexts (where their translations are blocked by prefixes).

One way of dealing with this issue is to equate translations up to substitutions, using the so-called *substitution lifting* [TCP12]. Here, we opt for an alternative, more direct treatment based on *explicit substitutions* (see, e.g., [LM99]). Intuitively, explicit substitutions delay variable substitution until those variables occur in reduction contexts. To incorporate explicit substitutions, we proceed as follows:

- We add explicit substitutions to terms $M\{\!N/x\}$ and configurations $C\{\!N/x\}$. These are not meant to be used when writing programs, instead appearing and disappearing as programs reduce (runtime syntax). That is, they appear when abstractions are applied and pairs deconstructed:

$$\frac{[\text{RED-LAM}]}{(\lambda x.M) N \rightarrow_{\mathbb{M}} M\{\!N/x\}} \quad \frac{[\text{RED-PAIR}]}{\text{let } (x, y) = (N_1, N_2) \text{ in } M \rightarrow_{\mathbb{M}} M\{\!N_1/x, N_2/y\}}$$

Explicit substitutions disappear when they meet the substituted variable:

$$\frac{[\text{RED-SUBST}]}{x\{\!N/x\} \rightarrow_{\mathbb{M}} N}$$

- We add reduction contexts $\mathcal{R}\{\!N/x\}$ and configuration contexts $\mathcal{G}\{\!N/x\}$. We then define a structural congruence for terms, denoted $\equiv_{\mathbb{M}}$, with a single rule that enables extruding the scope of explicit substitutions across reduction contexts:

$$\frac{[\text{SC-SUB-EXT}]}{x \notin \text{fv}(\mathcal{R})} \frac{}{(\mathcal{R}[M])\{\!N/x\} \equiv_{\mathbb{M}} \mathcal{R}[M\{\!N/x\}]}$$

We close term reduction under this structural congruence:

$$\frac{[\text{RED-LIFT-SC}]}{M \equiv_{\mathbb{M}} M' \quad M' \rightarrow_{\mathbb{M}} N' \quad N' \equiv_{\mathbb{M}} N} \frac{}{M \rightarrow_{\mathbb{M}} N}$$

We also add rules to the structural congruence for configurations that lift explicit substitutions in terms and enable scope extrusion on the level of configurations, respectively:

$$\frac{[\text{SC-CONF-SUB}]}{\phi(M\{\!|N/x|\!\}) \equiv_{\text{C}} (\phi M)\{\!|N/x|\!\}} \qquad \frac{[\text{SC-CONF-SUB-EXT}]}{x \notin \text{fv}(\mathcal{G}) \quad \frac{}{(\mathcal{G}[C])\{\!|N/x|\!\} \equiv_{\text{C}} \mathcal{G}[C\{\!|N/x|\!\}]}}$$

- When moving terms between threads, we need to make sure that we do not affect variables that are bound by explicit substitutions. As such we define a specific form of thread context, denoted $\hat{\mathcal{F}}$, that disallows the hole to appear under explicit substitutions. Configuration reductions [RED-SPAWN], [RED-SEND], and [RED-RECV] (cf. Figure 6.2) then use these specific contexts.
- To type explicit substitutions, we add the following rules for terms and configurations:

$$\frac{[\text{TYP-SUB}]}{\Gamma, x : T \vdash_{\text{M}} M : U \quad \Delta \vdash_{\text{M}} N : T}{\Gamma, \Delta \vdash_{\text{M}} M\{\!|N/x|\!\} : U} \qquad \frac{[\text{TYP-CONF-SUB}]}{\Gamma, x : T \vdash_{\text{C}}^{\phi} C : U \quad \Delta \vdash_{\text{M}} N : T}{\Gamma, \Delta \vdash_{\text{C}}^{\phi} C\{\!|N/x|\!\} : U}$$

Example 6.4.2. We revisit Example 6.4.1, this time using explicit substitutions:

$$\begin{aligned} (\lambda x.x (\lambda y.y)) ((\lambda w.w) (\lambda z.z)) &\rightarrow_{\text{M}} (x (\lambda y.y)) \{\!|((\lambda w.w) (\lambda z.z))/x|\!\} \\ &\equiv_{\text{M}} (x \{\!|((\lambda w.w) (\lambda z.z))/x|\!\}) (\lambda y.y) \\ &\rightarrow_{\text{M}} ((\lambda w.w) (\lambda z.z)) (\lambda y.y) \\ &\rightarrow_{\text{M}} (w \{\!|(\lambda z.z)/w|\!\}) (\lambda y.y) \rightarrow_{\text{M}} (\lambda z.z) (\lambda y.y) \\ &\rightarrow_{\text{M}} z \{\!|(\lambda y.y)/z|\!\} \rightarrow_{\text{M}} \lambda y.y \end{aligned} \quad \nabla$$

Example 6.4.3 (The Bookshop Scenario in LASTⁿ). Recall the bookshop scenario introduced in Section 6.2, already illustrated by Example 6.3.2 for LAST^{*}. Although the end result is the same, the CbN semantics and explicit substitutions of LASTⁿ do change the behavior of the system (\blacklozenge Sys) compared to its behavior under LAST^{*}.

We start illustrating this behavior by reconsidering how the system starts by setting up channels; as shown in Figure 6.6 (top), not all explicit substitutions can be immediately resolved. At this point, the explicit substitutions on the main thread cannot be resolved, as neither of m', s' appears under a reduction context in $\text{Son}_{s', m'}$. We continue the example by examining the behavior of the son at this point, shown in Figure 6.6 (bottom). This chain of explicit substitutions cannot be resolved further: s'_2 does not appear under a reduction context. In fact, they will not be resolved until the son has delegated his (pending) access to z' to his mother, along with his pending messages in the form of explicit substitutions, as shown by the sequence leading to process Sys^2 in Figure 6.7.

Next, the mother's thread finally performs her son's two original outputs:

$$\text{Sys}^2 \rightarrow_{\text{C}}^3 (\mathbf{v}y'[\text{visa, buy, "Dune"}])y((\mathbf{v}z'[\epsilon]z)(\blacklozenge \text{let } (\text{book}, m'_2) = \text{recv } z' \text{ in } \dots \parallel \blacklozenge \text{let } x_1 = y' \text{ in } \dots \{\!|z/m_1|\!\}) \parallel \blacklozenge \text{Shop}_y)$$

$$\begin{aligned}
\diamond \text{Sys} &= \diamond \text{let } (s, s') = \text{new in} \dots \\
&\rightarrow_{\text{c}} (\mathbf{v}y[\epsilon]y') \diamond \text{let } (s, s') = (y, y') \text{ in} \dots \\
&\rightarrow_{\text{c}} (\mathbf{v}y[\epsilon]y') \diamond \text{spawnShop}_s; \dots \{\{y/s, y'/s'\}\} \\
&\equiv_{\text{c}} (\mathbf{v}y[\epsilon]y') (\{\{\diamond \text{spawnShop}_s; \dots \}\{y/s, y'/s'\}\}) \\
&\rightarrow_{\text{c}} (\mathbf{v}y[\epsilon]y') (\{\{\diamond \text{let } (m, m') = \text{new in} \dots \parallel \diamond \text{Shop}_s \}\{y/s, y'/s'\}\}) \\
&\equiv_{\text{c}} (\mathbf{v}y[\epsilon]y') (\{\{\diamond \text{let } (m, m') = \text{new in} \dots \\
&\quad \parallel \diamond \text{let } (\text{title}, s_1) = \text{recv } (s \{\{y/s\}\}) \text{ in} \dots \}\{y'/s'\}\}) \\
&\rightarrow_{\text{c}} (\mathbf{v}y[\epsilon]y') (\{\{\diamond \text{let } (m, m') = \text{new in} \dots \parallel \diamond \text{let } (\text{title}, s_1) = \text{recv } y \text{ in} \dots \}\{y'/s'\}\}) \\
&\rightarrow_{\text{c}}^2 (\mathbf{v}y[\epsilon]y') (\{\{\mathbf{v}z[\epsilon]z'\} (\{\{\diamond \text{spawnMother}_m; \text{Son}_{s', m'} \}\{z/m, z'/m', y'/s'\}\} \parallel \diamond \text{Shop}_y)\}\}) \\
&\rightarrow_{\text{c}} (\mathbf{v}y[\epsilon]y') (\{\{\mathbf{v}z[\epsilon]z'\} (\{\{\diamond \text{Son}_{s', m'} \}\{z'/m', y'/s'\}\} \parallel \diamond \text{Mother}_m \{\{z/m\}\}) \parallel \diamond \text{Shop}_y)\}\}) \\
&\equiv_{\text{c}} (\mathbf{v}y[\epsilon]y') (\{\{\mathbf{v}z[\epsilon]z'\} (\{\{\diamond \text{Son}_{s', m'} \}\{z'/m', y'/s'\}\} \\
&\quad \parallel \diamond \text{let } (x, m_1) = \text{recv } (m \{\{z/m\}\}) \text{ in} \dots \}\} \parallel \diamond \text{Shop}_y)\}\}) \\
&\rightarrow_{\text{c}} (\mathbf{v}y[\epsilon]y') (\{\{\mathbf{v}z[\epsilon]z'\} (\{\{\diamond \text{Son}_{s', m'} \}\{z'/m', y'/s'\}\} \\
&\quad \parallel \diamond \text{let } (x, m_1) = \text{recv } z \text{ in} \dots \}\} \parallel \diamond \text{Shop}_y)\}\}) \\
&= (\mathbf{v}y[\epsilon]y') (\{\{\mathbf{v}z[\epsilon]z'\} (\{\{\diamond \text{Son}_{s', m'} \}\{z'/m', y'/s'\}\} \parallel \diamond \text{Mother}_z)\} \parallel \diamond \text{Shop}_y)\} =: \text{Sys}^1
\end{aligned}$$

$$\begin{aligned}
&\text{Son}_{s', m'} \{\{z'/m', y'/s'\}\} \\
&= \text{let } s'_1 = \text{send "Dune" } s' \text{ in} \dots \{\{z'/m', y'/s'\}\} \\
&\rightarrow_{\text{M}} \text{let } s'_2 = \text{select buy } s'_1 \text{ in} \dots \{\{\text{send "Dune" } s'/s'_1, z'/m', y'/s'\}\} \\
&\rightarrow_{\text{M}} \text{let } m'_1 = \text{send } s'_2 (m' \{\{z'/m'\}\}) \text{ in} \dots \{\{\text{select buy } s'_1/s'_2, \text{send "Dune" } s'/s'_1, y'/s'\}\} \\
&\rightarrow_{\text{M}} \text{let } m'_1 = \text{send } s'_2 z' \text{ in} \dots \{\{\text{select buy } s'_1/s'_2, \text{send "Dune" } s'/s'_1, y'/s'\}\} \\
&\rightarrow_{\text{M}} \text{let } (\text{book}, m'_2) = \text{recv } (m'_1 \{\{\text{send } s'_2 z'/m'_1\}\}) \\
&\quad \text{in} \dots \{\{\text{select buy } s'_1/s'_2, \text{send "Dune" } s'/s'_1, y'/s'\}\} \\
&\rightarrow_{\text{M}} \text{let } (\text{book}, m'_2) = \text{recv } (\text{send } s'_2 z') \text{ in} \dots \{\{\text{select buy } s'_1/s'_2, \text{send "Dune" } s'/s'_1, y'/s'\}\} \\
&=: \text{Son}_{s', z'}^1
\end{aligned}$$

Figure 6.6 | Behavior of the bookshop scenario in LASTⁿ, part 1/2 (cf. Example 6.4.3).

$$\begin{aligned}
\text{Sys}^1 &\rightarrow_c^5 (\mathbf{v}y[\epsilon]y')((\mathbf{v}z[\epsilon]z')(\blacklozenge \text{Son}_{s',z'}^1 \parallel \blacklozenge \text{Mother}_z) \parallel \blacklozenge \text{Shop}_y) \\
&\equiv_c (\mathbf{v}y[\epsilon]y')((\mathbf{v}z'[\epsilon]z)(\blacklozenge \text{let } (book, m'_2) = \text{recv } (\text{send } s'_2 z') \text{ in } \dots \parallel \blacklozenge \text{Mother}_z) \\
&\quad \{\{\text{select buy } s'_1 / s'_2, \text{ send "Dune" } s' / s'_1, y' / s'\}\} \parallel \blacklozenge \text{Shop}_y) \\
&\rightarrow_c (\mathbf{v}y[\epsilon]y')((\mathbf{v}z'[s'_2]z)(\blacklozenge \text{let } (book, m'_2) = \text{recv } z' \text{ in } \dots \\
&\quad \parallel \blacklozenge \text{let } (x, m_1) = \text{recv } z \text{ in } \dots) \\
&\quad \{\{\text{select buy } s'_1 / s'_2, \text{ send "Dune" } s' / s'_1, y' / s'\}\} \parallel \blacklozenge \text{Shop}_y) \\
&\rightarrow_c (\mathbf{v}y[\epsilon]y')((\mathbf{v}z'[\epsilon]z)(\blacklozenge \text{let } (book, m'_2) = \text{recv } z' \text{ in } \dots \\
&\quad \parallel \blacklozenge \text{let } (x, m_1) = (s'_2, z) \text{ in } \dots) \\
&\quad \{\{\text{select buy } s'_1 / s'_2, \text{ send "Dune" } s' / s'_1, y' / s'\}\} \parallel \blacklozenge \text{Shop}_y) \\
&\rightarrow_c (\mathbf{v}y[\epsilon]y')((\mathbf{v}z'[\epsilon]z)(\blacklozenge \text{let } (book, m'_2) = \text{recv } z' \text{ in } \dots \\
&\quad \parallel \blacklozenge \text{let } x_1 = \text{send visa } (x \{\{s'_2 / x, \text{select buy } s'_1 / s'_2, \\
&\quad \quad \text{send "Dune" } s' / s'_1, y' / s'\}\}) \\
&\quad \text{in } \dots \{\{z / m_1\}\}) \parallel \blacklozenge \text{Shop}_y) \\
&\rightarrow_c (\mathbf{v}y[\epsilon]y')((\mathbf{v}z'[\epsilon]z)(\blacklozenge \text{let } (book, m'_2) = \text{recv } z' \text{ in } \dots \\
&\quad \parallel \blacklozenge \text{let } x_1 = \text{send visa } (s'_2 \{\{\text{select buy } s'_1 / s'_2, \\
&\quad \quad \text{send "Dune" } s' / s'_1, y' / s'\}\}) \\
&\quad \text{in } \dots \{\{z / m_1\}\}) \parallel \blacklozenge \text{Shop}_y) \\
&\rightarrow_c (\mathbf{v}y[\epsilon]y')((\mathbf{v}z'[\epsilon]z)(\blacklozenge \text{let } (book, m'_2) = \text{recv } z' \text{ in } \dots \\
&\quad \parallel \blacklozenge \text{let } x_1 = \text{send visa } (\text{select buy } (s'_1 \{\{\text{send "Dune" } s' / s'_1, \\
&\quad \quad \quad y' / s'\}\})) \\
&\quad \text{in } \dots \{\{z / m_1\}\}) \parallel \blacklozenge \text{Shop}_y) \\
&\rightarrow_c (\mathbf{v}y[\epsilon]y')((\mathbf{v}z'[\epsilon]z)(\blacklozenge \text{let } (book, m'_2) = \text{recv } z' \text{ in } \dots \\
&\quad \parallel \blacklozenge \text{let } x_1 = \text{send visa } (\text{select buy } (\text{send "Dune" } (s' \{\{y' / s'\}\}))) \\
&\quad \text{in } \dots \{\{z / m_1\}\}) \parallel \blacklozenge \text{Shop}_y) \\
&\rightarrow_c (\mathbf{v}y[\epsilon]y')((\mathbf{v}z'[\epsilon]z)(\blacklozenge \text{let } (book, m'_2) = \text{recv } z' \text{ in } \dots \\
&\quad \parallel \blacklozenge \text{let } x_1 = \text{send visa } (\text{select buy } (\text{send "Dune" } y')) \\
&\quad \text{in } \dots \{\{z / m_1\}\}) \parallel \blacklozenge \text{Shop}_y) =: \text{Sys}^2
\end{aligned}$$

Figure 6.7 | Behavior of the bookshop scenario in LASTⁿ, part 2/2 (cf. Example 6.4.3).

At this point, the system behaves roughly as in Example 6.3.2: there is no further session delegation (as we just witnessed between the son and the mother), so upcoming explicit substitutions can be resolved straightforwardly. ∇

Closed sessions. Both in LAST^n and APCP, closed sessions have no associated behavior. This entails some management on both sides to garbage-collect unused variables with type `end`. As a result, translating terms with variables requires two forms: one for regular variables, and another for variables typed `end`. Because such a translation can get burdensome, we opt to add a form of ‘semi-explicit’ closing to LAST^n . The idea is that when the type of a buffered channel’s endpoint is `end` that endpoint may be closed. Once both endpoints of a channel have been closed, the channel and its buffer can be garbage-collected. This treatment ensures relief from translating unused variables, in such a way that the translation of terms with variables comes in one intuitive form only. To formalize this idea, we proceed as follows:

- We add terms for endpoint closing $\text{close } M; N$ and a reduction context $\text{close } \mathcal{R}; N$, with behavior on the level of configurations defined by the following new reduction:

$$\frac{[\text{RED-CLOSE}]}{(\nu x[\vec{m}])y(\mathcal{F}[\text{close } x; M] \parallel C) \rightarrow_{\mathcal{C}} (\nu \square[\vec{m}])y(\mathcal{F}[M] \parallel C)}$$

Here, ‘ \square ’ is a special runtime endpoint variable that indicates that the endpoint has been closed and hence that the variable is not used anywhere inside the enclosed configuration. Then, buffered channels can be garbage-collected as follows:

$$\frac{[\text{RED-RES-NIL}]}{(\nu \square[\epsilon])\square C \rightarrow_{\mathcal{C}} C}$$

- We type the new session closing construct by replacing Rule [TYP-END] as follows:

$$\frac{[\text{TYP-CLOSE}]}{\frac{\Gamma \vdash_M M : \text{end} \quad \Delta \vdash_M N : T}{\Gamma, \Delta \vdash_M \text{close } M; N : T}}$$

- We add a new session type for endpoints that have been already closed. With a slight abuse of notation, we denote it as \square . We disallow using this type in the typing of terms, leaving it only to appear in the typing of buffered channels. To ensure that closed endpoint variables are not used in configurations, we add side-conditions to Rule [TYP-RES]: $x = \square$ if and only if $S' = \square$ and similarly for y . The following two new rules enable typing partially closed buffered channels:

$$\frac{[\text{TYP-BUF-END-L}]}{\emptyset \vdash_{\mathcal{B}} [\epsilon] : \text{end} > \square}$$

$$\frac{[\text{TYP-BUF-END-R}]}{\emptyset \vdash_{\mathcal{B}} [\epsilon] : \square > \text{end}}$$

Example 6.4.4. We illustrate the semi-explicit closing of sessions in LASTⁿ in the context of the bookstore scenario introduced in Section 6.2. Consider the system where all session interactions have taken place, and all three threads are ready to close their sessions:

$$\text{Sys} \rightarrow_{\mathbb{C}}^* (\mathbf{v}y[\epsilon]y')(\mathbf{v}z[\epsilon]z')(\blacklozenge \text{close } z'; \text{book}(\text{"Dune"}) \parallel \blacklozenge \text{close } z; \text{close } y') \parallel \blacklozenge \text{close } y =: \text{Sys}^c$$

The order in which endpoints are closed is unimportant; here, we execute the `close` primitives from left to right.

$$\begin{aligned} \text{Sys}^c &\equiv_{\mathbb{C}} (\mathbf{v}y[\epsilon]y')(\mathbf{v}z'[\epsilon]z)(\blacklozenge \text{close } z'; \text{book}(\text{"Dune"}) \parallel \blacklozenge \text{close } z; \text{close } y') \parallel \blacklozenge \text{close } y \\ &\rightarrow_{\mathbb{C}} \blacklozenge \text{book}(\text{"Dune"}) \parallel (\mathbf{v}y[\epsilon]y')(\mathbf{v}\square[\epsilon]z)\blacklozenge \text{close } z; \text{close } y' \parallel \blacklozenge \text{close } y \\ &\equiv_{\mathbb{C}} \blacklozenge \text{book}(\text{"Dune"}) \parallel (\mathbf{v}y[\epsilon]y')(\mathbf{v}z[\epsilon]\square)\blacklozenge \text{close } z; \text{close } y' \parallel \blacklozenge \text{close } y \\ &\rightarrow_{\mathbb{C}} \blacklozenge \text{book}(\text{"Dune"}) \parallel (\mathbf{v}y[\epsilon]y')(\mathbf{v}\square[\epsilon]\square)\blacklozenge \text{close } y' \parallel \blacklozenge \text{close } y \\ &\rightarrow_{\mathbb{C}} \blacklozenge \text{book}(\text{"Dune"}) \parallel (\mathbf{v}y[\epsilon]y')(\blacklozenge \text{close } y' \parallel \blacklozenge \text{close } y) \\ &\equiv_{\mathbb{C}} \blacklozenge \text{book}(\text{"Dune"}) \parallel (\mathbf{v}y'[\epsilon]y)(\blacklozenge \text{close } y' \parallel \blacklozenge \text{close } y) \\ &\rightarrow_{\mathbb{C}} \blacklozenge \text{book}(\text{"Dune"}) \parallel \blacklozenge () \parallel (\mathbf{v}\square[\epsilon]y)\blacklozenge \text{close } y \\ &\rightarrow_{\mathbb{C}} \blacklozenge \text{book}(\text{"Dune"}) \parallel (\mathbf{v}\square[\epsilon]y)\blacklozenge \text{close } y \\ &\equiv_{\mathbb{C}} \blacklozenge \text{book}(\text{"Dune"}) \parallel (\mathbf{v}y[\epsilon]\square)\blacklozenge \text{close } y \tag{*} \\ &\rightarrow_{\mathbb{C}} \blacklozenge \text{book}(\text{"Dune"}) \parallel (\mathbf{v}\square[\epsilon]\square)\blacklozenge () \\ &\rightarrow_{\mathbb{C}} \blacklozenge \text{book}(\text{"Dune"}) \parallel \blacklozenge () \\ &\rightarrow_{\mathbb{C}} \blacklozenge \text{book}(\text{"Dune"}) \end{aligned}$$

Additionally, we illustrate the typing of half-closed sessions on the configuration marked (*). Recall from Example 6.3.3 that we consider **B** (`book`) a primitive non-linear type that can be weakened/contracted at will and is self-dual. We have:

$$\begin{array}{c} \frac{}{y:\text{end} \vdash_{\mathbb{M}} y:\text{end}} \text{[TYP-VAR]} \quad \frac{}{\emptyset \vdash_{\mathbb{M}} () : \mathbf{I}} \text{[TYP-UNIT]} \\ \frac{}{y:\text{end} \vdash_{\mathbb{M}} \text{close } y; () : \mathbf{I}} \text{[TYP-CLOSE]} \\ \frac{}{y:\text{end} \vdash_{\mathbb{C}}^{\blacklozenge} \blacklozenge \text{close } y; () : \mathbf{I}} \text{[TYP-CHILD]} \quad \frac{}{\emptyset \vdash_{\mathbb{B}} [\epsilon] : \text{end} > \square} \text{[TYP-BUF-END-L]} \\ \frac{}{\emptyset \vdash_{\mathbb{C}}^{\blacklozenge} (\mathbf{v}y[\epsilon]\square)\blacklozenge \text{close } y; () : \mathbf{I}} \text{[TYP-RES]} \tag{6.2} \\ \frac{}{\emptyset \vdash_{\mathbb{M}} \text{book}(\text{"Dune"}) : \mathbf{B}} \text{[TYP-MAIN]} \\ \frac{}{\emptyset \vdash_{\mathbb{C}}^{\blacklozenge} \blacklozenge \text{book}(\text{"Dune"}) : \mathbf{B}} \text{[TYP-PAR]} \tag{6.2} \\ \frac{}{\emptyset \vdash_{\mathbb{C}}^{\blacklozenge} \blacklozenge \text{book}(\text{"Dune"}) \parallel (\mathbf{v}y[\epsilon]\square)\blacklozenge \text{close } y; () : \mathbf{B}} \text{[TYP-PAR]} \quad \nabla \end{array}$$

Type preservation LASTⁿ satisfies the expected correctness properties: protocol fidelity and communication safety. Both properties follow directly from *type preservation*.

Theorem 6.4.5 (Type Preservation for LASTⁿ). *Given $\Gamma \vdash_{\mathbb{C}}^{\phi} C : T$, if $C \equiv_{\mathbb{C}} D$ or $C \rightarrow_{\mathbb{C}} D$, then $\Gamma \vdash_{\mathbb{C}}^{\phi} D : T$.*

Proof. By proving subject congruence ($\equiv_{\mathbb{C}}$ preserves typing) and subject reduction ($\rightarrow_{\mathbb{C}}$ preserves typing) separately. In both cases, we first prove separately subject congruence and subject reduction on the term level ($\equiv_{\mathbb{M}}$ and $\rightarrow_{\mathbb{M}}$, respectively). These results follow by induction on the derivation of the structural congruence or reduction. Below we give a few interesting cases; Appendix E.2 contains detailed proofs.

- For $\equiv_{\mathbb{M}}$, the only interesting case is the only base case, i.e., Rule [SC-SUB-EXT]:

$$x \notin \text{fv}(\mathcal{R}) \implies (\mathcal{R}[M])\{N/x\} \equiv_{\mathbb{M}} \mathcal{R}[M\{N/x\}]$$

We apply induction on the structure of the reduction context \mathcal{R} . As an interesting, representative case, consider $\mathcal{R} = L\{\mathcal{R}'/y\}$. Assuming $x \notin \text{fv}(\mathcal{R})$, we have $x \notin \text{fv}(L) \cup \text{fv}(\mathcal{R}')$. We apply inversion of typing:

$$\frac{\frac{\Gamma, y : U \vdash_{\mathbb{M}} L : T \quad \Delta, x : U' \vdash_{\mathbb{M}} \mathcal{R}'[M] : U}{\Gamma, \Delta, x : U' \vdash_{\mathbb{M}} L\{\mathcal{R}'[M]\}/y : T} \text{[TYP-SUB]} \quad \Delta' \vdash_{\mathbb{M}} N : U'}{\Gamma, \Delta, \Delta' \vdash_{\mathbb{M}} (L\{\mathcal{R}'[M]\}/y)\{N/x\} : T} \text{[TYP-SUB]}$$

We can derive:

$$\frac{\Delta, x : U' \vdash_{\mathbb{M}} \mathcal{R}'[M] : U \quad \Delta' \vdash_{\mathbb{M}} N : U'}{\Delta, \Delta' \vdash_{\mathbb{M}} (\mathcal{R}'[M])\{N/x\} : U} \text{[TYP-SUB]}$$

Since $x \notin \text{fv}(\mathcal{R}')$, by Rule [SC-SUB-EXT], $(\mathcal{R}'[M])\{N/x\} \equiv_{\mathbb{M}} \mathcal{R}'[M\{N/x\}]$. Then, by the IH, $\Delta, \Delta' \vdash_{\mathbb{M}} \mathcal{R}'[M\{N/x\}] : U$. Hence, we can conclude the following:

$$\frac{\Gamma, y : U \vdash_{\mathbb{M}} L : T \quad \Delta, \Delta' \vdash_{\mathbb{M}} \mathcal{R}'[M\{N/x\}] : U}{\Gamma, \Delta, \Delta' \vdash_{\mathbb{M}} L\{\mathcal{R}'[M\{N/x\}]\}/y : T} \text{[TYP-SUB]}$$

It is straightforward to see that this reasoning works in opposite direction as well.

- For $\rightarrow_{\mathbb{M}}$, all cases are straightforward.
- For $\equiv_{\mathbb{C}}$, we detail the base case Rule [SC-RES-SWAP]: $(\mathbf{v}x[\epsilon]y)C \equiv_{\mathbb{C}} (\mathbf{v}y[\epsilon]x)C$.

The analysis depends on whether exactly one of x, y is \square or not. We discuss both cases.

- Exactly one of x, y is \square ; w.l.o.g., assume $x = \square$. We have the following:

$$\frac{\frac{\frac{}{\emptyset \vdash_{\mathbb{B}} [\epsilon] : \square > \text{end}} \text{[TYP-BUF-END-R]} \quad \Gamma, x : \text{end} \vdash_{\mathbb{C}}^{\phi} C : T}{\Gamma \vdash_{\mathbb{C}}^{\phi} (\mathbf{v}\square[\epsilon]y)C : T} \text{[TYP-RES]}}{\equiv_{\mathbb{C}} \frac{\frac{}{\emptyset \vdash_{\mathbb{B}} [\epsilon] : \text{end} > \square} \text{[TYP-BUF-END-L]} \quad \Gamma, x : \text{end} \vdash_{\mathbb{C}}^{\phi} C : T}{\Gamma \vdash_{\mathbb{C}}^{\phi} (\mathbf{v}y[\epsilon]\square)C : T} \text{[TYP-RES]}} \text{[TYP-RES]}$$

– Neither or both of x, y are \square . We have the following:

$$\frac{\frac{\overline{\emptyset \vdash_{\mathbf{B}} [e] : S' > S'}}{[TYP-BUF]} \quad \Gamma, x : S', y : \overline{S'} \vdash_{\mathbf{C}}^{\phi} C : T}{\Gamma \vdash_{\mathbf{C}}^{\phi} (\mathbf{v}x[e]y)C : T} [TYP-RES]}{\equiv_{\mathbf{C}}}$$

$$\frac{\overline{\emptyset \vdash_{\mathbf{B}} [e] : \overline{S'} > \overline{S'}} [TYP-BUF] \quad \Gamma, x : S', y : \overline{S'} \vdash_{\mathbf{C}}^{\phi} C : T}{\Gamma \vdash_{\mathbf{C}}^{\phi} (\mathbf{v}y[e]x)C : T} [TYP-RES]}$$

- For $\rightarrow_{\mathbf{C}}$, we detail the base case Rule [RED-SEND]: $(\mathbf{v}x[\overline{m}]y)(\hat{\mathcal{F}}[\text{send } Mx] \parallel C) \rightarrow_{\mathbf{C}} (\mathbf{v}x[M, \overline{m}]y)(\hat{\mathcal{F}}[x] \parallel C)$.

This case follows by induction on the structure of $\hat{\mathcal{F}}$. The inductive cases follow from the IH straightforwardly. The fact that the hole in $\hat{\mathcal{F}}$ does not occur under an explicit substitution guarantees that we can move M out of the context of $\hat{\mathcal{F}}$ and into the buffer. We consider the base case ($\hat{\mathcal{F}} = \phi \mathcal{R}$). By well-typedness, it must be that $\mathcal{R} = \mathcal{R}_1[\text{close } \mathcal{R}_2; M]$. We apply induction on the structures of $\mathcal{R}_1, \mathcal{R}_2$ and consider the base cases: $\mathcal{R}_1 = \mathcal{R}_2 = [\cdot]$. We apply inversion of typing, w.l.o.g. assuming that $\phi = \blacklozenge$ and $y \in \text{fv}(C)$:

$$\frac{\frac{\frac{\Delta_1 \vdash_{\mathbf{M}} M : T \quad \overline{x : !T.\text{end} \vdash_{\mathbf{M}} x : !T.\text{end}} [TYP-VAR]}{\Delta_1, x : !T.\text{end} \vdash_{\mathbf{M}} \text{send } Mx : \text{end}} [TYP-SEND]}{\Delta_1, \Delta_2, x : !T.\text{end} \vdash_{\mathbf{M}} \text{close}(\text{send } Mx); N : U} [TYP-CLOSE]}{\Delta_1, \Delta_2, x : !T.\text{end} \vdash_{\mathbf{C}}^{\blacklozenge} \blacklozenge(\text{close}(\text{send } Mx); N) : U} [TYP-MAIN]} \quad (6.3)$$

$$\frac{(6.3) \quad \Delta, y : \overline{S} \vdash_{\mathbf{C}}^{\blacklozenge} C : \mathbf{1}}{\Delta_1, \Delta_2, \Delta, x : !T.\text{end}, y : \overline{S} \vdash_{\mathbf{C}}^{\blacklozenge} \blacklozenge(\text{close}(\text{send } Mx); N) \parallel C : U} [TYP-PAR-R]} \quad (6.4)$$

$$\frac{\Gamma \vdash_{\mathbf{B}} [\overline{m}] : !T.\text{end} > S \quad (6.4)}{\Gamma, \Delta_1, \Delta_2, \Delta \vdash_{\mathbf{C}}^{\blacklozenge} (\mathbf{v}x[\overline{m}]y)(\blacklozenge(\text{close}(\text{send } Mx); N) \parallel C) : U} [TYP-RES]}$$

Note that the derivation of $\Gamma \vdash_{\mathbf{B}} [\overline{m}] : !T.\text{end} > S$ depends on the size of \overline{m} . By induction on the size of \overline{m} (IH₂), we derive $\Gamma, \Delta_1 \vdash_{\mathbf{B}} [M, \overline{m}] : \text{end} > S$:

– If \overline{m} is empty, it follows by inversion of typing that $\Gamma = \emptyset$ and $S = !T.\text{end}$:

$$\overline{\emptyset \vdash_{\mathbf{B}} [e] : !T.\text{end} > !T.\text{end}} [TYP-BUF]}$$

Then, we derive the following:

$$\frac{\frac{\Delta_1 \vdash_{\mathbf{M}} M : T \quad \overline{\emptyset \vdash_{\mathbf{B}} [e] : \text{end} > \text{end}} [TYP-BUF]}{\Delta_1 \vdash_{\mathbf{B}} [M] : \text{end} > !T.\text{end}} [TYP-BUF-SEND]}}$$

– If $\overline{m} = \overline{m}', L$, it follows by inversion of typing that $\Gamma = \Gamma', \Gamma''$ and $S = !T'.\text{end}'$:

$$\frac{\Gamma' \vdash_{\mathbf{M}} L : T' \quad \Gamma'' \vdash_{\mathbf{B}} [\overline{m}'] : !T.\text{end} > \text{end}'}{\Gamma', \Gamma'' \vdash_{\mathbf{B}} [\overline{m}', L] : !T.\text{end} > !T'.\text{end}'} [TYP-BUF-SEND]}$$

By IH₂, $\Gamma'', \Delta_1 \vdash_{\mathbf{B}} [M, \bar{m}'] : \text{end} > \text{end}'$, allowing us to derive the following:

$$\frac{\Gamma' \vdash_{\mathbf{M}} L : T' \quad \Gamma'', \Delta_1 \vdash_{\mathbf{B}} [M, \bar{m}'] : \text{end} > \text{end}'}{\Gamma', \Gamma'', \Delta_1 \vdash_{\mathbf{B}} [M, \bar{m}', L] : \text{end} > !T'.\text{end}'} \text{ [TYP-BUF-SEND]}$$

- If $\bar{m} = \bar{m}', j$, it follows by inversion of typing that there exist types S_i for each i in a set of labels I , where $j \in I$, such that $S = \oplus\{i : S_i\}_{i \in I}$:

$$\frac{\Gamma \vdash_{\mathbf{B}} [\bar{m}'] : !T.\text{end} > S_j}{\Gamma \vdash_{\mathbf{B}} [\bar{m}, j] : !T.\text{end} > \oplus\{i : S_i\}_{i \in I}} \text{ [TYP-BUF-SEL]}$$

By IH₂, $\Gamma, \Delta_1 \vdash_{\mathbf{B}} [M, \bar{m}'] : \text{end} > S_j$, so we derive the following:

$$\frac{\Gamma, \Delta_1 \vdash_{\mathbf{B}} [M, \bar{m}'] : \text{end} > S_j}{\Gamma, \Delta_1 \vdash_{\mathbf{B}} [M, \bar{m}', j] : \text{end} > \oplus\{i : S_i\}_{i \in I}} \text{ [TYP-BUF-SEL]}$$

Now, we can derive the typing of the structurally congruent configuration:

$$\frac{\frac{\frac{x : \text{end} \vdash_{\mathbf{M}} x : \text{end} \text{ [TYP-VAR]} \quad \Delta_2 \vdash_{\mathbf{M}} N : U \text{ [TYP-CLOSE]}}{\Delta_2, x : \text{end} \vdash_{\mathbf{M}} \text{close } x; N : U \text{ [TYP-MAIN]}}}{\Delta_2, x : \text{end} \vdash_{\mathbf{C}} \diamond(\text{close } x; N) : U} \text{ (6.5)}}{\Gamma, \Delta_1 \vdash_{\mathbf{B}} [M, \bar{m}] : \text{end} > S \quad \frac{\Lambda, y : \bar{S} \vdash_{\mathbf{C}} C : \mathbf{1} \text{ [TYP-PAR-R]}}{\Delta_2, \Lambda, x : \text{end}, y : \bar{S} \vdash_{\mathbf{C}} \diamond(\text{close } x; N) \parallel C : U \text{ [TYP-RES]}} \text{ (6.5)}}{\Gamma, \Delta_1, \Delta_2, \Lambda \vdash_{\mathbf{C}} (\mathbf{v}x[M, \bar{m}]y)(\diamond(\text{close } x; N) \parallel C) : U} \text{ (6.5)}$$

□

6.4.2. FAITHFULLY TRANSLATING LASTⁿ INTO APCP

We now define a typed translation from LASTⁿ into APCP. Then, we show that this translation is operationally complete and sound, in the sense of Section 6.3.4.

The translation: Key ideas. Before we define the translation, let us discuss its key idea, inspired by Milner’s translation of the *lazy* λ -calculus [Mil92]. The most important design decision is how to translate variables. Variables serve two purposes: (i) as placeholders for future substitutions and (ii) as an access point to buffered channels. As such, the translation uses variables as sends (i) to trigger explicit substitutions or (ii) to trigger interaction with a buffer. Another important design decision is the translation of buffers: the buffer’s types guide the translation to form a sequence of inputs/outputs that are explicitly forwarded (i.e., not using the forwarder process) between the buffer endpoints.

The translation: Types. Equipped with these ideas about translating variables and buffers, let us give a deeper insight into our translation by taking a look at how it turns functional and session types in LASTⁿ into session types in APCP.

Before moving on, note that LASTⁿ does not guarantee deadlock-freedom by typing. As such, there is no point in annotating types with priorities, as the priority requirements induced by typing translated processes may not always be satisfiable. We therefore use a special APCP typing judgment, denoted \vdash^* , which indicates well-typedness modulo priority annotations and requirements. We will recover priorities and deadlock-freedom in Section 6.4.3.

Definition 6.4.6 below introduces two forms of type translation: while we use $\llbracket - \rrbracket$ to translate the types of terms/configurations, we use $\langle - \rangle$ to translate the types of variables (remember that variables serve a special role, so a special translation should not be surprising). We write $\langle \Gamma \rangle$ to denote a component-wise translation, where each assignment $x : T$ translates to an assignment $x : \langle T \rangle$. As such, our *typed* translation takes, e.g., a typed term $\Gamma \vdash_M M : T$ and returns a typed process

$$\vdash^* \llbracket M \rrbracket z \blacktriangleright \langle \Gamma \rangle, z : \langle T \rangle.$$

Above, $\llbracket M \rrbracket z$ is the process that models the behavior of M on a fresh name z (defined next).

Let us now define the two forms of translation of types (that are mutually recursive):

Definition 6.4.6 (Translation of Types).

$$\begin{aligned} \langle T \rangle &\triangleq \bullet \otimes \overline{\llbracket T \rrbracket} \quad (\text{if } T \neq \square) \\ \llbracket T \times U \rrbracket &\triangleq \langle T \rangle \otimes \langle U \rangle & \llbracket T \multimap U \rrbracket &\triangleq \langle T \rangle \wp \langle U \rangle & \llbracket \mathbf{1} \rrbracket &\triangleq \bullet \\ \llbracket !T.S \rrbracket &\triangleq \bullet \otimes \langle T \rangle \wp \langle S \rangle & \llbracket \oplus\{i : S_i\}_{i \in I} \rrbracket &\triangleq \bullet \otimes \&\{i : \langle S_i \rangle\}_{i \in I} & \llbracket \text{end} \rrbracket &\triangleq \bullet \otimes \bullet \\ \llbracket ?T.S \rrbracket &\triangleq \overline{\langle T \rangle} \otimes \langle S \rangle & \llbracket \&\{i : S_i\}_{i \in I} \rrbracket &\triangleq \oplus\{i : \overline{\langle S_i \rangle}\}_{i \in I} & \llbracket \square \rrbracket &\triangleq \langle \square \rangle \triangleq \bullet \end{aligned}$$

Some intuitions follow:

- The translation $\langle - \rangle$ (row 1) clearly shows the translation of variables as sends.
- The translation $\llbracket - \rrbracket$ translates functional types straightforwardly (row 2): pairs send access to their components as variables, abstractions receive their parameter as a variable and then provide the return type, and units have no behavior.
- The translation of session types (rows 3 and 4) is more interesting: at a first glance they seem to be translated dually. This is because these are types that belong to buffered channel endpoints. As such, when a variable is typed $!T.S$ and we send a term on this variable, the translation sends something along the variable and thus the variable receives. Additionally, the translation of sends and selections have an extra send: this signifies a handshake between the variable and the buffer, indicating that both are ready to perform the actual send/selection.

Example 6.4.7. We illustrate the translation of types by means of an example. After giving the translation of the type $(T \times S) \multimap !T.S$, we break the resulting APCP type down and explain it in

terms of the associated behavior of a process translated from a term implementing the type.

$$\begin{aligned}
\llbracket (T \times S) \multimap !T.S \rrbracket &= (T \times S) \wp \llbracket !T.S \rrbracket \\
&= (\bullet \otimes \overline{\llbracket T \times S \rrbracket}) \wp \bullet \otimes (T) \wp \overline{\llbracket S \rrbracket} \\
&= (\bullet \otimes \overline{(T) \otimes (S)}) \wp \bullet \otimes (\bullet \otimes \overline{\llbracket T \rrbracket}) \wp \bullet \otimes \overline{\llbracket S \rrbracket} \\
&= (\bullet \otimes (T) \wp (S)) \wp \bullet \otimes (\bullet \otimes \overline{\llbracket T \rrbracket}) \wp \bullet \otimes \llbracket S \rrbracket \\
&= (\bullet \otimes (\bullet \otimes \overline{\llbracket T \rrbracket}) \wp \bullet \otimes \overline{\llbracket S \rrbracket}) \wp \bullet \otimes (\bullet \otimes \overline{\llbracket T \rrbracket}) \wp \bullet \otimes \llbracket S \rrbracket
\end{aligned}$$

This type can be explained as follows:

$(\bullet \otimes$	}]	announce pair ready
$(\bullet \otimes$	}]	announce substitution ready
$\overline{\llbracket T \rrbracket}$	}]	actual first component
$) \wp$	}]	receive first component
$\bullet \otimes$	}]	announce substitution ready
$\overline{\llbracket S \rrbracket}$	}]	actual second component
$) \wp$	}]	receive parameter
$\bullet \otimes$	}]	trigger buffer
$(\bullet \otimes$	}]	announce substitution ready
$\overline{\llbracket T \rrbracket}$	}]	actual payload
$) \wp$	}]	receive payload provider
$\bullet \wp$	}]	await substitution ready
$\llbracket S \rrbracket$	}]	actual continuation

▽

The translation: Terms, configurations, and buffers. Now we complete the definition of our translation. We proceed inductively on the typing derivations of terms, configurations, and buffers. Hence, the definition is on the typing rules in Figure 6.4 (including the changes discussed in Section 6.4.1). As such, typed terms and configurations are translated $\llbracket \Gamma \vdash_M M : T \rrbracket z$ and $\llbracket \Gamma \vdash_C^{\phi} C : T \rrbracket z$, respectively, where the behavior of the term or configuration is executed on the fresh name z , as usual. Typed buffers are translated $\llbracket \Gamma \vdash_B [\tilde{m}] : S' > S \rrbracket a) b$. The translated buffer stores the translations of the messages in \tilde{m} and forwards them on fresh name b ; the buffer receives new messages on the fresh name a . Note that, if the buffer is empty, the roles of a and b may be reversed (depending on S), and the buffer may receive new messages on b instead.

Importantly, the translation is *type preserving* using the translations of types introduced in Definition 6.4.6. Appendix E.3 contains a detailed proof.

Theorem 6.4.8 (Type Preservation for the Translation).

- If $\Gamma \vdash_M M : T$, then $\vdash^* \llbracket M \rrbracket z \triangleright (\Gamma), z : \llbracket T \rrbracket$;
- If $\Gamma \vdash_C^\phi C : T$, then $\vdash^* \llbracket C \rrbracket z \triangleright (\Gamma), z : \llbracket T \rrbracket$;
- If $\Gamma \vdash_B \langle \vec{m} \rangle : S' > S$, then $\vdash^* \llbracket \langle \vec{m} \rangle \rrbracket a \triangleright (\Gamma), a : \overline{\llbracket S' \rrbracket}, b : \overline{\llbracket S \rrbracket}$.

Figures 6.8 to 6.10 give the translation of term, configuration, and buffer typing rules. The figures omit types; they follow Definition 6.4.6 and Theorem 6.4.8. The figures include line-by-line explanations of the translation. Recall that we often write ‘_’ to denote a fresh name of type •; when sending names denoted ‘_’, we omit binders ‘(v_)’.

Example 6.4.9. Figure 6.11 illustrates our translation by translating a subterm of the shop defined in Section 6.2 (leaving the translation of the primitive book-lookup `book(title)` unspecified). Below, we translate the outer buffer in the final state of the system in Example 6.4.3:

$$\begin{aligned}
& \llbracket (\mathbf{v}y'[\text{visa}, \text{buy}, \text{“Dune”}]y)(\mathbf{v}z'[\epsilon]z) \dots \parallel \diamond \text{Shop}_y \rrbracket z \\
= & (\mathbf{v}a_1y')(\mathbf{v}b_1y)(\\
& (\mathbf{v}c_1d_1)(\mathbf{v}e_1f_1)(c_1_, g_1); \\
& \llbracket \text{“Dune”} \rrbracket g_1 \\
& | b_1(_, h_1); h_1[d_1, e_1] \\
& | (\mathbf{v}c_2d_2)(f_1_, e_2); e_2[c_2] \triangleleft \text{buy} \\
& | (\mathbf{v}c_3d_3)(\mathbf{v}e_3f_3)(c_3_, g_3); \\
& \llbracket \text{visa} \rrbracket g_3 \\
& | d_2(_, h_3); h_3[d_3, e_3] \\
& | f_3(_, c_4); (\mathbf{v}d_4e_4)(c_4_, d_4) | e_4(f_4, g_4); \\
& (\mathbf{v}h_4k_4)(a_1_, l_4); l_4[f_4, h_4] \\
& | g_4(_, c_5); c_5[_, _] | k_4(_, d_5); d_5[_, _] \rangle \rangle \rangle \rangle \\
& | \llbracket (\mathbf{v}z'[\epsilon]z) \dots \parallel \diamond \text{Shop}_y \rrbracket z
\end{aligned}$$

$\llbracket (\mathbf{v}y'[\dots]y) \dots \rrbracket z$
 $\llbracket [\dots, \text{“Dune”}] a_1 \rrbracket b_1$
 $\llbracket [\dots, \text{buy}] a_1 \rrbracket f_1$
 $\llbracket [\text{visa}] a_1 \rrbracket d_2$
 $\llbracket [\epsilon] : !B.\text{end} > !B.\text{end} \rrbracket f_3 \rrbracket a_1$
 $\llbracket [\epsilon] : \text{end} > \text{end} \rrbracket g_4 \rrbracket k_4$

Design decisions: Explicit substitutions and closing. Having presented our typed translation, we reflect on our decision to enrich LASTⁿ with explicit substitutions and closing.

As we will see next, adopting explicit substitutions leads to a direct operational correctness result. To see why, suppose we were to apply substitutions immediately. Then, e.g., the translation of function application (Figure 6.8) needs to somehow encode that substitution of a variable in the translation of a function for the translation of the parameter. However, if this variable does not occur under an evaluation context, there is no way in APCP to perform such a substitution immediately. Hence, the translation would still need to encode such *implicit* substitutions in LASTⁿ *explicitly* in APCP. This discrepancy would then have to be handled by means of the aforementioned substitution lifting in our operational correspondence results. Although this is a perfectly viable approach, we prefer to have a more direct operational

[TYP-VAR]	$\llbracket x \rrbracket z \triangleq x[_, z]$	
[TYP-ABS]	$\llbracket \lambda x. M \rrbracket z \triangleq z(x, a); \llbracket M \rrbracket a$	receive x , then run body
[TYP-APP]	$\llbracket M N \rrbracket z \triangleq (\mathbf{v}ab)(\mathbf{v}cd)(\llbracket M \rrbracket a$ $\quad b[c, z]$ $\quad d(_, e); \llbracket N \rrbracket e)$	run abstraction trigger function body parameter as future substitution
[TYP-UNIT]	$\llbracket 0 \rrbracket z \triangleq \mathbf{0}$	
[TYP-PAIR]	$\llbracket (M, N) \rrbracket z \triangleq (\mathbf{v}ab)(\mathbf{v}cd)(z[a, c]$ $\quad b(_, e); \llbracket M \rrbracket e d(_, f); \llbracket N \rrbracket f)$	announce pair is ready components as future substitutions
[TYP-SPLIT]	$\llbracket \text{let } (x, y) = M \text{ in } N \rrbracket z \triangleq (\mathbf{v}ab)(a(x, y); \llbracket N \rrbracket z$ $\quad \llbracket M \rrbracket b)$	block body until pair ready run pair
[TYP-NEW]	$\llbracket \text{new} \rrbracket z \triangleq (\mathbf{v}ab)(a[_, z]$ $\quad b(_, c); (\mathbf{v}dx)(\mathbf{v}ey)($ $\quad \quad \llbracket [e] \rrbracket d)e$ $\quad \quad \llbracket (x, y) \rrbracket c)$	activate buffer block until activated prepare buffer return pair of endpoints
[TYP-SPAWN]	$\llbracket \text{spawn } M; N \rrbracket z \triangleq (\mathbf{v}ab)(a[_, z]$ $\quad b(_, c); ($ $\quad \quad (\mathbf{v}_ \llbracket M \rrbracket _ \llbracket N \rrbracket c)$	activate bodies block until activated run bodies
[TYP-CLOSE]	$\llbracket \text{close } M; N \rrbracket z \triangleq (\mathbf{v}ab)(\llbracket M \rrbracket a$ $\quad b(_, _); \llbracket N \rrbracket z)$	run argument to activate buffer wait for buffer to close
[TYP-SEND]	$\llbracket \text{send } M N \rrbracket z \triangleq (\mathbf{v}ab)(\mathbf{v}cd)(a(_, e); \llbracket M \rrbracket e$ $\quad \llbracket N \rrbracket c$ $\quad d(_, f); (\mathbf{v}gh)($ $\quad \quad f[b, g]$ $\quad \quad h[_, z]))$	block payload until received run channel term to activate buffer wait for buffer to activate send to buffer prepare returned endpoint variable
[TYP-RECV]	$\llbracket \text{recv } M \rrbracket z \triangleq (\mathbf{v}ab)(\llbracket M \rrbracket a$ $\quad b(c, d);$ $\quad \quad (\mathbf{v}ef)(z[c, e] f(_, g); d[_, g]))$	run channel term to activate buffer receive from buffer returned pair
[TYP-SEL]	$\llbracket \text{select } j M \rrbracket z \triangleq (\mathbf{v}ab)(\llbracket M \rrbracket a$ $\quad b(_, c); (\mathbf{v}de)($ $\quad \quad c[d] \triangleleft j$ $\quad \quad e[_, z]))$	run channel term to activate buffer wait for buffer to activate select with buffer prepare returned endpoint variable

Figure 6.8 | Translating LASTⁿ into ACP, Part 1/3.

[TYP-CASE]	$\llbracket \text{case } M \text{ of } \{i : N_i\}_{i \in I} \rrbracket z \triangleq (\mathbf{v}ab)(\llbracket M \rrbracket a$ run channel term to activate buffer $ b(c) \triangleright \{i :$ branch on buffer $\llbracket N_i c \rrbracket z\}_{i \in I})$ apply continuation to endpoint
[TYP-SUB]	$\llbracket M \{N/x\} \rrbracket z \triangleq (\mathbf{v}xa)(\llbracket M \rrbracket z$ run body $a(_, b); \llbracket N \rrbracket b)$ block until body is variable
[TYP-MAIN]	$\llbracket \blacklozenge M \rrbracket z \triangleq \llbracket M \rrbracket z$
[TYP-CHILD]	$\llbracket \blacklozenge M \rrbracket z \triangleq \llbracket M \rrbracket z$
[TYP-PAR] ($T_1 = \mathbf{1}$)	$\llbracket C \parallel D \rrbracket z \triangleq (\mathbf{v}_)(\llbracket C \rrbracket _ \llbracket D \rrbracket z$
[TYP-PAR] ($T_2 = \mathbf{1}$)	$\llbracket C \parallel D \rrbracket z \triangleq \llbracket C \rrbracket z (\mathbf{v}_)(\llbracket D \rrbracket _)$
[TYP-RES]	$\llbracket (\mathbf{v}x\{\bar{m}\}y)C \rrbracket z \triangleq (\mathbf{v}ax)(\mathbf{v}by)(\llbracket \bar{m} \rrbracket a)b$ run buffer $ \llbracket C \rrbracket z)$ run configuration
[TYP-CONF-SUB]	$\llbracket C \{N/x\} \rrbracket z \triangleq (\mathbf{v}xa)(\llbracket C \rrbracket z$ run configuration $ a(_, b); \llbracket N \rrbracket b)$ block until configuration is variable
[TYP-BUF] ($S' = !T.S$)	$\llbracket [e] \rrbracket a)b \triangleq a(_, c); (\mathbf{v}de)($ wait for activation $c(_, d)$ activate send $ e(f, g); (\mathbf{v}hk)($ receive from send $b(_, l);$ wait for activation $l[f, h]$ send to receive $ \llbracket [e] : S > S \rrbracket g)k))$
[TYP-BUF] ($S' = \oplus \{i : S_i\}_{i \in I}$)	$\llbracket [e] \rrbracket a)b \triangleq a(_, c); (\mathbf{v}de)($ wait for activation $c(_, d)$ activate select $ e(f) \triangleright \{i : (\mathbf{v}gh)($ receive selection $b(_, k);$ wait for activation $k[g] \triangleleft i$ make selection $ \llbracket [e] : S_i > S_i \rrbracket f)h))$
[TYP-BUF] ($S' \in \{?T.S, \&\{i : S_i\}_{i \in I}\}$)	$\llbracket [e] \rrbracket a)b \triangleq \llbracket [e] : \overline{S'} > \overline{S'} \rrbracket b)a$

Figure 6.9 | Translating LASTⁿ into APCP, Part 2/3.

[TYP-BUF] ($S' = \text{end}$)	$\llbracket [\epsilon] \rrbracket a \rangle b \triangleq a(_, c); c[_, _] b(_, d); d[_, _]$	close concurrently
[TYP-BUF] ($S' = \square$)	$\llbracket [\epsilon] \rrbracket a \rangle b \triangleq \mathbf{0}$	
[TYP-BUF-SEND]	$\llbracket [\vec{m}, M] \rrbracket a \rangle b \triangleq (\mathbf{v}cd)(\mathbf{v}ef)(c(_, g); \llbracket M \rrbracket g$ $ b(_, h);$ $h[d, e]$ $ \llbracket [\vec{m}] \rrbracket a \rangle f)$	block payload until received wait for activation send to receive run buffer
[TYP-BUF-SEL]	$\llbracket [\vec{m}, j] \rrbracket a \rangle b \triangleq (\mathbf{v}cd)(b(_, e);$ $e[c] < j$ $ \llbracket [\vec{m}] \rrbracket a \rangle d)$	wait for activation make selection run buffer
[TYP-BUF-END-L]	$\llbracket [\epsilon] \rrbracket a \rangle b \triangleq a(_, c); c[_, _]$	
[TYP-BUF-END-R]	$\llbracket [\epsilon] \rrbracket a \rangle b \triangleq b(_, c); c[_, _]$	

Figure 6.10 | Translating LASTⁿ into APCP, Part 3/3.

6

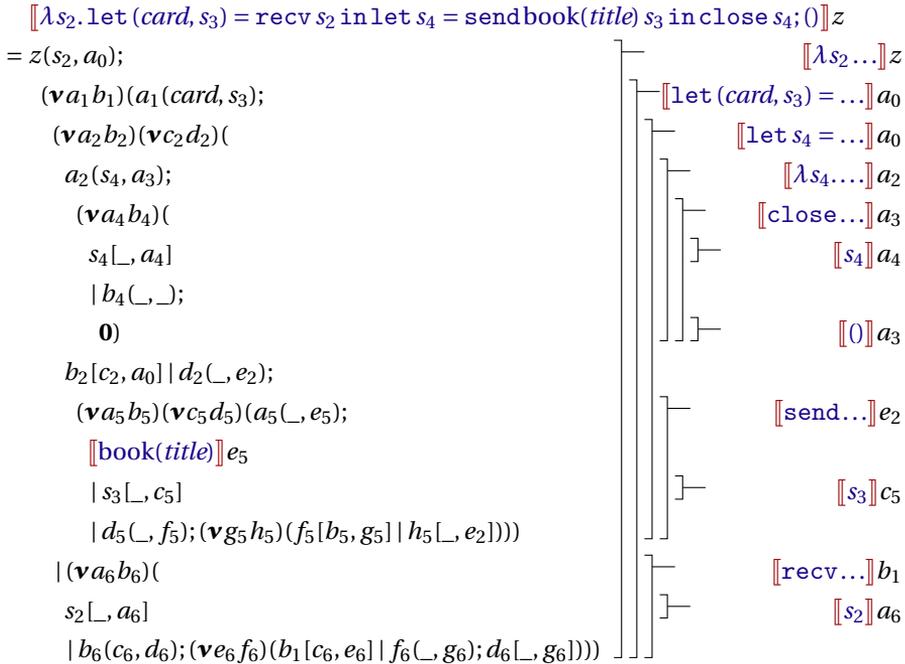


Figure 6.11 | Partial translation of the bookshop (cf. Example 6.4.9).

correspondence, which entails more direct proofs that are not affected by an asymmetric treatment of substitutions.

Our choice for semi-explicit closing of sessions is more pragmatic: it leads to a compact translation. Suppose we were to treat closed sessions by silently weakening them. Consider, e.g., Rule [RED-SEND] (Figure 6.2): the `send`-primitive is replaced by a variable pointing to the buffered channel, even if the session ends after the send. Hence, the translation would need a separate case for translating variables for closed sessions. Consequently, the translation would need similar such separate cases anywhere variables/closed sessions may occur. This would lead to a translation where the key ideas are unnecessarily obfuscated. It is clearly preferable to treat closed sessions semi-explicitly in favor of a more streamlined translation.

Faithfulness: Operational correspondence. Following the discussion in Section 6.3.4, here we finally show that the translation presented above satisfies the operational correctness criterion (completeness and soundness) as proposed by Gorla [Gor10]. We first state both results, and then their proofs.

Theorem 6.4.10 (Completeness). *Given $\Gamma \vdash_{\mathcal{C}}^{\phi} C : T$, if $C \rightarrow_{\mathcal{C}} D$, then $\llbracket C \rrbracket z \rightarrow^* \llbracket D \rrbracket z$.*

Theorem 6.4.11 (Soundness). *Given $\Gamma \vdash_{\mathcal{C}}^{\phi} C : T$, if $\llbracket C \rrbracket z \rightarrow^* Q$, then there exists D such that $C \rightarrow_{\mathcal{C}}^* D$ and $Q \rightarrow^* \llbracket D \rrbracket z$.*

Both results rely on the following lemma, which decomposes translations of terms/configurations under contexts into some evaluation context containing the translation of the respective term/configuration, and transfers free variables/names and substitutions in and out of the translation(cf. Appendix E.4):

Lemma 6.4.12.

- $\llbracket \mathcal{R}[M] \rrbracket z = \mathcal{E}[\llbracket M \rrbracket z']$ for some \mathcal{E}, z' ;
- $\llbracket \mathcal{F}[M] \rrbracket z = \mathcal{E}[\llbracket M \rrbracket z']$ for some \mathcal{E}, z' ;
- $\llbracket \mathcal{G}[C] \rrbracket z = \mathcal{E}[\llbracket C \rrbracket z']$ for some \mathcal{E}, z' ;
- $x \notin \text{fv}(C)$ implies $x \notin \text{fn}(\llbracket C \rrbracket z)$.
- $x \in \text{fv}(C)$ implies $\llbracket C\{y/x\} \rrbracket z = \llbracket C \rrbracket z\{y/x\}$.

Completeness additionally relies on the following lemma, that decomposes the translation of buffers of several shapes into an evaluation context containing the translation of a continuation of the respective buffer(cf. Appendix E.4.1):

Lemma 6.4.13.

- $S' \neq \square$ implies $\llbracket \Gamma \vdash_{\mathcal{B}} [\bar{m}] : S' > S \rrbracket a \rangle b = \mathcal{E}[\llbracket \emptyset \vdash_{\mathcal{B}} [e] : S' > S' \rrbracket a \rangle c]$
- $S' \neq \square$ implies $\llbracket \Gamma, \Delta \vdash_{\mathcal{B}} [M, \bar{m}] : S' > S \rrbracket a \rangle b = \mathcal{E}[\llbracket \Delta \vdash_{\mathcal{B}} [M] : S' > !T.S' \rrbracket a \rangle c]$
- $S' \neq \square$ implies $\llbracket \Gamma \vdash_{\mathcal{B}} [j, \bar{m}] : S' > S \rrbracket a \rangle b = \mathcal{E}[\llbracket \emptyset \vdash_{\mathcal{B}} [j] : S' > \oplus\{i : S_i\}_{i \in I} \cup \{j : S'\} \rrbracket a \rangle c]$

- $S \neq \square$ implies $\llbracket \Gamma \vdash_{\mathbf{B}} [\vec{m}] : \text{end} > S \rrbracket a \rangle b = \mathcal{E}[\llbracket \emptyset \vdash_{\mathbf{B}} [\epsilon] : \text{end} > \text{end} \rrbracket a \rangle c]$
- $S \neq \square$ implies $\llbracket \Gamma \vdash_{\mathbf{B}} [\vec{m}] : \square > S \rrbracket a \rangle b = \mathcal{E}[\llbracket \emptyset \vdash_{\mathbf{B}} [\epsilon] : \square > \text{end} \rrbracket a \rangle c]$

for some \mathcal{E}, c .

With these pre-requisites in place, we discuss the proofs of Theorems 6.4.10 and 6.4.11.

Proof of completeness (Theorem 6.4.10). By induction on the derivation of $C \rightarrow_c D$. We discuss one representative rule for communication, as well as the structural rules; other rules are detailed in Appendix E.4.1.

- Rule [RED-SEND]: $(\mathbf{v}x[\vec{m}]y)(\hat{\mathcal{F}}[\text{send } Mx] \parallel C) \rightarrow_c (\mathbf{v}x[M, \vec{m}]y)(\hat{\mathcal{F}}[x] \parallel C)$. W.l.o.g., assume C is a child thread. By Lemma 6.4.12, for any L , $\llbracket \mathcal{F}[L] \rrbracket z = \mathcal{E}_1[\llbracket L \rrbracket z']$ for some \mathcal{E}_1, z' (*₁). Moreover, since $\hat{\mathcal{F}}$ does not have its hole under an explicit substitution, it does not capture any free variables of M ; hence, by Lemma 6.4.12, \mathcal{E}_1 does not capture any free names of $\llbracket M \rrbracket u$ for any u (*₂). By inversion of typing, $\Gamma \vdash_{\mathbf{B}} [\vec{m}] : S_1 > S$ where $S_1 = !T.S_2$ (*₃). By Lemma 6.4.13, $\llbracket \Gamma \vdash_{\mathbf{B}} [\vec{m}] : S_1 > S \rrbracket a \rangle b = \mathcal{E}_2[\llbracket \emptyset \vdash_{\mathbf{B}} [\epsilon] : S_1 > S_1 \rrbracket a \rangle c]$ (*₄) and $\llbracket \Gamma, \Delta \vdash_{\mathbf{B}} [M, \vec{m}] : S_1 > S \rrbracket a \rangle b = \mathcal{E}_2[\llbracket \Delta \vdash_{\mathbf{B}} [M] : S_1 > S_1 \rrbracket a \rangle c]$ (*₅) for some \mathcal{E}_2, c . Below, we omit types from translations of buffers. The thesis holds as follows:

$$\begin{aligned}
& \llbracket (\mathbf{v}x[\vec{m}]y)(\hat{\mathcal{F}}[\text{send } Mx] \parallel C) \rrbracket z \\
&= (\mathbf{v}ax)(\mathbf{v}by)(\llbracket [\vec{m}] \rrbracket a \rangle b \mid \llbracket \hat{\mathcal{F}}[\text{send } Mx] \rrbracket z \mid (\mathbf{v}_)\llbracket C \rrbracket _) \\
&= (\mathbf{v}ax)(\mathbf{v}by)(\mathcal{E}_2[\llbracket [\epsilon] \rrbracket a \rangle c] \mid \mathcal{E}_1[\llbracket \text{send } Mx \rrbracket z'] \mid (\mathbf{v}_)\llbracket C \rrbracket _) \quad (*_1, *_4) \\
&= (\mathbf{v}ax)(\mathbf{v}by)(\\
&\quad \mathcal{E}_2[a(_, c_1); (\mathbf{v}d_1 e_1)(c_1 _, d_1] \mid e_1(f_1, g_1); (\mathbf{v}h_1 k_1)(c(_, l_1); l_1[f_1, h_1] \mid \llbracket [\epsilon] \rrbracket g_1 \rangle k_1)) \\
&\quad \mid \mathcal{E}_1[(\mathbf{v}a_2 b_2)(\mathbf{v}c_2 d_2)(a_2(_, e_2); \llbracket M \rrbracket e_2 \mid x(_, c_2) \\
&\quad \quad \quad \mid d_2(_, f_2); (\mathbf{v}g_2 h_2)(f_2[b_2, g_2] \mid h_2(_, z')))] \\
&\quad \mid (\mathbf{v}_)\llbracket C \rrbracket _) \\
&\hspace{15em} (*_3) \\
&\rightarrow (\mathbf{v}c_2 d_2)(\mathbf{v}by)(\\
&\quad \mathcal{E}_2[(\mathbf{v}d_1 e_1)(c_2(_, d_1] \mid e_1(f_1, g_1); (\mathbf{v}h_1 k_1)(c(_, l_1); l_1[f_1, h_1] \mid \llbracket [\epsilon] \rrbracket g_1 \rangle k_1)) \\
&\quad \mid \mathcal{E}_1[(\mathbf{v}a_2 b_2)(a_2(_, e_2); \llbracket M \rrbracket e_2 \mid d_2(_, f_2); (\mathbf{v}g_2 h_2)(f_2[b_2, g_2] \mid h_2(_, z')))] \\
&\quad \mid (\mathbf{v}_)\llbracket C \rrbracket _) \\
&\rightarrow (\mathbf{v}e_1 d_1)(\mathbf{v}by)(\\
&\quad \mathcal{E}_2[e_1(f_1, g_1); (\mathbf{v}h_1 k_1)(c(_, l_1); l_1[f_1, h_1] \mid \llbracket [\epsilon] \rrbracket g_1 \rangle k_1)] \\
&\quad \mid \mathcal{E}_1[(\mathbf{v}a_2 b_2)(a_2(_, e_2); \llbracket M \rrbracket e_2 \mid (\mathbf{v}g_2 h_2)(d_1[b_2, g_2] \mid h_2(_, z')))] \\
&\quad \mid (\mathbf{v}_)\llbracket C \rrbracket _) \\
&\rightarrow (\mathbf{v}b_2 a_2)(\mathbf{v}g_2 h_2)(\mathbf{v}by)(\\
&\quad \mathcal{E}_2[(\mathbf{v}h_1 k_1)(c(_, l_1); l_1[b_2, h_1] \mid \llbracket [\epsilon] \rrbracket g_2 \rangle k_1)] \\
&\quad \mid \mathcal{E}_1[a_2(_, e_2); \llbracket M \rrbracket e_2 \mid h_2(_, z')] \\
&\quad \mid (\mathbf{v}_)\llbracket C \rrbracket _)
\end{aligned}$$

$$\begin{aligned}
&\equiv (\mathbf{v}ax)(\mathbf{v}by)(& (*) \\
&\quad \mathcal{E}_2[(\mathbf{v}a_2b_2)(\mathbf{v}h_1k_1)(a_2(_, e_2); \llbracket M \rrbracket e_2 \mid c(_, l_1); l_1[b_2, h_1] \mid \llbracket [e] \rrbracket a)k_1)] \\
&\quad \mid \mathcal{E}_1[x(_, z')] \\
&\quad \mid (\mathbf{v}_)\llbracket C \rrbracket_] \\
&= (\mathbf{v}ax)(\mathbf{v}by)(\mathcal{E}_2[\llbracket [M] \rrbracket a \rrbracket c] \mid \mathcal{E}_1[\llbracket [x] \rrbracket z'] \mid (\mathbf{v}_)\llbracket C \rrbracket_] \\
&= (\mathbf{v}ax)(\mathbf{v}by)(\llbracket [M, \tilde{m}] \rrbracket a \rrbracket b \mid \llbracket \hat{\mathcal{F}}[x] \rrbracket z \mid (\mathbf{v}_)\llbracket C \rrbracket_] & (*_1, *_5) \\
&= \llbracket (\mathbf{v}x[M, \tilde{m}]y)(\hat{\mathcal{F}}[x] \parallel C) \rrbracket z
\end{aligned}$$

- Rule [RED-LIFT-C]: $C \rightarrow_C C'$ implies $\mathcal{G}[C] \rightarrow_C \mathcal{G}[C']$. This case follows from Lemma 6.4.12 and the IH.
- Rule [RED-LIFT-M]: $M \rightarrow_M M'$ implies $\mathcal{F}[M] \rightarrow_M \mathcal{F}[M']$. By Lemma 6.4.12, it suffices to show completeness on the level of terms. Hence, we apply induction on the derivation of $M \rightarrow_M M'$ (IH₂). In Appendix E.4.1, this property is proven separately as Theorem E.4.3. Here, we discuss one representative reduction for computation, as well as the structural rules:

- Rule [RED-LAM]: $(\lambda x.M) N \rightarrow_M M\{N/x\}$. The thesis holds as follows:

$$\begin{aligned}
\llbracket (\lambda x.M) N \rrbracket z &= (\mathbf{v}a_1b_1)(\mathbf{v}c_1d_1)(a_1(x, a_2); \llbracket M \rrbracket a_2 \mid b_1[c_1, z] \mid d_1(_, e_1); \llbracket N \rrbracket e_1) \\
&\rightarrow (\mathbf{v}c_1d_1)(\llbracket M \rrbracket z\{c_1/x\} \mid d_1(_, e_1); \llbracket N \rrbracket e_1) \\
&\equiv (\mathbf{v}xd_1)(\llbracket M \rrbracket z \mid d_1(_, e_1); \llbracket N \rrbracket e_1) \\
&= \llbracket M\{N/x\} \rrbracket z
\end{aligned}$$

- Rule [RED-LIFT]: $M \rightarrow_M N$ implies $\mathcal{R}[M] \rightarrow_M \mathcal{R}[N]$. This case follows from Lemma 6.4.12 and IH₂.
- Rule [RED-LIFT-SC]: $M \equiv_M M'$, $M' \rightarrow_M N'$, and $N' \equiv_M N$ imply $M \rightarrow_M N$. By IH₂, it suffices to show that the translation preserves structural congruence of terms as structural congruence of processes. Hence, we apply induction on the derivation of $M \equiv_M M'$ (and similarly for $N' \equiv_M N$; IH₃). In Appendix E.4.1, this property is proven separately as Theorem E.4.1. The inductive cases follow from IH₃ and Lemma 6.4.12 directly. We detail the (only) base case of Rule [SC-SUB-EXT]: $x \notin \text{fn}(\mathcal{R})$ implies $(\mathcal{R}[M])\{N/x\} \equiv_M \mathcal{R}[M\{N/x\}]$.

The analysis is by induction on the structure of \mathcal{R} (IH₄), assuming $x \notin \text{fn}(\mathcal{R})$. The base case where $\mathcal{R} = [\cdot]$ is immediate. We detail one representative inductive case:

$\mathcal{R} = \mathcal{R}' M'$. The thesis holds as follows:

$$\begin{aligned}
& \llbracket (\mathcal{R}' [M] M') \{N/x\} \rrbracket z \\
&= (\mathbf{v}x a_1) (\mathbf{v}a_2 b_2) (\mathbf{v}c_2 d_2) (\llbracket \mathcal{R}' [M] \rrbracket a_2 \mid b_2 [c_2, z] \mid d_2 (_, e_2); \llbracket M' \rrbracket e_2 \\
&\quad \mid a_1 (_, b_1); \llbracket N \rrbracket b_1) \\
&\equiv (\mathbf{v}a_2 b_2) (\mathbf{v}c_2 d_2) (\llbracket \mathcal{R}' [M] \rrbracket a_2 \mid a_1 (_, b_1); \llbracket N \rrbracket b_1 \\
&\quad \mid b_2 [c_2, z] \mid d_2 (_, e_2); \llbracket M' \rrbracket e_2) \\
&= (\mathbf{v}a_2 b_2) (\mathbf{v}c_2 d_2) (\llbracket (\mathcal{R}' [M]) \{N/x\} \rrbracket a_2 \mid b_2 [c_2, z] \mid d_2 (_, e_2); \llbracket M' \rrbracket e_2) \\
&\equiv (\mathbf{v}a_2 b_2) (\mathbf{v}c_2 d_2) (\llbracket \mathcal{R}' [M \{N/x\}] \rrbracket a_2 \mid b_2 [c_2, z] \mid d_2 (_, e_2); \llbracket M' \rrbracket e_2) \quad (\text{IH}_4) \\
&= \llbracket (\mathcal{R}' [M \{N/x\}]) M' \rrbracket z = \llbracket \mathcal{R} [M \{N/x\}] \rrbracket z
\end{aligned}$$

- Rule [RED-CONF-LIFT-SC]: $C \equiv_c C'$, $C' \rightarrow_c D'$, and $D' \equiv_c D$ imply $C \rightarrow_c D$. By the IH, it suffices to show that the translation preserves structural congruence of configurations as structural congruence of processes. Hence, we apply induction on the derivation of $C \equiv_c C'$ (and similarly for $D' \equiv_c D$; IH₂). In Appendix E.4.1, this property is proven separately as Theorem E.4.2. The inductive cases follow from IH₂ and Lemma 6.4.12 straightforwardly. We detail the interesting base case of Rule [SC-RES-SWAP]: $(\mathbf{v}x[\epsilon]y)C \equiv_c (\mathbf{v}y[\epsilon]x)C$. Both directions are analogous; we detail the left to right direction. We first infer the typing of the left configuration:

$$\frac{\emptyset \vdash_B [\epsilon] : S' > S \quad \Gamma \vdash_C^\phi C : T}{\Gamma' \vdash_C^\phi (\mathbf{v}x[\epsilon]y)C : T} \quad [\text{TYP-RES/-BUF}]$$

Here, $\Gamma' = \Gamma \setminus x : S'$, $y : \bar{S}$. The analysis depends on whether $x = \square$ and/or $y = \square$. In each case, we show that

$$\llbracket \emptyset \vdash_B [\epsilon] : S' > S \rrbracket a \rangle b = \llbracket \emptyset \vdash_B [\epsilon] : \bar{S} > \bar{S}' \rrbracket b \rangle a : \quad (6.6)$$

- Case $x = y = \square$, or $x \neq \square$ and $y \neq \square$. Either way, $S' = S$. If $S' = \square$, both translations are $\mathbf{0}$; the thesis follows immediately. Otherwise, the thesis follows by induction on the structure of S' ; clearly, the resulting translations are exactly the same.
- Case $x = \square$ and $y \neq \square$, or $x \neq \square$ and $y = \square$. W.l.o.g., assume the former. Then $S' = \square$ and $S = \text{end}$. The thesis then holds as follows:

$$\begin{aligned}
\llbracket \emptyset \vdash_B [\epsilon] : \square > \text{end} \rrbracket a \rangle b &= b(_, c); c(_, _) \\
&= \llbracket \emptyset \vdash_B [\epsilon] : \text{end} > \square \rrbracket b \rangle c
\end{aligned}$$

The thesis then holds as follows:

$$\begin{aligned}
\llbracket (\mathbf{v}x[\epsilon]y)C \rrbracket z &= (\mathbf{v}ax)(\mathbf{v}by) (\llbracket \emptyset \vdash_B [\epsilon] : S' > S \rrbracket a \rangle b \mid \llbracket C \rrbracket z) \\
&= (\mathbf{v}ax)(\mathbf{v}by) (\llbracket \emptyset \vdash_B [\epsilon] : \bar{S} > \bar{S}' \rrbracket b \rangle a \mid \llbracket C \rrbracket z) \quad (6.6) \\
&\equiv (\mathbf{v}by)(\mathbf{v}ax) (\llbracket \emptyset \vdash_B [\epsilon] : \bar{S} > \bar{S}' \rrbracket b \rangle a \mid \llbracket C \rrbracket z) \\
&= \llbracket (\mathbf{v}y[\epsilon]x)C \rrbracket z \quad \square
\end{aligned}$$

Proof of soundness (Theorem 6.4.11). By induction on the number k of steps $\llbracket C \rrbracket z \rightarrow^k Q$ (IH₁). We distinguish cases on all possible initial reductions $\llbracket C \rrbracket z \rightarrow Q_0$ and discuss all possible following reductions. Here, we rely on APCP's confluence of independent reductions, allowing us to focus on a specific sequence of reductions, postponing other possibilities that eventually lead to the same result.

We then use induction on the structure of C (IH₂). The goal is to identify some D_0 such that we can isolate $k_0 \geq 0$ reductions such that $C \rightarrow_C D_0$ and $\llbracket C \rrbracket z \rightarrow Q_0 \rightarrow^{k_0} \llbracket D_0 \rrbracket z$ (where k_0 may be different in each case). We then have $\llbracket D_0 \rrbracket z \rightarrow^{k-k_0} Q$, so it follows from IH₁ that there exists D such that $D_0 \rightarrow_C^* D$ and $\llbracket D_0 \rrbracket z \rightarrow^* \llbracket D \rrbracket z$.

Here, we detail only the interesting case of an interaction between the translations of a buffer and a contained configuration; Appendix E.4.2 details the whole proof. That is, $C = (\mathbf{v}x\langle \vec{m} \rangle y)C_1$. We have

$$\llbracket (\mathbf{v}x\langle \vec{m} \rangle y)C_1 \rrbracket z = (\mathbf{v}a_1x)(\mathbf{v}b_1y)(\llbracket \langle \vec{m} \rangle \rrbracket a_1 \rangle b_1 \mid \llbracket C_1 \rrbracket z).$$

The reduction may originate from (i) $\llbracket \langle \vec{m} \rangle \rrbracket a_1 \rangle b_1$, (ii) $\llbracket C_1 \rrbracket z$, (iii) a synchronization between a_1 in $\llbracket \langle \vec{m} \rangle \rrbracket a_1 \rangle b_1$ and x in $\llbracket C_1 \rrbracket z$, or (iv) a synchronization between b_1 in $\llbracket \langle \vec{m} \rangle \rrbracket a_1 \rangle b_1$ and y in $\llbracket C_1 \rrbracket z$. We detail each case:

- (i) The reduction stems from $\llbracket \langle \vec{m} \rangle \rrbracket a_1 \rangle b_1$. No matter the $\langle \vec{m} \rangle$, no reduction is possible.
- (ii) The reduction originates from $\llbracket C_1 \rrbracket z$. We thus have $\llbracket C_1 \rrbracket z \rightarrow Q_1$. By IH₂, there are $D_1, k_1 \geq 0$ such that $C_1 \rightarrow_C D_1$ and $\llbracket C_1 \rrbracket z \rightarrow Q_1 \rightarrow^{k_1} \llbracket D_1 \rrbracket z$. Let $D_0 \triangleq (\mathbf{v}x\langle \vec{m} \rangle y)D_1$. We have $C \rightarrow_C D_0$. Moreover:

$$\begin{aligned} \llbracket C \rrbracket z &= (\mathbf{v}a_1x)(\mathbf{v}b_1y)(\llbracket \langle \vec{m} \rangle \rrbracket a_1 \rangle b_1 \mid \llbracket C_1 \rrbracket z) \\ &\rightarrow^{k_1+1} (\mathbf{v}a_1x)(\mathbf{v}b_1y)(\llbracket \langle \vec{m} \rangle \rrbracket a_1 \rangle b_1 \mid \llbracket D_1 \rrbracket z) \\ &= \llbracket D_0 \rrbracket z \end{aligned}$$

- (iii) The reduction originates from a synchronization between a_1 in $\llbracket \langle \vec{m} \rangle \rrbracket a_1 \rangle b_1$ and x in $\llbracket C_1 \rrbracket z$. By well-typedness, $\Delta \vdash_{\mathbb{B}} \langle \vec{m} \rangle : S' > S$. Note first that, by Lemma 6.4.13, $S' \neq \square$ implies that there are \mathcal{E}_2, c_1 such that $\llbracket \langle \vec{m} \rangle : S' > S \rrbracket a_1 \rangle b_1 = \mathcal{E}_2 \llbracket \langle \epsilon \rangle : S' > S' \rrbracket a_1 \rangle c_1$. The analysis depends on S' , so we consider all possibilities. In each case, if the reduction is indeed possible, we show that the reduction is the first step in the execution of some rule such that $C \rightarrow_C D_0$. The corresponding reduction $\llbracket C \rrbracket z \rightarrow Q_0 \rightarrow^{k_0} \llbracket D_0 \rrbracket z$ follows the corresponding case in the proof of Theorem 6.4.10 (Completeness).

- Case $S' = \square$. Then $x = \square$ is not free in C_1 , and thus x is not free in $\llbracket C_1 \rrbracket z$: the reduction is not possible.
- Case $S' = \text{end}$. The analysis depends on whether $S = \square$ or not; w.l.o.g., assume not. We have

$$\llbracket \langle \epsilon \rangle : \text{end} > \text{end} \rrbracket a_1 \rangle c_1 = a_1(_, c_2); \dots \mid \dots$$

Thus, the synchronization is between the receive on a_1 and a send on x in $\llbracket C_1 \rrbracket z$. A send on a variable x can only occur in the translation of that variable directly, under some reduction context. Since x is of type **end** and its translation appears

under a reduction context, the only well-typed way for x to appear in C_1 is if $C_1 = \mathcal{G}[\mathcal{F}[\text{close } x; M_1]]$. We then have

$$C \equiv_{\mathcal{C}} \mathcal{G}'[(\mathbf{v}x[\vec{m}]y)(\mathcal{F}[\text{close } x; M_1] | C_2)].$$

Hence, the observed reduction is the first step of executing Rule [RED-CLOSE].

- Case $S' = !T_2.S'_2$. We have

$$\llbracket [\epsilon] : !T_2.S'_2 > !T_2.S'_2 \rrbracket a_1 \rangle c_1 = a_1(_, c_2); \dots$$

Thus, the synchronization is between the receive on a_1 and a send on x in $\llbracket C_1 \rrbracket z$. A send on a variable x can only occur in the translation of that variable directly, under some reduction context. Since x is of type $!T_2.S'_2$ and its translation appears under a reduction context, the only well-typed way for x to appear in C_1 is if $C_1 = \mathcal{G}[\mathcal{F}[\text{send } M_1 x]]$. We then have

$$C \equiv_{\mathcal{C}} \mathcal{G}'[(\mathbf{v}x[\vec{m}]y)(\hat{\mathcal{F}}'[\text{send } M_1 x] | C_2)].$$

Hence, the observed reduction is the first step of executing Rule [RED-SEND].

- Case $S' = ?T_2.S'_2$. We have

$$\llbracket [\epsilon] : ?T_2.S'_2 > ?T_2.S'_2 \rrbracket a_1 \rangle c_1 = \llbracket [\epsilon] : !T_2.\overline{S'_2} > !T_2.\overline{S'_2} \rrbracket c_1 \rangle a_1 = c_1(_, c_2); \dots$$

Thus, the reduction is not possible.

- Case $S' = \oplus\{i.S_2^i\}_{i \in I}$. We have

$$\llbracket [\epsilon] : \oplus\{i.S_2^i\}_{i \in I} > \oplus\{i.S_2^i\}_{i \in I} \rrbracket a_1 \rangle c_1 = a_1(_, c_2); \dots$$

Thus, the synchronization is between the receive on a_1 and a send on x in $\llbracket C_1 \rrbracket z$. A send on a variable x can only occur in the translation of that variable directly, under some reduction context. Since x is of type $\oplus\{i.S_2^i\}_{i \in I}$ and its translation appears under a reduction context, the only well-typed way for x to appear in C_1 is if $C_1 = \mathcal{G}[\mathcal{F}[\text{select } j x]]$ where $j \in I$. We then have

$$C \equiv_{\mathcal{C}} \mathcal{G}'[(\mathbf{v}x[\vec{m}]y)(\mathcal{F}[\text{select } j x] | C_2)].$$

Hence, the observed reduction is the first step of executing Rule [RED-SELECT].

- Case $S' = \&\{i.S_2^i\}_{i \in I}$. We have

$$\begin{aligned} \llbracket [\epsilon] : \&\{i.S_2^i\}_{i \in I} > \&\{i.S_2^i\}_{i \in I} \rrbracket a_1 \rangle c_1 &= \llbracket [\epsilon] : \oplus\{i.\overline{S_2^i}\}_{i \in I} > \oplus\{i.\overline{S_2^i}\}_{i \in I} \rrbracket c_1 \rangle a_1 \\ &= c_1(_, c_2); \dots \end{aligned}$$

Thus, the reduction is not possible.

(iv) The reduction originates from a synchronization between b_1 in $\llbracket [\vec{m}] \rrbracket a_1 \rangle b_1$ and y in $\llbracket C_1 \rrbracket z$. By well-typedness, $\Delta \vdash_{\mathbb{B}} [\vec{m}] : S' > S$. The analysis depends on S , so we consider all possibilities. In each case, if the reduction is indeed possible, we show that the reduction is the first step in the execution of some rule such that $C \rightarrow_C D_0$. The corresponding reduction $\llbracket C \rrbracket z \rightarrow Q_0 \rightarrow^{k_0} \llbracket D_0 \rrbracket z$ follows the corresponding case in the proof of Theorem 6.4.10 (Completeness).

- Case $S = \square$. Then $y = \square$ is not free in C_1 , and thus y is not free in $\llbracket C_1 \rrbracket z$: the reduction is not possible.
- Case $S = \text{end}$. By well-typedness, then $\vec{m} = \epsilon$. Let $C' \triangleq (\mathbf{v}y[\epsilon]x)C_1$; we have $C \equiv_C C'$ and $\llbracket C \rrbracket z \equiv \llbracket C' \rrbracket z$ (by Theorem E.4.2). The thesis then follows as in the analogous case under Sub-case (iii) above.
- Case $S = !T_2.S_2$. By well-typedness, then $\vec{m} = \vec{m}', M_1$. We have

$$\llbracket [\vec{m}', M_1] : S' > !T_2.S_2 \rrbracket a_1 \rangle b_1 = (\mathbf{v}\dots)(\mathbf{v}\dots)(\dots | b_1(_, h_2); \dots | \dots).$$

Thus, the synchronization is between the receive on b_1 and a send on y in $\llbracket C_1 \rrbracket z$. A send on a variable y can only occur in the translation of that variable directly, under some reduction context. Since y is of type $\bar{S} = ?T_2.S_2$ and its translation appears under a reduction context, the only well-typed way for y to appear in C_1 is if $C_1 = \mathcal{G}[\mathcal{F}[\text{recv } y]]$. We then have

$$C \equiv_C \mathcal{G}'[(\mathbf{v}x[\vec{m}', M_1]y)(\mathcal{F}'[\text{recv } y] | C_2)].$$

Hence, the observed reduction is the first step of executing Rule [RED-RECV].

- Case $S = ?T_2.S_2$. By well-typedness, $\vec{m} = \epsilon$; this case is analogous to Case $S = \text{end}$.
- Case $S = \oplus\{i : S_2^i\}_{i \in I}$. By well-typedness, then $\vec{m} = \vec{m}', j$ where $j \in I$. We have

$$\llbracket [\vec{m}', j] : S' > \oplus\{i : S_2^i\}_{i \in I} \rrbracket a_1 \rangle b_1 = (\mathbf{v}\dots)(b_1(_, e_2); \dots | \dots).$$

Thus, the synchronization is between the receive on b_1 and a send on y in $\llbracket C_1 \rrbracket z$. A send on a variable y can only occur in the translation of that variable directly, under some reduction context. Since y is of type $\bar{S} = \&\{i : S_2^i\}_{i \in I}$ and its translation appears under a reduction context, the only well-typed way for y to appear in C_1 is if $C_1 = \mathcal{G}[\mathcal{F}[\text{case } y \text{ of } \{i : M_{1,i}\}_{i \in I}]]$. We then have

$$C \equiv_C \mathcal{G}'[(\mathbf{v}x[\vec{m}', j]y)(\mathcal{F}[\text{case } y \text{ of } \{i : M_{1,i}\}_{i \in I}] | C_2)].$$

Hence, the observed reduction is the first step of executing Rule [RED-CASE].

- Case $S = \&\{i : S_2^i\}_{i \in I}$. By well-typedness, then $\vec{m} = \epsilon$; this case is analogous to Case $S = \text{end}$ above. \square

6.4.3. DEADLOCK-FREE LASTⁿ

By virtue of Theorem 6.3.15, well-typed ACP processes that are typable under empty contexts ($\vdash P \triangleright \emptyset$) are deadlock-free. We may transfer this result to LASTⁿ configurations by appealing to the operational correctness of our translation (Theorems 6.4.10 and 6.4.11 above). Each deadlock-free configuration in LASTⁿ obtained via this transference satisfies two requirements:

- The configuration is typable $\emptyset \vdash_{\mathbf{c}}^{\blacklozenge} C : \mathbf{1}$, i.e., it needs no external resources and has no external behavior.
- The typed translation of the configuration satisfies priority requirements in ACP: it is well-typed under ‘ \vdash ’, not only under ‘ \vdash^* ’ (cf. Section 6.4.2).

We rely on soundness (Theorem 6.4.11) to transfer deadlock-freedom to configurations:

Theorem 6.4.14 (Deadlock-freedom for LASTⁿ). *Given $\emptyset \vdash_{\mathbf{c}}^{\blacklozenge} C : \mathbf{1}$, if $\vdash \llbracket C \rrbracket z \triangleright \Gamma$ for some Γ , then $C \equiv \blacklozenge 0$ or $C \rightarrow_{\mathbf{c}} D$ for some D .*

Proof. By Theorem 6.4.8 (type preservation for the translation), $\Gamma = z : \llbracket \mathbf{1} \rrbracket = z : \bullet$. Then $\vdash (\mathbf{v}z_)\llbracket C \rrbracket z \triangleright \emptyset$. Hence, by Theorem 6.3.15 (deadlock-freedom), either $(\mathbf{v}z_)\llbracket C \rrbracket z \equiv \mathbf{0}$ or $(\mathbf{v}z_)\llbracket C \rrbracket z \rightarrow Q$ for some Q . The rest of the analysis depends on which possibility holds:

- We have $(\mathbf{v}z_)\llbracket C \rrbracket z \equiv \mathbf{0}$. We straightforwardly deduce from the well-typedness and translation of C that $C \equiv_{\mathbf{c}} \blacklozenge 0$, proving the thesis.
- We have $(\mathbf{v}z_)\llbracket C \rrbracket z \rightarrow Q$ for some Q . We argue that this implies that $\llbracket C \rrbracket z \rightarrow Q_0$, for some Q_0 .
 - The reduction involves z . Since z is of type \bullet in $\llbracket C \rrbracket z$, then z must occur in a forwarder, and the reduction involves a forwarder $[z \leftrightarrow x]$ for some x . Since x is not free in $\llbracket C \rrbracket z$, there must be a restriction on x . Hence, the forwarder $[z \leftrightarrow x]$ can also reduce with this restriction, instead of with the restriction $(\mathbf{v}z_)$. This means that $\llbracket C \rrbracket z \rightarrow Q_0$ for some Q_0 .
 - The reduction does not involve z , in which case the reduction must be internal to $\llbracket C \rrbracket z$. That is, $\llbracket C \rrbracket z \rightarrow Q_0$ for some Q_0 and $Q \equiv (\mathbf{v}z_)\llbracket C \rrbracket z$.

First, by contradiction, we show that z is not involved in this reduction: Since z is of type \bullet in $\llbracket C \rrbracket z$, then z must occur in a forwarder, and the reduction involves a forwarder $[z \leftrightarrow x]$ for some x . However, our translation (Figures 6.8 to 6.10) does not generate forwarders, so this is clearly a contradiction. Hence, the reduction does not involve z .

Thus, the reduction must be internal to $\llbracket C \rrbracket z$. That is, $\llbracket C \rrbracket z \rightarrow Q_0$ for some Q_0 and $Q \equiv (\mathbf{v}z_)\llbracket C \rrbracket z$. Then, by Theorem 6.4.11 (soundness), there exists D such that $C \rightarrow_{\mathbf{c}}^* D$. Looking at the proof of Theorem 6.4.11 (in Appendix E.4.2), it is easy to see that in fact $C \rightarrow_{\mathbf{c}}^+ D$. That is, there exists D_0 such that $C \rightarrow_{\mathbf{c}} D_0$, proving the thesis. \square

Example 6.4.15. To illustrate the insights gained from deadlock analysis in APCP through translation from LASTⁿ, we consider a seemingly deadlock-free configuration that is not. To this end, we first discuss how we can assign priorities to the translated types of the configuration, and extract from the translation requirements on those priorities. Next, we show that our example leads to unsatisfiable priority requirements, indicating the elusive deadlock in the original configuration. We close the example by considering an alternative configuration that is indeed deadlock-free.

Our example is a classic showcase of deadlock due to cyclic connections under synchronous communication. Though one would expect this example to be deadlock-free under asynchronous communication, it is not: there is a deadlock induced by the call-by-name semantics of LASTⁿ. Let

$$\begin{array}{ll} M_{x,y} := \text{let } x_1 = \text{send } () \text{ } x \text{ in} & C := \blacklozenge \text{let } (x, x') = \text{new in} \\ \quad \text{let } (v, y_1) = \text{recv } y \text{ in} & \quad \text{let } (y, y') = \text{new in} \\ \quad \text{close } x_1; \text{close } y_1; v, & \quad \text{spawn } M_{x,y}; M_{y',x'}. \end{array}$$

Before showing the deadlock and its source, we analyze the translation into APCP.

By Theorem 6.4.8 and assigning priority variables to each connective, we have

$$\begin{array}{l} \vdash^* \llbracket M_{x,y} \rrbracket z_1 \blacktriangleright y : \bullet \otimes^{\circ_1} (\bullet \otimes^{\circ_2} \bullet) \wp^{\circ_3} \bullet \otimes^{\circ_4} \bullet \wp^{\circ_5} \bullet, \\ \quad x : \bullet \otimes^{\circ_6} \bullet \wp^{\circ_7} (\bullet \wp^{\circ_8} \bullet) \otimes^{\circ_9} \bullet \otimes^{\circ_{10}} \bullet \wp^{\circ_{11}} \bullet, z_1 : \bullet, \\ \vdash^* \llbracket M_{y',x'} \rrbracket z_2 \blacktriangleright x' : \bullet \otimes^{\pi_1} (\bullet \otimes^{\pi_2} \bullet) \wp^{\pi_3} \bullet \otimes^{\pi_4} \bullet \wp^{\pi_5} \bullet, \\ \quad y' : \bullet \otimes^{\pi_6} \bullet \wp^{\pi_7} (\bullet \wp^{\pi_8} \bullet) \otimes^{\pi_9} \bullet \otimes^{\pi_{10}} \bullet \wp^{\pi_{11}} \bullet, z_2 : \bullet. \\ \vdash^* \llbracket C \rrbracket z \blacktriangleright z : \bullet \end{array}$$

To determine requirements on these priorities, we analyze the translations of typing rules into APCP derivations in Figures 6.8 to 6.10 and the priority requirements induced by them. Indeed, a deadlock is detected, because APCP requires $\circ_6 < \pi_1 < \pi_6 < \circ_1 < \circ_6$, which is unsatisfiable.

Before detailing the origin of these requirements, we first give an intuition behind this unsatisfiable chain of priority requirements, and how they reflect the deadlock that is indeed present in C . From left to right, the requirements denote that (1) the send on x occurs before the receive on x' , (2) the receive on x' occurs before the send on y' , (3) the send on y' occurs before the receive on y , (4) the receive on y occurs before the send on x . Steps (2) and (3) stand out: $M_{x,y}$ and $M_{y',x'}$ seem to define an opposite order. This is because in, e.g., $M_{x,y}$, the call-by-name semantics of LASTⁿ transforms the $\text{let } x_1$ into an explicit substitution that can only be resolved—thus enabling the $\text{send } () \text{ } x$ —once the $\text{close } x_1$ is unblocked by the $\text{let } (v, y_1)$, which in turn is waiting for the $\text{recv } y$ to be resolved. To be precise:

$$\begin{array}{l} M_{x,y} \rightarrow_{\mathbb{M}} (\text{let } (v, y_1) = \text{recv } y \text{ in } \dots) \llbracket \text{send } () \text{ } x / x_1 \rrbracket =: M'_{x,y} \not\rightarrow_{\mathbb{M}} \\ M_{y',x'} \rightarrow_{\mathbb{M}} (\text{let } (v', x'_1) = \text{recv } x' \text{ in } \dots) \llbracket \text{send } () \text{ } y' / y'_1 \rrbracket =: M'_{y',x'} \not\rightarrow_{\mathbb{M}} \\ C \rightarrow_{\mathbb{C}}^{\circ} (\mathbf{v} s[e] s') (\mathbf{v} t[e] t') (\blacklozenge M'_{x,t} \llbracket s / x \rrbracket \parallel \blacklozenge M'_{y',s'} \llbracket t' / y' \rrbracket) \not\rightarrow_{\mathbb{C}} \end{array}$$

We now detail the origin of the conflicting priority requirements; that is, we spell out the rules of the translation and the induced requirements. Note that many of these rules include

names and priority variables that are not visible outside the derivation, being created from within certain parts of the translation.

1. Requirement $\circ_6 < \pi_1$ originates from the translation of **new** in the **let** (x, x') . More precisely, the translation of **new** prepares the translation of the upcoming buffer, which follows the involved types. The requirement is induced by a step in the translation of this buffer (Rule [TYP-BUF] in Figures 6.9 and 6.10):

$$\frac{\begin{array}{l} \vdash^* \llbracket [c] : \text{end} > \text{end} \rrbracket g_3 \triangleright k_3 \triangleright g_3 : \bullet \mathfrak{R}^{\rho_5} \bullet \otimes^{\circ_{11}} \bullet, \quad \circ_8 = \pi_2, \circ_6 < \pi_1, \circ_9 < \pi_1, \\ k_3 : \bullet \mathfrak{R}^{\rho_6} \bullet \otimes^{\pi_5} \bullet \quad \pi_1 < \circ_8, \pi_1 < \pi_5, \circ_7 < \circ_9, \\ \pi_3 < \pi_2, \pi_3 < \pi_4 \end{array}}{\vdash^* \llbracket [c] : !\text{end} > !\text{end} \rrbracket d_2 \triangleright e_2 \triangleright d_2 : \bullet \mathfrak{R}^{\circ_6} \bullet \otimes^{\circ_7} (\bullet \otimes^{\circ_8} \bullet) \mathfrak{R}^{\circ_9} \bullet \mathfrak{R}^{\circ_{10}} \bullet \otimes^{\circ_{11}} \bullet, \\ e_2 : \bullet \mathfrak{R}^{\pi_1} (\bullet \mathfrak{R}^{\pi_2} \bullet) \otimes^{\pi_3} \bullet \mathfrak{R}^{\pi_4} \bullet \otimes^{\pi_5} \bullet}$$

2. Requirement $\pi_1 < \pi_6$ originates from four substeps, including intermediate priorities: $\pi_1 < \pi_3 < \pi_{14} < \pi_{12} < \pi_6$.

- (a) $\pi_1 < \pi_3$ stems from the translation of the variable x' (Rule [TYP-VAR] in Figure 6.8):

$$\frac{\pi_1 < \pi_3}{\vdash^* \llbracket x' \rrbracket a'_4 \triangleright x' : \bullet \otimes^{\pi_1} (\bullet \otimes^{\pi_2} \bullet) \mathfrak{R}^{\pi_3} \bullet \otimes^{\pi_4} \bullet \mathfrak{R}^{\pi_5} \bullet, a'_4 : (\bullet \mathfrak{R}^{\pi_2} \bullet) \otimes^{\pi_3} \bullet \mathfrak{R}^{\pi_4} \bullet \otimes^{\pi_5} \bullet}$$

- (b) $\pi_3 < \pi_{14}$ stems from the translation of the **recv** x' (Rule [TYP-RECV] in Figure 6.8):

$$\frac{\begin{array}{l} \vdash^* \llbracket x' \rrbracket a'_4 \triangleright x' : \bullet \otimes^{\pi_1} (\bullet \otimes^{\pi_2} \bullet) \mathfrak{R}^{\pi_3} \bullet \otimes^{\pi_4} \bullet \mathfrak{R}^{\pi_5} \bullet, \quad \pi_{14} < \pi_2, \pi_{14} < \pi_{15}, \\ a'_4 : (\bullet \mathfrak{R}^{\pi_2} \bullet) \otimes^{\pi_3} \bullet \mathfrak{R}^{\pi_4} \bullet \otimes^{\pi_5} \bullet \quad \pi_4 < \pi_5, \pi_3 < \pi_{14} \end{array}}{\vdash^* \llbracket \text{recv } x' \rrbracket b'_3 \triangleright x' : \bullet \otimes^{\pi_1} (\bullet \otimes^{\pi_2} \bullet) \mathfrak{R}^{\pi_3} \bullet \otimes^{\pi_4} \bullet \mathfrak{R}^{\pi_5} \bullet, \\ b'_3 : (\bullet \mathfrak{R}^{\pi_2} \bullet) \otimes^{\pi_{14}} \bullet \mathfrak{R}^{\pi_{15}} \bullet \otimes^{\pi_5} \bullet}$$

- (c) $\pi_{14} < \pi_{12}$ stems from the translation of **let** (v', x'_1) (Rule [TYP-SPLIT] in Figure 6.8):

$$\frac{\begin{array}{l} \vdash^* \llbracket \text{recv } x' \rrbracket b'_3 \triangleright x' : \bullet \otimes^{\pi_1} (\bullet \otimes^{\pi_2} \bullet) \mathfrak{R}^{\pi_3} \bullet \otimes^{\pi_4} \bullet \mathfrak{R}^{\pi_5} \bullet, \quad \vdash^* \llbracket \dots \rrbracket a'_2 \triangleright y'_1 : \bullet \otimes^{\pi_{12}} \bullet \mathfrak{R}^{\pi_{11}} \bullet, \quad \pi_{14} < \pi_{12} \\ b'_3 : (\bullet \mathfrak{R}^{\pi_2} \bullet) \otimes^{\pi_{14}} \bullet \mathfrak{R}^{\pi_{15}} \bullet \otimes^{\pi_5} \bullet \quad v' : \bullet \otimes^{\pi_2} \bullet, \\ x'_1 : \bullet \otimes^{\pi_{15}} \bullet \mathfrak{R}^{\pi_5} \bullet \end{array}}{\vdash^* \llbracket \text{let } (v', x'_1) = \text{recv } x' \text{ in } \dots \rrbracket a'_2 \triangleright x' : \bullet \otimes^{\pi_1} (\bullet \otimes^{\pi_2} \bullet) \mathfrak{R}^{\pi_3} \bullet \otimes^{\pi_4} \bullet \mathfrak{R}^{\pi_5} \bullet, \\ y'_1 : \bullet \otimes^{\pi_{12}} \bullet \mathfrak{R}^{\pi_{11}} \bullet, a'_2 : \bullet}$$

- (d) Finally, $\pi_{12} < \pi_6$ originates from the translation of the **let** y'_1 . To be precise, this syntactic sugar breaks down into an abstraction and an application; the

requirement originates from the application (Rule [TYP-APP] in Figure 6.8):

$$\begin{array}{c}
 \begin{array}{l}
 \vdash^* [\lambda y'_1 \dots] a'_1 \\
 \blacktriangleright x' : \bullet \otimes^{\pi_1} (\bullet \otimes^{\pi_2} \bullet) \wp^{\pi_3} \bullet \otimes^{\pi_4} \bullet \wp^{\pi_5} \bullet, \\
 a'_1 : (\bullet \otimes^{\pi_{12}} \bullet \wp^{\pi_{11}} \bullet) \wp^{\pi_{13}} \bullet
 \end{array}
 \quad
 \begin{array}{l}
 \vdash^* [\text{send } () y'] e'_1 \\
 \blacktriangleright y' : \bullet \otimes^{\pi_6} \bullet \wp^{\pi_7} (\bullet \wp^{\pi_8} \bullet) \\
 \otimes^{\pi_9} \bullet \otimes^{\pi_{10}} \bullet \wp^{\pi_{11}} \bullet, \\
 e'_1 : \bullet \otimes^{\pi_{11}} \bullet
 \end{array}
 \quad
 \frac{\pi_{12} < \pi_6, \quad \pi_{13} < \pi_{12}}{}
 \end{array}
 \quad
 \frac{}{\vdash^* [\text{let } y'_1 = \text{send } y' \text{ in } \dots] z_2 \blacktriangleright}
 \begin{array}{l}
 x' : \bullet \otimes^{\pi_1} (\bullet \otimes^{\pi_2} \bullet) \wp^{\pi_3} \bullet \otimes^{\pi_4} \bullet \wp^{\pi_5} \bullet, \\
 y' : \bullet \otimes^{\pi_6} \bullet \wp^{\pi_7} (\bullet \wp^{\pi_8} \bullet) \otimes^{\pi_9} \bullet \otimes^{\pi_{10}} \bullet \wp^{\pi_{11}} \bullet, \\
 z_2 : \bullet
 \end{array}$$

3. Requirement $\pi_6 < \pi_1$ originates from the buffer prepared by the translation of `new` in the `let` (y, y'). It is derived similar to Requirement (1).
4. Requirement $\pi_1 < \pi_6$ originates from four similar substeps as in Requirement (2).

We conclude that the translation of C cannot be typed under \vdash , because the priority requirements cannot be satisfied. Hence, Theorem 6.4.14 does not apply, and so deadlock-freedom cannot be guaranteed for C .

Note that it is straightforward to define variants of C whose translations are well-typed under \vdash , thus guaranteeing deadlock-freedom through Theorem 6.4.14. An example is the variant of $M_{x,y}$ above in which the `close` x_1 occurs before the `let` (v, y_1). ∇

Remark 6.4.16. Determining the deadlock-freedom of well-typed LAST^n programs by means of translation into APCP is of similar complexity as a direct, priority-based approach. It is easy to see that the translation is $O(n)$ in the size of the LAST^n typing derivation. We could add priorities to the types of LAST^n and derive priority requirements from the translation; this would boil down to roughly the same amount of checking. Hence, the indirect approach via APCP is similarly complex. This justifies keeping the type system of LAST^n simple, compared to type systems that use priorities for deadlock-free functional programs such as those by, e.g., Padovani and Novara [PN15] and Kokke and Dardha [KD21a]. ∇

6.5. RELATED WORK

We have already discussed the related works by Gay and Vasconcelos [GV10], Wadler [Wad12], Kokke and Dardha [KD21a; KD21b], and Padovani and Novara [PN15]. Lindley and Morris [LM15] formally define a semantics for Wadler's GV , prove deadlock-freedom and operational correspondence of the translation into Wadler's CP , and give a translation from CP into GV . Other related work in this line is Fowler *et al.*'s *Asynchronous* GV with buffered asynchronous communication and a call-by-value semantics, and *Exceptional* GV (EGV) which extends the former with exception handling [Fow19; Fow+19].

Table 6.1 summarizes the comparison of LAST^n to some of these related works. Note that none of the mentioned works supports sending anything but values, unlike LAST^n . Our work ensures deadlock-freedom for configurations with cyclic topologies by means of a translation into a system with an established deadlock-freedom result (cf. Remark 6.4.16); the alternative approach is to enhance GV 's type system with priorities, as done by Padovani and Novara [PN15] and Kokke and Dardha [KD21a; KD21b].

	LAST [GV10]	GV [Wad12]	EGV [Fow+19]	PGV [KD21a; KD21b]	LAST ⁿ (this chapter)
Communication	Async.	Sync.	Async.	Sync.	Async.
Cyclic Topologies	✓	×	×	✓	✓
Deadlock-freedom	×	✓ (typing)	✓ (typing)	✓ (typing)	✓ (via APCP)

Table 6.1 | The features of LASTⁿ compared to related works.

Typed encodings between (concurrent) λ -calculi and π -calculi. Several prior works develop typed encodings between λ - and π -calculi; to our knowledge, all of them consider call-by-value semantics, most do not consider λ with message-passing, and none translate variables as sends, as we do. Some of these works have been discussed in Section 6.3.4, where we justified the notions of completeness and soundness relevant for our translation of LASTⁿ into APCP. Vasconcelos [Vas00] translates an untyped λ -calculus into an input/output-typed π -calculus; the translation is sound, up to barbed congruence. The aforementioned work by Wadler [Wad12; Wad14] translates the session-typed GV with synchronous message-passing into the session-typed CP, without giving a semantics for GV nor associated completeness/soundness results. Lindley and Morris [LM15] formalize a semantics for GV and its translation into CP, and prove completeness; no soundness result is given. Kokke and Dardha [KD21a] define PGV, an extension of GV with priority annotations to support deadlock-free cyclic thread configurations; they give a translation from PCP into PGV that is both sound and complete, but no translation in the other direction is studied. Toninho *et al.* [TCP12] translate a linearly typed λ -calculus into a session-typed π -calculus derived from intuitionistic linear logic; they prove completeness, but for soundness they extend reduction in λ to call-by-name. Toninho and Yoshida [TY21] translate a linearly typed λ -calculus without message-passing into a session-typed polymorphic π -calculus. Their translation is fully abstract: it is complete and sound, with the latter result requiring an extension of reduction in π with commuting conversions.

6.6. CLOSING REMARKS

In this chapter, we consider cyclic process networks with asynchronous communication in the setting of a prototypical functional language. We introduced LASTⁿ, a new functional language with asynchronous, session-typed communication. Inspired by Gay and Vasconcelos' LAST, the design of LASTⁿ combines buffered communication with a call-by-name reduction strategy, explicit substitutions, and explicit session closing. In our opinion, this design makes LASTⁿ an interesting object of study on its own. In the spirit of Gay and Vasconcelos' work, we defined a deliberately simple type system for LASTⁿ, whose type preservation property ensures protocol fidelity and communication safety, but not deadlock-freedom. This means that well-typed threads in LASTⁿ can perform session protocols that may lead to

stuck terms/configurations. To connect to the world of processes and to recover deadlock-freedom guarantees to the functional realm, we presented a translation from LAST^n to APCP (a session-typed variant of the asynchronous π -calculus) that is *operationally correct*. In particular, operational correctness includes the *soundness* property, which ensures that the translation reflects reduction steps and is critical to the transfer of deadlock-freedom formalized by Theorem 6.4.14. This way, we were able to analyze deadlock-freedom in LAST^n by leaning on the established results for APCP (Theorem 6.3.15) without sacrificing complexity (cf. Remark 6.4.16).

In future work, it would be interesting to study the extension of LAST^n with recursion/recursive types, and to extend our translation into APCP (and its operational correspondence results) accordingly. We do not expect technical difficulties, in particular if LAST^n is enhanced with the kind of tail-recursive behavior present in APCP.

7

BUNCHED FUNCTIONS AS PROCESSES

This chapter discusses an interpretation of the logic of bunched implications (BI) as a typed functional calculus. It frames the calculus as a prototype programming language. This way, an important litmus test is obtained for the interpretation of BI as π BI, a session-typed message-passing process calculus: a faithful translation would show that the process calculus can accurately model real programming languages and concepts. Thus, this chapter addresses the following research question, introduced in Section 1.2.2.2:

Research Question II-2. *Can π BI faithfully represent the $\alpha\lambda$ -calculus on a low level of abstraction, and can we exploit π BI's correctness properties in the $\alpha\lambda$ -calculus?*

This chapter is the result of a collaboration between myself and Dan Frumin, Emanuele D'Ossualdo, and Jorge A. Pérez. Here, I focus on the translation part of our publication [Fru+22] to which I contributed significantly. I include a self-contained summary of BI and π BI (Section 7.3); omitted details and proofs can be found in the chapter dedicated to π BI (Chapter 5). The publication contains additional material: a denotational semantics to derive behavioral equivalence and provenance tracking (omitted as a whole).

7.1. INTRODUCTION

The π -calculus [Mil89; MPW92] is a paradigmatic process calculus for studying message-passing concurrency, i.e., the interaction between concurrent processes collaborating by exchanging messages. Studying message-passing concurrency as in the π -calculus is important, as it reveals fine-grained and precise properties of systems that coordinate by exchanging messages. However, due to this level of precision in the π -calculus, it is not always obvious how results for the π -calculus can be applied to real-world programming.

One way to gain insights from the π -calculus is to design programming calculi that are more coarse and perhaps less expressive, but more intuitive. Such calculi can showcase more directly the properties of programs gained from formal study. Ideally, this idea can be

strengthened by translation of the more intuitive calculus into the π -calculus. This then shows that the fine-grained features of the π -calculus suitably handle the features of the coarser calculus, possibly enabling the transference of some of the properties of the π -calculus.

This story also works in the opposite direction. Suppose given a calculus that is intuitive to work with. Because of the coarseness of its design, it may not be clear how it can be implemented as a programming language (e.g., how to design a compiler). A translation into the π -calculus can then reveal more precise and fine-grained principles, giving insights in how to achieve such an implementation.

Our contributions. In this chapter, we study such a translation. In particular, we study the $\alpha\lambda$ -calculus [OP99; OHe03; Pym13]: a variant of the λ -calculus, derived from a Curry-Howard interpretation of the logic of bunched implications (BI). The $\alpha\lambda$ -calculus is interesting, because it inherits from BI a fine-grained resource control based on ownership. Though such properties are an interesting topic for study on their own, in this chapter the focus lies on translating the $\alpha\lambda$ -calculus into π BI. The calculus π BI is a variant of the π -calculus [Fru+22], also derived from a Curry-Howard interpretation of BI. As such, π BI is also interesting on its own, as it implements BI's management of ownership explicitly in the process language. In contrast, the $\alpha\lambda$ -calculus handles ownership management more coarsely and implicitly. Here, we show how π BI can serve as a fine-grained explanation of the management of ownership in the $\alpha\lambda$ -calculus inherited from BI. Details on π BI and the management of ownership derived from BI can be found in Chapter 7.

In Section 7.2 we introduce the $\alpha\lambda$ -calculus, and in Section 7.3 we briefly recall π BI. In Section 7.4 we define a translation from the $\alpha\lambda$ -calculus into π BI, and show that this translation satisfies *operational correspondences*: established correctness properties of translations that ensure that the behavior of translated programs precisely captures the behavior of source programs, attesting to the faithfulness of the translation. Sections 7.5 and 7.6 briefly discuss related work and conclusions, respectively.

7

7.2. THE $\alpha\lambda$ -CALCULUS

Here, we introduce the $\alpha\lambda$ -calculus: syntax (Section 7.2.1), semantics (Section 7.2.2), and type system (Section 7.2.3), as introduced by O'Hearn and Pym [OP99; OHe03; Pym13].

7.2.1. SYNTAX

We use M, N, L, \dots for terms, and $a, b, c, \dots, x, y, z, \dots$ for variables.

Definition 7.2.1 (Syntax of the $\alpha\lambda$ -calculus). *Figure 7.1 gives the syntax of the $\alpha\lambda$ -calculus.*

The $\alpha\lambda$ -calculus is based on the λ -calculus, but (almost) all of its constructs come in two variants: one multiplicative and one additive. Multiplicative (resp. additive) abstraction ' $\lambda x.M$ ' (resp. ' $\alpha x.M$ ') is to be used with the corresponding application ' $M N$ ' (resp. ' $M @ N$ '). The multiplicative (resp. additive) unit ' 0_m ' (resp. ' 0_a ') is to be used with the corresponding unit-let ' $\text{let } 0_m = M \text{ in } N$ ' (resp. ' $\text{let } 0_a = M \text{ in } N$ '). Multiplicative pairs

$M, N, L ::= x$	variable		
$\lambda x.M$	abstraction	$M N$	application
$\alpha x.M$	abstraction	$M @ N$	application
0_m	unit	$\text{let } 0_m = M \text{ in } N$	unit-let
0_a	unit	$\text{let } 0_a = M \text{ in } N$	unit-let
$\langle M, N \rangle$	pair	$\text{let } \langle x, y \rangle = M \text{ in } N$	pair-let
(M, N)	pair	$\pi_i M$	projection
$\text{select}_i(N)$	selection	$\text{case } M \text{ of } \{1(x_1) : N, 2(x_2) : L\}$	branch

Figure 7.1 | Syntax of the $\alpha\lambda$ -calculus (Definition 7.2.1).

' $\langle M, N \rangle$ ' can be "unpacked" with the pair-let construct ' $\text{let } \langle x, y \rangle = M \text{ in } N$ ', while additive pairs ' (M, N) ' can be projected with ' $\pi_i(M)$ ' (where $i \in \{1, 2\}$). Selection ' $\text{select}_i(N)$ ' and branching ' $\text{case } M \text{ of } \{1(x_1) : N, 2(x_2) : L\}$ ' appear in one variant only.

We write $\text{fv}(M)$ to denote the free variables of M . As usual, substitution of a term N for a variable x in a term M is denoted $M\{N/x\}$. We write $M\{N_1/x_1, \dots, N_n/x_n\}$ for the sequence of substitutions $M\{N_1/x_1\} \dots \{N_n/x_n\}$.

7.2.2. SEMANTICS

The reduction semantics of the $\alpha\lambda$ -calculus, denoted $M \mapsto N$, follows a call-by-name strategy for the λ -calculus. Figure 7.2 gives the rules to derive reductions.

Rules [RED-APP-M] and [RED-APP-A] (β -)reduce function applications to substitutions. Rules [RED-LET-UNIT-A] and [RED-LET-UNIT-A] eliminate unit-lets. Rule [RED-LET-PAIR] unpacks pairs into substitutions. Rule [RED-PROJ-PAIR] projects pairs. Rule [RED-CASE-SEL] selects a branch and substitutes accordingly. The other rules in Figure 7.2 close reduction under call-by-value evaluation contexts.

7.2.3. TYPE SYSTEM

The type system for the $\alpha\lambda$ -calculus is derived from the natural deduction presentation of BI. It follows the idea of the simply-typed λ -calculus, where a term requires variables of a certain type to provide a behavior of a certain type. As such, $\alpha\lambda$ -calculus typing judgments are of the form $\Delta \vdash M : A$, where the term M provides a behavior of type A by using the variables in the typing context Δ .

The top of Figure 7.3 gives types, bunches, and bunched contexts; we explain the behavior associated with types when we discuss the typing rules below. Bunches Δ are binary trees with internal nodes labelled with either ';' or ',' , and with leaves being either unit bunches (\emptyset_m or \emptyset_a) or typing assignments ($x : A$). We write $\text{fv}(\Delta)$ for the set of variables occurring in the bunch Δ , and write $x \in \Delta$ to denote $x \in \text{fv}(\Delta)$.

Bunched contexts Γ are bunches with a hole $[\cdot]$. As usual, we write $\Gamma[\Delta]$ for a bunch obtained by replacing $[\cdot]$ with Δ in Γ . We write $\Gamma[[\cdot] \mid \dots \mid [\cdot]]$ for a bunched context with

Primitive reductions:

$$\begin{array}{c}
\frac{[\text{RED-APP-M}]}{(\lambda x.M) N \rightarrow M\{N/x\}} \qquad \frac{[\text{RED-APP-A}]}{(\alpha x.M) @ N \rightarrow M\{N/x\}} \qquad \frac{[\text{RED-LET-UNIT-M}]}{\text{let } 0_m = 0_m \text{ in } M \rightarrow M} \\
\frac{[\text{RED-LET-UNIT-A}]}{\text{let } 0_a = 0_a \text{ in } M \rightarrow M} \qquad \frac{[\text{RED-LET-PAIR}]}{\text{let } \langle x, y \rangle = \langle M_1, M_2 \rangle \text{ in } N \rightarrow N\{M_1/x, M_2/y\}} \\
\frac{[\text{RED-PROJ-PAIR}]}{\pi_i(M_1, M_2) \rightarrow M_i} \qquad \frac{[\text{RED-CASE-SEL}]}{\text{caseselect}_i(M) \text{ of } \{1(x_1) : N_1, 2(x_2) : N_2\} \rightarrow N_i\{M/x_i\}} \qquad i \in \{1, 2\}
\end{array}$$

Lifted reductions:

$$\begin{array}{c}
\frac{[\text{RED-CTX-APP-M}]}{M \rightarrow M'} \qquad \frac{[\text{RED-CTX-APP-A}]}{M @ N \rightarrow M' @ N} \qquad \frac{[\text{RED-CTX-LET}]}{M \rightarrow M' \quad p \in \{0_m, 0_a, \langle x, y \rangle\}} \\
\frac{M N \rightarrow M' N}{M N \rightarrow M' N} \qquad \frac{M @ N \rightarrow M' @ N}{M @ N \rightarrow M' @ N} \qquad \frac{M \rightarrow M' \quad p \in \{0_m, 0_a, \langle x, y \rangle\}}{\text{let } p = M \text{ in } N \rightarrow \text{let } p = M' \text{ in } N} \\
\frac{[\text{RED-CTX-PROJ}]}{M \rightarrow M'} \qquad \frac{[\text{RED-CTX-CASE}]}{\text{case } M \text{ of } \{1(x_1) : N_1, 2(x_2) : N_2\} \rightarrow \text{case } M' \text{ of } \{1(x_1) : N_1, 2(x_2) : N_2\}} \\
\frac{M \rightarrow M'}{\pi_i M \rightarrow \pi_i M'} \qquad \frac{M \rightarrow M'}{\text{case } M \text{ of } \{1(x_1) : N_1, 2(x_2) : N_2\} \rightarrow \text{case } M' \text{ of } \{1(x_1) : N_1, 2(x_2) : N_2\}}
\end{array}$$

Figure 7.2 | Reduction rules for the $\alpha\lambda$ -calculus.

multiple holes.

Figure 7.3 also gives the typing rules for the $\alpha\lambda$ -calculus. Rule [TYP-ID] types a variable of arbitrary type. Rule [TYP-CONG] closes typing under the least congruence on bunches closed under commutative monoid laws for ‘,’ with unit ϕ_m , and for ‘;’ with unit ϕ_a , denoted \equiv . For example, $(\Delta_1, \phi_m); \Delta_2 \equiv \Delta_2; \Delta_1$. Rule [TYP-WEAKEN] discards resources from a bunch joined by ‘;’ (i.e., additively combined). Rule [TYP-CONTRACT] duplicates resources under ‘;’; notation $\Delta^{(1)}$ denotes a copy of Δ with each variable annotated with ‘ $_^{(1)}$ ’.

Rule [TYP-WAND-I] (resp. [TYP-IMPL-I]) types a multiplicative (resp. additive) abstraction. Notice how the resources are joined with ‘,’ (resp. ‘;’), thus limiting (resp. enabling) the application of Rules [TYP-WEAKEN] and [TYP-CONTRACT]; this principle holds for all other rules. Rules [TYP-WAND-E] and [TYP-IMPL-E] type function application. Rules [TYP-EMPTY-I] and [TYP-TRUE-I] type the units, and Rule [TYP-EMPTY-E] and [TYP-TRUE-E] type unit-lets. Rule [TYP-SEP-I] types multiplicative pairs, and Rule [TYP-SEP-E] types their unpacking. Rule [TYP-CONJ-I] types additive pairs, and Rule [TYP-CONJ-E] types their projection. Rule [TYP-DISJ-I] types selection, and Rule [TYP-DISJ-E] types branching. Finally, Rule [TYP-CUT] types substitution; note that this rule is admissible (cf. [OHe03]).

7.3. π BI: A SUMMARY

Similar to how the $\alpha\lambda$ -calculus is derived from the natural deduction presentation of BI, π BI is a variant of the session-typed π -calculus derived from the sequent calculus presentation of

Types, bunches, and contexts:

$$\begin{array}{ll}
A, B, C ::= \mathbf{1}_m \mid A * B \mid A \multimap B & \text{multiplicatives} \\
\mid \mathbf{1}_a \mid A \wedge B \mid A \rightarrow B \mid A \vee B & \text{additives} \\
\Delta, \Theta ::= \emptyset_m \mid \emptyset_a \mid x : A \mid \Delta, \Delta \mid \Delta; \Delta & \text{bunches} \\
\Gamma ::= [\cdot] \mid \Delta, \Gamma \mid \Delta; \Gamma \mid \Gamma, \Delta \mid \Gamma; \Delta & \text{bunched contexts}
\end{array}$$

Typing:

$$\begin{array}{c}
\frac{[TYP-ID]}{x : A \vdash x : A} \qquad \frac{[TYP-CONG]}{\Delta \vdash M : A \quad \Delta \equiv \Theta} \quad \Theta \vdash M : A \qquad \frac{[TYP-WEAKEN]}{\Gamma[\Delta] \vdash M : A} \quad \Gamma[\Delta] \vdash M : A \\
\\
\frac{[TYP-CONTRACT]}{\Gamma[\Delta^{(1)}; \Delta^{(2)}] \vdash M : A} \quad \Gamma[\Delta] \vdash M\{x/x^{(1)}, x/x^{(2)} \mid x \in \text{fv}(\Delta)\} : A \qquad \frac{[TYP-WAND-I]}{\Delta, x : A \vdash M : B} \quad \Delta \vdash \lambda x. M : A \multimap B \qquad \frac{[TYP-IMPL-I]}{\Delta; x : A \vdash M : B} \quad \Delta \vdash \alpha x. M : A \rightarrow B \\
\\
\frac{[TYP-WAND-E]}{\Delta \vdash M : A \multimap B \quad \Theta \vdash N : A} \quad \Delta, \Theta \vdash M N : B \qquad \frac{[TYP-IMPL-E]}{\Delta \vdash M : A \rightarrow B \quad \Theta \vdash N : A} \quad \Delta; \Theta \vdash M @ N : B \qquad \frac{[TYP-EMP-I]}{\emptyset_m \vdash \mathbf{0}_m : \mathbf{1}_m} \\
\\
\frac{[TYP-TRUE-I]}{\emptyset_a \vdash \mathbf{0}_a : \mathbf{1}_a} \qquad \frac{[TYP-EMP-E]}{\Delta \vdash M : \mathbf{1}_m \quad \Gamma[\emptyset_m] \vdash N : A} \quad \Gamma[\Delta] \vdash \text{let } \mathbf{0}_m = M \text{ in } N : A \qquad \frac{[TYP-TRUE-E]}{\Delta \vdash M : \mathbf{1}_a \quad \Gamma[\emptyset_a] \vdash N : A} \quad \Gamma[\Delta] \vdash \text{let } \mathbf{0}_a = M \text{ in } N : A \\
\\
\frac{[TYP-SEP-I]}{\Delta \vdash M : A \quad \Theta \vdash N : B} \quad \Delta, \Theta \vdash \langle M, N \rangle : A * B \qquad \frac{[TYP-CONJ-I]}{\Delta \vdash M : A \quad \Theta \vdash N : B} \quad \Delta; \Theta \vdash (M, N) : A \wedge B \\
\\
\frac{[TYP-SEP-E]}{\Delta \vdash M : A * B \quad \Gamma[x : A, y : B] \vdash N : C} \quad \Gamma[\Delta] \vdash \text{let } \langle x, y \rangle = M \text{ in } N : C \qquad \frac{[TYP-CONJ-E]}{\Delta \vdash M : A_1 \wedge A_2 \quad i \in \{1, 2\}} \quad \Delta \vdash \pi_i M : A_i \\
\\
\frac{[TYP-DISJ-I]}{\Delta \vdash M : A_i \quad i \in \{1, 2\}} \quad \Delta \vdash \text{select}_i(M) \vdash A_1 \vee A_2 \\
\\
\frac{[TYP-DISJ-E]}{\Delta \vdash M : A_1 \vee A_2 \quad \Gamma[x_1 : A_1] \vdash N_1 : C \quad \Gamma[x_2 : A_2] \vdash N_2 : C} \quad \Gamma[\Delta] \vdash \text{case } M \text{ of } \{1(x_1) : N_1, 2(x_2) : N_2\} : C \\
\\
\frac{[TYP-CUT]}{\Delta \vdash M : A \quad \Gamma[x : A] \vdash N : C} \quad \Gamma[\Delta] \vdash N\{M/x\} : C
\end{array}$$

Figure 7.3 | Types and typing rules for the $\alpha\lambda$ -calculus.

$P, Q, R ::= \bar{x}[y]; (P \mid Q)$	send		$x(y); P$	receive
$x[]$	close		$x(); P$	wait
$\bar{x} < \text{inl}; P$	left selection		$x \triangleright \{\text{inl} : P; \text{inr} : Q\}$	branch
$\bar{x} < \text{inr}; P$	right selection		$[x \leftrightarrow y]$	forwarder
$(\nu x)(P \mid Q)$	restriction + parallel		$\rho[\sigma]; P$	spawn

Figure 7.4 | Syntax of π BI processes.

BI. In this section, we give a brief summary of π BI; see Chapter 5 for details and proofs.

Notation. We assume an enumerable set of *names* $a, b, c, \dots, x, y, z \in \text{Name}$ to denote channels. We make use of finite partial functions $f: A \xrightarrow{\text{fin}} B$. We write $f(x) = \perp$ if f is not defined on x . We define $\text{dom}(f) = \{x \in A \mid f(x) \neq \perp\}$. We write $[a_1 \mapsto b_1; \dots; a_n \mapsto b_n]$ to denote a map, and \emptyset for the empty map. We will also use set comprehensions for finite functions, e.g., $[a \mapsto b \mid a \in \{1, 2\}, b = a^2]$. For a finite partial function f and a set X , we write $f \setminus X$ for the function that coincides with f except for being undefined on X . We write $\mathbb{P}(A)$ to denote the powerset of set A .

Syntax. The syntax of π BI processes is given in Figure 7.4. The structure and conventions of process calculi based on Curry-Howard correspondences are typically based on implicit expectations of how the components of a system are organized—an expectation that is ultimately verified by typing. The idea is that interaction is grouped into a *session*, the sequence of interactions along a single channel. As hinted at above, a process P should *provide* a session at some specific channel $x \in \text{fn}(P)$, and there is always a single *user* of the session exchanging messages with P along x . To provide a session, a process can make use of sessions on other channels. Most constructs are standard and reflect these expectations:

- *Receive/Send:* A process $x(y); P$ receives a channel y from the session at x and proceeds as P , continuing the session at x .

A process $\bar{x}[y]; (P \mid Q)$ sends a *fresh* channel y over the session at x ; the process P provides the new session at y , while Q continues the session at x .

- *Labeled choice (selection and branching):* The processes $\bar{x} < \text{inl}; P$ and $\bar{x} < \text{inr}; P$ select left/right labels over the session at x , respectively. The dual process $x \triangleright \{\text{inl} : P; \text{inr} : Q\}$ offers these left/right options, which trigger continuation P or Q , respectively.
- *Explicit session closing:* The end of a session is expected to be explicitly closed by a final handshake between the dual prefixes $x[]$ and $x(); P$ (empty send/receive, respectively).
- *Structured parallel composition:* Parallel composition is used jointly with restriction. In a process $(\nu x)(P \mid Q)$ a new session is created at x , provided by P with Q as its only user. To improve readability, we sometimes annotate the parallel operator with the name of the associated restriction, and write $(\nu x)(P \mid_x Q)$.

$$\begin{array}{c}
\text{[CONG-ASSOC-L]} \\
\frac{x \notin \text{fn}(Q) \quad y \notin \text{fn}(P)}{(\mathbf{v}x)(P|_x(\mathbf{v}y)(Q|_y R)) \equiv (\mathbf{v}y)(Q|_y(\mathbf{v}x)(P|_x R))} \\
\\
\begin{array}{cc}
\text{[CONG-ASSOC-R]} & \text{[CONG-SPAWN-SWAP]} \\
\frac{x \notin \text{fn}(R) \quad y \notin \text{fn}(P)}{(\mathbf{v}x)(P|_x(\mathbf{v}y)(Q|_y R)) \equiv (\mathbf{v}y)((\mathbf{v}x)(P|_x Q)|_y R)} & \frac{\sigma_1 \not\equiv \sigma_2}{\rho[\sigma_1]; \rho[\sigma_2]; Q \equiv \rho[\sigma_2]; \rho[\sigma_1]; Q}
\end{array}
\end{array}$$

Figure 7.5 | Structural congruence.

- *Forwarders*: A process $[x \leftrightarrow y]$ provides a session at x as a copycat of the session at y .

The key novel construct of π BI is the *spawn prefix* $\rho[\sigma]; P$. It is parametrized by what we call a *spawn binding* σ . Spawn bindings, formally defined below, are a unification and generalization of prefixes like $\rho[x \mapsto x_1, x_2]$ (copy the session at x to x_1 and x_2) but also $\rho[x \mapsto \emptyset]$ (drop the session at x). Indeed, in addition to allowing the simultaneous mapping of more than one name x , we allow names to be mapped to sets of names, encompassing the nullary and binary cases above.

Definition 7.3.1 (Spawn Binding). *A finite partial function $\sigma : \text{Name} \xrightarrow{\text{fin}} \mathbb{P}(\text{Name})$ is a spawn binding if:*

- $\forall x, y \in \text{dom}(\sigma). x \neq y \implies \sigma(x) \cap \sigma(y) = \emptyset$, and
- $\forall x \in \text{dom}(\sigma). \text{dom}(\sigma) \cap \sigma(x) = \emptyset$.

We define the restrictions of σ to be the set $\text{restr}(\sigma) = \bigcup_{x \in \text{dom}(\sigma)} \sigma(x)$. We omit redundant delimiters in spawn prefixes, e.g., we write $\rho[x \mapsto x_1, x_2; y \mapsto y_1]$ for $\rho[[x \mapsto \{x_1, x_2\}; y \mapsto \{y_1\}]$.

Given two spawn bindings σ_1 and σ_2 we say they are independent, written $\sigma_1 \not\equiv \sigma_2$, if $\text{dom}(\sigma_1) \cap \text{dom}(\sigma_2) = \emptyset$, $\text{dom}(\sigma_1) \cap \text{restr}(\sigma_2) = \emptyset$, $\text{restr}(\sigma_1) \cap \text{restr}(\sigma_2) = \emptyset$, and $\text{dom}(\sigma_2) \cap \text{restr}(\sigma_1) = \emptyset$.

Free and bound names. Except for the new spawn construct, the notion of free and bound names is standard: the processes $\bar{x}[y]; (P|Q)$, $x(y); P$, and $(\mathbf{v}y); (P|Q)$ all bind y . For the spawn prefix, the situation is a bit different. Given a set of names X , a spawn $\rho[x \mapsto X]; P$ signals to the context that P will use $n = |X|$ times the session at x . The names in X indicate the new names that P will use instead of x . As such, these new names are bound in P by the spawn prefix, whereas the original name x is free in P . Formally, $\text{fn}(\rho[\sigma]; P) = (\text{fn}(P) \setminus \text{restr}(\sigma)) \cup \text{dom}(\sigma)$.

We implicitly identify processes up to α -conversion and we adopt Barendregt's variable convention: all bound names are different, and bound names are different from free names.

Structural congruence. As usual, we define a congruence that identifies processes up to inconsequential syntactical differences. *Structural congruence*, denoted \equiv , is the smallest congruence satisfying the rules in Figure 7.5: the orders of parallel compositions and independent

$$\begin{array}{c}
\frac{[\text{RED-RECV-SEND}]}{(\mathbf{v}x)(x(y); Q \mid_x \bar{x}[y]; (P_1 \mid P_2)) \rightarrow (\mathbf{v}x)((\mathbf{v}y)(P_1 \mid_y Q) \mid_x P_2)} \qquad \frac{[\text{RED-WAIT-CLOSE}]}{(\mathbf{v}x)(x(); Q \mid_x x[]) \rightarrow Q} \\
\frac{[\text{RED-SEND-RECV}]}{(\mathbf{v}x)(\bar{x}[y]; (P_1 \mid P_2) \mid_x x(y); Q) \rightarrow (\mathbf{v}x)(P_2 \mid_x (\mathbf{v}y)(P_1 \mid_y Q))} \qquad \frac{[\text{RED-CLOSE-WAIT}]}{(\mathbf{v}x)(x[] \mid_x x(); Q) \rightarrow Q} \\
\frac{[\text{RED-SEL-BRA}]}{(\mathbf{v}x)(\bar{x} \triangleleft \ell; P \mid_x x \triangleright \{\text{inl} : Q_{\text{inl}}, \text{inr} : Q_{\text{inr}}\}) \rightarrow (\mathbf{v}x)(P \mid_x Q_\ell)} \qquad \frac{[\text{RED-FWD-R}]}{(\mathbf{v}x)(P \mid_x [y \leftrightarrow x]) \rightarrow P\{y/x\}} \\
\frac{[\text{RED-FWD-L}]}{(\mathbf{v}x)([x \leftrightarrow y] \mid_x P) \rightarrow P\{y/x\}} \\
\frac{[\text{RED-SPAWN}]}{\sigma = \{x_1, \dots, x_n\} \quad \sigma' = ((\sigma \setminus \{x\}) \cup \{z \mapsto \{z_1, \dots, z_n\} \mid z \in \text{fn}(P) \setminus \{x\}\})}{(\mathbf{v}x)(P \mid_x \rho[\sigma]; Q) \rightarrow \rho[\sigma']; (\mathbf{v}x_1)(P^{(1)} \mid_{x_1} \dots (\mathbf{v}x_n)(P^{(n)} \mid_{x_n} Q) \dots)} \\
\frac{[\text{RED-SPAWN-R}]}{x \notin \text{dom}(\sigma)} \frac{(\mathbf{v}x)(P \mid_x \rho[\sigma]; Q) \rightarrow \rho[\sigma]; (\mathbf{v}x)(P \mid_x Q)}{\qquad} \qquad \frac{[\text{RED-SPAWN-L}]}{x \notin \text{dom}(\sigma)} \frac{(\mathbf{v}x)(\rho[\sigma]; P \mid_x Q) \rightarrow \rho[\sigma]; (\mathbf{v}x)(P \mid_x Q)}{\qquad} \\
\frac{[\text{RED-SPAWN-MERGE}]}{\rho[\sigma_1]; \rho[\sigma_2]; P \rightarrow \rho[\sigma_1 \times \sigma_2]; P} \\
\mathcal{K} ::= [\cdot] \mid \rho[\sigma]; \mathcal{K} \qquad \frac{[\text{RED-EVAL-CTX}]}{P \rightarrow Q} \qquad \frac{[\text{RED-CONG}]}{P \equiv P' \quad P' \rightarrow Q' \quad Q' \equiv Q}{P \rightarrow Q} \\
\begin{array}{l}
\mid (\mathbf{v}x)(P \mid_x \mathcal{K}) \\
\mid (\mathbf{v}x)(\mathcal{K} \mid_x P)
\end{array}
\end{array}$$

Figure 7.6 | Reduction rules for πBI .

spawn prefixes do not matter (Rules [CONG-ASSOC-R], [CONG-ASSOC-L], and [CONG-SPAWN-SWAP], respectively).

Semantics. The operational semantics of πBI is defined in terms of a reduction relation, denoted \rightarrow , which combines the usual reductions of the π -calculus with reductions for spawn prefixes. As usual, we shall write \rightarrow^* to denote the reflexive, transitive closure of \rightarrow , and $P \not\rightarrow$ when P cannot reduce.

Figure 7.6 gives the reduction rules. The first seven rules describe interactions along a channel. Rules [RED-RECV-SEND] and [RED-SEND-RECV] describe the exchange of channel y along x . The resulting process contains an explicit restriction for y with P_2 out of scope, reflecting the expectation that P_1 is the provider of the new session at y . Rules [RED-WAIT-

CLOSE] and [RED-CLOSE-WAIT] describe the closing of a session at x . Rule [RED-SEL-BRA] shows how a branch offered on x can be selected by sending inl or inr . Finally, Rules [RED-FWD-R] and [RED-FWD-L] explain the elimination of a forwarder connected by restriction in terms of a substitution.

The next four rules of Figure 7.6 define the semantics of spawn . The crucial rule is Rule [RED-SPAWN], which uses the following definition.

Definition 7.3.2 (Indexed Renaming). *Given a process P with $\text{fn}(P) = \{a, b, \dots, z\}$, we define $P^{(i)}$ to be the process P where every free name is replaced by a fresh copy of the name indexed by i . Formally, assuming $a_i, b_i, \dots, z_i \notin \text{fn}(P)$, $P^{(i)} \triangleq P\{a_i / a, b_i / b, \dots, z_i / z\}$.*

Rule [RED-SPAWN] then duplicates or discards a process as specified by the involved spawn binding (Definition 7.3.1), propagating the spawn accordingly.

Rules [RED-SPAWN-R], [RED-SPAWN-L], and [RED-SPAWN-MERGE] show how the spawn prefix interacts with independent process compositions and with other spawn prefixes, respectively. Rules [RED-SPAWN-R] and [RED-SPAWN-L] are forms of scope extrusion: spawn prefixes can “bubble up” past restrictions that do not capture their bindings, possibly enabling interactions of the spawn with processes in the outer context. Rule [RED-SPAWN-MERGE] describes how two consecutive spawn prefixes can be combined into a single spawn , by merging the spawn bindings, denoted \times , as follows.

Definition 7.3.3 (Merge). *Let $\sigma[X] \triangleq \bigcup\{\sigma(x) \mid x \in X \cap \text{dom}(\sigma)\}$. The merge of two spawn bindings σ_1, σ_2 , written $\sigma_1 \times \sigma_2$, is defined as:*

$$(\sigma_1 \times \sigma_2)(x) \triangleq \begin{cases} \sigma_2[\sigma_1(x)] \cup (\sigma_1(x) \setminus \text{dom}(\sigma_2)) & \text{if } x \in \text{dom}(\sigma_1) \\ \sigma_2(x) & \text{if } x \notin \text{dom}(\sigma_1) \cup \text{restr}(\sigma_1) \\ \perp & \text{otherwise} \end{cases}$$

The last two rules in Figure 7.6 are purely structural. Rule [RED-EVAL-CTX] closes reduction under *evaluation contexts*, denoted \mathcal{K} , consisting of spawn prefixes and structured parallel compositions (cf. Figure 7.6 for its definition). Rule [RED-CONG] closes reduction under structural congruence.

Typing. The π BI type system is based on the BI sequent calculus, and follows the approach of π DILL: propositions are interpreted as session types, where the context governs the *use* of available channels and the conclusion governs the process’ behavior on the *provided* channel. As such, the type system of π BI uses judgments of the form $\Delta \vdash P \blacktriangleright x : A$, where the process P provides the session A on channel x , while using the sessions provided by the typing context Δ .

The top of Figure 7.7 gives types, bunches, and bunched contexts; we explain the session behavior associated with types when we discuss the typing rules below. Bunches Δ are binary trees with internal nodes labelled with either ‘;’ or ‘,’ and with leaves being either unit bunches (\emptyset_m or \emptyset_a) or typing assignments ($x : A$). We write $\text{fv}(\Delta)$ for the set of variables occurring in the bunch Δ , and write $x \in \Delta$ to denote $x \in \text{fv}(\Delta)$.

$$\begin{array}{c}
\text{[TYP-SEP-R]} \\
\frac{\Delta_1 \vdash P_1 \blacktriangleright y : A \quad \Delta_2 \vdash P_2 \blacktriangleright x : B}{\Delta_1, \Delta_2 \vdash \bar{x}[y]; (P_1 | P_2) \blacktriangleright x : A * B} \\
\text{[TYP-SEP-L]} \\
\frac{\Gamma[x : B, y : A] \vdash P \blacktriangleright z : C}{\Gamma[x : A * B] \vdash x(y); P \blacktriangleright z : C} \\
\text{[TYP-WAND-R]} \\
\frac{\Delta, y : A \vdash P \blacktriangleright x : B}{\Delta \vdash x(y); P \blacktriangleright x : A * B} \\
\text{[TYP-WAND-L]} \\
\frac{\Delta \vdash P_1 \blacktriangleright y : A \quad \Gamma[x : B] \vdash P_2 \blacktriangleright z : C}{\Gamma[\Delta, x : A * B] \vdash \bar{x}[y]; (P_1 | P_2) \blacktriangleright z : C} \\
\text{[TYP-EMP-R]} \\
\frac{}{\emptyset_m \vdash x[] \blacktriangleright x : \mathbf{I}_m} \\
\text{[TYP-EMP-L]} \\
\frac{\Gamma[\emptyset_m] \vdash P \blacktriangleright z : C}{\Gamma[x : \mathbf{I}_m] \vdash x(); P \blacktriangleright z : C} \\
\text{[TYP-CONJ-R]} \\
\frac{\Delta_1 \vdash P_1 \blacktriangleright y : A \quad \Delta_2 \vdash P_2 \blacktriangleright x : B}{\Delta_1; \Delta_2 \vdash \bar{x}[y]; (P_1 | P_2) \blacktriangleright x : A \wedge B} \\
\text{[TYP-CONJ-L]} \\
\frac{\Gamma[x : B; y : A] \vdash P \blacktriangleright z : C}{\Gamma[x : A \wedge B] \vdash x(y); P \blacktriangleright z : C} \\
\text{[TYP-IMPL-R]} \\
\frac{\Delta; y : A \vdash P \blacktriangleright x : B}{\Delta \vdash x(y); P \blacktriangleright x : A \rightarrow B} \\
\text{[TYP-IMPL-L]} \\
\frac{\Delta \vdash P_1 \blacktriangleright y : A \quad \Gamma[x : B] \vdash P_2 \blacktriangleright z : C}{\Gamma[\Delta; x : A \rightarrow B] \vdash \bar{x}[y]; (P_1 | P_2) \blacktriangleright z : C} \\
\text{[TYP-TRUE-R]} \\
\frac{\Gamma[\emptyset_a] \vdash P \blacktriangleright z : C}{\Gamma[x : \mathbf{I}_a] \vdash x(); P \blacktriangleright z : C} \\
\text{[TYP-TRUE-L]} \\
\frac{}{\emptyset_a \vdash x[] \blacktriangleright x : \mathbf{I}_a} \\
\text{[TYP-DISJ-R-INL]} \\
\frac{\Delta \vdash P \blacktriangleright x : A}{\Delta \vdash \bar{x} \triangleleft \text{inl}; P \blacktriangleright x : A \vee B} \\
\text{[TYP-DISJ-L-INL]} \\
\frac{\Delta \vdash P \blacktriangleright x : B}{\Delta \vdash \bar{x} \triangleleft \text{inr}; P \blacktriangleright x : A \vee B} \\
\text{[TYP-FWD]} \\
\frac{}{y : A \vdash [x \leftrightarrow y] \blacktriangleright x : A} \\
\text{[TYP-CUT]} \\
\frac{\Delta \vdash P \blacktriangleright x : A \quad \Gamma[x : A] \vdash Q \blacktriangleright x : C}{\Gamma[\Delta] \vdash (\mathbf{v}x)(P | Q) \blacktriangleright z : C} \\
\text{[TYP-STRUCT]} \\
\frac{\Delta_2 \vdash P \blacktriangleright z : C \quad \sigma : \Delta_1 \rightsquigarrow \Delta_2}{\Delta_1 \vdash \rho[\sigma]; P \blacktriangleright z : C} \\
\text{[TYP-BUNCH-EQUIV]} \\
\frac{\Delta_2 \vdash P \blacktriangleright z : C \quad \Delta_2 \equiv \Delta_1}{\Delta_1 \vdash P \blacktriangleright z : C}
\end{array}$$

Spawn binding:

$$\begin{array}{c}
\text{[SPAWN-CONTRACT]} \\
\frac{}{[x \mapsto \{x_1, \dots, x_n\} \mid x \in \Delta] : \Gamma[\Delta] \rightsquigarrow \Gamma[\Delta^{(1)}; \dots; \Delta^{(n)}]} \\
\text{[SPAWN-WEAKEN]} \\
\frac{}{[x \mapsto \emptyset \mid x \in \Delta_1] : \Gamma[\Delta_1; \Delta_2] \rightsquigarrow \Gamma[\Delta_2]} \\
\text{[SPAWN-MERGE]} \\
\frac{\sigma_1 : \Delta_1 \rightsquigarrow \Delta_2 \quad \sigma_2 : \Delta_2 \rightsquigarrow \Delta_3}{(\sigma_1 \times \sigma_2) : \Delta_1 \rightsquigarrow \Delta_3}
\end{array}$$

Figure 7.7 | Typing rules and spawn binding rules for π BI.

Bunched contexts Γ are bunches with a hole $[\cdot]$. As usual, we write $\Gamma[\Delta]$ for a bunch obtained by replacing $[\cdot]$ with Δ in Γ . We write $\Gamma[[\cdot] \mid \dots \mid [\cdot]]$ for a bunched context with multiple holes.

Types, bunches, and bunched context are the same for π BI as for the $\alpha\lambda$ -calculus given in Figure 7.3. Figure 7.7 gives the type system for π BI. We organize them in four groups: the first six rules type communication primitives with multiplicative types, and the next six rules with additive types; the following three rules type branching primitives using disjunction; the final four rules type forwarding, structured parallel composition, and the structural rules.

The type $A * B$ is assigned to a session that sends a name of type A and continues as B . Rule [TYP-SEP-R] states that to *provide* a session of type $A * B$ on x , a process must send on x a new name y and continue with a process providing a session of type A on y in parallel with a process providing the continuation session B on x . Rule [TYP-SEP-L] describes how to *use* a session of type $A * B$ on x : a process must receive on x a new name y which is to be used for the session of type A , after which the process must provide the continuation session B on x .

Rules [TYP-WAND-R] and [TYP-WAND-L] describe the type $A \multimap B$. These rules are dual to the rules for $A * B$: providing $A \multimap B$ requires a receive, and using it requires a send.

Rule [TYP-EMP-R] states how to close a session of type $\mathbf{1}_m$ using an empty send, followed by termination. The dual Rule [TYP-EMP-L] uses the empty receive. Note that Rule [TYP-EMP-R] requires the context to be \emptyset_m , effectively forcing processes to consume all the sessions they use before terminating.

The rules for sessions of additive type are identical to the ones for multiplicative types, except that the latter (de)composes bunches using ‘,’ while the former uses ‘;’. In particular, the process interpretation of the rules is identical for both counterparts. The difference has effect elsewhere, where the choice between ‘;’ and ‘,’ affects the possibility of using Rule [TYP-STRUCT] (explained last).

Disjunction types branching. To provide on x a session of type $A \vee B$, the process must select inl/inr on x and continues by providing A/B , respectively. Using a session of type $A \vee B$ on x requires a branch on x , where the left branch uses x as A and the right branch as B .

Rule [TYP-FWD] types the forwarder $[x \leftrightarrow y]$ as providing a session of type A on x as a copycat of a session of the same type on y in the context. Rule [TYP-CUT] connects processes P and Q along the channel x : P must *provide* a session of type A on x , whereas Q must *use* the session of the same type on the same channel.

Rule [TYP-BUNCH-EQUIV] closes typing under bunch equivalence (cf. Section 7.2.3). Rule [TYP-STRUCT] extends indexed renaming (Definition 7.3.2) to bunches as follows.

Definition 7.3.4 (Indexed Bunch Renaming). *Let Δ be a bunch with $\text{fn}(\Delta) = \{a, b, \dots, z\}$. Assuming $a_i, b_i, \dots, z_i \notin \text{fn}(\Delta)$, we define $\Delta^{(i)} \triangleq \Delta\{a_i/a, b_i/b, \dots, z_i/z\}$, where $\Delta\theta$ is the bunch obtained by applying the substitution θ to all the leaves of Δ .*

Rule [TYP-STRUCT] subsumes and generalizes the two structural rules of weakening and contraction.

7

To relate spawn bindings and their corresponding transformations of bunches, we define a *spawn binding typing* judgment $\sigma : \Delta_1 \rightsquigarrow \Delta_2$; the bottom of Figure 5.5 gives their rules. The idea is to consider a binding σ as the merge of a sequence of bindings $\sigma = \sigma_1 \times \dots \times \sigma_k$, where each σ_i is either a weakening or a contraction binding. The weakening and contraction bindings are typed using Rules [SPAWN-WEAKEN] and [SPAWN-CONTRACT].

7.4. TRANSLATING THE $\alpha\lambda$ -CALCULUS INTO πBI

Here, we develop a type-preserving translation from the $\alpha\lambda$ -calculus to πBI , and establish its correctness in a very strong sense: the translation satisfies an *operational correspondence* property, which asserts how reductions in the source and target calculi are preserved and reflected (Theorems 7.4.3 and 7.4.5, respectively).

7.4.1. THE TRANSLATION

Given a typed term $\Delta \vdash M : A$ and a name $z \notin \text{fv}(M)$, we inductively translate the typing derivation of M to a typing derivation for a process in πBI , denoted $\Delta \vdash \mathcal{T}_z(\Delta \vdash M : A) \blacktriangleright z : A$. As customary in translations of λ into π (cf. [Mil92; SW03; Wad14]), the parameter z is a name on which the behavior of the source term M is made available. By abuse of notation, we often write $\Delta \vdash \mathcal{T}_z(M) \blacktriangleright z : A$.

Typing rule for $\alpha\lambda$ -calculus term M	π BI translation $\mathcal{T}_z(M)$
$\frac{[\text{TYP-ID}]}{x : A \vdash x : A}$	$[z \leftrightarrow x]$
$\frac{[\text{TYP-WEAKEN}]}{\frac{\Gamma[\Delta] \vdash M : A}{\Gamma[\Delta; \Delta'] \vdash M : A}}$	$\rho[x \mapsto \emptyset \mid x \in \text{fv}(\Delta)']; \mathcal{T}_z(M)$
$\frac{[\text{TYP-CONTRACT}]}{\frac{\Gamma[\Delta^{(1)}; \Delta^{(2)}] \vdash M : A}{\Gamma[\Delta] \vdash M\{x/x^{(1)}, x/x^{(2)} \mid x \in \text{fv}(\Delta)\} : A}}$	$\rho[x \mapsto x_1, x_2]; \mathcal{T}_z(M)$
$\frac{[\text{TYP-WAND-I}]}{\frac{\Delta, x : A \vdash M : B}{\Delta \vdash \lambda x. M : A * B}}$	$z(x); \mathcal{T}_z(M)$
$\frac{[\text{TYP-WAND-E}]}{\frac{\Delta \vdash M : A * B \quad \Theta \vdash N : A}{\Delta, \Theta \vdash M N : B}}$	$(\mathbf{v}x)(\mathcal{T}_x(M) \mid \bar{x}[y]; (\mathcal{T}_y(N) \mid [z \leftrightarrow x]))$
$\frac{[\text{TYP-EMP-I}]}{\emptyset_m \vdash 0_m : \mathbf{1}_m}$	$z[]$
$\frac{[\text{TYP-EMP-E}]}{\frac{\Delta \vdash M : \mathbf{1}_m \quad \Gamma[\emptyset_m] \vdash N : A}{\Gamma[\Delta] \vdash \text{let } 0_m = M \text{ in } N : A}}$	$(\mathbf{v}x)(\mathcal{T}_x(M) \mid x0; \mathcal{T}_z(N))$
$\frac{[\text{TYP-SEP-I}]}{\frac{\Delta \vdash M : A \quad \Theta \vdash N : B}{\Delta, \Theta \vdash \langle M, N \rangle : A * B}}$	$\bar{z}[y]; (\mathcal{T}_y(M) \mid \mathcal{T}_z(N))$
$\frac{[\text{TYP-SEP-E}]}{\frac{\Delta \vdash M : A * B \quad \Gamma[x : A, y : B] \vdash N : C}{\Gamma[\Delta] \vdash \text{let } \langle x, y \rangle = M \text{ in } N : C}}$	$(\mathbf{v}y)(\mathcal{T}_y(M) \mid y(x); \mathcal{T}_z(N))$
$\frac{[\text{TYP-CONJ-E}]}{\frac{\Delta \vdash M : A_1 \wedge A_2}{\Delta \vdash \pi_1 M : A_1}}$	$(\mathbf{v}x_2)(\mathcal{T}_{x_2}(M) \mid x_2(x_1); \rho[x_2 \mapsto \emptyset]; [z \leftrightarrow x_1])$
$\frac{[\text{TYP-CONJ-E}]}{\frac{\Delta \vdash M : A_1 \wedge A_2}{\Delta \vdash \pi_2 M : A_2}}$	$(\mathbf{v}x_2)(\mathcal{T}_{x_2}(M) \mid x_2(x_1); \rho[x_1 \mapsto \emptyset]; [z \leftrightarrow x_2])$
$\frac{[\text{TYP-DISJ-I}]}{\Delta \vdash M : A_1}{\Delta \vdash \text{select}_1(M) \vdash A_1 \vee A_2}$	$\bar{z} \triangleleft \text{inl}; \mathcal{T}_z(M)$
$\frac{[\text{TYP-DISJ-I}]}{\Delta \vdash M : A_2}{\Delta \vdash \text{select}_2(M) \vdash A_1 \vee A_2}$	$\bar{z} \triangleleft \text{inr}; \mathcal{T}_z(M)$
$\frac{[\text{TYP-DISJ-E}]}{\frac{\Delta \vdash M : A_1 \vee A_2 \quad \Gamma[x_1 : A_1] \vdash N_1 : C \quad \Gamma[x_2 : A_2] \vdash N_2 : C}{\Gamma[\Delta] \vdash \text{case } M \text{ of } \{1(x_1) : N_1, 2(x_2) : N_2\} : C}}$	$(\mathbf{v}x)(\mathcal{T}_x(M) \mid x \triangleright \left\{ \begin{array}{l} \text{inl} : \mathcal{T}_z(N_1)\{x/x_1\}, \\ \text{inr} : \mathcal{T}_z(N_2)\{x/x_2\} \end{array} \right\})$
$\frac{[\text{TYP-CUT}]}{\frac{\Delta \vdash M : A \quad \Gamma[x : A] \vdash N : C}{\Gamma[\Delta] \vdash N\{M/x\} : C}}$	$(\mathbf{v}x)(\mathcal{T}_x(M) \mid \mathcal{T}_z(N))$

Figure 7.8 | Translation of $\alpha\lambda$ -calculus typing rules into π BI (omitting Rule [TYP-CONG] and several additive rules).

$$\begin{array}{c}
\frac{a_2 : A \quad w : A \rightarrow B}{\begin{array}{l} \vdash \mathcal{T}_{a'_2}(a_2) = [a'_2 \leftrightarrow a_2] \quad \vdash [x \leftrightarrow w] \\ \blacktriangleright a'_2 : A \quad \blacktriangleright x : A \rightarrow B \end{array}} \\
\frac{y : A \rightarrow A \rightarrow B \quad a_2 : A; w : A \rightarrow A \rightarrow B \quad a_1 : A \quad x : B}{\begin{array}{l} \vdash \mathcal{T}_w(y) = [w \leftrightarrow y] \quad \vdash \bar{w}[a'_2]; (\mathcal{T}_{a'_2}(a_2) \mid [x \leftrightarrow w]) \quad \vdash \mathcal{T}_{a'_1}(a_1) = [a'_1 \leftrightarrow a_1] \quad \vdash [z \leftrightarrow x] \\ \blacktriangleright w : A \rightarrow A \rightarrow B \quad \blacktriangleright x : A \rightarrow B \quad \blacktriangleright a'_1 : A \quad \blacktriangleright z : B \end{array}} \\
\frac{a_2 : A; y : A \rightarrow A \rightarrow B \quad a_1 : A; x : A \rightarrow B}{\begin{array}{l} \vdash \mathcal{T}_x(M_4) = (\mathbf{v}w)(\mathcal{T}_w(y) \mid \bar{w}[a'_2]; (\mathcal{T}_{a'_2}(a_2) \mid [x \leftrightarrow w])) \quad \vdash \bar{x}[a'_1]; (\mathcal{T}_{a'_1}(a_1) \mid [z \leftrightarrow x]) \\ \blacktriangleright x : A \rightarrow B \quad \blacktriangleright z : B \end{array}} \\
\frac{a_1 : A; a_2 : A; y : A \rightarrow A \rightarrow B \vdash \mathcal{T}_z(M_3) = (\mathbf{v}x)(\mathcal{T}_x(M_4) \mid \bar{x}[a'_1]; (\mathcal{T}_{a'_1}(a_1) \mid [z \leftrightarrow x])) \blacktriangleright z : B}{\frac{a : A; y : A \rightarrow A \rightarrow B \vdash \mathcal{T}_z(M_2) = \rho[a \mapsto a_1, a_2]; \mathcal{T}_z(M_3) \blacktriangleright z : B}{\frac{a : A \vdash \mathcal{T}_z(M_1) = z(y); \mathcal{T}_z(M_2) \blacktriangleright z : (A \rightarrow A \rightarrow B) \rightarrow B}{\emptyset_m \vdash \mathcal{T}_z(M) = z(a); \mathcal{T}_z(M_1) \blacktriangleright z : A * (A \rightarrow A \rightarrow B) \rightarrow B}}}
\end{array}$$

Figure 7.9 | Typing derivation of an $\alpha\lambda$ -calculus term into π BI (cf. Example 7.4.1).

The translation is inspired by a canonical translation of proofs in natural deduction into sequent calculi (cf. [Pym13, Section 6.3]), and it is type-preserving by construction. Figure 7.8 gives the translation of $\alpha\lambda$ -calculus typing rules. The (derivation of) typings of the translated processes are omitted; as mentioned before, the typings are the same as for the source terms. Appendix F.1 includes translations (including those omitted here) with full typing derivations. The figure omits the translation of Rule [TYP-CONG], as it translates directly to Rule [TYP-CONG] of π BI. The figure also omits the translations of several additive typing rules, because their translations are equivalent to those of their multiplicative counterparts.

The identity derivation is translated into a forwarder. Introduction rules are translated using right rules for the associated connectives, and elimination rules are translated using the corresponding left rule in combination with a cut. Weakening and contraction, which use implicit substitutions in the $\alpha\lambda$ -calculus, are translated using the explicit spawn construct.

The following example features the translation of an interesting term, including the full typing derivation of the translated process.

Example 7.4.1. Consider the following $\alpha\lambda$ -calculus derivation of $M \triangleq \lambda a. \alpha y. (y @ a) @ a$:

$$\begin{array}{c}
\frac{a_2 : A \vdash a_2 : A \quad y : A \rightarrow A \rightarrow B \vdash y : A \rightarrow A \rightarrow B}{\frac{a_2 : A; y : A \rightarrow A \rightarrow B \vdash M_4 \triangleq y @ a_2 : A \rightarrow B \quad a_1 : A \vdash a_1 : A}{\frac{a_1 : A; a_2 : A; y : A \rightarrow A \rightarrow B \vdash M_3 \triangleq (y @ a_2) @ a_1 : B}{\frac{a : A; y : A \rightarrow A \rightarrow B \vdash M_2 \triangleq (y @ a) @ a : B}{\frac{a : A \vdash M_1 \triangleq \alpha y. (y @ a) @ a : (A \rightarrow A \rightarrow B) \rightarrow B}{\emptyset_m \vdash M = \lambda a. \alpha y. (y @ a) @ a : A * (A \rightarrow A \rightarrow B) \rightarrow B}}}}}
\end{array}$$

The translation of M into πBI is

$$\mathcal{T}_z(M) = z(a); z(y); \rho[a \mapsto a_1, a_2]; (\mathbf{v}x)((\mathbf{v}w)([w \leftrightarrow y] | \bar{w}[a'_2]; ([a'_2 \leftrightarrow a_2] | [x \leftrightarrow w])) | \bar{x}[a'_1]; ([a'_1 \leftrightarrow a_1] | [z \leftrightarrow x]))$$

Figure 7.9 gives the typing of $\mathcal{T}_z(M)$ in πBI . ▽

7.4.2. OPERATIONAL CORRESPONDENCE

Here we show that the translation $\mathcal{T}_z(-)$ preserves and reflects behavior of terms and processes. We formulate this important property in terms of an *operational correspondence* result, following established criteria (cf. [Pet19; Gor10]). Concretely, we establish the result in two parts: *completeness* and *soundness*. The former states that reduction of $\alpha\lambda$ -calculus terms induces corresponding reductions of their process translations into πBI . The latter states that reductions of translated terms are reflected by corresponding reductions of source terms in the $\alpha\lambda$ -calculus. Appendix F.1 gives detailed proofs.

7.4.2.1. COMPLETENESS

For completeness, we want to mimic every $\alpha\lambda$ -calculus reduction with one or multiple πBI reductions. That is, we would like to show that the translation induces a simulation. To accurately characterize this, we need to address the discrepancy between the way substitutions and function applications are handled in $\alpha\lambda$ -calculus and πBI .

Unfortunately, the reductions of a translated πBI process might diverge from the source term, due to the way substitutions and function applications are handled in the $\alpha\lambda$ -calculus. A function application $(\alpha x.M)@N$ results in a term with a substitution $M\{N/x\}$. If there are multiple occurrences of x in M —which is possible due to contraction—, they all get substituted with N . On the πBI side, substitution is represented as a composition $(\mathbf{v}x)(\mathcal{T}_x(N) | \mathcal{T}_z(M))$, in which *one copy* of $\mathcal{T}_x(N)$ gets connected with the body $\mathcal{T}_z(M)$ through the endpoint x . The contraction of the multiple occurrences of x in M is handled with a spawn prefix in $\mathcal{T}_z(M)$.

To address this discrepancy, we formulate completeness in a generalized way: following the approach by Toninho *et al.* [TCP12], we define a *substitution lifting* relation which we show to be a simulation.

Definition 7.4.2 (Substitution Lifting). *Given a term M and a process P of the same typing, we say P lifts the substitutions of M , denoted $\Delta \vdash P \blacktriangleright M \blacktriangleright z : A$, or $P \blacktriangleright M$ for short, if:*

1. $P \equiv \rho[\sigma_s]; \dots; \rho[\sigma_1]; (\mathbf{v}x_n)(\mathcal{T}_{x_n}(N_n) | \dots | (\mathbf{v}x_1)(\mathcal{T}_{x_1}(N_1) | \mathcal{T}_z(M')) \dots)$ where for each $i \in [1, s]$, $\sigma_i = [y_1 \mapsto \emptyset; \dots; y_m \mapsto \emptyset]$ or $\sigma_i = [y_1 \mapsto y_1^{(1)}, y_1^{(2)}; \dots; y_m \mapsto y_m^{(1)}, y_m^{(2)}]$;
2. $M = M'\{N_1/x_1, \dots, N_n/x_n\}\{\bar{\sigma}_1, \dots, \bar{\sigma}_s\}$ where for each $i \in [1, s]$, $\bar{\sigma}_i$ denotes a substitution corresponding to the binding σ_i . Specifically, $\bar{\sigma}_i$ is an empty substitution if σ_i is weakening, and is the substitution $\{y_1/y_1^{(1)}, y_1/y_1^{(2)}, \dots, y_m/y_m^{(1)}, y_m/y_m^{(2)}\}$ if σ_i is contraction.

That is, both P and M are composed of n cuts with (the translations of) the terms M, N_1, \dots, N_n .

Note that for any well-typed N we have $\mathcal{T}_z(N) \blacktriangleright N$.

We now show the completeness result.

Theorem 7.4.3 (Completeness). *Suppose given $\Delta \vdash M : A$ and $\Delta \vdash P \blacktriangleright z : A$ such that $P \blacktriangleright M$. If $M \mapsto N$, then there exists Q such that $P \rightarrow^* Q \blacktriangleright N$.*

Proof (Sketch). We first prove separately a basic version of completeness without substitution lifting; this follows by induction on the derivation of the term reduction. Then, we distinguish cases on the source of the reduction: from a substitution, or from the term itself. In the former case, we can argue that the forwarder representing the substitution is not blocked; hence, the substitution can be resolved and the reduction mimicked following basic completeness. The latter case follows from basic completeness directly. \square

7.4.2.2. SOUNDNESS

Completeness (Theorem 7.4.3) shows that the reductions of terms are preserved by the translation. We now show that reductions of translated processes are reflected by reductions of source terms. However, there is a caveat: the translated processes are “more concurrent”, and have more possible reductions that cannot be immediately matched in source terms.

Example 7.4.4. For some term $M\{N/x\}$ and a corresponding substitution-lifted process $P \triangleq (\nu x)(\mathcal{T}_x(N) \mid \mathcal{T}_z(M))$, suppose that the subterm N has a reduction $N \mapsto N'$. The process P can mimic this reduction:

$$P \rightarrow (\nu x)(Q \mid \mathcal{T}_z(M)),$$

for some Q . However, we do not necessarily have a corresponding $M\{N/x\} \mapsto M\{N'/x\}$, since the variable x might occur at a position where it is not enabled (e.g., under a λ -binder). ∇

In order to be able to reflect all the reductions in translated processes, we state soundness in terms of an extended class of reductions for terms, denoted \hookrightarrow (with reflexive, transitive closure denoted \hookrightarrow^*). To be precise, let \mathcal{C} be an arbitrary $\alpha\lambda$ -calculus context. In addition to the reductions in Figure 7.2, we consider reductions under arbitrary contexts:

$$\frac{[\text{RED-ARBITRARY-CTX}]}{\frac{M \hookrightarrow N}{\mathcal{C}[M] \hookrightarrow \mathcal{C}[N]}}$$

Theorem 7.4.5 (Soundness). *Given $\Delta \vdash P \blacktriangleright M \blacktriangleright z : A$, if $P \rightarrow^* Q$, then there exist N and R such that $M \hookrightarrow^* N$ and $Q \rightarrow^* R \blacktriangleright N$.*

Proof (Sketch). By cases on the possible reductions of P , informed by the structure and typing of the source term M . The key point in the proof is to postpone certain independent reductions of the target process, which cannot be immediately matched by reductions in the source term. \square

Note that the premise in Theorem 7.4.5 permits arbitrarily many reduction steps from P to Q (i.e., $P \rightarrow^* Q$), assuring that *every* sequence of reductions of P is reflected by a corresponding sequence of reductions of the source term M . The alternative, with a single reduction in the premise (i.e., $P \rightarrow Q$), is a much weaker property.

7.5. RELATED WORK

The works of O’Hearn [OHe03] and Pym [Pym13] are, to our knowledge, the only prior investigations into (non-concurrent) Curry-Howard correspondences based on BI. These works were later extended to cover polymorphism [CPR08] and store with strong update [BO06]. An extension λ_{sep} of an affine version of the $\alpha\lambda$ -calculus with a more fine-grained notion of separation was studied by Atkey [Atk04; Atk06].

7.6. CONCLUSIONS

We have presented a translation from O’Hearn and Pym’s $\alpha\lambda$ -calculus—a variant of the λ -calculus derived from the logic of bunched implications (BI)—to our own πBI —a variant of the π -calculus derived from BI. As main result, we have shown that the translation is operationally correct: translated processes preserve the behavior of source terms (completeness) and no more (soundness). Hence, the translation induces an adequate explanation of the implicit management of resource ownership in the $\alpha\lambda$ -calculus in terms of explicit ownership management in πBI .

III

MULTIPARTY SESSION TYPES: DISTRIBUTED AND ASYNCHRONOUS

8

THE GLOBAL AND LOCAL PERSPECTIVE: RELATIVE TYPES

This chapter discusses multiparty session types (MPSTs), from a global and local perspective. That is, MPSTs are usually expressed as global types that describe communication protocols from a vantage point. But confirming protocol conformance is usually done on a protocol participant level, so a perspective of the protocol that is “local” to the participant is needed. Prior methods of obtaining such local perspectives have been shown to be problematic, so this chapter explores new ways of obtaining local perspectives. Hence, it answers the following research question, introduced in Section 1.2.3.1:

Research Question III-1. *Can we define a method for obtaining local perspectives from global types that induces a class of well-formed global types featuring communication patterns not supported before?*

8.1. INTRODUCTION

It is essential that the components of which modern distributed software systems consist communicate well. This is easier said than done, as these components are often provided by several distributors, who prefer not to share the specifications of their software. As a result, developers of distributed software are left to guess at the behavior of third-party components, as their public documentation is often incomplete or outdated.

It is thus of the utmost importance to find ways of taming the communication between the components of distributed systems, on which we rely in our everyday lives. Designing methods for guaranteeing that components communicate correctly should be guided by two main principles: (1) the techniques should be straightforward to implement in existing software, and (2) verification techniques should be compositional. Principle (1) helps in convincing software distributors to invest in implementing the techniques, as the implementation requires little effort but gains greater accessibility making their software more attractive.

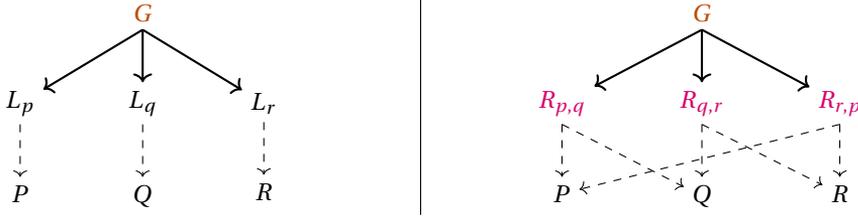


Figure 8.1 | Local projection (left) and relative projection (right) of global type G onto its participants p, q, r , implemented by processes P, Q, R , respectively.

Principle (2) means that guaranteeing the correctness of individual components implies the correctness of the whole system. This entails that software distributors can guarantee that their software behaves correctly in any (correctly behaving) circumstances, without disclosing their software's design. Moreover, it alleviates verifying correctness in entire distributed systems, which can be costly and complex, as distributed systems contain a lot of concurrency (i.e., things can happen in many orders).

A particularly salient approach to verifying the correctness of communication between distributed components can be found in multiparty session types (MPSTs) [HYC08; HYC16]. The theory of MPSTs deals with communication *protocols*, i.e., sequences of message exchanges between protocol *participants*. The messages may contain data, but also labels that determine which path to take when a protocol branches. In MPSTs, such protocols are often expressed as *global types* that describe communication protocols between multiple participants from a vantage point. The following global type expresses a protocol where a Server (' s ') requests a Client (' c ') to login through an Authorization Service (' a ') (adapted from an example from [SY19]):

$$G_{\text{auth}} \triangleq \mu X.s!c\{\text{login}.c!a(\text{pwd}\langle\text{str}\rangle).a!s(\text{succ}\langle\text{bool}\rangle).X, \text{quit}.\text{end}\} \quad (8.1)$$

8 The global type G_{auth} denotes a recursive protocol (' μX '), meaning that it may repeat. It starts with a message from s to c (' $s!c$ ') carrying a label `login` or `quit` that determines how the protocol proceeds. In the `login` case, the protocol proceeds with a message from c to a carrying a label `pwd` and a value of type `str` ('`pwd<str>`'). This is followed by a message from a to s carrying the label `succ` with a `bool` value, after which the protocol repeats (' X '). In the `quit` case, the protocol ends ('`end`').

The idea of verification with MPSTs is that a protocol participant's implementation as a distributed component is checked for compliance to its part in a global type. If all components in a system comply to their respective parts in a global type, compositionality of such *local* verifications then guarantees that the whole system complies to the protocol. As global types may contain information that is irrelevant to one particular participant, local verification can be simplified by only considering those interactions of the global type that are relevant to the participant under scrutiny, i.e., by taking a perspective that is *local* to the participant. Such local perspectives can also be helpful to guide the development of components.

The widely accepted method of obtaining local perspectives from global types is *local projection*, which projects a global type onto a single participant, leading to a *local type*

that expresses only those message exchanges in the global type in which the participant is involved [HYC08; HYC16; Yos+10]. Figure 8.1 (left) illustrates how this method is used in the local verification of processes implementing the roles of the participants of a global type. However, as we discuss next, global types may contain communication patterns that cannot be expressed as local types. Therefore, verification techniques that rely on local projection can only handle a limited class of *well-formed* global types.

The class of global types that are well-formed for local projection excludes many non-sensical communication patterns, but it also excludes many useful patterns such as those occurring in G_{auth} (8.1) (as observed by Scalas and Yoshida [SY19]). This is because local projection cannot adequately handle *non-local choices*. In G_{auth} , the exchange between s and c denotes a non-local choice for the protocol local to a : the global type states that a should communicate with c and s only after s sends to c the label `login`.

It is unfortunate that local projection cannot handle global types with non-local choices as in G_{auth} (8.1): clearly, this global type expresses a protocol that is very useful in practice. Hence, it is important to reconsider using local projection for compositional verification techniques. This chapter introduces *relative projection*, a new approach to obtaining local perspectives of global types. Relative projection projects global types onto *pairs of participants*, leading to a form of binary session types called *relative types*. This new projection enables the verification of a new class of *relative well-formed* global types that includes global types with non-local choices such as G_{auth} . It does so by incorporating explicit coordination messages called *dependencies* that force participants to synchronize on non-local choices.

Sections 8.2 and 8.3 introduce global and relative types, respectively. Section 8.4 introduces relative projection and the corresponding class of relative well-formed global types. Section 8.5 compares classical well-formedness based on local projection and our new relative well-formedness. Sections 8.6 and 8.7 discuss related work and conclusions, respectively.

8.2. THE GLOBAL PERSPECTIVE

We analyze multiparty protocols specified as *global types*. We consider a standard syntax, with session delegation and recursion, subsuming the one given in the seminal paper by Honda *et al.* [HYC16]. In the following, we write p, q, r, s, \dots to denote (*protocol*) *participants*.

Definition 8.2.1 (Global Types). Global types G and message types S, T are defined as:

$$\begin{array}{l}
 G \triangleq p!q\{i\langle S \rangle.G\}_{i \in I} \quad \text{exchange} \quad | \quad \text{end} \quad \text{end} \\
 \quad | \mu X.G \mid X \quad \text{recursion} \\
 S, T \triangleq !T.S \quad \text{send} \quad | \quad \oplus\{i : S\}_{i \in I} \quad \text{selection} \quad | \quad \text{end} \quad \text{end} \\
 \quad | ?T.S \quad \text{receive} \quad | \quad \&\{i : S\}_{i \in I} \quad \text{branch}
 \end{array}$$

We include basic types (e.g., `unit`, `bool`, `int`), which are all syntactic sugar for `end`.

The type $p!q\{i\langle S_i \rangle.G_i\}_{i \in I}$ specifies a direct exchange from participant p to participant q , which precedes protocol G_i : p chooses a label $i \in I$ and sends it to q along with a message of type S_i . Message exchange is *asynchronous*: the protocol can continue as G_i before the

message has been received by q . The type $\mu X.G$ defines a recursive protocol: whenever a path of exchanges in G reaches the recursion variable X , the protocol continues as $\mu X.G$. The type end denotes the completed protocol.

Recursive definitions bind recursion variables, so recursion variables not bound by a recursive definition are free. We write $\text{frv}(G)$ to denote the set of free recursion variables of G , and say G is *closed* if $\text{frv}(G) = \emptyset$. Recursion in global types is tail-recursive and *contractive* (i.e. they contain no subexpressions of the form $\mu X_1 \dots \mu X_n.X_1$). We define the unfolding of a recursive global type by substituting copies of the recursive definition for recursive calls, i.e., $\mu X.G$ unfolds to $G\{\mu X.G/X\}$.

In approaches based on MPST, the grammar of global types specifies multiparty protocols but does not ensure their correct implementability; such guarantees are given in terms of *well-formedness*, defined as projectability onto all participants (cf. Section 8.3).

Message types S, T define binary protocols. Type $!T.S$ (resp. $?T.S$) denotes the send (resp. receive) of a message of type T followed by the continuation S . Type $\oplus\{i : S_i\}_{i \in I}$ denotes *selection*: the output of a choice for a label $i \in I$ followed by the continuation S_i . Type $\&\{i : S_i\}_{i \in I}$ denotes *branching*: the input of a label $i \in I$ followed by the continuation S_i . Type end denotes the end of the protocol. Due to the tail-recursive nature of session and global types, there are no recursive message types.

It is useful to obtain the set of participants of a global type:

Definition 8.2.2 (Participants of Global Types). *We define the set of participants of global type G , denoted $\text{part}(G)$:*

$$\begin{aligned} \text{part}(p!q\{i\langle S_i \rangle.G_i\}_{i \in I}) &\triangleq \{p, q\} \cup \bigcup_{i \in I} \text{part}(G_i) & \text{part}(\text{end}) &\triangleq \emptyset \\ \text{part}(\mu X.G) &\triangleq \text{part}(G) & \text{part}(X) &\triangleq \emptyset \end{aligned}$$

8.3. THE LOCAL PERSPECTIVE

8

While a global type such as G_{auth} (8.1) describes a protocol from a vantage point, *relative types* describe the interactions between *pairs* of participants. This way, relative types capture the peer-to-peer nature of multiparty protocols. We develop projection from global types onto relative types (Section 8.4) and use it to establish a new class of *well-formed* global types.

A choice between participants in a global type is *non-local* if it influences future exchanges between other participants. Our approach uses *dependencies* to expose these non-local choices in the relative types of these other participants.

Definition 8.3.1 (Relative Types). *Relative types R are defined as follows, where the S_i are message types (cf. Definition 8.2.1):*

$$\begin{array}{l} R \triangleq p!q\{i\langle S \rangle.R\}_{i \in I} \quad \text{exchange} \quad | \quad \text{end} \quad \text{end} \\ | (p!r)!q\{i.R\}_{i \in I} \quad \text{output dependency} \quad | \quad \mu X.R \mid X \quad \text{recursion} \\ | (p?r)!q\{i.R\}_{i \in I} \quad \text{input dependency} \end{array}$$

We detail the syntax above.

- Type $p!q \llbracket i \langle S_i \rangle . R_i \rrbracket_{i \in I}$ specifies that p must choose a label $i \in I$ and send it to q along with a message of type S_i after which the protocol continues with R_i .
- Given a participant r different from q , r , type $(p?r)!q \llbracket i . R_i \rrbracket_{i \in I}$ expresses a dependency: a non-local choice between p and r which influences the protocol between p and q . Here, the dependency indicates that after p receives from r the chosen label, p must forward it to q , determining the protocol between p and q .
- Similarly, type $(p!r)!q \llbracket i . R_i \rrbracket_{i \in I}$ expresses a dependency, which indicates that after p sends to r the chosen label, p must forward it to q .
- Types $\mu X . R$ and X define recursion, just as their global counterparts.
- The type end specifies the end of the protocol between p and q .

Definition 8.3.2 (Participants of Relative Types). *We define the set of participants of relative type R , denoted $\text{part}(R)$:*

$$\begin{aligned} \text{part}(p!q \llbracket i \langle S_i \rangle . R_i \rrbracket_{i \in I}) &\triangleq \{p, q\} \cup \bigcup_{i \in I} \text{part}(R_i) & \text{part}(\text{end}) &\triangleq \emptyset \\ \text{part}((p?r)!q \llbracket i . R_i \rrbracket_{i \in I}) &\triangleq \{p, q\} \cup \bigcup_{i \in I} \text{part}(R_i) & \text{part}(\mu X . R) &\triangleq \text{part}(R) & \text{part}(X) &\triangleq \emptyset \\ \text{part}((p!r)!q \llbracket i . R_i \rrbracket_{i \in I}) &\triangleq \{p, q\} \cup \bigcup_{i \in I} \text{part}(R_i) \end{aligned}$$

We introduce some useful notation:

Notation 8.3.3.

- We write $p!q(i \langle S \rangle) . G$ for a global type with a single branch $p!q\{i \langle S \rangle . G\}$ (and similarly for exchanges and dependencies in relative types).
- We omit unit message types from global and relative types, writing, e.g., $i.G$ for $i \langle \text{unit} \rangle . G$.

8.4. RELATIVE PROJECTION AND WELL-FORMEDNESS

We define *relative projection* for global types. We want relative projection to fail when it would return a non-contractive recursive type: hence, we define contractiveness on relative types:

Definition 8.4.1 (Contractive Relative Types). *Given a relative type R and a recursion variable X , we say R is contractive on X if either of the following holds:*

- R contains an exchange, or
- R ends in a recursive call on any $Y \neq X$.

Relative projection then relies on the contractiveness of relative types. It also relies on an auxiliary function to determine if a dependency message is needed and possible.

Algorithm 1: Relative Projection of G onto (p, q) (Definition 8.4.2).

```

1 def  $G \rangle (p, q)$  as
2   switch  $G$  do
3     case  $s!r\{i\langle T_i \rangle, G_i\}_{i \in I}$  do
4        $\forall i \in I. R_i \triangleq G_i \rangle (p, q)$ 
5       if  $(p = s \wedge q = r)$  then return  $p!q\{i\langle T_i \rangle, R_i\}_{i \in I}$ 
6       else if  $(q = s \wedge p = r)$  then return  $q!p\{i\langle T_i \rangle, R_i\}_{i \in I}$ 
7       else return  $ddep((p, q), G)$ 
8     case  $\mu X. G'$  do
9        $R' \triangleq G' \rangle (p, q)$ 
10      if  $(R' \text{ defined and contractive on } X)$  then return  $\mu X. R'$ 
11      else return end
12     case  $X$  do return  $X$ 
13     case end do return end

```

Definition 8.4.2 (Relative Projection). *Given a global type G , we define its relative projection onto a pair of participants (p, q) , denoted $G \rangle (p, q)$, by induction on the structure of G as given in Algorithm 1, using the auxiliary function $ddep$ defined as follows:*

$$ddep((p, q), s!r\{i\langle S_i \rangle, G_i\}_{i \in I}) \triangleq \begin{cases} G_i \rangle (p, q) \ [i' \in I] & \text{if } \forall i, j. G_i \rangle (p, q) = G_j \rangle (p, q) \\ (p!r)!q\{i.(G_i) \rangle (p, q)\}_{i \in I} & \text{if } p = s \\ (q!r)!p\{i.(G_i) \rangle (p, q)\}_{i \in I} & \text{if } q = s \\ (p?s)!q\{i.(G_i) \rangle (p, q)\}_{i \in I} & \text{if } p = r \\ (q?s)!p\{i.(G_i) \rangle (p, q)\}_{i \in I} & \text{if } q = r \end{cases}$$

We discuss how Definition 8.4.2 projects global types onto a pair of participants (p, q) , as per Algorithm 1. The most interesting case is the projection of a direct exchange $s!r\{i\langle S_i \rangle, G_i\}_{i \in I}$ (line 3). When the exchange involves both p and q , the projection yields an exchange between p and q with the appropriate sender. Otherwise, the projection relies on the function ‘ $ddep(\dots)$ ’, which determines whether the exchange is a non-local choice for p and q and yields an appropriate projection accordingly:

- If the projections of all branches are equal, the exchange is not a non-local choice and $ddep$ yields the projection of any branch.
- If there are branches with different projections, the exchange is a non-local choice, so $ddep$ yields a dependency if possible. If p or q is involved, $ddep$ yields an appropriate dependency (e.g., $p!r$ if p is the sender, or $q?s$ if q is the recipient). If neither p nor q are involved, then $ddep$ cannot yield a dependency and projection is thus undefined.

The projection of $\mu X. G'$ (line 8) considers the projection of the body $G' \rangle (p, q)$ to see whether p and q interact in G' . If $G' \rangle (p, q)$ is not contractive on X (Definition 8.4.1), it is **end** or X : p and q do not interact and the projection yields **end** (line 11). Otherwise, p and q

do interact and projection preserves the recursive definition (line 10). The projections of recursive calls X (line 12) and end (line 13) are homomorphic.

Example 8.4.3 (Projections of G_{auth}). To illustrate relative projection, let us reconsider G_{auth} :

$$G_{\text{auth}} = \mu X.s!c \left\{ \begin{array}{l} \text{login}.c!a(\text{passwd}(\text{str})).a!s : \text{auth}(\text{bool}).X, \\ \text{quit}.c!a(\text{quit}).\text{end} \end{array} \right\}$$

The relative projection onto (s, c) is straightforward, as there are no non-local choices:

$$G_{\text{auth}} \rangle (s, c) = \mu X.s!c \left\{ \begin{array}{l} \text{login}.X, \\ \text{quit}.\text{end} \end{array} \right\}$$

However, compare the projection of the initial login branch onto (s, a) and (c, a) with the projection of the quit branch: they are different. Therefore, the initial exchange between s and c is a non-local choice in the protocols relative to (s, a) and (c, a) . Since s is involved in this exchange, the non-local choice is detected by ddep :

$$\text{ddep}((s, a), s!c\{\text{login} \dots, \text{quit} \dots\}) = (s!c)!a \{\{\text{login} \dots, \text{quit} \dots\}\}$$

Hence, this non-local choice is included in the relative projection onto (s, a) as a dependency:

$$G_{\text{auth}} \rangle (s, a) = \mu X.(s!c)!a \left\{ \begin{array}{l} \text{login}.a!s(\text{auth}(\text{bool})).X, \\ \text{quit}.\text{end} \end{array} \right\}$$

Similarly, c is involved in the initial exchange, so the non-local choice can also be included in the relative projection onto (c, a) as a dependency:

$$G_{\text{auth}} \rangle (c, a) = \mu X.(c?s)!a \left\{ \begin{array}{l} \text{login}.c!a(\text{passwd}(\text{str})).X, \\ \text{quit}.c!a(\text{quit}(\text{unit})).\text{end} \end{array} \right\} \quad \nabla$$

The input order of participants for projection does not matter:

Proposition 8.4.4. *Suppose given a global type G and distinct participants $p, q \in \text{part}(G)$.*

- *If $G \rangle (p, q)$ is defined, then $G \rangle (p, q) = G \rangle (q, p)$ and $\text{part}(G \rangle (p, q)) \subseteq \{p, q\}$;*
- *$G \rangle (p, q)$ is undefined if and only if $G \rangle (q, p)$ is undefined.*

Well-formed Global Types. We now define *well-formedness* for global types. Unlike usual MPST approaches, our definition relies exclusively on (relative) projection (Definition 8.4.2), and does not appeal to external notions such as merge and subtyping [Hu+12; YG20].

Definition 8.4.5 (Relative Well-Formedness). *A global type G is relative well-formed if, for every distinct $p, q \in \text{part}(G)$, the projection $G \rangle (p, q)$ is defined.*

Dependencies in relative types follow the non-local choices in the given global type: by implementing such choices, dependencies ensure correct projectability. They induce additional messages, but in our view this is an acceptable price to pay for an expressive notion of well-formedness based only on projection. It is easy to see that in a global type with n participants, the number of messages per communication is $O(n)$ —an upper-bound following from the worst-case scenario in which both sender and recipient have to forward a label to $n - 2$ participants due to dependencies, as in the example above. However, in practice, sender and recipient will rarely both have to forward labels, let alone both to all participants.

8.5. COMPARING WELL-FORMEDNESS

It is instructive to examine how the notion of well-formed global types induced by our relative projection compares to *merge-based* well-formedness [Hu+12; CYH09].

To define merge-based well-formedness, we define local types and projection of global types onto local types. Local types express one participant's perspective of a global protocol.

Definition 8.5.1 (Local Types). Local types L are defined as follows, where the S are the message types from Definition 8.2.1:

$$L \triangleq \begin{array}{l} p!q \{ \langle i \rangle S_i . L_i \}_{i \in I} \quad \text{send} \quad | \quad \text{end} \quad \text{end} \\ | \quad p?q \{ \langle i \rangle S_i . L_i \}_{i \in I} \quad \text{receive} \quad | \quad \mu X . L \mid X \quad \text{recursion} \end{array}$$

The local types $p!q \{ \langle i \rangle S_i . L_i \}_{i \in I}$ and $p?q \{ \langle i \rangle S_i . L_i \}_{i \in I}$ represent sending a choice from and receiving a choice from q , respectively. All of end, $\mu X . L$, and X are just as before.

Instead of dependency messages, local projection relies on *merge*. Intuitively, merge combines overlapping but not necessarily identical receives. This is a main difference with respect to our relative projection.

Definition 8.5.2 (Merge of Local Types). For local types L_1 and L_2 , we define $L_1 \sqcup L_2$ as the merge of L_1 and L_2 :

$$\begin{aligned} \mu X . L_1 \sqcup \mu X . L_2 &\triangleq \mu X . (L_1 \sqcup L_2) & X \sqcup X &\triangleq X \\ p!q \{ \langle i \rangle S_i . L_i \}_{i \in I} \sqcup p!q \{ \langle i \rangle S_i . L_i \}_{i \in I} &\triangleq p!q \{ \langle i \rangle S_i . L_i \}_{i \in I} & \text{end} \sqcup \text{end} &\triangleq \text{end} \\ p?q \{ \langle i \rangle S_i . L_i \}_{i \in I} \sqcup p?q \{ \langle j \rangle S'_j . L'_j \}_{j \in J} &\triangleq p?q \left(\begin{array}{l} \{ \langle i \rangle S_i . L_i \}_{i \in I \cap J} \\ \cup \{ \langle j \rangle S'_j . L'_j \}_{j \in J \setminus I} \\ \cup \{ \langle k \rangle S_k \sqcup S'_k . (L_k \sqcup L'_k) \}_{k \in I \cap J} \end{array} \right) \end{aligned}$$

The merge between message types $S_1 \sqcup S_2$ corresponds to the identity function. If the local types do not match the above definition, their merge is undefined.

We can now define local projection based on merge:

Definition 8.5.3 (Merge-based Local Projection). For global type G and participant p , Figure 8.2 defines the merge-based local projection of G under p , denoted $G \upharpoonright p$.

$$\begin{aligned}
& \text{end} \upharpoonright p \triangleq \text{end} \\
& (\mu X.G) \upharpoonright p \triangleq \begin{cases} \text{end} & \text{if } G \upharpoonright p = \text{end} \text{ or } G \upharpoonright p = X \\ \mu X.(G \upharpoonright p) & \text{otherwise} \end{cases} & X \upharpoonright p \triangleq X \\
& (r!s\{i\langle U_i \rangle.G_i\}_{i \in I}) \upharpoonright p \triangleq \begin{cases} p?r\{i\langle U_i \rangle.(G_i \upharpoonright p)\}_{i \in I} & \text{if } p = s \\ p!s\{i\langle U_i \rangle.(G_i \upharpoonright p)\}_{i \in I} & \text{if } p = r \\ \sqcup_{i \in I} (G_i \upharpoonright p) & \text{otherwise} \end{cases}
\end{aligned}$$

Figure 8.2 | Merge-based local projection (cf. Definition 8.5.3).

Definition 8.5.4 (Merge Well-formedness). *A global type G is merge well-formed if, for every $p \in \text{part}(G)$, the merge-based local projection $G \upharpoonright p$ is defined.*

The classes of relative and merge well-formed global types are *incomparable*: many protocols are supported by both methods of projection, but some only by one; we explore the differences next. It may be surprising that our new approach does not subsume the traditional. Though outside of the scope of this chapter, in future work we plan to Possible approaches are to partially integrate merge in relative projection, or to expand the detection of non-local choices beyond triplets of participants (cf. Example 8.5.6).

8.5.1. RELATIVE WELL-FORMED, NOT MERGE WELL-FORMED

The merge of local types with outgoing messages of different labels is undefined. Therefore, if a global type has communications, e.g., from s to a with different labels across branches of a prior communication between b and a , the global type is not merge well-formed. In contrast, such global types can be relative well-formed, because the prior communication may induce a dependency. Similarly, global types with communications with different participants across branches of a prior communication are never merge well-formed, but may be relative well-formed. The following example illustrates a global type with messages of different labels across branches of a prior communication:

Example 8.5.5. We give an adaptation of the two-buyer-seller protocol in which Seller (s) tells Alice (a) to pay or not, depending on whether Bob (b) tells a to buy or not.

$$G_{\text{rwf}} \triangleq b!a \left\{ \begin{array}{l} \text{ok}.s!a(\text{pay}\langle \text{int} \rangle).\text{end}, \\ \text{cancel}.s!a(\text{cancel}).\text{end} \end{array} \right\}$$

This protocol is relative well-formed, as the relative projections onto every pair of participants is defined. Notice how there is a dependency in the relative projection onto s and a :

$$G_{\text{rwf}} \upharpoonright (s, a) = (a?b)!s \left\{ \begin{array}{l} \text{ok}.s!a(\text{pay}\langle \text{int} \rangle).\text{end}, \\ \text{cancel}.s!a(\text{cancel}).\text{end} \end{array} \right\}$$

However, we do not have merge well-formedness: the merge-based local projection onto s is not defined:

$$G_{\text{rwf}} \upharpoonright s = s!a(\text{pay}\langle \text{int} \rangle).\text{end} \sqcup s!a(\text{cancel}).\text{end} \quad \nabla$$

8.5.2. MERGE WELL-FORMED, NOT RELATIVE WELL-FORMED

For a communication between, e.g., a and b , to induce a dependency for subsequent communications between other participants, at least one of a and b must be involved. Therefore, global types where communications with participants other than a and b have different labels across branches of a prior communication between a and b are never relative well-formed. In contrast, merge can combine the reception of different labels, so such global types may be merge well-formed—as long as the sender is aware of which branch has been taken before. The following example demonstrates such a situation, and explains how such global types can be modified to be relative well-formed:

Example 8.5.6. Consider a variant of the two-buyer-seller protocol in which Seller (s) invokes a new participant, Mail-service (m), to deliver the requested product. In the following global type, Bob (b) tells Alice (a) of its decision to buy or not, after which b sends the same choice to s , who then either invokes m to deliver the product or not:

$$G_{\text{mwf}} \triangleq b!a \left\{ \begin{array}{l} \text{ok}.b!s(\text{ok}).s!m(\text{deliver}\langle\text{str}\rangle).\text{end}, \\ \text{quit}.b!s(\text{quit}).s!m(\text{quit}).\text{end} \end{array} \right\}$$

G_{mwf} is merge well-formed: the merge-based local projections onto all participants are defined. Notice how the two different messages from s are merged in the merge-based local projection onto m :

$$G_{\text{mwf}} \upharpoonright m = m?s \left\{ \begin{array}{l} \text{deliver}\langle\text{str}\rangle.\text{end}, \\ \text{quit}.\text{end} \end{array} \right\}$$

G_{mwf} is not relative well-formed: the relative projection onto s and m is not defined. The initial exchange between b and a cannot induce a dependency, since neither of s and m is involved. Hence, the relative projections of both branches must be identical, but they are not:

$$s!m(\text{deliver}\langle\text{str}\rangle).\text{end} \neq s!m(\text{quit}).\text{end}$$

8

We recover relative well-formedness by modifying G_{mwf} : we give s the same options to send to m in both branches of the initial communication:

$$G'_{\text{mwf}} \triangleq b!a \left\{ \begin{array}{l} \text{ok}.b!s(\text{ok}).s!m\{\text{deliver}\langle\text{str}\rangle.\text{end}, \text{quit}.\text{end}\}, \\ \text{quit}.b!s(\text{quit}).s!m\{\text{deliver}\langle\text{str}\rangle.\text{end}, \text{quit}.\text{end}\} \end{array} \right\}$$

The new protocol is still merge well-formed, but it is now relative well-formed too; the relative projection onto s and m is defined:

$$G'_{\text{mwf}} \upharpoonright (s, m) = s!m \left\{ \begin{array}{l} \text{deliver}\langle\text{address}\rangle.\text{end}, \\ \text{quit}.\text{end} \end{array} \right\}$$

This modification may not be ideal, though, because s can quit the protocol even if b has ok'ed the transaction, and that s can still invoke a delivery even if b has quit the transaction. ∇

8.6. RELATED WORK

There are many works on MPST and their integration into programming languages; see [Hüt+16; Anc+16] for surveys. Triggered by flawed proofs of type safety and limitations of usual theories, Scalas and Yoshida [SY19] define a meta-framework of multiparty protocols based on local types, without global types and projection. Their work has been a source of inspiration for our developments; we address similar issues by adopting relative types, instead of cutting ties with global types.

Other approaches to multiparty protocols. In a broader context, Message Sequence Charts (MSCs) provide graphical specifications of multiparty protocols. Alur *et al.* [AEY05] and Abdallah *et al.* [AHJ15] study the decidability of model-checking properties such as implementability of MSC Graphs and High-level MSCs (HMSCs) as Communicating FSMs (CFSMs). We note that the decidability of key notions for MPST (such as well-formedness and typability) has been addressed in [HYC16].

Collaboration diagrams are another visual model for communicating processes (see, e.g. [BF08]). Salaün *et al.* [SBR12] encode collaboration diagrams into the LOTOS process algebra [Bri89] to enable model-checking [Gar+07], realizability checks for synchronous and asynchronous communication, and synthesis of participant implementations.

8.7. CONCLUSIONS

We have introduced a new method to obtain local perspectives from global types. This method uses *relative projection* to project a global type onto *pairs* of its participants, yielding a form of binary session type dubbed *relative types*.

Relative types and projection support an expressive class of global types (those that are *relative well-formed*), because of the way they deal with the *non-local choices* that influence the interactions between pairs of participants: they make these decision points that are implicit in the global type explicit by means of coordination messages called *dependencies*.

Our new relative projection improves over traditional methods of *local projection*. First, relative projection yields relative types that are more directly compatible with binary session type theories. Second, the class of relative well-formed global types is arguably more expressive than the the class of global types that are well-formed for local projection. Though these classes are incomparable, we have demonstrated with several examples that many global types that are not relative well-typed can be transformed to equivalent, relative well-formed global types. In future work, we plan to improve relative projection to subsume merge-based approaches entirely.

The methods introduced in this chapter are readily usable for the verification of implementations of multiparty session types, be it static (Chapter 9) or dynamic (Chapter 10).

9

BINARY SESSION TYPES FOR DISTRIBUTED MULTIPARTY SESSION

This chapter addresses the verification of distributed systems, in particular as implementations of multiparty session types (MPSTs). The chapter then introduces a framework in which such distributed models of MPSTs can be analyzed. Instead of re-inventing the wheel, the framework relies on message-passing processes in APCP and their derived correctness properties. It thus answers the following research question, introduced in Section 1.2.3.2:

Research Question III-2. *Can we leverage on binary session types to guarantee protocol conformance and deadlock-freedom for distributed (model) implementations of MPSTs?*

This chapter includes a self-contained summary of MPSTs (Section 9.3) and of APCP (Section 9.2). Omitted details and proofs can be found in the chapters dedicated to these subjects (Chapters 3 and 8, respectively). The chapter also relies on global types and relative projection, presented in detail in Chapter 8; a summary is included in Section 9.3 with minor adjustments compared to Chapter 8.

9.1. INTRODUCTION

This chapter presents a new approach to the analysis of the *protocols* that pervade concurrent and distributed software. Such protocols provide an essential unifying glue between communicating programs; ensuring that communicating programs implement protocols correctly, avoiding protocol violations and deadlocks, is an important but difficult problem. Here, we study *multiparty session types (MPST)* [HYC16], an approach to correctness in message-passing programs that uses governing protocols as types in program verification.

As a motivating example, let us consider a *recursive authorization protocol*, adapted from an example by Scalas and Yoshida [SY19]. It involves three participants: a Client, a Server, and an Authorization service. Intuitively, the protocol proceeds as follows. The Server requests

the Client either to *login* or to *quit* the protocol. In the case of login, the Client sends a password to the Authorization service, which then may authorize the login with the Server; subsequently, the protocol can be performed again: this is useful when, e.g., clients must renew their authorization privileges after some time. In the case of quit, the protocol ends.

MPST use *global types* to specify multiparty protocols. The authorization protocol just described can be specified by the following global type between Client (*c*), Server (*s*), and Authorization service (*a*):

$$G_{\text{auth}} = \mu X.s!c \left\{ \begin{array}{l} \text{login}.c!a\{\text{passwd}\langle\text{str}\rangle.a!s\{\text{auth}\langle\text{bool}\rangle.X\}, \\ \text{quit}.c!a\{\text{quit.end}\} \end{array} \right\}$$

After declaring a recursion on the variable X (μX), the global type G_{auth} stipulates that s sends to c ($s!c$) a label login or quit. The rest of the protocol depends on this choice by s . In the login-branch, c sends to a a label passwd along with a string value ($\langle\text{str}\rangle$) and a sends to s a label auth and a boolean value, after which the protocol loops to the beginning of the recursion (X). In the quit-branch, c sends to a a label quit after which the protocol ends (end).

In MPST, participants are implemented as distributed processes that communicate asynchronously. Each process must correctly implement its corresponding portion of the protocol; these individual guarantees ensure that the interactions between processes conform to the given global type. Correctness follows from *protocol fidelity* (processes interact as stipulated by the protocol), *communication safety* (no errors or mismatches in messages), and *deadlock-freedom* (processes never get stuck waiting for each other). Ensuring that implementations satisfy these properties is a challenging problem, which is further compounded by two common and convenient features in interacting processes: *delegation* and *interleaving*. We motivate them in the context of our example:

- *Delegation*, or higher-order channel passing, can effectively express that the Client transparently reconfigures its involvement by asking another participant (say, a Password Manager) to act on its behalf;
- *Interleaving* arises when a single process implements more than one role: e.g., an implementation of both the Server and the Authorization service in a sequential process.

9

Note that while delegation is explicitly specified in a global type, interleaving arises in its implementation as interacting processes, not in its specification.

MPST have been widely studied from foundational and applied angles [Bet+08; CDP12; Hu+12; Sca+17; BD19; Bej+19; SY19; Cas+20; Ima+20; MYZ20]. The original theory by Honda *et al.* [HYC08] defines a behavioral type system [Hüt+16; Anc+16] for a π -calculus, which exploits linearity to ensure protocol fidelity and communication safety; most derived works retain this approach and target the same properties. Deadlock-freedom is hard to ensure by typing when implementations feature delegation and interleaving. In simple scenarios without interleaving and/or delegation, deadlock-freedom is easy, as it concerns a single-threaded protocol. In contrast, deadlock-freedom for processes running multiple, interleaved protocols (possibly delegated) is a much harder problem, addressed only by some advanced type systems [Bet+08; PVV14; Cop+16].

In this chapter, we tackle the problem of ensuring that networks of interacting processes correctly implement a given global type in a Deadlock-free manner, while supporting delegation and interleaving. Our approach is informed by the differences between *orchestration* and *choreography*, two salient approaches to the coordination and organization of interacting processes in service-oriented paradigms [Pel03]:

- In *orchestration*-based approaches, processes interact through a coordinator process which ensures that they all follow the protocol as intended. Quoting Van der Aalst, in an orchestration “the conductor tells everybody in the orchestra what to do and makes sure they all play in sync” [Aal09].
- In *choreography*-based approaches, processes interact directly following the protocol without external coordination. Again quoting Van der Aalst, in a choreography “dancers dance following a global scenario without a single point of control” [Aal09].

Specification and analysis techniques based on MPST fall under the choreography-based approach. The global type provides the protocol’s specification; based on the global type, participant implementations interact directly with each other, without an external coordinator.

As we will see, the contrast between orchestration and choreography is relevant here because it induces a different *network topology* for interacting processes. In an orchestration, the resulting process network is *centralized*: all processes must connect to a central orchestrator process. In a choreography, the process network is *decentralized*, as processes can directly connect to each other.

Contributions. We develop a new decentralized analysis of multiparty protocols.

- Here ‘analysis’ refers to (i) ways of specifying such protocols as interacting processes *and* (ii) techniques to verify that those processes satisfy the intended correctness properties.
- Also, aligned with the above discussion, ‘decentralized’ refers to the intended network topology for processes, which does not rely on an external coordinator.

Our decentralized analysis of global types enforces protocol fidelity, communication safety, and deadlock-freedom for process implementations, while uniformly supporting delegation, interleaving, and asynchronous communication.

The *key idea* of our analysis is to exploit global types to generate *router processes* (simply *routers*) that enable participant implementations to communicate directly. There is a router per participant; it is intended to serve as a “wrapper” for an individual participant’s implementation. The composition of an implementation with its corresponding router is called a *routed implementation*. Collections of routed implementations can then be connected in arbitrary *process networks* that correctly realize the multiparty protocol, subsuming centralized and decentralized topologies.

Routers are *synthesized* from global types, and do not change the behavior of the participant implementations they wrap; they merely ensure that networks of routed implementations correctly behave as described by the given multiparty protocol. Returning to Van

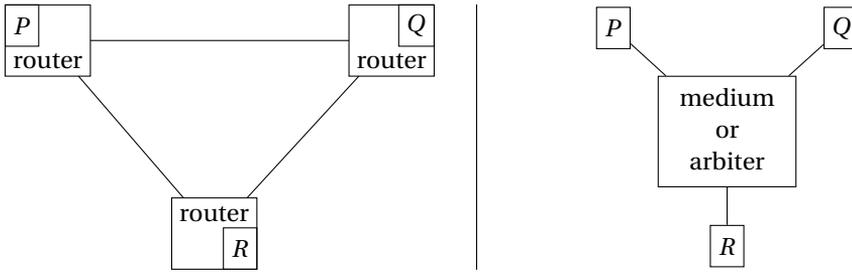


Figure 9.1 | Given processes P , Q , and R implementing the roles of c , s , and a , respectively, protocol G_{auth} can be realized as a choreography of routed implementations (our approach, left) and as an orchestration of implementations, with a medium or arbiter process (previous works, right).

der Aalst’s analogies quoted above, we may say that in our setting participant implementations are analogous to skilled but barefoot dancers, and that routers provide them with the appropriate shoes to dance without a central point of control. To make this analogy a bit more concrete, Figure 9.1 (left) illustrates the decentralized process network formed by routed implementations of the participants of G_{auth} : once wrapped by an appropriate router, implementations P , Q , and R can be composed directly in a decentralized process network.

A central technical challenge in our approach is to ensure that compositions of routed implementations conform to their global type. The channels that enable the arbitrary composition of routed implementations need to be typed in accordance with the given multiparty protocol. Unfortunately, the usual notion of projection in MPST, which obtains a single participant’s perspective from a global type, does not suffice: we need a local perspective that is relative to the *two participants* that the connected routed implementations represent. To this end, we introduce a new notion, *relative projection*, which isolates the exchanges of the global type that relate to pairs of participants. In the case of G_{auth} , for instance, we need three relative types, describing the protocol for a and c , for a and s , and for c and s .

A derived challenge is that when projecting a global type onto a pair of participants, it is possible to encounter *non-local choices*: choices by other participants that affect the protocol between the two participants involved in the projection. To handle this, relative projection explicitly records non-local choices in the form of *dependencies*, which inform the projection’s participants that they need to coordinate on the results of the non-local choices.

In all, our decentralized analysis of global types relies on three intertwined novel notions:

- **Routers** that wrap participant implementations in order to enable their composition in arbitrary network topologies, whilst guaranteeing that the resulting process networks correctly follow the given global type in a Deadlock-free manner.
- **Relative Types** that type the channels between routed implementations, obtained by means of a new notion of projection of global types onto pairs of participants.
- **Relative Projection** and **Dependencies** that make it explicit in relative types that participants need to coordinate on non-local choices.

The key ingredients of our decentralized analysis for G_{auth} are jointly depicted in Figure 9.2.

With respect to prior analyses of multiparty protocols, a distinguishing feature of our work is its natural support of decentralized process networks, as expected in a choreography-based approach. Caires and Pérez [CP16] connect participant implementations through a central coordinator, called *medium process*. This medium process is generated from a global type, and intervenes in all exchanges to ensure that the participant implementations follow the multiparty protocol. The composition of the medium with the participant implementations can then be analyzed using a type system for binary sessions. In a similar vein, Carbone *et al.* [Car+16] define a type system in which they use global types to validate choreographies of participant implementations. Their analysis of protocol implementations—in particular, deadlock-freedom—relies on encodings into another type system where participant implementations connect to a central coordinator, called the *arbiter process*. Similar to mediums, arbiters are generated from the global type to ensure that participant implementations follow the protocol as intended. Both these approaches are clear examples of orchestration, and thus do not support decentralized network topologies.

To highlight the differences between our decentralized analysis and prior approaches, compare the choreography of routed implementations in Figure 9.1 (left) with an implementation of G_{auth} in the style of Caires and Pérez and of Carbone *et al.*, in Figure 9.1 (right). These prior works rely on orchestration because the type systems they use for verifying process implementations restrict connections between processes: they only admit a form of process composition that makes it impossible to simultaneously connect three or more participant implementations [DP22; DP15]. In this chapter, we overcome this obstacle by relying on APCP (Asynchronous Priority-based Classical Processes) [HP21b], a type system that allows for more general forms of process composition. By using annotations on types, APCP prevents *circular dependencies*, i.e., cyclically connected processes that are stuck waiting for each other. This is how our approach supports networks of routed participants in both centralized and decentralized topologies, thus subsuming choreography and orchestration approaches.

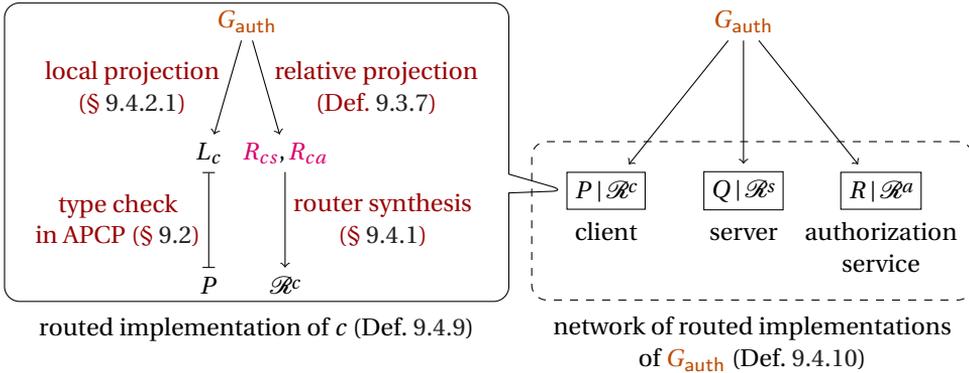


Figure 9.2 | Decentralized analysis of G_{auth} into a network of routed implementations. The definition of G_{auth} contains message types. Focusing on the client c (on the left), L_c denotes a session type, whereas R_{cs} and R_{ca} are relative types with respect to the server and the authorization service, respectively.

Outline. This chapter is structured as follows:

- Section 9.2 recalls APCP and summarizes the correctness properties for asynchronous processes derived from typing.
- Section 9.3 recalls relative types and relative projection, and defines *well-formed* global types, a class of global types that includes protocols with non-local choices.
- Section 9.4 introduces the synthesis of routers. A main result is their typability in APCP (Theorem 9.4.14). We establish deadlock-freedom for networks of routed implementations (Theorem 9.4.19), which we transfer to multiparty protocols via an operational correspondence result (Theorems 9.4.21 and 9.4.25). Moreover, we show that our approach strictly generalizes prior analyses based on centralized topologies (Theorem 9.4.34).
- Section 9.5 demonstrates our contributions with a full development of the routed implementations for G_{auth} , and an example of the flexible support for *delegation* and *interleaving* enabled by our router-based approach and APCP.

We discuss further related works in Section 9.6 and conclude the chapter in Section 9.7. We use colors to improve readability.

9.2. APCP: A SUMMARY

In this section we briefly summarize the session-typed process calculus APCP (Asynchronous Priority-based Classical Processes). We introduce its syntax, semantics, and type system. We also summarize results: type preservation (Theorem 9.2.12) and deadlock-freedom (Theorem 9.2.13). Chapter 3 discusses all details of APCP.

Syntax. We write $a, b, c, \dots, x, y, z, \dots$ to denote (channel) *names* (also known as *names*); by convention we use the early letters of the alphabet for the objects of output-like prefixes. Also, we write $\tilde{x}, \tilde{y}, \tilde{z}, \dots$ to denote sequences of names. In APCP, communication is *asynchronous* (cf. [HT91; HT92; Bou92]) and *dyadic*: each communication involves the transmission of a pair of names, a message name and a continuation name. With a slight abuse of notation, we sometimes write $x_i \in \tilde{x}$ to refer to a specific element in the sequence \tilde{x} . Also, we write i, j, k, \dots to denote *labels* for choices and I, J, K, \dots to denote sets of labels. We write X, Y, \dots to denote *recursion variables*, and P, Q, \dots to denote processes.

Definition 9.2.1 (APCP Syntax). *The syntax of APCP processes is as follows:*

$P, Q ::= x[a, b]$	<i>send</i>	$x(y, z); P$	<i>receive</i>
$x[b] \triangleleft \ell$	<i>selection</i>	$x(z) \triangleright \{i : P_i\}_{i \in I}$	<i>branch</i>
$(\mathbf{v}xy)P$	<i>restriction</i>	$P \mid Q$	<i>parallel</i>
$\mathbf{0}$	<i>inaction</i>	$[x \leftrightarrow y]$	<i>forwarder</i>
$\mu X(\tilde{z}); P$	<i>recursive definition</i>	$X\langle \tilde{z} \rangle$	<i>recursive call</i>

The send $x[a, b]$ sends along x a message name a and a continuation name b . The receive $x(y, z); P$ blocks until on x a message and continuation name are received (referred to in P as the placeholders y and z , respectively), binding y and z in P . The selection $x[b] \triangleleft i$ sends along x a label i and a continuation name b . The branch $x(z) \triangleright \{i : P_i\}_{i \in I}$ blocks until it receives on x a label $i \in I$ and a continuation name (referred to in P_i as the placeholder z), binding z in each P_i . In the rest of this chapter, we refer to sends, receives, selections, and branches—including their continuations, if any—as *prefixes*. We refer to sends and selections collectively as *outputs*, and to receives and branches as *inputs*.

Restriction $(\mathbf{v}xy)P$ binds x and y in P , thus declaring them as the two names of a channel and enabling communication, as in [Vas12]. The process $P \mid Q$ denotes the parallel composition of P and Q . The process $\mathbf{0}$ denotes inaction. The forwarder $[x \leftrightarrow y]$ is a primitive copycat process that links together x and y . We say a forwarder $[x \leftrightarrow y]$ in P is *independent* if P does not bind x and y together through restriction (and *dependent* if it does). The process $\mu X(\tilde{z}); P$ denotes a recursive definition, binding occurrences of X in P ; the names \tilde{z} form a context for P . Then P may contain recursive calls $X\langle \tilde{z} \rangle$ that indicate a repetition of P , providing the names \tilde{z} as context. We only consider contractive recursion, disallowing processes with subexpressions of the form $\mu X_1(\tilde{z}); \dots; \mu X_n(\tilde{z}); X_1\langle \tilde{z} \rangle$.

Names and recursion variables are free unless otherwise stated (i.e., unless they are bound somehow). We write $\text{fn}(P)$ and $\text{frv}(P)$ for the sets of free names and free recursion variables of P , respectively, and $\text{bn}(P)$ for the set of bound names of P . Also, we write $P\{x/y\}$ to denote the capture-avoiding substitution of the free occurrences of y in P for x . Notation $P\{\mu X(y_1, \dots, y_n); P'\}/X\langle y_1, \dots, y_n \rangle$ denotes the substitution of occurrences of recursive calls $X\langle y_1, \dots, y_n \rangle$ in P with the recursive definition $\mu X(y_1, \dots, y_n); P'$, which we call *unfolding recursion*. We write sequences of substitutions $P\{x_1/y_1\} \dots \{x_n/y_n\}$ as $P\{x_1/y_1, \dots, x_n/y_n\}$.

Notation 9.2.2 (Derivable Bound Communication). *We use the following syntactic sugar:*

$$\begin{aligned} \bar{x}[y] \cdot P &:= (\mathbf{v}ya)(\mathbf{v}zb)(x[a, b] \mid P\{z/x\}) & \bar{x} \triangleleft \ell \cdot P &:= (\mathbf{v}zb)(x[b] \triangleleft \ell \mid P\{z/x\}) \\ x(y); P &:= x(y, z); P\{z/x\} & x \triangleright \{i : P_i\}_{i \in I} &:= x(z) \triangleright \{i : P_i\{z/x\}\}_{i \in I} \end{aligned}$$

Operational semantics. We define a reduction relation for processes ($P \rightarrow Q$) that formalizes how complementary outputs/inputs on connected names may synchronize. As usual for π -calculi, reduction relies on *structural congruence* ($P \equiv Q$), which relates processes with minor syntactic differences.

Definition 9.2.3 (Structural Congruence (\equiv) for APCP). *Structural congruence for APCP, denoted $P \equiv Q$, is the smallest congruence on the syntax of processes satisfying the following axioms:*

$$\begin{array}{c}
\frac{[CONG-ALPHA]}{P \equiv_{\alpha} Q} \quad \frac{[CONG-PAR-UNIT]}{P \mid \mathbf{0} \equiv P} \quad \frac{[CONG-PAR-COMM]}{P \mid Q \equiv Q \mid P} \quad \frac{[CONG-PAR-ASSOC]}{P \mid (Q \mid R) \equiv (P \mid Q) \mid R} \\
\\
\frac{[CONG-SCOPE]}{P \mid (\nu xy)Q \equiv (\nu xy)(P \mid Q)} \quad \frac{[CONG-RES-COMM]}{(\nu xy)(\nu zw)P \equiv (\nu zw)(\nu xy)P} \quad \frac{[CONG-RES-SYMM]}{(\nu xy)P \equiv (\nu yx)P} \\
\\
\frac{[CONG-RES-INACT]}{(\nu xy)\mathbf{0} \equiv \mathbf{0}} \quad \frac{[CONG-FWD-SYMM]}{[x \leftrightarrow y] \equiv [y \leftrightarrow x]} \quad \frac{[CONG-RES-FWD]}{(\nu xy)[x \leftrightarrow y] \equiv \mathbf{0}} \\
\\
\frac{[CONG-UNFOLD]}{\mu X(x_1, \dots, x_n); P \equiv P\{\{\mu X(y_1, \dots, y_n); P\{y_1/x_1, \dots, y_n/x_n\}\}/X\langle y_1, \dots, y_n \rangle\}}
\end{array}$$

Structural congruence defines the following properties for processes. Processes are equivalent up to α -equivalence (Rule [CONG-ALPHA]). Parallel composition is associative (Rule [CONG-PAR-ASSOC]) and commutative (Rule [CONG-PAR-COMM]), with unit $\mathbf{0}$ (Rule [CONG-PAR-UNIT]). A parallel process may be moved into or out of a restriction as long as the bound channels do not occur free in the moved process (Rule [CONG-SCOPE]): this is *scope inclusion* and *scope extrusion*, respectively. Restrictions on inactive processes may be dropped (Rule [CONG-RES-INACT]), and the order of names in restrictions and of consecutive restrictions does not matter (Rules [CONG-RES-SYMM] and [CONG-RES-COMM], respectively). Forwarders are symmetric (Rule [CONG-FWD-SYMM]), and equivalent to inaction if both names are bound together through restriction (Rule [CONG-RES-FWD]). Finally, a recursive definition is equivalent to its unfolding (Rule [CONG-UNFOLD]), replacing any recursive calls with copies of the recursive definition, where the recursive definition's contextual names are pairwise substituted for by the call's names.

As we will see next, the semantics of APCP is closed under structural congruence. This means that processes are *equi-recursive*; however, APCP's typing discipline (described next) treats recursive types as *iso-recursive* (see, e.g., Pierce [Pie02]).

We now define the reduction relation $P \rightarrow Q$.

Definition 9.2.4 (Reduction (\rightarrow) for APCP). *Reduction for APCP is a relation between processes,*

denoted $P \rightarrow Q$. It is defined by the following rules:

$$\begin{array}{c}
 \frac{[\text{RED-SEND-RECV}]}{(\mathbf{v}xy)(x[a, b] \mid y(z, y'); Q) \rightarrow Q\{a/z, b/y'\}} \\
 \\
 \frac{[\text{RED-SEL-BRA}]}{(\mathbf{v}xy)(x[b] \triangleleft j \mid y(y') \triangleright \{i : Q_i\}_{i \in I}) \rightarrow Q_j\{b/y'\}} \quad \frac{[\text{RED-FWD}]}{(\mathbf{v}xy)([x \leftrightarrow z] \mid P) \rightarrow P\{z/y\}} \quad x, y \neq z \\
 \\
 \frac{[\text{RED-CONG}]}{P \equiv P' \quad P' \rightarrow Q' \quad Q' \equiv Q}{P \rightarrow Q} \quad \frac{[\text{RED-RES}]}{P \rightarrow Q}{(\mathbf{v}xy)P \rightarrow (\mathbf{v}xy)Q} \quad \frac{[\text{RED-PAR}]}{P \rightarrow Q}{P \mid R \rightarrow Q \mid R}
 \end{array}$$

We write \rightarrow^* for the reflexive, transitive closure of \rightarrow .

Rule [RED-SEND-RECV] synchronizes a send and a receive on connected names and substitutes the message and continuation names. Rule [RED-SEL-BRA] synchronizes a selection and a branch: the received label determines the continuation process, substituting the continuation name appropriately. Rule [RED-FWD] implements the forwarder as a substitution. Rules [RED-CONG], [RED-RES], and [RED-PAR] close reduction under structural congruence, restriction, and parallel composition, respectively.

Type system. APCP types processes by assigning binary session types to names. Following Curry-Howard interpretations, we present session types as linear logic propositions (cf., e.g., Caires *et al.* [CPT16], Wadler [Wad12], Caires and Pérez [CP17], and Dardha and Gay [DG18]). We extend these propositions with recursion and *priority* annotations on connectives. Intuitively, prefixes typed with lower priority should not be blocked by those with higher priority.

We write \circ, π, ρ, \dots to denote priorities, and ω to denote the ultimate priority that is greater than all other priorities and cannot be increased further. That is, for every $\circ \in \mathbb{N}$, we have $\omega > \circ$ and $\omega + \circ = \omega$.

Definition 9.2.5 (Session Types for APCP). *The following grammar defines the syntax of session types A, B . Let $\circ \in \mathbb{N}$.*

$$A, B ::= A \otimes^\circ B \mid A \wp^\circ B \mid \oplus^\circ \{i : A\}_{i \in I} \mid \&^\circ \{i : A\}_{i \in I} \mid \bullet \mid \mu X. A \mid X$$

A name of type $A \otimes^\circ B$ (resp. $A \wp^\circ B$) first sends (resp. receives) a name of type A and then behaves as B . A name of type $\oplus^\circ \{i : A_i\}_{i \in I}$ selects a label $i \in I$ and then behaves as A_i . A name of type $\&^\circ \{i : A_i\}_{i \in I}$ offers a choice: after receiving a label $i \in I$, the name behaves as A_i . A name of type \bullet is closed; it does not require a priority, as closed names do not exhibit behavior and thus are non-blocking.

Type $\mu X. A$ denotes a recursive type, in which A may contain occurrences of the recursion variable X . As customary, μ is a binder: it induces the standard notions of α -equivalence, substitution (denoted $A\{B/X\}$), and free recursion variables (denoted $\text{frv}(A)$). We work with tail-recursive, contractive types, disallowing types of the form $\mu X_1 \dots \mu X_n. X_1$ and $\mu X. X \otimes^\circ A$.

Recursive types are treated iso-recursively: there will be an explicit typing rule that unfolds recursive types, and recursive types are not equal to their unfolding. We postpone formalizing the unfolding of recursive types, as it requires additional definitions to ensure consistency of priorities upon unfolding.

Duality, the cornerstone notion of session types and linear logic, ensures that the two names of a channel have matching prefixes. Furthermore, dual types must have matching priority annotations. The following inductive definition of duality suffices for our tail-recursive types (cf. Gay *et al.* [GTV20]).

Definition 9.2.6 (Duality). *The dual of session type A , denoted \bar{A} , is defined inductively as follows:*

$$\begin{array}{lll} \overline{A \otimes B} \triangleq \bar{A} \wp^{\circ} \bar{B} & \overline{\oplus^{\circ}\{i : A_i\}_{i \in I}} \triangleq \&^{\circ}\{\bar{A}_i\}_{i \in I} & \bar{\bullet} \triangleq \bullet & \overline{\mu X.A} \triangleq \mu X.\bar{A} \\ \overline{A \wp^{\circ} B} \triangleq \bar{A} \otimes^{\circ} \bar{B} & \overline{\&^{\circ}\{i : A_i\}_{i \in I}} \triangleq \oplus^{\circ}\{\bar{A}_i\}_{i \in I} & & & \bar{X} \triangleq X \end{array}$$

The priority of a type is determined by the priority of the type's outermost connective:

Definition 9.2.7 (Priorities). *For session type A , $\text{pr}(A)$ denotes its priority:*

$$\begin{array}{ll} \text{pr}(A \otimes B) \triangleq \text{pr}(A \wp^{\circ} B) \triangleq \circ & \text{pr}(\mu X.A) \triangleq \text{pr}(A) \\ \text{pr}(\oplus^{\circ}\{i : A_i\}_{i \in I}) \triangleq \text{pr}(\&^{\circ}\{i : A_i\}_{i \in I}) \triangleq \circ & \text{pr}(\bullet) \triangleq \text{pr}(X) \triangleq \omega \end{array}$$

We now turn to formalizing the unfolding of recursive types. Recall the intuition that prefixes typed with lower priority should not be blocked by those with higher priority. Based on this rationale, we observe that the unfolding of the recursive type $\mu X.A$ should not result in $A\{\mu X.A/X\}$, as usual, but that the priorities of the unfolded type should be *increased*.

Definition 9.2.8 (Lift). *For proposition A and $t \in \mathbb{N}$, we define $\uparrow^t A$ as the lift operation:*

$$\begin{array}{lll} \uparrow^t(A \otimes B) \triangleq (\uparrow^t A) \otimes^{\circ+t} (\uparrow^t B) & \uparrow^t(\oplus^{\circ}\{i : A_i\}_{i \in I}) \triangleq \oplus^{\circ+t}\{\uparrow^t A_i\}_{i \in I} & \uparrow^t \bullet \triangleq \bullet \\ \uparrow^t(A \wp^{\circ} B) \triangleq (\uparrow^t A) \wp^{\circ+t} (\uparrow^t B) & \uparrow^t(\&^{\circ}\{i : A_i\}_{i \in I}) \triangleq \&^{\circ+t}\{\uparrow^t A_i\}_{i \in I} & \\ \uparrow^t(\mu X.A) \triangleq \mu X.(\uparrow^t A) & \uparrow^t X \triangleq X & \end{array}$$

Henceforth, the unfolding of $\mu X.A$ is $A\{\mu X.(\uparrow^t A)/X\}$, denoted $\text{unfold}^t(\mu X.A)$, where $t \in \mathbb{N}$ depends on the highest priority of the types occurring in a typing context. We recall that we do not consider types to be equi-recursive: recursive types are not equal to their unfolding. Recursive types can only be unfolded by typing rules, discussed next.

We now define the top priority of a type, i.e., the highest priority appearing in a type:

Definition 9.2.9 (Top Priority). *For session type A , $\text{top}(A)$ denotes its top priority:*

$$\begin{array}{ll} \text{top}(A \otimes B) \triangleq \text{top}(A \wp^{\circ} B) \triangleq \max(\text{top}(A), \text{top}(B), \circ) & \\ \text{top}(\oplus^{\circ}\{i : A_i\}_{i \in I}) \triangleq \text{top}(\&^{\circ}\{i : A_i\}_{i \in I}) \triangleq \max(\max_{i \in I}(\text{top}(A_i)), \circ) & \\ \text{top}(\mu X.A) \triangleq \text{top}(A) & \text{top}(\bullet) \triangleq \text{top}(X) \triangleq 0 \end{array}$$

Judgments are of the form $\Omega \vdash P \blacktriangleright \Gamma$, where:

- P is a process;
- Γ is a context that assigns types to channels ($x : A$);
- Ω is a context that assigns tuples of types to recursion variables ($X : (A, B, \dots)$).

Both contexts Γ and Ω obey *exchange*: assignments may be silently reordered. Γ is *linear*, disallowing *weakening* (i.e., all assignments must be used; with the exception of names typed \bullet) and *contraction* (i.e., assignments may not be duplicated). Ω allows weakening and contraction, because a recursive definition may be called *zero or more* times.

The empty context is written \emptyset . In writing $\Gamma, x : A$ we assume that $x \notin \text{dom}(\Gamma)$ (and similarly for Ω). We write $\uparrow^t \Gamma$ to denote the component-wise extension of lift (Definition 9.2.8) to typing contexts. Also, we write $\text{pr}(\Gamma)$ to denote the least of the priorities of all types in Γ (Definition 9.2.7). An assignment $\tilde{z} : \tilde{A}$ means $z_1 : A_1, \dots, z_k : A_k$. We define the top priority of a sequence of types $\text{top}(\tilde{A})$ as $\max_{A_i \in \tilde{A}}(\text{top}(A_i))$.

Figure 9.3 (top) gives the typing rules. We describe the typing rules from a *bottom-up* perspective. Rule [TYP-SEND] types a send; this rule does not have premises to provide a continuation process, leaving the free names to be bound to a continuation process using Rules [TYP-PAR] and [TYP-RES] (discussed hereafter). Similarly, Rule [TYP-SEL] types an unbound selection. Both rules require that the priority of the subject is lower than the priorities of both objects (continuation and payload). Rules [TYP-RECV] and [TYP-BRA] type receives and branches, respectively. In both cases, the used name's priority must be lower than the priorities of the other types in the continuation's typing.

Rule [TYP-PAR] types the parallel composition of two processes that do not share assignments on the same names. Rule [TYP-RES] types a restriction, where the two restricted names must be of dual type and thus have matching priority. Rule [TYP-END] silently removes a closed name from the typing context. Rule [TYP-INACT] types an inactive process with no names. Rule [TYP-FWD] types forwarding between names of dual type.

Rules [TYP-REC] and [TYP-VAR] type recursive processes, where the former types recursive definitions and the latter types recursive calls. Rule [TYP-REC] unfolds all types. While unfolding, the priorities in these types are lifted by a common value, denoted t in the rule, that must be greater than the top priority occurring in the original types (cf. Definition 9.2.9). This makes sure that any priority requirements that come up in the typing of the recursive body of the process remain valid. The recursive context is used to record the bodies of the original folded types. Rule [TYP-REC] then requires that the types of names are recursive on the recursion variable used for the call. It checks that the bodies of the types concur with the types recorded in the recursive context, up to a lift by a common value t (i.e., the lifter used in the application of Rule [TYP-REC]).

The binding of sends and selections to continuation processes (Notation 9.2.2) is derivable in APCP. Figure 9.3 (bottom) also includes an admissible Rule [TYP-LIFT] that lifts a process' priorities.

Theorem 9.2.10. *Rules [TYP-SEND*] and [TYP-SEL*] in Figure 9.3 (bottom) are derivable, and Rule [TYP-LIFT] in Figure 9.3 (bottom) is admissible.*

Results. Well-typed processes satisfy protocol fidelity, communication safety, and deadlock-freedom. The former two of these properties follow from *type preservation*, which ensures that APCP's semantics preserves typing.

Type preservation holds *up to unfolding*. To formalize this, we define the relation $(\vdash P \blacktriangleright \Gamma) \lesssim \Gamma'$, which says that Γ and Γ' are equal up to (un)folding of recursive types consistent with

$$\begin{array}{c}
\frac{[\text{TYP-SEND}] \quad \circ < \text{pr}(A), \text{pr}(B)}{\Omega \vdash x[y, z] \blacktriangleright x : A \otimes^\circ B, y : \bar{A}, z : \bar{B}} \qquad \frac{[\text{TYP-RECV}] \quad \Omega \vdash P \blacktriangleright \Gamma, y : A, z : B \quad \circ < \text{pr}(\Gamma)}{\Omega \vdash x(y, z); P \blacktriangleright \Gamma, x : A \wp^\circ B} \\
\\
\frac{[\text{TYP-SEL}] \quad j \in I \quad \circ < \text{pr}(A_j)}{\Omega \vdash x[z] \triangleleft j \blacktriangleright x : \oplus^\circ \{i : A_i\}_{i \in I}, z : \bar{A}_j} \qquad \frac{[\text{TYP-BRA}] \quad \forall i \in I. \Omega \vdash P_i \blacktriangleright \Gamma, z : A_i \quad \circ < \text{pr}(\Gamma)}{\Omega \vdash x(z) \triangleright \{i : P_i\}_{i \in I} \blacktriangleright \Gamma, x : \&^\circ \{i : A_i\}_{i \in I}} \\
\\
\frac{[\text{TYP-END}] \quad \Omega \vdash P \blacktriangleright \Gamma}{\Omega \vdash P \blacktriangleright \Gamma, x : \bullet} \qquad \frac{[\text{TYP-PAR}] \quad \Omega \vdash P \blacktriangleright \Gamma \quad \Omega \vdash Q \blacktriangleright \Delta}{\Omega \vdash P | Q \blacktriangleright \Gamma, \Delta} \qquad \frac{[\text{TYP-RES}] \quad \Omega \vdash P \blacktriangleright \Gamma, x : A, y : \bar{A}}{\Omega \vdash (\mathbf{v}xy)P \blacktriangleright \Gamma} \qquad \frac{[\text{TYP-INACT}] \quad}{\Omega \vdash \mathbf{0} \blacktriangleright \emptyset} \\
\\
\frac{[\text{TYP-FWD}] \quad}{\Omega \vdash [x \leftrightarrow y] \blacktriangleright x : \bar{A}, y : A} \\
\\
\frac{[\text{TYP-REC}] \quad \Omega, X : \tilde{A} \vdash P \blacktriangleright \tilde{z} : \tilde{U} \quad t \in \mathbb{N} > \text{top}(\tilde{A}) \quad \forall U_i \in \tilde{U}. U_i = \text{unfold}^t(\mu X. A_i)}{\Omega \vdash \mu X(\tilde{z}); P \blacktriangleright \tilde{z} : \overline{\mu X. \tilde{A}}} \\
\\
\frac{[\text{TYP-VAR}] \quad t \in \mathbb{N} \quad \forall U_i \in \tilde{U}. U_i = \mu X. \uparrow^t A_i}{\Omega, X : \tilde{A} \vdash X(\tilde{z}) \blacktriangleright \tilde{z} : \tilde{U}} \\
\\
\hdashline
\frac{[\text{TYP-SEND}\star] \quad \Omega \vdash P \blacktriangleright \Gamma, y : A, x : B \quad \circ < \text{pr}(A), \text{pr}(B)}{\Omega \vdash \bar{x}[y] \cdot P \blacktriangleright \Gamma, x : A \otimes^\circ B} \qquad \frac{[\text{TYP-SEL}\star] \quad \Omega \vdash P \blacktriangleright \Gamma, x : A_j \quad j \in I \quad \circ < \text{pr}(A_j)}{\Omega \vdash \bar{x} \triangleleft j \cdot P \blacktriangleright \Gamma, x : \oplus^\circ \{i : A_i\}_{i \in I}} \\
\\
\frac{[\text{TYP-LIFT}] \quad \Omega \vdash P \blacktriangleright \Gamma \quad t \in \mathbb{N}}{\Omega \vdash P \blacktriangleright \uparrow^t \Gamma}
\end{array}$$

Figure 9.3 | The typing rules of APCP (top) and derivable rules (bottom).

the typing of P under Γ :

$$\begin{array}{c}
\text{[UNF-FOLD]} \\
\frac{(\Omega \vdash P\{\{\mu X(\tilde{y}); P\{\tilde{y}/\tilde{z}\}\}/X\langle\tilde{y}\rangle\} \blacktriangleright \tilde{z} : \tilde{U}) \simeq \tilde{z} : \tilde{U}' \quad \forall U'_i \in \tilde{U}'; U'_i = \text{unfold}^t(\mu X.A'_i)}{(\Omega \vdash P\{\{\mu X(\tilde{y}); P\{\tilde{y}/\tilde{z}\}\}/X\langle\tilde{y}\rangle\} \blacktriangleright \tilde{z} : \tilde{U}) \simeq \tilde{z} : \widetilde{\mu X.A'}} \\
\text{[UNF-UNF]} \\
\frac{(\Omega \vdash \mu X(\tilde{z}); P \blacktriangleright \tilde{z} : \widetilde{\mu X.A}) \simeq \tilde{z} : \widetilde{\mu X.A'} \quad \forall U'_i \in \tilde{U}'; U'_i = \text{unfold}^t(\mu X.A'_i)}{(\Omega \vdash \mu X(\tilde{z}); P \blacktriangleright \tilde{z} : \widetilde{\mu X.A}) \simeq \tilde{z} : \tilde{U}'} \\
\text{.....} \\
\text{[UNF-SEND]} \\
\frac{}{(\Omega \vdash x[y, z] \blacktriangleright x : A \otimes^\circ B, y : \bar{A}, z : \bar{B}) \simeq x : A \otimes^\circ B, y : \bar{A}, z : \bar{B}} \\
\text{[UNF-RECV]} \\
\frac{(\Omega \vdash P \blacktriangleright \Gamma, y : A, z : B) \simeq \Gamma', y : A', z : B'}{(\Omega \vdash x(y, z); P \blacktriangleright \Gamma, x : A \wp^\circ B) \simeq \Gamma', x : A' \wp^\circ B'} \\
\text{[UNF-SEL]} \\
\frac{}{(\Omega \vdash x[z] \triangleleft j \blacktriangleright x : \oplus^\circ \{i : A_i\}_{i \in I}, z : \bar{A}_j) \simeq x : \oplus^\circ \{i : A_i\}_{i \in I}, z : \bar{A}_j} \\
\text{[UNF-BRA]} \\
\frac{\forall i \in I. (\Omega \vdash P_i \blacktriangleright \Gamma, z : A_i) \simeq \Gamma', z : A'_i}{(\Omega \vdash x(z) \triangleright \{i : P_i\}_{i \in I} \blacktriangleright \Gamma, x : \&^\circ \{i : A_i\}_{i \in I}) \simeq \Gamma', x : \&^\circ \{i : A'_i\}_{i \in I}} \\
\text{[UNF-END]} \quad \text{[UNF-PAR]} \\
\frac{(\Omega \vdash P \blacktriangleright \Gamma) \simeq \Gamma'}{(\Omega \vdash P \blacktriangleright \Gamma, x : \bullet) \simeq \Gamma', x : \bullet} \quad \frac{(\Omega \vdash P \blacktriangleright \Gamma) \simeq \Gamma' \quad (\Omega \vdash Q \blacktriangleright \Delta) \simeq \Delta'}{(\Omega \vdash P | Q \blacktriangleright \Gamma, \Delta) \simeq \Gamma', \Delta'} \\
\text{[UNF-RES]} \quad \text{[UNF-INACT]} \\
\frac{(\Omega \vdash P \blacktriangleright \Gamma, x : A, y : \bar{A}) \simeq \Gamma', x : A', y : \bar{A}'}{(\Omega \vdash (\nu xy)P \blacktriangleright \Gamma) \simeq \Gamma'} \quad \frac{}{(\Omega \vdash \mathbf{0} \blacktriangleright \emptyset) \simeq \emptyset} \\
\text{[UNF-FWD]} \quad \text{[UNF-REC]} \\
\frac{}{(\Omega \vdash [x \leftrightarrow y] \blacktriangleright x : \bar{A}, y : A) \simeq x : \bar{A}, y : A} \quad \frac{(\Omega, X : \tilde{A} \vdash P \blacktriangleright \tilde{z} : \tilde{U}) \simeq \tilde{z} : \tilde{U}'}{(\Omega \vdash \mu X(\tilde{z}); P \blacktriangleright \tilde{z} : \widetilde{\mu X.A}) \simeq \tilde{z} : \widetilde{\mu X.A'}} \\
\text{[UNF-VAR]} \\
\frac{}{(\Omega, X : \tilde{A} \vdash X\langle\tilde{z}\rangle \blacktriangleright \tilde{z} : \tilde{U}) \simeq \tilde{z} : \tilde{U}}
\end{array}$$

Figure 9.4 | Inference rules for Definition 9.2.11.

Definition 9.2.16 (Pending Names). *Given a process P , we define the set of pending names of P , denoted $\text{pn}(P)$, as follows:*

$$\begin{array}{lll}
\text{pn}(x[y, z]) \triangleq \{x\} & \text{pn}(x(y, z); P) \triangleq \{x\} \cup (\text{pn}(P) \setminus \{y, z\}) \\
\text{pn}(x[z] \triangleleft \ell) \triangleq \{x\} & \text{pn}(x(z) \triangleright \{i : P_i\}_{i \in I}) \triangleq \{x\} \cup (\bigcup_{i \in I} \text{pn}(P_i) \setminus \{z\}) \\
\text{pn}(P | Q) \triangleq \text{pn}(P) \cup \text{pn}(Q) & \text{pn}(\mu X(\tilde{x}); P) \triangleq \text{pn}(P) & \text{pn}(\mathbf{0}) \triangleq \emptyset \\
\text{pn}((\mathbf{v}xy)P) \triangleq \text{pn}(P) & \text{pn}(X(\tilde{x})) \triangleq \emptyset & \text{pn}([x \leftrightarrow y]) \triangleq \{x, y\}
\end{array}$$

Theorem 9.2.17 (Reactivity). *Suppose given a process $\phi \vdash P \blacktriangleright \phi$. Then, for every $x \in \text{pn}(P)$ there exists a process P' such that $P \rightarrow^* P'$ and $P' \xrightarrow{\alpha} Q$, for some process Q and label α with subject x .*

Example. To illustrate ACP processes and their session types, we give implementations for the three participants in G_{auth} in Section 9.1.

Example 9.2.18. Processes P , Q , and R are typed implementations for participants c , s , and a , respectively, each using a single channel to perform the exchanges described by G_{auth} .

$$\begin{array}{l}
\phi \vdash P \triangleq (\mathbf{v}X)(c_\mu; c_\mu \triangleright \left\{ \begin{array}{l} \text{login} : c_\mu(u); \overline{c_\mu} \triangleleft \text{passwd} \cdot \overline{c_\mu}[\text{logmein345}] \cdot X \langle c_\mu \rangle, \\ \text{quit} : c_\mu(w); \overline{c_\mu} \triangleleft \text{quit} \cdot \overline{c_\mu}[z] \cdot \mathbf{0} \end{array} \right\}) \\
\blacktriangleright c_\mu : \mu X. \&^2 \left\{ \begin{array}{l} \text{login} : \bullet \wp^3 \oplus^4 \{ \text{passwd} : \bullet \otimes^5 X \}, \\ \text{quit} : \bullet \wp^3 \oplus^4 \{ \text{quit} : \bullet \otimes^5 \bullet \} \end{array} \right\} \\
\phi \vdash Q \triangleq \mu X(s_\mu; \overline{s_\mu} \triangleleft \text{login} \cdot \overline{s_\mu}[u] \cdot s_\mu \triangleright \{ \text{auth} : s_\mu(v); X \langle s_\mu \rangle \}) \\
\blacktriangleright s_\mu : \mu X. \otimes^0 \{ \text{login} : \bullet \otimes^1 \&^{10} \{ \text{auth} : \bullet \wp^{11} X \}, \text{quit} : \bullet \otimes^1 \bullet \} \\
\phi \vdash R \triangleq \mu X(a_\mu; a_\mu \triangleright \left\{ \begin{array}{l} \text{login} : a_\mu \triangleright \{ \text{passwd} : a_\mu(u); \overline{a_\mu} \triangleleft \text{auth} \cdot \overline{a_\mu}[v] \cdot X \langle a_\mu \rangle \}, \\ \text{quit} : a_\mu \triangleright \{ \text{quit} : a_\mu(w); \mathbf{0} \} \end{array} \right\}) \\
\blacktriangleright a_\mu : \mu X. \&^2 \left\{ \begin{array}{l} \text{login} : \&^6 \{ \text{passwd} : \bullet \wp^7 \oplus^8 \{ \text{auth} : \bullet \otimes^9 X \} \}, \\ \text{quit} : \&^6 \{ \text{quit} : \bullet \wp^7 \bullet \} \end{array} \right\}
\end{array}$$

9

Process P is a specific implementation for c , where we use ‘**logmein345**’ to denote a closed endpoint representing the password string “logmein345”. Similarly, Q is a specific implementation for s that continuously chooses the login branch. ∇

9.3. GLOBAL TYPES AND RELATIVE TYPES: A SUMMARY

In this section we briefly summarize MPSTs global types and their projection onto relative types. This corresponds to their detailed introduction in Chapter 8 with minor adjustments to accommodate routers.

Global types. In the following, we write p, q, r, s, \dots to denote (*protocol*) *participants*.

Definition 9.3.1 (Global Types). Global types G and message types S, T are defined as:

$$\begin{array}{l}
 G \triangleq p!q\{i\langle S_i \rangle.G_i\}_{i \in I} \quad \text{exchange} \quad | \quad \text{end} \quad \text{end} \\
 \quad | \mu X.G | X \quad \text{recursion} \quad | \quad \text{skip}.G \quad \text{skip} \\
 S, T \triangleq !T.S \quad \text{send} \quad | \quad \oplus\{i : S_i\}_{i \in I} \quad \text{selection} \quad | \quad \text{end} \quad \text{end} \\
 \quad | ?T.S \quad \text{receive} \quad | \quad \&\{i : S_i\}_{i \in I} \quad \text{branch}
 \end{array}$$

We include basic types (e.g., unit, bool, int), which are all syntactic sugar for end.

The type $p!q\{i\langle S_i \rangle.G_i\}_{i \in I}$ specifies a direct exchange from participant p to participant q , which precedes protocol G_i : p chooses a label $i \in I$ and sends it to q along with a message of type S_i . Message exchange is *asynchronous*: the protocol can continue as G_i before the message has been received by q . The type $\mu X.G$ defines a recursive protocol: whenever a path of exchanges in G reaches the recursion variable X , the protocol continues as $\mu X.G$. The type end denotes the completed protocol. For technical convenience, we introduce the construct $\text{skip}.G$, which denotes an unobservable step that precedes G .

Recursive definitions bind recursion variables, so recursion variables not bound by a recursive definition are free. We write $\text{frv}(G)$ to denote the set of free recursion variables of G , and say G is *closed* if $\text{frv}(G) = \emptyset$. Recursion in global types is tail-recursive and *contractive* (i.e. they contain no subexpressions of the form $\mu X_1 \dots \mu X_n.X_1$). As for the session types in Section 9.2, we define the unfolding of a recursive global type by substituting copies of the recursive definition for recursive calls, i.e., $\mu X.G$ unfolds to $G\{\mu X.G/X\}$.

Message types S, T define binary protocols, not to be confused with the types in § 9.2. Type $!T.S$ (resp. $?T.S$) denotes the send (resp. receive) of a message of type T followed by the continuation S . Type $\oplus\{i : S_i\}_{i \in I}$ denotes *selection*: the output of a choice for a label $i \in I$ followed by the continuation S_i . Type $\&\{i : S_i\}_{i \in I}$ denotes *branching*: the input of a label $i \in I$ followed by the continuation S_i . Type end denotes the end of the protocol. Due to the tail-recursiveness of session and global types, there are no recursive message types.

It is useful to obtain the set of participants of a global type:

Definition 9.3.2 (Participants of Global Types). We define the set of participants of global type G , denoted $\text{part}(G)$:

$$\begin{array}{l}
 \text{part}(p!q\{i\langle S_i \rangle.G_i\}_{i \in I}) \triangleq \{p, q\} \cup \bigcup_{i \in I} \text{part}(G_i) \quad \text{part}(\text{skip}.G) \triangleq \text{part}(G) \quad \text{part}(\text{end}) \triangleq \emptyset \\
 \text{part}(\mu X.G) \triangleq \text{part}(G) \quad \text{part}(X) \triangleq \emptyset
 \end{array}$$

Relative types. While a global type such as G_{auth} (9.1) describes a protocol from a vantage point, *relative types* describe the interactions between *pairs* of participants.

A choice between participants in a global type is *non-local* if it influences future exchanges between other participants. Our approach uses *dependencies* to expose these non-local choices in the relative types of these other participants.

Definition 9.3.3 (Relative Types). Relative types R are defined as follows, where the S_i are message types:

$$\begin{array}{lcl}
 R \triangleq p!q \llbracket i \langle S_i \rangle . R_i \rrbracket_{i \in I} & \text{exchange} & | \text{end} & \text{end} \\
 | (p!r)!q \llbracket i . R_i \rrbracket_{i \in I} & \text{output dependency} & | \mu X . R | X & \text{recursion} \\
 | (p?r)!q \llbracket i . R_i \rrbracket_{i \in I} & \text{input dependency} & | \text{skip} . R & \text{skip}
 \end{array}$$

We detail the syntax above.

- Type $p!q \llbracket i \langle S_i \rangle . R_i \rrbracket_{i \in I}$ specifies that p must choose a label $i \in I$ and send it to q along with a message of type S_i after which the protocol continues with R_i .
- Given a participant r different from q , type $(p?r)!q \llbracket i . R_i \rrbracket_{i \in I}$ expresses a dependency: a non-local choice between p and r which influences the protocol between p and q . Here, the dependency indicates that after p receives from r the chosen label, p must forward it to q , determining the protocol between p and q .
- Similarly, type $(p!r)!q \llbracket i . R_i \rrbracket_{i \in I}$ expresses a dependency, which indicates that after p sends to r the chosen label, p must forward it to q .
- Types $\mu X . R$ and X define recursion, just as their global counterparts.
- The type end specifies the end of the protocol between p and q .
- The type $\text{skip} . R$ denotes an unobservable step that precedes R .

Definition 9.3.4 (Participants of Relative Types). We define the set of participants of relative type R , denoted $\text{part}(R)$:

$$\begin{array}{lll}
 \text{part}(p!q \llbracket i \langle S_i \rangle . R_i \rrbracket_{i \in I}) \triangleq \{p, q\} \cup \bigcup_{i \in I} \text{part}(R_i) & \text{part}(\text{skip} . R) \triangleq \text{part}(R) & \text{part}(\text{end}) \triangleq \emptyset \\
 \text{part}((p?r)!q \llbracket i . R_i \rrbracket_{i \in I}) \triangleq \{p, q\} \cup \bigcup_{i \in I} \text{part}(R_i) & \text{part}(\mu X . R) \triangleq \text{part}(R) & \text{part}(X) \triangleq \emptyset \\
 \text{part}((p!r)!q \llbracket i . R_i \rrbracket_{i \in I}) \triangleq \{p, q\} \cup \bigcup_{i \in I} \text{part}(R_i) & &
 \end{array}$$

We introduce some useful notation:

9

Notation 9.3.5.

- We write $p!q(i \langle S \rangle) . G$ for a global type with a single branch $p!q(i \langle S \rangle) . G$ (and similarly for exchanges and dependencies in relative types).
- We omit unit message types from global and relative types, writing, e.g., $i . G$ for $i \langle \text{unit} \rangle . G$.
- Given $k > 1$, we write skip^k for a sequence of k skips.

Algorithm 2: Relative Projection of G onto (p, q) (Definition 9.3.7).

```

1 def  $G \rangle (p, q)$  as
2   switch  $G$  do
3     case  $s!r\{i\langle T_i \rangle . G_i\}_{i \in I}$  do
4        $\forall i \in I. R_i \triangleq G_i \rangle (p, q)$ 
5       if  $(p = s \wedge q = r)$  then return  $p!q \llbracket i\langle T_i \rangle . R_i \rrbracket_{i \in I}$ 
6       else if  $(q = s \wedge p = r)$  then return  $q!p \llbracket i\langle T_i \rangle . R_i \rrbracket_{i \in I}$ 
7       else return  $ddep((p, q), G)$ 
8     case  $\mu X. G' \rangle$  do
9        $R' \triangleq G' \rangle (p, q)$ 
10      if  $(R' \text{ defined and contractive on } X)$  then return  $\mu X. R'$ 
11      else return end
12     case  $X$  do return  $X$ 
13     case end do return end
14     case skip.  $G' \rangle (p, q)$ 

```

Relative projection and well-formedness. We define *relative projection* for global types. We want relative projection to fail when it would return a non-contractive recursive type: hence, we define contractiveness on relative types:

Definition 9.3.6 (Contractive Relative Types). *Given a relative type R and a recursion variable X , we say R is contractive on X if either of the following holds:*

- R contains an exchange, or
- R ends in a recursive call on any $Y \neq X$.

Relative projection then relies on the contractiveness of relative types. It also relies on an auxiliary function to determine if a dependency message is needed and possible.

Definition 9.3.7 (Relative Projection). *Given a global type G , we define its relative projection onto a pair of participants (p, q) , denoted $G \rangle (p, q)$, by induction on the structure of G as given in Algorithm 2, using the auxiliary function $ddep$ defined as follows:*

$$ddep((p, q), s!r\{i\langle S_i \rangle . G_i\}_{i \in I}) \triangleq \begin{cases} \text{skip.}(G_{i'}) \rangle (p, q) & [i' \in I] & \text{if } \forall i, j. G_i \rangle (p, q) = G_j \rangle (p, q) \\ (p!r)!q \llbracket i.(G_i) \rrbracket_{i \in I} & \text{if } p = s \\ (q!r)!p \llbracket i.(G_i) \rrbracket_{i \in I} & \text{if } q = s \\ (p?s)!q \llbracket i.(G_i) \rrbracket_{i \in I} & \text{if } p = r \\ (q?s)!p \llbracket i.(G_i) \rrbracket_{i \in I} & \text{if } q = r \end{cases}$$

We discuss how Definition 9.3.7 projects global types onto a pair of participants (p, q) , as per Algorithm 2. The most interesting case is the projection of a direct exchange $s!r\{i\langle S_i \rangle . G_i\}_{i \in I}$ (line 3). When the exchange involves both p and q , the projection yields

an exchange between p and q with the appropriate sender. Otherwise, the projection relies on the function ‘ $ddep(\dots)$ ’, which determines whether the exchange is a non-local choice for p and q and yields an appropriate projection accordingly:

- If the projections of all branches are equal, the exchange is not a non-local choice and $ddep$ yields the unobservable step $skip$ followed by the projection of any branch.
- If there are branches with different projections, the exchange is a non-local choice, so $ddep$ yields a dependency if possible. If p or q is involved, $ddep$ yields an appropriate dependency (e.g., $p!r$ if p is the sender, or $q?s$ if q is the recipient). If neither p nor q are involved, then $ddep$ cannot yield a dependency and projection is thus undefined.

The projection of $\mu X.G'$ (line 8) considers the projection of the body G' $\rangle (p, q)$ to see whether p and q interact in G' . If G' $\rangle (p, q)$ is not contractive on X (Definition 9.3.6), it is a (possibly empty) sequence of skips followed by end or X : p and q do not interact and the projection yields end (line 11). Otherwise, p and q do interact and projection preserves the recursive definition (line 10). The projections of recursive calls X (line 12), end (line 13), and $skip$ (line 14) are homomorphic.

Example 9.3.8 (Projections of G_{auth}). To illustrate relative projection, let us reconsider G_{auth} :

$$G_{auth} = \mu X.s!c \left\{ \begin{array}{l} \text{login}.c!a(\text{passwd}\langle \text{str} \rangle).a!s : \text{auth}\langle \text{bool} \rangle.X, \\ \text{quit}.c!a(\text{quit}).\text{end} \end{array} \right\}$$

The relative projection onto (s, c) is straightforward, as there are no non-local choices:

$$G_{auth} \rangle (s, c) = \mu X.s!c \left\{ \begin{array}{l} \text{login}.skip^2.X, \\ \text{quit}.skip.\text{end} \end{array} \right\}$$

However, compare the projection of the initial login branch onto (s, a) and (c, a) with the projection of the quit branch: they are different. Therefore, the initial exchange between s and c is a non-local choice in the protocols relative to (s, a) and (c, a) . Since s is involved in this exchange, the non-local choice is detected by $ddep$:

$$ddep((s, a), s!c\{\text{login}\dots, \text{quit}\dots\}) = (s!c)!a \llbracket \text{login}\dots, \text{quit}\dots \rrbracket$$

Hence, this non-local choice is included in the relative projection onto (s, a) as a dependency:

$$G_{auth} \rangle (s, a) = \mu X.(s!c)!a \left\{ \begin{array}{l} \text{login}.skip.a!s(\text{auth}\langle \text{bool} \rangle).X, \\ \text{quit}.skip.\text{end} \end{array} \right\}$$

Similarly, c is involved in the initial exchange, so the non-local choice can also be included in the relative projection onto (c, a) as a dependency:

$$G_{auth} \rangle (c, a) = \mu X.(c?s)!a \left\{ \begin{array}{l} \text{login}.c!a(\text{passwd}\langle \text{str} \rangle).skip.X, \\ \text{quit}.c!a(\text{quit}\langle \text{unit} \rangle).\text{end} \end{array} \right\} \quad \nabla$$

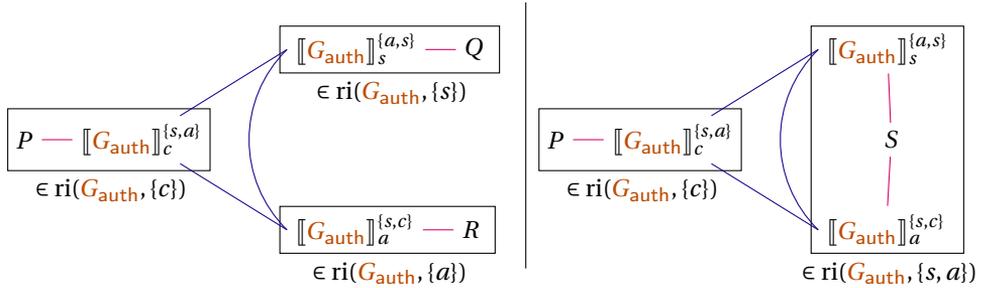


Figure 9.5 | Two different networks of routed implementations for G_{auth} (9.1), without interleaving (left) and with interleaving (right). For participants p and \tilde{q} , Definition 9.4.3 gives the router process $\llbracket G \rrbracket_p^{\tilde{q}}$ and Definition 9.4.9 gives the set $\text{ri}(G, \tilde{q})$. Lines indicate channels and boxes are local compositions of processes.

The input order of participants for projection does not matter:

Proposition 9.3.9. *Suppose given a global type G and distinct participants $p, q \in \text{part}(G)$.*

- *If $G \triangleright (p, q)$ is defined, then $G \triangleright (p, q) = G \triangleright (q, p)$ and $\text{part}(G) \triangleright (p, q) \subseteq \{p, q\}$;*
- *$G \triangleright (p, q)$ is undefined if and only if $G \triangleright (q, p)$ is undefined.*

We now define *well-formedness* for global types.

Definition 9.3.10 (Relative Well-Formedness). *A global type G is relative well-formed if, for every distinct $p, q \in \text{part}(G)$, the projection $G \triangleright (p, q)$ is defined.*

9.4. ANALYZING GLOBAL TYPES USING ROUTERS

In this section, we develop our decentralized analysis of multiparty protocols (Section 9.3) using relative types and APCP (Section 9.2). The intended setup is as follows. Each participant’s role in a global type G is implemented by a process, which is connected to a *router*: a process that orchestrates the participant’s interactions in G . The resulting *routed implementations* (Definition 9.4.9) can then directly connect to each other to form a decentralized *network of routed implementations* that implements G . This way we realize the scenario sketched in Figure 9.1 (left), which is featured in more detail in Figure 9.5 (left).

Key in our analysis is the *synthesis* of a participant’s router from a global type (Section 9.4.1). To assert well-typedness—and thus deadlock-freedom—of networks of routed implementations (Theorem 9.4.14), we extract binary session types from the global type and its associated relative types (Section 9.4.2):

- from global types we extract types for channels between implementations and routers;
- from relative types we extract types for channels between pairs of routers.

After defining routers and showing their typability, we set up networks of routed implementations of global types (Section 9.4.3). To enable the transference of deadlock-freedom

from APCP to multiparty protocols, we then establish an operational correspondence between global types and networks of routed implementations (Theorems 9.4.21 and 9.4.25). Finally, to show that our routed approach strictly generalizes the prior centralized analyses [CP16; Car+16], we define an orchestrated analysis of global types and show that it is behaviorally equivalent to a centralized composition of routers (Section 9.4.4).

In the following section (Section 9.5), we will show routers in action.

9.4.1. SYNTHESIS OF ROUTERS

We synthesize routers by decomposing each exchange in the global type into four sub-steps, which we motivate by considering the initial exchange from s to c in G_{auth} (9.1): $slc\{\text{login}\dots, \text{quit}\dots\}$. As explained in Example 9.3.8, this exchange induces a dependency in the relative projections of G_{auth} onto (s, a) and (c, a) . We decompose this initial exchange as follows, where P , Q , and R are the implementations of c , s , and a , respectively (given in Example 9.2.18) and \mathcal{R}^x stands for the router of each $x \in \{s, c, a\}$. Below, multiple actions in one step happen concurrently:

1. Q sends $\ell \in \{\text{login}, \text{quit}\}$ to \mathcal{R}^s .
2. \mathcal{R}^s sends ℓ to \mathcal{R}^c (recipient) and \mathcal{R}^a (output dependency). Q sends unit value v to \mathcal{R}^s .
3. \mathcal{R}^c sends ℓ to P and \mathcal{R}^a (input dependency). \mathcal{R}^s forwards v to \mathcal{R}^c .
4. \mathcal{R}^c forwards v to P . \mathcal{R}^a sends ℓ to R .

In Section 9.4.2, we follow this decomposition to assign to each consecutive step a consecutive priority: this ensures the consistency of priority checks required to establish the deadlock-freedom of networks of routed implementations.

We define an algorithm that synthesizes a *router process* for a given global type and participant. More precisely: given G , a participant p , and $\tilde{q} = \text{part}(G) \setminus \{p\}$, the algorithm generates a process, denoted $\llbracket G \rrbracket_p^{\tilde{q}}$, which connects with a process implementing p 's role in G on channel μ_p ; we shall write such channels in **purple**. This router for p connects with the routers of the other participants in G ($q_i \in \tilde{q}$) on channels p_{q_1}, \dots, p_{q_n} ; we shall write such channels in **pink**. (This convention explains the colors of the lines in Figure 9.5.)

The router synthesis algorithm relies on relative projection to detect non-local choices; this way, the router can synchronize with the participant's implementation and with other routers appropriately. To this end, we define the predicate 'hdep', which is true for an exchange and a pair of participants if the exchange induces a dependency for either participant. Recall that relative projection produces a skip when an exchange is not non-local (cf. Definition 9.3.7). Thus, hdep only holds true if relative projection does not produce a skip.

Definition 9.4.1. *The predicate $\text{hdep}(q, p, G)$ is true if and only if*

- $G = slr\{i\langle S_i \rangle.G_i\}_{i \in I}$ and $q \notin \{s, r\}$ and $p \in \{s, r\}$, and
- $\text{ddep}((p, q), G) \neq \text{skip.R}$ for all relative types R , where ddep is as in Definition 9.3.7.

Algorithm 3: Synthesis of Router Processes (Definition 9.4.3).

```

1 def  $\llbracket G \rrbracket_p^{\tilde{q}}$  as
2   switch  $G$  do
3     case  $s!r\{i\langle S_i \rangle, G_i\}_{i \in I}$  do
4       |  $\text{deps} \triangleq \{q \in \tilde{q} \mid \text{hdep}(q, p, G)\}$ 
5       | if  $p = s$  then return
6         |  $\mu_p \triangleright \{i : \overline{p} \triangleleft i \cdot (\overline{p} q \triangleleft i)_{q \in \text{deps}} \cdot \mu_p(v); \overline{p} r[w] \cdot ([v \leftrightarrow w] \mid \llbracket G_i \rrbracket_p^{\tilde{q}})\}_{i \in I}$ 
7         | else if  $p = r$  then return
8           |  $p_s \triangleright \{i : \overline{\mu}_p \triangleleft i \cdot (\overline{p} q \triangleleft i)_{q \in \text{deps}} \cdot p_s(v); \overline{\mu}_p[w] \cdot ([v \leftrightarrow w] \mid \llbracket G_i \rrbracket_p^{\tilde{q}})\}_{i \in I}$ 
9           | else if  $p \notin \{s, r\}$  then
10            |  $\text{depon}_s \triangleq \{s \in \tilde{q} \wedge \text{hdep}(p, s, G)\}$ 
11            |  $\text{depon}_r \triangleq \{r \in \tilde{q} \wedge \text{hdep}(p, r, G)\}$ 
12            | if  $\text{depon}_s$  and  $\neg \text{depon}_r$  then return  $p_s \triangleright \{i : \overline{\mu}_p \triangleleft i \cdot \llbracket G_i \rrbracket_p^{\tilde{q}}\}_{i \in I}$ 
13            | else if  $\text{depon}_r$  and  $\neg \text{depon}_s$  then return  $p_r \triangleright \{i : \overline{\mu}_p \triangleleft i \cdot \llbracket G_i \rrbracket_p^{\tilde{q}}\}_{i \in I}$ 
14            | else if  $\text{depon}_s$  and  $\text{depon}_r$  then return  $p_s \triangleright \{i : \overline{\mu}_p \triangleleft i \cdot p_r \triangleright \{i : \llbracket G_i \rrbracket_p^{\tilde{q}}\}_{i \in I}$ 
15            | else return  $\llbracket G_j \rrbracket_p^{\tilde{q}}$  for any  $j \in I$ 
16     case  $\mu X.G'$  do
17       |  $\tilde{q}' \triangleq \{q \in \tilde{q} \mid G \langle p, q \rangle \neq \text{end}\}$ 
18       | if  $\tilde{q}' \neq \emptyset$  then return  $\mu X(\mu_p, (p_q)_{q \in \tilde{q}'}); \llbracket G' \rrbracket_p^{\tilde{q}'}$ 
19       | else return 0
20     case  $X$  do return  $X \langle \mu_p, (p_q)_{q \in \tilde{q}} \rangle$ 
21     case skip. $G'$  do return  $\llbracket G' \rrbracket_p^{\tilde{q}}$ 
22     case end do return 0

```

Example 9.4.2. Consider the type $G_h \triangleq p!q\{a.p!r(a).\text{end}, b.r!p(b).\text{end}\}$. Then $\text{hdep}(q, p, G_h)$ is false because the initial exchange in G_h is not a dependency for p and q , but $\text{hdep}(r, p, G_h)$ is true because the initial exchange in G_h is indeed a dependency for p and r . ∇

Definition 9.4.3 (Router Synthesis). *Given a global type G , a participant p , and participants \tilde{q} , Algorithm 3 defines the synthesis of a router process, denoted $\llbracket G \rrbracket_p^{\tilde{q}}$, that interfaces the interactions of p with the other protocol participants according to G .*

We often write \mathcal{R}^p for $\llbracket G \rrbracket_p^{\text{part}(G) \setminus \{p\}}$ when G is clear from the context.

Algorithm 3 distinguishes six cases depending on the syntax of G (Definition 9.3.1). The key case is $s!r\{i\langle U_i \rangle, G_i\}_{i \in I}$ (line 3). First, the algorithm computes a set deps of participants that depend on the exchange using hdep (cf. Definition 9.4.1). Then, the algorithm considers the three possibilities for p :

1. If $p = s$ then p is the sender (line 5): the algorithm returns a process that receives a

label $i \in I$ over μ_p ; sends i over p_r and over p_q for every $q \in \text{deps}$; receives a channel v over μ_p ; forwards v as w over p_r ; and continues as $\llbracket G_i \rrbracket_p^{\tilde{q}}$.

2. If $p = r$ then p is the recipient (line 6): the algorithm returns a process that receives a label $i \in I$ over p_s ; sends i over μ_p and over p_q for every $q \in \text{deps}$; receives a channel v over p_s ; forwards v as w over μ_p ; and continues as $\llbracket G_i \rrbracket_p^{\tilde{q}}$.
3. Otherwise, if p is not involved (line 7), we use `hdep` to determine whether p depends on an output from s , an input from r , or on both (lines 8 and 9). If p only depends on the output from s , the algorithm returns a process that receives a label $i \in I$ over p_s ; sends i over μ_p ; and continues as $\llbracket G_i \rrbracket_p^{\tilde{q}}$ (line 10). If p only depends on an input from r , the returned process is similar; the only difference is that i is received over p_r (line 11).

When p depends on *both* the output from s and on the input from r (line 12), the algorithm returns a process that receives a label $i \in I$ over p_s ; sends i over μ_p ; receives the label i over p_r ; and continues as $\llbracket G_i \rrbracket_p^{\tilde{q}}$.

If there are no dependencies, the returned process is $\llbracket G_j \rrbracket_p^{\tilde{q}}$, for arbitrary $j \in I$ (line 13).

In case $\mu X.G'$ (line 14), the algorithm stores in \tilde{q}' those $q \in \tilde{q}$ that interact with p in G' (i.e. $(\mu X.G') \langle p, q \rangle \neq \text{end}$). Then, if \tilde{q}' is non-empty (line 16), the algorithm returns a recursive definition with as context the channels p_q for $q \in \tilde{q}'$ and μ_p . Otherwise, the algorithm returns $\mathbf{0}$ (line 17). In case X (line 18), the algorithm returns a recursive call with as context the channels p_q for $q \in \tilde{q}$ and μ_p . In case $\text{skip}.G'$ (line 19), it continues with G' immediately. Finally, in case end (line 20), the algorithm returns $\mathbf{0}$.

Considering the number of steps required to return a process, the complexity of Algorithm 3 is linear in the size of the given global type (defined as the sum of the number of communications over all branches).

9.4.2. TYPES FOR THE ROUTER'S CHANNELS

Here, we obtain session types (cf. Definition 9.2.5) for (i) the channels between routers and implementations (Section 9.4.2.1) and for (ii) the channels between pairs of routers (Section 9.4.2.2). While the former are extracted from global types, the latter are extracted from relative types.

9

9.4.2.1. THE CHANNELS BETWEEN ROUTERS AND IMPLEMENTATIONS

We begin with the session types for the channels between routers and implementations (given in purple), extracted directly from the global type. A participant's implementation performs on this channel precisely those actions that the participant must perform as per the global type. Hence, we define this extraction as a form of *local projection* onto a *single participant*. The resulting session type may be used as a guidance for specifying a participant implementation, which can then connect to the router's dually typed channel endpoint.

Global types contain message types (Definition 9.3.1), so we must first define how we extract session types from message types. This is a straightforward definition, which leaves

Below, $\circ \in \mathbb{N}$ is arbitrary:

$$\begin{aligned} \langle \text{end} \rangle &\triangleq \bullet & \langle !T.S \rangle &\triangleq \langle T \rangle \otimes^\circ \langle S \rangle & \langle \oplus \{i : S_i\}_{i \in I} \rangle &\triangleq \oplus^\circ \{i : \langle S_i \rangle\}_{i \in I} \\ \langle ?T.S \rangle &\triangleq \langle T \rangle \wp^\circ \langle S \rangle & \langle \& \{i : S_i\}_{i \in I} \rangle &\triangleq \&^\circ \{i : \langle S_i \rangle\}_{i \in I} \end{aligned}$$

.....
If $G = s!r\{i \langle S_i \rangle . G_i\}_{i \in I}$,

$$G \downarrow^\circ p \triangleq \begin{cases} \oplus^\circ \{i : \langle S_i \rangle \otimes^{\circ+1} (G_i \downarrow^{\circ+4} p)\}_{i \in I} & \text{if } p = s \\ \&^{\circ+2} \{i : \langle S_i \rangle \wp^{\circ+3} (G_i \downarrow^{\circ+4} p)\}_{i \in I} & \text{if } p = r \\ \&^{\circ+2} \{i : \langle G_i \downarrow^{\circ+4} p \rangle\}_{i \in I} & \text{if } p \notin \{s, r\} \text{ and } \text{hdep}(p, s, G) \\ \&^{\circ+3} \{i : \langle G_i \downarrow^{\circ+4} p \rangle\}_{i \in I} & \text{if } p \notin \{s, r\} \text{ and } \neg \text{hdep}(p, s, G) \\ & \text{and } \text{hdep}(p, r, G) \\ G_{i'} \downarrow^{\circ+4} p & \text{[any } i' \in I] \\ & \text{otherwise} \end{cases}$$

Otherwise,

$$\begin{aligned} \text{end} \downarrow^\circ p &\triangleq \bullet & (\text{skip}.G') \downarrow^\circ p &\triangleq G' \downarrow^{\circ+4} p & X \downarrow^\circ p &\triangleq X \\ (\mu X.G') \downarrow^\circ p &\triangleq \begin{cases} \mu X. (G' \downarrow^\circ p) & \text{if } G' \downarrow^\circ p \text{ defined and contractive on } X \\ \bullet & \text{otherwise} \end{cases} \end{aligned}$$

Figure 9.6 | Extracting session types from message types (top), and local projection: extracting session types from a global type (bottom, cf. Definition 9.4.6).

priorities unspecified: they do not matter for the typability of routers, which simply forward messages. Note that one must still specify these priorities when type-checking implementations, making sure they concur between sender and recipient.

Definition 9.4.4 (From Message Types to Session Types). *We define the extraction of a session type from message type S , denoted $\langle S \rangle$, by induction on the structure of S as in Figure 9.6 (top).*

We now define local projection. To deal with non-local choices, local projection incorporates dependencies by relying on the dependency detection of relative projection (cf. Definition 9.3.7). Also similar to relative projection, local projection relies on a notion of contractiveness for session types.

Definition 9.4.5 (Contractive Session Types). *Given a session type A and a recursion variable X , we say A is contractive on X if either of the following holds:*

- A contains a connective in $\{\otimes, \wp, \oplus, \&\}$, or
- A is a recursive call on a variable other than X .

Definition 9.4.6 (Local Projection: From Global Types to Session Types). *We define the local projection of global type G onto participant p with priority \circ , denoted $G \downarrow^\circ p$, by induction on the structure of G as in Figure 9.6 (bottom), relying on message type extraction (Definition 9.4.4) and the predicate hdep (Definition 9.4.1).*

We consider the local projection of an exchange in a global type onto a participant p with priority \circ . The priorities in local projection reflect the four sub-steps into which we decompose exchanges in global types (cf. Section 9.4.1). There are three possibilities, depending on the involvement of p in the exchange:

1. If p is the sender, local projection specifies a selection (\oplus) between the exchange's labels at priority \circ and a send (\otimes) of the associated message type at priority $\circ + 1$, followed by the projection of the chosen branch at priority $\circ + 4$.
2. If p is the recipient, local projection specifies a branch ($\&$) on the exchange's labels at priority $\circ + 2$ and a receive (\wp) of the associated message type at priority $\circ + 3$, followed by the projection of the chosen branch at priority $\circ + 4$.
3. If p is neither sender nor recipient, local projection uses the predicate hdep (Definition 9.4.1) to detect a dependency on the sender's output or the recipient's input. If there is a dependency on the output, local projection specifies a branch on the exchange's labels at priority $\circ + 2$. If there is a dependency on the input, local projection specifies a branch at priority $\circ + 3$. Otherwise, when there is no dependency at all, local projection simply continues with the projection of any branch at priority $\circ + 4$.

Projection only preserves recursive definitions if they contain actual behavior (i.e., the projection of the recursive loop is contractive, cf. Definition 9.4.5). The projections of end and recursion variables are homomorphic. The projection of skip projects the skip's continuation, at priority $\circ + 4$ to keep the priority aligned with the priorities of the other types of the router.

9.4.2.2. THE CHANNELS BETWEEN PAIRS OF ROUTERS

For the channels between pairs of routers (given in **pink**), we extract session types from relative types (Definition 9.3.3). Considering a relative type that describes the protocol between p and q , this entails decomposing it into a type for p and a dual type for q .

9

Definition 9.4.7 (From Relative Types to Session Types). *We define the extraction of a session type from relative type R between p and q at p 's perspective with priority \circ , denoted $(R)_{p,q}^\circ$, by induction on the structure of R as in Figure 9.7.*

Here, extraction is *directional*: in $(R)_{p,q}^\circ$, the annotation $p \rangle q$ says that the session type describes the perspective of p 's router with respect to q 's. Messages with sender p are decomposed into selection (\oplus) at priority $\circ + 1$ followed by a send (\otimes) at priority $\circ + 2$. Dependencies on messages received by p become selection types (\oplus) at priority $\circ + 1$, and dependencies on messages sent by p become selection types (\oplus) at priority $\circ + 2$. Messages from q and dependencies on q yield dual types. Extraction from end and recursion is homomorphic, and extraction from skip simply extracts from the skip's continuation at priority $\circ + 4$.

$$\begin{aligned}
\langle\langle s!r \langle i \langle S_i \rangle . R_i \rangle_{i \in I} \rangle_{p,q}^\circ &\triangleq \begin{cases} \oplus^{\circ+1} \left\{ i : \langle S_i \rangle \otimes^{\circ+2} \langle R_i \rangle_{p,q}^{\circ+4} \right\}_{i \in I} & \text{if } p = s \\ \&^{\circ+1} \left\{ i : \overline{\langle S_i \rangle} \wp^{\circ+2} \langle R_i \rangle_{p,q}^{\circ+4} \right\}_{i \in I} & \text{if } q = s \end{cases} \\
\langle\langle r?s \rangle!t \langle i . R_i \rangle_{i \in I} \rangle_{p,q}^\circ &\triangleq \begin{cases} \oplus^{\circ+2} \left\{ i : \langle R_i \rangle_{p,q}^{\circ+4} \right\}_{i \in I} & \text{if } p = r \\ \&^{\circ+2} \left\{ i : \langle R_i \rangle_{p,q}^{\circ+4} \right\}_{i \in I} & \text{if } q = r \end{cases} \\
\langle\langle s!r \rangle!t \langle i . R_i \rangle_{i \in I} \rangle_{p,q}^\circ &\triangleq \begin{cases} \oplus^{\circ+1} \left\{ i : \langle R_i \rangle_{p,q}^{\circ+4} \right\}_{i \in I} & \text{if } p = s \\ \&^{\circ+1} \left\{ i : \langle R_i \rangle_{p,q}^{\circ+4} \right\}_{i \in I} & \text{if } q = s \end{cases} \\
\langle\text{end}\rangle_{p,q}^\circ &\triangleq \bullet \quad \langle\text{skip} . R \rangle_{p,q}^\circ \triangleq \langle R \rangle_{p,q}^{\circ+4} \quad \langle\mu X . R \rangle_{p,q}^\circ \triangleq \mu X . \langle R \rangle_{p,q}^\circ \quad \langle X \rangle_{p,q}^\circ \triangleq X
\end{aligned}$$

Figure 9.7 | Extracting session types from relative types (cf. Definition 9.4.7).

This way, the channel endpoint of p 's router that connects to q 's router will be typed $\langle\langle G \rangle (p, q) \rangle_{p,q}^\circ$, i.e. the session type extracted from the relative projection of G onto p, q at p 's perspective. Similarly, the endpoint of this channel at q 's router will have the type $\langle\langle G \rangle (p, q) \rangle_{q,p}^\circ$, i.e. the same relative projection but at q 's perspective. Clearly, these session types must be dual.

Theorem 9.4.8. *Given a relative well-formed global type G and $p, q \in \text{part}(G)$,*

$$\langle\langle G \rangle (p, q) \rangle_{p,q}^\circ = \overline{\langle\langle G \rangle (p, q) \rangle_{q,p}^\circ}.$$

Proof (Sketch). By construction from Definitions 9.3.7 and 9.4.7. □

9.4.3. NETWORKS OF ROUTED IMPLEMENTATIONS

Having defined routers and types for their channels, we now turn to defining *networks of routed implementations*, i.e., process networks of routers and implementations that correctly represent a given multiparty protocol. Then, we appeal to the types obtained in Section 9.4.2 to establish the typability of routers (Theorem 9.4.14). Finally, we show that all networks of routed implementations of well-formed global types are deadlock-free (Theorem 9.4.19), and that networks of routed implementations behave as depicted by the global types from which they are generated (Theorems 9.4.21 and 9.4.25). Appendix G details proofs (including auxiliary definitions and results, and an overview of them); here, we give only proof sketches.

We begin by defining routed implementations, which connect implementations of subsets of protocol participants with routers:

Definition 9.4.9 (Routed Implementations). *Given a closed, relative well-formed global type G , for participants $\tilde{p} \subseteq \text{part}(G)$, the set of routed implementations of \tilde{p} in G is defined as follows*

(cf. Definition 9.4.6 for local projection ‘ \downarrow ’ and Definition 9.4.3 for router synthesis ‘ $\llbracket \dots \rrbracket$ ’):

$$\text{ri}(G, \tilde{p}) \triangleq \left\{ (\mathbf{v}\mu_p p_\mu)_{p \in \tilde{p}} (Q \mid \prod_{p \in \tilde{p}} \mathcal{R}^p) \left| \begin{array}{l} \emptyset \vdash Q \blacktriangleright \Gamma, (p_\mu : (G \downarrow^0 p))_{p \in \tilde{p}} \\ \wedge \forall p \in \tilde{p}. \mathcal{R}^p = \llbracket G \rrbracket_p^{\text{part}(G) \setminus \{p\}} \end{array} \right. \right\}$$

We write $\mathcal{N}_{\tilde{p}}, \mathcal{N}'_{\tilde{p}}, \dots$ to denote elements of $\text{ri}(G, \tilde{p})$.

Thus, the composition of a collection of routers and an implementation Q is a routed implementation as long as Q can be typed in a context that includes the corresponding projected types. Note that the parameter \tilde{p} indicates the presence of *interleaving*: when \tilde{p} is a singleton, the set $\text{ri}(G, \tilde{p})$ contains processes in which there is a single router and the implementation Q is single-threaded (non-interleaved); more interestingly, when \tilde{p} includes two or more participants, the set $\text{ri}(G, \tilde{p})$ consists of processes in which the implementation Q interleaves the roles of the multiple participants in \tilde{p} .

A network of routed implementations of a global type, or simply a *network*, is then the composition of any combination of routed implementations that together account for all the protocol’s participants. Hence, we define sets of networks, quantified over all possible combinations of sets of participants and their respective routed implementations. The definition relies on *complete partitions* of the participants of a global type, i.e., a split of $\text{part}(G)$ into non-empty, disjoint subsets whose union yields $\text{part}(G)$.

Definition 9.4.10 (Networks). *Suppose given a closed, relative well-formed global type G . Let \mathbb{P}_G be the set of all complete partitions of $\text{part}(G)$ with elements π, π', \dots . The set of networks of G is defined as*

$$\text{net}(G) \triangleq \{ (\mathbf{v}p_q q_p)_{p, q \in \text{part}(G)} (\prod_{\tilde{p} \in \pi} \mathcal{N}_{\tilde{p}}) \mid \pi \in \mathbb{P}_G \wedge \forall \tilde{p} \in \pi. \mathcal{N}_{\tilde{p}} \in \text{ri}(G, \tilde{p}) \}.$$

We write $\mathcal{N}, \mathcal{N}', \dots$ to denote elements of $\text{net}(G)$.

Example 9.4.11. Figure 9.5 depicts two networks in $\text{net}(G_{\text{auth}})$ related to different partitions of $\text{part}(G_{\text{auth}})$, namely $\{\{a\}, \{s\}, \{c\}\}$ (non-interleaved) on the left and $\{\{a, s\}, \{c\}\}$ (interleaved) on the right. ∇

Because a network \mathcal{N} may not be typable under the empty typing context, we have the following definition to “complete” networks.

9

Definition 9.4.12 (Completable Networks). *Suppose given a network \mathcal{N} such that $\emptyset \vdash \mathcal{N} \blacktriangleright \Gamma$. We say that \mathcal{N} is completable if (i) Γ is empty or (ii) there exist \tilde{v}, \tilde{w} such that $\emptyset \vdash (\mathbf{v}\tilde{v}\tilde{w})\mathcal{N} \blacktriangleright \emptyset$. When \mathcal{N} is completable, we write \mathcal{N}° to stand for \mathcal{N} (if $\emptyset \vdash \mathcal{N} \blacktriangleright \emptyset$) or $(\mathbf{v}\tilde{v}\tilde{w})\mathcal{N}$ (otherwise).*

Proposition 9.4.13. *For any closed, relative well-formed global type G , there exists at least one completable network $\mathcal{N} \in \text{net}(G)$.*

Proof (Sketch). By generating processes typed $\emptyset \vdash Q \blacktriangleright p_\mu : (G \downarrow^0 p)$ and composing them with routers appropriately. \square

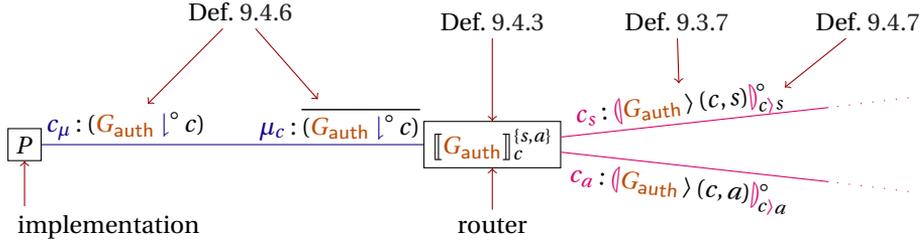


Figure 9.8 | Overview of Theorem 9.4.14, with the definitions and notations for synthesizing and typing routers, using participant c of G_{auth} implemented as P (cf. Example 9.2.18). Boxes indicate processes and lines indicate channels.

9.4.3.1. THE TYPABILITY OF ROUTERS

We wish to establish that the networks of a global type are deadlock-free. This result, formalized by Theorem 9.4.19 (Page 227), hinges on the typability of routers, which we address next. Figure 9.8 gives an overview of the definitions and notations involved.

Theorem 9.4.14. *Suppose given a closed, relative well-formed global type G , and a $p \in \text{part}(G)$. Then,*

$$\emptyset \vdash \llbracket G \rrbracket_p^{\text{part}(G) \setminus \{p\}} \blacktriangleright \overline{\mu_p : G \downarrow^0 p}, (p_q : \langle G \rangle (p, q) \downarrow_p^0 q)_{q \in \text{part}(G) \setminus \{p\}}.$$

Theorem 9.4.14 follows as a corollary of a more general statement, enabling induction on the structure of G as well as reasoning about recursive types. The latter requires extensive knowledge about the context of recursive definitions in G . Appendix G.1.1 details the auxiliary definitions and results needed for this, as well as a complete proof of Theorem 9.4.14. There is another important detail about the typability of routers that we need to address in detail here.

Alarm processes. We focus on networks of routed implementations—compositions of synthesized routers and well-typed processes. However, in order to establish the typability of routers we must account for an edge case that goes beyond these assumptions, namely when a routed implementation is connected to some undesirable implementation, not synthesized by Algorithm 3. Consider the following example:

Example 9.4.15. Consider again the global type G_{auth} , which, for the purpose of this example, we write as follows:

$$G_{\text{auth}} = s!c \left\{ \begin{array}{l} \text{login} : G_{\text{login}}, \\ \text{quit} : G_{\text{quit}} \end{array} \right\}$$

As established in Example 9.3.8, the initial exchange between s and c determines a dependency for the interactions of a with both s and c . Therefore, the implementation of a needs to receive the choice between login and quit from the implementations of both s and c . An undesirable implementation for c , without a router, could be for instance as follows:

$$R' \triangleq c_s \triangleright \left\{ \begin{array}{l} \text{login} : \overline{c_a} \triangleleft \text{quit} \cdot \dots, \\ \text{quit} : \overline{c_a} \triangleleft \text{quit} \cdot \dots \end{array} \right\}$$

Notice how R' always sends to a the label quit, even if the choice made by s (and sent to c) is login. Now, if s chooses login, the router of a is in limbo: on the one hand, it expects s to behave as specified in G_{login} ; on the other hand, it expects c to behave as specified in G_{quit} . Clearly, the router of a is in an inconsistent state due to c 's implementation. ∇

Because routers always forward the chosen label correctly, this kind of undesirable behavior never occurs in the networks of Definition 9.4.10—we state this formally in Section 9.4.3.2 (Theorem 9.4.18). Still, in order to prove that our routers are well-typed, we must accommodate the possibility that a router ends up in an undesirable state due to inconsistent forwarding. For this, we extend APCP with an *alarm process* that signals an inconsistency on a given set of channel endpoints.

Definition 9.4.16 (Alarm Process). *Given channel endpoints $\tilde{x} = x_1, \dots, x_n$, we write $\text{alarm}(\tilde{x})$ to denote an inconsistent state on those endpoints.*

In a way, $\text{alarm}(\tilde{x})$ is closer to an observable action (a “barb”) than to an actual process term: $\text{alarm}(\tilde{x})$ does not have reductions, and no process from Definition 9.2.1 can reduce to $\text{alarm}(\tilde{x})$. We assume that $\text{alarm}(\tilde{x})$ does not occur in participant implementations (cf. Q in Definition 9.4.9); we treat it as a process solely for the purpose of refining the router synthesis algorithm (Algorithm 3) with the possibility of inconsistent forwarding. The refinement concerns the process on line 12:

$$p_s \triangleright \{i : \overline{\mu_p} \triangleleft i \cdot p_r \triangleright \{i : \llbracket G_i \rrbracket_p^{\tilde{q}}\}\}_{i \in I}$$

We extend it with additional branches, as follows:

$$p_s \triangleright \{i : \overline{\mu_p} \triangleleft i \cdot p_r \triangleright \left(\begin{array}{c} \{i : \llbracket G_i \rrbracket_p^{\tilde{q}}\} \\ \cup \{i' : \text{alarm}(\mu_p, (p_q)_{q \in \tilde{q}})\}_{i' \in I \setminus \{i\}} \end{array} \right)\}_{i \in I} \quad (9.1)$$

This new process for line 12 captures the kind of inconsistency illustrated by Example 9.4.15, which occurs when a label $i \in I$ is received over p_s after which a label $i' \in I \setminus \{i\}$ is received over p_r . We account for this case by using the underlined alarm processes.

Routers are then made of processes as in Definition 9.2.1, selectively extended with alarms as just described. Because $\text{alarm}(\tilde{x})$ merely acts as an observable that signals undesirable behavior, we find it convenient to type it using the following axiom:

9

$$\frac{[\text{TYP-ALARM}]}{\Omega \vdash \text{alarm}(x_1, \dots, x_n) \blacktriangleright x_1 : A_1, \dots, x_n : A_n}$$

where the recursive context Ω and types A_1, \dots, A_n are arbitrary.

9.4.3.2. TRANSFERENCE OF RESULTS (OPERATIONAL CORRESPONDENCE)

Given a global type G , we now formalize the transference of correctness properties such as deadlock-freedom from $\text{net}(G)$ (cf. Definition 9.4.10) to G . Here, we define an *operational correspondence* between networks and global types, in both directions. That is, we show that a network performs interactions between implementations and routers and between pairs of routers if and only if that communication step is stipulated in the corresponding global type (Theorems 9.4.21 and 9.4.25).

Alarm-freedom. Before formalizing the operational correspondence, we show that networks of routed implementations never reduce to alarm processes. To be precise, because alarm processes only can occur in routers (not in implementations), we show that none of the routers of a network reduce to an alarm process, formalized using evaluation contexts:

Definition 9.4.17 (Evaluation Context). *Evaluation contexts (\mathcal{E}) have the following grammar:*

$$\mathcal{E} ::= [\cdot] \mid \mathcal{E} \mid P \mid (\mathbf{v}xy)\mathcal{E} \mid \mu X(\bar{x}); \mathcal{E}$$

We write $\mathcal{E}[P]$ to denote the process obtained by replacing the hole $[\cdot]$ in \mathcal{E} by P .

Theorem 9.4.18. *Given a relative well-formed global type G and a network of routed implementations $\mathcal{N} \in \text{net}(G)$, then*

$$\mathcal{N} \not\rightarrow^* \mathcal{E}[\text{alarm}(\bar{x})],$$

for any evaluation context \mathcal{E} and set of endpoints \bar{x} .

Proof (Sketch). By contradiction: alarm processes only occur when a router receives different labels for the same dependency, but routers are hard-coded to forward the correct label. \square

Deadlock-freedom. It follows from this and the typability of routers (Theorem 9.4.14) that networks of routed implementations are deadlock-free:

Theorem 9.4.19. *For relative well-formed global type G , every $\mathcal{N} \in \text{net}(G)$ is deadlock-free.*

Proof. By the typability of routers (Theorem 9.4.14) and the duality of the types of router channels (Theorem 9.4.8), $\emptyset \vdash \mathcal{N} \blacktriangleright \emptyset$. Hence, by Theorem 9.2.13, \mathcal{N} is deadlock-free, and by Theorem 9.4.18, \mathcal{N} never reduces to the alarm process. \square

Operation correspondence. To formalize our operational correspondence result, we apply the labeled reductions for processes $P \xrightarrow{\alpha} Q$ (cf. Definition 9.2.14) and define a labeled transition system (LTS) for global types $G \xrightarrow{\alpha} G'$.

Definition 9.4.20 (LTS for Global Types). *We define the relation $G \xrightarrow{\alpha} G'$, with labels β of the form $p!q(\ell\langle S \rangle)$ (sender, recipient, label, and message type), by the following rules:*

$$\begin{array}{c} \text{[GLOB-EXCH]} \\ \frac{j \in I}{p!q\{i\langle S_i \rangle.G_i\}_{i \in I} \xrightarrow{p!q(j\langle S_j \rangle)} G_j} \end{array} \quad \begin{array}{c} \text{[GLOB-SKIP]} \\ \frac{G \xrightarrow{\alpha} G'}{\text{skip}.G \xrightarrow{\alpha} G'} \end{array} \quad \begin{array}{c} \text{[GLOB-REC]} \\ \frac{G\{(\mu X.G)/X\} \xrightarrow{\alpha} G'}{\mu X.G \xrightarrow{\alpha} G'} \end{array}$$

Intuitively, operational correspondence states:

1. every transition of a global type is mimicked by a precise sequence of labeled reductions originating from a completable network (*completeness*; Theorem 9.4.21), and
2. for every labeled reduction originated in a completable network there is a corresponding global type transition (*soundness*; Theorem 9.4.25).

We write $\rho_1 \rho_2$ for the composition of relations ρ_1 and ρ_2 . Recall that the notation \rightarrow^* stands for finite sequences of reductions.

Completeness.

Theorem 9.4.21 (Operational Correspondence: Completeness). *Suppose given a relative well-formed global type G . Also, suppose given $p, q \in \text{part}(G)$ and a set of labels J such that $j \in J$ if and only if $G \xrightarrow{p!q\langle S_j \rangle} G_j$ for some S_j . Then,*

1. *for any completable $\mathcal{N} \in \text{net}(G)$, there exists a $j' \in J$ such that $\mathcal{N} \circlearrowleft \star \xrightarrow{p\mu \triangleright \mu p : j'} \mathcal{N}_0$;*
2. *for any $j' \in J$, there exists a completable $\mathcal{N} \in \text{net}(G)$ such that $\mathcal{N} \circlearrowleft \star \xrightarrow{p\mu \triangleright \mu p : j'} \mathcal{N}_0$;*
3. *for any completable $\mathcal{N} \in \text{net}(G)$ and any $j' \in J$, if $\mathcal{N} \circlearrowleft \star \xrightarrow{p\mu \triangleright \mu p : j'} \mathcal{N}_0$, then there exists a completable $\mathcal{N}_{j'} \in \text{net}(G_{j'})$ such that,*

$$\mathcal{N}_0 \xrightarrow{p q \triangleright q p : j'} \star \xrightarrow{\mu q \triangleright q \mu : j'} \star \xrightarrow{p \mu \triangleright \mu p : v} p q \triangleright q p : w \xrightarrow{[v \leftrightarrow w]} \star \xrightarrow{\mu q \triangleright q \mu : w} [v \leftrightarrow w] \mathcal{N}_{j'} \circlearrowleft.$$

Proof (Sketch). Each Sub-item is proved separately:

1. By definition of completable networks (Definition 9.4.12), routers (Definition 9.4.3), and their types (Theorem 9.4.14), the thesis follows from reactivity (Theorem 9.2.17).
2. We can construct an implementation process for p that picks $j' \in J$ (cf. Proposition G.1.1). The thesis then follows from Sub-item (1).
3. The thesis follows by the shape of G and the routers in \mathcal{N} (cf. Definition 9.4.3). \square

Soundness. Our soundness result, given below as Theorem 9.4.25, will capture the notion that after any sequence of reductions from the network of a global type G , a network of another global type G' can be reached. Crucially, G' can be reached from G through a series of transitions. Networks are inherently concurrent, whereas global types are built out of sequential compositions; as a result, the network could have enabled (asynchronous) actions that correspond to exchanges that are not immediately enabled in the global type.

Example 9.4.22. Consider the global types

$$G \triangleq a!b\{1\langle S_1 \rangle.c!d\{1\langle S' \rangle.\text{end}\}, 2\langle S_2 \rangle.c!d\{1\langle S' \rangle.\text{end}\}\}$$

and

$$G' \triangleq a!b\{1\langle S \rangle.b!c\{1\langle S' \rangle.\text{end}\}\}.$$

Clearly, the initial exchange in G between a and b is not a dependency for the following exchange between c and d . The routers of c and d synthesized from G thus start with their exchange, without awaiting the initial exchange between a and b to complete. Hence, in a network of G , both exchanges in G may be enabled simultaneously. ∇

We further refer to exchanges that may be simultaneously enabled in networks as *independent (global) exchanges*. In Example 9.4.22 above, all exchanges appearing in G are independent, while the two exchanges in G' are not.

The proof of soundness relies on Proposition 9.4.23: if different reductions are simultaneously enabled for a given process, then they do not exclude each other. That is, the same process is reached no matter the order in which those reductions are executed. We refer to simultaneously enabled reductions as *independent reductions*.

Proposition 9.4.23 (Independent Reductions). *Suppose given a process $\Omega \vdash P \blacktriangleright \Gamma$ and reduction labels α and $\alpha'_1, \dots, \alpha'_n$ ($n \geq 1$) where $\alpha \notin \{\alpha'_1, \dots, \alpha'_n\}$ (cf. Definition 9.2.14). If $P \xrightarrow{\alpha}$ and $P \xrightarrow{\alpha'_1} \dots \xrightarrow{\alpha'_n}$, then there exists a process Q such that $P \xrightarrow{\alpha, \alpha'_1} \dots \xrightarrow{\alpha'_n} Q$ and $P \xrightarrow{\alpha'_1} \dots \xrightarrow{\alpha'_n} \alpha, Q$.*

Proof (Sketch). By induction on n . The crux is that, since reductions α and α'_i are enabled simultaneously, they must occur in parallel parts of P . Hence, these reductions do not influence each other, proving the thesis. \square

To understand the role of independent reductions in soundness, consider the following example. We first introduce some notation which we also use in the proof of soundness: given an ordered sequence of reduction labels $\vec{\alpha} = (\alpha_1, \dots, \alpha_k)$, we write $P \xrightarrow{\vec{\alpha}} Q$ to denote $P \xrightarrow{\alpha_1} \dots \xrightarrow{\alpha_k} Q$.

Example 9.4.24. The global type $G = \mu X. a!b(1\langle S \rangle). c!d(1\langle S \rangle). X$ features two independent exchanges. Consider a network $\mathcal{N} \in \text{net}(G)$. Let $\vec{\alpha}$ denote the sequence of labeled reductions necessary to complete the exchange in G between a and b , and $\vec{\beta}$ similarly for the exchange between c and d . Assuming that communication with routers is not blocked by implementation processes, we have $\mathcal{N} \circ \xrightarrow{\vec{\alpha}}$ and $\mathcal{N} \circ \xrightarrow{\vec{\beta}}$, because the exchanges are independent.

Now, suppose that from $\mathcal{N} \circ$ we observe m times the sequence of $\vec{\beta}$ reductions: $\mathcal{N} \circ \underbrace{\xrightarrow{\vec{\beta}} \dots \xrightarrow{\vec{\beta}}}_{m \text{ times}} N'$. We see that N' is not a network of a global type reachable from G : there are still m exchanges between a and b pending. Still, we can exhibit a series of transitions from G that includes m times the exchange between c and d :

$$G \underbrace{\xrightarrow{a!b(1\langle S \rangle), c!d(1\langle S \rangle)} \dots \xrightarrow{a!b(1\langle S \rangle), c!d(1\langle S \rangle)}}_{m \text{ times}} G$$

Following these transitions, we can exhibit a corresponding sequence of reductions from $\mathcal{N} \circ$ that includes m times the sequence $\vec{\beta}$ and ends up in another network $\mathcal{M} \in \text{net}(G)$:

$$\mathcal{N} \circ \underbrace{\xrightarrow{\vec{\alpha}, \vec{\beta}} \dots \xrightarrow{\vec{\alpha}, \vec{\beta}}}_{m \text{ times}} \mathcal{M} \circ$$

At this point it is crucial that from $\mathcal{N} \circ$ the sequences of reductions $\vec{\alpha}$ and $\vec{\beta}$ can be performed independently. Hence, by Proposition 9.4.23, $\mathcal{N} \circ \underbrace{\xrightarrow{\vec{\beta}} \dots \xrightarrow{\vec{\beta}}}_{m \text{ times}} N' \underbrace{\xrightarrow{\vec{\alpha}} \dots \xrightarrow{\vec{\alpha}}}_{m \text{ times}} \mathcal{M} \circ$. ∇

Theorem 9.4.25 (Operational Correspondence: Soundness). *Suppose given a relative well-formed global type G and a completable $\mathcal{N} \in \text{net}(G)$. For every ordered sequence of $k \geq 0$ reduction labels $\vec{\alpha} = (\alpha_1, \dots, \alpha_k)$ and N' such that $\mathcal{N} \circ \vec{\alpha} \rightarrow N'$, there exist G' and β_1, \dots, β_n (with $n \geq 0$) such that (i) $G \xrightarrow{\beta_1} \dots \xrightarrow{\beta_n} G'$ and (ii) $N' \rightarrow^* \mathcal{M} \circ$, with $\mathcal{M} \in \text{net}(G')$.*

Proof (Sketch). By induction on the structure of G . Then we apply induction on the size of $\vec{\alpha}$. We follow the reductions in $\vec{\alpha}$, but in the order as they appear in G . Eventually, we reach a G' that is reachable from G (cf. Definition 9.4.20), as well as a network of G' that is reachable from N' . We then apply Proposition 9.4.23 show that the same network can be reached by following reductions in the order as they appear in $\vec{\alpha}$. \square

In the light of Theorem 9.4.25, let us revisit Example 9.4.24:

Example 9.4.26 (Revisiting Example 9.4.24). Recall the global type

$$G = \mu X. a!b(1\langle S \rangle). c!d(1\langle S \rangle). X$$

from Example 9.4.24, with two independent exchanges.

We take some $\mathcal{N} \in \text{net}(G)$ such that $\mathcal{N} \circ \underbrace{\vec{\beta} \dots \vec{\beta}}_{m \text{ times}} N'$, where $\vec{\beta}$ denotes the sequence of reduction labels corresponding to the exchange between c and d . By Theorem 9.4.25, there indeed are G' and β_1, \dots, β_n such that $G \xrightarrow{\beta_1} \dots \xrightarrow{\beta_n} G'$ and $N' \rightarrow^* \mathcal{M} \circ$, with $\mathcal{M} \in \text{net}(G')$. To be precise, following Theorem 9.4.25, indeed

$$G \underbrace{\xrightarrow{a!b(1\langle S \rangle), c!d(1\langle S \rangle)} \dots \xrightarrow{a!b(1\langle S \rangle), c!d(1\langle S \rangle)}}_{m \text{ times}} G \quad \text{and} \quad \mathcal{N} \circ \underbrace{\vec{\beta} \dots \vec{\beta}}_{m \text{ times}} N' \underbrace{\vec{\alpha} \dots \vec{\alpha}}_{m \text{ times}} \mathcal{M} \circ$$

where $\vec{\alpha}$ is the sequence of reduction labels corresponding to the exchange between a and b and $\mathcal{M} \in \text{net}(G)$. ∇

9.4.4. ROUTERS STRICTLY GENERALIZE CENTRALIZED ORCHESTRATORS

Unlike our decentralized analysis, previous analyses of global types using binary session types rely on centralized orchestrators (called mediums [CP16] or arbiters [Car+16]). Here, we show that our approach strictly generalizes these centralized approaches. Readers interested in our decentralized approach in action may safely skip this section and go directly to Section 9.5.

We introduce an algorithm that synthesizes an orchestrator—a single process that orchestrates the interactions between a protocol's participants (Section 9.4.4.1). We show that the composition of this orchestrator with a context of participant implementations is behaviorally equivalent to the specific case in which routed implementations are organized in a *centralized composition* (Theorem 9.4.34 in Section 9.4.4.2).

9.4.4.1. SYNTHESIS OF ORCHESTRATORS

We define the synthesis of an orchestrator from a global type. The orchestrator of G will have a channel endpoint μp_i for connecting to the process implementation of every $p_i \in \text{part}(G)$.

Algorithm 4: Synthesis of Orchestrator Processes (Definition 9.4.27).

```

1 def  $O_{\tilde{q}}[G]$  as
2   switch  $G$  do
3     case  $s!r\{i\langle S_i\rangle.G_i\}_{i\in I}$  do
4        $\text{deps} \triangleq \{q \in \tilde{q} \mid \text{hdep}(q, s, G) \vee \text{hdep}(q, r, G)\}$ 
5       return  $\mu_s \triangleright \{i : \underline{\mu_r} \triangleleft i \cdot \underline{(\mu_q \triangleleft i)}_{q \in \text{deps}} \cdot \mu_s(v); \underline{\mu_r}[w] \cdot ([v \leftrightarrow w] \mid O_{\tilde{q}}[G_i])\}_{i \in I}$ 
6     case  $\mu X.G'$  do
7        $\tilde{q}' \triangleq \{q \in \tilde{q} \mid G \downarrow^0 q \neq \bullet\}$ 
8       if  $\tilde{q}' \neq \emptyset$  then return  $\mu X((\mu_q)_{q \in \tilde{q}'}; O_{\tilde{q}'}[G'])$ 
9       else return  $0$ 
10    case  $X$  do return  $X((\mu_q)_{q \in \tilde{q}})$ 
11    case  $\text{skip}.G'$  do return  $O_{\tilde{q}}[G']$ 
12    case end do return  $0$ 

```

Definition 9.4.27 (Orchestrator). *Given a global type G and participants \tilde{q} , Algorithm 4 defines the synthesis of an orchestrator process, denoted $O_{\tilde{q}}[G]$, that orchestrates interactions according to G .*

Algorithm 4 follows a similar structure as the router synthesis algorithm (Algorithm 3). The input parameter \tilde{q} keeps track of active participants, making sure recursions are well-defined; it should be initialized as $\text{part}(G)$.

We briefly discuss how the orchestrator process is generated. The interesting case is an exchange $p!q\{i\langle U_i\rangle.G_i\}_{i \in I}$ (line 3), where the algorithm combines the several cases of the router's algorithm (that depend on the involvement of the router's participant). First, the sets of participants deps that depend on the sender and on the recipient are computed (line 4) using the auxiliary predicate hdep (cf. Definition 9.4.1). Then, the algorithm returns a process (line 5) that receives a label $i \in I$ over μ_s ; forwards it over μ_r and over μ_q for all $q \in \text{deps}$; receives a channel over μ_s ; forwards it over μ_r ; and continues as $O_{\tilde{q}}[G_i]$.

The synthesis of a recursive definition $\mu X.G'$ (line 6) requires care, as the set of active participants \tilde{q} may change. In order to decide which $q \in \tilde{q}$ are active in G' , the algorithm computes the local projection of G onto each $q \in \tilde{q}$ to determine the orchestrator's future behavior on μ_q , creating a new set \tilde{q}' with those $q \in \tilde{q}$ for which the projection is different from \bullet (line 7). Then, the algorithm returns a recursive process with as context the channel endpoints μ_q for $q \in \tilde{q}'$, with $O_{\tilde{q}'}[G']$ as the body.

The synthesis of a recursive call X (line 10) yields a recursive call with as context the channels μ_q for $q \in \tilde{q}$. Finally, for $\text{skip}.G'$ (line 11) the algorithm returns the orchestrator for G' , and for end (line 12) the algorithm returns 0 .

There is a minor difference between the orchestrators synthesized by Algorithm 4 and the mediums defined by Caires and Pérez [CP16]. The difference is in the underlined portion in line 5, which denotes explicit messages (obtained via dependency detection) needed to deal with non-local choices. The mediums by Caires and Pérez do not include such communications, as their typability is based on local types, which rely on a merge operation

at projection time. The explicit actions in line 5 make the orchestrator compatible with participant implementations that connect with routers. Aside from these actions, our concept of orchestrator is essentially the same as that of mediums.

Crucially, orchestrators can be typed using local projection (cf. Definition 9.4.6) similar to the typing of routers using relative projection (cf. Theorem 9.4.14). This result follows by construction (see Appendix G.2.1 for details):

Theorem 9.4.28. *Given a closed, relative well-formed global type G ,*

$$\emptyset \vdash \mathcal{O}_{\text{part}(G)}[G] \blacktriangleright (\mu_p : \overline{(G \downarrow^0 p)})_{p \in \text{part}(G)}.$$

9.4.4.2. ORCHESTRATORS AND CENTRALIZED COMPOSITIONS OF ROUTERS ARE BEHAVIORALLY EQUIVALENT

First, we formalize what we mean by a centralized composition of routers, called a *hub of routers*. A hub of routers is just a specific composition of routers, formalized as the centralized composition of the routers of all a global type's participants synthesized from the global type:

Definition 9.4.29 (Hub of a Global Type). *Given global type G , we define the hub of routers of G as follows:*

$$\mathcal{H}_G \triangleq (\mathbf{v} p_q q_p)_{p, q \in \text{part}(G)} \prod_{p \in \text{part}(G)} \mathcal{R}^p$$

Hubs of routers can be typed using local projection (cf. Definition 9.4.6), identical to the typing of orchestrators (cf. Theorem 9.4.28):

Theorem 9.4.30. *For relative well-formed global type G and priority \circ ,*

$$\emptyset \vdash \mathcal{H}_G \blacktriangleright (\mu_p : \overline{(G \downarrow^\circ p)})_{p \in \text{part}(G)}.$$

Proof. By the typability of routers (Theorem 9.4.14) and the duality of the types of the endpoints connecting pairs of routers (Theorem 9.4.8). \square

To state the behavioral equivalence of orchestrators and hubs of routers, we first define the specific behavioral equivalence we desire. To this end, we first define a labeled transition system (LTS) for APCP:

Definition 9.4.31 (LTS for APCP). *We define the labels α for transitions for processes as follows:*

$\alpha ::= x y$	<i>communication</i>	τ	<i>hidden</i>
$x[a, b]$	<i>send</i>	$(\mathbf{v} ya)(\mathbf{v} zb)x[a, b]$	<i>bound send</i>
$x[b] \triangleleft j$	<i>selection</i>	$(\mathbf{v} zb)x[b] \triangleleft j$	<i>bound selection</i>
$u(v, w)$	<i>receive</i>	$y(w) \triangleright j$	<i>branch</i>

The relation labeled transition ($P \xrightarrow{\alpha} Q$) is then defined by the rules in Figure 9.9.

Proposition 9.4.32. $P \rightarrow Q$ if and only if $P \xrightarrow{\tau} Q$.

$$\begin{array}{c}
\text{[LTS-SEND]} \quad \text{[LTS-SEND-OPEN]} \quad \text{[LTS-REC]} \\
\frac{x[a, b] \xrightarrow{x[a, b]} \mathbf{0}}{\text{[LTS-SEND]}} \quad \frac{P \xrightarrow{x[a, b]} P'}{(\mathbf{v}ya)(\mathbf{v}zb)P \xrightarrow{(\mathbf{v}ya)(\mathbf{v}zb)x[a, b]} P'} \quad \frac{u(v, w); P \xrightarrow{u(v, w)} P}{\text{[LTS-REC]}} \\
\\
\text{[LTS-SEND-CLOSE]} \quad \text{[LTS-SEL]} \quad \text{[LTS-SEL-OPEN]} \\
\frac{P \xrightarrow{(\mathbf{v}ya)(\mathbf{v}zb)x[a, b]} P' \quad Q \xrightarrow{u(v, w)} Q'}{P | Q \xrightarrow{x|u} (\mathbf{v}yv)(\mathbf{v}zw)(P' | Q')} \quad \frac{x[b] \triangleleft j \xrightarrow{x[b] \triangleleft j} \mathbf{0}}{\text{[LTS-SEL]}} \quad \frac{P \xrightarrow{x[b] \triangleleft j} P'}{(\mathbf{v}zb)P \xrightarrow{(\mathbf{v}zb)x[b] \triangleleft j} P'} \quad \text{[LTS-SEL-OPEN]} \\
\\
\text{[LTS-BRA]} \quad \text{[LTS-SEL-CLOSE]} \\
\frac{j \in I}{u(w) \triangleright \{i : P_i\}_{i \in I} \xrightarrow{u(w) \triangleright j} P_j} \quad \frac{P \xrightarrow{(\mathbf{v}zb)x[b] \triangleleft j} P' \quad Q \xrightarrow{u(w) \triangleright j} Q'}{P | Q \xrightarrow{x|u} (\mathbf{v}zw)(P' | Q')} \quad \text{[LTS-SEL-CLOSE]} \\
\\
\text{[LTS-PAR-L]} \quad \text{[LTS-PAR-R]} \\
\frac{P \xrightarrow{\alpha} Q \quad \text{bn}(\alpha) \cap \text{fn}(R) = \emptyset}{P | R \xrightarrow{\alpha} Q | R} \quad \frac{P \xrightarrow{\alpha} Q \quad \text{bn}(\alpha) \cap \text{fn}(R) = \emptyset}{R | P \xrightarrow{\alpha} R | Q} \quad \text{[LTS-PAR-R]} \\
\\
\text{[LTS-FWD]} \quad \text{[LTS-COMM]} \quad \text{[LTS-RES]} \\
\frac{(\mathbf{v}yz)([x \leftrightarrow y] | P) \xrightarrow{\tau} P\{x/z\}}{\text{[LTS-FWD]}} \quad \frac{P \xrightarrow{x|u} Q}{(\mathbf{v}xu)P \xrightarrow{\tau} Q} \quad \frac{P \xrightarrow{\alpha} Q \quad y, y' \notin \text{fn}(\alpha)}{(\mathbf{v}yy')P \xrightarrow{\alpha} (\mathbf{v}yy')Q} \quad \text{[LTS-RES]}
\end{array}$$

Figure 9.9 | Labeled transition system for APCP (cf. Definition 9.4.31).

As customary, we write \Rightarrow for the reflexive, transitive closure of $\xrightarrow{\tau}$, and we write $\xRightarrow{\alpha}$ for $\Rightarrow \xrightarrow{\alpha} \Rightarrow$ if $\alpha \neq \tau$ and for \Rightarrow otherwise.

We can now define the behavioral equivalence we desire:

Definition 9.4.33 (Weak Bisimilarity). *A binary relation \mathbb{B} on processes is a weak bisimulation if, for every $(P, Q) \in \mathbb{B}$,*

- $P \xrightarrow{\alpha} P'$ implies that there is Q' such that $Q \xRightarrow{\alpha} Q'$ and $(P', Q') \in \mathbb{B}$, and
- $Q \xrightarrow{\alpha} Q'$ implies that there is P' such that $P \xRightarrow{\alpha} P'$ and $(P', Q') \in \mathbb{B}$.

Two processes P and Q are weakly bisimilar if there exists a weak bisimulation \mathbb{B} such that $(P, Q) \in \mathbb{B}$.

Our equivalence result shall relate an orchestrator and a hub on a single but arbitrary channel. In order to isolate such a channel, we place the orchestrator and hub of routers in an evaluation context consisting of restrictions and parallel compositions with arbitrary processes, such that it connects all but one of the orchestrator's or hub's channels. For

example, given a global type G and implementations $\emptyset \vdash P_q \blacktriangleright \mu_q : G \downarrow^0 q$ for every participant $q \in \text{part}(G) \setminus \{p\}$, we could use the following evaluation context:

$$\mathcal{E} \triangleq (\mathbf{v} \mu_q q_\mu)_{q \in \text{part}(G) \setminus \{p\}} \left(\prod_{q \in \text{part}(G) \setminus \{p\}} P_q \mid [\cdot] \right)$$

Replacing the hole in this evaluation context with the orchestrator or hub of routers of G leaves one channel free: the channel μ_p for the implementation of p . Now we can observe the behavior of these two processes on μ_p .

Theorem 9.4.34. *Suppose given a relative well-formed global type G . Let \mathcal{H}_G be the hub of routers of G (Definition 9.4.29) and take the orchestrator $O_{\text{part}(G)}[G]$ of G (Definition 9.4.27). Let $p \in \text{part}(G)$, and let \mathcal{E} be an evaluation context such that $\emptyset \vdash \mathcal{E}[\mathcal{H}_G] \blacktriangleright \mu_p : \overline{(G \downarrow^0 p)}$. Then, $\mathcal{E}[\mathcal{H}_G]$ and $\mathcal{E}[O_{\text{part}(G)}[G]]$ are weakly bisimilar (Definition 9.4.33).*

Proof (Sketch). By coinductively constructing a candidate relation \mathbb{B} and showing that it is a weak bisimulation and that $(\mathcal{E}[\mathcal{H}_G], \mathcal{E}[O_{\text{part}(G)}[G]]) \in \mathbb{B}$. \square

9.5. ROUTERS IN ACTION

We demonstrate our router-based analysis of global types by means of several examples. First, in Sections 9.5.1 and 9.5.2 we consider two simple protocols, illustrating the different components of our approach and our support for delegation and interleaving. Then, in Section 9.5.3 we revisit G_{auth} from Section 9.1 to illustrate how our analysis supports also more complex protocols featuring also non-local choices and recursion.

9.5.1. DELEGATION AND INTERLEAVING

We illustrate our analysis by considering a global type with delegation and interleaving, based on an example by Toninho and Yoshida [TY18, Ex. 6.9]. Consider the global type:

$$G_{\text{intrl}} \triangleq p!q(1\langle \text{int.end} \rangle).r!t(2\langle \text{int} \rangle).p!q(3).\text{end}$$

Following Toninho and Yoshida [TY18], we define implementations of the roles of the four participants (p, q, r, t) of G_{intrl} using three processes (P_1, P_2 , and P_3): P_2 and P_3 implement the roles of q and r , respectively, and P_1 interleaves the roles of p and t by sending a channel s to q and receiving an int value v from r , which it should forward to q over s .

$$\begin{aligned} \emptyset \vdash P_1 &\triangleq \overline{p_\mu} \triangleleft 1 \cdot \overline{p_\mu}[s] \cdot (t_\mu \triangleright \{2 : t_\mu(v); \overline{s}[w] \cdot [v \leftrightarrow w]\} \mid \overline{p_\mu} \triangleleft 3 \cdot \overline{p_\mu}[z] \cdot \mathbf{0}) \\ &\blacktriangleright p_\mu : \oplus^0 \{1 : (\langle \text{int.end} \rangle) \otimes^1 \oplus^8 \{3 : \bullet \otimes^9 \bullet\}\}, t_\mu : \&^6 \{2 : \bullet \otimes^7 \bullet\} \end{aligned}$$

$$\emptyset \vdash P_2 \triangleq q_\mu \triangleright \{1 : q_\mu(y); y(x); q_\mu \triangleright \{3 : q_\mu(u); \mathbf{0}\}\} \blacktriangleright q_\mu : \&^2 \{1 : (\langle \text{int.end} \rangle) \overline{\otimes}^3 \&^{10} \{3 : \bullet \overline{\otimes}^{11} \bullet\}\}$$

$$\emptyset \vdash P_3 \triangleq \overline{r_\mu} \triangleleft 2 \cdot \overline{r_\mu}[\mathbf{33}] \cdot \mathbf{0} \blacktriangleright r_\mu : \oplus^4 \{2 : \bullet \otimes^5 \bullet\}$$

where ‘ $\mathbf{33}$ ’ denotes a closed channel endpoint representing the number ‘33’.

To prove that P_1 , P_2 , and P_3 correctly implement G_{intrl} , we compose them with the routers synthesized from G_{intrl} . For example, the routers for p and t , to which P_1 will connect, are as follows (omitting curly braces for branches on a single label):

$$\begin{aligned}\mathcal{R}^p &= \mu_p \triangleright 1; \overline{p}_q \triangleleft 1 \cdot \mu_p(s); \overline{p}_q[s'] \cdot ([s \leftrightarrow s'] | \mu_p \triangleright 3; \overline{p}_q \triangleleft 3 \cdot \mu_p(z); \overline{p}_q[z'] \cdot ([z \leftrightarrow z'] | \mathbf{0})) \\ \mathcal{R}^t &= t_r \triangleright 2; \overline{t}_r \triangleleft 2 \cdot t_r(v); \overline{t}_r[v'] \cdot ([v \leftrightarrow v'] | \mathbf{0})\end{aligned}$$

We assign values to the priorities in $(\text{!int.end}) = \bullet \otimes^\circ \bullet$ to ensure that P_1 and P_2 are well-typed; assigning $\circ = 8$ works, because the send on s in P_1 occurs after the receive on t_μ (which has priority 6–7) and the receive on y in P_2 occurs before the second branch on q_μ (which has priority 10–11).

The types assigned to p_μ and t_μ in P_1 coincide with $(G_{\text{intrl}} \downarrow^0 p)$ and $(G_{\text{intrl}} \downarrow^0 t)$, respectively (cf. Definition 9.4.6). Therefore, by Theorem 9.4.14, the process P_1 connects to the routers for p and t : $(\nu p_\mu \mu_p)(\nu t_\mu \mu_t)(P_1 | \mathcal{R}^p | \mathcal{R}^t)$ is well-typed. Similarly, $(\nu q_\mu \mu_q)(P_2 | \mathcal{R}^q)$ and $(\nu r_\mu \mu_r)(P_3 | \mathcal{R}^r)$ are well-typed.

The composition of these routed implementations results in the following network:

$$N_{\text{intrl}} \triangleq \begin{array}{c} (\nu p_q q_p)(\nu p_r r_p) \\ (\nu p_t t_p)(\nu q_r r_q) \\ (\nu q_t t_q)(\nu r_t t_r) \end{array} \left(\begin{array}{c} (\nu p_\mu \mu_p)(\nu t_\mu \mu_t)(P_1 | \mathcal{R}^p | \mathcal{R}^t) \\ | (\nu q_\mu \mu_q)(P_2 | \mathcal{R}^q) \\ | (\nu r_\mu \mu_r)(P_3 | \mathcal{R}^r) \end{array} \right)$$

We have $N_{\text{intrl}} \in \text{net}(G_{\text{intrl}})$ (cf. Definition 9.4.10), so, by Theorem 9.4.19, N_{intrl} is deadlock-free and, by Theorems 9.4.21 and 9.4.25, it correctly implements G_{intrl} .

9.5.2. ANOTHER EXAMPLE OF DELEGATION

Here, we further demonstrate our support for interleaving, showing how a participant can delegate the rest of its interactions in a protocol. The following global type formalizes a protocol in which a Client (c) asks an online Password Manager (p) to login with a Server (s):

$$G_{\text{deleg}} \triangleq c!p(\text{login}\langle S \rangle).G'_{\text{deleg}}$$

where

$$\begin{aligned}S &\triangleq \text{!}(\text{?bool.end}).S' \\ S' &\triangleq \&\{\text{passwd} : \text{?str}.\oplus\{\text{auth} : \text{!bool.end}\}\} \\ G'_{\text{deleg}} &\triangleq c!s(\text{passwd}\langle \text{str} \rangle).s!c(\text{auth}\langle \text{bool} \rangle).\text{end}\end{aligned}$$

Here S' expresses the type of \mathcal{R}^c 's channel endpoint μ_c . This means that we can give implementations for c and p such that c can send its channel endpoint c_μ to p , after which p logs in with s in c 's place, forwarding the authorization boolean received from s to c . Giving such implementations is relatively straightforward, demonstrating the flexibility of our global types and analysis using APCP and routers.

Using local projection, we can compute a type for c 's implementation to safely connect with its router

$$G_{\text{deleg}} \downarrow^0 c = \oplus^0 \{\text{login} : \langle S \rangle \otimes^1 (G'_{\text{deleg}} \downarrow^4 c)\}$$

where

$$\begin{aligned} \langle\langle S \rangle\rangle &= (\bullet \wp^\circ \bullet) \otimes^\kappa \langle\langle S' \rangle\rangle \\ \langle\langle S' \rangle\rangle &= \&^\pi \{\text{passwd} : \bullet \wp^\rho \oplus^\delta \{\text{auth} : \bullet \otimes^\phi \bullet\}\} \\ G'_{\text{deleg}} \downarrow^4 c &= \oplus^4 \{\text{passwd} : \bullet \otimes^5 \&^{10} \{\text{auth} : \bullet \wp^{11} \bullet\}\} \end{aligned}$$

Notice how $\overline{\langle\langle S' \rangle\rangle} = G'_{\text{deleg}} \downarrow^4 c$, given the assignments $\pi = 4, \rho = 5, \delta = 10, \phi = 11$.

We can use these types to guide the design of a process implementation for c . Consider:

$$\emptyset \vdash Q \triangleq \overline{c_\mu} \triangleleft \text{login} \cdot \overline{c_\mu}[u] \cdot \overline{u}[v] \cdot ([u \leftrightarrow c_\mu] \mid v(a); \mathbf{0}) \triangleright c_\mu : G_{\text{deleg}} \downarrow^0 c$$

This implementation is interesting: after the first exchange in G_{deleg} —sending a fresh channel u (to p)— c sends another fresh channel v over u ; then, c delegates the rest of its exchanges in G'_{deleg} by forwarding all traffic on c_μ over u ; in the meantime, c awaits an authorization boolean over v .

Again, using local projection, we can compute a type for p 's implementation to connect with its router:

$$G_{\text{deleg}} \downarrow^0 p = \&^2 \{\text{login} : \overline{\langle\langle S \rangle\rangle} \wp^3 \bullet\}$$

We can then use it to type the following implementation for p :

$$\emptyset \vdash P \triangleq p_\mu \triangleright \left\{ \begin{array}{l} \text{login} : p_\mu(c_\mu); c_\mu(v); \\ \overline{c_\mu} \triangleleft \text{passwd} \cdot \overline{c_\mu}[\text{pwd123}] \cdot \\ c_\mu \triangleright \{\text{auth} : c_\mu(a); \overline{v}[a'] \cdot [a \leftrightarrow a']\} \end{array} \right\} \triangleright p_\mu : G_{\text{deleg}} \downarrow^0 p$$

In this implementation, p receives a channel c_μ (from c) over which it first receives a channel v . Then, it behaves over c_μ according to c 's role in G'_{deleg} . Finally, p forwards the authorization boolean received from s over v , effectively sending the boolean to c .

Given an implementation for s , say $\emptyset \vdash S \triangleright s_\mu : G_{\text{deleg}} \downarrow^0 s$, what remains is to assign values to the remaining priorities in $\langle\langle S \rangle\rangle$: assigning $\circ = 12, \kappa = 4$ works. Now, we can compose the implementations P , Q and S with their respective routers and then compose these routed implementations together to form a deadlock-free network of G_{deleg} . This way, e.g., the router for c is as follows (again, omitting curly braces for branches on a single label):

$$\begin{aligned} \mathcal{R}^c &= \mu_c \triangleright \text{login}; \overline{c_p} \triangleleft \text{login} \cdot \mu_c(u); \overline{c_p}[u'] \cdot (\\ & [u \leftrightarrow u'] \mid \mu_c \triangleright \text{passwd}; \overline{c_s} \triangleleft \text{passwd} \cdot \mu_c(v); \overline{c_s}[v'] \cdot (\\ & [v \leftrightarrow v'] \mid c_s \triangleright \text{auth}; \overline{\mu_c} \triangleleft \text{auth} \cdot c_s(w); \overline{\mu_c}[w'] \cdot ([w \leftrightarrow w'] \mid \mathbf{0})) \end{aligned}$$

Interestingly, the router is agnostic of the fact that the endpoint u it receives over μ_c is in fact the opposite endpoint of the channel formed by μ_c .

9.5.3. THE AUTHORIZATION PROTOCOL IN ACTION

Let us repeat G_{auth} from Section 9.1:

$$G_{\text{auth}} = \mu X.s!c \left\{ \begin{array}{l} \text{login}.c!a(\text{passwd}\langle\text{str}\rangle).a!s(\text{auth}\langle\text{bool}\rangle).X, \\ \text{quit}.c!a(\text{quit}).\text{end} \end{array} \right\}$$

The relative projections of G_{auth} are as follows:

$$\begin{aligned} G_{\text{auth}} \rangle (s, a) &= \mu X. (s!c)!a \left\{ \begin{array}{l} \text{login.skip.a!s(auth\langle bool \rangle).X,} \\ \text{quit.skip.end} \end{array} \right\} \\ G_{\text{auth}} \rangle (c, a) &= \mu X. (c?s)!a \left\{ \begin{array}{l} \text{login.c!a(passwd\langle str \rangle).skip.X,} \\ \text{quit.c!a(quit).end} \end{array} \right\} \\ G_{\text{auth}} \rangle (s, c) &= \mu X. s!c \left\{ \begin{array}{l} \text{login.skip}^2.X, \\ \text{quit.skip.end} \end{array} \right\} \end{aligned}$$

The typed routers synthesized from G_{auth} are given in Figure 9.10. Let us explain the behavior of \mathcal{R}^a , the router of a . \mathcal{R}^a is a recursive process on recursion variable X , using the endpoint for the implementation μ_a and the endpoint for the other routers a_c and a_s as context. The initial message in G_{auth} from s to c is a dependency for a 's interactions with both s and c . Therefore, the router first branches on the first dependency with s : a label received over a_s (login or quit). Let us detail the login branch. Here, the router sends login over μ_a . Then, the router branches on the second dependency with c : a label received over a_c (again, login or quit).

- In the second login branch, the router receives the label `passwd` over a_c , which it then sends over μ_a . The router then receives an endpoint (the password) over a_c , which it forwards over μ_a . Finally, the router receives the label `auth` over μ_a , which it sends over a_s . Then, the router receives an endpoint (the authorization result) over μ_a , which it forwards over a_s . The router then recurses to the beginning of the loop on the recursion variable X , passing the endpoints μ_a, a_s, a_c as recursive context.
- In the quit branch, the router is in an inconsistent state, because it has received a label over a_c which does not concur with the label received over a_s . Hence, the router signals an alarm on its endpoints μ_a, a_s, a_c .

Notice how the typing of the routers in Figure 9.10 follows Theorem 9.4.14: for each $p \in \{c, s, a\}$, the endpoint μ_p is typed with local projection (Definition 9.4.6), and for each $q \in \{c, s, a\} \setminus \{p\}$ the endpoint pq is typed with relative projection (Definitions 9.3.7 and 9.4.7).

Consider again the participant implementations given in Example 9.2.18: P implements the role of c , Q the role of s , and R the role of a . Notice that the types of the channels of these processes coincide with relative projections:

$$\emptyset \vdash P \blacktriangleright c_\mu : G_{\text{auth}} \downarrow^0 c \quad \emptyset \vdash Q \blacktriangleright s_\mu : G_{\text{auth}} \downarrow^0 s \quad \emptyset \vdash R \blacktriangleright a_\mu : G_{\text{auth}} \downarrow^0 a$$

Let us explore how to compose these implementations with their respective routers. The order of composition determines the network topology.

Decentralized By composing each router with their respective implementation, and then composing the resulting routed implementations, we obtain a decentralized topology:

$$N_{\text{auth}}^{\text{decentralized}} \triangleq \begin{array}{l} (\mathbf{v}c_s s_c) \left(\begin{array}{l} (\mathbf{v}\mu_c c_\mu) (\mathcal{R}^c | P) \\ | (\mathbf{v}\mu_s s_\mu) (\mathcal{R}^s | Q) \\ | (\mathbf{v}\mu_a a_\mu) (\mathcal{R}^a | R) \end{array} \right) \end{array}$$

$$\vdash \mathcal{R}^c = \mu X(\mu_c, c_s, c_a); c_s \triangleright \left\{ \begin{array}{l} \text{login} : \overline{\mu_c} \triangleleft \text{login} \cdot \overline{c_a} \triangleleft \text{login} \cdot c_s(u); \overline{\mu_c}[u'] \cdot \\ \quad ([u \leftrightarrow u'] \mid \mu_c \triangleright \left\{ \begin{array}{l} \text{passwd} : \overline{c_a} \triangleleft \text{passwd} \cdot \mu_c(v); \overline{c_a}[v'] \cdot \\ \quad ([v \leftrightarrow v'] \mid X(\mu_c, c_s, c_a)) \end{array} \right\}), \\ \text{quit} : \overline{\mu_c} \triangleleft \text{quit} \cdot \overline{c_a} \triangleleft \text{quit} \cdot c_s(w); \overline{\mu_c}[w'] \cdot \\ \quad ([w \leftrightarrow w'] \mid \mu_c \triangleright \left\{ \begin{array}{l} \text{quit} : \overline{c_a} \triangleleft \text{quit} \cdot \mu_c(z); \overline{c_a}[z'] \cdot \\ \quad ([z \leftrightarrow z'] \mid \mathbf{0}) \end{array} \right\}) \end{array} \right\}$$

$$\begin{aligned} \blacktriangleright \mu_c &: \mu X. \oplus^2 \left\{ \begin{array}{l} \text{login} : \bullet \otimes^3 \&^4 \{ \text{passwd} : \bullet \wp^5 X \}, \\ \text{quit} : \bullet \otimes^3 \&^4 \{ \text{quit} : \bullet \wp^5 \bullet \} \end{array} \right\} = \overline{(G_{\text{auth}} \downarrow^0 c)}, \\ c_s &: \mu X. \&^1 \{ \text{login} : \bullet \wp^2 X, \text{quit} : \bullet \wp^2 \bullet \} = \langle (G_{\text{auth}}) \rangle (c, s)_{c,s}^0, \\ c_a &: \mu X. \oplus^2 \left\{ \begin{array}{l} \text{login} : \oplus^5 \{ \text{passwd} : \bullet \otimes^6 X \}, \\ \text{quit} : \oplus^5 \{ \text{quit} : \bullet \otimes^6 \bullet \} \end{array} \right\} = \langle (G_{\text{auth}}) \rangle (c, a)_{c,a}^0 \end{aligned}$$

$$\vdash \mathcal{R}^s = \mu X(\mu_s, s_c, s_a); \mu_s \triangleright \left\{ \begin{array}{l} \text{login} : \overline{s_c} \triangleleft \text{login} \cdot \overline{s_a} \triangleleft \text{login} \cdot \mu_s(u); \overline{s_c}[u'] \cdot \\ \quad ([u \leftrightarrow u'] \mid s_a \triangleright \left\{ \begin{array}{l} \text{auth} : \overline{\mu_s} \triangleleft \text{auth} \cdot s_a(v); \overline{\mu_s}[v'] \cdot \\ \quad ([v \leftrightarrow v'] \mid X(\mu_s, s_c, s_a)) \end{array} \right\}), \\ \text{quit} : \overline{s_c} \triangleleft \text{quit} \cdot \overline{s_a} \triangleleft \text{quit} \cdot \mu_s(v); \overline{s_c}[v'] \cdot \\ \quad ([v \leftrightarrow v'] \mid \mathbf{0}) \end{array} \right\}$$

$$\begin{aligned} \blacktriangleright \mu_s &: \mu X. \&^0 \{ \text{login} : \bullet \wp^1 \oplus^{10} \{ \text{auth} : \bullet \otimes^{11} X \}, \text{quit} : \bullet \wp^1 \bullet \} = \overline{(G_{\text{auth}} \downarrow^0 s)}, \\ s_c &: \mu X. \oplus^1 \{ \text{login} : \bullet \otimes^2 X, \text{quit} : \bullet \otimes^2 \bullet \} = \langle (G_{\text{auth}}) \rangle (s, c)_{s,c}^0, \\ s_a &: \mu X. \oplus^1 \{ \text{login} : \&^9 \{ \text{auth} : \bullet \wp^{10} X \}, \text{quit} : \bullet \} = \langle (G_{\text{auth}}) \rangle (s, a)_{s,a}^0 \end{aligned}$$

$$\vdash \mathcal{R}^a = \mu X(\mu_a, a_c, a_s); a_s \triangleright \left\{ \begin{array}{l} \text{login} : \overline{\mu_a} \triangleleft \text{login} \cdot \\ \quad \left\{ \begin{array}{l} \text{login} : \\ \quad \left\{ \begin{array}{l} \text{passwd} : \overline{\mu_a} \triangleleft \text{passwd} \cdot a_c(u); \overline{\mu_a}[u'] \cdot \\ \quad ([u \leftrightarrow u'] \mid \mu_a \triangleright \left\{ \begin{array}{l} \text{auth} : \\ \quad \overline{a_s} \triangleleft \text{auth} \cdot \mu_a(v); \overline{a_s}[v'] \cdot \\ \quad ([v \leftrightarrow v'] \mid X(\mu_a, a_c, a_s)) \end{array} \right\}) \end{array} \right\} \end{array} \right\}, \\ \text{quit} : \text{alarm}(\mu_a, a_c, a_s) \\ \text{quit} : \overline{\mu_a} \triangleleft \text{quit} \cdot \\ \quad \left\{ \begin{array}{l} \text{login} : \text{alarm}(\mu_a, a_c, a_s), \\ a_c \triangleright \left\{ \text{quit} : \overline{\mu_a} \triangleleft \text{quit} \cdot a_c(w); \overline{\mu_a}[w'] \cdot \\ \quad ([w \leftrightarrow w'] \mid \mathbf{0}) \end{array} \right\} \end{array} \right\}$$

$$\begin{aligned} \blacktriangleright \mu_a &: \mu X. \oplus^2 \left\{ \begin{array}{l} \text{login} : \oplus^6 \{ \text{passwd} : \bullet \otimes^7 \&^8 \{ \text{auth} : \bullet \wp^9 X \} \}, \\ \text{quit} : \oplus^6 \{ \text{quit} : \bullet \otimes^7 \bullet \} \end{array} \right\} = \overline{(G_{\text{auth}} \downarrow^0 a)}, \\ a_c &: \mu X. \&^2 \left\{ \begin{array}{l} \text{login} : \&^5 \{ \text{passwd} : \bullet \wp^6 X \}, \\ \text{quit} : \&^5 \{ \text{quit} : \bullet \wp^6 \bullet \} \end{array} \right\} = \langle (G_{\text{auth}}) \rangle (a, c)_{a,c}^0, \\ a_s &: \mu X. \&^1 \{ \text{login} : \oplus^9 \{ \text{auth} : \bullet \otimes^{10} X \}, \text{quit} : \bullet \} = \langle (G_{\text{auth}}) \rangle (a, s)_{a,s}^0 \end{aligned}$$

Figure 9.10 | Routers synthesized from G_{auth} .

$$\begin{aligned}
& \vdash O_{\{c,s,a\}}[G_{\text{auth}}] \\
& = \mu X(\mu_c, \mu_s, \mu_a); \\
& \quad \mu_s \triangleright \left\{ \begin{array}{l} \text{login} : \overline{\mu_c} \triangleleft \text{login} \cdot \overline{\mu_a} \triangleleft \text{login} \cdot \mu_s(u); \overline{\mu_c}[u'] \cdot ((u \leftrightarrow u') \\ \quad | \mu_c \triangleright \left\{ \begin{array}{l} \text{auth} : \overline{\mu_a} \triangleleft \text{passwd} \cdot \mu_c(v); \overline{\mu_a}[v'] \cdot \\ \quad ((v \leftrightarrow v') | \mu_a \triangleright \left\{ \begin{array}{l} \text{auth} : \overline{\mu_s} \triangleleft \text{auth} \cdot \mu_a(w); \overline{\mu_s}[w'] \cdot \end{array} \right\}) \\ \quad ((w \leftrightarrow w') | X(\mu_c, \mu_s, \mu_a)) \end{array} \right\} \\ \text{quit} : \overline{\mu_c} \triangleleft \text{quit} \cdot \overline{\mu_a} \triangleleft \text{quit} \cdot \mu_s(z); \overline{\mu_c}[z'] \cdot \\ \quad ((z \leftrightarrow z') | \mu_c \triangleright \{ \text{quit} : \overline{\mu_a} \triangleleft \text{quit} \cdot \mu_c(y); \overline{\mu_a}[y'] \cdot ((y \leftrightarrow y') | \mathbf{0}) \}) \end{array} \right\} \\
& \blacktriangleright \overline{\mu_c} : G_{\text{auth}} \downarrow^0 c, \mu_s : G_{\text{auth}} \downarrow^0 s, \mu_a : G_{\text{auth}} \downarrow^0 a
\end{aligned}$$

Figure 9.11 | Orchestrator synthesized from G_{auth} (cf. Definition 9.4.27).

This composition is a network of routed implementations of G_{auth} (cf. Definition 9.4.10), so Theorems 9.4.19, 9.4.21 and 9.4.25 apply: we have $N_{\text{auth}}^{\text{decentralized}} \in \text{net}(G_{\text{auth}})$, so $N_{\text{auth}}^{\text{decentralized}}$ behaves as specified by G_{auth} and is deadlock-free.

Centralized By first composing the routers, and then composing the connected routers with each implementation, we obtain a centralized topology:

$$N_{\text{auth}}^{\text{centralized}} \triangleq \begin{pmatrix} (\mathbf{v}\mu_c c_\mu) \\ (\mathbf{v}\mu_s s_\mu) \\ (\mathbf{v}\mu_a a_\mu) \end{pmatrix} \begin{pmatrix} (\mathbf{v}c_s s_c) \\ (\mathbf{v}c_a a_c) \\ (\mathbf{v}s_a a_s) \end{pmatrix} \begin{pmatrix} \mathcal{R}^c \\ \mathcal{R}^s \\ \mathcal{R}^a \end{pmatrix} \begin{pmatrix} |P \\ |Q \\ |R \end{pmatrix}$$

Note that the composition of routers is a *hub of routers* (Definition 9.4.29). Consider the composition of P , Q and R with the orchestrator of G_{auth} (given in Figure 9.11):

$$N_{\text{auth}}^{\text{orchestrator}} \triangleq \begin{pmatrix} (\mathbf{v}\mu_c c_\mu) \\ (\mathbf{v}\mu_s s_\mu) \\ (\mathbf{v}\mu_a a_\mu) \end{pmatrix} \begin{pmatrix} O_{\{c,s,a\}}[G_{\text{auth}}] \\ |R \end{pmatrix}$$

By Theorem 9.4.34, the hub of routers and the orchestrator of G_{auth} are weakly bisimilar (Definition 9.4.33). Hence, $N_{\text{auth}}^{\text{centralized}}$ and $N_{\text{auth}}^{\text{orchestrator}}$ behave the same.

Since each of $N_{\text{auth}}^{\text{top}}$ with $\text{top} \in \{\text{decentralized}, \text{centralized}, \text{orchestrator}\}$ is typable in empty contexts, by Theorem 9.4.19, each of these compositions is deadlock-free. Moreover, $N_{\text{auth}}^{\text{decentralized}}$ and $N_{\text{auth}}^{\text{centralized}}$ are structurally congruent, so, by Theorems 9.4.21 and 9.4.25, they behave as prescribed by G_{auth} . Finally, by Theorem 9.4.34, $N_{\text{auth}}^{\text{centralized}}$ and $N_{\text{auth}}^{\text{orchestrator}}$ are bisimilar, and so $N_{\text{auth}}^{\text{orchestrator}}$ also behaves as prescribed by G_{auth} .

9.6. RELATED WORK

Types for deadlock-freedom. Our decentralized analysis of global types is related to type systems that ensure deadlock-freedom for multiparty sessions with delegation and interleav-

ing [Bet+08; PVV14; Cop+16]. Unlike these works, we rely on a type system for *binary* sessions which is simple and enables an expressive analysis of global types. Coppo *et al.* [Bet+08; Cop+13; Cop+16] give type systems for multiparty protocols, with asynchrony and support for interleaved sessions by tracking of mutual dependencies between them; as per Toninho and Yoshida [TY18], our example in Section 9.5.1 is typable in APCP but not in their system. Padovani *et al.* [PVV14] develop a type system that enforces liveness properties for multiparty sessions, defined on top of a π -calculus with labeled communication. Rather than global types, their type structure follows approaches based on *conversation types* [CV10]. Toninho and Yoshida [TY18] analyze binary sessions, leveraging on deadlock-freedom results for multiparty sessions to extend Wadler's CLL [Wad12] with cyclic networks. Their process language is synchronous and uses replication rather than recursion. We note that their Examples 6.8 and 6.9 can be typed in APCP (cf. Section 9.5.1); a detailed comparison between their extended CLL and APCP is interesting future work.

MPSTs and binary analyses of global types. As already mentioned, Caires and Pérez [CP16] and Carbone *et al.* [Car+15; Car+16; Car+17] reduce the analysis of global types to binary session type systems based on intuitionistic and classical linear logic, respectively. Our routers strictly generalize the centralized mediums of Caires and Pérez (cf. Section 9.4.4). We substantially improve over the expressivity of the decentralized approach of Carbone *et al.* based on coherence, but reliant on encodings into centralized arbiters; for instance, their approach does not support the example from Toninho and Yoshida [TY18] we discuss in Section 9.5.1. Also, Caires and Pérez support neither recursive global types nor asynchronous communication, and neither do Carbone *et al.*.

Scalas *et al.* [Sca+17] leverage on an encoding of binary session types into *linear types* [DGS12; KPT99] to reduce multiparty sessions to processes typable with linear types, with applications in Scala programming. Their analysis is decentralized but covers processes with synchronous communication only; also, their deadlock-freedom result is limited with respect to ours: it does not support interleaving, such as in the example in Section 9.5.1.

9.7. CONCLUSIONS

9

We have developed a new analysis of multiparty protocols specified as global types. As a distinguishing feature, our analysis accounts for multiparty protocols implemented by arbitrary process networks, which can be centralized (as in orchestration-based approaches) but also decentralized (as in choreography-based approaches). Another salient feature is that we can ensure both protocol conformance (protocol fidelity, communication safety) and deadlock-freedom, which is notoriously hard to establish for protocols/implementations involving delegation and interleaving. To this end, we have considered asynchronous process implementations in APCP, the typed process language that we introduced in [HP21a] (Chapter 3). Our analysis enables the transference of correctness properties from APCP to multiparty protocols. We have illustrated these features using the authorization protocol G_{auth} adapted from Scalas and Yoshida [SY19] as a running example; additional examples further justify how our approach improves over previous analyses (cf. Section 9.5).

Our analysis of multiparty protocols rests upon three key innovations: *routers*, which enable global type analysis as decentralized networks; *relative types* that capture protocols between pairs of participants; *relative projection*, which admits global types with non-local choices. In our opinion, these notions are interesting on their own. In particular, relative types shed new light on more expressive protocol specifications than usual MPST, which are tied to notions of local types and merge/subtyping.

There are several interesting avenues for future work. We would like to develop a type system based on relative types, integrating the logic of routers into a static type checking that ensures deadlock-freedom for processes.

10

MONITORS FOR BLACKBOX IMPLEMENTATIONS OF MULTIPARTY SESSION TYPES

This chapter explores the verification of the correctness of distributed systems without access to the specification of system components. That is, these systems consist of “blackboxes”. The idea is to confirm protocol conformance for multiparty session types (MPSTs), where blackboxes implement the roles of protocol participants. By equipping blackboxes with monitors that observe their behavior, this chapter studies the dynamic verification of distributed implementations of MPSTs. That is, the chapter addresses the following research question, introduced in Section 1.2.3.3:

Research Question III-3. *Can we dynamically verify distributed blackbox implementations of MPSTs, and what correctness properties can we guarantee therein?*

This chapter includes a self-contained summary of MPSTs (Section 10.3). Omitted details can be found in the chapter dedicated to MPSTs (Chapter 8).

10.1. INTRODUCTION

Runtime verification excels at analyzing systems with components that cannot be (statically) checked, such as closed-source and third-party components with unknown/partial specifications [Bar+18; FPS18]. In this spirit, we present a monitoring framework for networks of communicating components. We adopt *global types* from *multiparty session types* [HYC08; HYC16] both to specify protocols and to synthesize monitors. As we explain next, rather than process implementations, we consider “*blackboxes*”—components whose exact structure is unknown. Also, aiming at wide applicability, we cover networks of monitored components that implement global types that go beyond the scope of existing techniques.

Session types provide precise specifications of the protocols that components should respect. It is then natural to use session types as references for distributed monitoring [Boc+17; BFS21; JGP16; GJP22; Thi14; Iga+17]. In particular, Bocchi *et al.* [Boc+17; Boc+13; Che+12] use multiparty session types to monitor networks of π -calculus processes. Leveraging notions originally conceived for static verification (such as *global types* and their *projection* onto *local types*), their framework guarantees the correctness of monitored networks with statically and dynamically checked components.

However, existing monitoring techniques based on multiparty session types have two limitations. One concerns the class of protocols they support; the other is their reliance on fully specified components, usually given as (typed) processes. That is, definitions of networks assume that a component can be inspected—an overly strong assumption in many cases. There is then a tension between (i) the assumptions on component structure and (ii) the strength of formal guarantees: the less we know about components, the harder it is to establish such guarantees.

Our approach. We introduce a new approach to monitoring based on multiparty session types that relies on minimal assumptions on a component’s structure. As key novelty, we consider *blackboxes*—components with unknown structure but observable behavior—and *networks* of monitored blackboxes that use asynchronous message-passing to implement multiparty protocols specified as global types.

As running example, let us consider the global type G_a (inspired by an example by Scalas and Yoshida [SY19]), which expresses an authorization protocol between three participants: server (s), client (c), and authorization service (a).

$$G_a \triangleq \mu X. s!c\{\text{login}\langle \rangle. c!a\{\text{pwd}\langle \text{str} \rangle. a!s\{\text{succ}\langle \text{bool} \rangle. X\}\}, \text{quit}\langle \rangle. \text{end}\} \quad (10.1)$$

This recursive global type (μX) specifies that s sends to c ($s!c$) a choice between labels `login` and `quit`. In the `login`-branch, c sends to a a password of type $\langle \text{str} \rangle$ and a notifies s whether it was correct, after which the protocol repeats (X). In the `quit`-branch, the protocol ends (`end`). As explained in [SY19], G_a is not supported by most theories of multiparty sessions, including those in [Boc+17; Boc+13; Che+12].

Figure 10.1 illustrates our approach to monitoring global types such as G_a . There is a blackbox per participant, denoted P_s , P_c , and P_a , whose behavior is given by a labeled transition system (LTS). Each blackbox implements a participant as dictated by G_a while coupled with a monitor (M_s , M_c , and M_a in Figure 10.1). Monitors are *synthesized* from G_a by relying on *relative types* [HP22] (discussed in Chapter 8), which provide local views of the global type: they specify protocols between *pairs* of participants; hence, in the case of G_a , we have three relative types: $R_{c,s}$, $R_{c,a}$, and $R_{s,a}$.

Introduced in [HP22] for type-checking communicating components, relative types are instrumental to our approach. They give a fine-grained view of protocols that is convenient for monitor synthesis. Relative types explicitly specify *dependencies* between participants, e.g., when the behavior of a participant p is the result of a prior choice made by some other participants q and r . Treating dependencies as explicit messages is key to ensuring the distributed implementability of protocols that usual multiparty theories cannot support (e.g., G_a (10.1)).

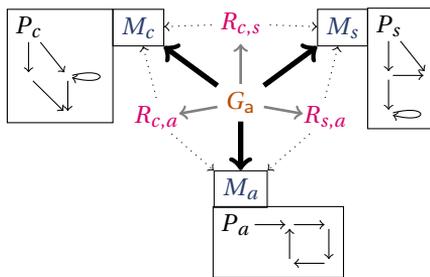


Figure 10.1 | Monitoring setup based on the global type (multiparty protocol) G_a (10.1). Each protocol participant has a blackbox (an LTS), attached to a monitor (e.g. P_c and M_c). The monitors are synthesized from G_a (thick arrows). Relative types (e.g. $R_{c,s}$) obtained by projection from G_a (thin gray arrows) are used in this synthesis (dotted arrows).

Our algorithm for monitor synthesis mechanically computes these dependencies from relative types, and exploits them to coordinate monitored blackboxes.

A central ingredient in our technical developments is the notion of *satisfaction* (Definition 10.4.2), which defines when a monitored blackbox conforms to the role of a specific participant. Building upon satisfaction, we prove *soundness* and *transparency* for networks of monitored blackboxes. Soundness (Theorem 10.4.6) ensures that if each monitored blackbox in a network behaves correctly (according to a global type), then the entire network behaves correctly too. Transparency (Theorem 10.4.12) ensures that monitors do not interfere with the (observable) behavior of their contained blackboxes; it is given in terms of a (weak) behavioral equivalence, which is suitably informed by the actions of a given global type.

Related work. The literature on distributed runtime verification is vast. In this setting, the survey by Francalanza *et al.* [FPS18] proposes several classification criteria. Phrased in terms of their criteria, our work concerns distributed monitoring for asynchronous message-passing. We work with blackboxes, whose monitors are minimally intrusive: they do not alter behavior, but do contribute to coordination.

The works by Bocchi *et al.* [Boc+17; Boc+13; Che+12] and by Scalas and Yoshida [SY19], mentioned above, are a main source of inspiration to us. The work [SY19] highlights the limitations of techniques based on the projection of a global type onto local types: many practical protocols, such as G_a , cannot be analyzed because their projection onto local types is undefined. With respect to [Boc+17; Boc+13; Che+12], there are three major differences. First, Bocchi *et al.* rely on precise specifications of components (π -calculus processes), whereas we monitor blackboxes (LTSs). Second, we resort to relative types, whereas they rely on local types; this is a limitation, as just mentioned. Third, their monitors drop incorrect messages (cf. [Ace+18]) instead of signaling errors, as we do. Their framework ensures transparency (akin to Theorem 10.4.12) and safety, i.e., monitored components do not misbehave. In contrast, we establish soundness, which is different and more technically involved than safety: our focus is on monitoring blackboxes rather than fully specified components, and soundness concerns correct behavior rather than the absence of misbehavior.

We mention runtime verification techniques based on *binary* session types, a sub-class of multiparty session types. Bartolo Burlò *et al.* [BFS21] monitor sequential processes that communicate synchronously, prove that ill-typed processes raise errors, and consider also probabilistic session types [Bar+22; Bar+21]. Other works couple monitoring session types with *blame assignment* upon protocol violations [JGP16; GJP22; Thi14; Iga+19]. Jia *et al.* [JGP16] monitor asynchronous session-typed processes. Gommerstadt *et al.* [GJP22; GJP18] extend [JGP16] with rich refinement-based contracts. Thiemann [Thi14] and Igarashi *et al.* [Iga+19; Iga+17] use gradual session types to combine statically and dynamically typed languages. We do not consider blame assignment, but it can conceivably be added by enhancing error signals.

Outline. Section 10.2 defines networks of monitored blackboxes and their behavior. Section 10.3 defines how to synthesize monitors from global types. Section 10.4 defines correct monitored blackboxes, and establishes soundness and transparency. Section 10.5 concludes the chapter. We use colors to improve readability.

Appendix H includes additional examples (including the running example from [Boc+17]), a description of a practical toolkit based on this chapter, and omitted proofs.

10.2. NETWORKS OF MONITORED BLACKBOXES

We write P, Q, \dots to denote *blackbox processes* (simply *blackboxes*) that implement protocol *participants* (denoted p, q, \dots). We assume that a blackbox P is associated with an LTS that specifies its behavior. Transitions are denoted $P \xrightarrow{\alpha} P'$. Actions α , defined in Figure 10.2 (top), encompass messages m , which can be labeled data but also *dependency messages* (simply *dependencies*). As we will see, dependencies are useful to ensure the coordinated implementation of choices. Messages abstract away from values, and include only their type.

A silent transition τ denotes an internal computation. Transitions $p!q(\ell\langle T \rangle)$ and $p?q(\ell\langle T \rangle)$ denote the output and input of a message of type T with label ℓ between p and q , respectively. If a message carries no data, we write $\ell\langle \rangle$ (i.e., the data type is empty). Dependency outputs are used for monitors, defined below.

We adopt minimal assumptions about the behavior of blackboxes:

Definition 10.2.1 (Assumptions). *We assume the following about LTSs of blackboxes:*

- (**Finite** τ) *Sequences of τ -transitions are finite.*
- (**Input/Output**) *Never are input- and output-transitions available at the same time.*
- (**End**) *There are never transitions after an end-transition.*

Let ℓ and T denote a label and a data type, respectively.

Actions	$\alpha, \beta \triangleq \tau$ (silent) m (message) end (end)
Messages	$m, n \triangleq p!q(\ell\langle T \rangle)$ (output) $p!q(\ell)$ (dep. output, only for networks) $p?q(\ell\langle T \rangle)$ (input) $p?q(\ell)$ (dep. input)

Given α , the *recipient in α* is defined as follows:

$$\begin{aligned} \text{recip}(p!q(\ell\langle T \rangle)) &\triangleq \text{recip}(p!q(\ell)) \triangleq q \\ \text{recip}(p?q(\ell\langle T \rangle)) &\triangleq \text{recip}(p?q(\ell)) \triangleq \text{recip}(\tau) \triangleq \text{recip}(\text{end}) \triangleq \text{undefined} \end{aligned}$$

Let D, E, \dots denote sets of participants; I, J, \dots denote non-empty sets of labels; X, Y, \dots denote recursion variables.

Networks	$\mathcal{P}, \mathcal{Q} \triangleq [\langle p : P : \vec{m} \rangle : M : \vec{n}]$ (monitored blackbox) $\mathcal{P} \mathcal{Q}$ (parallel composition) error_D (error signal)
Monitors	$M \triangleq p!q\{i\langle T_i \rangle.M\}_{i \in I}$ (output) $p!D(\ell).M$ (dep. output) $p?q\{i\langle T_i \rangle.M\}_{i \in I}$ (input) $p?q\{i.M\}_{i \in I}$ (dep. input) $\mu X.M X$ (recursion) end (end) error (error) \checkmark (finished)

The set of *subjects of a network* is as follows:

$$\text{sub}([\langle p : P : \vec{m} \rangle : M : \vec{n}]) \triangleq \{p\} \quad \text{sub}(\mathcal{P} | \mathcal{Q}) \triangleq \text{sub}(\mathcal{P}) \cup \text{sub}(\mathcal{Q}) \quad \text{sub}(\text{error}_D) \triangleq D$$

Figure 10.2 | Actions, messages, networks, and monitors.

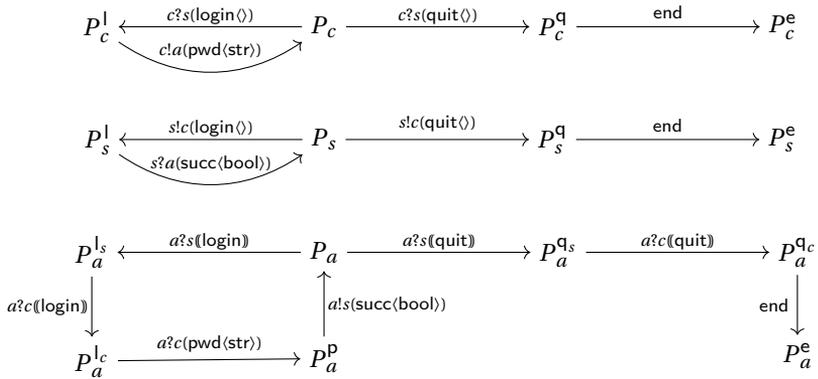


Figure 10.3 | Example blackboxes (cf. Example 10.2.2).

Example 10.2.2. The blackboxes P_c, P_s, P_a implement c, s, a , respectively, in G_a (10.1) with the LTSs in Figure 10.3. All three LTSs respect the assumptions in Definition 10.2.1. On the other hand, the following LTS violates all three assumptions; in particular, there are an input- and an output-transition simultaneously enabled at Q :

$$\tau \hookrightarrow Q^p \longleftarrow \xrightarrow{c!a(\text{pwd}(\text{str}))} Q \xrightarrow{c?s(\text{quit}())} Q^q \longleftarrow \xrightarrow{\text{end}}$$

▽

Blackboxes communicate asynchronously, using buffers (denoted \vec{m}): ordered sequences of messages, with the most-recently received message on the left. The empty buffer is denoted ϵ . When a blackbox does an input transition, it attempts to read the message from its buffer. An output transition places the message in the recipient's buffer; to accommodate this, we mark each blackbox with the participant they implement. The result is a *buffered blackbox*, denoted $\langle p : P : \vec{m} \rangle$.

By convention, the buffer of p contains output messages with recipient p . We allow the silent reordering of messages with different senders; this way, e.g., given $q \neq r$, $\vec{m}, q!p(\ell\langle T \rangle), r!p(\ell'\langle T' \rangle), \vec{n}$ and $\vec{m}, r!p(\ell'\langle T' \rangle), q!p(\ell\langle T \rangle), \vec{n}$ are the same.

Having defined standalone (buffered) blackboxes, we now define how they interact in *networks*. We couple each buffered blackbox with a *monitor* M , which has its own buffer \vec{n} . The result is a *monitored blackbox*, denoted $[\langle p : P : \vec{m} \rangle : M : \vec{n}]$.

Monitors define finite state machines that accept sequences of incoming and outgoing messages, as stipulated by some protocol. An *error* occurs when an exchange does not conform to such a protocol. Additionally, monitors support the dependencies mentioned earlier: when a blackbox exchanges a message, the monitor broadcasts the message's label to other monitored blackboxes such that they can receive the chosen label and react accordingly.

Networks, defined in Figure 10.2 (bottom), are compositions of monitored blackboxes and *error signals*. An error signal error_D replaces a monitored blackbox when its monitor detects an error involving participants in the set D . Indeed, a participant's error will propagate to the other monitored blackboxes in a network.

Output and (dependency) input monitors check outgoing and incoming (dependency) messages, respectively. Output dependency monitors $p!D(\ell).M$ broadcast ℓ to the participants in D . Recursive monitors are encoded by recursive definitions ($\mu X.M$) and calls (X). The end monitor waits for the buffered blackbox to end the protocol. The error monitor denotes an inability to process received messages; it will be used when a sender and recipient send different dependency messages. The finished monitor \checkmark is self-explanatory.

We now define the behavior of monitored blackboxes in networks:

10

Definition 10.2.3 (LTS for Networks). *We define an LTS for networks, denoted $\mathcal{P} \xrightarrow{\alpha} Q$, by the rules in Figures 10.5 and 10.6 (Pages 249 and 250, respectively) with actions α as in Figure 10.2 (top).*

We write $\mathcal{P} \Rightarrow Q$ to denote a sequence of zero or more τ -transitions $\mathcal{P} \xrightarrow{\tau} \dots \xrightarrow{\tau} Q$, and we write $\mathcal{P} \not\Rightarrow Q$ to denote that there do not exist α, Q such that $\mathcal{P} \xrightarrow{\alpha} Q$.

Figures 10.5 and 10.6 give four groups of rules, which we briefly discuss. The Transition group [BUF-*] defines the behavior of a buffered blackbox in terms of the behavior of the blackbox it

$$\begin{array}{c}
\frac{[\langle c : P_c : \epsilon \rangle : c?s\{\text{quit}\langle \rangle . \text{end} \} : \epsilon] \xrightarrow{\tau} [\langle c : P_c : \epsilon \rangle : c?s\{\text{quit}\langle \rangle . \text{end} \} : s!c(\text{quit}\langle \rangle)]}{[\langle s : P_s : \epsilon \rangle : s!c\{\text{quit}\langle \rangle . \text{end} \} : \epsilon] \xrightarrow{\tau} [\langle s : P_s^q : \epsilon \rangle : \text{end} : \epsilon]} \\
\downarrow \tau \\
\frac{[\langle c : P_c^e : \epsilon \rangle : \checkmark : \epsilon] \xleftarrow{\text{end}} \xleftarrow{\text{end}} [\langle c : P_c^q : \epsilon \rangle : \text{end} : \epsilon] \xleftarrow{\tau} [\langle c : P_c : s!c(\text{quit}\langle \rangle) \rangle : \text{end} : \epsilon]}{[\langle s : P_s^e : \epsilon \rangle : \checkmark : \epsilon] \xleftarrow{\tau} [\langle s : P_s^q : \epsilon \rangle : \text{end} : \epsilon] \xleftarrow{\tau} [\langle s : P_s^q : \epsilon \rangle : \text{end} : \epsilon]} \\
\hline
\frac{[\langle c : P_c : \epsilon \rangle : c?s\{\text{login}\langle \rangle . M_c^1 \} : s!c(\text{quit}\langle \rangle)] \xrightarrow{\tau} \text{error}_{\{c\}}}{[\langle s : P_s^q : \epsilon \rangle : \text{end} : \epsilon] \xrightarrow{\tau} \text{error}_{\{c,s\}}}
\end{array}$$

Figure 10.4 | The LTS for networks (Definition 10.2.3) at work: transitions of correctly/incorrectly communicating monitored blackboxes of participants of G_a (10.1). Top: s sends to c label quit, monitor of c reads message, blackbox of c reads message, both components end. Bottom: monitor of c expects login message but finds quit message so signals error, error propagates to s .

$$\begin{array}{c}
\frac{[\text{BUF-OUT}] \quad P \xrightarrow{p!q(\ell\langle T \rangle)} P'}{\langle p : P : \vec{m} \rangle \xrightarrow{p!q(\ell\langle T \rangle)} \langle p : P' : \vec{m} \rangle} \qquad \frac{[\text{BUF-IN}] \quad P \xrightarrow{p?q(\ell\langle T \rangle)} P'}{\langle p : P : \vec{m}, q!p(\ell\langle T \rangle) \rangle \xrightarrow{\tau} \langle p : P' : \vec{m} \rangle} \\
\frac{[\text{BUF-IN-DEP}] \quad P \xrightarrow{p?q(\ell)} P'}{\langle p : P : \vec{m}, q!p(\ell) \rangle \xrightarrow{\tau} \langle p : P' : \vec{m} \rangle} \qquad \frac{[\text{BUF-TAU}] \quad P \xrightarrow{\tau} P'}{\langle p : P : \vec{m} \rangle \xrightarrow{\tau} \langle p : P' : \vec{m} \rangle} \\
\frac{[\text{BUF-END}] \quad P \xrightarrow{\text{end}} P'}{\langle p : P : \vec{m} \rangle \xrightarrow{\text{end}} \langle p : P' : \vec{m} \rangle} \\
\hline
\frac{[\text{MON-OUT}] \quad \langle p : P : \vec{m} \rangle \xrightarrow{p!q(j\langle T_j \rangle)} \langle p : P' : \vec{m} \rangle \quad M = p!q\{i\langle T_i \rangle . M_i\}_{i \in I} \quad j \in I}{[\langle p : P : \vec{m} \rangle : M : \vec{n}] \xrightarrow{p!q(j\langle T_j \rangle)} [\langle p : P' : \vec{m} \rangle : M_j : \vec{n}]} \\
\frac{[\text{MON-IN}] \quad M = p?q\{y . M_i\}_{y \in Y} \quad x \in Y \quad n' \in \{q!p(x), q!p(x)\}}{[\langle p : P : \vec{m} \rangle : M : \vec{n}, n'] \xrightarrow{\tau} [\langle p : P : n', \vec{m} \rangle : M_j : \vec{n}]} \\
\frac{[\text{MON-TAU}] \quad \langle p : P : \vec{m} \rangle \xrightarrow{\tau} \langle p : P' : \vec{m}' \rangle \quad M \neq \checkmark}{[\langle p : P : \vec{m} \rangle : M : \vec{n}] \xrightarrow{\tau} [\langle p : P' : \vec{m}' \rangle : M : \vec{n}]} \\
\frac{[\text{MON-OUT-DEP}] \quad [\langle p : P : \vec{m} \rangle : p!(D \cup \{q\})(\ell) . M' : \vec{n}] \xrightarrow{p!q(\ell)} [\langle p : P : \vec{m} \rangle : p!D(\ell) . M' : \vec{n}]}{[\langle p : P : \vec{m} \rangle : p!\emptyset(\ell) . M' : \vec{n}] \xrightarrow{\tau} [\langle p : P : \vec{m} \rangle : M' : \vec{n}]} \\
\frac{[\text{MON-REC}] \quad [\langle p : P : \vec{m} \rangle : M\{\mu X . M / X\} : \vec{n}] \xrightarrow{\alpha} [\langle p : P' : \vec{m}' \rangle : M' : \vec{n}']}{[\langle p : P : \vec{m} \rangle : \mu X . M : \vec{n}] \xrightarrow{\alpha} [\langle p : P' : \vec{m}' \rangle : M' : \vec{n}']} \\
\frac{[\text{MON-END}] \quad \langle p : P : \vec{m} \rangle \xrightarrow{\text{end}} \langle p : P' : \vec{m} \rangle}{[\langle p : P : \vec{m} \rangle : \text{end} : \epsilon] \xrightarrow{\text{end}} [\langle p : P' : \vec{m} \rangle : \checkmark : \epsilon]}
\end{array}$$

Figure 10.5 | LTS for networks (Definition 10.2.3), part 1 of 2.

$$\begin{array}{c}
\text{[ERROR-OUT]} \frac{M = p!r\{i\langle T_i \rangle.M_i\}_{i \in I} \implies (r \neq q \vee j \notin I) \quad \langle p : P : \vec{m} \rangle \xrightarrow{p!q(j\langle T_j \rangle)} \langle p : P' : \vec{m} \rangle \quad M \notin \{\mu X.M', p!D(\ell).M'\}}{[\langle p : P : \vec{m} \rangle : M : \vec{n}] \xrightarrow{\tau} \text{error}_{\{p\}}} \\
\text{[ERROR-END]} \frac{\langle p : P : \vec{m} \rangle \xrightarrow{\text{end}} \langle p : P' : \vec{m} \rangle \quad \vec{n} = \epsilon \implies M \notin \{\mu X.M', p!D(\ell).M', \text{end}\}}{[\langle p : P : \vec{m} \rangle : M : \vec{n}] \xrightarrow{\tau} \text{error}_{\{p\}}} \\
\text{[ERROR-IN]} \frac{M = p?q\{y.M_y\}_{y \in Y} \quad x \notin Y \quad n' \in \{q!p(x), q!p(x)\}}{[\langle p : P : \vec{m} \rangle : M : \vec{n}, n'] \xrightarrow{\tau} \text{error}_{\{p\}}} \\
\text{[ERROR-MON]} \frac{}{[\langle p : P : \vec{m} \rangle : \text{error} : \vec{n}] \xrightarrow{\tau} \text{error}_{\{p\}}} \quad \text{[PAR-ERROR]} \frac{}{\text{error}_D \mid [\langle p : P : \vec{m} \rangle : M : \vec{n}] \xrightarrow{\tau} \text{error}_{D \cup \{p\}}} \\
\text{[OUT-MON-BUF]} \frac{\mathcal{P} \xrightarrow{n'} \mathcal{P}' \quad n' \in \{q!p(x), q!p(x)\}}{\mathcal{P} \mid [\langle p : P : \vec{m} \rangle : M : \vec{n}] \xrightarrow{\tau} \mathcal{P}' \mid [\langle p : P : \vec{m} \rangle : M : n', \vec{n}]} \\
\text{[PAR]} \frac{\mathcal{P} \xrightarrow{\alpha} \mathcal{P}' \quad \text{recip}(\alpha) \notin \text{sub}(Q)}{\mathcal{P} \mid Q \xrightarrow{\alpha} \mathcal{P}' \mid Q} \quad \text{[CONG]} \frac{\mathcal{P} \equiv \mathcal{P}' \quad \mathcal{P}' \xrightarrow{\alpha} Q' \quad Q' \equiv Q}{\mathcal{P} \xrightarrow{\alpha} Q}
\end{array}$$

Figure 10.6 | LTS for networks (Definition 10.2.3), part 2 of 2.

contains; note that input transitions are hidden as τ -transitions. The Transition group [MON-*] defines the behavior of a monitored blackbox when the behavior of the enclosed buffered blackbox concurs with the monitor; again, input transitions are hidden as τ -transitions.

When the behavior of the buffered blackbox does not concur with the monitor, the Transition group [ERROR-*] replaces the monitored blackbox with an error signal. Transition [PAR-ERROR] propagates error signals to parallel monitored blackboxes. If a network parallel to the monitored blackbox of p has an outgoing message with recipient p , Transition [OUT-MON-BUF] places this message in the buffer of the monitored blackbox as a τ -transition. Transition [PAR] closes transitions under parallel composition, as long as the recipient in the action of the transition ($\text{recip}(\alpha)$) is not a subject of the composed network ($\text{sub}(Q)$, the participants for which monitored blackboxes and error signals appear in Q). Transition [CONG] closes transitions under \equiv , which denotes a congruence that defines parallel composition as commutative and associative.

Figure 10.4 shows transitions of correct/incorrect communications in networks.

10

10.3. MONITORS FOR BLACKBOXES SYNTHESIZED FROM GLOBAL TYPES

In theories of multiparty session types [HYC08; HYC16], *global types* conveniently describe message-passing protocols between sets of participants from a vantage point. Here we use

them as specifications for monitors in networks (Algorithm 6); for a local view of such global protocols we use *relative types* [HP22] (cf. Chapter 8), which describe the interactions and dependencies between *pairs* of participants.

Definition 10.3.1 (Global and Relative Types).

$$\begin{array}{ll}
\text{Global types} & G, G' : \triangleq p!q\{i\langle T_i \rangle.G\}_{i \in I} \quad (\text{exchange}) \quad | \text{end} \quad (\text{end}) \\
& \quad | \mu X.G | X \quad (\text{recursion}) \\
\text{Relative types} & R, R' : \triangleq p!q\{\!\!| i\langle T_i \rangle.R \!\!\}_{i \in I} \quad (\text{exchange}) \quad | \text{end} \quad (\text{end}) \\
& \quad | (p!r)!q\{\!\!| i.R \!\!\}_{i \in I} \quad (\text{output dep.}) \quad | \mu X.R | X \quad (\text{recursion}) \\
& \quad | (p?r)!q\{\!\!| i.R \!\!\}_{i \in I} \quad (\text{input dep.})
\end{array}$$

We write $\text{part}(G)$ to denote the set of participants involved in exchanges in G .

The global type $p!q\{i\langle T_i \rangle.G\}_{i \in I}$ specifies that p sends to q some $j \in I$ with T_j , continuing as G_j . A relative type specifies a protocol between a pair of participants, say p and q . The type $p!q\{\!\!| i\langle T_i \rangle.R \!\!\}_{i \in I}$ specifies that p sends to q some $j \in I$ with T_j , continuing as R_j . If the protocol between p and q depends on a prior choice involving p or q , their relative type includes a *dependency*: $(p!r)!q\{\!\!| i.R \!\!\}_{i \in I}$ (resp. $(p?r)!q\{\!\!| i.R \!\!\}_{i \in I}$) specifies that p forwards to q the $j \in I$ sent to (resp. received from) r by p . For both global and relative types, tail-recursion is defined with recursive definitions μX and recursive calls X , and end specifies the end of the protocol.

Relative types are obtained from global types by means of projection:

Definition 10.3.2 (Relative Projection). *The relative projection of a global type onto a pair of participants, denoted $G \langle p, q \rangle$, is defined by Algorithm 5.*

The projection of an exchange onto (p, q) is an exchange if p and q are sender and recipient (lines 5 and 6). Otherwise, if the protocol between p and q does not depend on the exchange (the projections of all branches are equal), the projection is the union of the projected branches (line 7). The union of relative types, denoted $R \cup R'$, is defined only on identical relative types (e.g., $p!q\{\!\!| i\langle T_i \rangle.R \!\!\}_{i \in I} \cup p!q\{\!\!| i\langle T_i \rangle.R \!\!\}_{i \in I} = p!q\{\!\!| i\langle T_i \rangle.R \!\!\}_{i \in I}$; see appendix H.3 for a formal definition). If there is a dependency and p or q is sender/recipient, the projection is a dependency (lines 8 and 9). Projection is undefined if there is a dependency but p nor q is involved.

The projection of $\mu X.G'$ is a relative type starting with a recursive definition, provided that the projection of G' onto (p, q) contains an exchange or nested recursive call (line 12) to avoid recursion with only dependencies; otherwise, the projection returns end (line 13). The projections of recursive calls and end are homomorphic (lines 14 and 15).

Example 10.3.3. The relative projections of G_a (10.1) are:

$$\begin{aligned}
R_{c,s} &\triangleq G_a \langle c, s \rangle = \mu X.s!c\{\!\!| \text{login}\langle \rangle.X, \text{quit}\langle \rangle.\text{end} \!\!\} \\
R_{c,a} &\triangleq G_a \langle c, a \rangle = \mu X.(c?s)!a\{\!\!| \text{login}.c!a\{\!\!| \text{pwd}\langle \text{str} \rangle.X \!\!\}, \text{quit}.\text{end} \!\!\} \\
R_{s,a} &\triangleq G_a \langle s, a \rangle = \mu X.(s!c)!a\{\!\!| \text{login}.a!s\{\!\!| \text{succ}\langle \text{bool} \rangle.X \!\!\}, \text{quit}.\text{end} \!\!\}
\end{aligned}$$

Hence, the exchange from s to c is a dependency for the protocols of a . ▽

Algorithm 5: Relative projection of G onto p and q (Definition 10.3.2).

```

1 def  $G \rangle (p, q)$  as
2   switch  $G$  do
3     case  $s!r\{i \langle T_i \rangle . G_i\}_{i \in I}$  do
4        $\forall i \in I. R_i \triangleq G_i \rangle (p, q)$ 
5       if  $(p = s \wedge q = r)$  then return  $p!q\{i \langle T_i \rangle . R_i\}_{i \in I}$ 
6       else if  $(q = s \wedge p = r)$  then return  $q!p\{i \langle T_i \rangle . R_i\}_{i \in I}$ 
7       else if  $\forall i, j \in I. R_i = R_j$  then return  $\bigcup_{i \in I} R_i$ 
8       else if  $s \in \{p, q\} \wedge t \in \{p, q\} \setminus \{s\}$  then return  $(s!r)!t\{i . R_i\}_{i \in I}$ 
9       else if  $r \in \{p, q\} \wedge t \in \{p, q\} \setminus \{r\}$  then return  $(r?s)!t\{i . R_i\}_{i \in I}$ 
10      case  $\mu X. G'$  do
11         $R' \triangleq G' \rangle (p, q)$ 
12        if ( $R'$  contains an exchange or a recursive call on any  $Y \neq X$ ) then return  $\mu X. R'$ 
13      else return end
14      case  $X$  do return  $X$ 
15      case end do return end

```

Not all global types are sensible. A valid global type may, e.g., require a participant p to have different behaviors, depending on a choice that p is unaware of (see, e.g., [CDP12]). In the following, we work only with *well-formed* global types:

Definition 10.3.4 (Well-formedness). *We say a global type G is well-formed if and only if, for all pairs of participants $p \neq q \in \text{part}(G)$, the projection $G \rangle (p, q)$ is defined, and all recursion in G is non-contractive (e.g., $G \neq \mu X. X$) and bound.*

Our running example G_a (10.1) is well-formed in the above sense; also, as explained in [SY19], G_a is *not* well-formed in most theories of multiparty sessions (based on projection onto local types). As such, G_a goes beyond the scope of such theories.

Synthesizing monitors. Next, we define a procedure to synthesize monitors for the participants of global types. This procedure detects dependencies as follows:

Definition 10.3.5 (Dependence). *Given a global type G , we say p depends on q in G , denoted $p \text{ depsOn } q \text{ in } G$, if and only if*

$$G = s!r\{i \langle T_i \rangle . G_i\}_{i \in I} \wedge p \notin \{s, r\} \wedge q \in \{s, r\} \wedge \exists i, j \in I. G_i \rangle (p, q) \neq G_j \rangle (p, q).$$

Thus, $p \text{ depsOn } q \text{ in } G$ holds if and only if G is an exchange involving q but not p , and the relative projections of at least two branches of the exchange are different.

Definition 10.3.6 (Synthesis of Monitors from Global Types). *Algorithm 6 synthesizes the monitor for p in G with participants D , denoted $\text{gt2mon}(G, p, D)$.*

Algorithm 6: Synthesis of monitors from global types (Definition 10.3.6).

```

1 def gt2mon( $G, p, D$ ) as
2   switch  $G$  do
3     case  $s!r\{i\langle T_i \rangle, G_i\}_{i \in I}$  do
4       |  $\text{deps} \triangleq \{q \in D \mid q \text{ dependsOn } p \text{ in } G\}$ 
5       | if  $p = s$  then return  $p!r\{i\langle T_i \rangle, p!\text{deps}(i), \text{gt2mon}(G_i, p, D)\}_{i \in I}$ 
6       | else if  $p = r$  then return  $p?s\{i\langle T_i \rangle, p!\text{deps}(i), \text{gt2mon}(G_i, p, D)\}_{i \in I}$ 
7       | else if  $p \notin \{r, s\}$  then
8         |  $\text{depOn}_s \triangleq \{s \in D \wedge p \text{ dependsOn } s \text{ in } G\}$ 
9         |  $\text{depOn}_r \triangleq \{r \in D \wedge p \text{ dependsOn } r \text{ in } G\}$ 
10        | if  $(\text{depOn}_s \wedge \neg \text{depOn}_r)$  then return  $p?s\{i, \text{gt2mon}(G_i, p, D)\}_{i \in I}$ 
11        | else if  $(\text{depOn}_r \wedge \neg \text{depOn}_s)$  then return  $p?r\{i, \text{gt2mon}(G_i, p, D)\}_{i \in I}$ 
12        | else if  $(\text{depOn}_s \wedge \text{depOn}_r)$  then
13          | return  $p?s\{i, p?r\{i, \text{gt2mon}(G_i, p, D)\} \cup \{j, \text{error}\}_{j \in I \setminus \{i\}}\}_{i \in I}$ 
14          | else return  $\text{gt2mon}(G_k, p, D)$  (arbitrary  $k \in I$ )
15        case  $\mu X. G'$  do
16          |  $D' \triangleq \{q \in D \mid G\langle p, q \rangle \neq \text{end}\}$ 
17          | if  $D' \neq \emptyset$  then return  $\mu X. \text{gt2mon}(G', p, D')$ 
18          | else return end
19        case  $X$  do return  $X$ 
20        case end do return end

```

Initially, $D = \text{part}(G) \setminus \{p\}$. The monitor for p of an exchange where p is sender (resp. recipient) is an output (resp. input) followed in each branch by a dependency output, using dependence (Definition 10.3.5) to compute the participants with dependencies (lines 5 and 6). If p is not involved, we detect a dependency for p with Definition 10.3.5. In case p depends on sender/recipient, we detect a dependency for p with Definition 10.3.5. In case p depends on sender/recipient but not both, the monitor is a dependency input (lines 10 and 11). If p depends on sender *and* recipient, the monitor contains two consecutive dependency inputs (line 13); when the two received labels differ, the monitor enters an error-state. When there is no dependency for p , the monitor uses an arbitrary branch (line 14). To synthesize a monitor for $\mu X. G'$, the algorithm uses projection to compute D' with participants having exchanges with p in G' (cf. Algorithm 5 line 12). If D' is non-empty, the monitor starts with a recursive definition (line 17) and the algorithm continues with D' ; otherwise, the monitor is end (line 18). The monitors of X and end are homomorphic (lines 19 and 20).

Example 10.3.7. Let us use $G \triangleq p!q\{\ell\langle T \rangle, \mu X. p!r\{\ell'\langle T' \rangle, X, \ell''\langle T'' \rangle, \text{end}\}\}$ to illustrate algorithm 6. We have $G\langle p, q \rangle = p!q\{\ell\langle T \rangle, \text{end}\}$: the projection of the recursive body in G is $(p!r)\{q\{\ell'\langle T' \rangle, X, \ell''\langle T'' \rangle, \text{end}\}\}$, but there are no exchanges between p and q , so the projection of the recursive definition is end. Were the monitor for p synthesized with $q \in D$, Definition 10.3.5 would detect a dependency: the recursive definition's monitor would be $p!r\{\ell'\langle T' \rangle, p!\{q\}\{\ell'\langle T' \rangle, X, \ell''\langle T'' \rangle, p!\{q\}\{\ell''\langle T'' \rangle, \text{end}\}\}$. However, per $G\langle p, q \rangle$, p nor q expects a dependency at this point of the protocol. Hence, the algorithm removes q from D when entering

the recursive body in G . ▽

Example 10.3.8. The monitors of c , s , a in G_a (10.1) are:

$$\begin{aligned}
M_c &\triangleq \text{gt2mon}(G_a, c, \{s, a\}) \\
&= \mu X. c? s \left\{ \left\{ \text{login} \langle \rangle . c! \{a\} (\text{login}) . c! a \{ \text{pwd} \langle \text{str} \rangle . c! \emptyset (\text{pwd}) . X \}, \right\} \right\} \\
&\quad \left\{ \left\{ \text{quit} \langle \rangle . c! \{a\} (\text{quit}) . \text{end} \right\} \right\} \\
M_s &\triangleq \text{gt2mon}(G_a, s, \{c, a\}) \\
&= \mu X. s! c \left\{ \left\{ \text{login} \langle \rangle . s! \{a\} (\text{login}) . s? a \{ \text{succ} \langle \text{bool} \rangle . s! \emptyset (\text{succ}) . X \}, \right\} \right\} \\
&\quad \left\{ \left\{ \text{quit} \langle \rangle . s! \{a\} (\text{quit}) . \text{end} \right\} \right\} \\
M_a &\triangleq \text{gt2mon}(G_a, a, \{c, s\}) \\
&= \mu X. a? s \left\{ \left(\text{login} . a? c \left\{ \left(\text{login} . a? c \{ \text{pwd} \langle \text{str} \rangle . a! \emptyset (\text{pwd}) . \right. \right. \right. \right. \\
&\quad \left. \left. \left. \left. \left. a! s \{ \text{succ} \langle \text{bool} \rangle . a! \emptyset (\text{succ}) . X \}, \right\} \right\} \right\} \right\} , \left. \left. \left. \left. \left. \text{quit} . \text{error} \right\} \right\} \right\} \right\} \right\} \\
&\quad \left\{ \left(\text{quit} . a? c \{ \text{quit} . \text{end} , \text{login} . \text{error} \} \right) \right\}
\end{aligned}$$
▽

10.4. PROPERTIES OF CORRECT MONITORED BLACKBOXES

Given a global type G , we establish the precise conditions under which a network of monitored blackboxes correctly implements G . That is, we define how the monitored blackbox \mathcal{P} of a participant p of G should behave, i.e., when \mathcal{P} *satisfies* the role of p in G (satisfaction, Definition 10.4.2). We then prove two important properties of networks of monitored blackboxes that satisfy a given global type:

Soundness: The network behaves correctly according to the global type (Theorem 10.4.6);

Transparency: The monitors interfere minimally with buffered blackboxes (Theorem 10.4.12).

As we will see in Section 10.4.2, satisfaction is exactly the condition under which a network \mathcal{P} is sound with respect to a global type G .

10.4.1. SATISFACTION

Our aim is to attest that \mathcal{P} satisfies the role of p in G if it meets certain conditions on the behavior of monitored blackboxes with respect to the protocol. As we have seen, the role of p in G is determined by projection. Satisfaction is then a relation \mathcal{R} between (i) monitored blackboxes and (ii) maps from participants $q \in \text{part}(G) \setminus \{p\}$ to relative types between p and q , denoted RTs; \mathcal{R} must contain $(\mathcal{P}, \text{RTs})$ with relative projections of G . Given any $(\mathcal{P}', \text{RTs}')$ in \mathcal{R} , the general idea of satisfaction is (i) that an output to q by \mathcal{P}' means that $\text{RTs}'(q)$ is a corresponding exchange from p to q , and (ii) that if there is a q such that $\text{RTs}'(q)$ is an exchange from q to p then \mathcal{P}' behaves correctly afterwards.

In satisfaction, dependencies in relative types require care. For example, if $\text{RTs}'(q)$ is an exchange from p to q and $\text{RTs}'(r)$ is a dependency on this exchange, then \mathcal{P}' must first send a label to q and then send *the same label* to r . Hence, we need to track the labels chosen by the

monitored blackbox for later reference. To this end, we uniquely identify each exchange in a global type by its *location* $\vec{\ell}$: a sequence of labels denoting the choices leading to the exchange. Projection then uses these locations to annotate each exchange and recursive definition/call in the relative type it produces. Because projection skips independent exchanges (Algorithm 5, line 7), some exchanges and recursive definitions/calls may be associated with multiple locations; hence, they are annotated with *sets* of locations, denoted \mathbb{L} . Satisfaction then tracks choices using a map from sets of locations to labels, denoted Lb1s . Projection with location annotations is formally defined in Appendix H.3, along with a corresponding definition for unfolding recursion.

Before defining satisfaction, we set up some useful notation for type signatures, locations, relative types, and maps.

Notation 10.4.1. Let \mathbf{P} denote the set of all participants, \mathbf{R} the set of all relative types, \mathbf{N} the set of all networks, and \mathbf{L} the set of all labels.

Notation $\mathbb{P}(S)$ denotes the powerset of S . Given a set S , we write \vec{S} to denote the set of all sequences of elements from S . We write $\mathbb{L} \cap \mathbb{L}'$ to stand for $\mathbb{L} \cap \mathbb{L}' \neq \emptyset$. We write $\mathbb{L} \leq \mathbb{L}'$ if every $\vec{\ell}' \in \mathbb{L}'$ is prefixed by some $\vec{\ell} \in \mathbb{L}$.

In relative types, we write \diamond to denote either $!$ or $?$. We write $\text{unfold}(\mathbf{R})$ for the inductive unfolding of \mathbf{R} if \mathbf{R} starts with recursive definitions, and for \mathbf{R} itself otherwise. We write $\mathbf{R} \doteq \mathbf{R}'$ whenever $\text{unfold}(\mathbf{R}) = \text{unfold}(\mathbf{R}')$.

We shall use monospaced fonts to denote maps (such as RTs and Lb1s). We often define maps using the notation of injective relations. Given a map \mathbb{M} , we write $(x, y) \in \mathbb{M}$ to denote that $x \in \text{dom}(\mathbb{M})$ and $\mathbb{M}(x) = y$. We write $\mathbb{M}[x \mapsto y']$ to denote the map obtained by adding to \mathbb{M} an entry for x pointing to y' , or updating an already existing entry for x . Maps are partial.

Definition 10.4.2 (Satisfaction). A relation \mathcal{R} is sat-signed if its signature is $\mathbf{N} \times (\mathbf{P} \rightarrow \mathbf{R}) \times (\mathbb{P}(\vec{\mathbf{L}}) \rightarrow \mathbf{L})$. We define the following properties of relations:

- A sat-signed relation \mathcal{R} holds at p if it satisfies the conditions in Figure 10.7.
- A sat-signed relation \mathcal{R} progresses at p if for every $(\mathcal{P}, \text{RTs}, \text{Lb1s}) \in \mathcal{R}$, we have $\mathcal{P} \xrightarrow{\alpha} \mathcal{P}'$ for some α and \mathcal{P}' , given that one of the following holds:
 - $\text{RTs} \neq \emptyset$ and, for every $(q, \mathbf{R}) \in \text{RTs}$, $\mathbf{R} \doteq \text{end}$;
 - There is $(q, \mathbf{R}) \in \text{RTs}$ such that (i) $\mathbf{R} \doteq p!q^{\mathbf{L}} \{ \{ i \langle T_i \rangle . \mathbf{R}_i \} \}_{i \in I}$ or $\mathbf{R} \doteq (p \diamond r)!q^{\mathbf{L}} \{ \{ i . \mathbf{R}_i \} \}_{i \in I}$, and (ii) for every $(q', \mathbf{R}') \in \text{RTs} \setminus \{(q, \mathbf{R})\}$, either $\mathbf{R}' \doteq \text{end}$ or $\text{unfold}(\mathbf{R}')$ has locations \mathbb{L}' with $\mathbb{L} \leq \mathbb{L}'$.
- A sat-signed relation \mathcal{R} is a satisfaction at p if it holds and progresses at p .

We write $\mathcal{R} \models^{\text{Lb1s}} \mathcal{P} \triangleright \text{RTs} @ p$ if \mathcal{R} is a satisfaction at p with $(\mathcal{P}, \text{RTs}, \text{Lb1s}) \in \mathcal{R}$, and $\mathcal{R} \models \mathcal{P} \triangleright \text{RTs} @ p$ when Lb1s is empty. We write $\models^{\text{Lb1s}} \mathcal{P} \triangleright \text{RTs} @ p$ if there exists \mathcal{R} such that $\mathcal{R} \models^{\text{Lb1s}} \mathcal{P} \triangleright \text{RTs} @ p$.

Satisfaction requires \mathcal{R} to hold at p : each $(\mathcal{P}, \text{RTs}, \text{Lb1s}) \in \mathcal{R}$ enjoys the conditions in Figure 10.7, discussed next, which ensure that \mathcal{P} respects the protocols in RTs .

Given $(\mathcal{P}, \text{RTs}, \text{Lb1s}) \in \mathcal{R}$, all the following conditions hold:

1. **(Tau)** If $\mathcal{P} \xrightarrow{\tau} \mathcal{P}'$, then $(\mathcal{P}', \text{RTs}, \text{Lb1s}) \in \mathcal{R}$.
2. **(End)** If $\mathcal{P} \xrightarrow{\text{end}} \mathcal{P}'$, then, for every $(q, R) \in \text{RTs}$, $R \stackrel{\circ}{=} \text{end}$, $\mathcal{P}' \not\rightarrow$, and $(\mathcal{P}', \emptyset, \emptyset) \in \mathcal{R}$.
3. **(Output)** If $\mathcal{P} \xrightarrow{p!q(j\langle T_j \rangle)} \mathcal{P}'$, then $\text{RTs}(q) \stackrel{\circ}{=} p!q^{\mathbb{L}} \{i\langle T_i \rangle.R_i\}_{i \in I}$ with $j \in I$, and $(\mathcal{P}', \text{RTs}[q \mapsto R_j], \text{Lb1s}[\mathbb{L} \mapsto j]) \in \mathcal{R}$.
4. **(Input)** If there is $(q, R) \in \text{RTs}$ such that $R \stackrel{\circ}{=} q!p^{\mathbb{L}} \{i\langle T_i \rangle.R_i\}_{i \in I}$, then $\mathcal{P} = [\langle p : P : \vec{m} \rangle : M : \vec{n}]$, and, for every $j \in I$, $([\langle p : P : \vec{m} \rangle : M : q!p(j\langle T_j \rangle)], \vec{n}, \text{RTs}[q \mapsto R_j], \text{Lb1s}[\mathbb{L} \mapsto j]) \in \mathcal{R}$.
5. **(Dependency output)** If $\mathcal{P} \xrightarrow{p!q(j)} \mathcal{P}'$, then $\text{RTs}(q) \stackrel{\circ}{=} (p \diamond r)!q^{\mathbb{L}} \{i.R_i\}_{i \in I}$ with $j \in I$, there is $(\mathbb{L}', j) \in \text{Lb1s}$ such that $\mathbb{L}' \cap \mathbb{L}$, and $(\mathcal{P}', \text{RTs}[q \mapsto R_j], \text{Lb1s}) \in \mathcal{R}$.
6. **(Dependency input)** If there is $(q, R) \in \text{RTs}$ s.t. $R \stackrel{\circ}{=} (q \diamond r)!p^{\mathbb{L}} \{i.R_i\}_{i \in I}$, then $\mathcal{P} = [\langle p : P : \vec{m} \rangle : M : \vec{n}]$, and either of the following holds:
 - (Fresh label) there is no $\mathbb{L}' \in \text{dom}(\text{Lb1s})$ such that $\mathbb{L}' \cap \mathbb{L}$, and, for every $j \in I$, $([\langle p : P : \vec{m} \rangle : M : q!p(j)], \vec{n}, \text{RTs}[q \mapsto R_j], \text{Lb1s}[\mathbb{L} \mapsto j]) \in \mathcal{R}$;
 - (Known label) there is $(\mathbb{L}', j) \in \text{Lb1s}$ such that $\mathbb{L}' \cap \mathbb{L}$ and $j \in I$, and $([\langle p : P : \vec{m} \rangle : M : q!p(j)], \vec{n}, \text{RTs}[q \mapsto R_j], \text{Lb1s}) \in \mathcal{R}$.

Figure 10.7 | Satisfaction: conditions under which \mathcal{R} holds at p (Definition 10.4.2).

(Tau) allows τ -transitions without affecting RTs and Lb1s. (End) allows an end-transition, given that all relative types in RTs are end. The resulting state should not transition, enforced by empty RTs and Lb1s.

(Output) allows an output-transition with a message to q , given that $\text{RTs}(q)$ is a corresponding output by p . Then, $\text{RTs}(q)$ updates to the continuation of the appropriate branch and Lb1s records the choice under the locations of $\text{RTs}(q)$.

(Input) triggers when there is $(q, R) \in \text{RTs}$ where R is a message from q to p . Satisfaction targets the standalone behavior of \mathcal{P} , so we simulate a message sent by q . The resulting behavior is analyzed after buffering any such message; $\text{RTs}(q)$ is updated to the continuation of the corresponding branch. Again, Lb1s records the choice at the locations of $\text{RTs}(q)$.

(Dependency Output) allows an output-transition with a dependency message to q , given that $\text{RTs}(q)$ is a corresponding dependency output by p with locations \mathbb{L} . The message's label should be recorded in Lb1s at some \mathbb{L}' that shares a location with \mathbb{L} : here \mathbb{L}' relates to a past exchange between p and some r in G from which the dependency output in $\text{RTs}(q)$ originates. This ensures that the dependency output is preceded by a corresponding exchange, and that the dependency output carries the same label as originally chosen for the preceding exchange. Afterwards, $\text{RTs}(q)$ is updated to the continuation of the appropriate branch.

(Dependency Input) triggers when there is $(q, R) \in \text{RTs}$ such that R is a dependency exchange from q to p , forwarding a label exchanged between q and r . As in the input case, a message from q is simulated by buffering it in \mathcal{P} . In this case, $\text{RTs}(r)$ could be a dependency

exchange from r to p , originating from the same exchange between q and r in G . To ensure that the buffered messages contain the same label, we distinguish “fresh” and “known” cases. In the fresh case, we consider the first of the possibly two dependency exchanges: there is no $\mathbb{L}' \in \text{dom}(\text{Lb1s})$ that shares a location with the locations \mathbb{L} of $\text{RTs}(q)$. Hence, we analyze each possible dependency message, updating $\text{RTs}(q)$ appropriately and recording the choice in Lb1s . The known case then considers the second dependency exchange: there is a label in Lb1s at \mathbb{L}' that shares a location with \mathbb{L} . Hence, we buffer a message with the same label, and update $\text{RTs}(q)$ accordingly.

Satisfaction also requires \mathcal{R} to progress at p , for each $(\mathcal{P}, \text{RTs}, \text{Lb1s}) \in \mathcal{R}$ making sure that \mathcal{P} does not idle whenever we are expecting a transition from \mathcal{P} . There are two cases. (1) If all relative types in RTs are end, we expect an end-transition. (2) If there is a relative type in RTs that is a (dependency) output, we expect an output transition. However, \mathcal{P} may idle if it is waiting for a message: there is $(q, R) \in \text{RTs}$ such that R is a (dependency) input originating from an exchange in G that precedes the exchange related to the output.

Definition 10.4.3 (Satisfaction for Networks). *Let us write $\text{RTsOf}(G, p)$ to denote the set $\{(q, G) \langle p, q \rangle \mid q \in \text{part}(G) \setminus \{p\}\}$. Moreover, we write*

- $\mathcal{R} \models [\langle p : P : \epsilon \rangle : M : \epsilon] \triangleright G @ p$ if and only if $M = \text{gt2mon}(G, p, \text{part}(G) \setminus \{p\})$ and $\mathcal{R} \models [\langle p : P : \epsilon \rangle : M : \epsilon] \triangleright \text{RTsOf}(G, p) @ p$. We write $\models [\langle p : P : \epsilon \rangle : M : \epsilon] \triangleright G @ p$ to denote that there exists \mathcal{R} such that $\mathcal{R} \models [\langle p : P : \epsilon \rangle : M : \epsilon] \triangleright G @ p$.
- $\models \mathcal{P} \triangleright G$ if and only if $\mathcal{P} \equiv \prod_{p \in \text{part}(G)} [\langle p : P_p : \epsilon \rangle : M_p : \epsilon]$ and, for every $p \in \text{part}(G)$, $\models [\langle p : P_p : \epsilon \rangle : M_p : \epsilon] \triangleright G @ p$.

Example 10.4.4. The following satisfaction assertions hold with implementations, relative types, and monitors from Examples 10.2.2, 10.3.3 and 10.3.8, respectively:

$$\begin{aligned} & \models [\langle c : P_c : \epsilon \rangle : M_c : \epsilon] \triangleright \{(s, R_{c,s}), (a, R_{c,a})\} @ c \\ & \models [\langle s : P_s : \epsilon \rangle : M_s : \epsilon] \triangleright \{(c, R_{c,s}), (a, R_{s,a})\} @ s \\ & \models [\langle a : P_a : \epsilon \rangle : M_a : \epsilon] \triangleright \{(c, R_{c,a}), (s, R_{s,a})\} @ a \\ & \models [\langle c : P_c : \epsilon \rangle : M_c : \epsilon] \mid [\langle s : P_s : \epsilon \rangle : M_s : \epsilon] \mid [\langle a : P_a : \epsilon \rangle : M_a : \epsilon] \triangleright G_a \end{aligned}$$

We also have: $\not\models [\langle c : P_c : \epsilon \rangle : \mu X. c? s \{ \text{quit}(\langle \rangle. \text{end} \} : \epsilon] \triangleright G_a @ c$. This is because $R_{c,s}$ specifies that s may send login to c , which this monitor would not accept. ∇

10.4.2. SOUNDNESS

Our *first result* is that satisfaction is sound with respect to global types: when a network of monitored blackboxes satisfies a global type G (Definition 10.4.3), any path of transitions eventually reaches a state that satisfies another global type reachable from G . Hence, the satisfaction of the individual components that a network comprises is enough to ensure that the network behaves as specified by the global type. Reachability between global types is defined as an LTS:

Definition 10.4.5 (LTS for Global Types). *We define an LTS for global types, denoted $G \xrightarrow{\ell} G'$, by the following rules:*

$$\frac{[\text{GLOB-EXCH}] \quad j \in I}{p!q\{i\langle T_i \rangle.G_i\}_{i \in I} \xrightarrow{j} G_j} \quad \frac{[\text{GLOB-REC}] \quad G\{\mu X.G/X\} \xrightarrow{\ell} G'}{\mu X.G \xrightarrow{\ell} G'}$$

Given $\vec{\ell} = \ell_1, \dots, \ell_n$, we write $G \xrightarrow{\vec{\ell}} G'$ to denote $G \xrightarrow{\ell_1} \dots \xrightarrow{\ell_n} G'$.

Theorem 10.4.6 (Soundness). *If $\models \mathcal{P} \triangleright G$ (Definition 10.4.3) and $\mathcal{P} \Rightarrow \mathcal{P}_0$ then there exist $G', \vec{\ell}, \mathcal{P}'$ such that $G \xrightarrow{\vec{\ell}} G', \mathcal{P}_0 \Rightarrow \mathcal{P}'$, and $\models \mathcal{P}' \triangleright G'$.*

We sketch the proof of Theorem 10.4.6 (see Appendix H.4 for details). We prove a stronger statement that starts from a network \mathcal{P} that satisfies an intermediate G_0 reachable from G . This way, we apply induction on the number of transitions between \mathcal{P} and \mathcal{P}_0 , relating the transitions of the network to the transitions of G_0 one step at a time by relying on satisfaction (Definition 10.4.2). Hence, we inductively “consume” the transitions between \mathcal{P} and \mathcal{P}_0 until we have passed through \mathcal{P}_0 and end up in a network satisfying G' reachable from G_0 . We use an auxiliary lemma to account for global types with *independent exchanges*, such as $G' = p!q\{\ell\langle T \rangle.r!s\{\ell'\langle T' \rangle.\text{end}\}\}$. In G' , the exchange involving (p, q) is unrelated to that involving (r, s) , so they occur concurrently in a network implementing G' . Hence, the transitions from \mathcal{P} to \mathcal{P}_0 might not follow the order specified in G_0 . The lemma ensures that concurrent (i.e., unrelated) transitions always end up in the same state, no matter the order. This way we show transitions from \mathcal{P} in the order specified in G_0 , which we restore to the observed order using the lemma when we are done.

Theorem 10.4.6 implies that any \mathcal{P} that satisfies some global type is *error free*, i.e., \mathcal{P} never reduces to a network containing error_D (Theorem H.4.7, Appendix H.4).

10.4.3. TRANSPARENCY

The task of monitors is to observe and verify behavior *with minimal interference*: monitors should be *transparent*. Transparency is usually expressed as a bisimulation between a monitored and unmonitored component [LBW05; FFM12; Boc+17; Ace+18].

Our *second result* is thus a transparency result. For it to be informative, we assume that we observe the (un)monitored blackbox as if it were running in a network of monitored blackboxes that adhere to a given global protocol. This way, we can assume that received messages are correct, such that the monitor does not transition to an error signal. To this end, we enhance the LTS for networks (Definition 10.2.3):

1. As in satisfaction (Definition 10.4.2), we consider (un)monitored blackboxes on their own. Hence, we need a way to simulate messages sent by other participants. Otherwise, a blackbox would get stuck waiting for a message and the bisimulation would hold trivially. We thus add a transition that buffers messages. Similar to satisfaction (Input) and (Dependency Input), these messages cannot be arbitrary; we parameterize the enhanced LTS by an *oracle* that determines which messages are allowed as stipulated by a given global type.

$$\begin{array}{c}
\text{[BUF-MON]} \frac{\alpha = p?q(x), n' = q!p(x) \text{ or } \alpha = p?q(x), n' = q!p(x) \quad \Omega(\alpha) = \Omega'}{[\langle p:P:\tilde{m} \rangle : M : \tilde{n}] \xrightarrow{\alpha}_{\Omega'} [\langle p:P:\tilde{m} \rangle : M : n', \tilde{n}]} \\
\text{[BUF-UNMON]} \frac{\alpha = p?q(x), m' = q!p(x) \text{ or } \alpha = p?q(x), m' = q!p(x) \quad \Omega(\alpha) = \Omega'}{\langle p:P:\tilde{m} \rangle \xrightarrow{\alpha}_{\Omega'} \langle p:P:m', \tilde{m} \rangle} \\
\text{[DEP]} \frac{\mathcal{P} \xrightarrow{p!q(\ell)} \mathcal{P}'}{\mathcal{P} \xrightarrow{\tau}_{\Omega} \mathcal{P}'} \quad \text{[NO-DEP]} \frac{\mathcal{P} \xrightarrow{\alpha} \mathcal{P}' \quad \alpha \notin \{p?q(x), p?q(x), p!q(\ell)\} \quad \Omega(\alpha) = \Omega'}{\mathcal{P} \xrightarrow{\alpha}_{\Omega'} \mathcal{P}'}
\end{array}$$

Figure 10.8 | Enhanced LTS for networks (Definition 10.4.8).

2. Besides observing and verifying transitions, our monitors additionally send dependency messages. This leads to an asymmetry in the behavior of monitored blackboxes and unmonitored blackboxes, as the latter do not send dependency messages. Hence, we rename dependency output actions to τ .

We now define the enhanced LTS for networks, after setting up some notation.

Notation 10.4.7. Let A denote the set of all actions. Given $\Omega : \mathbb{P}(\vec{A})$, we write $\alpha + \Omega$ to denote the set containing every sequence in Ω prepended with α . We write $\Omega(\alpha) = \Omega'$ iff $\alpha + \Omega' \subseteq \Omega$ and there is no Ω'' such that $\alpha + \Omega' \subset \alpha + \Omega'' \subseteq \Omega$.

Definition 10.4.8 (Enhanced LTS for Networks). We define an enhanced LTS for networks, denoted $\mathcal{P} \xrightarrow{\alpha}_{\Omega} \mathcal{P}'$ where $\Omega, \Omega' : \mathbb{P}(\vec{A})$, by the rules in Figure 10.8.

We write $\mathcal{P} \xrightarrow{\alpha}_{\Omega} \mathcal{P}'$ whenever \mathcal{P} transitions to \mathcal{P}' in zero or more τ -transitions, i.e., $\mathcal{P} \xrightarrow{\tau}_{\Omega} \dots \xrightarrow{\tau}_{\Omega} \mathcal{P}'$. We write $\mathcal{P} \xrightarrow{\alpha}_{\Omega} \mathcal{P}'$ when $\mathcal{P} \xrightarrow{\alpha}_{\Omega} \mathcal{P}_1 \xrightarrow{\alpha}_{\Omega'} \mathcal{P}_2 \xrightarrow{\alpha}_{\Omega'} \mathcal{P}'$, omitting the α -transition when $\alpha = \tau$. Given $\vec{\alpha} = \alpha_1, \dots, \alpha_n$, we write $\mathcal{P} \xrightarrow{\vec{\alpha}}_{\Omega_0} \mathcal{P}'$ when $\mathcal{P} \xrightarrow{\alpha_1}_{\Omega_1} \mathcal{P}_1 \dots \mathcal{P}_{n-1} \xrightarrow{\alpha_n}_{\Omega_n} \mathcal{P}'$.

Thus, Transitions [BUF-*] simulate messages from other participants, consulting Ω and transforming it into Ω' . Transition [DEP] renames dependency outputs to τ . Transition [NO-DEP] passes any other transitions, updating Ω to Ω' accordingly.

We now define a weak bisimilarity on networks, governed by oracles.

Definition 10.4.9 (Bisimilarity). A relation $\mathcal{B} : N \times \mathbb{P}(\vec{A}) \times N$ is a (weak) bisimulation if, for every $(\mathcal{P}, \Omega, Q) \in \mathcal{B}$:

1. For every $\mathcal{P}', \alpha, \Omega_1$ such that $\mathcal{P} \xrightarrow{\alpha}_{\Omega_1} \mathcal{P}'$, there exist $\vec{b}, \Omega_2, Q', \mathcal{P}''$ such that $Q \xrightarrow{\vec{b}, \alpha}_{\Omega_2} Q', \mathcal{P}' \xrightarrow{\vec{b}}_{\Omega_2} \mathcal{P}''$, and $(\mathcal{P}'', \Omega_2, Q') \in \mathcal{B}$;
2. The symmetric analog.

We say \mathcal{P} and Q are bisimilar with respect to Ω , denoted $\mathcal{P} \approx_{\Omega} Q$, if there exists a bisimulation \mathcal{B} such that $(\mathcal{P}, \Omega, Q) \in \mathcal{B}$.

To improve readability, below we write ‘ $\cup[x \in S \dots]$ ’ instead of ‘ $\cup_{x \in S \dots}$ ’.

$$\begin{aligned}
& \cup[(q, R) \in \text{RTs}. R \doteq p!q^{\mathbb{L}} \{i \langle T_i \rangle . R_i\}_{i \in I}] \cup [j \in I] \\
& \quad p!q(j \langle T_j \rangle) + \text{LO}(p, \text{RTs}[q \mapsto R_j], \text{Lb1s}[\mathbb{L} \mapsto j]) \quad (\text{Output}) \\
& \cup \cup[(q, R) \in \text{RTs}. R \doteq q!p^{\mathbb{L}} \{i \langle T_i \rangle . R_i\}_{i \in I}] \cup [j \in I] \\
& \quad p?q(j \langle T_j \rangle) + \text{LO}(p, \text{RTs}[q \mapsto R_j], \text{Lb1s}[\mathbb{L} \mapsto j]) \quad (\text{Input}) \\
& \cup \cup[(q, R) \in \text{RTs}. R \doteq (q \diamond r)!p^{\mathbb{L}} \{i . R_i\}_{i \in I} \wedge \exists \mathbb{L}' \in \text{dom}(\text{Lb1s}). \mathbb{L}' \cap \mathbb{L}] \cup [j \in I] \\
& \quad p?q(j) + \text{LO}(p, \text{RTs}[q \mapsto R_j], \text{Lb1s}[\mathbb{L} \mapsto j]) \quad (\text{Fresh Dependency Input}) \\
& \cup \cup[(q, R) \in \text{RTs}. R \doteq (q \diamond r)!p^{\mathbb{L}} \{i . R_i\}_{i \in I} \wedge \exists (\mathbb{L}', j) \in \text{Lb1s}. \mathbb{L}' \cap \mathbb{L} \wedge j \in I] \\
& \quad p?q(j) + \text{LO}(p, \text{RTs}[q \mapsto R_j], \text{Lb1s}) \quad (\text{Known Dependency Input}) \\
& \cup \cup[(q, R) \in \text{RTs}. R \doteq (p \diamond r)!q^{\mathbb{L}} \{i . R_i\}_{i \in I} \wedge \exists (\mathbb{L}', j) \in \text{Lb1s}. \mathbb{L}' \cap \mathbb{L} \wedge j \in I] \\
& \quad \text{LO}(p, \text{RTs}[q \mapsto R_j], \text{Lb1s}) \quad (\text{Dependency Output}) \\
& \cup \text{end} + \text{LO}(p, \emptyset, \emptyset) \quad [\text{only if } \forall (q, R) \in \text{RTs}. R \doteq \text{end}] \quad (\text{End}) \\
& \cup \tau + \text{LO}(p, \text{RTs}, \text{Lb1s}) \quad (\text{Tau})
\end{aligned}$$

Figure 10.9 | Definition of the label oracle (Definition 10.4.10), $\text{LO}(p, \text{RTs}, \text{Lb1s})$.

Clause 1 says that Q can mimic a transition from \mathcal{P} to \mathcal{P}' , possibly after τ - and [BUF]-transitions. We then allow \mathcal{P}' to “catch up” on those additional transitions, after which the results are bisimilar (under a new oracle); Clause 2 is symmetric. Additional [BUF]-transitions are necessary: an unmonitored blackbox can read messages from its buffer directly, whereas a monitor may need to move messages between buffers first. If the monitor first needs to move messages that are not in its buffer yet, we need to add those messages with [BUF]-transitions. The unmonitored blackbox then needs to catch up on those additional messages.

Similar to soundness, satisfaction defines the conditions under which we prove transparency of monitors. Moreover, we need to define the precise oracle under which bisimilarity holds. This oracle is defined similarly to satisfaction: it depends on actions observed, relative types (in RTs), and prior choices (in Lb1s).

Definition 10.4.10 (Label Oracle). *The label oracle of participant p under $\text{RTs} : \mathbf{P} \rightarrow \mathbf{R}$ and $\text{Lb1s} : \mathbb{P}(\bar{\mathbb{L}}) \rightarrow \mathbf{L}$, denoted $\text{LO}(p, \text{RTs}, \text{Lb1s})$ is defined in Figure 10.9.*

10

The label oracle $\text{LO}(p, \text{RTs}, \text{Lb1s})$ thus consists of several subsets, each resembling a condition of satisfaction in Figure 10.7. Dependency outputs are exempt: the enhanced LTS renames them to τ , so the label oracle simply looks past them without requiring a dependency output.

We now state our transparency result, after defining a final requirement: minimality of satisfaction. This allows us to step backward through satisfaction relations, such that we can reason about buffered messages.

Definition 10.4.11 (Minimal Satisfaction). *We write $\vdash \mathcal{P} \triangleright G @ p$ whenever there exists \mathcal{R} such that $\mathcal{R} \models \mathcal{P} \triangleright \text{RTsOf}(G, p) @ p$ (Definition 10.4.3) and \mathcal{R} is minimal, i.e., there is no $\mathcal{R}' \subset \mathcal{R}$*

such that $\mathcal{R}' \models \mathcal{P} \triangleright \text{RTsOf}(G, p) @ p$.

Theorem 10.4.12 (Transparency). *Suppose $\vdash [\langle p : P : \epsilon \rangle : M : \epsilon] \triangleright G @ p$ (Definition 10.4.11). Let $\Omega \triangleq \text{LO}(p, \text{RTsOf}(G, p), \emptyset)$. Then $[\langle p : P : \epsilon \rangle : M : \epsilon] \approx_{\Omega} \langle p : P : \epsilon \rangle$.*

We sketch the proof of Theorem 10.4.12 (see Appendix H.5). The minimal satisfaction of the monitored blackbox contains all states that the monitored blackbox can reach through transitions. We create a relation \mathcal{B} by pairing each such state $[\langle p : P' : \bar{m} \rangle : M' : \bar{n}]$ with $\langle p : P' : \bar{n}, \bar{m} \rangle$ —notice how the buffers are combined. We do so while keeping an informative relation between relative types, monitors, buffers, and oracles. This information gives us the appropriate oracles to include in \mathcal{B} . We then show that \mathcal{B} is a weak bisimulation by proving that the initial monitored and unmonitored blackbox are in \mathcal{B} , and that the conditions of Definition 10.4.9 hold. While Clause 1 is straightforward, Clause 2 requires care: by using the relation between relative types, monitors, and buffers, we infer the shape of the monitor from a transition of the unmonitored blackbox. This allows us to show that the monitored blackbox can mimic the transition, possibly after outputting dependencies and/or receiving additional messages (as discussed above).

We close by comparing our Theorems 10.4.6 and 10.4.12 with Bocchi *et al.*'s safety and transparency results [Boc+17], respectively. First, their safety result [Boc+17, Thm. 5.2] guarantees satisfaction instead of assuming it; their framework suppresses unexpected messages, which prevents the informative guarantee given by our Theorem 10.4.6. Second, Theorem 10.4.12 and their transparency result [Boc+17, Thm. 6.1] differ, among other things, in the presence of an oracle, which is not needed in their setting: they can inspect the inputs of monitored processes, whereas we cannot verify the inputs of a blackbox without actually sending messages to it.

10.5. CONCLUSION

We have proposed a new framework for dynamically analyzing networks of communicating components (blackboxes), governed by global types, with minimal assumptions about observable behavior. We use global types and relative projection [HP22] to synthesize monitors, and define when a monitored component satisfies the governing protocol. We prove that networks of correct monitored components are sound with respect to a global type, and that monitors are transparent.

We have implemented a practical toolkit, called `Re1aMon`, based on the framework presented here. `Re1aMon` allows users to deploy JavaScript programs that monitor web-applications in any programming language and with third-party/closed-source components according to a global type. The toolkit is publicly available [DHP23] and includes implementations of our running example (the global type G_a), as well as an example that incorporates a closed-source weather API. Appendix H.2 includes more details.

As future work, we plan to extend our framework to uniformly analyze systems combining monitored blackboxes and statically checked components (following [HP22]). We also plan to study under which restrictions our approach coincides with Bocchi *et al.*'s [Boc+17].

11

CONCLUSIONS

Since each chapter includes conclusions of their own, I will only briefly conclude my dissertation as a whole. In this thesis, I have addressed from different angles the following encompassing research question:

Encompassing Research Question. *How can we push the boundaries of the logical foundations of session types (binary and multiparty), extending their expressiveness and applicability, while preserving fundamental correctness properties?*

Let me rephrase this, not in terms of pushing boundaries, but in terms of using logical foundations as a starting point. Linear logic identifies precisely an area of session types where processes/programs are very well-behaved: they satisfy important correctness criteria of which deadlock-freedom is most significant. Starting in this area, we can change parts of the definitions of session types and processes/programs, such that we relax some restrictions or change the behavior of processes/programs. The question is then: how and where can we do this without sacrificing correctness?

Chapters 3 and 4 take this approach most directly: the former switches from synchronous to asynchronous communication, and the latter reintroduces non-deterministic choice; in both cases, we prove that correctness properties are preserved. Chapter 5 takes a different angle, by studying the area of session types identified by the logic of bunched implications and the correctness properties that hold therein.

Chapters 6 and 7 connect the worlds of processes in Chapters 3 and 5 to the world of functional programs. In particular, the former shows how guarantees gained from linear logic in the world of processes can be transferred to the world of functional programs, whereas the latter shows that the worlds of processes and of functional programs—both derived separately from the logic of bunched implications—are tightly connected.

Chapters 8 and 9 show how useful the insights gained in Chapter 3 can be, as they connect binary session types—connected to linear logic directly—to multiparty session types—further from logic, but more useful in practice. Chapter 10 then shows that this connection not only

applies to the static verification of multiparty session types implemented as processes, but also to dynamic verification.

All in all, this dissertation demonstrates that the established logical foundations in linear logic are important and useful, but that they by no means should be viewed as absolute “laws of message-passing”. Session type systems derived from logic form a solid starting point in developing systems that address more specific features (such as asynchrony and non-determinism). As such, logic contributes greatly to providing correctness properties. Moreover, it provides a unified language design on which to build, perhaps paving the way for an idealistic framework in which many approaches can be united to address a multitude of important message-passing aspects at once.

BIBLIOGRAPHY

- [Aal09] W. M. P. van der Aalst. “Orchestration”. In: *Encyclopedia of Database Systems*. Ed. by Ling Liu and M. Tamer Özsu. Boston, MA: Springer US, 2009, pp. 2004–2005. ISBN: 978-0-387-39940-9. DOI: 10.1007/978-0-387-39940-9_1197. URL: https://doi.org/10.1007/978-0-387-39940-9_1197.
- [Abr93] Samson Abramsky. “Computational Interpretations of Linear Logic”. In: *Theoretical Computer Science* 111.1 (Apr. 12, 1993), pp. 3–57. ISSN: 0304-3975. DOI: 10.1016/0304-3975(93)90181-R. URL: <http://www.sciencedirect.com/science/article/pii/030439759390181R> (visited on 10/23/2019).
- [Ace+18] Luca Aceto et al. “On Runtime Enforcement via Suppressions”. In: *29th International Conference on Concurrency Theory (CONCUR 2018)*. Ed. by Sven Schewe and Lijun Zhang. Vol. 118. Leibniz International Proceedings in Informatics (LIPIcs). Dagstuhl, Germany: Schloss Dagstuhl–Leibniz-Zentrum fuer Informatik, 2018, 34:1–34:17. ISBN: 978-3-95977-087-3. DOI: 10.4230/LIPIcs.CONCUR.2018.34. URL: <http://drops.dagstuhl.de/opus/volltexte/2018/9572> (visited on 02/07/2023).
- [AEY05] Rajeev Alur, Kousha Etessami, and Mihalis Yannakakis. “Realizability and Verification of MSC Graphs”. In: *Theoretical Computer Science. Automata, Languages and Programming* 331.1 (Feb. 15, 2005), pp. 97–114. ISSN: 0304-3975. DOI: 10.1016/j.tcs.2004.09.034. URL: <http://www.sciencedirect.com/science/article/pii/S030439750400670X> (visited on 09/07/2020).
- [AHJ15] Rouwaida Abdallah, Loïc Hélouët, and Claude Jard. “Distributed Implementation of Message Sequence Charts”. In: *Software & Systems Modeling* 14.2 (May 1, 2015), pp. 1029–1048. ISSN: 1619-1374. DOI: 10.1007/s10270-013-0357-1. URL: <https://doi.org/10.1007/s10270-013-0357-1> (visited on 09/07/2020).
- [ALM16] Robert Atkey, Sam Lindley, and J. Garrett Morris. “Conflation Confers Concurrency”. In: *A List of Successes That Can Change the World: Essays Dedicated to Philip Wadler on the Occasion of His 60th Birthday*. Ed. by Sam Lindley et al. Lecture Notes in Computer Science. Cham: Springer International Publishing, 2016, pp. 32–55. ISBN: 978-3-319-30936-1. DOI: 10.1007/978-3-319-30936-1_2. URL: https://doi.org/10.1007/978-3-319-30936-1_2 (visited on 12/11/2019).
- [Anc+16] Davide Ancona et al. “Behavioral Types in Programming Languages”. In: *Foundations and Trends® in Programming Languages* 3.2-3 (July 20, 2016), pp. 95–230. ISSN: 2325-1107, 2325-1131. DOI: 10.1561/25000000031. URL: <https://www.nowpublishers.com/article/Details/PGL-031> (visited on 12/23/2020).

- [AP16] Gabrielle Anderson and David Pym. “A Calculus and Logic of Bunched Resources and Processes”. In: *Theoretical Computer Science* 614 (Feb. 8, 2016), pp. 63–96. ISSN: 0304-3975. DOI: 10.1016/j.tcs.2015.11.035. URL: <https://www.sciencedirect.com/science/article/pii/S0304397515011214> (visited on 08/17/2023).
- [AQ12] Ryuta Arisaka and Shengchao Qin. “LBI Cut Elimination Proof with BI-MultiCut”. In: *2012 Sixth International Symposium on Theoretical Aspects of Software Engineering*. 2012 Sixth International Symposium on Theoretical Aspects of Software Engineering. July 2012, pp. 235–238. DOI: 10.1109/TASE.2012.30.
- [Atk04] Robert Atkey. “A λ -Calculus for Resource Separation”. In: *Automata, Languages and Programming*. Ed. by Josep Díaz et al. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 2004, pp. 158–170. ISBN: 978-3-540-27836-8. DOI: 10.1007/978-3-540-27836-8_16.
- [Atk06] Robert Atkey. “Substructural Simple Type Theories for Separation and In-Place Update”. PhD thesis. University of Edinburgh, 2006.
- [Bar+18] Ezio Bartocci et al. “Introduction to Runtime Verification”. In: *Lectures on Runtime Verification: Introductory and Advanced Topics*. Ed. by Ezio Bartocci and Yliès Falcone. Lecture Notes in Computer Science. Cham: Springer International Publishing, 2018, pp. 1–33. ISBN: 978-3-319-75632-5. DOI: 10.1007/978-3-319-75632-5_1. URL: https://doi.org/10.1007/978-3-319-75632-5_1 (visited on 05/16/2023).
- [Bar+21] Christian Bartolo Burlò et al. “Towards Probabilistic Session-Type Monitoring”. In: *Coordination Models and Languages*. Ed. by Ferruccio Damiani and Ornella Dardha. Lecture Notes in Computer Science. Cham: Springer International Publishing, 2021, pp. 106–120. ISBN: 978-3-030-78142-2. DOI: 10.1007/978-3-030-78142-2_7.
- [Bar+22] Christian Bartolo Burlò et al. “PSTMonitor: Monitor Synthesis from Probabilistic Session typesImage 1”. In: *Science of Computer Programming* 222 (Oct. 1, 2022), p. 102847. ISSN: 0167-6423. DOI: 10.1016/j.scico.2022.102847. URL: <https://www.sciencedirect.com/science/article/pii/S0167642322000806> (visited on 02/24/2023).
- [BC10] James Brotherston and Cristiano Calcagno. “Classical BI: Its Semantics and Proof Theory”. In: *Logical Methods in Computer Science* Volume 6, Issue 3 (July 20, 2010). ISSN: 1860-5974. DOI: 10.2168/LMCS-6(3:3)2010. URL: <https://lmcs.episciences.org/1014> (visited on 08/16/2023).
- [BD19] Franco Barbanera and Mariangiola Dezani-Ciancaglini. “Open Multiparty Sessions”. Version 1. In: *Electronic Proceedings in Theoretical Computer Science* 304 (Sept. 12, 2019), pp. 77–96. ISSN: 2075-2180. DOI: 10.4204/EPTCS.304.6. arXiv: 1909.05972. URL: <http://arxiv.org/abs/1909.05972> (visited on 06/15/2020).

- [Bej+19] Andi Bejleri et al. “Comprehensive Multiparty Session Types”. In: *The Art, Science, and Engineering of Programming* 3.3 (Feb. 1, 2019), 6:1–6:59. ISSN: 2473-7321. DOI: 10.22152/programming-journal.org/2019/3/6. URL: <https://programming-journal.org/2019/3/6/> (visited on 10/21/2020).
- [Bet+08] Lorenzo Bettini et al. “Global Progress in Dynamically Interleaved Multiparty Sessions”. In: *CONCUR 2008 - Concurrency Theory*. Ed. by Franck van Breugel and Marsha Chechik. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 2008, pp. 418–433. ISBN: 978-3-540-85361-9. DOI: 10.1007/978-3-540-85361-9_33.
- [BF08] Tevfik Bultan and Xiang Fu. “Specification of Realizable Service Conversations Using Collaboration Diagrams”. In: *Service Oriented Computing and Applications* 2.1 (Apr. 1, 2008), pp. 27–39. ISSN: 1863-2394. DOI: 10.1007/s11761-008-0022-7. URL: <https://doi.org/10.1007/s11761-008-0022-7> (visited on 01/11/2021).
- [BFS21] Christian Bartolo Burlò, Adrian Francalanza, and Alceste Scalas. “On the Monitorability of Session Types, in Theory and Practice”. In: *35th European Conference on Object-Oriented Programming (ECOOP 2021)*. Ed. by Anders Møller and Manu Sridharan. Vol. 194. Leibniz International Proceedings in Informatics (LIPIcs). Dagstuhl, Germany: Schloss Dagstuhl – Leibniz-Zentrum für Informatik, 2021, 20:1–20:30. ISBN: 978-3-95977-190-0. DOI: 10.4230/LIPIcs.ECOOP.2021.20. URL: <https://drops.dagstuhl.de/opus/volltexte/2021/14063> (visited on 02/06/2023).
- [BH03] Martin Berger and Kohei Honda. “The Two-Phase Commitment Protocol in an Extended π -Calculus”. In: *Electronic Notes in Theoretical Computer Science*. EXPRESS’00, 7th International Workshop on Expressiveness in Concurrency (Satellite Workshop from CONCUR 2000) 39.1 (Feb. 1, 2003), pp. 21–46. ISSN: 1571-0661. DOI: 10.1016/S1571-0661(05)82502-2. URL: <https://www.sciencedirect.com/science/article/pii/S1571066105825022> (visited on 04/11/2022).
- [BKP92] E.S. de Boer, J.W. Klop, and C. Palamidessi. “Asynchronous Communication in Process Algebra”. In: *[1992] Proceedings of the Seventh Annual IEEE Symposium on Logic in Computer Science*. [1992] Proceedings of the Seventh Annual IEEE Symposium on Logic in Computer Science. June 1992, pp. 137–147. DOI: 10.1109/LICS.1992.185528.
- [BKT85] J. A. Bergstra, J. W. Klop, and J. V. Tucker. “Process Algebra with Asynchronous Communication Mechanisms”. In: *Seminar on Concurrency*. Ed. by Stephen D. Brookes, Andrew William Roscoe, and Glynn Winskel. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 1985, pp. 76–95. ISBN: 978-3-540-39593-5. DOI: 10.1007/3-540-15670-4_4.
- [BO06] Josh Berdine and Peter W. O’Hearn. “Strong Update, Disposal, and Encapsulation in Bunched Typing”. In: *Electronic Notes in Theoretical Computer Science*. Proceedings of the 22nd Annual Conference on Mathematical Foundations of Programming Semantics (MFPS XXII) 158 (May 5, 2006), pp. 81–98. ISSN: 1571-0661.

- DOI: 10.1016/j.entcs.2006.04.006. URL: <https://www.sciencedirect.com/science/article/pii/S1571066106001605> (visited on 08/17/2023).
- [BO16] Stephen Brookes and Peter W. O’Hearn. “Concurrent Separation Logic”. In: *ACM SIGLOG News* 3.3 (Aug. 8, 2016), pp. 47–65. DOI: 10.1145/2984450.2984457. URL: <https://doi.org/10.1145/2984450.2984457> (visited on 12/11/2020).
- [Boc+13] Laura Bocchi et al. “Monitoring Networks through Multiparty Session Types”. In: *Formal Techniques for Distributed Systems*. Ed. by Dirk Beyer and Michele Boreale. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 2013, pp. 50–65. ISBN: 978-3-642-38592-6. DOI: 10.1007/978-3-642-38592-6_5.
- [Boc+17] Laura Bocchi et al. “Monitoring Networks through Multiparty Session Types”. In: *Theoretical Computer Science* 669 (Mar. 22, 2017), pp. 33–58. ISSN: 0304-3975. DOI: 10.1016/j.tcs.2017.02.009. URL: <http://www.sciencedirect.com/science/article/pii/S0304397517301263> (visited on 10/21/2020).
- [Bor98] Michele Boreale. “On the Expressiveness of Internal Mobility in Name-Passing Calculi”. In: *Theoretical Computer Science. Concurrency Theory* 195.2 (Mar. 30, 1998), pp. 205–226. ISSN: 0304-3975. DOI: 10.1016/S0304-3975(97)00220-X. URL: <http://www.sciencedirect.com/science/article/pii/S030439759700220X> (visited on 07/08/2020).
- [Bou92] Gérard Boudol. *Asynchrony and the Pi-calculus*. Research Report RR-1702. INRIA, 1992, p. 15. URL: <https://hal.inria.fr/inria-00076939> (visited on 06/26/2020).
- [BP17] Stephanie Balzer and Frank Pfenning. “Manifest Sharing with Session Types”. In: *Proc. ACM Program. Lang.* 1 (ICFP Aug. 2017), 37:1–37:29. ISSN: 2475-1421. DOI: 10.1145/3110281. URL: <http://doi.acm.org/10.1145/3110281> (visited on 10/02/2019).
- [BP96] Andrew Barber and Gordon D. Plotkin. *Dual Intuitionistic Linear Logic*. ECS-LFCS-96-347. Edinburgh: University of Edinburgh, School of Informatics, Laboratory for Foundations of Computer Science, Sept. 23, 1996, p. 54. URL: <http://www.lfcs.inf.ed.ac.uk/reports/96/ECS-LFCS-96-347/> (visited on 10/17/2019).
- [BPV08] Romain Beauxis, Catuscia Palamidessi, and Frank D. Valencia. “On the Asynchronous Nature of the Asynchronous π -Calculus”. In: *Concurrency, Graphs and Models: Essays Dedicated to Ugo Montanari on the Occasion of His 65th Birthday*. Ed. by Pierpaolo Degano, Rocco De Nicola, and José Meseguer. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 2008, pp. 473–492. ISBN: 978-3-540-68679-8. DOI: 10.1007/978-3-540-68679-8_29. URL: https://doi.org/10.1007/978-3-540-68679-8_29 (visited on 09/19/2022).
- [Bri89] Ed Brinksma. *LOTOS — A Formal Description Technique Based on the Temporal Ordering of Observational Behaviour*. ISO 8807:1989. International Organization for Standardization, Feb. 1989, p. 142. URL: <https://www.iso.org/cms/render/live/en/sites/isoorg/contents/data/standard/01/62/16258.html> (visited on 01/11/2021).

- [Bro12] James Brotherston. “Bunched Logics Displayed”. In: *Studia Logica* 100.6 (Dec. 1, 2012), pp. 1223–1254. ISSN: 1572-8730. DOI: 10.1007/s11225-012-9449-0. URL: <https://doi.org/10.1007/s11225-012-9449-0> (visited on 08/16/2023).
- [BTP19] Stephanie Balzer, Bernardo Toninho, and Frank Pfenning. “Manifest Deadlock-Freedom for Shared Session Types”. In: *Programming Languages and Systems*. Ed. by Luís Caires. Lecture Notes in Computer Science. Cham: Springer International Publishing, 2019, pp. 611–639. ISBN: 978-3-030-17184-1. DOI: 10.1007/978-3-030-17184-1_22.
- [BV15] James Brotherston and Jules Villard. “Sub-Classical Boolean Bunched Logics and the Meaning of Par”. In: *24th EACSL Annual Conference on Computer Science Logic (CSL 2015)*. Ed. by Stephan Kreutzer. Vol. 41. Leibniz International Proceedings in Informatics (LIPIcs). Dagstuhl, Germany: Schloss Dagstuhl–Leibniz-Zentrum fuer Informatik, 2015, pp. 325–342. ISBN: 978-3-939897-90-3. DOI: 10.4230/LIPIcs.CSL.2015.325. URL: <http://drops.dagstuhl.de/opus/volltexte/2015/5423> (visited on 08/16/2023).
- [Cai14] Luís Caires. *Types and Logic, Concurrency and Non-Determinism*. MSR-TR-2014-104. Microsoft Research: In Essays for the Luca Cardelli Fest, Sept. 2014, pp. 69–84. URL: <http://research.microsoft.com/apps/pubs/default.aspx?id=226237>.
- [Car+15] Marco Carbone et al. “Multiparty Session Types as Coherence Proofs”. In: *26th International Conference on Concurrency Theory (CONCUR 2015)*. Ed. by Luca Aceto and David de Frutos Escrig. Vol. 42. Leibniz International Proceedings in Informatics (LIPIcs). Dagstuhl, Germany: Schloss Dagstuhl–Leibniz-Zentrum fuer Informatik, 2015, pp. 412–426. ISBN: 978-3-939897-91-0. DOI: 10.4230/LIPIcs.CONCUR.2015.412. URL: <http://drops.dagstuhl.de/opus/volltexte/2015/5366> (visited on 01/24/2020).
- [Car+16] Marco Carbone et al. “Coherence Generalises Duality: A Logical Explanation of Multiparty Session Types”. In: *27th International Conference on Concurrency Theory (CONCUR 2016)*. Ed. by Josée Desharnais and Radha Jagadeesan. Vol. 59. Leibniz International Proceedings in Informatics (LIPIcs). Dagstuhl, Germany: Schloss Dagstuhl–Leibniz-Zentrum fuer Informatik, 2016, 33:1–33:15. ISBN: 978-3-95977-017-0. DOI: 10.4230/LIPIcs.CONCUR.2016.33. URL: <http://drops.dagstuhl.de/opus/volltexte/2016/6181> (visited on 01/21/2020).
- [Car+17] Marco Carbone et al. “Multiparty Session Types as Coherence Proofs”. In: *Acta Informatica* 54.3 (May 1, 2017), pp. 243–269. ISSN: 1432-0525. DOI: 10.1007/s00236-016-0285-y. URL: <https://doi.org/10.1007/s00236-016-0285-y> (visited on 08/03/2023).
- [Cas+20] Ilaria Castellani et al. “Global Types with Internal Delegation”. In: *Theoretical Computer Science*. In Memory of Maurice Nivat, a Founding Father of Theoretical Computer Science - Part II 807 (Feb. 6, 2020), pp. 128–153. ISSN: 0304-3975. DOI: 10.1016/j.tcs.2019.09.027. URL: <http://www.sciencedirect.com/science/article/pii/S030439751930578X> (visited on 02/13/2020).

- [CDP12] Giuseppe Castagna, Mariangiola Dezani-Ciancaglini, and Luca Padovani. “On Global Types and Multi-Party Session”. In: *Logical Methods in Computer Science* 8.1 (Mar. 15, 2012). DOI: 10.2168/LMCS-8(1:24)2012. URL: <https://lmcs.episciences.org/773/pdf> (visited on 04/17/2020).
- [Che+12] Tzu-Chun Chen et al. “Asynchronous Distributed Monitoring for Multiparty Session Enforcement”. In: *Trustworthy Global Computing*. Ed. by Roberto Bruni and Vladimiro Sassone. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 2012, pp. 25–45. ISBN: 978-3-642-30065-3. DOI: 10.1007/978-3-642-30065-3_2.
- [CMV22] Filipe Casal, Andreia Mordido, and Vasco T. Vasconcelos. “Mixed Sessions”. In: *Theoretical Computer Science* 897 (Jan. 2, 2022), pp. 23–48. ISSN: 0304-3975. DOI: 10.1016/j.tcs.2021.08.005. URL: <https://www.sciencedirect.com/science/article/pii/S0304397521004631> (visited on 10/04/2022).
- [Cop+13] Mario Coppo et al. “Inference of Global Progress Properties for Dynamically Interleaved Multiparty Sessions”. In: *Coordination Models and Languages*. Ed. by Rocco De Nicola and Christine Julien. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 2013, pp. 45–59. ISBN: 978-3-642-38493-6. DOI: 10.1007/978-3-642-38493-6_4.
- [Cop+16] Mario Coppo et al. “Global Progress for Dynamically Interleaved Multiparty Sessions”. In: *Mathematical Structures in Computer Science* 26.2 (Feb. 2016), pp. 238–302. ISSN: 0960-1295, 1469-8072. DOI: 10.1017/S0960129514000188. URL: <https://www.cambridge.org/core/journals/mathematical-structures-in-computer-science/article/global-progress-for-dynamically-interleaved-multiparty-sessions/E412D2FA6BBDD53F0DBCD527E6B3813F> (visited on 07/08/2020).
- [CP10] Luís Caires and Frank Pfenning. “Session Types as Intuitionistic Linear Propositions”. In: *CONCUR 2010 - Concurrency Theory*. Ed. by Paul Gastin and François Laroussinie. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 2010, pp. 222–236. ISBN: 978-3-642-15375-4. DOI: 10.1007/978-3-642-15375-4_16.
- [CP16] Luís Caires and Jorge A. Pérez. “Multiparty Session Types Within a Canonical Binary Theory, and Beyond”. In: *Formal Techniques for Distributed Objects, Components, and Systems*. Ed. by Elvira Albert and Ivan Lanese. Lecture Notes in Computer Science. Springer International Publishing, 2016, pp. 74–95. ISBN: 978-3-319-39570-8. DOI: 10.1007/978-3-319-39570-8_6.
- [CP17] Luís Caires and Jorge A. Pérez. “Linearity, Control Effects, and Behavioral Types”. In: *Programming Languages and Systems*. Ed. by Hongseok Yang. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 2017, pp. 229–259. ISBN: 978-3-662-54434-1. DOI: 10.1007/978-3-662-54434-1_9.

- [CPR08] Matthew Collinson, David Pym, and Edmund Robinson. “Bunched Polymorphism”. In: *Mathematical Structures in Computer Science* 18.6 (Dec. 2008), pp. 1091–1132. ISSN: 1469-8072, 0960-1295. DOI: 10 . 1017 / S0960129508007159. URL: <https://www.cambridge.org/core/journals/mathematical-structures-in-computer-science/article/abs/bunched-polymorphism/6E0F28DDB0340B9BB1F15A010CCE70FE> (visited on 08/15/2023).
- [CPT16] Luís Caires, Frank Pfenning, and Bernardo Toninho. “Linear Logic Propositions as Session Types”. In: *Mathematical Structures in Computer Science* 26.3 (Mar. 2016), pp. 367–423. ISSN: 0960-1295, 1469-8072. DOI: 10 . 1017 / S0960129514000218. URL: <https://www.cambridge.org/core/journals/mathematical-structures-in-computer-science/article/linear-logic-propositions-as-session-types/810338DAF92DDBDA77C95DEB12FD1057> (visited on 10/15/2019).
- [CR03] Feng Chen and Grigore Roşu. “Towards Monitoring-Oriented Programming: A Paradigm Combining Specification and Implementation”. In: *Electronic Notes in Theoretical Computer Science. RV ’2003, Run-time Verification (Satellite Workshop of CAV ’03)* 89.2 (Oct. 1, 2003), pp. 108–127. ISSN: 1571-0661. DOI: 10 . 1016 / S1571 - 0661 (04) 81045 - 4. URL: <https://www.sciencedirect.com/science/article/pii/S1571066104810454> (visited on 10/13/2023).
- [Cur34] H. B. Curry. “Functionality in Combinatory Logic”. In: *Proceedings of the National Academy of Sciences* 20.11 (Nov. 1, 1934), pp. 584–590. ISSN: 0027-8424, 1091-6490. DOI: 10 . 1073 / pnas . 20 . 11 . 584. pmid: 16577644. URL: <https://www.pnas.org/content/20/11/584> (visited on 07/13/2020).
- [CV10] Luís Caires and Hugo Torres Vieira. “Conversation Types”. In: *Theoretical Computer Science. European Symposium on Programming 2009* 411.51 (Dec. 4, 2010), pp. 4399–4440. ISSN: 0304-3975. DOI: 10 . 1016 / j . tcs . 2010 . 09 . 010. URL: <http://www.sciencedirect.com/science/article/pii/S0304397510004895> (visited on 03/31/2020).
- [CYH09] Marco Carbone, Nobuko Yoshida, and Kohei Honda. “Asynchronous Session Types: Exceptions and Multiparty Interactions”. In: *Formal Methods for Web Services: 9th International School on Formal Methods for the Design of Computer, Communication, and Software Systems, SFM 2009, Bertinoro, Italy, June 1-6, 2009, Advanced Lectures*. Ed. by Marco Bernardo, Luca Padovani, and Gianluigi Zavattaro. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 2009, pp. 187–212. ISBN: 978-3-642-01918-0. DOI: 10 . 1007 / 978 - 3 - 642 - 01918 - 0 _ 5. URL: https://doi.org/10.1007/978-3-642-01918-0_5 (visited on 06/12/2020).
- [DeY+12] Henry DeYoung et al. “Cut Reduction in Linear Logic as Asynchronous Session-Typed Communication”. In: *Computer Science Logic (CSL’12) - 26th International Workshop/21st Annual Conference of the EACSL*. Ed. by Patrick Cégielski and Arnaud Durand. Vol. 16. Leibniz International Proceedings in Informatics (LIPIcs).

- Dagstuhl, Germany: Schloss Dagstuhl–Leibniz-Zentrum fuer Informatik, 2012, pp. 228–242. ISBN: 978-3-939897-42-2. DOI: 10.4230/LIPIcs.CSL.2012.228. URL: <http://drops.dagstuhl.de/opus/volltexte/2012/3675> (visited on 08/27/2019).
- [Dez96] Mariangiola Dezani-Ciancaglini. “Logical Semantics for Concurrent Lambda-Calculus”. PhD thesis. Nijmegen University, 1996. URL: <http://www.di.unito.it/~dezani/papers/tesi.ps>.
- [DG18] Ornella Dardha and Simon J. Gay. “A New Linear Logic for Deadlock-Free Session-Typed Processes”. In: *Foundations of Software Science and Computation Structures*. Ed. by Christel Baier and Ugo Dal Lago. Lecture Notes in Computer Science. Springer International Publishing, 2018, pp. 91–109. ISBN: 978-3-319-89366-2. DOI: 10.1007/978-3-319-89366-2_5.
- [DGS12] Ornella Dardha, Elena Giachino, and Davide Sangiorgi. “Session Types Revisited”. In: *Principles and Practice of Declarative Programming, PPDP’12, Leuven, Belgium - September 19 - 21, 2012*. Ed. by Danny De Schreye, Gerda Janssens, and Andy King. ACM, 2012, pp. 139–150. ISBN: 978-1-4503-1522-7. DOI: 10.1145/2370776.2370794.
- [DHP23] Rares A. Dobre, Bas van den Heuvel, and Jorge A. Pérez. *RelaMon: A JS Toolkit for the Runtime Verification of Web Applications Written in Any Language*. Last visited: Jun 2023. June 1, 2023. URL: <script%3E%5Curl%7Bhttps://github.com/basvdheuvel/RelaMon%7D%3C/script> (visited on 06/02/2023).
- [Doc19] Simon Robert Docherty. “Bunched Logics: A Uniform Approach”. Doctoral. UCL (University College London), May 28, 2019. 245 pp. URL: <https://discovery.ucl.ac.uk/id/eprint/10073115/> (visited on 08/16/2023).
- [DP15] Ornella Dardha and Jorge A. Pérez. “Comparing Deadlock-Free Session Typed Processes”. In: *Electronic Proceedings in Theoretical Computer Science* 190 (Aug. 26, 2015), pp. 1–15. ISSN: 2075-2180. DOI: 10.4204/EPTCS.190.1. arXiv: 1508.06707. URL: <http://arxiv.org/abs/1508.06707> (visited on 06/22/2020).
- [DP22] Ornella Dardha and Jorge A. Pérez. “Comparing Type Systems for Deadlock Freedom”. In: *Journal of Logical and Algebraic Methods in Programming* 124 (Jan. 1, 2022), p. 100717. ISSN: 2352-2208. DOI: 10.1016/j.jlamp.2021.100717. URL: <https://www.sciencedirect.com/science/article/pii/S2352220821000808> (visited on 06/27/2022).
- [DP95] U. Deliguoro and A. Piperno. “Nondeterministic Extensions of Untyped λ -Calculus”. In: *Information and Computation* 122.2 (Nov. 1, 1995), pp. 149–177. ISSN: 0890-5401. DOI: 10.1006/inco.1995.1145. URL: <https://www.sciencedirect.com/science/article/pii/S0890540185711455> (visited on 09/11/2023).
- [ER03] Thomas Ehrhard and Laurent Regnier. “The Differential Lambda-Calculus”. In: *Theoretical Computer Science* 309.1 (Dec. 2, 2003), pp. 1–41. ISSN: 0304-3975. DOI: 10.1016/S0304-3975(03)00392-X. URL: <https://www.sciencedirect.com/science/article/pii/S030439750300392X> (visited on 09/11/2023).

- [FFM12] Yliès Falcone, Jean-Claude Fernandez, and Laurent Mounier. “What Can You Verify and Enforce at Runtime?” In: *International Journal on Software Tools for Technology Transfer* 14.3 (June 1, 2012), pp. 349–382. ISSN: 1433-2787. DOI: 10.1007/s10009-011-0196-8. URL: <https://doi.org/10.1007/s10009-011-0196-8> (visited on 02/07/2023).
- [Fow+19] Simon Fowler et al. “Exceptional Asynchronous Session Types: Session Types without Tiers”. In: *Proceedings of the ACM on Programming Languages* (Jan. 2, 2019). DOI: 10.1145/3290341. URL: <https://dl.acm.org/doi/abs/10.1145/3290341> (visited on 06/17/2022).
- [Fow19] Simon Fowler. “Typed Concurrent Functional Programming with Channels, Actors, and Sessions”. University of Edinburgh, 2019. 290 pp. URL: <http://www.simonjf.com/writing/phd-thesis.pdf>.
- [FPS18] Adrian Francalanza, Jorge A. Pérez, and César Sánchez. “Runtime Verification for Decentralised and Distributed Systems”. In: *Lectures on Runtime Verification: Introductory and Advanced Topics*. Ed. by Ezio Bartocci and Yliès Falcone. Lecture Notes in Computer Science. Cham: Springer International Publishing, 2018, pp. 176–210. ISBN: 978-3-319-75632-5. DOI: 10.1007/978-3-319-75632-5_6. URL: https://doi.org/10.1007/978-3-319-75632-5_6 (visited on 06/22/2021).
- [Fru+22] Dan Frumin et al. “A Bunch of Sessions: A Propositions-as-Sessions Interpretation of Bunched Implications in Channel-Based Concurrency”. In: *Proceedings of the ACM on Programming Languages* 6 (OOPSLA2 Oct. 31, 2022), 155:841–155:869. DOI: 10.1145/3563318. URL: <https://doi.org/10.1145/3563318> (visited on 11/01/2022).
- [Gar+07] Hubert Garavel et al. “CADP 2006: A Toolbox for the Construction and Analysis of Distributed Processes”. In: *Computer Aided Verification*. Ed. by Werner Damm and Holger Hermanns. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 2007, pp. 158–163. ISBN: 978-3-540-73368-3. DOI: 10.1007/978-3-540-73368-3_18.
- [Gir87] Jean-Yves Girard. “Linear Logic”. In: *Theoretical Computer Science* 50.1 (Jan. 1, 1987), pp. 1–101. ISSN: 0304-3975. DOI: 10.1016/0304-3975(87)90045-4. URL: <http://www.sciencedirect.com/science/article/pii/0304397587900454> (visited on 10/17/2019).
- [Gir89] Jean-Yves Girard. *Proofs and Types*. Cambridge Tracts in Theoretical Computer Science 7. Cambridge [England] ; New York: Cambridge University Press, 1989. 176 pp. ISBN: 978-0-521-37181-0.
- [GJP18] Hannah Gommerstadt, Limin Jia, and Frank Pfenning. “Session-Typed Concurrent Contracts”. In: *Programming Languages and Systems*. Ed. by Amal Ahmed. Lecture Notes in Computer Science. Cham: Springer International Publishing, 2018, pp. 771–798. ISBN: 978-3-319-89884-1. DOI: 10.1007/978-3-319-89884-1_27.

- [GJP22] Hannah Gommerstadt, Limin Jia, and Frank Pfenning. “Session-Typed Concurrent Contracts”. In: *Journal of Logical and Algebraic Methods in Programming* 124 (Jan. 1, 2022), p. 100731. ISSN: 2352-2208. DOI: 10.1016/j.jlamp.2021.100731. URL: <https://www.sciencedirect.com/science/article/pii/S2352220821000948> (visited on 02/24/2023).
- [GM14] Jan Friso Groote and Mohammad Reza Mousavi. *Modeling and Analysis of Communicating Systems*. Cambridge, MA, USA: MIT Press, Aug. 29, 2014. 392 pp. ISBN: 978-0-262-02771-7.
- [Gor10] Daniele Gorla. “Towards a Unified Approach to Encodability and Separation Results for Process Calculi”. In: *Information and Computation* 208.9 (Sept. 1, 2010), pp. 1031–1053. ISSN: 0890-5401. DOI: 10.1016/j.ic.2010.05.002. URL: <https://www.sciencedirect.com/science/article/pii/S0890540110001008> (visited on 01/27/2022).
- [GTV20] Simon J. Gay, Peter Thiemann, and Vasco T. Vasconcelos. “Duality of Session Types: The Final Cut”. In: *Electronic Proceedings in Theoretical Computer Science* 314 (Apr. 3, 2020), pp. 23–33. ISSN: 2075-2180. DOI: 10.4204/EPTCS.314.3. arXiv: 2004.01322. URL: <http://arxiv.org/abs/2004.01322> (visited on 09/09/2020).
- [GV07] Simon Gay and Vasco Vasconcelos. *Asynchronous Functional Session Types*. Technical Report 007-251. Glasgow, Scotland: Department of Computing Science, University of Glasgow, 2007.
- [GV10] Simon J. Gay and Vasco T. Vasconcelos. “Linear Type Theory for Asynchronous Session Types”. In: *Journal of Functional Programming* 20.1 (Jan. 2010), pp. 19–50. ISSN: 1469-7653, 0956-7968. DOI: 10.1017/S0956796809990268. URL: <https://www.cambridge.org/core/journals/journal-of-functional-programming/article/linear-type-theory-for-asynchronous-session-types/605DA26DDDE9B1CCD35D33D0D62DF20C> (visited on 09/19/2022).
- [GVR03] Simon Gay, Vasco Vasconcelos, and Antonio Ravara. *Session Types for Inter-Process Communication*. Technical Report 2003-133. Glasgow, Scotland: Department of Computing Science, University of Glasgow, 2003.
- [Heu+23] Bas van den Heuvel et al. “Typed Non-determinism in Functional and Concurrent Calculi”. In: *Programming Languages and Systems*. Ed. by Chung-Kil Hur. Lecture Notes in Computer Science. Singapore: Springer Nature, 2023, pp. 112–132. ISBN: 978-981-9983-11-7. DOI: 10.1007/978-981-99-8311-7_6.
- [HJH90] Jifeng He, Mark B. Josephs, and Charles Antony Richard Hoare. “A Theory of Synchrony and Asynchrony”. In: *Programming Concepts and Methods: Proceedings of the IFIP Working Group 2.2, 2.3 Working Conference on Programming Concepts and Methods, Sea of Galilee, Israel, 2-5 April, 1990*. Ed. by Manfred Broy and Cliff B. Jones. North-Holland, 1990, pp. 459–478.

- [Hon93] Kohei Honda. “Types for Dyadic Interaction”. In: *CONCUR’93*. Ed. by Eike Best. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 1993, pp. 509–523. ISBN: 978-3-540-47968-0. DOI: 10.1007/3-540-57208-2_35.
- [How80] William A Howard. “The Formulae-as-Types Notion of Construction”. In: *To HB Curry: essays on combinatory logic, lambda calculus and formalism* 44 (1980), pp. 479–490.
- [HP20] Bas van den Heuvel and Jorge A. Pérez. “Session Type Systems Based on Linear Logic: Classical versus Intuitionistic”. In: *Proceedings of the 12th International Workshop on Programming Language Approaches to Concurrency- and Communication-centric Software, Dublin, Ireland, 26th April 2020*. Ed. by Stephanie Balzer and Luca Padovani. Vol. 314. Electronic Proceedings in Theoretical Computer Science. Open Publishing Association, 2020, pp. 1–11. DOI: 10.4204/EPTCS.314.1.
- [HP21a] Bas van den Heuvel and Jorge A. Pérez. “Deadlock Freedom for Asynchronous and Cyclic Process Networks”. In: *Proceedings 14th Interaction and Concurrency Experience, Online, 18th June 2021*. Ed. by Julien Lange et al. Vol. 347. Electronic Proceedings in Theoretical Computer Science. Open Publishing Association, 2021, pp. 38–56. DOI: 10.4204/EPTCS.347.3.
- [HP21b] Bas van den Heuvel and Jorge A. Pérez. “Deadlock Freedom for Asynchronous and Cyclic Process Networks (Extended Version)”. A short version appears in the Proceedings of ICE’21: arXiv:2110.00146. Nov. 25, 2021. arXiv: 2111.13091 [cs]. URL: <http://arxiv.org/abs/2111.13091> (visited on 11/29/2021).
- [HP22] Bas van den Heuvel and Jorge A. Pérez. “A Decentralized Analysis of Multiparty Protocols”. In: *Science of Computer Programming* (June 30, 2022), p. 102840. ISSN: 0167-6423. DOI: 10.1016/j.scico.2022.102840. URL: <https://www.sciencedirect.com/science/article/pii/S0167642322000739> (visited on 08/18/2022).
- [HP24] Bas van den Heuvel and Jorge A. Pérez. *Asynchronous Session-Based Concurrency: Deadlock-freedom in Cyclic Process Networks*. Jan. 22, 2024. DOI: 10.48550/arXiv.2111.13091. arXiv: 2111.13091 [cs]. URL: <http://arxiv.org/abs/2111.13091> (visited on 02/12/2024). preprint.
- [HPD23] Bas van den Heuvel, Jorge A. Pérez, and Rares A. Dobre. “Monitoring Blackbox Implementations of Multiparty Session Protocols”. In: *Runtime Verification*. Ed. by Panagiotis Katsaros and Laura Nenzi. Lecture Notes in Computer Science. Cham: Springer Nature Switzerland, 2023, pp. 66–85. ISBN: 978-3-031-44267-4. DOI: 10.1007/978-3-031-44267-4_4.
- [HT91] Kohei Honda and Mario Tokoro. “An Object Calculus for Asynchronous Communication”. In: *ECOOP’91 European Conference on Object-Oriented Programming*. Ed. by Pierre America. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 1991, pp. 133–147. ISBN: 978-3-540-47537-8. DOI: 10.1007/BFb0057019.

- [HT92] Kohei Honda and Mario Tokoro. “On Asynchronous Communication Semantics”. In: *Object-Based Concurrent Computing*. Ed. by M. Tokoro, O. Nierstrasz, and P. Wegner. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 1992, pp. 21–51. ISBN: 978-3-540-47260-5. DOI: 10.1007/3-540-55613-3_2.
- [Hu+12] Raymond Hu et al. “Parameterised Multiparty Session Types”. In: *Logical Methods in Computer Science* Volume 8, Issue 4 (Oct. 11, 2012). DOI: 10.2168/LMCS-8(4:6)2012. URL: <https://lmcs.episciences.org/924/pdf> (visited on 06/12/2020).
- [Hüt+16] Hans Hüttel et al. “Foundations of Session Types and Behavioural Contracts”. In: *ACM Comput. Surv.* 49.1 (Apr. 2016), 3:1–3:36. ISSN: 0360-0300. DOI: 10.1145/2873052. URL: <http://doi.acm.org/10.1145/2873052> (visited on 09/02/2019).
- [HVK98] Kohei Honda, Vasco T. Vasconcelos, and Makoto Kubo. “Language Primitives and Type Discipline for Structured Communication-Based Programming”. In: *Programming Languages and Systems*. Ed. by Chris Hankin. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 1998, pp. 122–138. ISBN: 978-3-540-69722-0. DOI: 10.1007/BFb0053567.
- [HYC08] Kohei Honda, Nobuko Yoshida, and Marco Carbone. “Multiparty Asynchronous Session Types”. In: *Proceedings of the 35th Annual ACM SIGPLAN-SIGACT Symposium on Principles of Programming Languages*. POPL ’08. San Francisco, California, USA: Association for Computing Machinery, Jan. 7, 2008, pp. 273–284. ISBN: 978-1-59593-689-9. DOI: 10.1145/1328438.1328472. URL: <https://doi.org/10.1145/1328438.1328472> (visited on 01/22/2020).
- [HYC16] Kohei Honda, Nobuko Yoshida, and Marco Carbone. “Multiparty Asynchronous Session Types”. In: *Journal of the ACM* 63.1 (Mar. 2016). ISSN: 0004-5411. DOI: 10.1145/2827695. URL: <https://doi.org/10.1145/2827695>.
- [Iga+17] Atsushi Igarashi et al. “Gradual Session Types”. In: *Proceedings of the ACM on Programming Languages* 1 (ICFP Aug. 29, 2017), 38:1–38:28. DOI: 10.1145/3110282. URL: <https://doi.org/10.1145/3110282> (visited on 02/24/2023).
- [Iga+19] Atsushi Igarashi et al. “Gradual Session Types”. In: *Journal of Functional Programming* 29 (2019), e17. ISSN: 0956-7968, 1469-7653. DOI: 10.1017/S0956796819000169. URL: <https://www.cambridge.org/core/journals/journal-of-functional-programming/article/gradual-session-types/C6A5BBDD228A2C1B3E4A652E57B7CF89> (visited on 02/24/2023).
- [Ima+20] Keigo Imai et al. “Multiparty Session Programming With Global Protocol Combinators”. In: *34th European Conference on Object-Oriented Programming (ECOOP 2020)*. Ed. by Robert Hirschfeld and Tobias Pape. Vol. 166. Leibniz International Proceedings in Informatics (LIPIcs). Dagstuhl, Germany: Schloss Dagstuhl–Leibniz-Zentrum für Informatik, 2020, 9:1–9:30. ISBN: 978-3-95977-154-2. DOI: 10.4230/LIPIcs.ECOOP.2020.9. URL: <https://drops.dagstuhl.de/opus/volltexte/2020/13166> (visited on 12/23/2020).

- [JGP16] Limin Jia, Hannah Gommerstadt, and Frank Pfenning. “Monitors and Blame Assignment for Higher-order Session Types”. In: *Proceedings of the 43rd Annual ACM SIGPLAN-SIGACT Symposium on Principles of Programming Languages* (St. Petersburg, FL, USA). POPL ’16. New York, NY, USA: ACM, 2016, pp. 582–594. ISBN: 978-1-4503-3549-2. DOI: 10.1145/2837614.2837662. URL: <http://doi.acm.org/10.1145/2837614.2837662> (visited on 08/27/2019).
- [KD21a] Wen Kokke and Ornela Dardha. “Prioritise the Best Variation”. In: *Formal Techniques for Distributed Objects, Components, and Systems*. Ed. by Kirstin Peters and Tim A. C. Willemse. Lecture Notes in Computer Science. Cham: Springer International Publishing, 2021, pp. 100–119. ISBN: 978-3-030-78089-0. DOI: 10.1007/978-3-030-78089-0_6.
- [KD21b] Wen Kokke and Ornela Dardha. *Prioritise the Best Variation*. Dec. 16, 2021. DOI: 10.48550/arXiv.2103.14466. arXiv: 2103.14466 [cs]. URL: <http://arxiv.org/abs/2103.14466> (visited on 08/23/2022). preprint.
- [KL17] Naoki Kobayashi and Cosimo Laneve. “Deadlock Analysis of Unbounded Process Networks”. In: *Information and Computation* 252 (Feb. 1, 2017), pp. 48–70. ISSN: 0890-5401. DOI: 10.1016/j.ic.2016.03.004. URL: <https://www.sciencedirect.com/science/article/pii/S0890540116000419> (visited on 04/22/2021).
- [KMP19] Wen Kokke, Fabrizio Montesi, and Marco Peressotti. “Better Late than Never: A Fully-Abstract Semantics for Classical Processes”. In: *Proceedings of the ACM on Programming Languages* 3 (POPL Jan. 2, 2019), 24:1–24:29. DOI: 10.1145/3290337. URL: <https://doi.org/10.1145/3290337> (visited on 06/03/2020).
- [KMW20] Wen Kokke, J. Garrett Morris, and Philip Wadler. “Towards Races in Linear Logic”. In: *Logical Methods in Computer Science* Volume 16, Issue 4 (Dec. 15, 2020). DOI: 10.23638/LMCS-16(4:15)2020. URL: <https://lmcs.episciences.org/6979/pdf> (visited on 12/21/2020).
- [Kob06] Naoki Kobayashi. “A New Type System for Deadlock-Free Processes”. In: *CONCUR 2006 – Concurrency Theory*. Ed. by Christel Baier and Holger Hermanns. Lecture Notes in Computer Science. Springer Berlin Heidelberg, 2006, pp. 233–247. ISBN: 978-3-540-37377-3. DOI: 10.1007/11817949_16.
- [Kou+16] Dimitrios Kouzapas et al. “On Asynchronous Eventful Session Semantics”. In: *Mathematical Structures in Computer Science* 26.2 (Feb. 2016), pp. 303–364. ISSN: 0960-1295, 1469-8072. DOI: 10.1017/S096012951400019X. URL: <https://www.cambridge.org/core/journals/mathematical-structures-in-computer-science/article/abs/on-asynchronous-eventful-session-semantics/57FD921B189FCF117165F1F69977FF5B> (visited on 10/04/2022).
- [KPT99] Naoki Kobayashi, Benjamin C. Pierce, and David N. Turner. “Linearity and the Pi-Calculus”. In: *ACM Transactions on Programming Languages and Systems* 21.5 (Sept. 1, 1999), pp. 914–947. ISSN: 01640925. DOI: 10.1145/330249.330251. URL: <http://portal.acm.org/citation.cfm?doid=330249.330251> (visited on 11/27/2019).

- [KSV09] Paul Klint, Tijs van der Storm, and Jurgen Vinju. “RASCAL: A Domain Specific Language for Source Code Analysis and Manipulation”. In: *2009 Ninth IEEE International Working Conference on Source Code Analysis and Manipulation*. 2009 Ninth IEEE International Working Conference on Source Code Analysis and Manipulation. Sept. 2009, pp. 168–177. DOI: 10.1109/SCAM.2009.28.
- [KSV19] Paul Klint, Tijs van der Storm, and Jurgen Vinju. “Rascal, 10 Years Later”. In: *2019 19th International Working Conference on Source Code Analysis and Manipulation (SCAM)*. 2019 19th International Working Conference on Source Code Analysis and Manipulation (SCAM). Sept. 2019, pp. 139–139. DOI: 10.1109/SCAM.2019.00023.
- [KYH11] Dimitrios Kouzapas, Nobuko Yoshida, and Kohei Honda. “On Asynchronous Session Semantics”. In: *Formal Techniques for Distributed Systems*. Ed. by Roberto Bruni and Juergen Dingel. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 2011, pp. 228–243. ISBN: 978-3-642-21461-5. DOI: 10.1007/978-3-642-21461-5_15.
- [LBW05] Jay Ligatti, Lujo Bauer, and David Walker. “Edit Automata: Enforcement Mechanisms for Run-Time Security Policies”. In: *International Journal of Information Security* 4.1 (Feb. 1, 2005), pp. 2–16. ISSN: 1615-5270. DOI: 10.1007/s10207-004-0046-8. URL: <https://doi.org/10.1007/s10207-004-0046-8> (visited on 02/07/2023).
- [LM15] Sam Lindley and J. Garrett Morris. “A Semantics for Propositions as Sessions”. In: *Programming Languages and Systems*. Ed. by Jan Vitek. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 2015, pp. 560–584. ISBN: 978-3-662-46669-8. DOI: 10.1007/978-3-662-46669-8_23.
- [LM99] Jean-Jacques Lévy and Luc Maranget. “Explicit Substitutions and Programming Languages”. In: *Foundations of Software Technology and Theoretical Computer Science*. Ed. by C. Pandu Rangan, V. Raman, and R. Ramanujam. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 1999, pp. 181–200. ISBN: 978-3-540-46691-8. DOI: 10.1007/3-540-46691-6_14.
- [Mil89] Robin Milner. *Communication and Concurrency*. Prentice Hall International Series in Computer Science. New York, USA: Prentice Hall, 1989. 260 pp. ISBN: 0-13-115007-3.
- [Mil90] Robin Milner. “Functions as Processes”. In: *Automata, Languages and Programming*. Ed. by Michael S. Paterson. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 1990, pp. 167–180. ISBN: 978-3-540-47159-2. DOI: 10.1007/BFb0032030.
- [Mil92] Robin Milner. “Functions as Processes”. In: *Mathematical Structures in Computer Science* 2.2 (June 1992), pp. 119–141. ISSN: 1469-8072, 0960-1295. DOI: 10.1017/S0960129500001407. URL: <https://www.cambridge.org/core/journals/mathematical-structures-in-computer-science/article/abs/functions-as-processes/D29A5196C0200520342AEFC8B98D0286> (visited on 07/24/2023).

- [MPW92] Robin Milner, Joachim Parrow, and David Walker. “A Calculus of Mobile Processes, I”. In: *Information and Computation* 100.1 (Sept. 1, 1992), pp. 1–40. ISSN: 0890-5401. DOI: 10 . 1016 / 0890 - 5401 (92) 90008 - 4. URL: <http://www.sciencedirect.com/science/article/pii/S0890540192900084> (visited on 11/19/2019).
- [MYZ20] Rupak Majumdar, Nobuko Yoshida, and Damien Zufferey. “Multiparty Motion Coordination: From Choreographies to Robotics Programs”. In: *Proceedings of the ACM on Programming Languages* 4 (OOPSLA Nov. 13, 2020), 134:1–134:30. DOI: 10 . 1145 / 3428202. URL: <https://doi.org/10.1145/3428202> (visited on 12/23/2020).
- [Nes00] Uwe Nestmann. “What Is a “Good” Encoding of Guarded Choice?” In: *Information and Computation* 156.1 (Jan. 10, 2000), pp. 287–319. ISSN: 0890-5401. DOI: 10 . 1006 / inco . 1999 . 2822. URL: <https://www.sciencedirect.com/science/article/pii/S0890540199928225> (visited on 09/14/2023).
- [NFM03] Uwe Nestmann, Rachele Fuzzati, and Massimo Merro. “Modeling Consensus in a Process Calculus”. In: *CONCUR 2003 - Concurrency Theory*. Ed. by Roberto Amadio and Denis Lugiez. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 2003, pp. 399–414. ISBN: 978-3-540-45187-7. DOI: 10 . 1007 / 978 - 3 - 540 - 45187 - 7 _ 26.
- [NT04] Matthias Neubauer and Peter Thiemann. “An Implementation of Session Types”. In: *Practical Aspects of Declarative Languages*. Ed. by Bharat Jayaraman. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 2004, pp. 56–70. ISBN: 978-3-540-24836-1. DOI: 10 . 1007 / 978 - 3 - 540 - 24836 - 1 _ 5.
- [OHe03] Peter O’Hearn. “On Bunched Typing”. In: *Journal of Functional Programming* 13.4 (July 2003), pp. 747–796. ISSN: 1469-7653, 0956-7968. DOI: 10 . 1017 / S0956796802004495. URL: <https://www.cambridge.org/core/journals/journal-of-functional-programming/article/on-bunched-typing/4AFEBD081F0F0AFFCF03C8415DDE53A4> (visited on 09/03/2020).
- [OHe19] Peter O’Hearn. “Separation Logic”. In: *Communications of the ACM* 62.2 (Jan. 28, 2019), pp. 86–95. ISSN: 0001-0782. DOI: 10 . 1145 / 3211968. URL: <https://dl.acm.org/doi/10.1145/3211968> (visited on 08/15/2023).
- [OP99] Peter W. O’Hearn and David J. Pym. “The Logic of Bunched Implications”. In: *The Bulletin of Symbolic Logic* 5.2 (1999), pp. 215–244. ISSN: 1079-8986. DOI: 10 . 2307 / 421090. JSTOR: 421090. URL: <https://www.jstor.org/stable/421090> (visited on 11/02/2020).
- [Pad14] Luca Padovani. “Deadlock and Lock Freedom in the Linear π -Calculus”. In: *Proceedings of the Joint Meeting of the Twenty-Third EACSL Annual Conference on Computer Science Logic (CSL) and the Twenty-Ninth Annual ACM/IEEE Symposium on Logic in Computer Science (LICS)* (Vienna, Austria). CSL-LICS ’14. New York, NY, USA: ACM, 2014, 72:1–72:10. ISBN: 978-1-4503-2886-9. DOI: 10 . 1145 / 2603088 . 2603116. URL: <http://doi.acm.org/10.1145/2603088.2603116> (visited on 10/10/2019).

- [Pal03] Catuscia Palamidessi. “Comparing the Expressive Power of the Synchronous and the Asynchronous Pi-Calculi”. In: *Mathematical Structures in Computer Science* 13.5 (Oct. 2003), pp. 685–719. ISSN: 09601295, 14698072. DOI: 10.1017/S0960129503004043. arXiv: 1307.2062 [cs]. URL: <http://arxiv.org/abs/1307.2062> (visited on 09/19/2022).
- [Pel03] C. Peltz. “Web Services Orchestration and Choreography”. In: *Computer* 36.10 (Oct. 2003), pp. 46–52. ISSN: 1558-0814. DOI: 10.1109/MC.2003.1236471.
- [Pér+14] Jorge A. Pérez et al. “Linear Logical Relations and Observational Equivalences for Session-Based Concurrency”. In: *Information and Computation* 239 (Dec. 1, 2014), pp. 254–302. ISSN: 0890-5401. DOI: 10.1016/j.ic.2014.08.001. URL: <http://www.sciencedirect.com/science/article/pii/S089054011400100X> (visited on 06/12/2020).
- [Pet12] Kirstin Peters. “Translational Expressiveness: Comparing Process Calculi Using Encodings”. PhD thesis. Berlin, Germany: Technische Universität Berlin, Nov. 28, 2012. URL: <https://depositonce.tu-berlin.de/items/urn:nbn:de:kobv:83-opus-37495> (visited on 09/14/2023).
- [Pet19] Kirstin Peters. “Comparing Process Calculi Using Encodings”. Version 1. In: *Electronic Proceedings in Theoretical Computer Science* 300 (Aug. 22, 2019), pp. 19–38. ISSN: 2075-2180. DOI: 10.4204/EPTCS.300.2. arXiv: 1908.08633. URL: <http://arxiv.org/abs/1908.08633> (visited on 10/27/2020).
- [Pie02] Benjamin C. Pierce. *Types and Programming Languages*. Cambridge, Massachusetts: MIT Press, 2002. 648 pp. ISBN: 978-0-262-16209-8.
- [PN15] Luca Padovani and Luca Novara. “Types for Deadlock-Free Higher-Order Programs”. In: *Formal Techniques for Distributed Objects, Components, and Systems*. Ed. by Susanne Graf and Mahesh Viswanathan. Lecture Notes in Computer Science. Cham: Springer International Publishing, 2015, pp. 3–18. ISBN: 978-3-319-19195-9. DOI: 10.1007/978-3-319-19195-9_1.
- [PNP21] Joseph W. N. Paulus, Daniele Nantes-Sobrinho, and Jorge A. Pérez. “Non-Deterministic Functions as Non-Deterministic Processes”. In: *6th International Conference on Formal Structures for Computation and Deduction (FSCD 2021)*. Ed. by Naoki Kobayashi. Vol. 195. Leibniz International Proceedings in Informatics (LIPIcs). Dagstuhl, Germany: Schloss Dagstuhl – Leibniz-Zentrum für Informatik, 2021, 21:1–21:22. ISBN: 978-3-95977-191-7. DOI: 10.4230/LIPIcs.FSCD.2021.21. URL: <https://drops.dagstuhl.de/opus/volltexte/2021/14259> (visited on 10/06/2022).
- [POY04] David J. Pym, Peter W. O’Hearn, and Hongseok Yang. “Possible Worlds and Resources: The Semantics of BI”. In: *Theoretical Computer Science. Mathematical Foundations of Programming Semantics* 315.1 (May 5, 2004), pp. 257–305. ISSN: 0304-3975. DOI: 10.1016/j.tcs.2003.11.020. URL: <http://www.sciencedirect.com/science/article/pii/S0304397503006248> (visited on 11/06/2020).

- [PP19] Klaas Pruiksma and Frank Pfenning. “A Message-Passing Interpretation of Adjoint Logic”. In: *Programming Language Approaches to Concurrency- and Communication-centric Software (PLACES)*. PLACES. Vol. 291. Electronic Proceedings in Theoretical Computer Science. Open Publishing Association, Apr. 2, 2019, pp. 60–79. DOI: 10.4204/EPTCS.291.6. arXiv: 1904.01290. URL: <http://arxiv.org/abs/1904.01290> (visited on 04/13/2021).
- [PP21] Klaas Pruiksma and Frank Pfenning. “A Message-Passing Interpretation of Adjoint Logic”. In: *Journal of Logical and Algebraic Methods in Programming* 120.100637 (Apr. 2021). ISSN: 2352-2208. DOI: 10.1016/j.jlamp.2020.100637. URL: <http://www.sciencedirect.com/science/article/pii/S235222082030122X> (visited on 01/04/2021).
- [PR10] Michele Pagani and Simona Ronchi della Rocca. “Solvability in Resource Lambda-Calculus”. In: *Foundations of Software Science and Computational Structures*. Ed. by Luke Ong. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 2010, pp. 358–373. ISBN: 978-3-642-12032-9. DOI: 10.1007/978-3-642-12032-9_25.
- [Pru+18] Klaas Pruiksma et al. “Adjoint Logic”. In: *Unpublished manuscript* (Apr. 2018).
- [PVV14] Luca Padovani, Vasco Thudichum Vasconcelos, and Hugo Torres Vieira. “Typing Liveness in Multiparty Communicating Systems”. In: *Coordination Models and Languages*. Ed. by Eva Kühn and Rosario Pugliese. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 2014, pp. 147–162. ISBN: 978-3-662-43376-8. DOI: 10.1007/978-3-662-43376-8_10.
- [PY22] Kirstin Peters and Nobuko Yoshida. “On the Expressiveness of Mixed Choice Sessions”. In: *Electronic Proceedings in Theoretical Computer Science* 368 (Sept. 6, 2022), pp. 113–130. ISSN: 2075-2180. DOI: 10.4204/EPTCS.368.7. arXiv: 2209.06819 [cs]. URL: <http://arxiv.org/abs/2209.06819> (visited on 10/04/2022).
- [Pym13] David J. Pym. *The Semantics and Proof Theory of the Logic of Bunched Implications*. Springer Science & Business Media, Apr. 17, 2013. 323 pp. ISBN: 978-94-017-0091-7. Google Books: [bm_uCAAQAQBAJ](https://books.google.com/books/bm_uCAAQAQBAJ).
- [QKB21] Zesen Qian, G. A. Kavvos, and Lars Birkedal. “Client-Server Sessions in Linear Logic”. In: *Proceedings of the ACM on Programming Languages* 5 (ICFP Aug. 19, 2021), 62:1–62:31. DOI: 10.1145/3473567. URL: <https://dl.acm.org/doi/10.1145/3473567> (visited on 08/15/2023).
- [RC21] Pedro Rocha and Luís Caires. “Propositions-as-Types and Shared State”. In: *Proceedings of the ACM on Programming Languages* 5 (ICFP Aug. 18, 2021), 79:1–79:30. DOI: 10.1145/3473584. URL: <https://doi.org/10.1145/3473584> (visited on 08/25/2021).
- [RC23] Pedro Rocha and Luís Caires. “Safe Session-Based Concurrency with Shared Linear State”. In: *Programming Languages and Systems*. Ed. by Thomas Wies. Lecture Notes in Computer Science. Cham: Springer Nature Switzerland, 2023, pp. 421–450. ISBN: 978-3-031-30044-8. DOI: 10.1007/978-3-031-30044-8_16.

- [Ree09] Jason Reed. “A Judgmental Deconstruction of Modal Logic”. In: *Unpublished manuscript, January* (2009).
- [SBR12] G. Salaün, T. Bultan, and N. Roohi. “Realizability of Choreographies Using Process Algebra Encodings”. In: *IEEE Transactions on Services Computing* 5.3 (Third 2012), pp. 290–304. ISSN: 1939-1374. DOI: 10.1109/TSC.2011.9.
- [Sca+17] Alceste Scalas et al. “A Linear Decomposition of Multiparty Sessions for Safe Distributed Programming”. In: *31st European Conference on Object-Oriented Programming (ECOOP 2017)*. Ed. by Peter Müller. Vol. 74. Leibniz International Proceedings in Informatics (LIPIcs). Dagstuhl, Germany: Schloss Dagstuhl–Leibniz-Zentrum fuer Informatik, 2017, 24:1–24:31. ISBN: 978-3-95977-035-4. DOI: 10.4230/LIPIcs.ECOOP.2017.24. URL: <http://drops.dagstuhl.de/opus/volltexte/2017/7263> (visited on 08/03/2023).
- [SW03] Davide Sangiorgi and David Walker. *The Pi-Calculus: A Theory of Mobile Processes*. Cambridge University Press, Oct. 16, 2003. 600 pp. ISBN: 978-0-521-54327-9. Google Books: [objectObject].
- [SY19] Alceste Scalas and Nobuko Yoshida. “Less Is More: Multiparty Session Types Revisited”. In: *Proceedings of the ACM on Programming Languages* 3 (POPL Jan. 2, 2019). Revised, extended version at <https://www.doc.ic.ac.uk/research/technicalreports/2018/DTRS18-6.pdf>, 30:1–30:29. DOI: 10.1145/3290343. URL: <https://doi.org/10.1145/3290343> (visited on 02/11/2020).
- [TCP12] Bernardo Toninho, Luis Caires, and Frank Pfenning. “Functions as Session-Typed Processes”. In: *Foundations of Software Science and Computational Structures*. Ed. by Lars Birkedal. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 2012, pp. 346–360. ISBN: 978-3-642-28729-9. DOI: 10.1007/978-3-642-28729-9_23.
- [TCP14] Bernardo Toninho, Luis Caires, and Frank Pfenning. “Corecursion and Non-divergence in Session-Typed Processes”. In: *Trustworthy Global Computing*. Ed. by Matteo Maffei and Emilio Tuosto. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 2014, pp. 159–175. ISBN: 978-3-662-45917-1. DOI: 10.1007/978-3-662-45917-1_11.
- [Thi14] Peter Thiemann. “Session Types with Gradual Typing”. In: *Trustworthy Global Computing*. Ed. by Matteo Maffei and Emilio Tuosto. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 2014, pp. 144–158. ISBN: 978-3-662-45917-1. DOI: 10.1007/978-3-662-45917-1_10.
- [THK94] Kaku Takeuchi, Kohei Honda, and Makoto Kubo. “An Interaction-Based Language and Its Typing System”. In: *PARLE’94 Parallel Architectures and Languages Europe*. Ed. by Costas Halatsis et al. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 1994, pp. 398–413. ISBN: 978-3-540-48477-6. DOI: 10.1007/3-540-58184-7_118.
- [TY18] Bernardo Toninho and Nobuko Yoshida. “Interconnectability of Session-Based Logical Processes”. In: *ACM Transactions on Programming Languages and Systems (TOPLAS)* 40.4 (Dec. 13, 2018), p. 17. DOI: 10.1145/3242173.

- [TY21] Bernardo Toninho and Nobuko Yoshida. “On Polymorphic Sessions and Functions: A Tale of Two (Fully Abstract) Encodings”. In: *ACM Transactions on Programming Languages and Systems* 43.2 (June 10, 2021), 7:1–7:55. ISSN: 0164-0925. DOI: 10.1145/3457884. URL: <https://doi.org/10.1145/3457884> (visited on 01/31/2022).
- [Vas+20] Vasco T. Vasconcelos et al. “Mixed Sessions”. In: *Programming Languages and Systems*. Ed. by Peter Müller. Lecture Notes in Computer Science. Cham: Springer International Publishing, 2020, pp. 715–742. ISBN: 978-3-030-44914-8. DOI: 10.1007/978-3-030-44914-8_26.
- [Vas00] Vasco T. Vasconcelos. *The call-by-value λ -calculus, the SECD machine, and the π -calculus*. report di-fcul-tr-00-3. Department of Informatics, University of Lisbon, May 2000. URL: <https://repositorio.ul.pt/handle/10451/14097> (visited on 09/15/2023).
- [Vas12] Vasco T. Vasconcelos. “Fundamentals of Session Types”. In: *Information and Computation* 217 (Aug. 1, 2012), pp. 52–70. ISSN: 0890-5401. DOI: 10.1016/j.ic.2012.05.002. URL: <http://www.sciencedirect.com/science/article/pii/S0890540112001022> (visited on 10/22/2020).
- [VGR06] Vasco T. Vasconcelos, Simon J. Gay, and António Ravara. “Type Checking a Multithreaded Functional Language with Session Types”. In: *Theoretical Computer Science* 368.1 (Dec. 5, 2006), pp. 64–87. ISSN: 0304-3975. DOI: 10.1016/j.tcs.2006.06.028. URL: <https://www.sciencedirect.com/science/article/pii/S0304397506003902> (visited on 07/20/2023).
- [VRG04] Vasco Vasconcelos, António Ravara, and Simon Gay. “Session Types for Functional Multithreading”. In: *CONCUR 2004 - Concurrency Theory*. Ed. by Philippa Gardner and Nobuko Yoshida. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 2004, pp. 497–511. ISBN: 978-3-540-28644-8. DOI: 10.1007/978-3-540-28644-8_32.
- [Wad12] Philip Wadler. “Propositions As Sessions”. In: *Proceedings of the 17th ACM SIGPLAN International Conference on Functional Programming* (Copenhagen, Denmark). ICFP ’12. New York, NY, USA: ACM, 2012, pp. 273–286. ISBN: 978-1-4503-1054-3. DOI: 10.1145/2364527.2364568. URL: <http://doi.acm.org/10.1145/2364527.2364568> (visited on 09/03/2019).
- [Wad14] Philip Wadler. “Propositions as Sessions”. In: *Journal of Functional Programming* 24.2-3 (May 2014), pp. 384–418. ISSN: 0956-7968, 1469-7653. DOI: 10.1017/S095679681400001X. URL: <https://www.cambridge.org/core/journals/journal-of-functional-programming/article/propositions-as-sessions/0985539E5D607AC00FB00FF900BA1C86> (visited on 07/24/2023).
- [YG20] Nobuko Yoshida and Lorenzo Gheri. “A Very Gentle Introduction to Multiparty Session Types”. In: *Distributed Computing and Internet Technology*. Ed. by Dang Van Hung and Meenakshi D´Souza. Lecture Notes in Computer Science. Cham: Springer International Publishing, 2020, pp. 73–93. ISBN: 978-3-030-36987-3. DOI: 10.1007/978-3-030-36987-3_5.

- [Yos+10] Nobuko Yoshida et al. “Parameterised Multiparty Session Types”. In: *Foundations of Software Science and Computational Structures*. Ed. by Luke Ong. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 2010, pp. 128–145. ISBN: 978-3-642-12032-9. DOI: 10.1007/978-3-642-12032-9_10.
- [YV07] Nobuko Yoshida and Vasco T. Vasconcelos. “Language Primitives and Type Discipline for Structured Communication-Based Programming Revisited: Two Systems for Higher-Order Session Communication”. In: *Electronic Notes in Theoretical Computer Science*. Proceedings of the First International Workshop on Security and Rewriting Techniques (SecReT 2006) 171.4 (July 10, 2007), pp. 73–93. ISSN: 1571-0661. DOI: 10.1016/j.entcs.2007.02.056. URL: <https://www.sciencedirect.com/science/article/pii/S1571066107004239> (visited on 02/03/2022).

ACKNOWLEDGMENTS

As far as I know, there is no way to write “concurrently”, so unfortunately I need to “linearize” my unordered acknowledgments. I shall switch between English and Dutch, reflecting the language I speak with people. Groups of people are listed alphabetically.

My PhD supervisor, Jorge Pérez, deserves a lot of gratitude. Starting with my first email asking for advice on getting a PhD position in TCS, he has always supported me and my career with 100% conviction. Through the years, we found a good way of collaborating, even though I worked from Amsterdam most of the time. Jorge’s abilities and insights in the academic world are inspiring and humbling. Jorge, take a day or two off every now and then ;). I should also express my gratitude to my second supervisor, Gerard Renardel de Lavalette; we didn’t spend much time together, but I did enjoy it when we did.

I would also like to express my deepest gratitude to the reading committee of my dissertation: Marieke Huisman, Alexander Lazovik, Nobuko Yoshida. I know the thesis got rather lengthy, so I greatly appreciate the time they took from their busy schedules to read it.

Zonder mijn ouders, Carolien en Teije, zou ik hier niet zijn gekomen (letterlijk). Mijn hele leven hebben ze mij zonder (grote) vraagtekens altijd gesteund in wat ik ook doe. Pap en mam, hoewel wij als een goed Nederlands gezin elkaar soms maanden niet zien, denk ik altijd aan jullie en ben ik jullie altijd dankbaar voor hoe jullie onvoorwaardelijk voor me klaarstaan; ik hou van jullie! Ik hoop dat mijn vader ermee kan leven dat zijn investeringen in mij niet veel zullen bijdragen aan zijn pensioen als ik op het academische pad blijf . . .

Arianne is de liefde van m’n leven, en mijn steun en toeverlaat. Hoe ze het uithoudt met mij is me een compleet raadsel, zeker gezien mijn carrièrekeuze niet de meest optimale levenssituaties oplevert voor haar. Arianne, je bent een enorme steun geweest tijdens de zwaarste perioden van mijn PhD, en ik hoop dat ik je niet te veel heb belast met mijn gestress. Laten we nog heel veel beleven samen, ik hou van je!

Tom (or, as he prefers to be referred to by others than me, Tomislav) is one of my best friends. We met each other at the Master of Logic in Amsterdam, and Tom quickly became an excellent friend at a time where I really needed one. Tom, I am very grateful to have you in my life, and although you are moving back to Zagreb, I don’t think you will ever get rid of me. Not only has Tom submerged me in Croatian culture at his wedding, he has also introduced me to his many friends from the Balkans who live in Amsterdam; I consider them my own friends and fondly refer them as the “Balkan Boys”: Frane, Granit, Milan, Nino, and Vojin.

Met acht jaar jonger, gingen ik en mijn broertje, Sam, de langste tijd niet echt goed met elkaar om. Tijdens mijn PhD, echter, zijn we meer en meer gaan hangen, en nu beschouw ik Sam als een van mijn beste vrienden. Wat we ook doen samen—gamen, deels mislukte fiets-/kampeervakanties, helpen met verhuizen—, het geeft me altijd veel plezier. Sam, ik ben heel blij dat we zo goed met elkaar omgaan de laatste tijd. Natuurlijk ben ik mijn zus, Eva, ook dankbaar. Ik heb geleerd politieke discussies met haar uit de weg gegaan (vooral omdat

ze nog progressiever is dan ik . . .), maar het is altijd fijn samen; dankzij haar ken ik ook haar partner, Anne, die me ervan heeft overtuigd te gaan GM'en voor RPGs, en natuurlijk heb ik mijn twee fantastische neefjes, Siep en Willem, aan hen te danken.

Tijmen is de beste vriend die ik aan mijn tijd bij de bachelorstudieverening via over heb gehouden. Toendertijd hebben we veel gehangen, waarbij we altijd muziek maakten, luisterden, en ontdekten. Een tijdje hebben we weinig contact gehad, maar ik ben erg blij dat we elkaar hervonden hebben door onze stoner-band-projecten met Arianne en Niels. Ik ben ook heel blij met onze recente regelmatige game-/hang-sessies. Niet te vergeten: Tijmen, enorm bedankt voor het ontwerpen van de kaft van mijn thesis, je hebt het fantastisch gedaan!

Ik moet ook de andere fantastische vrienden noemen die ik aan mijn via-tijd over heb gehouden, en die ik nog steeds met enige regelmaat zie: Bram, Chiel, Elise, Fabiën, Iris, Jelte, Jorn, Micha, Robbert, Sander. Het is altijd een plezier om met jullie wat te drinken, bordspelletjes of RPGs te spelen, op city-trips te gaan, etcetera.

Of course, I want to thank my colleagues at the University of Groningen: Alen, Anton, Dan, Helle, Joe, Juan, Revantha, Tina, Vitor. During my PhD I also got to know researchers outside of Groningen, both through visits and through fruitful collaboration: Daniele, Emanuele, Farzaneh, Stephanie; thank you, and I hope we get to work together more in the future.

To anyone I didn't mention explicitly, family, friends, and colleagues: thank you!

III

APPENDICES

A

PROOFS FOR CHAPTER 2

This appendix details proofs of the results in Chapter 2.

Theorem 2.3.4 (Subject Congruence). *If $\vdash P \blacktriangleright \Delta$ and $P \equiv Q$, then $\vdash Q \blacktriangleright \Delta$.*

Proof. By induction on the derivation of $P \equiv Q$. The inductive cases, which apply congruence under contexts, follow from the IH straightforwardly. I discuss each base case, corresponding to the axioms in Definition 2.2.1, separately:

- **(Rule [CONG-ALPHA])** Then $P \equiv_\alpha Q$, i.e., P and Q are equal up to renaming of bound names. Hence, reflect this renaming in the derivation of $\vdash P \blacktriangleright \Delta$ to obtain a derivation of $\vdash Q \blacktriangleright \Delta$.
- **(Rule [CONG-PAR-UNIT])** By inversion of Rules [TYP-PAR] and [TYP-INACT], $\vdash P \blacktriangleright \Delta$, $\vdash \mathbf{0} \blacktriangleright \emptyset$, and $\vdash P | \mathbf{0} \blacktriangleright \Delta$, immediately showing the thesis.
- **(Rule [CONG-PAR-COMM])** By inversion of Rule [TYP-PAR], $\vdash P \blacktriangleright \Delta_1$, $\vdash Q \blacktriangleright \Delta_2$, and $\vdash P | Q \blacktriangleright \Delta_1, \Delta_2$. By Rule [TYP-PAR], $\vdash Q | P \blacktriangleright \Delta_1, \Delta_2$, showing the thesis.
- **(Rule [CONG-PAR-ASSOC])** By inversion of two applications of Rule [TYP-PAR], $\vdash P \blacktriangleright \Delta_1$, $\vdash Q \blacktriangleright \Delta_2$, $\vdash R \blacktriangleright \Delta_3$, and $\vdash P | (Q | R) \blacktriangleright \Delta_1, \Delta_2, \Delta_3$. By two applications of Rule [TYP-PAR], $\vdash (P | Q) | R \blacktriangleright \Delta_1, \Delta_2, \Delta_3$, showing the thesis.
- **(Rule [CONG-SCOPE])** By inversion of Rules [TYP-PAR] and [TYP-RES], $\vdash P \blacktriangleright \Delta_1$, $\vdash Q \blacktriangleright \Delta_2$, $x : A$, $y : \bar{A}$, $\vdash (\mathbf{v}xy)Q \blacktriangleright \Delta_2$, and $\vdash P | (\mathbf{v}xy)Q \blacktriangleright \Delta_1, \Delta_2$. Since $x, y \notin \text{fn}(P)$, $x, y \notin \text{dom}(P)$. By Rules [TYP-PAR] and [TYP-RES], $\vdash (\mathbf{v}xy)(P | Q) \blacktriangleright \Delta_1, \Delta_2$, showing the thesis.
- **(Rule [CONG-RES-COMM])** By inversion of two applications of Rule [TYP-RES], $\vdash P \blacktriangleright \Delta$, $x : A$, $y : \bar{A}$, $z : B$, $w : \bar{B}$, and $\vdash (\mathbf{v}xy)(\mathbf{v}zw)P \blacktriangleright \Delta$. By two applications of Rule [TYP-RES], $\vdash (\mathbf{v}zw)(\mathbf{v}xy)P \blacktriangleright \Delta$, showing the thesis.

A

- **(Rule [CONG-RES-SYMM])** By inversion of Rule [TYP-RES], $\vdash P \blacktriangleright \Delta, x : A, y : \bar{A}$, and $\vdash (\mathbf{v}xy)P \blacktriangleright \Delta$. By involution of duality and Rule [TYP-RES], $\vdash (\mathbf{v}yx)P \blacktriangleright \Delta$, showing the thesis.
- **(Rule [CONG-FWD-SYMM])** By inversion of Rule [TYP-FWD], $\vdash [x \leftrightarrow y] \blacktriangleright x : A, y : \bar{A}$. By involution of duality and Rule [TYP-FWD], $\vdash [y \leftrightarrow x] \blacktriangleright x : A, y : \bar{A}$, showing the thesis.
- **(Rule [CONG-RES-FWD])** By inversion of Rules [TYP-RES] and [TYP-FWD], $\vdash [x \leftrightarrow y] \blacktriangleright x : A, y : \bar{A}$, and $\vdash (\mathbf{v}xy)[x \leftrightarrow y] \blacktriangleright \emptyset$. By Rule [TYP-INACT], $\vdash \mathbf{0} \blacktriangleright \emptyset$, showing the thesis. \square

Theorem 2.3.5 (Subject Reduction). *If $\vdash P \blacktriangleright \Delta$ and $P \rightarrow Q$, then $\vdash Q \blacktriangleright \Delta$.*

Proof. By induction on the derivation of $P \rightarrow Q$. I discuss each case, corresponding to the rules in Definition 2.2.2, separately:

- **(Rule [RED-CLOSE-WAIT])** By inversion of Rules [TYP-RES], [TYP-PAR], [TYP-CLOSE], and [TYP-WAIT], $\vdash x[] \blacktriangleright x : \mathbf{1}$, $\vdash Q \blacktriangleright \Delta$, $\vdash y() ; Q \blacktriangleright \Delta, y : \perp$, and $\vdash (\mathbf{v}xy)(x[] | y(); Q) \blacktriangleright \Delta$, immediately showing the thesis.
- **(Rule [RED-SEND-RECV])** By inversion of Rules [TYP-RES], [TYP-PAR], [TYP-SEND], and [TYP-RECV], $\vdash P \blacktriangleright \Delta_1, \vdash x[a, b]; P \blacktriangleright \Delta_1, x : A \otimes B, a : \bar{A}, b : \bar{B}, \vdash Q \blacktriangleright \Delta_2, z : \bar{A}, y' : \bar{B}, \vdash y(z, y'); Q \blacktriangleright \Delta_2, y : \bar{A} \wp \bar{B}$, and $\vdash (\mathbf{v}xy)(x[a, b]; P | y(z, y'); Q) \blacktriangleright \Delta_1, \Delta_2, a : \bar{A}, b : \bar{B}$. It is straightforward to derive $\vdash Q\{a/z, b/y'\} \blacktriangleright \Delta_2, a : \bar{A}, b : \bar{B}$. By Rule [TYP-PAR], $\vdash P | Q\{a/z, b/y'\} \blacktriangleright \Delta_1, \Delta_2, a : \bar{A}, b : \bar{B}$, showing the thesis.
- **(Rule [RED-SEL-BRA])** By inversion of Rules [TYP-RES], [TYP-PAR], [TYP-SEL], and [TYP-BRA], $\vdash P \blacktriangleright \Delta_1, \vdash x[b] \triangleleft j; P \blacktriangleright \Delta_1, x : \oplus_{i \in I} A_i, b : \bar{A}_j, \vdash Q_i \blacktriangleright \Delta_2, y' : \bar{A}_i$ for every $i \in I$, $\vdash y(y') \triangleright \{i.Q_i\}_{i \in I} \blacktriangleright \Delta_2, y : \&_{i \in I} \bar{A}_i$, and $\vdash (\mathbf{v}xy)(x[b] \triangleleft j; P | y(y') \triangleright \{i.Q_i\}_{i \in I}) \blacktriangleright \Delta_1, \Delta_2, b : \bar{A}_j$. It is straightforward to derive $\vdash Q_j\{b/y'\} \blacktriangleright \Delta_2, b : \bar{A}_j$. By Rule [TYP-PAR], $\vdash P | Q_j\{b/y'\} \blacktriangleright \Delta_1, \Delta_2, b : \bar{A}_j$, showing the thesis.
- **(Rule [RED-FWD])** By inversion of Rules [TYP-RES], [TYP-PAR], and [TYP-FWD], $\vdash [x \leftrightarrow z] \blacktriangleright x : A, z : \bar{A}, P \blacktriangleright \Delta, y : \bar{A}$, and $\vdash (\mathbf{v}xy)([x \leftrightarrow z] | P) \blacktriangleright \Delta, z : \bar{A}$. It is straightforward to derive $\vdash P\{z/y\} \blacktriangleright \Delta, y : \bar{A}$, showing the thesis.
- **(Rule [RED-CONG])** By Theorem 2.3.4, $\vdash P' \blacktriangleright \Delta$. By the IH, $\vdash Q' \blacktriangleright \Delta$. By Theorem 2.3.4, $\vdash Q \blacktriangleright \Delta$, showing the thesis.
- **(Rule [RED-RES])** By inversion of Rule [TYP-RES], $\vdash P \blacktriangleright \Delta, x : A, y : \bar{A}$, and $\vdash (\mathbf{v}xy)P \blacktriangleright \Delta$. By the IH, $\vdash Q \blacktriangleright \Delta, x : A, y : \bar{A}$. By Rule [TYP-RES], $\vdash (\mathbf{v}xy)Q \blacktriangleright \Delta$, showing the thesis.
- **(Rule [RED-PAR])** By inversion of Rule [TYP-PAR], $\vdash P \blacktriangleright \Delta_1, \vdash R \blacktriangleright \Delta_2$, and $\vdash P | R \blacktriangleright \Delta_1, \Delta_2$. By the IH, $\vdash Q \blacktriangleright \Delta_1$. By Rule [TYP-PAR], $\vdash Q | R \blacktriangleright \Delta_1, \Delta_2$, showing the thesis. \square

B

PROOFS FOR CHAPTER 3

This appendix details proofs of the results in Chapter 3.

B.1. SUBJECT REDUCTION

Theorem 3.3.24 (Subject Congruence). *If $\Omega \vdash P \blacktriangleright \Gamma$ and $P \equiv Q$, then there exists Γ' such that $\Omega \vdash Q \blacktriangleright \Gamma'$ and $(\Omega \vdash P \blacktriangleright \Gamma) \cong (\Omega \vdash Q \blacktriangleright \Gamma')$.*

Proof. By induction on the derivation of $P \equiv Q$. The cases for the structural rules follow from the IH directly. All base cases are straightforward, except the cases of unfolding and folding. We detail unfolding, where $P = \mu X(\tilde{z}); P'$ and $Q = P' \{(\mu X(\tilde{y}); P' \{\tilde{y}/\tilde{z}\})/X\langle\tilde{y}\rangle\}$. The other direction, folding, is similar.

By type inversion of Rule [TYP-REC],

$$\begin{aligned} \Omega \vdash P \blacktriangleright \Omega; \tilde{z} : \widetilde{\mu X.A} \\ \Omega, X : \tilde{A} \vdash P' \blacktriangleright \tilde{z} : \tilde{U} \end{aligned}$$

where there exists $t \in \mathbb{N} > \text{top}(\widetilde{\mu X.A})$ such that each

$$U_i = \text{unfold}^t(\mu X.A_i) = A_i\{(\mu X.\uparrow^t A_i)/X\}.$$

Let π denote the typing derivation of P' .

P' may contain $m \geq 0$ recursive calls $X\langle\tilde{y}\rangle$. For each call, there is an application of Rule [TYP-VAR] in π . We uniquely identify each such application of Rule [TYP-VAR] as ρ_j for $0 < j \leq m$. Since APCP only allows tail-recursion, these multiple recursive calls can only occur inside branches on names not in \tilde{z} , so the common lifter of each ρ_j must be t .

$$\rho_j \left\{ \frac{}{\Omega'_j, X : \tilde{A} \vdash X\langle\tilde{y}_j\rangle \blacktriangleright \tilde{y}_j : \widetilde{\mu X.\uparrow^t A}} \right\} \text{ [TYP-VAR]}$$

where $\Omega'_j \supseteq \Omega$, because rules applied in π can only add assignments to the recursive context. Recall that $\widetilde{y_j} : \widetilde{\mu X. \uparrow^t A}$ is notation for $y_{j_1} : \mu X. \uparrow^t A_1, \dots, y_{j_k} : \mu X. \uparrow^t A_k$, as introduced in Section 3.3.2.

The unfolding of a recursive process replaces each recursive call by a copy of the recursive definition. Hence, to find a typing derivation for Q we proceed as follows, for each $0 < j \leq m$:

1. We obtain a derivation π'_j of $P'\{\widetilde{y_j}/\widetilde{z}\}$ from π by substituting \widetilde{z} for $\widetilde{y_j}$ (while avoiding capturing names) and by lifting all priorities by t (including the priorities of X in the recursive context of ρ_j).
2. We apply Rule [TYP-REC] on X in the conclusion of π'_j , resulting in a new typing derivation ρ'_j :

$$\rho'_j \left\{ \frac{\pi'_j \quad \Omega'_j, X : \uparrow^t \widetilde{A} \vdash P'\{\widetilde{y_j}/\widetilde{z}\} \blacktriangleright \widetilde{y_j} : \uparrow^t \widetilde{U}}{\Omega'_j \vdash \mu X(\widetilde{y_j}); P'\{\widetilde{y_j}/\widetilde{z}\} \blacktriangleright \widetilde{y_j} : \widetilde{\mu X. \uparrow^t A}} \text{ [TYP-REC]} \right.$$

For every $0 < j \leq m$, the context of the conclusion of ρ'_j coincides with the context of the conclusion of ρ_j , up to the assignment $X : \uparrow^t \widetilde{A}$ in the recursive context not present in ρ'_j . We intend to obtain from π a new derivation π' by replacing each ρ_j with ρ'_j . By Proposition 3.3.23, the fact that each ρ'_j is missing the assignment to X in the recursive context does not influence the steps in π . Hence, we can indeed obtain such a derivation π' :

$$\Omega \vdash \underbrace{P'\{\mu X(\widetilde{y}); P'\{\widetilde{y}/\widetilde{z}\}/X(\widetilde{y})\}}_Q \blacktriangleright \widetilde{z} : \widetilde{U}$$

where $\forall U_i \in \widetilde{U}. U_i = \text{unfold}^t(A_i)$.

Let $\Gamma' = \widetilde{z} : \widetilde{U}$. We have $\Omega \vdash Q \blacktriangleright \Gamma'$. To prove the thesis, we have to show that Γ and Γ' are equal up to unfolding. Following the typing rules applied in the derivation of $\Omega \vdash Q \blacktriangleright \widetilde{z} : \widetilde{U}$, we have $(\Omega \vdash Q \blacktriangleright \widetilde{z} : \widetilde{U}) \lesssim \widetilde{z} : \widetilde{U}$ (cf. Definition 3.3.21). Then, by Rule [UNF-FOLD], $(\Omega \vdash Q \blacktriangleright \widetilde{z} : \widetilde{U}) \lesssim \widetilde{z} : \widetilde{\mu X. A}$. Similarly, we have $(\Omega \vdash P \blacktriangleright \widetilde{z} : \widetilde{\mu X. A}) \lesssim \widetilde{z} : \widetilde{\mu X. A}$, so by Rule [UNF-UNF], $(\Omega \vdash P \blacktriangleright \widetilde{z} : \widetilde{\mu X. A}) \lesssim \widetilde{z} : \widetilde{U}$. Hence, $(\Omega \vdash P \blacktriangleright \Gamma) \cong (\Omega \vdash Q \blacktriangleright \Gamma')$, proving the thesis. \square

B.2. DEADLOCK-FREEDOM

Lemma 3.3.29 (Unfolding). *If $\Omega \vdash P \blacktriangleright \Gamma$, then there is a process P^* such that $P^* \equiv P$ and P^* is not of the form $\mu X(\widetilde{z}); Q$.*

Proof. By induction on the number n of consecutive recursive definitions prefixing P , such that P is of the form $\mu X_1(\widetilde{z}); \dots; \mu X_n(\widetilde{z}); Q$. If $n = 0$, the thesis follows immediately, as $P \equiv P$.

Otherwise, $n \geq 1$. Then there are X, Q such that $P = \mu X(\bar{z}); Q$, where Q starts with $n - 1$ consecutive recursive definitions. Let $R \triangleq Q\{(\mu X(\bar{y}); Q\{\bar{y}/\bar{z}\})/X(\bar{y})\}$. Clearly, $R \equiv P$. Then, because R starts with $n - 1$ consecutive recursive definitions, the thesis follows by appealing to the IH. \square

Theorem 3.3.30 (Progress). *If $\phi \vdash P \blacktriangleright \Gamma$ and $\text{live}(P)$, then there is a process Q such that $P \rightarrow Q$.*

Proof. We distinguish the two cases of $\text{live}(P)$: P contains a restriction on a pair of active names, or P contains a restriction on a forwarded name under a reduction context. In both cases, we first unfold any recursive definitions preceding the involved prefixes/forwarders, resulting in $P^* \equiv P$. By subject congruence (Theorem 3.3.24), there exists Γ' such that $\phi \vdash P^* \blacktriangleright \Gamma'$ and $(\vdash P^* \blacktriangleright \Gamma') \simeq \Gamma$. By Definition 3.3.21, the only difference between Γ' and Γ is the unfolding of recursive types.

1. P^* contains a restriction on a pair of active names. That is, $P^* \equiv (\mathbf{v}xy)P^{*'}$ and $x, y \in \text{an}(P^{*'})$. The rest of the analysis depends on how x and y occur as active names in $P^{*'}$. As a representative case, we consider that x occurs as the subject of a send. By inversion of typing, then y occurs as the subject of a receive. Hence, we have $P^* \equiv \mathcal{E}[(\mathbf{v}xy)(x[a, b] \mid y(v, z); P^{*''})]$. Let $Q \triangleq \mathcal{E}[P^{*''}\{a/v, b/z\}]$. Then, by Rule [RED-SEND-RECV], $P^* \rightarrow Q$. Hence, by Rule [RED-CONG], $P \rightarrow Q$, proving the thesis.
2. P^* contains a restriction on a forwarded name under a reduction context. That is, $P^* \equiv \mathcal{E}[(\mathbf{v}yz)([x \leftrightarrow y] \mid P^{*'})]$ where $z \neq x$. Let $Q = \mathcal{E}[P^{*'}\{x/z\}]$. Then, by Rule [RED-FWD], $P^* \rightarrow Q$. Hence, by Rule [RED-CONG], $P \rightarrow Q$, proving the thesis. \square

Lemma 3.3.31. *If $\phi \vdash P \blacktriangleright \phi$ and P is not live, then P has no prefixes or independent forwarders.*

Proof. W.l.o.g., assume all recursion in P is unfolded. Take $P^* \equiv P$ such that $P^* = (\mathbf{v}x_i x'_i)_{i \in I} \prod_{j \in J} P_j$ where, for every $j \in J$, P_j is a prefix or forwarder. That is, every P_j is a *thread* which cannot be broken down further into parallel components or restrictions.

By abuse of notation, we write $\text{pr}(P_j)$ to denote the priority of the type of the subject of the prefix of P_j . Also, we write $\text{pr}(x)$ to denote the priority of the type of x .

Toward a contradiction, assume that there is at least one prefix or independent forwarder in P . We apply induction on the size of J .

- In the base case, $J = \emptyset$. Then there cannot be any prefixes or independent forwarders in P : a contradiction.
- In the inductive case, $J = J' \cup \{j\}$. W.l.o.g., assume that, for every $j' \in J'$, $\text{pr}(P_j) \leq \text{pr}(P_{j'})$ (i.e., pick P_j as one of the prefixes/forwarders with the least priority of all threads). By assumption, P_j denotes a prefix or forwarder on some endpoint x_i . By well-typedness, x_i is connected through restriction to x'_i . By Rule [TYP-RES], $\text{pr}(x_i) = \text{pr}(x'_i)$. Further analysis depends on P_j : a receive (or, analogously, a branch), a send (or, analogously, a selection), or a forwarder.
 - Suppose $P_j = x_i(y, z); P'_j$. By Rule [TYP-RECV], $x'_i \notin \text{fn}(P'_j)$, because the rule requires $\text{pr}(x_i) < \text{pr}(x'_i)$: otherwise, this would contradict the fact that $\text{pr}(x_i) = \text{pr}(x'_i)$. Hence, there exists $j' \in J'$ such that $x'_i \in \text{fn}(P_{j'})$.

If $J' = \emptyset$, the contradiction is immediate. Otherwise, the analysis depends on the prefix of $P_{j'}$. Since P is not live, this cannot be a send with subject x'_i or an independent forwarder on x'_i . The prefix can also not be a dependent forwarder, for x_i already appears in P_j . This leaves us with two possibilities: a receive (or, analogously, a branch) on another endpoint, or a send (or, analogously, a selection) with object x'_i .

- ◊ If $P_{j'} = x_k(v, w); P'_{j'}$, where $x'_i \in \text{fn}(P'_{j'})$, then, by Rule [TYP-RECV], $\text{pr}(x_k) < \text{pr}(x'_i)$. Hence, $\text{pr}(P_{j'}) = \text{pr}(x_k) < \text{pr}(x'_i) = \text{pr}(x_i) = \text{pr}(P_j)$: this contradicts the assumption that $\text{pr}(P_j) \leq \text{pr}(P_{j'})$.
- ◊ If $P_{j'} = x[a, b]$ where $x'_i \in \{a, b\}$, w.l.o.g., assume $x'_i = a$. Then, by Rule [TYP-SEND], $\text{pr}(x_k) < \text{pr}(x'_i)$. The contradiction follows as in the previous case.
- Suppose $P_j = x_i[a, b]$. By Rule [TYP-SEND], $x'_i \notin \{a, b\}$, because the rule requires $\text{pr}(x_i) < \text{pr}(x'_i)$: otherwise, this would contradict the fact that $\text{pr}(x_i) = \text{pr}(x'_i)$. Hence, there exists $j' \in J'$ such that $x'_i \in \text{fn}(P_{j'})$. The contradiction follows as in the previous case.
- Suppose $P_j = [x_i \leftrightarrow x_k]$. By well-typedness, x_i is connected through restriction to x'_i . Since P is not live, it must be that $x'_i = x_k$: P_j is not an independent forwarder. Then there must be a $j' \in J'$ where $P_{j'}$ fulfills the assumption that P contains at least one prefix or independent forwarder. The contradiction then follows from the IH. \square

Theorem 3.3.32 (Deadlock-freedom). *If $\emptyset \vdash P \blacktriangleright \emptyset$, then either $P \equiv \mathbf{0}$ or $P \rightarrow Q$ for some Q .*

Proof. The analysis depends on whether P is live or not.

- If P is not live, then, by Lemma 3.3.31, it does not contain any prefixes or independent forwarders. Any recursive definitions in P are thus of the form $\mu X_1(); \dots; \mu X_n(); \mathbf{0}$: contractiveness requires recursive calls to be prefixed by receives/branches or bound to parallel sends/selections/forwarders, of which there are none. Hence, we can use structural congruence to rewrite each recursive definition in P to $\mathbf{0}$ by unfolding, yielding $P' \equiv P$. Any dependent forwarders in P are of the form $(\mathbf{v}xy)[x \leftrightarrow y]$, and can be rewritten to $\mathbf{0}$ using Rule [CONG-RES-FWD] (cf. Definition 3.3.4). The remaining derivation of P' only contains applications of Rule [TYP-INACT], [TYP-PAR], [TYP-END], or [TYP-RES] on closed names. It follows straightforwardly that $P \equiv P' \equiv \mathbf{0}$.
- If P is live, by Theorem 3.3.30 there is Q s.t. $P \rightarrow Q$. \square

B.3. REACTIVITY

Proposition 3.3.34. *For any P and P' , $P \rightarrow P'$ if and only if there exists a label α such that $P \xrightarrow{\alpha} P'$.*

Proof. Immediate by definition, because each reduction in Definition 3.3.4 corresponds to a labeled reduction, and vice versa. \square

Theorem 3.3.36 (Reactivity). *Suppose given a process $\emptyset \vdash P \blacktriangleright \emptyset$. Then, for every $x \in \text{pn}(P)$ there exists a process P' such that $P \rightarrow^* P'$ and $P' \xrightarrow{\alpha} Q$, for some process Q and label α with subject x .*

Proof. Take any $x \in \text{pn}(P)$. Because P is typable under empty contexts, x is bound to some $y \in \text{pn}(P)$ by restriction. By typing, in P there is exactly one prefix on x and one prefix on y (they may also occur in forwarder processes). Following the restrictions on priorities in the typing of x and y in P , the prefixes on x and y cannot occur sequentially in P (cf. the proof of Lemma 3.3.31 for details on this reasoning). By typability, the prefix on y is dual to the prefix on x .

We apply induction on the number of receives, branches, and recursive definitions in P blocking the prefixes on x and y , denoted n and m , respectively. Because P is typable under empty contexts, the blocking receives and branches that are on names in $\text{pn}(P)$ also have to be bound to pending names by restriction. The prefixes on these connected names may also be prefixed by receives, branches, and recursive definitions, so we may need to unblock those prefixes as well. Since there can only be a finite number of names in any given process, we also apply induction on the number of prefixes blocking these connected prefixes.

- If $n = 0$ and $m = 0$, then the prefixes on x and y occur at the top-level; because they do not occur sequentially, the communication between x and y can take place immediately. Hence, $P \xrightarrow{\alpha} Q$ where x and y are the subjects of α . This proves the thesis, with $P' = P$.
- If $n > 0$ or $m > 0$, the analysis depends on the foremost prefixes blocking the prefixes on x and y .

If either of these blocking prefixes is a recursive definition ($\mu X(\tilde{y})$), we unfold the recursion. Because a corresponding recursive call ($X(\tilde{z})$) cannot occur as a prefix, the effect of unfolding either (i) triggers prefixes that occur in parallel to those on x and y , or (ii) the prefixes on x or y precede the punfolded recursive call. In either case, the number of prefixes decreases, and the thesis follows from the IH.

Otherwise, if neither foremost prefix is a recursive definition, then the foremost prefixes must be on names in $\text{pn}(P)$. Consider the prefix that is typable with the least priority. W.l.o.g. assume that this is the foremost prefix of x . Suppose this prefix is on some name w connected to another name $z \in \text{pn}(P)$ by restriction. By typability, the priority of w is less than that of x and all of the prefixes in between. This means that the number of prefixes blocking the prefix on z strictly decreases. Hence, by the IH, $P \rightarrow^* P'' \xrightarrow{\alpha'} Q'$ in a finite number of steps, where w and z are the subjects of α' . The communication between w and z can be performed, and n decreases. By type preservation (Theorem 3.3.25), $\emptyset \vdash Q' \blacktriangleright \emptyset$. The thesis then follows from the IH: $P \rightarrow^* P'' \xrightarrow{\alpha'} Q' \rightarrow^* P' \xrightarrow{\alpha} Q$ in finite steps, where x and y are the subjects of α . \square

C

APPENDICES FOR CHAPTER 4

C.1. PROOF OF TYPE PRESERVATION

Here we prove type preservation for both semantics. Type preservation consists of *subject congruence* (structural congruence preserves typing) and *subject reduction* (reduction preserves typing). The former is ubiquitous for both semantics, while the latter requires separate proofs.

C.1.1. SUBJECTION CONGRUENCE

Theorem C.1.1. *If $\vdash P \blacktriangleright \Gamma$ and $P \equiv Q$, then $\vdash Q \blacktriangleright \Gamma$.*

Proof. By induction on the derivation of the structural congruence. We first detail the base cases. In each case we apply inversion on the typing of P and derive the typing of Q ; this straightforwardly works in both directions.

- Rule [CONG-ALPHA]: $P \equiv_{\alpha} Q \implies P \equiv Q$. Since alpha-renaming only affects bound names, it does not affect the names in Γ , so clearly $\vdash Q \blacktriangleright \Gamma$.
- Rule [CONG-FWD-SYMM]: $[x \leftrightarrow y] \equiv [y \leftrightarrow x]$.

$$\frac{}{\vdash [x \leftrightarrow y] \blacktriangleright x : A, y : \bar{A}} \text{[TYP-FWD]} \quad \equiv \quad \frac{}{\vdash [y \leftrightarrow x] \blacktriangleright x : A, y : \bar{A}} \text{[TYP-FWD]}$$

- Rule [CONG-PAR-UNIT]: $P \mid \mathbf{0} \equiv P$.

$$\frac{\frac{\vdash P \blacktriangleright \Gamma \quad \frac{}{\vdash \mathbf{0} \blacktriangleright \emptyset} \text{[TYP-INACT]}}{\vdash P \mid \mathbf{0} \blacktriangleright \Gamma} \text{[TYP-PAR]}}{\vdash P \blacktriangleright \Gamma} \quad \equiv \quad \vdash P \blacktriangleright \Gamma$$

- Rule [CONG-PAR-ASSOC]: $(P | Q) | R \equiv P | (Q | R)$.

$$\frac{\frac{\frac{\vdash P \blacktriangleright \Gamma \quad \vdash Q \blacktriangleright \Delta}{\vdash P | Q \blacktriangleright \Gamma, \Delta} [\text{TYP-PAR}] \quad \vdash R \blacktriangleright \Lambda}{\vdash (P | Q) | R \blacktriangleright \Gamma, \Delta, \Lambda} [\text{TYP-PAR}]}{\vdash P | (Q | R) \blacktriangleright \Gamma, \Delta, \Lambda} [\text{TYP-PAR}] \equiv$$

$$\frac{\frac{\frac{\vdash P \blacktriangleright \Gamma \quad \frac{\frac{\vdash Q \blacktriangleright \Delta \quad \vdash R \blacktriangleright \Lambda}{\vdash Q | R \blacktriangleright \Delta, \Lambda} [\text{TYP-PAR}]}{\vdash P | (Q | R) \blacktriangleright \Gamma, \Delta, \Lambda} [\text{TYP-PAR}]}}{\vdash P | (Q | R) \blacktriangleright \Gamma, \Delta, \Lambda} [\text{TYP-PAR}]$$

- Rule [CONG-PAR-COMM]: $P | Q \equiv Q | P$.

$$\frac{\frac{\vdash P \blacktriangleright \Gamma \quad \vdash Q \blacktriangleright \Delta}{\vdash P | Q \blacktriangleright \Gamma, \Delta} [\text{TYP-PAR}]}{\vdash P | Q \blacktriangleright \Gamma, \Delta} [\text{TYP-PAR}] \equiv \frac{\frac{\vdash Q \blacktriangleright \Delta \quad \vdash P \blacktriangleright \Gamma}{\vdash Q | P \blacktriangleright \Gamma, \Delta} [\text{TYP-PAR}]}{\vdash Q | P \blacktriangleright \Gamma, \Delta} [\text{TYP-PAR}]$$

- Rule [CONG-CONN-SYMM]: $(\nu x)(P | Q) \equiv (\nu x)(Q | P)$.

$$\frac{\frac{\vdash P \blacktriangleright \Gamma, x : A \quad \vdash Q \blacktriangleright \Delta, x : \bar{A}}{\vdash (\nu x)(P | Q) \blacktriangleright \Gamma, \Delta} [\text{TYP-CUT}]}{\vdash (\nu x)(P | Q) \blacktriangleright \Gamma, \Delta} [\text{TYP-CUT}] \equiv \frac{\frac{\vdash Q \blacktriangleright \Delta, x : \bar{A} \quad \vdash P \blacktriangleright \Gamma, x : A}{\vdash (\nu x)(Q | P) \blacktriangleright \Gamma, \Delta} [\text{TYP-CUT}]}{\vdash (\nu x)(Q | P) \blacktriangleright \Gamma, \Delta} [\text{TYP-CUT}]$$

- Rule [CONG-CONN-PAR]: $x \notin \text{fn}(Q) \implies (\nu x)((P | Q) | R) \equiv (\nu x)(P | R) | Q$. Assume the condition.

$$\frac{\frac{\frac{\frac{\vdash P \blacktriangleright \Gamma, x : A \quad \vdash Q \blacktriangleright \Delta}{\vdash P | Q \blacktriangleright \Gamma, \Delta, x : A} [\text{TYP-PAR}] \quad \vdash R \blacktriangleright \Lambda, x : \bar{A}}{\vdash (\nu x)((P | Q) | R) \blacktriangleright \Gamma, \Delta, \Lambda} [\text{TYP-CUT}]}{\vdash (\nu x)((P | Q) | R) \blacktriangleright \Gamma, \Delta, \Lambda} [\text{TYP-CUT}]}{\vdash (\nu x)((P | Q) | R) \blacktriangleright \Gamma, \Delta, \Lambda} [\text{TYP-CUT}] \equiv$$

$$\frac{\frac{\frac{\frac{\vdash P \blacktriangleright \Gamma, x : A \quad \vdash R \blacktriangleright \Lambda, x : \bar{A}}{\vdash (\nu x)(P | R) \blacktriangleright \Gamma, \Lambda} [\text{TYP-CUT}] \quad \vdash Q \blacktriangleright \Delta}{\vdash (\nu x)(P | R) | Q \blacktriangleright \Gamma, \Delta, \Lambda} [\text{TYP-PAR}]}{\vdash (\nu x)(P | R) | Q \blacktriangleright \Gamma, \Delta, \Lambda} [\text{TYP-PAR}]$$

- Rule [CONG-CONN-CONN]: $x \notin \text{fn}(Q) \implies (\nu x)((\nu y)(P | Q) | R) \equiv (\nu y)((\nu x)(P | R) | Q)$. Assume the condition.

$$\frac{\frac{\frac{\frac{\frac{\vdash P \blacktriangleright \Gamma, y : A, x : B \quad \vdash Q \blacktriangleright \Delta, y : \bar{A}}{\vdash (\nu y)(P | Q) \blacktriangleright \Gamma, \Delta, x : B} [\text{TYP-CUT}] \quad \vdash R \blacktriangleright \Lambda, x : \bar{B}}{\vdash (\nu x)((\nu y)(P | Q) | R) \blacktriangleright \Gamma, \Delta, \Lambda} [\text{TYP-CUT}]}{\vdash (\nu x)((\nu y)(P | Q) | R) \blacktriangleright \Gamma, \Delta, \Lambda} [\text{TYP-CUT}]}{\vdash (\nu x)((\nu y)(P | Q) | R) \blacktriangleright \Gamma, \Delta, \Lambda} [\text{TYP-CUT}] \equiv$$

$$\frac{\frac{\frac{\frac{\frac{\vdash P \blacktriangleright \Gamma, y : A, x : B \quad \vdash R \blacktriangleright \Lambda, x : \bar{B}}{\vdash (\nu x)(P | R) \blacktriangleright \Gamma, \Lambda, y : A} [\text{TYP-CUT}] \quad \vdash Q \blacktriangleright \Delta, y : \bar{A}}{\vdash (\nu y)((\nu x)(P | R) | Q) \blacktriangleright \Gamma, \Delta, \Lambda} [\text{TYP-CUT}]}{\vdash (\nu y)((\nu x)(P | R) | Q) \blacktriangleright \Gamma, \Delta, \Lambda} [\text{TYP-CUT}]$$

- Rule [CONG-ND-REFL]: $P \# P \equiv P$.

$$\frac{\frac{\vdash P \blacktriangleright \Gamma \quad \vdash P \blacktriangleright \Gamma}{\vdash P \# P \blacktriangleright \Gamma} [\text{TYP-ND}]}{\vdash P \# P \blacktriangleright \Gamma} [\text{TYP-ND}] \equiv \vdash P \blacktriangleright \Gamma$$

- Rule [CONG-ND-SYMM]: $P \# Q \equiv Q \# P$.

$$\frac{\vdash P \blacktriangleright \Gamma \quad \vdash Q \blacktriangleright \Gamma}{\vdash P \# Q \blacktriangleright \Gamma} \text{ [TYP-ND]} \quad \equiv \quad \frac{\vdash Q \blacktriangleright \Gamma \quad \vdash P \blacktriangleright \Gamma}{\vdash Q \# P \blacktriangleright \Gamma} \text{ [TYP-ND]}$$

- Rule [CONG-ND-ASSOC]: $(P \# Q) \# R \equiv P \# (Q \# R)$

$$\frac{\frac{\vdash P \blacktriangleright \Gamma \quad \vdash Q \blacktriangleright \Gamma}{\vdash P \# Q \blacktriangleright \Gamma} \text{ [TYP-ND]} \quad \vdash R \blacktriangleright \Gamma}{\vdash (P \# Q) \# R \blacktriangleright \Gamma} \text{ [TYP-ND]} \quad \equiv \quad \frac{\vdash P \blacktriangleright \Gamma \quad \frac{\vdash Q \blacktriangleright \Gamma \quad \vdash R \blacktriangleright \Gamma}{\vdash Q \# R \blacktriangleright \Gamma} \text{ [TYP-ND]}}{\vdash P \# (Q \# R) \blacktriangleright \Gamma} \text{ [TYP-ND]}$$

- Rule [CONG-SRV]: $x \notin \text{fn}(Q) \implies (\mathbf{v}x)(!x(y); P \mid Q) \equiv Q$. Assume the condition.

$$\frac{\frac{\vdash P \blacktriangleright ?\Gamma, y:A}{\vdash !x(y); P \blacktriangleright ?\Gamma, x:!A} \text{ [TYP-SRV]} \quad \frac{\vdash Q \blacktriangleright \Delta}{\vdash Q \blacktriangleright \Delta, x:?\bar{A}} \text{ [TYP-WEAKEN]}}{\vdash (\mathbf{v}x)(!x(y); P \mid Q) \blacktriangleright ?\Gamma, \Delta} \text{ [TYP-CUT]} \quad \equiv \quad \frac{\vdash Q \blacktriangleright \Delta}{\vdash Q \blacktriangleright ?\Gamma, \Delta} \text{ [TYP-WEAKEN]*}$$

The inductive cases follow from the IH straightforwardly. □

C.1.2. SUBJECT REDUCTION: EAGER SEMANTICS

The proofs relies on the follows auxiliary results:

- Lemma C.1.2 infers the type of a name from how it appear in a process.
- Lemma C.1.3 infers typing after reduction and collapsing ND-contexts.
- Theorem C.1.4 proves subject reduction.

Lemma C.1.2. *Suppose $\vdash P \blacktriangleright \Gamma, x:A$.*

1. If $P = \mathcal{X}[x[]]$, then $A = \mathbf{1}$.
2. If $P = \mathcal{X}[x0; P']$, then $A = \perp$.
3. If $P = \mathcal{X}[\bar{x}[y]; (P' \mid P'')]$, then $A = B \otimes C$.
4. If $P = \mathcal{X}[x(y); P']$, then $A = B \wp C$.
5. If $P = \mathcal{X}[\bar{x} \triangleleft j; P']$, then $A = \oplus \{i : B_i\}_{i \in I}$ where $j \in I$.

6. If $P = \mathcal{N}[x \triangleright \{i : P'_i\}_{i \in I}]$, then $A = \&\{i : B_i\}_{i \in I}$.
7. If $P = \mathcal{N}[\bar{x} \triangleleft \text{some}; P']$, then $A = \&B$.
8. If $P = \mathcal{N}[\bar{x} \triangleleft \text{none}]$, then $A = \&B$.
9. If $P = \mathcal{N}[x \triangleright \text{some}_{w_1, \dots, w_n}; P']$, then $A = \oplus B$.
10. If $P = \mathcal{N}[\text{?}\bar{x}[y]; P']$, then $A = ?B$.
11. If $P = \mathcal{N}[\text{!}x(y); P']$, then $A = !B$.

C

Proof. Each item follows by induction on the structure of the ND-context. The base case follows by inversion of typing, and the inductive cases follow from the IH straightforwardly. \square

Lemma C.1.3. For each of the following items, assume $\Gamma \cap \Delta = \emptyset$.

1. If $\vdash \mathcal{N}[x \leftrightarrow y] \triangleright \Gamma, x : A$ and $\vdash Q \triangleright \Delta, x : \bar{A}$, then $\vdash (\mathcal{N})[Q\{y/x\}] \triangleright \Gamma, \Delta$.
2. If $\vdash \mathcal{N}[x[]] \triangleright \Gamma, x : \mathbf{1}$, then $\vdash (\mathcal{N})[\mathbf{0}] \triangleright \Gamma$.
3. If $\vdash \mathcal{N}[x(); Q] \triangleright \Gamma, x : \perp$, then $\vdash (\mathcal{N})[Q] \triangleright \Gamma$.
4. If $\text{bn}(\mathcal{N}) \cap \text{fn}(\mathcal{N}') = \emptyset$ and $\vdash \mathcal{N}[\bar{x}[y]; (P|Q)] \triangleright \Gamma, x : A \otimes B$ and $\vdash \mathcal{N}'[x(z); R] \triangleright \Delta, x : \bar{A} \wp \bar{B}$, then $\vdash (\mathcal{N})[(\mathbf{v}x)(Q | (\mathbf{v}y)(P | (\mathcal{N}')[R\{y/z\}]))] \triangleright \Gamma, \Delta$.
5. If $\vdash \mathcal{N}[\bar{x} \triangleleft j; P] \triangleright \Gamma, x : \oplus\{i : A_i\}_{i \in I}$ and $j \in I$, then $\vdash (\mathcal{N})[P] \triangleright \Gamma, x : A_j$.
6. If $\vdash \mathcal{N}[x \triangleright \{i : P_i\}_{i \in I}] \triangleright \Gamma, x : \&\{i : A_i\}_{i \in I}$, then $\vdash (\mathcal{N})[P_i] \triangleright \Gamma, x : A_i$ for every $i \in I$.
7. If $\vdash \mathcal{N}[\bar{x} \triangleleft \text{some}; P] \triangleright \Gamma, x : \&A$, then $\vdash \mathcal{N}[P] \triangleright \Gamma, x : A$.
8. If $\vdash \mathcal{N}[\bar{x} \triangleleft \text{none}] \triangleright \Gamma, x : \&A$, then $\vdash (\mathcal{N})[\mathbf{0}] \triangleright \Gamma$.
9. If $\vdash \mathcal{N}[x \triangleright \text{some}_{w_1, \dots, w_n}; P] \triangleright \Gamma, x : \oplus A$, then $\vdash (\mathcal{N})[P] \triangleright \Gamma, x : A$ and $\vdash (\mathcal{N})[\bar{w} \triangleleft \text{none}_1 | \dots | \bar{w} \triangleleft \text{none}_n] \triangleright \Gamma$.
10. If $\text{bn}(\mathcal{N}') \cap \text{fn}(\mathcal{N}) = \emptyset$ and $\vdash \mathcal{N}[\text{?}\bar{x}[y]; P] \triangleright \Gamma, x : ?A$ and $\vdash \mathcal{N}'[\text{!}x(y); Q] \triangleright \Delta, x : \bar{!}A$, then $\vdash (\mathcal{N}')[(\mathbf{v}x)((\mathbf{v}y)((\mathcal{N})[P] | Q\{y/z\}) | \text{!}x(z); Q)]$.

Proof. For each item, we apply induction on the structure of the ND-contexts. In each case, we detail the base case: $\mathcal{N} = [\cdot]$. For simplicity, w.l.o.g., we assume no names in Γ and Δ were derived with [TYP-WEAKEN]. In each case, we derive the typing of the condition, and infer the typing of the conclusion.

1.

$$\frac{}{\vdash [x \leftrightarrow y] \triangleright \mathbf{x} : A, y : \bar{A}} \text{ [TYP-FWD]} \quad \wedge \quad \vdash Q \triangleright \Delta, x : \bar{A} \quad \implies \quad \vdash Q\{y/x\} \triangleright \Delta, y : \bar{A}$$

2.

$$\frac{}{\vdash x[] \blacktriangleright x : \mathbf{1}} \text{ [TYP-CLOSE]} \quad \Rightarrow \quad \frac{}{\vdash \mathbf{0} \blacktriangleright \emptyset} \text{ [TYP-INACT]}$$

3.

$$\frac{\vdash Q \blacktriangleright \Gamma}{\vdash x(); Q \blacktriangleright \Gamma, x : \perp} \text{ [TYP-WAIT]} \quad \Rightarrow \quad \vdash Q \blacktriangleright \Gamma$$

4.

$$\frac{\vdash P \blacktriangleright \Gamma, y : A \quad \vdash Q \blacktriangleright \Gamma', x : B}{\vdash \bar{x}[y]; (P|Q) \blacktriangleright \Gamma, \Gamma', x : A \otimes B} \text{ [TYP-SEND]} \quad \wedge \quad \frac{\vdash R \blacktriangleright \Delta, z : \bar{A}, x : \bar{B}}{\vdash x(z); R \blacktriangleright \Delta, x : \bar{A} \wp \bar{B}} \text{ [TYP-RECV]}$$

$$\Rightarrow \frac{\vdash Q \blacktriangleright \Gamma', x : B \quad \frac{\vdash P \blacktriangleright \Gamma, y : A \quad \vdash R\{y/z\} \blacktriangleright \Delta, y : \bar{A}, x : \bar{B}}{\vdash (\mathbf{v}y)(P|R\{y/z\}) \blacktriangleright \Gamma, \Delta, x : \bar{B}} \text{ [TYP-CUT]}}{\vdash (\mathbf{v}x)(Q|(\mathbf{v}y)(P|R\{y/z\})) \blacktriangleright \Gamma, \Gamma', \Delta} \text{ [TYP-CUT]}$$

5.

$$\frac{\vdash P \blacktriangleright \Gamma, x : A_j \quad j \in I}{\vdash \bar{x} \triangleleft j; P \blacktriangleright \Gamma, x : \oplus\{i : A_i\}_{i \in I}} \text{ [TYP-SEL]} \quad \Rightarrow \quad \vdash P \blacktriangleright \Gamma, x : A_j$$

6.

$$\frac{\forall i \in I. \vdash P_i \blacktriangleright \Gamma, x : A_i}{\vdash x \triangleright \{i : P_i\}_{i \in I} \blacktriangleright \Gamma, x : \&\{i : A_i\}} \text{ [TYP-BRA]} \quad \Rightarrow \quad \forall i \in I. \vdash P_i \blacktriangleright \Gamma, x : A_i$$

7.

$$\frac{\vdash P \blacktriangleright \Gamma, x : A}{\vdash \bar{x} \triangleleft \text{some}; P \blacktriangleright \Gamma, x : \&A} \text{ [TYP-SOME]} \quad \Rightarrow \quad \vdash P \blacktriangleright \Gamma, x : A$$

8.

$$\frac{}{\vdash \bar{x} \triangleleft \text{none} \blacktriangleright x : \&A} \text{ [TYP-NONE]} \quad \Rightarrow \quad \frac{}{\vdash \mathbf{0} \blacktriangleright \emptyset} \text{ [TYP-INACT]}$$

9.

$$\frac{\vdash P \blacktriangleright w_1 : \&B_1, \dots, w_n : \&B_n, x : A}{\vdash x \triangleright \text{some}_{w_1, \dots, w_n}; P \blacktriangleright w_1 : \&B_1, \dots, w_n : \&B_n, x : \oplus A} \text{ [TYP-SOME-IN]} \quad \Rightarrow$$

$$\frac{\vdash P \blacktriangleright w_1 : \&B_1, \dots, w_n : \&B_n, x : A \quad \wedge \quad \frac{}{\vdash \bar{w} \triangleleft \text{none}_1 \blacktriangleright w_1 : \&B_1} \text{ [TYP-NONE]} \quad \dots \quad \frac{}{\vdash \bar{w} \triangleleft \text{none}_n \blacktriangleright w_n : \&B_n} \text{ [TYP-NONE]}}{\vdash \bar{w} \triangleleft \text{none}_1 | \dots | \bar{w} \triangleleft \text{none}_n \blacktriangleright w_1 : \&B_1, \dots, w_n : \&B_n}$$

C

10. This item depends on whether $x \in \text{fn}(P)$.

- Case $x \in \text{fn}(P)$:

$$\begin{array}{c}
\frac{\frac{\frac{\vdash P\{x'/x\} \blacktriangleright \Gamma, y : A, x' : ?A}{\vdash ?\bar{x}[y]; P\{x'/x\} \blacktriangleright \Gamma, x : ?A, x' : ?A} \text{ [TYP-CLI]}}{\vdash ?\bar{x}[y]; P \blacktriangleright \Gamma, x : ?A} \text{ [TYP-CONTRACT]}}{\vdash P \blacktriangleright \Gamma, y : A, x : ?A} \quad \wedge \\
\frac{\vdash Q \blacktriangleright ?\Delta, z : \bar{A}}{\vdash !x(z); Q \blacktriangleright ?\Delta, x : !\bar{A}} \text{ [TYP-SRV]} \quad \Rightarrow \\
\frac{\frac{\frac{\vdash P \blacktriangleright \Gamma, y : A, x : ?A \quad \frac{\frac{\vdash Q\{y/z\}}{\{w'/w\}_{w \in \text{dom}(?\Delta)} \blacktriangleright ?\Delta', y : \bar{A}} \text{ [TYP-CUT]}}{\vdash (\mathbf{v}y)(P | Q\{y/z\}\{w'/w\}_{w \in \text{dom}(?\Delta)}) \blacktriangleright \Gamma, ?\Delta', x : ?A} \text{ [TYP-CUT]}}{\vdash (\mathbf{v}x)((\mathbf{v}y)(P | Q\{y/z\}\{w'/w\}_{w \in \text{dom}(?\Delta)}) | !x(z); Q) \blacktriangleright \Gamma, ?\Delta, ?\Delta'} \text{ [TYP-CUT]}}{\vdash (\mathbf{v}x)((\mathbf{v}y)(P | Q\{y/z\}) | !x(z); Q) \blacktriangleright \Gamma, ?\Delta} \text{ [TYP-CONTRACT]*}
\end{array}$$

- Case $x \notin \text{fn}(P)$:

$$\begin{array}{c}
\frac{\frac{\vdash P \blacktriangleright \Gamma, y : A}{\vdash ?\bar{x}[y]; P \blacktriangleright \Gamma, x : ?A} \text{ [TYP-CLI]}}{\vdash P \blacktriangleright \Gamma, y : A} \quad \wedge \quad \frac{\vdash Q \blacktriangleright ?\Delta, z : \bar{A}}{\vdash !x(z); Q \blacktriangleright ?\Delta, x : !\bar{A}} \text{ [TYP-SRV]} \quad \Rightarrow \\
\frac{\frac{\frac{\vdash P \blacktriangleright \Gamma, y : A \quad \frac{\frac{\vdash Q\{y/z\}}{\{w'/w\}_{w \in \text{dom}(?\Delta)} \blacktriangleright ?\Delta', y : \bar{A}} \text{ [TYP-CUT]}}{\vdash (\mathbf{v}y)(P | Q\{y/z\}\{w'/w\}_{w \in \text{dom}(?\Delta)}) \blacktriangleright \Gamma, ?\Delta'} \text{ [TYP-CUT]}}{\vdash (\mathbf{v}y)(P | Q\{y/z\}\{w'/w\}_{w \in \text{dom}(?\Delta)}) \blacktriangleright \Gamma, ?\Delta', x : ?A} \text{ [TYP-WEAKEN]}}{\vdash (\mathbf{v}x)((\mathbf{v}y)(P | Q\{y/z\}\{w'/w\}_{w \in \text{dom}(?\Delta)}) | !x(z); Q) \blacktriangleright \Gamma, ?\Delta, ?\Delta'} \text{ [TYP-CUT]}}{\vdash (\mathbf{v}x)((\mathbf{v}y)(P | Q\{y/z\}) | !x(z); Q) \blacktriangleright \Gamma, ?\Delta} \text{ [TYP-CONTRACT]*}
\end{array}$$

The inductive cases follow straightforwardly. Notice that the conditions on the bound and free names of the ND-contexts in Items 4 and 10 make sure that no names are captured when embedding one context in the other. \square

Theorem C.1.4 (SR for the Eager Semantics). *If $\vdash P \blacktriangleright \Gamma$ and $P \longrightarrow Q$, then $\vdash Q \blacktriangleright \Gamma$.*

Proof. By induction on the derivation of the reduction. In each case, we infer the typing of P to derive the typing of Q .

- Rule [RED-EAGER-FWD].

$$\frac{\frac{\vdash \mathcal{X}[x \leftrightarrow y] \blacktriangleright \Gamma, x : A \quad \vdash Q \blacktriangleright \Delta, x : \bar{A}}{\vdash (\mathbf{v}x)(\mathcal{X}[x \leftrightarrow y] | Q) \blacktriangleright \Gamma, \Delta} \text{[TYP-CUT]}}{\vdash \mathcal{X}[Q\{y/x\}] \blacktriangleright \Gamma, \Delta} \Rightarrow$$

(Lemma C.1.3, Item 1)

$$\vdash \mathcal{X}[Q\{y/x\}] \blacktriangleright \Gamma, \Delta$$

- Rule [RED-EAGER-CLOSE-WAIT].

$$\frac{\frac{\text{(Lemma C.1.2, Item 1)} \quad \text{(Lemma C.1.2, Item 2)}}{\vdash \mathcal{X}[x[]] \blacktriangleright \Gamma, x : \mathbf{1} \quad \vdash \mathcal{X}'[x(); Q] \blacktriangleright \Delta, x : \perp} \text{[TYP-CUT]}}{\vdash \mathbf{v}x(\mathcal{X}[x[]] | \mathcal{X}'[x(); Q]) \blacktriangleright \Gamma, \Delta} \Rightarrow$$

$$\frac{\text{(Lemma C.1.3, Item 2)} \quad \text{(Lemma C.1.3, Item 3)}}{\vdash (\mathcal{X})[\mathbf{0}] \blacktriangleright \Gamma \quad \vdash (\mathcal{X}')[Q] \blacktriangleright \Delta} \text{[TYP-PAR]}}{\vdash (\mathcal{X})[\mathbf{0}] | (\mathcal{X}')[Q] \blacktriangleright \Gamma, \Delta}$$

- Rule [RED-EAGER-SEND-RECV].

$$\frac{\frac{\text{(Lemma C.1.2, Item 3)} \quad \text{(Lemma C.1.2, Item 4)}}{\vdash \mathcal{X}[\bar{x}[y]; (P | Q)] \blacktriangleright \Gamma, x : A \otimes B \quad \vdash \mathcal{X}'[x(z); R] \blacktriangleright \Delta, x : \bar{A} \wp \bar{B}} \text{[TYP-CUT]}}{\vdash (\mathbf{v}x)(\mathcal{X}[\bar{x}[y]; (P | Q)] | \mathcal{X}'[x(z); R]) \blacktriangleright \Gamma, \Delta} \Rightarrow$$

(Lemma C.1.3, Item 4)

$$\vdash (\mathcal{X})[(\mathbf{v}x)(Q | \mathbf{v}y(P | (\mathcal{X}')[R\{y/z\}])] \blacktriangleright \Gamma, \Delta$$

- Rule [RED-EAGER-SEL-BRA].

$$\frac{\frac{\text{(Lemma C.1.2, Item 5)} \quad j \in I \quad \text{(Lemma C.1.2, Item 6)}}{\vdash \mathcal{X}[\bar{x} \triangleleft j; P] \blacktriangleright \Gamma, x : \oplus\{i : A_i\}_{i \in I} \quad \mathcal{X}'[x \triangleright \{i : Q_i\}_{i \in I}] \blacktriangleright \Delta, x : \&\{i : \bar{A}_i\}_{i \in I}} \text{[TYP-CUT]}}{\vdash (\mathbf{v}x)(\mathcal{X}[\bar{x} \triangleleft j; P] | \mathcal{X}'[x \triangleright \{i : Q_i\}_{i \in I}]) \blacktriangleright \Gamma, \Delta} \Rightarrow$$

$$\frac{\text{(Lemma C.1.3, Item 5)} \quad \text{(Lemma C.1.3, Item 6)}}{\vdash (\mathcal{X})[P] \blacktriangleright \Gamma, x : A_j \quad \vdash (\mathcal{X}')[Q_j] \blacktriangleright \Delta, x : \bar{A}_j} \text{[TYP-CUT]}}{\vdash (\mathbf{v}x)((\mathcal{X})[P] | (\mathcal{X}')[Q_j]) \blacktriangleright \Gamma, \Delta}$$

- Rule [RED-EAGER-CLI-SRV].

$$\frac{\frac{\text{(Lemma C.1.2, Item 10)} \quad \text{(Lemma C.1.2, Item 11)}}{\vdash \mathcal{X}[?\bar{x}[y]; P] \blacktriangleright \Gamma, x : ?A \quad \vdash \mathcal{X}'[!x(z); Q] \blacktriangleright \Delta, x : \bar{A}} \text{[TYP-CUT]}}{\vdash (\mathbf{v}x)(\mathcal{X}[?\bar{x}[y]; P] | \mathcal{X}'[!x(z); Q]) \blacktriangleright \Gamma, \Delta} \Rightarrow$$

(Lemma C.1.3, Item 10)

$$\vdash (\mathcal{X}')[(\mathbf{v}y)((\mathcal{X})[P] | Q\{y/z\}) | !x(z); Q] \blacktriangleright \Gamma, \Delta$$

- Rule [RED-EAGER-SOME].

$$\begin{array}{c}
\text{(Lemma C.1.2, Item 7)} \qquad \qquad \qquad \text{(Lemma C.1.2, Item 9)} \\
\frac{\vdash \mathcal{N}[\bar{x} \triangleleft \text{some}; P] \triangleright \Gamma, x : \&A \quad \vdash \mathcal{N}'[x \triangleright \text{some}_{(w_1, \dots, w_n)}; Q] \triangleright \Delta, x : \oplus \bar{A}}{\vdash (\mathbf{v}x)(\mathcal{N}[\bar{x} \triangleleft \text{some}; P] \mid \mathcal{N}'[x \triangleright \text{some}_{(w_1, \dots, w_n)}; Q]) \triangleright \Gamma, \Delta} \text{[TYP-CUT]} \\
\\
\text{(Lemma C.1.3, Item 7)} \qquad \qquad \qquad \text{(Lemma C.1.3, Item 9)} \\
\frac{\vdash (\mathcal{N})[P] \triangleright \Gamma, x : A \quad \vdash (\mathcal{N}') [Q] \triangleright \Delta, x : \bar{A}}{\vdash (\mathbf{v}x)((\mathcal{N})[P] \mid (\mathcal{N}') [Q]) \triangleright \Gamma, \Delta} \text{[TYP-CUT]} \\
\Rightarrow
\end{array}$$

- Rule [RED-EAGER-NONE].

$$\begin{array}{c}
\text{(Lemma C.1.2, Item 8)} \qquad \qquad \qquad \text{(Lemma C.1.2, Item 9)} \\
\frac{\vdash \mathcal{N}[\bar{x} \triangleleft \text{none}] \triangleright \Gamma, x : \&A \quad \vdash \mathcal{N}'[x \triangleright \text{some}_{(w_1, \dots, w_n)}; Q] \triangleright \Delta, x : \oplus \bar{A}}{\vdash (\mathbf{v}x)(\mathcal{N}[\bar{x} \triangleleft \text{none}] \mid \mathcal{N}'[x \triangleright \text{some}_{(w_1, \dots, w_n)}; Q]) \triangleright \Gamma, \Delta} \text{[TYP-CUT]} \Rightarrow \\
\\
\text{(Lemma C.1.3, Item 8)} \qquad \qquad \qquad \text{(Lemma C.1.3, Item 9)} \\
\frac{\vdash (\mathcal{N})[\mathbf{0}] \triangleright \Gamma \quad \vdash (\mathcal{N}')[\bar{w} \triangleleft \text{none}_1 \mid \dots \mid \bar{w} \triangleleft \text{none}_n] \triangleright \Delta}{\vdash (\mathcal{N})[\mathbf{0}] \mid (\mathcal{N}')[\bar{w} \triangleleft \text{none}_1 \mid \dots \mid \bar{w} \triangleleft \text{none}_n] \triangleright \Gamma, \Delta} \text{[TYP-PAR]}
\end{array}$$

- Rule [RED-EAGER-CONG]. Assume $P \equiv P'$ and $P' \longrightarrow Q'$ and $Q' \equiv Q$. By Theorem C.1.1, $\vdash P' \triangleright \Gamma$. By the IH, $\vdash Q' \triangleright \Gamma$. By Theorem C.1.1, $\vdash Q \triangleright \Gamma$.
- Rule [RED-EAGER-CONN]. Assume $P \longrightarrow P'$.

$$\begin{array}{c}
\frac{\vdash P \triangleright \Gamma, x : A \quad \vdash Q \triangleright \Delta, x : \bar{A}}{\vdash (\mathbf{v}x)(P \mid Q) \triangleright \Gamma, \Delta} \text{[TYP-CUT]} \Rightarrow \\
\\
\text{(IH)} \\
\frac{\vdash P' \triangleright \Gamma, x : A \quad \vdash Q \triangleright \Delta, x : \bar{A}}{\vdash (\mathbf{v}x)(P' \mid Q) \triangleright \Gamma, \Delta} \text{[TYP-CUT]}
\end{array}$$

- Rule [RED-EAGER-PAR]. Assume $P \longrightarrow P'$.

$$\begin{array}{c}
\frac{\vdash P \triangleright \Gamma \quad \vdash Q \triangleright \Delta}{\vdash P \mid Q \triangleright \Gamma, \Delta} \text{[TYP-PAR]} \Rightarrow \frac{\text{(IH)} \quad \vdash P' \triangleright \Gamma \quad \vdash Q \triangleright \Delta}{\vdash P' \mid Q \triangleright \Gamma, \Delta} \text{[TYP-PAR]}
\end{array}$$

- Rule [RED-EAGER-ND]. Assume $P \longrightarrow P'$.

$$\begin{array}{c}
\frac{\vdash P \triangleright \Gamma \quad \vdash Q \triangleright \Gamma}{\vdash P \# Q \triangleright \Gamma} \text{[TYP-ND]} \Rightarrow \frac{\text{(IH)} \quad \vdash P' \triangleright \Gamma \quad \vdash Q \triangleright \Gamma}{\vdash P' \# Q \triangleright \Gamma} \text{[TYP-ND]} \quad \square
\end{array}$$

C.1.3. SUBJECT REDUCTION: LAZY SEMANTICS

Lemma C.1.5. *For both of the following items, assume $\Gamma \cap \Delta = \emptyset$.*

1. *If $\forall i \in I. \forall j \in J. \text{bn}(C_i) \cap \text{fn}(D_j) = \emptyset$ and $\forall i \in I. \vdash C_i[\bar{x}[y_i]; (P_i | Q_i)] \blacktriangleright \Gamma, x : A \otimes B$ and $\forall j \in J. \vdash D_j[x(z); R_j] \blacktriangleright \Delta, x : \bar{A} \wp \bar{B}$, then*

$$\vdash \prod_{i \in I} C_i[(\mathbf{v}x)(Q_i | (\mathbf{v}w)(P_i\{w/y_i\} | \prod_{j \in J} D_j[R_j\{w/z\}])] \blacktriangleright \Gamma, \Delta.$$

2. *If $\forall i \in I. \forall j \in J. \text{bn}(D_j) \cap \text{fn}(C_i) = \emptyset$ and $\forall i \in I. \vdash C_i[\bar{x}[y_i]; P_i] \blacktriangleright \Gamma, x : ?A$ and $\forall j \in J. \vdash D_j[!x(z); Q_j] \blacktriangleright \Delta, x : !\bar{A}$, then*

$$\prod_{j \in J} D_j[(\mathbf{v}x)((\mathbf{v}w)(\prod_{i \in I} C_i[P_i\{w/y_i\}] | Q_j\{w/z\}) | !x(z); Q_j)] \blacktriangleright \Gamma, \Delta.$$

Proof. Both items follow by induction on the structures of the D-contexts. For each item, we detail the base case, where $\forall i \in I. C_i = [\cdot]$ and $\forall j \in J. D_j = [\cdot]$. The inductive cases follow from the IH straightforwardly.

1.

$$\begin{array}{c} \forall i \in I. \frac{\vdash P_i \blacktriangleright \Gamma, y_i : A \quad \vdash Q_i \blacktriangleright \Delta, x : B}{\vdash \bar{x}[y_i]; (P_i | Q_i) \blacktriangleright \Gamma, \Delta, x : A \otimes B} \text{[TYP-SEND]} \quad \wedge \\ \forall j \in J. \frac{\vdash R_j \blacktriangleright \Delta, z : \bar{A}, x : \bar{B}}{\vdash x(z); R_j \blacktriangleright \Delta, x : \bar{A} \wp \bar{B}} \text{[TYP-RECV]} \quad \implies \\ \frac{\forall j \in J. \vdash R_j\{w/z\} \blacktriangleright \Delta, w : \bar{A}, x : \bar{B}}{\vdash \prod_{j \in J} R_j\{w/z\} \blacktriangleright \Delta, w : \bar{A}, x : \bar{B}} \text{[TYP-ND]}^* \\ \frac{\forall i \in I. \vdash P_i\{w/y_i\} \blacktriangleright \Gamma, w : A \quad \vdash \prod_{j \in J} R_j\{w/z\} \blacktriangleright \Delta, w : \bar{A}, x : \bar{B}}{\vdash \prod_{j \in J} R_j\{w/z\} \blacktriangleright \Delta, w : \bar{A}, x : \bar{B}} \text{[TYP-CUT]} \\ \frac{\forall i \in I. \vdash Q_i \blacktriangleright \Delta, x : B \quad \forall i \in I. \vdash (\mathbf{v}w)(P_i\{w/y_i\} | \prod_{j \in J} R_j\{w/z\}) \blacktriangleright \Gamma, \Delta, \Lambda}{\vdash \prod_{i \in I} (\mathbf{v}x)(Q_i | (\mathbf{v}w)(P_i\{w/y_i\} | \prod_{j \in J} R_j\{w/z\})) \blacktriangleright \Gamma, \Delta, \Lambda} \text{[TYP-CUT]} \\ \frac{\vdash \prod_{i \in I} (\mathbf{v}x)(Q_i | (\mathbf{v}w)(P_i\{w/y_i\} | \prod_{j \in J} R_j\{w/z\})) \blacktriangleright \Gamma, \Delta, \Lambda}{\vdash \prod_{i \in I} (\mathbf{v}x)(Q_i | (\mathbf{v}w)(P_i\{w/y_i\} | \prod_{j \in J} R_j\{w/z\})) \blacktriangleright \Gamma, \Delta, \Lambda} \text{[TYP-ND]}^* \end{array}$$

2. This item depends on whether $x \in \text{fn}(P_i)$ or not, for each $i \in I$. W.l.o.g., we only consider the cases where either $\forall i \in I. x \in \text{fn}(P_i)$ or $\forall i \in I. x \notin \text{fn}(P_i)$.

- Case $\forall i \in I. x \in \text{fn}(P_i)$.

$$\frac{\frac{\frac{\vdash P_i\{x'/x\} \blacktriangleright \Gamma, y_i : A, x' : ?A}{\vdash ?\bar{x}[y_i]; P_i\{x'/x\} \blacktriangleright \Gamma, x : ?A, x' : ?A} \text{[TYP-CLI]}}{\forall i \in I. \vdash ?\bar{x}[y_i]; P_i \blacktriangleright \Gamma, x : ?A} \text{[TYP-CONTRACT]} \quad \wedge$$

$$\frac{\frac{\vdash Q_j \blacktriangleright ?\Delta, x : \bar{A}}{\forall j \in J. \vdash !x(z); Q_j \blacktriangleright ?\Delta, x : \bar{A}} \text{[TYP-SERV]} \quad \Rightarrow$$

$$\begin{array}{c} \forall i \in I. \\ \vdash P_i\{w/y_i\} \\ \blacktriangleright \Gamma, w : A, x : ?A \\ \hline \forall j \in J. \\ \vdash Q_j\{w/z\} \\ \{v'/v\}_{v \in \text{dom}(?\Delta)} \\ \blacktriangleright ?\Delta', w : \bar{A} \\ \hline \forall j \in J. \\ \vdash Q_j \\ \blacktriangleright ?\Delta, x : \bar{A} \\ \hline \forall j \in J. \\ \vdash !x(z); Q_j \\ \blacktriangleright ?\Delta, x : \bar{A} \\ \hline \forall j \in J. \\ \vdash (\mathbf{v}w)(\prod_{i \in I} P_i\{w/y_i\} \mid Q_j\{w/z\}\{v'/v\}_{v \in \text{dom}(?\Delta)}) \\ \blacktriangleright \Gamma, ?\Delta', x : ?A \\ \hline \forall j \in J. \\ \vdash (\mathbf{v}x)((\mathbf{v}w)(\prod_{i \in I} P_i\{w/y_i\} \mid Q_j\{w/z\}\{v'/v\}_{v \in \text{dom}(?\Delta)}) \mid !x(z); Q_j) \\ \blacktriangleright \Gamma, ?\Delta, ?\Delta' \\ \hline \forall j \in J. \\ \vdash \prod_{j \in J} (\mathbf{v}x)((\mathbf{v}w)(\prod_{i \in I} P_i\{w/y_i\} \mid Q_j\{w/z\}\{v'/v\}_{v \in \text{dom}(?\Delta)}) \mid !x(z); Q_j) \\ \blacktriangleright \Gamma, ?\Delta, ?\Delta' \\ \hline \vdash \prod_{j \in J} (\mathbf{v}x)((\mathbf{v}w)(\prod_{i \in I} P_i\{w/y_i\} \mid Q_j\{w/z\}) \mid !x(z); Q_j) \blacktriangleright \Gamma, ?\Delta \end{array} \text{[TYP-ND]}^* \text{[TYP-CUT]} \text{[TYP-SERV]} \text{[TYP-CUT]} \text{[TYP-ND]}^* \text{[TYP-CONTRACT]}^*$$

- Case $\forall i \in I. x \notin \text{fn}(P_i)$.

$$\begin{array}{c}
\frac{\frac{\frac{}{\vdash P_i \blacktriangleright \Gamma, y_i : A} \text{[TYP-CLI]}}{\forall i \in I. \vdash ?\bar{x}[y_i]; P_i \vdash \Gamma, x : ?A} \quad \wedge}{\frac{\frac{}{\vdash Q_j \blacktriangleright ?\Delta, x : \bar{A}} \text{[TYP-SRV]}}{\forall j \in J. \vdash !x(z); Q_j \blacktriangleright ?\Delta, x : !\bar{A}} \quad \Rightarrow} \\
\\
\frac{\frac{\frac{\frac{\frac{}{\vdash P_i \{w/y_i\}} \blacktriangleright \Gamma, w : A} \text{[TYP-ND]}^*}{\vdash \prod_{i \in I} P_i \{w/y_i\}} \blacktriangleright \Gamma, w : A} \quad \frac{\frac{\frac{}{\vdash Q_j \{w/z\}} \{v'/v\}_{v \in \text{dom}(?\Delta)}} \blacktriangleright ?\Delta', w : \bar{A}} \quad \text{[TYP-CUT]}}{\frac{\frac{\frac{}{\forall j \in J. \vdash (\mathbf{v}w)(\prod_{i \in I} P_i \{w/y_i\} \mid Q_j \{w/z\} \{v'/v\}_{v \in \text{dom}(?\Delta)}) \blacktriangleright \Gamma, ?\Delta'} \text{[TYP-WEAKEN]}}{\forall j \in J. \vdash (\mathbf{v}w)(\prod_{i \in I} P_i \{w/y_i\} \mid Q_j \{w/z\} \{v'/v\}_{v \in \text{dom}(?\Delta)}) \blacktriangleright \Gamma, ?\Delta', x : ?A} \quad \frac{\frac{\frac{}{\forall j \in J. \vdash Q_j} \blacktriangleright ?\Delta, z : \bar{A}} \text{[TYP-SRV]}}{\forall j \in J. \vdash !x(z); Q_j} \blacktriangleright ?\Delta, x : !\bar{A}} \text{[TYP-CUT]}}}{\frac{\frac{\frac{}{\forall j \in J. \vdash (\mathbf{v}x)((\mathbf{v}w)(\prod_{i \in I} P_i \{w/y_i\} \mid Q_j \{w/z\} \{v'/v\}_{v \in \text{dom}(?\Delta)}) \mid !x(z); Q_j)} \blacktriangleright \Gamma, ?\Delta, ?\Delta'} \text{[TYP-ND]}^*}{\frac{\frac{\frac{}{\vdash \prod_{j \in J} (\mathbf{v}x)((\mathbf{v}w)(\prod_{i \in I} P_i \{w/y_i\} \mid Q_j \{w/z\} \{v'/v\}_{v \in \text{dom}(?\Delta)}) \mid !x(z); Q_j)} \blacktriangleright \Gamma, ?\Delta, ?\Delta'} \text{[TYP-CONTRACT]}^*}{\vdash \prod_{j \in J} (\mathbf{v}x)((\mathbf{v}w)(\prod_{i \in I} P_i \{w/y_i\} \mid Q_j \{w/z\}) \mid !x(z); Q_j) \blacktriangleright \Gamma, ?\Delta} \quad \square}
\end{array}$$

Theorem C.1.6 (SR for the Lazy Semantics). *If $\vdash P \blacktriangleright \Gamma$ and $P \rightsquigarrow_S Q$, then $\vdash Q \blacktriangleright \Gamma$.*

Proof. By induction on the derivation of the reduction.

- Rule [RED-LAZY-FWD]: $(\mathbf{v}x)(\prod_{i \in I} C_i[x \leftrightarrow y] \mid Q) \rightsquigarrow_{x,y} \prod_{i \in I} C_i[Q\{y/x\}]$.

$$\begin{array}{c}
\frac{\frac{\frac{}{\forall i \in I. \vdash C_i[x \leftrightarrow y] \blacktriangleright \Gamma, x : A} \text{[TYP-ND]}^*}{\vdash \prod_{i \in I} C_i[x \leftrightarrow y] \blacktriangleright \Gamma, x : A} \quad \frac{}{\vdash Q \blacktriangleright \Delta, x : \bar{A}} \text{[TYP-CUT]}}{\frac{}{\vdash (\mathbf{v}x)(\prod_{i \in I} C_i[x \leftrightarrow y] \mid Q) \blacktriangleright \Gamma, \Delta} \quad \Rightarrow} \\
\\
\frac{\frac{}{\forall i \in I. \vdash C_i[Q\{y/x\}] \blacktriangleright \Gamma, \Delta} \text{[TYP-ND]}^*}{\vdash \prod_{i \in I} C_i[Q\{y/x\}] \blacktriangleright \Gamma, \Delta}
\end{array}$$

- Rule [RED-LAZY-SEND-RECV]:

$$(\mathbf{v}x)(\prod_{i \in I} C_i[\bar{x}[y_i]; (P_i | Q_i)] | \prod_{j \in J} \mathcal{D}_j[x(z); R_j]) \\ \rightsquigarrow_x \prod_{i \in I} C_i \left[(\mathbf{v}x)(Q_i | (\mathbf{v}w)(P_i\{w/y_i\} | \prod_{j \in J} \mathcal{D}_j[R_j\{w/z\}])) \right].$$

$$\begin{array}{c} \text{(Lemma C.1.2, Item 3)} \qquad \qquad \qquad \text{(Lemma C.1.2, Item 4)} \\ \forall i \in I. \qquad \qquad \qquad \forall j \in J. \\ \frac{\vdash C_i[\bar{x}[y_i]; (P_i | Q_i)] \blacktriangleright \Gamma, x : A \otimes B}{\vdash \prod_{i \in I} C_i[\bar{x}[y_i]; (P_i | Q_i)]} \text{[TYP-ND]}^* \quad \frac{\vdash \mathcal{D}_j[x(z); R_j] \vdash \Delta, x : \bar{A} \wp \bar{B}}{\vdash \prod_{j \in J} \mathcal{D}_j[x(z); R_j]} \text{[TYP-ND]}^* \\ \hline \frac{\vdash \prod_{i \in I} C_i[\bar{x}[y_i]; (P_i | Q_i)] \blacktriangleright \Gamma, x : A \otimes B \quad \vdash \prod_{j \in J} \mathcal{D}_j[x(z); R_j] \blacktriangleright \Delta, x : \bar{A} \wp \bar{B}}{\vdash (\mathbf{v}x)(\prod_{i \in I} C_i[\bar{x}[y_i]; (P_i | Q_i)] | \prod_{j \in J} \mathcal{D}_j[x(z); R_j]) \blacktriangleright \Gamma, \Delta} \text{[TYP-CUT]} \\ \text{(Lemma C.1.5, Item 1)} \\ \Rightarrow \quad \vdash \prod_{i \in I} C_i[(\mathbf{v}x)(Q_i | (\mathbf{v}w)(P_i\{w/y_i\} | \prod_{j \in J} \mathcal{D}_j[R_j\{w/z\}]))] \blacktriangleright \Gamma, \Delta \end{array}$$

- Rule [RED-LAZY-SEL-BRA]: $k' \in K$ implies

$$(\mathbf{v}x)(\prod_{i \in I} C_i[\bar{x} \triangleleft k'; P_i] | \prod_{j \in J} \mathcal{D}_j[x \triangleright \{k : Q_j^k\}_{k \in K}]) \\ \rightsquigarrow_x (\mathbf{v}x)(\prod_{i \in I} C_i[P_i] | \prod_{j \in J} \mathcal{D}_j[Q_j^{k'}]).$$

Take any $k' \in K$.

$$\begin{array}{c} \text{(Lemma C.1.2, Item 5)} \qquad \qquad \qquad \text{(Lemma C.1.2, Item 6)} \\ \forall i \in I. \quad \frac{\vdash C_i[\bar{x} \triangleleft k'; P_i] \blacktriangleright \Gamma, x : \oplus \{k : A_k\}_{k \in K}}{\vdash \prod_{i \in I} C_i[\bar{x} \triangleleft k'; P_i] \blacktriangleright \Gamma, x : \oplus \{k : A_k\}_{k \in K}} \text{[TYP-ND]}^* \quad \forall j \in J. \quad \frac{\vdash \mathcal{D}_j[x \triangleright \{k : Q_j^k\}_{k \in K}] \blacktriangleright \Delta, x : \& \{k : \bar{A}_k\}_{k \in K}}{\vdash \prod_{j \in J} \mathcal{D}_j[x \triangleright \{k : Q_j^k\}_{k \in K}] \blacktriangleright \Delta, x : \& \{k : \bar{A}_k\}_{k \in K}} \text{[TYP-ND]}^* \\ \hline \frac{\vdash \prod_{i \in I} C_i[\bar{x} \triangleleft k'; P_i] \blacktriangleright \Gamma, x : \oplus \{k : A_k\}_{k \in K} \quad \vdash \prod_{j \in J} \mathcal{D}_j[x \triangleright \{k : Q_j^k\}_{k \in K}] \blacktriangleright \Delta, x : \& \{k : \bar{A}_k\}_{k \in K}}{\vdash (\mathbf{v}x)(\prod_{i \in I} C_i[\bar{x} \triangleleft k'; P_i] | \prod_{j \in J} \mathcal{D}_j[x \triangleright \{k : Q_j^k\}_{k \in K}]) \blacktriangleright \Gamma, \Delta} \text{[TYP-CUT]} \quad \Rightarrow \\ \frac{\forall i \in I. \quad \frac{\vdash C_i[P_i] \blacktriangleright \Gamma, x : A}{\vdash \prod_{i \in I} C_i[P_i] \blacktriangleright \Gamma, x : A} \text{[TYP-ND]}^* \quad \forall j \in J. \quad \frac{\vdash \mathcal{D}_j[Q_j^{k'}] \blacktriangleright \Delta, x : \bar{A}}{\vdash \prod_{j \in J} \mathcal{D}_j[Q_j^{k'}] \blacktriangleright \Delta, x : \bar{A}} \text{[TYP-ND]}^*}{\vdash (\mathbf{v}x)(\prod_{i \in I} C_i[P_i] | \prod_{j \in J} \mathcal{D}_j[Q_j^{k'}]) \blacktriangleright \Gamma, \Delta} \text{[TYP-CUT]} \end{array}$$

- Rule [RED-LAZY-CLI-SRV]:

$$(\mathbf{v}x)(\prod_{i \in I} C_i[\bar{x}[y_i]; P_i] | \prod_{j \in J} \mathcal{D}_j[!x(z); Q_j]) \\ \rightsquigarrow_x \prod_{j \in J} \mathcal{D}_j \left[(\mathbf{v}x)(\prod_{i \in I} C_i[P_i\{w/z\}] | Q_j\{w/z\}) | !x(z); Q_j \right].$$

$$\begin{array}{c}
\text{(Lemma C.1.2, Item 10)} \\
\frac{\forall i \in I. \vdash C_i[\bar{x}[y_i]; P_i] \triangleright \Gamma, x : ?A}{\vdash \#_{i \in I} C_i[\bar{x}[y_i]; P_i] \triangleright \Gamma, x : ?A} \text{[TYP-ND]}^* \\
\text{(Lemma C.1.2, Item 11)} \\
\frac{\forall j \in J. \vdash \mathcal{D}_j[!x(z); Q_j] \triangleright \Delta, x : !\bar{A}}{\vdash \#_{j \in J} \mathcal{D}_j[!x(z); Q_j] \triangleright \Delta, x : !\bar{A}} \text{[TYP-ND]}^* \\
\hline
\vdash (\mathbf{v}x)(\#_{i \in I} C_i[\bar{x}[y_i]; P_i] \mid \#_{j \in J} \mathcal{D}_j[!x(z); Q_j]) \triangleright \Gamma, \Delta \quad \text{[TYP-CUT]} \\
\text{(Lemma C.1.5, Item 2)} \\
\Rightarrow \vdash \#_{j \in J} \mathcal{D}_j[(\mathbf{v}x)(\mathbf{v}w)(\#_{i \in I} C_i[P_i\{w/z\}] \mid Q_j\{w/z\}) !x(z); Q_j] \triangleright \Gamma, \Delta
\end{array}$$

- Rule [RED-LAZY-CLOSE-WAIT]:

$$(\mathbf{v}x)(\#_{i \in I} C_i[x \llbracket \cdot \rrbracket] \mid \#_{j \in J} \mathcal{D}_j[x0; Q_j]) \rightsquigarrow_x \#_{i \in I} C_i[0] \mid \#_{j \in J} \mathcal{D}_j[Q_j].$$

$$\begin{array}{c}
\text{(Lemma C.1.2, Item 1)} \\
\frac{\forall i \in I. \vdash C_i[x \llbracket \cdot \rrbracket] \triangleright \Gamma, x : \mathbf{1}}{\vdash \#_{i \in I} C_i[x \llbracket \cdot \rrbracket] \triangleright \Gamma, x : \mathbf{1}} \text{[TYP-ND]}^* \\
\text{(Lemma C.1.2, Item 2)} \\
\frac{\forall j \in J. \vdash \mathcal{D}_j[x0; Q_j] \triangleright \Delta, x : \perp}{\vdash \#_{j \in J} \mathcal{D}_j[x0; Q_j] \triangleright \Delta, x : \perp} \text{[TYP-ND]}^* \\
\hline
\vdash (\mathbf{v}x)(\#_{i \in I} C_i[x \llbracket \cdot \rrbracket] \mid \#_{j \in J} \mathcal{D}_j[x0; Q_j]) \triangleright \Gamma, \Delta \quad \Rightarrow \\
\frac{\frac{\forall i \in I. \vdash C_i[0] \triangleright \Gamma}{\vdash \#_{i \in I} C_i[0] \triangleright \Gamma} \text{[TYP-ND]}^* \quad \frac{\forall j \in J. \vdash \mathcal{D}_j[Q_j] \triangleright \Delta}{\vdash \#_{j \in J} \mathcal{D}_j[Q_j] \triangleright \Delta} \text{[TYP-ND]}^*}{\vdash \#_{i \in I} C_i[0] \mid \#_{j \in J} \mathcal{D}_j[Q_j] \triangleright \Gamma, \Delta} \text{[TYP-PAR]}
\end{array}$$

- Rule [RED-LAZY-SOME]:

$$\begin{array}{c}
(\mathbf{v}x)(\#_{i \in I} C_i[\bar{x} \triangleleft \text{some}; P_i] \mid \#_{j \in J} \mathcal{D}_j[x \triangleright \text{some}_{w_1, \dots, w_n}; Q_j]) \\
\rightsquigarrow_x (\mathbf{v}x)(\#_{i \in I} C_i[P_i] \mid \#_{j \in J} \mathcal{D}_j[Q_j]).
\end{array}$$

$$\begin{array}{c}
\text{(Lemma C.1.2, Item 7)} \\
\frac{\forall i \in I. \vdash C_i[\bar{x} \triangleleft \text{some}; P_i] \triangleright \Gamma, x : \&A}{\vdash \#_{i \in I} C_i[\bar{x} \triangleleft \text{some}; P_i] \triangleright \Gamma, x : \&A} \text{[TYP-ND]}^* \\
\text{(Lemma C.1.2, Item 9)} \\
\frac{\forall j \in J. \vdash \mathcal{D}_j[x \triangleright \text{some}_{w_1, \dots, w_n}; Q_j] \triangleright \Delta, x : \oplus \bar{A}}{\vdash \#_{j \in J} \mathcal{D}_j[x \triangleright \text{some}_{w_1, \dots, w_n}; Q_j] \triangleright \Delta, x : \oplus \bar{A}} \text{[TYP-ND]}^* \\
\hline
\vdash (\mathbf{v}x)(\#_{i \in I} C_i[\bar{x} \triangleleft \text{some}; P_i] \mid \#_{j \in J} \mathcal{D}_j[x \triangleright \text{some}_{w_1, \dots, w_n}; Q_j]) \triangleright \Gamma, \Delta \quad \Rightarrow \\
\frac{\frac{\forall i \in I. \vdash C_i[P_i] \triangleright \Gamma, x : A}{\vdash \#_{i \in I} C_i[P_i] \triangleright \Gamma, x : A} \text{[TYP-ND]}^* \quad \frac{\forall j \in J. \vdash \mathcal{D}_j[Q_j] \triangleright \Delta, x : \bar{A}}{\vdash \#_{j \in J} \mathcal{D}_j[Q_j] \triangleright \Delta, x : \bar{A}} \text{[TYP-ND]}^*}{\vdash (\mathbf{v}x)(\#_{i \in I} C_i[P_i] \mid \#_{j \in J} \mathcal{D}_j[Q_j]) \triangleright \Gamma, \Delta} \text{[TYP-CUT]}
\end{array}$$

- Rule [RED-LAZY-NONE]:

$$(\mathbf{v}x)(\prod_{i \in I} C_i[\bar{x} \langle \text{none} \rangle] \mid \prod_{j \in J} \mathcal{D}_j[x \triangleright \text{some}_{w_1, \dots, w_n}; Q_j]) \\ \rightsquigarrow_x (\mathbf{v}x)(\prod_{i \in I} C_i[\mathbf{0}] \mid \prod_{j \in J} \mathcal{D}_j[\bar{w} \langle \text{none}_1 \mid \dots \mid \bar{w} \langle \text{none}_n \rangle]).$$

(Lemma C.1.2, Item 9)

$$\begin{array}{c} \text{(Lemma C.1.2, Item 8)} \quad \forall j \in J. \\ \forall i \in I. \\ \frac{\vdash C_i[\bar{x} \langle \text{none} \rangle] \triangleright \Gamma, x : \&A}{\vdash \prod_{i \in I} C_i[\bar{x} \langle \text{none} \rangle] \triangleright \Gamma, x : \&A} \text{[TYP-ND]}^* \quad \frac{\vdash \mathcal{D}_j[x \triangleright \text{some}_{w_1, \dots, w_n}; Q_j] \triangleright \Delta, x : \oplus \bar{A}}{\vdash \prod_{j \in J} \mathcal{D}_j[x \triangleright \text{some}_{w_1, \dots, w_n}; Q_j] \triangleright \Delta, x : \oplus \bar{A}} \text{[TYP-ND]}^*}{\vdash (\mathbf{v}x)(\prod_{i \in I} C_i[\bar{x} \langle \text{none} \rangle] \mid \prod_{j \in J} \mathcal{D}_j[x \triangleright \text{some}_{w_1, \dots, w_n}; Q_j]) \triangleright \Gamma, \Delta} \text{[TYP-CUT]} \\ \implies \\ \frac{\frac{\forall i \in I. \vdash C_i[\mathbf{0}] \triangleright \Gamma}{\vdash \prod_{i \in I} C_i[\mathbf{0}] \triangleright \Gamma} \text{[TYP-ND]}^* \quad \frac{\forall j \in J. \vdash \mathcal{D}_j[\bar{w} \langle \text{none}_1 \mid \dots \mid \bar{w} \langle \text{none}_n \rangle] \triangleright \Delta}{\vdash \prod_{j \in J} \mathcal{D}_j[\bar{w} \langle \text{none}_1 \mid \dots \mid \bar{w} \langle \text{none}_n \rangle] \triangleright \Delta} \text{[TYP-ND]}^*}{\vdash \prod_{i \in I} C_i[\mathbf{0}] \mid \prod_{j \in J} \mathcal{D}_j[\bar{w} \langle \text{none}_1 \mid \dots \mid \bar{w} \langle \text{none}_n \rangle] \triangleright \Gamma, \Delta} \text{[TYP-PAR]} \end{array}$$

□

C.2. PROOF OF DEADLOCK-FREEDOM

C.2.1. EAGER SEMANTICS

The proof uses several definitions and lemmas, which we summarize:

- Definition C.2.1 defines single-choice multi-hole contexts, where holes may only appear on one side of non-deterministic choices. Definition C.2.2 yields deterministic multi-hole contexts from single-choice multi-hole contexts by collapsing non-deterministic choices to the sides of holes. Lemma C.2.3 ensures typing remains consistent when collapsing a single-choice multi-hole context.
- Lemma C.2.4 states that any typable process not equivalent to $\mathbf{0}$ can be written as an S-context with each hole replaced by a prefixed process. Let us refer to this as the *S-context form*.
- Lemma C.2.5 states that if a process in S-context form is typable under empty context and has a forwarder as one of its prefixes, that process contains a cut on one of the forwarder's subjects.
- Lemma C.2.6 states that the number of prefixed processes of a process in S-context form is at least the number of cuts in the S-context. This lemma is key to the proof of deadlock-freedom, as it is necessary to show the next lemma.

- Lemma C.2.7 states that if a process in S-context form is typable under empty context, then there must be two of its prefixed processes that share a subject.
- Theorem 4.3.4 proves deadlock-freedom for the eager semantics.

Definition C.2.1 (Single-choice Multi-hole Contexts). *We define single-choice multi-hole contexts (S -contexts, for short) as follows:*

$$\mathcal{S} ::= [\cdot]_i \mid (\mathbf{v}x)(\mathcal{S} \mid \mathcal{S}) \mid \mathcal{S} \mid \mathcal{S} \mid \mathcal{S} \# P$$

An S -context is n -ary if it has n holes $[\cdot]_1, \dots, [\cdot]_n$. We write $\mathcal{S}[P_1, \dots, P_n]$ to denote the process obtained from the n -ary multi-hole context \mathcal{S} by replacing each i -th hole in \mathcal{S} with P_i . Given an S -context \mathcal{S} with hole indices I and a sequence of processes $(P_i)_{i \in I}$, we write $\mathcal{S}[P_i]_{i \in I}$ to denote the process obtained from \mathcal{S} by replacing each hole with index i in \mathcal{S} with P_i . We say an S -context is a deterministic multi-hole context (DM-context, for short) if its holes do not appear inside any non-deterministic choices.

Definition C.2.2 (Collapse of Single-choice Multi-hole Contexts). *We define the collapse of S -context \mathcal{S} , by abuse of notation denoted $\langle\!\langle \mathcal{S} \rangle\!\rangle$, as follows, yielding a deterministic multi-hole context:*

$$\langle\!\langle [\cdot]_i \rangle\!\rangle \triangleq [\cdot]_i \quad \langle\!\langle \mathcal{S} \mid \mathcal{S}' \rangle\!\rangle \triangleq \langle\!\langle \mathcal{S} \rangle\!\rangle \mid \langle\!\langle \mathcal{S}' \rangle\!\rangle \quad \langle\!\langle (\mathbf{v}x)(\mathcal{S} \mid \mathcal{S}') \rangle\!\rangle \triangleq (\mathbf{v}x)(\langle\!\langle \mathcal{S} \rangle\!\rangle \mid \langle\!\langle \mathcal{S}' \rangle\!\rangle) \quad \langle\!\langle \mathcal{S} \# P \rangle\!\rangle \triangleq \langle\!\langle \mathcal{S} \rangle\!\rangle$$

Lemma C.2.3. *If $\vdash \mathcal{S}[P_i]_{i \in I} \blacktriangleright \Gamma$, then $\vdash \langle\!\langle \mathcal{S} \rangle\!\rangle[P_i]_{i \in I} \blacktriangleright \Gamma$.*

Proof. Straightforward, by induction on the structure of \mathcal{S} . □

Lemma C.2.4. *If $\vdash P \blacktriangleright \Gamma$ and $P \neq \mathbf{0}$, then there exist S -context \mathcal{S} with indices I and sequence of prefixed processes $(\alpha_i; P_i)_{i \in I}$ such that $P \equiv \mathcal{S}[\alpha_i; P_i]_{i \in I}$.*

Proof. Using structural congruence, we first remove all cuts with unused servers and parallel compositions with $\mathbf{0}$, obtaining $P' \equiv P$. Since $P \neq \mathbf{0}$, $P' \neq \mathbf{0}$. Then, we construct \mathcal{S} by induction on the typing derivation of P' . Rules [TYP-INACT] and [TYP-WEAKEN] do not occur, because of how we obtained P' from P . The structural rules [TYP-PAR], [TYP-CUT] are simply copied. In case of Rule [TYP-ND], we arbitrarily pick a branch to continue the construction of \mathcal{S} with, while copying the entire other branch. The other rules, which type prefixes, add a hole to \mathcal{S} ; we mark the hole with index i and refer to the prefixed process typed by the rule as $\alpha_i; P_i$. Clearly, $P \equiv P' = \mathcal{S}[\alpha_i; P_i]_{i \in I}$. □

Lemma C.2.5. *If $\vdash P = \mathcal{S}[\alpha_i; P_i]_{i \in I} \blacktriangleright \emptyset$ and there is $j \in I$ s.t. $\alpha_j = [x \leftrightarrow y]$, then there are $\mathcal{X}, \mathcal{X}', Q$ such that $P = \mathcal{X}[(\mathbf{v}x)(\mathcal{X}'[x \leftrightarrow y] \mid Q)]$.*

Proof. Note that there must be a restriction on x in P , because x appears free in $[x \leftrightarrow y]$ but $\vdash P \blacktriangleright \emptyset$. First, we obtain \mathcal{X} from P by replacing the restriction on x in P with a hole, referring to the parallel component in which $[x \leftrightarrow y]$ appears as P' and to the other parallel component as Q . Then, we obtain \mathcal{X}' from P' by replacing $[x \leftrightarrow y]$ with a hole. Clearly, $P = \mathcal{X}[(\mathbf{v}x)(\mathcal{X}'[x \leftrightarrow y] \mid Q)]$. □

Lemma C.2.6. *If the derivation of $\vdash P = \mathcal{S}[\alpha_i; P_i]_{i \in I} \blacktriangleright \Gamma$ and \mathcal{S} is deterministic and contains n cuts, then $|I| \geq n + 1$.*

Proof. We apply strong induction on the number n of cuts in \mathcal{S} :

- Case $n = 0$. Any \mathcal{S} -context must have at least one hole, so \mathcal{S} has at least one hole. Hence, $|I| \geq 1 = n + 1$.
- Case $n = n' + 1$. By abuse of notation, $P = P_1 | \dots | P_k$, where for each $1 \leq k' \leq k$, $P_{k'}$ is not a parallel composition. By assumption, $m \geq 1$ of the P_1, \dots, P_k are cuts. W.l.o.g., assume P_1, \dots, P_m are cuts.

For each $1 \leq j \leq m$, by inversion of Rule [TYP-PAR], $\vdash P_j \blacktriangleright \Gamma_j$, and by construction, there are \mathcal{S}_j, I_j s.t. $P_j = \mathcal{S}_j[\alpha_i; P_i]_{i \in I_j}$ where \mathcal{S}_j is deterministic. We have for each $1 \leq j \leq m$ and $1 \leq j' \leq m$ where $j \neq j'$ that $I_j \cap I_{j'} = \emptyset$, and $\bigcup_{1 \leq j \leq m} I_j \subseteq I$. Then, for each $1 \leq j \leq m$, let $1 \leq n_j \leq n$ be the number of cuts in \mathcal{S}_j . Since P_{m+1}, \dots, P_k are not cuts, we have $\sum_{1 \leq j \leq m} n_j = n$.

Take any $1 \leq j \leq m$. We have $P_j = (\mathbf{v}x)(P'_j | P''_j)$, and by inversion of Rule [TYP-CUT], $\vdash P'_j \blacktriangleright \Gamma'_j, x : A$ and $\vdash P''_j \blacktriangleright \Gamma''_j, x : \bar{A}$ where $\Gamma_j = \Gamma'_j, \Gamma''_j$. By construction, there are $\mathcal{S}'_j, \mathcal{S}''_j, I'_j, I''_j$ s.t. $P'_j = \mathcal{S}'_j[\alpha_i; P_i]_{i \in I'_j}$ and $P''_j = \mathcal{S}''_j[\alpha_i; P_i]_{i \in I''_j}$ and \mathcal{S}'_j and \mathcal{S}''_j are deterministic. We have $I'_j \cap I''_j = \emptyset$ and $I'_j \cup I''_j = I_j$.

Let n'_j and n''_j be the number of cuts in \mathcal{S}'_j and \mathcal{S}''_j , respectively. We have that $n'_j + n''_j + 1 = n_j$. Since $n_j \leq n = n' + 1$, then $n'_j, n''_j \leq n'$. Then, by the IH, $|I'_j| \geq n'_j + 1$ and $|I''_j| \geq n''_j + 1$. Therefore, $|I_j| = |I'_j \cup I''_j| = |I'_j| + |I''_j| \geq n'_j + n''_j + 1 + 1 = n_j + 1$.

In conclusion,

$$|I| \geq |\bigcup_{1 \leq j \leq m} I_j| = \sum_{1 \leq j \leq m} |I_j| \geq \sum_{1 \leq j \leq m} (n_j + 1) = \sum_{1 \leq j \leq m} n_j + m = n + m \geq n + 1. \quad \square$$

Lemma C.2.7. *If $\vdash P = \mathcal{S}[\alpha_i; P_i]_{i \in I} \blacktriangleright \emptyset$ where for each $i \in I$, $\alpha_i \neq [x \leftrightarrow y]$ for any x and y , then there are $j, k \in I$ where $j \neq k$ and $x = \text{sub}(\alpha_j) = \text{sub}(\alpha_k)$, and there are $\mathcal{N}, \mathcal{N}_j, \mathcal{N}_k$ such that $P = \mathcal{N}[(\mathbf{v}x)(\mathcal{N}_j[\alpha_j] | \mathcal{N}_k[\alpha_k])]$.*

Proof. Let $Q = (\mathcal{S})[(\alpha_i)_{i \in I}]$. Then Q is deterministic and, by Lemma C.2.3, $\vdash Q \blacktriangleright \emptyset$. Let n be the number of cuts in \mathcal{S} . By Lemma C.2.6, $|I| \geq n + 1$.

Suppose, for contradiction, that for every $j, k \in I$ where $j \neq k$, we have $\text{sub}(\alpha_j) \neq \text{sub}(\alpha_k)$. Since $\vdash Q \blacktriangleright \emptyset$, for each $j \in I$, $\text{sub}(\alpha_j)$ must be bound by a cut, so \mathcal{S} must contain $|I|$ cuts. This means $|I| = n$, contradicting the fact that $|I| \geq n + 1$. Therefore, there must be $j, k \in I$ where $j \neq k$ such that $\text{sub}(\alpha_j) = \text{sub}(\alpha_k)$.

Hence, we can take $x = \text{sub}(\alpha_j) = \text{sub}(\alpha_k)$. Since $\vdash P \blacktriangleright \emptyset$ but x appears free in $\alpha_j; P_j$ and $\alpha_k; P_k$, there must be a restriction on x in \mathcal{S} containing the holes $[\cdot]_j$ and $[\cdot]_k$. We now obtain \mathcal{N} from P by replacing the restriction on x in P with a hole, referring to the parallel component in which $\alpha_j; P_j$ appears as P_j and the component in which $\alpha_k; P_k$ appears as P_k . Then, we obtain \mathcal{N}_j and \mathcal{N}_k from P_j and P_k , respectively, by replacing $\alpha_j; P_j$ and $\alpha_k; P_k$ with a hole. Clearly, $P = \mathcal{N}[(\mathbf{v}x)(\mathcal{N}_j[\alpha_j; P_j] | \mathcal{N}_k[\alpha_k; P_k])]$. \square

Theorem 4.3.4 (Deadlock-freedom: Eager Semantics). *If $P \vdash \emptyset$ and $P \neq \mathbf{0}$, then there is R such that $P \longrightarrow R$.*

Proof. By Lemma C.2.4, there are S-context \mathcal{S} with hole indices I and sequence of prefixed processes $(\alpha_i; P_i)_{i \in I}$ such that $P \equiv \mathcal{S}[\alpha_i; P_i]_{i \in I}$. The next step depends on whether there is a forwarder process among the α_i .

- If there exists $j \in I$ s.t. $\alpha_j = [x \leftrightarrow y]$ for some x and y , then by Lemma C.2.5 there are $\mathcal{N}, \mathcal{N}', Q$ s.t. $\mathcal{S}[\alpha_i; P_i] = \mathcal{N}[(\mathbf{v}x)(\mathcal{N}'[x \leftrightarrow y] \mid Q)]$.

$$\begin{aligned} & (\mathbf{v}x)(\mathcal{N}'[x \leftrightarrow y] \mid Q) \longrightarrow \mathcal{N}'[Q\{y/x\}] \triangleq R' \\ \mathcal{S}[\alpha_i; P_i]_{i \in I} = \mathcal{N}[(\mathbf{v}x)(\mathcal{N}'[x \leftrightarrow y] \mid Q)] & \longrightarrow \mathcal{N}[R'] \triangleq R \\ & P \longrightarrow R \end{aligned}$$

- If for each $i \in I$, $\alpha_i \neq [x \leftrightarrow y]$ for any x and y , then by Lemma C.2.7 there are $j, k \in I$ where $j \neq k$ and $x = \text{sub}(\alpha_j) = \text{sub}(\alpha_k)$ for some x , and $\mathcal{N}, \mathcal{N}_j, \mathcal{N}_k$ such that $\mathcal{S}[\alpha_i; P_i]_{i \in I} = \mathcal{N}[(\mathbf{v}x)(\mathcal{N}_j[\alpha_j; P_j] \mid \mathcal{N}_k[\alpha_k; P_k])]$.

We now show by cases on α_j that there is R' such that

$$(\mathbf{v}x)(\mathcal{N}_j[\alpha_j; P_j] \mid \mathcal{N}_k[\alpha_k; P_k]) \longrightarrow R'.$$

First, note that by typability, if the type for x in $\mathcal{N}_j[\alpha_j; P_j]$ is A , then the type for x in $\mathcal{N}_k[\alpha_k; P_k]$ is \bar{A} . In the following cases, we determine more precisely the form of A by typing inversion on $\mathcal{N}_j[\alpha_j; P_j]$, and then determine the form of α_k by typing inversion using the form of \bar{A} . Note that we can exclude any cases where α_j or α_k are forwarder processes, as we assume they are not.

- If $\alpha_j; P_j = x[]$, then $A = \mathbf{1}$ and $\bar{A} = \perp$. Hence, $\alpha_k; P_k = x0; P_k$. By Rule [RED-EAGER-CLOSE-WAIT], there is R' such that

$$(\mathbf{v}x)(\mathcal{N}_j[x[]] \mid \mathcal{N}_k[x0; P_k]) \longrightarrow R'.$$

- If $\alpha_j; P_j = \bar{x}[y]; (P'_j \mid P''_j)$ for some y , then $A = B \otimes C$ and $\bar{A} = \bar{B} \bar{\otimes} \bar{C}$ for some B and C . Hence, $\alpha_k; P_k = x(z); P_k$ for some z . By Rule [RED-EAGER-SEND-RECV], there is R' such that

$$(\mathbf{v}x)(\mathcal{N}_j[\bar{x}[y]; (P'_j \mid P''_j)] \mid \mathcal{N}_k[x(z); P_k]) \longrightarrow R'.$$

- If $\alpha_j; P_j = \bar{x} \triangleleft l'; P_j$, then $A = \oplus \{l : B_l\}_{l \in L}$ and $\bar{A} = \& \{l : \bar{B}_l\}_{l \in L}$ for some $(B_l)_{l \in L}$ where $l' \in L$. Hence, $\alpha_k; P_k = x \triangleright \{l : P'_k\}_{l \in L}$. By Rule [RED-EAGER-SEL-BRA], there is R' such that

$$(\mathbf{v}x)(\mathcal{N}_j[\bar{x} \triangleleft l'; P_j] \mid \mathcal{N}_k[x \triangleright \{l : P'_k\}_{l \in L}]) \longrightarrow R'.$$

- If $\alpha_j; P_j = \bar{x} \triangleleft \text{some}; P_j$, then $A = \oplus B$ and $\bar{A} = \& \bar{B}$ for some B . Hence, $\alpha_k = x \triangleright \text{some}_{w_1, \dots, w_n}; P_k$ for some w_1, \dots, w_n . By Rule [RED-EAGER-SOME], there is R' such that

$$(\mathbf{v}x)(\mathcal{N}_j[\bar{x} \triangleleft \text{some}; P_j] \mid \mathcal{N}_k[x \triangleright \text{some}_{w_1, \dots, w_n}; P_k]) \longrightarrow R'.$$

- If $\alpha_j; P_j = \bar{x} \triangleleft \text{none}$, then $A = \oplus B$ and $\bar{A} = \& \bar{B}$ for some B . Hence, $\alpha_k = x \triangleright \text{some}_{w_1, \dots, w_n}; P_k$ for some w_1, \dots, w_n . By Rule [RED-EAGER-NONE], there is R' such that

$$(\mathbf{v}x)(\mathcal{N}_j[\bar{x} \triangleleft \text{none}] \mid \mathcal{N}_k[x \triangleright \text{some}_{w_1, \dots, w_n}; P_k]) \longrightarrow R'.$$

- If $\alpha_j; P_j = ?\bar{x}[y]; P_j$ for some y , then $A = ?B$ and $\bar{A} = !\bar{B}$ for some B . Hence, $\alpha_k; P_k = !x(z); P_k$ for some z . By Rule [RED-EAGER-CLI-SRV], there is R' such that

$$(\mathbf{v}x)(\mathcal{N}_j[?\bar{x}[y]; P_j] \mid \mathcal{N}_k[!x(z); P_k]) \longrightarrow R'.$$

- Otherwise, α_j is a receiving prefix and α_k is thus a sending prefix. By cases on α_k , the proof is analogous to above.

In conclusion,

$$\begin{aligned} S[\alpha_i; P_i]_{i \in I} &= \mathcal{N}[(\mathbf{v}x)(\mathcal{N}_j[\alpha_j; P_j] \mid \mathcal{N}_k[\alpha_k; P_k])] \longrightarrow \mathcal{N}[R'] \triangleq R \\ &P \longrightarrow R. \end{aligned} \quad \square$$

C.2.2. LAZY SEMANTICS

We require the following definitions and intermediate results:

- Definition C.2.8 defines non-deterministic reduction contexts with multiple holes.
- Lemma C.2.9 states that processes in ND-context form with at least one prefix on a free name can be written as multi-hole ND-contexts.
- Lemma C.2.10 states that multi-hole ND-contexts can be split into deterministic and non-deterministic parts.
- Definition C.2.11 defines the *flattening* of multi-hole ND-contexts, propagating choices to the top-level.
- Lemma C.2.12 states that well-typed processes in multi-hole ND-context form can be flattened to the non-deterministic composition of D-contexts.
- Lemma C.2.13 states that when a process reduces by synchronization between flattened multi-hole ND-contexts, then the same process with unflattened multi-hole ND-contexts reduces to the same process.

- Theorem C.2.14 states that an eager reduction implies a lazy reduction to the same process.
- Theorem C.2.15 proved deadlock-freedom for the lazy semantics.

Definition C.2.8 (Multi-hole Non-deterministic Reduction Contexts).

$$\mathcal{M} ::= [\cdot] \mid (\mathbf{v}x)(P \mid \mathcal{M}) \mid P \mid \mathcal{M} \mid \mathcal{M} \# \mathcal{M}$$

Lemma C.2.9. *If $\vdash \mathcal{N}[\alpha; P] \blacktriangleright \Gamma, x : A$ and $x \in \text{sub}(\alpha)$, then there are \mathcal{M} and $(\alpha_i; P_i)_{i \in I}$ such that $\mathcal{N}[\alpha; P] = \mathcal{M}[\alpha_i; P_i]_{i \in I}$ where $x \notin \text{fn}(\mathcal{M})$ and $x \in \bigcap_{i \in I} \text{fn}(\alpha_i; P_i)$ and there is $i' \in I$ such that $\alpha_{i'}; P_{i'} = \alpha; P$.*

Lemma C.2.10. *For every multi-hole ND-context \mathcal{M} with indices I :*

- *If \mathcal{M} has two or more holes, there are $\mathcal{C}, \mathcal{M}_1$ with indices I_1, \mathcal{M}_2 with indices I_2 such that $\mathcal{M} = \mathcal{C}[\mathcal{M}_1 \# \mathcal{M}_2]$ where $I_1 \cap I_2 = \emptyset$ and $I = I_1 \cup I_2$.*
- *If \mathcal{M} has only one hole, there is \mathcal{C} such that $\mathcal{M} = \mathcal{C}$.*

Definition C.2.11.

$$\text{flat}(\mathcal{C}[\mathcal{M} \# \mathcal{M}']) \triangleq \text{flat}(\mathcal{C}[\mathcal{M}]) \# \text{flat}(\mathcal{C}[\mathcal{M}']) \qquad \text{flat}(\mathcal{C}) \triangleq \mathcal{C}$$

Lemma C.2.12. *If $\vdash \mathcal{M}[P_i]_{i \in I} \blacktriangleright \Gamma$ where $x \notin \text{fn}(\mathcal{M})$ and $\forall i \in I. x \in \text{fn}(P_i)$, then there are $(\mathcal{C}_i)_{i \in I}$ such that $\text{flat}(\mathcal{M}[P_i]_{i \in I}) = \prod_{i \in I} \mathcal{C}_i[P_i]$ where $\forall i \in I. x \notin \text{fn}(\mathcal{C}_i)$.*

Lemma C.2.13. *If*

$$(\mathbf{v}x)(\mathcal{N}[\text{flat}(\mathcal{M}[\alpha_i; P_i]_{i \in I}) \mid \mathcal{N}'[\text{flat}(\mathcal{M}'[\beta_j; Q_j]_{j \in J})]) \rightsquigarrow_S R,$$

then

$$(\mathbf{v}x)(\mathcal{N}[\mathcal{M}[\alpha_i; P_i]_{i \in I} \mid \mathcal{N}'[\mathcal{M}'[\beta_j; Q_j]_{j \in J}]) \rightsquigarrow_S R.$$

Proof. By induction on the structures of \mathcal{M} and \mathcal{M}' . By Lemma C.2.10, we only have to consider two cases for \mathcal{M} ($\mathcal{M} = \mathcal{C}[\mathcal{M}_1 \# \mathcal{M}_2]$ and $\mathcal{M} = \mathcal{C}$), and similarly for \mathcal{M}' . We only detail the base case ($\mathcal{M} = \mathcal{C}$ and $\mathcal{M}' = \mathcal{C}'$) and a representative inductive case ($\mathcal{M} = \mathcal{C}[\mathcal{M}_1 \# \mathcal{M}_2]$ and $\mathcal{M}' = \mathcal{C}'$).

- $\mathcal{M} = \mathcal{C}$ and $\mathcal{M}' = \mathcal{C}'$. Note that \mathcal{M} and \mathcal{M}' have only one hole; w.l.o.g., assume $I = J = \{1\}$.

$$\begin{aligned} \text{flat}(\mathcal{M}[\alpha_1; P_1]) &= \text{flat}(\mathcal{C}[\alpha_1; P_1]) = \mathcal{C}[\alpha_1; P_1] = \mathcal{M}[\alpha_1; P_1] \\ \text{flat}(\mathcal{M}'[\beta_1; Q_1]) &= \text{flat}(\mathcal{C}'[\beta_1; Q_1]) = \mathcal{C}'[\beta_1; Q_1] = \mathcal{M}'[\beta_1; Q_1] \end{aligned}$$

The thesis follows by assumption and equality.

- $\mathcal{M} = C[\mathcal{M}_1 \# \mathcal{M}_2]$ and $\mathcal{M}' = C'$. Note that \mathcal{M}' has only one hole; w.l.o.g., assume $J = \{1\}$.

$$\begin{aligned}
& (\mathbf{v}x)(\mathcal{N}[\text{flat}(\mathcal{M}[\alpha_i; P_i]_{i \in I}) \mid \mathcal{N}'[\text{flat}(\mathcal{M}'[\beta_1; Q_1])]) \\
&= (\mathbf{v}x)(\mathcal{N}[\text{flat}(C[\mathcal{M}_1 \# \mathcal{M}_2])[\alpha_i; P_i]_{i \in I} \mid \mathcal{N}'[\text{flat}(C'[\beta_1; Q_1])]) \\
&= (\mathbf{v}x)(\mathcal{N}[(\text{flat}(C[\mathcal{M}_1]) \# \text{flat}(C[\mathcal{M}_2]))[\alpha_i; P_i]_{i \in I} \mid \mathcal{N}'[C'[\beta_1; Q_1]]) \quad (\text{C.1})
\end{aligned}$$

There are I_1 and I_2 such that $I_1 \cap I_2 = \emptyset$ and $I = I_1 \cup I_2$ and

$$\begin{aligned}
& (\mathbf{v}x)(\mathcal{N}[\text{flat}(\mathcal{M}[\alpha_i; P_i]_{i \in I}) \mid \mathcal{N}'[\text{flat}(\mathcal{M}'[\beta_1; Q_1])]) \\
&= (\mathbf{v}x)(\mathcal{N}[\text{flat}(C[\mathcal{M}_1])[\alpha_i; P_i]_{i \in I_1} \# \text{flat}(C[\mathcal{M}_2])[\alpha_i; P_i]_{i \in I_2} \mid \mathcal{N}'[C'[\beta_1; Q_1]]). \quad (\text{by (C.1)}) \\
& \quad \quad \quad (\text{C.2})
\end{aligned}$$

Let $\mathcal{N}_1 = \mathcal{N}[\cdot \# \text{flat}(C[\mathcal{M}_2])[\alpha_i; P_i]_{i \in I_2}]$.

$$\begin{aligned}
& (\mathbf{v}x)(\mathcal{N}[\text{flat}(\mathcal{M}[\alpha_i; P_i]_{i \in I}) \mid \mathcal{N}'[\text{flat}(\mathcal{M}'[\beta_1; Q_1])]) \\
&= (\mathbf{v}x)(\mathcal{N}_1[\text{flat}(C[\mathcal{M}_1])[\alpha_i; P_i]_{i \in I_1} \mid \mathcal{N}'[C'[\beta_1; Q_1]]) \quad (\text{by (C.2)}) \\
&\rightsquigarrow_S R \quad \quad \quad (\text{by assumption}) \\
& \quad \quad \quad (\text{C.3})
\end{aligned}$$

$$\begin{aligned}
& (\mathbf{v}x)(\mathcal{N}_1[C[\mathcal{M}_1][\alpha_i; P_i]_{i \in I_1} \mid \mathcal{N}'[C'[\beta_1; Q_1]]) \\
&= (\mathbf{v}x)(\mathcal{N}[C[\mathcal{M}_1][\alpha_i; P_i]_{i \in I_1} \# \text{flat}(C[\mathcal{M}_2])[\alpha_i; P_i]_{i \in I_2} \mid \mathcal{N}'[C'[\beta_1; Q_1]]) \\
&\rightsquigarrow_S R \quad \quad \quad (\text{by IH on (C.3)}) \\
& \quad \quad \quad (\text{C.4})
\end{aligned}$$

Let $\mathcal{N}_2 = \mathcal{N}[C[\mathcal{M}_1][\alpha_i; P_i]_{i \in I_1} \# \cdot]$.

$$\begin{aligned}
& (\mathbf{v}x)(\mathcal{N}[C[\mathcal{M}_1][\alpha_i; P_i]_{i \in I_1} \# \text{flat}(C[\mathcal{M}_2])[\alpha_i; P_i]_{i \in I_2} \mid \mathcal{N}'[C'[\beta_1; Q_1]]) \\
&= (\mathbf{v}x)(\mathcal{N}_2[\text{flat}(C[\mathcal{M}_2])[\alpha_i; P_i]_{i \in I_2} \mid \mathcal{N}'[C'[\beta_1; Q_1]]) \\
&\rightsquigarrow_S R \quad \quad \quad (\text{by (C.4)}) \\
& \quad \quad \quad (\text{C.5})
\end{aligned}$$

$$\begin{aligned}
& (\mathbf{v}x)(\mathcal{N}_2[C[\mathcal{M}_2][\alpha_i; P_i]_{i \in I_2} \mid \mathcal{N}'[C'[\beta_1; Q_1]]) \\
&= (\mathbf{v}x)(\mathcal{N}[C[\mathcal{M}_1][\alpha_i; P_i]_{i \in I_1} \# C[\mathcal{M}_2][\alpha_i; P_i]_{i \in I_2} \mid \mathcal{N}'[C'[\beta_1; Q_1]]) \\
&= (\mathbf{v}x)(\mathcal{N}[C[\mathcal{M}_1][\alpha_i; P_i]_{i \in I_1} \# C[\mathcal{M}_2][\alpha_i; P_i]_{i \in I_2} \mid \mathcal{N}'[C'[\beta_1; Q_1]]) \\
&\rightsquigarrow_S R \quad \quad \quad (\text{by IH on (C.5)}) \\
& \quad \quad \quad (\text{C.6})
\end{aligned}$$

$$\begin{aligned}
& (\mathbf{v}x)(\mathcal{N}[C[\mathcal{M}_1][\alpha_i; P_i]_{i \in I_1} \# \mathcal{M}_2[\alpha_i; P_i]_{i \in I_2} \mid \mathcal{N}'[C'[\beta_1; Q_1]]) \\
&= (\mathbf{v}x)(\mathcal{N}[C[(\mathcal{M}_1 \# \mathcal{M}_2)[\alpha_i; P_i]_{i \in I} \mid \mathcal{N}'[C'[\beta_1; Q_1]]) \\
&= (\mathbf{v}x)(\mathcal{N}[C[\mathcal{M}_1 \# \mathcal{M}_2][\alpha_i; P_i]_{i \in I} \mid \mathcal{N}'[C'[\beta_1; Q_1]]) \\
&= (\mathbf{v}x)(\mathcal{N}[\mathcal{M}[\alpha_i; P_i]_{i \in I} \mid \mathcal{N}'[\mathcal{M}'[\beta_1; Q_1]]) \\
&\rightsquigarrow_S R \quad \quad \quad (\text{by Rule [RED-LAZY-SCOPE] on (C.6)})
\end{aligned}$$

□

Theorem C.2.14. *If $\vdash P \blacktriangleright \Gamma$ and $P \longrightarrow R$, then $P \rightsquigarrow_S R$.*

Proof. By induction on the derivation of the reduction. The inductive cases of Rules [RED-EAGER-CONG], [RED-EAGER-CONN], [RED-EAGER-PAR], and [RED-EAGER-ND] follow from the IH straightforwardly, using the corresponding closure rule for \rightsquigarrow . As representative base case, we consider Rule [RED-EAGER-CLOSE-WAIT]: $P = (\mathbf{v}x)(\mathcal{N}[x[]] \mid \mathcal{N}'[x0; Q]) \longrightarrow R$.

By inversion of typing, $\vdash \mathcal{N}[x[]] \blacktriangleright \Gamma, x : A$, so by Lemma C.2.9, there are \mathcal{M} and $(\alpha_i; P_i)_{i \in I}$ such that $\mathcal{N}[x[]] = \mathcal{M}[\alpha_i; P_i]_{i \in I}$ where $x \notin \text{fn}(\mathcal{M})$ and $x \in \bigcap_{i \in I} \text{fn}(\alpha_i; P_i)$ and there is $i' \in I$ such that $\alpha_{i'}; P_{i'} = x[]$. Similarly, there are \mathcal{M}' and $(\beta_j; Q_j)_{j \in J}$ such that $\mathcal{N}'[x0; Q] = \mathcal{M}'[\beta_j; Q_j]_{j \in J}$ where $x \notin \text{fn}(\mathcal{M}')$ and $x \in \bigcap_{j \in J} \text{fn}(\beta_j; Q_j)$ and there is $j' \in J$ such that $\beta_{j'}; Q_{j'} = x0; Q$.

By Lemma C.2.12,

$$\text{flat}(\mathcal{M}[\alpha_i; P_i]_{i \in I}) = \prod_{i \in I} C_i[\alpha_i; P_i] \quad \text{and} \quad \text{flat}(\mathcal{M}'[\beta_j; Q_j]_{j \in J}) = \prod_{j \in J} C'_j[\beta_j; Q_j].$$

By typability, there is $I' \subseteq I$ such that $\forall i \in I'. \alpha_i \triangleright x[]$ and $\forall i \in I \setminus I'. \alpha_i \not\triangleright x[]$; hence, $i' \in I'$. Similarly, there is $J' \subseteq J$ such that $\forall j \in J'. \beta_j \triangleright x0$ and $\forall j \in J \setminus J'. \beta_j \not\triangleright x0$; hence, $j' \in J'$. Then, by Definition 4.2.4,

$$\text{flat}(\mathcal{M}[\alpha_i; P_i]_{i \in I}) \geq_x \prod_{i \in I'} C_i[x[]] \quad \text{and} \quad \text{flat}(\mathcal{M}'[\beta_j; Q_j]_{j \in J}) \geq_x \prod_{j \in J'} C_j[x0; Q_j].$$

By Rule [RED-LAZY-CLOSE-WAIT],

$$(\mathbf{v}x)(\prod_{i \in I'} C_i[x[]] \mid \prod_{j \in J'} C_j[x0; Q_j]) \rightsquigarrow_x R,$$

so by Rule [RED-LAZY-PRECONG],

$$(\mathbf{v}x)(\text{flat}(\mathcal{M}[\alpha_i; P_i]_{i \in I}) \mid \text{flat}(\mathcal{M}'[\beta_j; Q_j]_{j \in J})) \rightsquigarrow_x R.$$

Then, by Lemma C.2.13,

$$(\mathbf{v}x)(\mathcal{M}[\alpha_i; P_i]_{i \in I} \mid \mathcal{M}'[\beta_j; Q_j]_{j \in J}) \rightsquigarrow_x R.$$

As second base case, we consider Rule [RED-EAGER-FWD]: $P = (\mathbf{v}x)(\mathcal{N}[[x \leftrightarrow y]] \mid Q) \longrightarrow R$. By inversion of typing, $\vdash \mathcal{N}[[x \leftrightarrow y]] \blacktriangleright \Gamma, x : A, y : \bar{A}$, so by Lemma C.2.9, there are \mathcal{M} and $(\alpha_i; P_i)_{i \in I}$ such that $\mathcal{N}[[x \leftrightarrow y]] = \mathcal{M}[\alpha_i; P_i]_{i \in I}$ where $x \notin \text{fn}(\mathcal{M})$ and $x \in \bigcap_{i \in I} \text{fn}(\alpha_i; P_i)$ and there is $i' \in I$ such that $\alpha_{i'}; P_{i'} = [x \leftrightarrow y]$.

By Lemma C.2.12, $\text{flat}(\mathcal{M}[\alpha_i; P_i]_{i \in I}) = \prod_{i \in I} C_i[\alpha_i; P_i]$. By typability, there is $I' \subseteq I$ such that $\forall i \in I'. \alpha_i = [x \leftrightarrow y]$ and $\forall i \in I \setminus I'. \alpha_i \neq [x \leftrightarrow y]$; hence, $i' \in I'$.

Then, by Definition 4.2.4, $\text{flat}(\mathcal{M}[\alpha_i; P_i]_{i \in I}) \geq_{x,y} \prod_{i \in I'} C_i[[x \leftrightarrow y]]$. By Rule [RED-LAZY-FWD],

$$(\mathbf{v}x)(\prod_{i \in I'} C_i[[x \leftrightarrow y]] \mid Q) \rightsquigarrow_{x,y} R,$$

so by Rule [RED-LAZY-PRECONG],

$$(\mathbf{v}x)(\text{flat}(\mathcal{M}[\alpha_i; P_i]_{i \in I}) \mid Q) \rightsquigarrow_{x,y} R.$$

Then, by Lemma C.2.13,

$$(\mathbf{v}x)(\mathcal{M}[\alpha_i; P_i]_{i \in I} \mid Q) \rightsquigarrow_{x,y} R. \quad \square$$

C

Theorem C.2.15 (Deadlock-freedom: Lazy Semantics). *If $\vdash P \blacktriangleright \emptyset$ and $P \neq \mathbf{0}$, then $P \rightsquigarrow_S R$ for some S and R .*

Proof. As a corollary of Theorems 4.3.4 and C.2.14. □

C.3. PROOF OF BISIMILARITY RESULT

- Definition C.3.1 defines when prefixes are duals.
- Lemma C.3.2 states that when a process typed under empty context has a ready prefix (Definition 4.3.5), the process can reduce to a state where the prefix's dual is ready too.

Definition C.3.1 (Dual Prefix). *Given prefixes α and β (Definition 4.2.3), we say α and β are duals, denoted $\alpha \overline{\triangleright} \beta$, if and only if $\text{sub}(\alpha) \cap \text{sub}(\beta) \neq \emptyset$.*

Lemma C.3.2. *Given $\vdash P \blacktriangleright \emptyset$, if $P \downarrow_\alpha$, then there exist P', β such that $P \longrightarrow^* P' \downarrow_\beta$ and $\alpha \overline{\triangleright} \beta$.*

Proof. By well-typedness, there appears β in P with $\alpha \overline{\triangleright} \beta$. However, we may have $P \not\downarrow_\beta$, because β is blocked by other prefixes. Hence, we need to find reductions from P such that we unblock β . However, the prefixes blocking β are connected to dual prefixes, that may be blocked themselves. The crux of this proof is thus to show that we can reduce P , such that we eventually unblock β .

The proof is by induction on the number of names that may block β (IH₁). Initially, this number corresponds to the total number of names appearing in P . Suppose β is blocked by n prefixes γ_i , where γ_n blocks β , and γ_1 is not blocked. We apply another layer of induction on n (IH₂).

In the inductive case, $n \geq 1$. The goal is to perform a reduction that synchronizes γ_1 with its dual, say $\overline{\gamma_1}$. The prefix $\overline{\gamma_1}$ may be blocked by a number of prefixes itself. However, the type system of $s\pi^+$ is based on Rule [TYP-CUT], so $\overline{\gamma_1}$ appears in parallel with the duals of $\gamma_2, \dots, \gamma_n$ and α . We then may apply IH₁ to find $P \longrightarrow^* P_0 \downarrow_{\overline{\gamma_1}}$. We can then reduce P_0 by synchronizing between γ_1 and $\overline{\gamma_1}$: $P \longrightarrow^* P_0 \longrightarrow P_1$. In P_1 , β is blocked by one less prefix. Hence, by IH₂, $P \longrightarrow^* P_0 \longrightarrow P_1 \longrightarrow^* P' \downarrow_\beta$, proving the thesis.

In the base case, β is not blocked: $P \downarrow_\beta$. Let $P' \triangleq P$; trivially, $P \longrightarrow^* P' \downarrow_\beta$, proving the thesis. □

Theorem 4.3.8. *Take $\vdash R \equiv \mathcal{N}[\alpha_1; (P \# Q)] \blacktriangleright \emptyset$ and $\vdash S \equiv \mathcal{N}[\alpha_2; P \# \alpha_3; Q] \blacktriangleright \emptyset$, where $\alpha_1 \triangleright \triangleleft \alpha_2 \triangleright \triangleleft \alpha_3$ and $\alpha_1, \alpha_2, \alpha_3$ require a continuation. Suppose that $P \not\sim_L Q$ and $P \not\sim_E Q$. Then (i) $R \sim_L S$ but (ii) $R \not\sim_E S$.*

Proof. For (i), we construct a relation \mathbb{B} as follows:

$$\begin{aligned} \text{Id}^{\equiv} &\triangleq \{(T, U) \mid T \equiv U\} \\ \mathbb{B}' &\triangleq \{(T, U) \mid \vdash T \equiv \mathcal{M}[\beta_1; (V \# W)] \blacktriangleright \emptyset \text{ and} \\ &\quad \vdash U \equiv \mathcal{M}[\beta_2; V \# \beta_3; W] \blacktriangleright \emptyset \text{ and} \\ &\quad V \not\prec_L W \text{ and} \\ &\quad \beta_1 \triangleright \triangleleft \beta_2 \triangleright \triangleleft \beta_3 \text{ and} \\ &\quad \beta_1, \beta_2, \beta_3 \text{ require a continuation}\} \\ \mathbb{B} &\triangleq \text{Id}^{\equiv} \cup \mathbb{B}' \end{aligned}$$

We prove that \mathbb{B} is a strong ready-prefix bisimulation w.r.t. the lazy semantics by proving the three conditions of Definition 4.3.6 for each $(T, U) \in \mathbb{B}$. We distinguish cases depending on whether $(T, U) \in \text{Id}^{\equiv}$ or $(T, U) \in \mathbb{B}'$.

- $(T, U) \in \text{Id}^{\equiv}$. The three conditions hold trivially.
- $(T, U) \in \mathbb{B}'$. Then $T \equiv \mathcal{M}[\beta_1; (V \# W)]$, $U \equiv \mathcal{M}[\beta_2; V \# \beta_3; W]$, $V \not\prec_L W$, and $\beta_1 \triangleright \triangleleft \beta_2 \triangleright \triangleleft \beta_3$. We prove each condition separately.
 1. Suppose $T \rightsquigarrow T'$. Note that the hole in \mathcal{M} may appear inside a non-deterministic choice. We distinguish three cases: (a) the reduction is inside \mathcal{M} and maintains the branch with the hole, (b) the reduction is inside \mathcal{M} and discards the branch with the hole, or (c) the reduction synchronizes on β_1 .
 - (a) The reduction is inside \mathcal{M} and maintains the branch with the hole. Then $T' \equiv \mathcal{M}'[\beta_1; (V \# W)]$ and $U \rightsquigarrow U' \equiv \mathcal{M}'[\beta_2; V \# \beta_3; W]$. Clearly, $(T', U') \in \mathbb{B}'$, so $(T', U') \in \mathbb{B}$.
 - (b) The reduction is inside \mathcal{M} and discards the branch with the hole. Then there exists U' such that $U \rightsquigarrow U' \equiv T'$, so $(T', U') \in \text{Id}^{\equiv}$, and thus $(T', U') \in \mathbb{B}$.
 - (c) The reduction synchronizes on β_1 . Then $T' \equiv \mathcal{M}'[V \# W]$ and, since $\beta_1 \triangleright \triangleleft \beta_2 \triangleright \triangleleft \beta_3$, $U \rightsquigarrow U' \equiv \mathcal{M}'[V \# W]$. Then $T' \equiv U'$, so $(T', U') \in \text{Id}^{\equiv}$ and thus $(T', U') \in \mathbb{B}$.
 2. Suppose $U \rightsquigarrow U'$. By reasoning analogous to above, $T \rightsquigarrow T'$ and $(T', U') \in \mathbb{B}$.
 3. Suppose $T \downarrow_{\gamma}$. If the prefix γ appears in \mathcal{M} , then clearly also $U \downarrow_{\gamma}$. Otherwise, $\gamma = \beta_1$. We have, e.g., $\gamma \triangleright \triangleleft \beta_2$ and clearly $U \downarrow_{\beta_2}$. The other direction is analogous.

It remains to show that $(R, S) \in \mathbb{B}$ which trivially holds.

For (ii), toward a contradiction, assume there exists a strong ready-prefix bisimulation w.r.t. $\longrightarrow \mathbb{B}$ where $(R, S) \in \mathbb{B}$.

By Lemma C.3.2, there exist R', β_1 such that $R \longrightarrow^* R' \downarrow_{\beta_1}$, and $\alpha_1 \overline{\triangleright} \beta_1$. By the well-typedness of R and S , β_1 must appear in \mathcal{N} , and the reduction $R \longrightarrow^* R'$ takes place in \mathcal{N} . Take $x \in \text{sub}(\alpha_1) \cap \text{sub}(\beta_1)$ (which is non-empty by Lemma C.3.2). Then $R' \equiv \mathcal{N}'_1[(\nu x)(\mathcal{N}'_2[\beta_1; R'_2] \mid \mathcal{N}'_3[\alpha_1; (P \# Q)])]$. Moreover, clearly $S \longrightarrow^* S'$ following the same reductions, resulting in $S' \equiv \mathcal{N}'_1[(\nu x)(\mathcal{N}'_2[\beta_1; R'_2] \mid \mathcal{N}'_3[\alpha_2; P \# \alpha_3; Q])]$; note that, since $\alpha_1 \triangleright \triangleleft \alpha_2 \triangleright \triangleleft \alpha_3$, also $\alpha_2 \overline{\triangleright} \beta_1$ and $\alpha_3 \overline{\triangleright} \beta_1$. At this point, we must have $(R', S') \in \mathbb{B}$.

The synchronization between β_1 and α_1 gives $R' \longrightarrow R'' \equiv \mathcal{N}''[P \# Q]$. Then by the bisimulation, there exists S'' such that $S' \longrightarrow S''$ with $(R'', S'') \in \mathbb{B}$. By clause 3 of the bisimulation, R'' and S'' must have the same ready-prefixes, so clearly the reduction $S' \longrightarrow S''$ results from a synchronization between β_1 and either of α_2 and α_3 . W.l.o.g., let us assume this was α_3 . Then $S'' \equiv \mathcal{N}''[Q]$. By assumption, $P \not\sim_{\mathbb{E}} Q$ and thus $P \# Q \not\sim_{\mathbb{E}} Q$, so clearly $R'' \not\sim_{\mathbb{E}} S''$. Hence, \mathbb{B} cannot be a strong ready-prefix bisimulation w.r.t. \longrightarrow . In other words, $R \not\sim_{\mathbb{E}} S$. \square

D

PROOFS FOR CHAPTER 5

This appendix details the proofs of the results in Chapter 5. We first introduce auxiliary lemmas about (typed) spawn bindings and free/bound names of processes in Appendix D.1. We then present omitted proofs of subject congruence and subject reduction in Appendix D.2. After that we prove deadlock-freedom (Theorem 5.3.3) in Appendix D.3, introducing a *progress* lemma. Finally, in Appendix D.4 we detail our proof of weak normalization.

D.1. AUXILIARY RESULTS

D.1.1. SPAWN BINDINGS

We will need the following properties for proving subject reduction, all shown by induction on spawn binding typing.

Lemma D.1.1. *If $\sigma : \Delta_1 \rightsquigarrow \Delta_2$, then $\sigma : \Gamma[\Delta_1] \rightsquigarrow \Gamma[\Delta_2]$ for any bunched context Γ .*

Lemma D.1.2. *Suppose that $\sigma : \Gamma_1[x : A] \rightsquigarrow \Delta_2$ and $x \notin \text{dom}(\sigma)$. Then $\Delta_2 = \Gamma_2[x : A]$ for some Γ_2 . Furthermore, for any Δ we have $\sigma : \Gamma_1[\Delta] \rightsquigarrow \Gamma_2[\Delta]$.*

Proof. We proceed by induction on $\sigma : \Gamma_1[x : A] \rightsquigarrow \Delta_2$.

- **(Case Rule [SPAWN-WEAKEN])** If $[y \mapsto \emptyset \mid y \in \text{fn}(\Delta)] : \Gamma[\Delta; \Delta'] \rightsquigarrow \Gamma[\Delta']$, then, from the assumption that $x \notin \text{dom}(\sigma)$, we know that x does not occur in Δ . That means that x is either part of Δ' or Γ .

In either case, we can freely replace $x : A$ with an arbitrary bunch.

- **(Case Rule [SPAWN-CONTRACT])** Similar to the previous case.
- **(Case Rule [SPAWN-MERGE])** Suppose we have $(\sigma_1 \times \sigma_2) : \Gamma_\theta[x : A] \rightsquigarrow \Delta_2$ with $\sigma_1 : \Gamma_\theta[x : A] \rightsquigarrow \Delta_1$ for some intermediate bunch Δ_1 .

Since $x \notin \text{dom}(\sigma_1 \times \sigma_2)$, we know that $x \notin \text{dom}(\sigma_1)$. Hence, $\Delta_1 = \Gamma_1[x : A]$ by the IH, and we have $\sigma_1 : \Gamma_1[\Delta] \rightsquigarrow \Gamma_2[\Delta]$ for any bunch Δ .

Furthermore, $x \notin \text{restr}(\sigma_1)$ (otherwise we would not be able to replace $x : A$ with an arbitrary bunch Δ). Hence, $x \notin \text{dom}(\sigma_2)$, and by the IH we have $\Delta_2 = \Gamma_2[x : A]$ for some Γ_2 , and $\sigma_2 : \Gamma_1[\Delta] \rightsquigarrow \Gamma_2[\Delta]$ for any bunch Δ . The desired result then follows by using Rule [SPAWN-MERGE] again. \square

Lemma D.1.3. *Suppose that $\sigma : \Delta_1 \rightsquigarrow \Delta_2$ and $\sigma(x) = \{x_1, \dots, x_n\}$. Then $\Delta_1 = \Gamma_1[x : A]$ and $\Delta_2 = \Gamma_2[x_1 : A \mid \dots \mid x_n : A]$, for some Γ_1 and Γ_2 . Furthermore, for any bunch Δ we have:*

$$(\sigma \setminus \{x\}) \cup \{y \mapsto \{y_1, \dots, y_n\} \mid y \in \text{fn}(\Delta)\} : \Gamma_1[\Delta] \rightsquigarrow \Gamma_2[\Delta^{(1)} \mid \dots \mid \Delta^{(n)}]$$

Proof. Similar to the previous lemma. \square

D

D.1.2. NAMES AND SUBSTITUTIONS

Lemma D.1.4. *If $\Delta \vdash P \blacktriangleright x : C$, then $\text{fn}(P) = \text{fn}(\Delta) \cup \{x\}$.*

Lemma D.1.5. *If $(\mathbf{v}x)(P \mid (\mathbf{v}y)(Q \mid R))$ is a well-typed process, then x is shared either between P and Q , or between P and R , but not between all the three subprocesses, and y is shared between Q and R . That is, either $x \in \text{fn}(P) \cap \text{fn}(Q)$ and $x \notin \text{fn}(R)$, or $x \in \text{fn}(P) \cap \text{fn}(R)$ and $x \notin \text{fn}(Q)$. And in both cases we have $y \notin \text{fn}(P)$*

This lemma implies that whenever we have a typed process $(\mathbf{v}x)(P \mid (\mathbf{v}y)(Q \mid R))$, then one of the congruences Rule [CONG-ASSOC-L] or [CONG-ASSOC-R] applies.

Lemma D.1.6. *If $(\mathbf{v}x)(P \mid \rho[\sigma]; Q)$ is a well-typed process, and $x \notin \sigma$, then $\text{fn}(P) \cap \text{restr}(\sigma) = \emptyset$.*

Similarly to the previous lemma, this lemma implies that for a well-typed process of the form $(\mathbf{v}x)(P \mid \rho[\sigma]; Q)$ either Rule [RED-SPAWN] or Rule [RED-SPAWN-R] applies.

Lemma D.1.7. *If $(\mathbf{v}x)(\rho[\sigma_1]; P \mid \rho[\sigma_2]; Q)$ is a well-typed process, then σ_1 and σ_2 are independent.*

Lemma D.1.8. *If $\Delta \vdash P \blacktriangleright x : C$ and θ is an injective substitution, then $\Delta\theta \vdash P\theta \blacktriangleright \theta(x) : C$.*

D.2. TYPE PRESERVATION

Theorem 5.3.1 (Type Preservation). *Assume $\Delta \vdash P \blacktriangleright x : C$. If $P \equiv Q$ or $P \rightarrow Q$, then $\Delta \vdash Q \blacktriangleright x : C$.*

Proof (structural congruence). We proceed by induction on $P \equiv Q$, examining the possible typing derivations of P .

(**Case Rule** [CONG-ASSOC-L]) This congruence states that the order of independent cuts

does not matter. This corresponds to the following proof conversion:

$$\begin{array}{c}
\Delta_1 \vdash P \blacktriangleright x : A \quad \frac{\Delta_2 \vdash Q \blacktriangleright y : B \quad \Gamma[x : A \mid y : B] \vdash R \blacktriangleright z : C}{\Gamma[x : A \mid \Delta_2] \vdash (\mathbf{v}y)(Q \mid_y R) \blacktriangleright z : C}}{\Gamma[\Delta_1 \mid \Delta_2] \vdash (\mathbf{v}x)(P \mid_x (\mathbf{v}y)(Q \mid_y R)) \blacktriangleright z : C} \\
\equiv \\
\Delta_2 \vdash Q \blacktriangleright y : B \quad \frac{\Delta_1 \vdash P \blacktriangleright x : A \quad \Gamma[x : A \mid y : B] \vdash R \blacktriangleright z : C}{\Gamma[\Delta_1 \mid y : B] \vdash (\mathbf{v}x)(P \mid_x R) \blacktriangleright z : C}}{\Gamma[\Delta_1 \mid \Delta_2] \vdash (\mathbf{v}y)(Q \mid_y (\mathbf{v}x)(P \mid_x R)) \blacktriangleright z : C}
\end{array}$$

(Case Rule [CONG-ASSOC-R]) This congruence states that the order of subsequent cuts does not matter. This corresponds to the following proof conversion:

$$\begin{array}{c}
\Delta \vdash P \blacktriangleright x : A \quad \frac{\Gamma_1[x : A] \vdash Q \blacktriangleright y : B \quad \Gamma_2[y : B] \vdash R \blacktriangleright z : C}{\Gamma_2[\Gamma_1[x : A]] \vdash (\mathbf{v}y)(Q \mid_y R) \blacktriangleright z : C}}{\Gamma_2[\Gamma_1[\Delta]] \vdash (\mathbf{v}x)(P \mid_x (\mathbf{v}y)(Q \mid_y R)) \blacktriangleright z : C} \\
\equiv \\
\Delta \vdash P \blacktriangleright x : A \quad \frac{\Gamma_1[x : A] \vdash Q \blacktriangleright y : B}{\Gamma_1[\Delta] \vdash (\mathbf{v}x)(P \mid_x Q) \blacktriangleright y : B} \quad \Gamma_2[y : B] \vdash R \blacktriangleright z : C}{\Gamma_2[\Gamma_1[\Delta]] \vdash (\mathbf{v}y)((\mathbf{v}x)(P \mid_x Q) \mid_y R) \blacktriangleright z : C}
\end{array}$$

(Case Rule [CONG-SPAWN-SWAP]) If two spawn bindings σ and σ' are independent, then they correspond to two independent applications of Rule [TYP-STRUCT] that can be commuted past each other. For example:

$$\begin{array}{c}
\frac{\Gamma[\emptyset_a \mid \Delta^{(1)}; \Delta^{(2)}] \vdash P \blacktriangleright z : C}{\Gamma[\emptyset_a \mid \Delta] \vdash \rho[x \mapsto \{x_1, x_2\} \mid x \in \text{fn}(\Delta)]; P \blacktriangleright z : C}}{\Gamma[\Delta' \mid \Delta] \vdash \rho[x \mapsto \emptyset \mid x \in \text{fn}(\Delta')]; \rho[x \mapsto \{x_1, x_2\} \mid x \in \text{fn}(\Delta)]; P \blacktriangleright z : C} \\
\equiv \\
\frac{\Gamma[\emptyset_a \mid \Delta^{(1)}; \Delta^{(2)}] \vdash P \blacktriangleright z : C}{\Gamma[\Delta' \mid \Delta^{(1)}; \Delta^{(2)}] \vdash \rho[x \mapsto \emptyset \mid x \in \text{fn}(\Delta')]; P \blacktriangleright z : C}}{\Gamma[\Delta' \mid \Delta] \vdash \rho[x \mapsto \{x_1, x_2\}]; \rho[x \mapsto \emptyset \mid x \in \text{fn}(\Delta')]; P \blacktriangleright z : C}
\end{array}$$

(Closure under program contexts) By the IH. □

Proof (reduction). By induction on the reduction $P \rightarrow Q$ and the typing derivation. The case Rule [RED-CONG] follows from the proof above and the IH. The case Rule [RED-EVAL-CTX] for evaluation contexts of the forms $\mathcal{X} = (\mathbf{v}x)([\cdot] \mid P)$ and $\mathcal{X} = \rho[\sigma]; [\cdot]$ follows from the IH.

(Case Rule [RED-CLOSE-WAIT]) It corresponds to the following reduction of proofs, or its

additive variant:

$$\frac{\frac{\emptyset_m \vdash x[] \triangleright x : \mathbf{I}_m}{\Gamma[\emptyset_m] \vdash Q \triangleright z : C} \quad \frac{\Gamma[\emptyset_m] \vdash Q \triangleright z : C}{\Gamma[x : \mathbf{I}_m] \vdash x0; Q \triangleright z : C}}{\Gamma[\emptyset_m] \vdash (\mathbf{v}x)(x[] | x x0; Q) \triangleright z : C}$$

$$\rightarrow$$

$$\Gamma[\emptyset_m] \vdash Q \triangleright z : C$$

(Case Rule [RED-WAIT-CLOSE]) Processes of the form $(\mathbf{v}x)(x0; Q | x x[])$ are not typable.

(Case Rule [RED-SEND-RECV]) It corresponds to the following reduction of proofs, or its additive version:

$$\frac{\frac{\Delta_1 \vdash P_1 \triangleright y : A \quad \Delta_2 \vdash P_2 \triangleright x : B}{\Delta_1, \Delta_2 \vdash \bar{x}[y]; (P_1 | P_2) \triangleright x : A * B} \quad \frac{\Gamma[y : A, x : B] \vdash Q \triangleright z : C}{\Gamma[x : A * B] \vdash x(y); Q \triangleright z : C}}{\Gamma[\Delta_1, \Delta_2] \vdash (\mathbf{v}x)(\bar{x}[y]; (P_1 | P_2) | x x(y); Q) \triangleright z : C}$$

$$\rightarrow$$

$$\frac{\Delta_2 \vdash P_2 \triangleright x : B \quad \frac{\Delta_1 \vdash P_1 \triangleright y : A \quad \Gamma[y : A, x : B] \vdash Q \triangleright z : C}{\Gamma[\Delta_1, x : B] \vdash (\mathbf{v}y)(P_1 | y Q) \triangleright z : C}}{\Gamma[\Delta_1, \Delta_2] \vdash (\mathbf{v}x)(P_2 | x (\mathbf{v}y)(P_1 | y Q)) \triangleright z : C}$$

(Case Rule [RED-RECV-SEND]) It corresponds to the following reduction of proofs, or its additive version:

$$\frac{\frac{\Delta, y : A \vdash Q \triangleright x : B}{\Delta \vdash x(y); Q \triangleright x : A * B} \quad \frac{\Theta \vdash P_1 \triangleright y : A \quad \Gamma[x : B] \vdash P_2 \triangleright z : C}{\Gamma[\Theta, x : A * B] \vdash \bar{x}[y]; (P_1 | P_2) \triangleright z : C}}{\Gamma[\Theta, \Delta] \vdash (\mathbf{v}x)(x(y); Q | x \bar{x}[y]; (P_1 | P_2)) \triangleright z : C}$$

$$\rightarrow$$

$$\frac{\Theta \vdash P_1 \triangleright y : A \quad \Delta, y : A \vdash Q \triangleright x : B}{\Delta, \Theta \vdash (\mathbf{v}y)(P_1 | y Q) \triangleright x : B} \quad \Gamma[x : B] \vdash P_2 \triangleright z : C}{\frac{\Gamma[\Delta, \Theta] \vdash (\mathbf{v}y)((\mathbf{v}y)(P_1 | y Q) | x P_2) \triangleright z : C}{\Gamma[\Theta, \Delta] \vdash (\mathbf{v}y)((\mathbf{v}y)(P_1 | y Q) | x P_2) \triangleright z : C}}$$

(Case Rule [RED-SEL-BRA]) It corresponds to the following reduction of proofs (w.l.o.g., for $\ell = \text{inl}$):

$$\frac{\frac{\Delta \vdash P \triangleright x : A}{\Delta \vdash \bar{x} \triangleleft \text{inl}; P \triangleright x : A \vee B} \quad \frac{\Gamma[x : A] \vdash Q_1 \triangleright z : C \quad \Gamma[x : B] \vdash Q_2 \triangleright z : C}{\Gamma[x : A \vee B] \vdash x \triangleright \{\text{inl} : Q_1, \text{inr} : Q_2\} \triangleright z : C}}{\Gamma[\Delta] \vdash (\mathbf{v}x)(\bar{x} \triangleleft \text{inl}; P | x x \triangleright \{\text{inl} : Q_1, \text{inr} : Q_2\}) \triangleright z : C}$$

$$\rightarrow$$

$$\frac{\Delta \vdash P \triangleright x : A \quad \Gamma[x : A] \vdash Q_1 \triangleright z : C}{\Gamma[\Delta] \vdash (\mathbf{v}x)(P | Q_1) \triangleright z : C}$$

(Case Rule [RED-FWD-L]) Follows from Lemma D.1.8.

$$\frac{\frac{y : A \vdash [x \leftrightarrow y] \blacktriangleright x : A \quad \Gamma[x : A] \vdash P \blacktriangleright z : C}{\Gamma[y : A] \vdash (\mathbf{v}x)([x \leftrightarrow y] |_x P) \blacktriangleright z : C}}{\Gamma[y : A] \vdash P\{y/x\} \blacktriangleright z : C}$$

(Case Rule [RED-FWD-R]) Follows from Lemma D.1.8.

$$\frac{\frac{\Delta \vdash P \blacktriangleright x : A \quad x : A \vdash [y \leftrightarrow x] \blacktriangleright y : A}{\Delta \vdash (\mathbf{v}x)(P |_x [y \leftrightarrow x]) \blacktriangleright y : A}}{\Delta \vdash P\{y/x\} \blacktriangleright y : A}$$

(Case Rule [RED-SPAWN]) By Lemma D.1.3, the derivation that we have is of the following shape:

$$\frac{\Delta \vdash P \blacktriangleright x : A \quad \frac{\Gamma_I[x_1 : A | \dots | x_n : A] \vdash Q \blacktriangleright z : C \quad \sigma : \Gamma_2[x : A] \rightsquigarrow \Gamma_I[x_1 : A | \dots | x_n : A]}{\Gamma_2[x : A] \vdash \rho[\sigma]; Q \blacktriangleright z : C}}{\Gamma_2[\Delta] \vdash (\mathbf{v}x)(P |_x \rho[\sigma]; Q) \blacktriangleright z : C}}{\rightarrow \frac{\frac{\frac{\Delta^{(n)} \vdash P^{(n)} \blacktriangleright x_n : A \quad \Gamma_I[x_1 : A | \dots | x_n : A] \vdash Q \blacktriangleright z : C}{\Gamma_I[x_1 : A | \dots | \Delta^{(n)}] \vdash (\mathbf{v}x_n)(P^{(n)} |_{x_n} Q) \blacktriangleright z : C}}{\Gamma_I[\Delta^{(1)} | \dots | \Delta^{(n)}] \vdash (\mathbf{v}x_1)(P^{(1)} |_{x_1} \dots (\mathbf{v}x_n)(P^{(n)} |_{x_n} Q) \dots) \blacktriangleright z : C} \quad \text{(Lemma D.1.3)}}{\Gamma_2[\Delta] \vdash \rho[\sigma']; (\mathbf{v}x_1)(P^{(1)} |_{x_1} \dots (\mathbf{v}x_n)(P^{(n)} |_{x_n} Q) \dots) \blacktriangleright z : C} \quad \sigma' : \Gamma_2[\Delta] \rightsquigarrow \Gamma_I[\Delta^{(1)} | \dots | \Delta^{(n)}]}}$$

(Case Rule [RED-SPAWN-L]) This reduction corresponds to moving Rule [TYP-STRUCT] past a Rule [TYP-CUT]. Since $\rho[\sigma]; P$ appears on the left side of the composition, we know that the application of Rule [TYP-STRUCT] was independent from Q and from Rule [TYP-CUT]. The corresponding proof transformation is as follows:

$$\frac{\frac{\Delta_1 \vdash P \blacktriangleright x : A \quad \sigma : \Delta_2 \rightsquigarrow \Delta_1}{\Delta_2 \vdash \rho[\sigma]; P \blacktriangleright x : A} \quad \Gamma[x : A] \vdash Q \blacktriangleright z : C}{\Gamma[\Delta_2] \vdash (\mathbf{v}x)(\rho[\sigma]; P |_x Q) \blacktriangleright z : C}}{\rightarrow \frac{\frac{\Delta_1 \vdash P \blacktriangleright x : A \quad \Gamma[x : A] \vdash Q \blacktriangleright z : C}{\Gamma[\Delta_1] \vdash (\mathbf{v}x)(P |_x Q) \blacktriangleright z : C} \quad \text{(Lemma D.1.1)}}{\Gamma[\Delta_2] \vdash \rho[\sigma]; (\mathbf{v}x)(P |_x Q) \blacktriangleright z : C} \quad \sigma : \Gamma[\Delta_2] \rightsquigarrow \Gamma[\Delta_1]}}$$

(Case Rule [RED-SPAWN-R]) Similar to the previous case. Since $x \notin \sigma$ we know that the

application of Rule [TYP-STRUCT] is independent of the Rule [TYP-CUT].

$$\begin{array}{c}
 \frac{\Delta \vdash P \blacktriangleright x : A \quad \frac{\Gamma_1[x : A] \vdash Q \blacktriangleright z : C \quad \sigma : \Gamma_2[x : A] \rightsquigarrow \Gamma_1[x : A]}{\Gamma_2[x : A] \vdash \rho[\sigma]; Q \blacktriangleright z : C}}{\Gamma_2[\Delta] \vdash (\mathbf{v}x)(P \mid_x \rho[\sigma]; Q) \blacktriangleright z : C}}{\rightarrow} \\
 \frac{\Delta \vdash P \blacktriangleright x : A \quad \Gamma_1[x : A] \vdash Q \blacktriangleright z : C \quad (\text{Lemma D.1.2})}{\Gamma_1[\Delta] \vdash (\mathbf{v}x)(P \mid_x Q) \blacktriangleright z : C} \quad \sigma : \Gamma_2[\Delta] \rightsquigarrow \Gamma_1[\Delta]}{\Gamma_2[\Delta] \vdash \rho[\sigma]; (\mathbf{v}x)(P \mid_x Q) \blacktriangleright z : C}
 \end{array}$$

(Case Rule [RED-SPAWN-MERGE]) Directly using the rules for spawn prefix typing. \square

D.3. DEADLOCK-FREEDOM

To prove deadlock-freedom, we first need to analyze when a process is *not* stuck, i.e. when it can reduce. We define the *readiness* of a process, which is a means to syntactically determine whether a process can reduce. This notion of readiness¹ is useful when implementing π BI as, e.g., a programming language: a reduction can be derived by simply analyzing the syntax of a program.

To define readiness, we need to know which names can be used for a communication. We define this as a process' set of *active names*: free names used for communication prefixes not guarded by other communication prefixes.

Definition D.3.1 (Active Names). *Given a process P , we define the set of active names of P , denoted $\text{an}(P)$, as follows:*

$$\begin{array}{ll}
 \text{an}(x[]) \triangleq \{x\} & \text{an}((\mathbf{v}x)(P \mid_x Q)) \triangleq (\text{an}(P) \cup \text{an}(Q)) \setminus \{x\} \\
 \text{an}(x(); P) \triangleq \{x\} & \text{an}(\rho[\sigma]; P) \triangleq \text{dom}(\sigma) \cup (\text{an}(P) \setminus \text{restr}(\sigma)) \\
 \text{an}(\bar{x}[y]; (P \mid Q)) \triangleq \{x\} & \text{an}(x(y); P) \triangleq \{x\} \\
 \text{an}(\bar{x} \triangleleft \text{inl}; P) \triangleq \text{an}(\bar{x} \triangleleft \text{inr}; P) \triangleq \{x\} & \text{an}([x \leftrightarrow y]) \triangleq \{x, y\} \\
 \text{an}(x \triangleright \{\text{inl} : P, \text{inr} : Q\}) \triangleq \{x\} &
 \end{array}$$

Lemma D.3.2. *If $P \equiv Q$ then $\text{an}(P) = \text{an}(Q)$.*

Proof. There are no rules of structural congruence that add or remove prefixes. Moreover, the only rule of structural congruence that affects names only affects *bound* names, and active names are free by definition. \square

¹In some literature this notion is referred to as “liveness”, but we did not want to confuse it here with a more semantic notion of liveness.

Definition D.3.3 (Ready process). *A process P is ready, denoted $\text{ready}(P)$, if it is expected to reduce. Formally, the ready predicate is defined by the following rules:*

$$\begin{array}{c}
\frac{[\text{RDY-SPAWN}]}{\text{ready}(Q)} \\
\hline
\text{ready}(\rho[\sigma]; Q)
\end{array}
\qquad
\frac{[\text{RDY-MERGE}]}{\text{ready}(\rho[\sigma]; \rho[\sigma']; Q)}
\qquad
\frac{[\text{RDY-CONG}]}{\text{ready}(Q)} \quad P \equiv Q
\qquad
\frac{[\text{RDY-AN}]}{x \in \text{an}(P) \cap \text{an}(Q)} \\
\hline
\text{ready}((\mathbf{v}x)(P \mid_x Q))
\qquad
\frac{[\text{RDY-PAR}]}{\text{ready}(P) \vee \text{ready}(Q)} \\
\hline
\text{ready}((\mathbf{v}x)(P \mid_x Q))
\qquad
\frac{[\text{RDY-SPAWN-CUT}]}{\text{ready}((\mathbf{v}x)(\rho[\sigma]; P \mid_x Q))}
\qquad
\frac{[\text{RDY-CUT-SPAWN}]}{\text{ready}((\mathbf{v}x)(P \mid_x \rho[\sigma]; Q))}
\qquad
\frac{[\text{RDY-FWD-L}]}{\text{ready}((\mathbf{v}x)([x \leftrightarrow y] \mid_x Q))}
\qquad
\frac{[\text{RDY-FWD-R}]}{\text{ready}((\mathbf{v}x)(P \mid_x [x \leftrightarrow y]))}$$

The following then assures that well-typed, ready processes can reduce:

Lemma D.3.4 (Progress). *Suppose given a process P such that $\Delta \vdash P \blacktriangleright z : C$ and $\text{ready}(P)$. Then, there exists a process S such that $P \rightarrow S$.*

Proof. By induction on the derivation of $\text{ready}(P)$.

- **(Case $P = \rho[\sigma]; Q$ and $\text{ready}(Q)$)** By the IH, there exists S' such that $Q \rightarrow S'$. By Rule [RED-EVAL-CTX], $P \rightarrow \rho[\sigma]; S'$.
- **(Case $P = \rho[\sigma]; \rho[\sigma']; Q$)** By Rule [RED-SPAWN-MERGE], $P \rightarrow \rho[\sigma \times \sigma']; Q$.
- **(Case $P \equiv Q$ and $\text{ready}(Q)$)** By the IH, there exists S such that $Q \rightarrow S$. By Rule [RED-CONG], $P \rightarrow S$.
- **(Case $P = (\mathbf{v}x)(Q \mid R)$ and $x \in \text{an}(Q) \cap \text{an}(R)$)** We have $\Delta = \Gamma[\Delta']$ where $\Delta' \vdash Q \blacktriangleright x : A$ and $\Gamma[x : A] \vdash R \blacktriangleright z : C$. Since $x \in \text{an}(Q) \cap \text{an}(R)$, there is an unguarded prefix with subject x in both Q and R . Being unguarded, the prefix in Q appears inside a sequence of n cuts and spawns. Similarly, the prefix in R appears inside a sequence of m cuts and spawns. By induction on n and m , we show that there exists a process S such that $P \rightarrow S$.
 - If $n = 0$ and $m = 0$, the analysis depends on whether $Q = [x \leftrightarrow y]$ or $R = [y \leftrightarrow x]$, or neither. If so, this case is analogous the appropriate of the latter two cases of this proof. Otherwise, neither Q nor R is a forwarder. In that case, Q is typable with a right rule for send, receive, selection, or branching on x , depending on the type A . Similarly, R is typable with a dual left rule on x . Suppose, as a representative example, that $A = B_1 * B_2$. Then, Q is typable with Rule [TYP-SEP-R], i.e., $Q = \bar{x}[y]; (Q_1 \mid Q_2)$. Similarly, R is typable with Rule [TYP-SEP-L], i.e., $R = x(y'); R'$. Then $P = (\mathbf{v}x)(\bar{x}[y]; (Q_1 \mid Q_2) \mid x(y'); R)$. Let $S \triangleq (\mathbf{v}x)(Q_2 \mid_x (\mathbf{v}y)(Q_1 \mid_y R'\{y/y'\}))$. By Rule [RED-SEND-RECV], $P \rightarrow S$.
 - If $n = n' + 1$, then the analysis depends on whether the outermost construct in Q is a cut or a spawn. We thus consider these two cases:

- ◊ If the outermost construct is a cut, then $P = (\mathbf{v}x)((\mathbf{v}w)(Q_1 \mid_w Q_2) \mid_x R)$. The prefix on x appears in Q_2 , under a sequence of n' sequence of and spawns. Since $x \in \text{fn}((\mathbf{v}w)(Q_1 \mid_w Q_2))$, we know $w \neq x$. This means that $x \notin \text{fn}(Q_1)$. Hence, by Rule [CONG-ASSOC-R], $P \equiv (\mathbf{v}w)(Q_1 \mid_w (\mathbf{v}x)(Q_2 \mid_x R))$. By the IH, there exists S' such that $(\mathbf{v}x)(Q_2 \mid_x R) \rightarrow S'$. Let $S = (\mathbf{v}w)(Q_1 \mid_w S')$. Then, by Rules [RED-EVAL-CTX] and [RED-CONG], $P \rightarrow S$.
- ◊ If the outermost construct is a spawn, then $Q = \rho[\sigma]; Q'$ and the proof follows as in the case where $P = (\mathbf{v}x)(\rho[\sigma]; Q \mid_x R)$.

– If $m = m' + 1$, the analysis is analogous to the case above.

- **(Case $P = (\mathbf{v}x)(Q \mid_x R)$ and ready(Q) or ready(R))** W.l.o.g., assume ready(Q). By the IH, there exists S' such that $Q \rightarrow S'$. By Rule [RED-EVAL-CTX], $P \rightarrow (\mathbf{v}x)(S' \mid R)$.
- **(Case $P = (\mathbf{v}x)(\rho[\sigma]; Q \mid R)$)** By well-typedness, $x \notin \sigma$. Hence, by Rule [RED-SPAWN-L],

$$P \rightarrow \rho[\sigma]; (\mathbf{v}x)(Q \mid_x R).$$

- **(Case $P = (\mathbf{v}x)(Q \mid_x \rho[\sigma]; R)$)** The analysis depends on whether $x \in \sigma$ or not, so we consider two cases:

– If $x \in \sigma$, then $\sigma(x) = \{x_1, \dots, x_n\}$. Let

$$\sigma' = (\sigma \setminus \{x\}) \cup [w \mapsto \{w_1, \dots, w_n\} \mid w \in (\text{fn}(Q) \setminus \{x\})]$$

and $S = \rho[\sigma']; (\mathbf{v}x_1)(Q^{(1)} \mid_{x_1} \dots (\mathbf{v}x_n)(Q^{(n)} \mid_{x_n} R) \dots)$. By Rule [RED-SPAWN], $P \rightarrow S$.

– If $x \notin \sigma$, by Rule [RED-SPAWN-R], $P \rightarrow \rho[\sigma]; (\mathbf{v}x)(Q \mid_x R)$.

- **(Case $P = (\mathbf{v}x)([x \leftrightarrow y] \mid_x Q)$)** By Rule [RED-FWD-L], $P \rightarrow Q\{y/x\}$.
- **(Case $P = (\mathbf{v}x)(Q \mid_x [y \leftrightarrow x])$)** By Rule [RED-FWD-R], $P \rightarrow Q\{y/x\}$. □

Theorem 5.3.3 (Deadlock-freedom). *Given an empty bunch Σ , if $\Sigma \vdash P \blacktriangleright z$: A with $A \in \{\mathbf{1}_m, \mathbf{1}_a\}$, then either (i) $P \equiv z[]$, or (ii) $P \equiv \rho[\emptyset]; z[]$, or (iii) there exists S such that $P \rightarrow S$.*

Proof. If the process P is ready, then the result follows from Lemma D.3.4. Otherwise, towards a contradiction, assume $P \not\equiv z[]$ and $P \not\equiv \rho[\emptyset]; z[]$. W.l.o.g., assume P is not prefixed by an empty spawn. Since Σ contains no names, and P is not an empty send on z , the only possibility is that P is a cut: $P \equiv (\mathbf{v}x)(Q \mid_x R)$. There are several possibilities for Q and R : they can be communications on x , they can be spawn prefixes with only x in the domain, they can be cuts, or they can be forwarders on x .

- **(Case Q or R is a spawn prefix with only x in the domain)** By definition, P is ready: a contradiction.
- **(Case Q or R is a forwarder on x)** By definition, P is ready: a contradiction.

- **(Case Q is a communication on x)** By typability, x must be free in R , so R must contain an action on x : a spawn prefix with x in the domain, a forwarder on x , or a communication on x . If $x \in \text{an}(R)$, then $x \in \text{an}(Q) \cap \text{an}(R)$, so P is ready by definition: a contradiction. Otherwise, there is a name y such that the action on x in R is guarded by a spawn prefix with y in the domain or by a communication prefix on y . Either way, there must be a cut on y in R , i.e., $R \equiv (\mathbf{v}y)(R_1 \mid y R_2)$. We show by induction on the structures of R_1 and R_2 that R is ready.
 - **(Case R_2 is a spawn with y in the domain)** Then R is ready by definition.
 - **(Case R_1 or R_2 is a forwarder on x)** Then R is ready by definition.
 - **(Case R_1 is a communication prefix on y)** The analysis depends on whether $y \in \text{an}(R_2)$. If so, R is ready by definition: a contradiction. Otherwise, there is a name z such that the action on y in R_2 is guarded by a spawn prefix with z in the domain or by a communication prefix on z . Either way, there must be a cut on z in R_2 , i.e., $R_2 \equiv (\mathbf{v}z)(R'_2 \mid z R''_2)$. By the IH, R'_2 or R''_2 is ready, so R_2 is ready by definition. Hence, R is ready by definition.
 - **(Case R_2 is a communication prefix on y)** This case is analogous to the previous case.
 - **(Case R_1 or R_2 is a cut)** Then, by the IH, R_1 or R_2 is ready, so R is ready by definition.

Since R is ready, also P is ready: a contradiction.

- **(Case R is a communication prefix on x)** This case is analogous to the previous case.

In each case, the assumption that P is not ready is contradicted, so $P \equiv z[]$ or $P \equiv \rho[\emptyset]; z[]$. \square

D.4. WEAK NORMALIZATION

Recall our normalization strategy: If a process can perform a communication reduction or a forwarder reduction, then we do exactly that reduction. If a process can only perform a reduction that involves a spawn prefix, then we

1. select an (active) spawn prefix with the least depth;
2. perform the spawn reduction;
3. propagate the newly created spawn prefix to the very top-level, merging it with other spawn prefixes along the way.

We will show that this reduction strategy terminates, by assigning a particular lexicographical measure to the processes and showing that our strategy strictly reduces this measure. This measure counts the number of communication prefixes in a process at a given depth, where depth is determined by spawn prefixes. Let us make this precise.

For a process P we consider its *skeleton* $\text{skel}(P)$, which is a finite map assigning to each number n the amount of communication prefixes at depth n and above. Since processes are finite, each communication prefix occurs at a finite depth. That means that $\text{skel}(P)(k) = 0$ for any k greater than the maximal depth of the process. Formally, we define skeletons as follows.

Definition D.4.1 (Skeleton). A function $s: \mathbb{N} \rightarrow \mathbb{N}$ is a skeleton of depth k , if $\forall i > k. s(i) = 0$.

We define \mathbb{S}_k as the set of all skeletons of depth k . Moreover, we define $\mathbb{S} \triangleq \bigcup_{k \in \mathbb{N}} \mathbb{S}_k$ and equip it with the strict quasi-order $<$ such that

$$s_1 < s_2 \iff \exists j. (s_1(j) < s_2(j) \wedge \forall i > j. s_1(i) = s_2(i))$$

We also define $s_1 \leq s_2 \triangleq (s_1 = s_2 \vee s_1 < s_2)$.

The following lemmas allow us to do well-founded recursion on skeletons.

Lemma D.4.2. If $s_2 \in \mathbb{S}_k$ and $s_2 > s_1$ then $s_1 \in \mathbb{S}_k$.

Proof. From $s_2 > s_1$ we get some j such that $s_1(j) < s_2(j)$ and $\forall i > j. s_1(i) = s_2(i)$.

D

- **(Case $j \leq k$)** Then $\forall i > k. s_1(i) = s_2(i) = 0$ which proves $s_1 \in \mathbb{S}_k$.

- **(Case $j > k$)** This is impossible as we would have $s_1(j) < s_2(j) = 0$. □

Lemma D.4.3. $(\mathbb{S}_k, <)$ is well-founded.

Proof. Towards a contradiction, assume $s_0 > s_1 > \dots$ is an infinite descending chain of \mathbb{S}_k . Let j_n be the witness for $s_n > s_{n+1}$, i.e., $s_n(j_n) > s_{n+1}(j_n)$ and $\forall i > j_n. s_n(i) = s_{n+1}(i)$. From $s_n, s_{n+1} \in \mathbb{S}_k$ we get $j_n < k$. Since there are finitely many natural numbers below k , by the pigeonhole principle, the sequence j_0, j_1, \dots contains at least one number that repeats infinitely often. Among the ones that do, pick the greatest to be m . By definition, all the numbers larger than m appear finitely often in j_0, j_1, \dots and so there is a position p such that $\forall n \geq p. j_n \leq m$. We obtain that $\forall n \geq p. s_n(m) \geq s_{n+1}(m)$. Moreover, let $i_0 < i_1 < \dots$ be such that j_{i_0}, j_{i_1}, \dots consists of the infinite subsequence of the occurrences of m in j_p, j_{p+1}, \dots , i.e., $m = j_{i_0} = j_{i_1} = \dots$. We have $s_{i_0}(m) > s_{i_0+1}(m) \geq \dots \geq s_{i_1}(m) > s_{i_1+1}(m) \geq \dots$. We obtain that $s_{i_0}(m) > s_{i_1}(m) > \dots$ is an infinite descending chain of \mathbb{N} , which is a contradiction. □

Lemma D.4.4. $(\mathbb{S}, <)$ is well-founded.

Proof. Towards a contradiction, assume $s_0 > s_1 > \dots$ is an infinite descending chain of \mathbb{S} . Since $s_0 \in \mathbb{S}_k$ for some k , by Lemma D.4.2, $\forall i. s_i \in \mathbb{S}_k$. Therefore we have an infinite descending chain of \mathbb{S}_k which contradicts Lemma D.4.3. □

For a process P , its *skeleton* $\text{skel}(P)$ is a finite map assigning to each number n the amount of communication prefixes at depth n .

Definition D.4.5 (Skeleton of P). Given $s, s_1, s_2 \in \mathbb{S}$, we define:

$$[1](i) \triangleq \begin{cases} 1 & \text{if } i = 0 \\ 0 & \text{otherwise} \end{cases} \quad (s_1 \oplus s_2)(i) \triangleq s_1(i) + s_2(i) \quad (\blacktriangleright s)(i) \triangleq \begin{cases} s(0) & \text{if } i = 0 \\ s(i-1) & \text{if } i > 0 \end{cases}$$

The skeleton of a process P , written $\text{skel}(P)$, is then defined as:

$$\text{skel}(P) \triangleq \begin{cases} [1] & \text{if } P = [x \leftrightarrow y] \text{ or } P = x[] \\ [1] \oplus \text{skel}(Q_1) \oplus \text{skel}(Q_2) & \text{if } P = \bar{x}[y]; (Q_1 \mid Q_2) \text{ or } P = x \triangleright \{\text{inl} : Q_1, \text{inr} : Q_2\} \\ [1] \oplus \text{skel}(Q) & \text{if } P = x(); Q \text{ or } P = x(y); Q \text{ or } P = \bar{x} \triangleleft \ell; Q \\ \text{skel}(Q_1) \oplus \text{skel}(Q_2) & \text{if } P = (\mathbf{v}x)(Q_1 \mid_x Q_2) \\ \blacktriangleright \text{skel}(Q) & \text{if } P = \rho[\sigma]; Q \end{cases}$$

Note that if $s = \text{skel}(P)$ then $\forall i. s(i) \geq s(i+1)$.

For example:

$$\text{skel}((\mathbf{v}x)(x[] \mid_x \rho[\sigma]; (\mathbf{v}y)(y[] \mid_y \rho[\sigma']; x(); y(); k[]))) = [0 \mapsto 5, 1 \mapsto 4; 2 \mapsto 3; _ \mapsto 0].$$

The measure. Recall from the main part of the chapter, that when computing a measure associated to the process we have to take special care of the top-level spawn prefix. We define the measure function μ as follows.

$$\mu(P) \triangleq \begin{cases} \text{skel}(Q) & \text{if } P = \rho[\sigma]; Q \\ \text{skel}(P) & \text{otherwise} \end{cases}$$

Lemma D.4.6. *If $P \equiv Q$, then $\mu(P) = \mu(Q)$.*

Proof. None of the congruences can change whether the top-level construct is a spawn prefix. Furthermore, none of the congruences change depth of any communication prefixes. \square

Lemma D.4.7. *The communication reductions strictly decrease the measure. That is, Rules [RED-CLOSE-WAIT], [RED-SEND-RECV], [RED-RECV-SEND], [RED-SEL-BRA], [RED-FWD-L], and [RED-FWD-R] decrease the measure μ , even when occurring under arbitrary evaluation contexts.*

Similarly, Rule [RED-SPAWN-MERGE] strictly decreases the measure.

Proof. Each of those rules reduce the amount of communication prefixes at a given depth, and, as such, decrease the skeleton of the process. The only thing that we need to note is the special spawn prefix condition on μ in Rules [RED-CLOSE-WAIT], [RED-FWD-L], and [RED-FWD-R]. In those cases, the reduction might introduce a spawn prefix in front of the process. However, in that case the measure μ will still strictly decrease. \square

As we have seen, Rules [RED-SPAWN], [RED-SPAWN-L], and [RED-SPAWN-R] might temporarily increase the measure, but if we repeat them long enough then the measure will actually decrease.

Lemma D.4.8. *Let \mathcal{X}_0 be a non-empty evaluation context which may contain a $\rho[\sigma_0]; [_]$ sub-context only at the top level. Let $\mathcal{X}_0[\rho[\sigma]; Q]$ be a process. In other words, $\rho[\sigma]$ is an active prefix spawn at the least depth in $\mathcal{X}_0[\rho[\sigma]; Q]$. Then there exists a spawn binding σ' , and an evaluation context \mathcal{X}_1 which is free of $\rho[\sigma_1]; [_]$ sub-contexts for any σ_1 , such that*

$$\mathcal{X}_0[\rho[\sigma]; Q] \rightarrow^* \rho[\sigma']; \mathcal{X}_1[Q] \quad \text{and} \quad \mu(\mathcal{X}_0[\rho[\sigma]; Q]) > \mu(\rho[\sigma']; \mathcal{X}_1[Q]).$$

Proof. We first show that the last condition follows from the previous ones. By definition, $\mu(\rho[\sigma']; \mathcal{K}_I[Q]) = \text{skel}(\mathcal{K}_I[Q])$. We then consider two situations. If $\mathcal{K}_O[\rho[\sigma]; Q]$ does not have a spawn prefix at the top level, then

$$\mu(\mathcal{K}_O[\rho[\sigma]; Q]) = \text{skel}(\mathcal{K}_O[\rho[\sigma]; Q]) > \text{skel}(\mathcal{K}_I[Q]),$$

as the later process has less spawn prefixes. On the other hand, if $\mathcal{K}_O[\rho[\sigma]; Q]$ begins with a spawn prefix at the top level, that prefix cannot be $\rho[\sigma]$ itself, as \mathcal{K}_O is non-empty. Then the process $\mathcal{K}_O[\rho[\sigma]; Q]$ is of the form $\rho[\sigma']; \mathcal{K}_I[\rho[\sigma]; Q]$, and we have

$$\mu(\rho[\sigma']; \mathcal{K}_I[\rho[\sigma]; Q]) = \text{skel}(\mathcal{K}_I[\rho[\sigma]; Q]) > \text{skel}(\mathcal{K}_I[Q]).$$

Thus, we only need to find an adequate context \mathcal{K}_I and establish the reduction. We prove this by induction on the size of the evaluation context \mathcal{K}_O . We do a case analysis on the “tail” of the evaluation context.

D

- **(Case \mathcal{K}_O is of the form $\mathcal{K}'_O[\rho[\sigma']; \cdot]$)** If \mathcal{K}_O contains the $\rho[\sigma']; \cdot$, then by our assumption, it is on the top level. That means that \mathcal{K}'_O is empty. We then apply Rule [RED-SPAWN-MERGE]:

$$\rho[\sigma']; \rho[\sigma]; Q \rightarrow \rho[\sigma' \times \sigma]; Q.$$

Then pick \mathcal{K}_I to be empty.

- **(Case $\mathcal{K}_O[\rho[\sigma]; Q]$ is of the form $\mathcal{K}'_O[(\mathbf{v}x)(P \mid_x \rho[x \mapsto x_1, x_2]; Q)]$)** We then have a reduction

$$\mathcal{K}'_O[(\mathbf{v}x)(P \mid_x \rho[x \mapsto x_1, x_2]; Q)] \rightarrow \mathcal{K}'_O[\rho[z \mapsto z_1, z_2]; (\mathbf{v}x_1)(P^{(1)} \mid_{x_1} (\mathbf{v}x_2)(P^{(2)} \mid_{x_2} Q))],$$

if $\text{fn}(P) = \{x, z\}$.

If \mathcal{K}'_O is empty, then we are done. If it is not, then by the induction hypothesis we then have

$$\begin{aligned} & \mathcal{K}'_O[\rho[z \mapsto z_1, z_2]; (\mathbf{v}x_1)(P^{(1)} \mid_{x_1} (\mathbf{v}x_2)(P^{(2)} \mid_{x_2} Q))] \\ & \rightarrow^* \\ & \rho[\sigma']; \mathcal{K}_I[(\mathbf{v}x_1)(P^{(1)} \mid_{x_1} (\mathbf{v}x_2)(P^{(2)} \mid_{x_2} Q))], \end{aligned}$$

which we chain with the original application of Rule [RED-SPAWN].

Other cases are handled similarly. \square

Theorem 5.3.4 (Weak Normalization). *If $\Delta \vdash P \blacktriangleright z : A$ is a typed process, then P is weakly normalizing, i.e., there exists some Q such that $P \rightarrow^* Q \not\rightarrow$.*

Proof. We give a normalization procedure as follows. Given a process P , we consider its possible reductions, and apply them in order that would decrease the measure μ . We repeat this until we reach a normal form. Since the measure is strictly decreasing, this procedure will terminate by Lemma D.4.4.

Thanks to Lemma D.4.6 we can consider possible reductions of P up to congruence. Let us consider which reductions can apply to P .

- **(Case Rules [RED-SPAWN], [RED-SPAWN-L], [RED-SPAWN-R], or [RED-SPAWN-MERGE])** In that case we find a spawn prefix, involved with such a reduction, with the least depth. Then this spawn prefix will satisfy the conditions of Lemma D.4.8, and we pull out this active prefix upfront, decreasing the measure.
- **(Case communication or forwarder reductions)** In that case we apply that exact reduction, which by Lemma D.4.7 will decrease the measure. \square

E

APPENDICES FOR CHAPTER 6

This appendix details proofs of the results in Chapter 6.

E.1. SELF-CONTAINED DEFINITION OF LAST^n AND ITS TYPE SYSTEM

Figure E.1 gives the term language of LAST^n , Figure E.2 the configuration language, and Figure E.3 the type system.

E.2. TYPE PRESERVATION

Here, we prove type preservation for LAST^n :

Theorem 6.4.5 (Type Preservation for LAST^n). *Given $\Gamma \vdash_{\mathcal{C}}^{\phi} C : T$, if $C \equiv_{\mathcal{C}} D$ or $C \rightarrow_{\mathcal{C}} D$, then $\Gamma \vdash_{\mathcal{C}}^{\phi} D : T$.*

The proof is split into two parts: subject congruence and subject reduction. These and intermediate results are organized as follows:

- Theorems E.2.1 and E.2.2 prove subject congruence and subject reduction for terms, respectively.
- Theorems E.2.3 and E.2.4 then prove subject congruence and subject reduction for configurations, respectively, from which Theorem 6.4.5 follows.

Theorem E.2.1 (Subject Congruence for Terms). *If $\Gamma \vdash_{\mathcal{M}} M : T$ and $M \equiv_{\mathcal{M}} N$, then $\Gamma \vdash_{\mathcal{M}} N : T$.*

Proof. By induction on the derivation of $M \equiv_{\mathcal{M}} N$. The inductive cases follow from the IH directly. We consider the only Rule [SC-SUB-EXT]:

$$x \notin \text{fv}(\mathcal{R}) \implies (\mathcal{R}[M])\{N/x\} \equiv_{\mathcal{M}} \mathcal{R}[M\{N/x\}]$$

Terms (M, N, L) and reduction contexts (\mathcal{R}) :

$M, N, L ::= x$	variable	new	create new channel
0	unit value	spawn $M; N$	spawn M in parallel to N
$\lambda x.M$	abstraction	(M, N)	pair construction
$M N$	application	let $(x, y) = M$ in N	pair deconstruction
send $M N$	send M along N	select ℓM	select label ℓ along M
recv M	receive along M	case M of $\{i : M\}_{i \in I}$	offer labels in I along M
close $M; N$	close M	$M\{N/x\}$	explicit substitution

$\mathcal{R} ::= [\cdot] \mathcal{R} M \text{send } M \mathcal{R} \text{recv } \mathcal{R} \text{let } (x, y) = \mathcal{R} \text{ in } M$
select $\ell \mathcal{R} \text{case } \mathcal{R} \text{ of } \{i : M\}_{i \in I} \text{close } \mathcal{R}; M \mathcal{R}\{M/x\}$

E

Structural congruence for terms (\equiv_M) and term reduction (\rightarrow_M):

$\frac{\text{[SC-SUB-EXT]} \quad x \notin \text{fv}(\mathcal{R})}{(\mathcal{R}[M])\{N/x\} \equiv_M \mathcal{R}\{M\{N/x\}\}}$	$\frac{\text{[RED-LAM]}}{(\lambda x.M) N \rightarrow_M M\{N/x\}}$
$\frac{\text{[RED-PAIR]}}{\text{let } (x, y) = (M_1, M_2) \text{ in } N \rightarrow_M N\{M_1/x, M_2/y\}}$	$\frac{\text{[RED-NAME-SUB]}}{x\{M/x\} \rightarrow_M M}$
$\frac{\text{[RED-LIFT]}}{\mathcal{R}[M] \rightarrow_M \mathcal{R}[N]} \quad \frac{\text{[RED-LIFT-SC]} \quad M \equiv_M M' \quad M' \rightarrow_M N' \quad N' \equiv_M N}{M \rightarrow_M N}$	

Figure E.1 | The LASTⁿ term language.

Markers (ϕ), messages (m, n), configurations (C, D, E), thread (\mathcal{F}) and configuration (\mathcal{G}) contexts:

$$\phi ::= \blacklozenge \mid \diamond$$

$$m, n ::= M \mid \ell$$

$$C, D, E ::= \phi M \mid C \parallel D \mid (\mathbf{v}x[\vec{m}]y)C \mid C \{\!| M/x \!\}$$

$$\mathcal{F} ::= \phi \mathcal{R}$$

$$\mathcal{G} ::= [\cdot] \mid \mathcal{G} \parallel C \mid (\mathbf{v}x[\vec{m}]y)\mathcal{G} \mid \mathcal{G} \{\!| M/x \!\}$$

Structural congruence for configurations ($\equiv_{\mathcal{C}}$):

$$\begin{array}{c} \text{[SC-TERM-SC]} \\ \frac{M \equiv_{\mathbf{M}} M'}{\phi M \equiv_{\mathcal{C}} \phi M'} \\ \text{[SC-RES-SWAP]} \\ \frac{}{(\mathbf{v}x[\varepsilon]y)C \equiv_{\mathcal{C}} (\mathbf{v}y[\varepsilon]x)C} \\ \text{[SC-RES-COMM]} \\ \frac{}{(\mathbf{v}x[\vec{m}]y)(\mathbf{v}z[\vec{n}]w)C \equiv_{\mathcal{C}} (\mathbf{v}z[\vec{n}]w)(\mathbf{v}x[\vec{m}]y)C} \\ \text{[SC-RES-EXT]} \\ \frac{x, y \notin \text{fv}(C)}{(\mathbf{v}x[\vec{m}]y)(C \parallel D) \equiv_{\mathcal{C}} C \parallel (\mathbf{v}x[\vec{m}]y)D} \\ \text{[SC-PAR-COMM]} \\ \frac{}{C \parallel D \equiv_{\mathcal{C}} D \parallel C} \\ \text{[SC-PAR-ASSOC]} \\ \frac{}{C \parallel (D \parallel E) \equiv_{\mathcal{C}} (C \parallel D) \parallel E} \\ \text{[SC-CONF-SUB]} \\ \frac{}{\phi(M \{\!| N/x \!\}) \equiv_{\mathcal{C}} (\phi M) \{\!| N/x \!\}} \\ \text{[SC-CONF-SUB-EXT]} \\ \frac{x \notin \text{fv}(\mathcal{G})}{(\mathcal{G}[C]) \{\!| M/x \!\} \equiv_{\mathcal{C}} \mathcal{G}\{C \{\!| M/x \!\}\}} \end{array}$$

Configuration reduction ($\rightarrow_{\mathcal{C}}$):

$$\begin{array}{c} \text{[RED-NEW]} \\ \frac{}{\mathcal{F}[\text{new}] \rightarrow_{\mathcal{C}} (\mathbf{v}x[\varepsilon]y)(\mathcal{F}[(x, y)])} \\ \text{[RED-SEND]} \\ \frac{}{(\mathbf{v}x[\vec{m}]y)(\hat{\mathcal{F}}[\text{send } Mx] \parallel C) \rightarrow_{\mathcal{C}} (\mathbf{v}x[M, \vec{m}]y)(\hat{\mathcal{F}}[x] \parallel C)} \\ \text{[RED-RECV]} \\ \frac{}{(\mathbf{v}x[\vec{m}, M]y)(\hat{\mathcal{F}}[\text{recv } y] \parallel C) \rightarrow_{\mathcal{C}} (\mathbf{v}x[\vec{m}]y)(\hat{\mathcal{F}}[(M, y)] \parallel C)} \\ \text{[RED-SELECT]} \\ \frac{}{(\mathbf{v}x[\vec{m}]y)(\mathcal{F}[\text{select } \ell x] \parallel C) \rightarrow_{\mathcal{C}} (\mathbf{v}x[\ell, \vec{m}]y)(\mathcal{F}[x] \parallel C)} \\ \text{[RED-CASE]} \\ \frac{j \in I}{(\mathbf{v}x[\vec{m}, j]y)(\mathcal{F}[\text{case } y \text{ of } \{i : M_i\}_{i \in I}] \parallel C) \rightarrow_{\mathcal{C}} (\mathbf{v}x[\vec{m}]y)(\mathcal{F}[M_j y] \parallel C)} \\ \text{[RED-CLOSE]} \\ \frac{}{(\mathbf{v}x[\vec{m}]y)(\mathcal{F}[\text{close } x; M] \parallel C) \rightarrow_{\mathcal{C}} (\mathbf{v}\square[\vec{m}]y)(\mathcal{F}[M] \parallel C)} \\ \text{[RED-RES-NIL]} \\ \frac{}{(\mathbf{v}\square[\varepsilon]\square)C \rightarrow_{\mathcal{C}} C} \\ \text{[RED-LIFT-C]} \\ \frac{C \rightarrow_{\mathcal{C}} C'}{\mathcal{G}[C] \rightarrow_{\mathcal{C}} \mathcal{G}[C']} \\ \text{[RED-LIFT-M]} \\ \frac{M \rightarrow_{\mathbf{M}} M'}{\mathcal{F}[M] \rightarrow_{\mathcal{C}} \mathcal{F}[M']} \\ \text{[RED-PAR-NIL]} \\ \frac{}{C \parallel \diamond \rightarrow_{\mathcal{C}} C} \\ \text{[RED-CONF-LIFT-SC]} \\ \frac{C \equiv_{\mathcal{C}} C' \quad C' \rightarrow_{\mathcal{C}} D' \quad D' \equiv_{\mathcal{C}} D}{C \rightarrow_{\mathcal{C}} D} \end{array}$$

Figure E.2 | The LAST^{nl} configuration language.

$$\begin{array}{c}
\text{[TYP-VAR]} \\
\frac{}{x : T \vdash_M x : T} \\
\\
\text{[TYP-ABS]} \\
\frac{\Gamma, x : T \vdash_M M : U}{\Gamma \vdash_M \lambda x. M : T \multimap U} \\
\\
\text{[TYP-APP]} \\
\frac{\Gamma \vdash_M M : T \multimap U \quad \Delta \vdash_M N : T}{\Gamma, \Delta \vdash_M M N : U} \\
\\
\text{[TYP-UNIT]} \\
\frac{}{\emptyset \vdash_M () : \mathbf{1}} \\
\\
\text{[TYP-PAIR]} \\
\frac{\Gamma \vdash_M M : T \quad \Delta \vdash_M N : U}{\Gamma, \Delta \vdash_M (M, N) : T \times U} \\
\\
\text{[TYP-SPLIT]} \\
\frac{\Gamma \vdash_M M : T \times T' \quad \Delta, x : T, y : T' \vdash_M N : U}{\Gamma, \Delta \vdash_M \text{let } (x, y) = M \text{ in } N : U} \\
\\
\text{[TYP-NEW]} \\
\frac{}{\emptyset \vdash_M \text{new} : S \times \bar{S}} \\
\\
\text{[TYP-SPAWN]} \\
\frac{\Gamma \vdash_M M : \mathbf{1} \quad \Delta \vdash_M N : T}{\Gamma, \Delta \vdash_M \text{spawn } M ; N : T} \\
\\
\text{[TYP-CLOSE]} \\
\frac{\Gamma \vdash_M M : \text{end} \quad \Delta \vdash_M N : T}{\Gamma, \Delta \vdash_M \text{close } M ; N : T} \\
\\
\text{[TYP-SEND]} \\
\frac{\Gamma \vdash_M M : T \quad \Delta \vdash_M N : !T.S}{\Gamma, \Delta \vdash_M \text{send } M N : S} \\
\\
\text{[TYP-RECV]} \\
\frac{\Gamma \vdash_M M : ?T.S}{\Gamma \vdash_M \text{recv } M : T \times S} \\
\\
\text{[TYP-SEL]} \\
\frac{\Gamma \vdash_M M : \oplus \{i : S_i\}_{i \in I} \quad j \in I}{\Gamma \vdash_M \text{select } j M : S_j} \\
\\
\text{[TYP-CASE]} \\
\frac{\Gamma \vdash_M M : \& \{i : S_i\}_{i \in I} \quad \forall i \in I. \Delta \vdash_M N_i : S_i \multimap U}{\Gamma, \Delta \vdash_M \text{case } M \text{ of } \{i : N_i\}_{i \in I} : U} \\
\\
\text{[TYP-SUB]} \\
\frac{\Gamma, x : T \vdash_M M : U \quad \Delta \vdash_M N : T}{\Gamma, \Delta \vdash_M M \{N/x\} : U} \\
\\
\text{[TYP-BUF]} \\
\frac{}{\emptyset \vdash_B [e] : S' > S'} \\
\\
\text{[TYP-BUF-SEND]} \\
\frac{\Gamma \vdash_M M : T \quad \Delta \vdash_B [\vec{m}] : S' > S}{\Gamma, \Delta \vdash_B [\vec{m}, M] : S' > !T.S} \\
\\
\text{[TYP-BUF-SEL]} \\
\frac{\Gamma \vdash_B [\vec{m}] : S' > S_j \quad j \in I}{\Gamma \vdash_B [\vec{m}, j] : S' > \oplus \{i : S_i\}_{i \in I}} \\
\\
\text{[TYP-BUF-END-L]} \\
\frac{}{\emptyset \vdash_B [e] : \text{end} > \square} \\
\\
\text{[TYP-BUF-END-R]} \\
\frac{}{\emptyset \vdash_B [e] : \square > \text{end}} \\
\\
\text{[TYP-MAIN]} \\
\frac{\Gamma \vdash_M M : \hat{T}}{\Gamma \vdash_C \blacklozenge M : \hat{T}} \\
\\
\text{[TYP-CHILD]} \\
\frac{\Gamma \vdash_M M : \mathbf{1}}{\Gamma \vdash_C \blacklozenge M : \mathbf{1}} \\
\\
\text{[TYP-PAR]} \\
\frac{\Gamma \vdash_C^{\phi_1} C : T_1 \quad \Delta \vdash_C^{\phi_2} D : T_2 \quad \{T_1, T_2\} \setminus \{T\} = \mathbf{1}}{\Gamma, \Delta \vdash_C^{\phi_1 + \phi_2} C \parallel D : T} \\
\\
\text{[TYP-RES]} \\
\frac{\Gamma \vdash_B [\vec{m}] : S' > S \quad \Delta, x : S' \vdash_C^{\phi} C : T \quad \Gamma', y : \bar{S} = \Gamma, \Delta}{\Gamma' \vdash_C^{\phi} (\nu x([\vec{m}])y)C : T} \\
\\
\text{[TYP-CONF-SUB]} \\
\frac{\Gamma, x : T \vdash_C^{\phi} C : U \quad \Delta \vdash_M M : T}{\Gamma, \Delta \vdash_C^{\phi} C \{M/x\} : U}
\end{array}$$

Figure E.3 | LAST^n typing rules for terms (top), buffers (center), and configurations (bottom).

We apply induction on the structure of the reduction context \mathcal{R} . As an interesting, representative case, consider $\mathcal{R} = L\{\mathcal{R}'/y\}$. Assuming $x \notin \text{fv}(\mathcal{R})$, we have $x \notin \text{fv}(L) \cup \text{fv}(\mathcal{R}')$. We apply inversion of typing:

$$\frac{\frac{\Gamma, y:U \vdash_M L:T \quad \Delta, x:U' \vdash_M \mathcal{R}'[M]:U}{\Gamma, \Delta, x:U' \vdash_M L\{\mathcal{R}'[M]/y\}:T} \text{[TYP-SUB]}}{\Gamma, \Delta, \Delta' \vdash_M (L\{\mathcal{R}'[M]/y\})\{N/x\}:T} \Delta' \vdash_M N:U' \text{[TYP-SUB]}$$

We can derive:

$$\frac{\Delta, x:U' \vdash_M \mathcal{R}'[M]:U \quad \Delta' \vdash_M N:U'}{\Delta, \Delta' \vdash_M \mathcal{R}'[M]\{N/x\}:U} \text{[TYP-SUB]}$$

Since $x \notin \text{fv}(\mathcal{R}')$, by Rule [SC-SUB-EXT], $(\mathcal{R}'[M])\{N/x\} \equiv_M \mathcal{R}'[M\{N/x\}]$. Then, by the IH, $\Delta, \Delta' \vdash_M \mathcal{R}'[M\{N/x\}]:U$. Hence, we can conclude the following:

$$\frac{\Gamma, y:U \vdash_M L:T \quad \Delta, \Delta' \vdash_M \mathcal{R}'[M\{N/x\}]:U}{\Gamma, \Delta, \Delta' \vdash_M L\{\mathcal{R}'[M\{N/x\}]/y\}:T} \text{[TYP-SUB]}$$

It is straightforward to see that this reasoning works in opposite direction as well. \square

E

Theorem E.2.2 (Subject Reduction for Terms). *If $\Gamma \vdash_M M:T$ and $M \rightarrow_M N$, then $\Gamma \vdash_M N:T$.*

Proof. By induction on the derivation of $M \rightarrow_M N$ (IH₁). The case of Rule [RED-LIFT] follows by induction on the structure of the reduction context \mathcal{R} , where the base case ($\mathcal{R} = [_]$) follows from IH₁. The case of Rule [RED-LIFT-SC] follows from IH₁ and Theorem E.2.1 (subject congruence for terms). We consider the other cases, applying inversion of typing and deriving the typing of the term after reduction:

- Rule [RED-LAM]: $(\lambda x.M) N \rightarrow_M M\{N/x\}$.

$$\frac{\frac{\Gamma, x:T \vdash_M M:U}{\Gamma \vdash_M \lambda x.M:T \multimap U} \text{[TYP-ABS]}}{\Gamma, \Delta \vdash_M (\lambda x.M) N:U} \Delta \vdash_M N:T \text{[TYP-APP]}}$$

$$\xrightarrow{\rightarrow_M}$$

$$\frac{\Gamma, x:T \vdash_M M:U \quad \Delta \vdash_M N:T}{\Gamma, \Delta \vdash_M M\{N/x\}:U} \text{[TYP-SUB]}$$

- Rule [RED-PAIR]: $\text{let } (x, y) = (M_1, M_2) \text{ in } N \rightarrow_M N\{M_1/x, M_2/y\}$.

$$\frac{\frac{\Gamma \vdash_M M_1:T \quad \Gamma' \vdash_M M_2:T'}{\Gamma, \Gamma' \vdash_M (M_1, M_2):T \times T'} \text{[TYP-PAIR]}}{\Gamma, \Gamma', \Delta \vdash_M \text{let } (x, y) = (M_1, M_2) \text{ in } N:U} \Delta, x:T, y:T' \vdash_M N:U \text{[TYP-SPLIT]}$$

$$\xrightarrow{\rightarrow_M}$$

$$\frac{\Delta, x:T, y:T' \vdash_M N:U \quad \Gamma \vdash_M M_1:T}{\Gamma, \Delta, y:T' \vdash_M N\{M_1/x\}:U} \text{[TYP-SUB]}}{\Gamma, \Gamma', \Delta \vdash_M N\{M_1/x, M_2/y\}:U} \Gamma' \vdash_M M_2:T' \text{[TYP-SUB]}$$

- Rule [RED-NAME-SUB]: $x\{M/x\} \rightarrow_M M$.

$$\frac{\frac{x:U \vdash_M x:U \quad \Gamma \vdash_M M:U}{\Gamma \vdash_M x\{M/x\}:U} \text{[TYP-VAR]} \quad \text{[TYP-SUB]}}{\Gamma \vdash_M M:U} \text{[TYP-SUB]}$$

$$\xrightarrow{M}$$

$$\Gamma \vdash_M M:U \quad \square$$

Theorem E.2.3 (Subject Congruence for Configurations). *If $\Gamma \vdash_C^\phi C:T$ and $C \equiv_C D$, then $\Gamma \vdash_C^\phi D:T$.*

Proof. By induction on the derivation of $C \equiv_C D$. The inductive cases follow from the IH directly. The case for Rule [SC-TERM-SC] follows from Theorem E.2.1 (subject congruence for terms). The cases for Rules [SC-RES-COMM], [SC-PAR-NIL], [SC-PAR-COMM], and [PAR-ASSOC] are straightforward. We consider the other cases:

- Rule [SC-RES-SWAP]: $(\nu x[\epsilon]y)C \equiv_C (\nu y[\epsilon]x)C$.

The analysis depends on whether exactly one of x, y is \square or not. We discuss both cases.

- Exactly one of x, y is \square ; w.l.o.g., assume $x = \square$. We have the following:

$$\frac{\frac{\emptyset \vdash_B [\epsilon]:\square > \text{end} \quad \Gamma, x:\text{end} \vdash_C^\phi C:T}{\Gamma \vdash_C^\phi (\nu \square[\epsilon]y)C:T} \text{[TYP-RES]} \quad \text{[TYP-BUF-END-R]}}{\Gamma \vdash_C^\phi (\nu \square[\epsilon]y)C:T} \text{[TYP-RES]}$$

$$\equiv_C$$

$$\frac{\frac{\emptyset \vdash_B [\epsilon]:\text{end} > \square \quad \Gamma, x:\text{end} \vdash_C^\phi C:T}{\Gamma \vdash_C^\phi (\nu y[\epsilon]\square)C:T} \text{[TYP-RES]} \quad \text{[TYP-BUF-END-L]}}{\Gamma \vdash_C^\phi (\nu y[\epsilon]\square)C:T} \text{[TYP-RES]}$$

- Neither or both of x, y are \square . We have the following:

$$\frac{\frac{\emptyset \vdash_B [\epsilon]:S' > S' \quad \Gamma, x:S', y:\bar{S}' \vdash_C^\phi C:T}{\Gamma \vdash_C^\phi (\nu x[\epsilon]y)C:T} \text{[TYP-RES]} \quad \text{[TYP-BUF]}}{\Gamma \vdash_C^\phi (\nu x[\epsilon]y)C:T} \text{[TYP-RES]}$$

$$\equiv_C$$

$$\frac{\frac{\emptyset \vdash_B [\epsilon]:\bar{S}' > \bar{S}' \quad \Gamma, x:S', y:\bar{S}' \vdash_C^\phi C:T}{\Gamma \vdash_C^\phi (\nu y[\epsilon]x)C:T} \text{[TYP-RES]} \quad \text{[TYP-BUF]}}{\Gamma \vdash_C^\phi (\nu y[\epsilon]x)C:T} \text{[TYP-RES]}$$

- Rule [SC-RES-EXT]: $x, y \notin \text{fv}(C) \implies (\nu x[\vec{m}]y)(C \parallel D) \equiv_C C \parallel (\nu x[\vec{m}]y)D$.

The analysis depends on whether C or D are child threads. W.l.o.g., we assume C is a child thread. Assuming $x, y \notin \text{fn}(C)$, we apply inversion of typing:

$$\frac{\frac{\Gamma \vdash_B [\vec{m}]:S' > S \quad \frac{\Delta \vdash_C^\diamond C:\mathbf{1} \quad \Lambda, x:S', y:\bar{S} \vdash_C^\phi D:T}{\Delta, \Lambda, x:S', y:\bar{S} \vdash_C^{\diamond+\phi} C \parallel D:T} \text{[TYP-PAR-L]}}{\Gamma, \Delta, \Lambda \vdash_C^{\diamond+\phi} (\nu x[\vec{m}]y)(C \parallel D):T} \text{[TYP-RES]}}$$

Then, we derive the typing of the structurally congruent configuration:

$$\frac{\frac{\Delta \vdash_{\mathcal{C}}^{\diamond} C : \mathbf{1} \quad \frac{\Gamma \vdash_{\mathcal{B}} [\vec{m}] : S' > S \quad \Lambda, x : S', y : \bar{S} \vdash_{\mathcal{C}}^{\phi} D : T}{\Gamma, \Delta \vdash_{\mathcal{C}}^{\phi} (\mathbf{v}x[\vec{m}]y)D : T} \text{ [TYP-RES]}}{\Gamma, \Delta, \Lambda \vdash_{\mathcal{C}}^{\diamond+\phi} C \parallel (\mathbf{v}x[\vec{m}]y)D : T} \text{ [TYP-PAR-L]}}$$

The other direction is analogous.

- Rule [SC-CONF-SUB]: $\phi(M\{\!|N/x|\!\}) \equiv_{\mathcal{C}} (\phi M)\{\!|N/x|\!\}$.

This case follows by a straightforward inversion of typing on both terms:

$$\frac{\frac{\frac{\Gamma, x : T \vdash_{\mathcal{M}} M : U \quad \Delta \vdash_{\mathcal{M}} N : T}{\Gamma, \Delta \vdash_{\mathcal{M}} M\{\!|N/x|\!\} : U} \text{ [TYP-SUB]}}{\Gamma, \Delta \vdash_{\mathcal{C}}^{\phi} \phi(M\{\!|N/x|\!\}) : U} \text{ [TYP-MAIN/CHILD]}}{\equiv_{\mathcal{C}} \frac{\Gamma, x : T \vdash_{\mathcal{M}} M : U}{\Gamma, x : T \vdash_{\mathcal{C}}^{\phi} \phi M : U} \text{ [TYP-MAIN/CHILD]} \quad \Delta \vdash_{\mathcal{M}} N : T}{\Gamma, \Delta \vdash_{\mathcal{C}}^{\phi} (\phi M)\{\!|N/x|\!\} : U} \text{ [TYP-CONF-SUB]}}$$

- Rule [SC-CONF-SUB-EXT]: $x \notin \text{fv}(\mathcal{G}) \implies (\mathcal{G}[C])\{\!|M/x|\!\} \equiv_{\mathcal{C}} \mathcal{G}[C\{\!|M/x|\!\}]$.

This case follows by induction on the structure of \mathcal{G} . The inductive cases follow from the IH straightforwardly. For the base case ($\mathcal{G} = [\cdot]$), the structural congruence is simply an equality. \square

Theorem E.2.4 (Subject Reduction for Configurations). *If $\Gamma \vdash_{\mathcal{C}}^{\phi} C : T$ and $C \rightarrow_{\mathcal{C}} D$, then $\Gamma \vdash_{\mathcal{C}}^{\phi} D : T$.*

Proof. By induction on the derivation of $C \rightarrow_{\mathcal{C}} D$ (IH₁). The case of Rule [RED-LIFT-C] ($C \rightarrow_{\mathcal{C}} C' \implies \mathcal{G}[C] \rightarrow_{\mathcal{C}} \mathcal{G}[C']$) follows by induction on the structure of \mathcal{G} , directly from IH₁. The case of Rule [RED-LIFT-M] ($M \rightarrow_{\mathcal{M}} M' \implies \mathcal{F}[M] \rightarrow_{\mathcal{C}} \mathcal{F}[M']$) follows by induction on the structure of \mathcal{F} , where the base case ($\mathcal{F} = \phi[\cdot]$) follows from Theorem E.2.2 (subject reduction for terms). The case for Rule [RED-CONF-LIFT-SC] ($C \equiv_{\mathcal{C}} C' \wedge C' \rightarrow_{\mathcal{C}} D' \wedge D' \equiv_{\mathcal{C}} D \implies C \rightarrow_{\mathcal{C}} D$) follows from IH₁ and Theorem E.2.3 (subject congruence for configurations). We consider the other cases:

- Rule [RED-NEW]: $\mathcal{F}[\text{new}] \rightarrow_{\mathcal{C}} (\mathbf{v}x[\epsilon]y)(\mathcal{F}[(x, y)])$.

This case follows by induction on the structure of \mathcal{F} . The inductive cases follow from the IH directly. For the base case ($\mathcal{F} = \phi[\cdot]$), we apply inversion of typing and derive

the typing of the reduced configuration:

$$\begin{array}{c}
\frac{}{\emptyset \vdash_{\mathbf{M}} \mathbf{new} : S \times \bar{S}} \text{[TYP-NEW]} \\
\frac{}{\emptyset \vdash_{\mathbf{C}}^{\phi} \phi \mathbf{new} : S \times \bar{S}} \text{[TYP-MAIN/CHILD]} \\
\rightarrow_{\mathbf{C}} \\
\frac{}{\emptyset \vdash_{\mathbf{B}} [\epsilon] : S > S} \text{[TYP-BUF]} \quad \frac{\frac{x : S \vdash_{\mathbf{M}} x : S}{x : S, y : \bar{S} \vdash_{\mathbf{M}} (x, y) : S \times \bar{S}} \text{[TYP-MAIN/CHILD]} \quad \frac{y : \bar{S} \vdash_{\mathbf{M}} y : \bar{S}}{} \text{[TYP-VAR]}}{x : S, y : \bar{S} \vdash_{\mathbf{C}}^{\phi} \phi(x, y) : S \times \bar{S}} \text{[TYP-PAIR]} \\
\frac{}{\emptyset \vdash_{\mathbf{C}}^{\phi} (\mathbf{vx}[\epsilon]y)(\phi(x, y)) : S \times \bar{S}} \text{[TYP-RES]}
\end{array}$$

- Rule [RED-SPAWN]: $\hat{\mathcal{F}}[\mathbf{spawn} M; N] \rightarrow_{\mathbf{C}} \hat{\mathcal{F}}[N] \parallel \diamond M$. By induction on the structure of $\hat{\mathcal{F}}$, which excludes holes under explicit substitution and so no names of M are captured by $\hat{\mathcal{F}}$. The inductive cases follows from the IH directly; we detail the base case ($\hat{\mathcal{F}} = \phi[\cdot]$):

$$\begin{array}{c}
\frac{\Gamma \vdash_{\mathbf{M}} M : \mathbf{1} \quad \Delta \vdash_{\mathbf{M}} N : T}{\Gamma, \Delta \vdash_{\mathbf{M}} \mathbf{spawn} M; N : T} \text{[TYP-SPAWN]} \\
\frac{}{\Gamma, \Delta \vdash_{\mathbf{C}}^{\phi} \phi \mathbf{spawn} M; N : T} \text{[TYP-MAIN/-CHILD]} \\
\rightarrow_{\mathbf{C}} \\
\frac{\Delta \vdash_{\mathbf{M}} N : T}{\Delta \vdash_{\mathbf{C}}^{\phi} \phi N : T} \text{[TYP-MAIN/-CHILD]} \quad \frac{\Gamma \vdash_{\mathbf{M}} M : \mathbf{1}}{\Gamma \vdash_{\mathbf{C}}^{\diamond} \diamond M : \mathbf{1}} \text{[TYP-CHILD]} \\
\frac{}{\Gamma, \Delta \vdash_{\mathbf{C}}^{\phi+\diamond} \phi N \parallel \diamond M : T} \text{[TYP-PAR-R]}
\end{array}$$

Clearly, $\phi + \diamond = \phi$, proving the thesis.

- Rule [RED-SEND]: $(\mathbf{vx}[\bar{m}]y)(\hat{\mathcal{F}}[\mathbf{send} M x] \parallel C) \rightarrow_{\mathbf{C}} (\mathbf{vx}[M, \bar{m}]y)(\hat{\mathcal{F}}[x] \parallel C)$.

This case follows by induction on the structure of $\hat{\mathcal{F}}$. The inductive cases follow from the IH straightforwardly. The fact that the hole in $\hat{\mathcal{F}}$ does not occur under an explicit substitution guarantees that we can move M out of the context of $\hat{\mathcal{F}}$ and into the buffer. We consider the base case ($\hat{\mathcal{F}} = \phi \mathcal{R}$). By well-typedness, it must be that $\mathcal{R} = \mathcal{R}_1[\mathbf{close} \mathcal{R}_2; M]$. We apply induction on the structures of $\mathcal{R}_1, \mathcal{R}_2$ and consider the base cases: $\mathcal{R}_1 = \mathcal{R}_2 = [\cdot]$. We apply inversion of typing, w.l.o.g. assuming that $\phi = \blacklozenge$ and

$y \in \text{fv}(C)$:

$$\frac{\frac{\frac{\Delta_1 \vdash_M M : T \quad x : !T.\text{end} \vdash_M x : !T.\text{end}}{\Delta_1, x : !T.\text{end} \vdash_M \text{send } Mx : \text{end}} \text{ [TYP-SEND]} \quad \Delta_2 \vdash_M N : U \text{ [TYP-CLOSE]}}{\Delta_1, \Delta_2, x : !T.\text{end} \vdash_M \text{close}(\text{send } Mx); N : U \text{ [TYP-MAIN]}} \quad \text{(E.1)} \quad \Lambda, y : \bar{S} \vdash_C^\diamond C : \mathbf{1}}{\Delta_1, \Delta_2, \Lambda, x : !T.\text{end}, y : \bar{S} \vdash_C^\diamond (\text{close}(\text{send } Mx); N) \parallel C : U \text{ [TYP-PAR-R]}} \text{ (E.2)}$$

$$\frac{\Gamma \vdash_B [\bar{m}] : !T.\text{end} > S \quad \text{(E.2)}}{\Gamma, \Delta_1, \Delta_2, \Lambda \vdash_C^\diamond (\nu x [\bar{m}]) y (\diamond (\text{close}(\text{send } Mx); N) \parallel C) : U \text{ [TYP-RES]}}$$

Note that the derivation of $\Gamma \vdash_B [\bar{m}] : !T.\text{end} > S$ depends on the size of \bar{m} . By induction on the size of \bar{m} (IH₂), we derive $\Gamma, \Delta_1 \vdash_B [M, \bar{m}] : \text{end} > S$:

- If \bar{m} is empty, it follows by inversion of typing that $\Gamma = \emptyset$ and $S = !T.\text{end}$:

$$\frac{}{\emptyset \vdash_B [\epsilon] : !T.\text{end} > !T.\text{end}} \text{ [TYP-BUF]}$$

Then, we derive the following:

$$\frac{\frac{\Delta_1 \vdash_M M : T \quad \emptyset \vdash_B [\epsilon] : \text{end} > \text{end}}{\Delta_1 \vdash_B [M] : \text{end} > !T.\text{end}} \text{ [TYP-BUF-SEND]}}{\Delta_1 \vdash_B [M] : \text{end} > !T.\text{end}} \text{ [TYP-BUF]}$$

- If $\bar{m} = \bar{m}', L$, it follows by inversion of typing that $\Gamma = \Gamma', \Gamma''$ and $S = !T'.\text{end}'$:

$$\frac{\frac{\Gamma' \vdash_M L : T' \quad \Gamma'' \vdash_B [\bar{m}'] : !T.\text{end} > \text{end}'}}{\Gamma', \Gamma'' \vdash_B [\bar{m}', L] : !T.\text{end} > !T'.\text{end}'} \text{ [TYP-BUF-SEND]}$$

By IH₂, $\Gamma'', \Delta_1 \vdash_B [M, \bar{m}'] : \text{end} > \text{end}'$, allowing us to derive the following:

$$\frac{\frac{\Gamma' \vdash_M L : T' \quad \Gamma'', \Delta_1 \vdash_B [M, \bar{m}'] : \text{end} > \text{end}'}}{\Gamma', \Gamma'', \Delta_1 \vdash_B [M, \bar{m}', L] : \text{end} > !T'.\text{end}'} \text{ [TYP-BUF-SEND]}$$

- If $\bar{m} = \bar{m}', j$, it follows by inversion of typing that there exist types S_i for each i in a set of labels I , where $j \in I$, such that $S = \oplus \{i : S_i\}_{i \in I}$:

$$\frac{\Gamma \vdash_B [\bar{m}'] : !T.\text{end} > S_j}{\Gamma \vdash_B [\bar{m}', j] : !T.\text{end} > \oplus \{i : S_i\}_{i \in I}} \text{ [TYP-BUF-SEL]}$$

By IH₂, $\Gamma, \Delta_1 \vdash_B [M, \bar{m}'] : \text{end} > S_j$, so we derive the following:

$$\frac{\Gamma, \Delta_1 \vdash_B [M, \bar{m}'] : \text{end} > S_j}{\Gamma, \Delta_1 \vdash_B [M, \bar{m}', j] : \text{end} > \oplus \{i : S_i\}_{i \in I}} \text{ [TYP-BUF-SEL]}$$

Now, we can derive the typing of the structurally congruent configuration:

$$\begin{array}{c}
\frac{}{x : \text{end} \vdash_{\mathbf{M}} x : \text{end}} \text{[TYP-VAR]} \quad \frac{}{\Delta_2 \vdash_{\mathbf{M}} N : U} \text{[TYP-CLOSE]} \\
\frac{}{\Delta_2, x : \text{end} \vdash_{\mathbf{M}} \text{close } x; N : U} \text{[TYP-MAIN]} \\
\frac{}{\Delta_2, x : \text{end} \vdash_{\mathbf{C}}^{\diamond} \blacklozenge(\text{close } x; N) : U} \text{[TYP-MAIN]} \\
\text{(E.3)} \quad \frac{}{\Lambda, y : \bar{S} \vdash_{\mathbf{C}}^{\diamond} C : \mathbf{1}} \text{[TYP-PAR-R]} \\
\frac{\Gamma, \Delta_1 \vdash_{\mathbf{B}} [M, \bar{m}] : \text{end} > S \quad \Delta_2, \Lambda, x : \text{end}, y : \bar{S} \vdash_{\mathbf{C}}^{\diamond} \blacklozenge(\text{close } x; N) \parallel C : U}{\Gamma, \Delta_1, \Delta_2, \Lambda \vdash_{\mathbf{C}}^{\diamond} (\mathbf{v}x[M, \bar{m}]y)(\blacklozenge(\text{close } x; N) \parallel C) : U} \text{[TYP-RES]}
\end{array}$$

- Rule [RED-RECV]: $(\mathbf{v}x[\bar{m}, M]y)(\hat{\mathcal{F}}[\text{recv } y] \parallel C) \rightarrow_{\mathbf{C}} (\mathbf{v}x[\bar{m}]y)(\hat{\mathcal{F}}[(M, y)] \parallel C)$.

For this case, we apply induction on the structure of $\hat{\mathcal{F}}$. The inductive cases follow from the IH directly. We consider the base case ($\hat{\mathcal{F}} = \phi[\cdot]$). We apply inversion of typing, w.l.o.g. assuming that $\phi = \blacklozenge$, and then derive the typing of the reduced configuration:

$$\begin{array}{c}
\frac{}{y : ?T.\bar{S} \vdash_{\mathbf{M}} y : ?T.\bar{S}} \text{[TYP-VAR]} \\
\frac{}{y : ?T.\bar{S} \vdash_{\mathbf{M}} \text{recv } y : T \times \bar{S}} \text{[TYP-RECV]} \\
\frac{}{y : ?T.\bar{S} \vdash_{\mathbf{C}}^{\diamond} \blacklozenge(\text{recv } y) : T \times \bar{S}} \text{[TYP-MAIN]} \quad \frac{}{\Lambda, x : S' \vdash_{\mathbf{C}}^{\diamond} C : \mathbf{1}} \text{[TYP-PAR-R]} \\
\pi \triangleq \frac{}{\Lambda, x : S', y : ?T.\bar{S} \vdash_{\mathbf{C}}^{\diamond} \blacklozenge(\text{recv } y) \parallel C : T \times \bar{S}} \text{[TYP-PAR-R]} \\
\frac{\Gamma \vdash_{\mathbf{M}} M : T \quad \Delta \vdash_{\mathbf{B}} [\bar{m}] : S' > S}{\Gamma, \Delta \vdash_{\mathbf{B}} [\bar{m}, M] : S' > !T.S} \text{[TYP-BUF-SEND]} \quad \pi \\
\frac{}{\Gamma, \Delta, \Lambda \vdash_{\mathbf{C}}^{\diamond} (\mathbf{v}x[\bar{m}, M]y)(\blacklozenge(\text{recv } y) \parallel C) : T \times \bar{S}} \text{[TYP-RES]} \\
\rightarrow_{\mathbf{C}} \\
\frac{\Gamma \vdash_{\mathbf{M}} M : T \quad y : \bar{S} \vdash_{\mathbf{M}} y : \bar{S}}{\Gamma, y : \bar{S} \vdash_{\mathbf{M}} (M, y) : T \times \bar{S}} \text{[TYP-PAIR]} \\
\frac{}{\Gamma, y : \bar{S} \vdash_{\mathbf{C}}^{\diamond} \blacklozenge(M, y) : T \times \bar{S}} \text{[TYP-MAIN]} \quad \frac{}{\Lambda, x : S' \vdash_{\mathbf{C}}^{\diamond} C : \mathbf{1}} \text{[TYP-PAR-R]} \\
\frac{\Delta \vdash_{\mathbf{B}} [\bar{m}] : S' > S \quad \Gamma, \Lambda, x : S', y : \bar{S} \vdash_{\mathbf{C}}^{\diamond} \blacklozenge(M, y) \parallel C : T \times \bar{S}}{\Gamma, \Delta, \Lambda \vdash_{\mathbf{C}}^{\diamond} (\mathbf{v}x[\bar{m}]y)(\blacklozenge(M, y) \parallel C) : T \times \bar{S}} \text{[TYP-RES]}
\end{array}$$

- Rule [RED-SELECT] is similar to the case of Rule [RED-SEND]: $(\mathbf{v}x[\bar{m}]y)(\mathcal{F}[\text{select } \ell x] \parallel C) \rightarrow_{\mathbf{C}} (\mathbf{v}x[\ell, \bar{m}]y)(\mathcal{F}[x] \parallel C)$.
- Rule [RED-CASE] is similar to the case of Rule [RED-RECV]:

$$j \in I \implies (\mathbf{v}x[\bar{m}, j]y)(\mathcal{F}[\text{case } y \text{ of } \{i : M_i\}_{i \in I}] \parallel C) \rightarrow_{\mathbf{C}} (\mathbf{v}x[\bar{m}]y)(\mathcal{F}[M_j y] \parallel C)$$

- Rule [RED-CLOSE]: $(\mathbf{v}x[\bar{m}]y)(\mathcal{F}[\text{close } x; M] \parallel C) \rightarrow_{\mathbf{C}} (\mathbf{v}\square[\bar{m}]y)(\mathcal{F}[M] \parallel C)$. By induction on the structure of \mathcal{F} . The inductive cases follows from the IH straightforwardly;

we detail the base case ($\mathcal{F} = \phi[\cdot]$). Assume, w.l.o.g., that $\phi = \blacklozenge$. We first derive the typing of the configuration before reduction:

$$\frac{\frac{\frac{x : \text{end} \vdash_{\mathbf{M}} x : \text{end} \quad \Delta \vdash_{\mathbf{M}} M : T}{\Delta, x : \text{end} \vdash_{\mathbf{M}} \text{close } x ; M : T} \text{ [TYP-CLOSE]}}{\Delta, x : \text{end} \vdash_{\mathbf{C}} \blacklozenge \text{close } x ; M : T} \text{ [TYP-MAIN]}}{\Gamma \vdash_{\mathbf{B}} [\bar{m}] : \text{end} > S} \quad \frac{\Theta \vdash_{\mathbf{C}} \blacklozenge C : \mathbf{1}}{\Delta, \Theta, x : \text{end} \vdash_{\mathbf{C}} \blacklozenge \text{close } x ; M \parallel C : T} \text{ [TYP-PAR-R]}}{\Gamma' \vdash_{\mathbf{C}} (\nu x[\bar{m}] y)(\blacklozenge \text{close } x ; M \parallel C) : T} \text{ [TYP-RES/-BUF]}$$

We prove that $\Gamma \vdash_{\mathbf{B}} [\bar{m}] : \square > S$. The analysis depends on whether $y = \square$.

- If $y = \square$, then $\bar{m} = \epsilon$, $S = \square$, $\Gamma' = \Gamma, \Delta, \Theta$, and $\Gamma = \emptyset$, because $\Gamma \vdash_{\mathbf{B}} [\bar{m}] : \text{end} > S$ must be derived as follows:

$$\frac{}{\emptyset \vdash_{\mathbf{B}} [\epsilon] : \text{end} > \square} \text{ [TYP-BUF-END-L]}$$

The thesis holds as follows:

$$\frac{}{\emptyset \vdash_{\mathbf{B}} [\epsilon] : \square > \square} \text{ [TYP-BUF]}$$

- If $y \neq \square$, then $\Gamma', y : \bar{S} = \Gamma, \Delta, \Theta$. We apply induction on the size of \bar{m} (IH₂):
 - ◊ If $\bar{m} = \epsilon$, then $\Gamma = \emptyset$, $S = \text{end}$, because $\Gamma \vdash_{\mathbf{B}} [\epsilon] : \text{end} > S$ must be derived as follows:

$$\frac{}{\emptyset \vdash_{\mathbf{B}} [\epsilon] : \text{end} > \text{end}} \text{ [TYP-BUF]}$$

The thesis then holds as follows:

$$\frac{}{\emptyset \vdash_{\mathbf{B}} [\epsilon] : \square > \text{end}} \text{ [TYP-BUF-END-R]}$$

- ◊ If $\bar{m} = \bar{m}', N$, then $\Gamma = \Gamma_1, \Gamma_2$, and $S = !U.S'$, because $\Gamma \vdash_{\mathbf{B}} [\bar{m}', N] : \text{end} > S$ must be derived as follows:

$$\frac{\Gamma_1 \vdash_{\mathbf{M}} N : U \quad \Gamma_2 \vdash_{\mathbf{B}} [\bar{m}'] : \text{end} > S'}{\Gamma_1, \Gamma_2 \vdash_{\mathbf{B}} [\bar{m}', N] : \text{end} > !U.S'} \text{ [TYP-BUF-SEND]}$$

By IH₂, $\Gamma_2 \vdash_{\mathbf{B}} [\bar{m}'] : \square > S'$. The thesis then holds as follows:

$$\frac{\Gamma_1 \vdash_{\mathbf{M}} N : U \quad \Gamma_2 \vdash_{\mathbf{B}} [\bar{m}'] : \square > S'}{\Gamma_1, \Gamma_2 \vdash_{\mathbf{B}} [\bar{m}', N] : \square > !U.S'} \text{ [TYP-BUF-SEND]}$$

Now, we derive the typing of the reduced configuration:

$$\frac{\frac{\frac{\Delta \vdash_{\mathbf{M}} M : T}{\Delta \vdash_{\mathbf{C}} \blacklozenge M : T} \text{ [TYP-MAIN]}}{\Gamma \vdash_{\mathbf{B}} [\bar{m}] : \square > S} \quad \frac{\Theta \vdash_{\mathbf{C}} \blacklozenge C : \mathbf{1}}{\Delta, \Theta \vdash_{\mathbf{C}} \blacklozenge M \parallel C : T} \text{ [TYP-PAR-R]}}{\Gamma' \vdash_{\mathbf{C}} (\nu \square[\bar{m}] y)(\blacklozenge M \parallel C) : T} \text{ [TYP-RES/-BUF]}$$

- Rule [RED-RES-NIL]: $(\mathbf{v}\square[\epsilon]\square)C \rightarrow_C C$. We have

$$\frac{\frac{\overline{\emptyset \vdash_B [\epsilon] : \square > \square}}{\Gamma \vdash_C^\phi (\mathbf{v}\square[\epsilon]\square)C : T} \text{[TYP-BUF]} \quad \Gamma \vdash_C^\phi C : T}{\Gamma \vdash_C^\phi (\mathbf{v}\square[\epsilon]\square)C : T} \text{[TYP-RES/-RES-BUF]}$$

$$\xrightarrow{C}$$

$$\Gamma \vdash_C^\phi C : T$$

- Rule [RED-PAR-NIL]: $C \parallel \diamond 0 \rightarrow_C C$. We have the following:

$$\frac{\frac{\frac{\overline{\emptyset \vdash_M 0 : \mathbf{1}}}{\emptyset \vdash_C^\diamond \diamond 0 : \mathbf{1}} \text{[TYP-UNIT]} \quad \Gamma \vdash_C^\phi C : T}{\emptyset \vdash_C^\diamond \diamond 0 : \mathbf{1}} \text{[TYP-CHILD]}}{\Gamma \vdash_C^\phi C \parallel \diamond 0 : T} \text{[TYP-PAR]}$$

$$\xrightarrow{C}$$

$$\Gamma \vdash_C^\phi C : T \quad \square$$

E

E.3. TRANSLATION: TYPE PRESERVATION

Theorem 6.4.8 (Type Preservation for the Translation).

- If $\Gamma \vdash_M M : T$, then $\vdash^* \llbracket M \rrbracket z \blacktriangleright (\Gamma), z : \llbracket T \rrbracket$;
- If $\Gamma \vdash_C^\phi C : T$, then $\vdash^* \llbracket C \rrbracket z \blacktriangleright (\Gamma), z : \llbracket T \rrbracket$;
- If $\Gamma \vdash_B \llbracket \vec{m} \rrbracket : S' > S$, then $\vdash^* \llbracket \llbracket \vec{m} \rrbracket \rrbracket a \blacktriangleright b \blacktriangleright (\Gamma), a : \overline{\llbracket S' \rrbracket}, b : \overline{\llbracket S \rrbracket}$.

Proof. By induction on the LAST^n typing derivation. It is sufficient to give the typing of the translations of typing rules in Figures 6.8 to 6.10 as follows; checking the derivations is straightforward.

[TYP-VAR]	$\vdash^* \llbracket x : T \vdash_M x : T \rrbracket z$	$\blacktriangleright x : \llbracket T \rrbracket, z : \llbracket T \rrbracket$
[TYP-ABS]	$\vdash^* \llbracket \Gamma \vdash_M \lambda x. M : T \multimap U \rrbracket z$	$\blacktriangleright (\Gamma), z : \llbracket T \rrbracket \wp \llbracket U \rrbracket = \llbracket T \multimap U \rrbracket$
[TYP-APP]	$\vdash^* \llbracket \Gamma, \Delta \vdash_M M N : U \rrbracket z$	$\blacktriangleright (\Gamma), (\Delta), z : \llbracket U \rrbracket$
[TYP-UNIT]	$\vdash^* \llbracket \emptyset \vdash_M () : \mathbf{1} \rrbracket z$	$\blacktriangleright z : \bullet = \llbracket \mathbf{1} \rrbracket$
[TYP-PAIR]	$\vdash^* \llbracket \Gamma, \Delta \vdash_M (M, N) : T \times U \rrbracket z$	$\blacktriangleright (\Gamma), (\Delta), z : (\bullet \wp \llbracket T \rrbracket) \otimes (\bullet \wp \llbracket U \rrbracket)$ $= \llbracket T \rrbracket \otimes \llbracket U \rrbracket$ $= \llbracket T \times U \rrbracket$
[TYP-SPLIT]	$\vdash^* \llbracket \Gamma, \Delta \vdash_M \text{let } (x, y) = M \text{ in } N : U \rrbracket z$	$\blacktriangleright (\Gamma), (\Delta), z : \llbracket U \rrbracket$
[TYP-NEW]	$\vdash^* \llbracket \emptyset \vdash_M \text{new} : S \times \overline{S} \rrbracket z$	$\blacktriangleright z : \overline{\llbracket S \rrbracket} \otimes \overline{\llbracket \overline{S} \rrbracket} = \llbracket S \times \overline{S} \rrbracket$
[TYP-SPAWN]	$\vdash^* \llbracket \Gamma, \Delta \vdash_M \text{spawn } M; N : T \rrbracket z$	$\blacktriangleright (\Gamma), (\Delta), z : \llbracket T \rrbracket$
[TYP-CLOSE]	$\vdash^* \llbracket \Gamma, \Delta \vdash_M \text{close } M; N : T \rrbracket z$	$\blacktriangleright (\Gamma), (\Delta), z : \llbracket T \rrbracket$

[TYP-SEND]	$\vdash^* [\Gamma \vdash_{\mathbf{M}} \text{send } MN : S] z$	$\blacktriangleright (\Gamma), (\Delta), z : [S]$
[TYP-RECV]	$\vdash^* [\Gamma \vdash_{\mathbf{M}} \text{recv } M : T \times S] z$	$\blacktriangleright (\Gamma), z : (\bullet \wp [T]) \otimes (\bullet \wp [S])$ $= (T) \otimes (S) = [T \times S]$
[TYP-SEL]	$\vdash^* [\Gamma \vdash_{\mathbf{M}} \text{select } j M : S_j] z$	$\blacktriangleright (\Gamma), z : [S_j]$
[TYP-CASE]	$\vdash^* [\Gamma \vdash_{\mathbf{M}} \text{case } M \text{ of } \{i : N_i\}_{i \in I} : U] z$	$\blacktriangleright (\Gamma), (\Delta), z : [U]$
[TYP-SUB]	$\vdash^* [\Gamma, \Delta \vdash_{\mathbf{M}} M \{N/x\} : U] z$	$\blacktriangleright (\Gamma), (\Delta), z : [U]$
[TYP-MAIN]	$\vdash^* [\Gamma \vdash_{\mathbf{C}} \blacklozenge M : \hat{T}] z$	$\blacktriangleright (\Gamma), z : [\hat{T}]$
[TYP-CHILD]	$\vdash^* [\Gamma \vdash_{\mathbf{C}} \blacklozenge M : \mathbf{1}] z$	$\blacktriangleright (\Gamma), z : \bullet = [\mathbf{1}]$
[TYP-PAR] ($T_1 = \mathbf{1}$)	$\vdash^* [\Gamma, \Delta \vdash_{\mathbf{C}}^{\phi_1 + \phi_2} C \parallel D : T_2] z$	$\blacktriangleright (\Gamma), (\Delta), z : [T_2]$
[TYP-PAR] ($T_2 = \mathbf{1}$)	$\vdash^* [\Gamma, \Delta \vdash_{\mathbf{C}}^{\phi_1 + \phi_2} C \parallel D : T_1] z$	$\blacktriangleright (\Gamma), (\Delta), z : [T_1]$
[TYP-RES]	$\vdash^* [\Gamma' \vdash_{\mathbf{C}}^{\phi} (\mathbf{v}x[\vec{m}]y)C : T] z$	$\blacktriangleright (\Gamma'), z : [T]$
[TYP-CONF-SUB]	$\vdash^* [\Gamma, \Delta \vdash_{\mathbf{C}}^{\phi} C \{M/x\} : U] z$	$\blacktriangleright (\Gamma), (\Delta), z : [U]$
[TYP-BUF] ($S' = !T.S$)	$\vdash^* [\emptyset \vdash_{\mathbf{B}} [e] : S' > S'] a \rangle b$	$\blacktriangleright a : \bullet \wp \bullet \otimes (T) \wp (\overline{S})$ $= \bullet \wp [S'] = (\overline{S'})$, $b : \bullet \wp (T) \otimes (\overline{S})$ $= \bullet \wp [?T.\overline{S}] = \bullet \wp [\overline{S'}] = (\overline{S'})$
[TYP-BUF] ($S' = \oplus \{i : S_i\}_{i \in I}$)	$\vdash^* [\emptyset \vdash_{\mathbf{B}} [e] : S' > S'] a \rangle b$	$\blacktriangleright a : \bullet \wp \bullet \otimes \& \{i : (\overline{S_i})\}_{i \in I}$ $= \bullet \wp [S'] = (\overline{S'})$, $b : \bullet \wp \oplus \{i : (\overline{S_i})\}_{i \in I}$ $= \bullet \wp [\& \{i : S_i\}_{i \in I}]$ $= \bullet \wp [\overline{S'}] = (\overline{S'})$
[TYP-BUF] ($S' \in \{?T.S, \& \{i : S_i\}_{i \in I}\}$)	$\vdash^* [\emptyset \vdash_{\mathbf{B}} [e] : S' > S'] a \rangle b$	$\blacktriangleright a : (\overline{S'}) = (\overline{S'}), b : (\overline{S'})$
[TYP-BUF] ($S' = \text{end}$)	$\vdash^* [\emptyset \vdash_{\mathbf{B}} [e] : S' > S'] a \rangle b$	$\blacktriangleright a : \bullet \wp \bullet \otimes \bullet = (\overline{S'})$, $b : \bullet \wp \bullet \otimes \bullet = (\overline{S'}) = (\overline{S'})$
[TYP-BUF] ($S' = \square$)	$\vdash^* [\emptyset \vdash_{\mathbf{B}} [e] : S' > S'] a \rangle b$	$\blacktriangleright a : \bullet = (\overline{S'}), b : \bullet = (\overline{S'}) = (\overline{S'})$
[TYP-BUF-SEND]	$\vdash^* [\Gamma, \Delta \vdash_{\mathbf{B}} [\vec{m}, M] : S' > !T.S] a \rangle b$	$\blacktriangleright (\Gamma), (\Delta), a : (\overline{S'})$, $b : \bullet \wp (T) \otimes (\overline{S}) = \bullet \wp [?T.\overline{S}]$ $= \bullet \wp [!T.S] = (\overline{!T.S})$

$$\begin{array}{ll}
\text{[TYP-BUF-SEL]} & \vdash^* \llbracket \Gamma \vdash_{\text{B}} [\bar{m}, j] : S' > \oplus \{i : S_i\}_{i \in I} \rrbracket a \rrbracket b \quad \blacktriangleright (\Gamma), a : \overline{\langle S' \rangle}, b : \bullet \wp \oplus \{i : \overline{\langle S_i \rangle}\}_{i \in I} \\
& \quad \quad \quad = \bullet \wp \llbracket \& \{i : \overline{\langle S_i \rangle}\}_{i \in I} \rrbracket \\
& \quad \quad \quad = \bullet \wp \llbracket \oplus \{i : S_i\}_{i \in I} \rrbracket \\
& \quad \quad \quad = \overline{\langle \oplus \{i : S_i\}_{i \in I} \rangle} \\
\text{[TYP-BUF-END-L]} & \vdash^* \llbracket \emptyset \vdash_{\text{B}} [c] : \text{end} > \square \rrbracket a \rrbracket b \quad \blacktriangleright a : \bullet \wp \bullet \otimes \bullet = \overline{\langle \text{end} \rangle}, \\
& \quad \quad \quad b : \bullet = \overline{\langle \square \rangle} = \overline{\langle \square \rangle} \\
\text{[TYP-BUF-END-R]} & \vdash^* \llbracket \emptyset \vdash_{\text{B}} [c] : \square > \text{end} \rrbracket a \rrbracket b \quad \blacktriangleright a : \bullet = \overline{\langle \square \rangle}, \quad \square \\
& \quad \quad \quad b : \bullet \wp \bullet \otimes \bullet = \overline{\langle \text{end} \rangle} = \overline{\langle \text{end} \rangle}
\end{array}$$

E.4. OPERATIONAL CORRESPONDENCE

Appendices E.4.1 and E.4.2 prove completeness and soundness, respectively. Both results rely on the following lemma, which ensures that LAST^n contexts translate to evaluation contexts in APCP.

E

Lemma 6.4.12.

- $\llbracket \mathcal{R}[M] \rrbracket z = \mathcal{E}[\llbracket M \rrbracket z']$ for some \mathcal{E}, z' ;
- $\llbracket \mathcal{F}[M] \rrbracket z = \mathcal{E}[\llbracket M \rrbracket z']$ for some \mathcal{E}, z' ;
- $\llbracket \mathcal{G}[C] \rrbracket z = \mathcal{E}[\llbracket C \rrbracket z']$ for some \mathcal{E}, z' ;
- $x \notin \text{fv}(C)$ implies $x \notin \text{fn}(\llbracket C \rrbracket z)$.
- $x \in \text{fv}(C)$ implies $\llbracket C\{y/x\} \rrbracket z = \llbracket C \rrbracket z\{y/x\}$.

Proof (Sketch). By induction on the structure of the contexts. □

E.4.1. COMPLETENESS

Here we prove the completeness of the translation. The proof relies on the following intermediate results:

- Theorems E.4.1 and E.4.2 prove that the translation preserves structural congruence for terms and configurations, respectively.
- Theorem E.4.3 then shows that the translation is complete with respect to term reduction.
- Lemma 6.4.13 shows how the translation of buffers with messages can be decomposed using evaluation contexts.
- Finally, we prove completeness (Theorem 6.4.10).

Theorem E.4.1 (Preservation of Structural Congruence for Terms). *Given $\Gamma \vdash_M M : T$, if $M \equiv_M N$, then $\llbracket M \rrbracket z \equiv \llbracket N \rrbracket z$.*

Proof. By induction on the derivation of $M \equiv_M N$ (IH₁). The inductive cases follow from IH₁ and Lemma 6.4.12 directly. We detail the (only) base case of Rule [SC-SUB-EXT]: $x \notin \text{fn}(\mathcal{R})$ implies $\mathcal{R}[M] \llbracket N/x \rrbracket \equiv_M \mathcal{R}[M \llbracket N/x \rrbracket]$.

The analysis is by induction on the structure of \mathcal{R} (IH₂), assuming $x \notin \text{fn}(\mathcal{R})$. The base case where $\mathcal{R} = [\cdot]$ is immediate. We detail one representative inductive case: $\mathcal{R} = \mathcal{R}' M'$. The thesis holds as follows:

$$\begin{aligned}
& \llbracket (\mathcal{R}'[M] M') \llbracket N/x \rrbracket \rrbracket z \\
&= (\mathbf{v}x a_1)(\mathbf{v}a_2 b_2)(\mathbf{v}c_2 d_2)(\llbracket \mathcal{R}'[M] \rrbracket a_2 \mid b_2[c_2, z] \mid d_2(_, e_2); \llbracket M' \rrbracket e_2) \\
&\quad \mid a_1(_, b_1); \llbracket N \rrbracket b_1) \\
&\equiv (\mathbf{v}a_2 b_2)(\mathbf{v}c_2 d_2)(\mathbf{v}x a_1)(\llbracket \mathcal{R}'[M] \rrbracket a_2 \mid a_1(_, b_1); \llbracket N \rrbracket b_1) \\
&\quad \mid b_2[c_2, z] \mid d_2(_, e_2); \llbracket M' \rrbracket e_2) \\
&= (\mathbf{v}a_2 b_2)(\mathbf{v}c_2 d_2)(\llbracket (\mathcal{R}'[M] \llbracket N/x \rrbracket) \rrbracket a_2 \mid b_2[c_2, z] \mid d_2(_, e_2); \llbracket M' \rrbracket e_2) \\
&\equiv (\mathbf{v}a_2 b_2)(\mathbf{v}c_2 d_2)(\llbracket (\mathcal{R}'[M \llbracket N/x \rrbracket]) \rrbracket a_2 \mid b_2[c_2, z] \mid d_2(_, e_2); \llbracket M' \rrbracket e_2) \\
&= \llbracket (\mathcal{R}'[M \llbracket N/x \rrbracket]) M' \rrbracket z = \llbracket \mathcal{R}[M \llbracket N/x \rrbracket] \rrbracket z \quad \square
\end{aligned} \tag{IH_2}$$

Theorem E.4.2 (Preservation of Structural Congruence for Configurations). *Given $\Gamma \vdash_C^\phi C : T$, if $C \equiv_C D$, then $\llbracket C \rrbracket z \equiv \llbracket D \rrbracket z$.*

Proof. By induction on the derivation of $C \equiv_C D$ (IH₁). The inductive cases follow from IH₁ and Lemma 6.4.12 straightforwardly. We detail the base cases, induced by the ten rules in Figure E.2:

- Rule [SC-TERM-SC]: $M \equiv_M M'$ implies $\phi M \equiv_C \phi M'$. We have $\llbracket \phi M \rrbracket z = \llbracket M \rrbracket z$ and $\llbracket \phi M' \rrbracket z = \llbracket M' \rrbracket z$. By the assumption that $M \equiv_M M'$ and Theorem E.4.1, $\llbracket M \rrbracket z \equiv \llbracket M' \rrbracket z$. The thesis follows immediately.
- Rule [SC-RES-SWAP]: $(\mathbf{v}x[\epsilon]y)C \equiv_C (\mathbf{v}y[\epsilon]x)C$. Both directions are analogous; we detail the left to right direction. We first infer the typing of the left configuration:

$$\frac{\emptyset \vdash_B [\epsilon] : S' > S \quad \Gamma \vdash_C^\phi C : T}{\Gamma' \vdash_C^\phi (\mathbf{v}x[\epsilon]y)C : T} \text{[TYP-RES/-BUF]}$$

Here, $\Gamma' = \Gamma \setminus x : S', y : \bar{S}$. The analysis depends on whether $x = \square$ and/or $y = \square$. In each case, we show that

$$\llbracket \emptyset \vdash_B [\epsilon] : S' > S \rrbracket a \rrbracket b = \llbracket \emptyset \vdash_B [\epsilon] : \bar{S} > \bar{S}' \rrbracket b \rrbracket a : \tag{E.4}$$

- Case $x = y = \square$, or $x \neq \square$ and $y \neq \square$. Either way, $S' = S$. If $S' = \square$, both translations are $\mathbf{0}$; the thesis follows immediately. Otherwise, the thesis follows by induction on the structure of S' ; clearly, the resulting translations are exactly the same.

- Case $x = \square$ and $y \neq \square$, or $x \neq \square$ and $y = \square$. W.l.o.g., assume the former. Then $S' = \square$ and $S = \text{end}$. The thesis then holds as follows:

$$\begin{aligned} \llbracket \emptyset \vdash_{\mathbf{B}} [\epsilon] : \square > \text{end} \rrbracket a \rangle b &= b(_, c); c[_, _] \\ &= \llbracket \emptyset \vdash_{\mathbf{B}} [\epsilon] : \text{end} > \square \rrbracket b \rangle c \end{aligned}$$

The thesis then holds as follows:

$$\begin{aligned} \llbracket (\mathbf{v}x[\epsilon]y)C \rrbracket z &= (\mathbf{v}ax)(\mathbf{v}by)(\llbracket \emptyset \vdash_{\mathbf{B}} [\epsilon] : S' > S \rrbracket a \rangle b \mid \llbracket C \rrbracket z) \\ &= (\mathbf{v}ax)(\mathbf{v}by)(\llbracket \emptyset \vdash_{\mathbf{B}} [\epsilon] : \bar{S} > \bar{S}' \rrbracket b \rangle a \mid \llbracket C \rrbracket z) & (E.4) \\ &\equiv (\mathbf{v}by)(\mathbf{v}ax)(\llbracket \emptyset \vdash_{\mathbf{B}} [\epsilon] : \bar{S} > \bar{S}' \rrbracket b \rangle a \mid \llbracket C \rrbracket z) \\ &= \llbracket (\mathbf{v}y[\epsilon]x)C \rrbracket z \end{aligned}$$

- Rule [SC-RES-COMM]: $(\mathbf{v}x[\bar{m}]y)(\mathbf{v}z[\bar{n}]w)C \equiv_c (\mathbf{v}z[\bar{n}]w)(\mathbf{v}x[\bar{m}]y)C$. The thesis holds as follows:

$$\begin{aligned} \llbracket (\mathbf{v}x[\bar{m}]y)(\mathbf{v}z[\bar{n}]w)C \rrbracket z &= (\mathbf{v}a_1x)(\mathbf{v}b_1y)(\llbracket [\bar{m}] \rrbracket a_1 \rangle b_1 \mid (\mathbf{v}a_2z)(\mathbf{v}b_2w)(\llbracket [\bar{n}] \rrbracket a_2 \rangle b_2 \mid \llbracket C \rrbracket z)) \\ &\equiv (\mathbf{v}a_2z)(\mathbf{v}b_2w)(\llbracket [\bar{n}] \rrbracket a_2 \rangle b_2 \mid (\mathbf{v}a_1x)(\mathbf{v}b_1y)(\llbracket [\bar{m}] \rrbracket a_1 \rangle b_1 \mid \llbracket C \rrbracket z)) \\ &= \llbracket (\mathbf{v}z[\bar{n}]w)(\mathbf{v}x[\bar{m}]y)C \rrbracket z \end{aligned}$$

- Rule [SC-RES-EXT]: $x, y \notin \text{fv}(C)$ implies $(\mathbf{v}x[\bar{m}]y)(C \parallel D) \equiv_c C \parallel (\mathbf{v}x[\bar{m}]y)D$. The analysis depends on which of C, D is a child thread; w.l.o.g., assume that C is. Assume the condition; by Lemma 6.4.12, then $x, y \notin \text{fn}(\llbracket C \rrbracket _)$ (*). The thesis holds as follows:

$$\begin{aligned} \llbracket (\mathbf{v}x[\bar{m}]y)(C \parallel D) \rrbracket z &= (\mathbf{v}ax)(\mathbf{v}by)(\llbracket [\bar{m}] \rrbracket a \rangle b \mid (\mathbf{v}_)\llbracket C \rrbracket _ \mid \llbracket D \rrbracket z) \\ &\equiv (\mathbf{v}_)\llbracket C \rrbracket _ \mid (\mathbf{v}ax)(\mathbf{v}by)(\llbracket [\bar{m}] \rrbracket a \rangle b \mid \llbracket D \rrbracket z) & (*) \\ &= \llbracket C \parallel (\mathbf{v}x[\bar{m}]y)D \rrbracket z \end{aligned}$$

- Rule [SC-PAR-COMM]: $C \parallel D \equiv_c D \parallel C$. The analysis depends on which of C, D is a child thread; w.l.o.g., assume that C is. The thesis holds as follows:

$$\begin{aligned} \llbracket C \parallel D \rrbracket z &= (\mathbf{v}_)\llbracket C \rrbracket _ \mid \llbracket D \rrbracket z \\ &\equiv \llbracket D \rrbracket z \mid (\mathbf{v}_)\llbracket C \rrbracket _ \\ &= \llbracket D \parallel C \rrbracket z \end{aligned}$$

- Rule [SC-PAR-ASSOC]: $C \parallel (D \parallel E) \equiv_c (C \parallel D) \parallel E$. The analysis depends on which of C, D, E are child threads; w.l.o.g., assume that C, D are. The thesis holds as follows:

$$\begin{aligned} \llbracket C \parallel (D \parallel E) \rrbracket z &= (\mathbf{v}_)\llbracket C \rrbracket _ \mid ((\mathbf{v}_)\llbracket D \rrbracket _ \mid \llbracket E \rrbracket z) \\ &\equiv (\mathbf{v}_)((\mathbf{v}_)\llbracket C \rrbracket _ \mid \llbracket D \rrbracket _) \mid \llbracket E \rrbracket z \\ &= \llbracket (C \parallel D) \parallel E \rrbracket z \end{aligned}$$

- Rule [SC-CONF-SUB]: $\phi(M\{N/x\}) \equiv_{\mathbf{c}} (\phi M)\{N/x\}$. The thesis holds as follows:

$$\begin{aligned} \llbracket \phi(M\{N/x\}) \rrbracket z &= (\mathbf{v}xa)(\llbracket M \rrbracket z \mid a(_, b); \llbracket N \rrbracket b) \\ &= (\mathbf{v}xa)(\llbracket \phi M \rrbracket z \mid a(_, b); \llbracket N \rrbracket b) \\ &= \llbracket (\phi M)\{N/x\} \rrbracket z \end{aligned}$$

- Rule [SC-CONF-SUB-EXT]: $x \notin \text{fv}(\mathcal{G})$ implies $(\mathcal{G}[C])\{M/x\} \equiv_{\mathbf{c}} \mathcal{G}[C\{M/x\}]$. By Lemma 6.4.12, for any D , $\llbracket \mathcal{G}[D] \rrbracket z = \mathcal{E}[\llbracket D \rrbracket z']$ for some $\mathcal{E}, z' (*_1)$. Assume the condition; by Lemma 6.4.12, then $x \notin \text{fn}(\mathcal{E}) (*_2)$. The thesis holds as follows:

$$\begin{aligned} \llbracket (\mathcal{G}[C])\{M/x\} \rrbracket z &= (\mathbf{v}xa)(\llbracket \mathcal{G}[C] \rrbracket z \mid a(_, b); \llbracket M \rrbracket b) \\ &= (\mathbf{v}xa)(\mathcal{E}[\llbracket C \rrbracket z'] \mid a(_, b); \llbracket M \rrbracket b) && (*_1) \\ &\equiv \mathcal{E}(\mathbf{v}xa)(\llbracket C \rrbracket z' \mid a(_, b); \llbracket M \rrbracket b) && (*_2) \\ &= \mathcal{E}[\llbracket C\{M/x\} \rrbracket z'] \\ &= \llbracket \mathcal{G}[C\{M/x\}] \rrbracket z && (*_1) \end{aligned}$$

□

E

Theorem E.4.3 (Completeness of Reduction for Terms). *Given $\Gamma \vdash_{\mathbf{M}} M : T$, if $M \rightarrow_{\mathbf{M}} N$, then $\llbracket M \rrbracket z \rightarrow^* \llbracket N \rrbracket z$.*

Proof. By induction on the derivation of $M \rightarrow_{\mathbf{M}} N$. We detail each rule:

- Rule [RED-LAM]: $(\lambda x.M) N \rightarrow_{\mathbf{M}} M\{N/x\}$. The thesis holds as follows:

$$\begin{aligned} \llbracket (\lambda x.M) N \rrbracket z &= (\mathbf{v}a_1 b_1)(\mathbf{v}c_1 d_1)(a_1(x, a_2); \llbracket M \rrbracket a_2 \mid b_1[c_1, z] \mid d_1(_, e_1); \llbracket N \rrbracket e_1) \\ &\rightarrow (\mathbf{v}c_1 d_1)(\llbracket M \rrbracket z\{c_1/x\} \mid d_1(_, e_1); \llbracket N \rrbracket e_1) \\ &\equiv (\mathbf{v}x d_1)(\llbracket M \rrbracket z \mid d_1(_, e_1); \llbracket N \rrbracket e_1) \\ &= \llbracket M\{N/x\} \rrbracket z \end{aligned}$$

- Rule [RED-PAIR]: $\text{let } (x, y) = (M_1, M_2) \text{ in } N \rightarrow_{\mathbf{M}} N\{M_1/x, M_2/y\}$. The thesis holds as follows:

$$\begin{aligned} \llbracket \text{let } (x, y) = (M_1, M_2) \text{ in } N \rrbracket z &= (\mathbf{v}a_1 b_1)(a_1(x, y); \llbracket N \rrbracket z \\ &\quad \mid (\mathbf{v}a_2 b_2)(\mathbf{v}c_2 d_2)(b_1[a_2, c_2] \\ &\quad \quad \mid b_2(_, e_2); \llbracket M_1 \rrbracket e_2 \\ &\quad \quad \mid d_2(_, f_2); \llbracket M_2 \rrbracket f_2)) \\ &\rightarrow (\mathbf{v}a_2 b_2)(\mathbf{v}c_2 d_2)(\llbracket N \rrbracket z\{a_2/x, c_2/y\} \\ &\quad \mid b_2(_, e_2); \llbracket M_1 \rrbracket e_2 \mid d_2(_, f_2); \llbracket M_2 \rrbracket f_2) \\ &\equiv (\mathbf{v}y d_2)((\mathbf{v}x b_2)(\llbracket N \rrbracket z \mid b_2(_, e_2); \llbracket M_1 \rrbracket e_2) \mid d_2(_, f_2); \llbracket M_2 \rrbracket f_2) \\ &= \llbracket N\{M_1/x, M_2/y\} \rrbracket z \end{aligned}$$

- Rule [RED-NAME-SUB]: $x\{M/x\} \rightarrow_M M$. The thesis holds as follows:

$$\begin{aligned} \llbracket x\{M/x\} \rrbracket z &= (\mathbf{v}xa)(x[_, z] \mid a(_, b); \llbracket M \rrbracket b) \\ &\rightarrow \llbracket M \rrbracket z \end{aligned}$$

- Rule [RED-LIFT]: $M \rightarrow_M N$ implies $\mathcal{R}[M] \rightarrow_M \mathcal{R}[N]$. By Lemma 6.4.12, for any L , $\llbracket \mathcal{R}[L] \rrbracket z = \mathcal{E}[\llbracket L \rrbracket z']$ for some \mathcal{E}, z' (*₁). Assume the condition; by the IH, $\llbracket M \rrbracket z' \rightarrow^* \llbracket N \rrbracket z'$ (*₂). The thesis holds as follows:

$$\llbracket \mathcal{R}[M] \rrbracket z = \mathcal{E}[\llbracket M \rrbracket z'] \quad (*_1)$$

$$\rightarrow^* \mathcal{E}[\llbracket N \rrbracket z'] \quad (*_2)$$

$$= \llbracket \mathcal{R}[N] \rrbracket z \quad (*_1)$$

- Rule [RED-LIFT-SC]: $M \equiv_M M'$, $M' \rightarrow_M N'$, and $N' \equiv_M N$ imply $M \rightarrow_M N$. Assume the conditions. By Theorem E.4.1, $\llbracket M \rrbracket z \equiv \llbracket M' \rrbracket z$ (*₁) and $\llbracket N' \rrbracket z \equiv \llbracket N \rrbracket z$ (*₂). By the IH, $\llbracket M' \rrbracket z \rightarrow^* \llbracket N' \rrbracket z$ (*₃). The thesis holds as follows:

$$\llbracket M \rrbracket z \equiv \llbracket M' \rrbracket z \quad (*_1)$$

$$\rightarrow^* \llbracket N' \rrbracket z \quad (*_3)$$

$$\equiv \llbracket N \rrbracket z \quad (*_2)$$

□

Lemma 6.4.13.

- $S' \neq \square$ implies $\llbracket \Gamma \vdash_B [\vec{m}] : S' > S \rrbracket a \rangle b = \mathcal{E}[\llbracket \emptyset \vdash_B [\epsilon] : S' > S' \rrbracket a \rangle c]$
- $S' \neq \square$ implies $\llbracket \Gamma, \Delta \vdash_B [M, \vec{m}] : S' > S \rrbracket a \rangle b = \mathcal{E}[\llbracket \Delta \vdash_B [M] : S' > !T.S' \rrbracket a \rangle c]$
- $S' \neq \square$ implies $\llbracket \Gamma \vdash_B [j, \vec{m}] : S' > S \rrbracket a \rangle b = \mathcal{E}[\llbracket \emptyset \vdash_B [j] : S' > \oplus\{i : S_i\}_{i \in I} \cup \{j : S'\} \rrbracket a \rangle c]$
- $S \neq \square$ implies $\llbracket \Gamma \vdash_B [\vec{m}] : \text{end} > S \rrbracket a \rangle b = \mathcal{E}[\llbracket \emptyset \vdash_B [\epsilon] : \text{end} > \text{end} \rrbracket a \rangle c]$
- $S \neq \square$ implies $\llbracket \Gamma \vdash_B [\vec{m}] : \square > S \rrbracket a \rangle b = \mathcal{E}[\llbracket \emptyset \vdash_B [\epsilon] : \square > \text{end} \rrbracket a \rangle c]$

for some \mathcal{E}, c .

Proof (Sketch). By induction on the size of \vec{m} . □

Theorem 6.4.10 (Completeness). *Given $\Gamma \vdash_C^\phi C : T$, if $C \rightarrow_C D$, then $\llbracket C \rrbracket z \rightarrow^* \llbracket D \rrbracket z$.*

Proof. By induction on the derivation of $C \rightarrow_C D$. We detail every rule:

- Rule [RED-NEW]: $\mathcal{F}[\text{new}] \rightarrow_{\mathbf{c}} (\mathbf{v}x[\epsilon]y)(\mathcal{F}[(x, y)])$. By Lemma 6.4.12, for any M , $\llbracket \mathcal{F}[M] \rrbracket z = \mathcal{E}[\llbracket M \rrbracket z']$ for some \mathcal{E}, z' (*). The thesis holds as follows:

$$\begin{aligned}
\llbracket \mathcal{F}[\text{new}] \rrbracket z &= \mathcal{E}[\llbracket \text{new} \rrbracket z'] & (*) \\
&= \mathcal{E}[(\mathbf{v}ab)(a[_, z'] | b[_, c]; (\mathbf{v}dx)(\mathbf{v}ey)(\llbracket [\epsilon] \rrbracket d)e | \llbracket (x, y) \rrbracket c)] \\
&\rightarrow \mathcal{E}[(\mathbf{v}dx)(\mathbf{v}ey)(\llbracket [\epsilon] \rrbracket d)e | \llbracket (x, y) \rrbracket z')] \\
&\equiv (\mathbf{v}dx)(\mathbf{v}ey)(\llbracket [\epsilon] \rrbracket d)e | \mathcal{E}[\llbracket (x, y) \rrbracket z']) \\
&= (\mathbf{v}dx)(\mathbf{v}ey)(\llbracket [\epsilon] \rrbracket d)e | \llbracket \mathcal{F}[(x, y)] \rrbracket z) & (*) \\
&= \llbracket (\mathbf{v}x[\epsilon]y)(\mathcal{F}[(x, y)]) \rrbracket z
\end{aligned}$$

- Rule [RED-SPAWN]: $\hat{\mathcal{F}}[\text{spawn } M; N] \rightarrow_{\mathbf{c}} \hat{\mathcal{F}}[N] \parallel \diamond M$. By Lemma 6.4.12, for any L , $\llbracket \mathcal{F}[L] \rrbracket z = \mathcal{E}[\llbracket L \rrbracket z']$ for some \mathcal{E}, z' (*₁). Moreover, since $\hat{\mathcal{F}}$ does not have its hole under an explicit substitution, it does not capture any free variables of M ; hence, by Lemma 6.4.12, \mathcal{E} does not capture any free names of $\llbracket M \rrbracket u$ for any u (*₂). The thesis holds as follows:

$$\begin{aligned}
\llbracket \hat{\mathcal{F}}[\text{spawn } M; N] \rrbracket z &= \mathcal{E}[\llbracket \text{spawn } M; N \rrbracket z'] & (*) \\
&= \mathcal{E}[(\mathbf{v}ab)(a[_, z'] | b[_, c]; ((\mathbf{v}_) \llbracket M \rrbracket _ | \llbracket N \rrbracket c))] \\
&\rightarrow \mathcal{E}[(\mathbf{v}_) \llbracket M \rrbracket _ | \llbracket N \rrbracket z'] \\
&\equiv \mathcal{E}[\llbracket N \rrbracket z' | (\mathbf{v}_) \llbracket M \rrbracket _] & (*) \\
&= \llbracket \hat{\mathcal{F}}[N] \rrbracket z | (\mathbf{v}_) \llbracket M \rrbracket _ & (*) \\
&= \llbracket \hat{\mathcal{F}}[N] \parallel \diamond M \rrbracket z
\end{aligned}$$

- Rule [RED-SEND]: $(\mathbf{v}x[\tilde{m}]y)(\hat{\mathcal{F}}[\text{send } M x] \parallel C) \rightarrow_{\mathbf{c}} (\mathbf{v}x[M, \tilde{m}]y)(\hat{\mathcal{F}}[x] \parallel C)$. W.l.o.g., assume C is a child thread. By Lemma 6.4.12, for any L , $\llbracket \mathcal{F}[L] \rrbracket z = \mathcal{E}_1[\llbracket L \rrbracket z']$ for some \mathcal{E}_1, z' (*₁). Moreover, since $\hat{\mathcal{F}}$ does not have its hole under an explicit substitution, it does not capture any free variables of M ; hence, by Lemma 6.4.12, \mathcal{E}_1 does not capture any free names of $\llbracket M \rrbracket u$ for any u (*₂). By inversion of typing, $\Gamma \vdash_{\mathbf{B}} \llbracket \tilde{m} \rrbracket : S_1 > S$ where $S_1 = !T.S_2$ (*₃). By Lemma 6.4.13, $\llbracket \Gamma \vdash_{\mathbf{B}} \llbracket \tilde{m} \rrbracket : S_1 > S \rrbracket a \rrbracket b = \mathcal{E}_2[\llbracket \emptyset \vdash_{\mathbf{B}} [\epsilon] : S_1 > S_1 \rrbracket a \rrbracket c]$ (*₄) and $\llbracket \Gamma, \Delta \vdash_{\mathbf{B}} [M, \tilde{m}] : S_1 > S \rrbracket a \rrbracket b = \mathcal{E}_2[\llbracket \Delta \vdash_{\mathbf{B}} [M] : S_1 > S_1 \rrbracket a \rrbracket c]$ (*₅) for some \mathcal{E}_2, c . Below, we omit types from translations of buffers. The thesis holds as follows:

$$\begin{aligned}
&\llbracket (\mathbf{v}x[\tilde{m}]y)(\hat{\mathcal{F}}[\text{send } M x] \parallel C) \rrbracket z \\
&= (\mathbf{v}ax)(\mathbf{v}by)(\llbracket [\tilde{m}] \rrbracket a \rrbracket b | \llbracket \hat{\mathcal{F}}[\text{send } M x] \rrbracket z | (\mathbf{v}_) \llbracket C \rrbracket _) \\
&= (\mathbf{v}ax)(\mathbf{v}by)(\mathcal{E}_2[\llbracket [\epsilon] \rrbracket a \rrbracket c] | \mathcal{E}_1[\llbracket \text{send } M x \rrbracket z'] | (\mathbf{v}_) \llbracket C \rrbracket _) & (*_1, *_4) \\
&= (\mathbf{v}ax)(\mathbf{v}by)(\\
&\quad \mathcal{E}_2[a[_, c_1]; (\mathbf{v}d_1e_1)(c_1[_, d_1] | e_1(f_1, g_1); (\mathbf{v}h_1k_1)(c[_, l_1]; l_1[f_1, h_1] | \llbracket [\epsilon] \rrbracket g_1)k_1)) \\
&\quad | \mathcal{E}_1[(\mathbf{v}a_2b_2)(\mathbf{v}c_2d_2)(a_2[_, e_2]; \llbracket M \rrbracket e_2 | x[_, c_2] \\
&\quad \quad | d_2[_, f_2]; (\mathbf{v}g_2h_2)(f_2[b_2, g_2] | h_2[_, z'])]) \\
&\quad | (\mathbf{v}_) \llbracket C \rrbracket _) & (*) \\
\end{aligned}$$

$$\begin{aligned}
& \rightarrow (\mathbf{v}c_2d_2)(\mathbf{v}by)(\\
& \quad \mathcal{E}_2[(\mathbf{v}d_1e_1)(c_2_, d_1) | e_1(f_1, g_1); (\mathbf{v}h_1k_1)(c_, l_1); l_1[f_1, h_1] | \llbracket [e] \rrbracket g_1 \rangle k_1]) \\
& \quad | \mathcal{E}_1[(\mathbf{v}a_2b_2)(a_2_, e_2); \llbracket [M] \rrbracket e_2 | d_2_, f_2); (\mathbf{v}g_2h_2)(f_2[b_2, g_2] | h_2_, z')] \\
& \quad | (\mathbf{v}_)\llbracket [C] \rrbracket _ \\
& \rightarrow (\mathbf{v}e_1d_1)(\mathbf{v}by)(\\
& \quad \mathcal{E}_2[e_1(f_1, g_1); (\mathbf{v}h_1k_1)(c_, l_1); l_1[f_1, h_1] | \llbracket [e] \rrbracket g_1 \rangle k_1]) \\
& \quad | \mathcal{E}_1[(\mathbf{v}a_2b_2)(a_2_, e_2); \llbracket [M] \rrbracket e_2 | (\mathbf{v}g_2h_2)(d_1[b_2, g_2] | h_2_, z')] \\
& \quad | (\mathbf{v}_)\llbracket [C] \rrbracket _ \\
& \rightarrow (\mathbf{v}b_2a_2)(\mathbf{v}g_2h_2)(\mathbf{v}by)(\\
& \quad \mathcal{E}_2[(\mathbf{v}h_1k_1)(c_, l_1); l_1[b_2, h_1] | \llbracket [e] \rrbracket g_2 \rangle k_1]) \\
& \quad | \mathcal{E}_1[a_2_, e_2); \llbracket [M] \rrbracket e_2 | h_2_, z']) \\
& \quad | (\mathbf{v}_)\llbracket [C] \rrbracket _ \\
& \equiv (\mathbf{v}ax)(\mathbf{v}by)(\tag{*2} \\
& \quad \mathcal{E}_2[(\mathbf{v}a_2b_2)(\mathbf{v}h_1k_1)(a_2_, e_2); \llbracket [M] \rrbracket e_2 | c_, l_1); l_1[b_2, h_1] | \llbracket [e] \rrbracket a \rangle k_1]) \\
& \quad | \mathcal{E}_1[x_, z']) \\
& \quad | (\mathbf{v}_)\llbracket [C] \rrbracket _ \\
& = (\mathbf{v}ax)(\mathbf{v}by)(\mathcal{E}_2[\llbracket [M] \rrbracket a \rangle c] | \mathcal{E}_1[x_, z'] | (\mathbf{v}_)\llbracket [C] \rrbracket _) \\
& = (\mathbf{v}ax)(\mathbf{v}by)(\llbracket [M, \tilde{m}] \rrbracket a \rangle b | \hat{\mathcal{F}}[x]z | (\mathbf{v}_)\llbracket [C] \rrbracket _) \tag{*,*5} \\
& = \llbracket [(\mathbf{v}x[M, \tilde{m}]y)(\hat{\mathcal{F}}[x] \parallel C)] z
\end{aligned}$$

- Rule [RED-RECV]: $(\mathbf{v}x[\tilde{m}, M]y)(\hat{\mathcal{F}}[\text{recv } y] \parallel C) \rightarrow_c (\mathbf{v}x[\tilde{m}]y)(\hat{\mathcal{F}}[(M, y)] \parallel C)$. W.l.o.g., assume C is a child thread. By Lemma 6.4.12, for any L , $\llbracket [\mathcal{F}[L]] z = \mathcal{E}[\llbracket [L] z' \rrbracket$ for some \mathcal{E}, z' (*1). Moreover, since $\hat{\mathcal{F}}$ does not have its hole under an explicit substitution, it does not capture any free variables of M ; hence, by Lemma 6.4.12, \mathcal{E} does not capture any free names of $\llbracket [M] u$ for any u (*2). The thesis holds as follows:

$$\begin{aligned}
& \llbracket [(\mathbf{v}x[\tilde{m}, M]y)(\hat{\mathcal{F}}[\text{recv } y] \parallel C)] z \\
& = (\mathbf{v}ax)(\mathbf{v}by)(\llbracket [[\tilde{m}, M] a \rangle b | \hat{\mathcal{F}}[\text{recv } y] z | (\mathbf{v}_)\llbracket [C] \rrbracket _] \\
& = (\mathbf{v}ax)(\mathbf{v}by)(\llbracket [[\tilde{m}, M] a \rangle b | \mathcal{E}[\llbracket [\text{recv } y] z' \rrbracket | (\mathbf{v}_)\llbracket [C] \rrbracket _] \tag{*1} \\
& = (\mathbf{v}ax)(\mathbf{v}by)(\\
& \quad (\mathbf{v}c_1d_1)(\mathbf{v}e_1f_1)(c_1_, g_1); \llbracket [M] \rrbracket g_1 | b_, h_1); h_1[d_1, e_1] | \llbracket [[\tilde{m}] a \rangle f_1] \\
& \quad | \mathcal{E}[(\mathbf{v}a_2b_2)(y_, a_2) | b_2(c_2, d_2); (\mathbf{v}e_2, f_2)(z'[c_2, e_2] | f_2_, g_2); d_2_, g_2]) \\
& \quad | (\mathbf{v}_)\llbracket [C] \rrbracket _) \\
& \rightarrow (\mathbf{v}ax)(\mathbf{v}a_2b_2)(\\
& \quad (\mathbf{v}c_1d_1)(\mathbf{v}e_1f_1)(c_1_, g_1); \llbracket [M] \rrbracket g_1 | a_2[d_1, e_1] | \llbracket [[\tilde{m}] a \rangle f_1] \\
& \quad | \mathcal{E}[b_2(c_2, d_2); (\mathbf{v}e_2, f_2)(z'[c_2, e_2] | f_2_, g_2); d_2_, g_2]) \\
& \quad | (\mathbf{v}_)\llbracket [C] \rrbracket _) \\
& \rightarrow (\mathbf{v}ax)(\mathbf{v}d_1c_1)(\mathbf{v}f_1e_1)(\\
& \quad c_1_, g_1); \llbracket [M] \rrbracket g_1 | \llbracket [[\tilde{m}] a \rangle f_1] \\
& \quad | \mathcal{E}[(\mathbf{v}e_2, f_2)(z'[d_1, e_2] | f_2_, g_2); e_1_, g_2]) \\
& \quad | (\mathbf{v}_)\llbracket [C] \rrbracket _)
\end{aligned}$$

$$\begin{aligned}
&\equiv (\mathbf{v}ax)(\mathbf{v}f_1e_1)(\tag{*2} \\
&\quad \llbracket \vec{m} \rrbracket a) f_1 \\
&\quad | \mathcal{E}[(\mathbf{v}d_1c_1)(\mathbf{v}e_2, f_2)(z'[d_1, e_2] | c_1_, g_1); \llbracket M \rrbracket g_1 | f_2_, g_2); e_1_, g_2]) \\
&\quad | (\mathbf{v}_)\llbracket C \rrbracket_] \\
&\equiv (\mathbf{v}ax)(\mathbf{v}by)(\\
&\quad \llbracket \vec{m} \rrbracket a) b \\
&\quad | \mathcal{E}[(\mathbf{v}d_1c_1)(\mathbf{v}e_2, f_2)(z'[d_1, e_2] | c_1_, g_1); \llbracket M \rrbracket g_1 | f_2_, g_2); y_, g_2]) \\
&\quad | (\mathbf{v}_)\llbracket C \rrbracket_] \\
&= (\mathbf{v}ax)(\mathbf{v}by)(\llbracket \vec{m} \rrbracket a) b | \mathcal{E}[\llbracket (M, y) \rrbracket z' | (\mathbf{v}_)\llbracket C \rrbracket_] \\
&= (\mathbf{v}ax)(\mathbf{v}by)(\llbracket \vec{m} \rrbracket a) b | \llbracket \hat{\mathcal{F}}[(M, y)] z | (\mathbf{v}_)\llbracket C \rrbracket_] \tag{*1} \\
&= \llbracket (\mathbf{v}x[\vec{m}]y)(\hat{\mathcal{F}}[(M, y)] \parallel C) \rrbracket z
\end{aligned}$$

- Rule [RED-SELECT]: $(\mathbf{v}x[\vec{m}]y)(\mathcal{F}[\text{select } \ell x] \parallel C) \rightarrow_C (\mathbf{v}x[\ell, \vec{m}]y)(\mathcal{F}[x] \parallel C)$. W.l.o.g., assume C is a child thread. By Lemma 6.4.12, for any L , $\llbracket \mathcal{F}[L] \rrbracket z = \mathcal{E}_1[\llbracket L \rrbracket z']$ for some \mathcal{E}_1, z' (*1). By inversion of typing, $\Gamma \vdash_B \llbracket \vec{m} \rrbracket : S_1 > S$ where $S_1 = \oplus\{i : S_i\} \cup \{\ell : S_2\}$ (*2). By Lemma 6.4.13, $\llbracket \Gamma \vdash_B \llbracket \vec{m} \rrbracket : S_1 > S \rrbracket a) b = \mathcal{E}_2[\llbracket \emptyset \vdash_B [e] : S_1 > S_1 \rrbracket a) c]$ (*3) and $\llbracket \Gamma \vdash_B [\ell, \vec{m}] : S_1 > S \rrbracket a) b = \mathcal{E}_2[\llbracket \emptyset \vdash_B [\ell] : S_1 > S_1 \rrbracket a) c]$ (*4) for some \mathcal{E}_2, c . Below, we omit types from translations of buffers. The thesis holds as follows:

$$\begin{aligned}
&\llbracket (\mathbf{v}x[\vec{m}]y)(\mathcal{F}[\text{select } \ell x] \parallel C) \rrbracket z \\
&= (\mathbf{v}ax)(\mathbf{v}by)(\llbracket \vec{m} \rrbracket a) b | \llbracket \mathcal{F}[\text{select } \ell x] \rrbracket z | (\mathbf{v}_)\llbracket C \rrbracket_] \\
&= (\mathbf{v}ax)(\mathbf{v}by)(\mathcal{E}_2[\llbracket [e] \rrbracket a) c] | \mathcal{E}_1[\llbracket \text{select } \ell x \rrbracket z'] | (\mathbf{v}_)\llbracket C \rrbracket_] \tag{*,*3} \\
&= (\mathbf{v}ax)(\mathbf{v}by)(\\
&\quad \mathcal{E}_2[a_, c_1); (\mathbf{v}d_1e_1)(c_1_, d_1 | e_1(f_1) \triangleright \{i : \dots\}_{i \in I} \cup \{\ell : (\mathbf{v}g_1h_1) \left(\begin{array}{l} c_, k_1; k_1[g_1] \triangleleft \ell \\ | \llbracket [e] \rrbracket f_1 \rrbracket h_1 \end{array} \right) \})] \\
&\quad | \mathcal{E}_1[(\mathbf{v}a_2b_2)(x_, a_2 | b_2_, c_2); (\mathbf{v}d_2e_2)(c_2[d_2] \triangleleft \ell | e_2_, z')]]) \\
&\quad | (\mathbf{v}_)\llbracket C \rrbracket_] \\
&\tag{*2} \\
&\rightarrow (\mathbf{v}a_2b_2)(\mathbf{v}by)(\\
&\quad \mathcal{E}_2[(\mathbf{v}d_1e_1)(a_2_, d_1 | e_1(f_1) \triangleright \{i : \dots\}_{i \in I} \cup \{\ell : (\mathbf{v}g_1h_1) \left(\begin{array}{l} c_, k_1; k_1[g_1] \triangleleft \ell \\ | \llbracket [e] \rrbracket f_1 \rrbracket h_1 \end{array} \right) \})] \\
&\quad | \mathcal{E}_1[b_2_, c_2); (\mathbf{v}d_2e_2)(c_2[d_2] \triangleleft \ell | e_2_, z')]]) \\
&\quad | (\mathbf{v}_)\llbracket C \rrbracket_] \\
&\rightarrow (\mathbf{v}a_2b_2)(\mathbf{v}by)(\\
&\quad \mathcal{E}_2[(\mathbf{v}d_1e_1)(a_2_, d_1 | e_1(f_1) \triangleright \{i : \dots\}_{i \in I} \cup \{\ell : (\mathbf{v}g_1h_1) \left(\begin{array}{l} c_, k_1; k_1[g_1] \triangleleft \ell \\ | \llbracket [e] \rrbracket f_1 \rrbracket h_1 \end{array} \right) \})] \\
&\quad | \mathcal{E}_1[b_2_, c_2); (\mathbf{v}d_2e_2)(c_2[d_2] \triangleleft \ell | e_2_, z')]]) \\
&\quad | (\mathbf{v}_)\llbracket C \rrbracket_] \\
&\rightarrow (\mathbf{v}d_2e_2)(\mathbf{v}by)(\\
&\quad \mathcal{E}_2[(\mathbf{v}g_1h_1)(c_, k_1); k_1[g_1] \triangleleft \ell | \llbracket [e] \rrbracket d_2) h_1]) \\
&\quad | \mathcal{E}_1[e_2_, z']] \\
&\quad | (\mathbf{v}_)\llbracket C \rrbracket_]
\end{aligned}$$

$$\begin{aligned}
&\equiv (\mathbf{v}ax)(\mathbf{v}by)(\\
&\quad \mathcal{E}_2[(\mathbf{v}g_1 h_1)(c(_, k_1); k_1[g_1] \triangleleft \ell \mid \llbracket \epsilon \rrbracket a) h_1] \\
&\quad \mid \mathcal{E}_1[x[_, z']] \\
&\quad \mid (\mathbf{v}_)\llbracket C \rrbracket _) \\
&= (\mathbf{v}ax)(\mathbf{v}by)(\mathcal{E}_2[\llbracket \ell \rrbracket a]c \mid \mathcal{E}_1[\llbracket x \rrbracket z'] \mid (\mathbf{v}_)\llbracket C \rrbracket _) \\
&= (\mathbf{v}ax)(\mathbf{v}by)(\llbracket \ell, \tilde{m} \rrbracket a)b \mid \llbracket \mathcal{F}[x] \rrbracket z \mid (\mathbf{v}_)\llbracket C \rrbracket _) \quad (*_1, *_4) \\
&= \llbracket (\mathbf{v}x[\ell, \tilde{m}]y)(\mathcal{F}[x] \parallel C) \rrbracket z
\end{aligned}$$

- Rule [RED-CASE]: $j \in I$ implies

$$(\mathbf{v}x[\tilde{m}, j]y)(\mathcal{F}[\text{case } y \text{ of } \{i : M_i\}_{i \in I} \parallel C]) \rightarrow_c (\mathbf{v}x[\tilde{m}]y)(\mathcal{F}[M_j y \parallel C]).$$

W.l.o.g., assume C is a child thread. By Lemma 6.4.12, for any L , $\llbracket \mathcal{F}[L] \rrbracket z = \mathcal{E}[\llbracket L \rrbracket z']$ for some $\mathcal{E}, z' (*_*)$. Assume the condition. The thesis holds as follows:

$$\begin{aligned}
&\llbracket (\mathbf{v}x[\tilde{m}, j]y)(\mathcal{F}[\text{case } y \text{ of } \{i : M_i\}_{i \in I} \parallel C]) \rrbracket z \\
&= (\mathbf{v}ax)(\mathbf{v}by)(\llbracket \tilde{m}, j \rrbracket a)b \mid \llbracket \mathcal{F}[\text{case } y \text{ of } \{i : M_i\}_{i \in I}] \rrbracket z \mid (\mathbf{v}_)\llbracket C \rrbracket _) \\
&= (\mathbf{v}ax)(\mathbf{v}by)(\llbracket \tilde{m}, j \rrbracket a)b \mid \mathcal{E}[\llbracket \text{case } y \text{ of } \{i : M_i\}_{i \in I} \rrbracket z'] \mid (\mathbf{v}_)\llbracket C \rrbracket _) \quad (*) \\
&= (\mathbf{v}ax)(\mathbf{v}by)(\\
&\quad (\mathbf{v}c_1 d_1)(b(_, e_1); e_1[c_1] \triangleleft j \mid \llbracket \tilde{m} \rrbracket a) d_1) \\
&\quad \mid \mathcal{E}[(\mathbf{v}a_2 b_2)(y[_, a_2] \mid b_2(c_2) \triangleright \{i : \llbracket M_i c_2 \rrbracket z'\}_{i \in I})] \\
&\quad \mid (\mathbf{v}_)\llbracket C \rrbracket _) \\
&\rightarrow (\mathbf{v}ax)(\mathbf{v}a_2 b_2)(\\
&\quad (\mathbf{v}c_1 d_1)(a_2[c_1] \triangleleft j \mid \llbracket \tilde{m} \rrbracket a) d_1) \\
&\quad \mid \mathcal{E}[b_2(c_2) \triangleright \{i : \llbracket M_i c_2 \rrbracket z'\}_{i \in I}] \\
&\quad \mid (\mathbf{v}_)\llbracket C \rrbracket _) \\
&\rightarrow (\mathbf{v}ax)(\mathbf{v}d_1 c_1)(\llbracket \tilde{m} \rrbracket a) d_1 \mid \mathcal{E}[\llbracket M_j c_2 \rrbracket z'\{c_1/c_2\}] \mid (\mathbf{v}_)\llbracket C \rrbracket _) \\
&= (\mathbf{v}ax)(\mathbf{v}d_1 c_1)(\llbracket \tilde{m} \rrbracket a) d_1 \mid \mathcal{E}[\llbracket M_j c_1 \rrbracket z'] \mid (\mathbf{v}_)\llbracket C \rrbracket _) \quad (\text{Lemma 6.4.12}) \\
&\equiv (\mathbf{v}ax)(\mathbf{v}by)(\llbracket \tilde{m} \rrbracket a)b \mid \mathcal{E}[\llbracket M_j y \rrbracket z'] \mid (\mathbf{v}_)\llbracket C \rrbracket _) \quad (\text{Lemma 6.4.12}) \\
&= (\mathbf{v}ax)(\mathbf{v}by)(\llbracket \tilde{m} \rrbracket a)b \mid \llbracket \mathcal{F}[M_j y] \rrbracket z \mid (\mathbf{v}_)\llbracket C \rrbracket _) \quad (*) \\
&= \llbracket (\mathbf{v}x[\tilde{m}]y)(\mathcal{F}[M_j y \parallel C]) \rrbracket z
\end{aligned}$$

- Rule [RED-CLOSE]: $(\mathbf{v}x[\tilde{m}]y)(\mathcal{F}[\text{close } x; M] \parallel C) \rightarrow_c (\mathbf{v}\square[\tilde{m}]y)(\mathcal{F}[M] \parallel C)$. W.l.o.g., assume C is a child thread. By Lemma 6.4.12, for any L , $\llbracket \mathcal{F}[L] \rrbracket z = \mathcal{E}_1[\llbracket L \rrbracket z']$ for some $\mathcal{E}_1, z' (*_1)$. The analysis depends on whether $y = \square$; w.l.o.g., assume not. By inversion of typing, $\Gamma \vdash_B \llbracket \tilde{m} \rrbracket : \text{end} > S$ where $S \neq \square (*_2)$. By Lemma 6.4.13, $\llbracket \Gamma \vdash_B \llbracket \tilde{m} \rrbracket : \text{end} > S \rrbracket a \rrbracket b = \mathcal{E}_2[\llbracket \emptyset \vdash_B \epsilon : \text{end} > \text{end} \rrbracket a \rrbracket c] (*_3)$ and $\llbracket \Gamma \vdash_B \llbracket \tilde{m} \rrbracket : \square > S \rrbracket a \rrbracket b = \mathcal{E}_2[\llbracket \emptyset \vdash_B \epsilon : \square > \text{end} \rrbracket a \rrbracket c] (*_4)$ for some \mathcal{E}_2, c . Below, we omit translations of buffers. The thesis holds as follows:

$$\begin{aligned}
&\llbracket (\mathbf{v}x[\tilde{m}]y)(\mathcal{F}[\text{close } x; M] \parallel C) \rrbracket z \\
&= (\mathbf{v}ax)(\mathbf{v}by)(\llbracket \tilde{m} \rrbracket a) b \mid \llbracket \mathcal{F}[\text{close } x; M] \rrbracket z \mid (\mathbf{v}_)\llbracket C \rrbracket _)
\end{aligned}$$

$$\begin{aligned}
&= (\mathbf{v}ax)(\mathbf{v}by)(\mathcal{E}_2[\llbracket \epsilon \rrbracket a]c) \mid \mathcal{E}_1[\llbracket \text{close } x; M \rrbracket z'] \mid (\mathbf{v}_)\llbracket C \rrbracket__ & (*_1, *_3) \\
&= (\mathbf{v}ax)(\mathbf{v}by)(& (*_2) \\
&\quad \mathcal{E}_2[a(_, c_1); c_1[_, _] \mid b(_, d_1); d_1[_, _]] \\
&\quad \mid \mathcal{E}_1[\mathbf{v}a_2b_2(x[_, a_2] \mid b_2(_, _)); \llbracket M \rrbracket z'] \\
&\quad \mid (\mathbf{v}_)\llbracket C \rrbracket__) \\
&\rightarrow (\mathbf{v}a_2b_2)(\mathbf{v}by)(& \\
&\quad \mathcal{E}_2[a_2[_, _] \mid b(_, d_1); d_1[_, _]] \\
&\quad \mid \mathcal{E}_1[b_2(_, _); \llbracket M \rrbracket z'] \\
&\quad \mid (\mathbf{v}_)\llbracket C \rrbracket__) \\
&\rightarrow (\mathbf{v}by)(\mathcal{E}_2[b(_, d_1); d_1[_, _]] \mid \mathcal{E}_1[\llbracket M \rrbracket z'] \mid (\mathbf{v}_)\llbracket C \rrbracket__) \\
&\equiv (\mathbf{v}a_)(\mathbf{v}by)(\mathcal{E}_2[b(_, d_1); d_1[_, _]] \mid \mathcal{E}_1[\llbracket M \rrbracket z'] \mid (\mathbf{v}_)\llbracket C \rrbracket__) \\
&= (\mathbf{v}a_)(\mathbf{v}by)(\mathcal{E}_2[\llbracket \epsilon \rrbracket a]c) \mid \mathcal{E}_1[\llbracket M \rrbracket z'] \mid (\mathbf{v}_)\llbracket C \rrbracket__) \\
&= (\mathbf{v}a_)(\mathbf{v}by)(\llbracket \tilde{m} \rrbracket a) b \mid \llbracket \mathcal{F}[M] \rrbracket z \mid (\mathbf{v}_)\llbracket C \rrbracket__) & (*_1, *_4) \\
&= \llbracket (\mathbf{v}\square[\tilde{m}]y)(\mathcal{F}[M] \mid C) \rrbracket z
\end{aligned}$$

- Rule [RED-PAR-NIL]: $C \parallel \diamond 0 \rightarrow_C C$. The thesis holds as follows:

$$\begin{aligned}
\llbracket C \parallel \diamond 0 \rrbracket z &= \llbracket C \rrbracket z \mid (\mathbf{v}_)\mathbf{0} \\
&\equiv \llbracket C \rrbracket z
\end{aligned}$$

- Rule [RED-RES-NIL]: $(\mathbf{v}\square[\epsilon]\square)C \rightarrow_C C$. The thesis holds as follows:

$$\begin{aligned}
\llbracket (\mathbf{v}\square[\epsilon]\square)C \rrbracket z &= (\mathbf{v}a_)(\mathbf{v}b_)(\mathbf{0} \mid \llbracket C \rrbracket z) \\
&\equiv \llbracket C \rrbracket z
\end{aligned}$$

- Rule [RED-LIFT-C]: $C \rightarrow_C C'$ implies $\mathcal{G}[C] \rightarrow_C \mathcal{G}[C']$. By Lemma 6.4.12, for any D , $\llbracket \mathcal{G}[D] \rrbracket z = \mathcal{E}[\llbracket D \rrbracket z']$ for some \mathcal{E}, z' (*₁). Assume the condition. By the IH, $\llbracket C \rrbracket z' \rightarrow^* \llbracket C' \rrbracket z'$ (*₂). The thesis holds as follows:

$$\llbracket \mathcal{G}[C] \rrbracket z = \mathcal{E}[\llbracket C \rrbracket z'] \quad (*_1)$$

$$\rightarrow^* \mathcal{E}[\llbracket C' \rrbracket z'] \quad (*_2)$$

$$= \llbracket \mathcal{G}[C'] \rrbracket z \quad (*_1)$$

- Rule [RED-LIFT-M]: $M \rightarrow_M M'$ implies $\mathcal{F}[M] \rightarrow_C \mathcal{F}[M']$. By Lemma 6.4.12, for any N , $\llbracket \mathcal{F}[N] \rrbracket z = \mathcal{E}[\llbracket N \rrbracket z']$ for some \mathcal{E}, z' (*₁). Assume the condition. By Theorem E.4.3, $\llbracket M \rrbracket z' \rightarrow^* \llbracket M' \rrbracket z'$ (*₂). The thesis holds as follows:

$$\llbracket \mathcal{F}[M] \rrbracket z = \mathcal{E}[\llbracket M \rrbracket z'] \quad (*_1)$$

$$\rightarrow^* \mathcal{E}[\llbracket M' \rrbracket z'] \quad (*_2)$$

$$= \llbracket \mathcal{F}[M'] \rrbracket z \quad (*_1)$$

- Rule [RED-CONF-LIFT-SC]: $C \equiv_{\mathcal{C}} C'$, $C' \rightarrow_{\mathcal{C}} D'$, and $D' \equiv_{\mathcal{C}} D$ imply $C \rightarrow_{\mathcal{C}} D$. Assume the conditions. By Theorem E.4.2, $\llbracket C \rrbracket z \equiv \llbracket C' \rrbracket z$ (*₁) and $\llbracket D' \rrbracket z \equiv \llbracket D \rrbracket z$ (*₂). By the IH, $\llbracket C' \rrbracket z \rightarrow^* \llbracket D' \rrbracket z$ (*₃). The thesis holds as follows:

$$\llbracket C \rrbracket z \equiv \llbracket C' \rrbracket z \quad (*_1)$$

$$\rightarrow^* \llbracket D' \rrbracket z \quad (*_3)$$

$$\equiv \llbracket D \rrbracket z \quad (*_2)$$

□

E.4.2. SOUNDNESS

Theorem 6.4.11 (Soundness). *Given $\Gamma \vdash_{\mathcal{C}}^{\phi} C : T$, if $\llbracket C \rrbracket z \rightarrow^* Q$, then there exists D such that $C \rightarrow_{\mathcal{C}}^* D$ and $Q \rightarrow^* \llbracket D \rrbracket z$.*

Proof. By induction on the number k of steps $\llbracket C \rrbracket z \rightarrow^k Q$ (IH₁). We distinguish cases on all possible initial reductions $\llbracket C \rrbracket z \rightarrow Q_0$ and discuss all possible following reductions. Here, we rely on APCP's confluence of independent reductions, allowing us to focus on a specific sequence of reductions, postponing other possibilities that eventually lead to the same result.

We then use induction on the structure of C (IH₂). The goal is to identify some D_0 such that we can isolate $k_0 \geq 0$ reductions such that $C \rightarrow_{\mathcal{C}} D_0$ and $\llbracket C \rrbracket z \rightarrow Q_0 \rightarrow^{k_0} \llbracket D_0 \rrbracket z$ (where k_0 may be different in each case). We then have $\llbracket D_0 \rrbracket z \rightarrow^{k-k_0} Q$, so it follows from IH₁ that there exists D such that $D_0 \rightarrow_{\mathcal{C}}^* D$ and $\llbracket D_0 \rrbracket z \rightarrow^* \llbracket D \rrbracket z$.

- Case $C = \phi M$. By construction, we can identify a maximal context \mathcal{R} and a term M_0 such that $M = \mathcal{R}[M_0]$ and the observed reduction $\llbracket \phi(\mathcal{R}[M_0]) \rrbracket z \rightarrow Q_0$ originates from the translation of M_0 directly (i.e., not from inside an evaluation context in the translation of M_0 or from interaction with the translation of \mathcal{R}).

We detail every case for M_0 , though not all cases may be applicable to show a reduction. In each case, we rely on Lemma 6.4.12 to work with \mathcal{E}, z' such that $\llbracket \phi(\mathcal{R}[M_0]) \rrbracket z = \llbracket \mathcal{R}[M_0] \rrbracket z = \mathcal{E}[\llbracket M_0 \rrbracket z']$. Also, in many cases, subterms that partake in the reduction may appear in sequences of explicit substitutions; since structural congruence can always extrude the scope of explicit substitutions, they can, w.l.o.g., be factored out of the proofs below.

- Case $M_0 = x$. We have $\llbracket x \rrbracket z' = x[__, z']$, so no reduction is possible.
- Case $M_0 = ()$. We have $\llbracket () \rrbracket z' = \mathbf{0}$, so no reduction is possible.
- Case $M_0 = \lambda x.M_1$. We have $\llbracket \lambda x.M_1 \rrbracket z' = z'(x, a); \llbracket M_1 \rrbracket a$, so no reduction is possible.
- Case $M_0 = M_1 M_2$. We have

$$\llbracket M_1 M_2 \rrbracket z' = (\mathbf{v} a_1 b_1)(\mathbf{v} c_1 d_1)(\llbracket M_1 \rrbracket a_1 \mid b_1[c_1, z'] \mid d_1[__, e_1]; \llbracket M_2 \rrbracket e_1).$$

The reduction can only originate from a synchronization between the send on b_1 and a receive on a_1 in $\llbracket M_1 \rrbracket a_1$. By well-typedness, M_1 must be of type $T_2 \multimap T_1$

and M_2 of type T_2 . It must then be the case that $M_1 = \lambda x.M_{1,1}$: this is the only possibility for a receive on a_1 in $\llbracket M_1 \rrbracket a_1$.

Let $D_0 \triangleq \phi(\mathcal{R}[M_{1,1} \llbracket M_2/x \rrbracket])$. We have $C \rightarrow_c D_0$. Moreover:

$$\begin{aligned} \llbracket C \rrbracket z &= \mathcal{E}[(\mathbf{v}a_1b_1)(\mathbf{v}c_1d_1)(a_1(x, a_2); \llbracket M_{1,1} \rrbracket a_2 \mid b_1[c_1, z'] \mid d_1(_, e_1); \llbracket M_2 \rrbracket e_1)] \\ &\rightarrow \mathcal{E}[(\mathbf{v}xd_1)(\llbracket M_{1,1} \rrbracket z' \mid d_1(_, e_1); \llbracket M_2 \rrbracket e_1)] \\ &= \llbracket D_0 \rrbracket z \end{aligned}$$

– Case $M_0 = \mathbf{new}$. We have

$$\llbracket \mathbf{new} \rrbracket z' = (\mathbf{v}a_1b_1)(a_1[_, z'] \mid b_1(_, c_1); (\mathbf{v}d_1x)(\mathbf{v}e_1y)(\llbracket [\epsilon] \rrbracket d_1 \rangle e_1 \mid \llbracket (x, y) \rrbracket c_1)).$$

The reduction can only originate from a synchronization between the send on a_1 and the receive on b_1 . Let $D_0 \triangleq (\mathbf{v}x[\epsilon]y)(\phi(\mathcal{R}[\llbracket (x, y) \rrbracket]))$. We have $C \rightarrow_c D_0$. Moreover:

$$\begin{aligned} \llbracket C \rrbracket z &= \mathcal{E}[(\mathbf{v}a_1b_1)(a_1[_, z'] \mid b_1(_, c_1); (\mathbf{v}d_1x)(\mathbf{v}e_1y)(\llbracket [\epsilon] \rrbracket d_1 \rangle e_1 \mid \llbracket (x, y) \rrbracket c_1))] \\ &\rightarrow (\mathbf{v}d_1x)(\mathbf{v}e_1y)(\llbracket [\epsilon] \rrbracket d_1 \rangle e_1 \mid \mathcal{E}[\llbracket (x, y) \rrbracket z']) \\ &= \llbracket D_0 \rrbracket z \end{aligned}$$

– Case $M_0 = \mathbf{spawn} M_1; M_2$. We have

$$\llbracket \mathbf{spawn} M_1; M_2 \rrbracket z' = (\mathbf{v}a_1)(a_1[_, z'] \mid b_1(_, c_1); ((\mathbf{v}_)\llbracket M_1 \rrbracket_\mid \llbracket M_2 \rrbracket c_1)).$$

The reduction can only originate from a synchronization between the send on a_1 and the receive on b_1 . Let $D_0 \triangleq \phi(\mathcal{R}[M_2]) \parallel \diamond M_1$. We have $C \rightarrow_c D_0$. Moreover:

$$\begin{aligned} \llbracket C \rrbracket z &= \mathcal{E}[(\mathbf{v}a_1)(a_1[_, z'] \mid b_1(_, c_1); ((\mathbf{v}_)\llbracket M_1 \rrbracket_\mid \llbracket M_2 \rrbracket c_1))] \\ &\rightarrow \mathcal{E}[\llbracket M_2 \rrbracket z'] \mid (\mathbf{v}_)\llbracket M_1 \rrbracket__ \\ &= \llbracket D_0 \rrbracket z \end{aligned}$$

– Case $M_0 = (M_1, M_2)$. We have

$$\llbracket (M_1, M_2) \rrbracket z' = (\mathbf{v}a_1b_1)(\mathbf{v}c_1d_1)(z'[a_1, c_1] \mid b_1(_, e_1); \llbracket M_1 \rrbracket e_1 \mid d_1(_, f_1); \llbracket M_2 \rrbracket f_1),$$

so no reduction is possible.

– Case $M_0 = \mathbf{let} (x, y) = M_1 \mathbf{in} M_2$. We have

$$\llbracket \mathbf{let} (x, y) = M_1 \mathbf{in} M_2 \rrbracket z' = (\mathbf{v}a_1b_1)(a_1(x, y); \llbracket M_2 \rrbracket z' \mid \llbracket M_1 \rrbracket b_1).$$

The reduction can only originate from a synchronization between the receive on a_1 and a send on b_1 in $\llbracket M_1 \rrbracket b_1$. By well-typedness, M_1 must be of type $T_{1,1} \times T_{1,2}$. It must then be the case that $M_1 = (M_{1,1}, M_{1,2})$: this is the only possibility for a send on b_1 in $\llbracket M_1 \rrbracket b_1$.

Let $D_0 \triangleq \phi(\mathcal{R}[M_1 \{M_{1.1}/x, M_{1.2}/y\}])$. We have $C \rightarrow_c D_0$. Moreover:

$$\begin{aligned} & \llbracket C \rrbracket z \\ &= \mathcal{E}[(\mathbf{v}a_1 b_1)(a_1(x, y); \llbracket M_2 \rrbracket z' \mid (\mathbf{v}a_2 b_2)(\mathbf{v}c_2 d_2) \left(\begin{array}{l} b_1[a_2, c_2] \mid b_2(_, e_2); \llbracket M_{1.1} \rrbracket e_2 \\ \mid d_2(_, f_2); \llbracket M_{1.2} \rrbracket f_2 \end{array} \right))] \\ &\rightarrow \mathcal{E}[(\mathbf{v}y d_2)(\mathbf{v}x b_2)(\llbracket M_2 \rrbracket z' \mid b_2(_, e_2); \llbracket M_{1.1} \rrbracket e_2) \mid d_2(_, f_2); \llbracket M_{1.2} \rrbracket f_2)] \\ &= \llbracket D_0 \rrbracket z \end{aligned}$$

– Case $M_0 = \text{send } M_1 M_2$. We have

$$\llbracket \text{send } M_1 M_2 \rrbracket z' = (\mathbf{v}a_1 b_1)(\mathbf{v}c_1 d_1) \left(\begin{array}{l} a_1(_, e_1); \llbracket M_1 \rrbracket e_1 \mid \llbracket M_2 \rrbracket c_1 \\ \mid d_1(_, f_1); (\mathbf{v}g_1 h_1)(f_1[b_1, g_1] \mid h_1[_, z']) \end{array} \right).$$

The reduction can only originate from a synchronization between the receive on d_1 and a send on c_1 in $\llbracket M_2 \rrbracket c_1$. By well-typedness, M_2 must be of type $!T_1.S_2$. No reduction is possible: no M_2 can satisfy these conditions.

– Case $M_0 = \text{recv } M_1$. We have

$$\llbracket \text{recv } M_1 \rrbracket z' = (\mathbf{v}a_1 b_1)(\llbracket M_1 \rrbracket a_1 \mid b_1(c_1, d_1); (\mathbf{v}e_1 f_1)(z'[c_1, e_1] \mid f_1(_, g_1); d_1[_, g_1])).$$

The reduction can only originate from a synchronization between the receive on b_1 and a send on a_1 in $\llbracket M_1 \rrbracket a_1$. By well-typedness, M_1 must be of type $?T_1.S_1$. No reduction is possible: no M_1 can satisfy these conditions.

– Case $M_0 = \text{select } j M_1$. We have

$$\llbracket \text{select } j M_1 \rrbracket z' = (\mathbf{v}a_1 b_1)(\llbracket M_1 \rrbracket a_1 \mid b_1(_, c_1); (\mathbf{v}d_1 e_1)(c_1[d_1] \triangleleft j \mid e_1[_, z'])).$$

The reduction can only originate from a synchronization between the receive on b_1 and a send on a_1 in $\llbracket M_1 \rrbracket a_1$. By well-typedness, M_1 must be of type $\oplus\{i : S_1^i\}_{i \in I}$ with $j \in I$. No reduction is possible: no M_1 can satisfy these conditions.

– Case $M_0 = \text{case } M_1 \text{ of } \{i : M_2^i\}_{i \in I}$. We have

$$\llbracket \text{case } M_1 \text{ of } \{i : M_2^i\}_{i \in I} \rrbracket z' = (\mathbf{v}a_1 b_1)(\llbracket M_1 \rrbracket a_1 \mid b_1(c_2) \triangleright \{i : \llbracket M_2^i c_2 \rrbracket z'\}_{i \in I}).$$

The reduction can only originate from a synchronization between the branch on b_1 and a selection on a_1 in $\llbracket M_1 \rrbracket a_1$. By well-typedness, M_1 must be of type $\&\{i : S_2^i\}_{i \in I}$. No reduction is possible: no M_1 can satisfy these conditions.

– Case $M_0 = \text{close } M_1; M_2$. We have

$$\llbracket \text{close } M_1; M_2 \rrbracket z' = (\mathbf{v}a_1 b_1)(\llbracket M_1 \rrbracket a_1 \mid b_1(_, _); \llbracket M_2 \rrbracket z').$$

The reduction can only originate from a synchronization between the receive on b_1 and a send on a_1 in $\llbracket M_1 \rrbracket a_1$. By well-typedness, M_1 must be of type end . No reduction is possible: no M_1 can satisfy these conditions.

- Case $M_0 = M_1 \{M_2/x\}$. We have

$$\llbracket M_1 \{M_2/x\} \rrbracket z' = (\mathbf{v}x a_1)(\llbracket M_1 \rrbracket z' \mid a_1(_, b_1); \llbracket M_2 \rrbracket b_1).$$

The reduction can only originate from a synchronization between the receive on a_1 and a send on x in $\llbracket M_1 \rrbracket z'$. It must then be the case that $M_1 = \mathcal{R}_J[x]$. By Lemma 6.4.12, $\llbracket \mathcal{R}_J[x] \rrbracket z' = \mathcal{E}_J[\llbracket x \rrbracket z_1] = \mathcal{E}_J[x[_, z_1]]$.

Let $D_0 \triangleq \phi(\mathcal{R}[\mathcal{R}_J[M_2]])$. We have $C \equiv_{\mathcal{C}} \phi(\mathcal{R}[\mathcal{R}_J[x\{M_1/x\}]]) \rightarrow_{\mathcal{C}} D_0$. Moreover:

$$\begin{aligned} \llbracket C \rrbracket z &= \mathcal{E}[(\mathbf{v}x a_1)(\mathcal{E}_J[x[_, z_1]] \mid a_1(_, b_1); \llbracket M_2 \rrbracket b_1)] \\ &\rightarrow \mathcal{E}[\mathcal{E}_J[\llbracket M_2 \rrbracket z_1]] \\ &= \llbracket D_0 \rrbracket z \end{aligned}$$

- Case $C = C_1 \parallel C_2$. Assume, w.l.o.g., that C_2 is a child thread. We have

$$\llbracket C \rrbracket z = \llbracket C_1 \rrbracket z \mid (\mathbf{v}_)\llbracket C_2 \rrbracket _.$$

The reduction may originate from $\llbracket C_1 \rrbracket z$ or from $\llbracket C_2 \rrbracket _$; w.l.o.g., assume the former.

We thus have $\llbracket C_1 \rrbracket z \rightarrow Q_1$. By IH₂, there are $D_1, k_1 \geq 0$ such that $C_1 \rightarrow_{\mathcal{C}} D_1$ and $\llbracket C_1 \rrbracket z \rightarrow Q_1 \rightarrow^{k_1} \llbracket D_1 \rrbracket z$. Let $D_0 \triangleq D_1 \parallel C_2$. We have $C \rightarrow_{\mathcal{C}} D_0$. Moreover:

$$\begin{aligned} \llbracket C \rrbracket z &= \llbracket C_1 \rrbracket z \mid (\mathbf{v}_)\llbracket C_2 \rrbracket _ \\ &\rightarrow^{k_1+1} \llbracket D_1 \rrbracket z \mid (\mathbf{v}_)\llbracket C_2 \rrbracket _ \\ &= \llbracket D_0 \rrbracket z \end{aligned}$$

- Case $C = (\mathbf{v}x[\vec{m}]y)C_1$. We have

$$\llbracket (\mathbf{v}x[\vec{m}]y)C_1 \rrbracket z = (\mathbf{v}a_1x)(\mathbf{v}b_1y)(\llbracket [\vec{m}] \rrbracket a_1 \rangle b_1 \mid \llbracket C_1 \rrbracket z).$$

The reduction may originate from (i) $\llbracket [\vec{m}] \rrbracket a_1 \rangle b_1$, (ii) $\llbracket C_1 \rrbracket z$, (iii) a synchronization between a_1 in $\llbracket [\vec{m}] \rrbracket a_1 \rangle b_1$ and x in $\llbracket C_1 \rrbracket z$, or (iv) a synchronization between b_1 in $\llbracket [\vec{m}] \rrbracket a_1 \rangle b_1$ and y in $\llbracket C_1 \rrbracket z$. We detail each case:

- (i) The reduction stems from $\llbracket [\vec{m}] \rrbracket a_1 \rangle b_1$. No matter the $[\vec{m}]$, no reduction is possible.
- (ii) The reduction originates from $\llbracket C_1 \rrbracket z$. We thus have $\llbracket C_1 \rrbracket z \rightarrow Q_1$. By IH₂, there are $D_1, k_1 \geq 0$ such that $C_1 \rightarrow_{\mathcal{C}} D_1$ and $\llbracket C_1 \rrbracket z \rightarrow Q_1 \rightarrow^{k_1} \llbracket D_1 \rrbracket z$. Let $D_0 \triangleq (\mathbf{v}x[\vec{m}]y)D_1$. We have $C \rightarrow_{\mathcal{C}} D_0$. Moreover:

$$\begin{aligned} \llbracket C \rrbracket z &= (\mathbf{v}a_1x)(\mathbf{v}b_1y)(\llbracket [\vec{m}] \rrbracket a_1 \rangle b_1 \mid \llbracket C_1 \rrbracket z) \\ &\rightarrow^{k_1+1} (\mathbf{v}a_1x)(\mathbf{v}b_1y)(\llbracket [\vec{m}] \rrbracket a_1 \rangle b_1 \mid \llbracket D_1 \rrbracket z) \\ &= \llbracket D_0 \rrbracket z \end{aligned}$$

- (iii) The reduction originates from a synchronization between a_1 in $\llbracket [\vec{m}] \rrbracket a_1 \rangle b_1$ and x in $\llbracket C_1 \rrbracket z$. By well-typedness, $\Delta \vdash_{\mathcal{B}} [\vec{m}] : S' > S$. Note first

that, by Lemma 6.4.13, $S' \neq \square$ implies that there are \mathcal{E}_2, c_1 such that $\llbracket [\vec{m}] : S' > S \rrbracket a_1 \rangle b_1 = \mathcal{E}_2 \llbracket [\epsilon] : S' > S' \rrbracket a_1 \rangle c_1$. The analysis depends on S' , so we consider all possibilities. In each case, if the reduction is indeed possible, we show that the reduction is the first step in the execution of some rule such that $C \rightarrow_c D_0$. The corresponding reduction $\llbracket C \rrbracket z \rightarrow Q_0 \rightarrow^{k_0} \llbracket D_0 \rrbracket z$ follows the corresponding case in the proof of Theorem 6.4.10 (Completeness).

- ◇ Case $S' = \square$. Then $x = \square$ is not free in C_1 , and thus x is not free in $\llbracket C_1 \rrbracket z$: the reduction is not possible.
- ◇ Case $S' = \text{end}$. The analysis depends on whether $S = \square$ or not; w.l.o.g., assume not. We have

$$\llbracket [\epsilon] : \text{end} > \text{end} \rrbracket a_1 \rangle c_1 = a_1(_, c_2); \dots | \dots$$

Thus, the synchronization is between the receive on a_1 and a send on x in $\llbracket C_1 \rrbracket z$.

A send on a variable x can only occur in the translation of that variable directly, under some reduction context. Since x is of type `end` and its translation appears under a reduction context, the only well-typed way for x to appear in C_1 is if $C_1 = \mathcal{G}[\mathcal{F}[\text{close } x; M_1]]$. We then have

$$C \equiv_c \mathcal{G}'[(\mathbf{v}x[\vec{m}]y)(\mathcal{F}[\text{close } x; M_1] | C_2)].$$

Hence, the observed reduction is the first step of executing Rule [RED-CLOSE].

- ◇ Case $S' = !T_2.S'_2$. We have

$$\llbracket [\epsilon] : !T_2.S'_2 > !T_2.S'_2 \rrbracket a_1 \rangle c_1 = a_1(_, c_2); \dots$$

Thus, the synchronization is between the receive on a_1 and a send on x in $\llbracket C_1 \rrbracket z$.

A send on a variable x can only occur in the translation of that variable directly, under some reduction context. Since x is of type $!T_2.S'_2$ and its translation appears under a reduction context, the only well-typed way for x to appear in C_1 is if $C_1 = \mathcal{G}[\mathcal{F}[\text{send } M_1 x]]$. We then have

$$C \equiv_c \mathcal{G}'[(\mathbf{v}x[\vec{m}]y)(\hat{\mathcal{F}}'[\text{send } M_1 x] | C_2)].$$

Hence, the observed reduction is the first step of executing Rule [RED-SEND].

- ◇ Case $S' = ?T_2.S'_2$. We have

$$\llbracket [\epsilon] : ?T_2.S'_2 > ?T_2.S'_2 \rrbracket a_1 \rangle c_1 = \llbracket [\epsilon] : !T_2.\overline{S'_2} > !T_2.\overline{S'_2} \rrbracket c_1 \rangle a_1 = c_1(_, c_2); \dots$$

Thus, the reduction is not possible.

- ◇ Case $S' = \oplus\{i.S_2^i\}_{i \in I}$. We have

$$\llbracket [\epsilon] : \oplus\{i.S_2^i\}_{i \in I} > \oplus\{i.S_2^i\}_{i \in I} \rrbracket a_1 \rangle c_1 = a_1(_, c_2); \dots$$

Thus, the synchronization is between the receive on a_1 and a send on x in $\llbracket C_1 \rrbracket z$.

A send on a variable x can only occur in the translation of that variable directly, under some reduction context. Since x is of type $\oplus\{i.S_2^i\}_{i \in I}$ and its translation appears under a reduction context, the only well-typed way for x to appear in C_1 is if $C_1 = \mathcal{G}[\mathcal{F}[\text{select } j \ x]]$ where $j \in I$. We then have

$$C \equiv_{\mathcal{C}} \mathcal{G}'[(\mathbf{v}x[\bar{m}]y)(\mathcal{F}[\text{select } j \ x] \mid C_2)].$$

Hence, the observed reduction is the first step of executing Rule [RED-SELECT].

◇ Case $S' = \&\{i.S_2^i\}_{i \in I}$. We have

$$\begin{aligned} \llbracket [e] : \&\{i.S_2^i\}_{i \in I} > \&\{i.S_2^i\}_{i \in I} \rrbracket a_1 \rangle c_1 &= \llbracket [e] : \oplus\{i.\bar{S}_2^i\}_{i \in I} > \oplus\{i.\bar{S}_2^i\}_{i \in I} \rrbracket c_1 \rangle a_1 \\ &= c_1(_, c_2); \dots \end{aligned}$$

Thus, the reduction is not possible.

(iv) The reduction originates from a synchronization between b_1 in $\llbracket [\bar{m}] \rrbracket a_1 \rangle b_1$ and y in $\llbracket C_1 \rrbracket z$. By well-typedness, $\Delta \vdash_{\mathcal{B}} [\bar{m}] : S' > S$. The analysis depends on S , so we consider all possibilities. In each case, if the reduction is indeed possible, we show that the reduction is the first step in the execution of some rule such that $C \rightarrow_{\mathcal{C}} D_0$. The corresponding reduction $\llbracket C \rrbracket z \rightarrow_{Q_0} \rightarrow^{k_0} \llbracket D_0 \rrbracket z$ follows the corresponding case in the proof of Theorem 6.4.10 (Completeness).

- ◇ Case $S = \square$. Then $y = \square$ is not free in C_1 , and thus y is not free in $\llbracket C_1 \rrbracket z$: the reduction is not possible.
- ◇ Case $S = \text{end}$. By well-typedness, then $\bar{m} = \epsilon$. Let $C' \triangleq (\mathbf{v}y[\epsilon]x)C_1$; we have $C \equiv_{\mathcal{C}} C'$ and $\llbracket C \rrbracket z \equiv \llbracket C' \rrbracket z$ (by Theorem E.4.2). The thesis then follows as in the analogous case under Sub-case (iii) above.
- ◇ Case $S = !T_2.S_2$. By well-typedness, then $\bar{m} = \bar{m}', M_1$. We have

$$\llbracket [\bar{m}', M_1] : S' > !T_2.S_2 \rrbracket a_1 \rangle b_1 = (\mathbf{v}\dots)(\mathbf{v}\dots)(\dots \mid b_1(_, h_2); \dots \mid \dots).$$

Thus, the synchronization is between the receive on b_1 and a send on y in $\llbracket C_1 \rrbracket z$.

A send on a variable y can only occur in the translation of that variable directly, under some reduction context. Since y is of type $\bar{S} = ?T_2.\bar{S}_2$ and its translation appears under a reduction context, the only well-typed way for y to appear in C_1 is if $C_1 = \mathcal{G}[\mathcal{F}[\text{recv } y]]$. We then have

$$C \equiv_{\mathcal{C}} \mathcal{G}'[(\mathbf{v}x[\bar{m}', M_1]y)(\hat{\mathcal{F}}'[\text{recv } y] \mid C_2)].$$

Hence, the observed reduction is the first step of executing Rule [RED-RECV].

- ◇ Case $S = ?T_2.S_2$. By well-typedness, $\bar{m} = \epsilon$; this case is analogous to Case $S = \text{end}$.

- ◇ Case $S = \oplus\{i : S_2^i\}_{i \in I}$. By well-typedness, then $\vec{m} = \vec{m}'$, j where $j \in I$. We have

$$\llbracket \vec{m}', j \rrbracket : S' > \oplus\{i : S_2^i\}_{i \in I} \ a_1 \rangle b_1 = (\mathbf{v} \dots)(b_1(_, e_2); \dots | \dots).$$

Thus, the synchronization is between the receive on b_1 and a send on y in $\llbracket C_1 \rrbracket z$.

A send on a variable y can only occur in the translation of that variable directly, under some reduction context. Since y is of type $\overline{S} = \&\{i : S_2^i\}_{i \in I}$ and its translation appears under a reduction context, the only well-typed way for y to appear in C_1 is if $C_1 = \mathcal{G}[\mathcal{F}[\text{case } y \text{ of } \{i : M_{1,i}\}_{i \in I}]]$. We then have

$$C \equiv_{\mathcal{C}} \mathcal{G}'[(\mathbf{v}x[\vec{m}', j])y](\mathcal{F}[\text{case } y \text{ of } \{i : M_{1,i}\}_{i \in I}] | C_2).$$

Hence, the observed reduction is the first step of executing Rule [RED-CASE].

- ◇ Case $S = \&\{i : S_2^i\}_{i \in I}$. By well-typedness, then $\vec{m} = \epsilon$; this case is analogous to Case $S = \text{end}$ above.

E

- Case $C = C_1 \llbracket M/x \rrbracket$. We have

$$\llbracket C_1 \llbracket M/x \rrbracket \rrbracket z = (\mathbf{v}x a_1)(\llbracket C_1 \rrbracket z | a_1(_, b_1); \llbracket M \rrbracket b_1).$$

The reduction may originate from (i) $\llbracket C_1 \rrbracket z$ or (ii) a synchronization between the receive on a_1 and a send on x in $\llbracket C_1 \rrbracket z$. We detail both cases:

- (i) The reduction originates from $\llbracket C_1 \rrbracket z$. We thus have $\llbracket C_1 \rrbracket z \rightarrow Q_1$. By IH₂, there are D_1 , $k_1 \geq 0$ such that $C_1 \rightarrow_{\mathcal{C}} D_1$ and $\llbracket C_1 \rrbracket z \rightarrow Q_1 \rightarrow^{k_1} \llbracket D_1 \rrbracket z$. Let $D_0 \triangleq D_1 \llbracket M/x \rrbracket$. We have $C \rightarrow_{\mathcal{C}} D_0$. Moreover:

$$\begin{aligned} \llbracket C \rrbracket z &= (\mathbf{v}x a_1)(\llbracket C_1 \rrbracket z | a_1(_, b_1); \llbracket M \rrbracket b_1) \\ &\rightarrow^{k_1+1} (\mathbf{v}x a_1)(\llbracket D_1 \rrbracket z | a_1(_, b_1); \llbracket M \rrbracket b_1) \\ &= \llbracket D_0 \rrbracket z \end{aligned}$$

- (ii) The reduction originates from a synchronization between the receive on a_1 and a send on x in $\llbracket C_1 \rrbracket z$. It must then be the case that $C_1 = \mathcal{G}[\mathcal{F}[x]]$. By Lemma 6.4.12, $\llbracket \mathcal{G}[\mathcal{F}[x]] \rrbracket z = \mathcal{E}[\llbracket x \rrbracket z'] = \mathcal{E}[x[_, z']]$.

Let $D_0 \triangleq \mathcal{G}[\mathcal{F}[M]]$. We have $C \equiv_{\mathcal{C}} \mathcal{G}[\mathcal{F}[x \llbracket M/x \rrbracket]] \rightarrow_{\mathcal{C}} D_0$. Moreover:

$$\begin{aligned} \llbracket C \rrbracket z &= (\mathbf{v}x a_1)(\mathcal{E}[x[_, z']] | a_1(_, b_1); \llbracket M \rrbracket b_1) \\ &\rightarrow \mathcal{E}[\llbracket M \rrbracket z'] \\ &= \llbracket D_0 \rrbracket z \end{aligned}$$

□

F

APPENDICES FOR CHAPTER 7

This appendix details the translation from the $\alpha\lambda$ -calculus into πBI and proofs of the accompanying operational correspondence results, all presented in Chapter 7.

F.1. FULL TRANSLATION

Here we present the full translation of $\alpha\lambda$ -calculus typing rules into typed πBI processes. In each case, we give the name of the rule along with the full derivation of the translated πBI process.

$$\frac{[\text{TYP-ID}]}{x : A \vdash \mathcal{T}_z(x) = [z \leftrightarrow x] \blacktriangleright z : A}$$

$$\frac{[\text{TYP-CONG}]}{\Delta \vdash \mathcal{T}_z(M) \blacktriangleright z : A \quad \Delta \equiv \Theta}{\Theta \vdash \mathcal{T}_z(M) \blacktriangleright z : A}$$

$$\frac{[\text{TYP-WEAKEN}]}{\Gamma[\Delta] \vdash \mathcal{T}_z(M) \blacktriangleright z : A}{\Gamma[\Delta; \Delta'] \vdash \mathcal{T}_z(M) = \rho[x \mapsto \emptyset \mid x \in \text{fv}(\Delta)]; \mathcal{T}_z(M) \blacktriangleright z : A}$$

$$\frac{[\text{TYP-CONTRACT}]}{\Gamma[\Delta] \vdash \mathcal{T}_z(M\{x/x^{(1)}, x/x^{(2)} \mid x \in \text{fv}(\Delta)\}) = \rho[x \mapsto x_1, x_2]; \mathcal{T}_z(M) \blacktriangleright z : A}{\Gamma[\Delta^{(1)}; \Delta^{(2)}] \vdash \mathcal{T}_z(M) \blacktriangleright z : A}$$

$$\frac{[\text{TYP-WAND-I}]}{\Delta, x : A \vdash \mathcal{T}_z(M) \blacktriangleright z : B}{\Delta \vdash \mathcal{T}_z(\lambda x. M) = z(x); \mathcal{T}_z(M) \blacktriangleright z : A \multimap B}$$

$$\frac{[\text{TYP-IMPL-I}] \quad \Delta; x : A \vdash \mathcal{T}_z(M) \blacktriangleright z : B}{\Delta \vdash \mathcal{T}_z(\alpha x.M) = z(x); \mathcal{T}_z(M) \blacktriangleright z : A \rightarrow B}$$

$$\frac{[\text{TYP-WAND-E}] \quad \Delta \vdash \mathcal{T}_x(M) \blacktriangleright x : A * B \quad \frac{\Theta \vdash \mathcal{T}_y(N) \blacktriangleright y : A \quad \overline{x : B \vdash [z \leftrightarrow x] \blacktriangleright z : B}}{\Theta, x : A * B \vdash \bar{x}[y]; (\mathcal{T}_y(N) \mid [z \leftrightarrow x]) \blacktriangleright z : B}}{\Delta, \Theta \vdash \mathcal{T}_z(M N) = (\mathbf{v}x)(\mathcal{T}_x(M) \mid \bar{x}[y]; (\mathcal{T}_y(N) \mid [z \leftrightarrow x])) \blacktriangleright z : B}$$

$$\frac{[\text{TYP-IMPL-E}] \quad \Delta \vdash \mathcal{T}_x(M) \blacktriangleright x : A \rightarrow B \quad \frac{\Theta \vdash \mathcal{T}_y(N) \blacktriangleright y : A \quad \overline{x : B \vdash [z \leftrightarrow x] \blacktriangleright z : B}}{\Theta; x : A \rightarrow B \vdash \bar{x}[y]; (\mathcal{T}_y(N) \mid [z \leftrightarrow x]) \blacktriangleright z : B}}{\Delta; \Theta \vdash \mathcal{T}_z(M N) = (\mathbf{v}x)(\mathcal{T}_x(M) \mid \bar{x}[y]; (\mathcal{T}_y(N) \mid [z \leftrightarrow x])) \blacktriangleright z : B}$$

$$\frac{[\text{TYP-EMP-I}] \quad \overline{\emptyset_m \vdash \mathcal{T}_z(0_m) = z[] \blacktriangleright z : \mathbf{1}_m}}$$

$$\frac{[\text{TYP-TRUE-I}] \quad \overline{\emptyset_a \vdash \mathcal{T}_z(0_a) = z[] \blacktriangleright z : \mathbf{1}_a}}$$

$$\frac{[\text{TYP-EMP-E}] \quad \frac{\Delta \vdash \mathcal{T}_x(M) \blacktriangleright x : \mathbf{1}_m \quad \frac{\Gamma[\emptyset_m] \vdash \mathcal{T}_z(N) \blacktriangleright z : A}{\Gamma[x : \mathbf{1}_m] \vdash x(); \mathcal{T}_z(N) \blacktriangleright z : A}}{\Gamma[\Delta] \vdash \mathcal{T}_z(\text{let } 0_m = M \text{ in } N) = (\mathbf{v}x)(\mathcal{T}_x(M) \mid x(); \mathcal{T}_z(N)) \blacktriangleright z : A}}$$

$$\frac{[\text{TYP-TRUE-E}] \quad \frac{\Delta \vdash \mathcal{T}_x(M) \blacktriangleright x : \mathbf{1}_a \quad \frac{\Gamma[\emptyset_a] \vdash \mathcal{T}_z(N) \blacktriangleright z : A}{\Gamma[x : \mathbf{1}_a] \vdash x(); \mathcal{T}_z(N) \blacktriangleright z : A}}{\Gamma[\Delta] \vdash \mathcal{T}_z(\text{let } 0_a = M \text{ in } N) = (\mathbf{v}x)(\mathcal{T}_x(M) \mid x(); \mathcal{T}_z(N)) \blacktriangleright z : A}}$$

$$\frac{[\text{TYP-SEP-I}] \quad \frac{\Delta \vdash \mathcal{T}_y(M) \blacktriangleright y : A \quad \Theta \vdash \mathcal{T}_z(N) \blacktriangleright z : B}{\Delta, \Theta \vdash \mathcal{T}_z(\langle M, N \rangle) = \bar{z}[y]; (\mathcal{T}_y(M) \mid \mathcal{T}_z(N)) \blacktriangleright z : A * B}}$$

$$\frac{[\text{TYP-CONJ-I}] \quad \frac{\Delta \vdash \mathcal{T}_y(M) \blacktriangleright y : A \quad \Theta \vdash \mathcal{T}_z(N) \blacktriangleright z : B}{\Delta; \Theta \vdash \mathcal{T}_z((M, N)) = \bar{z}[y]; (\mathcal{T}_y(M) \mid \mathcal{T}_z(N)) \blacktriangleright z : A \wedge B}}$$

$$\frac{[\text{TYP-SEP-E}] \quad \frac{\Delta \vdash \mathcal{T}_y(M) \blacktriangleright y : A * B \quad \frac{\Gamma[x : A, y : B] \vdash \mathcal{T}_z(N) \blacktriangleright z : C}{\Gamma[y : A * B] \vdash y(x); \mathcal{T}_z(N) \blacktriangleright z : C}}{\Gamma[\Delta] \vdash \mathcal{T}_z(\text{let } \langle x, y \rangle = M \text{ in } N) = (\mathbf{v}y)(\mathcal{T}_z(N) \mid y(x); \mathcal{T}_z(N)) \blacktriangleright z : C}}$$

[TYP-CONJ-E]

$$\frac{\Delta \vdash \mathcal{T}_{x_2}(M) \blacktriangleright x_2 : A_1 \wedge A_2 \quad \frac{\frac{x_1 : A_1 \vdash [z \leftrightarrow x_1] \blacktriangleright z : A_1}{x_1 : A_1; x_2 : A_2 \vdash \rho[x_2 \mapsto \emptyset]; [z \leftrightarrow x_1] \blacktriangleright z : A_1}}{x_2 : A_1 \wedge A_2 \vdash x_2(x_1); \rho[x_2 \mapsto \emptyset]; [z \leftrightarrow x_1] \blacktriangleright z : A_1}}{\Delta \vdash \mathcal{T}_z(\pi_1 M) = (\mathbf{v}x_2)(\mathcal{T}_{x_2}(M) \mid x_2(x_1); \rho[x_2 \mapsto \emptyset]; [z \leftrightarrow x_1]) \blacktriangleright z : A_1}$$

[TYP-CONJ-E]

$$\frac{\Delta \vdash \mathcal{T}_{x_2}(M) \blacktriangleright x_2 : A_1 \wedge A_2 \quad \frac{\frac{x_2 : A_2 \vdash [z \leftrightarrow x_2] \blacktriangleright z : A_2}{x_1 : A_1; x_2 : A_2 \vdash \rho[x_1 \mapsto \emptyset]; [z \leftrightarrow x_2] \blacktriangleright z : A_1}}{x_2 : A_1 \wedge A_2 \vdash x_2(x_1); \rho[x_1 \mapsto \emptyset]; [z \leftrightarrow x_2] \blacktriangleright z : A_2}}{\Delta \vdash \mathcal{T}_z(\pi_2 M) = (\mathbf{v}x_2)(\mathcal{T}_{x_2}(M) \mid x_2(x_1); \rho[x_1 \mapsto \emptyset]; [z \leftrightarrow x_2]) \blacktriangleright z : A_2}$$

[TYP-DISJ-I]

$$\frac{\Delta \vdash \mathcal{T}_z(M) \blacktriangleright z : A_1}{\Delta \vdash \mathcal{T}_z(\text{select}_1(M) = \bar{z} \langle \text{inl}; \mathcal{T}_z(M) \rangle \blacktriangleright z : A_1 \vee A_2)}$$

[TYP-DISJ-I]

$$\frac{\Delta \vdash \mathcal{T}_z(M) \blacktriangleright z : A_2}{\Delta \vdash \mathcal{T}_z(\text{select}_2(M) = \bar{z} \langle \text{inr}; \mathcal{T}_z(M) \rangle \blacktriangleright z : A_1 \vee A_2)}$$

[TYP-DISJ-E]

$$\frac{\Delta \vdash \mathcal{T}_x(M) \blacktriangleright x : A_1 \vee A_2 \quad \frac{\Gamma[x : A_1] \vdash \mathcal{T}_z(N_1)\{x/x_1\} \blacktriangleright z : C \quad \Gamma[x : A_2] \vdash \mathcal{T}_z(N_2)\{x/x_2\} \blacktriangleright z : C}{\Gamma[x : A_1 \vee A_2] \vdash x \triangleright \{\text{inl} : \mathcal{T}_z(N_1), \text{inr} : \mathcal{T}_z(N_2)\} \blacktriangleright z : C}}{\Gamma[\Delta] \vdash \mathcal{T}_z(\text{case } M \text{ of } \{1(x_1); N_1, 2(x_2); N_2\}) = (\mathbf{v}x)(\mathcal{T}_x(M) \mid x \triangleright \{\text{inl} : \mathcal{T}_z(N_1), \text{inr} : \mathcal{T}_z(N_2)\}) \blacktriangleright z : C}$$

[TYP-CUT]

$$\frac{\Delta \vdash \mathcal{T}_x(M) \blacktriangleright x : A \quad \Gamma[x : A] \vdash \mathcal{T}_z(N) \blacktriangleright z : C}{\Gamma[\Delta] \vdash \mathcal{T}_z(N\{M/x\}) = (\mathbf{v}x)(\mathcal{T}_x(M) \mid \mathcal{T}_z(N)) \blacktriangleright z : C}$$

F.2. OPERATION CORRESPONDENCE: PROOFS

F.2.1. COMPLETENESS

We split the proof of completeness into two parts. First, we show that if a term can reduce, then this reduction is matched by the translated process, and the resulting term and process diverge up to substitution lifting.

Lemma F.2.1 (Basic Completeness). *Given $\Delta \vdash M : A$, if $M \mapsto N$, then there exists Q such that $\mathcal{T}_z(M) \rightarrow^* Q \blacktriangleright N$.*

Proof. By induction on the derivation of $M \mapsto N$. There are six base cases:

- Rule [RED-APP-M]. We have $(\lambda x.M) N \rightarrow M\{N/x\}$. We then have

$$\begin{aligned} \mathcal{T}_z((\lambda x.M) N) &= (\mathbf{v}y)(y(x); \mathcal{T}_y(M) \mid \bar{y}[x]; (\mathcal{T}_x(N) \mid [z \leftrightarrow y])) \\ &\rightarrow (\mathbf{v}y)((\mathbf{v}x)(\mathcal{T}_x(N) \mid \mathcal{T}_y(M)) \mid [z \leftrightarrow y]) \\ &\rightarrow (\mathbf{v}x)(\mathcal{T}_x(N) \mid \mathcal{T}_z(M)) \blacktriangleright M\{N/x\}. \end{aligned}$$

- Rule [RED-APP-A]. Analogous to Rule [RED-APP-M].
- Rule [RED-PROJ-PAIR]. We have $\pi_i(M_1, M_2) \rightarrow M_i$ for $i \in \{1, 2\}$. Let $i' \in \{1, 2\} \setminus \{i\}$.

$$\begin{aligned} \mathcal{T}_z(\pi_i(M_1, M_2)) &= (\mathbf{v}x_1)(\bar{x}_1[x_2]; (\mathcal{T}_{x_2}(M_2) \mid \mathcal{T}_{x_1}(M_1)) \mid x_1(x_2); \rho[x_{i'} \mapsto \emptyset]; [z \leftrightarrow x_i]) \\ &\rightarrow (\mathbf{v}x_1)(\mathcal{T}_{x_1}(M_1) \mid (\mathbf{v}x_2)(\mathcal{T}_{x_2}(M_2) \mid \rho[x_{i'} \mapsto \emptyset]; [z \leftrightarrow x_i])) \\ &\rightarrow \rho[z \mapsto \emptyset \mid z \in \text{fv}(M_{i'})]; (\mathbf{v}x_i)(\mathcal{T}_{x_i}(M_i) \mid [z \leftrightarrow x_i]) \\ &\rightarrow \rho[z \mapsto \emptyset \mid z \in \text{fv}(M_{i'})]; \mathcal{T}_z(M_i) \\ &\blacktriangleright M_i \end{aligned}$$

- Rule [RED-LET-UNIT-M]. We have $\text{let } 0_m = 0_m \text{ in } M \rightarrow M$.

$$\begin{aligned} \mathcal{T}_z(\text{let } 0_m = 0_m \text{ in } M) &= (\mathbf{v}x)(x[] \mid x0; \mathcal{T}_z(M)) \\ &\rightarrow \mathcal{T}_z(M) \\ &\blacktriangleright M \end{aligned}$$

- Rule [RED-LET-PAIR]. We have $\text{let } \langle x, y \rangle = \langle M_1, M_2 \rangle \text{ in } N \rightarrow N\{M_1/x, M_2/y\}$.

$$\begin{aligned} \mathcal{T}_z(\text{let } \langle x, y \rangle = \langle M_1, M_2 \rangle \text{ in } N) &= (\mathbf{v}x)(\bar{x}[y]; (\mathcal{T}_y(M_2) \mid \mathcal{T}_x(M_1)) \mid x(y); \mathcal{T}_z(N)) \\ &\rightarrow (\mathbf{v}x)(\mathcal{T}_x(M_1) \mid (\mathbf{v}y)(\mathcal{T}_y(M_2) \mid \mathcal{T}_z(N))) \\ &\equiv (\mathbf{v}y)(\mathcal{T}_y(M_2) \mid (\mathbf{v}x)(\mathcal{T}_x(M_1) \mid \mathcal{T}_z(N))) \\ &\blacktriangleright N\{M_1/x, M_2/y\} \end{aligned}$$

- Rule [RED-CASE-SEL]. We have, for $i \in \{1, 2\}$, that

$$\text{case select}_i(M) \text{ of } \{1(x_1) : N_1, 2(x_2) : N_2\} \rightarrow N_i\{M/x_i\}.$$

Expanding the translation:

$$\begin{aligned} \mathcal{T}_z(\text{case select}_i(M) \text{ of } \{1(x_1) : N_1, 2(x_2) : N_2\}) \\ = (\mathbf{v}x_1)(\mathcal{T}_{x_1}(\text{select}_i(M) \mid x_1 \triangleright \{\text{inl} : \mathcal{T}_z(N_1), \text{inr} : (\mathbf{v}x_2)([x_2 \leftrightarrow x_1] \mid \mathcal{T}_z(N_2))\}) \end{aligned}$$

There are two cases for $i \in \{1, 2\}$.

- Case $i = 1$.

$$\begin{aligned} &(\mathbf{v}x_1)(\mathcal{T}_{x_1}(\text{select}_1(M) \mid x_1 \triangleright \{\text{inl} : \mathcal{T}_z(N_1), \text{inr} : (\mathbf{v}x_2)([x_2 \leftrightarrow x_1] \mid \mathcal{T}_z(N_2))\}) \\ &= (\mathbf{v}x_1)(\bar{x}_1 \triangleleft \text{inl}; \mathcal{T}_{x_1}(M) \mid x_1 \triangleright \{\text{inl} : \mathcal{T}_z(N_1), \text{inr} : (\mathbf{v}x_2)([x_2 \leftrightarrow x_1] \mid \mathcal{T}_z(N_2))\}) \\ &\rightarrow (\mathbf{v}x_1)(\mathcal{T}_{x_1}(M) \mid \mathcal{T}_z(N_1)) \\ &\blacktriangleright N_1\{M/x_1\} \end{aligned}$$

– Case $i = 2$.

$$\begin{aligned}
& (\mathbf{v}x_1)(\mathcal{T}_{x_1}(\text{select}_2(M) \mid x_1 \triangleright \{\text{inl} : \mathcal{T}_z(N_1), \text{inr} : (\mathbf{v}x_2)([x_2 \leftrightarrow x_1] \mid \mathcal{T}_z(N_2))\})) \\
&= (\mathbf{v}x_1)(\overline{x_1} \triangleleft \text{inr}; \mathcal{T}_{x_1}(M) \mid x_1 \triangleright \{\text{inl} : \mathcal{T}_z(N_1), \text{inr} : (\mathbf{v}x_2)([x_2 \leftrightarrow x_1] \mid \mathcal{T}_z(N_2))\}) \\
&\rightarrow (\mathbf{v}x_1)(\mathcal{T}_{x_1}(M) \mid (\mathbf{v}x_2)([x_2 \leftrightarrow x_1] \mid \mathcal{T}_z(N_2))) \\
&\rightarrow (\mathbf{v}x_1)(\mathcal{T}_{x_1}(M) \mid \mathcal{T}_z(N_2)\{x_1/x_2\}) \\
&\equiv (\mathbf{v}x_2)(\mathcal{T}_{x_2}(M) \mid \mathcal{T}_z(N_2)) \\
&\blacktriangleright N_2\{M/x_2\}
\end{aligned}$$

The inductive cases all concern the lifted reductions. Each case is analogous, so we only detail the arbitrarily chosen case of reduction lifting under λ -application. Assume $M \mapsto M'$. We have $M N \mapsto M' N$. By the IH, $\mathcal{T}_y(M) \rightarrow^* P \blacktriangleright M'$. Hence, assuming $M' = M''\{N_1/x_1, \dots, N_n/x_n\}$, we have $P \equiv (\mathbf{v}x_n)(\mathcal{T}_{x_n}(N_n) \mid \dots (\mathbf{v}x_1)(\mathcal{T}_{x_1}(N_1) \mid \mathcal{T}_y(M'')) \dots)$. Moreover,

$$M' N = (M''\{N_1/x_1, \dots, N_n/x_n\}) N = (M'' N)\{N_1/x_1, \dots, N_n/x_n\}.$$

We have the following:

$$\begin{aligned}
\mathcal{T}_z(M N) &= (\mathbf{v}y)(\mathcal{T}_y(M) \mid y(w); \mathcal{T}_z(N)) \\
&\rightarrow^* (\mathbf{v}y)((\mathbf{v}x_n)(\mathcal{T}_{x_n}(N_n) \mid \dots (\mathbf{v}x_1)(\mathcal{T}_{x_1}(N_1) \mid \mathcal{T}_y(M'')) \dots) \mid y(w); \mathcal{T}_z(N)) \\
&\equiv (\mathbf{v}x_n)(\mathcal{T}_{x_n}(N_n) \mid \dots (\mathbf{v}x_1)(\mathcal{T}_{x_1}(N_1) \mid (\mathbf{v}y)(\mathcal{T}_y(M'') \mid y(w); \mathcal{T}_z(N))) \dots) \\
&\blacktriangleright M' N
\end{aligned}$$

□

The statement of Lemma F.2.1 cannot be chained to form a simulation diagram, since the premise does not start with the substitution relation as in the result. The full version of completeness starts with a term and a process that are related via substitution lifting:

Theorem 7.4.3 (Completeness). *Suppose given $\Delta \vdash M : A$ and $\Delta \vdash P \blacktriangleright z : A$ such that $P \blacktriangleright M$. If $M \mapsto N$, then there exists Q such that $P \rightarrow^* Q \blacktriangleright N$.*

Proof. Since $P \blacktriangleright M$, we can write the latter as $M'\{N_1/x_1, \dots, N_n/x_n\}$. We then consider two cases, depending on whether the reduction $M \mapsto N$ already happens in M' , or whether this reduction is triggered by one of the substitutions.

In the former case we already have a reduction $M' \mapsto N'$ that is “lifted” to the reduction $M'\{N_1/x_1, \dots, N_n/x_n\} \mapsto N'\{N_1/x_1, \dots, N_n/x_n\}$. We can then appeal directly to Lemma F.2.1 to obtain a process Q such that $\mathcal{T}_z(M') \rightarrow^* Q \blacktriangleright N'$. Then,

$$\begin{aligned}
& (\mathbf{v}x_1)(\mathcal{T}_x(N_1)_1 \mid \dots (\mathbf{v}x_n)(\mathcal{T}_{x_n}(N_n) \mid \mathcal{T}_z(M')) \dots) \\
&\rightarrow^* (\mathbf{v}x_1)(\mathcal{T}_x(N_1)_1 \mid \dots (\mathbf{v}x_n)(\mathcal{T}_{x_n}(N_n) \mid Q) \dots) \blacktriangleright N'\{N_1/x_1, \dots, N_n/x_n\}.
\end{aligned}$$

In the second case, the reduction in the term is only enabled after some substitution $\{N_i/x_i\}$ is performed. The idea is to reduce this to the first case, by explicitly performing the substitution $\{N_i/x_i\}$ in the corresponding processes.

If $\{N_i/x_i\}$ is the substitution that enables the reduction $M'\{N_1/x_1, \dots, N_n/x_n\} \mapsto N$, then the variable x_i is located at a head position in the term M' . This means that in the translation,

the corresponding process $\mathcal{T}_c(x_i)$ will not occur under an input/output prefix, which will allow us to eagerly perform the substitution by using the forwarder reduction, combined with the structural congruences and [RED-SPAWN-R].

Let us demonstrate what we mean by an example. Suppose that $M = (x_1 M'')\{N_1/x_1, N_2/x_2\}$ and $N_1 = \lambda a.T$. Clearly, in this case the beta reduction is enabled only after the substitution. The corresponding substitution-lifted process can reduce as follows:

$$\begin{aligned}
& (\mathbf{v}x_2)(\mathcal{T}_{x_2}(N_2) \mid (\mathbf{v}x_1)(\mathcal{T}_{x_1}(N_1) \mid \mathcal{T}_z(x_1 M''))) \\
&= (\mathbf{v}x_2)(\mathcal{T}_{x_2}(N_2) \mid (\mathbf{v}x_1)(\mathcal{T}_{x_1}(N_1) \mid (\mathbf{v}c)(\mathcal{T}_c(x_1) \mid \bar{c}[b]; (\mathcal{T}_b(M'') \mid [z \leftarrow c]))) \\
&= (\mathbf{v}x_2)(\mathcal{T}_{x_2}(N_2) \mid (\mathbf{v}x_1)(\mathcal{T}_{x_1}(N_1) \mid (\mathbf{v}c)([c \leftarrow x_1] \mid \bar{c}[b]; (\mathcal{T}_b(M'') \mid [z \leftarrow c]))) \\
&\rightarrow (\mathbf{v}x_2)(\mathcal{T}_{x_2}(N_2) \mid (\mathbf{v}x_1)(\mathcal{T}_{x_1}(N_1) \mid \bar{x}_1[b]; (\mathcal{T}_b(M'') \mid [z \leftarrow x_1]))) \\
&= (\mathbf{v}x_2)(\mathcal{T}_{x_2}(N_2) \mid \mathcal{T}_z(N_1 M'')) \blacktriangleright (N_1 M'')\{N_2/x_2\}.
\end{aligned}$$

The forwarder reduction in that sequence corresponds to explicitly performing the substitution $\{N_1/x_1\}$. After that we get a term $(N_1 M'')\{N_2/x_2\}$ in which the reduction is enabled prior to the substitution, thus leaving us with the scenario from the case of this theorem. \square

F.2.2. SOUNDNESS

F

Theorem 7.4.5 (Soundness). *Given $\Delta \vdash P \blacktriangleright M \blacktriangleright z : A$, if $P \rightarrow^* Q$, then there exist N and R such that $M \hookrightarrow^* N$ and $Q \rightarrow^* R \blacktriangleright N$.*

Proof. By definition, $P \equiv \rho[\sigma_s]; \dots \rho[\sigma_1]; (\mathbf{v}x_n)(\mathcal{T}_{x_n}(M_n) \mid \dots (\mathbf{v}x_1)(\mathcal{T}_{x_1}(M_1) \mid \mathcal{T}_z(M')) \dots)$ where $M = M'\{M_1/x_1, \dots, M_n/x_n\}\{\bar{\sigma}_1, \dots, \bar{\sigma}_s\}$. Let us consider possible reductions of P . First, each parallel subprocess of P may reduce internally. Second, one of the subprocesses may be a forwarder, in which case a forwarder reduction is applicable. Third, one of the subprocesses may start with a spawn prefix, which can interact with the cuts. Note that no message-passing communication between the subprocesses of P is possible, as follows from the definition of the translation. We discuss each possible case:

- $\mathcal{T}_{x_i}(M_i)$ for $i \in [1, n]$ reduces internally, i.e., $\mathcal{T}_{x_i}(M_i) \rightarrow Q_i$. We apply induction on the derivation of $\Delta \vdash M : A$. Clearly, $\mathcal{T}_{x_i}(M_i) \blacktriangleright M_i$. Since the typing derivation of M_i is a sub-derivation of the typing derivation of M , the IH applies: there exist N_i and R_i such that $M_i \hookrightarrow^* N_i$ and $Q_i \rightarrow^* R_i \blacktriangleright N_i$.

Let

$$Q' \triangleq \rho[\sigma_s]; \dots \rho[\sigma_1]; (\mathbf{v}x_n)(\mathcal{T}_{x_n}(M_n) \mid \dots (\mathbf{v}x_i)(Q_i \mid \dots (\mathbf{v}x_1)(\mathcal{T}_{x_1}(M_1) \mid \mathcal{T}_z(M')) \dots) \dots);$$

we have $P \rightarrow Q'$. From Q' , all the reductions that were possible from P are still possible. However, these reductions are all independent, so we postpone all but further reductions of Q' . Let

$$R \triangleq \rho[\sigma_s]; \dots \rho[\sigma_1]; (\mathbf{v}x_n)(\mathcal{T}_{x_n}(M_n) \mid \dots (\mathbf{v}x_i)(R_i \mid \dots (\mathbf{v}x_1)(\mathcal{T}_{x_1}(M_1) \mid \mathcal{T}_z(M')) \dots) \dots);$$

we have $Q' \rightarrow^* R$.

By definition,

$$R_i \equiv \rho[\sigma'_t]; \dots \rho[\sigma'_1]; (\mathbf{v}y_m)(\mathcal{T}_{y_m}(L_n) \mid \dots (\mathbf{v}y_1)(\mathcal{T}_{y_1}(L_1) \mid \mathcal{T}_{x_i}(N'_i)) \dots),$$

where $N_i = N'_i\{L_1/y_1, \dots, L_m/y_m\}\{\tilde{\sigma}'_1, \dots, \tilde{\sigma}'_t\}$. Let

$$M_0 = M'\{M_1/x_1, \dots, N_i/x_i, \dots, M_n/x_n\};$$

we have $M \rightarrow^* M_0$. Due to the shape of R_i , which includes substitutions, weakenings, and contractions in N_i , R is not yet of a shape that we can relate to M_0 .

First, we have to move the spawn prefixes in R_i to the sequence of spawn prefixes at the beginning of R . The procedure depends on whether there are x_{i+1}, \dots, x_n that are weakened or contracted by the spawn prefixes in R_i . This is largely analogous to the latter cases of spawn prefixes commuting and interacting, so here we assume that no weakening or contraction takes place. By typability, none of the substitutions in N_i touch the variable x_i , so we can commute the cuts in R_i past the cut on x_i in R . Let

$$\begin{aligned} R' \triangleq & \rho[\sigma_s]; \dots \rho[\sigma_1]; \rho[\sigma'_t]; \dots \rho[\sigma'_1]; \\ & (\mathbf{v}x_n)(\mathcal{T}_{x_n}(M_n) \mid \dots (\mathbf{v}y_m)(\mathcal{T}_{y_m}(L_m) \mid \dots (\mathbf{v}y_1)(\mathcal{T}_{y_1}(L_1) \mid (\mathbf{v}x_i)(\mathcal{T}_{x_i}(N'_i) \\ & \mid \dots (\mathbf{v}x_1)(\mathcal{T}_{x_1}(M_1) \mid \mathcal{T}_z(M')) \dots) \dots) \dots) \end{aligned}$$

We have $R \rightarrow^* R'$. Moreover,

$$M_0 = M'\{M_1/x_1, \dots, N'_i/x_i, L_1/y_1, \dots, L_m/y_m, \dots, M_n/x_n\}\{\tilde{\sigma}'_1, \dots, \tilde{\sigma}'_s, \tilde{\sigma}'_1, \dots, \tilde{\sigma}'_t\},$$

and thus $R' \triangleright M_0$. This proves the thesis.

- $\mathcal{T}_z(M')$ reduces internally. We apply induction on the derivation of $\Delta \vdash M : A$ (IH₁); there is a case per typing rule, although not all cases may yield a reduction in P . In each case, we additionally apply induction on the number k of reductions from P to Q (IH₂), i.e., $P \rightarrow^k Q$. Depending on the shape of P , and relying on the independence of reductions, we then isolate k' reductions $P \rightarrow^{k'} Q'$ such that $Q' \triangleright N'$ and $M \rightarrow N'$ (where k' may be different in each case). We then have $Q' \rightarrow^{k-k'} Q$, so it follows from IH₂ that $N' \rightarrow^* N$ and $Q' \rightarrow^* R$ such that $R \triangleright N$.

Note that applications of IH₁ yield processes with spawn prefixes that need to be commuted past cuts to bring them to the front of the process, while some of them apply weakening or contraction when meeting certain cuts. We explain such procedures in the latter cases of this proof, so here we assume that IH₁ yields processes without spawn prefixes.

- Rule [TYP-ID]. We have $M' = y$ and $\mathcal{T}_z(M') = [z \leftrightarrow y]$; no reductions are possible.
- Rule [TYP-CONG]. The thesis follows from IH₁ directly.

- Rule [TYP-WEAKEN]. We have $\mathcal{T}_z(M') = \rho[x \mapsto \emptyset \mid x \in \text{fv}(\Delta')]; \mathcal{T}_z(M')$. There is only one possibility of reduction:

$$\rho[x \mapsto \emptyset \mid x \in \text{fv}(\Delta')]; \mathcal{T}_z(M') \rightarrow \rho[x \mapsto \emptyset \mid x \in \text{fv}(\Delta')]; Q'$$

By IH₁, there exist L and R' such that $M' \mapsto^* L$ and $Q' \rightarrow^* R' \blacktriangleright L$. Then

$$R' \equiv (\mathbf{v}y_m)(\mathcal{T}_{y_m}(L_m) \mid \dots (\mathbf{v}y_1)(\mathcal{T}_{y_1}(L_1) \mid \mathcal{T}_z(L')) \dots)$$

and $L' = L'\{L_1/y_1, \dots, L_m/y_m\}$.

Let $R_0 \triangleq (\mathbf{v}x_n)(\mathcal{T}_{x_n}(M_n) \mid \dots (\mathbf{v}x_1)(\mathcal{T}_{x_1}(M_1) \mid \rho[x \mapsto \emptyset \mid x \in \text{fv}(\Delta')]; R'))$; we have $P \rightarrow^* R_0$. Also, let $M_0 \triangleq L'\{L_1/y_1, \dots, L_m/y_m, M_1/x_1, \dots, M_n/x_n\}$; we have $M \mapsto^* M_0$.

At this point, R_0 is not of appropriate shape to relate it to M_0 through substitution lifting, because the weakening spawn prefix is in the middle of the substitutions. There are two possibilities for reduction here: the spawn interacts with one of the cuts on x_i , or the spawn commutes past them all. The former is analogous to the case of a spawn prefix in $\mathcal{T}_z(M')$ interacting with a cut, which follows the current case. In the latter case, let

$$R \triangleq \rho[x \mapsto \emptyset \mid x \in \text{fv}(\Delta')]; (\mathbf{v}x_n)(\mathcal{T}_{x_n}(M_n) \mid \dots (\mathbf{v}x_1)(\mathcal{T}_{x_1}(M_1) \mid R')).$$

Now, $R_0 \rightarrow^* R$ and $R \blacktriangleright M_0$, proving the thesis.

- Rule [TYP-CONTRACT]. Analogous to Rule [TYP-WEAKEN].
- Rule [TYP-WAND-I]. We have $M' = \lambda x.M''$ and $\mathcal{T}_z(M') = z(x); \mathcal{T}_z(M'')$; no reductions are possible.
- Rule [TYP-IMPL-I]. Analogous to Rule [TYP-WAND-I].
- Rule [TYP-WAND-E]. We have $M' = L_1 L_2$ and

$$\mathcal{T}_z(M') = (\mathbf{v}x)(\mathcal{T}_x(L_1) \mid \bar{x}[y]; (\mathcal{T}_y(L_2) \mid [z \leftrightarrow x])).$$

There are three possible reductions: $\mathcal{T}_x(L_1)$ reduces internally, $\mathcal{T}_x(L_1)$ is prefixed by a spawn which commutes past the restriction on x , or the output on x synchronizes with an input on x in $\mathcal{T}_x(L_1)$.

- ◊ $\mathcal{T}_x(L_1)$ reduces internally, i.e., $\mathcal{T}_x(L_1) \rightarrow Q'$. By IH₁, there exist N and R' such that $L_1 \mapsto^* N$ and $Q' \rightarrow^* R' \blacktriangleright N$. Then

$$R' \equiv (\mathbf{v}y_m)(\mathcal{T}_{y_m}(N_m) \mid \dots (\mathbf{v}y_1)(\mathcal{T}_{y_1}(N_1) \mid \mathcal{T}_x(N')) \dots)$$

and $N = N'\{N_1/y_1, \dots, N_m/y_m\}$. Let

$$R_0 \triangleq (\mathbf{v}x_n)(\mathcal{T}_{x_n}(M_n) \mid \dots (\mathbf{v}x_1)(\mathcal{T}_{x_1}(M_1) \mid (\mathbf{v}x)(R' \mid \bar{x}[y]; (\mathcal{T}_y(L_2) \mid [z \leftrightarrow x]))) \dots);$$

we have $P \rightarrow^* R_0$. Also, let

$$\begin{aligned} M_0 &\triangleq (N'\{N_1/y_1, \dots, N_m/y_m\} L_2)\{M_1/x_1, \dots, M_n/x_n\} \\ &= (N' L_2)\{N_1/y_1, \dots, N_m/y_m, M_1/x_1, \dots, M_n/x_n\} \end{aligned}$$

we have $M \mapsto^* M_0$. We have

$$R_0 \equiv (\mathbf{v}x_n)(\mathcal{T}_{x_n}(M_n) \mid \dots (\mathbf{v}x_1)(\mathcal{T}_{x_1}(M_1) \mid (\mathbf{v}y_m)(\mathcal{T}_{y_m}(N_m) \mid \dots (\mathbf{v}y_1)(\mathcal{T}_{y_1}(N_1) \mid (\mathbf{v}x)(\mathcal{T}_x(N') \mid \bar{x}[y]; (\mathcal{T}_y(L_2) \mid [z \leftrightarrow x]))) \dots)) \dots),$$

so $R_0 \blacktriangleright M_0$. This proves the thesis.

- ◇ $\mathcal{T}_x(L_1)$ is prefixed by a spawn which commutes past the restriction on x . This case is analogous to the case of a spawn prefix in $\mathcal{T}_x(M')$ commuting past cuts, which follows the current case.
- ◇ The output on x synchronizes with an input on x in $\mathcal{T}_x(L_1)$. By typability, then $L_1 = \lambda y.L'_1$ and $\mathcal{T}_x(L_1) = x(y); \mathcal{T}_x(L'_1)$. Let

$$Q'_0 \triangleq (\mathbf{v}x)((\mathbf{v}y)(\mathcal{T}_y(L_2) \mid \mathcal{T}_x(L'_1)) \mid [z \leftrightarrow x]).$$

Then $\mathcal{T}_x(M') \rightarrow Q'_0$.

From Q'_0 , there may be similar reductions as from $\mathcal{T}_x(M')$, with an additional forwarder reduction possible. All of these reductions are independent, so we postpone all but the forwarder reduction. Let $Q'_1 \triangleq (\mathbf{v}y)(\mathcal{T}_y(L_2) \mid \mathcal{T}_z(L'_1))$. Then $Q'_0 \rightarrow Q'_1$.

Let $Q' \triangleq (\mathbf{v}x_n)(\mathcal{T}_{x_n}(M_n) \mid \dots (\mathbf{v}x_1)(\mathcal{T}_{x_1}(M_1) \mid Q'_1))$; we have $P \rightarrow^2 Q'$. Also, let $M_0 \triangleq M'_1\{L_2/y, M_1/x_1, \dots, M_n/x_n\}$; we have $M \mapsto M_0$. Since $Q' \rightarrow^{k-2} Q$, the thesis then follows from IH₂.

- Rule [TYP-IMPL-E]. Analogous to Rule [TYP-WAND-E].
- Rule [TYP-EMP-I]. We have $M' = ()_m$ and $\mathcal{T}_z(M') = z[]$; no reductions are possible.
- Rule [TYP-TRUE-I]. Analogous to Rule [TYP-EMP-I].
- Rule [TYP-EMP-E]. We have $M' = \text{let } ()_m = L_1 \text{ in } L_2$ and

$$\mathcal{T}_z(M') = (\mathbf{v}x)(\mathcal{T}_x(L_1) \mid x(); \mathcal{T}_z(L_2)).$$

There are three possible reductions: $\mathcal{T}_x(L_1)$ reduces internally, $\mathcal{T}_x(L_2)$ is prefixed by a spawn which commutes past the restriction on x , or the empty input on x synchronizes with an empty output on x in $\mathcal{T}_x(L_1)$. The former two sub-cases are analogous to the similar sub-cases in Rule [TYP-WAND-E]. In the latter case, by typability, we have $L_1 = ()_m$ and $\mathcal{T}_x(L_1) = x[]$.

Let $Q_0 \triangleq \mathcal{T}_z(L_2)$; we have $\mathcal{T}_z(M') \rightarrow Q_0$. Let

$$Q' \triangleq (\mathbf{v}x_n)(\mathcal{T}_{x_n}(M_n) \mid \dots (\mathbf{v}x_1)(\mathcal{T}_{x_1}(M_1) \mid Q_0) \dots);$$

we have $P \rightarrow Q'$.

Let $M_0 \triangleq L_2\{M_1/x_1, \dots, M_n/x_n\}$; we have $M \mapsto M_0$ and $Q' \blacktriangleright M_0$. Since $Q' \rightarrow^{k-1} Q$, the thesis follows from IH₂.

- Rule [TYP-TRUE-E]. Analogous to Rule [TYP-EMP-E].

- Rule [TYP-SEP-I]. We have $M' = \langle L_1, L_2 \rangle$ and $\mathcal{T}_z(M') = \bar{z}[y]; (\mathcal{T}_y(L_1) \mid \mathcal{T}_z(L_2))$; no reductions are possible.
- Rule [TYP-CONJ-I]. Analogous to Rule [TYP-SEP-I].
- Rule [TYP-SEP-E]. We have $M' = \mathbf{1et} \langle x, y \rangle = L_1 \mathbf{in} L_2$ and

$$\mathcal{T}_z(M') = (\mathbf{v}y)(\mathcal{T}_y(L_1) \mid y(x); \mathcal{T}_z(L_2)).$$

There are three possible reductions: $\mathcal{T}_y(L_1)$ reduces internally, $\mathcal{T}_y(L_1)$ is prefixed by a spawn which commutes past the restriction on y , or the input on y synchronizes with an output on y in $\mathcal{T}_y(L_1)$. The former two sub-cases are analogous to the similar sub-cases in Rule [TYP-WAND-E]. In the latter case, by typability, we have $L_1 = \langle K_1, K_2 \rangle$ and $\mathcal{T}_y(L_1) = \bar{y}[x]; (\mathcal{T}_x(K_1) \mid \mathcal{T}_y(K_2))$.

Let $Q_0 \triangleq (\mathbf{v}y)(\mathcal{T}_y(K_2) \mid (\mathbf{v}x)(\mathcal{T}_x(K_1) \mid \mathcal{T}_z(L_2)))$; we have $\mathcal{T}_z(M') \rightarrow Q_0$. Let

$$Q' \triangleq (\mathbf{v}x_n)(\mathcal{T}_{x_n}(M_n) \mid \dots \mid (\mathbf{v}x_1)(\mathcal{T}_{x_1}(M_1) \mid Q_0) \dots);$$

we have $P \rightarrow Q'$.

Let $M_0 \triangleq L_2 \{K_1 / x, K_2 / y, M_1 / x_1, \dots, M_n / x_n\}$; we have $M \mapsto M_0$ and $Q' \blacktriangleright M_0$. Since $Q' \rightarrow^{k-1} Q$, the thesis follows from IH₂.

- Rule [TYP-CONJ-E]. We have $M' = \pi_i L$ and

$$\mathcal{T}_z(M') = (\mathbf{v}x_2)(\mathcal{T}_{x_2}(L) \mid x_2(x_1); \rho[x_{i'} \mapsto \emptyset]; [z \leftrightarrow x_i])$$

for $i \in \{1, 2\}$ and $i' \in \{1, 2\} \setminus \{i\}$. W.l.o.g., let $i = 1$ and $i' = 2$. There are three possible reductions: $\mathcal{T}_{x_2}(L)$ reduces internally, $\mathcal{T}_{x_2}(L)$ is prefixed by a spawn which commutes past the restriction on x_2 , or the input on x_2 synchronizes with an output on x_2 in $\mathcal{T}_{x_2}(L)$. The former two sub-cases are analogous to the similar sub-cases in Rule [TYP-WAND-E].

In the latter case, by typability, we have $L = (L_1, L_2)$ and

$$\mathcal{T}_{x_2}(L) = \bar{x}_2[x_1]; (\mathcal{T}_{x_1}(L_1) \mid \mathcal{T}_{x_2}(L_2)).$$

Let $Q_0 = (\mathbf{v}x_2)(\mathcal{T}_{x_2}(L_2) \mid (\mathbf{v}x_1)(\mathcal{T}_{x_1}(L_1) \mid \rho[x_2 \mapsto \emptyset]; [z \leftrightarrow x_1]))$; we have $\mathcal{T}_z(M') \rightarrow Q_0$. From Q_0 , there may be internal reductions of $\mathcal{T}_{x_2}(L_2)$ or $\mathcal{T}_{x_1}(L_1)$, a spawn prefix in $\mathcal{T}_{x_2}(L_2)$ may commute past the restriction on x_2 , a spawn prefix in $\mathcal{T}_{x_1}(L_1)$ may commute past the restrictions on x_1 and x_2 , and the spawn prefix $\rho[x_2 \mapsto \emptyset]$ may commute past the restriction on x_1 . All these reductions are independent, so we postpone all but the commute of the spawn prefix $\rho[x_2 \mapsto \emptyset]$. Let

$$Q_1 \triangleq (\mathbf{v}x_2)(\mathcal{T}_{x_2}(L_2) \mid \rho[x_2 \mapsto \emptyset]; (\mathbf{v}x_1)(\mathcal{T}_{x_1}(L_1) \mid [z \leftrightarrow x_1]));$$

we have $Q_0 \rightarrow Q_1$.

From Q_1 we have the same possible reductions as from Q_0 , except that there may also be weakening of x_2 due to the spawn prefix $\rho[x_2 \mapsto \emptyset]$ interacting with the restriction on x_2 . Again, we postpone all but the latter reduction. Let

$$Q_2 \triangleq \rho[y \mapsto \emptyset \mid y \in \text{fv}(L_2)]; (\mathbf{v}x_1)(\mathcal{T}_{x_1}(L_1) \mid [z \leftrightarrow x_1]);$$

we have $Q_1 \rightarrow Q_2$.

From Q_2 , we again have the reductions that were available from Q_1 , but also the reduction of the forwarder $[z \leftrightarrow x_1]$. We postpone all but the latter. Let

$$Q_3 \triangleq \rho[y \mapsto \emptyset \mid y \in \text{fv}(L_2)]; \mathcal{T}_z(L_1);$$

we have $Q_2 \rightarrow Q_3$.

Let $Q'_0 \triangleq (\mathbf{v}x_n)(\mathcal{T}_{x_n}(M_n) \mid \dots \mid (\mathbf{v}x_1)(\mathcal{T}_{x_1}(M_1) \mid Q_3) \dots)$; we have $P \rightarrow^4 Q'_0$. Also, let $M_0 \triangleq L_1\{M_1/x_1, \dots, M_n/x_n\}$, where the resources used by L_2 have been weakened. At this point, Q'_0 is not of appropriate shape to relate it to M_0 through substitution lifting, because of the spawn prefix in Q_3 . There are two possibilities for reduction here: the spawn interacts with one of the cuts on x_i , or the spawn commutes past them all. The former is analogous to the case of a spawn prefix in $\mathcal{T}_z(M')$ interacting with a cut, which follows the current case. In the latter case, let

$$Q' \triangleq \rho[y \mapsto \emptyset \mid y \in \text{fv}(L_2)]; (\mathbf{v}x_n)(\mathcal{T}_{x_n}(M_n) \mid \dots \mid (\mathbf{v}x_1)(\mathcal{T}_{x_1}(M_1) \mid \mathcal{T}_z(L_1)) \dots).$$

Now $Q'_0 \rightarrow^n Q'$ and $Q' \blacktriangleright M_0$.

Since $Q' \rightarrow^{k-4-n} Q$, the thesis follows from IH₂.

- Rule [TYP-DISJ-I]. We have $M' = \text{select}_i(N)$ for $i \in \{1, 2\}$. Depending on the value of i , $\mathcal{T}_z(M')$ is either $\bar{z} \triangleleft \text{inl}; \mathcal{T}_z(N)$ or $\bar{z} \triangleleft \text{inr}; \mathcal{T}_z(N)$. Either way, no reductions are possible.
- Rule [TYP-DISJ-E]. We have

$$\begin{aligned} M' &= \text{case } N \text{ of } \{1(y_1) : L_1, 2(y_2) : L_2\} \\ \mathcal{T}_z(M') &= (\mathbf{v}y_1)(\mathcal{T}_{y_1}(N) \mid y_1 \triangleright \{\text{inl} : \mathcal{T}_z(L_1), \text{inr} : (\mathbf{v}y_2)([y_2 \leftrightarrow y_1] \mid \mathcal{T}_z(L_2))\}). \end{aligned}$$

There are three possible reductions: $\mathcal{T}_{y_1}(N)$ reduces, $\mathcal{T}_{y_1}(N)$ is prefixed by a spawn which commutes past the restriction on y_1 , or the case on y_1 synchronizes with a select on y_1 in $\mathcal{T}_{y_1}(N)$. The former two sub-cases are analogous to the similar sub-cases in Rule [TYP-WAND-E].

In the latter case, by typability, we have $N = \text{select}_i(N')$ for $i \in \{1, 2\}$. The rest of the analysis depends on the value of i :

- ◊ Case $i = 1$. We have $\mathcal{T}_{y_1}(N) = \bar{y}_1 \triangleleft \text{inl}; \mathcal{T}_{y_1}(N')$. Let $Q_0 \triangleq (\mathbf{v}y_1)(\mathcal{T}_{y_1}(N') \mid \mathcal{T}_z(L_1))$; we have $\mathcal{T}_z(M') \rightarrow Q_0$. Let $Q' \triangleq (\mathbf{v}x_n)(\mathcal{T}_{x_n}(M_n) \mid \dots \mid (\mathbf{v}x_1)(\mathcal{T}_{x_1}(M_1) \mid Q_0))$; we have $P \rightarrow Q'$. Also, let $M_0 \triangleq L_1\{N'/y_1, M_1/x_1, \dots, M_n/x_n\}$; we have $M \mapsto M_0$. Moreover, $Q' \blacktriangleright M_0$. Since $Q' \rightarrow^{k-1} Q$, the thesis follows from IH₂.
- ◊ Case $i = 2$. We have $\mathcal{T}_{y_1}(N) = \bar{y}_1 \triangleleft \text{inr}; \mathcal{T}_{y_1}(N')$. Let

$$Q_0 \triangleq (\mathbf{v}y_1)(\mathcal{T}_{y_1}(N') \mid (\mathbf{v}y_2)([y_2 \leftrightarrow y_1] \mid \mathcal{T}_z(L_2)))$$

for which we have $\mathcal{T}_z(M') \rightarrow Q_0$.

From Q_0 several reductions are possible: $\mathcal{T}_{y_1}(N')$ or $\mathcal{T}_z(L_2)$ reduce internally, a spawn prefix in $\mathcal{T}_{y_1}(N')$ commutes past the restriction on y_1 , a spawn

prefix in $\mathcal{T}_z(L_2)$ commutes past or interacts with the restriction on y_2 , or the forwarder $[y_2 \leftrightarrow y_1]$ interacts with the restriction on y_1 . These reductions are independent, so we postpone all but the forwarder reduction. Let

$$Q_1 \triangleq (\mathbf{v}y_2)(\mathcal{T}_{y_2}(N') | \mathcal{T}_z(L_2));$$

we have $Q_0 \rightarrow Q_1$.

Let $Q' \triangleq (\mathbf{v}x_n)(\mathcal{T}_{x_n}(M_n) | \dots (\mathbf{v}x_1)(\mathcal{T}_{x_1}(M_1) | Q_1) \dots)$; we have $P \rightarrow^2 Q'$. Also, let $M_0 \triangleq L_2\{N'/y_2, M_1/x_1, \dots, M_n/x_n\}$; we have $M \rightarrow M_0$. Moreover, $Q' \blacktriangleright M_0$. Since $Q' \rightarrow^{k-2} Q$, the thesis follows from IH₂.

- A forwarder in $\mathcal{T}_{x_i}(M_i)$ for $i \in [1, n]$ interacts with a cut. We apply induction on the number k of reductions from P to Q , i.e., $P \rightarrow^k Q$.

We have $\mathcal{T}_{x_i}(M_i) = [x_i \leftrightarrow y]$ for some y . Hence, $M_i = y$. Let

$$Q' \triangleq (\mathbf{v}x_n)(\mathcal{T}_{x_n}(M_n) | \dots (\mathbf{v}x_1)(\mathcal{T}_{x_1}(M_1) | \mathcal{T}_z(M'\{y/x_i\})) \dots)$$

without the cut on x_i . Since $\mathcal{T}_z(M'\{y/x_i\}) = \mathcal{T}_z(M'\{y/x_i\})$, we have $P \rightarrow Q'$. By typability, none of the M_1, \dots, M_{i-1} can contain the variable y , so we have

$$M'\{M_1/x_1, \dots, y/x_i, \dots, M_n/x_n\} = (M'\{y/x_i\})\{M_1/x_1, \dots, M_n/x_n\}$$

where the latter substitutions do not contain the substitution on x_i . Hence, $Q' \blacktriangleright M$. Since $Q' \rightarrow^{k-1} Q$, by the IH, there exist N and R such that $M \rightarrow^* N$ and $Q' \rightarrow^* R \blacktriangleright N$. This proves the thesis.

- A forwarder in $\mathcal{T}_z(M')$ interacts with a cut. We apply induction on the number k of reductions from P to Q , i.e., $P \rightarrow^k Q$.

We have $\mathcal{T}_z(M') = [z \leftrightarrow y]$ for some y and there exist $i \in [1, n]$ such that $x_i = y$. Hence, $M' = y$ and $M = y\{M_1/x_1, \dots, M_i/y, \dots, M_n/x_n\}$. Let

$$Q' \triangleq (\mathbf{v}x_n)(\mathcal{T}_{x_n}(M_n) | \dots (\mathbf{v}x_1)(\mathcal{T}_{x_1}(M_1) | \mathcal{T}_z(M_i)) \dots).$$

Since $\mathcal{T}_y(M_i)\{z/y\} = \mathcal{T}_z(M_i)$, we have $P \rightarrow Q'$. By typability, none of the M_1, \dots, M_{i-1} can contain the variable y , so we have

$$y\{M_1/x_1, \dots, M_i/y, \dots, M_n/x_n\} = M_i\{M_1/x_1, \dots, M_n/x_n\}$$

where the latter substitutions do not contain the substitution on x_i . Hence, $Q' \blacktriangleright M$. Since $Q' \rightarrow^{k-1} Q$, by the IH, there exist N and R such that $M \rightarrow^* N$ and $Q' \rightarrow^* R \blacktriangleright N$. This proves the thesis.

- A spawn prefix in $\mathcal{T}_z(M')$ commutes past or interacts with a cut. We apply induction on the number k of reductions from P to Q , i.e., $P \rightarrow^k Q$. The last applied rule in the typing derivation of $\mathcal{T}_z(M')$ is Rule [TYP-WEAKEN] or Rule [TYP-CONTRACT]; the rest of the analysis depends on which:

- Rule [TYP-WEAKEN]. The rule weakens the variables y_1, \dots, y_m . This case follows by commuting the spawn prefix past cuts on $x_i \notin \{y_1, \dots, y_m\}$ and performing the weakening when the spawn prefix meets cuts on $x_i \in \{y_1, \dots, y_m\}$. Other reductions that were possible from P remain possible throughout this process, but they are independent of these reductions, so we can postpone them. After k' steps of reduction, we reach from P a process Q' with the spawn commuted to the top of the process, and some cuts removed. The cuts that were removed concern substitutions of weakened variables, so removing these substitutions from M makes no difference. Similarly, the cuts that were commuted past concern substitutions that are independent of the weakening. Hence, $Q' \triangleright M$. Since $M \xrightarrow{*} M$ and $Q' \xrightarrow{k-k'} Q$, the thesis follows from the IH.
- Rule [TYP-CONTRACT]. This case is largely analogous to the case of Rule [TYP-WEAKEN], except that interactions of the spawn with cuts duplicates the cuts, and commuting past cuts moves the substitutions related to the contraction towards the end of the list of substitutions applied in M .
- A spawn prefix in $\mathcal{T}_{x_i}(M_i)$ for $i \in [1, n]$ commutes past a cut. This case is largely analogous to the previous case: first, the spawn can always commute past the cut on x_i , after which it may commute further or interact with cuts. \square

G

PROOFS FOR CHAPTER 9

This appendix details proofs of the results in Chapter 9.

G.1. PROOFS FOR SECTION 9.4.3

The following result is important: it shows that the type system of APCP is complete with respect to types, i.e., every syntactical type has a well-typed process.

Proposition G.1.1. *Given a type A , there exists $\Omega \vdash P \blacktriangleright x : A$.*

Proof (Sketch). By constructing P from the structure of A . To this end, we define characteristic processes: a function $\text{char}^x(A)$ that constructs a process that performs the behavior described by A on the name x .

$$\begin{aligned} \text{char}^x(A \otimes B) &\triangleq \bar{x}[y] \cdot (\text{char}^y(A) \mid \text{char}^x(B)) & \text{char}^x(\bullet) &\triangleq \mathbf{0} \\ \text{char}^x(A \wp B) &\triangleq x(y); (\text{char}^y(A) \mid \text{char}^x(B)) & \text{char}^x(\mu X.A) &\triangleq \mu X(x); \text{char}^x(A) \\ \text{char}^x(\oplus \{i : A_i\}_{i \in I}) &\triangleq \bar{x} \triangleleft j \cdot \text{char}^x(A_j) \text{ (any } j \in I) & \text{char}^x(X) &\triangleq X \langle x \rangle \\ \text{char}^x(\& \{i : A_i\}_{i \in I}) &\triangleq x \triangleright \{i : \text{char}^x(A_i)\}_{i \in I} \end{aligned}$$

For finite types, it is obvious that $\emptyset \vdash \text{char}^x(A) \blacktriangleright x : A$. For simplicity, we omit details about recursive types, which require unfolding. For closed, recursive types, the thesis is obvious as well: $\emptyset \vdash \text{char}^x(\mu X.A) \blacktriangleright x : \mu X.A$. \square

Proposition 9.4.13. *For any closed, relative well-formed global type G , there exists at least one completable network $\mathcal{N} \in \text{net}(G)$.*

Proof. To construct a completable network in $\text{net}(G)$, we construct a routed implementation (Definition 9.4.9) for every $p \in \text{part}(G)$. Given a $p \in \text{part}(G)$, by Proposition G.1.1, there exists $\emptyset \vdash Q \blacktriangleright p_\mu : (G \upharpoonright^0 p)$. Composing each such characteristic implementation process with routers, and then composing the routed implementations, we obtain a network $\mathcal{N} \in \text{net}(G)$, where $\emptyset \vdash \mathcal{N} \blacktriangleright \emptyset$. Hence, \mathcal{N} is completable. \square

G.1.1. PROOFS FOR SECTION 9.4.3.1

Considering the refinement of Algorithm 3 with alarm processes, we prove Theorem G.1.14 on Page 384, from which Theorem 9.4.14 follows as a corollary. It relies on some additional auxiliary definitions and results.

- To type the router for a participant at any point in the protocol, we need the definition of the entire protocol. It is not enough to only consider the current (partial) protocol at such points: we need information about bound recursion variables in order to perform unfolding in types. To this end, Definition G.1.2 defines *global contexts*, that allow us to look at part of a protocol while retaining definitions that concern the entire protocol.

As mentioned before, a context captures information about the recursion variables that are bound at any given point in a global type. Our goal is to obtain a *context-based* typability result for routers.

- The order in which recursive variables are bound is important to correctly unfold types, as illustrated by Example G.1.3. To account for nested recursions, Definition G.1.4 gives the bound variables of a context exactly in the order in which they appear.
- Definition G.1.5 retrieves the body of a recursive definition from a global context, informing us on how to unfold types.
- When unfolding bound recursion variables, we need the priorities of the unfolded types. Definition G.1.6 gives a priority that is expected at the hole in a context, as well as the priority expected at any recursive definition in a global type:

G

- To avoid non-contractive recursive types, relative projection (cf. Algorithm 2) closes a type when the participants do not interact inside a recursive definition. Hence, when typing a router for a recursive definition, we must determine which pairs of participants are “active” at any given point in a protocol, and close the connections with the “inactive” participants. See Example G.1.7 for an illustration.

Definition G.1.8 uses relative projection to determine the pairs of active participants at the hole of a context, as well as at any recursive definition in a global type. We consider pairs of participants (p, q) and (q, p) to be equivalent.

- When typing a router for a given protocol, we have to keep track of assignments in the recursive context at any point in the protocol. Lemmas G.1.9 and G.1.10 ensure that the active participants of recursive definitions are consistent with the active participants of their bodies. Lemma G.1.10 then ensures that when typing a recursive call, the endpoints given as context for the recursive call concur with the endpoints in the recursive context.
- Our typability result for routers relies on relative and local projection. Hence, we need to guarantee that all the projections we need at any given point of a protocol are defined. Proposition G.1.11 shows a form of compositionality for relative and local projection, guaranteeing the definedness of projections for all active participants of a given context:

- Recall Example G.1.3, where nested recursive definitions in a protocol require nested unfolding of recursive types. Definition G.1.12 gives us a concise way of writing such nested (or *deep*) unfoldings:
- When typing a router's recursive call, the types of the router's endpoints are unfoldings of the types in the recursive context. However, because of the deep unfolding in types, this is far from obvious. Proposition G.1.13 connects a particular form of deep unfolding with regular unfolding.
- Armed with these definitions and results, Theorem G.1.14 states our context-based typability result for routers.
- Finally, we repeat and prove Theorem 9.4.14 as a corollary of Theorem G.1.14, on Page 395.

Definition G.1.2 (Global Contexts). Global contexts \mathcal{C} are given by the following grammar:

$$\mathcal{C} \triangleq p!q(\{i\langle S \rangle.G\}_{i \in I} \cup \{i'\langle S' \rangle.C\}_{i' \notin I} \mid \text{skip}.C \mid \mu X.C \mid [\cdot])$$

We often simply write “context” when it is clear that we are referring to a global context. Given a context \mathcal{C} and a global type G , we write $\mathcal{C}[G]$ to denote the global type obtained by replacing the hole $[\cdot]$ in \mathcal{C} with G . If $G = \mathcal{C}[G_s]$ for some context \mathcal{C} and global type G_s , then we write $G_s \leq_{\mathcal{C}} G$.

Example G.1.3. Consider the following global type with three nested recursive definitions:

$$G_{\text{rec}} = \mu X.a!b(1).\mu Y.a!b(2).\mu Z.a!b\{x: X, y: Y, z: Z\}$$

To type the router for, e.g., a at the final exchange between a and b , we need to be aware of the unfolding of recursion. The recursion on X , Y , and Z have all to be unfolded, and the recursion on Z must include first the unfolding of X and then the unfolding of Y , which must in turn include the prior unfolding of X . ▽

Definition G.1.4 (Recursion Binders of Contexts). Given a global context \mathcal{C} , the sequence of recursion binders to the hole of \mathcal{C} , denoted $\text{ctxBind}(\mathcal{C})$, is defined as follows:

$$\begin{aligned} \text{ctxBind}(\mu X.C) &\triangleq (X, \text{ctxBind}(C)) & \text{ctxBind}(\text{skip}.C) &\triangleq \text{ctxBind}(C) & \text{ctxBind}([\cdot]) &\triangleq () \\ \text{ctxBind}(p!q(\{i\langle S_i \rangle.G_i\}_{i \in I} \cup \{i'\langle S_{i'} \rangle.C\}_{i' \notin I})) &\triangleq \text{ctxBind}(C) \end{aligned}$$

Given $G_s \leq_{\mathcal{C}} G$, the sequence of recursion binders of G_s , denoted $\text{subBind}(G_s, G)$, is defined as $\text{ctxBind}(C)$.

Definition G.1.5 (Recursion Extraction). The function $\text{recDef}(X, G)$ extracts the recursive definition on X from G : $\text{recDef}(X, G) = G'$ if $\mu X.G' \leq_{\mathcal{C}} G$ for some context \mathcal{C} . Also, $\text{recCtx}(X, G)$ extracts the context of the recursive definition on X in G : $\text{recCtx}(X, G) = \mathcal{C}$ if $\mu X.\text{recDef}(X, G) \leq_{\mathcal{C}} G$.

Definition G.1.6 (Absolute Priorities of Contexts). *Given a context C and $\circ \in \mathbb{N}$, we define $\text{ctxPri}^\circ(C)$ as follows:*

$$\begin{aligned} \text{ctxPri}^\circ([\cdot]) &\triangleq \circ & \text{ctxPri}^\circ(\text{skip}.C) &\triangleq \text{ctxPri}^{\circ+4}(C) & \text{ctxPri}^\circ(\mu X.C) &\triangleq \text{ctxPri}^\circ(C) \\ \text{ctxPri}^\circ(p!q(\{i\langle S_i \rangle.G_i\}_{i \in I} \cup \{i'\langle S_{i'} \rangle.C\}_{i' \notin I})) &\triangleq \text{ctxPri}^{\circ+4}(C) \end{aligned}$$

Then, the absolute priority of C , denoted $\text{ctxPri}(C)$, is defined as $\text{ctxPri}^0(C)$. The absolute priority of X in G , denoted $\text{varPri}(X, G)$, is defined as $\text{ctxPri}(C)$ for some context C such that $\mu X.\text{recDef}(X, G) \leq_C G$.

Example G.1.7. Consider the following global type, where a client (c) requests two independent, infinite Fibonacci sequences (f_1 and f_2):

$$G_{\text{fib}} \triangleq c!f_1(\text{init}(\text{int} \times \text{int})).c!f_2(\text{init}(\text{int} \times \text{int})).\underbrace{\mu X.f_1!c(\text{next}(\text{int})).f_2!c(\text{next}(\text{int})).X}_{G'_{\text{fib}}}$$

Participants f_1 and f_2 do not interact with each other in the body of the recursion, as formalized by their relative projection:

$$\text{recDef}(X, G_{\text{fib}}) \rangle (f_1, f_2) = \text{skip}^2.X$$

Hence, $G'_{\text{fib}} \rangle (f_1, f_2) = \text{end}$, and f_1 and f_2 do not form an active pair of participants for the recursion in G_{fib} . Therefore, f_1 's router closes its connection with f_2 's router at the start of the recursion on X , and vice versa. ∇

Definition G.1.8 (Active Participants). *Suppose given a relative well-formed global type G . The following mutually defined functions compute sets of pairs of active participants for recursive definitions and contexts, denoted $\text{recActive}(X, G)$ and $\text{active}(C, G)$, respectively.*

$$\begin{aligned} \text{recActive}(X, G) &\triangleq \{(p, q) \in \text{active}(\text{recCtx}(X, G), G) \mid (\mu X.\text{recDef}(X, G)) \rangle (p, q) \neq \text{end}\} \\ \text{active}(C, G) &\triangleq \begin{cases} \text{recActive}(Y, G) & \text{if } \text{ctxBind}(C) = (\tilde{X}, Y) \\ \text{part}(G)^2 & \text{otherwise} \end{cases} \end{aligned}$$

The interdependency between $\text{recActive}(X, G)$ and $\text{active}(C, G)$ is well-defined: the former function considers the active participants of a context, which contains less recursive definitions.

Lemma G.1.9. *Suppose given a closed, relative well-formed global type G , and a global type G_s and context C such that $G_s \leq_C G$. For any $Z \in \text{ctxBind}(C)$, $\text{active}(C, G) \subseteq \text{recActive}(Z, G)$.*

Proof. Take any $Z \in \text{ctxBind}(C)$. Then $\text{ctxBind}(C) = (\tilde{X}, Y)$. By definition,

$$\text{active}(C, G) = \text{recActive}(Y, G).$$

If $Y = Z$, the thesis is proven. Otherwise, by definition,

$$\text{recActive}(Y, G) \subseteq \text{active}(\text{recCtx}(Y, G), G).$$

Since the recursive definition on Z appears in $\text{recCtx}(Y, G)$, it follows by induction on the size of \tilde{X} that $\text{active}(\text{recCtx}(Y, G), G) \subseteq \text{recActive}(Z, G)$. This proves the thesis. \square

Lemma G.1.10. *Suppose given a closed, relative well-formed global type G , a recursion variable Z , and a context C such that $Z \leq_C G$. Then, $\text{active}(C, G) = \text{recActive}(Z, G)$.*

Proof. Because $G = C[Z]$ and G is closed (i.e. $\text{frv}(G) = \emptyset$), there is a recursive definition on Z in G . Hence, $\text{ctxBind}(C) \neq \emptyset$, i.e. $\text{ctxBind}(C) = (\tilde{X}, Y)$ and $\text{active}(C, G) = \text{recActive}(Y, G)$. If $Y = Z$, the thesis is proven. Otherwise, the recursive definition on Y in G appears somewhere inside the recursive definition on Z . Suppose, for contradiction, that $\text{active}(C, G) \neq \text{recActive}(Z, G)$. There are two cases: there exists $(p, q) \in \text{part}(G)^2$ s.t. (i) $(p, q) \in \text{active}(C, G)$ and $(p, q) \notin \text{recActive}(Z, G)$, or (ii) $(p, q) \in \text{recActive}(Z, G)$ and $(p, q) \notin \text{active}(C, G)$. Case (i) contradicts Lemma G.1.9.

In case (ii), $(\mu Z. \text{recDef}(Z, G)) \langle p, q \rangle \neq \text{end}$ and $(\mu Y. \text{recDef}(Y, G)) \langle p, q \rangle = \text{end}$. The recursive call on Z in G appears somewhere inside the recursive definition on Y , and hence $\text{recDef}(Y, G) \langle p, q \rangle$ contains the recursive call on Z . This means that $\text{recDef}(Y, G) \langle p, q \rangle$ is contractive on Y (Definition 9.3.6), and hence $(\mu Y. \text{recDef}(Y, G)) \langle p, q \rangle \neq \text{end}$, contradicting the assumption. \square

Proposition G.1.11. *Suppose given a closed, relative well-formed global type G , and a global type G_s such that $G_s \leq_C G$. Then, for every $(p, q) \in \text{active}(C, G)$, the relative projection $G_s \rangle (p, q)$ is defined. Also, for every $p \in \{p \in \text{part}(G) \mid \exists q \in \text{part}(G). (p, q) \in \text{active}(C, G)\}$, the local projection $G_s \downarrow^\circ p$ is defined for any priority \circ .*

Proof. Suppose that, for contradiction, $G_s \rangle (p, q)$ is undefined. We show by induction on the structure of C that this means that $G \rangle (p, q)$ is undefined, contradicting the relative well-formedness of G .

- Hole: $C = [\cdot]$. We have $G_s = G$, and the thesis follows immediately.
- Exchange: $C = r!s(\{i \langle S_i \rangle. G_i\}_{i \in I} \cup \{i' \langle S_{i'} \rangle. C'\}_{i' \notin I})$. By the IH, $C'[G_s] \rangle (p, q)$ is undefined. Since the relative projection of an exchange relies on the relative projection of each of the exchange's branches, $G \rangle (p, q)$ is undefined.
- Skip: $C = \text{skip}.C'$. By the IH, $C'[G_s] \rangle (p, q)$ is undefined. Since the relative projection of a skip relies on the relative projection of the skip's continuation, $G \rangle (p, q)$ is undefined.
- Recursive definition: $C = \mu X. C'$. It follows from Lemma G.1.9 that

$$\text{active}(C, G) \subseteq \text{recActive}(X, G).$$

Hence, $(p, q) \in \text{recActive}(X, G)$, and thus

$$(\mu X. \text{recDef}(X, G)) \langle p, q \rangle = (\mu X. C'[G_s]) \langle p, q \rangle \neq \text{end},$$

which means that $C'[G_s] \rangle (p, q)$ is defined. This contradicts the IH.

The proof for the definedness of local projection is analogous. \square

Definition G.1.12 (Deep Unfolding). *Suppose given a sequence of tuples \tilde{U} , with each tuple consisting of a recursion variable X_i , a lift $t_i \in \mathbb{N}$, and a type B_i . The deep unfolding of the type A with \tilde{U} , denoted $\text{deepUnfold}(A, \tilde{U})$, is the type defined as follows:*

$$\begin{aligned} \text{deepUnfold}(A, ()) &\triangleq A \\ \text{deepUnfold}(A, (\tilde{U}, (X, t, B))) &\triangleq \text{deepUnfold}(A, \tilde{U})\{(\mu X. (\uparrow^t \text{deepUnfold}(B, \tilde{U}))) / X\} \end{aligned}$$

Proposition G.1.13. *Suppose given a type A and a sequence of tuples \tilde{U} consisting of a recursion variable, a lift, and a substitution type. Then,*

$$\text{deepUnfold}(A, (\tilde{U}, (X, t, A))) = \text{unfold}^t(\mu X. \text{deepUnfold}(A, \tilde{U})).$$

Proof. By Definition G.1.12:

$$\begin{aligned} \text{deepUnfold}(A, (\tilde{U}, (X, t, A))) &= \text{deepUnfold}(A, \tilde{U})\{(\mu X. (\uparrow^t \text{deepUnfold}(A, \tilde{U}))) / X\} \\ &= \text{unfold}^t(\mu X. \text{deepUnfold}(A, \tilde{U})) \quad \square \end{aligned}$$

Theorem G.1.14. *Suppose given a closed, relative well-formed global type G . Also, suppose given a global type G_s such that $G_s \leq_C G$, and a $p \in \text{part}(G)$ for which there is a $q \in \text{part}(G)$ such that $(p, q) \in \text{active}(C, G)$. Consider:*

- the participants with whom p interacts in G_s : $\tilde{q} \triangleq \{q \in \text{part}(G) \mid (p, q) \in \text{active}(C, G)\}$;
- the absolute priority of G_s : $\circ_C \triangleq \text{ctxPri}(C)$;
- the sequence of bound recursion variables of G_s : $\widetilde{X}_C \triangleq \text{ctxBind}(C)$;
- for every $X \in \widetilde{X}_C$:

- the body of the recursive definition on X in G : $G_X \triangleq \text{recDef}(X, G)$;
- the participants with whom p interacts in G_X :

$$\tilde{q}_X \triangleq \{q \in \text{part}(G) \mid (p, q) \in \text{recActive}(X, G)\};$$

- the absolute priority of G_X : $\circ_X \triangleq \text{varPri}(X, G)$;
- the sequence of bound recursion variables of G_X excluding X :

$$\widetilde{Y}_X \triangleq \text{subBind}(\mu X. G_X, G);$$

- the type required for μ_p for a recursive call on X :

$$A_{X,p} \triangleq \text{deepUnfold}(\overline{G_X \downarrow^{\circ_X} p}, (Y, t_Y, \overline{G_Y \downarrow^{\circ_Y} p})_{Y \in \widetilde{Y}_X});$$

- the type required for p_q for a recursive call on X :

$$B_{X,q} \triangleq \text{deepUnfold}(\langle G_X \rangle (p, q) \Big|_{p,q}^{\circ_X}, (Y, t_Y, \langle G_Y \rangle (p, q) \Big|_{p,q}^{\circ_Y})_{Y \in \widetilde{Y}_X});$$

- the minimum lift for typing a recursive definition on X :

$$t_X \triangleq \max_{\text{pr}}(A_X, (B_{X,q})_{q \in \widetilde{q}_X}) + 1;$$

- the type expected for μ_p for p 's router for G_s :

$$D_p \triangleq \text{deepUnfold}(\overline{G_s \downarrow^{\circ_C} p}, (X, t_X, \overline{G_X \downarrow^{\circ_X} p})_{X \in \widetilde{X}_C});$$

- the type expected for p_q for p 's router for G_s :

$$E_q \triangleq \text{deepUnfold}(\langle G_s \rangle (p, q) \Big|_{p,q}^{\circ_C}, (X, t_X, \langle G_X \rangle (p, q) \Big|_{p,q}^{\circ_X})_{X \in \widetilde{X}_C}).$$

Then, we have:

$$\left(X : (A_X, (B_{X,q})_{q \in \widetilde{q}_X}) \right)_{X \in \widetilde{X}_C} \vdash \llbracket G_s \rrbracket_p^{\widetilde{q}} \blacktriangleright \mu_p : D_p, (p_q : E_q)_{q \in \widetilde{q}}$$

Proof. We apply induction on the structure of G_s , with six cases as in Algorithm 3. We only detail the cases of exchange and recursion. Rule [TYP-ALARM] is used in only one sub-case (case 3(c), cf. Figure G.2 below).

- *Exchange:* $G_s = s!r \{i \langle S_i \rangle . G_i\}_{i \in I}$ (line 3).

In this case, we add connectives to the types obtained from the IH. Since we do not introduce any recursion variables to these types, the substitutions in the types from the IH are not affected. Hence, we can omit these substitutions from the types. Also, for each $i \in I$, we have $\text{frv}(G_i) \subseteq \text{frv}(G_s)$, i.e., the recursive context remains untouched in this derivation, so we also omit the recursive context.

Let $\text{deps} \triangleq \{q \in \widetilde{q} \mid \text{hdep}(q, p, G_s)\}$ (as on line 4). There are three cases depending on the involvement of p .

1. If $p = s$, then p is the sender (line 5).

Let us consider the relative projections onto p and the participants in \widetilde{q} . For the recipient r ,

$$G_s \rangle (p, r) = p!r \llbracket i \langle S_i \rangle . (G_i) \rangle (p, r) \rrbracket_{i \in I}. \quad (\text{G.1})$$

For each $q \in \text{deps}$, by Definition 9.4.1, $\text{ddep}((q, p), G) \neq \text{skip}.R$ for any R . That is, since p is the sender of the exchange, for each $q \in \text{deps}$, by the definitions in Algorithm 2,

$$G_s \rangle (p, q) = (p!r)!q \llbracket i . (G_i) \rangle (p, q) \rrbracket_{i \in I}. \quad (\text{G.2})$$

On the other hand, for each $q \in \tilde{q} \setminus \text{deps} \setminus \{r\}$,

$$G_s \rangle (p, q) = \text{skip}.(G_{i'} \rangle (p, q)) \quad (\text{G.3})$$

for any $i' \in I$, because for each $i, j \in I$,

$$G_i \rangle (p, q) = G_j \rangle (p, q). \quad (\text{G.4})$$

Let us take stock of the types we expect for each of the router's channels.

$$\begin{aligned} \text{For } \mu_p \text{ we expect } \quad \overline{G_s} \downarrow^{\circ_C} p &= \overline{\oplus^{\circ_C} \{i : \langle S_i \rangle \otimes^{\circ_C+1} (G_i \downarrow^{\circ_C+4} p)\}_{i \in I}} \\ &= \&^{\circ_C} \{i : \langle S_i \rangle \wp^{\circ_C+1} (G_i \downarrow^{\circ_C+4} p)\}_{i \in I}. \quad (\text{G.5}) \end{aligned}$$

$$\begin{aligned} \text{For } p_r \text{ we expect } \quad \langle G_s \rangle (p, r) \Big|_{p_r}^{\circ_C} &= \langle p!r \langle i \langle S_i \rangle . (G_i \rangle (p, r)) \rangle_{i \in I} \Big|_{p_r}^{\circ_C} \quad (\text{cf. (G.1)}) \\ &= \oplus^{\circ_C+1} \{i : \langle S_i \rangle \otimes^{\circ_C+2} \langle G_i \rangle (p, r) \Big|_{p_r}^{\circ_C+4}\}_{i \in I}. \quad (\text{G.6}) \end{aligned}$$

For each $q \in \text{deps}$,

$$\begin{aligned} \text{for } p_q \text{ we expect } \quad \langle G_s \rangle (p, q) \Big|_{p_q}^{\circ_C} &= \langle (p!r)!q \langle i \langle S_i \rangle . (G_i \rangle (p, q)) \rangle_{i \in I} \Big|_{p_q}^{\circ_C} \quad (\text{cf. (G.2)}) \\ &= \oplus^{\circ_C+1} \{i : \langle G_i \rangle (p, q) \Big|_{p_q}^{\circ_C+4}\}_{i \in I}. \quad (\text{G.7}) \end{aligned}$$

For each $q \in \tilde{q} \setminus \text{deps} \setminus \{r\}$,

$$\begin{aligned} \text{for } p_q \text{ we expect } \quad \langle G_s \rangle (p, q) \Big|_{p_q}^{\circ_C} &= \langle \text{skip}.(G_{i'} \rangle (p, q)) \rangle_{p_q}^{\circ_C} \quad (\text{cf. (G.3)}) \\ &= \langle G_{i'} \rangle (p, q) \Big|_{p_q}^{\circ_C+4} \text{ for any } i' \in I. \quad (\text{G.8}) \end{aligned}$$

G

Let us now consider the process returned by Algorithm 3, with each prefix marked with a number:

$$\llbracket G_s \rrbracket_p^{\tilde{q}} = \underbrace{\mu_p}_{1} \triangleright \left\{ i : \underbrace{\overline{p_r} \triangleleft i}_{2_i} \cdot \underbrace{(\overline{p_q} \triangleleft i)_{q \in \text{deps}}}_{3_i} \cdot \underbrace{\mu_p(v)}_{4_i} ; \underbrace{\overline{p_r}[w]}_{5_i} \cdot \langle [v \leftrightarrow w] \mid \llbracket G_i \rrbracket_p^{\tilde{q}} \rangle \right\}_{i \in I}$$

For each $i' \in I$, let $C_{i'} \triangleq C[s!r(\{i \langle S_i \rangle . G_i\}_{i \in I \setminus \{i'\}} \cup \{i' \langle S_{i'} \rangle . [\cdot]\})]$. Clearly, $G_{i'} \leq_{C_{i'}} G$. Also, because we are not adding recursion binders, the current value of \tilde{q} is appropriate for the IH. With this context $C_{i'}$ and \tilde{q} , we apply the IH to obtain the typing of $\llbracket G_{i'} \rrbracket_p^{\tilde{q}}$, where priorities start at $\text{ctxPri}(C_{i'}) = \text{ctxPri}(C) + 4 = \circ_C + 4$ (cf. Definition G.1.6). Following these typings, Figure G.1 gives the typing of $\llbracket G_s \rrbracket_p^{\tilde{q}}$, referring to parts of the process by the number marking its foremost prefix above. Clearly, the priorities in the derivation of Figure G.1 meet all requirements. The order of the applications of Rule [TYP-SEL \star] for each $q \in \text{deps}$ does not matter, since the selections are asynchronous.

2. If $p = r$, then p is the recipient (line 6). This case is analogous to the previous one.

definitions in Algorithm 2.

$$G_s \rangle (p, s) = \begin{cases} (s!r)!p \llbracket i.(G_i) \rangle (p, s) \rrbracket_{i \in I} & \text{if } \text{depon}_s \text{ is true} \\ \text{skip}.(G_{i'}) \rangle (p, s) \text{ for any } i' \in I & \text{otherwise} \end{cases} \quad (\text{G.9})$$

$$G_s \rangle (p, r) = \begin{cases} (r?s)!p \llbracket i.(G_i) \rangle (p, r) \rrbracket_{i \in I} & \text{if } \text{depon}_r \text{ is true} \\ \text{skip}.(G_{i'}) \rangle (p, r) \text{ for any } i' \in I & \text{otherwise} \end{cases} \quad (\text{G.10})$$

Let us also consider the relative projections onto p and the participants in \tilde{q} besides r and s , which follow by the relative well-formedness of G_s . For each $q \in \tilde{q} \setminus \{r, s\}$,

$$G_s \rangle (p, q) = \text{skip}.(G_{i'}) \rangle (p, q) \quad (\text{G.11})$$

for any $i' \in I$.

The rest of the analysis depends on the truth of depon_s and depon_r . There are four cases.

- (a) If depon_s is true and depon_r is false (line 10), let us take stock of the types we expect for each of the router's channels.

$$\begin{aligned} \text{For } \mu_p \text{ we expect} \quad & \overline{G_s \downarrow^{\circ c} p} = \overline{\&^{\circ c+2} \{i : (G_i \downarrow^{\circ c+4} p)\}_{i \in I}} \\ & = \oplus^{\circ c+2} \{i : (G_i \downarrow^{\circ c+4} p)\}_{i \in I}. \end{aligned} \quad (\text{G.12})$$

$$\begin{aligned} \text{For } p_s \text{ we expect} \quad & \llbracket G_s \rangle (p, s) \rrbracket_{p,s}^{\circ c} = \llbracket (s!r)!p \llbracket i.(G_i) \rangle (p, s) \rrbracket_{i \in I} \rrbracket_{p,s}^{\circ c} \\ & \text{(cf. (G.9))} \\ & = \&^{\circ c+1} \{i : \llbracket G_i \rangle (p, s) \rrbracket_{p,s}^{\circ c+4}\}_{i \in I}. \end{aligned} \quad (\text{G.13})$$

For each $q \in \tilde{q} \setminus \{s\}$,

$$\begin{aligned} \text{for } p_q \text{ we expect} \quad & \llbracket G_s \rangle (p, q) \rrbracket_{p,q}^{\circ c} = \llbracket \text{skip}.(G_{i'}) \rangle (p, q) \rrbracket_{p,q}^{\circ c} \\ & \text{(cf. (G.10) and (G.11))} \\ & = \llbracket G_{i'} \rangle (p, q) \rrbracket_{p,q}^{\circ c+4} \text{ for any } i' \in I. \end{aligned} \quad (\text{G.14})$$

Similar to case (1), we apply the IH to obtain the typing of $\llbracket G_i \rrbracket_p^{\tilde{q}}$ for each $i \in I$, starting at priority $\circ c + 4$. We derive the typing of $\llbracket G_s \rrbracket_p^{\tilde{q}}$:

$$\begin{array}{c} \forall i \in I. \vdash \llbracket G_i \rrbracket_p^{\tilde{q}} \triangleright \mu_p : \overline{G_i \downarrow^{\circ c+4} p}, (p_q : \llbracket G_i \rangle (p, q) \rrbracket_{p,q}^{\circ c+4})_{q \in \tilde{q}} \\ \hline \forall i \in I. \vdash \overline{\mu_p} \triangleleft i \cdot \llbracket G_i \rrbracket_p^{\tilde{q}} \triangleright \mu_p : \oplus^{\circ c+2} \{i : G_i \downarrow^{\circ c+4} p\}_{i \in I}, \\ \quad (p_q : \llbracket G_i \rangle (p, q) \rrbracket_{p,q}^{\circ c+4})_{q \in \tilde{q}} \\ \hline \vdash \llbracket G_s \rrbracket_p^{\tilde{q}} = p_s \triangleright \{i : \overline{\mu_p} \triangleleft i \cdot \llbracket G_i \rrbracket_p^{\tilde{q}}\}_{i \in I} \\ \quad \triangleright \mu_p : \oplus^{\circ c+2} \{i : G_i \downarrow^{\circ c+4} p\}_{i \in I}, \quad \text{(cf. (G.12))} \\ \quad p_s : \&^{\circ c+1} \{i : \llbracket G_i \rangle (p, q) \rrbracket_{p,q}^{\circ c+4}\}_{i \in I}, \quad \text{(cf. (G.13))} \\ \quad (p_q : \llbracket G_{i'} \rangle (p, q) \rrbracket_{p,q}^{\circ c+4})_{q \in \tilde{q}} \quad \text{(cf. (G.14))} \end{array} \quad \begin{array}{l} [\text{TYP-SEL}\star] \\ [\text{TYP-BRA}] \end{array}$$

- (b) The case where depon_s is false and depon_r is true (line 11) is analogous to the previous one.
- (c) If both depon_s and depon_r are true (line 12 and (9.1)), let us once again take stock of the types we expect for each of the router's channels.

$$\begin{aligned} \text{For } \mu_p \text{ we expect } \quad & \overline{G_s \downarrow^{\circ c} p} = \overline{\&^{\circ c+2} \{i : (G_i \downarrow^{\circ c+4} p)\}_{i \in I}} \\ & = \oplus^{\circ c+2} \{i : \overline{(G_i \downarrow^{\circ c+4} p)}\}_{i \in I} \quad (\text{G.15}) \end{aligned}$$

$$\begin{aligned} \text{For } p_s \text{ we expect } \quad & \langle\langle G_s \rangle (p, s) \rangle_{p,s}^{\circ c} = \langle\langle (s!r)!p \langle\langle i.(G_i) (p, s) \rangle \rangle_{i \in I} \rangle_{p,s}^{\circ c} \\ & \quad (\text{cf. (G.9)}) \\ & = \&^{\circ c+1} \{i : \langle\langle G_i \rangle (p, s) \rangle_{p,s}^{\circ c+4}\}_{i \in I} \quad (\text{G.16}) \end{aligned}$$

$$\begin{aligned} \text{For } p_r \text{ we expect } \quad & \langle\langle G_s \rangle (p, r) \rangle_{p,r}^{\circ c} = \langle\langle (r?s)!p \langle\langle i.(G_i) (p, r) \rangle \rangle_{i \in I} \rangle_{p,r}^{\circ c} \\ & \quad (\text{cf. (G.10)}) \\ & = \&^{\circ c+2} \{i : \langle\langle G_i \rangle (p, r) \rangle_{p,r}^{\circ c+4}\}_{i \in I} \quad (\text{G.17}) \end{aligned}$$

For each $q \in \tilde{q} \setminus \{s, r\}$,

$$\begin{aligned} \text{for } p_q \text{ we expect } \quad & \langle\langle G_s \rangle (p, q) \rangle_{p,q}^{\circ c} = \langle\langle \text{skip}.(G_{i'}) (p, q) \rangle \rangle_{p,q}^{\circ c} \quad (\text{cf. (G.11)}) \\ & = \langle\langle G_{i'} \rangle (p, q) \rangle_{p,q}^{\circ c+4} \text{ for any } i' \in I \\ & \quad (\text{G.18}) \end{aligned}$$

It is clear from (G.16) and (G.17) that the router will receive label $i \in I$ first on p_s and then $i' \in I$ on p_r . We rely on alarm processes (Definition 9.4.16) to handle the case $i' \neq i$.

Similar to case (1), we apply the IH to obtain the typing of $\llbracket G_i \rrbracket_p^{\tilde{q}}$ for each $i \in I$, starting at priority $\circ c + 4$. Figure G.2 gives the typing of $\llbracket G_s \rrbracket_p^{\tilde{q}}$.

- (d) If both depon_s and depon_r are false, let us again take stock of the types we expect for each of the router's channels.

$$\text{For } \mu_p \text{ we expect } \quad \overline{G_s \downarrow^{\circ c} p} = \overline{G_{i'} \downarrow^{\circ c+4} p} \text{ for any } i' \in I.$$

For each $q \in \tilde{q}$,

$$\begin{aligned} \text{for } p_q \text{ we expect } \quad & \langle\langle G_s \rangle (p, q) \rangle_{p,q}^{\circ c} = \langle\langle \text{skip}.(G_{i'}) (p, q) \rangle \rangle_{p,q}^{\circ c} \\ & \quad (\text{cf. (G.9), (G.10) and (G.11)}) \\ & = \langle\langle G_{i'} \rangle (p, q) \rangle_{p,q}^{\circ c+4} \text{ for any } i' \in I. \end{aligned}$$

Similar to case (1), we apply the IH to obtain the typing of $\llbracket G_{i'} \rrbracket_p^{\tilde{q}}$, starting at priority $\circ c + 4$. This directly proves the thesis.

- *Recursive definition:* $G_s = \mu Z.G'$ (line 14).

Let

$$\tilde{q}' \triangleq \{q \in \tilde{q} \mid G_s \langle\langle p, q \rangle \rangle \neq \text{end}\} \quad (\text{G.19})$$

$$\begin{array}{c}
\begin{array}{c}
\forall i \in I. \vdash \underline{\llbracket G_i \rrbracket_p^{\tilde{q}}} \\
\blacktriangleright \mu_p : G_i \downarrow^{c+4} p, \\
(p_q : \langle G_i \rangle (p, q))_{p,q}^{c+4} \Big)_{q \in \tilde{q}}
\end{array}
\quad
\begin{array}{c}
\frac{}{\forall i \in I. \forall i' \in I \setminus \{i\}. \vdash \text{alarm}(\text{chs})} \text{[TYP-ALARM]} \\
\blacktriangleright \mu_p : G_i \downarrow^{c+4} p, \\
p_s : \langle G_i \rangle (p, s)_{p,s}^{c+4}, \\
p_r : \langle G_{i'} \rangle (p, r)_{p,r}^{c+4}, \\
(p_q : \langle G_i \rangle (p, q))_{p,q}^{c+4} \Big)_{q \in \tilde{q} \setminus \{s,r\}}
\end{array} \\
\hline
\begin{array}{c}
\forall i \in I. \vdash \underline{p_r} \triangleright \{i : \underline{\llbracket G_i \rrbracket_p^{\tilde{q}}}\} \cup \{i' : \text{alarm}(\text{chs})\}_{i' \in I \setminus \{i\}} \\
\blacktriangleright \mu_p : G_i \downarrow^{c+4} p, p_s : \langle G_i \rangle (p, s)_{p,s}^{c+4}, \\
p_r : \&^{c+2} \{i : \langle G_{i'} \rangle (p, r)_{p,r}^{c+4}\}_{i \in I}, \\
(p_q : \langle G_i \rangle (p, q))_{p,q}^{c+4} \Big)_{q \in \tilde{q} \setminus \{s,r\}}
\end{array} \text{[TYP-BRA]} \\
\hline
\begin{array}{c}
\forall i \in I. \vdash \underline{\mu_p} \triangleleft i \cdot p_r \triangleright \{i : \underline{\llbracket G_i \rrbracket_p^{\tilde{q}}}\} \cup \{i' : \text{alarm}(\text{chs})\}_{i' \in I \setminus \{i\}} \\
\blacktriangleright \mu_p : \oplus^{c+2} \{i : G_i \downarrow^{c+4} p\}_{i \in I}, p_s : \langle G_i \rangle (p, s)_{p,s}^{c+4}, \\
p_r : \&^{c+2} \{i : \langle G_{i'} \rangle (p, r)_{p,r}^{c+4}\}_{i \in I}, \\
(p_q : \langle G_i \rangle (p, q))_{p,q}^{c+4} \Big)_{q \in \tilde{q} \setminus \{s,r\}}
\end{array} \text{[TYP-SEL*]} \\
\hline
\begin{array}{c}
\vdash \underline{\llbracket G_s \rrbracket_p^{\tilde{q}}} = p_s \triangleright \{i : \underline{\mu_p} \triangleleft i \cdot p_r \triangleright \{i : \underline{\llbracket G_i \rrbracket_p^{\tilde{q}}}\} \cup \{i' : \text{alarm}(\text{chs})\}_{i' \in I \setminus \{i\}}\}_{i \in I} \\
\blacktriangleright \mu_p : \oplus^{c+2} \{i : G_i \downarrow^{c+4} p\}_{i \in I}, \quad (\text{cf. (G.15)}) \\
p_s : \&^{c+1} \{i : \langle G_i \rangle (p, s)_{p,s}^{c+4}\}_{i \in I}, \quad (\text{cf. (G.16)}) \\
p_r : \&^{c+2} \{i : \langle G_{i'} \rangle (p, r)_{p,r}^{c+4}\}_{i \in I}, \quad (\text{cf. (G.17)}) \\
(p_q : \langle G_{i'} \rangle (p, q))_{p,q}^{c+4} \Big)_{q \in \tilde{q} \setminus \{s,r\}} \quad (\text{cf. (G.18)})
\end{array} \text{[TYP-BRA]}
\end{array}$$

Figure G.2 | Typing derivation used in the proof of Theorem 9.4.14, where $\text{chs} = \{\mu_p\} \cup \{p_q \mid q \in \tilde{q}\}$.

(as on line 15). We consider the relative projections onto p and the participants in \tilde{q} . For each $q \in \tilde{q}'$, we know $G_s \rangle (p, q) \neq \text{end}$, while for each $q \in \tilde{q} \setminus \tilde{q}'$, we know $G_s \rangle (p, q) = \text{end}$. More precisely, by Definition 9.3.7, for each $q \in \tilde{q}'$,

$$G_s \rangle (p, q) = (\mu Z.G') \rangle (p, q) = \mu Z.(G') \rangle (p, q). \quad (\text{G.20})$$

and thus

$$G' \rangle (p, q) \neq \text{skip}^*.\text{end} \text{ and } G' \rangle (p, q) \neq \text{skip}^*.Z.$$

For each $q \in \tilde{q} \setminus \tilde{q}'$,

$$G_s \rangle (p, q) = (\mu Z.G') \rangle (p, q) = \text{end}, \quad (\text{G.21})$$

and thus

$$G' \rangle (p, q) = \text{skip}^*.\text{end} \text{ or } G' \rangle (p, q) = \text{skip}^*.Z.$$

Further analysis depends on whether $\tilde{q}' = \emptyset$ or not. We thus examine two cases:

- If $\tilde{q}' = \emptyset$ (line 16), let us consider the local projection $G_s \downarrow^{\circ c} p$. We prove that $G_s \downarrow^{\circ c} p = \bullet$.

Suppose, for contradiction, that $G_s \downarrow^{\circ c} p \neq \bullet$. Then, by the definitions in Figure 9.6, $G' \downarrow^{\circ c} p \neq X$ and $G' \downarrow^{\circ c} p \neq \bullet$. That is, $G' \downarrow^{\circ c} p$ contains communications or some recursion variable other than Z . However, communications in $G' \downarrow^{\circ c} p$ originate from exchanges in G' , either involving p and some $q \in \tilde{q}$, or as a dependency on an exchange involving some $q \in \tilde{q}$. Moreover, recursion variables in $G' \downarrow^{\circ c} p$ originate from recursion variables in G' . But this would mean that for this q , $G' \downarrow^{\circ c} (p, q)$ contains interactions or recursion variables, contradicting (G.21). Therefore, it cannot be the case that $G_s \downarrow^{\circ c} p \neq \bullet$.

Let us take stock of the types we expect for each of the router's channels. For now, we omit the substitutions in the types.

For μ_p we expect $\overline{G_s \downarrow^{\circ c} p} = \bar{\bullet} = \bullet$.

For each $q \in \tilde{q}$, for p_q we expect $\langle G_s \rangle (p, q) \downarrow_{p,q}^{\circ c} = \langle \text{end} \rangle_{p,q}^{\circ c} = \bullet$. (cf. (G.21))

Because all expected types are \bullet , the substitutions do not affect the types, so we can omit them altogether.

First we apply Rule [TYP-INACT], giving us an arbitrary recursive context, and thus the recursive context we need. Then, we apply Rule [TYP-END] for μ_p and for p_q for each $q \in \tilde{q}$, and obtain the typing of $\llbracket G_s \rrbracket_p^{\tilde{q}}$ (omitting the recursive context):

$$\vdash \llbracket G_s \rrbracket_p^{\tilde{q}} = \mathbf{0} \blacktriangleright \mu_p : \bullet, (p_q : \bullet)_{q \in \tilde{q}}$$

- If $\tilde{q}' \neq \emptyset$ (line 17), then, following similar reasoning as in the previous case, $G_s \downarrow^{\circ c} p = \mu Z.(G' \downarrow^{\circ c} p)$. We take stock of the types we expect for each of the router's channels. Note that, because of the recursive definition on Z in G_s , there cannot be another recursive definition in the context \mathcal{C} capturing the recursion variable Z . Therefore, by Definition G.1.4, $Z \notin \tilde{X}_{\mathcal{C}}$.

For μ_p we expect $\text{deepUnfold}(\overline{G_s \downarrow^{\circ c} p}, \dots)$
 $= \text{deepUnfold}(\overline{\mu Z.(G' \downarrow^{\circ c} p)}, \dots)$
 $= \text{deepUnfold}(\overline{\mu Z.G' \downarrow^{\circ c} p}, \dots)$
 $= \mu Z. \text{deepUnfold}(\overline{G' \downarrow^{\circ c} p}, (X, t_X, \overline{G_X \downarrow^{\circ x} p})_{X \in \tilde{X}_{\mathcal{C}}}).$ (G.22)

For each $q \in \tilde{q}'$,

for p_q we expect $\text{deepUnfold}(\langle G_s \rangle (p, q) \downarrow_{p,q}^{\circ c}, \dots)$
 $= \text{deepUnfold}(\langle \mu Z.(G' \downarrow^{\circ c} p) \rangle (p, q) \downarrow_{p,q}^{\circ c}, \dots)$
 $= \text{deepUnfold}(\langle \mu Z.G' \downarrow^{\circ c} p \rangle (p, q) \downarrow_{p,q}^{\circ c}, \dots)$ (cf. (G.20))
 $= \mu Z. \text{deepUnfold}(\langle G' \downarrow^{\circ c} p \rangle (p, q) \downarrow_{p,q}^{\circ c},$ (G.23)
 $(X, t_X, \langle G_X \downarrow^{\circ x} p \rangle_{p,q}^{\circ x})_{X \in \tilde{X}_{\mathcal{C}}}).$

For each $q \in \tilde{q} \setminus \tilde{q}'$,

$$\begin{aligned}
 \text{for } p_q \text{ we expect } & \text{deepUnfold}(\llbracket G_s \rrbracket_p(p, q) \rrbracket_p^{\circ_C}, \dots) \\
 & = \text{deepUnfold}(\llbracket \text{end} \rrbracket_p^{\circ_C}, \dots) \\
 & = \text{deepUnfold}(\bullet, \dots) && \text{(cf. (G.21))} \\
 & = \bullet. && \text{(G.24)}
 \end{aligned}$$

We also need an assignment in the recursive context for every $X \in \widetilde{X}_C$, but not for Z .

Let $C' = C[\mu Z. [\cdot]]$. Clearly, $G' \leq_{C'} G$. Let us first establish some facts about the recursion binders, priorities, and active participants related to C' , G' , and Z :

- ◇ $\widetilde{X}_{C'} = \text{ctxBind}(C') = (\text{ctxBind}(C), Z) = (\widetilde{X}_C, Z)$ (cf. Definition G.1.4).
- ◇ $G_Z = \text{recDef}(Z, G) = G'$, as proven by the context C' (cf. Definition G.1.5).
- ◇ $\widetilde{Y}_Z = \text{subBind}(\mu Z. G_Z, G) = \text{ctxBind}(C) = \widetilde{X}_C$.
- ◇ $\circ_{C'} = \text{ctxPri}(C') = \text{ctxPri}(C) = \circ_C$, and $\circ_Z = \text{varPri}(Z, G) = \text{ctxPri}(C) = \circ_C$, and hence $\circ_{C'} = \circ_Z$ (cf. Definition G.1.6).
- ◇ $\tilde{q}_Z = \tilde{q}'$ (cf. Definition G.1.8 and (G.19)).

Because $\widetilde{X}_{C'} = (\widetilde{X}_C, Z)$ and $\tilde{q}' = \tilde{q}_Z$, \tilde{q}' is appropriate for the IH. We apply the IH on C' , G' , and \tilde{q}' to obtain a typing for $\llbracket G' \rrbracket_p^{\tilde{q}'}$, where we immediately make use of the facts established above. We give the assignment to Z in the recursive context separate from those for the recursion variables in \widetilde{X}_C . Also, by Proposition G.1.13, we can write the final unfolding on Z in the types separately. For example, the type for μ_p is

$$\begin{aligned}
 & \text{deepUnfold}(\overline{G' \downarrow^{\circ_{C'}} p}, (X, t_X, \overline{G_X \downarrow^{\circ_X} p})_{X \in \widetilde{X}_{C'}}) \\
 & = \text{deepUnfold}(\overline{G' \downarrow^{\circ_C} p}, (X, t_X, \overline{G_X \downarrow^{\circ_X} p})_{X \in (\widetilde{X}_C, Z)}) \\
 & = \text{deepUnfold}(\overline{G' \downarrow^{\circ_C} p}, ((X, t_X, \overline{G_X \downarrow^{\circ_X} p})_{X \in \widetilde{X}_C}, (Z, t_Z, \overline{G_Z \downarrow^{\circ_Z} p}))) \\
 & = \text{deepUnfold}(\overline{G' \downarrow^{\circ_C} p}, ((X, t_X, \overline{G_X \downarrow^{\circ_X} p})_{X \in \widetilde{X}_C}, (Z, t_Z, \overline{G' \downarrow^{\circ_C} p}))) \\
 & = \text{unfold}^{t_Z} (\mu Z. \text{deepUnfold}(\overline{G' \downarrow^{\circ_C} p}, (X, t_X, \overline{G_X \downarrow^{\circ_X} p})_{X \in \widetilde{X}_C})).
 \end{aligned}$$

The resulting typing is as follows:

$$\begin{aligned} & \left(X : \left(\left(\text{deepUnfold}(\overline{G_X \downarrow^{\circ X} p}, (Y, t_Y, \overline{G_Y \downarrow^{\circ Y} p})_{Y \in \widetilde{Y}_X}), \right. \right. \right. \\ & \left. \left. \left(\text{deepUnfold}(\langle G_X \rangle (p, q))_{p,q}^{\circ X}, (Y, t_Y, \langle G_Y \rangle (p, q))_{p,q}^{\circ Y} \right)_{Y \in \widetilde{Y}_X} \right)_{q \in \widetilde{q}_X} \right)_{X \in \widetilde{X}_C}, \\ & Z : \left(\left(\text{deepUnfold}(\overline{G' \downarrow^{\circ C} p}, (X, t_X, \overline{G_X \downarrow^{\circ X} p})_{X \in \widetilde{X}_C}), \right. \right. \\ & \left. \left(\text{deepUnfold}(\langle G' \rangle (p, q))_{p,q}^{\circ C}, (X, t_X, \langle G_X \rangle (p, q))_{p,q}^{\circ X} \right)_{X \in \widetilde{X}_C} \right)_{q \in \widetilde{q}'} \\ & \vdash \llbracket G' \rrbracket_p^{\widetilde{q}'} \triangleright \mu_p : \text{unfold}^{t_Z} (\mu Z. \text{deepUnfold}(\overline{G' \downarrow^{\circ C} p}, (X, t_X, \overline{G_X \downarrow^{\circ X} p})_{X \in \widetilde{X}_C})), \\ & \quad \left(p_q : \text{unfold}^{t_Z} (\mu Z. \text{deepUnfold}(\langle G' \rangle (p, q))_{p,q}^{\circ C}, \right. \\ & \quad \left. (X, t_X, \langle G_X \rangle (p, q))_{p,q}^{\circ X} \right)_{X \in \widetilde{X}_C} \Big)_{q \in \widetilde{q}'} \end{aligned}$$

By assumption, we have

$$t_Z = \max_{\text{pr}} \left(\left(\text{deepUnfold}(\overline{G' \downarrow^{\circ C} p}, (X, t_X, \overline{G_X \downarrow^{\circ X} p})_{X \in \widetilde{X}_C}) \right. \right. \\ \left. \left(\text{deepUnfold}(\langle G' \rangle (p, q))_{p,q}^{\circ C}, (X, t_X, \langle G_X \rangle (p, q))_{p,q}^{\circ X} \right)_{X \in \widetilde{X}_C} \right)_{q \in \widetilde{q}'} + 1,$$

so t_Z is clearly greater than the maximum priority appearing in the types before unfolding. Hence, we can apply Rule [TYP-REC] to eliminate Z from the recursive context, and to fold the types, giving the typing of $\llbracket G_s \rrbracket_p^{\widetilde{q}'} = \mu Z (\mu_p, (p_q)_{q \in \widetilde{q}'}); \llbracket G' \rrbracket_p^{\widetilde{q}'}$:

$$\begin{aligned} & \left(X : \left(\left(\text{deepUnfold}(\overline{G_X \downarrow^{\circ X} p}, (Y, t_Y, \overline{G_Y \downarrow^{\circ Y} p})_{Y \in \widetilde{Y}_X}), \right. \right. \right. \\ & \left. \left. \left(\text{deepUnfold}(\langle G_X \rangle (p, q))_{p,q}^{\circ X}, (Y, t_Y, \langle G_Y \rangle (p, q))_{p,q}^{\circ Y} \right)_{Y \in \widetilde{Y}_X} \right)_{q \in \widetilde{q}_X} \right)_{X \in \widetilde{X}_C} \\ & \vdash \llbracket G_s \rrbracket_p^{\widetilde{q}'} \triangleright \mu_p : \mu Z. \text{deepUnfold}(\overline{G' \downarrow^{\circ C} p}, (X, t_X, \overline{G_X \downarrow^{\circ X} p})_{X \in \widetilde{X}_C}), \\ & \quad \left(p_q : \mu Z. \text{deepUnfold}(\langle G' \rangle (p, q))_{p,q}^{\circ C}, (X, t_X, \langle G_X \rangle (p, q))_{p,q}^{\circ X} \right)_{X \in \widetilde{X}_C} \Big)_{q \in \widetilde{q}'} \end{aligned}$$

In this typing, the type for μ_p concurs with (G.22), and, for every $q \in \widetilde{q}'$, the type for p_q concurs with (G.23). For every $q \in \widetilde{q} \setminus \widetilde{q}'$, we can add the type for p_q in (G.24) by applying Rule [TYP-END]. This proves the thesis.

- *Recursive call:* $G_s = Z$ (line 18).

Clearly, because G is closed (i.e. $\text{frv}(G) = \emptyset$), $Z \in \widetilde{X}_C$. More precisely, $\widetilde{X}_C = (\widetilde{X}_1, Z, \widetilde{X}_2)$.

Note that the recursive definitions on the variables in \widetilde{X}_1 appear in G after the recursive definitions on the variables in (Z, \widetilde{X}_2) . Because the unfoldings of (Z, \widetilde{X}_2) occur before the unfoldings of \widetilde{X}_1 , the recursive definitions on the variables in \widetilde{X}_1 are renamed in order to avoid capturing these variables when performing the unfoldings of (Z, \widetilde{X}_2) . So, after the unfoldings of (Z, \widetilde{X}_2) , there are no recursive calls on the variables in \widetilde{X}_1 anymore, so the unfoldings on \widetilde{X}_1 do not have any effect on the types.

Also, note that $\tilde{X}_2 = \tilde{Y}_Z$ (cf. Definition G.1.4).

Let us take stock of the types we expect for our router's channels.

$$\begin{aligned}
\text{For } \mu_p \text{ we expect } & \text{deepUnfold}(\overline{G_s \downarrow^{\circ c} p}, \dots) \\
& = \text{deepUnfold}(\overline{Z \downarrow^{\circ c} p}, \dots) \\
& = \text{deepUnfold}(\overline{Z}, \dots) \\
& = \text{deepUnfold}(Z, (X, t_X, \overline{G_X \downarrow^{\circ x} p})_{X \in (\tilde{X}_1, Z, \tilde{Y}_Z)}) \\
& = \text{deepUnfold}(Z, (X, t_X, \overline{G_X \downarrow^{\circ x} p})_{X \in (Z, \tilde{Y}_Z)}) \\
& = \mu Z. (\uparrow^{tz} \text{deepUnfold}(\overline{G_Z \downarrow^{\circ z} p}, (X, t_X, \overline{G_X \downarrow^{\circ x} p})_{X \in \tilde{Y}_Z})) \quad (\text{G.25})
\end{aligned}$$

For each $q \in \tilde{q}$,

$$\begin{aligned}
\text{for } p_q \text{ we expect } & \text{deepUnfold}(\langle \langle G_s \rangle (p, q) \rangle_{p,q}^{\circ c}, \dots) \\
& = \text{deepUnfold}(\langle \langle Z \rangle \rangle_{p,q}^{\circ c}, \dots) \\
& = \text{deepUnfold}(Z, (X, t_X, \langle \langle G_X \rangle (p, q) \rangle_{p,q}^{\circ x} \rangle_{X \in (\tilde{X}_1, Z, \tilde{Y}_Z)}) \\
& = \text{deepUnfold}(Z, (X, t_X, \langle \langle G_X \rangle (p, q) \rangle_{p,q}^{\circ x} \rangle_{X \in (Z, \tilde{Y}_Z)}) \\
& = \mu Z. (\uparrow^{tz} \text{deepUnfold}(\langle \langle G_Z \rangle (p, q) \rangle_{p,q}^{\circ z}, (X, t_X, \langle \langle G_X \rangle (p, q) \rangle_{p,q}^{\circ x} \rangle_{X \in \tilde{Y}_Z})) \quad (\text{G.26})
\end{aligned}$$

Also, we need an assignment in the recursive context for every $X \in \tilde{X}_C$. By Lemma G.1.10, $\tilde{q} = \tilde{q}_Z$. Hence, for Z , the assignment should be as follows:

$$Z : \left(\left(\text{deepUnfold}(\overline{G_Z \downarrow^{\circ z} p}, (X, t_X, \overline{G_X \downarrow^{\circ x} p})_{X \in \tilde{Y}_Z}), \right. \right. \\
\left. \left. \left(\text{deepUnfold}(\langle \langle G_Z \rangle (p, q) \rangle_{p,q}^{\circ z}, (X, t_X, \langle \langle G_X \rangle (p, q) \rangle_{p,q}^{\circ x} \rangle_{X \in \tilde{Y}_Z})) \right)_{q \in \tilde{q}} \right) \quad (\text{G.27})$$

We apply Rule [TYP-VAR] to obtain the typing of $\llbracket G_s \rrbracket_{\tilde{q}}^p$, where we make us the rule's allowance for an arbitrary recursive context up to the assignment to Z . Rule [TYP-VAR] is applicable, because the types are recursive definitions on Z , concurring with the types assigned to Z , and lifted by a common lifter t_Z .

$$\begin{array}{c}
\left(X : \left(\left(\text{deepUnfold}(\overline{G_X \downarrow^{\circ x} p}, (Y, t_Y, \overline{G_Y \downarrow^{\circ y} p})_{Y \in \tilde{Y}_X}), \right. \right. \right. \\
\left. \left. \left(\text{deepUnfold}(\langle \langle G_X \rangle (p, q) \rangle_{p,q}^{\circ x}, (Y, t_Y, \langle \langle G_Y \rangle (p, q) \rangle_{p,q}^{\circ y} \rangle_{Y \in \tilde{Y}_X})) \right)_{q \in \tilde{q}_X} \right) \right)_{X \in \tilde{X}_C \setminus (Z)} , \\
Z : \left(\left(\text{deepUnfold}(\overline{G_Z \downarrow^{\circ z} p}, (X, t_X, \overline{G_X \downarrow^{\circ x} p})_{X \in \tilde{Y}_Z}), \right. \right. \\
\left. \left. \left(\text{deepUnfold}(\langle \langle G_Z \rangle (p, q) \rangle_{p,q}^{\circ z}, (X, t_X, \langle \langle G_X \rangle (p, q) \rangle_{p,q}^{\circ x} \rangle_{X \in \tilde{Y}_Z})) \right)_{q \in \tilde{q}} \right) \\
\vdash \llbracket G_s \rrbracket_{\tilde{q}}^p = X \langle \mu_p, (p_q)_{q \in \tilde{q}} \rangle \\
\blacktriangleright \mu_p : \mu Z. (\uparrow^{tz} \text{deepUnfold}(\overline{G_Z \downarrow^{\circ z} p}, (X, t_X, \overline{G_X \downarrow^{\circ x} p})_{X \in \tilde{Y}_Z})), \\
\left(p_q : \mu Z. (\uparrow^{tz} \text{deepUnfold}(\langle \langle G_Z \rangle (p, q) \rangle_{p,q}^{\circ z}, (X, t_X, \langle \langle G_X \rangle (p, q) \rangle_{p,q}^{\circ x} \rangle_{X \in \tilde{Y}_Z})) \right)_{q \in \tilde{q}}
\end{array}$$

In this typing, the type of μ_p concurs with the expected type in (G.25), the types of p_q for each $q \in \tilde{q}$ concurs with the expected types in (G.26), and the assignment to Z in the recursive context concurs with (G.27). This proves the thesis. \square

Theorem 9.4.14. *Suppose given a closed, relative well-formed global type G , and a $p \in \text{part}(G)$. Then,*

$$\emptyset \vdash \llbracket G \rrbracket_p^{\text{part}(G) \setminus \{p\}} \blacktriangleright \overline{\mu_p : G \downarrow^0 p, (p_q : \langle G \rangle (p, q))_{p,q}^0}_{q \in \text{part}(G) \setminus \{p\}}.$$

Proof. We have been given a closed, relative well-formed global type G , and a participant $p \in \text{part}(G)$. Let $C \triangleq [\cdot]$ and $G_s \triangleq G$. Clearly, $G_s \leq_C G$. By Definition G.1.8, $\text{active}(C, G) = \text{part}(G)^2$. For p to be a participant of G , there must be an exchange involving p and some other participant q , i.e. there exists a $q \in \text{part}(G)$ such that $(p, q) \in \text{active}(C, G)$. Moreover, \tilde{q} as defined in Theorem G.1.14 is

$$\{q \in \text{part}(G) \mid (p, q) \in \text{active}(C, G)\} = q \in \text{part}(G) \setminus \{p\}.$$

Hence, Theorem G.1.14 allows us to find a typing for $\llbracket G \rrbracket_p^{\text{part}(G) \setminus \{p\}}$.

Let us consider the precise values of the ingredients of Theorem G.1.14 in our application:

1. $\circ_C = \text{ctxPri}(C) = 0$,
2. $\tilde{X}_C = \text{ctxBind}(C) = ()$,
3. $D_p = \text{deepUnfold}(\overline{G_s \downarrow^{\circ_C} p, (X, t_X, G_x \downarrow^{\circ_X} p)_{X \in \tilde{X}_C}}) = \overline{G \downarrow^0 p}$ (cf. Definition G.1.12),
4. $E_q = \text{deepUnfold}(\langle G_s \rangle (p, q)_{p,q}^{\circ_C}, (X, t_X, \langle G_X \rangle (p, q))_{p,q}^{\circ_X})_{X \in \tilde{X}_C} = \langle G \rangle (p, q)_{p,q}^0$ (cf. Definition G.1.12).

Finally, the result of Theorem G.1.14 is as follows:

$$\left(X : (A_X, (B_{X,q})_{q \in \tilde{q}_X}) \right)_{X \in \tilde{X}_C} \vdash \llbracket G_s \rrbracket_p^{\tilde{q}} \blacktriangleright \mu_p : D_p, (p_q : E_q)_{q \in \tilde{q}}.$$

Applying (1)–(4) above, we get the following:

$$\emptyset \vdash \llbracket G \rrbracket_p^{\text{part}(G) \setminus \{p\}} \blacktriangleright \overline{\mu_p : G \downarrow^0 p, (p_q : \langle G \rangle (p, q))_{p,q}^0}_{q \in \text{part}(G) \setminus \{p\}}.$$

This coincides exactly with the result of Theorem 9.4.14. \square

G.1.2. PROOFS FOR SECTION 9.4.3.2

Alarm-freedom.

Theorem 9.4.18. *Given a relative well-formed global type G and a network of routed implementations $\mathcal{N} \in \text{net}(G)$, then*

$$\mathcal{N} \not\rightarrow^* \mathcal{E}[\text{alarm}(\tilde{x})],$$

for any evaluation context \mathcal{E} and set of endpoints \tilde{x} .

Proof. By Definition 9.4.10, \mathcal{N} consists only of routers (Definition 9.4.3) and well-typed processes not containing the alarm process (cf. the assumption below Definition 9.4.16).

Suppose, for contradiction, that there are \mathcal{E} and \tilde{x} such that $\mathcal{N} \rightarrow^* \mathcal{E}[\text{alarm}(\tilde{x})]$. Since only routers can contain the alarm process, there is a router \mathcal{R}^p in \mathcal{N} for participant $p \in \text{part}(G)$ that reduces to the alarm process. Since it is the only possibility for a router synthesized by Algorithm 3 to contain the alarm process, it must contain the process in (9.1). This process is synthesized on line 12 of Algorithm 3, so there is an exchange in G with sender $s \in \text{part}(G) \setminus \{p\}$ and recipient $r \in \text{part}(G) \setminus \{p\}$ that is a dependency for the interactions of p with both s and r .

For this exchange, the router \mathcal{R}^s for s contains the process returned on line 5 of Algorithm 3, and the router \mathcal{R}^r for r contains the process returned on line 6. Suppose s has a choice between the labels in I , and the implementation of s chooses $i \in I$. Then, \mathcal{R}^s sends i to \mathcal{R}^r and \mathcal{R}^p .

Now, for \mathcal{R}^p to reduce to the alarm process, it has to receive from \mathcal{R}^r a label $i' \in I \setminus \{i\}$. However, this contradicts line 6 of Algorithm 3, which clearly defines \mathcal{R}^r to send i to \mathcal{R}^p . Hence, $\mathcal{N} \not\rightarrow^* \mathcal{E}[\text{alarm}(\tilde{x})]$. \square

Completeness.

Theorem 9.4.21 (Operational Correspondence: Completeness). *Suppose given a relative well-formed global type G . Also, suppose given $p, q \in \text{part}(G)$ and a set of labels J such that $j \in J$ if and only if $G \xrightarrow{p!q\langle S_j \rangle} G_j$ for some S_j . Then,*

1. *for any completable $\mathcal{N} \in \text{net}(G)$, there exists a $j' \in J$ such that $\mathcal{N} \circlearrowleft \xrightarrow{p_\mu \triangleright \mu_p : j'} \mathcal{N}_0$;*
2. *for any $j' \in J$, there exists a completable $\mathcal{N} \in \text{net}(G)$ such that $\mathcal{N} \circlearrowleft \xrightarrow{p_\mu \triangleright \mu_p : j'} \mathcal{N}_0$;*
3. *for any completable $\mathcal{N} \in \text{net}(G)$ and any $j' \in J$, if $\mathcal{N} \circlearrowleft \xrightarrow{p_\mu \triangleright \mu_p : j'} \mathcal{N}_0$, then there exists a completable $\mathcal{N}_{j'} \in \text{net}(G_{j'})$ such that,*

$$\mathcal{N}_0 \xrightarrow{p_q \triangleright q_p : j'} \xrightarrow{\mu_q \triangleright q_\mu : j'} \xrightarrow{p_\mu \triangleright \mu_p : v} \xrightarrow{p_q \triangleright q_p : w} \xrightarrow{[v \leftrightarrow w]} \xrightarrow{\mu_q \triangleright q_\mu : w} \xrightarrow{[v \leftrightarrow w]} \mathcal{N}_{j'} \circlearrowleft.$$

Proof. By the labelled transitions of global types (Definition 9.4.20) and relative well-formedness, G is a sequence of skips followed by an exchange from p to q over the labels in J . Since the skips do not influence the behavior of routers, let us assume simply that

$$G = p!q\langle S_j \rangle . G_j \}_{j \in J}.$$

We prove each Sub-item separately.

1. Take any completable $\mathcal{N} \in \text{net}(G)$. By definition (Definition 9.4.12), $\emptyset \vdash \mathcal{N} \circlearrowleft \blacktriangleright \emptyset$. By the construction of networks of routed implementations (Definition 9.4.10), $p_\mu \in \text{bn}(\mathcal{N} \circlearrowleft)$, and p_μ is connected to μ_p .

Also by construction, the type of p_μ in the typing derivation of $\mathcal{N} \circlearrowleft$ is

$$G \downarrow^0 p = \oplus^0 \{j : \langle S_j \rangle \otimes^1 (G_j \downarrow^4 p)\}_{j \in J}.$$

By the well-typedness of \mathcal{N}° , we can infer the kind of action that is defined on p_μ : a selection, or a forwarder. By induction on the number of connected forwarders (which is finite by the finiteness of process terms), eventually a forwarder has to be connected to a selection. So, after reducing the forwarders, we have a selection on p_μ , of some $j' \in J$.

Hence, by reactivity (Theorem 9.2.17), after a finite number of steps, we can observe a communication of the label j' from p_μ to μ_p . This proves the thesis:

$$\mathcal{N}^\circ \rightarrow^* \frac{p_\mu \rangle \mu_p : j'}{\mathcal{N}_0}.$$

2. Following the proof of the existence of completable networks (Proposition 9.4.13), we can generate an implementation process for all of G 's participants from local projections (cf. Proposition G.1.1). Take any $j' \in J$. For the implementation process of p , we specifically generate an implementation process that sends the label j' . These implementation processes allow us to construct \mathcal{N} , which by construction is in $\text{net}(G)$ and is completable. Following the reasoning as in Sub-item (1), $\mathcal{N}^\circ \rightarrow^* \frac{p_\mu \rangle \mu_p : j'}{\mathcal{N}_0}$.
3. By definition (Definition 9.4.12), $\emptyset \vdash \mathcal{N}^\circ \blacktriangleright \emptyset$. Hence, by reactivity (Theorem 9.2.17), for any of the pending names of \mathcal{N}° , we can observe a communication after a finite number of steps. By construction (Definition 9.4.10), the endpoints that we are required to observe by thesis are bound in \mathcal{N}° . From the shape of G , the definition of routed implementations (Definition 9.4.9), and the typability of routers (Theorem 9.4.14), we know the types of all the required endpoints in \mathcal{N}° . We can deduce the required labeled reductions following the reasoning as in Sub-item (1). Let us summarize the origin of each of the network's steps:

1. $\mathcal{N}^\circ \rightarrow^* \frac{p_\mu \rangle \mu_p : j'}{\mathcal{N}_0}$: The implementation of p selects label j' with p 's router.
2. $\mathcal{N}_0 \xrightarrow{p q \rangle q_p : j'} \mathcal{N}_1$: The router of p forwards j' to q 's router.
3. $\mathcal{N}_1 \rightarrow^* \mathcal{N}_2$: The router of p forwards j' to the routers of the participant that depend on the output by p , and these routers forward j' to their respective implementations.
4. $\mathcal{N}_2 \xrightarrow{\mu q \rangle q_\mu : j'} \rightarrow^* \mathcal{N}_3$: The router of q forwards j' to q 's implementation, and to the routers of the participants that depend on the input by q , and these routers forward j' to their respective implementation (if they have not done so already for the output dependency on p).
5. $\mathcal{N}_3 \xrightarrow{p_\mu \rangle \mu_p : v, p q \rangle q_p : w, [v \leftrightarrow w]} \mathcal{N}_{4,v}$: The implementation of p sends an endpoint v to p 's router, which sends a fresh endpoint w to q 's router, and v is forwarded to w .
6. $\mathcal{N}_{4,v} \rightarrow^* \frac{\mu q \rangle q_\mu : w, [v \leftrightarrow w]}{\mathcal{N}_{j'}^\circ} \mathcal{N}_{j'}^\circ$: The router of q sends a fresh endpoint w to q 's implementations, and v is forwarded to w .

In $\mathcal{N}_{j'}^\circ$, all routers have transitioned to routers for $G_{j'}$. Moreover, by type preservation (Theorem 9.2.12), $\emptyset \vdash \mathcal{N}_{j'}^\circ \blacktriangleright \emptyset$. By isolating restrictions on endpoints that

belong only to implementation processes, we can find $\mathcal{N}_{j'} \in \text{net}(G_{j'})$ such that $\mathcal{N}_{j'}^\circ$ is its completion. This proves the thesis.

Note that G can also contain recursive definitions before the initial exchange; this case can be dealt with by unfolding. \square

Soundness. We first introduce auxiliary Lemmas G.1.15 and G.1.16. Then we prove Proposition 9.4.23 on Page 399. Finally we prove Theorem 9.4.25 on Page 400.

In the proof of soundness, we may encounter in a network reductions related to independent exchanges, so we have to be able to identify the independent exchanges in the global type to which the network belongs. Lemma G.1.16 states that independent exchanges related to observed reductions in a network of a global type G can be reached from G after any sequence of transitions in a finite number of steps. The proof of this lemma relies on Lemma G.1.15, which ensures that if a participant does not depend on a certain exchange, then the routers synthesized at each of the branches of the exchange are equal.

Lemma G.1.15. *Suppose given a relative well-formed global type $G = s!r\{i\langle S_i \rangle.G_i\}_{i \in I}$, and take any $p \in \text{part}(G) \setminus \{s, r\}$ and $\tilde{q} \subseteq \text{part}(G) \setminus \{p\}$. If neither $\text{hdep}(p, s, G)$ nor $\text{hdep}(p, r, G)$ holds, then $\llbracket G_i \rrbracket_p^{\tilde{q}} = \llbracket G_j \rrbracket_p^{\tilde{q}}$ for every $i, j \in I$.*

Proof. The analysis proceeds by cases on the structure of G . As a representative case we consider $G = s!r\{1\langle S_1 \rangle.G_1, 2\langle S_2 \rangle.G_2\}$. Towards a contradiction, we assume $\llbracket G_1 \rrbracket_p^{\tilde{q}} \neq \llbracket G_2 \rrbracket_p^{\tilde{q}}$. There are many cases where Algorithm 3 generates different routers for p at G_1 and at G_2 . We discuss the interesting case where $\llbracket G_1 \rrbracket_p^{\tilde{q}} = \mu_p \triangleright \dots$ (line 5) and $\llbracket G_2 \rrbracket_p^{\tilde{q}} = p q_2 \triangleright \dots$ (line 6). Then $G_1 = p!q_1\{\dots\}$ and $G_2 = q_2!p\{\dots\}$. We have $G_1 \rangle (p, q_1) = p!q_1\{\dots\}$ and $G_2 \rangle (p, q_1) = \text{skip} \dots$ or $G_2 \rangle (p, q_1) = (p?q_2)!q_1\{\dots\}$ (w.l.o.g., assume the former). Since G is relative well-formed, the projection $G \rangle (p, q_1)$ must exist. Hence, since $p \notin \{s, r\}$ and $G_1 \rangle (p, q_1) \neq G_2 \rangle (p, q_1)$, it must be the case that $q_1 \in \{s, r\}$ —w.l.o.g., assume $q_1 = s$. Then $G \rangle (p, q_1) = (q_1!r)!p\{1.p!q_1\{\dots\}, 2.\text{skip} \dots\}$, and thus $\text{hdep}(p, q_1, G) = \text{hdep}(p, s, G)$ is true. This contradicts the assumption that $\text{hdep}(p, s, G)$ is false. \square

Lemma G.1.16. *Suppose given a relative well-formed global type G and a completable $\mathcal{N} \in \text{net}(G)$ such that $\mathcal{N}^\circ \xrightarrow{c\mu \mu_c: \ell}$, for some $c \in \text{part}(G)$. For every G' and β_1, \dots, β_n ($n \geq 0$) such that $G \xrightarrow{\beta_1} \dots \xrightarrow{\beta_n} G'$ where c is not involved in any β_k (with $G = G'$ if $n = 0$), there exist G'' , $d \in \text{part}(G)$, and $\beta'_1, \dots, \beta'_m$ ($m \geq 0$) such that $G' \xrightarrow{\beta'_1} \dots \xrightarrow{\beta'_m} G'' = c!d\{i\langle S_i \rangle.G_i\}_{i \in I}$ where c is not involved in any β'_k (with $G'' = G'$ if $m = 0$).*

Proof. By induction on n (IH₁). We first observe that the behavior on μ_c in \mathcal{N}° can only arise from the router generated for c at G , following Algorithm 3 (line 5) after finitely many passes through lines 13 (no dependency) and 19 (skip); for simplicity, assume only line 13 applies.

- Case $n = 0$. Let $x \geq 0$ denote the number of passes through line 13 to generate the router for c at G . We apply induction on x (IH₂):

- Case $x = 0$. The router for c at G is generated through line 5, so $G = cd\{i\langle S_i \rangle.G_i\}_{i \in I}$, proving the thesis.
- Case $x = x' + 1$. Then $G = a!b\{i\langle S_i \rangle.G_i\}_{i \in I}$ and line 13 returns the router for c at G_j for any $j \in I$. We have $G \xrightarrow{a!b\langle j \rangle S_j} G_j$. Given the same implementation process for c as in \mathcal{N} , we can construct a completable $\mathcal{M} \in \text{net}(G_j)$ such that $\mathcal{M} \circlearrowleft \frac{c\mu \rangle \mu_c : \ell}{}$. Hence, the thesis follows from IH₂.
- Case $n = n' + 1$. By assumption, $G \xrightarrow{\beta_1} G'_1$ where c is not the sender or recipient in β_1 . Hence, $G = a!b\{i\langle S_i \rangle.G_i\}_{i \in I}$ where $G'_1 = G_j$ for some $j \in I$. The router for c at G is thus generated through line 13 of Algorithm 3. It follows from Lemma G.1.15 that this router is equal to the router for c at G'_1 , but with one less pass through line 13. Given the same implementation process for c as in \mathcal{N} , we can construct a completable $\mathcal{M} \in \text{net}(G'_1)$ such that $\mathcal{M} \circlearrowleft \frac{c\mu \rangle \mu_c : \ell}{}$. Hence, the thesis follows from IH₁. \square

Proposition 9.4.23 (Independent Reductions). *Suppose given a process $\Omega \vdash P \blacktriangleright \Gamma$ and reduction labels α and $\alpha'_1, \dots, \alpha'_n$ ($n \geq 1$) where $\alpha \notin \{\alpha'_1, \dots, \alpha'_n\}$ (cf. Definition 9.2.14). If $P \xrightarrow{\alpha}$ and $P \xrightarrow{\alpha'_1} \dots \xrightarrow{\alpha'_n}$, then there exists a process Q such that $P \xrightarrow{\alpha, \alpha'_1} \dots \xrightarrow{\alpha'_n} Q$ and $P \xrightarrow{\alpha'_1} \dots \xrightarrow{\alpha'_n, \alpha} Q$.*

Proof. By induction on n :

- $n = 1$. By assumption, $P \xrightarrow{\alpha}$ and $P \xrightarrow{\alpha'_1}$. The proof proceeds by considering all possible combinations of shapes for α and α'_1 (forwarder, send/receive, and selection/branching).

Consider the case where $\alpha = x \rangle y : a$ and $\alpha'_1 = w \rangle z : b$. Because P is well-typed, we infer that there are evaluation contexts \mathcal{E}_1 and \mathcal{E}_2 such that

$$P \equiv \mathcal{E}_1[(\mathbf{v}xy)(x[a, c] \mid y(a, c); P_1)] \equiv \mathcal{E}_2[(\mathbf{v}wz)(w[b, d] \mid z(b, d); P_2)]$$

(Definition 9.4.17). Since the reductions labeled α and α'_1 are both enabled in P , it cannot be the case that $x, y \in \text{fn}(P_2)$ and $w, z \in \text{fn}(P_1)$. Hence, there exists an evaluation context \mathcal{E}_3 such that $P \equiv \mathcal{E}_3[(\mathbf{v}xy)(x[a, c] \mid y(a, c); P_1) \mid (\mathbf{v}wz)(w[b, d] \mid z(b, d); P_2)]$. Then

$$P \xrightarrow{\alpha} Q_1 \equiv \mathcal{E}_3[P_1 \mid (\mathbf{v}wz)(w[b, d] \mid z(b, d); P_2)]$$

and $P \xrightarrow{\alpha'_1} Q_2 \equiv \mathcal{E}_3[(\mathbf{v}xy)(x[a, c] \mid y(a, c); P_1) \mid P_2]$. Let $Q = \mathcal{E}_3[P_1 \mid P_2]$; then $Q_1 \xrightarrow{\alpha'_1} Q$ and $Q_2 \xrightarrow{\alpha} Q$. Hence, $P \xrightarrow{\alpha, \alpha'_1} Q$ and $P \xrightarrow{\alpha'_1, \alpha} Q$.

All other cases proceed similarly. Note that when one of the reductions (say, α) has a selection/branching label, such a reduction would discard some branches and thus possible behaviors. This is not an issue for establishing the thesis, because typability guarantees that the sub-process that enables the α' -labeled reduction does not appear under the to-be-discarded branches. Hence, the execution of α will not jeopardize the α' -labeled reduction.

- $n = n' + 1$ for $n' \geq 1$. By the IH, $P \xrightarrow{\alpha} \xrightarrow{\alpha'_1} \dots \xrightarrow{\alpha'_{n'}} Q'_1$ and $P \xrightarrow{\alpha'_1} \dots \xrightarrow{\alpha'_{n'}} P' \xrightarrow{\alpha} Q'_1$. By assumption, $P' \xrightarrow{\alpha'_n} Q'_2$. Since P is well-typed, by Theorem 9.2.12 (type preservation), P' is well-typed. Since $P' \xrightarrow{\alpha} Q'_1$ and $P' \xrightarrow{\alpha'_n} Q'_2$, we can follow the same argumentation as in the base case to show that $Q'_1 \xrightarrow{\alpha'_n} Q$ and $Q'_2 \xrightarrow{\alpha} Q$. Hence, $P \xrightarrow{\alpha} \xrightarrow{\alpha'_1} \dots \xrightarrow{\alpha'_{n'}} Q'_1 \xrightarrow{\alpha'_n} Q$ and $P \xrightarrow{\alpha'_1} \dots \xrightarrow{\alpha'_{n'}} P' \xrightarrow{\alpha'_n} Q'_2 \xrightarrow{\alpha} Q$. \square

Theorem 9.4.25 (Operational Correspondence: Soundness). *Suppose given a relative well-formed global type G and a completable $\mathcal{N} \in \text{net}(G)$. For every ordered sequence of $k \geq 0$ reduction labels $\vec{\alpha} = (\alpha_1, \dots, \alpha_k)$ and N' such that $\mathcal{N}^\circ \xrightarrow{\vec{\alpha}} N'$, there exist G' and β_1, \dots, β_n (with $n \geq 0$) such that (i) $G \xrightarrow{\beta_1} \dots \xrightarrow{\beta_n} G'$ and (ii) $N' \rightarrow^* \mathcal{M}^\circ$, with $\mathcal{M} \in \text{net}(G')$.*

In the proof of soundness, whenever we assure that certain reductions are independent, we refer to those assurances as *independence facts (IFacts)*. Also, in the proof we consider labeled reductions, and distinguish between *protocol* and *implementation* reductions: the former are reductions with labels that indicate any interaction with a router, and the latter are any other reductions (which, by the definition of networks, can only occur within participant implementation processes). By a slight abuse of notation, given ordered sequences of reduction labels $\vec{\alpha}$ and $\vec{\alpha}'$, we write $\vec{\alpha}' \subseteq \vec{\alpha}$ to denote that $\vec{\alpha}'$ is a subsequence of $\vec{\alpha}$, where the labels in $\vec{\alpha}'$ appear in the same order in $\vec{\alpha}$ but not necessarily in sequence (and similarly for $\vec{\alpha}' \subset \vec{\alpha}$). With $\vec{\alpha} \setminus \vec{\alpha}'$ we denote the sequence obtained from $\vec{\alpha}$ by removing all the labels in $\vec{\alpha}'$, and $\vec{\alpha} \cup \vec{\alpha}'$ denotes the sequence obtained by adding the labels from $\vec{\alpha}'$ to the end of $\vec{\alpha}$.

Proof. By induction on the structure of G ; we detail the interesting cases of labeled exchanges with implicitly unfolded recursive definitions. We exhibit transitions $G \xrightarrow{\beta_1} \dots \xrightarrow{\beta_n} G'$ and establish a corresponding sequence of reductions $\mathcal{N}^\circ \rightarrow^* \mathcal{M}^\circ$ that includes all the labels in $\vec{\alpha}$, with $\mathcal{M} \in \text{net}(G')$. During this step, we assure the independence between the observed reductions $\vec{\alpha}$ and the reductions we establish (IFacts). Using these independence assurances, we show that also $N' \rightarrow^* \mathcal{M}^\circ$.

We apply induction on the size of $\vec{\alpha}$ (IH₁) to show the existence of (i) G' and β_1, \dots, β_n such that (i) $G \xrightarrow{\beta_1} \dots \xrightarrow{\beta_n} G'$ and (ii) $\mathcal{N}^\circ \rightarrow^* \mathcal{M}^\circ$ including all reductions in $\vec{\alpha}$, with $\mathcal{M} \in \text{net}(G')$:

- Base case: then $\vec{\alpha}$ is empty, and the thesis holds trivially, with $G' = G$ and $\mathcal{M} = \mathcal{N}$.
- Inductive case: then $\vec{\alpha}$ is non-empty.

By the definition of networks (Definition 9.4.10), we know that reductions starting at \mathcal{N}° are protocol reductions related to an independent exchange in G , or implementation reductions. Every protocol reduction in $\vec{\alpha}$ is related to some exchange in G , and so we can group sequences of protocol reductions related to the same exchange. By construction, every such sequence of protocol reductions $\vec{\alpha}_* \subseteq \vec{\alpha}$ starts with an implementation sending a label to a router, i.e., with a label of the form $\alpha_* = c_\mu \rangle \mu_c : \ell$. For each such α_* , the router in \mathcal{N} of the sender c has been synthesized from G in a finite number of inductive steps. We take the α_* that originates from the router synthesized in the least number of steps. This gives us the $\vec{\alpha}_*$ starting with α_* that relates

to an exchange in G which is not prefixed by exchanges relating to any of the other $\vec{\alpha}'_* \subseteq \vec{\alpha} \setminus \vec{\alpha}_*$.

Networks are well-typed by definition. None of the reductions in $\vec{\alpha}_*$ are blocked by protocol reductions appearing earlier in $\vec{\alpha}$ (**IFact 1**): they originate from exchanges in G appearing after the exchange related to $\vec{\alpha}_*$, and the priorities in their related types are thus higher than those in the types related to $\vec{\alpha}_*$, i.e., blocking by receiving or branching would contradict the well-typedness of \mathcal{N}° . However, it may be that some implementation reductions $\vec{\alpha}_+ \subseteq \vec{\alpha} \setminus \vec{\alpha}_*$ do block the reductions in $\vec{\alpha}_*$; they are also not blocked by any prior protocol reductions due to priorities (**IFact 2**). Hence, from \mathcal{N}° we can perform the implementation reductions in $\vec{\alpha}_+$. By type preservation (Theorem 9.2.12), this results in another completed network \mathcal{N}_6° of G . This establishes the reduction sequence $\mathcal{N}^\circ \xrightarrow{\vec{\alpha}_+} \mathcal{N}_6^\circ \xrightarrow{\vec{\alpha}_*}$.

By Lemma G.1.16, there are $m \geq 0$ transitions $G \xrightarrow{\beta_1} G_1 \dots \xrightarrow{\beta_m} G_m$ where the initial prefix of G_m corresponds to the labeled choice by the implementation of c : $G_m = c!d\{i\langle S_i \rangle, G'_i\}_{i \in I}$, with $\ell \in I$. Additionally, G_m contains exchanges related to every sequence of protocol reductions in $\vec{\alpha} \setminus \vec{\alpha}_+ \setminus \vec{\alpha}_*$: all these sequences start with a selection from implementation to router, and thus the involved participants do not depend on any of the exchanges between G and G_m , such that Lemma G.1.15 applies. To establish a sequence of reductions from \mathcal{N}_6° to the completion of a network $\mathcal{N}_m \in \text{net}(G_m)$, we apply induction on m (IH₂):

- The base case where $m = 0$ is trivial, with $G_m = G$ and thus $\mathcal{N}_m^\circ = \mathcal{N}_6^\circ$.
- In the inductive case, following the same approach as in the proof of completeness (Theorem 9.4.21), we reduce $\mathcal{N}_6^\circ \rightarrow^* \mathcal{N}_1^\circ$ such that $\mathcal{N}_1 \in \text{net}(G_1)$. Then, by IH₂, $\mathcal{N}_1^\circ \rightarrow^* \mathcal{N}_m^\circ$ where $\mathcal{N}_m \in \text{net}(G_m)$. Note that these reductions may require implementation reductions to unblock protocol reductions, and these implementation reductions may appear in $\vec{\alpha}$. None of the reductions from \mathcal{N}_6° to \mathcal{N}_m° can be blocked by any of the other protocol reductions in $\vec{\alpha}$, following again from priorities in types; hence, the leftover reductions in $\vec{\alpha}$ are independent from these reductions (**IFact 3**). Additionally, the sequence of protocol reductions $\vec{\alpha}_*$ was already enabled from \mathcal{N}_6° , so those reductions are also independent (**IFact 4**).

We know that $\mathcal{N}_m^\circ \xrightarrow{c\mu\mu c:\ell} G_m \xrightarrow{c!d(\ell\langle S_\ell \rangle)} G'_\ell$. From \mathcal{N}_m° , we again follow the proof of completeness to show that $\mathcal{N}_m^\circ \rightarrow^* \mathcal{M}_\ell^\circ$, where $\mathcal{M}_\ell \in \text{net}(G'_\ell)$. Given the definition of routers, it must be that all the reductions in $\vec{\alpha}_*$ appear in this sequence of reductions. Let $\vec{\alpha}' \subseteq \vec{\alpha}$ denote the leftover reductions from $\vec{\alpha}$ (i.e., $\vec{\alpha}$ except all reductions that occurred between \mathcal{N}° and \mathcal{M}_ℓ° , including $\vec{\alpha}_*$ and $\vec{\alpha}_+$).

By **IFacts 1–4**, $\mathcal{M}_\ell^\circ \xrightarrow{\vec{\alpha}'} \mathcal{M}'$. Then by IH₁, there exist G' and $\beta_{m+2}, \dots, \beta_n$ (with $n \geq m+1$) such that (i) $G'_\ell \xrightarrow{\beta_{m+2}} \dots \xrightarrow{\beta_n} G'$ and (ii) $\mathcal{M}_\ell^\circ \rightarrow^* \mathcal{M}^\circ$ including all reductions in $\vec{\alpha}'$, with $\mathcal{M} \in \text{net}(G')$. Let $\beta_{m+1} = c!d(\ell\langle S_\ell \rangle)$. We have shown the existence of G' and β_1, \dots, β_n such that (i) $G \xrightarrow{\beta_1} \dots \xrightarrow{\beta_m} G_m \xrightarrow{\beta_{m+1}} G'_\ell \xrightarrow{\beta_{m+2}} \dots \xrightarrow{\beta_n} G'$ and (ii) $\mathcal{N}^\circ \rightarrow^* \mathcal{N}_m^\circ \rightarrow^* \mathcal{M}_\ell^\circ \rightarrow^* \mathcal{M}^\circ$ including all reductions in $\vec{\alpha}$, with $\mathcal{M} \in \text{net}(G')$.

We are left to show that from $\mathcal{N}^\circ \rightarrow^* \mathcal{M}^\circ$ and $\mathcal{N}^\circ \xrightarrow{A} N'$, we can conclude that $N' \rightarrow^* \mathcal{M}^\circ$. We apply induction on the size of $\vec{\alpha}$ (IH₃), using **IFacts 1–4** and Proposition 9.4.23:

- Base case: Then $\vec{\alpha}$ is empty, there is nothing to do, and the thesis is proven.
- Inductive case: Then $\vec{\alpha} = \vec{\alpha}' \cup (\alpha')$. By IH₃, $\mathcal{N}^\circ \xrightarrow{\vec{\alpha}'} N'' \rightarrow^* N''' \xrightarrow{\alpha'} \rightarrow^* \mathcal{M}^\circ$. Moreover, by assumption, $N'' \xrightarrow{\alpha'} N'$. **IFacts 1–4** show that the α' -labeled reduction is independent from the reductions between N'' and N''' . Hence, by Proposition 9.4.23, we have $\mathcal{N}^\circ \xrightarrow{\vec{\alpha}'} N'' \xrightarrow{\alpha'} N' \rightarrow^* \mathcal{M}^\circ$. That is, $\mathcal{N}^\circ \xrightarrow{\vec{\alpha}} N' \rightarrow^* \mathcal{M}^\circ$, proving the thesis. \square

G.2. PROOFS FOR SECTION 9.4.4

G.2.1. PROOF FOR SECTION 9.4.4.1

Theorem 9.4.28. *Given a closed, relative well-formed global type G ,*

$$\emptyset \vdash \text{O}_{\text{part}(G)}[G] \triangleright (\mu_p : \overline{(G \downarrow^0 p)})_{p \in \text{part}(G)}.$$

Proof. We prove a more general statement. Suppose given a closed, relative well-formed global type G . Also, suppose given a global type $G_s \leq_C G$. Consider:

- the participants that are active in G_s :

$$\tilde{q} \triangleq \{q \in \text{part}(G) \mid \exists p \in \text{part}(G). (p, q) \in \text{active}(C, G)\};$$

- the absolute priority of G_s : $\circ_C \triangleq \text{ctxPri}(C)$;
- the sequence of bound recursion variables of G_s : $\widetilde{X}_C = \text{ctxBind}(C)$;
- for every $X \in \widetilde{X}_C$:

- the body of the recursive definition on X in G : $G_X \triangleq \text{recDef}(X, G)$;
- the participants that are active in G_X :

$$\tilde{q}_X \triangleq \{q \in \text{part}(G) \mid \exists p \in \text{part}(G). (p, q) \in \text{recActive}(X, G)\};$$

- the absolute priority of G_X : $\circ_X \triangleq \text{varPri}(X, G)$;
- the sequence of bound recursion variables of G_X excluding X :

$$\widetilde{Y}_X \triangleq \text{subBind}(\mu X. G_X, G);$$

- the type required for μ_q for a recursive call on X :

$$A_{X,q} \triangleq \text{deepUnfold}(\overline{G_X \downarrow^{\circ X} q}, (Y, t_Y, \overline{G_Y \downarrow^{\circ Y} q})_{Y \in \widetilde{Y}_X});$$

- the minimum lift for typing a recursive definition on X :

$$t_X \triangleq \max_{\text{pr}} \left((A_{X,q})_{q \in \widetilde{q}_X} \right) + 1;$$

- the type expected for μ_q for the orchestrator for G_s :

$$D_q \triangleq \text{deepUnfold}(\overline{G_s \downarrow^{\circ C} q}, (X, t_X, \overline{G_X \downarrow^{\circ X} q})_{X \in \widetilde{X}_C}).$$

Then, we have:

$$\left(X : (A_{X,q})_{q \in \widetilde{q}_X} \right)_{X \in \widetilde{X}_C} \vdash \text{O}_{\widetilde{q}}[G_s] \blacktriangleright (\mu_q : D_q)_{q \in \widetilde{q}}.$$

Similar to how Theorem 9.4.14 follows from Theorem G.1.14, the thesis follows as a corollary from this more general statement (cf. the proof of Theorem 9.4.14 on Page 395).

We apply induction on the structure of G_s , with six cases as in Algorithm 4. We only detail the cases of exchange and recursion.

- *Exchange*: $G_s = s!r \{i \langle S_i \rangle . G_i\}_{i \in I}$ (line 3).

Following similar reasoning as in the case for exchange in the proof of Theorem G.1.14, we can omit the unfoldings on types, as well as the recursive context.

Let $\text{deps}_s \triangleq \{q \in \widetilde{q} \mid \text{hdep}(q, s, G_s)\}$ and $\text{deps}_r \triangleq \{q \in \widetilde{q} \setminus \text{deps}_s \mid \text{hdep}(q, r, G_s)\}$. Note that $\text{deps}_s \cup \text{deps}_r$ coincides with deps as defined on line 4 and that $s, r \notin \text{deps}_s \cup \text{deps}_r$.

Let us take stock of the types we expect for each of the orchestrator's channels.

For μ_s we expect

$$\begin{aligned} \overline{G_s \downarrow^{\circ} s} &= \overline{\oplus^{\circ} \{i : \langle S_i \rangle \otimes^{\circ+1} \overline{(G_i \downarrow^{\circ+4} s)}\}_{i \in I}} \\ &= \overline{\&^{\circ} \{i : \langle S_i \rangle \wp^{\circ+1} \overline{(G_i \downarrow^{\circ+4} s)}\}_{i \in I}}. \end{aligned} \quad (\text{G.28})$$

For μ_r we expect

$$\begin{aligned} \overline{G_s \downarrow^{\circ} r} &= \overline{\&^{\circ+2} \{i : \langle S_i \rangle \wp^{\circ+3} \overline{(G_i \downarrow^{\circ+4} r)}\}_{i \in I}} \\ &= \overline{\oplus^{\circ+2} \{i : \langle S_i \rangle \otimes^{\circ+3} \overline{(G_i \downarrow^{\circ+4} r)}\}_{i \in I}}. \end{aligned} \quad (\text{G.29})$$

For each $q \in \text{deps}_s$,

for μ_q we expect

$$\begin{aligned} \overline{G_s \downarrow^{\circ} q} &= \overline{\&^{\circ+2} \{i : \overline{(G_i \downarrow^{\circ+4} q)}\}_{i \in I}} \\ &= \overline{\oplus^{\circ+2} \{i : \overline{(G_i \downarrow^{\circ+4} q)}\}_{i \in I}}. \end{aligned} \quad (\text{G.30})$$

For each $q \in \text{deps}_r$,

for μ_q we expect

$$\begin{aligned} \overline{G_s \downarrow^{\circ} q} &= \overline{\&^{\circ+3} \{i : \overline{(G_i \downarrow^{\circ+4} q)}\}_{i \in I}} \\ &= \overline{\oplus^{\circ+3} \{i : \overline{(G_i \downarrow^{\circ+4} q)}\}_{i \in I}}. \end{aligned} \quad (\text{G.31})$$

For each $q \in \widetilde{q} \setminus \text{deps}_s \setminus \text{deps}_r \setminus \{s, r\}$,

for μ_q we expect

$$\overline{G_s \downarrow^{\circ} q} = \overline{G_{i'} \downarrow^{\circ+4} q} \text{ for any } i' \in I. \quad (\text{G.32})$$

Let us now consider the process returned by Algorithm 3, with each prefix marked with a number.

$$O_{\tilde{q}}[G] = \underbrace{\mu_s \triangleright}_{1} \{i : \overline{\mu_r} \triangleleft i\} \cdot \underbrace{(\overline{\mu_q} \triangleleft i)}_{3_i} \cdot \underbrace{\mu_s(v)}_{4_i}; \underbrace{\overline{\mu_r}[w]}_{5_i} \cdot ([v \leftrightarrow w] \mid O_{\tilde{q}}[G_i])\}_{i \in I}$$

For each $i' \in I$, let $C_{i'} \triangleq C[sr(\{i \langle S_i \rangle . G_i\}_{i \in I \setminus \{i'\}} \cup \{i' \langle S_{i'} \rangle . [\cdot]\})]$. Clearly, $G_{i'} \leq_{C_{i'}} G$. Also, because we are not adding recursion binders, the current value of \tilde{q} is appropriate for the IH. With $C_{i'}$ and \tilde{q} , we apply the IH to obtain the typing of $O_{\tilde{q}}[G_{i'}]$, where priorities start at $\text{ctxPri}(C_{i'}) = \text{ctxPri}(C) + 4$ (cf. Definition G.1.6). Following these typings, Figure G.3 gives the typing of $O_{\tilde{q}}[G_s]$, referring to parts of the process by the number marking its foremost prefix above.

Clearly, the priorities in the derivation in Figure G.3 meet all requirements. The order of the applications of \oplus^* for each $q \in \text{deps}_s \cup \text{deps}_r$ does not matter, since the selections are asynchronous.

- *Recursive definition:* $G_s = \mu Z . G'$ (line 6). Let

$$\tilde{q}' \triangleq \{q \in \tilde{q} \mid G_s \downarrow^{\circ} q \neq \bullet\} \quad (\text{G.33})$$

(as on line 7). The analysis depends on whether $\tilde{q}' = \emptyset$ or not.

- If $\tilde{q}' = \emptyset$ (line 9), let us take stock of the types expected for each of the orchestrator's channels. For now, we omit the substitutions in the types.

G

$$\text{For each } q \in \tilde{q}, \text{ for } \mu_q \text{ we expect } \overline{G_s \downarrow^{\circ} c} q = \bullet. \quad (\text{G.34})$$

Because all expected types are \bullet , the substitutions do not affect the types, so we can omit them altogether.

First we apply Rule [TYP-INACT], giving us an arbitrary recursive context, thus the recursive context we need. Then, we apply Rule [TYP-END] for μ_q for each $q \in \tilde{q}$ (cf. (G.34)), and obtain the typing of $O_{\tilde{q}}[G_s]$ (omitting the recursive context):

$$\vdash O_{\tilde{q}}[G_s] = \mathbf{0} \blacktriangleright (\mu_q : \bullet)_{q \in \tilde{q}}.$$

- If $\tilde{q}' \neq \emptyset$ (line 8), let us take stock of the types expected for each of the orchestrator's channels. Note that, because of the recursive definition on Z in G_s , there cannot be another recursive definition in the context C capturing the recursion variable Z .

$$\begin{array}{c}
\frac{}{\forall i \in I. \vdash [v \leftrightarrow w] \blacktriangleright v : \overline{S_i}, w : S_i} \text{[TYP-FWD]} \quad \forall i \in I. \vdash \text{O}_{\tilde{q}}[G_i] \blacktriangleright (\mu_q : \overline{G_i \downarrow^{\circ+4} q})_{q \in \tilde{q}} \text{[TYP-PAR]} \\
\frac{\forall i \in I. \vdash [v \leftrightarrow w] | \text{O}_{\tilde{q}}[G_i] \blacktriangleright v : \overline{S_i}, w : S_i, (\mu_q : \overline{G_i \downarrow^{\circ+4} q})_{q \in \tilde{q}}}{\forall i \in I. \vdash 5_i \blacktriangleright v : \overline{S_i}, \mu_r : (\overline{S_i})^{\otimes^{\circ+3}} (\overline{G_i \downarrow^{\circ+4} r}), (\mu_q : \overline{G_i \downarrow^{\circ+4} q})_{q \in \tilde{q} \setminus \{r\}}} \text{[TYP-SEND}\star\text{]} \\
\frac{\forall i \in I. \vdash 4_i \blacktriangleright \mu_s : (\overline{S_i})^{\mathfrak{R}^{\circ+1}} (\overline{G_i \downarrow^{\circ+4} s}), \mu_r : (\overline{S_i})^{\otimes^{\circ+3}} (\overline{G_i \downarrow^{\circ+4} r}),}{(\mu_q : \overline{G_i \downarrow^{\circ+4} q})_{q \in \tilde{q} \setminus \{s,r\}}} \text{[TYP-RECV]} \\
\frac{}{\forall i \in I. \vdash 3_i \blacktriangleright \mu_s : (\overline{S_i})^{\mathfrak{R}^{\circ+1}} (\overline{G_i \downarrow^{\circ+4} s}), (\mu_q : \oplus^{\circ+2} \{i : (\overline{G_i \downarrow^{\circ+4} q})\}_{i \in I})_{q \in \text{deps}_s},} \text{[TYP-SEL}\star\text{]}^* \\
\mu_r : (\overline{S_i})^{\otimes^{\circ+3}} (\overline{G_i \downarrow^{\circ+4} r}), (\mu_q : \oplus^{\circ+3} \{i : (\overline{G_i \downarrow^{\circ+4} q})\}_{i \in I})_{q \in \text{deps}_r}, \\
(\mu_q : \overline{G_i \downarrow^{\circ+4} q})_{q \in \tilde{q} \setminus \text{deps}_s \setminus \text{deps}_r \setminus \{s,r\}} \\
\frac{}{\forall i \in I. \vdash 2_i \blacktriangleright \mu_s : (\overline{S_i})^{\mathfrak{R}^{\circ+1}} (\overline{G_i \downarrow^{\circ+4} s}), (\mu_q : \oplus^{\circ+2} \{i : (\overline{G_i \downarrow^{\circ+4} q})\}_{i \in I})_{q \in \text{deps}_s},} \text{[TYP-SEL}\star\text{]} \\
\mu_r : \oplus^{\circ+2} \{i : (\overline{S_i})^{\otimes^{\circ+3}} (\overline{G_i \downarrow^{\circ+4} r})\}_{i \in I}, \\
(\mu_q : \oplus^{\circ+3} \{i : (\overline{G_i \downarrow^{\circ+4} q})\}_{i \in I})_{q \in \text{deps}_r}, \\
(\mu_q : \overline{G_i \downarrow^{\circ+4} q})_{q \in \tilde{q} \setminus \text{deps}_s \setminus \text{deps}_r \setminus \{s,r\}} \\
\frac{}{\vdash \text{O}_{\tilde{q}}[G_s] = 1 \blacktriangleright \mu_s : \&^{\circ} \{i : (\overline{S_i})^{\mathfrak{R}^{\circ+1}} (\overline{G_i \downarrow^{\circ+4} s})\}_{i \in I},} \text{[TYP-RECV]} \\
\mu_r : \oplus^{\circ+2} \{i : (\overline{S_i})^{\otimes^{\circ+3}} (\overline{G_i \downarrow^{\circ+4} r})\}_{i \in I}, \quad \text{(cf. (G.28))} \\
(\mu_q : \oplus^{\circ+2} \{i : (\overline{G_i \downarrow^{\circ+4} q})\}_{i \in I})_{q \in \text{deps}_s} \quad \text{(cf. (G.29))} \\
(\mu_q : \oplus^{\circ+3} \{i : (\overline{G_i \downarrow^{\circ+4} q})\}_{i \in I})_{q \in \text{deps}_r} \quad \text{(cf. (G.30))} \\
(\mu_q : \oplus^{\circ+3} \{i : (\overline{G_i \downarrow^{\circ+4} q})\}_{i \in I})_{q \in \text{deps}_r} \quad \text{(cf. (G.31))} \\
(\mu_q : \overline{G_i \downarrow^{\circ+4} q})_{q \in \tilde{q} \setminus \text{deps}_s \setminus \text{deps}_r \setminus \{s,r\}} \quad \text{(cf. (G.32))}
\end{array}$$

Figure G.3 | Typing derivation used in the proof of Theorem 9.4.28.

Therefore, by Definition G.1.4, $Z \notin \widetilde{X}_C$.

For each $q \in \tilde{q}'$,

$$\begin{aligned}
\text{for } \mu_q \text{ we expect } & \text{deepUnfold}(\overline{G_s \downarrow^{\circ c} q}, \dots) \\
& = \text{deepUnfold}(\overline{\mu Z. (G' \downarrow^{\circ c} q)}, \dots) \\
& = \text{deepUnfold}(\overline{\mu Z. G' \downarrow^{\circ c} q}, \dots) \\
& = \mu Z. \text{deepUnfold}(\overline{G' \downarrow^{\circ c} q}, (X, t_X, \overline{G_X \downarrow^{\circ x} q})_{X \in \widetilde{X}_C}). \quad \text{(G.35)}
\end{aligned}$$

For each $q \in \tilde{q} \setminus \tilde{q}'$,

$$\begin{aligned}
\text{for } \mu_q \text{ we expect } & \text{deepUnfold}(\overline{G_s \downarrow^{\circ c} q}, \dots) \\
& = \text{deepUnfold}(\bullet, \dots) = \bullet. \quad \text{(G.36)}
\end{aligned}$$

We also need an assignment in the recursive context for every $X \in \widetilde{X}_C$, but not for Z .

Let $C' = C[\mu Z. \cdot]$. Clearly, $G' \leq_{C'} G$. Let us establish some facts about the recursion binders, priorities, and active participants related to C' , G' , and Z :

- ◊ $\widetilde{X}_{C'} = \text{ctxBind}(C') = (\text{ctxBind}(C), Z) = (\widetilde{X}_C, Z)$ (cf. Definition G.1.4).
- ◊ $G_Z = \text{recDef}(Z, G) = G'$, as proven by the context C' (cf. Definition G.1.5).
- ◊ $\widetilde{Y}_Z = \text{subBind}(\mu Z. G_Z, G) = \text{ctxBind}(C) = \widetilde{X}_C$.
- ◊ $\circ_{C'} = \text{ctxPri}(C') = \text{ctxPri}(C) = \circ_C$, and $\circ_Z = \text{varPri}(Z, G) = \text{ctxPri}(C) = \circ_C$, and hence $\circ_{C'} = \circ_Z$ (cf. Definition G.1.6).
- ◊ $\tilde{q}_Z = \tilde{q}'$ (cf. Definition G.1.8 and (G.33)).

Because $\widetilde{X}_{C'} = (\widetilde{X}_C, Z)$ and $\tilde{q}' = \tilde{q}_Z$, \tilde{q}' is appropriate for the IH. We apply the IH on C' , G' , and \tilde{q}' to obtain a typing for $O_{\tilde{q}'}[G']$, where we immediately make use of the facts established above. We given the assignment to Z in the recursive context separate from those for the recursion variables in \widetilde{X}_C . Also, by Proposition G.1.13, we can write the final unfolding on Z in the types separately.

$$\begin{aligned} & \left(X : \left(\text{deepUnfold}(\overline{G_X \downarrow^{\circ_X} q}, (Y, t_Y, \overline{G_Y \downarrow^{\circ_Y} q})_{Y \in \widetilde{Y}_X}) \right)_{q \in \tilde{q}_X} \right)_{X \in \widetilde{X}_C}, \\ & Z : \left(\text{deepUnfold}(\overline{G' \downarrow^{\circ_C} q}, (X, t_X, \overline{G_X \downarrow^{\circ_X} q})_{X \in \widetilde{X}_C}) \right)_{q \in \tilde{q}'} \\ & \vdash O_{\tilde{q}'}[G'] \\ & \blacktriangleright \left(\mu q : \text{unfold}^{t_Z}(\mu Z. \text{deepUnfold}(\overline{G' \downarrow^{\circ_C} q}, (X, t_X, \overline{G_X \downarrow^{\circ_X} q})_{X \in \widetilde{X}_C})) \right)_{q \in \tilde{q}'} \end{aligned}$$

G

By assumption, we have

$$t_Z = \max_{\text{pr}} \left(\text{deepUnfold}(\overline{G' \downarrow^{\circ_C} q}, (X, t_X, \overline{G_X \downarrow^{\circ_X} q})_{X \in \widetilde{X}_C}) \right)_{q \in \tilde{q}'} + 1,$$

so t_Z is clearly bigger than the maximum priority appearing in the types before unfolding. Hence, we can apply Rule [TYP-REC] to eliminate Z from the recursive context, and to fold the types, giving the typing of $O_{\tilde{q}}[G_s] = \mu Z((\mu q)_{q \in \tilde{q}'}); O_{\tilde{q}'}[G']$:

$$\begin{aligned} & \left(X : \left(\text{deepUnfold}(\overline{G_X \downarrow^{\circ_X} q}, (Y, t_Y, \overline{G_Y \downarrow^{\circ_Y} q})_{Y \in \widetilde{Y}_X}) \right)_{q \in \tilde{q}_X} \right)_{X \in \widetilde{X}_C} \\ & \vdash O_{\tilde{q}}[G_s] \blacktriangleright \left(\mu q : \mu Z. \text{deepUnfold}(\overline{G' \downarrow^{\circ_C} q}, (X, t_X, \overline{G_X \downarrow^{\circ_X} q})_{X \in \widetilde{X}_C}) \right)_{q \in \tilde{q}'} \end{aligned}$$

In this typing, the type for μq for every $q \in \tilde{q}'$ concurs with (G.35). For every $q \in \tilde{q} \setminus \tilde{q}'$, we can add the type for μq in (G.36) by applying Rule [TYP-END]. This proves the thesis.

- *Recursive call:* $G_s = Z$ (line 10).

Following similar reasoning as in the case of recursive call in the proof of Theorem G.1.14, let us take stock of the types we expect for our orchestrator's channels.

For each $q \in \tilde{q}$,

$$\begin{aligned}
\text{for } \mu_q \text{ we expect } & \overline{\text{deepUnfold}(\overline{G_s} \downarrow^{\circ c} q, \dots)} \\
& = \overline{\text{deepUnfold}(\overline{Z} \downarrow^{\circ c} q, \dots)} \\
& = \overline{\text{deepUnfold}(\overline{Z}, \dots)} \\
& = \overline{\text{deepUnfold}(Z, (X, t_X, \overline{G_X} \downarrow^{\circ x} q)_{X \in (\tilde{X}_1, Z, \tilde{Y}_Z)})} \\
& = \overline{\text{deepUnfold}(Z, (X, t_X, \overline{G_X} \downarrow^{\circ x} q)_{X \in (Z, \tilde{Y}_Z)})} \\
& = \mu_Z.(\uparrow^{t_Z} \overline{\text{deepUnfold}(\overline{G_Z} \downarrow^{\circ z} q, (X, t_X, \overline{G_X} \downarrow^{\circ x} q)_{X \in \tilde{Y}_Z})}) \quad (\text{G.37})
\end{aligned}$$

Also, we need an assignment in the recursive context for every $X \in \tilde{X}_C$. By Lemma G.1.10, $\tilde{q} = \tilde{q}_Z$. Hence, for Z , the assignment should be as follows:

$$Z : \left(\overline{\text{deepUnfold}(\overline{G_Z} \downarrow^{\circ z} q, (X, t_X, \overline{G_X} \downarrow^{\circ x} q)_{X \in \tilde{Y}_Z})} \right)_{q \in \tilde{q}} \quad (\text{G.38})$$

We apply Rule [TYP-VAR] to obtain the typing of $O_{\tilde{q}}[G_s]$, where we make us the rule's allowance for an arbitrary recursive context up to the assignment to Z . Rule [TYP-VAR] is applicable, because the types are recursive definitions on Z , concurring with the types assigned to Z , and lifted by a common lifter t_Z .

$$\begin{array}{c}
\overline{\left(X : \left(\overline{\text{deepUnfold}(\overline{G_X} \downarrow^{\circ x} q, (Y, t_Y, \overline{G_Y} \downarrow^{\circ y} q)_{Y \in \tilde{Y}_X})} \right)_{q \in \tilde{q}_X} \right)_{X \in \tilde{X}_C \setminus \{Z\}},} \\
Z : \left(\overline{\text{deepUnfold}(\overline{G_Z} \downarrow^{\circ z} q, (X, t_X, \overline{G_X} \downarrow^{\circ x} q)_{X \in \tilde{Y}_Z})} \right)_{q \in \tilde{q}} \\
\vdash O_{\tilde{q}}[G_s] = X \langle (\mu_q)_{q \in \tilde{q}} \rangle \blacktriangleright \\
(\mu_q : \mu_Z.(\uparrow^{t_Z} \overline{\text{deepUnfold}(\overline{G_Z} \downarrow^{\circ z} q, (X, t_X, \overline{G_X} \downarrow^{\circ x} q)_{X \in \tilde{Y}_Z})})_{q \in \tilde{q}}
\end{array} \quad [\text{TYP-VAR}]$$

In this typing, the types of μ_q for each $q \in \tilde{q}$ concur with the expected types in (G.37), and the assignment to Z in the recursive context concurs with (G.38). This proves the thesis. \square

G.2.2. PROOFS FOR SECTION 9.4.4.2

In what follows we write $O_G^{\tilde{q}}$ instead of $O_{\tilde{q}}[G]$. When we appeal to router and orchestrator synthesis, we often omit the parameter \tilde{q} . That is, we write $\llbracket G \rrbracket_p$ instead of $\llbracket G \rrbracket_p^{\tilde{q}}$, and O_G instead of $O_G^{\tilde{q}}$.

We list the auxiliary definitions and results necessary to prove Theorem 9.4.34. The proof is by coinduction, i.e., by exhibiting a weak bisimulation \mathbb{B} that contains the pair $(\mathcal{E}[\mathcal{H}_G], \mathcal{E}[O_G])$.

- Notation G.2.1 sets up some useful notation for the LTS of APCP (Definition 9.4.31).

- We define a function that, given a global type G and a *starting relation* \mathbb{B}_0 , computes a corresponding *candidate relation*. This function, given in Definition G.2.2, is denoted $\mathbb{B}(G, \mathbb{B}_0, p)$.

The function $\mathbb{B}(G, \mathbb{B}_0, p)$ constructs a relation between processes by following labeled transitions on μ_p that concur with the expected behavior of p 's router and the orchestrator depending on the shape of G . For example, for $G = s!p\{i\langle S_i \rangle.G_i\}_{i \in I}$, for each $i \in I$, the function constructs \mathbb{B}_1^i containing the processes reachable from \mathbb{B}_0 through a transition labeled $\overline{\mu_p} \triangleleft i$ (selection of the label chosen by s), and \mathbb{B}_2^i containing the processes reachable from \mathbb{B}_0 through a transition labeled $\overline{\mu_p}[y]$ (output of the endpoint sent by s); the resulting relation then consists of \mathbb{B}_0 and, for each $i \in I$, \mathbb{B}_1^i and $\mathbb{B}(G_i, \mathbb{B}_2^i, p)$ (i.e., the candidate relation for G_i starting with B_2^i). Since we are interested in a *weak bisimulation*, the τ -transitions of one process do not need to be simulated by related processes. Hence, e.g., if $(P, Q) \in \mathbb{B}_0$ and $P \xrightarrow{\tau} P'$ and $Q \xrightarrow{\tau} Q'$, then $\{(P, Q), (P', Q), (P, Q'), (P', Q')\} \subseteq \mathbb{B}(G, \mathbb{B}_0, p)$. This way, we only *synchronize* related processes when they can both take the same labeled transition.

- We intend to show that, if $G \xrightarrow{\beta_1} \dots \xrightarrow{\beta_k} G'$, the function $\mathbb{B}(G', \mathbb{B}_0, p)$ constructs a weak bisimulation. However, for this to hold, the starting relation \mathbb{B}_0 cannot be arbitrary: the pairs of processes in \mathbb{B}_0 have to be reachable from $\mathcal{E}[\mathcal{H}_G]$ and $\mathcal{E}[O_G]$ through labeled transitions that concur with the transitions from G to G' . Moreover, the processes must have “passed through” evaluation contexts containing the router for p at G' and the orchestrator at G' . Definition G.2.3 gives a *consistent starting relation*, parametric on k , that satisfies these requirements. Note that for constructing the relation \mathbb{B} , we only need the following definition for $k = 0$. However, in the proof that \mathbb{B} is a weak bisimulation we need to generalize it to $k \geq 0$ to assure that the starting relation of coinductive steps is consistent.
- Lemma G.2.4 states that processes in such a consistent starting relation follow a pattern of specific labeled transitions, passing through a context containing the router of p or the orchestrator.
- Lemma G.2.5 states that the relation obtained from $\mathbb{B}(G', \mathbb{B}_0, p)$ is a weak bisimulation, given the consistent starting relation $\mathbb{B}_0 = \langle G \xrightarrow{\beta_1} \dots \xrightarrow{\beta_k} G', (\mathcal{E}[\mathcal{H}_G], \mathcal{E}[O_G]), p \rangle$.
- The proof of Theorem 9.4.34 on Page 414 follows from these definitions and results.

Notation G.2.1. We adopt the following notational conventions.

- We write Proc to denote the set of all typable ACP processes.
- In the LTS for ACP (Definition 9.4.31), we simplify labels: we write an overlined variant for output and selection (e.g., for $(\mathbf{v}ab)\mu_p[a] \triangleleft \ell$ we write $\overline{\mu_p} \triangleleft \ell$), and omit continuation channels for input and branching (e.g., for $\mu_p(a) \triangleright \ell$ we write $\mu_p \triangleright \ell$).
- Also, we write $P \xrightarrow{\alpha_1 \dots \alpha_n} Q$ rather than $P \xrightarrow{\alpha_1} P_1 \xrightarrow{\alpha_2} P_2 \dots \xrightarrow{\alpha_n} Q$.

- We write $\vec{\alpha}$ to denote a sequence of labels, e.g., if $\vec{\alpha} = \alpha_1 \dots \alpha_n$ then $\vec{\alpha} \Rightarrow = \xrightarrow{\alpha_1 \dots \alpha_n}$. If $\vec{\alpha} = \epsilon$ (empty sequence), then $\vec{\alpha} \Rightarrow = \Rightarrow$.

Definition G.2.2 (Candidate Relation). Let G be a global type and let p be a participant of G . Also, let $\mathbb{B}_0 \subseteq \text{Proc} \times \text{Proc}$ denote a relation on processes. We define a candidate relation for a weak bisimulation of the hub and orchestrator of G observed on μ_p starting at \mathbb{B}_0 , by abuse of notation denoted $\mathbb{B}(G, \mathbb{B}_0, p)$. The definition is inductive on the structure of G :

- $G = \text{end}$. Then $\mathbb{B}(G, \mathbb{B}_0, p) = \mathbb{B}_0$.
- $G = s!r\{i\langle S_i \rangle.G_i\}_{i \in I}$. We distinguish four cases, depending on the involvement of p :
 - $p = s$. For every $i \in I$, let

$$\begin{aligned} \mathbb{B}_1^i &\triangleq \{(P_1, Q_1) \mid \exists (P_0, Q_0) \in \mathbb{B}_0. P_0 \xrightarrow{\mu_p \triangleright^i} P_1 \wedge Q_0 \xrightarrow{\mu_p \triangleright^i} Q_1\} \\ \mathbb{B}_2^i &\triangleq \{(P_2, Q_2) \mid \exists (P_1, Q_1) \in \mathbb{B}_1^i. P_1 \xrightarrow{\mu_p \triangleright^i} P_2 \wedge Q_1 \xrightarrow{\mu_p \triangleright^i} Q_2\} \end{aligned}$$

Then

$$\mathbb{B}(G, \mathbb{B}_0, p) \triangleq \mathbb{B}_0 \cup \bigcup_{i \in I} (\mathbb{B}_1^i \cup \mathbb{B}_2^i).$$

- $p = r$. For every $i \in I$, let

$$\begin{aligned} \mathbb{B}_1^i &\triangleq \{(P_1, Q_1) \mid \exists (P_0, Q_0) \in \mathbb{B}_0. P_0 \xrightarrow{\overline{\mu_p} \triangleleft^i} P_1 \wedge Q_0 \xrightarrow{\overline{\mu_p} \triangleleft^i} Q_1\} \\ \mathbb{B}_2^i &\triangleq \{(P_2, Q_2) \mid \exists (P_1, Q_1) \in \mathbb{B}_1^i. P_1 \xrightarrow{\overline{\mu_p} \triangleleft^i} P_2 \wedge Q_1 \xrightarrow{\overline{\mu_p} \triangleleft^i} Q_2\} \end{aligned}$$

Then

$$\mathbb{B}(G, \mathbb{B}_0, p) \triangleq \mathbb{B}_0 \cup \bigcup_{i \in I} (\mathbb{B}_1^i \cup \mathbb{B}_2^i).$$

- $p \notin \{s, r\}$ and $\text{hdep}(p, s, G)$ or $\text{hdep}(p, r, G)$. For every $i \in I$, let

$$\mathbb{B}_1^i \triangleq \{(P_1, Q_1) \mid \exists (P_0, Q_0) \in \mathbb{B}_0. P_0 \xrightarrow{\overline{\mu_p} \triangleleft^i} P_1 \wedge Q_0 \xrightarrow{\overline{\mu_p} \triangleleft^i} Q_1\}$$

Then

$$\mathbb{B}(G, \mathbb{B}_0, p) \triangleq \mathbb{B}_0 \cup \bigcup_{i \in I} \mathbb{B}_1^i.$$

- $p \notin \{s, r\}$ and neither $\text{hdep}(p, s, G)$ nor $\text{hdep}(p, r, G)$. Then

$$\mathbb{B}(G, \mathbb{B}_0, p) \triangleq \mathbb{B}(G_j, \mathbb{B}_0, p)$$

for any $j \in I$.

- $G = \mu X.G'$. Then $\mathbb{B}(G, \mathbb{B}_0, p) \triangleq \mathbb{B}(G'\{\mu X.G'/X\}, \mathbb{B}_0, p)$.
- $G = \text{skip}.G'$. Then $\mathbb{B}(G, \mathbb{B}_0, p) \triangleq \mathbb{B}(G', \mathbb{B}_0, p)$.

Definition G.2.3 (Consistent Starting Relation). Let $G \xrightarrow{\beta_1} \dots \xrightarrow{\beta_k} G'$ (with $k \geq 0$) be a sequence of labeled transitions from G to G' including the intermediate global types (cf. Definition 9.4.20) and let p be a participant of G . Also, let (P, Q) be a pair of initial processes. We define the consistent starting relation for observing the hub and orchestrator of G' on μ_p starting at (P, Q) after the transitions from G to G' , denoted $\langle G \xrightarrow{\beta_1} \dots \xrightarrow{\beta_k} G', (P, Q), p \rangle$. The definition is inductive on the number k of transitions:

- $k = 0$. Then $\langle G, (P, Q), p \rangle \triangleq \{(P', Q') \mid P \Rightarrow P' \wedge Q \Rightarrow Q'\}$.
- $k = k' + 1$. Then

$$\begin{aligned} & \langle G \xrightarrow{\beta_1} \dots \xrightarrow{\beta_{k'}} G_{k'} \xrightarrow{\beta_k} G_k, (P, Q), p \rangle \\ & \triangleq \{(P_k, Q_k) \mid \exists (P_{k'}, Q_{k'}) \in \langle G \xrightarrow{\beta_1} \dots \xrightarrow{\beta_{k'}} G_{k'}, (P, Q), p \rangle, \\ & \quad ((\exists C. P_{k'} \xRightarrow{\tilde{\alpha}} C[[G_k]]_p \Rightarrow P_k) \wedge (\exists \mathcal{D}. Q_{k'} \xRightarrow{\tilde{\alpha}} \mathcal{D}[O_{G_k}] \Rightarrow Q_k))\}, \end{aligned}$$

where $\tilde{\alpha}$ depends on $\beta_k = s!r(j\langle S_j \rangle)$ and $G_{k'}$ (in unfolded form if $G_{k'} = \mu X.G'_{k'}$):

- If $p = s$, then $\tilde{\alpha} = \mu_p \triangleright j, \mu_p(y)$.
- If $p = r$, then $\tilde{\alpha} = \overline{\mu_p} \triangleleft j, \overline{\mu_p}[y]$.
- If $p \notin \{s, r\}$ and $\text{hdep}(p, s, G_k)$ or $\text{hdep}(p, r, G_k)$, then $\tilde{\alpha} = \overline{\mu_p} \triangleleft j$.
- If $p \notin \{s, r\}$ and neither $\text{hdep}(p, s, G_k)$ nor $\text{hdep}(p, r, G_k)$, then $\tilde{\alpha} = \epsilon$.

Lemma G.2.4. Let G be a relative well-formed global type such that $G \xrightarrow{\beta_1} \dots \xrightarrow{\beta_k} G'$ for $k \geq 0$ and let p be a participant of G . Also, let \mathcal{E} be an evaluation context such that $\text{fn}(\mathcal{E}) = \{\mu_p\}$. Then there exists $\tilde{\alpha}$ such that, for every $(P, Q) \in \langle G \xrightarrow{\beta_1} \dots \xrightarrow{\beta_k} G', (\mathcal{E}[\mathcal{H}_G], \mathcal{E}[O_G]), p \rangle$,

- $\mathcal{E}[\mathcal{H}_G] \xRightarrow{\tilde{\alpha}} C[[G']_p] \Rightarrow P$ where C is an evaluation context without an output or selection on μ_p ; and
- $\mathcal{E}[O_G] \xRightarrow{\tilde{\alpha}} \mathcal{D}[O_{G'}] \Rightarrow Q$ where \mathcal{D} is an evaluation context without an output or selection on μ_p .

Proof. By induction on k . In the base case ($k = 0$), we have $G = G'$, so $\mathcal{E}[\mathcal{H}_G] = C[[G']_p] \Rightarrow P$ and $\mathcal{E}[O_G] = \mathcal{D}[O_{G'}] \Rightarrow Q$.

For the inductive case ($k = k' + 1$), we detail the representative case where

$$G \xrightarrow{\beta_1} \dots \xrightarrow{\beta_{k'}} G_{k'} = p!s\{i\langle S_i \rangle.G'_i\}_{i \in I} \xrightarrow{p!s(i'\langle S_{i'} \rangle)} G'$$

for some $i' \in I$. By the IH, for every $(P_{k'}, Q_{k'}) \in \langle G \xrightarrow{\beta_1} \dots \xrightarrow{\beta_{k'}} G_{k'}, (\mathcal{E}[\mathcal{H}_G], \mathcal{E}[O_G]), p \rangle$, there exists $\tilde{\alpha}'$ such that $\mathcal{E}[\mathcal{H}_G] \xRightarrow{\tilde{\alpha}'} \mathcal{C}'[[G_{k'}]^p] \Rightarrow P_{k'}$ and $\mathcal{E}[O_G] \xRightarrow{\tilde{\alpha}'} \mathcal{D}'[O_{G_{k'}}] \Rightarrow Q_{k'}$ where \mathcal{C}' and \mathcal{D}' are without output or selection on μ_p . Take any

$$(P, Q) \in \langle G \xrightarrow{\beta_1} \dots \xrightarrow{\beta_{k'}} G_{k'} \xrightarrow{s!p(i'\langle S_{i'} \rangle)} G', (\mathcal{E}[\mathcal{H}_G], \mathcal{E}[O_G]), p \rangle.$$

By definition, there exists

$$(P_{k'}, Q_{k'}) \in \langle G \xrightarrow{\beta_1} \dots \xrightarrow{\beta_{k'}} G_{k'}, (\mathcal{E}[\mathcal{H}_G], \mathcal{E}[O_G]), p \rangle$$

such that

$$P_{k'} \xrightarrow{\overline{\mu_p} \triangleleft i', \overline{\mu_p}[y]} \mathcal{C}[[G']^p] \Rightarrow P \text{ and } Q_{k'} \xrightarrow{\overline{\mu_p} \triangleleft i', \overline{\mu_p}[y]} \mathcal{D}[O_{G'}] \Rightarrow Q$$

where there are no outputs or selection on μ_p in \mathcal{C} and \mathcal{D} . Let $\tilde{\alpha} = \tilde{\alpha}', \overline{\mu_p} \triangleleft i', \overline{\mu_p}[y]$. Then $\mathcal{E}[\mathcal{H}_G] \xRightarrow{\tilde{\alpha}} \mathcal{C}[[G']_p] \Rightarrow P$ and $\mathcal{E}[O_G] \xRightarrow{\tilde{\alpha}} \mathcal{D}[O_{G'}] \Rightarrow Q$. \square

Lemma G.2.5. *Let G be a relative well-formed global type such that $G \xrightarrow{\beta_1} \dots \xrightarrow{\beta_k} G'$ (with $k \geq 0$) and let p be a participant of G . Also, let \mathcal{E} be an evaluation context such that $\text{fn}(\mathcal{E}) = \{\mu_p\}$. Then the relation $\mathbb{B}(G', \mathbb{B}_0)$, with $\mathbb{B}_0 = \langle G \xrightarrow{\beta_1} \dots \xrightarrow{\beta_k} G', (\mathcal{E}[\mathcal{H}_G], \mathcal{E}[O_G]), p \rangle$, is a weak bisimulation (cf. Definition 9.4.33).*

Proof. By coinduction on the structure of G' ; there are four cases (communication, recursion, skip, and end). We only detail the interesting case of communication, which is the only case which involves transitions with labels other than τ . There are four subcases depending on the involvement of p in the communication (p is sender, p is recipient, p depends on the communication, or p does not depend on the communication). In each subcase, the proof follows the same pattern, so as a representative case, we detail when p is the recipient of the communication, i.e., $G' = s!p[i\langle S_i \rangle].G'_i{}_{i \in I}$. Recall

$$[[G']]_p = p_s \triangleright \{i : \overline{\mu_p} \triangleleft i \cdot (\overline{p_q} \triangleleft i)_{q \in \text{deps}} \cdot p_s(v); \overline{\mu_p}[w] \cdot ([v \leftrightarrow w] \mid [[G'_i]]_p)\}_{i \in I},$$

(Algorithm 3 line 6)

$$[[G']]_s = \mu_p \triangleright \{i : \overline{s_p} \triangleleft i \cdot (\overline{s_q} \triangleleft i)_{q \in \text{deps}} \cdot \mu_s(v); \overline{s_p}[w] \cdot ([v \leftrightarrow w] \mid [[G'_i]]_s)\}_{i \in I},$$

(Algorithm 3 line 5)

$$O_{G'} = \mu_s \triangleright \{i : \overline{\mu_p} \triangleleft i \cdot (\overline{\mu_q} \triangleleft i)_{q \in \text{deps}} \cdot \mu_s(v); \overline{\mu_p}[w] \cdot ([v \leftrightarrow w] \mid O_{G'_i})\}_{i \in I}.$$

(Algorithm 4 line 3)

Let $\mathbb{B} = \mathbb{B}(G', \mathbb{B}_0)$. We have $\mathbb{B} = \mathbb{B}_0 \cup \bigcup_{i \in I} (\mathbb{B}_1^i \cup \mathbb{B}(G'_i, \mathbb{B}_2^i))$ with \mathbb{B}_1^i and \mathbb{B}_2^i as defined above. Take any $(P, Q) \in \mathbb{B}$; we distinguish cases depending on the subset of \mathbb{B} to which (P, Q) belongs:

- $(P, Q) \in \mathbb{B}_0$. By Lemma G.2.4, we have $\mathcal{E}[\mathcal{H}_G] \xRightarrow{\tilde{\alpha}} \mathcal{C}[[G']_p] \Rightarrow P$ and $\mathcal{E}[O_G] \xRightarrow{\tilde{\alpha}} \mathcal{D}[O_{G'}] \Rightarrow Q$, where \mathcal{C} and \mathcal{D} do not contain an output or selection on μ_p .

Suppose $P \xrightarrow{\alpha} P'$; we need to exhibit a matching weak transition from Q . By assumption, there are no outputs or selections on μ_p in \mathcal{C} and \mathcal{D} . Since there are no outputs or selections on μ_p in \mathcal{C} , by definition of $[[G']_p$, we need only consider two cases for α :

- $\alpha = \tau$. We have $Q \Rightarrow Q$, so $Q \xRightarrow{\tau} Q$. Since $\mathcal{C}[\llbracket G' \rrbracket_p] \Rightarrow P'$ and $\mathcal{D}[O_{G'}] \Rightarrow Q$, we have $(P', Q) \in \mathbb{B}_0 \subseteq \mathbb{B}$.
- $\alpha = \overline{\mu_p} \triangleleft j$ for some $j \in I$. To enable this transition, which originates from p 's router, somewhere in the τ -transitions between $\mathcal{C}[\llbracket G' \rrbracket_p]$ and P the label j was received on p_s , sent by the router of s on s_p . For this to happen, the label j was received on μ_s , sent from the context on s_μ . Since \mathcal{H}_G and O_G are embedded in the same context, the communication of j between s_μ and μ_s can also take place after a number of τ -transitions from $\mathcal{D}[O_{G'}]$, after which the selection of j on μ_p becomes enabled. Hence, since there are no outputs or selection on μ_p in \mathcal{D} , we have $Q \Rightarrow Q_0 \xrightarrow{\overline{\mu_p} \triangleleft j} Q'$. We have $\mathcal{D}[O_{G'}] \Rightarrow Q_0$, so $(P, Q_0) \in \mathbb{B}_0$. Since $P \xrightarrow{\overline{\mu_p} \triangleleft j} P'$ and $Q_0 \xrightarrow{\overline{\mu_p} \triangleleft j} Q'$, we have $(P', Q') \in \mathbb{B}_1^j \subseteq \mathbb{B}$.

Now suppose $Q \xrightarrow{\alpha} Q'$; we need to exhibit a matching weak transition from P . Again, we need only consider two cases for α :

- $\alpha = \tau$. Analogous to the similar case above.
 - $\alpha = \overline{\mu_p} \triangleleft j$ for some $j \in I$. To enable this transition, which originates from the orchestrator, somewhere in the τ -transitions between $\mathcal{D}[O_{G'}]$ and Q the label j was received on μ_s , sent from the context on s_μ . Hence, this communication can also take place after a number of transitions from $\mathcal{E}[\mathcal{H}_G]$, where the label is received by the router of s . After this, from $\mathcal{C}[\llbracket G' \rrbracket_p]$, the router of s forwards j to p 's router (communication between s_p and p_s), enabling the selection of j on μ_p in p 's router. Hence, since there are no outputs or selections in \mathcal{C} , we have $P \Rightarrow P_0 \xrightarrow{\overline{\mu_p} \triangleleft j} P'$. We have $\mathcal{C}[\llbracket G' \rrbracket_p] \Rightarrow P_0$, so $(P_0, Q) \in \mathbb{B}_0$. Since $P_0 \xrightarrow{\overline{\mu_p} \triangleleft j} P'$ and $Q \xrightarrow{\overline{\mu_p} \triangleleft j} Q'$, we have $(P', Q') \in \mathbb{B}_1^j \subseteq \mathbb{B}$.
- $(P, Q) \in \mathbb{B}_1^j$ for some $j \in I$. We have $\mathcal{E}[\mathcal{H}_G] \xrightarrow{\tilde{\alpha}} \mathcal{C}[\llbracket G' \rrbracket_p] \Rightarrow P_0 \xrightarrow{\overline{\mu_p} \triangleleft j} P$ and $\mathcal{E}[O_G] \xrightarrow{\tilde{\alpha}} \mathcal{D}[O_{G'}] \Rightarrow Q_0 \xrightarrow{\overline{\mu_p} \triangleleft j} Q$ where $(P_0, Q_0) \in \mathbb{B}_0$. Since we have already observed the selection of j on μ_p from both the hub and the orchestrator, we know that the routers of p and s are in branch j , and similarly the orchestrator is in branch j .

Suppose $P \xrightarrow{\alpha} P'$. To exhibit a matching weak transition from Q we only need to consider two cases for α :

- $\alpha = \tau$. We have $Q \xRightarrow{\tau} Q$, and $P_0 \xrightarrow{\overline{\mu_p} \triangleleft j} P'$ and $Q_0 \xrightarrow{\overline{\mu_p} \triangleleft j} Q$, so $(P', Q) \in \mathbb{B}_1^j \subseteq \mathbb{B}$.
- $\alpha = \overline{\mu_p}[y]$ for some y . The observed output of some y on μ_p must originate from p 's router. This output is only enabled after receiving some ν over p_s , which must be sent by the router of s over s_p . The output by the router of s is only enabled after receiving some ν over μ_s , sent by the context over s_μ . Since the hub and the orchestrator are embedded in the same context, the communication of ν from s_μ to μ_s can also occur (or has already occurred) for the orchestrator. After

this, the output of y over μ_p is enabled in the orchestrator, i.e., $Q \Rightarrow Q_1 \xrightarrow{\overline{\mu_p}[y]} Q'$. We have $Q_0 \xrightarrow{\overline{\mu_p} \triangleleft j} \Rightarrow Q_1$, so $(P, Q_1) \in \mathbb{B}_1^j$. Since $P \xrightarrow{\overline{\mu_p}[y]} \Rightarrow P'$ and $Q_1 \xrightarrow{\overline{\mu_p}[y]} \Rightarrow Q'$, we have $(P', Q') \in \mathbb{B}_2^j$. By definition, $\mathbb{B}_2^j \subseteq \mathbb{B}(G'_j, B_2^j) \subseteq \mathbb{B}$, so $(P', Q') \in \mathbb{B}$.

Now suppose $Q \xrightarrow{\alpha} Q'$. To exhibit a matching weak transition from P we only need to consider two cases for α :

- $\alpha = \tau$. Analogous to the similar case above.
- $\alpha = \overline{\mu_p}[y]$ for some y . The observed output of some y on μ_p must originate from the orchestrator. This output is only enabled after receiving some v over μ_s , sent by the context of s_μ . Since the hub and the orchestrator are embedded in the same context, the communication of v from s_μ to μ_s can also occur (or has already occurred) for the router of s . After this, the router of s sends another channel v' over s_p , received by p 's router on p_s . This enables the output of y on μ_p by p 's router, i.e., $P \Rightarrow P_1 \xrightarrow{\overline{\mu_p}[y]} P'$. We have $P_0 \xrightarrow{\overline{\mu_p} \triangleleft j} \Rightarrow P_1$, so $(P_1, Q) \in \mathbb{B}_1^j$. Since $P \xrightarrow{\overline{\mu_p}[y]} \Rightarrow P'$ and $Q_1 \xrightarrow{\overline{\mu_p}[y]} \Rightarrow Q'$, we have $(P', Q') \in \mathbb{B}_2^j$. As above, this implies that $(P', Q') \in \mathbb{B}$.
- For some $j \in I$, $(P, Q) \in \mathbb{B}(G'_j, \mathbb{B}_2^j)$. The thesis follows from proving that $\mathbb{B}(G'_j, \mathbb{B}_2^j)$ is a weak bisimulation. For this, we want to appeal to the coinduction hypothesis, so we have to show that $\mathbb{B}_2^j = \langle G \xrightarrow{\beta_1} \dots \xrightarrow{\beta_k} G' \xrightarrow{slp(j \langle S_j \rangle)} G'_j, (\mathcal{E}[\mathcal{H}_G], \mathcal{E}[O_G]), p \rangle$. We prove that $(P_2, Q_2) \in \mathbb{B}_2^j$ if and only if $(P_2, Q_2) \in \langle G \xrightarrow{\beta_1} \dots \xrightarrow{\beta_k} G' \xrightarrow{slp(j \langle S_j \rangle)} G'_j, (\mathcal{E}[\mathcal{H}_G], \mathcal{E}[O_G]), p \rangle$, i.e., we prove both directions of the bi-implication:

- Take any $(P_2, Q_2) \in \mathbb{B}_2^j$. We have $\mathcal{E}[\mathcal{H}_G] \xrightarrow{\tilde{\alpha}} C[[G']_p] \Rightarrow P_0 \xrightarrow{\overline{\mu_p} \triangleleft j} \Rightarrow P_1 \xrightarrow{\overline{\mu_p}[y]} \Rightarrow P_2$ and $\mathcal{E}[O_G] \xrightarrow{\tilde{\alpha}} \mathcal{D}[O_{G'}] \Rightarrow Q_0 \xrightarrow{\overline{\mu_p} \triangleleft j} \Rightarrow Q_1 \xrightarrow{\overline{\mu_p}[y]} \Rightarrow Q_2$, where $(P_0, Q_0) \in \mathbb{B}_0$ and $(P_1, P_1) \in \mathbb{B}_1^j$.

By definition, somewhere during the transitions from $C[[G']_p]$ to P_1 , we find $C'[[G'_j]_p]$, which may then further reduce by τ -transitions towards P_2 . As soon as we do find $C'[[G'_j]_p]$, the output on μ_p is available, and the selection on μ_p has already occurred or is still available. Because they are asynchronous actions, we can observe the selection and output on μ_p as soon as they are available, before further reducing p 's router. Hence, we can observe

$$C[[G']_p] \Rightarrow \xrightarrow{\overline{\mu_p} \triangleleft j} \xrightarrow{\overline{\mu_p}[y]} \Rightarrow C'[[G'_j]_p] \Rightarrow P_2,$$

i.e.,

$$\mathcal{E}[\mathcal{H}_G] \xrightarrow{\tilde{\alpha}} C[[G']_p] \xrightarrow{\overline{\mu_p} \triangleleft j, \overline{\mu_p}[y]} C'[[G'_j]_p] \Rightarrow P_2.$$

By definition, $\llbracket G'_j \rrbracket_p$ has no output or selection on μ_p available, so there are no outputs or selections on μ_p in C'' .

By a similar argument, we can observe $\mathcal{D}[O_{G'}] \xRightarrow{\overline{\mu_p} \triangleleft j} \xRightarrow{\overline{\mu_p} \triangleright y} \Rightarrow \mathcal{D}''[O_{G'_j}] \Rightarrow Q_2$, i.e., $\mathcal{E}[O_G] \xRightarrow{\tilde{\alpha}} \mathcal{D}[O_{G'}] \xRightarrow{\overline{\mu_p} \triangleleft j, \overline{\mu_p} \triangleright y} \mathcal{D}''[O_{G'_j}] \Rightarrow Q_2$. Also in this case, there are no outputs or selections on μ_p in \mathcal{D}'' .

By assumption and definition,

$$(C''[\llbracket G' \rrbracket_p], \mathcal{D}''[O_{G'}]) \in \mathbb{B}_0 = \langle G \xrightarrow{\beta_1} \dots \xrightarrow{\beta_k} G', (\mathcal{E}[\mathcal{H}_G], \mathcal{E}[O_G]), p \rangle.$$

Hence, by definition, $(P_2, Q_2) \in \langle G \xrightarrow{\beta_1} \dots \xrightarrow{\beta_k} G' \xrightarrow{s!p(j\langle S_j \rangle)} G'_j, (\mathcal{E}[\mathcal{H}_G], \mathcal{E}[O_G]), p \rangle$.

- Take any $(P, Q) \in \langle G \xrightarrow{\beta_1} \dots \xrightarrow{\beta_k} G' \xrightarrow{s!p(j\langle S_j \rangle)} G'_j, (\mathcal{E}[\mathcal{H}_G], \mathcal{E}[O_G]), p \rangle$. By definition, there are $(P', Q') \in \langle G \xrightarrow{\beta_1} \dots \xrightarrow{\beta_k} G', (\mathcal{E}[\mathcal{H}_G], \mathcal{E}[O_G]), p \rangle$ such that

$$P' \xRightarrow{\overline{\mu_p} \triangleleft j, \overline{\mu_p} \triangleright y} C[\llbracket G' \rrbracket_p] \Rightarrow P$$

and $Q' \xRightarrow{\overline{\mu_p} \triangleleft j, \overline{\mu_p} \triangleright y} \mathcal{D}[O_{G'}] \Rightarrow Q$. Since,

$$\mathbb{B}_0 = \langle G \xrightarrow{\beta_1} \dots \xrightarrow{\beta_k} G', (\mathcal{E}[\mathcal{H}_G], \mathcal{E}[O_G]), p \rangle,$$

by definition $(P, Q) \in \mathbb{B}_2^j$. □

Theorem 9.4.34. *Suppose given a relative well-formed global type G . Let \mathcal{H}_G be the hub of routers of G (Definition 9.4.29) and take the orchestrator $O_{\text{part}(G)}[G]$ of G (Definition 9.4.27). Let $p \in \text{part}(G)$, and let \mathcal{E} be an evaluation context such that $\emptyset \vdash \mathcal{E}[\mathcal{H}_G] \blacktriangleright \mu_p : \overline{(G \mid^\circ p)}$. Then, $\mathcal{E}[\mathcal{H}_G]$ and $\mathcal{E}[O_{\text{part}(G)}[G]]$ are weakly bisimilar (Definition 9.4.33).*

Proof. Let $\mathbb{B} = \mathbb{B}(G, \mathbb{B}_0)$, where $\mathbb{B}_0 = \langle G, (\mathcal{E}[\mathcal{H}_G], \mathcal{E}[O_G]), p \rangle$. By Lemma G.2.5, \mathbb{B} is a weak bisimulation. Because $(\mathcal{E}[\mathcal{H}_G], \mathcal{E}[O_G]) \in \mathbb{B}_0 \subseteq \mathbb{B}$, it then follows that $\mathcal{E}[\mathcal{H}_G]$ and $\mathcal{E}[O_G]$ are weakly bisimilar. □

H

APPENDICES FOR CHAPTER 10

H.1. THE RUNNING EXAMPLE FROM [BOC+17]

Bocchi *et al.* [Boc+17] develop a running example that is similar to ours. Their example concerns an ATM protocol between a client (c) and a payment server (s), preceded by a client authorization through a separate authenticator (a).

Bocchi *et al.*'s example includes assertions. Assertions are orthogonal to the method of projecting global types onto local protocols and extracting monitors from global types; adding assertions does not modify the spirit of our approach. Next we present G_{ATM} , a version of Bocchi *et al.*'s running example without assertions; it allows us to illustrate how our approach covers protocols considered in Bocchi *et al.*'s approach.

$$\begin{aligned} G_{ATM} &\triangleq c!a\{\text{login}\langle\text{str}\rangle.a!s\{\text{ok}\langle\rangle.a!c\{\text{ok}\langle\rangle.G_{loop}\}, \text{fail}\langle\rangle.a!c\{\text{fail}\langle\rangle.\text{end}\}\}\} \\ G_{loop} &\triangleq \mu X.s!c\{\text{account}\langle\text{int}\rangle.c!s\{\text{withdraw}\langle\text{int}\rangle.X, \text{deposit}\langle\text{int}\rangle.X, \text{quit}\langle\rangle.\text{end}\}\} \end{aligned}$$

Notice how, for this example to work under traditional forms of projection, a needs to explicitly forward the success of the login attempt to c .

Our framework supports G_{ATM} as is, because it is well-formed according to Definition 10.3.4. The relative projections attesting to this are as follows (cf. Algorithm 5):

$$\begin{aligned} G_{loop}\langle c, s \rangle &= \mu X.s!c\{\{\text{account}\langle\text{int}\rangle.c!s\{\{\text{withdraw}\langle\text{int}\rangle.X, \text{deposit}\langle\text{int}\rangle.X, \text{quit}\langle\rangle.\text{end}\}\}\}\} \\ G_{ATM}\langle c, s \rangle &= (s?a)!c\{\{\text{ok}\langle\rangle.(G_{loop}\langle c, s \rangle), \text{quit}\langle\rangle.\text{end}\}\} \\ G_{loop}\langle c, a \rangle &= \text{end} \\ G_{ATM}\langle c, a \rangle &= c!a\{\{\text{login}\langle\text{str}\rangle.(a!s)\{\{\text{ok}\langle\rangle.a!c\{\{\text{ok}\langle\rangle.\text{end}\}\}\}, \text{quit}\langle\rangle.a!c\{\{\text{quit}\langle\rangle.\text{end}\}\}\}\}\} \\ G_{loop}\langle s, a \rangle &= \text{end} \\ G_{ATM}\langle s, a \rangle &= a!s\{\{\text{ok}\langle\rangle.\text{end}, \text{fail}\langle\rangle.\text{end}\}\} \end{aligned}$$

As mentioned before, G_{ATM} contains an explicit dependency. We can modify the global type to make this dependency implicit, without altering G_{loop} :

$$G'_{\text{ATM}} \triangleq c!a\{\text{login}\langle \text{str} \rangle . a!s\{\text{ok}\langle \rangle . G_{\text{loop}}, \text{fail}\langle \rangle . \text{end}\}\}$$

The resulting relative projections are then as follows. Notice how the change has simplified the projection onto (c, a) .

$$\begin{aligned} R'_{c,s} &\triangleq G'_{\text{ATM}} \rangle (c, s) = (s?a)!c\{\{\text{ok}\langle \rangle . (G_{\text{loop}} \rangle (c, s)), \text{quit}\langle \rangle . \text{end}\}\} \\ R'_{c,a} &\triangleq G'_{\text{ATM}} \rangle (c, a) = c!a\{\{\text{login}\langle \text{str} \rangle . \text{end}\}\} \\ R'_{s,a} &\triangleq G'_{\text{ATM}} \rangle (s, a) = a!s\{\{\text{ok}\langle \rangle . \text{end}, \text{quit}\langle \rangle . \text{end}\}\} \end{aligned}$$

Using Algorithm 6, we extract monitors from G'_{ATM} :

$$\begin{aligned} &\text{gt2mon}(G_{\text{loop}}, c, \{s, a\}) \\ &= \mu X . c?s\{\text{account}\langle \text{int} \rangle . c!\emptyset(\text{account}) . c!s\left\{\left\{\begin{array}{l} \text{withdraw}\langle \text{int} \rangle . c!\emptyset(\text{withdraw}) . X, \\ \text{deposit}\langle \text{int} \rangle . c!\emptyset(\text{deposit}) . X, \\ \text{quit}\langle \rangle . c!\emptyset(\text{quit}) . \text{end} \end{array}\right\}\right\} \\ M'_c &\triangleq \text{gt2mon}(G'_{\text{ATM}}, c, \{s, a\}) \\ &= c!a\{\text{login}\langle \text{str} \rangle . c!\emptyset(\text{login}) . c?s\{\text{ok}\langle \rangle . \text{gt2mon}(G_{\text{loop}}, c, \{s, a\}), \text{fail}\langle \rangle . \text{end}\}\} \\ &\text{gt2mon}(G_{\text{loop}}, s, \{c, a\}) \\ &= \mu X . s!c\{\text{account}\langle \text{int} \rangle . s!\emptyset(\text{account}) . s?c\left\{\left\{\begin{array}{l} \text{withdraw}\langle \text{int} \rangle . s!\emptyset(\text{withdraw}) . X, \\ \text{deposit}\langle \text{int} \rangle . s!\emptyset(\text{deposit}) . X, \\ \text{quit}\langle \rangle . s!\emptyset(\text{quit}) . \text{end} \end{array}\right\}\right\} \\ M'_s &\triangleq \text{gt2mon}(G'_{\text{ATM}}, s, \{c, a\}) \\ &= s?a\{\text{ok}\langle \rangle . s!\{c\}\langle \text{ok} \rangle . \text{gt2mon}(G_{\text{loop}}, s, \{c, a\}), \text{fail}\langle \rangle . s!\{c\}\langle \text{fail} \rangle . \text{end}\} \\ M'_a &\triangleq \text{gt2mon}(G'_{\text{ATM}}, a, \{c, s\}) \\ &= a?c\{\{\text{login}\langle \text{str} \rangle . a!\emptyset(\text{login}) . a!s\{\text{ok}\langle \rangle . a!\emptyset(\text{ok}) . \text{end}, \text{fail}\langle \rangle . a!\emptyset(\text{fail}) . \text{end}\}\}\} \end{aligned}$$

Figure H.1 gives example blackboxes for the participants of G'_{ATM} .

It is not difficult to confirm that the following satisfactions hold (cf. Definitions 10.4.2 and 10.4.3):

$$\begin{aligned} &\models [\langle c : Q_c : \epsilon \rangle : M'_c : \epsilon] \triangleright \{(s, R'_{c,s}), (a, R'_{c,a})\} @ c \\ &\models [\langle s : Q_s : \epsilon \rangle : M'_s : \epsilon] \triangleright \{(c, R'_{c,s}), (a, R'_{s,a})\} @ s \\ &\models [\langle a : Q_a : \epsilon \rangle : M'_a : \epsilon] \triangleright \{(c, R'_{c,a}), (s, R'_{s,a})\} @ a \\ &\models [\langle c : Q_c : \epsilon \rangle : M'_c : \epsilon] \parallel [\langle s : Q_s : \epsilon \rangle : M'_s : \epsilon] \parallel [\langle a : Q_a : \epsilon \rangle : M'_a : \epsilon] \triangleright G_a \end{aligned}$$

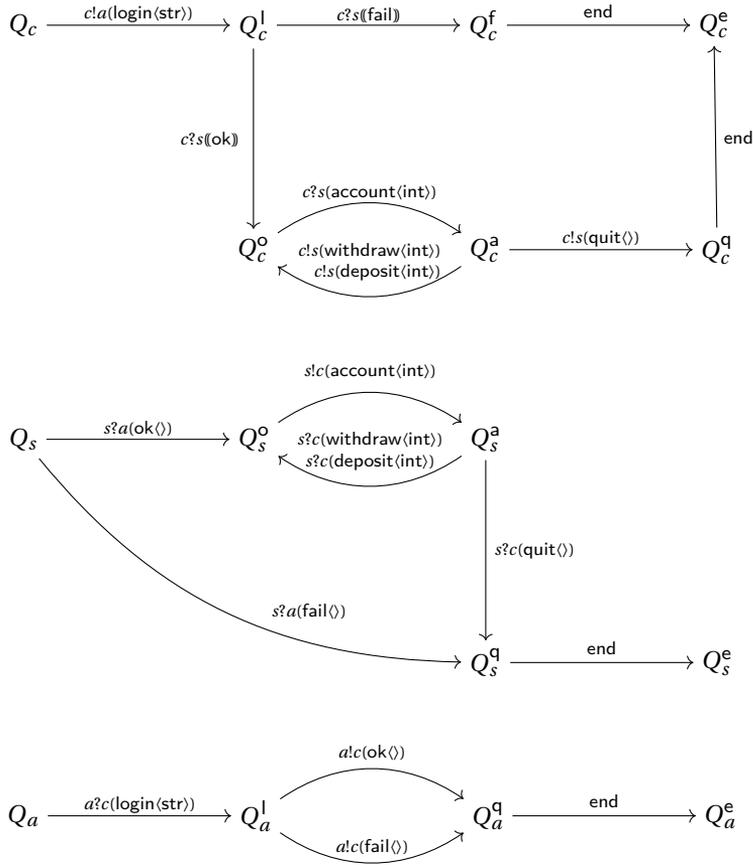


Figure H.1 | Blackbox LTSs for the participants of G'_{ATM} .



H.2. A TOOLKIT FOR MONITORING NETWORKS OF BLACKBOXES IN PRACTICE

To demonstrate the practical potential of our approach, we have developed a toolkit based on our framework—see <https://github.com/basvdheuvel/RelaMon> [DHP23].

The toolkit enhances message-passing web-applications with monitors. This way, it is possible to add a layer of security when communicating with, e.g., untrusted third-party APIs by monitoring their behavior according to an assumed governing protocol. The toolkit includes:

1. A tool, written in Rascal [KSV09; KSV19], that transpiles protocols specified as well-formed global types to JSON.

2. A monitor microservice, written in JavaScript, initialized with a protocol specification, a participant ID, the IP-addresses of the unmonitored component and the other components. The microservice uses relative projection on the supplied JSON protocol specification to construct a finite state machine using Algorithm 6, which acts as the monitor for the specified participant.

When all components and their respective monitors have been deployed, the monitors perform a handshake such that all components are ready to start executing the protocol. The monitors forward all correct messages between their respective components and the other monitors in the network, and if needed they send dependency messages. When a monitor detects an incorrect message, it signals an error to its component and the other monitors. This way, eventually the entire network becomes aware of the protocol violation, and the execution stops. It is then up to the components to gracefully deal with the protocol violation, e.g., by reverting to a prior state or restarting the protocol from the start.

The toolkit comes with two test suites:

- The authorization protocol in G_a (10.1), our running example.
- A weather protocol G_w between a client (c), a city database (d), and a weather API (w). For exchanges with a single branch, we write the message in parentheses and omit curly braces.

$$c!w(\text{key}\langle\text{str}\rangle).\mu X.c!d(\text{City}\langle\text{str}\rangle).d!c \left\{ \begin{array}{l} \text{coord}\langle\text{str}\rangle.c!w(\text{coord}\langle\text{str}\rangle).w!c(\text{temp}\langle\text{real}\rangle).X, \\ \text{unknown}\langle\rangle.X \end{array} \right\}$$

This is an interesting test suite, because the weather API (which requires an API key) is not set up to deal with dependencies. The suite compensates by including a program that acts as a “translator” for the weather API. The system is then still protected from protocol violations by the weather API.

H

H.3. RELATIVE TYPES WITH LOCATIONS

Here, we formally define relative types with locations, and define how they are used in related definitions.

We refer to an ordered sequence of labels $\vec{\ell}$ as a *location*. We write \mathbb{L} to denote a set of locations.

Definition H.3.1 (Relative Types with Locations). *Relative types with locations are defined by the following syntax:*

$$R, R' ::= p!q^{\mathbb{L}} \{ i\langle T_i \rangle . R \}_{i \in I} \mid (p!r)!q^{\mathbb{L}} \{ i.R \}_{i \in I} \mid (p?r)!q^{\mathbb{L}} \{ i.R \}_{i \in I} \mid \mu X.R \mid X \mid \text{end}$$

Definition H.3.2 (Relative Projection with Locations). *Relative projection with locations, denoted $G(p, q)^{\mathbb{L}}$, is defined by Algorithm 7. This algorithm relies on three auxiliary definitions:*

Algorithm 7: Relative projection with locations.

```

1 def  $G \rangle (p, q)^{\mathbb{L}}$  as
2   switch  $G$  do
3     case  $s!r \langle i \langle T_i \rangle . G_i \rangle_{i \in I}$  do
4        $\forall i \in I. R_i \triangleq G_i \rangle (p, q)^{\mathbb{L}+i}$ 
5       if  $(p = s \wedge q = r)$  then return  $p!q^{\mathbb{L}} \langle i \langle T_i \rangle . R_i \rangle_{i \in I}$ 
6       else if  $(q = s \wedge p = r)$  then return  $q!p^{\mathbb{L}} \langle i \langle T_i \rangle . R_i \rangle_{i \in I}$ 
7       else if  $\forall i, j \in I. \text{erase}(R_i) = \text{erase}(R_j)$  then return  $\bigcup_{i \in I} R_i$ 
8       else if  $s \in \{p, q\} \wedge t \in \{p, q\} \setminus \{s\}$  then return  $(s!r)!t^{\mathbb{L}} \langle i . R_i \rangle_{i \in I}$ 
9       else if  $r \in \{p, q\} \wedge t \in \{p, q\} \setminus \{r\}$  then return  $(r?s)!t^{\mathbb{L}} \langle i . R_i \rangle_{i \in I}$ 
10    case  $\mu X . G'$  do
11       $R' \triangleq G' \rangle (p, q)^{\mathbb{L}}$ 
12      if ( $R'$  contains an exchange or a recursive call on any  $Y \neq X$ ) then return
13         $\mu X^{\mathbb{L}} . R'$ 
14      else return end
15    case  $X$  do return  $X^{\mathbb{L}}$ 
16    case end do return end

```

- The erasure of a relative type, denoted $\text{erase}(R)$, is defined by replacing each set of locations in R by \emptyset (e.g., $\text{erase}(p!q^{\mathbb{L}} \langle i \langle T_i \rangle . R_i \rangle_{i \in I}) \triangleq p!q^{\emptyset} \langle i \langle T_i \rangle . \text{erase}(R_i) \rangle_{i \in I}$).
- Given R and R' such that $\text{erase}(R) = \text{erase}(R')$, we define the union of R and R' , denoted $R \cup R'$, by combining each set of locations for each corresponding message in R and R' (e.g., $p!q^{\mathbb{L}} \langle i \langle T_i \rangle . R_i \rangle_{i \in I} \cup p!q^{\mathbb{L}'} \langle i \langle T_i \rangle . R'_i \rangle_{i \in I} \triangleq p!q^{\mathbb{L} \cup \mathbb{L}'} \langle i \langle T_i \rangle . (R_i \cup R'_i) \rangle_{i \in I}$). Given $(R_a)_{a \in A}$ for finite A such that, for each $a, b \in A$, $\text{erase}(R_a) = \text{erase}(R_b)$, we inductively define $\bigcup_{a \in A} R_a$ as expected.
- We define the appendance of a label to a set of locations, denoted $\mathbb{L} + \ell$, as follows:

$$(\mathbb{L} \cup \{\vec{\ell}\}) + \ell' \triangleq (\mathbb{L} + \ell') \cup \{\vec{\ell}, \ell'\} \qquad \emptyset + \ell' \triangleq \emptyset$$

We extend this definition to the appendance of a location to a set of locations as follows:

$$\mathbb{L} + (\ell', \vec{\ell}) \triangleq (\mathbb{L} + \ell') + \vec{\ell} \qquad \mathbb{L} + \epsilon \triangleq \mathbb{L}$$

We extend this definition to the appendance of two sets of locations as follows:

$$\mathbb{L} + \mathbb{L}' \triangleq \bigcup_{\vec{\ell} \in \mathbb{L}'} \mathbb{L} + \vec{\ell}'$$

Definition H.3.3 (Dependence with Locations). *Given a well-formed global type G , we say p 's role in G depends on q 's role in the initial exchange in G , denoted $p \text{ depsOn } q$ in G , if and only if*

$$G = s!r \langle i \langle T_i \rangle . G_i \rangle_{i \in I} \wedge p \notin \{s, r\} \wedge q \in \{s, r\} \wedge \exists i, j \in I. \text{erase}(G_i) \langle p, q \rangle \neq \text{erase}(G_j) \langle p, q \rangle.$$

H.3.1. UNFOLDING RECURSIVE TYPES AND MONITORS

When unfolding recursive relative types, the location annotations require care. Consider, for example

$$\mu X^{\{1,2\}}.p!q^{\{1,2\}} \{ \ell_1 \langle T_1 \rangle . q!p^{\{1,2,\ell_1\}} \{ \ell_2 \langle T_2 \rangle . X^{\{1,2,\ell_1,\ell_2\}} \}, \ell' \langle T' \rangle . X^{\{1,2,\ell'\}} \}.$$

To unfold this type, we should replace each recursive call on X with a copy of the whole recursive definition. However, this is insufficient: the locations of the original recursive definition (starting at 1, 2) do not concur with the locations of the recursive calls (1, 2, ℓ_2 and 1, 2, ℓ'). Thus, we need to update the locations of the copied recursive calls by inserting the new path behind the location of the original recursive definition. This way, the recursive call at 1, 2, ℓ_1, ℓ_2 would get replaced by (inserted locations are underlined)

$$\mu X^{\{1,2,\underline{\ell_1},\underline{\ell_2}\}}.p!q^{\{1,2,\underline{\ell_1},\underline{\ell_2}\}} \left\{ \ell_1 \langle T_1 \rangle . q!p^{\{1,2,\underline{\ell_1},\underline{\ell_2},\ell_1\}} \{ \ell_2 \langle T_2 \rangle . X^{\{1,2,\underline{\ell_1},\underline{\ell_2},\ell_1,\ell_2\}} \}, \ell' \langle T' \rangle . X^{\{1,2,\underline{\ell_1},\underline{\ell_2},\ell'\}} \right\}.$$

We formally define unfolding of relative types, global types, and monitors, and prove some essential properties of these unfoldings. First, we give an overview of these definitions and results:

- We formally define the unfolding of a relative type $\mu X^{\mathbb{L}}.R$ by removing the prefix \mathbb{L} from the locations in R (using `remPref`), replacing each recursive call $X^{\mathbb{L}'}$ (where \mathbb{L}' is the location of the replaced recursive call) with the recursive definition beginning at location \mathbb{L}' (using `prepend`), and then replacing the original location \mathbb{L} (using `prepend`). Definition H.3.4 gives the required ingredients.
- Definition H.3.5 then defines the unfolding of relative types.
- Lemma H.3.6 states relations between relative projection, `prepend` and `remPref`.
- Definition H.3.7 defines the unfolding of global types.
- Lemmas H.3.8 to H.3.10 equate unfoldings of relative projections and global types.
- Definition H.3.11 defines the unfolding of monitors.
- Lemmas H.3.12 to H.3.16 equate unfoldings of synthesized monitors and global types.

Definition H.3.4 (Manipulation and Comparison of Locations).

- Given locations $\vec{\ell}$ and $\vec{\ell}'$, we say $\vec{\ell}'$ is a prefix of $\vec{\ell}$, denoted $\vec{\ell}' \leq \vec{\ell}$, if there exists a suffix $\vec{\ell}''$ such that $\vec{\ell} = \vec{\ell}', \vec{\ell}''$.
- We say $\vec{\ell}'$ is a strict prefix of $\vec{\ell}$, denoted $\vec{\ell}' < \vec{\ell}$, if $\vec{\ell}' \leq \vec{\ell}$ with suffix $\vec{\ell}'' \neq \epsilon$. We extend the prefix relation to sets of locations as follows: $\mathbb{L}' \leq \mathbb{L}$ iff $\forall \vec{\ell} \in \mathbb{L}. \exists \vec{\ell}' \in \mathbb{L}'. \vec{\ell}' \leq \vec{\ell}$, i.e., each location in \mathbb{L} is prefixed by a location in \mathbb{L}' .

- Given $\vec{\ell} \neq \epsilon$, we write $\text{fst}(\vec{\ell})$ to denote the first element of $\vec{\ell}$; formally, there exists $\vec{\ell}'$ such that $\text{fst}(\vec{\ell}), \vec{\ell}' = \vec{\ell}$.
- Given a set of locations \mathbb{L} and a relative type R , we define the prependance of \mathbb{L} to the locations in R , denoted $\text{prepend}(\mathbb{L}, R)$, by prepending \mathbb{L} to each location in R inductively; e.g.,

$$\text{prepend}(\mathbb{L}, p!q^{\mathbb{L}'} \{ \{ i \langle T_i \rangle . R_i \} \}_{i \in I} \triangleq p!q^{\mathbb{L} + \mathbb{L}'} \{ \{ i \langle T_i \rangle . \text{prepend}(\mathbb{L}, R_i) \} \}_{i \in I}.$$

- Given a relative type R , we define its first location, denoted $\text{fstLoc}(R)$, as the location annotation on the first exchange in R ; e.g., $\text{fstLoc}(p!q^{\mathbb{L}'} \{ \{ i \langle T_i \rangle . R_i \} \}_{i \in I}) \triangleq \mathbb{L}$.
- Given a set of locations \mathbb{L} and a relative type R , we define the removal of prefix \mathbb{L} from the locations in R , denoted $\text{remPref}(\mathbb{L}, R)$. Formally, it checks each location in \mathbb{L} as a possible prefix of each location in the set of locations of each exchange of R , and leaves only the suffix; e.g., $\text{remPref}(\mathbb{L}, p!q^{\mathbb{L}'} \{ \{ i \langle T_i \rangle . R_i \} \}_{i \in I}) \triangleq p!q^{\mathbb{L}''} \{ \{ i \langle T_i \rangle . \text{remPref}(\mathbb{L}, R_i) \} \}_{i \in I}$, where $\mathbb{L}'' \triangleq \{ \vec{\ell}'' \mid \exists \vec{\ell} \in \mathbb{L}, \vec{\ell}' \in \mathbb{L}'. \vec{\ell} \leq \vec{\ell}' \text{ with suffix } \vec{\ell}'' \}$.

Definition H.3.5 (Unfold Relative Type). Given a relative type $\mu X^{\mathbb{L}}.R$, we define its one-level unfolding, denoted $\text{unfold}_1(\mu X^{\mathbb{L}}.R)$, as follows:

$$\text{unfold}_1(\mu X^{\mathbb{L}}.R) \triangleq \text{prepend}(\mathbb{L}, \text{remPref}(\mathbb{L}, R) \{ \text{prepend}(\mathbb{L}', \text{remPref}(\mathbb{L}, \mu X^{\mathbb{L}}.R)) / X^{\mathbb{L}'} \})$$

Given a relative type R , we define its (full) unfolding, denoted $\text{unfold}(R)$, as follows:

$$\text{unfold}(R) \triangleq \begin{cases} \text{unfold}_1(\mu X^{\mathbb{L}}. \text{unfold}(R')) & \text{if } R = \mu X^{\mathbb{L}}.R' \\ R & \text{otherwise} \end{cases}$$

Lemma H.3.6. For any well-formed global type G , participants $p, q \in \text{part}(G)$, and set of locations \mathbb{L} ,

$$\begin{aligned} \text{prepend}(\mathbb{L}, G \rangle (p, q)^{\{\epsilon\}}) &= G \rangle (p, q)^{\mathbb{L}}, \\ \text{remPref}(\mathbb{L}, G \rangle (p, q)^{\mathbb{L}}) &= G \rangle (p, q)^{\{\epsilon\}}. \end{aligned}$$

Proof. By definition. □

Definition H.3.7 (Unfold Global Type). Given a well-formed global type $\mu X.G$, we define its one-level unfolding: $\text{unfold}_1(\mu X.G) \triangleq G \{ \mu X.G / X \}$. Given a well-formed global type G , we define its (full) unfolding, denoted $\text{unfold}(G)$, as follows:

$$\text{unfold}(G) \triangleq \begin{cases} \text{unfold}_1(\mu X. \text{unfold}(G')) & \text{if } G = \mu X.G' \\ G & \text{otherwise} \end{cases}$$

Lemma H.3.8. For any well-formed global type $\mu X.G$ and participants $p, q \in \text{part}(G)$,

$$(G) (p, q)^{\{e\}} \{((\mu X.G) \rangle (p, q)^{\mathbb{L}'}) / X^{\mathbb{L}'}\} = (G\{\mu X.G/X\}) \rangle (p, q)^{\{e\}}.$$

Proof. By definition. The starting location \mathbb{L}' for replacing each $X^{\mathbb{L}}$ is correct on the right-hand-side, because \mathbb{L}' is the location of the recursive call. Hence, the projection of the unfolded global type will at those spots start with \mathbb{L}' . \square

Lemma H.3.9. For any well-formed global type $\mu X.G$, participants $p, q \in \text{part}(G)$, and set of locations \mathbb{L} ,

$$\text{unfold}_1(\mu X.G) \rangle (p, q)^{\mathbb{L}} = \text{unfold}_1(\mu X.G) \rangle (p, q)^{\mathbb{L}}.$$

Proof. By Definition H.3.5 and lemmas H.3.6 and H.3.8:

$$\begin{aligned} & \text{unfold}_1(\mu X.G) \rangle (p, q)^{\mathbb{L}} \\ \stackrel{\text{Definition H.3.2}}{=} & \text{unfold}_1(\mu X^{\mathbb{L}}.(G) \rangle (p, q)^{\mathbb{L}}) \\ \stackrel{\text{Definition H.3.5}}{=} & \text{prepend}(\mathbb{L}, \text{remPref}(\mathbb{L}, G) \rangle (p, q)^{\mathbb{L}}) \\ & \{ \text{prepend}(\mathbb{L}', \text{remPref}(\mathbb{L}, \mu X^{\mathbb{L}}.(G) \rangle (p, q)^{\mathbb{L}})) / X^{\mathbb{L}'} \} \\ \stackrel{\text{Definition H.3.2}}{=} & \text{prepend}(\mathbb{L}, \text{remPref}(\mathbb{L}, G) \rangle (p, q)^{\mathbb{L}}) \{ \text{prepend}(\mathbb{L}', \text{remPref}(\mathbb{L}, \mu X.G) \rangle (p, q)^{\mathbb{L}}) / X^{\mathbb{L}'} \} \\ \stackrel{\text{Lemma H.3.6}}{=} & \text{prepend}(\mathbb{L}, (G) \rangle (p, q)^{\{e\}}) \{ \text{prepend}(\mathbb{L}', \mu X.G) \rangle (p, q)^{\{e\}} / X^{\mathbb{L}'} \} \\ \stackrel{\text{Lemma H.3.6}}{=} & \text{prepend}(\mathbb{L}, (G) \rangle (p, q)^{\{e\}}) \{ (\mu X.G) \rangle (p, q)^{\mathbb{L}'} / X^{\mathbb{L}'} \} \\ \stackrel{\text{Lemma H.3.8}}{=} & \text{prepend}(\mathbb{L}, G\{\mu X.G/X\}) \rangle (p, q)^{\{e\}} \\ \stackrel{\text{Lemma H.3.6}}{=} & G\{\mu X.G/X\} \rangle (p, q)^{\mathbb{L}} \\ \stackrel{\text{Definition H.3.7}}{=} & \text{unfold}_1(\mu X.G) \rangle (p, q)^{\mathbb{L}} \quad \square \end{aligned}$$

Lemma H.3.10. For any well-formed global type G , participants $p, q \in \text{part}(G)$, and set of locations \mathbb{L} ,

$$\text{unfold}(G) \rangle (p, q)^{\mathbb{L}} = \text{unfold}(G) \rangle (p, q)^{\mathbb{L}}.$$

Proof. By induction on the number of recursive definitions that G starts with (finite by well-formedness, Definition 10.3.4). In the base case, the thesis follows trivially. In the inductive

case, $G = \mu X.G'$:

$$\begin{aligned}
& \text{unfold}(\mu X.G') \rangle (p, q)^{\mathbb{L}} \\
& \stackrel{\text{Definition H.3.2}}{=} \text{unfold}(\mu X^{\mathbb{L}}.(G') \rangle (p, q)^{\mathbb{L}}) \\
& \stackrel{\text{Definition H.3.5}}{=} \text{unfold}_1(\mu X^{\mathbb{L}}.\text{unfold}(G') \rangle (p, q)^{\mathbb{L}}) \\
& \stackrel{\text{IH}}{=} \text{unfold}_1(\mu X^{\mathbb{L}}.(\text{unfold}(G') \rangle (p, q)^{\mathbb{L}})) \\
& \stackrel{\text{Definition H.3.2}}{=} \text{unfold}_1(\mu X.\text{unfold}(G') \rangle (p, q)^{\mathbb{L}}) \\
& \stackrel{\text{Lemma H.3.9}}{=} \text{unfold}_1(\mu X.\text{unfold}(G')) \rangle (p, q)^{\mathbb{L}} \\
& \stackrel{\text{Definition H.3.7}}{=} \text{unfold}(\mu X.G') \rangle (p, q)^{\mathbb{L}} \quad \square
\end{aligned}$$

Definition H.3.11 (Unfold Monitor). *Given a monitor $\mu X.M$, we define its one-level unfolding: $\text{unfold}_1(\mu X.M) \triangleq M\{\mu X.M/X\}$. Given a monitor M , we define its (full) unfolding, denoted $\text{unfold}(M)$, as follows:*

$$\text{unfold}(M) \triangleq \begin{cases} \text{unfold}_1(\mu X.\text{unfold}(M)) & \text{if } M = \mu X.M' \\ M & \text{otherwise} \end{cases}$$

Lemma H.3.12. *Suppose given a well-formed global type $G = \mu X.G'$, a participant p , and a set of locations \mathbb{L} . Let $D \triangleq \{q \in \text{part}(G) \setminus \{p\} \mid G \rangle (p, q)^{\mathbb{L}} \neq \text{end}\}$. Then*

$$\text{unfold}_1(\mu X.\text{gt2mon}(G', p, D)) = \text{gt2mon}(\text{unfold}_1(\mu X.G'), p, D).$$

Proof. By definition. The recursive calls in M' concur with the recursive calls in G' , and are prefixed by all the exchanges in G' in which p is involved. \square

Lemma H.3.13. *Suppose given*

- a well-formed global type $\mu X.G$,
- a set of participants D ,
- a participant $p \notin D$, and
- a set of locations \mathbb{L} .

Let $E_1 \triangleq \{q \in D \mid (\mu X.G) \rangle (p, q)^{\mathbb{L}} \neq \text{end}\}$ and $E_2 \triangleq \{q \in D \mid (G\{\mu X.G/X\}) \rangle (p, q)^{\mathbb{L}} \neq \text{end}\}$.
Then $E_1 = E_2$.

Proof. For any $q \in E_1$, $(\mu X.G) \rangle (p, q)^{\mathbb{L}} \neq \text{end}$. Then, by definition, $G \rangle (p, q)^{\mathbb{L}} \neq \text{end}$. Hence, the projection of the unfolding of G is also not end, and thus $q \in E_2$.

For any $q \in E_2$, the projection of the unfolding of G is not end. Then, by definition, $G \rangle (p, q)^{\mathbb{L}} \neq \text{end}$. Hence, by definition, $(\mu X.G) \rangle (p, q)^{\mathbb{L}} \neq \text{end}$, and thus $q \in E_1$. \square

Lemma H.3.14. *Suppose given*

- a well-formed global type G ,
- a set of participants D ,
- a participant $p \notin D$, and
- a set of locations \mathbb{L} .

Let $D' \triangleq \{q \in D \mid G\}(p, q)^{\mathbb{L}} \neq \text{end}\}$.

Then $\text{gt2mon}(G, p, D) = \text{gt2mon}(G, p, D')$.

Proof. By definition. Since p does not interact with any $q \in D \setminus D'$, only the $q \in D'$ affect the creation of the monitor. \square

Lemma H.3.15. *Suppose given*

- a well-formed global type G ,
- a participant p , and
- a set of locations \mathbb{L} .

Let $D \triangleq \text{part}(G) \setminus \{p\}$.

Then $\text{unfold}(\text{gt2mon}(G, p, D)) = \text{gt2mon}(\text{unfold}(G), p, D)$.

Proof. By induction on the number of recursive definitions that G starts with (finite by well-formedness, Definition 10.3.4). In the base case, the thesis follows trivially. In the inductive case, $G = \mu X.G'$. Let $D' \triangleq \{q \in D \mid G'\}(p, q)^{\mathbb{L}} \neq \text{end}\}$.

$$\begin{aligned}
 & \text{unfold}(\text{gt2mon}(\mu X.G', p, D)) \\
 \stackrel{\text{Definition 10.3.6}}{=} & \text{unfold}(\mu X. \text{gt2mon}(G', p, D')) \\
 \stackrel{\text{Definition H.3.11}}{=} & \text{unfold}_1(\mu X. \text{unfold}(\text{gt2mon}(G', p, D'))) \\
 \stackrel{\text{IH}}{=} & \text{unfold}_1(\mu X. \text{gt2mon}(\text{unfold}(G'), p, D')) \\
 \stackrel{\text{Lemma H.3.12}}{=} & \text{gt2mon}(\text{unfold}_1(\mu X. \text{unfold}(G')), p, D') \\
 \stackrel{\text{Definition H.3.7}}{=} & \text{gt2mon}(\text{unfold}(\mu X.G'), p, D') \\
 \stackrel{\text{Lemmas H.3.13 and H.3.14}}{=} & \text{gt2mon}(\text{unfold}(\mu X.G'), p, D) \quad \square
 \end{aligned}$$

Lemma H.3.16. *Suppose given*

- a well-formed global type $G = \mu X.G'$,
- a set of participants D , and
- a participant $p \notin D$.

If $\text{gt2mon}(G, p, D) = \text{end}$, then $\text{gt2mon}(G', p, D) \{ \text{gt2mon}(G', p, D) / X \} = \text{end}$.

Proof. Since $\text{gt2mon}(G, p, D) = \text{end}$, we have that $G\}(p, q)^{\mathbb{L}} = \text{end}$ for every $q \in D$. It follows by definition that $\text{gt2mon}(G', p, D) = \text{end}$. Hence, the unfolding is also end. \square

H.4. PROOF OF SOUNDNESS

Here we prove Theorem H.4.6, which is a generalized version of Theorem 10.4.6 (Page 258). We start with an overview of intermediate results used for the proof:

- Lemma H.4.1 shows that transitions that do not affect parallel networks are independent, i.e., they can be executed in any order without changing the outcome.
- Lemma H.4.2 shows that we can empty the Lb1s map of a satisfaction relation if the locations of all the relative types in RTs succeed all labels in $\text{dom}(\text{Lb1s})$, i.e., no exchanges in relative types in RTs relate to the choices recorded in Lb1s.
- Lemma H.4.3 shows that we can eliminate unions of relative types in the RTs map of a satisfaction relation for participants that do not depend on some exchange, allowing us to specify those independent relative types to some chosen branch.
- Definition H.4.4 defines a relation between global type, participants, relative types, monitor, blackbox, and buffer, such that together they are witness to a satisfaction relation.
- Lemma H.4.5 shows an inductive variant of soundness, given an intermediate global type G_0 between the initial G and the final G' .
- Theorem H.4.6 shows soundness.
- Theorem H.4.7 shows error freedom.

Lemma H.4.1 (Independence). *Suppose $\mathcal{P}_1 | Q | \mathcal{R} \xrightarrow{\tau} \mathcal{P}'_1 | Q' | \mathcal{R}$ and $\mathcal{P}_2 | Q | \mathcal{R} \xrightarrow{\tau} \mathcal{P}'_2 | Q | \mathcal{R}'$, where $\mathcal{P}_1 \not\equiv \mathcal{P}'_1$, $\mathcal{P}_2 \not\equiv \mathcal{P}'_2$, $Q \not\equiv Q'$, and $\mathcal{R} \not\equiv \mathcal{R}'$. Then*

$$\begin{array}{ccc} \mathcal{P}_1 | \mathcal{P}_2 | Q | \mathcal{R} & \xrightarrow{\tau} & \mathcal{P}'_1 | \mathcal{P}_2 | Q' | \mathcal{R} \\ \downarrow \tau & & \downarrow \tau \\ \mathcal{P}_1 | \mathcal{P}'_2 | Q | \mathcal{R}' & \xrightarrow{\tau} & \mathcal{P}'_1 | \mathcal{P}'_2 | Q' | \mathcal{R}'. \end{array}$$

Proof. By definition of the LTS for networks (Definition 10.2.3) the τ -transitions of both premises are derived from applications of Transition [PAR] and an application of Transition [OUT-BUF] or Transition [OUT-MON-BUF]. For example, in the first premise, \mathcal{P}_1 does an output which ends up in the buffer of a (monitored) blackbox in Q , leaving \mathcal{R} unchanged. In the second premise, \mathcal{P}_2 does an output which ends up in a buffer in \mathcal{R} , leaving Q unchanged. Hence, the outputs by \mathcal{P}_1 and \mathcal{P}_2 have completely different senders and recipients. As a result, in a network with all of \mathcal{P}_1 , \mathcal{P}_2 , Q , and \mathcal{R} these exchanges do not influence each other. The conclusion is that the order of these exchanges does not matter. \square

Lemma H.4.2. *Suppose*

- $\models^{\text{Lb1s}} \mathcal{P} \triangleright \text{RTs} @ p$ and
- *that, for every $(q, R) \in \text{RTs}$, $R \neq \text{end}$ implies $(\bigcup_{(\ell, \ell') \in \text{Lb1s}} \ell) < \text{fstLoc}(R)$.*

Then $\models \mathcal{P} \triangleright \text{RTs} @ p$.

Proof. By definition: clearly, if all the relative types are at a location past the recorded choices in Lb1s, none of the choices in Lb1s will ever be used for satisfaction anymore. \square

As satisfaction iterates through a collection of relative types obtained from a global type, there will be instances where some relative types are independent of the global type's initial exchange. By relative projection with locations (Definition H.3.2), these relative types are the union of the relative projections of the branches of the exchange. The following lemma assures that we can drop this union and simply continue with the relative projection of the branch followed by the participants involved in the exchange (sender, recipient, and/or depending participants).

Lemma H.4.3. *Suppose given*

- a well-formed global type $G = \text{slr}\{i \langle T_i \rangle . G_i\}_{i \in I}$, and
- $D \supseteq \text{part}(G) \setminus \{p\}$.

Let $D' \triangleq \{q \in D \mid \{p, q\} \subseteq \{s, r\}\} \cup \{q \in D \mid \{p, q\} \cap \{s, r\} \neq \emptyset \wedge (q \text{ depends on } p \text{ in } G \vee p \text{ depends on } q \text{ in } G)\}$.
Suppose $\models \mathcal{P} \triangleright \text{RTs} @ p$, where

$$\text{RTs} = \{(q, G_j) \langle p, q \rangle^{\{\vec{\ell}, j\}} \mid q \in D'\} \cup \{(q, \bigcup_{i \in I} G_i) \langle p, q \rangle^{\{\vec{\ell}, i\}} \mid q \in D \setminus D'\}$$

for some $j \in I$. Let $\text{RTs}' \triangleq \text{RTs}[q \mapsto G_j] \langle p, q \rangle^{\{\vec{\ell}, j\}} \mid q \in D \setminus D'$.

Then $\models \mathcal{P} \triangleright \text{RTs}' @ p$.

Proof. For any $q \in D \setminus D'$, for every $i, k \in I$, $\text{erase}(G_i) \langle p, q \rangle^{\{\vec{\ell}, k\}} = \text{erase}(G_k) \langle p, q \rangle^{\{\vec{\ell}, k\}}$. Since the satisfaction holds for an empty label function (i.e., $\models^\emptyset \mathcal{P} \triangleright \text{RTs} @ p$), the locations formed in each $G_i \langle p, q \rangle^{\{\vec{\ell}, i\}}$ are insignificant. Hence, it suffices to simply use $G_j \langle p, q \rangle^{\{\vec{\ell}, j\}}$ for every $q \in D \setminus D'$. \square

H

Definition H.4.4 (Initial satisfaction). *We define initial satisfaction, denoted $(G, p, \mathbb{L}, D) \Vdash (\text{RTs}, D', M, P, \vec{m})$, to hold if and only if*

$$\begin{aligned} D &\supseteq \text{part}(G) \setminus \{p\}, \\ \text{RTs} &= \{(q, G) \langle p, q \rangle^{\mathbb{L}} \mid q \in D\}, \\ D' &= \{q \in D \mid \text{unfold}(\text{RTs}(q)) \neq \text{end}\}, \\ \text{gt2mon}(G, p, D') \neq \text{end} &\implies M = \text{gt2mon}(G, p, D') \\ \text{gt2mon}(G, p, D') = \text{end} &\implies M \in \{\text{end}, \checkmark\} \\ &\models [\langle p : P : \vec{m} \rangle : M : \epsilon] \triangleright \text{RTs} @ p \end{aligned}$$

Lemma H.4.5 (Soundness — Generalized).

- Suppose given well-formed global types G and G_0 such that $\text{part}(G) \geq 2$ and $G \xrightarrow{\vec{\ell}_0} G_0$.
- For every $p \in \text{part}(G)$,

- suppose given a process P_p^0 and buffer \tilde{m}_p^0 , and
- take $\text{RTs}_p^0, D_p^0, M_p^0$ such that

$$(G_0, p, \{\tilde{\ell}_0\}, \text{part}(G) \setminus \{p\}) \Vdash (\text{RTs}_p^0, D_p^0, M_p^0, P_p^0, \tilde{m}_p^0).$$

- Suppose $\mathcal{P}_0 \triangleq \prod_{p \in \text{part}(G)} [\langle p : P_p^0 : \tilde{m}_p^0 \rangle : M_p^0 : \epsilon] \Rightarrow \mathcal{P}'$.

Then there exist $\tilde{\ell}', G'$ such that

- $G_0 \xrightarrow{\tilde{\ell}'} G'$,
- for every $p \in \text{part}(G)$ there exist $P'_p, \tilde{m}'_p, \text{RTs}'_p, D'_p, M'_p$ such that

$$(G', p, \{\tilde{\ell}_0, \tilde{\ell}'\}, \text{part}(G) \setminus \{p\}) \Vdash (\text{RTs}'_p, D'_p, M'_p, P'_p, \tilde{m}'_p),$$

and

- $\mathcal{P}' \Rightarrow \prod_{p \in \text{part}(G)} [\langle p : P'_p : \tilde{m}'_p \rangle : M'_p : \epsilon]$.

Proof. By induction on the number of transitions n from \mathcal{P}_0 to \mathcal{P}' (IH₁).

In the base case, where $n = 0$, the thesis follows immediately, because $\mathcal{P}' = \mathcal{P}_0$. To be precise, the assumption satisfies the conclusion by letting: $G' = G_0$; $\tilde{\ell} = \epsilon$; for every $p \in \text{part}(G)$, $P'_p = P_p^0$, $\tilde{m}'_p = \tilde{m}_p^0$, $D'_p = D_p^0$, $M'_p = M_p^0$, $\text{RTs}'_p = \text{RTs}_p^0$.

In the inductive case, where $n \geq 1$, we use the shape of G_0 and the assumed satisfactions of the monitored processes to determine the possible transitions from \mathcal{P}_0 . We then follow these transitions, and show that we can reach a network \mathcal{P}_1 where all the monitored processes satisfy some G_1 with $G_0 \xrightarrow{\tilde{\ell}_1} G_1$. If at this point we already passed through \mathcal{P}' , the thesis is proven. Otherwise, the thesis follows from IH₁, because the number of transitions from \mathcal{P}_1 is less than n .

There is a subtlety that we should not overlook: G_0 may contain several consecutive, independent exchanges. For example, suppose $G_0 = p!q\langle i\langle T_i \rangle .s!r\langle j\langle T_j \rangle .G_{i,j} \rangle_{j \in J} \rangle_{i \in I}$ where $\{p, q\} \not\# \{s, r\}$. Monitors nor satisfaction can prevent the exchange between s and r from happening before the exchange between p and q has been completed. Hence, the transitions from \mathcal{P}_0 to \mathcal{P}' may not entirely follow the order specified by G_0 .

We deal with this issue by applying induction on the number of out-of-order exchanges observed in the transitions to \mathcal{P}' . We then follow the transitions determined by monitors and satisfaction, in the order specified by G_0 , effectively “postponing” the out-of-order exchanges until it is their turn. We keep doing this, until we have eventually passed through all the postponed out-of-order exchanges. At this point, we have found an alternative path from \mathcal{P}_0 to the final network. To reconcile this alternative path with the path from \mathcal{P}_0 to \mathcal{P}' , we apply independence (Lemma H.4.1). This lemma essentially states that independent exchanges may be performed in any order, as they do not influence each other. Hence, we use independence (Lemma H.4.1) to move the postponed transitions back to their original position in the path from \mathcal{P}_0 to \mathcal{P}' , proving the thesis. Hereafter, we assume independent exchanges dealt with.

As a first step in our analysis, we consider the fact that G_0 may start with recursive definitions. Let $G_1 \triangleq \text{unfold}(G_0)$; by definition, G_1 does not start with recursive definitions. For every $p \in \text{part}(G)$, let $M_p^1 \triangleq \text{unfold}(M_p^0)$; by Lemma H.3.15, $M_p^1 = \text{gt2mon}(G_1, p, D_p^0)$, and, by definition of the LTS for networks (Definition 10.2.3), the LTS of $[\langle p : P_p^0 : \vec{m}_p^0 : M_p^1 : \epsilon \rangle]$ is equivalent to that of $[\langle p : P_p^0 : \vec{m}_p^0 : M_p^0 : \epsilon \rangle]$. For every $p \in \text{part}(G)$, let $\text{RTS}_p^1 \triangleq \{(q, \text{unfold}(\text{RTS}_p^0(q))) \mid q \in D_p^0\}$; by Lemma H.3.10, for every $q \in D_p^0$, $\text{RTS}_p^1(q) = G_1 \langle p, q \rangle$. The conditions for satisfaction in Figure 10.7 unfold any relative types. Hence, we can reuse the satisfaction given by the original initial satisfaction, to show that $(G_1, p, \{\vec{l}_0\}, \text{part}(G) \setminus \{p\}) \Vdash (\text{RTS}_p^1, D_p^0, M_p^1, P_p^0, \vec{m}_p^0)$. We then continue our analysis from this new unfolded initial satisfaction, for which all results transfer back to the original initial satisfaction.

The rest of our analysis depends on the shape of G_1 (exchange or end).

- Exchange: $G_1 = s!r\{i\langle T_i \rangle.H_i\}_{i \in I}$.

Let us make an inventory of all relative types and monitors at this point. We use this information to determine the possible behavior of the monitored blackboxes, and their interactions. This behavior, in combination with satisfaction, allows us to determine exactly how the network evolves and reaches a state required to apply IH₁.

- For s we have:

$$\begin{aligned} \text{RTS}_s^1(r) &= s!r\{\vec{l}_0\} \{i\langle T_i \rangle.H_i\} (s, r)\{\vec{l}_0, i\} \}_{i \in I} \\ \text{deps}_s &= \{q \in \text{part}(G) \mid q \text{ depsOn } s \text{ in } G_1\} \\ \text{RTS}_s^1(q) &= (s!r)!q\{\vec{l}_0\} \{i.H_i\} (s, q)\{\vec{l}_0, i\} \}_{i \in I} \quad [q \in \text{deps}_s] \\ \text{RTS}_s^1(q) &= \bigcup_{i \in I} (H_i) (s, q)\{\vec{l}_0, i\} \quad [q \in \text{part}(G) \setminus \{s, r\} \setminus \text{deps}_s] \\ M_s^1 &= s!r\{i\langle T_i \rangle.s!\text{deps}_s(i).\text{gt2mon}(H_i, s, D_s^0)\}_{i \in I} \end{aligned}$$

satisfaction (Output) allows the monitored blackbox of s to send $j\langle T_j \rangle$ for any $j \in I$ to r . Then satisfaction (Dependency Output) allows the monitored blackbox to send j to all $q \in \text{deps}_s$ (concurrently). However, there may be other relative types in RTS_s^1 that allow/require the monitored blackbox of to perform other tasks. Since the outputs above precede any other communications in RTS_s^1 (they originate from the first exchange in G_1), by the progress property of satisfaction (Definition 10.4.2), the monitored blackbox will keep transitioning. The monitor M_s^1 requires the blackbox to first perform the output above, and then the dependency outputs above. The buffered blackbox does not take any transitions other than τ and the outputs above: otherwise, the monitor would transition to an error signal, which cannot transition, contradicting the satisfaction's progress property.

It then follows that the monitored blackbox sends $j\langle T_j \rangle$ to r for some $j \in I$, after which it sends j to each $q \in \text{deps}_s$ (in any order), possibly interleaved with τ -transitions from the blackbox (finitely many, by blackbox LTS assumptions (Finite τ)) or from the buffered blackbox reading messages; let P_s^2 and \vec{m}_s^2 be the

resulting blackbox and buffer, respectively. By satisfaction (Definition 10.4.2), we have the following:

$$\begin{aligned} \text{RTs}_s^2 &\triangleq \text{RTs}_s^1[q \mapsto H_j](s, q)^{\{\vec{\ell}_0, j\}}]_{q \in \{r\} \cup \text{deps}_s} \\ M_s^2 &\triangleq \text{gt2mon}(H_j, s, D_s^0) \\ &\models^{\{(\vec{\ell}_0, j)\}} [\langle s : P_s^2 : \vec{m}_s^2 \rangle : M_s^2 : \epsilon] \triangleright \text{RTs}_s^2 @ s \end{aligned}$$

Clearly, for each $q \in \text{dom}(\text{RTs}_s^2)$, $\vec{\ell}_0 \leq \text{fstLoc}(\text{RTs}_s^2(q))$. Hence, by Lemma H.4.2, $\models [\langle s : P_s^2 : \vec{m}_s^2 \rangle : M_s^2 : \epsilon] \triangleright \text{RTs}_s^2 @ s$. Let $\text{RTs}_s^3 \triangleq \text{RTs}_s^2[q \mapsto H_j](r, q)^{\{\vec{\ell}_0, j\}}]_{q \in D \setminus \text{deps}_s \setminus \{s, r\}}$. Then, by Lemma H.4.3, $\models [\langle s : P_s^2 : \vec{m}_s^2 \rangle : M_s^2 : \epsilon] \triangleright \text{RTs}_s^3 @ s$. Let

$$D_s^3 \triangleq \{q \in \text{part}(G) \setminus \{s\} \mid \text{unfold}(\text{RTs}_s^3(q)) \neq \text{end}\}$$

and $M_s^3 \triangleq \text{gt2mon}(H_j, p, D_s^1)$. By Lemma H.3.14, $M_s^2 = M_s^3$. We have $G_1 \xrightarrow{j} H_j$. In conclusion,

$$(H_j, s, \{\vec{\ell}_0, j\}, \text{part}(G) \setminus \{s\}) \Vdash (\text{RTs}_s^3, D_s^3, M_s^3, P_s^2, \vec{m}_s^2),$$

such that the premise of IH₁ is satisfied for s .

– For r we have:

$$\begin{aligned} \text{RTs}_r^1(s) &= s!r^{\{\vec{\ell}_0\}} \{i \langle T_i \rangle . (H_i)(r, s)^{\{\vec{\ell}_0, i\}}\}_{i \in I} \\ \text{deps}_r &= \{q \in \text{part}(G) \mid q \text{ depsOn } r \text{ in } G_1\} \\ \text{RTs}_r^1(q) &= (r?s)!q^{\{\vec{\ell}_0\}} \{i . (H_i)(r, q)^{\{\vec{\ell}_0, i\}}\}_{i \in I} \quad [q \in \text{deps}_r] \\ \text{RTs}_r^1(q) &= \bigcup_{i \in I} (H_i)(r, q)^{\{\vec{\ell}_0, i\}} \quad [q \in \text{part}(G) \setminus \{s, r\} \setminus \text{deps}_r] \\ M_r^1 &= r?s \{i \langle T_i \rangle . r! \text{deps}_r(i) . \text{gt2mon}(H_i, r, D_r^0)\}_{i \in I} \end{aligned}$$

Since s sends $j \langle T_j \rangle$ to r , by Transition [OUT-MON-BUF], this message will end up in the buffer of the monitored blackbox of r . The monitor M_r^1 moves this message to the blackbox's buffer, and proceeds to send dependency messages j to all $q \in \text{deps}_r$ (concurrently). Following the same reasoning as above, the monitored blackbox will keep outputting the dependencies above, possibly interleaved with τ -transitions (from the blackbox or from the buffered blackbox reading messages), before doing anything else.

Let P_r^2 and \vec{m}_r^2 be the resulting blackbox and buffer, respectively. By satisfaction (Definition 10.4.2), we have the following (applying Lemmas H.3.14, H.4.2 and H.4.3 immediately):

$$\begin{aligned} \text{RTs}_r^2 &\triangleq \{(q, H_j)(r, q)^{\{\vec{\ell}_0, j\}} \mid q \in \text{part}(G) \setminus \{r\}\} \\ D_r^2 &\triangleq \{q \in \text{part}(G) \setminus \{s\} \mid \text{unfold}(\text{RTs}_r^2(q)) \neq \text{end}\} \\ M_r^2 &\triangleq \text{gt2mon}(H_j, r, D_r^2) \\ &\models [\langle r : P_r^2 : \vec{m}_r^2 \rangle : M_r^2 : \epsilon] \triangleright \text{RTs}_r^2 @ r \end{aligned}$$

In conclusion,

$$(H_j, r, \{\vec{\ell}_0, j\}, \text{part}(G) \setminus \{r\}) \Vdash (\text{RTs}_r^2, D_r^2, M_r^2, P_r^2, \vec{m}_r^2),$$

such that the premise of IH_1 is satisfied for r .

- For every $q \in \text{deps}_s \setminus \text{deps}_r$ we have:

$$\begin{aligned} \text{RTs}_q^1(s) &= (s!r)!q^{\{\vec{\ell}_0\}} \{i.(H_i) \langle q, s \rangle^{\{\vec{\ell}_0\}+i}\}_{i \in I} \\ \text{RTs}_q^1(q') &= \bigcup_{i \in I} (H_i) \langle q, q' \rangle^{\{\vec{\ell}_0\}+i} \quad [q' \in \text{part}(G) \setminus \{q, s\}] \\ M_q^1 &= q?s\{i.\text{gt2mon}(H_i, q, D_q^0)\}_{i \in I} \end{aligned}$$

Since s sends j to q , by Transition [OUT-MON-BUF], this message will end up in the buffer of the monitored blackbox of q . The monitor M_q^1 moves this message to the blackbox's buffer.

Let P_q^2 and \vec{m}_q^2 be the resulting blackbox and buffer, respectively. By satisfaction (Definition 10.4.2), we have the following (applying Lemmas H.3.14, H.4.2 and H.4.3 immediately):

$$\begin{aligned} \text{RTs}_q^2 &\triangleq \{(q', H_j) \langle q, q' \rangle^{\{\vec{\ell}_0, j\}} \mid q' \in \text{part}(G) \setminus \{q\}\} \\ D_q^2 &\triangleq \{q' \in \text{part}(G) \setminus \{q\} \mid \text{unfold}(\text{RTs}_q^2(q')) \neq \text{end}\} \\ M_q^2 &\triangleq \text{gt2mon}(H_j, q, D_q^2) \\ &\Vdash \langle q : P_q^2 : \vec{m}_q^2 : M_q^2 : \epsilon \rangle \triangleright \text{RTs}_q^2 @ q \end{aligned}$$

In conclusion,

$$(H_j, q, \{\vec{\ell}_0, j\}, \text{part}(G) \setminus \{q\}) \Vdash (\text{RTs}_q^2, D_q^2, M_q^2, P_q^2, \vec{m}_q^2),$$

such that the premise of IH_1 is satisfied for q .

- For every $q \in \text{deps}_r \setminus \text{deps}_s$, the procedure is similar to above.
- For every $q \in \text{deps}_s \cap \text{deps}_r$ we have:

$$\begin{aligned} \text{RTs}_q^1(s) &= (s!r)!q^{\{\vec{\ell}_0\}} \{i.(H_i) \langle q, s \rangle^{\{\vec{\ell}_0\}+i}\}_{i \in I} \\ \text{RTs}_q^1(r) &= (r?s)!q^{\{\vec{\ell}_0\}} \{i.(H_i) \langle q, r \rangle^{\{\vec{\ell}_0\}+i}\}_{i \in I} \\ \text{RTs}_q^1(q') &= \bigcup_{i \in I} (H_i) \langle q, q' \rangle^{\{\vec{\ell}_0\}+i} \quad [q' \in \text{part}(G) \setminus \{q, s, r\}] \\ M_q^1 &= q?s\{i.q?r\{i.\text{gt2mon}(H_i, q, D_q^0)\} \cup \{j.\text{error}\}_{j \in I \setminus \{i\}}\}_{i \in I} \end{aligned}$$

By Transition [OUT-MON-BUF], from s and r the message j will end up in the buffer of the monitored blackbox of q . The monitor M_q^1 first moves the message from s to the blackbox's buffer, and then the message from r . Even if the message from r is the first to end up in the monitor's buffer, this order of reception is enforced

because buffers allow exchange of message from different senders. Because s and r send the same j , the monitor will not reach the error state.

Let P_q^2 and \tilde{m}_q^2 be the resulting blackbox and buffer, respectively. By satisfaction (Definition 10.4.2), we have the following (applying Lemmas H.3.14, H.4.2 and H.4.3 immediately):

$$\begin{aligned} \text{RTs}_q^2 &\triangleq \{(q', H_j) \langle q, q' \rangle^{(\vec{\ell}_0, j)} \mid q' \in \text{part}(G) \setminus \{q\}\} \\ D_q^2 &\triangleq \{q' \in \text{part}(G) \setminus \{q\} \mid \text{unfold}(\text{RTs}_q^2(q')) \neq \text{end}\} \\ M_q^2 &\triangleq \text{gt2mon}(H_j, q, D_q^2) \\ &\models [\langle q : P_q^2 : \tilde{m}_q^2 \rangle : M_q^2 : \epsilon] \triangleright \text{RTs}_q^2 @ q \end{aligned}$$

In conclusion,

$$(H_j, q, \{\vec{\ell}_0, j\}, \text{part}(G) \setminus \{q\}) \Vdash (\text{RTs}_q^2, D_q^2, M_q^2, P_q^2, \tilde{m}_q^2),$$

such that the premise of IH₁ is satisfied for q .

– For every $q \in \text{part}(G) \setminus \{s, r\} \setminus \text{deps}_s \setminus \text{deps}_r$ we have:

$$\begin{aligned} \text{RTs}_q^1(q') &= \bigcup_{i \in I} (H_i) \langle q, q' \rangle^{(\vec{\ell}_0) + i} \quad [q' \in \text{part}(G) \setminus \{q\}] \\ M_q^1 &= \text{gt2mon}(H_k, q, D_q^0) \quad [\text{arbitrary } k \in I] \end{aligned}$$

If we observe transitions from q , we are guaranteed that the behavior is independent of the current exchange between s and r in G_1 : otherwise, $q \in \text{deps}_s \cup \text{deps}_r$. Hence, as mentioned before, we can safely postpone these steps.

We have (applying lemmas H.3.14 and H.4.2):

$$\begin{aligned} \text{RTs}_q^2 &\triangleq \{(q', H_j) \langle q, q' \rangle^{(\vec{\ell}_0, j)} \mid q' \in \text{part}(G) \setminus \{q\}\} \\ D_q^2 &\triangleq \{q' \in \text{part}(G) \setminus \{q\} \mid \text{unfold}(\text{RTs}_q^2(q')) \neq \text{end}\} \\ M_q^2 &\triangleq \text{gt2mon}(H_j, q, D_q^2) \\ &\models [\langle p : P_q^0 : \tilde{m}_q^0 \rangle : M_q^2 : \epsilon] \triangleright \text{RTs}_q^2 @ q \end{aligned}$$

In conclusion,

$$(H_j, q, \{\vec{\ell}_0, j\}, \text{part}(G) \setminus \{q\}) \Vdash (\text{RTs}_q^2, D_q^2, M_q^2, P_q^2, \tilde{m}_q^2),$$

such that the premise of IH₁ is satisfied for q .

At this point, the entire premise of IH₁ is satisfied. Hence, the thesis follows by IH₁.

- End: $G_0 = \text{end}$.

For every $p \neq q \in \text{part}(G)$, we have $\text{RTs}_p^1(q) = \text{end}$. By the definition of initial satisfaction (Definition H.4.4), for each $p \in \text{part}(G)$, $M_p^1 \in \{\text{end}, \checkmark\}$. By the progress properties of

satisfaction (Definition 10.4.2), each monitored blackbox will continue performing transitions; these can only be τ -transitions, for any other transition leads to an error signal or a violation of satisfaction. That is, each monitored blackbox will be reading messages from buffers or doing internal computations. However, there are only finitely many messages, and, by blackbox LTS assumptions (Finite τ), each blackbox is assumed to only perform finitely many τ -transitions in a row. Hence, at some point, we must see an end-transition from each monitored blackbox.

Suppose the observed transition originates from $p \in \text{part}(G)$. Suppose $M_p^1 = \text{end}$. Then the transition is either labeled τ or end. If the label is τ , IH₁ applies with premise trivially satisfied. If the label is end, we follow satisfaction (End) to apply IH₁.

It cannot be that $M_p^1 = \checkmark$: the LTS for networks (Definition 10.2.3) does not define any transitions, contradicting the observed transition. \square

Theorem H.4.6 (Soundness).

- Suppose given a well-formed global type G .
- For every $p \in \text{part}(G)$, suppose given a process P_p , and take RTs_p, M_p such that

$$(G, p, \{\epsilon\}, \text{part}(G) \setminus \{p\}) \Vdash (\text{RTs}_p, \text{part}(G) \setminus \{p\}, M_p, P_p, \epsilon).$$

- Suppose also $\prod_{p \in \text{part}(G)} [\langle p : P_p : \epsilon \rangle : M_p : \epsilon] \Rightarrow \mathcal{P}'$.

Then there exist $\tilde{\ell}', G'$ such that

- $G \xrightarrow{\tilde{\ell}'} G'$,
- for every $p \in \text{part}(G)$ there exist $P'_p, \tilde{m}'_p, \text{RTs}'_p, D'_p, M'_p$ such that
 - $(G', p, \{\ell'\}, \text{part}(G) \setminus \{p\}) \Vdash (\text{RTs}'_p, D'_p, M'_p, P'_p, \tilde{m}'_p)$, and
 - $\mathcal{P}' \Rightarrow \prod_{p \in \text{part}(G)} [\langle p : P'_p : \tilde{m}'_p \rangle : M'_p : \epsilon]$.

Proof. Follows directly from Lemma H.4.5, given $G \xrightarrow{\epsilon} G$. \square

Theorem H.4.7 (Error Freedom). Suppose given a well-formed global type G . For every $p \in \text{part}(G)$, suppose given a process P_p , and take RTs_p, M_p such that

$$(G, p, \{\epsilon\}, \text{part}(G) \setminus \{p\}) \Vdash (\text{RTs}_p, \text{part}(G) \setminus \{p\}, M_p, P_p, \epsilon).$$

If $\mathcal{P} \triangleq \prod_{p \in P} [\langle p : P_p : \epsilon \rangle : M_p : \epsilon] \Rightarrow \mathcal{P}'$, then there are no Q, D such that $\mathcal{P}' \Rightarrow Q \mid \text{error}_D$.

Proof. Suppose, towards a contradiction, that $\mathcal{P}' \Rightarrow Q \mid \text{error}_D$. Then, by multiple applications of Transition [ERROR-PAR], $Q \mid \text{error}_D \Rightarrow \text{error}_{D'}$ for some D' . Hence, $\mathcal{P} \Rightarrow \text{error}_{D'}$. Then, by soundness (Theorem H.4.6), $\text{error}_{D'}$ would further transition. However, the LTS of networks does not specify any transitions for error signals: a contradiction. \square

H.5. PROOF OF TRANSPARENCY

Here we prove Theorem H.5.12, which is the full version of Theorem 10.4.12 (Page 261). We start with an overview of intermediate results used for the proof:

- Definition H.5.1 defines an LTS for relative types, where transitions can only be (dependency) outputs.
- Definition H.5.2 defines a relation between a global type, participant, monitor, RTs, and buffer. The idea is that the relative types in RTs may be in an intermediate state between exchanges in the global type, reflected by messages in the buffer.
- Lemma H.5.3 shows that monitored blackboxes in a satisfaction relation do not transition to an error state through the enhanced LTS (Definition 10.4.8).
- Lemma H.5.4 shows that messages in the buffer of a monitored blackbox of p in a satisfaction relation are related to exchanges to p in RTs of the satisfaction relation.
- Lemma H.5.5 shows that an output transitions of a monitored blackbox in a satisfaction relation implies that the monitor is a related output, possibly preceded by a dependency output.
- Lemma H.5.6 shows that an end-transition of a monitored blackbox in a satisfaction relation implies that the monitor is end, possibly preceded by a dependency output.
- Lemma H.5.7 shows that a message in the buffer of a monitored blackbox relates to an exchange in a global type, reachable in finitely many steps.
- Lemma H.5.8 shows that if the blackbox of a monitored blackbox in a satisfaction relation does an input transition, then the monitor is a sequence of inputs ending in an input related to the input transition.
- Lemma H.5.9 shows that if the blackbox of a monitored blackbox in a satisfaction relation does a τ -transition, then the monitor is not \checkmark .
- Lemma H.5.10 shows that label oracles are equal for relative types prior and past dependency outputs.
- Lemma H.5.11 shows a precise relation between actions and label oracles.
- Theorem H.5.12 shows transparency.

Definition H.5.1 (LTS for Relative Types). *We define an LTS for relative types, denoted $R \xrightarrow{m}_p R'$, where actions are output (dependency) messages m (Figure 10.2 (top)) and p is the receiving*

participant, by the following rules:

$$\begin{array}{c}
 \text{[REL-EXCH]} \\
 \frac{j \in I}{q!p^{\mathbb{L}} \langle \langle i \langle T_i \rangle . R_i \rangle \rangle_{i \in I} \xrightarrow{q!p \langle j \langle T_j \rangle \rangle}_p R_j} \\
 \\
 \text{[REL-DEP]} \\
 \frac{j \in I}{(q \diamond r)!p^{\mathbb{L}} \langle \langle i . R_i \rangle \rangle_{i \in I} \xrightarrow{q!p \langle j \rangle}_p R_j} \\
 \\
 \text{[REL-REC]} \\
 \frac{\text{unfold}(\mu X^{\mathbb{L}} . R) \xrightarrow{m}_p R'}{\mu X^{\mathbb{L}} . R \xrightarrow{m}_p R'}
 \end{array}$$

Given $\vec{m} = m_1, \dots, m_k$, we write $R \xrightarrow{\vec{m}}_p R'$ to denote $R \xrightarrow{m_1}_p \dots \xrightarrow{m_k}_p R'$ (reflexive if $\vec{m} = \epsilon$). We write $\vec{m}(q)$ to denote the subsequence of messages from \vec{m} sent by q .

Definition H.5.2 (Coherent Setup $\triangleright \triangleleft$). A global type G_0 , a participant p , a monitor $M \neq \mu X . M'$, a map $\text{RTs} : \mathbf{P} \rightarrow \mathbf{R}$, and a sequence of messages \vec{n} are in a coherent setup, denoted $G_0 \triangleright \triangleleft p \triangleright \triangleleft M \triangleright \triangleleft \text{RTs} \triangleright \triangleleft \vec{n}$, if and only if there exist $G, \vec{\ell}$ such that $G_0 \xrightarrow{\vec{\ell}} G$, \vec{n} exclusively contains messages with sender in $\text{dom}(\text{RTs})$, and

- **(Initial state)** $M \in \{\text{gt2mon}(G, p, \text{part}(G_0) \setminus \{p\}), \checkmark\}$ implies that
 - for every $q \in \text{dom}(\text{RTs})$ there exists \mathbb{L}_q such that $(G) \langle p, q \rangle^{\mathbb{L}_q} \xrightarrow{\vec{n}(q)}_p \text{RTs}(q)$, and
 - if $M = \checkmark$ then $\text{gt2mon}(G, p, \text{part}(G_0) \setminus \{p\}) = \text{end}$;
- **(Intermediate state)** Otherwise, there exist G', j such that $G \xrightarrow{j} G'$, and either of the following holds:
 - all of the following hold:
 - ◊ $M = p!D(j). \text{gt2mon}(G', p, \text{part}(G_0) \setminus \{p\})$,
 - ◊ for every $q \in \text{dom}(\text{RTs}) \setminus D$ there exists \mathbb{L}_q such that $(G') \langle p, q \rangle^{\mathbb{L}_q} \xrightarrow{\vec{n}(q)}_p \text{RTs}(q)$, and
 - ◊ for every $q \in D$ there exists \mathbb{L}_q such that $\text{RTs}(q) = (G) \langle p, q \rangle^{\mathbb{L}_q}$;
 - all of the following hold:
 - ◊ $M = p?r \{j. \text{gt2mon}(G', p, \text{part}(G_0) \setminus \{p\}) \cup \{i.\text{error}\}_{i \in \Gamma \setminus \{j\}}\}$,
 - ◊ for every $q \in \text{dom}(\text{RTs}) \setminus \{r\}$ there exists \mathbb{L}_q such that $(G') \langle p, q \rangle^{\mathbb{L}_q} \xrightarrow{\vec{n}(q)}_p \text{RTs}(q)$, and
 - ◊ there exists \mathbb{L}_r such that $(G) \langle p, r \rangle^{\mathbb{L}_r} \xrightarrow{\vec{n}(r)}_p \text{RTs}(r)$.

Lemma H.5.3. Suppose

- $\mathcal{R} \models [\langle p : P_0 : \epsilon \rangle : M_0 : \epsilon] \triangleright \text{RTs}_0 @ p$,
- where $\text{RTs}_0 \triangleq \{(q, G_0) \langle p, q \rangle^{\{\epsilon\}} \mid q \in \text{part}(G_0) \setminus \{p\}\}$ for well-formed G_0 .

Then

- for any $([\langle p : P : \vec{m} \rangle : M : \vec{n}], \text{RTs}, \text{LbIs}) \in \mathcal{R}$ such that $G_0 \triangleright \triangleleft p \triangleright \triangleleft M \triangleright \triangleleft \text{RTs} \triangleright \triangleleft \vec{n}$, and

- for any $\alpha, \mathcal{P}', \Omega, \Omega'$ such that $[\langle p : P : \vec{m} \rangle : M : \vec{n}]_{\Omega} \xrightarrow{\alpha}_{\Omega'} \mathcal{P}'$,

we have $\mathcal{P}' \neq \text{error}_{\{p\}}$.

Proof. Suppose, towards a contradiction, that $\mathcal{P}' \equiv \text{error}_{\{p\}}$. Then the transition is due to Transition [NO-DEP], $\alpha = \tau$, $\Omega' = \Omega$, and the transition is derived from Transition [ERROR-OUT], [ERROR-IN], or [ERROR-MON]. We show in each case separately that this leads to a contradiction.

- Transition [ERROR-OUT]. Then M denotes an output, and so, by the definition of coherent setup (Definition H.5.2), there is a $q \in \text{dom}(\text{RTs})$ such that $\text{unfold}(\text{RTs}(q))$ is an output with a location that prefixes all other locations in RTs. By satisfaction (Tau), $(\text{error}_{\{p\}}, \text{RTs}, \text{Lb1s}) \in \mathcal{R}$. Then by the progress property of satisfaction (Definition 10.4.2), there exist α, \mathcal{P}'' such that $\text{error}_{\{p\}} \xrightarrow{\alpha} \mathcal{P}''$. However, the LTS for networks (Definition 10.2.3) does not define such a transition: a contradiction.
- Transition [ERROR-IN]. Then the monitor tries to read a message from \vec{n} , but the first relevant message is incorrect. By the definition of coherent setup (Definition H.5.2), all messages in \vec{n} are in accordance with satisfaction (Input) or (Dependency input). But then the message cannot be incorrect: a contradiction.
- Transition [ERROR-MON]. This means that $M = \text{error}$. This can only be the case after two related dependency inputs of different labels. However, the messages read must be due to satisfaction (Dependency input), where the first one records the chosen label in Lb1s, and the second one uses that label. Hence, it is not possible that two different labels have been received: a contradiction.

Hence, $\mathcal{P}' \neq \text{error}_{\{p\}}$. □

Lemma H.5.4. *Suppose*

- $\mathcal{R} \models [\langle p : P_0 : \epsilon \rangle : M_0 : \epsilon] \triangleright \text{RTs}_0 @ p$,
- where $\text{RTs}_0 \triangleq \{(q, G_0) (p, q)^{\{e\}} \mid q \in \text{part}(G_0) \setminus \{p\}\}$
- for well-formed G_0 with $p \in \text{part}(G_0)$.

Then

- for any $([\langle p : P : \vec{m} \rangle : M : \vec{n}], \text{RTs}, \text{Lb1s}) \in \mathcal{R}$
- with non-empty \vec{n}
- such that $G_0 \triangleright p \triangleright M \triangleright \text{RTs} \triangleright \vec{n}$,

there exist

- $\text{RTs}', \text{Lb1s}'$ such that $([\langle p : P : \vec{m} \rangle : M : \epsilon], \text{RTs}', \text{Lb1s}') \in \mathcal{R}$, and
- $(q, R) \in \text{dom}(\text{RTs}')$ such that

- $\text{unfold}(R) = q!p^{\mathbb{L}} \{i\langle T_i \rangle . R_i\}_{i \in I}$
- or $\text{unfold}(R) = (q\langle r \rangle)!p^{\mathbb{L}} \{i . R_i\}_{i \in I}$.

Proof. Take any $([\langle p : P : \vec{m} \rangle : M : \vec{n}], \text{RTs}, \text{Lb1s}) \in \mathcal{R}$ with non-empty \vec{n} such that

$$G_0 \triangleright p \triangleright M \triangleright \text{RTs} \triangleright \vec{n}.$$

By the minimality of \mathcal{R} , each message in \vec{n} traced back to applications of satisfaction (Input) or (Dependency input). By the definition of coherent setup (Definition H.5.2), each relative type in RTs relates G_0 with the messages in \vec{n} through the LTS for relative types (Definition H.5.1). Hence, at $([\langle p : P : \vec{m} \rangle : M : \epsilon], \text{RTs}', \text{Lb1s}') \in \mathcal{R}$, since \vec{n} is non-empty, the unfolding of at least one relative type in RTs' denotes an input by p . \square

Lemma H.5.5.

- *Suppose*
 - $\mathcal{R} \models [\langle p : P_0 : \epsilon \rangle : M_0 : \epsilon] \triangleright \text{RTs}_0 @ p$,
 - where $\text{RTs}_0 \triangleq \{(q, G_0) \langle p, q \rangle^{[\epsilon]} \mid q \in \text{part}(G_0) \setminus \{p\}\}$
 - for well-formed G_0 with $p \in \text{part}(G_0)$.
- *Take any* $([\langle p : P : \vec{m} \rangle : M : \vec{n}], \text{RTs}, \text{Lb1s}) \in \mathcal{R}$ such that $G_0 \triangleright p \triangleright M \triangleright \text{RTs} \triangleright \vec{n}$.
- *Suppose* $\langle p : P : \vec{m} \rangle \xrightarrow{p!q(j\langle T_j \rangle)} \langle p : P' : \vec{m} \rangle$.

Then

- $\text{unfold}(M) = M'$
- or $\text{unfold}(M) = p!D(\ell).M'$

H

where $M' = p!q\{i\langle T_i \rangle . M'_i\}_{i \in I}$ s.t. $j \in I$.

Proof. Suppose, toward a contradiction, that $\text{unfold}(M) \neq M'$ and $\text{unfold}(M) \neq p!D(\ell).M'$. Then, by Transition [ERROR-OUT], $[\langle p : P : \vec{m} \rangle : M : \vec{n}] \xrightarrow{\tau} \text{error}_{\{p\}}$. By satisfaction (Tau), $(\text{error}_{\{p\}}, \text{RTs}, \text{Lb1s}) \in \mathcal{R}$. If M starts with a sequence of recursive definitions, we unfold them; by Transition [MON-REC], the behavior is unchanged; let us assume, w.l.o.g., that M does not start with a recursive definition. From each possible shape of M , we derive a contradiction.

- $M = p!r\{k\langle T_k \rangle . M_k\}_{k \in K}$ for $r \neq q$. By definition of coherent setup (Definition H.5.2), $G_0 \xrightarrow{\ell} G$, $M = \text{gt2mon}(G, p, \text{part}(G_0) \setminus \{p\})$, and there exists \mathbb{L} such that $(G) \langle p, r \rangle^{\mathbb{L}} \xrightarrow{\vec{n}(r)}_p \text{RTs}(r)$. Then $\text{unfold}(G) \langle p, r \rangle^{\mathbb{L}} = p!r\{k\langle T_k \rangle . R_k\}_{k \in K}$. Since the LTS for relative types (Definition H.5.1) only allows input transitions, then $\text{RTs}(r) = G \langle p, r \rangle^{\mathbb{L}}$. Clearly, \mathbb{L} prefixes all other locations in RTs. Hence, by the progress property of satisfaction (Definition 10.4.2), there exists \mathcal{P}' such that $\text{error}_{\{p\}} \xrightarrow{\tau} \mathcal{P}'$. However, the LTS for networks (Definition 10.2.3) does not define such a transition: a contradiction.
- $M = p!q\{i\langle T_i \rangle . M_i\}_{i \in I}$ for $j \notin I$. Analogous to the case above.

- $M \equiv p?r\{k\langle T_k \rangle.M_k\}_{k \in K}$. By definition of coherent setup (Definition H.5.2), $G_0 \xrightarrow{\tilde{\ell}} G$, $M = \text{gt2mon}(G, p, \text{part}(G_0) \setminus \{p\})$, and there exists \mathbb{L} such that $(G)(p, r)^{\mathbb{L}} \xrightarrow{\tilde{n}(r)}_p \text{RTs}(r)$. Whether \tilde{n} is empty or not, there exist RTs' , $\text{Lb1s}'$ such that $([\langle p : P : \vec{m} \rangle : M : \epsilon], \text{RTs}', \text{Lb1s}') \in \mathcal{R}$: if empty, this holds vacuously with $\text{RTs}' \triangleq \text{RTs}$, $\text{Lb1s}' \triangleq \text{Lb1s}$; if non-empty, it follows from Lemma H.5.4. Then $\text{unfold}(\text{RTs}'(r)) = \text{unfold}(G)(p, r)^{\mathbb{L}} = r!p\{k\langle T_k \rangle.R_k\}_{k \in K}$. Again, by Transition [ERROR-OUT], $[\langle p : P : \vec{m} \rangle : M : \epsilon] \xrightarrow{\tau} \text{error}_{\{p\}}$, and, by satisfaction (Tau), $(\text{error}_{\{p\}}, \text{RTs}', \text{Lb1s}') \in \mathcal{R}$. Then, by satisfaction (Input), $\text{error}_{\{p\}} = [\langle p : P : \vec{m} \rangle : M' : \tilde{n}]$: a contradiction.
- $M = p?r\{k.M_k\}_{k \in K}$. Analogous to the case above.
- $M = \text{end}$. By definition of coherent setup (Definition H.5.2), $G_0 \xrightarrow{\tilde{\ell}} G$, $M = \text{gt2mon}(G, p, \text{part}(G_0) \setminus \{p\})$, and for every $q \in \text{dom}(\text{RTs})$ there exists \mathbb{L}_q such that $(G)(p, q)^{\mathbb{L}_q} \xrightarrow{\tilde{n}(q)}_p \text{RTs}(q)$. Since the LTS for relative types (Definition H.5.1) only allows input transitions, for every $q \in \text{dom}(\text{RTs})$, $\text{unfold}(\text{RTs}(q)) = \text{unfold}(G)(p, q)^{\mathbb{L}_q} = \text{end}$. Then, by satisfaction (End), there exists \mathcal{P}' such that $\text{error}_{\{p\}} \Rightarrow^{\text{end}} \mathcal{P}'$. However, the LTS for networks (Definition 10.2.3) does not define such transitions: a contradiction.
- $M = \text{error}$. By definition of coherent setup (Definition H.5.2), $M \neq \text{error}$: a contradiction.
- $M = \checkmark$. It cannot be the case that $M_0 = \checkmark$, and, by the LTS for networks (Definition 10.2.3), $M = \checkmark$ can only be reached through a transition labeled end. Hence, $[\langle p : P : \vec{m} \rangle : \checkmark : \tilde{n}]$ must have been reached through satisfaction (End). Then

$$[\langle p : P : \vec{m} \rangle : \checkmark : \tilde{n}] \not\vdash$$

a contradiction.

Hence, the thesis must indeed hold. □

Lemma H.5.6.

- *Suppose*
 - $\mathcal{R} \models [\langle p : P_0 : \epsilon \rangle : M_0 : \epsilon] \triangleright \text{RTs}_0 @ p$,
 - *where* $\text{RTs}_0 \triangleq \{(q, G_0)(p, q)^{\{\epsilon\}} \mid q \in \text{part}(G_0) \setminus \{p\}\}$
 - *for well-formed* G_0 *with* $p \in \text{part}(G_0)$.
- *Take any* $([\langle p : P : \vec{m} \rangle : M : \tilde{n}], \text{RTs}, \text{Lb1s}) \in \mathcal{R}$ *such that* $G_0 \bowtie p \bowtie M \bowtie \text{RTs} \bowtie \tilde{n}$.
- *Suppose* $\langle p : P : \vec{m} \rangle \xrightarrow{\text{end}} \langle p : P' : \vec{m} \rangle$.

Then $\tilde{n} = \epsilon$, and

- $\text{unfold}(M) = \text{end}$
- *or* $\text{unfold}(M) = p!D(\ell).\text{end}$.

Proof. Suppose toward a contradiction that $\tilde{n} \neq \epsilon$ or that $\text{unfold}(M) \notin \{\text{end}, p!D(\ell).\text{end}\}$. Then, by Transition [ERROR-END], $[\langle p : P : \tilde{m} \rangle : M : \tilde{n}] \xrightarrow{\tau} \text{error}_{\{p\}}$. The contradiction follows similar to the reasoning in the proof of Lemma H.5.5. We only discuss the additional case where $\tilde{n} \neq \epsilon$ and $M = p!D(\ell).M'$. By induction on the size of D , $[\langle p : P : \tilde{m} \rangle : M : \tilde{n}] \Rightarrow [\langle p : P : \tilde{m} \rangle : M' : \tilde{n}]$. By the definition of coherent setup (Definition H.5.2), M is synthesized from a global type, so M' is not a dependency output (there are never two consecutive dependency outputs). Hence, the other cases for M' apply and the search for a contradiction continues as usual. \square

Lemma H.5.7. *Suppose*

- $G_0 \triangleright p \triangleright M \triangleright \text{RTs} \triangleright \tilde{n}, u$
- with $G_0 \xrightarrow{\tilde{\ell}} G \xrightarrow{k} G'$
- and $u = q!p(j\langle T_j \rangle)$.

Then

- $G' = q!p\{i\langle T_i \rangle.G'_i\}_{i \in I}$ with $j \in I$
- or, for every k', G'' such that $G' \xrightarrow{k'} G''$, there exists (finite) $\tilde{\ell}'$ such that $G'' \xrightarrow{\tilde{\ell}'} q!p\{i\langle T_i \rangle.G''_i\}_{i \in I}$ with $j \in I$.

Proof. By the definition of coherent setup (Definition H.5.2), there are \mathbb{L}, \mathbb{L}' such that $\text{unfold}(G') (p, q)^{\mathbb{L}} = q!p^{\mathbb{L}'} \llbracket i\langle T_i \rangle.R_i \rrbracket_{i \in I}$ with $j \in I$. By definition, this relative type is generated in finitely many steps by Algorithm 7 (Line 7). We apply induction on the number x of steps this took. In the base case, the thesis holds trivially.

In the inductive case, the relative projections of all branches of G' onto (p, q) are the same. Take any k', G'' such that $G' \xrightarrow{k'} G''$. Then $G'' (p, q)^{\mathbb{L}'+k'}$ is generated in less than x steps through Algorithm 7 (line 7). Hence, the thesis follows from the IH. \square

H

Lemma H.5.8.

- *Suppose*
 - $\mathcal{R} \models [\langle p : P_0 : \epsilon \rangle : M_0 : \epsilon] \triangleright \text{RTs}_0 @ p$,
 - where $G_0 \triangleright p \triangleright M_0 \triangleright \text{RTs}_0 \triangleright \epsilon$
 - for well-formed G_0 with $p \in \text{part}(G_0)$.
- *Take any* $\text{RTs}, \text{LbIs}, \tilde{m}, \tilde{n}, M, P$ *such that*
 - $([\langle p : P : \tilde{m} \rangle : M : \tilde{n}], \text{RTs}, \text{LbIs}) \in \mathcal{R}$,
 - $G_0 \triangleright p \triangleright M \triangleright \text{RTs} \triangleright \tilde{n}$,
 - and \tilde{n} *is non-empty*.

If

- $P \xrightarrow{p^2q(j\langle T_j \rangle)} P'$

- *and* $\text{unfold}(M) \neq p?q\{i\langle T_i \rangle.M_i\}_{i \in I}$ for $I \ni \{j\}$,

then $\text{unfold}(M) \in \{p?r\{k\langle T_k \rangle.M_k\}_{k \in K}, p?r\{k.M_k\}_{k \in K}, p!D(\ell).M' \mid r \neq q\}$.

Proof. Assume, toward a contradiction, that

$$\text{unfold}(M) \notin \{p?r\{k\langle T_k \rangle.M_k\}_{k \in K}, p?r\{k.M_k\}_{k \in K}, p!D(\ell).M' \mid r \neq q\}.$$

We discuss each possible shape of $\text{unfold}(M)$ separately (w.l.o.g., assume M does not start with a recursive definition, i.e., $\text{unfold}(M) = M$).

- $M = p!r\{k\langle T_k \rangle.M_k\}_{k \in K}$. By definition of coherent setup (Definition H.5.2), $\text{unfold}(\text{RTs}(r)) = p!r^{\mathbb{L}}\{\{k\langle T_k \rangle.R_k\}_{k \in K}\}$ for some \mathbb{L} . It must then be that \mathbb{L} is the earliest location in all RTs. Then, by the progress property of satisfaction (Definition 10.4.2), the monitored blackbox must eventually do an output transition. However, by blackbox LTS assumptions (Input/Output), since P does an input transition, it cannot do an output transition: a contradiction.
- $M = p?q\{i\langle T_i \rangle.M_i\}_{i \in I}$ for $j \notin I$. Analogous to the similar case in the proof of Lemma H.5.5.
- $M = \text{end}$. Analogous to the similar case in the proof of Lemma H.5.5.
- $M = \text{error}$. Analogous to the similar case in the proof of Lemma H.5.5.
- $M = \checkmark$. It cannot be the case the $M_0 = \checkmark$, and, by the LTS for networks (Definition 10.2.3), $M = \checkmark$ can only be reached through a transition labeled end. Hence, the current monitored blackbox must have been reached through satisfaction (End) from $[\langle p : P : \vec{m} \rangle : \text{end} : \vec{n}]$. An end-transition from this state requires that \vec{n} is empty, which it is not: a contradiction.

Hence, the thesis must hold indeed. □

H

Lemma H.5.9.

- *Suppose*
 - $\mathcal{R} \models [\langle p : P_0 : \epsilon \rangle : M_0 : \epsilon] \triangleright \text{RTs}_0 @ p$,
 - where $G_0 \triangleright p \triangleright M_0 \triangleright \text{RTs}_0 \triangleright \epsilon$
 - for well-formed G_0 with $p \in \text{part}(G_0)$.
- *Take any* $\text{RTs}, \text{Lb1s}, \vec{m}, \vec{n}, M, P$ *such that*
 - $([\langle p : P : \vec{m} \rangle : M : \vec{n}], \text{RTs}, \text{Lb1s}) \in \mathcal{R}, G_0 \triangleright p \triangleright M \triangleright \text{RTs} \triangleright \vec{n}$,
 - and \vec{n} is non-empty.

If $P \xrightarrow{\tau} P'$, then $M \neq \checkmark$.

Proof. Suppose, toward a contradiction, that $M = \checkmark$. We have $M_0 \neq \checkmark$, so this state must have been reached through an end-transition between P_0 and P . However, by blackbox LTS assumptions (End), there can be no transitions after an end-transition: a contradiction. \square

Lemma H.5.10. *Suppose given $\text{RTs} : \mathbf{P} \rightarrow \mathbf{R}$ and $\text{Lb1s} : \mathbb{P}(\vec{\mathbf{L}}) \rightarrow \mathbf{L}$.*

If there is $(q, \mathbf{R}) \in \text{RTs}$ such that $\text{unfold}(\mathbf{R}) = (p \diamond r)!q^{\mathbb{L}} \{ i.R_i \}_{i \in I}$, then, for every $j \in I$,

$$LO(p, \text{RTs}, \text{Lb1s}) = LO(p, \text{RTs}[q \mapsto \mathbf{R}_j], \text{Lb1s}).$$

Proof. Trivially, by the definition of label oracle (Definition 10.4.10), the right-hand-side is a subset of the left-hand-side. For the other direction, the update of RTs might add additional sequences. However, since the update to RTs does not affect any other relative types and Lb1s is not updated, no sequences are removed. Hence, the left-hand-side is a subset of the right-hand-side. \square

Lemma H.5.11. *Suppose given $\text{RTs} : \mathbf{P} \rightarrow \mathbf{R}$, $\text{Lb1s} : \mathbb{P}(\vec{\mathbf{L}}) \rightarrow \mathbf{L}$, $\Omega = LO(p, \text{RTs}, \text{Lb1s})$, and $\Omega' = \Omega(\alpha)$.*

Then all of the following hold:

- *If $\alpha = p!q(j \langle T_j \rangle)$, then $\text{RTs}(q) \stackrel{\circ}{=} p!q^{\mathbb{L}} \{ i \langle T_i \rangle . R_i \}_{i \in I}$ with $j \in I$, and*

$$\Omega' = LO(p, \text{RTs}[q \mapsto \mathbf{R}_j], \text{Lb1s}[\mathbb{L} \mapsto j]).$$

- *If $\alpha = p?q(j \langle T_j \rangle)$, then $\text{RTs}(q) \stackrel{\circ}{=} q!p^{\mathbb{L}} \{ i \langle T_i \rangle . R_i \}_{i \in I}$ with $j \in I$, and*

$$\Omega' = LO(p, \text{RTs}[q \mapsto \mathbf{R}_j], \text{Lb1s}[\mathbb{L} \mapsto j]).$$

- *If $\alpha = p?q(\mathbb{L})$, then $\text{RTs}(q) \stackrel{\circ}{=} (q \diamond r)!p^{\mathbb{L}} \{ i.R_i \}_{i \in I}$ with $j \in I$. If $\exists \mathbb{L}' \in \text{dom}(\text{Lb1s}). \mathbb{L}' \cap \mathbb{L}$, then $\Omega' = LO(p, \text{RTs}[q \mapsto \mathbf{R}_j], \text{Lb1s}[\mathbb{L} \mapsto j])$. If $\exists (\mathbb{L}', j) \in \text{Lb1s}. \mathbb{L}' \cap \mathbb{L}$, then*

$$\Omega' = LO(p, \text{RTs}[q \mapsto \mathbf{R}_j], \text{Lb1s}).$$

- *If $\alpha = \text{end}$, then $\forall (q, \mathbf{R}) \in \text{RTs}. \mathbf{R} \stackrel{\circ}{=} \text{end}$, and $\Omega' = LO(p, \emptyset, \emptyset)$.*
- *If $\alpha = \tau$, then $\Omega' = \Omega = LO(p, \text{RTs}, \text{Lb1s})$.*

Proof. Keeping in mind Lemma H.5.10, Ω is generated with each possible α appearing exactly once under specific conditions and with unique continuation. \square

Theorem H.5.12 (Transparency). *Suppose given*

- *a well-typed global type G_0 ,*

- a participant $p \in \text{part}(G_0)$, and
- a blackbox P_0 .

Let

- $\text{RTs}_0 \triangleq \{(q, G_0) \langle p, q \rangle^{\{\epsilon\}} \mid q \in \text{part}(G_0) \setminus \{p\}\}$, and
- $M_0 \triangleq \text{gt2mon}(G_0, p, \text{part}(G_0) \setminus \{p\})$.

Suppose $\models [\langle p : P_0 : \epsilon \rangle : M_0 : \epsilon] \triangleright \text{RTs}_0 @ p$ minimally (Definition 10.4.11).

Let $\Omega_0 \triangleq \text{LO}(p, \text{RTs}_0, \emptyset)$. Then $[\langle p : P_0 : \epsilon \rangle : M_0 : \epsilon] \approx_{\Omega_0} \langle p : P_0 : \epsilon \rangle$.

Proof. By satisfaction (Definition 10.4.2), there exists a minimal satisfaction \mathcal{R} at p such that $([\langle p : P_0 : \epsilon \rangle : M_0 : \epsilon], \text{RTs}_0, \emptyset) \in \mathcal{R}$. Let

$$\begin{aligned} \mathcal{B} \triangleq \{ & ([\langle p : P : \vec{m} \rangle : M : \vec{n}], \Omega, \langle p : P : \vec{n}, \vec{m} \rangle) \\ & \mid \forall P, M, \vec{m}, \vec{n}. \exists \text{RTs}, \text{Lb1s}. (([\langle p : P : \vec{m} \rangle : M : \vec{n}], \text{RTs}, \text{Lb1s}) \in \mathcal{R} \\ & \wedge G_0 \triangleright p \triangleright M \triangleright \text{RTs} \triangleright \vec{n} \\ & \wedge \Omega = \text{LO}(p, \text{RTs}, \text{Lb1s})\}. \end{aligned}$$

Clearly, $([\langle p : P_0 : \epsilon \rangle : M_0 : \epsilon], \Omega_0, \langle p : P_0 : \epsilon \rangle) \in \mathcal{B}$, with $P = P_0, M = M_0, \vec{m} = \vec{n} = \epsilon, \text{RTs} = \text{RTs}_0, \text{Lb1s} = \emptyset$, and clearly $G_0 \triangleright p \triangleright M_0 \triangleright \text{RTs}_0 \triangleright \epsilon$.

It remains to show that \mathcal{B} is a weak bisimulation. Take any $(\mathcal{P}, \Omega, Q) \in \mathcal{B}$: there are P, M, \vec{n}, \vec{m} such that $\mathcal{P} = [\langle p : P : \vec{m} \rangle : M : \vec{n}]$, $Q = \langle p : P : \vec{n}, \vec{m} \rangle$, and there are $\text{RTs}, \text{Lb1s}$ such that $(\mathcal{P}, \text{RTs}, \text{Lb1s}) \in \mathcal{R}$, $G_0 \triangleright p \triangleright M \triangleright \text{RTs} \triangleright \vec{n}$, and $\Omega = \text{LO}(p, \text{RTs}, \text{Lb1s})$. We show that the two conditions of Definition 10.4.9 hold.

1. Take any $\mathcal{P}', \alpha, \Omega_1$ such that $\mathcal{P} \xrightarrow{\alpha}_{\Omega_1} \mathcal{P}'$. The analysis depends on the rule from Definition 10.4.8 used to derive the transition (Transition [BUF], [DEP], or [NO-DEP]). We never need to read extra messages, so in each case we show the thesis for $\vec{b} \triangleq \epsilon$ and $\mathcal{P}'' \triangleq \mathcal{P}'$. That is, in each case we show that there exists Q' such $Q \xrightarrow{\alpha}_{\Omega_1} Q'$ and $(\mathcal{P}', \Omega_1, Q') \in \mathcal{B}$.

- Transition [BUF-MON]. Then $\alpha \in \{p?q(x), p?q(x)\}$, $\mathcal{P}' = [\langle p : P : \vec{m} \rangle : M : u, \vec{n}]$ for $u \in \{q!p(x), q!p(x)\}$, and $\Omega_1 = \Omega(\alpha)$.

By Lemma H.5.11, we have $(q, R^q) \in \text{RTs}$ where $\text{unfold}(R^q)$ is a (dependency) message from q to p . For the sake of simplicity, assume w.l.o.g. that the message is no dependency. Then $\text{unfold}(R^q) = q!p^{\text{L}} \llbracket i \langle T_i \rangle . R_i^q \rrbracket_{i \in I}$, $\alpha = p?q(x)$, $x = j \langle T_j \rangle$ with $j \in I$, and $u = q!p(x)$. Let $\text{RTs}' \triangleq \text{RTs}[q \mapsto R_j^q]$ and $\text{Lb1s}' \triangleq \text{Lb1s}[\text{L} \mapsto j]$. By satisfaction (Input), $(\mathcal{P}', \text{RTs}', \text{Lb1s}') \in \mathcal{R}$. By Lemma H.5.11, $\Omega_1 = \text{LO}(p, \text{RTs}', \text{Lb1s}')$.

Since M is not updated, and the addition of u to the buffer only adds an input transition to the coherent setup (Definition H.5.2) reflected by updated entry for q in RTs' , we have $G_0 \triangleright p \triangleright M \triangleright \text{RTs}' \triangleright u, \vec{n}$. Let $Q' \triangleq \langle p : P : u, \vec{n}, \vec{m} \rangle$. By Transition [BUF], $Q \xrightarrow{\alpha}_{\Omega_1} Q'$ so $Q \xrightarrow{\alpha}_{\Omega_1} Q'$. Finally, by definition, $(\mathcal{P}', \Omega_1, Q') \in \mathcal{B}$.

- Transition [BUF-UNMON]. This rule does not apply to monitored blackboxes.
- Transition [DEP]. Then $\alpha = \tau$, $\mathcal{P} \xrightarrow{\alpha'} \mathcal{P}'$ with $\alpha' = s!r(j)$ for some s, r, j , and $\Omega_1 = \Omega$. This can only have been derived from Transition [MON-OUT-DEP]. Then $M = p!(D \cup \{r\})(j).M'$, $s = p$, and $\mathcal{P} \xrightarrow{\alpha'} [\langle p : P : \vec{m} \rangle : p!D(j).M' : \vec{n}] = \mathcal{P}'$. By satisfaction (Dependency output), we have $(r, R^r) \in \text{RTs}$ with $\text{unfold}(R^r) = (p \diamond q)!r^{\perp} \{i.R_i^r\}_{i \in I}$ and $j \in I$, and so $(\mathcal{P}', \text{RTs}', \text{Lb1s}) \in \mathcal{R}$ with $\text{RTs}' \triangleq \text{RTs}[r \mapsto R_j^r]$.

In RTs' , only the entry for r has been updated, so $G_0 \triangleright p \triangleright p!D(j).M' \triangleright \text{RTs}' \triangleright \vec{n}$. By Lemma H.5.10, $\Omega = \text{LO}(p, \text{RTs}', \text{Lb1s})$. We have $Q_\Omega \xrightarrow{\tau} Q$. Finally, by definition, $(\mathcal{P}', \Omega, Q) \in \mathcal{B}$.

- Transition [NO-DEP]. Then $\alpha \neq s!r(\ell)$ for any s, r, ℓ , $\mathcal{P} \xrightarrow{\alpha} \mathcal{P}'$, and $\Omega_1 = \Omega(\alpha)$. The analysis depends on the derivation of the transition. Some rules are impossible: there is no parallel composition in \mathcal{P} , no rules to derive transitions for buffered blackboxes are possible, and, by Lemma H.5.3, no transitions resulting in an error signal are possible.

Some rules require to first unfold recursion in M , derived by a number of consecutive applications of Transition [MON-REC]. We apply induction on this number. The inductive case is trivial by the IH.

In the base case, where there are no applications of Transition [MON-REC], we consider each possible rule (Transition [MON-OUT], [MON-IN], [MON-IN-DEP], [MON-TAU], [MON-OUT-DEP-EMPTY], and [MON-END]).

- Transition [MON-OUT]. Then $\alpha = p!q(j \langle T_j \rangle)$, $\langle p : P : \vec{m} \rangle \xrightarrow{\alpha} \langle p : P' : \vec{m} \rangle$, $M = p!q\{i \langle T_i \rangle . M_i\}_{i \in I}$, $j \in I$, and $\mathcal{P}' = [\langle p : P' : \vec{m} \rangle : M_j : \vec{n}]$.

The transition of the buffered blackbox must be due to Transition [BUF-OUT]: $P \xrightarrow{\alpha} P'$. By satisfaction (Output), we have $(q, R^q) \in \text{RTs}$ with $\text{unfold}(R^q) = p!q^{\perp} \{i \langle T_i \rangle . R_i^q\}_{i \in I}$ and $j \in I$, and so $(\mathcal{P}', \text{RTs}', \text{Lb1s}') \in \mathcal{R}$ with $\text{RTs}' \triangleq \text{RTs}[q \mapsto R_j^q]$ and $\text{Lb1s}' \triangleq \text{Lb1s}[\perp \mapsto j]$.

In RTs' , only the entry for q has been updated, so $G_0 \triangleright p \triangleright M_j \triangleright \text{RTs}' \triangleright \vec{n}$. By Lemma H.5.11, $\Omega_1 = \text{LO}(p, \text{RTs}', \text{Lb1s}')$. Let $Q' \triangleq \langle p : P' : \vec{n}, \vec{m} \rangle$. By Transition [BUF-OUT], $Q \xrightarrow{\alpha} Q'$. Then, by Transition [NO-DEP], $Q_\Omega \xrightarrow{\alpha} \Omega_1 Q'$ so $Q_\Omega \xrightarrow{\alpha} \Omega_1 Q'$. Finally, by definition, $(\mathcal{P}', \Omega_1, Q') \in \mathcal{B}$.

- Transition [MON-IN]. Then $\alpha = \tau$, $M = p?q\{i \langle T_i \rangle . M_i\}_{i \in I}$, $\vec{n} = \vec{n}'$, u where $u = q!p(j \langle T_j \rangle)$, $j \in I$, $\mathcal{P}' = [\langle p : P : u, \vec{m} \rangle : M_j : \vec{n}']$.

By satisfaction (Tau), $(\mathcal{P}', \text{RTs}, \text{Lb1s}) \in \mathcal{R}$. Since M has moved past the input from q ($\text{RTs}(q)$ was already past this point), and it has been removed from \vec{n} , we have $G_0 \triangleright p \triangleright M_j \triangleright \text{RTs} \triangleright \vec{n}'$. By Lemma H.5.11, $\Omega_1 = \text{LO}(p, \text{RTs}, \text{Lb1s})$.

We have $Q_\Omega \xrightarrow{\tau} \Omega_1 Q$. Finally, by definition, $(\mathcal{P}', \Omega_1, Q) \in \mathcal{B}$.

- Transition [MON-IN-DEP]. Analogous to Transition [MON-IN].
- Transition [MON-TAU]. Then $\alpha = \tau$, $\mathcal{P}' = [\langle p : P' : \vec{m}' \rangle : M : \vec{n}]$, and

$$\langle p : P : \vec{m} \rangle \xrightarrow{\tau} \langle p : P' : \vec{m}' \rangle.$$

By satisfaction (Tau), $(\mathcal{P}', \text{RTs}, \text{Lb1s}) \in \mathcal{R}$. By Lemma H.5.11, $\Omega_1 = \text{LO}(p, \text{RTs}, \text{Lb1s}) = \Omega$. Let $Q' \triangleq \langle p : P' : \vec{n}, \vec{m}' \rangle$. The transition of the buffered blackbox is derived from Transition [BUF-IN], [BUF-IN-DEP], or [BUF-TAU]. In any case, we can add messages to the back of the buffer without affecting the transition, such that $Q \xrightarrow{\tau} Q'$. By Transition [NO-DEP], $Q_{\Omega} \xrightarrow{\tau} Q'_{\Omega}$ so $Q_{\Omega} \xrightarrow{\tau} Q'_{\Omega}$. Finally, by definition, $(\mathcal{P}', \Omega_1, Q') \in \mathcal{B}$.

- Transition [MON-OUT-DEP-EMPTY]. Then $\alpha = \tau$, $M = p! \phi(\ell).M'$, and $\mathcal{P}' = [\langle p : P : \vec{m} \rangle : M' : \vec{n}]$.

By satisfaction (Tau), then $(\mathcal{P}', \text{RTs}, \text{Lb1s}) \in \mathcal{R}$. By Lemma H.5.11, $\Omega_1 = \text{LO}(p, \text{RTs}, \text{Lb1s}) = \Omega$. Since the step from M to M' has no effect on RTs, $G_0 \triangleright p \triangleright M' \triangleright \text{RTs} \triangleright \vec{n}$. We have $Q_{\Omega} \xrightarrow{\tau} Q_{\Omega}$. Then $(\mathcal{P}', \Omega_1, Q) \in \mathcal{B}$.

- Transition [MON-END]. Then $\alpha = \text{end}$, $M = \text{end}$, $\vec{n} = \epsilon$, $\langle p : P : \vec{m} \rangle \xrightarrow{\text{end}} \langle p : P' : \vec{m} \rangle$, and $\mathcal{P}' = [\langle p : P' : \vec{m} \rangle : \checkmark : \epsilon]$.

The transition of the buffered blackbox is derived from Transition [BUF-END]: $P \xrightarrow{\text{end}} P'$. Then by the same transition, $Q \xrightarrow{\text{end}} \langle p : P' : \vec{m} \rangle =: Q'$. By Lemma H.5.11, $\Omega_1 = \text{LO}(p, \phi, \phi)$. Then $Q_{\Omega} \xrightarrow{\text{end}} Q'_{\Omega}$. By satisfaction (End), for every $q \in \text{dom}(\text{RTs})$, $\text{unfold}(\text{RTs}(q)) = \text{end}$, and $(\mathcal{P}', \phi, \phi) \in \mathcal{R}$. Moreover, clearly, $G_0 \triangleright p \triangleright \checkmark \triangleright \phi \triangleright \epsilon$. Then, by definition, $(\mathcal{P}', \Omega_1, Q') \in \mathcal{B}$.

2. Take any Q', α, Ω_1 such that $Q_{\Omega} \xrightarrow{\alpha} Q'_{\Omega} \checkmark$. The analysis depends on the rule from Definition 10.4.8 used to derive the transition (Transition [BUF], [DEP], or [NO-DEP]).

- Transition [BUF-MON]. This rule does not apply to monitored blackboxes.
- Transition [BUF-UNMON]. Then $\alpha \in \{p?q(x), p?q(x)\}$, $Q' = \langle p : P : u, \vec{n}, \vec{m} \rangle$ for $u \in \{q!p(x), q!p(\langle \rangle x)\}$, and $\Omega_1 = \Omega(\alpha)$.

By Lemma H.5.11, we have $(q, R^q) \in \text{RTs}$ where $\text{unfold}(R^q)$ is a (dependency) message from q to p . For the sake of simplicity, assume w.l.o.g. that the message is no dependency. Then $\text{unfold}(R^q) = q!p^{\perp} \{ i \langle T_i \rangle . R_i^q \}_{i \in I}$, $\alpha = p?q(x)$, $x = j \langle T_j \rangle$ with $j \in I$, and $u = q!p(x)$. Let $\text{RTs}' \triangleq \text{RTs}[q \mapsto R_j^q]$ and $\text{Lb1s}' \triangleq \text{Lb1s}[\perp \mapsto j]$. Let $\mathcal{P}' \triangleq [\langle p : P : \vec{m} \rangle : M : u, \vec{n}]$. By satisfaction (Input), $(\mathcal{P}', \text{RTs}', \text{Lb1s}') \in \mathcal{R}$.

Since M is not updated, and the addition of u to the buffer only adds an input to the coherent setup (Definition H.5.2) reflected by the updated for q in RTs' , we have $G_0 \triangleright p \triangleright M \triangleright \text{RTs}' \triangleright u, \vec{n}$. By Lemma H.5.11, $\Omega_1 = \text{LO}(p, \text{RTs}', \text{Lb1s}')$. Let $\Omega_2 \triangleq \Omega_1$ and $\vec{b} \triangleq \epsilon$. We have $\mathcal{P}_{\Omega} \xrightarrow{\vec{b}} \mathcal{P}_{\Omega}$. By Transition [BUF], $\mathcal{P}_{\Omega} \xrightarrow{\alpha} \mathcal{P}'_{\Omega}$ so $\mathcal{P}_{\Omega} \xrightarrow{\vec{b}, \alpha} \mathcal{P}'_{\Omega}$. Let $Q'' \triangleq Q'$; we have $Q'_{\Omega_2} \xrightarrow{\vec{b}} Q''_{\Omega_2}$. Then, since $Q_{\Omega} \xrightarrow{\alpha} Q'_{\Omega}$, we have $Q_{\Omega} \xrightarrow{\alpha, \vec{b}} Q''_{\Omega}$. Finally, by definition, $(\mathcal{P}', \Omega_2, Q'') \in \mathcal{B}$.

- Transition [DEP]. Then $\alpha = \tau$, $Q \xrightarrow{\alpha'} Q'$ with $\alpha' = s!r(\ell)$ for some s, r, ℓ . There are no rules to derive this transition, so this case does not apply.
- Transition [NO-DEP]. Then $\alpha \neq s!r(\ell)$ for any s, r, ℓ , $Q \xrightarrow{\alpha} Q'$, and $\Omega_1 = \Omega(\alpha)$. The analysis depends on the derivation of the transition. Some rules are impossible: there is no parallel composition in Q , and no rules to derive transitions for monitored blackboxes are possible.

As in case 1 above, we may first need to unfold recursion in M , which we do inductively. We consider each possible rule (Transition [BUF-OUT], [BUF-IN], [BUF-IN-DEP], [BUF-TAU], and [BUF-END]).

- Transition [BUF-OUT]. Then $\alpha = p!q(j\langle T_j \rangle)$, $Q' = \langle p : P' : \bar{n}, \bar{m} \rangle$, and $P \xrightarrow{\alpha} P'$. Then, also by Transition [BUF-OUT], $\langle p : P : \bar{m} \rangle \xrightarrow{\alpha} \langle p : P' : \bar{m} \rangle$.

By Lemma H.5.5, $M = M'$ or $M = p!D(\ell).M'$ where $M' = p!q\{i\langle T_i \rangle.M'_i\}_{i \in I}$ for some $I \supseteq \{j\}$. W.l.o.g., assume the latter. Let $\mathcal{P}' \triangleq \langle p : P : \bar{m} \rangle : M' : \bar{n}$. By induction on the size of $D = \{r_1, \dots, r_k\}$, we show that $\mathcal{P} \xrightarrow{\tau} \Omega \mathcal{P}'$, where there exists RTs' such that $(\mathcal{P}', \text{RTs}', \text{Lb1s}) \in \mathcal{R}$, $G_0 \triangleright p \triangleright M' \triangleright \text{RTs}' \triangleright \bar{n}$, and $\Omega = \text{LO}(p, \text{RTs}', \text{Lb1s})$.

In the base case, $D = \emptyset$. By Transition [MON-OUT-DEP-EMPTY], $\mathcal{P} \xrightarrow{\tau} \mathcal{P}'$. Then, by Transition [NO-DEP], $\mathcal{P} \xrightarrow{\tau} \Omega \mathcal{P}'$ so $\mathcal{P} \xrightarrow{\tau} \Omega \mathcal{P}'$. Let $\text{RTs}' \triangleq \text{RTs}$. By satisfaction (Tau), $(\mathcal{P}', \text{RTs}', \text{Lb1s}) \in \mathcal{R}$. Since the step from M to M' does not affect any relative types, then also $G_0 \triangleright p \triangleright M' \triangleright \text{RTs}' \triangleright \bar{n}$. The condition on Ω holds by Lemma H.5.11.

In the inductive case, $D = D' \cup \{r_k\}$. By Transition [MON-OUT-DEP],

$$\mathcal{P} \xrightarrow{p!r_k(\ell)} \langle p : P : \bar{m} \rangle : p!D'(\ell).M' : \bar{n}.$$

Then, by Transition [DEP], $\mathcal{P} \xrightarrow{\tau} \Omega \langle p : P : \bar{m} \rangle : p!D'(\ell).M' : \bar{n}$. By satisfaction (Dependency output), there exists RTs' such that $(\langle p : P : \bar{m} \rangle : p!D'(\ell).M' : \bar{n}, \text{RTs}', \text{Lb1s}) \in \mathcal{R}$. Since RTs' only updates the entry of r (which was a dependency output in RTs), also $G_0 \triangleright p \triangleright p!D'(\ell).M' \triangleright \text{RTs}' \triangleright \bar{n}$. Using the same reasoning, by Lemma H.5.10, $\Omega = \text{LO}(p, \text{RTs}', \text{Lb1s})$. Then, by the IH, $\langle p : P : \bar{m} \rangle : p!D'(\ell).M' : \bar{n} \xrightarrow{\tau} \Omega \mathcal{P}'$ so $\mathcal{P} \xrightarrow{\tau} \Omega \mathcal{P}'$.

Now, let $\mathcal{P}'' \triangleq \langle p : P' : \bar{m} \rangle : M'_j : \bar{n}$. By Transition [MON-OUT], $\mathcal{P}' \xrightarrow{\alpha} \mathcal{P}''$. Let $\bar{b} \triangleq \epsilon$ and $\Omega_2 \triangleq \Omega_1$. By Transition [NO-DEP], since $\Omega_2 = \Omega(\alpha)$, $\mathcal{P}' \xrightarrow{\alpha} \Omega_2 \mathcal{P}''$ so $\mathcal{P} \xrightarrow{\bar{b}, \alpha} \Omega_2 \mathcal{P}''$.

By satisfaction (Output), we have $(q, R^q) \in \text{RTs}'$ with

$$\text{unfold}(R^q) = p!q^{\text{L}} \{i\langle T_i \rangle.R_i^q\}_{i \in I}$$

and $j \in I$. Let $\text{RTs}'' \triangleq \text{RTs}'[q \mapsto R_j^q]$ and $\text{Lb1s}' \triangleq \text{Lb1s}[\text{L} \mapsto j]$. Then $(\mathcal{P}'', \text{RTs}'', \text{Lb1s}') \in \mathcal{R}$. Since RTs'' only updates the entry for r (which was an output in RTs'), we have $G_0 \triangleright p \triangleright M'_j \triangleright \text{RTs}'' \triangleright \bar{n}$. By Lemma H.5.11, $\Omega_2 = \text{LO}(p, \text{RTs}'', \text{Lb1s}')$. Trivially, $Q' \xrightarrow{\bar{b}} \Omega_2 Q'$, so $Q_\Omega \xrightarrow{\alpha, \bar{b}} \Omega_2 Q'$. Finally, by definition, $(\mathcal{P}'', \Omega_2, Q') \in \mathcal{B}$.

- Transition [BUF-IN]. Then $\alpha = \tau$, $\bar{n}, \bar{m} = \bar{n}', \bar{m}', u$ where $u = q!p(j\langle T_j \rangle)$, $Q' = \langle p : P' : \bar{n}', \bar{m}' \rangle$, and $P \xrightarrow{p!q(j\langle T_j \rangle)} P'$. By Lemma H.5.11, $\Omega_1 = \Omega = \text{LO}(p, \text{RTs}, \text{Lb1s})$. We know u appears in \bar{n} or \bar{m} . We discuss each case separately.

◊ We have u appears in \vec{n} . Then $\vec{n} = \vec{n}'$, u and $\vec{m} = \vec{m}'$, and there are no messages in \vec{m} with sender q .

By Lemma H.5.7, from M any path leads to the input by p from q in finitely many steps. We show by induction on the maximal number of such steps that there are $\vec{b}, \vec{c}, \vec{d}, \Omega_2$ such that

$$\mathcal{P} \underset{\Omega}{\overset{\vec{b}}{\rightsquigarrow}} \Omega_2 [\langle p : P : \vec{d}, \vec{m} \rangle : p?q\{i\langle T_i \rangle . M'_i\}_{i \in I} : \vec{c}, u] =: \mathcal{P}'$$

where $j \in I$, $Q' \underset{\Omega_1}{\overset{\vec{b}}{\rightsquigarrow}} \Omega_2 \langle p : P' : \vec{c}, \vec{d}, \vec{m} \rangle =: Q''$, and that there exist $\text{RTs}', \text{Lb1s}'$ such that $(\mathcal{P}', \text{RTs}', \text{Lb1s}') \in \mathcal{R}$, $G_0 \triangleright p \triangleright p?q\{i\langle T_i \rangle . M'_i\}_{i \in I} \triangleright \text{RTs}' \triangleright \vec{c}, u$, and $\Omega_2 = \text{LO}(p, \text{RTs}', \text{Lb1s}')$.

In the base case, $M = p?q\{i\langle T_i \rangle . M'_i\}_{i \in I}$ with $j \in I$. Let $\vec{b} \triangleq \vec{d} \triangleq \vec{c}$, $\vec{c} \triangleq \vec{n}'$, $\Omega_2 \triangleq \Omega$. Then $\mathcal{P}' = \mathcal{P}$ and $Q'' = Q'$, so the thesis holds trivially.

In the inductive case, by Lemma H.5.8,

$$M \in \{p?r\{k\langle T_k \rangle . M_k\}_{k \in K}, p?r\{k . M_k\}_{k \in K}, p!D(\ell) . M' \mid r \neq q\}.$$

We discuss each case separately.

· $M = p?r\{k\langle T_k \rangle . M_k\}_{k \in K}$ for $r \neq q$. This case depends on whether there is a message from r in \vec{n}' . We discuss each case separately.

If there is a message from r in \vec{n}' , then $\vec{n}' = \vec{n}'', u, w$ where $w = r!p(k\langle T_{k'} \rangle)$ for $k' \in K$. Let $\mathcal{P}'' \triangleq [\langle p : P : w, \vec{m} \rangle : M_{k'} : \vec{n}'', u]$. By Transition [MON-IN], $\mathcal{P} \xrightarrow{\tau} \mathcal{P}''$. By satisfaction (Tau), $(\mathcal{P}'', \text{RTs}, \text{Lb1s}) \in \mathcal{R}$. Since both \vec{n}' and M have correspondingly updated, $G_0 \triangleright p \triangleright p \triangleright M_{k'} \triangleright \text{RTs} \triangleright \vec{n}'', u$. By Lemma H.5.11, we have $\Omega(\tau) = \Omega$. By Transition [NO-DEP], $\mathcal{P} \underset{\Omega}{\overset{\tau}{\rightsquigarrow}} \mathcal{P}''$. By the IH, there are $\vec{b}, \vec{c}, \vec{d}, \Omega_2$ such that $\mathcal{P}'' \underset{\Omega}{\overset{\vec{b}}{\rightsquigarrow}} \Omega_2 \mathcal{P}'$ so $\mathcal{P} \underset{\Omega}{\overset{\vec{b}}{\rightsquigarrow}} \Omega_2 \mathcal{P}'$, and $Q' \underset{\Omega}{\overset{\vec{b}}{\rightsquigarrow}} \Omega_2 Q''$. Moreover, there are $\text{RTs}', \text{Lb1s}'$ such that $(\mathcal{P}', \text{RTs}', \text{Lb1s}') \in \mathcal{R}$, $G_0 \triangleright p \triangleright p \triangleright p?q\{i\langle T_i \rangle . M'_i\}_{i \in I} \triangleright \text{RTs}' \triangleright \vec{c}, u$, and $\Omega_2 = \text{LO}(p, \text{RTs}', \text{Lb1s}')$.

If there is no message from r in \vec{n}' , by the definition of coherent setup (Definition H.5.2), we have $(r, R^r) \in \text{RTs}$ with $\text{unfold}(R^r) = r!p^{\text{L}}\{k\langle T_k \rangle . R_k^r\}_{k \in K}$. Take any $k' \in K$, and let $w \triangleq r!p(k'\langle T_{k'} \rangle)$. Let $\text{RTs}'' \triangleq \text{RTs}[r \mapsto R_{k'}^r]$ and $\text{Lb1s}'' \triangleq \text{Lb1s}[\text{L} \mapsto k']$. Also, let $\Omega'_2 \triangleq \text{LO}(p, \text{RTs}'', \text{Lb1s}'')$. Then, by Lemma H.5.11, $\Omega(p?r(k'\langle T_{k'} \rangle)) = \Omega'_2$.

Let $\mathcal{P}'_1 \triangleq [\langle p : P : \vec{m} \rangle : M : \vec{n}', u, w]$ and $Q''' \triangleq \langle p : P' : \vec{n}', w, \vec{m} \rangle$. By satisfaction (Input), $(\mathcal{P}'_1, \text{RTs}'', \text{Lb1s}'') \in \mathcal{R}$. Since the buffer and relative types have changed accordingly, $G_0 \triangleright p \triangleright p \triangleright M \triangleright \text{RTs}'' \triangleright \vec{n}', u, w$. By Transition [BUF], $\mathcal{P} \underset{\Omega}{\overset{w}{\rightsquigarrow}} \Omega'_2 \mathcal{P}'_1$ and $Q' \underset{\Omega_1}{\overset{w}{\rightsquigarrow}} \Omega'_2 Q'''$. Let $\mathcal{P}'_2 \triangleq [\langle p : P : w, \vec{m} \rangle : M_{k'} : \vec{n}', u]$. By Transition [MON-IN], $\mathcal{P}'_1 \xrightarrow{\tau} \mathcal{P}'_2$. By Lemma H.5.11, $\Omega'_2(\tau) = \Omega'_2$. Then, by Transition [NO-DEP],

$\mathcal{P}'_1 \xrightarrow{\tau}_{\Omega_2} \mathcal{P}'_2$. By satisfaction (Tau), $(\mathcal{P}'_2, \text{RTs}'', \text{Lb1s}'') \in \mathcal{R}$. Since the buffer and monitor have changed accordingly,

$$G_0 \triangleright p \triangleright M_{k'} \triangleright \text{RTs}'' \triangleright \vec{n}', u.$$

By the IH, there are $\vec{b}, \vec{c}, \vec{d}, \Omega_2$ such that $\mathcal{P}'_2 \xrightarrow{\vec{b}}_{\Omega_2} \mathcal{P}'$ so $\mathcal{P} \xrightarrow{w, \vec{b}}_{\Omega_2} \mathcal{P}'$, and $Q''' \xrightarrow{\vec{b}}_{\Omega_2} Q''$ so $Q' \xrightarrow{w, \vec{b}}_{\Omega_2} Q''$. Moreover, there are $\text{RTs}', \text{Lb1s}'$ such that $(\mathcal{P}', \text{RTs}', \text{Lb1s}') \in \mathcal{R}$, $G_0 \triangleright p \triangleright p?q\{i\langle T_i \rangle . M'_i\}_{i \in I} \triangleright \text{RTs}' \triangleright \vec{c}, u$, and $\Omega_2 = \text{LO}(p, \text{RTs}', \text{Lb1s}')$.

- $M = p?r\{k.M_k\}_{k \in K}$ for $r \neq q$. This case is analogous to the one above.
- $M = p!D(\ell).M'$. Let $\mathcal{P}'' \triangleq [\langle p : P : \vec{m} \rangle : M' : \vec{n}', u]$. Similar to the case of Transition [BUF-OUT] above, $\mathcal{P} \xrightarrow{\tau}_{\Omega} \mathcal{P}''$. Moreover, there are $\text{RTs}'', \text{Lb1s}''$ such that $(\mathcal{P}'', \text{RTs}'', \text{Lb1s}'') \in \mathcal{R}$, and $G_0 \triangleright p \triangleright M' \triangleright \text{RTs}'' \triangleright \vec{n}', u$. By Lemma H.5.10, $\Omega = \text{LO}(p, \text{RTs}'', \text{Lb1s}'')$.

By the IH, there are $\vec{b}, \vec{c}, \vec{d}, \Omega_2$ such that $\mathcal{P}'' \xrightarrow{\vec{b}}_{\Omega_2} \mathcal{P}'$ so $\mathcal{P} \xrightarrow{\vec{b}}_{\Omega_3} \mathcal{P}'$, and $Q' \xrightarrow{\vec{b}}_{\Omega_2} Q''$. Moreover, there are $\text{RTs}', \text{Lb1s}'$ such that $(\mathcal{P}', \text{RTs}', \text{Lb1s}') \in \mathcal{R}$, $G_0 \triangleright p \triangleright p?q\{i\langle T_i \rangle . M'_i\}_{i \in I} \triangleright \text{RTs}' \triangleright \vec{c}, u$, and $\Omega_2 = \text{LO}(p, \text{RTs}', \text{Lb1s}')$.

Let $\mathcal{P}'_1 \triangleq [\langle p : P : \vec{d}, \vec{m}, u \rangle : M'_j : \vec{c}]$. By Transition [MON-IN], $\mathcal{P}' \xrightarrow{\tau} \mathcal{P}'_1$. Since the buffer and monitor changed accordingly, $G_0 \triangleright p \triangleright M'_j \triangleright \text{RTs}' \triangleright \vec{c}$.

By Transition [NO-DEP], $\mathcal{P}' \xrightarrow{\tau}_{\Omega_2} \mathcal{P}'_1$. Let $\mathcal{P}'_2 \triangleq [\langle p : P' : \vec{d}, \vec{m} \rangle : M'_j : \vec{c}]$. By Lemma H.5.11, $\Omega_2(\tau) = \Omega_2$. By Transition [BUF-IN],

$$\langle p : P : \vec{d}, \vec{m}, u \rangle \xrightarrow{\tau} \langle p : P' : \vec{d}, \vec{m} \rangle,$$

so, by Transition [MON-TAU], $\mathcal{P}'_1 \xrightarrow{\tau} \mathcal{P}'_2$. By Transition [NO-DEP], $\mathcal{P}'_1 \xrightarrow{\tau}_{\Omega_2} \mathcal{P}'_2$. By satisfaction (Tau), $(\mathcal{P}'_2, \text{RTs}', \text{Lb1s}') \in \mathcal{R}$. We have $\mathcal{P} \xrightarrow{\vec{b}, \tau}_{\Omega_2} \mathcal{P}'_2$ and $Q \xrightarrow{\tau}_{\Omega_1} Q' \xrightarrow{\vec{b}}_{\Omega_2} Q''$. Recall that $\Omega_2 = \text{LO}(p, \text{RTs}', \text{Lb1s}')$. Then, by definition, $(\mathcal{P}'_2, \Omega_2, Q'') \in \mathcal{B}$.

- ◊ We have u appears in \vec{m} . Then $\vec{n} = \vec{n}'$ and $\vec{m} = \vec{m}', u$. Then, by Transition [BUF-IN], $\langle p : P : \vec{m}', u \rangle \xrightarrow{\tau} \langle p : P' : \vec{m}' \rangle$.

Let $\mathcal{P}' \triangleq [\langle p : P' : \vec{m}' \rangle : M : \vec{n}]$. By Transition [MON-TAU], $\mathcal{P} \xrightarrow{\tau} \mathcal{P}'$.

By Lemma H.5.11, $\Omega(\tau) = \Omega$, so $\Omega_1 = \Omega$. Let $\Omega_2 \triangleq \Omega$. Then, by Transition [NO-DEP], $\mathcal{P} \xrightarrow{\tau}_{\Omega_2} \mathcal{P}'$ so $\mathcal{P} \xrightarrow{\tau}_{\Omega_2} \mathcal{P}'$. By satisfaction (Tau), $(\mathcal{P}', \text{RTs}, \text{Lb1s}) \in \mathcal{R}$. Finally, $Q \xrightarrow{\tau}_{\Omega_1} Q' \xrightarrow{\vec{c}}_{\Omega_2} Q'$. Then $(\mathcal{P}', \Omega_2, Q') \in \mathcal{B}$.

- Transition [BUF-IN-DEP]. Analogous to Transition [BUF-IN].
- Transition [BUF-TAU]. Then $\alpha = \tau$, $Q' = \langle p : P' : \vec{n}, \vec{m} \rangle$, and $P \xrightarrow{\tau} P'$. By Transition [BUF-TAU], also $\langle p : P : \vec{m} \rangle \xrightarrow{\tau} \langle p : P' : \vec{m} \rangle$.

By Lemma H.5.9, $M \neq \checkmark$. Let $\mathcal{P}' \triangleq [\langle p:P':\vec{m} \rangle : M : \vec{n}]$. By Transition [MON-TAU], $\mathcal{P} \xrightarrow{\tau} \mathcal{P}'$.

By Lemma H.5.11, $\Omega(\tau) = \Omega$, so $\Omega_1 = \Omega$. Let $\Omega_2 \triangleq \Omega$. Then, by Transition [NO-DEP], $\mathcal{P} \xrightarrow{\alpha} \Omega \mathcal{P}'$ so $\mathcal{P} \xrightarrow{\epsilon, \alpha} \Omega_2 \mathcal{P}'$. By satisfaction (Tau), $(\mathcal{P}', \text{RTs}, \text{Lb1s}) \in \mathcal{R}$. Finally, we have $Q \xrightarrow{\alpha} \Omega_1 Q'$, $Q' \xrightarrow{\epsilon} \Omega_2 Q'$. Then $(\mathcal{P}', \Omega_2, Q') \in \mathcal{B}$.

– Transition [BUF-END]. Then $\alpha = \text{end}$, $P \xrightarrow{\text{end}} P'$, and $Q' = \langle p:P':\vec{n}, \vec{m} \rangle$. By Transition [BUF-END], also $\langle p:P:\vec{m} \rangle \xrightarrow{\text{end}} \langle p:P':\vec{m} \rangle$.

By Lemma H.5.6, $\vec{n} = \epsilon$, and $M = \text{end}$ or $M = p!D(\ell).\text{end}$. W.l.o.g., assume the latter. Let $\mathcal{P}' \triangleq [\langle p:P:\vec{m} \rangle : \text{end} : \epsilon]$. Similar to the case for Transition [BUF-OUT], $\mathcal{P} \xrightarrow{\tau} \Omega \mathcal{P}'$.

Let $\mathcal{P}'' \triangleq [\langle p:P':\vec{m} \rangle : \checkmark : \epsilon]$. By Transition [MON-END], $\mathcal{P}' \xrightarrow{\text{end}} \mathcal{P}''$. Let $\vec{b} \triangleq \epsilon$ and $\Omega_2 \triangleq \text{LO}(p, \emptyset, \emptyset)$. By Lemma H.5.11, $\Omega(\text{end}) = \Omega_2 = \Omega_1$. By Transition [NO-DEP], since $(\text{end}, \Omega_2) \in \Omega$, $\mathcal{P}' \xrightarrow{\text{end}} \Omega_2 \mathcal{P}''$, so $\mathcal{P} \xrightarrow{\vec{b}, \text{end}} \Omega_2 \mathcal{P}''$.

By satisfaction (End), for every $q \in \text{dom}(\text{RTs})$, $\text{unfold}(\text{RTs}(q)) = \text{end}$, and $(\mathcal{P}'', \emptyset, \emptyset) \in \mathcal{R}$. Clearly, $G_0 \triangleright \triangleleft p \triangleright \triangleleft \checkmark \triangleright \triangleleft \emptyset \triangleright \triangleleft \vec{n}$. Then, trivially, $Q' \xrightarrow{\vec{b}} \Omega_1 Q'$, so $Q \xrightarrow{\text{end}, \vec{b}} \Omega_2 Q'$. Finally, by definition, $(\mathcal{P}'', \Omega_2, Q') \in \mathcal{B}$. \square

TITLES IN THE IPA DISSERTATION SERIES SINCE 2021

- D. Frumin.** *Concurrent Separation Logics for Safety, Refinement, and Security.* Faculty of Science, Mathematics and Computer Science, RU. 2021-01
- A. Bentkamp.** *Superposition for Higher-Order Logic.* Faculty of Sciences, Department of Computer Science, VU. 2021-02
- P. Derakhshanfar.** *Carving Information Sources to Drive Search-based Crash Reproduction and Test Case Generation.* Faculty of Electrical Engineering, Mathematics, and Computer Science, TUD. 2021-03
- K. Aslam.** *Deriving Behavioral Specifications of Industrial Software Components.* Faculty of Mathematics and Computer Science, TU/e. 2021-04
- W. Silva Torres.** *Supporting Multi-Domain Model Management.* Faculty of Mathematics and Computer Science, TU/e. 2021-05
- A. Fedotov.** *Verification Techniques for xMAS.* Faculty of Mathematics and Computer Science, TU/e. 2022-01
- M.O. Mahmoud.** *GPU Enabled Automated Reasoning.* Faculty of Mathematics and Computer Science, TU/e. 2022-02
- M. Safari.** *Correct Optimized GPU Programs.* Faculty of Electrical Engineering, Mathematics & Computer Science, UT. 2022-03
- M. Verano Merino.** *Engineering Language-Parametric End-User Programming Environments for DSLs.* Faculty of Mathematics and Computer Science, TU/e. 2022-04
- G.E.C. Dupont.** *Network Security Monitoring in Environments where Digital and Physical Safety are Critical.* Faculty of Mathematics and Computer Science, TU/e. 2022-05
- T.M. Soethout.** *Banking on Domain Knowledge for Faster Transactions.* Faculty of Mathematics and Computer Science, TU/e. 2022-06
- P. Vukmirović.** *Implementation of Higher-Order Superposition.* Faculty of Sciences, Department of Computer Science, VU. 2022-07
- J. Wagemaker.** *Extensions of (Concurrent) Kleene Algebra.* Faculty of Science, Mathematics and Computer Science, RU. 2022-08
- R. Janssen.** *Refinement and Partiality for Model-Based Testing.* Faculty of Science, Mathematics and Computer Science, RU. 2022-09
- M. Laveaux.** *Accelerated Verification of Concurrent Systems.* Faculty of Mathematics and Computer Science, TU/e. 2022-10
- S. Kochanthara.** *A Changing Landscape: On Safety & Open Source in Automated and Connected Driving.* Faculty of Mathematics and Computer Science, TU/e. 2023-01
- L.M. Ochoa Venegas.** *Break the Code? Breaking Changes and Their Impact on Software Evolution.* Faculty of Mathematics and Computer Science, TU/e. 2023-02
- N. Yang.** *Logs and models in engineering complex embedded production software systems.* Faculty of Mathematics and Computer Science, TU/e. 2023-03
- J. Cao.** *An Independent Timing Analysis for Credit-Based Shaping in Ethernet TSN.* Faculty of Mathematics and Computer Science, TU/e. 2023-04
- K. Dokter.** *Scheduled Protocol Programming.* Faculty of Mathematics and Natural Sciences, UL. 2023-05

J. Smits. *Strategic Language Workbench Improvements.* Faculty of Electrical Engineering, Mathematics, and Computer Science, TUD. 2023-06

A. Arslanagić. *Minimal Structures for Program Analysis and Verification.* Faculty of Science and Engineering, RUG. 2023-07

M.S. Bouwman. *Supporting Railway Standardisation with Formal Verification.* Faculty of Mathematics and Computer Science, TU/e. 2023-08

S.A.M. Lathouwers. *Exploring Annotations for Deductive Verification.* Faculty of Electrical Engineering, Mathematics & Computer Science, UT. 2023-09

J.H. Stoel. *Solving the Bank, Lightweight Specification and Verification Techniques for*

Enterprise Software. Faculty of Mathematics and Computer Science, TU/e. 2023-10

D.M. Groenewegen. *WebDSL: Linguistic Abstractions for Web Programming.* Faculty of Electrical Engineering, Mathematics, and Computer Science, TUD. 2023-11

D.R. do Vale. *On Semantical Methods for Higher-Order Complexity Analysis.* Faculty of Science, Mathematics and Computer Science, RU. 2024-01

M.J.G Olsthoorn. *More Effective Test Case Generation with Multiple Tribes of AI.* Faculty of Electrical Engineering, Mathematics, and Computer Science, TUD. 2024-02

B. van den Heuvel. *Correctly Communicating Software: Distributed, Asynchronous, and Beyond.* Faculty of Science and Engineering, RUG. 2024-03