

Self-Augmented In-Context Learning for Unsupervised Word Translation

Yaoyiran Li Anna Korhonen Ivan Vulić

Language Technology Lab, TAL, University of Cambridge
{y1711, alk23, iv250}@cam.ac.uk

Abstract

Recent work has shown that, while large language models (LLMs) demonstrate strong word translation or bilingual lexicon induction (BLI) capabilities in few-shot setups, they still cannot match the performance of ‘traditional’ mapping-based approaches in the unsupervised scenario where no seed translation pairs are available, especially for lower-resource languages. To address this challenge with LLMs, we propose self-augmented in-context learning (SAIL) for unsupervised BLI: starting from a zero-shot prompt, SAIL iteratively induces a set of high-confidence word translation pairs for in-context learning (ICL) from an LLM, which it then reapplies to the same LLM in the ICL fashion. Our method shows substantial gains over zero-shot prompting of LLMs on two established BLI benchmarks spanning a wide range of language pairs, also outperforming mapping-based baselines across the board. In addition to achieving state-of-the-art unsupervised BLI performance, we also conduct comprehensive analyses on SAIL and discuss its limitations.

1 Introduction and Motivation

The task of word translation (WT), also known as bilingual lexicon induction (BLI), aims to automatically induce lexica of words with the same or similar meaning in different languages, thus bridging the lexical gap between languages. Even in the era of large language models (LLMs), BLI still has wide applications in machine translation and cross-lingual transfer learning (Sun et al., 2021; Zhou et al., 2021; Wang et al., 2022; Ghazvininejad et al., 2023; Jones et al., 2023). A particular BLI setup, termed (*fully*) *unsupervised BLI*, is especially compelling because it is not only more technically challenging but is also used as a pivotal component towards unsupervised machine translation (Lample et al., 2018; Artetxe et al., 2018b; Marchisio et al., 2020; Chronopoulou et al., 2021).

Until recently, BLI approaches have predominantly relied on learning cross-lingual word embedding (CLWE) mappings: these are known as MAPPING-BASED approaches and are developed based on static or decontextualised word embeddings (WEs) (Patra et al., 2019; Grave et al., 2019; Li et al., 2022a; Yu et al., 2023). Meanwhile, autoregressive LLMs have become the cornerstone of modern NLP techniques (Brown et al., 2020; Ouyang et al., 2022; Touvron et al., 2023a) with success in many real-world tasks (Kasneci et al., 2023; Wu et al., 2023; Thirunavukarasu et al., 2023; Li et al., 2024). Given this trend, recent BLI research has also started to shift towards exploring LLMs. Li et al. (2023) first show that prompting LLMs with gold-standard WT pairs as in-context examples (few-shot in-context learning: ICL) outperforms all existing BLI approaches in the supervised and semi-supervised BLI setups (where typically 1K~5K gold-standard WT pairs are available for training or ICL), while zero-shot prompting still falls behind traditional MAPPING-BASED approaches in the fully unsupervised BLI setup, especially for lower-resource languages.

In this work, we thus aim at improving unsupervised BLI with LLMs. To this end, we analyze the limitations of zero-shot prompting and propose a novel self-augmented in-context learning (SAIL) method for unsupervised BLI with LLMs. The key idea is to first retrieve a set of high-confidence WT pairs by zero-shot prompting LLMs, then iteratively refine the high-confidence dictionary and finally use the gradually refined bilingual lexicon for BLI inference in an ICL fashion (§2). Our extensive experiments show that SAIL establishes new state-of-the-art unsupervised BLI performance on two standard BLI benchmarks. We also conduct thorough analyses on our approach, providing further insights into its inner workings (§3-§4). Our code is publicly available at <https://github.com/cambridgeltl/sail-bli>.

2 Methodology

Unsupervised BLI: Task Preliminaries. We assume a pair of two languages: a source language L^x with its vocabulary \mathcal{X} and a target language L^y with vocabulary \mathcal{Y} . In a typical, standard BLI setup the vocabulary of each language contains the most frequent 200,000 word types in the language (Glavaš et al., 2019; Li et al., 2022a). Given a source word $w^x \in \mathcal{X}$, the unsupervised BLI task then aims to infer its translation in L^y , without any word-level parallel data (i.e., seed translation pairs from a lexicon) available for training or ICL.¹

Zero-Shot Prompting. Li et al. (2023) have proposed to prompt autoregressive LLMs for the BLI task, where the input word w^x is embedded into a predefined text template. We adopt the pool of templates provided by Li et al. (2023) and conduct template search for each LLM on a randomly chosen language pair. As an example, the zero-shot template for LLAMA-2_{7B} is as follows:²

‘The L^x word w^x in L^y is:’,

where L^x , L^y , and w^x are placeholders for the source language, target language, and the query word in the source language (e.g., $L^x = \text{Hungarian}$, $w^x = \text{macska}$, $L^y = \text{Catalan}$).

The deterministic beam search (with beam size of n as a hyper-parameter) is adopted to generate n output text pieces in the final beam, ranked by their sequence scores.³ For each of the n outputs, the first word in the generated output following the input sequence is extracted as a candidate answer. After filtering out those candidate answers not in \mathcal{Y} , the candidate L^y word with the highest associated sequence score is returned as the final word translation prediction.

Limitations of Zero-Shot Prompting. The above zero-shot approach for unsupervised BLI, proposed by Li et al. (2023), comes with several limitations. First, the template does not stipulate the output format and thus parsing the output text may not be as straightforward as expected. Put simply, LLM’s prediction may not be the first word in the generated sequence. Second, the LLM may not fully ‘understand’ the input template and sometimes may

tend not to generate words in the target language especially for lower-resource languages. For the *supervised* BLI setup, where a dictionary of gold standard translation pairs is assumed and available, few-shot in-context learning can substantially improve final BLI performance (Li et al., 2023), since it not only provides examples of the desired output format but also helps LLMs ‘understand’ the BLI task. However, the availability of such a seed dictionary is not assumed in the *unsupervised* BLI task variant, and the key idea of this work is to derive and iteratively refine a seed dictionary by prompting LLMs.

SAIL: Self-Augmented In-Context Learning for Unsupervised BLI. We thus propose to facilitate and improve unsupervised BLI by **S1**) using zero-shot prompting to retrieve \mathcal{D}_h , a set of high-confidence translation pairs, and then **S2**) leveraging these pairs as ‘self-augmented’ in-context examples for few-shot prompting to further iteratively refine \mathcal{D}_h (across 0 to $N_{it} - 1$ iterations, where N_{it} is a hyper-parameter denoting total times of \mathcal{D}_h inference in S1 and S2), and finally **S3**) conducting few-shot learning with the final, N_{it} -th self-created seed lexicon \mathcal{D}_h for BLI inference on the test set.

Deriving High-Confidence Pairs. For both steps S1 and S2 outlined above, we start with the most frequent N_f words in L^x since representations of less frequent words are considered to be much noisier in general (Artetxe et al., 2018a). For each w^x , we conduct $L^x \rightarrow L^y$ translation: we refer to this predicted word as \hat{w}^y .⁴ We then propose to conduct *word back-translation*, translating \hat{w}^y from L^y back into L^x . The word pair (w^x, \hat{w}^y) is considered a high-confidence pair only if w^x is also the output word of the back-translation step.⁵ We denote the set of all high-confidence pairs from the L^x words as \mathcal{D}_h^x . Likewise, we also start from the most frequent N_f words in L^y and symmetrically derive \mathcal{D}_h^y . Finally, we update the high-confidence dictionary with $\mathcal{D}_h = \mathcal{D}_h^x \cup \mathcal{D}_h^y$.⁶

Few-Shot Prompting with High-Confidence Pairs. Step S1 of SAIL relies on zero-shot prompting, but all the subsequent iterations in S2 and

¹Following prior work, when w^x has multiple ground truth translations in L^y , a prediction is considered correct if it is any of the ground truth answers.

²The full list of templates used for other LLMs are presented in Appendix C.

³We use $n = 5$ following Li et al. (2023).

⁴We do *not* require \hat{w}^y to be one of the most frequent N_f words in L^y .

⁵Earlier MAPPING-BASED approaches have retrieved high-confidence pairs through ranking cross-lingual word similarity scores (e.g., cosine similarity) to refine CLWE mappings (Artetxe et al., 2018a; Li et al., 2022a); in a sense, our work renovates and revitalises the idea with LLMs.

⁶Therefore, $|\mathcal{D}_h^x| \leq N_f$, $|\mathcal{D}_h^y| \leq N_f$, and $|\mathcal{D}_h| \leq 2 \times N_f$.

S3 apply few-shot prompting/ICL with the ‘self-augmented’ high-confidence translation pairs \mathcal{D}_h . Following Li et al. (2023), we adopt 5-shot prompting, and again conduct template search on the BLI task with a single, randomly selected language pair.⁷ The in-context examples, $(w_i^x, w_i^y) \in \mathcal{D}_h, 1 \leq i \leq 5$, are retrieved where the w_i^x words are the nearest neighbours of the input word w^x in L^x ’s static word embedding space. The few-shot template for LLAMA-2_{7B} is then as follows:

‘The L^x word w_1^x in L^y is w_1^y . The L^x word w_2^x in L^y is w_2^y The L^x word w^x in L^y is’.

3 Experimental Setup

BLI Data and LLMs. We adopt two standard BLI benchmarks: **1)** 5 languages from XLING (Glavaš et al., 2019) including German (DE), English (EN), French (FR), Italian (IT), and Russian (RU), their combinations resulting in 20 BLI directions; **2)** 3 lower-resource languages including Bulgarian (BG), Catalan (CA), and Hungarian (HU) from PanLex-BLI (Vulić et al., 2019), which result in 6 BLI directions.⁸ For both benchmarks, a test set of 2K WT pairs is provided for each BLI direction. We experiment with four open-source LLMs: LLAMA_{7B}, LLAMA-2_{7B}, LLAMA_{13B}, and LLAMA-2_{13B} (Touvron et al., 2023a,b). Li et al. (2023) found that 4 other families of LLMs, including mT5, mT0, mGPT and XGLM, underperform LLAMA; we thus skip these LLMs in our work.

Implementation Details and BLI Evaluation. As mentioned in §2, our hyper-parameter and template search are conducted on a single, randomly selected language pair, which is DE-FR, following Li et al. (2023). Batch size is set to 1. We adopt $N_{it} = 1, N_f = 5,000$ in our main experiments (§4.1) and then investigate their influence on BLI performance and the effectiveness of our proposed word back-translation in our further analyses (§4.2). Half-precision floating-point format (torch.float16) is adopted for all our SAIL and zero-shot experiments. Since our method does *not* imply any randomness, all results are from single runs. For evaluation, we adopt the standard *top-1 accuracy* as prior work.

⁷The decoding and output parsing strategy is the same as in zero-shot prompting.

⁸The two datasets are also used in many recent BLI works (Sachidananda et al., 2021; Aboagye et al., 2022; Li et al., 2022a,b; Vulić et al., 2020, 2023; Li et al., 2023).

Baselines. We adopt two established MAPPING-BASED baselines. **1)** VECMAP is a representative unsupervised BLI approach and features a self-learning mechanism that refines linear maps for deriving CLWEs (Artetxe et al., 2018a). **2)** CONTRASTIVEBLI learns CLWEs with a two-stage contrastive learning framework and is the strongest MAPPING-BASED approach for supervised and semi-supervised BLI tasks on our two benchmarks (Li et al., 2022a); however, it does not support unsupervised setup. We extend CONTRASTIVEBLI to unsupervised BLI by initialising the initial map with the unsupervised VECMAP method. The CONTRASTIVEBLI C1 variant based on static WEs and its stronger C2 variant combining static and decontextualised WEs are both used as our baselines. We adopt Cross-domain Similarity Local Scaling (CSLS) retrieval (Lample et al., 2018) for all MAPPING-BASED approaches as recommended in the baselines. In addition, we report **3)** ZERO-SHOT prompting with each of our LLMs as baselines following the previous findings of Li et al. (2023).

4 Results and Discussion

4.1 Main Results

Results on the Two BLI Benchmarks are summarised in Tables 1 and 2 respectively, with full BLI scores per each individual language pair in Tables 8 and 9 in Appendix F. As the main findings, **1)** our SAIL shows consistent gains against ZERO-SHOT prompting for each of the 4 LLMs, showing the effectiveness of the proposed approach; **2)** while ZERO-SHOT prompting still lags behind MAPPING-BASED approaches on PanLex-BLI’s lower-resource languages, applying SAIL outperforms MAPPING-BASED baselines across the board. The only exception is that CONTRASTIVEBLI (C2) still has a slight edge over SAIL with the weakest LLM overall, LLAMA_{7B}. **3)** Among the 4 LLMs, LLAMA-2_{13B} presents the strongest BLI capability.

Variance and Statistical Significance. The whole SAIL method does *not* imply any variance due to randomness: it does not rely on any actual LLM fine-tuning; we adopt deterministic beam search; the deterministic nearest neighbour retrieval is used for deriving in-context examples. Here, we report the statistical significance with χ^2 tests. When comparing SAIL and ZERO-SHOT prompting (both with LLAMA-2_{13B}), the p -value is $1.1e-251$ on 20 XLING BLI directions and $2.7e-109$ on 6 PanLex-BLI BLI directions. We then compare

[Unsupervised BLI]	DE	EN	FR	IT	RU	AVG.
MAPPING-BASED						
VECMAP	44.14	51.7	51.51	51.03	34.36	46.55
CONTRASTIVEBLI (C1)	44.72	52.12	52.29	51.77	35.5	47.28
CONTRASTIVEBLI (C2)	46.02	53.32	53.26	52.99	37.26	48.57
ZERO-SHOT						
LLAMA 7B	41.94	50.16	48.25	46.91	40.04	45.46
LLAMA-27B	43.91	52.7	50.68	48.23	42.8	47.66
LLAMA 13B	45.39	53.35	52.39	50.58	41.74	48.69
LLAMA-213B	47.12	55.02	51.31	52.02	43.09	49.71
SAIL (Ours)						
LLAMA 7B	51.39	61.92	58.92	56.94	50.7	55.97
LLAMA-27B	53.81	64.12	61.09	59.96	53.77	58.55
LLAMA 13B	55.35	64.84	62.49	61.27	54.5	59.69
LLAMA-213B	57.69	67.0	64.11	63.18	57.04	61.8

Table 1: Main results on the 20 XLING BLI directions. For each language, the average accuracy scores over 8 BLI directions (i.e., going from and going to other 4 languages) is reported. See also Appendix F.

[Unsupervised BLI]	BG	CA	HU	AVG.
MAPPING-BASED				
VECMAP	37.22	36.27	36.89	36.8
CONTRASTIVEBLI (C1)	36.7	35.86	37.82	36.79
CONTRASTIVEBLI (C2)	38.87	38.48	40.54	39.3
ZERO-SHOT				
LLAMA 7B	27.9	28.87	27.18	27.98
LLAMA-27B	28.2	27.21	26.92	27.45
LLAMA 13B	27.49	30.61	28.2	28.77
LLAMA-213B	29.08	32.38	30.53	30.66
SAIL (Ours)				
LLAMA 7B	37.02	37.63	36.29	36.98
LLAMA-27B	40.06	40.51	40.22	40.27
LLAMA 13B	41.71	42.76	42.07	42.18
LLAMA-213B	45.4	46.26	44.88	45.51

Table 2: Main results on 6 PanLex-BLI BLI directions. For each language, the average accuracy scores over 4 BLI directions (i.e., going from and going to other 2 languages) is reported. See also Appendix F.

SAIL (with LLAMA-213B) against CONTRASTIVEBLI (C2) which is our strongest MAPPING-BASED baseline: the p -values are $3.1e-300$ and $7.8e-20$ respectively. These show that our findings are strongly statistically significant.⁹

4.2 Further Analyses

Inspection of High-Confidence Dictionaries. To provide additional insight into our SAIL approach, we present statistics on the size of high-confidence dictionaries derived in our main experiments

⁹Usually $p < 0.05$ or $p < 0.001$ is considered to indicate statistical significance.

LLM (SAIL)	$ \mathcal{D}_h $: XLING		$ \mathcal{D}_h $: PanLex-BLI	
	MEAN	MIN~MAX	MEAN	MIN~MAX
LLAMA 7B	2471	1731~3180	1735	1363~2095
LLAMA-27B	3019	2086~3824	1873	1690~2183
LLAMA 13B	2850	2064~3579	2005	1548~2351
LLAMA-213B	2612	1577~3362	1737	1184~2049

Table 3: Statistics on $|\mathcal{D}_h|$ for each LLM over 20 XLING BLI directions and 6 PanLex-BLI BLI directions respectively.

($N_{it} = 1$, $N_f = 5,000$, and with word back-translation) over 20 XLING BLI directions and 6 PanLex-BLI BLI directions respectively for each of our four LLMs in Table 3. The values indicate that $|\mathcal{D}_h|$ of higher-resource languages (XLING) is typically greater than that of lower-resource languages (PanLex-BLI). In addition to the dictionary size, it is also worth investigating the quality of high-confidence dictionaries. However, to directly evaluate the quality of the ‘silver standard’ generated dictionaries is difficult since we do not have ground truth dictionaries for comparison. As a preliminary investigation, we randomly sample 50 translation pairs from the EN-DE LLAMA-213B-augmented dictionary and compare them with answers derived from Google Translate¹⁰ (EN→DE). We found that 40 out of the 50 pairs in our augmented dictionary are the same as the results from Google Translate. Although these results from Google Translate are also not ‘gold standard’ ground truth, it does point in the direction of reliability of extracted WT pairs.

Impact of N_{it} . Figure 1 shows the influence of the number of iterations N_{it} on the average BLI scores on XLING. When $N_{it} = 1$, where only step S1 is executed (see §2), SAIL already approaches (almost) its optimal performance. Further refining the \mathcal{D}_h for more iterations (step S2) only leads to small fluctuations in BLI performance, which we deem not worth the increased computational cost. Figure 3 (Appendix B) with results on PanLex-BLI shows a similar trend.

Impact of N_f . We then study the impact of the frequency threshold N_f on the average BLI performance with a subset of XLING spanning DE-FR, EN-RU and RU-FR, each in both directions. The results in Figure 2 reveal that even with $N_f = 1,000$, the BLI performance is boosted substantially when compared against the ZERO-SHOT baseline (i.e., when $N_f = 0$). When we further increase N_f , the

¹⁰<https://translate.google.com/>

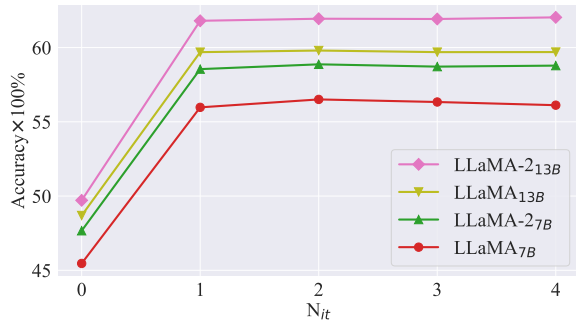


Figure 1: Top-1 accuracy ($\times 100\%$) averaged over 20 XLING BLI directions with respect to N_{it} . $N_{it} = 0$ yields the ZERO-SHOT baseline.

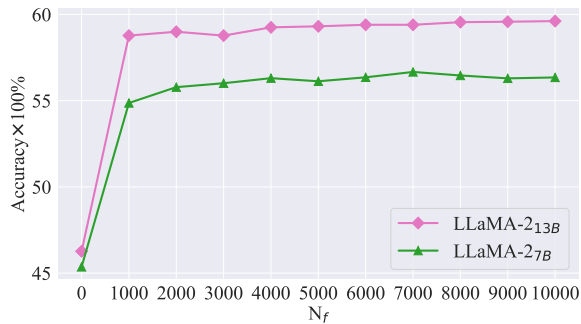


Figure 2: Top-1 accuracy on a subset of XLING with respect to N_f . $N_f = 0$ yields the ZERO-SHOT baseline.

LLM	ZERO-SHOT	SAIL (w/o back-translation)	SAIL
LLAMA-2 _{7B}	45.36	52.9	56.12
LLAMA-2 _{13B}	46.26	55.1	59.31

Table 4: BLI results on XLING, demonstrating the usefulness of back-translation when constructing \mathcal{D}_h . Top-1 accuracy ($\times 100\%$) scores.

accuracy score still increases slowly, and the gain seems negligible with $N_f \geq 5000$: i.e., increasing N_f again may not be worth the extra computation.

Impact of Word Back-Translation. The back-translation step aims to improve the quality of \mathcal{D}_h . Here, we experiment with the ablated version of SAIL without back-translation on the same XLING subset (DE-FR, EN-RU and RU-FR) as before. The results in Table 4 clearly demonstrate the effectiveness of proposed word back-translation: the p -values (χ^2 tests) are $8.8e-7$ and $1.0e-10$ respectively for LLaMA-2_{7B} and LLaMA-2_{13B} when comparing SAIL variants with and without the back-translation mechanism.

CHATGPT for BLI? We additionally report GPT-3.5 (OpenAI, 2022) and GPT-4 (Achiam et al., 2023) results on DE-FR, EN-RU and RU-FR with ZERO-SHOT prompting (see Appendix E for ex-

BLI Direction	LLAMA-2 _{13B}	GPT-3.5	GPT-4	LLAMA-2 _{13B}
	ZERO-SHOT			SAIL
DE→FR	46.64	59.52	62.6	61.5
FR→DE	50.8	58.41	60.63	56.29
EN→RU	47.6	55.85	55.9	63.75
RU→EN	51.44	59.93	60.35	59.93
RU→FR	41.17	59.77	61.39	60.29
FR→RU	39.94	46.82	49.35	54.11
Avg.	46.26	56.72	58.37	59.31

Table 5: Comparisons with GPT models.

perimental details). Note that the procedure of instruction-tuning of LLMs usually covers large-scale parallel data for machine translation. Therefore, leveraging CHATGPT models, even with ZERO-SHOT prompting, is *not* in line with the motivation of *unsupervised* BLI and leads to unfair comparisons with the results of our main experiments and baselines.¹¹ Here, we report CHATGPT results as an upper bound for ZERO-SHOT prompting. Our results in Table 5 show that 1) as expected, the instruction-tuned CHATGPT models outperform pretrained LLaMA-2_{13B} by a large margin in the ZERO-SHOT setup, but 2) our SAIL method with the same pretrained LLaMA-2_{13B} outperforms both GPT-3.5 and the state-of-the-art GPT-4¹² in terms of the average performance, even for the selected higher-resource languages, again demonstrating the effectiveness of the proposed SAIL approach.

5 Conclusion

We proposed Self-Augmented In-Context Learning (SAIL) to improve unsupervised BLI with LLMs. The key idea is to iteratively retrieve a set of high-confidence word translation pairs by prompting LLMs and then leverage the retrieved pairs as in-context examples for unsupervised BLI. Our experiments on two standard BLI benchmarks showed that the proposed SAIL method substantially outperforms established MAPPING-BASED and ZERO-SHOT BLI baselines. We also conducted a series of in-depth analyses on the high-confidence dictionary, key hyper-parameters, and the back-translation mechanism, and we additionally show that our SAIL approach with LLaMA-2_{13B} can even outperform ZERO-SHOT prompting with the state-of-the-art GPT-4 model.

¹¹The four LLaMA models used in our main experiments are pretrained LLMs without instruction-tuning (see Appendix D); our MAPPING-BASED baselines adopt static WEs derived from monolingual corpora of respective languages and our CONTRASTIVEBLI (C2) baseline additionally leverages pretrained mBERT (Devlin et al., 2019).

¹²We adopt the strong ‘gpt-4-turbo-2024-04-09’ model which ranked 1st on the LMSYS Chatbot Arena Leaderboard at the time of experimentation (May 12, 2024).

Limitations

The main limitation of this work, inherited from prior work as well (Li et al., 2023) is that the scope of our languages is constrained to the languages supported (or ‘seen’) by the underlying LLMs. For example, LLAMA-2 is reported to support only around 27 natural languages (Touvron et al., 2023b). This limitation could be mitigated if more advanced LLMs that support more languages are available in the future. It might also be feasible to adapt existing LLMs to more languages by fine-tuning on their monolingual corpora potentially combined with modern cross-lingual transfer learning techniques, whereas such adaptations of LLMs to unseen languages extend way beyond this work focused on the BLI task.

In addition, compared to the ZERO-SHOT baseline, our SAIL framework organically requires more computational time and budget, as reported in Table 7 of Appendix D.

Moreover, the SAIL framework is proposed and evaluated for the unsupervised BLI task. This work does not discuss if and how adapted variants of SAIL could also be applied to other NLP tasks beyond BLI. Further, the SAIL method should be equally applicable in weakly supervised BLI setups (Vulić et al., 2019) where a tiny set of available seed word translations (e.g., 50-500 word pairs) can be assumed to seed the iterative procedure. We leave this to future work.

Acknowledgements

We thank the anonymous reviewers for their valuable feedback. Yaoyiran Li is supported by Grace & Thomas C. H. Chan Cambridge International Scholarship. Anna Korhonen is supported by the UK Research and Innovation (UKRI) Frontier Research Grant EP/Y031350/1 (the UK government’s funding guarantee for ERC Advanced Grants). Ivan Vulić is supported by a personal Royal Society University Research Fellowship *Inclusive and Sustainable Language Technology for a Truly Multilingual World* (no 221137).

References

Prince Osei Aboagye, Jeff Phillips, Yan Zheng, Junpeng Wang, Chin-Chia Michael Yeh, Wei Zhang, Liang Wang, and Hao Yang. 2022. [Normalization of language embeddings for cross-lingual alignment](#). In *International Conference on Learning Representations*.

Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altschmidt, Sam Altman, Shyamal Anadkat, et al. 2023. [Gpt-4 technical report](#). *arXiv preprint arXiv:2303.08774*.

Anonymous. 2023. [Dm-bli: Dynamic multiple subspaces alignment for unsupervised bilingual lexicon induction](#). *OpenReview Preprint*.

Mikel Artetxe, Gorka Labaka, and Eneko Agirre. 2018a. [A robust self-learning method for fully unsupervised cross-lingual mappings of word embeddings](#). In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 789–798, Melbourne, Australia. Association for Computational Linguistics.

Mikel Artetxe, Gorka Labaka, Eneko Agirre, and Kyunghyun Cho. 2018b. [Unsupervised neural machine translation](#). In *International Conference on Learning Representations*.

Piotr Bojanowski, Edouard Grave, Armand Joulin, and Tomas Mikolov. 2017. [Enriching word vectors with subword information](#). *Transactions of the Association for Computational Linguistics*, 5:135–146.

Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel Ziegler, Jeffrey Wu, Clemens Winter, Chris Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. 2020. [Language models are few-shot learners](#). In *Advances in Neural Information Processing Systems*, volume 33, pages 1877–1901. Curran Associates, Inc.

Alexandra Chronopoulou, Dario Stojanovski, and Alexander Fraser. 2021. [Improving the lexical ability of pretrained language models for unsupervised neural machine translation](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 173–180, Online. Association for Computational Linguistics.

Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [BERT: Pre-training of deep bidirectional transformers for language understanding](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota. Association for Computational Linguistics.

Marjan Ghazvininejad, Hila Gonen, and Luke Zettlemoyer. 2023. [Dictionary-based phrase-level prompting of large language models for machine translation](#). *arXiv preprint arXiv:2302.07856*.

- Goran Glavaš, Robert Litschko, Sebastian Ruder, and Ivan Vulić. 2019. [How to \(properly\) evaluate cross-lingual word embeddings: On strong baselines, comparative analyses, and some misconceptions](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 710–721, Florence, Italy. Association for Computational Linguistics.
- Edouard Grave, Armand Joulin, and Quentin Berthet. 2019. [Unsupervised alignment of embeddings with wasserstein procrustes](#). In *Proceedings of the Twenty-Second International Conference on Artificial Intelligence and Statistics*, volume 89 of *Proceedings of Machine Learning Research*, pages 1880–1890. PMLR.
- Alex Jones, Isaac Caswell, Ishank Saxena, and Orhan Firat. 2023. [Bilex rx: Lexical data augmentation for massively multilingual machine translation](#). *arXiv preprint arXiv:2303.15265*.
- Enkelejda Kasneci, Kathrin Sessler, Stefan Küchermann, Maria Bannert, Daryna Dementieva, Frank Fischer, Urs Gasser, Georg Groh, Stephan Günemann, Eyke Hüllermeier, Stephan Krusche, Gitta Kutyniok, Tilman Michaeli, Claudia Nerdel, Jürgen Pfeffer, Oleksandra Poquet, Michael Sailer, Albrecht Schmidt, Tina Seidel, Matthias Stadler, Jochen Weller, Jochen Kuhn, and Gjergji Kasneci. 2023. [Chatgpt for good? on opportunities and challenges of large language models for education](#). *Learning and Individual Differences*, 103:102274.
- Guillaume Lample, Alexis Conneau, Marc’Aurelio Ranzato, Ludovic Denoyer, and Hervé Jégou. 2018. [Word translation without parallel data](#). In *Proceedings of the International Conference on Learning Representations*.
- Yaoyiran Li, Anna Korhonen, and Ivan Vulić. 2023. [On bilingual lexicon induction with large language models](#). In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 9577–9599, Singapore. Association for Computational Linguistics.
- Yaoyiran Li, Fangyu Liu, Nigel Collier, Anna Korhonen, and Ivan Vulić. 2022a. [Improving word translation via two-stage contrastive learning](#). In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 4353–4374, Dublin, Ireland. Association for Computational Linguistics.
- Yaoyiran Li, Fangyu Liu, Ivan Vulić, and Anna Korhonen. 2022b. [Improving bilingual lexicon induction with cross-encoder reranking](#). In *Findings of the Association for Computational Linguistics: EMNLP 2022*, pages 4100–4116, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Yaoyiran Li, Xiang Zhai, Moustafa Alzantot, Keyi Yu, Ivan Vulić, Anna Korhonen, and Mohamed Hammad. 2024. [Calrec: Contrastive alignment of generative llms for sequential recommendation](#). *arXiv preprint arXiv:2405.02429*.
- Sasha Luccioni, Victor Schmidt, Alexandre Lacoste, and Thomas Dandres. 2019. [Quantifying the carbon emissions of machine learning](#). In *NeurIPS 2019 Workshop on Tackling Climate Change with Machine Learning*.
- Kelly Marchisio, Kevin Duh, and Philipp Koehn. 2020. [When does unsupervised machine translation work?](#) In *Proceedings of the Fifth Conference on Machine Translation*, pages 571–583, Online. Association for Computational Linguistics.
- OpenAI. 2022. [Openai: Introducing chatgpt](#). URL <https://openai.com/blog/chatgpt>.
- Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, John Schulman, Jacob Hilton, Fraser Kelton, Luke Miller, Maddie Simens, Amanda Askell, Peter Welinder, Paul F Christiano, Jan Leike, and Ryan Lowe. 2022. [Training language models to follow instructions with human feedback](#). In *Advances in Neural Information Processing Systems*, volume 35, pages 27730–27744. Curran Associates, Inc.
- Barun Patra, Joel Ruben Antony Moniz, Sarthak Garg, Matthew R. Gormley, and Graham Neubig. 2019. [Bilingual lexicon induction with semi-supervision in non-isometric embedding spaces](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 184–193, Florence, Italy. Association for Computational Linguistics.
- Vin Sachidananda, Ziyi Yang, and Chenguang Zhu. 2021. [Filtered inner product projection for crosslingual embedding alignment](#). In *International Conference on Learning Representations*.
- Jimin Sun, Hwijee Ahn, Chan Young Park, Yulia Tsvetkov, and David R. Mortensen. 2021. [Cross-cultural similarity features for cross-lingual transfer learning of pragmatically motivated tasks](#). In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 2403–2414, Online. Association for Computational Linguistics.
- Arun James Thirunavukarasu, Darren Shu Jeng Ting, Kabilan Elangovan, Laura Gutierrez, Ting Fang Tan, and Daniel Shu Wei Ting. 2023. [Large language models in medicine](#). *Nature medicine*, 29(8):1930–1940.
- Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. 2023a. [Llama: Open and efficient foundation language models](#). *arXiv preprint arXiv:2302.13971*.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay

- Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. 2023b. [Llama 2: Open foundation and fine-tuned chat models](#). *arXiv preprint arXiv:2307.09288*.
- Ivan Vulić, Goran Glavaš, Fangyu Liu, Nigel Collier, Edoardo Maria Ponti, and Anna Korhonen. 2023. [Probing cross-lingual lexical knowledge from multilingual sentence encoders](#). In *Proceedings of the 17th Conference of the European Chapter of the Association for Computational Linguistics*, pages 2089–2105, Dubrovnik, Croatia. Association for Computational Linguistics.
- Ivan Vulić, Goran Glavaš, Roi Reichart, and Anna Korhonen. 2019. [Do we really need fully unsupervised cross-lingual embeddings?](#) In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 4407–4418, Hong Kong, China. Association for Computational Linguistics.
- Ivan Vulić, Edoardo Maria Ponti, Robert Litschko, Goran Glavaš, and Anna Korhonen. 2020. [Probing pretrained language models for lexical semantics](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 7222–7240, Online. Association for Computational Linguistics.
- Xinyi Wang, Sebastian Ruder, and Graham Neubig. 2022. [Expanding pretrained models to thousands more languages via lexicon-based adaptation](#). In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 863–877, Dublin, Ireland. Association for Computational Linguistics.
- Zongxiao Wu, Yizhe Dong, Yaoyiran Li, and Baofeng Shi. 2023. [Unleashing the power of text for credit default prediction: Comparing human-generated and ai-generated texts](#). *Available at SSRN 4601317*.
- Shenglong Yu, Wenya Guo, Ying Zhang, and Xiaojie Yuan. 2023. [Cd-bli: Confidence-based dual refinement for unsupervised bilingual lexicon induction](#). In *Natural Language Processing and Chinese Computing*, pages 379–391, Cham. Springer Nature Switzerland.
- Yucheng Zhou, Xiubo Geng, Tao Shen, Wenqiang Zhang, and Daxin Jiang. 2021. [Improving zero-shot cross-lingual transfer for multilingual question answering over knowledge graph](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 5822–5834, Online. Association for Computational Linguistics.

A Languages

Family	Language	Code
Germanic	English	EN
	German	DE
Romance	Catalan	CA
	French	FR
	Italian	IT
Slavic	Bulgarian	BG
	Russian	RU
Uralic	Hungarian	HU

Table 6: Languages used in our experiments with their ISO 639-1 codes.

B Impact of N_{it} with PanLex-BLI

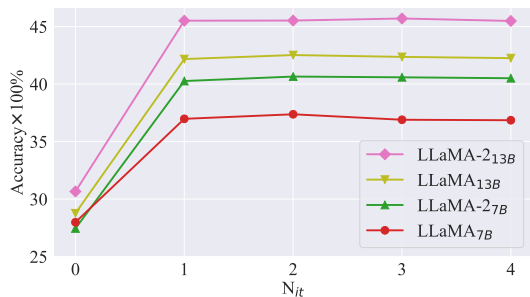


Figure 3: Top-1 accuracy (×100%) averaged over 6 PanLex-BLI BLI directions with respect to N_{it} . $N_{it} = 0$ yields the ZERO-SHOT baseline.

C Templates

Li et al. (2023) provide the suggested (carefully searched) templates for LLAMA 7B and LLAMA 13B, which we directly adopt in our work. For LLAMA-2_{7B} and LLAMA-2_{13B}, we conduct template search following Li et al. (2023) on a single language pair DE-FR in both directions. For CHATGPT models used in §4.2, details about their templates are provided in Appendix E.

Zero-Shot Template. LLAMA 7B, LLAMA-2_{7B} and LLAMA-2_{13B} share the same zero-shot template as introduced in §2. LLAMA 13B’s zero-shot template is as follows:

‘Translate from L^x to L^y : $w^x \Rightarrow$ ’.

Few-Shot Template. We have introduced the few-shot template of LLAMA-2_{7B} in §2. The remaining three LLMs happen to share the same few-shot template, given as follows:

‘The L^x word ‘ w_1^x ’ in L^y is w_1^y . The L^x word ‘ w_2^x ’ in L^y is w_2^y The L^x word ‘ w^x ’ in L^y is’.

D Reproducibility Checklist

- **Source Code:** our code is publicly available at <https://github.com/cambridgeltl/sail-bli>.
- **Hyper-Parameter Search:** N_{it} is selected from $\{1, 2, 3, 4\}$ and N_f from $\{1000, 2000, 3000, 4000, 5000, 6000, 7000, 8000, 9000, 10000\}$.
- **Software:** Python 3.9.7, PyTorch 1.10.1, Transformers 4.28.1, OpenAI 1.28.1.
- **Computing Infrastructure:** we run our codes on Wilkes3, a GPU cluster hosted by the University of Cambridge. Each run makes use of a single Nvidia 80GB A100 GPU and $32 \times$ CPU cores.
- **Half-Precision Floating-Point Format:** as introduced in §3, our BLI inference relies on `torch.float16` for both our SAIL and the ZERO-SHOT baseline. We have verified that fp16 can accelerate our computation with only negligible impact on the absolute BLI performance. Note that Li et al. (2023) did not specify `torch.float16` in their ZERO-SHOT experiments with LLAMA 7B and LLAMA 13B, so the BLI scores reported are slightly different from ours.
- **Data, WEs, LLMs:** all the BLI data, WEs, LLMs (excluding CHATGPT models) and baseline codes are open-source and publicly available. The WEs for retrieving in-context examples are fastText WEs (Bojanowski et al., 2017) trained on monolingual corpora of respective languages: the version pretrained on Wikipedia¹³ is used for XLING and the version pretrained with Wikipedia plus Common Crawl¹⁴ is used for PanLex-BLI, as recommended by XLING and PanLex-BLI, respectively. The same WEs are used for our MAPPING-BASED baselines. The LLMs used in our main experiments (LLAMA models) are summarised in Table 7. Note that we only adopt pretrained versions of LLAMA (e.g., ‘meta-llama/Llama-2-7b-hf’) rather than the instruction-tuned models (e.g., ‘meta-llama/Llama-2-7b-chat-hf’). The details of CHATGPT models used in §4.2 are provided in Appendix E.

¹³<https://fasttext.cc/docs/en/pretrained-vectors.html>

¹⁴<https://fasttext.cc/docs/en/crawl-vectors.html>

- **Baselines:** for every baseline, we use its recommended setup for unsupervised BLI and make sure the recommended setup achieves its own (near-)optimal performance. As introduced in §3, we extend CONTRASTIVEBLI to the unsupervised BLI setup. Specifically, we adopt the set of its hyper-parameters recommended for the weakly supervised BLI setup, which we found can also achieve strong unsupervised BLI performance.
- **Parameter Count and Runtime:** we report the number of parameters of each LLM and the GPU runtime for BLI inference on a single BLI direction DE→FR, which contains circa 2K word pairs, in Table 7.
- **Carbon Footprint:** our work consumes about 750 A100 GPU hours in total. We estimate that our experiments causes the emission of circa 90kg CO₂ equivalents according to a publicly available ‘machine learning emissions calculator’ (Luccioni et al., 2019)¹⁵.

E Details of CHATGPT Experiments

We run our CHATGPT experiments introduced in §4.2 with the OpenAI API.¹⁶ The model ID for GPT-3.5 is ‘gpt-3.5-turbo-0125’. For GPT-4, we adopt the state-of-the-art ‘gpt-4-turbo-2024-04-09’ model which ranked 1st on the LMSYS Chatbot Arena Leaderboard at the time of experimentation (May 12, 2024).

Our input to CHATGPT consists of two types of input messages: a *system* message followed by a *user* message. For the user message, we adopt the following template for both GPT-3.5 and GPT-4 as recommended in Anonymous (2023):

‘Translate the L^x word w^x into L^y :’,

which is also selected from the template pool of Li et al. (2023). We additionally adopt the following system message which is not used in Anonymous (2023) or Li et al. (2023):

‘Please complete the following sentence and only output the target word.’.

In our preliminary investigation, we find that our system message can considerably improve the BLI performance of both CHATGPT models.

There are two hyper-parameters used in our API calls: temperature = 0 and max_tokens = 5. Like our main experiments, we also extract the first word in the generated output sequence as the prediction for the target word. But different from our LLAMA experiments, we only derive a single output sequence from the CHATGPT API for each prompt. The code for our CHATGPT experiments is also provided in our GitHub repository.

F Full BLI Results

Table 8 shows detailed BLI scores for each BLI direction in the XLING dataset. Similarly, individual per-direction results on PanLex-BLI are presented in Table 9.

¹⁵<https://mlco2.github.io/impact/#compute>

¹⁶<https://platform.openai.com/docs/overview>

LLM	Model ID	Parameter Count	Runtime: ZERO-SHOT	Runtime: SAIL
LLAMA 7B	'huggyllama/llama-7b'	6, 738, 415, 616	5 min	40 min
LLAMA-2 _{7B}	'meta-llama/Llama-2-7b-hf'	6, 738, 415, 616	5 min	40 min
LLAMA 13B	'huggyllama/llama-13b'	13, 015, 864, 320	6 min	49 min
LLAMA-2 _{13B}	'meta-llama/Llama-2-13b-hf'	13, 015, 864, 320	6 min	49 min

Table 7: LLMs adopted in our work with their huggingface.co model IDs, parameter count, and GPU runtime on a single BLI direction for ZERO-SHOT prompting and SAIL respectively.

[Unsupervised BLI]	VecMAP	CONTRASTIVEBLI (C1)	CONTRASTIVEBLI (C2)	LLAMA 7B	LLAMA-2 _{7B}	LLAMA 13B	LLAMA-2 _{13B}	LLAMA 7B	LLAMA-2 _{7B}	LLAMA 13B	LLAMA-2 _{13B}
		MAPPING-BASED		ZERO-SHOT				SAIL (Ours)			
DE→FR	48.98	50.39	51.8	42.46	44.44	47.37	46.64	54.67	54.77	58.37	61.5
FR→DE	43.97	43.61	44.9	43.2	45.47	48.11	50.8	50.08	54.16	54.47	56.29
DE→IT	48.41	49.77	50.23	42.78	42.78	46.06	48.51	53.36	54.25	57.38	59.05
IT→DE	44.03	43.93	45.43	38.6	41.55	44.39	45.27	46.15	51.63	52.2	52.92
DE→RU	25.67	28.22	31.09	30.41	35.32	32.76	36.62	45.12	46.9	48.98	51.59
RU→DE	39.13	40.02	41.33	43.53	44.68	43.11	42.12	46.83	50.55	50.65	53.9
EN→DE	48.4	47.45	47.4	52.0	52.1	54.35	59.85	59.55	61.75	62.8	65.05
DE→EN	54.51	54.36	55.97	42.57	44.91	46.95	47.16	55.35	56.44	57.96	61.24
EN→FR	60.15	61.05	61.25	57.6	62.65	62.65	61.75	72.6	73.8	75.85	76.35
FR→EN	61.25	62.34	63.58	54.58	55.56	57.27	53.03	63.68	65.13	65.29	66.63
EN→IT	57.4	57.6	58.75	58.95	60.85	60.4	65.8	71.7	73.0	74.25	77.6
IT→EN	60.83	62.02	63.46	47.39	50.08	54.94	53.54	60.1	64.08	64.13	65.43
EN→RU	24.55	25.45	26.1	42.05	44.6	40.1	47.6	57.4	60.25	61.05	63.75
RU→EN	46.52	46.67	50.03	46.15	50.81	50.13	51.44	54.95	58.51	57.41	59.93
IT→FR	64.75	65.12	65.89	51.42	54.47	57.36	55.3	61.91	65.58	65.94	68.17
FR→IT	63.37	63.94	64.61	57.32	55.98	60.01	61.87	64.72	66.22	69.22	69.53
RU→FR	45.31	46.78	47.93	43.58	48.04	47.77	41.17	54.79	57.62	57.52	60.29
FR→RU	24.26	25.09	26.07	35.8	38.8	38.59	39.94	48.94	51.42	53.29	54.11
RU→IT	43.95	44.89	46.15	47.3	47.15	45.99	49.45	53.54	56.26	56.31	59.25
IT→RU	25.48	26.87	29.35	31.52	33.02	35.45	36.38	44.03	48.63	50.75	53.49
Avg.	46.55	47.28	48.57	45.46	47.66	48.69	49.71	55.97	58.55	59.69	61.8

Table 8: Full BLI results on 20 XLING BLI directions.

[Unsupervised BLI]	VecMAP	CONTRASTIVEBLI (C1)	CONTRASTIVEBLI (C2)	LLAMA 7B	LLAMA-2 _{7B}	LLAMA 13B	LLAMA-2 _{13B}	LLAMA 7B	LLAMA-2 _{7B}	LLAMA 13B	LLAMA-2 _{13B}
		MAPPING-BASED		ZERO-SHOT				SAIL (Ours)			
BG→CA	39.6	38.08	39.66	32.83	29.79	32.77	33.47	40.19	42.23	42.52	47.9
CA→HU	34.09	34.2	36.85	23.7	23.2	24.42	30.17	32.27	35.25	38.34	39.83
HU→BG	36.46	38.36	40.44	28.28	27.71	26.5	26.73	38.19	41.47	43.89	46.66
CA→BG	33.6	31.39	33.94	26.35	27.2	27.03	28.39	36.54	38.47	42.27	45.67
HU→CA	37.79	39.77	43.45	32.62	28.66	38.23	37.51	41.53	46.09	47.91	51.65
BG→HU	39.24	38.95	41.44	24.13	28.12	23.67	27.72	33.16	38.08	38.14	41.38
Avg.	36.8	36.79	39.3	27.98	27.45	28.77	30.66	36.98	40.27	42.18	45.51

Table 9: Full BLI results on 6 PanLex-BLI BLI directions.