Saumya Talera ⊠

Department of Computer Science and Engineering, Indian Institute of Technology Roorkee, India

Department of Computer Science and Engineering, Indian Institute of Technology Roorkee, India

Shabnam Khan ⊠

Department of Computer Science and Engineering, Indian Institute of Technology Roorkee, India

Shahbaz Khan ⊠ ©

Department of Computer Science and Engineering, Indian Institute of Technology Roorkee, India

Abstract

One of the most prominent problems studied in bioinformatics is genome assembly, where, given a set of overlapping substrings of a source string, the aim is to compute the source string. Most classical approaches to genome assembly use assembly graphs built using this set of substrings to compute the source string efficiently. Prominent such graphs present a tradeoff between scalability and avoiding information loss. The space efficient (hence scalable) de Bruijn graphs come at the price of losing crucial overlap information. On the other hand, complete overlap information is maintained by overlap graphs at the expense of quadratic space. Hierarchical overlap graphs were introduced by Cazaux and Rivals [IPL20] to overcome these limitations, i.e., avoiding information loss despite using linear space. However, their algorithm required superlinear space and time. After a series of suboptimal improvements, two optimal algorithms were simultaneously presented by Khan [CPM2021] and Park et al. [CPM2021].

We empirically analyze all the algorithms for computing Hierarchical overlap graphs, where the optimal algorithms [CPM2021] outperform the previous algorithms as expected. However, it is still based on non-intuitive arguments for its formal proof and use of non-trivial data structures for its implementation. We present an *intuitive*, *optimal* algorithm requiring linear space and time, which uses only *elementary arrays* for its implementation. We evaluated the algorithms on both real and random datasets. Despite the superior performance of optimal algorithms over previous algorithms it comes at the expense of extra memory. Our algorithm empirically proves even better for both time and memory over all the algorithms, highlighting its significance in both theory and practice.

We further explore the applications of hierarchical overlap graphs to solve various forms of suffix-prefix queries on a set of strings. Loukides et al. [CPM2023] recently presented state-of-the-art algorithms for these queries. However, these algorithms require complex black-box data structures and are seemingly impractical. Our algorithms, despite failing to match the state-of-the-art algorithms theoretically, answer different queries ranging from 0.002-100 milliseconds for a data set having around a billion characters.

2012 ACM Subject Classification General and reference \rightarrow Empirical studies; General and reference \rightarrow Performance; General and reference \rightarrow Experimentation; General and reference \rightarrow Performance; General and reference \rightarrow Empirical studies; Theory of computation \rightarrow Pattern matching; Theory of computation \rightarrow Data compression; Mathematics of computing \rightarrow Trees; Applied computing \rightarrow Bioinformatics; Applied computing \rightarrow Computational genomics

Keywords and phrases Hierarchical Overlap Graphs, String algorithms, Genome assembly

Supplementary Material https://github.com/renauga/hog

Funding Startup Research Grant SRG/2022/000801 by DST SERB, Government of India.

1 Introduction

Genome assembly is one of the most fundamental problems in Bioinformatics. For a source string (genome), practical limitations allow sequencing of only a collection of its substrings (reads) instead of the whole string. Thus, genome assembly aims to reconstruct the source genome using the sequenced reads. This is possible only because the sequencing ensures coverage of the entire string so that we find sufficient overlap among the substrings. This overlap information plays a fundamental role in solving the genome assembly problem. In most practical approaches [28, 3, 18, 2, 23, 24], this overlap information is efficiently processed by representing the substrings in the form of $assembly \ graphs$, such as $de \ Bruijn \ graphs$ [22] and $overlap \ graphs$ (or string graphs [17]). The de Bruijn graphs present a fundamental trade-off of achieving scalability (space efficiency) at the expense of loss in overlap information. This is possible by considering all possible substrings (k-mers) of the reads having length k, and storing the limited overlap information amongst them, thereby ensuring linear space. On the other hand, overlap graphs store the maximum overlap between every pair of reads explicitly, thereby requiring quadratic size, making them impractical for large data sets.

Hierarchical Overlap Graphs (HOG) were formally introduced by Cazaux and Rivals [6] as an alternative to overcome the limitations of the existing assembly graphs, maintaining the complete overlap information *implicitly* using optimal space (linear). HOG has nodes corresponding to the original substrings and the maximum overlap between every pair of these substrings. Notably, the linear size of HOG (despite storing the complete overlap information) highlights the redundancy of data stored in overlap graphs. Several applications of HOG have been formerly studied in [5, 4]. For a given set P of k strings with total length n, they [6] compute the HOG in $O(n+k^2)$ time. Moreover, they required superlinear space for this computation. Later, Park et al. [21] presented an algorithm requiring $O(n \log k)$ time and linear space. However, they assumed the character set of the strings to be of constant size. Finally, Khan [10] and Park et al. [20] independently presented optimal algorithms for computing the HOG in O(n) time. While the former algorithm only used standard data structures (as lists, stacks), the latter reduced the problem to that of computing borders [11] or failure links in the classical KMP algorithm.

Related Work. All the above algorithms, in theory, remove the non-essential nodes from an AC Trie [1]. In practice, they can use an intermediate Extended HOG (EHOG) to reduce the memory requirement for these algorithms (except [20]). Thus, the fundamental problem is marking those nodes of an AC Trie (or EHOG), which represent the set of maximum overlaps between every ordered pair of strings in P which is a special case of APSP. All Pairs Suffix Prefix (APSP) problem aims to calculate the maximum overlap between every pair of string among a set of strings. Gusfield et al. [8] optimally solved this classical problem in $O(n+k^2)$ time and O(n) space using generalized suffix tree [27]. Later, other optimal algorithms were presented using generalized suffix array [16] ([19, 25]) and Aho Corasick automaton [1] ([13]). Moreover, in practice, several algorithms having suboptimal bounds such as Readjoiner [7], SOF [9], and a recent algorithm by Lin and Park [12], have far superior performance for APSP, demonstrating the stark difference between theory and practice. Thus, any empirical analysis cannot trivially overlook the suboptimal algorithms. Note that since the APSP problem explicitly reports the maximum overlap for each of the k^2 ordered pair of strings, the above bound is optimal. However, when only the set of maximum overlaps is required (as in the case of HOG), the $O(k^2)$ factor proves suboptimal.

Recently, Loukides et al. [14] have studied several practically relevant variants of the APSP problem and presented state-of-the-art algorithms for the same. However, most of these algorithms involve complex black-box data structures, making them seemingly impractical. Another interesting variant of the APSP problem was solved by Ukkonen [26], which reports all pairwise overlaps (not just maximum) in the decreasing order of their lengths. Notably, this problem can be solved by EHOG by reporting the internal nodes from the bottom up.

1.1 Our Results

Our results can be succinctly outlined as follows.

- 1. Novel optimal algorithm for HOG. We present arguably a very *intuitive* algorithm, which is also *optimal*. Our algorithm runs in linear time and space. Despite the simplicity of the existing optimal algorithms, it still uses a non-intuitive approach and non-trivial data structures for its implementation, whereas our algorithm uses only *elementary arrays*.
- 2. Empirical evaluation of practical HOG algorithms. We analyzed all the algorithms on random and real datasets. On real datasets, the previous optimal algorithm improves the other algorithms by $1.3\text{-}8\times$ using $1.5\text{-}6\times$ more memory. However, the proposed algorithm improves the best time by 2.3-5 and memory by $\approx 1.5\times$. The relative performances improve with the size of the dataset. On random datasets having 10^5 strings with a total length of 10^7 , the optimal algorithm improves the previous state of the art by over $2-4\times$ times, while the proposed algorithm improves the optimal by $2.5-3\times$. Also, on simulated reads of a random string of length 10^6 , the proposed algorithm improved the optimal by $2.5\times$, which improved the previous state-of-the-art by $2\times$. Further, we find that the performance mainly depends on an intermediately computed EHOG used by all the algorithms. Our results show the superior performance of the proposed algorithm over previous algorithms on both random and real datasets.
- 3. Applications of HOG. We also explore the applications of hierarchical overlap graphs to solve various variants of suffix-prefix queries on a set of strings. Despite the algorithms not matching the state of the art [14] which require complex black-box data structures, our algorithm require 0.002 100 ms for all queries on a data set of a billion characters.

Outline of the paper. We first describe the basic notations and definitions used throughout the paper in Section 2. In Section 3, we briefly describe the previous results, highlighting the aspects affecting practical performance. This is followed by describing our proposed algorithm in Section 4. Then, in Section 5, we present the experimental setup and evaluation of the practical algorithms on real and random datasets, justifying the observations using further evaluation. Section 6 discussed some applications of HOG on variants of APSP queries. We finally present the conclusions and scope of future work in Section 7.

2 Preliminaries

We are given a set $P = \{p_1, p_2, ...p_k\}$ of k non-empty strings over a finite-set alphabet. The length of a string p_i is denoted by $|p_i|$. Let the total length of all strings $p_i \in P$ be $n \geq k$ as non-empty strings. An empty string is denoted by ϵ . A substring of a string p starting from the first character of p is a prefix of p, while a substring ending at the last character of p is known as a suffix of p. A prefix or suffix of p is called proper if it is not the same as p. For an ordered pair (p,q), an overlap is a string that is both a proper suffix of p and a proper prefix of p, and overlap is a string that is both a proper suffix of p and a proper prefix of p, and overlap is a string that is both a proper suffix of p and a proper prefix of p, and overlap is a string that is both a proper suffix of p and a proper prefix of p, and overlap is a string that is both a proper suffix of p and a proper prefix of p, and overlap is a string that is both a proper suffix of p and a proper prefix of p, and overlap is a string that is both a proper suffix of p and a proper prefix of p, and overlap is a string that is both a proper suffix of p and p and p are the sum of p are the sum of p and p are the sum of p are the sum of p and p are the sum of p and p are the sum of p are the sum of

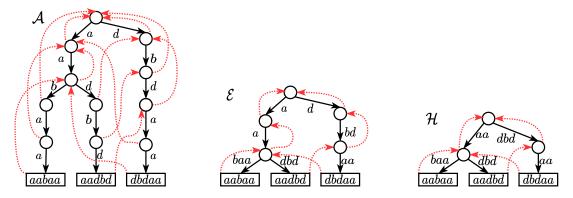


Figure 1 The structures \mathcal{A} , \mathcal{E} and \mathcal{H} for $P = \{aabaa, aadbd, dbdaa\}$ (figure reproduced from [10]).

For a given P, the ACT \mathcal{A} , EHOG \mathcal{E} , and HOG \mathcal{H} are defined using different vertex sets as follows. The vertices of \mathcal{A} are all possible prefixes of the strings in P (hence including P and ϵ). The vertices of \mathcal{E} are $P \cup \{\epsilon\}$ and all possible (not necessarily maximum) overlaps of strings in P. The vertices of \mathcal{H} are further restricted to the maximum overlaps $Ov(P) \cup P \cup \{\epsilon\}$. Hence for a given $P, V(\mathcal{H}) \subseteq V(\mathcal{E}) \subseteq V(\mathcal{A})$. For all the above, we add the following types of edges: (a) Tree edges (y, x) with label $x \setminus y$, for all $x \in V$ where y is the longest proper prefix of x in V, and (b) Suffix links (x, y) represented by dotted red edges, for all $x \in V$ where y is the longest proper suffix of x in V. See Figure 1 for examples of the same. Also, for each of the structures the number of nodes are O(n).

We abuse the notation to interchangeably refer to a node as a string (corresponding to it) and vice-versa. The name tree edges allows us to abuse the notation and treat each of \mathcal{A}, \mathcal{E} and \mathcal{H} as a tree with additional suffix links. This makes the outgoing tree edge neighbors of a node its children, which extends to the notion of descendants and ancestors. This also makes the leaves of the tree a subset of P, the empty string ϵ as the root, and the remaining strings as internal nodes. Note that some string $p_i \in P$ can also be an internal node if it is a prefix of some other string $p_j \in P$, which is why leaves of the tree are not the same as P. Further, starting from every node $p_i \in P$ and following the suffix links until we reach the root gives us the suffix path of p_i . We further have the following property.

▶ **Lemma 1** (HOG Property [8]). An internal node v in \mathcal{A} of P, is $ov(p_i, p_j)$ for two strings $p_i, p_j \in P$ iff v is an overlap of (p_i, p_j) and no descendant of v is an overlap of (p_i, p_j) .

3 Previous work

We now describe the relevant previous results related to the computation of HOG. For a given set of strings P, the ACT [1] can be computed in linear time and space. The classical algorithm builds a Trie and adds the suffix links efficiently using dynamic programming. EHOG [6] can be computed by simply traversing the suffix path of every string in P in linear time, and removing the untraversed vertices. The corresponding labels of tree edges, and suffix links with its labels are also updated simultaneously.

Given the \mathcal{A} (or \mathcal{E}) of P, its \mathcal{H} can be constructed by removing the nodes that do not satisfy the criterion in Lemma 1. Again, we update the edge labels and suffix links in linear time as described above. Various approaches for computing Ov(P) are as follows.

- 1. Cazaux and Rivals [6] requiring $O(n + k^2)$ time. This algorithm computes a list $R_l(u)$ containing all leaves having u as its suffix by traversing over all suffix paths. A bit vector maintains for each internal node x, the strings in P having overlaps in the descendants of x. The bit vector can be updated in a bottom-up fashion, and compared with $R_l(u)$ to decide whether u is added to \mathcal{H} . Along with suboptimal time, it also uses super linear space seemingly limiting its scalability.
- 2. Park et al. [21] requiring $O(n \log k)$ time. This algorithm sorts the strings in P lexicographically, which makes a contiguous set of leaves the descendant of each internal node. This allows them to use the practical segment tree data structure allowing update over an interval of in $O(\log k)$ time. For each node in the suffix path of $p_i \in P$, they simply count the number of descendant leaves (eligible prefixes) which are not covered by a larger prefix of p_i . This allows them to process each node of every suffix path (total O(n)) in a single segment tree query and update though requiring linear space.
- 3. Khan [10] requiring O(n) time. This algorithm also computes $R_l(u)$ as in [6] (referred as \mathcal{L}_u) and performs a traversal of \mathcal{A} which maintains the lowest internal node having each $p \in P$ as a suffix. On reaching the leaves all such internal nodes are maximum overlaps for the string representing the leaves. They primarily use stacks and lists for their implementation.
- 4. Park et al. [20] requiring O(n) time. The algorithm computes the overlaps by reducing the problem to that of computing borders or failure links in the classic KMP algorithm [11]. This allows each internal node to uniquely identify the ancestors whose presence in \mathcal{H} is affected by them (recall HOG property from Section 2) in linear time.

Note that except for the last algorithm [20], all the algorithms can operate directly on \mathcal{E} (instead of \mathcal{A} or P) resulting in significant performance enhancement when $|\mathcal{E}| \ll |\mathcal{A}|$.

4 Proposed Algorithm

As described in Section 3, all the algorithms essentially mark the nodes Ov(P) of \mathcal{A} (or \mathcal{E}), which will be added to \mathcal{H} , followed by a single traversal [10] to generate \mathcal{H} . The algorithm takes \mathcal{A} (or \mathcal{E}) input and produces $in\mathcal{H}$ array as an output. For any node v, $in\mathcal{H}_v$ is a boolean such that if its value is true then v should be in \mathcal{H} . We thus focus here on optimally computing this $in\mathcal{H}$ array. We describe the algorithm incrementally, firstly to mark all overlaps for all pairs (p_i, p_j) for a fixed p_i and all $p_j \in P$, secondly optimize it to require $O(|p_i|)$ time after initialization, and finally generalize it to find Ov(P) in O(n) time. Let us first recall an essential property of HOG that we use here.

▶ **Lemma 1** (HOG Property [8]). An internal node v in \mathcal{A} of P, is $ov(p_i, p_j)$ for two strings $p_i, p_j \in P$ iff v is an overlap of (p_i, p_j) and no descendant of v is an overlap of (p_i, p_j) .

Remark. For the sake of simplicity, we assume no string in P is a prefix of another, making the nodes in P be the leaves of \mathcal{A} . We shall later address how to handle this case separately.

4.1 Marking all overlaps $ov(p_i, *)$ for a string p_i

Recall that the suffix path of p_i visits all the overlaps of p_i in decreasing order of depth. Further, an internal node x on this path can be overlap of (p_i, p_j) only if p_j is a descendant of x (as x is a prefix of its descendants). Hence, for all the internal nodes which are overlaps for (p_i, p_j) , the node visited first would be $ov(p_i, p_j)$. Given the above properties, we propose the following simple process by colouring the leaves from white to black as follows.

Starting with all the leaves white, for every node x on the suffix path of p_i , we blacken all the white leaves in x's subtree, marking x if any leaf was blackened while processing x.

The correctness of the above algorithm is evident as x's are visited bottom up along the suffix path, and only the leaves p_i in subtree of x can have x as an overlap of (p_i, p_i) .

Algorithm 1 $Compute\mathcal{H}(A)$

```
foreach node \ v \in V(\mathcal{A}) do in\mathcal{H}[i] \leftarrow false;
in\mathcal{H}[root] \leftarrow true;
foreach node v \in V(A) do count[v] \leftarrow Number of children of v in tree A;
foreach node \ x \ in \ P \ do
     in\mathcal{H}[x] \leftarrow true;
     v \leftarrow \text{Suffix link of } x;
     V_m \leftarrow \emptyset;
     while v \neq root do
         if count[favDesc[v]] \neq 0 then
              in\mathcal{H}[v] \leftarrow true;
               u \leftarrow favDesc[v];
              while u \neq root do
                   Add u to V_m;
                   if u \neq favDesc[v] then
                       count[u] \leftarrow count[u] - 1;
                    if count[u] > 0 then break;
                   else count[u] \leftarrow 0;

u \leftarrow favPAnc[u];
         v \leftarrow \text{Suffix link of } v;
     foreach node v \in V_m do count[v] \leftarrow Number of children of v in tree \mathcal{A};
return in\mathcal{H};
```

4.2 Optimally marking $ov(p_i, *)$ for a string p_i

Clearly, visiting all descendants repeatedly is inefficient. The main idea behind the optimization is to lazily blacken the entire subtree of each x in constant time. This is possible since future updates and queries about blackened vertices (due to other x' further along the suffix path) will only occur at higher levels than x, avoiding direct queries to x's descendants.

However, to limit the number of updates to *constant*, we face another issue due to paths having nodes with single child (see Figure 1). We circumvent it by maintaining such an entire path using its *favoured* descendant, where we refer to nodes having multiple children as *favoured*. Note a *favoured* vertex is its own favoured descendant. The entire path having the same favoured descendant can be represented together because the number of white leaves of every node in such a path would always be the same.

We thus maintain the following data to use the above approach efficiently.

- count[x]: Number of child subtrees of x having white leaves.
- = favPAnc[x] : The closest proper ancestor of x having multiple children.
- = favDesc[x]: The closest descendant of x (not necessarily proper) having multiple children.
- V_m : List of vertices whose $count[\cdot]$ is modified while visiting a suffix path.

Initialization. Initially, since all the leaves are white, we initialize $V_m = \emptyset$ and count[x] as the number of children of x in the tree \mathcal{A} . Clearly, using a single traversal over the tree \mathcal{A} , we can initialize $count[\cdot]$, $favPAnc[\cdot]$ and $favDesc[\cdot]$ in O(n) time.

Processing Suffix path of p_i . Now, starting from the suffix of p_i in \mathcal{A} , we process each node x on the suffix path in order. The process of blackening all the leaves of the subtree of x can be performed lazily because the future nodes on the suffix path of p_i cannot be the descendants of x. Assuming the data structure is correctly maintained, the x is marked in $in\mathcal{H}$ if $count[x] \neq 0$, implying that leaves can be blackened while processing x (recall simplified algorithm). To blacken all the leaves in the subtree of x we set the count of its representative (nodes having a single child in a path are equivalent) favDesc[x] to zero. Recall that the suffix path of p_i is processed in the decreasing order of depth, hence we don't need to update the count of any other descendant of x. Further, the entire data structure can be updated by updating the count of the ancestors of x whose count is affected. Clearly, this includes all the ancestors of y having a subtree containing white leaves only among the descendants of x. These ancestors can be accessed by repeatedly reducing counts of favoured proper ancestors until some ancestor has other white leaves remaining in its other subtrees.

Analysis. For each x on the suffix path of $p_i \in P$, except for repeatedly updating the count of the favoured proper ancestors, all the other operations require constant time. We may have to process multiple such ancestors y whose count became zero, and at most one such ancestor y^* whose count remained non-zero. This unique ancestor y^* becoming non-zero for any x allows us to use amortized analysis to bound total time required for processing all the ancestors. We thus use an accounting argument by associating twice the cost of processing the ancestor y^* (whose count remains non-zero), to pays off for its future processing when $count[y^*]$ will become zero. The above argument works because initially every favoured proper ancestor y has $count[y] \ge 2$, thereafter while processing some x' for exactly one $y'^* = y$ the value of count[y] becomes 1 which costs twice while processing x' (still constant) for paying in advance for future. This advance payment is utilized for processing some x'' when count[y] becomes zero, where processing y will not be charged for x'' as it is already payed for while processing x'. Thus, for each x along the suffix path we process an amortized O(1) favoured proper ancestors in amortized O(1) time. This allows computing all $ov(p_i, *)$ for a $p_i \in P$ in $O(|p_i|)$ time in addition to a cost of O(n) for initializing the data structures.

4.3 Final Algorithm and Complexity

The final algorithm requires repeating the above algorithm for each $p_i \in P$. Note that both $favPAnc[\cdot]$ and $favDesc[\cdot]$ are not updated throughout the algorithm. In order to initialize $count[\cdot]$ efficiently, we simply maintain a list V_m of all the nodes with modified $count[\cdot]$ for each x on the suffix path, which can be used to restore $count[\cdot]$ efficiently.

The time taken after initialization by an iteration processing p_i is $O(|p_i|)$, we also have $V_m = O(|p_i|)$ and hence the data structures can be restored in $O(|p_i|)$. Thus, after initialization of data structures in O(n) time, the total time required by the algorithm is $\sum_{p_i \in P} |p_i| = O(n)$ which is optimal.

Remark: The case of a string $p_i \in P$ being a prefix of another in P can be handled as follows. Clearly, despite not being a leaf of the tree A, the simple algorithm may blacken it. Hence, on including p_i the effective *count* of the parent of p_i differs from that of its favoured descendant. Thus, each such $p_i \in P$ can be accounted for in the above algorithm simply by increasing the count of its parent in A and treating it as favoured.

5 Experimental Evaluation

We now evaluate the most promising algorithms for computing HOG in practice. Since the performance of these algorithms is strongly dependent on the underlying dataset, we evaluate these algorithms on both real and randomly generated datasets. Further, given the underlying application of HOG in bioinformatics, our real datasets were sources from EST datasets that were previously used for the evaluation of algorithms solving APSP [9, 12]. Also, given the dependence of the complexity of various algorithms on n and k, our generated random datasets helps evaluate this dependence by varying over these parameters. To evaluate the algorithms particularly for bioinformatics applications, we also consider random simulated reads of a large random string varying coverage and length of reads.

5.1 Algorithms

The following algorithms were found promising (see Section 3) for evaluation in practice.

- 1. CazauxR: The simplest algorithm by Cazaux and Rivals[6] requiring $O(n+k^2)$ time.
- 2. ParkCPR: The improved algorithm by Park et al. [21] requiring $O(n \log k)$ time.
- 3. Khan: The optimal algorithm by Khan [10] requiring O(n) time.
- 4. ParkPCPR: The optimal algorithm by Park et al. [20] requiring O(n) time.
- **5.** New: Our proposed algorithm requiring O(n) time.

We followed the approach described in previous results [10], that it is better to first build an \mathcal{E} from \mathcal{A} , and then use it to build \mathcal{H} instead of directly building \mathcal{H} using \mathcal{A} . Also, for a clearer comparison of relative performance, we use \mathcal{E} as an input in our algorithms to avoid additional time used by all the algorithms to build \mathcal{E} from P. Finally, to store child pointers in \mathcal{E} and \mathcal{A} we use vectors and arrays respectively, instead of lists to improve performance (see the discussion in Appendix B justifying our implementation choices).

5.2 Performance measures and Environment

Since all the algorithms compute the HOG \mathcal{H} , which is unique for a given set of strings P, the only relevant parameters evaluated are the *time* and *memory* required by the algorithms. For experiments on random data sets, the measures were averaged overall in several test cases to get an average performance.

All the algorithms were implemented in C++ with g++ compiler (v9.4.0) and use -O3 optimization flag. The performances were evaluated on an AMD Ryzen 9 7950X3D 16-Core Processor having 32 cores and 128 GB RAM running Linux Ubuntu 20.04.6 LTS.

5.3 Datasets

The algorithms' performance primarily depends on the parameters n and k. However, on further exploration, the relative sizes of underlying \mathcal{A} , \mathcal{E} and \mathcal{H} generated were also seemingly significant. The algorithms were thus evaluated on the following datasets:

1. Real data. We used the complete EST datasets (over alphabets $\{A, G, C, T\}$) of Citrus clementina¹, Citrus sinensis², Citrus trifoliata2³ and C. elegans⁴ removing some

¹ http://www.citrusgenomedb.org/

² http://www.citrusgenomedb.org/

³ http://www.citrusgenomedb.org/

⁴ http://www.uni-ulm.de/in/theo/research/seqana

Dataset	k	n	$ \mathcal{A} $	$ \mathcal{E} $	$ \mathcal{H} $
trifoliata	49.2K	36.2M	33.8M	86.764K	86.709K
clementina	104.6K	91.2M	62.7M	201.189K	201.023K
sinensis	151.9K	107.3M	101.0M	$311.208\mathrm{K}$	311.014K
elegans	206.5K	108.3M	81.0M	867.630K	867.618K
R_sphaeroides_M	1.5M	208.1M	173.4M	19.716M	19.715M
V_cholerae_M	1.6M	293.2M	235.8M	30.610M	30.609M
M_abscessus_M	2.0M	332.5M	250.8M	25.083M	25.082M
B_cereus_M	2.1M	$477.9\mathrm{M}$	$417.6\mathrm{M}$	$49.119\mathrm{M}$	49.117M
V_cholerae_H	3.9M	$353.7\mathrm{M}$	208.1M	$58.798\mathrm{M}$	58.798M
M_abscessus_H	5.5M	$492.4\mathrm{M}$	$257.5\mathrm{M}$	$62.039 \mathrm{M}$	62.038M
S_aureus_H	7.6M	741.9M	363.1M	$220.500\mathrm{M}$	220.500M
R_sphaeroides_H	7.7M	583.5M	$343.9\mathrm{M}$	$132.872\mathrm{M}$	132.870M
X_axonopodis_H	11.7M	1.1B	614.6M	$281.072\mathrm{M}$	281.071M
B_cereus_H	12.0M	1.2B	599.8M	315.366M	315.363M
B_fragilis_H	12.3M	1.2B	626.3M	363.588M	363.588M
A_hydrophila_H	13.1M	1.2B	642.9M	376.478M	376.477M

Table 1 Real datasets from EST and genome assemblies.

low-quality reads (containing other characters). These datasets were previously used for the evaluation of APSP algorithms [9, 12]. We additionally considered larger datasets on the genome assemblies of bacterial organisms⁵, which was previously used for evaluation of genome assemblers [15]. See Table 1 for a brief description of the datasets. As described later, the performance of the algorithm additionally depends on the sizes of \mathcal{A}, \mathcal{E} , and \mathcal{H} , which are presented to give a complete picture.

- 2. Random data. Given the dependence of the algorithms on the parameters n and k, we consider random datasets generated using two different approaches. We first fixed the value of $n=10^7$ and generated different datasets randomly for increasing values of k. We then fixed the value of $k = 10^5$, and generated different data sets randomly for increasing values of n. Thus, the datasets allow us to evaluate the performance of the algorithms with respect to each parameter, keeping the other as *constant*.
- 3. Random Simulated Reads. We consider an random string over $\{A, C, T, G\}$ of size 10^6 , and take a set of random substrings (reads) having $c \times$ coverage, i.e., the total length of reads is $n = c \times 10^6$. Now, for a given coverage, n is constant, and k is inversely proportional to the length of reads, which are varied for evaluation.

5.4 **Evaluation of real datasets**

We evaluate the algorithms on the real datasets described in Table 1. CazauxR timed out $(\approx 12 \mathrm{hrs})$ on larger bacterial genome datasets. Hence, its evaluation is limited to EST datasets (see Table 5 in Appendix B for details), while the rest are evaluated on all the datasets (see Table 2). In both the datasets, we first compute \mathcal{E} from the strings, which is used as an input to compute \mathcal{H} by all the algorithms. Note that the time and memory to

http://ccb.jhu.edu/gage_b/datasets/index.html

Dataset	\mathcal{E}		New Kha		Khan	Khan		ParkCPR		ParkPCPR	
Dataset	Mem	Time	Mem	Time	Mem	Time	Mem	Time	Mem	Time	
clementina	122.71x	61.93x	1.00x	1.00x	5.12x	1.69x	1.06x	7.16x	173.92x	202.23x	
sinensis	132.17x	73.75x	1.00x	1.00x	5.05x	1.86x	1.01x	7.77x	176.54x	214.45x	
trifoliata	129.03x	86.28x	1.00x	1.00x	4.75x	1.86x	1.07x	7.86x	223.44x	313.62x	
elegans	41.79x	18.26x	1.05x	1.00x	3.35x	1.43x	1.00x	5.47x	60.60x	58.39x	
A_hydrophila_H	1.82x	1.33x	1.14x	1.00x	1.82x	1.48x	1.00x	3.98x	2.68x	1.84x	
B_cereus_H	1.78x	1.36x	1.00x	1.00x	1.56x	1.47x	1.00x	3.92x	2.41x	1.97x	
B_cereus_M	4.92x	2.32x	1.13x	1.00x	1.94x	1.34x	1.00x	3.51x	6.81x	4.90x	
B_fragilis_H	1.82x	1.00x	1.11x	1.08x	1.77x	1.34x	1.00x	3.66x	2.63x	1.87x	
M_abscessus_H	2.87x	2.02x	1.12x	1.00x	2.23x	1.40x	1.00x	4.16x	4.51x	3.10x	
M_abscessus_M	5.59x	2.55x	1.12x	1.00x	2.24x	1.38x	1.00x	3.64x	8.01x	5.56x	
R_sphaeroides_H	2.13x	1.46x	1.13x	1.00x	2.07x	1.36x	1.00x	4.19x	3.29x	2.00x	
R_sphaeroides_M	4.56x	1.82x	1.00x	1.00x	1.93x	1.34x	1.00x	3.58x	6.12x	5.10x	
S_aureus_H	1.69x	1.00x	1.14x	1.14x	1.80x	1.41x	1.00x	3.94x	2.65x	1.97x	
V_cholerae_H	2.58x	1.73x	1.13x	1.00x	2.05x	1.36x	1.00x	3.57x	3.98x	2.70x	
V_cholerae_M	4.49x	2.02x	1.13x	1.00x	2.00x	1.35x	1.00x	3.22x	6.43x	4.37x	
X_axonopodis_H	1.80x	1.45x	1.00x	1.00x	1.42x	1.36x	1.00x	3.89x	2.29x	2.12x	

Table 2 Relative Performance of algorithms on Real Datasets (actual performance in Appendix C)

compute \mathcal{E} is comparable to the running time of all algorithms when the dataset is large but extremely large for smaller datasets. This can be explained by comparing the relative sizes of \mathcal{A} and \mathcal{E} for EST $(100-300\times)$ and bacterial genomes $(1.5-10\times)$ as for computing \mathcal{E} the input is \mathcal{A} , while \mathcal{H} is computed using \mathcal{E} . We also note that the size of \mathcal{H} only slightly improves \mathcal{E} , which indicates the significance of computing non-linear algorithms using \mathcal{E} (computable linearly) instead of directly from \mathcal{A} . The results are shown relative to the best, the actual performances are added to Appendix C for the sake of completeness.

For the EST datasets clearly, the proposed algorithm New performs faster compared to the other algorithm requiring minimum space as well, except in some cases where ParkCPR requires slightly less space. In general, as the size of the dataset increases the relative performance of CazauxR worsens around $100-3000\times$. On the other hand, the memory requirements are relatively same despite the super linear space complexity. For both ParkCPR and Khan the relative performance improves with the size of the dataset. This can be explained by the argument that as the size of the data increases the impact of the complexities of data structure involved may decrease. Another factor worth consideration is the relative memory usage of ParkCPR and Khan, where Khan required higher memory with respect to ParkCPR and CazauxR, despite improving the running time. Finally, the only algorithm unable to benefit from sharply reduced size of \mathcal{E} over \mathcal{A} is ParkPCPR which requires $60-220\times$ more memory, and time comparable only to CazauxR which is initially 2× better but becomes upto $10\times$ worse as graph size increases. Overall, ParkCPR improves CazauxR by $20-180\times$, while Khan improves ParkCPR by $6-8\times$ using $3-5\times$ more memory, and New improves Khan by $1.5-1.7\times$ in time and by $3.5-4\times$ in memory. And ParkPCPR has mixed results only comparable to CazauxR improving it by $0.5-10\times$ in time at the expense of $60-200\times$ more memory. Note that comparisons with CazauxR are done using Table 5 in Appendix B.

For the bacterial genome datasets, again New performs faster than other algorithms requiring less memory as well. Since CazauxR requires > 12hrs it is improved by ParkCPR

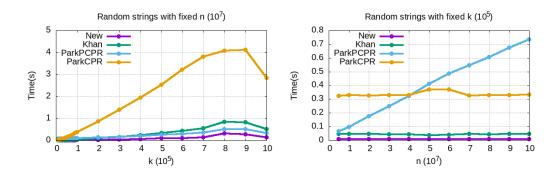


Figure 2 Variation of running time of the algorithms on the two types of random datasets

by at least $100\times$. For both ParkCPR and Khan, the relative performance (time and memory) again improves with the size of the dataset, where Khan still requires more memory despite being closer to ParkCPR. Again, ParkPCPR requires $2-8\times$ more memory being unable to exploit computation through $\mathcal E$, and requires mixed time with respect to ParkCPR ranging from $0.5-1.5\times$. Only reason why its performance is comparable with faster algorithms is that difference between $\mathcal A$ and $\mathcal E$ is way smaller than EST datasets. Overall, Khan improves ParkCPR by $1.3-2\times$ at the expense of slightly more memory, and New improves Khan by $2.3-2.5\times$ also improving the memory.

To summarize minimum time is always taken by New while minimum memory is often required by ParkCPR where New may be equivalent or up to 15% higher.

- ▶ Observation 2. Evaluation on real EST and bacterial genome datasets results in:
- 1. ParkCPR improves CazauxR by 20-180×, Khan improves ParkCPR by $1.3\text{-}8\times$ using $1.3\text{-}5\times$ more memory, and New improves Khan in time by $2.3\text{-}4\times$ and all in memory by $1.5\text{-}6\times$.
- 2. With increase in dataset's size, the relative performances of all algorithms improve.
- **3.** Though theoretically optimal ParkPCPR in unable to exploit computation using \mathcal{E} making its performance strongly dependent on ratio of $|\mathcal{A}|$ and $|\mathcal{E}|$.

5.5 Evaluation on random datasets

For the random datasets, we measured the average running time of the algorithms over several generated strings having the same parameters of n and k. The results of the experiments showing the variation of the running time with respect to k and n are shown in Figure 2.

The performance of the algorithms follow similar pattern as real datasets where New, Khan and ParkCPR are comparable while CazauxR is seemingly impractical. The performance of ParkCPR is improved by Khan by around $4\times$, while Khan is improved by New by $3\times$. Again performance of ParkPCPR is mixed performing very well for fixed k but very poorly for fixed k. This can again be attributed to the dependence of its performance on $|\mathcal{A}|$ instead of $|\mathcal{E}|$.

For a fixed value of $n=10^7$, as expected CazauxR increases quadratically with k. The other algorithms linearly increase up to $k = \approx 8 \times 10^5$, then decrease. Recall that ParkCPR had a logarithmic dependence on k, whereas Khan and New are independent of k. Given that for such a large value of k, the lengths of individual string becomes closer to 10, which my lead to smaller overlaps and hence smaller size of \mathcal{A}, \mathcal{E} and \mathcal{H} . Since the algorithms use the intermediate computation of \mathcal{E} for computing \mathcal{H} , the size of \mathcal{A}, \mathcal{E} would greatly affect the performance of the algorithms. Also, due to this apparent decrease in \mathcal{A} , ParkPCPR performs $\approx 2 \times$ better than Khan but $\approx 1.5 \times$ slower than New.

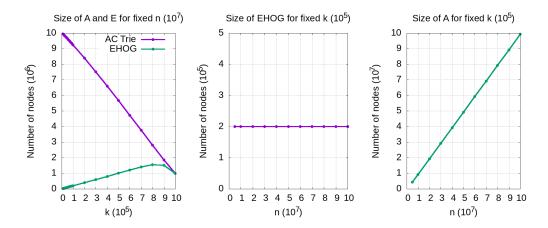


Figure 3 Variation of the size of EHOG $|\mathcal{E}|$ and AC Trie $|\mathcal{A}|$ on the two types of random datasets. The left plot shows variation of k, while mid and right for variation of n.

For a fixed value of $k=10^5$, evaluating CazauxR is impractical due to a direct dependence on k^2 , as was evident from the first experiment. For the remaining algorithms, we surprisingly see nearly constant performance irrespective of n, which is very surprising because all the algorithms are linearly dependent on n. Again, we believe the size of \mathcal{E} shall play a significant role in explaining this performance. This is because for completely random strings, the overlap is expected to be very small. Given that we have only four possible characters in the string k uniformly random strings may have $\log k$ sized overlap which is independent of n. The small size overlaps result in the smaller size of \mathcal{E} . Since k is the dominant factor in the size of \mathcal{E} , it possibly explains the near-constant performance of all the algorithms with variation of n. However, this is not true for \mathcal{A} which stores all the internal nodes not just corresponding to overlaps, which explains the linear dependence of ParkPCPR on n.

We verify the inference drawn from the above experiments by evaluating the variation in the size of $\mathcal E$ and $\mathcal A$ for both experiments (see Figure 3). Since the variation of $\mathcal E$ closely matches the performance of ParkCPR, Khan and New, it verifies our inferences that the running times of these algorithms are strongly dependent on $|\mathcal E|$ as compared to n or k. However, ParkPCPR seemingly depends on the sizes of both $\mathcal A$ and $\mathcal E$, wherein the former experiment (left), when the sizes are comparable ($\leq 10\times$) the size of $\mathcal E$ is dominant while in the latter experiment (right), when sizes are not comparable ($100-1000\times$), the size of $\mathcal A$ is dominant. This is comparable to the two cases in real datasets (EST vs genome) where relative sizes of $\mathcal A$ and $\mathcal E$ follow similar trends resulting is similar performance.

- \blacktriangleright **Observation 3.** Evaluation on random datasets under variation of n and k results in:
- 1. Khan improves ParkCPR $4\times$, while New improves Khan by $3\times$.
- 2. ParkPCPR improves Khan by around $2 \times$ if $|\mathcal{A}|$ and $|\mathcal{E}|$ are comparable (within $10 \times$) else performs worse dominated by the size of $|\mathcal{A}|$.
- **3.** The performance of ParkCPR, Khan and New are strongly dependent on $|\mathcal{E}|$, while that of ParkPCPR is dependent on both $|\mathcal{E}|$ and $|\mathcal{A}|$ based on their relative sizes, instead of n, k.

5.5.1 Evaluation on simulated random reads

Again, we computed the average performance over multiple trials. For a random source string of length 10^6 , we generate the datasets by considering random snapshots (reads) of

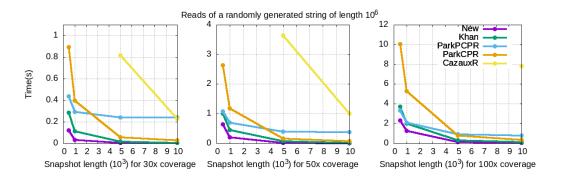


Figure 4 Variation of running time for random simulated reads data.

varying lengths. We evaluate the performance of the algorithms (see Figure 4) for different coverage $(30\times, 50\times$ and $100\times)$. As described earlier, for a given coverage, n is constant and k is inversely proportional to the length of reads. The results are shown in Figure 4.

Again, we see a similar pattern, where New is $\approx 2 \times$ better than Khan while Khan is $\approx 2.5 \times$ better than ParkCPR. Compared to these algorithms, CazauxR seems impractical. Some of the running times of CazauxR which were too high are not shown in Figure 4 to improve the readability of the graph. Again, ParkPCPR is comparable to New, Khan and ParkCPR, but its performance depends on the sizes of $|\mathcal{A}|$ and $|\mathcal{E}|$, as against the rest which depends only on $|\mathcal{E}|$, which results in difference in variation of its performance as compared to the rest.

For a fixed snapshot length, both k and n increase as the coverage increases. This possibly results in the increase of $|\mathcal{E}|$ as well, explaining the variation in performances of all algorithms. For a fixed coverage, as the length of the snapshots increases, k being inversely proportional decreases and n stays constant. Recall that the size of \mathcal{E} depends on the average length of overlaps ($\approx \log k$) as discussed in the previous section, resulting in a logarithmic variation of $\frac{1}{k}$. This is reflected in the relative performances of ParkCPR, Khan and New. However, ParkPCPR also depends on $|\mathcal{A}|$ which increases with the length of snapshot but is also affected by the decrease in k. Thus, the performance of ParkPCPR shows impact of both $|\mathcal{A}|$ and $|\mathcal{E}|$.

We again verify our inferences by evaluating the variation in the size of \mathcal{A} and \mathcal{E} increases (see Figure 5 and Figure 6). For a given snapshot length, the size of \mathcal{A} varies linearly with coverage due to n, while that of \mathcal{E} is superlinear due to the additional impact of k. For a given coverage, the variation of $|\mathcal{A}|$ and $|\mathcal{E}|$ is similar to inferred variation. Thus, the running time of all algorithms, except ParkPCPR, decreases similar to the decrease in $|\mathcal{E}|$, justifying the variation. However, the running time of ParkPCPR despite decreasing strongly with $|\mathcal{E}|$ differs from the rest due to the increase in $|\mathcal{A}|$. This again demonstrates the impact of $|\mathcal{A}|$ on ParkPCPR when it is comparable to $|\mathcal{E}|$.

- ▶ **Observation 4.** Evaluation on random simulated reads varying snapshot lengths and coverage results in:
- 1. Khan improves ParkCPR $2\times$, while New improves Khan by $2.5\times$.
- 2. The performance of ParkCPR, Khan and New are strongly dependent on $|\mathcal{E}|$.
- **3.** The performance of ParkPCPR strongly depends on |A|, but is also affected by $|\mathcal{E}|$ when the corresponding sizes are comparable.

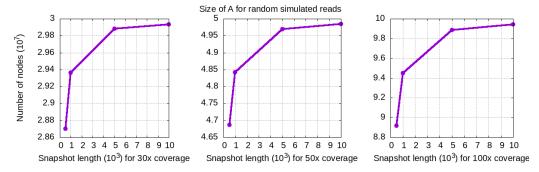


Figure 5 Variation of size of |A| for random simulated reads data.

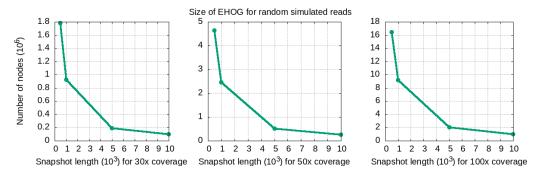


Figure 6 Variation of size of $|\mathcal{E}|$ for random simulated reads data.

6 Applications to APSP variants

We considered various variants of the APSP problem which were recently studied in [14] giving state of the art theoretical algorithms. However, most of these algorithms required complex black-box algorithms/data structures for its implementation. We then formulated simple solutions for the same problems using HOG (see Appendix A). Despite failing to match the state-of-the-art algorithms [14] theoretically by a large margin, our algorithms performed well in practice (see Table 3). In summary, to answer different queries ranging our algorithms required 0.002-100 milliseconds for a data set having around a billion characters.

7 Conclusion

We proposed a new algorithm for computing HOG and performed an empirical evaluation of all the practical algorithms. While the previous optimal algorithm [10] improves the other algorithms in time, it comes at the expense of increased memory usage. Our algorithm improves both time and memory with respect to all previous algorithms. Moreover, our algorithm is also arguably more intuitive and easier to implement using elementary data structures. We also verified the above results on random datasets generated uniformly and as simulated reads. In all the cases, the proposed algorithm improves the optimal by $2.5-4\times$, which improved the previous state-of-the-art by a $2-8\times$. We also considered some practical applications of the HOG on variants of the APSP problem by showing that it requires acceptable time despite the large size of the dataset. In the future, faster algorithms based on HOG for the variants of APSP might prove useful both theoretically and in practice.

Dataset	k	n	one-to-one	one-to-all	top	count	report
A_hydrophila_H	13081385	1235604318	0.010	95.375	34.238	8.434	10.783
B_cereus_H	12018488	1161420605	0.009	71.926	30.076	4.433	8.397
B_cereus_M	2068138	477906536	0.003	8.654	4.070	0.698	0.922
B_fragilis_H	12317015	1198165883	0.008	74.648	30.248	4.583	6.302
M_abscessus_H	5507950	492353747	0.002	28.556	11.384	1.627	2.376
M_abscessus_M	1986962	332468005	0.002	7.945	4.026	0.656	0.883
R_sphaeroides_H	7727979	583472776	0.003	51.254	19.836	2.811	4.310
R_sphaeroides_M	1509743	208072134	0.002	5.954	2.925	0.516	0.722
S_aureus_H	7601994	741898249	0.005	32.004	13.138	1.832	2.729
V_cholerae_H	3854210	353704636	0.002	15.161	6.823	1.085	1.451
V_cholerae_M	1577183	293246651	0.002	5.826	2.967	0.510	0.670
X_axonopodis_H	11669945	1096782704	0.009	76.691	30.474	5.002	7.976

Table 3 Running time (in milli-sec) of queries for genome assemblies datasets.

References -

- 1 Alfred V. Aho and Margaret J. Corasick. Efficient string matching: An aid to bibliographic search. Commun. ACM, 18(6):333–340, 1975. doi:10.1145/360825.360855.
- 2 Dmitry Antipov, Anton I. Korobeynikov, Jeffrey S. McLean, and Pavel A. Pevzner. hybrid-spades: an algorithm for hybrid assembly of short and long reads. *Bioinform.*, 32(7):1009–1015, 2016. doi:10.1093/BIOINFORMATICS/BTV688.
- 3 Anton Bankevich, Sergey Nurk, Dmitry Antipov, Alexey A. Gurevich, Mikhail Dvorkin, Alexander S. Kulikov, Valery M. Lesin, Sergey I. Nikolenko, Son K. Pham, Andrey D. Prjibelski, Alex Pyshkin, Alexander Sirotkin, Nikolay Vyahhi, Glenn Tesler, Max A. Alekseyev, and Pavel A. Pevzner. Spades: A new genome assembly algorithm and its applications to single-cell sequencing. J. Comput. Biol., 19(5):455–477, 2012. doi:10.1089/CMB.2012.0021.
- 4 Rodrigo Cánovas, Bastien Cazaux, and Eric Rivals. The compressed overlap index. *CoRR*, abs/1707.05613, 2017. arXiv:1707.05613.
- 5 Bastien Cazaux, Rodrigo Cánovas, and Eric Rivals. Shortest DNA cyclic cover in compressed space. In Ali Bilgin, Michael W. Marcellin, Joan Serra-Sagristà, and James A. Storer, editors, 2016 Data Compression Conference, DCC 2016, Snowbird, UT, USA, March 30 April 1, 2016, pages 536–545. IEEE, 2016. doi:10.1109/DCC.2016.79.
- 6 Bastien Cazaux and Eric Rivals. Hierarchical overlap graph. Inf. Process. Lett., 155, 2020. doi:10.1016/J.IPL.2019.105862.
- 7 Giorgio Gonnella and Stefan Kurtz. Readjoiner: a fast and memory efficient string graph-based sequence assembler. *BMC Bioinform.*, 13:82, 2012. doi:10.1186/1471-2105-13-82.
- 8 Dan Gusfield, Gad M. Landau, and Baruch Schieber. An efficient algorithm for the all pairs suffix-prefix problem. *Inf. Process. Lett.*, 41(4):181–185, 1992. doi:10.1016/0020-0190(92) 90176-V.
- Maan Haj Rachid and Qutaibah Malluhi. A practical and scalable tool to find overlaps between sequences. BioMed Research International, 2015:905261, Apr 2015. doi:10.1155/2015/905261.
- Shahbaz Khan. Optimal construction of hierarchical overlap graphs. In Pawel Gawrychowski and Tatiana Starikovskaya, editors, 32nd Annual Symposium on Combinatorial Pattern Matching, CPM 2021, July 5-7, 2021, Wrocław, Poland, volume 191 of LIPIcs, pages 17:1–17:11. Schloss Dagstuhl Leibniz-Zentrum für Informatik, 2021. doi:10.4230/LIPICS.CPM.2021.17.
- Donald E. Knuth, James H. Morris Jr., and Vaughan R. Pratt. Fast pattern matching in strings. SIAM J. Comput., 6(2):323–350, 1977. doi:10.1137/0206024.

- 12 Jihyuk Lim and Kunsoo Park. A fast algorithm for the all-pairs suffix-prefix problem. *Theor. Comput. Sci.*, 698:14–24, 2017. doi:10.1016/J.TCS.2017.07.013.
- Grigorios Loukides and Solon P. Pissis. All-pairs suffix/prefix in optimal time using aho-corasick space. *Inf. Process. Lett.*, 178:106275, 2022. doi:10.1016/J.IPL.2022.106275.
- Grigorios Loukides, Solon P. Pissis, Sharma V. Thankachan, and Wiktor Zuba. Suffix-prefix queries on a dictionary. In Laurent Bulteau and Zsuzsanna Lipták, editors, 34th Annual Symposium on Combinatorial Pattern Matching, CPM 2023, June 26-28, 2023, Marne-la-Vallée, France, volume 259 of LIPIcs, pages 21:1–21:20. Schloss Dagstuhl Leibniz-Zentrum für Informatik, 2023. doi:10.4230/LIPICS.CPM.2023.21.
- Tanja Magoc, Stephan Pabinger, Stefan Canzar, Xinyue Liu, Qi Su, Daniela Puiu, Luke J. Tallon, and Steven L. Salzberg. GAGE-B: an evaluation of genome assemblers for bacterial organisms. *Bioinform.*, 29(14):1718–1725, 2013. doi:10.1093/BIOINFORMATICS/BTT273.
- Udi Manber and Eugene W. Myers. Suffix arrays: A new method for on-line string searches. SIAM J. Comput., 22(5):935–948, 1993. doi:10.1137/0222058.
- 17 Eugene W. Myers. The fragment assembly string graph. In ECCB/JBI'05 Proceedings, Fourth European Conference on Computational Biology/Sixth Meeting of the Spanish Bioinformatics Network (Jornadas de BioInformática), Palacio de Congresos, Madrid, Spain, September 28 October 1, 2005, page 85, 2005. doi:10.1093/BIOINFORMATICS/BTI1114.
- Sergey Nurk, Dmitry Meleshko, Anton I. Korobeynikov, and Pavel A. Pevzner. metaspades: A new versatile de novo metagenomics assembler. In Mona Singh, editor, Research in Computational Molecular Biology 20th Annual Conference, RECOMB 2016, Santa Monica, CA, USA, April 17-21, 2016, Proceedings, volume 9649 of Lecture Notes in Computer Science, page 258. Springer, 2016. URL: https://link.springer.com/content/pdf/bbm% 3A978-3-319-31957-5%2F1.pdf.
- 19 Enno Ohlebusch and Simon Gog. Efficient algorithms for the all-pairs suffix-prefix problem and the all-pairs substring-prefix problem. *Inf. Process. Lett.*, 110(3):123–128, 2010. doi: 10.1016/J.IPL.2009.10.015.
- 20 Sangsoo Park, Sung Gwan Park, Bastien Cazaux, Kunsoo Park, and Eric Rivals. A linear time algorithm for constructing hierarchical overlap graphs. In Pawel Gawrychowski and Tatiana Starikovskaya, editors, 32nd Annual Symposium on Combinatorial Pattern Matching, CPM 2021, July 5-7, 2021, Wrocław, Poland, volume 191 of LIPIcs, pages 22:1–22:9. Schloss Dagstuhl Leibniz-Zentrum für Informatik, 2021. doi:10.4230/LIPICS.CPM.2021.22.
- Sung Gwan Park, Bastien Cazaux, Kunsoo Park, and Eric Rivals. Efficient construction of hierarchical overlap graphs. In Christina Boucher and Sharma V. Thankachan, editors, String Processing and Information Retrieval 27th International Symposium, SPIRE 2020, Orlando, FL, USA, October 13-15, 2020, Proceedings, volume 12303 of Lecture Notes in Computer Science, pages 277–290. Springer, 2020. doi:10.1007/978-3-030-59212-7_20.
- 22 P. A. Pevzner. l-Tuple DNA sequencing: computer analysis. *Journal of Biomolecular Structure & Dynamics*, 7(1):63–73, August 1989.
- Pavel A. Pevzner, Haixu Tang, and Michael S. Waterman. An eulerian path approach to dna fragment assembly. Proceedings of the National Academy of Sciences of the United States of America, 98(17):9748–9753, 2001.
- Jared T. Simpson and Richard Durbin. Efficient construction of an assembly string graph using the fm-index. *Bioinform.*, 26(12):367–373, 2010. doi:10.1093/BIOINFORMATICS/BTQ217.
- William H. A. Tustumi, Simon Gog, Guilherme P. Telles, and Felipe A. Louza. An improved algorithm for the all-pairs suffix-prefix problem. *J. Discrete Algorithms*, 37:34–43, 2016. doi:10.1016/J.JDA.2016.04.002.
- Esko Ukkonen. A linear-time algorithm for finding approximate shortest common superstrings. Algorithmica, 5(3):313–323, 1990. doi:10.1007/BF01840391.
- 27 Peter Weiner. Linear pattern matching algorithms. In 14th Annual Symposium on Switching and Automata Theory, Iowa City, Iowa, USA, October 15-17, 1973, pages 1-11. IEEE Computer Society, 1973. doi:10.1109/SWAT.1973.13.

Daniel R Zerbino and Ewan Birney. Velvet: algorithms for de novo short read assembly using de bruijn graphs. Genome research, 18(5):821—829, May 2008. doi:10.1101/gr.074492.107.

A Applications to String Problems

In this paper, we also consider the variations of the classical all-pairs suffix-prefix problem (APSP) on a set of strings P described by Loukides et al. [14].

- \blacksquare OnetoOne(i, j): report the string $ov(p_i, p_j)$.
- OnetoAll(i): report $ov(p_i, p_j)$ for every $p_j \in P$.
- Report(i, l): report all $j \in [1, k]$ where $ov(p_i, p_j) \ge l$ for an integer $l \ge 0$.
- Count(i, l): report the count of all $j \in [1, k]$ where $ov(p_i, p_j) \ge l$ for an integer $l \ge 0$.
- Top(i,c): report all $j \in [1,k]$ corresponding to any c highest values of $|ov(p_i,p_j)|$.

We are given a dictionary P of k strings p_1, p_2, p_k of total length n. For all the queries we assume the given strings are in sorted order. If the strings are not sorted, we can sort them in O(||P||).

A.1 One to One Query

We need to find for given i and j, $ov(p_i, p_j)$, where $p_i, p_j \in P$. Each node in HOG has 2 values associated with it - start and end. start indicates the minimum index in [1, k] such that the node is a prefix of p_{start} . end denotes the maximum index of the same.

We first obtain the node corresponding to the p_i , then we iterate over the suffix path of this node, and the first node in which we find j in between [start, end] is the deepest node which is the prefix of string p_j and also a suffix of string p_i so the length corresponding to this node is the $ov(p_i, p_j)$.

The number of nodes in the suffix path of a string is bounded by k and the length of the string p_i . So, the overall complexity of this algorithm is $O(min(k, |p_i|))$.

We can further improve the time complexity with HOG by using advanced data structure as used in Loukides et al. [14]. The data structure by Loukides et al. for answering one-to-one query constructs in $O(n \log \log n)$ time while the HOG construct requires O(n) time. The algorithm by Loukides et al. uses various black box algorithms, which are very difficult to implement, and ours are very easy to implement.

Naive Current Algorithm		With HOG		
$O(p_i + p_j)$	$O(\log \log k)$ with $O(n)$ space	$O(min(k, p_i) \text{ with } O(n) \text{ space }$		

A.2 One to All Query

We need to find $ov(p_i, p_j)$, for every $p_j \in P$ for given p_i .

▶ Lemma 5 ([14]). Let u and v be two non roots of HOG with labeled intervals $I_u = [start_u, end_u]$ and $I_v = [start_v, end_v]$, respectively then either $[start_u, end_u]$ contains $[start_v, end_v]$ or $[start_v, end_v]$ contains $[start_u, end_u]$ or $[start_v, end_v]$ and $[start_v, end_v]$ do not intersect.

We iterate over the suffix path of the string p_i , and for each node, we only need to update the answer for those strings that have not already been visited. As we iterate over the suffix path, the node we get will definitely have a smaller length than the node we already visited. So, we need to update the answer for only those strings that are visited the first time.

For each string, we maintain the best possible guess of the following not visited string. Then, when we iterate from start to end indexes of the current node in HOG, we jump the indexes by the NextRemaining nodes, and at last, we update the NextRemaining for the start and end indexes. This will take a total of O(k) time. As we basically jump through the whole range in O(1) time and we visit the compressed range at most one more time by the first node that contains this range(Lemma 5) in the suffix path of p_i and at that time we will not traverse this range. We compressed this new range and will not encounter the former range as the new one will now be contained by any other node.

We achieved the same complexity as Loukides et al., and our algorithm is very easy to implement. Also, HOG is specially designed for APSP. The algorithms used by Loukides et al. for APSP are built on some advanced data structure that answers only the queries for which they are designed. While HOG can answer various types of queries.

Naive	Current Algorithm	With HOG
$O((k-1) * p_i + \sum_{j=1}^{k} p_j)$	O(k) with $O(n)$ space	O(k) with $O(n)$ space

A.3 Report Query

We need to output for given p_i and l all indexes j such that $ov(p_i, p_j) \ge l$, where $p_j \in P$.

In this type of query, we are doing the same as a one-to-all query, except in this, we don't travel to the root of the tree; instead, we travel up to the node that has a corresponding string length greater than equal to l.

Naive	Current Algorithm	With HOG
$O((k-1) * p_i + \sum_{j=1}^{k} p_j)$	$O(\log n/\log\log n + output)$ with $O(n)$ space	O(k) with $O(n)$ space

A.4 Count Query

We need to output for given p_i and l number of indexes j such that $ov(p_i, p_j) \ge l$, where $p_j \in P$.

In this type of query, we are doing the same as the report query, except we return the count instead of the whole array.

Naive	Current Algorithm	With HOG
$O((k-1)* p_i + \sum_{j=1}^k p_j)$	$O(\log n/\log\log n)$ with $O(n)$ space	O(k) with $O(n)$ space

A.5 Top Query

We need to output for given p_i and c, c different indexes j with the highest values of $ov(p_i, p_j)$ (tie breaker solved arbitrarily), where $p_j \in P$.

In this type of query, we are doing the same as a one-to-all query, except in this, we don't travel to the root of the tree; instead, we stop when we find the answer for c vertices. As we know this is also the top c strings, which has the highest $ov(p_i, p_j)$.

Naive	Current Algorithm	With HOG
$O((k-1)* p_i + \sum_{j=1}^k p_j)$	$O(\log^2 n/\log\log n + output)$ with $O(n)$ space	O(k) with $O(n)$ space

Dataset			clementina	sinensis	trifoliata	elegans
	$Via \mathcal{A}$	Mem	3.37G	5.39G	1.80G	4.35G
New	VIA A	Time(s)	3.11	5.37	1.75	4.42
New	Via \mathcal{E}	Mem	2.38G	3.80G	1.27G	3.11G
	Via C	Time(s)	3.33	5.84	1.83	4.65
	Via A	Mem	3.70G	5.91G	1.98G	4.84G
Khan	Via A	Time(s)	3.76	6.35	1.98	5.07
Kiidii	Via \mathcal{E}	Mem	2.38G	3.80G	1.27G	3.11G
	Via C	Time(s)	3.54	6.03	1.76	4.81
	Via \mathcal{A}	Mem	2.62G	4.18G	1.40G	3.38G
ParkCPR.		Time(s)	4.07	6.82	2.08	6.11
raikorn	Via E	Mem	2.38G	3.80G	1.27G	3.11G
	Via C	Time(s)	3.90	6.60	2.01	5.80
	Via \mathcal{A}	Mem	5.12G	7.88G	2.64G	6.54G
ParkPCPR	Via A	Time(s)	3.83	6.14	1.93	4.96
raikrorn	Via E	Mem	3.38G	5.07G	1.70G	4.36G
	Via C	Time(s)	4.28	6.89	2.16	5.66
	Via A	Mem	-	-	-	-
CazauxR.	Vid A	Time(s)	>30min	>30min	>30min	>30min
Cazauxn	Via E	Mem	2.21G	3.53G	1.18G	2.89
	via C	Time(s)	19.37	41.73	5.05	132.26

Table 4 Actual Performance of the algorithms on bacterial genome datasets using input P

Comparisons between state of the art algorithm and our algorithm

We have achieved the same bound as of [14] for one-to-all query and our algorithm is easier to implement than the state-of-the-art algorithm. Also, for other queries, there is still room for improvement. Current algorithms with HOG are easier to implement than [14]. Also, We are able to answer multiple types of queries with only HOG, while in [14] they have used different data structures for different types of queries which make them harder to implement and will practically take more time for construction. Also, for construction of data structure in one-to-one query use $O(n \log \log n)$ time while we are constructing HOG in O(n) time.

В Justification of Implementation Approach

The computation of \mathcal{H} can be performed directly using the strings P and hence \mathcal{A} or from \mathcal{E} which is claimed to be more scalable. Table 4 shows a comparison between the two approaches where clearly less memory is required when computing via \mathcal{E} as compared to \mathcal{A} sometimes at the expense of slightly higher running time.

We further note that significant part of time is required in computing $\mathcal A$ and $\mathcal E$ which is computed by all the algorithms. This makes the relative performances of the algorithms less pronounced. A clearer picture would be possible in case we use \mathcal{E} directly as an input. The coresponding difference is highlighted in Table 5.

Finally, we tried a linked list to store children of both \mathcal{A} and \mathcal{E} nodes. In this case, we are converting the \mathcal{A} nodes directly into the \mathcal{E} while changing the links only. We delete additional \mathcal{A} nodes that are not included in the \mathcal{E} . Also, we used a pointer-based in which We store \mathcal{A} children into an array of size of number of characters in the dataset and $\mathcal E$ children into a

Dataset			clementina	sinensis	trifoliata	elegans
	Actual	Mem	2.38G	3.80G	1.27G	3.11G
ε	Actual	Time(s)	3.37	6.01	1.86	4.63
ε	Relative	Mem	157.75x	132.17x	129.03x	41.79x
	Relative	Time	61.93x	73.75x	86.28x	18.26x
	Actual	Mem	19.41M	28.73M	9.84M	78.45M
New	Actual	Time(s)	0.05	0.08	0.02	0.25
New	Relative	Mem	1.29x	1.00x	1.00x	1.05x
	Relative	Time	1.00x	1.00x	1.00x	1.00x
	Actual	Mem	99.44M	145.05M	46.77M	249.32M
Khan	Actual	Time(s)	0.09	0.15	0.04	0.36
Midii	Relative	Mem	6.59x	5.05x	4.75x	3.35x
	Relative	Time	1.69x	1.86x	1.86x	1.43x
	Actual	Mem	20.50M	29.10M	10.54M	74.42M
ParkCPR	Actual	Time(s)	0.39	0.63	0.17	1.39
raikorn	Relative	Mem	1.36x	1.01x	1.07x	1.00x
	Relative	Time	7.16x	7.77x	7.86x	5.47x
	Actual	Mem	3.38G	5.07G	2.20G	4.51G
ParkPCPR	Actual	Time(s)	11.01	17.48	6.76	14.81
raikrorn	Relative	Mem	223.58x	176.54x	223.44x	60.60x
	Relative	Time	202.23x	214.45x	313.62x	58.39x
	Actual	Mem	15.10M	32.30M	47.40M	134.53M
CazauxR	Actual	Time(s)	5.36	24.04	59.81	195.86
oazauxn	Relative	Mem	1.00x	1.12x	4.82x	1.81x
	1 telative	Time	98.41x	294.86x	2.77Kx	772.40x

Table 5 Actual and Relative performance of the algorithm using \mathcal{E} as input.

		Array Based	Pointer Based	List Based	
Via A	Mem	35.37G	47.31G	109.14G	
	Time(s)	140.32	244.36	360.86	
$Via~\mathcal{E}$	Mem	56.90G	57.78G	104.34G	
	Time(s)	218.91	388.87	528.76	

Table 6 Comparison between different implementations using A_hydrophila_H Dataset

dynamic vector. Then, We make \mathcal{A} using pointers of the \mathcal{A} nodes. While constructing \mathcal{E} , We are making new \mathcal{E} nodes and deleting the \mathcal{A} nodes side by side while DFS the \mathcal{A} . Then, finally, we store \mathcal{A} as a vector of \mathcal{A} nodes. In this, we are not deleting the \mathcal{A} nodes at all. As in Table 6, We tested all these three approaches using A_hydophila_H Dataset and New algorithm, The vector of \mathcal{A} nodes is the fastest and most memory-efficient approach in all three approaches. So, We have used this approach in the experimentation.

C Actual performance of algorithms on real datasets

Dataset	\mathcal{E}		New		Khan		ParkCPR		ParkPCPR	
Dataset	Mem	Time(s)	Mem	Time(s)	Mem	Time(s)	Mem	Time(s)	Mem	Time(s)
clementina	2.38G	3.37	19.41M	0.05	99.44M	0.09	20.50M	0.39	3.38G	11.01
sinensis	3.80G	6.01	28.73M	0.08	145.05M	0.15	29.10M	0.63	5.07G	17.48
trifoliata	1.27G	1.86	9.84M	0.02	46.77M	0.04	10.54M	0.17	2.20G	6.76
elegans	3.11G	4.63	78.45M	0.25	249.32M	0.36	74.42M	1.39	4.51G	14.81
A_hydrophila_H	54.99G	226.8	34.47G	170.85	54.96G	253.51	30.25G	680.75	81.11G	314.12
B_cereus_H	53.29G	185.76	29.86G	136.31	46.55G	200.12	29.86G	534.82	71.99G	268.18
B_cereus_M	19.41G	46.2	4.47G	19.9	7.64G	26.75	3.95G	69.81	26.87G	97.5
B_fragilis_H	54.32G	158.43	33.29G	171.11	52.83G	212.9	29.89G	579.89	78.63G	295.73
$M_abscessus_H$	14.44G	51.43	5.62G	25.44	11.22G	35.56	5.03G	105.8	22.64G	78.75
$M_abscessus_M$	11.35G	26.57	2.27G	10.43	4.54G	14.43	2.03G	37.96	16.27G	58.01
R_sphaeroides_H	22.83G	99.02	12.10G	67.89	22.17G	92.39	10.73G	284.49	35.36G	135.88
$R_sphaeroides_M$	8.40G	15.61	1.84G	8.6	3.55G	11.49	1.84G	30.77	11.28G	43.85
S_aureus_H	29.97G	86.69	20.19G	98.87	31.92G	121.93	17.72G	341.56	46.96G	170.71
V_cholerae_H	12.23G	41.63	5.35G	24.12	9.73G	32.72	4.74G	86.1	18.87G	65.1
V_cholerae_M	11.07G	24.69	2.79G	12.22	4.93G	16.44	2.47G	39.32	15.87G	53.36
X_axonopodis_H	53.72G	180.35	29.82G	124.58	42.38G	169.8	29.82G	484.43	68.32G	263.64

■ Table 7 Actual Performance of Algorithms using Real Datasets