

EasyRL4Rec: An Easy-to-use Library for Reinforcement Learning Based Recommender Systems

Yuanqing Yu
DCST, Tsinghua University
Beijing 100084, China
yyq23@mails.tsinghua.edu.cn

Chongming Gao*
University of Science and
Technology of China
chongming.gao@gmail.com

Jiawei Chen*
Zhejiang University
Hangzhou, China
sleepyhunt@zju.edu.cn

Heng Tang
Zhejiang University
Hangzhou, China
tanghengsb@zju.edu.cn

Yuefeng Sun
Zhejiang University
Hangzhou, China
sun920523033@163.com

Qian Chen
University of Science and
Technology of China
chenxing202022@gmail.com

Weizhi Ma
AIR, Tsinghua University
Beijing 100084, China
mawz@tsinghua.edu.cn

Min Zhang
DCST, Tsinghua University
Beijing 100084, China
z-m@tsinghua.edu.cn

ABSTRACT

Reinforcement Learning (RL)-Based Recommender Systems (RSs) have gained rising attention for their potential to enhance long-term user engagement. However, research in this field faces challenges, including the lack of user-friendly frameworks, inconsistent evaluation metrics, and difficulties in reproducing existing studies. To tackle these issues, we introduce *EasyRL4Rec*, an easy-to-use code library designed specifically for RL-based RSs. This library provides lightweight and diverse RL environments based on five public datasets and includes core modules with rich options, simplifying model development. It provides unified evaluation standards focusing on long-term outcomes and offers tailored designs for state modeling and action representation for recommendation scenarios. Furthermore, we share our findings from insightful experiments with current methods. *EasyRL4Rec* seeks to facilitate the model development and experimental process in the domain of RL-based RSs. The library is available for public use¹.

CCS CONCEPTS

• **Information systems** → **Recommender systems**.

KEYWORDS

Recommender Systems; Reinforcement Learning; Code Library

ACM Reference Format:

Yuanqing Yu, Chongming Gao, Jiawei Chen, Heng Tang, Yuefeng Sun, Qian Chen, Weizhi Ma, and Min Zhang. 2024. *EasyRL4Rec: An Easy-to-use Library for Reinforcement Learning Based Recommender Systems*. In *Proceedings of the 47th International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR '24)*, July 14–18, 2024, Washington, DC, USA. ACM, New York, NY, USA, 11 pages. <https://doi.org/10.1145/3626772.3657868>

*Corresponding author. This work is supported by the Natural Science Foundation of China (Grant No. U21B2026, 62372399, 62372260), and the advanced computing resources provided by the Supercomputing Center of Hangzhou City University.

¹<https://github.com/chongminggao/EasyRL4Rec>

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for third-party components of this work must be honored. For all other uses, contact the owner/author(s).
SIGIR '24, July 14–18, 2024, Washington, DC, USA
© 2024 Copyright held by the owner/author(s).
ACM ISBN 979-8-4007-0431-4/24/07.
<https://doi.org/10.1145/3626772.3657868>

1 INTRODUCTION

Recommender systems (RSs) are increasingly becoming integral to various domains, such as e-commerce, social media, and on-line streaming services. Traditional RSs usually rely on supervised learning methods like collaborative filtering [41] to learn and predict users' interests. However, these methods often fail to capture the long-term effects, leading to potential issues like Feedback Loops [35], Filter Bubbles [12], and other undesirable biases [7, 8].

Reinforcement Learning (RL)-Based Recommender Systems have gained rising attention due to their ability to optimize long-term user engagement. In this setting, the recommendation process is perceived as a multi-step decision-making problem. An agent (recommender) interacts with the environment (users) and receives feedback on actions (items). The main goal of RL-based RSs is to learn an optimal recommendation policy that maximizes cumulative rewards (users' long-term engagement) through trial and error. Currently, RL-based RSs have been extensively applied in scenarios such as short video recommendations [4, 5, 34, 57], e-commerce recommendations [39, 61], and beyond.

With increasing attention to RL-based RSs, research in this field is confronted with the following three challenges.

- **Absence of an easy-to-use framework.** Currently, there is a lack of easy-to-use frameworks for academic research. Research for RL-based RSs requires interactive environment building. However, existing resources neither use mass datasets nor simulated data generated by simulators, making them inconvenient for usage. In addition, it is difficult to directly apply RL libraries (e.g. rllib [31]) to recommendation scenarios due to the absence of suitable environments and state modeling.
- **Distinct evaluation strategies in different work.** The absence of standardized evaluation metrics complicates model comparisons across different research teams. While some studies follow traditional RS metrics such as Normalized Discounted Cumulative Gain (NDCG) and Hit Rate (HR), others use RL-specific measures like cumulative reward and interaction length, leading to inconsistencies in performance assessment.
- **Poor reproducibility of previous studies.** Thirdly, poor reproducibility of some previous studies increases the difficulty of further studies. Researchers and practitioners in this field often face challenges in reproducing methods and ensuring the effectiveness of self-implemented baselines due to variations in details, hindering the field's development.

Table 1: A comparison between EasyRL4Rec and existing resources. Real Data refers to using data collected from the real world and not generated by simulators. Disc.Act. indicates support for discrete action-based policies, while Cont.Act. is short for continuous action. Interactive training indicates learning with instant feedback.

Type	Resource	Modules				Training		Evaluation	
		Real Data	State Encoder	Disc.Act.	Cont.Act.	RL Policy	Offline Logs	Interactive	Long-term
Simulators & Datasets	RecoGym [39]			✓			✓	✓	
	RecSim [23]			✓		✓		✓	✓
	Virtual-Taobao [45]	✓		✓	✓	✓		✓	✓
	SOFA [22]	✓	✓	✓		✓	✓		✓
	KuaiSim [60]	✓		✓		✓		✓	✓
	RL4RS [51]	✓		✓	✓	✓	✓	✓	✓
Frameworks & Libraries	BEARS [2]	✓		✓					✓
	MABWiser [47]	✓		✓		Only have Bandits methods.	Most Bandits methods do not have an explicit training.		✓
	OBP [40]	✓		✓					✓
	iRec [46]	✓		✓					✓
	EasyRL4Rec	✓	✓	✓	✓	✓	✓	✓	✓

To tackle the above issues, we implement a comprehensive code library for RL-based RSs, named *EasyRL4Rec*. It provides an easy-to-use framework with core modules with rich choices and a unified training and evaluating process, aiming to simplify the model development and experimental process in the domain of RL-based RS. The library is composed of four core modules: `Environment`, `Policy`, `StateTracker`, and `Collector`, which cater to different stages of the RL interaction process. `Environment`, built from lightweight static datasets, provides feedback on upcoming actions. The `Policy` module selects the optimal action based on the current state, which is encoded by `StateTracker`. `Collector` bridges the interactions between `Environment` and `Policy`. To address the difficulty of obtaining user states from environments, we implement multiple `StateTrackers` for state modeling, encompassing today’s popular methods in sequential modeling [21, 25, 48, 58]. Since items in RSs are discrete, *EasyRL4Rec* includes a mechanism to convert continuous actions to discrete items, allowing for continuous action-based policies.

Moreover, *EasyRL4Rec* provides a unified training and evaluation procedure by `Trainer` and `Evaluator` executors. `Evaluator` supports three modes, allowing for the removal of recommended items and a quit mechanism. `Trainer` offers two training paradigms: learning directly from offline logs or training with a pre-trained user model. With this unified framework, we conduct comprehensive experiments on classic RL models and several recent work [16, 55] and present insightful results. The main contributions of this work can be summarized as follows:

- **Easy-to-use Framework.** *EasyRL4Rec* provides an easy-to-use framework for RL-based RSs. We construct lightweight RL environments based on five public datasets encompassing diverse domains, which are easy to follow for researchers. Moreover, the design of core modules with rich options reduces the complexity of developing a new model.
- **Unified Evaluation Standards.** *EasyRL4Rec* offers a unified experimental pipeline, evaluating models with various metrics

from the perspective of long-term benefits (e.g. Cumulative Reward). Furthermore, the library offers two training paradigms and three evaluation settings, giving users multiple choices.

- **Tailored Designs for Recommendation Scenarios.** In response to challenges when applying RL algorithms in practical RSs, we have developed customizable modules for state modeling and action representation, with a conversion mechanism to support continuous action-based policies.
- **Insightful Experiments for RL-based RSs.** With *EasyRL4Rec*, we conduct experiments to compare the performance of classic RL models and some recent work, presenting insightful results from multiple perspectives.

2 RELATED WORK

2.1 Development of RL-Based RSs

Reinforcement Learning (RL), a branch of machine learning, focuses on agents learning the ability of decision-making through environmental feedback². Recently, RL-Based Recommender Systems have gained considerable attention due to their ability to model recommendation as a multi-step decision-making process and enhance the long-term benefits.

Numerous studies have investigated the application of RL in recommender systems. Shani et al. [44] first formulated the recommendation process as a Markov Decision Process (MDP) and utilized model-based RL methods. Zhao et al. [62] adapt a DQN [37] architecture to incorporate positive and negative feedback from users. Zheng et al. [63] applies the Dueling DQN algorithm to news recommendation. Chen et al. [9, 10] extend REINFORCE [54] and off-policy actor-critic algorithm to recommendation. Xin et al. [55] proposed to utilize self-supervision signals to empower RL-based RSs. Unlike most methods based on discrete actions, Cai et al. [4], Liu et al. [34], Xue et al. [57] investigate the applications of continuous action-based RL and improvements of long-term user engagement in short-video scenarios. In addition, Ren et al. [38]

²RL in this work specifically refers to deep reinforcement learning.

focus on effective state representations, while recent work [16, 19] addresses specific issues when applying RL in RSs.

The above work mainly focuses on optimizing RL policy, state modeling, or specific issues in recommendation scenarios. However, over 60% of existing work is not open-source, inspiring us to develop a library that encompasses these aspects and facilitates the reproduction of existing work.

2.2 Resources for RL-Based RSs

Existing resources for RL-based RSs can be categorized into two groups: Simulators & Datasets, and Frameworks & Libraries. In Table 1, we summarize the characteristics of existing resources regarding modules and experimental procedures.

2.2.1 Simulators and Datasets. Numerous studies have focused on the development of datasets or simulation platforms to create interactive RL environments. RecoGym [39] focuses on simulation bandit environments under e-commerce recommendation setting, while Virtual-Taobao [45] provides a user simulator trained on historical behavior data. RecSim [23] is a simulation platform supporting sequential user interactions and easy configuration of environments. Additionally, SOFA [22] is the first simulator that accounts for interaction biases for optimization and evaluation. In the latest work, RL4RS [51] provides a validated simulation environment, advanced evaluation methods, and a real dataset. KuaiSim [60] offers an environment with multi-behavior feedback, supporting three levels of recommendation tasks.

However, most of these studies merely provide an interactive environment, lacking integrated experimental procedures and other crucial components in RL-based RSs, such as diverse policies and state trackers. RL4RS is the most similar work to our library, with the following distinctions: 1) They focus on datasets and evaluation, whereas our goal is to offer an easy-to-use framework for developing new models and facilitating experiments. 2) They support only specific slate recommendation scenarios, whereas our library caters to broader and more commonly used scenarios.

2.2.2 Frameworks and Libraries. As far as we know, there are few frameworks or libraries that directly address RL-based RSs. However, some high-quality libraries exist for Multi-Armed Bandit (MAB) algorithms [1, 6, 30, 49] with interactive training environments³. BEARS [2] serves as an evaluation framework that facilitates easy testing of bandit-based RS solutions and supports reproducible offline assessments. MABWiser [47] is a parallelizable library that supports traditional MAB solutions and Contextual Bandits. Open Bandit Pipeline (OBP) [40] focuses on off-policy evaluation (OPE) and provides a streamlined and standardized library for implementing batch bandit algorithms and OPE. iRec [46] proposes an interactive recommender systems framework that also caters to multi-armed bandits models.

These libraries primarily serve bandit-based RSs and do not incorporate RL policies. Moreover, some well-established libraries designed for classic RL scenarios (e.g. rllib [31], tianshou [53]) cannot be directly applied to recommendations due to the lack of recommendation environment construction and state modeling.

³In Table 1, MAB algorithms is not classified as RL policies, within the scope of deep reinforcement learning.

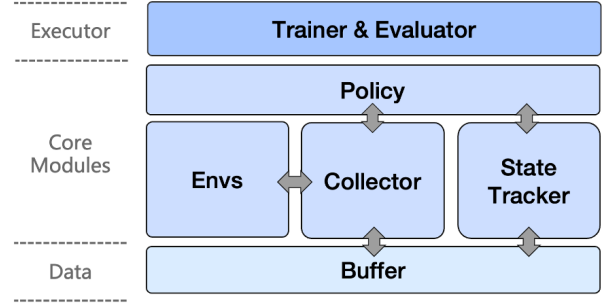


Figure 1: Architecture of EasyRL4Rec. The library is structured around four core modules: **Environment** (abbreviated as **Envs**), **Policy**, **StateTracker**, and **Collector**. **Buffer** serves as a fundamental data structure for organizing raw data trajectories, while the **Trainer** and **Evaluator** act as executors, managing the entire process.

3 PRELIMINARIES

In RL-based RSs, the sequential interactions are formulated as a Markov decision process (MDP) $M = (\mathcal{S}, \mathcal{A}, \mathcal{P}, R, \gamma)$ where

- \mathcal{S} , state space, $s_t \in \mathcal{S}$ represents the current state of user at timestamp t . In recommendation scenarios, user characteristics and user history are usually modeled as states, where user history refers to the actions and corresponding feedback of each step in the previous interaction process.
- \mathcal{A} , action space, $a_t \in \mathcal{A}$ represents the action that RL agent take at timestamp t . In recommendation scenarios, the recommended product is generally chosen as the action.
- \mathcal{P} : state transition probability function, $P(s, a, s') = P(s_{t+1} = s' | s_t = s, a_t = a)$ represents the transition probability from (s, a) to s' .
- r : reward function, $r(s, a)$ denotes the reward by taking action a at state s . Rewards in recommendation scenarios are usually set to feedback signals provided by users, such as click behavior, favorite behavior, or dwell time.
- γ : the discount factor for future rewards.

The main goal of RL is to learn an optimal decision-making policy $\pi_\theta(a|s)$ to maximize the cumulative reward G_T :

$$\max_{\pi} \mathbb{E}[G_T] = \max_{\pi} \mathbb{E} \left[\sum_{t=0}^T \gamma^t r(s_t, a_t) \right] \quad (1)$$

4 THE LIBRARY-EASYRL4REC

4.1 Library Overview

The overall architecture of EasyRL4Rec is illustrated in Figure 1. The library is composed of four core modules: **Environment**, **Policy**, **StateTracker**, and **Collector**, each addressing distinct stages of the reinforcement learning interaction process. The **Buffer** serves as a fundamental data structure for organizing raw data trajectories, while the **Trainer** and **Evaluator** act as executors, managing the entire process. In the following, we will delve into the designs of these core modules. The details of the training and evaluation pipeline can be found in Section 5.

4.2 Environment

The `Environment` module is responsible for constructing RL environments from static datasets and providing feedback on upcoming actions. Compared to simulation platforms, environments built from public datasets are much lighter and allow for faster training.

Previous work [16] has pointed out that some recommendation datasets are too sparse or lack necessary information (e.g., timestamps, explicit feedback, item categories) to build RL environments. In EasyRL4Rec, we choose five public datasets suitable for the RL task to construct environments, encompassing diverse recommendation scenarios, such as e-commerce, movies, and short-video recommendations. The statistics of datasets after preprocessing are summarized in Table 2.

Consistent with prior research [22, 51, 60], we implement RL environments using the APIs of OpenAI Gymnasium [50]. The central function of the environment is the `step()` method, which returns observed states and rewards for the current action. Rewards can be defined as clicks, ratings, etc., and can be sourced from static datasets. For offline evaluation, we employ an MF model trained on the test set to predict the rating/reward of vacant user-item pairs.

Table 2: Datasets currently involved in the EasyRL4Rec. These datasets vary in size and encompass diverse domains.

Dataset	Domain	Usage	#user	#item	#inter.
Coat [42]	Product	Train	290	300	7.0k
		Test	290	300	4.6k
YahooR3 [36]	Music	Train	15,400	1,000	311.7k
		Test	5,400	1,000	54.0k
MovieLens ⁴	Movie	Train	6,040	3,952	800.4k
		Test	6,040	3,952	200.5k
KuaiRec [17]	Video	Train	7,176	10,728	12530.8k
		Test	1,411	3,327	4676.6k
KuaiRand [18]	Video	Train	26,210	7,538	1141.6k
		Test	27,285	7,583	1186.1k

4.3 Policy

The `Policy` module applies a RL algorithm to select the optimal action based on the current state. We implement this module by extending RL policies in the Tianshou [53], incorporating the following tailored designs for recommendation scenarios.

Firstly, we support both discrete and continuous action-based policies. Given that items in RSs are discrete and better suited for discrete actions, we include a mechanism to convert continuous actions to discrete items, supporting continuous action-based policies. Secondly, we customize policies by encoding the state via `StateTracker` since states cannot be directly obtained from environments. These encoded state embeddings are optimized simultaneously with policies. Thirdly, we introduce a *Remove Recommended Items* option when interacting with environments, addressing the common need for multi-round recommendation. This feature is implemented by adding a mask for logits.

Policies supported by EasyRL4Rec can be categorized as follows:

- **Batch RL:** Learn policies from offline logs collected in advance, also known as OfflineRL. EasyRL4Rec supports classical batch RL algorithms, including BCQ [13], CQL [29], and CRR [52].
- **Model-free Off-policy RL:** Learn from trajectory data generated by a different policy. Classic algorithms such as DQN [37], C51 [3], DDPG [32], and TD3 [14] have been included in EasyRL4Rec.
- **Model-free On-policy RL:** Learn from trajectory data generated by the current policy being learned. EasyRL4Rec supports algorithms like PG [54], A2C [26], PPO [43], etc.

4.4 StateTracker

Unlike traditional application fields such as games, the state in recommended scenarios cannot be directly obtained from the environment, which requires artificial modeling of the state. The `StateTracker` module is responsible for modeling and encoding states.

In most research work [10, 19, 55, 59], users’ characteristics and interaction history are usually transformed into state representations to capture user preferences and action sequence values at the current moment. This setting will be used for state encoding in this study. We have implemented five different `StateTrackers` in EasyRL4Rec, which are all classical models for sequential recommendation:

- **Average** [33]: Average concatenates the user embedding and the average pooling result of historical actions as the state representation.
- **GRU** [21]: GRU is a seminal method using RNNs to model user action sequences for session-based recommendation.
- **Caser** [48]: Caser learns sequential patterns using Convolutional Neural Network (CNN) modeling historical actions as an “image” among time and latent dimensions.
- **SASRec** [25]: SASRec is a self-attention-based sequential model that can balance short-term intent and long-term preference.
- **NextItNet** [58]: NextItNet is an effective generative model that is capable of learning high-level representation from both short- and long-range item dependencies.

4.5 Collector

The `Collector` module serves as a crucial link facilitating interactions between `Environment` and `Policy`, responsible for collecting interaction trajectories into `Buffer`.

`Collector` plays a pivotal role in both the Training and Evaluation stages. To be specific, at time t , the `Collector` would call `Policy` to execute an action a_t according to observed information o_t . Subsequently, it conveys this action to `Environment` and gets corresponding rewards r_t . Considering a complete interaction from time 1 to time T , the observations, actions, and rewards at each timestamp, denoted as $\{(o_1, a_1, r_1), \dots, (o_T, a_T, r_T)\}$, would be considered as one single trajectory and stored in `Buffer`. These trajectories would be sampled for policy learning and subsequent updates.

⁴<https://grouplens.org/datasets/movielens/1m>

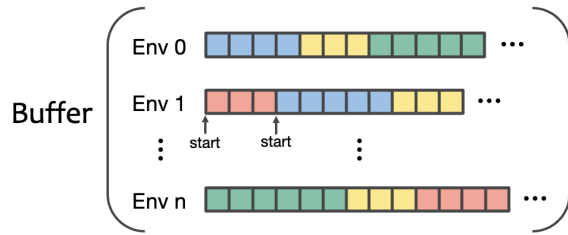


Figure 2: Visualization of data/trajectories stored in Buffer. To support simultaneous interactions in multiple environments, `Buffer` comprises interaction data from n environments, with different trajectories in each environment represented by distinct colors and the presence of the `start` symbol.

For effective construction and utilization, EasyRL4Rec supports simultaneous interaction in isolative multiple environments. As visualization in Figure 2, data in the `Buffer` are stored in a streaming manner. Data collected at timestamp t would be stored as a block containing all pertinent information (like (o_t, a_t, r_t)). These blocks are organized sequentially, and trajectories are differentiated by the presence of the `start` symbol.

5 TRAINING AND EVALUATION PIPELINE

In this section, we will introduce the whole pipeline of training and evaluation applied to RL-based RSs in our library. Following training and evaluation settings exhibit substantial distinctions from conventional recommender systems.

5.1 Training

Different from multi-armed bandit (MAB) algorithms [1, 6, 30, 49], which often have simpler problem structure and operational mechanisms, deep RL uses deep neural networks to approximate the optimal policy and/or value functions, requiring training before deployment. Typically, training involves an iterative process where the model interacts with an environment to update the network’s weights and learn optimal policies through trial and error.

EasyRL4Rec offers two training settings: (1) Learning from Offline Logs and (2) Learning with a User Model. In the former setting, the policy directly learns from offline logs, which have been collected in the `Buffer` in advance. As the blue lines shown in Figure 3, offline logs from the dataset would be split into trajectories and used to build `Buffer` for the training process. Then, `Policy` would iteratively get a batch of trajectories and learn the relationships between actions and outcomes involved. In EasyRL4Rec, we implement three buffer construction methods: (1) Sequential: logs would be split in chronological order. (2) Convolution: logs would be augmented through convolution. (3) Counterfactual: logs would be randomly shuffled over time. This setting is suitable for classic batch RL methods such as BCQ [15], CQL [29], and CRR [52].

The Learning with a User Model setting follows a paradigm similar to ChatGPT’s RLHF learning [11]. As the red lines shown in Figure 3, a user model (or reward model) is pre-trained using training data to capture users’ preferences. Then, a behavior policy would

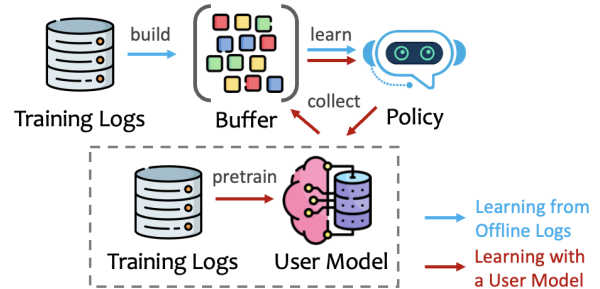


Figure 3: Two Training Settings. Blue lines represent the process of learning from offline logs, while red lines represent the process of learning with a user model.

interact with this user model and `Collector` collects feedback on a series of actions into `Buffer`. Subsequently, the target policy would learn from trajectories stored in `Buffer`. The distinction between on-policy and off-policy methods hinges on whether the behavior policy is the same as the target policy. One epoch in the training process can have multiple above loops.

5.2 Evaluation

The evaluation process and metrics vary across current studies, making it challenging to compare model performance from different research teams fairly. In EasyRL4Rec, we execute evaluation in an offline manner, due to less time- and money-consuming than online tests. More importantly, a policy requires thorough evaluation in an offline environment before deployment online. Due to the sparsity of the dataset and missing interaction data in the test set, we follow the simulation methodology proposed by previous research [22, 51]. To be specific, a simulated environment is established to provide missing feedback from users on specific items recommended by the policy. In our library, we adopt a similar approach to [22], leveraging a Matrix Factorization (MF) [27, 28] model to predict missing values in the user-item matrix.

To better simulate real online user behavior for evaluation, we introduce a quit mechanism following work [16, 19, 56]. In this setting, users will interrupt the process of interaction and quit when the termination condition is triggered. The termination condition can be customized according to datasets and requirements of researchers, like considering the mentality of boredom. Moreover, we offer the option of allowing repeated recommendations, catering to the needs of online applications.

Combining these two mechanisms, EasyRL4Rec offer three modes for evaluation: `FreeB`, `NX_0_`, `NX_10_`, which are described in detail as follows:

- **FreeB**: allow repeated recommendations, interactions are terminated by quit mechanism.
- **NX_0_**: prohibit repeated recommendations, interactions are terminated by quit mechanism.
- **NX_X_**: prohibit repeated recommendations, interactions are fixed as X rounds without quit mechanism.

Table 3: Metrics currently involved in the EasyRL4Rec. Metrics measuring long-term effects are used to evaluate RL policies, while others can be used to evaluate user models.

Scenarios		Metrics
Reinforcement Learning	Long-term effects	Cumulative Reward (R_{cumu}), Average Reward (R_{avg}), Interaction Length (<i>Length</i>)
Recommender Systems	Prediction	MAE, MSE, RMSE
	Top-K	Recall, Precision, NDCG, HitRate, MAP, MRR
	Others	Coverage, Diversity, Novelty

Furthermore, EasyRL4Rec provides abundant evaluation metrics that are commonly used in the field of Reinforcement Learning and Recommender Systems, which are summarised in Table 3. To evaluate the long-term effects of RL policies, we introduce Cumulative Reward (R_{cumu}) $\sum_t r_t$ to measure the cumulative gain of one interaction trajectory, which is usually applied in the RL scenario. In addition, Interaction Length (*Length*) and Average Reward (R_{avg}) measure the length of the interaction trajectory and the single-round reward, respectively. We also provide commonly used metrics in traditional RSs for evaluating user models or other recommendation models, such as Normalized Discounted Cumulative Gain (NDCG [24]), HitRate, etc.

6 APPLICATION EXAMPLES OF EASYRL4REC

In this section, we present the typical usage example of our library, which includes three stages: Preparation, Training, and Evaluation. To implement a new algorithm using EasyRL4Rec, researchers can modify our core modules easily.

6.1 Initialization & Preparation

In this, we must prepare the chosen dataset and train the user model, which will be used to construct environments. The following code snippet demonstrates the usage of our library to pre-train a user model. Firstly, one must specify the save path and the dataset. After configuring the learning task and initializing the user model, the model can be fitted to the training data. All intermediate results and model parameters will be saved.

```

1 # 1. Prepare the saved path.
2 MODEL_SAVE_PATH, logger_path = prepare_dir_log(args)
3
4 # 2. Prepare dataset
5 env, dataset, kwargs_um = get_true_env(args)
6 dataset_train, dataset_val = prepare_dataset(args, dataset,...)
7
8 # 3. Setup user model
9 task, task_logit_dim, is_ranking = get_task(args.env, args.yfeat)
10 ensemble_models = setup_user_model(args,...)
11
12 # 4. Learn and evaluate model
13 ensemble_models.fit_data(dataset_train, dataset_val,...)

```

6.2 Policy Training

As mentioned in section 5.1, EasyRL4Rec supports two types of training settings. Here, we take the Learning with a User Model

setting as an example, with the main code outlined below. We call the `Policy` module to give a batch of actions according to current states, then obtain feedback from `Environment`. With trajectories collected in `Buffer`, we can update the parameters in `Policy`.

```

1 # Collect training data in Buffer
2 result = self.policy(self.data, self.buffer, ...) # inference
3 act = to_numpy(result.act)
4 if self.exploration_noise: # exploration
5     act = self.policy.exploration_noise(act, self.data)
6 # Obtain feedback from Environment
7 obs_next, rew, terminated, truncated, info = self.env.step(...)
8 ...
9 # Update Policy
10 losses = self.policy.update(self.batch_size, ...)

```

6.3 Policy Evaluation

During the evaluation process, we will evaluate the performance of the trained policy, measuring the long-term effects. As the following code snippet shows, we first reset all parameters in `Environment` and `Buffer`. Then, the `Collector` will call the `Policy` and `Environment` module to collect test trajectories, similar to the training process. For collected data, we calculate metrics through callback functions⁵.

```

1 # Reset the Environment and Buffer
2 collector.reset_env()
3 collector.reset_buffer()
4 policy.eval()
5 # Collect test trajectories (call Policy and obtain feedback)
6 test_result = collector.collect(n_episode) # similar as training
7 ...
8 # Callback functions to calculate metrics
9 for callback in self.policy.callbacks:
10     callback.on_epoch_end(self.epoch, test_result)

```

7 EXPERIMENTS

In this section, we conduct comprehensive experiments on models based on classic RL policies and some recent work. To ensure a balanced comparison, we separately evaluate the overall performance of model-free RL policies (see Section 7.2) and batch RL policies (see Section 7.3) under different training conditions. We then detail our insights regarding the effectiveness of RL policies in terms of coverage, diversity, and novelty - factors often overlooked in prior research. Importantly, we identify the *Preference Overestimation* issue in RL-based RSs, exploring possible reasons. Further experiments on the influence of each component are available in Section 7.6 and Section 7.7. All tables and figures can be reproduced by the code available at https://github.com/chongminggao/EasyRL4Rec/tree/main/visual_results.

7.1 Experimental Settings

7.1.1 Datasets. We conduct experiments on Coat⁶, MovieLens⁷, and KuaiRec⁸, three representative datasets with various scales

⁵A callback is a function provided as an argument to another function, executed after the latter completes its task.

⁶<https://www.cs.cornell.edu/~schnabts/mnar/>

⁷<https://grouplens.org/datasets/movielens/1m/>

⁸<https://kuaiREC.com/>

Table 4: Performance comparison between model-free RL methods trained with a user model on three datasets. Policies using continuous action are indicated by the symbol (C). The meaning of underlining and bold should be included in the caption. The best results are highlighted in bold, and the second-best results are underlined.

Method	Coat			MovieLens			KuaiRec			
	R _{cumu}	R _{avg}	Length	R _{cumu}	R _{avg}	Length	R _{cumu}	R _{avg}	Length	
Offpolicy	DQN	54.3476	2.4687	22.0196	21.9550	2.9400	7.4624	12.6543	0.7935	15.9480
	C51	41.0788	2.5941	15.8280	18.0006	2.8290	6.3440	11.5855	0.8151	14.2304
	DDPG(C)	16.3348	2.3277	7.0200	9.3706	3.0329	3.1152	9.2155	1.0192	9.0440
	TD3(C)	16.3232	2.3542	6.9324	10.1620	2.9410	3.4568	7.8179	<u>0.8610</u>	9.0980
Onpolicy	PG	<u>79.3392</u>	<u>2.6586</u>	29.8424	27.9514	3.2614	8.5708	18.8922	0.6326	29.8628
	A2C	81.7952	2.7341	29.9164	<u>32.4296</u>	3.2526	9.9704	25.2442	0.8437	<u>29.9196</u>
	PPO	73.0300	2.5306	28.8552	29.2253	<u>3.6532</u>	8.0000	19.0767	0.6359	30.0000
	PG(C)	21.0912	2.5914	8.1424	17.8453	2.5247	7.0824	15.8942	0.6637	23.9260
	A2C(C)	24.5980	2.5137	9.7932	26.5039	3.3884	7.8172	18.2968	0.6732	27.2416
	PPO(C)	53.2212	2.5962	20.5100	29.4684	3.8737	7.6016	18.6928	0.6730	27.6780
	DORL	76.9936	2.6025	29.5816	45.7708	2.6401	17.3440	<u>22.5246</u>	0.7533	29.9016
	IntRD	77.4292	2.5926	<u>29.8660</u>	25.9168	2.2783	<u>11.3676</u>	20.9392	0.7748	27.0216

and domains. Statistics of three datasets have been shown in Table 2. Details of data Preprocessing and environment building are presented in Section 4.2.

7.1.2 Models implementation. Currently, EasyRL4Rec supports more than fifteen classic RL policies as base models and implements several recent work [16, 55] in RL-based RSs. Experiments are conducted on some representative algorithms, covering batch RL policies and model-free RL policies. Reproducing more models in previous work is considered future work.

7.1.3 Experimental Details. In the training stage, all policies are trained with 100 epochs, with the default learning rate $1e^{-3}$. We apply the first training paradigm, i.e. learning from offline logs, to train batch RL algorithms. When training model-free RL algorithms, we pre-train a user model (DeepFM [20]) to guide the on-line learning of RL policies. For the evaluation process, after each epoch, the policy undergoes evaluation using 100 episodes (i.e., interaction trajectories), and the maximum recommended sequence length is limited to 30. We set the random seed to 2023 for consistency and reproducibility. The code for replicating all experimental results is available in our library.

7.2 Performance of Model-free RL

We evaluate the performance of representative model-free RL algorithms, which can be divided into two groups:

- **Off-policy:** Off-policy methods learn from data produced by a policy different from the one currently being optimized. For our experiments, we choose Q-learning based **DQN** [37], **C51** [3], and continuous control based methods like **DDPG** [32] and **TD3** [14].
- **On-policy:** Contrarily, on-policy methods utilize data generated by their current policy. This category includes policy gradient-based **PG** [54], and actor-critic-based **A2C** [26] and **PPO** [43].
- **Others:** **DORL** [16] is a debiased model based on A2C policy to alleviate the Matthew effect. **Intrinsic** modifies the reward

model by incorporating an intrinsic reward, which fosters exploration to enhance item coverage and diversity.

While items in Recommender Systems (RSs) are inherently discrete and thus more compatible with discrete action-based policies, EasyRL4Rec incorporates a feature that enables the transformation of continuous actions into discrete items, supporting continuous action-based policies. The overall performance of model-free RL algorithms is presented in Table 4, which reports the mean values of all metrics during the last 25% of the training epochs. From the experimental results, we mainly have the following observations.

Firstly, discrete action-based methods perform much better than continuous action-based methods (marked by (C)). Discrete methods such as DQN and C51 in the off-policy category, and PG and PPO in the on-policy category, achieve higher R_{cumu} and longer Length across all three datasets. Yet continuous methods like DDPG(C), TD3(C), PG(C), and A2C(C) show fewer Lengths, which might be due to less efficient exploration strategies or poor fit between the continuous action representation and the discrete item space in RSs. This trend suggests that discrete action spaces, which are more aligned with the discrete items in recommender systems, are more effective for model-free RL algorithms.

Secondly, on-policy methods achieve better results than off-policy methods within the same action type. For example, focusing on discrete action strategies on the KuaiRec dataset, the on-policy method PG demonstrates a better performance with an R_{cumu} of compared to the off-policy method DQN. This trend is further supported by Figure 4, which shows the variation curves of 1) cumulative reward, 2) interaction length, and 3) single-round reward during training on the Coat and KuaiRec datasets. This could indicate that on-policy methods, which keeps target-policy align with behavior-policy, are more adept at handling the exploration-exploitation tradeoff in these contexts.

Thirdly, methods designed for RSs (DORL, Intrinsic) achieve competing results to the best method. On the Coat and KuaiRec datasets, DORL and Intrinsic achieve slightly worse results than

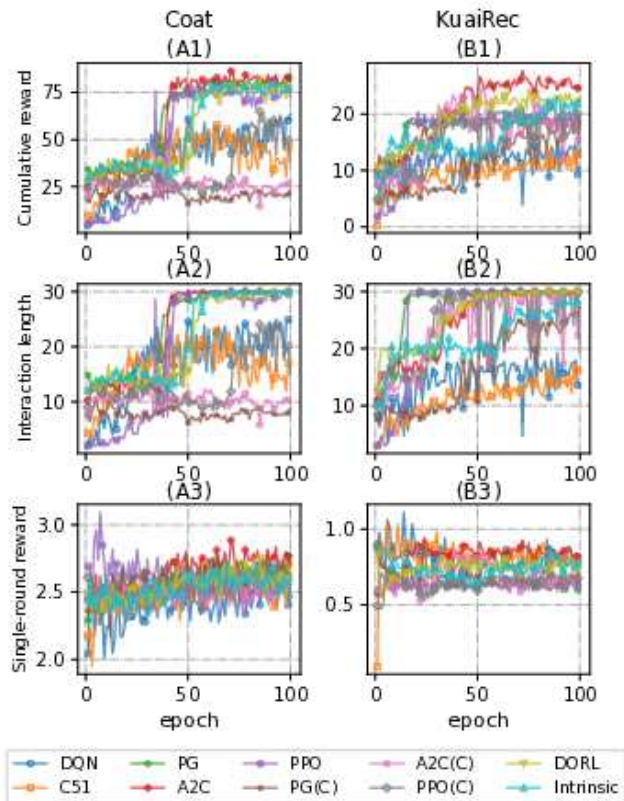


Figure 4: Variation curves of 1) cumulative reward, 2) interaction length, and 3) single-round reward during training on the Coat and KuaiRec datasets.

A2C, while on MovieLens, DORL achieves superior performance compared to other models.

7.3 Performance of Batch RL

We conducted experiments on models based on Batch Reinforcement Learning (Batch RL) using the following representative algorithms:

- **BCQ** [13], short for Batch-Constrained deep Q-learning, utilizes high-confidence data to update the policy.
- **CQL** [29], or Conservative Q-Learning, incorporates a Q-value regularizer over an actor-critic policy.
- **CRR** [52], or Critic Regularized Regression, trains the policy to avoid out-of-distribution (OOD) actions.
- **SQN** [55], or Self-Supervised Q-learning, employs self-supervised learning (SSL) to enhance Reinforcement Learning-based Recommender Systems (RL RSs). It comprises two output layers (heads): one for the cross-entropy loss and the other for RL.

Table 5 shows the performance of different batch RL algorithms trained from offline logs. As shown, CRR outperforms all models across all three datasets, while BCQ yields the lowest performance. Regarding the issue of Preference Overestimation (detailed

Table 5: Performance comparison between batch RL methods trained from offline logs. The best results are highlighted in bold, and the second-best results are underlined.

Method	Coat			MovieLens			KuaiRec		
	R _{cumu}	R _{avg}	Len	R _{cumu}	R _{avg}	Len	R _{cumu}	R _{avg}	Len
BCQ	9.56	2.36	4.06	9.54	<u>3.81</u>	2.51	4.34	0.83	5.24
CQL	23.35	2.27	10.28	<u>9.89</u>	3.85	2.57	5.28	1.03	5.12
CRR	28.96	2.23	13.00	10.13	2.95	3.44	8.57	<u>0.87</u>	9.83
SQN	<u>26.60</u>	<u>2.31</u>	<u>11.51</u>	9.45	2.78	<u>3.39</u>	<u>6.82</u>	0.77	<u>8.92</u>

Table 6: Performance of Coverage, Diversity & Novelty on the KuaiRec Dataset. The best results are highlighted in bold, and the second-best results are underlined.

Method		Coverage	Diversity	Novelty
Offpolicy	DQN	<u>0.0505</u>	0.8981	2.6370
	C51	0.1027	0.8797	2.5135
	DDPG(C)	0.0477	0.8209	2.3907
	TD3(C)	0.0438	0.8286	2.2612
Onpolicy	PG	0.0015	0.8273	2.9794
	A2C	0.0020	0.8291	2.3907
	PPO	0.0015	0.8276	2.5408
	PG(C)	0.0071	0.8386	3.0606
	A2C(C)	0.0098	0.8419	<u>3.4543</u>
	PPO(C)	0.0141	0.8677	3.5830
	DORL	0.0021	0.8307	3.1160
Intrinsic	0.0274	<u>0.8950</u>	2.7575	

in Section 7.5), both CQL and CRR outperform BCQ due to their more conservative strategies. Furthermore, it is worth noting that due to the limited availability of offline logs, batch RL methods achieve lower rewards compared to model-free RL baselines that are trained online with a user model.

7.4 Coverage, Diversity & Novelty

We evaluate the effectiveness of these models in terms of coverage, diversity, and novelty—factors often overlooked in prior research. From Table 6 we can observe the performance of on-policy and off-policy methods with respect to coverage, diversity, and novelty.

For coverage, which measures the proportion of the state-action space that the policy explores, off-policy methods exhibit higher coverage than the on-policy methods. This observation indicates that on-policy methods are generally more conservative in exploration. In terms of diversity, which quantifies the variety of the actions taken by the policy, all methods perform similarly. Among all methods, DQN stands out with a diversity score of 0.8981, suggesting it is capable of producing a wide range of actions. It’s worth noting that Intrinsic promotes better coverage and diversity than its on-policy counterparts due to its reward structure. Novelty measures the tendency of the policy to recommend less popular or less known items. As we can see, on-policy methods perform better than off-policy methods, which indicates that on-policy methods pay more attention to the user’s niche interests.

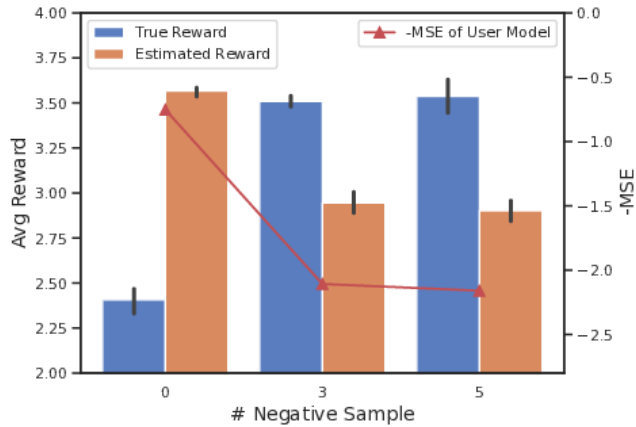


Figure 5: Demonstration of preference overestimation issue on MovieLens-1M, with red lines representing -MSE of User Model, while orange bars and blue bars representing estimated reward and true reward respectively.

7.5 Preference Overestimation Issue

In this section, we discuss our observations on the *Preference Overestimation* issue that occurs in RL-based RSs. Much like the challenge of value overestimation in offline RL, this particular issue can result in an exaggerated estimation of user preferences for items that rarely appear in the training logs. To explore this problem, we evaluated the performance of the A2C algorithm using various user models, each trained with a different number of negative samples.

From Figure 5 we can observe that user models trained with **fewer** negative samples tend to predict more accurately, as indicated by the higher negative mean squared error (MSE). However, choosing a user model with seemingly superior predictive performance (for instance, one trained with 0 negative samples) leads to a paradox. Despite the model predicting higher rewards, as shown by the orange bars, the actual average rewards received, represented by the blue bars, are disappointingly low. This stark contrast brings to light the issue of preference overestimation.

Though this issue could be alleviated by some conservative algorithms, our findings suggest that increasing the number of negative samples could be a viable strategy. This approach remains further explored in future research.

7.6 Impact of StateTrackers

StateTracker is used to generate representations of the current state as input to `Policy` module. The details of different StateTrackers can be found in Section 4.4. We conduct experiments to investigate the impact of the choice of StateTrackers, encompassing today’s popular methods in sequential modeling.

We keep the same experimental setting as Section 7 and choose A2C [26] as the algorithm. From Table 7 we can observe that, there is no significant difference between all StateTrackers, with GRU achieving the best R_{cumu} . It indicates that the choice of StateTracker has a minimal impact on the model performance.

Table 7: Performance comparison between StateTrackers on KuaiRec. The best results are highlighted in bold, and the second-best results are underlined.

StateTrackers	R_{cumu}	R_{avg}	Length
GRU [21]	19.1353	0.6385	29.9688
Caser [48]	18.6679	0.6226	29.9824
SASRec [25]	18.5527	0.6184	<u>30.0000</u>
Average [33]	<u>18.8922</u>	<u>0.6326</u>	29.8628
NextItNet [58]	18.7167	0.6239	30.0000

7.7 Impact of Construction Methods

As mentioned in section 5.1, EasyRL4Rec offers three different buffer construction methods: (1) Sequential: logs are split in chronological order. (2) Convolution: logs are augmented through convolution. (3) Counterfactual: logs are randomly shuffled over time.

We conduct experiments with CRR [52] policy on the KuaiRec dataset, with results present in Table 8. We can observe no significant difference across the Sequential, Convolution, and Counterfactual constructions. The slight variations in performance metrics suggest that all three constructions provide comparable effectiveness in their contributions to the model’s ability to predict or recommend.

Table 8: Performance comparison between different construction methods on KuaiRec. The best results are highlighted in bold, and the second-best results are underlined.

Construction	R_{cumu}	R_{avg}	Length
Sequential	<u>8.5656</u>	0.8713	9.8332
Convolution	8.5639	<u>0.8704</u>	<u>9.8420</u>
Counterfactual	8.5740	0.8701	9.8516

8 CONCLUSION & FUTURE WORK

In this work, we introduce EasyRL4Rec, an easy-to-use code library specifically crafted for RL-based RSs, simplifying the development and evaluation of RL models. EasyRL4Rec constructs lightweight RL environments based on five public datasets. It offers a unified training and evaluation pipeline, evaluating models from the perspective of long-term benefits. Moreover, EasyRL4Rec facilitates customizable state modeling and action representation, addressing challenges in applying RL to recommender systems. Through comprehensive experiments, we compare the performance of existing models and share our findings from various perspectives.

Currently, EasyRL4Rec supports lots of classic RL algorithms, but few recent studies in RL-base RSs. In the future, we plan to extend EasyRL4Rec to include more existing models, more datasets, and more utils like parameters-tuning for easy usage. EasyRL4Rec is expected to facilitate future research in the field of RL-based RSs.

REFERENCES

- [1] Peter Auer, Nicolo Cesa-Bianchi, and Paul Fischer. 2002. Finite-time analysis of the multiarmed bandit problem. *Machine learning* 47 (2002), 235–256.
- [2] Andrea Barraza-Urbina, Georgia Koutrika, Mathieu d'Aquin, and Conor Hayes. 2018. BEARS: Towards an evaluation framework for bandit-based interactive recommender systems. *REVEAL 18, October 6–7, 2018, Vancouver, Canada* (2018).
- [3] Marc G Bellemare, Will Dabney, and Rémi Munos. 2017. A distributional perspective on reinforcement learning. In *International conference on machine learning*. PMLR, 449–458.
- [4] Qingpeng Cai, Shuchang Liu, Xueliang Wang, Tianyou Zuo, Wentao Xie, Bin Yang, Dong Zheng, Peng Jiang, and Kun Gai. 2023. Reinforcing User Retention in a Billion Scale Short Video Recommender System. In *Companion Proceedings of the ACM Web Conference 2023 (WWW '23 Companion)*. Association for Computing Machinery, 421–426. <https://doi.org/10.1145/3543873.3584640>
- [5] Qingpeng Cai, Zhenghai Xue, Chi Zhang, Wanqi Xue, Shuchang Liu, Ruohan Zhan, Xueliang Wang, Tianyou Zuo, Wentao Xie, Dong Zheng, et al. 2023. Two-Stage Constrained Actor-Critic for Short Video Recommendation. In *Proceedings of the ACM Web Conference 2023*. 865–875.
- [6] Olivier Chapelle and Lihong Li. 2011. An empirical evaluation of thompson sampling. *Advances in neural information processing systems* 24 (2011).
- [7] Jiawei Chen, Hande Dong, Yang Qiu, Xiangnan He, Xin Xin, Liang Chen, Guli Lin, and Keping Yang. 2021. AutoDebias: Learning to debias for recommendation. In *Proceedings of the 44th International ACM SIGIR Conference on Research and Development in Information Retrieval*. 21–30.
- [8] Jiawei Chen, Hande Dong, Xiang Wang, Fuli Feng, Meng Wang, and Xiangnan He. 2023. Bias and debias in recommender system: A survey and future directions. *ACM Transactions on Information Systems* 41, 3 (2023), 1–39.
- [9] Minmin Chen, Alex Beutel, Paul Covington, Sagar Jain, Francois Belletti, and Ed H Chi. 2019. Top-k off-policy correction for a REINFORCE recommender system. In *Proceedings of the Twelfth ACM International Conference on Web Search and Data Mining*. 456–464.
- [10] Minmin Chen, Can Xu, Vince Gatto, Devanshu Jain, Aviral Kumar, and Ed Chi. 2022. Off-policy actor-critic for recommender systems. In *Proceedings of the 16th ACM Conference on Recommender Systems*. 338–349.
- [11] Paul F Christiano, Jan Leike, Tom Brown, Miljan Martic, Shane Legg, and Dario Amodei. 2017. Deep reinforcement learning from human preferences. *Advances in neural information processing systems* 30 (2017).
- [12] Seth Flaxman, Sharad Goel, and Justin M Rao. 2016. Filter bubbles, echo chambers, and online news consumption. *Public opinion quarterly* 80, S1 (2016), 298–320.
- [13] Scott Fujimoto, Edoardo Conti, Mohammad Ghavamzadeh, and Joelle Pineau. 2019. Benchmarking batch deep reinforcement learning algorithms. *arXiv preprint arXiv:1910.01708* (2019).
- [14] Scott Fujimoto, Herke Hoof, and David Meger. 2018. Addressing function approximation error in actor-critic methods. In *International conference on machine learning*. PMLR, 1587–1596.
- [15] Scott Fujimoto, David Meger, and Doina Precup. 2019. Off-policy deep reinforcement learning without exploration. In *International conference on machine learning*. PMLR, 2052–2062.
- [16] Chongming Gao, Kexin Huang, Jiawei Chen, Yuan Zhang, Biao Li, Peng Jiang, Shiqi Wang, Zhong Zhang, and Xiangnan He. 2023. Alleviating Matthew Effect of Offline Reinforcement Learning in Interactive Recommendation. In *Proceedings of the 46th International ACM SIGIR Conference on Research and Development in Information Retrieval (Taipei, Taiwan) (SIGIR '23)*. 11 pages. <https://doi.org/10.1145/3539618.3591636>
- [17] Chongming Gao, Shijun Li, Wenqiang Lei, Jiawei Chen, Biao Li, Peng Jiang, Xiangnan He, Jiaxin Mao, and Tat-Seng Chua. 2022. KuaiRec: A Fully-Observed Dataset and Insights for Evaluating Recommender Systems. In *Proceedings of the 31st ACM International Conference on Information & Knowledge Management (Atlanta, GA, USA) (CIKM '22)*. 540–550. <https://doi.org/10.1145/3511808.3557220>
- [18] Chongming Gao, Shijun Li, Yuan Zhang, Jiawei Chen, Biao Li, Wenqiang Lei, Peng Jiang, and Xiangnan He. 2022. KuaiRand: An Unbiased Sequential Recommendation Dataset with Randomly Exposed Videos. In *Proceedings of the 31st ACM International Conference on Information and Knowledge Management (Atlanta, GA, USA) (CIKM '22)*. 3953–3957. <https://doi.org/10.1145/3511808.3557624>
- [19] Chongming Gao, Shiqi Wang, Shijun Li, Jiawei Chen, Xiangnan He, Wenqiang Lei, Biao Li, Yuan Zhang, and Peng Jiang. 2022. CRS: Bursting filter bubbles by counterfactual interactive recommender system. *ACM Transactions on Information Systems* (2022).
- [20] Hui Feng Guo, Ruiming Tang, Yunming Ye, Zhenguo Li, and Xiuqiang He. 2017. DeepFM: A Factorization-Machine Based Neural Network for CTR Prediction. In *Proceedings of the 26th International Joint Conference on Artificial Intelligence (Melbourne, Australia) (IJCAI'17)*. AAAI Press, 1725–1731.
- [21] Balázs Hidasi, Alexandros Karatzoglou, Linas Baltrunas, and Domonkos Tikk. 2015. Session-based recommendations with recurrent neural networks. *arXiv preprint arXiv:1511.06939* (2015).
- [22] Jin Huang, Harrie Oosterhuis, Maarten De Rijke, and Herke Van Hoof. 2020. Keeping dataset biases out of the simulation: A debiased simulator for reinforcement learning based recommender systems. In *Proceedings of the 14th ACM Conference on Recommender Systems*. 190–199.
- [23] Eugene Ie, Chih-wei Hsu, Martin Mladenov, Vihan Jain, Sanmit Narvekar, Jing Wang, Rui Wu, and Craig Boutilier. 2019. Recsim: A configurable simulation platform for recommender systems. *arXiv preprint arXiv:1909.04847* (2019).
- [24] Kalervo Järvelin and Jaana Kekäläinen. 2002. Cumulated gain-based evaluation of IR techniques. *ACM Transactions on Information Systems (TOIS)* 20, 4 (2002), 422–446.
- [25] Wang-Cheng Kang and Julian McAuley. 2018. Self-attentive sequential recommendation. In *2018 IEEE International Conference on Data Mining (ICDM)*. IEEE, 197–206.
- [26] Vijay Konda and John Tsitsiklis. 1999. Actor-Critic Algorithms. In *Advances in Neural Information Processing Systems*, S.olla, T. Leen, and K. Müller (Eds.), Vol. 12. MIT Press. https://proceedings.neurips.cc/paper_files/paper/1999/file/6449f44a102fde848669bdd9eb6b76fa-Pa
- [27] Yehuda Koren. 2008. Factorization meets the neighborhood: a multifaceted collaborative filtering model. In *Proceedings of the 14th ACM SIGKDD international conference on Knowledge discovery and data mining*. 426–434.
- [28] Yehuda Koren, Robert Bell, and Chris Volinsky. 2009. Matrix factorization techniques for recommender systems. *Computer* 42, 8 (2009), 30–37.
- [29] Aviral Kumar, Aurick Zhou, George Tucker, and Sergey Levine. 2020. Conservative q-learning for offline reinforcement learning. *Advances in Neural Information Processing Systems* 33 (2020), 1179–1191.
- [30] Lihong Li, Wei Chu, John Langford, and Robert E Schapire. 2010. A contextual-bandit approach to personalized news article recommendation. In *Proceedings of the 19th international conference on World wide web*. 661–670.
- [31] Eric Liang, Richard Liaw, Robert Nishihara, Philipp Moritz, Roy Fox, Ken Goldberg, Joseph E. Gonzalez, Michael I. Jordan, and Ion Stoica. 2018. RLlib: Abstractions for Distributed Reinforcement Learning. In *International Conference on Machine Learning (ICML)*.
- [32] Timothy P Lillicrap, Jonathan J Hunt, Alexander Pritzel, Nicolas Heess, Tom Erez, Yuval Tassa, David Silver, and Daan Wierstra. 2015. Continuous control with deep reinforcement learning. *arXiv preprint arXiv:1509.02971* (2015).
- [33] Feng Liu, Ruiming Tang, Xutao Li, Weinan Zhang, Yunming Ye, Haokun Chen, Hui Feng Guo, Yuzhou Zhang, and Xiuqiang He. 2020. State representation modeling for deep reinforcement learning based recommendation. *Knowledge-Based Systems* 205 (2020), 106170.
- [34] Shuchang Liu, Qingpeng Cai, Bowen Sun, Yuhao Wang, Ji Jiang, Dong Zheng, Peng Jiang, Kun Gai, Xiangyu Zhao, and Yongfeng Zhang. 2023. Exploration and Regularization of the Latent Action Space in Recommendation. In *Proceedings of the ACM Web Conference 2023*. 833–844.
- [35] Masoud Mansoury, Himan Abdollahpour, Mykola Pechenizkiy, Bamshad Mobasher, and Robin Burke. 2020. Feedback loop and bias amplification in recommender systems. In *Proceedings of the 29th ACM international conference on information & knowledge management*. 2145–2148.
- [36] Benjamin M. Marlin and Richard S. Zemel. 2009. Collaborative Prediction and Ranking with Non-Random Missing Data. In *Proceedings of the Third ACM Conference on Recommender Systems (New York, New York, USA)*. Association for Computing Machinery, New York, NY, USA, 5–12. <https://doi.org/10.1145/1639714.1639717>
- [37] Volodymyr Mnih, Koray Kavukcuoglu, David Silver, Alex Graves, Ioannis Antonoglou, Daan Wierstra, and Martin Riedmiller. 2013. Playing atari with deep reinforcement learning. *arXiv preprint arXiv:1312.5602* (2013).
- [38] Zhaochun Ren, Na Huang, Yidan Wang, Pengjie Ren, Jun Ma, Jiahuan Lei, Xinlei Shi, Hengliang Luo, Joemon Jose, and Xin Xin. 2023. Contrastive State Augmentations for Reinforcement Learning-Based Recommender Systems. In *Proceedings of the 46th International ACM SIGIR Conference on Research and Development in Information Retrieval*. 922–931.
- [39] David Rohde, Stephen Bonner, Travis Dunlop, Flavian Vasile, and Alexandros Karatzoglou. 2018. Recogym: A reinforcement learning environment for the problem of product recommendation in online advertising. *arXiv preprint arXiv:1808.00720* (2018).
- [40] Yuta Saito, Shunsuke Aihara, Megumi Matsutani, and Yusuke Narita. 2020. Open bandit dataset and pipeline: Towards realistic and reproducible off-policy evaluation. *arXiv preprint arXiv:2008.07146* (2020).
- [41] J Ben Schaffer, Dan Frankowski, Jon Herlocker, and Shilad Sen. 2007. Collaborative filtering recommender systems. In *The adaptive web*. Springer, 291–324.
- [42] Tobias Schnabel, Adith Swaminathan, Ashudeep Singh, Navin Chandak, and Thorsten Joachims. 2016. Recommendations as Treatments: Debiasing Learning and Evaluation. In *Proceedings of the 33rd International Conference on International Conference on Machine Learning (New York, NY, USA)*. JMLR.org, 1670–1679.
- [43] John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. 2017. Proximal policy optimization algorithms. *arXiv preprint arXiv:1707.06347* (2017).

- [44] Guy Shani, David Heckerman, Ronen I Brafman, and Craig Boutilier. 2005. An MDP-based recommender system. *Journal of Machine Learning Research* 6, 9 (2005).
- [45] Jing-Cheng Shi, Yang Yu, Qing Da, Shi-Yong Chen, and An-Xiang Zeng. 2019. Virtual-taobao: Virtualizing real-world online retail environment for reinforcement learning. In *Proceedings of the AAAI Conference on Artificial Intelligence*, Vol. 33. 4902–4909.
- [46] Thiago Silva, Nicollas Silva, Heitor Werneck, Carlos Mito, Adriano CM Pereira, and Leonardo Rocha. 2022. Irec: An interactive recommendation framework. In *Proceedings of the 45th International ACM SIGIR Conference on Research and Development in Information Retrieval*. 3165–3175.
- [47] Emily Strong, Bernard Kleynhans, and Serdar Kadioğlu. 2019. Mabwiser: A parallelizable contextual multi-armed bandit library for python. In *2019 IEEE 31st International Conference on Tools with Artificial Intelligence (ICTAI)*. IEEE, 909–914.
- [48] Jiayi Tang and Ke Wang. 2018. Personalized top-n sequential recommendation via convolutional sequence embedding. In *Proceedings of the eleventh ACM international conference on web search and data mining*. 565–573.
- [49] Michel Tokic. 2010. Adaptive ϵ -greedy exploration in reinforcement learning based on value differences. In *KI 2010: Advances in Artificial Intelligence: 33rd Annual German Conference on AI, Karlsruhe, Germany, September 21-24, 2010. Proceedings* 33. Springer, 203–210.
- [50] Mark Towers, Jordan K. Terry, Ariel Kwiatkowski, John U. Balis, Gianluca de Cola, Tristan Deleu, Manuel Goulão, Andreas Kallinteris, Arjun KG, Markus Krimmel, Rodrigo Perez-Vicente, Andrea Pierré, Sander Schulhoff, Jun Jet Tai, Andrew Tan Jin Shen, and Omar G. Younis. 2023. Gymnasium. <https://doi.org/10.5281/zenodo.8127026>
- [51] Kai Wang, Zhene Zou, Minghao Zhao, Qilin Deng, Yue Shang, Yile Liang, Runze Wu, Xudong Shen, Tangjie Lyu, and Changjie Fan. 2023. RL4RS: A Real-World Dataset for Reinforcement Learning based Recommender System. In *Proceedings of the 46th International ACM SIGIR Conference on Research and Development in Information Retrieval*. 2935–2944.
- [52] Ziyu Wang, Alexander Novikov, Konrad Zolna, Josh S Merel, Jost Tobias Springenberg, Scott E Reed, Bobak Shahriari, Noah Siegel, Caglar Gulcehre, Nicolas Heess, et al. 2020. Critic regularized regression. *Advances in Neural Information Processing Systems* 33 (2020), 7768–7778.
- [53] Jiayi Weng, Huayu Chen, Dong Yan, Kaichao You, Alexis Duburcq, Minghao Zhang, Yi Su, Hang Su, and Jun Zhu. 2022. Tianshou: A Highly Modularized Deep Reinforcement Learning Library. *Journal of Machine Learning Research* 23, 267 (2022), 1–6. <http://jmlr.org/papers/v23/21-1127.html>
- [54] Ronald J Williams. 1992. Simple statistical gradient-following algorithms for connectionist reinforcement learning. *Reinforcement learning* (1992), 5–32.
- [55] Xin Xin, Alexandros Karatzoglou, Ioannis Arapakis, and Joemon Jose. 2020. Self-Supervised Reinforcement Learning for Recommender Systems. In *Proceedings of the 43th International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR '20)*.
- [56] Shuyuan Xu, Juntao Tan, Zuohui Fu, Jianchao Ji, Shelby Heinecke, and Yongfeng Zhang. 2022. Dynamic causal collaborative filtering. In *Proceedings of the 31st ACM International Conference on Information & Knowledge Management*. 2301–2310.
- [57] Wanqi Xue, Qingpeng Cai, Zhenghai Xue, Shuo Sun, Shuchang Liu, Dong Zheng, Peng Jiang, Kun Gai, and Bo An. 2023. PrefRec: Recommender Systems with Human Preferences for Reinforcing Long-term User Engagement. In *Proceedings of the 29th ACM SIGKDD Conference on Knowledge Discovery and Data Mining (KDD '23)*. Association for Computing Machinery, New York, NY, USA, 2874–2884. <https://doi.org/10.1145/3580305.3599473>
- [58] Fajie Yuan, Alexandros Karatzoglou, Ioannis Arapakis, Joemon M Jose, and Xiangnan He. 2019. A simple convolutional generative network for next item recommendation. In *Proceedings of the twelfth ACM international conference on web search and data mining*. 582–590.
- [59] Qihua Zhang, Juning Liu, Yuzhuo Dai, Yifan Qi, Yifan Yuan, Kunlun Zheng, Fan Huang, and Xianfeng Tan. 2022. Multi-task fusion via reinforcement learning for long-term user satisfaction in recommender systems. In *Proceedings of the 28th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*. 4510–4520.
- [60] Kesen Zhao, Shuchang Liu, Qingpeng Cai, Xiangyu Zhao, Ziru Liu, Dong Zheng, Peng Jiang, and Kun Gai. 2023. KuaiSim: A comprehensive simulator for recommender systems. *arXiv preprint arXiv:2309.12645* (2023).
- [61] Xiangyu Zhao, Long Xia, Liang Zhang, Zhuoye Ding, Dawei Yin, and Jiliang Tang. 2018. Deep reinforcement learning for page-wise recommendations. In *Proceedings of the 12th ACM conference on recommender systems*. 95–103.
- [62] Xiangyu Zhao, Liang Zhang, Zhuoye Ding, Long Xia, Jiliang Tang, and Dawei Yin. 2018. Recommendations with negative feedback via pairwise deep reinforcement learning. In *Proceedings of the 24th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*. 1040–1048.
- [63] Guanjie Zheng, Fuzheng Zhang, Zihan Zheng, Yang Xiang, Nicholas Jing Yuan, Xing Xie, and Zhenhui Li. 2018. DRN: A deep reinforcement learning framework for news recommendation. In *Proceedings of the 2018 world wide web conference*. 167–176.