

# Behavioral Refinement via Interpolant-based Policy Diffusion

Kaiqi Chen<sup>1</sup>, Eugene Lim<sup>1</sup>, Kelvin Lin<sup>1</sup>, Yiyang Chen<sup>1</sup>, and Harold Soh<sup>1,2</sup>

<sup>1</sup>Dept. of Computer Science, National University of Singapore.

<sup>2</sup>Smart Systems Institute, NUS.

Contact Authors: {kaiqi, harold}@comp.nus.edu.sg

**Abstract**—Imitation learning empowers artificial agents to mimic behavior by learning from demonstrations. Recently, diffusion models, which have the ability to model high-dimensional and multimodal distributions, have shown impressive performance on imitation learning tasks. These models learn to shape a policy by diffusing actions (or states) from standard Gaussian noise. However, the target policy to be learned is often significantly different from Gaussian and this mismatch can result in poor performance when using a small number of diffusion steps (to improve inference speed) and under limited data. The key idea in this work is that initiating from a more informative source than Gaussian enables diffusion methods to mitigate the above limitations. We contribute both theoretical results, a new method, and empirical findings that show the benefits of using an informative source policy. Our method, which we call BRIDGER, leverages the stochastic interpolants framework to bridge arbitrary policies, thus enabling a flexible approach towards imitation learning. It generalizes prior work in that standard Gaussians can still be applied, but other source policies can be used if available. In experiments on challenging benchmarks, BRIDGER outperforms state-of-the-art diffusion policies and we provide further analysis on design considerations when applying BRIDGER.

## I. INTRODUCTION

Imitation learning enables robots to learn policies from demonstrations and has been applied to a variety of domains including manipulation [33, 56, 12], autonomous driving [32, 4], and shared autonomy [38, 54]. Recently, there has been a significant interest in the adaptation of diffusion models for imitation learning [6, 36, 17]. These deep generative models, which progressively transform Gaussian noise to a policy over a number of diffusion steps, offer practical advantages over classical techniques [40, 41] — they scale well with the number of dimensions in the action/state spaces (e.g., for visuo-motor learning on a 7-DoF robot arm [6]) and are able to capture complex multimodal distributions. However, current diffusion methods also require large training datasets and typically have long inference times due to the number of diffusion steps needed to obtain effective action distributions for complex tasks [36].

An examination of existing diffusion-style imitation learning reveals a fundamental issue: these models learn to shape a policy starting from standard Gaussian noise, which is often starkly different from the intended policy or action distribution. The key insight in our work is that initiating from Gaussian noise isn't a prerequisite. To explore this, we move beyond the conventional diffusion framework and employ stochastic

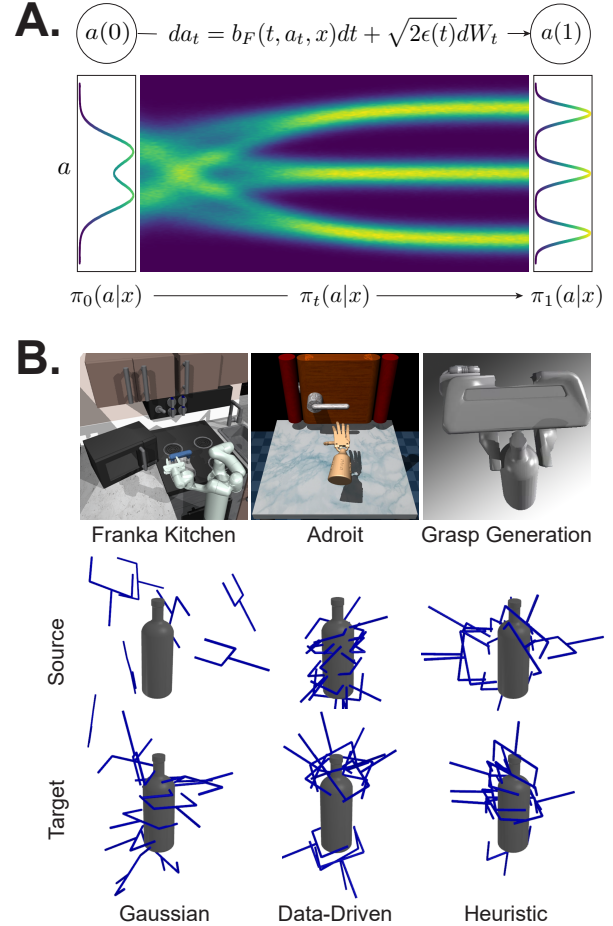


Figure 1: (A) Overview of action generation with BRIDGER. With trained velocity  $b$  and score  $s$  functions, BRIDGER transports the actions from source distribution  $\pi_0(a|x)$  to the target distribution  $\pi_1(a|x)$  via the forward SDE (Eq. 9). (B) We tested BRIDGER on challenging robot benchmark tasks and show that using informative source policies enhances performance. For example, in 6-DoF grasp generation, using heuristic or data-driven source policies results in more successful grasps compared to the conventional Gaussian.

interpolants [2] for bridging arbitrary densities within finite time (Fig. 1). This approach allows us to leverage stochastic source policies, enabling the diffusion process to begin from a more informative starting point. We find that this shift retains the inherent advantages of diffusion-style imitation learning, but positively impacts inference time and performance. Our approach also generalizes prior work in diffusion-based imi-

tation learning since if no source policy is available, simple distributions such as the Gaussian can be used.

In this paper, we first contribute a theoretical analysis of the impact of different source policies in diffusion. In brief, we find that under reasonable assumptions, selecting a better source policy results in better target policies. We then turn to a practical approach for incorporating source policies into diffusion methods. Applying the stochastic interpolants framework [2] to imitation learning, we derive a new method called BRIDGER (**B**ehavioral **R**efinement through **I**nterpolant-based **D**iffusion for **G**enerative **R**obotics). To our knowledge, our work is the first application of this bridging methodology to imitation learning, contrasting with its previous use in simple synthetic tasks [58] and image generation [58, 24]. In addition to standard neural architecture design for the learnt forward model, the stochastic interpolant framework relies on several critical design choices including the source policy and interpolant. The interpolant dictates how a sample transitions from the source to the target distribution, with the transition modulated by noise introduced through time-dependent Gaussian latent variables [2].

We contribute a systematic empirical study of the effects of using source policies (and other design elements) on a diverse set of robot tasks, including the Franka kitchen benchmark, grasp generation, and challenging tasks using a robot hand. Overall, the experimental results coincide with our theoretical findings; Gaussians were seldom the most effective source distribution and surprisingly, even simple heuristic distributions resulted in superior learnt policies compared to the Gaussian. We demonstrate that given a good source policy, BRIDGER surpasses existing state-of-the-art diffusion policies. Additionally, we discuss the effects of the interpolant function when learning highly multi-modal behaviors.

In summary, our work connects distribution bridging to imitation learning, which results in improved performance and addresses inherent limitations of standard diffusion, such as lengthy inference times. We contribute:

- Theoretical results on the impact of diffusing from source policies of varying quality;
- A practical method that enables source distributions to be used in diffusion methods for imitation learning, allowing for better trade-offs between inference speed and performance;
- A comprehensive empirical study demonstrating the impact of source distributions and interpolant design on outcome quality across various robot tasks.

From a broader perspective, our research demonstrates the potential of bridging models in imitation learning. We hope that this work lays the foundation for future imitation learning methods that leverage past policies for lifelong robot learning.

## II. PRELIMINARIES: BACKGROUND AND RELATED WORK

### A. Problem Formulation

In imitation learning, we wish to learn a policy from expert demonstrations. Let  $\pi_1(a|x)$  be an expert policy; it captures

the probability of an expert selecting an action  $a$  given an observation  $x$ . Suppose we have a dataset  $\mathcal{D} = \{x^{(i)}, a^{(i)}\}_{i=1}^N$  drawn from  $\pi_1(a|x)$  and let  $\pi_0(a|x)$  be a distribution that we can easily sample  $a$  from.

Our goal is to learn a model for transporting actions drawn from  $\pi_0$  to  $\pi_1$ . More concretely, given an observation  $x$ , let  $\pi_t(a|x)$  over time  $t \in [0, 1]$  be distributions on the *bridge* that links  $\pi_0(a|x)$  and  $\pi_1(a|x)$ . Let  $\hat{\pi}_t$  be the density of the learned distribution over time  $t \in [0, 1]$ . We want the generated target density  $\hat{\pi}_1$  to match the ground truth density  $\pi_1$ .

Similar to recent research [6], our approach primarily generates *action sequences* rather than single-step actions. Upon completing (or partially completing) an action sequence, the model assimilates a new observation to generate the subsequent action sequence. In the following,  $a$  denotes an action sequence or a target pose, depending on the context.

### B. Diffusion-based Policy Learning

Diffusion-based policy methods [6, 36] are largely based on Denoising Diffusion Probabilistic Models (DDPM) [16]. These methods operate by progressively adding noise to an action  $a_1$  during a forward process and subsequently, employing a reverse process to learn how to denoise. This is achieved by training a neural network  $g_v(a_{t_k}, t_k)$  to predict the noise  $z \sim \mathcal{N}(0, I)$  added to the data sample, within a defined temporal sequence  $0 = t_0 < t_1 < \dots < t_{K-1} < t_K = 1$ . The training utilizes a regression loss,

$$\mathcal{L}(v) = \mathbb{E} [\|z - g_v(\sqrt{\alpha_k}a_1 + \sqrt{1 - \alpha_k}z, t_k)\|^2]. \quad (1)$$

Upon completion of training, DDPM utilizes initial samples  $a_0$  drawn from a standard Gaussian distribution and applies a  $K$ -step denoising procedure to synthesize the desired output  $a_1$ ,

$$a_{t_k} = \frac{1}{\sqrt{\alpha_k}} \left( a_{t_{k-1}} - \frac{1 - \alpha_k}{\sqrt{1 - \alpha_k}} g_v(a_{t_k}, t_k) \right) + \sigma_k \mathcal{N}(0, I). \quad (2)$$

One limitation the original DDPM is slow sampling; the number of steps  $K$  required is typically large (e.g., hundreds to thousands). To improve sample efficiency, diffusion-based policy methods [6, 36] employ Denoising Diffusion Implicit Models (DDIM) [8], which apply a *deterministic* non-Markovian process to trade-off between sample quality and inference speed.

## III. BRIDGING POLICIES: THEORETICAL CONSIDERATIONS

The central premise of this work is the use of source policies for diffusion-based imitation learning: we posit that starting with a more informative source density facilitates the shaping of the target density. We examine this hypothesis theoretically in this section. Under reasonable assumptions, we show that a “good” source policy can enhance the resultant the target policy up to an additive factor. Note that these results apply to any diffusion-type model whereby a source distribution is gradually adapted over time to match a target.

Formally, we denote the “difference” between the action distribution  $\hat{\pi}$  at time  $t$  (conditioned upon observation  $x$ ) and the expert policy  $\pi_1$  as

$$\phi_{F,\hat{\pi}}(t, x) = F(\hat{\pi}_t(\cdot|x), \pi_1(\cdot|x)).$$

where  $F(\cdot, \cdot)$  is a measure of difference between two distributions (e.g. KL divergence  $\mathbb{KL}(\cdot, \cdot)$  and cross-entropy  $\mathbb{H}(\cdot, \cdot)$ ). In our setup, we diffuse from a source distribution  $\hat{\pi}$  from time  $t = 0$  to  $t = 1$ , and would like  $\phi_{F,\hat{\pi}}(1, x)$  to be small.

**Assumption 1.** *There exist constants  $\epsilon_{\max} > \epsilon_{\min} > 0$  such that for all  $t, x$ ,*

$$0 \geq -\epsilon_{\min} \geq \partial_t \phi_{F,\hat{\pi}}(t, x) \geq -\epsilon_{\max}.$$

We can interpret  $\epsilon_{\min} dt$  and  $\epsilon_{\max} dt$  as the minimum and maximum improvement in the differences towards  $\pi_1$  after diffusing for some infinitesimal  $dt$  time. We believe is this reasonable given a trained model with limited capacity.

**Theorem 1.** *Let  $\hat{\pi}_0$  and  $\hat{\rho}_0$  be two source distributions and given that Assumption 1 holds. Then the improvement of the generated target distribution is bounded by the improvement of the source distribution*

$$\begin{aligned} \phi_{F,\hat{\pi}}(1, x) - \phi_{F,\hat{\rho}}(1, x) \\ \leq \phi_{F,\hat{\pi}}(0, x) - \phi_{F,\hat{\rho}}(0, x) + \epsilon_{\max} - \epsilon_{\min}. \end{aligned}$$

The proof can be found in the Appendix A. Intuitively, Theorem 1 states that if  $\hat{\pi}_0$  is a better source distribution than  $\hat{\rho}_0$  (i.e.,  $\phi_{F,\hat{\pi}}(0, x) < \phi_{F,\hat{\rho}}(0, x)$ ), then after diffusion,  $\hat{\pi}_1$  is better than  $\hat{\rho}_1$  up to an additive factor of  $\epsilon_{\max} - \epsilon_{\min}$ . To elaborate, let us rewrite the bound as

$$\phi_{F,\hat{\pi}}(1, x) + d(\hat{\pi}_0, \hat{\rho}_0) - (\epsilon_{\max} - \epsilon_{\min}) \leq \phi_{F,\hat{\rho}}(1, x)$$

where  $d(\hat{\pi}_0, \hat{\rho}_0) = \phi_{F,\hat{\rho}}(0, x) - \phi_{F,\hat{\pi}}(0, x)$  is the difference in  $F$  between  $\hat{\pi}$  and  $\hat{\rho}$  at time 0. If  $\phi_{F,\hat{\pi}}(0, x) < \phi_{F,\hat{\rho}}(0, x)$ , then  $d(\hat{\pi}_0, \hat{\rho}_0) > 0$ . The positive factor  $\epsilon_{\max} - \epsilon_{\min}$  accounts for the variability in improvements during the diffusion process; a greater disparity in the changes when starting from  $\hat{\pi}_0$  versus  $\hat{\rho}_0$  can influence the quality of the resulting target distributions. If we further assume that the improvements are equal regardless of the initial source, then this factor disappears and we obtain

$$\phi_{F,\hat{\pi}}(1, x) + d(\hat{\pi}_0, \hat{\rho}_0) \leq \phi_{F,\hat{\rho}}(1, x).$$

In practice, it is necessary to discretize time steps for sampling. Next, we extend our theoretical results to discrete time. Suppose we split the domain of time  $[0, 1]$  into  $K + 1$  discrete time steps  $0 = t_0 < t_1 < \dots < t_{K-1} < t_K = 1$ . We make a similar assumption,

**Assumption 2.** *There exist constants  $\epsilon_{\max} > \epsilon_{\min} > 0$  such that for all  $t, x$ ,*

$$0 \geq -\epsilon_{\min} \delta t_k \geq \phi_{F,\hat{\pi}}(t_k, x) - \phi_{F,\hat{\pi}}(t_{k-1}, x) \geq -\epsilon_{\max} \delta t_k$$

where  $k \in \{1, \dots, K\}$  and  $\delta t_k = t_{k+1} - t_k$ .

Here,  $\epsilon_{\min} \delta t_k$  and  $\epsilon_{\max} \delta t_k$  quantify the minimum and maximum improvement in  $F$  towards  $\pi_1$  after diffusing with step size  $\delta t_k$ .

**Theorem 2.** *Let  $\hat{\pi}_0$  and  $\hat{\rho}_0$  be two source distributions and given that Assumption 2 holds. Then the improvement of the generated target distribution is bounded by the improvement of the source distribution*

$$\begin{aligned} \phi_{F,\hat{\pi}}(1, x) - \phi_{F,\hat{\rho}}(1, x) \\ \leq \phi_{F,\hat{\pi}}(0, x) - \phi_{F,\hat{\rho}}(0, x) + \epsilon_{\max} - \epsilon_{\min}. \end{aligned}$$

Finally, we establish a similar result for the expected cost  $\mathbb{E}[c(a|x)]$  when  $F$  is the cross-entropy and the expert is Boltzmann rational.

**Assumption 3.** *The density of the expert policy*

$$\pi_1(a|x) = \frac{1}{Z} \exp(-c(a|x))$$

where  $Z$  is a normalizing constant.

**Theorem 3.** *Let  $\hat{\pi}_0$  and  $\hat{\rho}_0$  be two source distributions and given that both Assumption 2 and 3 holds for  $F = \mathbb{H}$  (cross-entropy). Then for any observation  $x$ , we have*

$$\begin{aligned} \mathbb{E}_{a \sim \hat{\pi}_1}[c(a|x)] - \mathbb{E}_{a \sim \hat{\rho}_1}[c(a|x)] \\ \leq \mathbb{E}_{a \sim \hat{\pi}_0}[c(a|x)] - \mathbb{E}_{a \sim \hat{\rho}_0}[c(a|x)] + \epsilon_{\max} - \epsilon_{\min}. \end{aligned}$$

Similar to Theorem 1, if we let  $d_c(\hat{\pi}_0, \hat{\rho}_0) = \mathbb{E}_{a \sim \hat{\rho}_0}[c(a|x)] - \mathbb{E}_{a \sim \hat{\pi}_0}[c(a|x)]$  and  $\hat{\pi}_0$  is a lower-cost source policy compared to  $\hat{\rho}_0$ , i.e.,  $d_c(\hat{\pi}_0, \hat{\rho}_0) > 0$ , then under equal improvement  $(\epsilon_{\max} - \epsilon_{\min}) = 0$ ,

$$\mathbb{E}_{\hat{\pi}_1}[c(a|x)] + d_c(\hat{\pi}_0, \hat{\rho}_0) < \mathbb{E}_{\hat{\rho}_1}[c(a|x)].$$

In words, the policy derived from the better source policy achieves a lower expected cost. In the next section, we discuss how we can practically bridge distributions for imitation learning.

#### IV. METHOD: BRIDGER FOR IMITATION LEARNING

In this section, we present a method that can learn to adapt a source policy to match observed demonstrations. The source policy could be a simple Gaussian, or an action distribution hand-crafted using prior knowledge, or a data-driven policy learned from data. We call our method **Behavioral Refinement via Interpolant-based Diffusion for Generative Robotics (BRIDGER)**.

BRIDGER is based on Stochastic Interpolants [2], a recently-proposed framework to bridge densities in finite time. At a high-level, a stochastic interpolant is a time-dependent random variable that “interpolates” between two arbitrary densities. As a concrete example, consider two densities  $p_0$  and  $p_1$ . A simple linear stochastic interpolant is

$$y_t = (1-t)y_0 + ty_1 + \sqrt{2t(1-t)}z \quad (3)$$

where  $y_0$  and  $y_1$  are drawn from  $p_0$  and  $p_1$ , respectively, and  $z$  is drawn from a standard Gaussian. By construction, the paths of  $y_t$  bridge samples from  $p_0$  at time  $t = 0$  and from  $p_1$  at

$t = 1$ . Our goal is to learn how to transport samples along the paths of this interpolant.

In the following, we will present stochastic interpolants more formally and show how they can be adapted to imitation learning. We will then detail the key design elements explored in this work.

#### A. Stochastic Interpolants for Imitation Learning

Let  $(C^r(\mathbb{R}^n))^m$  be the space of  $r$  continuously differentiable functions from  $\mathbb{R}^m$  to  $\mathbb{R}^n$  and  $(C_0^r(\mathbb{R}^n))^m$  as the space of compactly supported and  $r$  continuously differentiable functions from  $\mathbb{R}^m$  to  $\mathbb{R}^n$ . We extend the definition of stochastic interpolant in [2] to condition on observation  $x$ , similar to the concurrent work [18].

**Definition 1** (Stochastic Interpolant). Denote  $n_x$  and  $n_a$  as the dimension of observation and action respectively. Let  $x \in \mathbb{R}^{n_x}$  be an observation. Given two probability density functions  $\pi_0(a|x)$  and  $\pi_1(a|x)$ , a stochastic interpolant between  $\pi_0(a|x)$  and  $\pi_1(a|x)$  is a stochastic process  $\{a_t\}_{t \in [0,1]}$  satisfying

$$a_t = I(t, a_0, a_1, x) + \gamma(t)z, \quad t \in [0, 1] \quad (4)$$

where

1.  $I \in C^2([0, 1] \times \mathbb{R}^{n_a} \times \mathbb{R}^{n_a} \times \mathbb{R}^{n_x})^{n_a}$  satisfies the boundary conditions  $I(0, a_0, a_1, x) = a_0$  and  $I(1, a_0, a_1, x) = a_1$
2. There exist some  $C_1 < \infty$  such that  $|\partial_t I(t, a_0, a_1, x)| \leq C_1 |a_0 - a_1|$  for  $t \in [0, 1]$ .
3.  $\gamma(t)$  satisfies  $\gamma(0) = \gamma(1) = 0$ ,  $\gamma(t) > 0$  for all  $t \in (0, 1)$ , and  $\gamma^2 \in C^2([0, 1])$ .
4. The pair  $(a_0, a_1)$  is drawn from a probability measure  $v$  that marginalizes on  $\pi_0(\cdot|x)$  and  $\pi_1(\cdot|x)$ .
5.  $z$  is a standard Gaussian random variable independent of  $(a_0, a_1)$ .

From Definition 1 and Theorem 2.6 of [2], the transport equation between the source and target distribution is

$$\partial_t \pi + \nabla_a \cdot (b\pi) = 0 \quad (5)$$

where  $\pi(t, a, x) := \pi_t(a|x)$  and the velocity  $b$  is defined as

$$b(t, a, x) = \mathbb{E} [\partial_t I(t, a_0, a_1, x) + \dot{\gamma}(t)z]. \quad (6)$$

We can rewrite the transport equation (Eq. 5) as a forward Fokker-Planck equation, along with the corresponding forward stochastic process [2]. For any  $\epsilon \in C_0([0, 1])$  with  $\epsilon(t) \geq 0$  for all  $t \in [0, 1]$ , the probability density  $\pi$  in equation 4 satisfies the forward Fokker-Planck equation

$$\partial_t \pi + \nabla_a \cdot (b_F \pi) = \epsilon \nabla_a^2 \pi, \quad \pi(0) = \pi_0 \quad (7)$$

where

$$b_F(t, a, x) := b(t, a, x) + \epsilon(t)s(t, a, x) \quad (8)$$

and  $s(t, a, x) := \nabla_a \log \pi(t, a, x)$  is the score of  $\pi_t(\cdot|x)$ . The solutions of the forward stochastic differentiable equation (SDE) associated with the Fokker-Planck (Eqn. 7) satisfy

$$da_t = b_F(t, a_t, x) dt + \sqrt{2\epsilon(t)} dW_t \quad (9)$$

solved forward in time from the initial action  $a_0 \sim \pi_0$ .

**Action Sampling.** Using above properties, we can sample actions by transporting samples from the source distribution  $\pi_0$  to the target distribution  $\pi_1$ , i.e., we solve the forward SDE in Eq. 9 (See Fig. 1). The time interval  $t \in [0, 1]$  is discretized into points  $t_0, \dots, t_K$ , with  $K$  denoting the total number of diffusion steps and  $\delta t$  representing the uniform time step increment between  $t_k$  and  $t_{k+1}$ . The specifics of the sampling process are outlined in Algorithm 1.

---

#### Algorithm 1 BRIDGER Sampling

---

**Input:** Current observation  $x$  and a sample from the source policy  $a_0 \sim \pi_0(a_0|x)$

**for**  $k \leftarrow 1$  **to**  $K$  **do**

$z \sim \mathcal{N}(0, I)$

$b_F(t_k, a_{t_k}, x) = b(t_k, x) + \epsilon(t_k)s(t_k, a_{t_k}, x)$

$a_{t_{k+1}} = a_{t_k} + b_F(t, a_{t_k}, x)\delta t + \sqrt{2\epsilon(t_k)}z$

**end for**

**Output:**  $a_1$

---

**Model Training.** Sampling actions as above requires the velocity  $b$  and score  $s$ . Suppose that these two functions are parameterized by function approximators (e.g., neural networks), denoted as  $b_\theta$  and  $s_\eta$ . The velocity  $b$  defined in equation 6 can be trained by minimizing,

$$L_b(\theta) = \int_0^1 \mathbb{E} [b_\theta(t, a_t, x) - (\partial_t I(t, a_0, a_1, x) + \dot{\gamma}(t)z)]^2 dt \quad (10)$$

where  $a_t$  is defined in Eqn. (4) and the expectation is taken independently over  $\pi_0(a_0|x)$ ,  $\pi_1(a_1|x)$ , and  $\mathcal{N}(z|0, I)$ . Similarly, the score  $s$  of the probability density  $\pi(t)$  can be trained by minimizing

$$L_s(\eta) = \int_0^1 \mathbb{E} [s_\eta(t, a_t, x) + \gamma^{-1}(t)z]^2 dt. \quad (11)$$

In practice, predicting  $\gamma^{-1}(t)z$  can be difficult since  $\gamma^{-1}(t)$  approaches infinity as  $t$  approaches 0 or 1. To address this issue, we re-parameterize the score as  $s_\eta = \hat{s}_\eta \gamma^{-1}(t)$  in our model. To further improve training stability, we decompose the velocity  $b$  as suggested in [2],

$$b(t, a, x) = v(t, a, x) - \dot{\gamma}(t)\gamma(t)s(t, a, x) \quad (12)$$

where  $v$  can be trained by minimizing the quadratic objective

$$L_v(\phi) = \int_0^1 \mathbb{E} (v_\phi(t, a_t, x) - \partial_t I(t, a_0, a_1, x))^2 dt \quad (13)$$

Given samples in the dataset  $D$  comprising tuples  $(x, a_1)$ , the above objectives can be approximated via Monte-Carlo sampling. Our training algorithm is outlined in Algorithm 2.

---

**Algorithm 2** BRIDGER Training
 

---

**Input:**  $D$  and batch size  $N$ 
**while** Not Converged **do**
 $(x, a_1) \sim D$  and  $a_0 \sim \pi_0(a|x)$  ▷ Sample data
 $t \sim U(0, 1)$  ▷ Uniformly sample  $t$ 

 Sample  $a_t \sim I(t, a_0, a_1, x) + \gamma(t)z$ 

Compute losses:

$$L_b(\theta) = \frac{1}{N} \sum (b_\theta(t, a_t, x) - (\partial_t I + \dot{\gamma}z)).$$

$$L_s(\eta) = \frac{1}{N} \sum (s_\eta(t, a_t, x) + \gamma^{-1}z).$$

$$L_v(\phi) = \frac{1}{N} \sum (v_\phi(t, a_t, x) - \partial_t I).$$

 Gradient descent on  $\theta, \eta$  and  $\phi$ 
**end while**
**Output:**  $b_\theta, s_\eta$  and  $v_\phi$ 


---

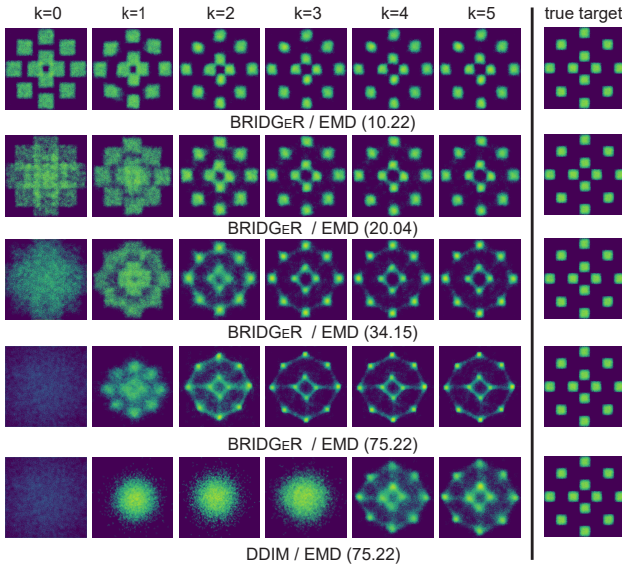


Figure 2: Intermediate distributions obtained from BRIDGER and DDIM trained on 2D synthetic data. With a source distribution that is closer to the target distribution (smaller Earth Mover’s Distance (EMD) values), BRIDGER can better recover the true target distribution.

### B. Design Decisions

To apply BRIDGER in practice, we have to design several key components, specifically the source distribution  $\pi_0$ , the interpolant  $I(t, a_0, a_1, x)$ , and the noise schedule  $\gamma(t)$  and the  $\epsilon(t)$ . In this work, we will focus on comparing specific source distributions and interpolants.

**Source Distributions.** As shown by Theorem 1 in Sec. III, a source distribution that closer to the target can yield better policies. Our preliminary experiments with 2D synthetic samples supports this notion (Fig. 2 and 3) — we see that source distributions that are closer to the target (lower EMD) are more similar to the true target distribution. Along with standard Gaussians, our experiments will involve two kinds of source policies:

- *Heuristic policies:* hand-crafted policies (e.g., using rules) based on prior knowledge. Our heuristic policies are task-

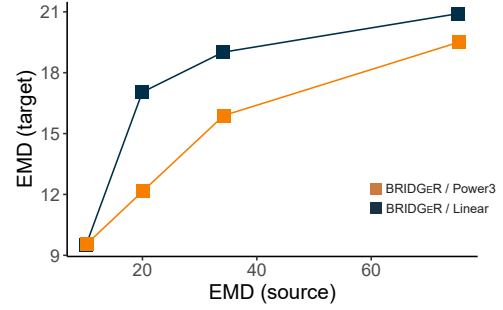


Figure 3: Earth Mover’s Distance (EMD) of the generated target distributions under different source distributions and interpolant functions on our 2D synthetic dataset. Each point represents the EMD between a source/target distribution and the true target distribution.

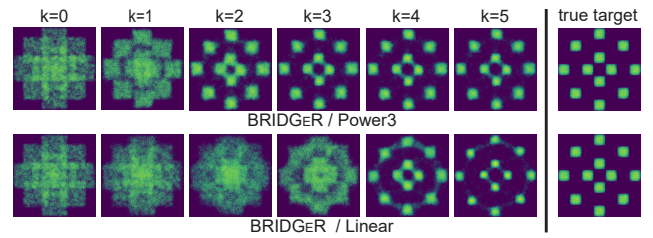


Figure 4: Intermediate distributions under different interpolant functions (trained on 2D synthetic data).

dependent and detailed in Appendix C.

- *Data-driven policies:* policies learned from a dataset. In our experiments, we use lightweight Conditional Variational Autoencoders (CVAEs) [44] as a representative policy. CVAEs tend to not fully capture complex target distributions, but are cheap to sample from.

These policy types are commonly employed in robotics and by comparing them, we aim to evaluate potential benefits that BRIDGER may offer under different use-cases.

**Interpolant Function.** The second major component is the interpolant function  $I(t, a_0, a_1, x)$ . We will use spatially linear interpolants [2],  $a_t = \alpha(t)a_0 + \beta(t)a_1 + \gamma(t)z$ , specifically,

- *Linear Interpolant* where  $\alpha(t) = 1 - t$  and  $\beta(t) = t$ .
- *Power3 Interpolant* where  $\alpha(t) = (1 - t)^m$  and  $\beta(t) = 1 - (1 - t)^m$ . In our experiments, we set  $m = 3$ , which worked well in preliminary tests.

The linear interpolant uniformly progresses samples from the source to the target distribution, which we observed makes training more stable. Conversely, the Power3 interpolant starts with larger steps that decelerate towards the end. This introduces the target pattern sooner than the linear approach, as shown in Fig. 4. Qualitatively, we find Power3 worked better in scenarios with highly multi-modal demonstrations.

**Noise Schedule and Diffusion Coefficient.** The noise schedule governs the variance of Gaussian latent noise across the bridge. In our experiments, we set  $\gamma(t) = d\sqrt{2t(1-t)}$ , with  $d$  acting as a scalar to adjust  $\gamma$ ’s magnitude. This configuration results in minimal Gaussian noise at the onset of the transition from the source distribution, increasing to a peak variance

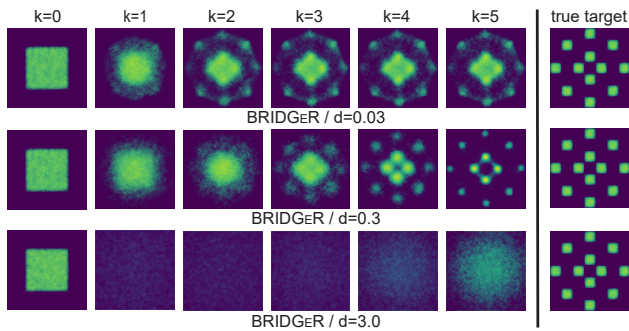


Figure 5: Intermediate distributions with varying  $\gamma(t) = d\sqrt{2t(1-t)}$ . When the support of the source distribution is narrower than the target distribution, selecting a small  $\gamma$  value ( $d = 0.03$ ) results in samples clustering within the high-density areas of the source. Conversely, an excessively large  $\gamma$  ( $d = 3$ ) results in overdispersion. However, a well-chosen  $\gamma$  ( $d = 0.3$ ) facilitates coverage to ensure reasonable recovery of the target.

before tapering off to zero as samples approach the target distribution. Selecting a larger  $d$  facilitates exploration of low-density areas but risks introducing excessive noise, as illustrated in Figure 5. The diffusion coefficient  $\epsilon(t)$  controls the level of noise in the forward SDE (Eq. 9). In our experiments, we define  $\epsilon$  as  $\epsilon(t) = c(1-t)$ , where  $c$  is a scalar to adjust its magnitude. We set two choices for  $c$  (1 and 3) and for  $d$  (0.03 and 0.3) and reported the best results. In general, our results were relatively robust to these choices.

## V. RELATED WORK

BRIDGEr builds upon a large body of work in imitation learning [19, 57, 49], specifically behavior cloning.

Behavior cloning has had a long history, with early methods adopting supervised learning techniques, principally regression [4, 33, 33, 56, 12, 37, 46]. Although efficient, regression-based methods were generally unable to capture multi-modal behavior. Later methods used classification methods, by discretizing the action space [40, 41, 3, 50], to address this limitation but were sensitive to the hyperparameters (such as the level of discretization) and struggled with high-precision tasks [11].

Modern imitation methods employ generative models, starting with Gaussian Mixture Models [27], then transitioning to more powerful Energy-Based Models (EBMs) [7, 11, 20, 43] and Diffusion Models [39, 6, 31, 30]. Compared to EBMs, diffusion models have demonstrated better training stability [6] and effectiveness in generating consistent, multi-modal action sequences for visual-motor control [39, 6, 31, 30] and hierarchical, long-horizon planning tasks [35, 15, 29, 5, 51].

Recent progress has been made in reducing the computational costs of diffusion methods by adapting the number of diffusion steps [17] or leveraging DDIM [36].

Unlike the above methods, BRIDGEr is the first to generalize diffusion-type policy learning to exploit source stochastic policies. As we will see, this leads to better performance compared to strong baselines (such as DDIM) when informative

policies are available, especially when using a small number of diffusion steps.

Since BRIDGEr adapts existing distributions, it can be seen as a few-shot learner, specifically for imitation learning [9, 49]. Existing work on few-shot imitation learning requires either specific prior policies [10, 55, 23] or a hierarchical structure [52]. In contrast, BRIDGEr only requires that we are able to sample from the source policy. For fair comparison against few-shot methods, we adopt residual learning which is used for few-shot reinforcement learning [42, 1, 21], planning [28], and shared autonomy [38, 54].

## VI. EXPERIMENTS

This section describes experiments designed to evaluate the performance of BRIDGEr relative to recent methods, particularly diffusion-based imitation learning. More importantly, we aimed to test our hypothesis that leveraging better source distributions within a diffusion framework can lead to better policies. We further hypothesized that BRIDGEr performs better than DDIM policies given a small number of diffusion steps, and limited data. Finally, we sought to examine the effect of decision decisions, particularly the interpolant choice.

In the following, we first give an overview of our experimental setup (details relegated to Appendix) followed by our main results.

### A. Domains

To evaluate our hypotheses above, we chose six challenging robot benchmarks in three domains [13, 34, 14, 47] (See Fig. 6). The tasks in these domains feature multi-modal demonstrations, which comprise multiple stages with high-dimensional and high-precision actions.

**Franka Kitchen (State Observations).** The goal in Franka Kitchen is to control a 7 DoF robot arm to solve seven subtasks by reaching a desired state configuration (Fig. 6). Franka Kitchen comprises three datasets and we chose the mixed dataset, which is considered as the most challenging; it presents various subtasks being executed with 4 target subtasks that are not completed in sequence [13]. The model is trained on three varying data sizes: small (16k sequences), medium (32k sequences), large (64k sequences).

**Adroit (State Observations).** The Adroit tasks require control of a 24-DoF robot hand to accomplish four tasks and is considered one of the most challenging task sets; it requires a model to generate intricate, high-dimensional, and high-precision action sequences over long time horizons. We use the dataset of human demonstrations provided in the DAPG repository [13]. Similar to Franka Kitchen, we train the model on three different data sizes; small (1.25k sequences), medium (2.5k sequences), and large (5k sequences).

**6-DoF Grasp Pose Generation (Point-Cloud Observations).** The goal here is to generate grasp poses capable of picking up an object given the object’s point cloud. The target grasp-pose distribution is multi-modal [47], with high-dimensional point clouds as conditioning observations. BRIDGEr is trained on

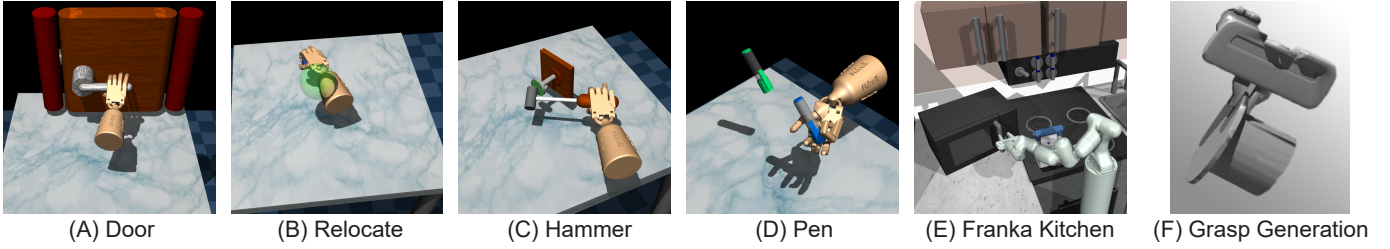


Figure 6: Experimental Domains. (A)-(D) Adroit tasks that involve the control of a 24-degree-of-freedom robot hand to accomplish four specific tasks: (A) Door: opening a door, (B) Relocate: moving a ball to a target position, (C) Hammer: driving a nail into a board, and (D) Pen: aligning a pen with a target orientation [13]. (E) Franka Kitchen includes 7 objects available for interaction and the aim is to accomplish 4 subtasks: opening the microwave, relocating the kettle, flipping the light switch, and sliding open the cabinet door, with arbitrary order. (F) The goal of 6-DoF Grasp-Pose generation is to generate grasp poses capable of successfully picking up an object.

Acronym dataset [48] (552 objects with 200-2000 grasps per object) after a LogMap transformation [47] of the grasp poses.

### B. Compared Methods.

BRIDGER was implemented in PyTorch and trained using the Algorithm 2. Additional details regarding hyperparameters and network structure are given in Appendix D. To evaluate performance, we compared BRIDGER against strong baselines, specifically:

- *DDIM*: Diffusion policy [6, 36], a recent diffusion-based imitation-learning method which trains DDPM and applies DDIM [45] during test-time.
- *Residual Policy*: This baseline applies residual learning towards policy learning [42, 1, 21] and is a representative method not based on diffusion.
- *SE3*: A state-of-the-art score-based diffusion model designed in SE(3) [47] specifically designed for generating 6-Dof grasp poses. Note that this baseline only applies to the grasp generation domain.

We also evaluated variants of BRIDGER with different Interpolant functions (Linear and Power3), along with different source policies. As stated in Sec. IV, we investigate three different kinds of source policies:

- *Gaussian*: a standard Gaussian, similar to DDPM.
- *CVAE*: a data-driven policy. For fair comparison to the baselines, the CVAE source policy was trained using the same dataset. Qualitatively, we find the CVAE was generally not able to capture the diversity of demonstrations.
- *Heuristic*: hand-crafted policies for the Hammer, Door, and Grasp tasks (described in Appendix C). Heuristic policies were not available for the other tasks due to their complexity and the high-dimension of the action space.

We label each BRIDGER variant as BRIDGER / [···] / [···]. For example, BRIDGER / CVAE / Linear represents BRIDGER with a CVAE source policy and the linear interpolant.

### C. Test Methodology.

Following prior work, we compute success measures for the different tasks. We report success rate (Adroit) and number of successful tasks (Franka Kitchen), averaged over three

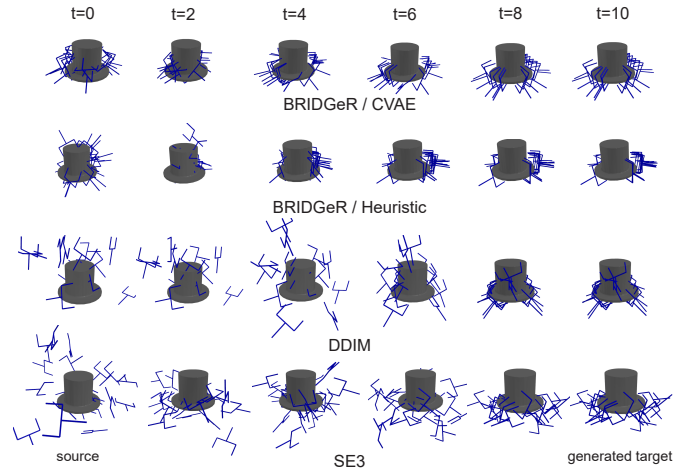


Figure 7: Fifteen sampled grasps across the diffusion steps for BRIDGER, DDIM and SE3. We visualize 15 grasps samples every 2 diffuse steps until  $k = 10$ .

different seeds. Under each seed, the models are tested with 100 random initializations for each configuration (dataset sizes [small, medium, large]  $\times$  the number of diffusion steps).

For the Grasp task, we evaluated the models in Nvidia Isaac Gym [26] and we report the rate of successful grasps; the robot was able to pick up the object without dropping it [47]. Each object was evaluated using 100 grasps with random initialization of the object pose. We tested our models on both on unseen-objects belonging to the object categories seen in the dataset and unseen-objects from unseen categories. In addition to success rates, we also measured the Earth Mover’s Distance (EMD) between the generated grasps and the training data distribution.

### D. Main Results and Discussion

In this section, we summarize our key findings, with full results and plots in Appendix F. We focus on our main hypotheses and significant observations.

**With a more informative source policy, BRIDGER outperforms the baselines, especially with a small of diffusion steps.** We observed that BRIDGER achieves the best success

Table I: Average task performance of BRIDGER against current state-of-the-art methods under a different number of diffusion steps when trained with the Large dataset. Overall, BRIDGER outperforms all competing methods. Results are similar for the small and medium datasets with complete results in the Appendix.

		CVAE	BRIDGER Heuristic	Gaussian	Residual Policy		DDIM
					CVAE	Heuristic	
Door	$k = 5$	<b>0.60 ± 0.15</b>	0.00 ± 0.00	0.08 ± 0.06	0.04 ± 0.06	0.00 ± 0.00	0.02 ± 0.02
	$k = 20$	<b>0.52 ± 0.23</b>	0.45 ± 0.04	0.10 ± 0.07	0.04 ± 0.06	0.00 ± 0.00	0.38 ± 0.11
	$k = 80$	0.50 ± 0.14	<b>0.63 ± 0.08</b>	0.12 ± 0.09	0.04 ± 0.06	0.00 ± 0.00	0.05 ± 0.02
Relocate	$k = 5$	<b>0.75 ± 0.11</b>	-	0.61 ± 0.05	0.3 ± 0.04	-	0.17 ± 0.04
	$k = 20$	0.7 ± 0.11	-	<b>0.72 ± 0.09</b>	0.34 ± 0.04	-	0.37 ± 0.04
	$k = 80$	0.79 ± 0.08	-	<b>0.81 ± 0.04</b>	0.34 ± 0.04	-	0.26 ± 0.03
Hammer	$k = 5$	<b>0.44 ± 0.11</b>	0.2 ± 0.24	0.16 ± 0.04	0.13 ± 0.06	0.24 ± 0.07	0.01 ± 0.01
	$k = 20$	0.63 ± 0.08	<b>0.74 ± 0.07</b>	0.35 ± 0.02	0.13 ± 0.06	0.24 ± 0.07	0.17 ± 0.12
	$k = 80$	<b>0.72 ± 0.09</b>	0.47 ± 0.25	0.43 ± 0.09	0.13 ± 0.06	0.24 ± 0.07	0.03 ± 0.04
Pen	$k = 5$	0.45 ± 0.04	-	0.43 ± 0.02	0.33 ± 0.12	-	<b>0.54 ± 0.03</b>
	$k = 20$	0.49 ± 0.09	-	0.53 ± 0.02	0.33 ± 0.12	-	<b>0.51 ± 0.03</b>
	$k = 80$	<b>0.55 ± 0.06</b>	-	<b>0.55 ± 0.03</b>	0.33 ± 0.12	-	0.52 ± 0.05
Franka Kitchen	$k = 5$	<b>1.96 ± 0.03</b>	-	1.18 ± 0.02	1.55 ± 0.10	-	1.84 ± 0.06
	$k = 20$	<b>2.09 ± 0.04</b>	-	1.54 ± 0.03	1.55 ± 0.10	-	1.93 ± 0.07
	$k = 80$	<b>2.16 ± 0.03</b>	-	1.70 ± 0.05	1.55 ± 0.10	-	1.92 ± 0.02

Table II: Success rate (averaged over 100 grasps on ten test objects). BRIDGER significantly outperforms DDIM and Residual Policy across the number of diffusion steps. Compared to SE3, BRIDGER achieve higher success rate when the number of diffusion steps is small. We show up to  $k = 160$  steps to be consistent with prior reported results [47].

		CVAE	BRIDGER Heuristic	Gaussian	Residual Policy		DDIM	SE3
					CVAE	Heuristic		
Seen Categories	$k = 5$	<b>0.73 ± 0.15</b>	0.64 ± 0.17	0.56 ± 0.17	0.09 ± 0.15	0.01 ± 0.03	0.52 ± 0.24	0.38 ± 0.26
	$k = 20$	<b>0.93 ± 0.08</b>	0.91 ± 0.07	0.83 ± 0.28	0.09 ± 0.15	0.01 ± 0.03	0.64 ± 0.21	0.78 ± 0.19
	$k = 160$	0.88 ± 0.10	<b>0.91 ± 0.08</b>	0.90 ± 0.06	0.09 ± 0.15	0.01 ± 0.03	0.64 ± 0.26	<b>0.91 ± 0.08</b>
Unseen Categories	$k = 5$	<b>0.48 ± 0.12</b>	0.43 ± 0.19	0.45 ± 0.14	0.10 ± 0.16	0.12 ± 0.28	0.33 ± 0.20	0.20 ± 0.10
	$k = 20$	<b>0.67 ± 0.21</b>	<b>0.67 ± 0.26</b>	0.65 ± 0.25	0.10 ± 0.16	0.12 ± 0.28	0.41 ± 0.23	0.55 ± 0.24
	$k = 160$	<b>0.71 ± 0.24</b>	0.66 ± 0.23	0.64 ± 0.23	0.10 ± 0.16	0.12 ± 0.28	0.35 ± 0.19	0.66 ± 0.25

rate across the diffusion steps for many of the tasks. The differences in success rates for Adroit and Franka Kitchen tasks (Table I) are significant when the number of diffusion steps was small  $k = 5$ ; the exception was the Adroit pen task where DDIM performs slightly better. The grasp generation results in Table II further supports this finding, where we see BRIDGER’s average success rates surpassing the state-of-the-art SE3 model with  $k = 5$  and  $k = 20$ . For higher diffusion steps, SE3 catches up and the methods appear comparable in terms of success rate. However, SE3 achieves poorer EMD scores compared to BRIDGER (Fig. 9). Fig. 7 shows sample grasps at different diffusion steps; we see that using an informative source policy enables BRIDGER to more quickly converge to a reasonable set of grasps.

Interestingly, we observed that BRIDGER consistently achieved better scores than DDIM and the Residual Policy regardless of the dataset size (See Fig. 8 for the Door task, with plots for other tasks in the Appendix). Potentially, larger datasets may negate the benefit afforded by the source policy since more data could enable DDIM to better generalize.

**BRIDGER achieves better performance when using better source policies.** Fig. 10 illustrates the difference in success rates between the source and final action distributions. Overall,

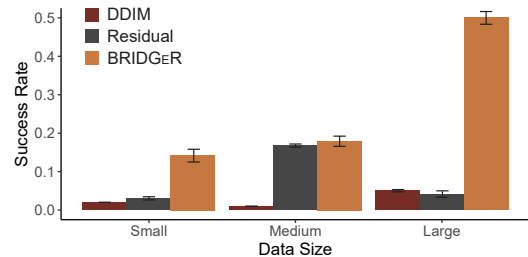


Figure 8: Average success rate under different training dataset on Adroit Door task ( $k = 80$  for DDIM and BRIDGER). BRIDGER consistently surpasses baselines across different training data size.

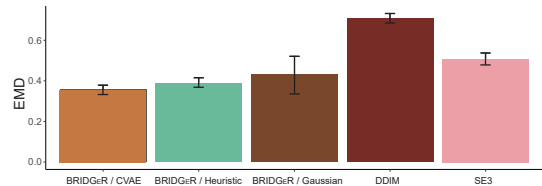


Figure 9: Average Earth Mover’s Distance between generated grasps pose and target grasp poses on Seen Categories in Grasp Generation task ( $k = 160$  for SE3, DDIM and BRIDGER). Lower EMD indicates BRIDGER is closer to the dataset distribution.



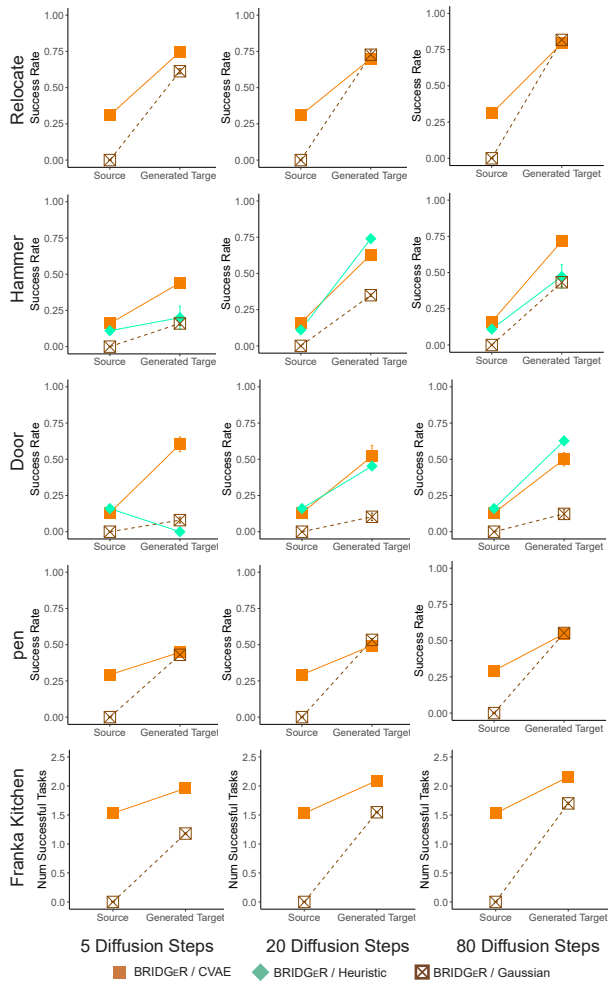


Figure 10: Task performance of BRIDGER starting from different source policies using the Power3 interpolant. In general, with better source distribution, BRIDGER achieves higher task performance.

starting from a source policy with higher success rates tended to result in a better action distributions. This difference can persist even with  $k = 80$  steps, with potentially diminishing marginal improvement as illustrated in the Relocate and Franka Kitchen tasks. As suggested by our theoretical results, this could be due to variations in the gradual improvements over the diffusion steps.

**The Power3 interpolant is more appropriate than the Linear interpolant when behavior distributions exhibit high multi-modality.** We find that both interpolants perform comparably in tasks like Adroit, where robot behaviors are intricate, but largely uni-modal. In contrast, the Power3 interpolant significantly outperforms the Linear interpolant in Grasp Generation (Fig. 11) where the distribution of end-effector poses is highly multi-modal (Fig. 6.F). This efficiency potentially stems from Power3’s rapid convergence to a variety of high-density target areas, followed by fine-scale adaptation. This notion is supported by Fig. 12, which illustrates the smoothness of the velocity and score functions over time (as measured by approximate Lipschitz constants [53]). We

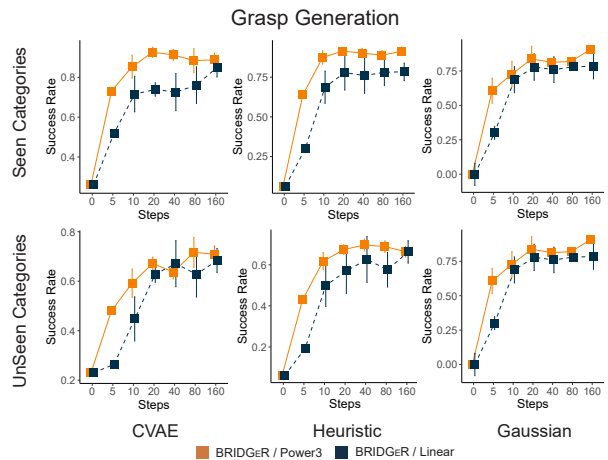


Figure 11: The success rate of BRIDGER with the Power3 and Linear interpolants for grasp generation. In general, Power3 achieves better scores when starting from the same source policy, especially when the number of diffusion steps is small. The error bars represent standard deviations over 10 test objects.

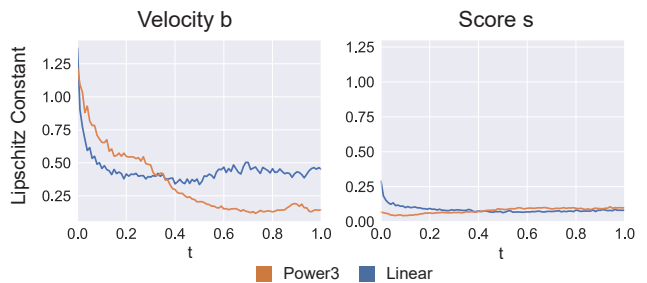


Figure 12: Approximate Lipschitz constants of the velocity  $b$  and score  $s$  for the Grasp task.

observe the Lipschitz constants for Power3 to be larger at the start of the process (a “rougher” function) but gradually falls below that of Linear. This suggests that the function is making more rapid changes at the outset and smaller adaptations towards the middle and end of the diffusion process.

## VII. CONCLUSIONS AND FUTURE WORK

In this work, we investigate the potential of integrating informative source distributions into diffusion-style imitation learning. We provide theoretical results that support this idea and propose BRIDGER, a stochastic interpolant method for imitation learning. Our experiments results show that BRIDGER outperforms strong baselines, including state-of-the-art diffusion policies on various benchmark tasks. We provide additional analyses on our experimental results to elucidate the effect of various design decisions within BRIDGER.

**Limitations and Future Work.** Here, we have shown that leveraging prior knowledge (in the form of source policies) improves learned diffusion policy performance. Here, the prior knowledge can be obtained either from human experts or existing datasets. It would be interesting to explore other forms of prior knowledge, e.g., policies designed for other tasks and those constructed using foundation models. Specific to

BRIDGER, we explored a salient but limited set of design considerations; future work can examine more elaborate interpolant functions, along with more in-depth analysis of noise schedules and diffusion coefficients. Moreover, our evaluations comprise simulation benchmarks as our study involved tens of thousands of trials; recent work [6] has shown that diffusion policies can work on real robots and we plan to conduct real world trials using BRIDGER in subsequent work. Finally, we plan to extend BRIDGER to enable classifier-guided sampling.

#### REFERENCES

- [1] Minttu Alakuijala, Gabriel Dulac-Arnold, Julien Mairal, Jean Ponce, and Cordelia Schmid. Residual reinforcement learning from demonstrations. *arXiv preprint arXiv:2106.08050*, 2021.
- [2] Michael S Albergo, Nicholas M Boffi, and Eric Vanden-Eijnden. Stochastic interpolants: A unifying framework for flows and diffusions. *arXiv preprint arXiv:2303.08797*, 2023.
- [3] Yahav Avigal, Lars Berscheid, Tamim Asfour, Torsten Kröger, and Ken Goldberg. Speedfolding: Learning efficient bimanual folding of garments. in 2022 ieee. In *RSJ International Conference on Intelligent Robots and Systems (IROS)*, pages 1–8.
- [4] Mariusz Bojarski, Davide Del Testa, Daniel Dworakowski, Bernhard Firner, Beat Flepp, Praseon Goyal, Lawrence D Jackel, Mathew Monfort, Urs Muller, Jiakai Zhang, et al. End to end learning for self-driving cars. *arXiv preprint arXiv:1604.07316*, 2016.
- [5] Lili Chen, Shikhar Bahl, and Deepak Pathak. Playfusion: Skill acquisition via diffusion from language-annotated play. In *Conference on Robot Learning*, pages 2012–2029. PMLR, 2023.
- [6] Cheng Chi, Siyuan Feng, Yilun Du, Zhenjia Xu, Eric Cousineau, Benjamin Burchfiel, and Shuran Song. Diffusion policy: Visuomotor policy learning via action diffusion. *arXiv preprint arXiv:2303.04137*, 2023.
- [7] Gaurav Datta, Ryan Hoque, Anrui Gu, Eugen Solowjow, and Ken Goldberg. Iifl: Implicit interactive fleet learning from heterogeneous human supervisors. In *Conference on Robot Learning*, pages 2340–2356. PMLR, 2023.
- [8] Yilun Du and Igor Mordatch. Implicit generation and generalization in energy-based models. *arXiv preprint arXiv:1903.08689*, 2019.
- [9] Yan Duan, Marcin Andrychowicz, Bradly Stadie, OpenAI Jonathan Ho, Jonas Schneider, Ilya Sutskever, Pieter Abbeel, and Wojciech Zaremba. One-shot imitation learning. *Advances in neural information processing systems*, 30, 2017.
- [10] Chelsea Finn, Tianhe Yu, Tianhao Zhang, Pieter Abbeel, and Sergey Levine. One-shot visual imitation learning via meta-learning. In *Conference on robot learning*, pages 357–368. PMLR, 2017.
- [11] Pete Florence, Corey Lynch, Andy Zeng, Oscar A Ramirez, Ayzaan Wahid, Laura Downs, Adrian Wong, Johnny Lee, Igor Mordatch, and Jonathan Tompson. Implicit behavioral cloning. In *Conference on Robot Learning*, pages 158–168. PMLR, 2022.
- [12] Peter Florence, Lucas Manuelli, and Russ Tedrake. Self-supervised correspondence in visuomotor policy learning. *IEEE Robotics and Automation Letters*, 5(2):492–499, 2019.
- [13] Justin Fu, Aviral Kumar, Ofir Nachum, George Tucker, and Sergey Levine. D4rl: Datasets for deep data-driven reinforcement learning. *arXiv preprint arXiv:2004.07219*, 2020.
- [14] Abhishek Gupta, Vikash Kumar, Corey Lynch, Sergey Levine, and Karol Hausman. Relay policy learning: Solving long-horizon tasks via imitation and reinforcement learning. In *Conference on Robot Learning*, pages 1025–1037. PMLR, 2020.
- [15] Huy Ha, Pete Florence, and Shuran Song. Scaling up and distilling down: Language-guided robot skill acquisition. In *Conference on Robot Learning*, pages 3766–3777. PMLR, 2023.
- [16] Jonathan Ho, Ajay Jain, and Pieter Abbeel. Denoising diffusion probabilistic models. *Advances in neural information processing systems*, 33:6840–6851, 2020.
- [17] Xixi Hu, Bo Liu, Xingchao Liu, et al. Rf-policy: Rectified flows are computation-adaptive decision makers. In *NeurIPS 2023 Foundation Models for Decision Making Workshop*, 2023.
- [18] Ding Huang, Jian Huang, Ting Li, and Guohao Shen. Conditional stochastic interpolation for generative learning. *arXiv preprint arXiv:2312.05579*, 2023.
- [19] Ahmed Hussein, Mohamed Medhat Gaber, Eyad Elyan, and Chrisina Jayne. Imitation learning: A survey of learning methods. *ACM Computing Surveys (CSUR)*, 50(2):1–35, 2017.
- [20] Daniel Jarrett, Ioana Bica, and Mihaela van der Schaar. Strictly batch imitation learning by energy-based distribution matching. *Advances in Neural Information Processing Systems*, 33:7354–7365, 2020.
- [21] Tobias Johannink, Shikhar Bahl, Ashvin Nair, Jianlan Luo, Avinash Kumar, Matthias Loskyll, Juan Aparicio Ojea, Eugen Solowjow, and Sergey Levine. Residual reinforcement learning for robot control. In *2019 International Conference on Robotics and Automation (ICRA)*, pages 6023–6029. IEEE, 2019.
- [22] Diederik P Kingma and Jimmy Ba. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*, 2014.
- [23] Jiayi Li, Tao Lu, Xiaoge Cao, Yinghao Cai, and Shuo Wang. Meta-imitation learning by watching video demonstrations. In *International Conference on Learning Representations*, 2021.
- [24] Guan-Horng Liu, Arash Vahdat, De-An Huang, Evangelos A Theodorou, Weili Nie, and Anima Anandkumar. I<sup>2</sup>sb: Image-to-image schrödinger bridge. *arXiv preprint arXiv:2302.05872*, 2023.

- [25] Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. *arXiv preprint arXiv:1711.05101*, 2017.
- [26] Viktor Makoviychuk, Lukasz Wawrzyniak, Yunrong Guo, Michelle Lu, Kier Storey, Miles Macklin, David Hoeller, Nikita Rudin, Arthur Allshire, Ankur Handa, et al. Isaac gym: High performance gpu based physics simulation for robot learning. In *Thirty-fifth Conference on Neural Information Processing Systems Datasets and Benchmarks Track (Round 2)*, 2021.
- [27] Ajay Mandlekar, Danfei Xu, Josiah Wong, Soroush Nasiriany, Chen Wang, Rohun Kulkarni, Li Fei-Fei, Silvio Savarese, Yuke Zhu, and Roberto Martín-Martín. What matters in learning from offline human demonstrations for robot manipulation. In *Conference on Robot Learning*, pages 1678–1690. PMLR, 2022.
- [28] Ajay Mandlekar, Caelan Reed Garrett, Danfei Xu, and Dieter Fox. Human-in-the-loop task and motion planning for imitation learning. In *Conference on Robot Learning*, pages 3030–3060. PMLR, 2023.
- [29] Utkarsh Aashu Mishra, Shangjie Xue, Yongxin Chen, and Danfei Xu. Generative skill chaining: Long-horizon skill planning with diffusion models. In *Conference on Robot Learning*, pages 2905–2925. PMLR, 2023.
- [30] Eley Ng, Ziang Liu, and Monroe Kennedy. Diffusion co-policy for synergistic human-robot collaborative tasks. *IEEE Robotics and Automation Letters*, 2023.
- [31] Tim Pearce, Tabish Rashid, Anssi Kanervisto, Dave Bignell, Mingfei Sun, Raluca Georgescu, Sergio Valcarcel Macua, Shan Zheng Tan, Ida Momennejad, Katja Hofmann, et al. Imitating human behaviour with diffusion models. In *The Eleventh International Conference on Learning Representations (ICLR 2023)*, 2023.
- [32] Dean A Pomerleau. Alvin: An autonomous land vehicle in a neural network. *Advances in neural information processing systems*, 1, 1988.
- [33] Rouhollah Rahmatizadeh, Pooya Abolghasemi, Ladislau Bölöni, and Sergey Levine. Vision-based multi-task manipulation for inexpensive robots using end-to-end learning from demonstration. In *2018 IEEE international conference on robotics and automation (ICRA)*, pages 3758–3765. IEEE, 2018.
- [34] Aravind Rajeswaran, Vikash Kumar, Abhishek Gupta, Giulia Vezzani, John Schulman, Emanuel Todorov, and Sergey Levine. Learning complex dexterous manipulation with deep reinforcement learning and demonstrations. *Robotics: Science and Systems XIV*, 2018.
- [35] Moritz Reuss and Rudolf Lioutikov. Multimodal diffusion transformer for learning from play. In *2nd Workshop on Language and Robot Learning: Language as Grounding*, 2023.
- [36] Moritz Reuss, Maximilian Li, Xiaogang Jia, and Rudolf Lioutikov. Goal-conditioned imitation learning using score-based diffusion policies. *arXiv preprint arXiv:2304.02532*, 2023.
- [37] Stéphane Ross, Geoffrey Gordon, and Drew Bagnell. A reduction of imitation learning and structured prediction to no-regret online learning. In *Proceedings of the fourteenth international conference on artificial intelligence and statistics*, pages 627–635. JMLR Workshop and Conference Proceedings, 2011.
- [38] Charles Schaff and Matthew R Walter. Residual policy learning for shared autonomy. *arXiv preprint arXiv:2004.05097*, 2020.
- [39] Paul Maria Scheickl, Nicolas Schreiber, Christoph Haas, Niklas Freymuth, Gerhard Neumann, Rudolf Lioutikov, and Franziska Mathis-Ullrich. Movement primitive diffusion: Learning gentle robotic manipulation of deformable objects. *arXiv preprint arXiv:2312.10008*, 2023.
- [40] Nur Muhammad Shafiullah, Zichen Cui, Ariuntuya Arty Altanzaya, and Lerrel Pinto. Behavior transformers: Cloning  $k$  modes with one stone. *Advances in neural information processing systems*, 35:22955–22968, 2022.
- [41] Pratyusha Sharma, Lekha Mohan, Lerrel Pinto, and Abhinav Gupta. Multiple interactions made easy (mime): Large scale demonstrations data for imitation. In *Conference on robot learning*, pages 906–915. PMLR, 2018.
- [42] Tom Silver, Kelsey Allen, Josh Tenenbaum, and Leslie Kaelbling. Residual policy learning. *arXiv preprint arXiv:1812.06298*, 2018.
- [43] Sumeet Singh, Stephen Tu, and Vikas Sindhwani. Revisiting energy based models as policies: Ranking noise contrastive estimation and interpolating energy models. *arXiv preprint arXiv:2309.05803*, 2023.
- [44] Kihyuk Sohn, Honglak Lee, and Xinchen Yan. Learning structured output representation using deep conditional generative models. *Advances in neural information processing systems*, 28, 2015.
- [45] Jiaming Song, Chenlin Meng, and Stefano Ermon. Denoising diffusion implicit models. In *International Conference on Learning Representations*, 2020.
- [46] Sam Toyer, Rohin Shah, Andrew Critch, and Stuart Russell. The magical benchmark for robust imitation. *Advances in Neural Information Processing Systems*, 33: 18284–18295, 2020.
- [47] Julen Urain, Niklas Funk, Jan Peters, and Georgia Chalvatzaki. Se (3)-diffusionfields: Learning smooth cost functions for joint grasp and motion optimization through diffusion. In *2023 IEEE International Conference on Robotics and Automation (ICRA)*, pages 5923–5930. IEEE, 2023.
- [48] Nikolaus Vahrenkamp, Martin Do, Tamim Asfour, and Rüdiger Dillmann. Integrated grasp and motion planning. In *2010 IEEE International Conference on Robotics and Automation*, pages 2883–2888. IEEE, 2010.
- [49] Yaqing Wang, Quanming Yao, James T Kwok, and Lionel M Ni. Generalizing from a few examples: A survey on few-shot learning. *ACM computing surveys (csur)*, 53(3):1–34, 2020.
- [50] Jimmy Wu, Xingyuan Sun, Andy Zeng, Shuran Song, Johnny Lee, Szymon Rusinkiewicz, and Thomas Funkhouser. Spatial action maps for mobile manipula-

- tion. *arXiv preprint arXiv:2004.09141*, 2020.
- [51] Zhou Xian, Nikolaos Gkanatsios, Theophile Gervet, Tsung-Wei Ke, and Katerina Fragkiadaki. Chaineddiffuser: Unifying trajectory diffusion and keypose prediction for robotic manipulation. In *Conference on Robot Learning*, pages 2323–2339. PMLR, 2023.
  - [52] Mengda Xu, Zhenjia Xu, Cheng Chi, Manuela Veloso, and Shuran Song. Xskill: Cross embodiment skill discovery. In *Conference on Robot Learning*, pages 3536–3555. PMLR, 2023.
  - [53] Zhantao Yang, Ruili Feng, Han Zhang, Yujun Shen, Kai Zhu, Lianghua Huang, Yifei Zhang, Yu Liu, Deli Zhao, Jingren Zhou, et al. Eliminating lipschitz singularities in diffusion models. *arXiv preprint arXiv:2306.11251*, 2023.
  - [54] Takuma Yoneda, Luzhe Sun, Bradley Stadie, Ge Yang, and Matthew Walter. To the noise and back: Diffusion for shared autonomy. *arXiv preprint arXiv:2302.12244*, 2023.
  - [55] Tianhe Yu, Chelsea Finn, Annie Xie, Sudeep Dasari, Tianhao Zhang, Pieter Abbeel, and Sergey Levine. One-shot imitation from observing humans via domain-adaptive meta-learning. *arXiv preprint arXiv:1802.01557*, 2018.
  - [56] Tianhao Zhang, Zoe McCarthy, Owen Jow, Dennis Lee, Xi Chen, Ken Goldberg, and Pieter Abbeel. Deep imitation learning for complex manipulation tasks from virtual reality teleoperation. In *2018 IEEE International Conference on Robotics and Automation (ICRA)*, pages 5628–5635. IEEE, 2018.
  - [57] Boyuan Zheng, Sunny Verma, Jianlong Zhou, Ivor W Tsang, and Fang Chen. Imitation learning: Progress, taxonomies and challenges. *IEEE Transactions on Neural Networks and Learning Systems*, (99):1–16, 2022.
  - [58] Linqi Zhou, Aaron Lou, Samar Khanna, and Stefano Ermon. Denoising diffusion bridge models. *arXiv preprint arXiv:2309.16948*, 2023.

APPENDIX A  
PROOFS

**Theorem 1.** Let  $\hat{\pi}_0$  and  $\hat{\rho}_0$  be two source distributions and given that Assumption 1 holds. Then the improvement of the generated target distribution is bounded by the improvement of the source distribution

$$\begin{aligned} \phi_{F,\hat{\pi}}(1, x) - \phi_{F,\hat{\rho}}(1, x) \\ \leq \phi_{F,\hat{\pi}}(0, x) - \phi_{F,\hat{\rho}}(0, x) + \epsilon_{\max} - \epsilon_{\min}. \end{aligned}$$

*Proof:* By Lagrange's Theorem, there exist  $s \in [0, 1]$  such that  $\partial_t \phi_{F,\hat{\pi}}(s, x) = \phi_{F,\hat{\pi}}(1, x) - \phi_{F,\hat{\pi}}(0, x)$ . Rearranging the terms and using the assumption that the derivative is upper bounded by  $-\epsilon_{\min}$ , we have

$$\begin{aligned} \phi_{F,\hat{\pi}}(1, x) &= \phi_{F,\hat{\pi}}(0, x) + \partial_t \phi_{F,\hat{\pi}}(s, x) \\ &\leq \phi_{F,\hat{\pi}}(0, x) - \epsilon_{\min}. \end{aligned} \quad (14)$$

Similarly, there must exist  $s'$  such that  $\partial_t \phi_{F,\hat{\rho}}(s', x) = \phi_{F,\hat{\rho}}(1, x) - \phi_{F,\hat{\rho}}(0, x)$ . Rearranging the terms and using the assumption that the derivative is lower bounded by  $-\epsilon_{\max}$ ,

$$\begin{aligned} \phi_{F,\hat{\rho}}(1, x) &= \phi_{F,\hat{\rho}}(0, x) + \partial_t \phi_{F,\hat{\rho}}(s', x) \\ &\geq \phi_{F,\hat{\rho}}(0, x) - \epsilon_{\max}. \end{aligned} \quad (15)$$

Putting these results together, we have

$$\begin{aligned} \phi_{F,\hat{\pi}}(1, x) - \phi_{F,\hat{\rho}}(1, x) \\ \leq (\phi_{F,\hat{\pi}}(0, x) - \epsilon_{\min}) - (\phi_{F,\hat{\rho}}(0, x) - \epsilon_{\max}) \\ = \phi_{F,\hat{\pi}}(0, x) - \phi_{F,\hat{\rho}}(0, x) + \epsilon_{\max} - \epsilon_{\min}. \end{aligned}$$

where the inequality is due to Equation 14 and 15.  $\blacksquare$

**Theorem 2.** Let  $\hat{\pi}_0$  and  $\hat{\rho}_0$  be two source distributions and given that Assumption 2 holds. Then the improvement of the generated target distribution is bounded by the improvement of the source distribution

$$\begin{aligned} \phi_{F,\hat{\pi}}(1, x) - \phi_{F,\hat{\rho}}(1, x) \\ \leq \phi_{F,\hat{\pi}}(0, x) - \phi_{F,\hat{\rho}}(0, x) + \epsilon_{\max} - \epsilon_{\min}. \end{aligned}$$

*Proof:* We prove by induction. In particular, we will prove that for all  $k \in \{1, \dots, K\}$ , we have

$$\begin{aligned} \phi_{F,\hat{\pi}}(t_k, x) - \phi_{F,\hat{\rho}}(t_k, x) \\ \leq \phi_{F,\hat{\pi}}(0, x) - \phi_{F,\hat{\rho}}(0, x) + (\epsilon_{\max} - \epsilon_{\min}) \sum_{i=1}^k \delta t_i. \end{aligned} \quad (16)$$

When  $k = 1$ , we have

$$\begin{aligned} \phi_{F,\hat{\pi}}(t_1, x) - \phi_{F,\hat{\rho}}(t_1, x) \\ \leq (\phi_{F,\hat{\pi}}(t_0, x) - \epsilon_{\min} \delta t_1) - (\phi_{F,\hat{\rho}}(t_0, x) - \epsilon_{\max} \delta t_1) \\ = (\phi_{F,\hat{\pi}}(0, x) - \phi_{F,\hat{\rho}}(0, x)) + (\epsilon_{\max} - \epsilon_{\min}) \delta t_1. \end{aligned}$$

Now assume that Equation 16 is true for  $k$ . Then

$$\begin{aligned} \phi_{F,\hat{\pi}}(t_{k+1}, x) - \phi_{F,\hat{\rho}}(t_{k+1}, x) \\ \leq (\phi_{F,\hat{\pi}}(t_k, x) - \epsilon_{\min} \delta t_{k+1}) - (\phi_{F,\hat{\rho}}(t_k, x) - \epsilon_{\max} \delta t_{k+1}) \\ = (\phi_{F,\hat{\pi}}(t_k, x) - \phi_{F,\hat{\rho}}(t_k, x)) + (\epsilon_{\max} - \epsilon_{\min}) \delta t_{k+1} \\ \leq \phi_{F,\hat{\pi}}(0, x) - \phi_{F,\hat{\rho}}(0, x) + (\epsilon_{\max} - \epsilon_{\min}) \sum_{i=1}^{k+1} \delta t_i. \end{aligned}$$

In particular, when  $k = K$ , we have

$$\begin{aligned} \phi_{F,\hat{\pi}}(1, x) - \phi_{F,\hat{\rho}}(1, x) \\ = \phi_{F,\hat{\pi}}(t_K, x) - \phi_{F,\hat{\rho}}(t_K, x) \\ \leq \phi_{F,\hat{\pi}}(0, x) - \phi_{F,\hat{\rho}}(0, x) + (\epsilon_{\max} - \epsilon_{\min}) \sum_{i=1}^K \delta t_i \\ \leq \phi_{F,\hat{\pi}}(0, x) - \phi_{F,\hat{\rho}}(0, x) + \epsilon_{\max} - \epsilon_{\min} \end{aligned}$$

where the sum telescopes to  $t_K - t_0 = 1$ .  $\blacksquare$

**Theorem 3.** Let  $\hat{\pi}_0$  and  $\hat{\rho}_0$  be two source distributions and given that both Assumption 2 and 3 holds for  $F = \mathbb{H}$  (cross-entropy). Then for any observation  $x$ , we have

$$\begin{aligned} \mathbb{E}_{a \sim \hat{\pi}_1} [c(a|x)] - \mathbb{E}_{a \sim \hat{\rho}_1} [c(a|x)] \\ \leq \mathbb{E}_{a \sim \hat{\pi}_0} [c(a|x)] - \mathbb{E}_{a \sim \hat{\rho}_0} [c(a|x)] + \epsilon_{\max} - \epsilon_{\min}. \end{aligned}$$

*Proof:* We prove by induction. In particular, we will prove that for all  $k \in \{1, \dots, K\}$ , we have

$$\begin{aligned} \mathbb{E}_{\hat{\pi}_{[k]}} [c(a|x)] - \mathbb{E}_{\hat{\rho}_{[k]}} [c(a|x)] \\ \leq \mathbb{E}_{\hat{\pi}_{[k-1]}} [c(a|x)] - \mathbb{E}_{\hat{\rho}_{[k-1]}} [c(a|x)] + (\epsilon_{\max} - \epsilon_{\min}) \sum_{i=1}^k \delta t_i. \end{aligned}$$

where for brevity, we denote  $\hat{\pi}_{t_k}$  as  $\hat{\pi}_{[k]}$ . Let  $\epsilon = \epsilon_{\max} - \epsilon_{\min}$ . When  $k = 1$ , we have

$$\begin{aligned} \mathbb{E}_{\hat{\pi}_{[1]}} [c(a|x)] - \mathbb{E}_{\hat{\rho}_{[1]}} [c(a|x)] \\ = \int (\hat{\pi}_{[1]}(a|x) - \hat{\rho}_{[1]}(a|x)) c(a|x) da \\ = - \int (\hat{\pi}_{[1]}(a|x) - \hat{\rho}_{[1]}(a|x)) (\ln Z - \ln \pi_1(a|x)) da \\ = - \int \hat{\pi}_{[1]}(a|x) \ln \pi_1(a|x) - \hat{\rho}_{[1]}(a|x) \ln \pi_1(a|x) da \\ = \mathbb{H}(\hat{\pi}_{[1]}(\cdot|x), \pi_1(\cdot|x)) - \mathbb{H}(\hat{\rho}_{[1]}(\cdot|x), \pi_1(\cdot|x)) \\ \leq \mathbb{H}(\hat{\pi}_{[0]}(\cdot|x), \pi_1(\cdot|x)) - \mathbb{H}(\hat{\rho}_{[0]}(\cdot|x), \pi_1(\cdot|x)) + \epsilon \delta t_1 \\ = - \int \hat{\pi}_{[0]}(a|x) \ln \pi_1(a|x) - \hat{\rho}_{[0]}(a|x) \ln \pi_1(a|x) da + \epsilon \delta t_1 \\ = - \int (\hat{\pi}_{[0]}(a|x) - \hat{\rho}_{[0]}(a|x)) (\ln Z - \ln \pi_1(a|x)) da + \epsilon \delta t_1 \\ = \int (\hat{\pi}_{[0]}(a|x) - \hat{\rho}_{[0]}(a|x)) c(a|x) da + \epsilon \delta t_1 \\ = \mathbb{E}_{\hat{\pi}_{[0]}} [c(a|x)] - \mathbb{E}_{\hat{\rho}_{[0]}} [c(a|x)] + (\epsilon_{\max} - \epsilon_{\min}) \delta t_1. \end{aligned}$$

The inductive case can be proven similarly. At  $k = K$ , the sum telescopes to 1, thus yielding our result.  $\blacksquare$

APPENDIX B  
EXPERIMENT DOMAINS

**Franka Kitchen (State).** The goal of Franka Kitchen is to control a 7 DoF robot arm to interact with the various objects to reach a desired state configuration (Fig. 6). The environment includes 7 objects available for interaction [13]. Franka Kitchen comprises three datasets: 1) a complete dataset that includes demonstrations of all 4 target subtasks performed

in a specific order, 2) a partial dataset that includes sub-trajectories where the 4 subtasks are completed sequentially, and 3) a mixed dataset, presenting various subtasks being executed, but the 4 subtasks are not completed in sequence and the demonstrated behaviors are multi-modal [13]. We train the models on the mixed dataset, which is considered the most challenging among the three. The model is trained on varying data sizes: 1) small size: 16000 sequences, 2) medium size: 32000 sequences, and 3) large size: 64000 sequences. We evaluate CVAE [44] source distributions trained on the same dataset (using state observations). Similar to [6], the models predict action sequences with receding-horizon control (16 steps of actions, of which 8 steps of actions are executed on the robot without re-planning).

**Adroit (State).** Adroit encompasses the control of a 24-degree-of-freedom robotic hand to accomplish four specific tasks (Fig. 6). Adroit is one of the most challenging task sets, as it requires a model to generate intricate, high-dimensional, and high-precision action sequences over long time horizons. We use the dataset of human demonstrations provided in the DAPG repository [13]. Similar to Franka Kitchen, we train the model on different data sizes: 1) small size: 1250 sequences, 2) medium size: 2500 sequences, and 3) large size: 5000 sequences. We evaluate two source distributions: 1) CVAE [44] trained on the same dataset (on 4 tasks) and 2) hand-craft heuristic source distribution (on door and hammer). The models are trained on state observation. Similar to Franka Kitchen, we apply receding-horizon control; the models predict 64 steps of actions, of which 48 steps of actions are executed on the robot without re-planning.

**6-DoF Grasp Pose Generation (Point-Cloud).** The objective is to generate grasp poses capable of picking up an object based on the object’s point cloud (Fig. 6). The demonstrated behavior’s distribution is intricate and highly multi-modal [47], with high-dimensional point clouds as observations. Our model is trained on 11 object categories sourced from the Acronym dataset [48], encompassing 552 objects with approximately 200-2000 grasps for each object. Similar to Adroit, we evaluate two different source distributions: 1) CVAE [44] trained on the same dataset and 2) hand-crafted heuristic source distributions. Both source distributions use point-cloud observations.

#### APPENDIX C SOURCE POLICIES

As mentioned above, our experiments involve heuristic policies and data-driven CVAE policies:

**Heuristic policies.** We used hand-crafted policies for the following tasks:

- **Adroit Hammer:** the policy involves moving the hand towards the hammer, closing the hand, and subsequently rotating the wrist to swing the hammer.
- **Adroit Door:** the policy involves moving the hand towards the handle of the door, closing the hand, rotating the wrist, and pulling the hand back.

- **Grasp Generation:** We sample grasp poses directed at the object, distributing them uniformly on a sphere with its center at the object. The sphere’s radius is determined by adding 0.5 to the average distance from the normalized point cloud to its center.

**Data-driven policies.** We use lightweight Conditional Variational Autoencoders (CVAEs) as a representative policy. The CVAEs are trained to generate action sequences conditioned on observations specific to each domain (as described above). In Franka Kitchen and Adroit tasks, the CVAEs are parameterized by multi-layer perceptrons with  $\approx 3 \times 10^6$  parameters (10 times fewer parameters compared to the diffusion models). In Grasp Generation task, CVAE is parameterized using the Grasp SE(3)-DiffusionFields neural network [47] with  $\approx 3.5 \times 10^6$  parameters (approximately half of the number of parameters of the diffusion models).

#### APPENDIX D BASELINES

We compare BRIDGER Policy with the current state-of-the-art diffusion-style behavior cloning. Since BRIDGER can be viewed as one kind of residual model, we also compare it against a residual policy. For ablation studies, we evaluate BRIDGER under different configurations, focusing on the source distributions and interpolants. In the following, we present an overview of each methods.

**DDIM.** Diffusion Policy [6, 36] trains a Denoising Diffusion Probabilistic Model [16] and applied Denoising Diffusion Implicit Model (DDIM) [45] during testing. In Adroit and Franka Kitchen tasks, the model is parameterized by the CNN-based U-net [6]. In Grasp Generation tasks, the model is parameterized by Grasp SE(3)-DiffusionFields neural network [47].

**SE3 for Grasping.** Score-based diffusion model designed in SE(3) space [47]. The model is specifically designed for generating 6-DoF grasp poses and parameterized by Grasp SE(3)-DiffusionFields neural network. It represents a state-of-the-art generative model for grasps.

**Residual Policy.** Residual Policy [42, 1, 21] takes in the sample from the source distribution as input and predicts the difference between the source sample and the target sample. The model is parameterized by the CNN-based U-net [6] similar to the network used in DDIM and is trained by Mean Square Error (MSE). For Grasp Generation tasks, it is parameterized by the Grasp SE(3)-DiffusionFields neural network [47].

**BRIDGER.** Our stochastic interpolant policy. The model is parameterized by the CNN-based U-net [6] for the Adroit and Franka Kitchen tasks and parameterized by Grasp SE(3)-DiffusionFields neural network [47] for Grasp Generation. When compared with other baselines, we set  $\gamma$  scale  $d$  and  $\epsilon$  scale  $c$  as in Table. III. We conduct an ablation study of BRIDGER with different source distribution, interpolant functions,  $\gamma$  and  $\epsilon$  scale. We name each ablation as BRIDGER

Table III: Values of  $\gamma$  scale  $d$  and  $\epsilon$  scale  $c$  in BRIDGER under different source policies.

	CVAE		Heuristic		Gaussian	
	$\gamma$ scale $d$	$\epsilon$ scale $c$	$\gamma$ scale $d$	$\epsilon$ scale $c$	$\gamma$ scale $d$	$\epsilon$ scale $c$
Door	0.03	1.0	0.03	1.0	0.03	1.0
Relocate	0.3	1.0	-	-	0.3	1.0
Hammer	0.03	3.0	0.3	1.0	0.03	3.0
Pen	0.03	1.0	-	-	0.03	1.0
Franka Kitchen	0.03	3.0	-	-	0.03	3.0
Grasp Generation	0.3	1.0	0.3	1.0	0.3	1.0

$/ [\dots] / [\dots]$ . For example, BRIDGER / Linear / CVAE represents BRIDGER with CVAE as the source distribution and linear function as the interpolant.

For fair comparison, each method has approximately the same number of parameters. In Adroit and Franka Kitchen, methods have  $\approx 6.7 \times 10^7$  parameters each. In Grasp Generation tasks, the parameter count for each method is  $\approx 6.2 \times 10^6$ .

#### APPENDIX E MODEL TRAINING

In both Adroit and Franka Kitchen, we utilized AdamW [25] as the optimizer. The model was trained for 3000 epochs for Adroit and 5000 epochs for Franka Kitchen. The learning rate was set to  $5 \times 10^{-6}$  with a learning rate decay of 0.5 every 500 epochs. The batch size was fixed at 256.

For Grasp Generation, we employed Adam [22] as the optimizer. The model was trained for 4000 epochs with the learning rate  $5 \times 10^{-4}$ . Similar to Adroit and Franka Kitchen, the learning rate decay was set to 0.5 every 500 epochs. The batch contains 100 objects with 80 grasps per object.

#### APPENDIX F ADDITIONAL RESULTS AND PLOTS

In this section, we present additional results, complementing the main paper.

**BRIDGER against baselines.** Performance comparisons between BRIDGER v.s. the baselines on different training data sizes and diffusion steps for Adroit and Franka Kitchen are shown in Table. IV (large training data size), V (medium training data size) and VI (small training data size). Results for Grasp Generation with varying number of steps are presented in Table. VII and VIII. We report the results of BRIDGER with Power3 interpolant function and decomposed velocity  $b$ . The values of  $\gamma$  scale and  $\epsilon$  scale are listed in Table. III.

**BRIDGER with Power3 and Linear interpolant function.** The performance metrics comparing the different interpolant functions on the Adroit and Franka Kitchen tasks are shown in Table. IX (large training data size), X (medium training data size) and XI (small training data size). The results for grasp generation presented in Table. XII and XIII.

##### A. Other Findings

**Larger  $\gamma$  value encourages exploration.** Our findings indicate that increasing the  $\gamma$  scale  $d$  is beneficial when there is a significant discrepancy between the source and target

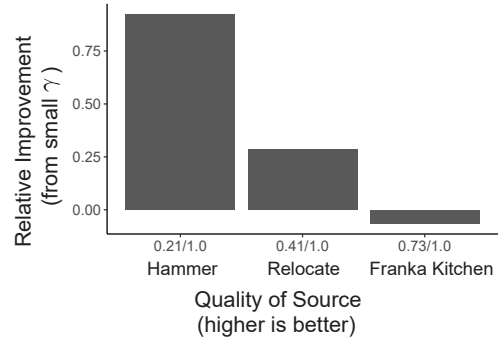


Figure 13: Relative improvement is the ratio of the source distribution’s performance to the best performance achieved by BRIDGER. Increasing the  $\gamma$  scale parameter from  $d = 0.03$  to  $d = 0.3$  yields relative improvements in scenarios where the source distribution significantly deviates from the target distribution, as observed in the Hammer and Relocate tasks. This adjustment promotes exploration, enhancing performance. Conversely, in cases where the source distribution closely matches the target, such as in the Franka Kitchen task, increasing the  $\gamma$  scale parameter does not contribute to performance gains.

distributions. Specifically, in experiments, the heuristic source policy in Hammer and the CVAE source policy in Relocate exhibited suboptimal performance, with relative ratios of source policy performance to the best performance of our method being 0.41 and 0.21, respectively. Comparing  $\gamma$  scale values (0.03 vs. 0.3), we observed that an increased  $\gamma$  scale led to improved outcomes, as depicted in Figure 13. We believe this is due to larger exploration in the sampling process during training. However, when the source distribution closely resembles the target distribution, increasing  $\gamma$  does not further enhance performance. This is exemplified in the Franka Kitchen scenario, where the relative ratio between source-only and optimal performance of our method stands at 0.73, suggesting a relatively minor gap. In such contexts, our method yields comparable results regardless of the increased  $\gamma$  scale, as illustrated in Figure 13.

Table IV: Full results of average task performance of BRIDGER against current state-of-the-art methods under varying number of diffusion steps when trained with the Large dataset.

		CVAE	BRIDGER Heuristic	Gaussian	Residual Policy		DDIM
					CVAE	Heuristic	
Door	$k = 0$	$0.13 \pm 0.04$	<b><math>0.16 \pm 0.06</math></b>	$0.00 \pm 0.00$	$0.13 \pm 0.04$	<b><math>0.16 \pm 0.06</math></b>	$0.00 \pm 0.00$
	$k = 5$	<b><math>0.60 \pm 0.15</math></b>	$0.00 \pm 0.00$	$0.08 \pm 0.06$	$0.04 \pm 0.06$	$0.00 \pm 0.00$	$0.02 \pm 0.02$
	$k = 10$	<b><math>0.54 \pm 0.18</math></b>	$0.27 \pm 0.01$	$0.07 \pm 0.05$	$0.04 \pm 0.06$	$0.00 \pm 0.00$	$0.31 \pm 0.08$
	$k = 20$	<b><math>0.52 \pm 0.23</math></b>	$0.45 \pm 0.04$	$0.10 \pm 0.07$	$0.04 \pm 0.06$	$0.00 \pm 0.00$	$0.38 \pm 0.11$
	$k = 40$	$0.48 \pm 0.19$	<b><math>0.72 \pm 0.02</math></b>	$0.07 \pm 0.05$	$0.04 \pm 0.06$	$0.00 \pm 0.00$	$0.03 \pm 0.00$
	$k = 80$	$0.50 \pm 0.14$	<b><math>0.63 \pm 0.08</math></b>	$0.12 \pm 0.09$	$0.04 \pm 0.06$	$0.00 \pm 0.00$	$0.05 \pm 0.02$
Relocate	$k = 0$	<b><math>0.31 \pm 0.15</math></b>	-	$0.00 \pm 0.00$	<b><math>0.31 \pm 0.15</math></b>	-	$0.00 \pm 0.00$
	$k = 5$	<b><math>0.75 \pm 0.11</math></b>	-	$0.61 \pm 0.05$	$0.30 \pm 0.04$	-	$0.17 \pm 0.04$
	$k = 10$	<b><math>0.75 \pm 0.08</math></b>	-	$0.73 \pm 0.11$	$0.30 \pm 0.04$	-	$0.38 \pm 0.11$
	$k = 20$	$0.70 \pm 0.11$	-	<b><math>0.72 \pm 0.09</math></b>	$0.30 \pm 0.04$	-	$0.37 \pm 0.04$
	$k = 40$	$0.77 \pm 0.11$	-	<b><math>0.78 \pm 0.05</math></b>	$0.30 \pm 0.04$	-	$0.38 \pm 0.11$
	$k = 80$	$0.79 \pm 0.08$	-	<b><math>0.81 \pm 0.04</math></b>	$0.30 \pm 0.04$	-	$0.26 \pm 0.03$
Hammer	$k = 0$	<b><math>0.16 \pm 0.03</math></b>	$0.11 \pm 0.08$	$0.00 \pm 0.00$	<b><math>0.16 \pm 0.03</math></b>	$0.11 \pm 0.08$	$0.00 \pm 0.00$
	$k = 5$	<b><math>0.44 \pm 0.11</math></b>	$0.20 \pm 0.24$	$0.16 \pm 0.04$	$0.13 \pm 0.06$	$0.24 \pm 0.07$	$0.01 \pm 0.01$
	$k = 10$	$0.54 \pm 0.17$	<b><math>0.62 \pm 0.11</math></b>	$0.30 \pm 0.04$	$0.13 \pm 0.06$	$0.24 \pm 0.07$	$0.11 \pm 0.08$
	$k = 20$	$0.63 \pm 0.08$	<b><math>0.74 \pm 0.07</math></b>	$0.35 \pm 0.02$	$0.13 \pm 0.06$	$0.24 \pm 0.07$	$0.17 \pm 0.12$
	$k = 40$	<b><math>0.58 \pm 0.12</math></b>	<b><math>0.58 \pm 0.21</math></b>	$0.36 \pm 0.05$	$0.13 \pm 0.06$	$0.24 \pm 0.07$	$0.01 \pm 0.01$
	$k = 80$	<b><math>0.72 \pm 0.09</math></b>	$0.47 \pm 0.25$	$0.43 \pm 0.09$	$0.13 \pm 0.06$	$0.24 \pm 0.07$	$0.03 \pm 0.04$
Pen	$k = 0$	<b><math>0.29 \pm 0.05</math></b>	-	$0.00 \pm 0.00$	<b><math>0.29 \pm 0.05</math></b>	-	$0.00 \pm 0.00$
	$k = 5$	$0.45 \pm 0.04$	-	$0.43 \pm 0.02$	$0.33 \pm 0.12$	-	<b><math>0.54 \pm 0.03</math></b>
	$k = 10$	$0.49 \pm 0.02$	-	$0.46 \pm 0.04$	$0.33 \pm 0.12$	-	<b><math>0.54 \pm 0.04</math></b>
	$k = 20$	$0.49 \pm 0.09$	-	<b><math>0.53 \pm 0.02</math></b>	$0.33 \pm 0.12$	-	$0.51 \pm 0.03$
	$k = 40$	$0.52 \pm 0.07$	-	<b><math>0.54 \pm 0.05</math></b>	$0.33 \pm 0.12$	-	$0.53 \pm 0.02$
	$k = 80$	<b><math>0.55 \pm 0.06</math></b>	-	<b><math>0.55 \pm 0.03</math></b>	$0.33 \pm 0.12$	-	$0.52 \pm 0.05$
Franka Kitchen	$k = 0$	<b><math>1.53 \pm 0.09</math></b>	-	$0.00 \pm 0.00$	<b><math>1.53 \pm 0.09</math></b>	-	$0.00 \pm 0.00$
	$k = 5$	<b><math>1.96 \pm 0.03</math></b>	-	$1.18 \pm 0.02$	$1.55 \pm 0.10$	-	$1.84 \pm 0.06$
	$k = 10$	<b><math>2.13 \pm 0.01</math></b>	-	$1.28 \pm 0.24$	$1.55 \pm 0.10$	-	$1.91 \pm 0.01$
	$k = 20$	<b><math>2.09 \pm 0.04</math></b>	-	$1.54 \pm 0.03$	$1.55 \pm 0.10$	-	$1.93 \pm 0.07$
	$k = 40$	<b><math>2.13 \pm 0.06</math></b>	-	$1.67 \pm 0.01$	$1.55 \pm 0.10$	-	$1.99 \pm 0.04$
	$k = 80$	<b><math>2.16 \pm 0.03</math></b>	-	$1.70 \pm 0.05$	$1.55 \pm 0.10$	-	$1.92 \pm 0.02$



Table V: Full results of average task performance of BRIDGEr against current state-of-the-art methods under varying number of diffusion steps when trained with the Medium dataset.

		CVAE	BRIDGEr Heuristic	Gaussian	Residual Policy		DDIM
					CVAE	Heuristic	
Door	$k = 0$	$0.12 \pm 0.08$	<b><math>0.16 \pm 0.06</math></b>	$0.00 \pm 0.00$	$0.12 \pm 0.08$	<b><math>0.16 \pm 0.06</math></b>	$0.00 \pm 0.00$
	$k = 5$	<b><math>0.20 \pm 0.11</math></b>	$0.07 \pm 0.00$	$0.08 \pm 0.00$	$0.16 \pm 0.11$	$0.02 \pm 0.02$	$0.00 \pm 0.00$
	$k = 10$	$0.15 \pm 0.07$	$0.00 \pm 0.00$	$0.02 \pm 0.02$	<b><math>0.16 \pm 0.11</math></b>	$0.02 \pm 0.02$	$0.02 \pm 0.01$
	$k = 20$	<b><math>0.13 \pm 0.06</math></b>	$0.00 \pm 0.00$	$0.08 \pm 0.10$	$0.16 \pm 0.11$	$0.02 \pm 0.02$	$0.03 \pm 0.02$
	$k = 40$	$0.13 \pm 0.08$	$0.01 \pm 0.02$	$0.12 \pm 0.11$	<b><math>0.16 \pm 0.11</math></b>	$0.02 \pm 0.02$	$0.00 \pm 0.00$
	$k = 80$	<b><math>0.18 \pm 0.13</math></b>	$0.08 \pm 0.06$	$0.13 \pm 0.11$	$0.16 \pm 0.11$	$0.02 \pm 0.02$	$0.00 \pm 0.00$
Relocate	$k = 0$	<b><math>0.24 \pm 0.15</math></b>	-	$0.00 \pm 0.00$	<b><math>0.24 \pm 0.12</math></b>	-	$0.00 \pm 0.00$
	$k = 5$	<b><math>0.55 \pm 0.02</math></b>	-	$0.52 \pm 0.08$	$0.29 \pm 0.07$	-	$0.01 \pm 0.01$
	$k = 10$	<b><math>0.56 \pm 0.04</math></b>	-	$0.61 \pm 0.09$	$0.29 \pm 0.07$	-	$0.09 \pm 0.01$
	$k = 20$	$0.62 \pm 0.16$	-	<b><math>0.63 \pm 0.12</math></b>	$0.29 \pm 0.07$	-	$0.12 \pm 0.04$
	$k = 40$	$0.55 \pm 0.12$	-	<b><math>0.58 \pm 0.15</math></b>	$0.29 \pm 0.07$	-	$0.020 \pm 0.01$
	$k = 80$	<b><math>0.64 \pm 0.11</math></b>	-	$0.54 \pm 0.10$	$0.29 \pm 0.07$	-	$0.03 \pm 0.01$
Hammer	$k = 0$	$0.09 \pm 0.15$	<b><math>0.11 \pm 0.08</math></b>	$0.00 \pm 0.00$	$0.09 \pm 0.15$	<b><math>0.11 \pm 0.08</math></b>	$0.00 \pm 0.00$
	$k = 5$	$0.04 \pm 0.05$	<b><math>0.17 \pm 0.20</math></b>	$0.04 \pm 0.01$	$0.11 \pm 0.02$	$0.12 \pm 0.05$	$0.00 \pm 0.00$
	$k = 10$	$0.14 \pm 0.14$	<b><math>0.43 \pm 0.18</math></b>	$0.11 \pm 0.03$	$0.11 \pm 0.02$	$0.12 \pm 0.05$	$0.03 \pm 0.02$
	$k = 20$	$0.25 \pm 0.11$	<b><math>0.51 \pm 0.18</math></b>	$0.24 \pm 0.03$	$0.11 \pm 0.02$	$0.12 \pm 0.05$	$0.04 \pm 0.04$
	$k = 40$	$0.42 \pm 0.10$	<b><math>0.48 \pm 0.27</math></b>	$0.29 \pm 0.02$	$0.11 \pm 0.02$	$0.12 \pm 0.05$	$0.00 \pm 0.00$
	$k = 80$	<b><math>0.37 \pm 0.06</math></b>	$0.32 \pm 0.24$	$0.31 \pm 0.07$	$0.11 \pm 0.02$	$0.12 \pm 0.05$	$0.00 \pm 0.00$
Pen	$k = 0$	<b><math>0.21 \pm 0.05</math></b>	-	$0.00 \pm 0.00$	<b><math>0.21 \pm 0.05</math></b>	-	$0.00 \pm 0.00$
	$k = 5$	<b><math>0.48 \pm 0.06</math></b>	-	<b><math>0.48 \pm 0.02</math></b>	$0.19 \pm 0.05$	-	$0.42 \pm 0.02$
	$k = 10$	<b><math>0.50 \pm 0.04</math></b>	-	$0.46 \pm 0.07$	$0.19 \pm 0.05$	-	<b><math>0.50 \pm 0.07</math></b>
	$k = 20$	<b><math>0.57 \pm 0.05</math></b>	-	$0.46 \pm 0.05$	$0.19 \pm 0.05$	-	$0.49 \pm 0.03$
	$k = 40$	<b><math>0.58 \pm 0.04</math></b>	-	$0.45 \pm 0.07$	$0.19 \pm 0.05$	-	$0.52 \pm 0.03$
	$k = 80$	$0.56 \pm 0.05$	-	$0.49 \pm 0.06$	$0.19 \pm 0.05$	-	<b><math>0.57 \pm 0.04</math></b>
Franka Kitchen	$k = 0$	<b><math>1.43 \pm 0.17</math></b>	-	$0.00 \pm 0.00$	<b><math>1.43 \pm 0.17</math></b>	-	$0.00 \pm 0.00$
	$k = 5$	<b><math>1.88 \pm 0.04</math></b>	-	$1.57 \pm 0.14$	$1.4 \pm 0.06$	-	$1.82 \pm 0.08$
	$k = 10$	<b><math>2.04 \pm 0.02</math></b>	-	$1.62 \pm 0.22$	$1.4 \pm 0.06$	-	$1.74 \pm 0.04$
	$k = 20$	<b><math>2.12 \pm 0.05</math></b>	-	$1.48 \pm 0.23$	$1.4 \pm 0.06$	-	$1.81 \pm 0.04$
	$k = 40$	<b><math>2.09 \pm 0.05</math></b>	-	$1.51 \pm 0.36$	$1.4 \pm 0.06$	-	$1.79 \pm 0.07$
	$k = 80$	<b><math>2.11 \pm 0.05</math></b>	-	$1.44 \pm 0.28$	$1.4 \pm 0.06$	-	$1.79 \pm 0.06$

Table VI: Full results of average task performance of BRIDGER against current state-of-the-art methods under varying number of diffusion steps when trained with the Small dataset.

		CVAE	BRIDGER Heuristic	Gaussian	Residual Policy		DDIM
					CVAE	Heuristic	
Door	$k = 0$	$0.08 \pm 0.12$	<b><math>0.16 \pm 0.06</math></b>	$0.00 \pm 0.00$	$0.08 \pm 0.12$	<b><math>0.16 \pm 0.06</math></b>	$0.00 \pm 0.00$
	$k = 5$	<b><math>0.10 \pm 0.06</math></b>	$0.00 \pm 0.00$	$0.00 \pm 0.00$	$0.00 \pm 0.00$	$0.01 \pm 0.02$	$0.00 \pm 0.00$
	$k = 10$	<b><math>0.10 \pm 0.07</math></b>	$0.00 \pm 0.00$	$0.01 \pm 0.01$	$0.00 \pm 0.00$	$0.01 \pm 0.02$	$0.00 \pm 0.00$
	$k = 20$	<b><math>0.12 \pm 0.08</math></b>	$0.00 \pm 0.00$	$0.05 \pm 0.02$	$0.00 \pm 0.00$	$0.01 \pm 0.02$	$0.00 \pm 0.00$
	$k = 40$	<b><math>0.14 \pm 0.14</math></b>	$0.00 \pm 0.00$	$0.06 \pm 0.01$	$0.00 \pm 0.00$	$0.01 \pm 0.02$	$0.00 \pm 0.00$
	$k = 80$	<b><math>0.14 \pm 0.14</math></b>	$0.00 \pm 0.00$	$0.06 \pm 0.01$	$0.00 \pm 0.00$	$0.01 \pm 0.02$	$0.00 \pm 0.00$
Relocate	$k = 0$	<b><math>0.18 \pm 0.13</math></b>	-	$0.00 \pm 0.00$	<b><math>0.18 \pm 0.13</math></b>	-	$0.00 \pm 0.00$
	$k = 5$	<b><math>0.56 \pm 0.06</math></b>	-	$0.23 \pm 0.05$	$0.20 \pm 0.07$	-	$0.00 \pm 0.00$
	$k = 10$	<b><math>0.55 \pm 0.06</math></b>	-	$0.31 \pm 0.05$	$0.20 \pm 0.07$	-	$0.00 \pm 0.00$
	$k = 20$	<b><math>0.51 \pm 0.03</math></b>	-	$0.28 \pm 0.04$	$0.20 \pm 0.07$	-	$0.00 \pm 0.00$
	$k = 40$	<b><math>0.49 \pm 0.04</math></b>	-	$0.37 \pm 0.06$	$0.20 \pm 0.07$	-	$0.00 \pm 0.00$
	$k = 80$	<b><math>0.56 \pm 0.14</math></b>	-	$0.31 \pm 0.04$	$0.20 \pm 0.07$	-	$0.01 \pm 0.01$
Hammer	$k = 0$	$0.09 \pm 0.15$	<b><math>0.11 \pm 0.08</math></b>	$0.00 \pm 0.00$	$0.07 \pm 0.12$	<b><math>0.11 \pm 0.08</math></b>	$0.00 \pm 0.00$
	$k = 5$	$0.04 \pm 0.04$	<b><math>0.16 \pm 0.08</math></b>	$0.03 \pm 0.03$	$0.07 \pm 0.04$	$0.08 \pm 0.04$	$0.00 \pm 0.00$
	$k = 10$	<b><math>0.09 \pm 0.08</math></b>	$0.04 \pm 0.01$	$0.06 \pm 0.02$	$0.07 \pm 0.04$	$0.08 \pm 0.04$	$0.01 \pm 0.01$
	$k = 20$	<b><math>0.21 \pm 0.12</math></b>	$0.14 \pm 0.09$	$0.18 \pm 0.07$	$0.07 \pm 0.04$	$0.08 \pm 0.04$	$0.01 \pm 0.01$
	$k = 40$	<b><math>0.28 \pm 0.21</math></b>	$0.21 \pm 0.18$	$0.18 \pm 0.04$	$0.07 \pm 0.04$	$0.08 \pm 0.04$	$0.01 \pm 0.01$
	$k = 80$	$0.21 \pm 0.13$	<b><math>0.24 \pm 0.26</math></b>	$0.17 \pm 0.01$	$0.07 \pm 0.04$	$0.08 \pm 0.04$	$0.01 \pm 0.00$
Pen	$k = 0$	<b><math>0.24 \pm 0.11</math></b>	-	$0.00 \pm 0.00$	<b><math>0.24 \pm 0.11</math></b>	-	$0.00 \pm 0.00$
	$k = 5$	$0.38 \pm 0.07$	-	$0.34 \pm 0.03$	<b><math>0.48 \pm 0.10</math></b>	-	$0.41 \pm 0.05$
	$k = 10$	$0.44 \pm 0.05$	-	$0.43 \pm 0.03$	<b><math>0.48 \pm 0.10</math></b>	-	$0.45 \pm 0.03$
	$k = 20$	<b><math>0.50 \pm 0.08</math></b>	-	$0.40 \pm 0.03$	$0.48 \pm 0.10$	-	$0.47 \pm 0.01$
	$k = 40$	<b><math>0.53 \pm 0.09</math></b>	-	$0.48 \pm 0.01$	$0.48 \pm 0.10$	-	$0.47 \pm 0.04$
	$k = 80$	<b><math>0.55 \pm 0.05</math></b>	-	$0.38 \pm 0.08$	$0.48 \pm 0.10$	-	$0.47 \pm 0.03$
Franka Kitchen	$k = 0$	<b><math>1.43 \pm 0.17</math></b>	-	$0.00 \pm 0.00$	<b><math>1.43 \pm 0.17</math></b>	-	$0.00 \pm 0.00$
	$k = 5$	<b><math>1.88 \pm 0.04</math></b>	-	$1.41 \pm 0.06$	$1.33 \pm 0.07$	-	$1.81 \pm 0.03$
	$k = 10$	<b><math>2.02 \pm 0.11</math></b>	-	$1.66 \pm 0.07$	$1.33 \pm 0.07$	-	$1.94 \pm 0.12$
	$k = 20$	<b><math>1.99 \pm 0.06</math></b>	-	$1.60 \pm 0.09$	$1.33 \pm 0.07$	-	$1.92 \pm 0.04$
	$k = 40$	<b><math>2.01 \pm 0.03</math></b>	-	$1.70 \pm 0.07$	$1.33 \pm 0.07$	-	$1.71 \pm 0.05$
	$k = 80$	<b><math>2.00 \pm 0.01</math></b>	-	$1.60 \pm 0.03$	$1.33 \pm 0.07$	-	$1.78 \pm 0.09$

Table VII: Success rate (averaged over 100 grasps on ten test objects). BRIDGER significantly outperforms DDIM and Residual Policy across the number of diffusion steps. Compared to SE3, BRIDGER achieve higher success rate when the number of diffusion steps is small. We show up to  $k = 160$  steps to be consistent with prior reported results [47].

		CVAE	BRIDGER Heuristic	Gaussian	Residual Policy		DDIM	SE3
					CVAE	Heuristic		
Seen Categories	$k = 0$	<b><math>0.26 \pm 0.02</math></b>	$0.06 \pm 0.00$	$0.00 \pm 0.00$	<b><math>0.26 \pm 0.02</math></b>	$0.06 \pm 0.00$	$0.00 \pm 0.00$	$0.00 \pm 0.00$
	$k = 5$	<b><math>0.73 \pm 0.15</math></b>	$0.64 \pm 0.17$	$0.56 \pm 0.17$	$0.09 \pm 0.15$	$0.01 \pm 0.03$	$0.52 \pm 0.24$	$0.38 \pm 0.26$
	$k = 10$	$0.85 \pm 0.17$	<b><math>0.87 \pm 0.12</math></b>	$0.72 \pm 0.27$	$0.09 \pm 0.15$	$0.01 \pm 0.03$	$0.61 \pm 0.27$	$0.56 \pm 0.20$
	$k = 20$	<b><math>0.93 \pm 0.08</math></b>	$0.91 \pm 0.07$	$0.83 \pm 0.28$	$0.09 \pm 0.15$	$0.01 \pm 0.03$	$0.64 \pm 0.21$	$0.78 \pm 0.19$
	$k = 40$	<b><math>0.91 \pm 0.08</math></b>	$0.90 \pm 0.08$	$0.81 \pm 0.27$	$0.09 \pm 0.15$	$0.01 \pm 0.03$	$0.61 \pm 0.26$	$0.89 \pm 0.04$
	$k = 80$	<b><math>0.88 \pm 0.18</math></b>	<b><math>0.88 \pm 0.08</math></b>	$0.82 \pm 0.05$	$0.09 \pm 0.15$	$0.01 \pm 0.03$	$0.64 \pm 0.24$	$0.83 \pm 0.20$
	$k = 160$	$0.88 \pm 0.10$	<b><math>0.91 \pm 0.08</math></b>	$0.90 \pm 0.06$	$0.09 \pm 0.15$	$0.01 \pm 0.03$	$0.64 \pm 0.26$	<b><math>0.91 \pm 0.08</math></b>
Unseen Categories	$k = 0$	<b><math>0.23 \pm 0.04</math></b>	$0.00 \pm 0.00$	$0.00 \pm 0.00$	<b><math>0.23 \pm 0.04</math></b>	$0.00 \pm 0.00$	$0.00 \pm 0.00$	$0.00 \pm 0.00$
	$k = 5$	<b><math>0.48 \pm 0.12</math></b>	$0.43 \pm 0.19$	$0.45 \pm 0.14$	$0.09 \pm 0.15$	$0.01 \pm 0.03$	$0.33 \pm 0.20$	$0.20 \pm 0.10$
	$k = 10$	$0.59 \pm 0.31$	<b><math>0.61 \pm 0.26</math></b>	$0.60 \pm 0.21$	$0.09 \pm 0.15$	$0.01 \pm 0.03$	$0.38 \pm 0.21$	$0.39 \pm 0.15$
	$k = 20$	<b><math>0.67 \pm 0.21</math></b>	<b><math>0.67 \pm 0.26</math></b>	$0.65 \pm 0.25$	$0.09 \pm 0.15$	$0.01 \pm 0.03$	$0.41 \pm 0.23$	$0.55 \pm 0.24$
	$k = 40$	$0.63 \pm 0.29$	<b><math>0.69 \pm 0.22</math></b>	<b><math>0.69 \pm 0.20</math></b>	$0.09 \pm 0.15$	$0.01 \pm 0.03$	$0.33 \pm 0.19$	$0.61 \pm 0.21$
	$k = 80$	<b><math>0.71 \pm 0.20</math></b>	$0.68 \pm 0.25$	$0.69 \pm 0.21$	$0.09 \pm 0.15$	$0.01 \pm 0.03$	$0.38 \pm 0.23$	$0.63 \pm 0.29$
	$k = 160$	<b><math>0.71 \pm 0.24</math></b>	$0.66 \pm 0.23$	$0.64 \pm 0.23$	$0.09 \pm 0.15$	$0.01 \pm 0.03$	$0.35 \pm 0.19$	$0.66 \pm 0.25$

Table VIII: Average Earth Mover’s Distance between generated grasp poses and target grasp poses. BRIDGER significantly outperforms SE3, DDIM and Residual Policy across the number of diffusion steps..

		BRIDGER			Residual Policy		DDIM	SE3
		CVAE	Heuristicx	Gaussian	CVAE	Heuristic		
Seen Categories	$k = 0$	<b>0.86 ± 0.09</b>	1.11 ± 0.06	1.34 ± 0.08	<b>0.66 ± 0.09</b>	1.21 ± 0.06	1.34 ± 0.08	1.45 ± 0.08
	$k = 5$	0.38 ± 0.03	<b>0.36 ± 0.03</b>	0.39 ± 0.05	0.69 ± 0.02	1.55 ± 0.03	1.41 ± 0.14	0.44 ± 0.03
	$k = 10$	0.38 ± 0.03	<b>0.36 ± 0.03</b>	0.37 ± 0.04	0.69 ± 0.02	1.55 ± 0.03	1.41 ± 0.14	0.41 ± 0.03
	$k = 20$	0.39 ± 0.05	<b>0.35 ± 0.03</b>	0.39 ± 0.05	0.79 ± 0.03	1.55 ± 0.03	0.64 ± 0.21	0.40 ± 0.02
	$k = 40$	0.37 ± 0.02	<b>0.35 ± 0.02</b>	0.40 ± 0.06	0.73 ± 0.03	1.55 ± 0.03	0.52 ± 0.24	0.40 ± 0.01
	$k = 80$	0.38 ± 0.02	<b>0.35 ± 0.02</b>	0.40 ± 0.03	0.74 ± 0.02	1.55 ± 0.03	0.52 ± 0.24	0.45 ± 0.02
	$k = 160$	0.38 ± 0.02	<b>0.35 ± 0.02</b>	0.43 ± 0.08	0.70 ± 0.02	1.55 ± 0.03	0.64 ± 0.26	0.50 ± 0.03
Unseen Categories	$k = 0$	<b>0.83 ± 0.15</b>	1.21 ± 0.12	1.42 ± 0.04	<b>0.83 ± 0.15</b>	1.21 ± 0.12	1.42 ± 0.04	1.38 ± 0.02
	$k = 5$	0.48 ± 0.13	<b>0.44 ± 0.09</b>	0.45 ± 0.09	1.48 ± 0.06	1.57 ± 0.06	0.73 ± 0.08	0.49 ± 0.07
	$k = 10$	0.49 ± 0.15	<b>0.45 ± 0.11</b>	0.44 ± 0.09	1.48 ± 0.06	1.57 ± 0.06	0.80 ± 0.10	0.45 ± 0.06
	$k = 20$	0.50 ± 0.15	<b>0.42 ± 0.10</b>	0.48 ± 0.11	1.48 ± 0.06	1.57 ± 0.06	0.76 ± 0.09	0.45 ± 0.09
	$k = 40$	0.49 ± 0.13	<b>0.43 ± 0.08</b>	0.48 ± 0.12	1.48 ± 0.06	1.57 ± 0.06	0.80 ± 0.13	0.47 ± 0.06
	$k = 80$	0.50 ± 0.15	<b>0.45 ± 0.11</b>	0.49 ± 0.12	1.48 ± 0.06	1.57 ± 0.06	0.81 ± 0.12	0.56 ± 0.10
	$k = 160$	0.49 ± 0.141	<b>0.44 ± 0.11</b>	0.52 ± 0.15	1.48 ± 0.06	1.57 ± 0.06	0.78 ± 0.14	0.58 ± 0.10

Table IX: Full results of average task performance of BRIDGER with Power3 and Linear interpolant functions under varying number of diffusion steps when trained with the Large dataset.

		BRIDGER / Power3			BRIDGER / Linear		
		CVAE	Heuristic	Gaussian	CVAE	Heuristic	Gaussian
Door	$k = 0$	0.13 ± 0.04	<b>0.16 ± 0.06</b>	0.00 ± 0.00	0.13 ± 0.04	<b>0.16 ± 0.06</b>	0.00 ± 0.00
	$k = 5$	<b>0.60 ± 0.15</b>	0.00 ± 0.00	0.08 ± 0.06	0.44 ± 0.26	0.16 ± 0.01	0.04 ± 0.06
	$k = 10$	<b>0.54 ± 0.18</b>	0.27 ± 0.01	0.07 ± 0.05	0.44 ± 0.32	0.16 ± 0.02	0.21 ± 0.15
	$k = 20$	<b>0.52 ± 0.23</b>	0.45 ± 0.04	0.10 ± 0.07	0.45 ± 0.29	0.18 ± 0.03	0.31 ± 0.20
	$k = 40$	0.48 ± 0.19	<b>0.72 ± 0.02</b>	0.07 ± 0.05	0.46 ± 0.30	0.11 ± 0.02	0.33 ± 0.18
	$k = 80$	0.50 ± 0.14	<b>0.63 ± 0.08</b>	0.12 ± 0.09	0.42 ± 0.29	0.14 ± 0.06	0.20 ± 0.09
Relocate	$k = 0$	<b>0.31 ± 0.15</b>	-	0.00 ± 0.00	<b>0.31 ± 0.15</b>	-	0.00 ± 0.00
	$k = 5$	<b>0.75 ± 0.11</b>	-	0.61 ± 0.05	0.64 ± 0.12	-	0.29 ± 0.12
	$k = 10$	<b>0.75 ± 0.08</b>	-	0.73 ± 0.11	0.68 ± 0.16	-	0.74 ± 0.04
	$k = 20$	0.70 ± 0.11	-	0.72 ± 0.09	0.64 ± 0.12	-	<b>0.76 ± 0.07</b>
	$k = 40$	0.77 ± 0.11	-	<b>0.78 ± 0.05</b>	0.63 ± 0.19	-	0.71 ± 0.04
	$k = 80$	0.79 ± 0.08	-	<b>0.81 ± 0.04</b>	0.68 ± 0.19	-	0.74 ± 0.01
Hammer	$k = 0$	<b>0.16 ± 0.03</b>	0.11 ± 0.08	0.00 ± 0.00	<b>0.16 ± 0.03</b>	0.11 ± 0.08	0.00 ± 0.00
	$k = 5$	<b>0.44 ± 0.11</b>	0.20 ± 0.24	0.16 ± 0.04	0.31 ± 0.18	0.06 ± 0.04	0.04 ± 0.02
	$k = 10$	0.54 ± 0.17	<b>0.62 ± 0.11</b>	0.30 ± 0.04	0.54 ± 0.13	0.22 ± 0.07	0.08 ± 0.05
	$k = 20$	0.63 ± 0.08	<b>0.74 ± 0.07</b>	0.35 ± 0.02	0.56 ± 0.05	0.50 ± 0.10	0.14 ± 0.04
	$k = 40$	<b>0.58 ± 0.12</b>	<b>0.58 ± 0.21</b>	0.36 ± 0.05	0.48 ± 0.06	0.50 ± 0.12	0.24 ± 0.06
	$k = 80$	<b>0.72 ± 0.09</b>	0.47 ± 0.25	0.43 ± 0.09	0.48 ± 0.09	0.50 ± 0.17	0.29 ± 0.10
Pen	$k = 0$	<b>0.29 ± 0.05</b>	-	0.00 ± 0.00	<b>0.29 ± 0.05</b>	-	0.00 ± 0.00
	$k = 5$	0.45 ± 0.04	-	0.43 ± 0.02	<b>0.48 ± 0.05</b>	-	0.42 ± 0.03
	$k = 10$	<b>0.49 ± 0.02</b>	-	0.46 ± 0.04	<b>0.49 ± 0.03</b>	-	<b>0.49 ± 0.05</b>
	$k = 20$	0.49 ± 0.09	-	<b>0.53 ± 0.02</b>	0.51 ± 0.03	-	0.52 ± 0.04
	$k = 40$	0.52 ± 0.07	-	0.54 ± 0.05	0.49 ± 0.04	-	<b>0.51 ± 0.04</b>
	$k = 80$	0.55 ± 0.06	-	0.55 ± 0.03	<b>0.59 ± 0.03</b>	-	0.57 ± 0.05
Franka Kitchen	$k = 0$	<b>1.53 ± 0.09</b>	-	0.00 ± 0.00	<b>1.53 ± 0.09</b>	-	0.00 ± 0.00
	$k = 5$	1.96 ± 0.03	-	1.18 ± 0.02	<b>2.03 ± 0.11</b>	-	1.12 ± 0.09
	$k = 10$	<b>2.13 ± 0.01</b>	-	1.28 ± 0.24	2.10 ± 0.01	-	1.55 ± 0.09
	$k = 20$	2.09 ± 0.04	-	1.54 ± 0.03	<b>2.11 ± 0.05</b>	-	1.70 ± 0.04
	$k = 40$	<b>2.13 ± 0.06</b>	-	1.67 ± 0.01	2.08 ± 0.06	-	1.79 ± 0.04
	$k = 80$	<b>2.16 ± 0.03</b>	-	1.70 ± 0.05	2.06 ± 0.06	-	1.79 ± 0.01

Table X: Full results of average task performance of BRIDGER with Power3 and Linear interpolant functions under varying number of diffusion steps when trained with the Medium dataset.

		BRIDGER / Power3			BRIDGER / Linear		
		CVAE	Heuristic	Gaussian	CVAE	Heuristic	Gaussian
Door	$k = 0$	$0.12 \pm 0.08$	<b><math>0.16 \pm 0.06</math></b>	$0.00 \pm 0.00$	$0.12 \pm 0.08$	<b><math>0.16 \pm 0.06</math></b>	$0.00 \pm 0.00$
	$k = 5$	$0.20 \pm 0.11$	$0.07 \pm 0.00$	$0.08 \pm 0.00$	<b><math>0.32 \pm 0.11</math></b>	$0.02 \pm 0.02$	$0.04 \pm 0.05$
	$k = 10$	$0.15 \pm 0.07$	$0.00 \pm 0.00$	$0.02 \pm 0.02$	<b><math>0.25 \pm 0.11</math></b>	$0.00 \pm 0.00$	$0.22 \pm 0.12$
	$k = 20$	$0.13 \pm 0.06$	$0.00 \pm 0.00$	$0.08 \pm 0.10$	<b><math>0.25 \pm 0.09</math></b>	$0.00 \pm 0.00$	<b><math>0.25 \pm 0.16</math></b>
	$k = 40$	$0.13 \pm 0.08$	$0.01 \pm 0.02$	$0.12 \pm 0.11$	<b><math>0.28 \pm 0.12</math></b>	$0.00 \pm 0.00$	$0.22 \pm 0.12$
	$k = 80$	$0.18 \pm 0.13$	$0.08 \pm 0.06$	$0.13 \pm 0.11$	<b><math>0.28 \pm 0.12</math></b>	$0.02 \pm 0.03$	$0.26 \pm 0.16$
Relocate	$k = 0$	<b><math>0.24 \pm 0.15</math></b>	-	$0.00 \pm 0.00$	<b><math>0.24 \pm 0.12</math></b>	-	$0.00 \pm 0.00$
	$k = 5$	$0.55 \pm 0.02$	-	$0.52 \pm 0.08$	<b><math>0.63 \pm 0.09</math></b>	-	$0.52 \pm 0.08$
	$k = 10$	$0.56 \pm 0.04$	-	$0.61 \pm 0.09$	<b><math>0.65 \pm 0.06</math></b>	-	<b><math>0.65 \pm 0.02</math></b>
	$k = 20$	$0.62 \pm 0.16$	-	$0.63 \pm 0.12$	$0.61 \pm 0.05$	-	<b><math>0.65 \pm 0.02</math></b>
	$k = 40$	$0.55 \pm 0.12$	-	$0.58 \pm 0.15$	$0.57 \pm 0.01$	-	<b><math>0.60 \pm 0.08</math></b>
	$k = 80$	$0.64 \pm 0.11$	-	$0.54 \pm 0.10$	$0.65 \pm 0.05$	-	<b><math>0.66 \pm 0.06</math></b>
Hammer	$k = 0$	$0.09 \pm 0.15$	<b><math>0.11 \pm 0.08</math></b>	$0.00 \pm 0.00$	$0.09 \pm 0.15$	<b><math>0.11 \pm 0.08</math></b>	$0.00 \pm 0.00$
	$k = 5$	$0.04 \pm 0.05$	<b><math>0.17 \pm 0.20</math></b>	$0.04 \pm 0.01$	$0.10 \pm 0.07$	$0.09 \pm 0.01$	$0.03 \pm 0.01$
	$k = 10$	$0.14 \pm 0.14$	<b><math>0.43 \pm 0.18</math></b>	$0.11 \pm 0.03$	$0.22 \pm 0.09$	$0.24 \pm 0.07$	$0.20 \pm 0.02$
	$k = 20$	$0.25 \pm 0.11$	<b><math>0.51 \pm 0.18</math></b>	$0.24 \pm 0.03$	$0.28 \pm 0.08$	$0.33 \pm 0.07$	$0.22 \pm 0.07$
	$k = 40$	$0.42 \pm 0.10$	<b><math>0.48 \pm 0.27</math></b>	$0.29 \pm 0.02$	$0.43 \pm 0.15$	$0.25 \pm 0.03$	$0.36 \pm 0.05$
	$k = 80$	$0.37 \pm 0.06$	$0.32 \pm 0.24$	$0.31 \pm 0.07$	<b><math>0.40 \pm 0.08</math></b>	$0.35 \pm 0.01$	$0.28 \pm 0.10$
Pen	$k = 0$	<b><math>0.21 \pm 0.05</math></b>	-	$0.00 \pm 0.00$	<b><math>0.21 \pm 0.05</math></b>	-	$0.00 \pm 0.00$
	$k = 5$	<b><math>0.48 \pm 0.06</math></b>	-	<b><math>0.48 \pm 0.02</math></b>	<b><math>0.48 \pm 0.05</math></b>	-	$0.42 \pm 0.03$
	$k = 10$	<b><math>0.50 \pm 0.04</math></b>	-	$0.46 \pm 0.07$	$0.49 \pm 0.03$	-	$0.49 \pm 0.05$
	$k = 20$	<b><math>0.57 \pm 0.05</math></b>	-	$0.46 \pm 0.05$	$0.51 \pm 0.03$	-	$0.52 \pm 0.04$
	$k = 40$	<b><math>0.58 \pm 0.04</math></b>	-	$0.45 \pm 0.07$	$0.49 \pm 0.04$	-	$0.51 \pm 0.04$
	$k = 80$	$0.56 \pm 0.05$	-	$0.49 \pm 0.06$	<b><math>0.59 \pm 0.03</math></b>	-	$0.56 \pm 0.05$
Franka Kitchen	$k = 0$	<b><math>1.43 \pm 0.17</math></b>	-	$0.00 \pm 0.00$	<b><math>1.43 \pm 0.17</math></b>	-	$0.00 \pm 0.00$
	$k = 5$	$1.88 \pm 0.04$	-	$1.57 \pm 0.14$	<b><math>2.06 \pm 0.02</math></b>	-	$1.02 \pm 0.04$
	$k = 10$	$2.04 \pm 0.02$	-	$1.62 \pm 0.22$	<b><math>2.09 \pm 0.01</math></b>	-	$1.41 \pm 0.09$
	$k = 20$	<b><math>2.12 \pm 0.05</math></b>	-	$1.48 \pm 0.23$	$2.04 \pm 0.02$	-	$1.75 \pm 0.02$
	$k = 40$	$2.09 \pm 0.05$	-	$1.51 \pm 0.36$	<b><math>2.11 \pm 0.05</math></b>	-	$1.81 \pm 0.16$
	$k = 80$	<b><math>2.11 \pm 0.05</math></b>	-	$1.44 \pm 0.28$	$2.03 \pm 0.07$	-	$1.82 \pm 0.06$

Table XI: Full results of average task performance of BRIDGER with Power3 and Linear interpolant functions under varying number of diffusion steps when trained with the Small dataset.

		BRIDGER / Power3			BRIDGER / Linear		
		CVAE	Heuristic	Gaussian	CVAE	Heuristic	Gaussian
Door	$k = 0$	$0.08 \pm 0.12$	<b><math>0.16 \pm 0.06</math></b>	$0.00 \pm 0.00$	$0.08 \pm 0.12$	<b><math>0.16 \pm 0.06</math></b>	$0.00 \pm 0.00$
	$k = 5$	$0.10 \pm 0.06$	$0.00 \pm 0.00$	$0.00 \pm 0.00$	<b><math>0.13 \pm 0.04</math></b>	$0.00 \pm 0.00$	$0.03 \pm 0.03$
	$k = 10$	$0.10 \pm 0.07$	$0.00 \pm 0.00$	$0.01 \pm 0.01$	<b><math>0.11 \pm 0.06</math></b>	$0.00 \pm 0.00$	$0.06 \pm 0.07$
	$k = 20$	<b><math>0.12 \pm 0.08</math></b>	$0.00 \pm 0.00$	$0.05 \pm 0.02$	$0.09 \pm 0.03$	$0.00 \pm 0.00$	$0.08 \pm 0.06$
	$k = 40$	<b><math>0.14 \pm 0.14</math></b>	$0.00 \pm 0.00$	$0.06 \pm 0.01$	$0.11 \pm 0.05$	$0.00 \pm 0.00$	$0.12 \pm 0.02$
	$k = 80$	<b><math>0.14 \pm 0.14</math></b>	$0.00 \pm 0.00$	$0.06 \pm 0.01$	$0.12 \pm 0.05$	$0.00 \pm 0.00$	$0.13 \pm 0.03$
Relocate	$k = 0$	<b><math>0.18 \pm 0.13</math></b>	-	$0.00 \pm 0.00$	<b><math>0.18 \pm 0.13</math></b>	-	$0.00 \pm 0.00$
	$k = 5$	$0.56 \pm 0.06$	-	$0.23 \pm 0.05$	<b><math>0.59 \pm 0.14</math></b>	-	$0.11 \pm 0.10$
	$k = 10$	$0.55 \pm 0.06$	-	$0.31 \pm 0.05$	<b><math>0.60 \pm 0.05</math></b>	-	$0.59 \pm 0.16$
	$k = 20$	$0.51 \pm 0.03$	-	$0.28 \pm 0.04$	$0.59 \pm 0.02$	-	<b><math>0.63 \pm 0.06</math></b>
	$k = 40$	$0.49 \pm 0.04$	-	$0.37 \pm 0.06$	$0.57 \pm 0.11$	-	<b><math>0.58 \pm 0.04</math></b>
	$k = 80$	$0.56 \pm 0.14$	-	$0.31 \pm 0.04$	<b><math>0.61 \pm 0.02</math></b>	-	$0.55 \pm 0.02$
Hammer	$k = 0$	$0.09 \pm 0.15$	<b><math>0.11 \pm 0.08</math></b>	$0.00 \pm 0.00$	$0.07 \pm 0.12$	<b><math>0.11 \pm 0.08</math></b>	$0.00 \pm 0.00$
	$k = 5$	$0.04 \pm 0.04$	$0.16 \pm 0.08$	$0.03 \pm 0.03$	$0.05 \pm 0.01$	<b><math>0.17 \pm 0.01</math></b>	$0.04 \pm 0.06$
	$k = 10$	$0.09 \pm 0.08$	$0.04 \pm 0.01$	$0.06 \pm 0.02$	<b><math>0.22 \pm 0.01</math></b>	$0.20 \pm 0.07$	$0.12 \pm 0.10$
	$k = 20$	$0.21 \pm 0.12$	$0.14 \pm 0.09$	$0.18 \pm 0.07$	$0.20 \pm 0.08$	<b><math>0.28 \pm 0.07</math></b>	$0.19 \pm 0.11$
	$k = 40$	$0.28 \pm 0.21$	$0.21 \pm 0.18$	$0.18 \pm 0.04$	$0.24 \pm 0.09$	<b><math>0.36 \pm 0.18</math></b>	$0.17 \pm 0.11$
	$k = 80$	$0.21 \pm 0.13$	$0.24 \pm 0.26$	$0.17 \pm 0.01$	$0.29 \pm 0.00$	<b><math>0.37 \pm 0.21</math></b>	$0.21 \pm 0.08$
Pen	$k = 0$	<b><math>0.24 \pm 0.11</math></b>	-	$0.00 \pm 0.00$	<b><math>0.24 \pm 0.11</math></b>	-	$0.00 \pm 0.00$
	$k = 5$	$0.38 \pm 0.07$	-	<b><math>0.34 \pm 0.03</math></b>	<b><math>0.42 \pm 0.09</math></b>	-	$0.35 \pm 0.03$
	$k = 10$	$0.44 \pm 0.05$	-	$0.43 \pm 0.03$	$0.42 \pm 0.10$	-	<b><math>0.45 \pm 0.03</math></b>
	$k = 20$	<b><math>0.50 \pm 0.08</math></b>	-	$0.40 \pm 0.03$	$0.45 \pm 0.11$	-	$0.47 \pm 0.01$
	$k = 40$	<b><math>0.53 \pm 0.09</math></b>	-	$0.48 \pm 0.01$	$0.46 \pm 0.08$	-	$0.46 \pm 0.09$
	$k = 80$	<b><math>0.55 \pm 0.05</math></b>	-	$0.38 \pm 0.08$	$0.49 \pm 0.07$	-	$0.52 \pm 0.05$
Franka Kitchen	$k = 0$	<b><math>1.43 \pm 0.17</math></b>	-	$0.00 \pm 0.00$	<b><math>1.43 \pm 0.17</math></b>	-	$0.00 \pm 0.00$
	$k = 5$	$1.88 \pm 0.04$	-	$1.41 \pm 0.06$	<b><math>2.02 \pm 0.04</math></b>	-	$1.04 \pm 0.07$
	$k = 10$	<b><math>2.02 \pm 0.11</math></b>	-	$1.66 \pm 0.07$	<b><math>2.02 \pm 0.04</math></b>	-	$1.42 \pm 0.03$
	$k = 20$	$1.99 \pm 0.06$	-	$1.60 \pm 0.09$	<b><math>2.07 \pm 0.04</math></b>	-	$1.69 \pm 0.05$
	$k = 40$	<b><math>2.01 \pm 0.03</math></b>	-	$1.70 \pm 0.07$	$2.00 \pm 0.02$	-	$1.78 \pm 0.07$
	$k = 80$	<b><math>2.00 \pm 0.01</math></b>	-	$1.60 \pm 0.03$	$1.93 \pm 0.04$	-	$1.57 \pm 0.11$

Table XII: Success rate (averaged over 100 grasps on ten test objects). BRIDGER with Power3 interpolant function performs better than Linear interpolant function. We show up to  $k = 160$  steps to be consistent with prior reported results [47].

		BRIDGER / Power3			BRIDGER / Linear		
		CVAE	Heuristic	Gaussian	CVAE	Heuristic	Gaussian
Seen Categories	$k = 0$	<b><math>0.26 \pm 0.02</math></b>	$0.06 \pm 0.00$	$0.00 \pm 0.00$	<b><math>0.26 \pm 0.02</math></b>	$0.06 \pm 0.00$	$0.00 \pm 0.00$
	$k = 5$	<b><math>0.73 \pm 0.15</math></b>	$0.64 \pm 0.17$	$0.56 \pm 0.17$	$0.52 \pm 0.29$	$0.31 \pm 0.28$	$0.30 \pm 0.30$
	$k = 10$	$0.85 \pm 0.17$	<b><math>0.87 \pm 0.12</math></b>	$0.72 \pm 0.27$	$0.71 \pm 0.30$	$0.53 \pm 0.27$	$0.68 \pm 0.24$
	$k = 20$	<b><math>0.93 \pm 0.08</math></b>	$0.91 \pm 0.07$	$0.83 \pm 0.28$	$0.73 \pm 0.33$	$0.86 \pm 0.10$	$0.77 \pm 0.14$
	$k = 40$	<b><math>0.91 \pm 0.08</math></b>	$0.90 \pm 0.08$	$0.81 \pm 0.27$	$0.72 \pm 0.33$	$0.77 \pm 0.28$	$0.76 \pm 0.28$
	$k = 80$	<b><math>0.88 \pm 0.18</math></b>	<b><math>0.88 \pm 0.08</math></b>	$0.82 \pm 0.05$	$0.76 \pm 0.25$	$0.79 \pm 0.27$	$0.78 \pm 0.29$
	$k = 160$	$0.88 \pm 0.10$	<b><math>0.91 \pm 0.08</math></b>	$0.90 \pm 0.06$	$0.85 \pm 0.16$	$0.86 \pm 0.14$	$0.78 \pm 0.28$
Unseen Categories	$k = 0$	<b><math>0.23 \pm 0.04</math></b>	$0.00 \pm 0.00$	$0.00 \pm 0.00$	<b><math>0.23 \pm 0.04</math></b>	$0.00 \pm 0.00$	$0.00 \pm 0.00$
	$k = 5$	<b><math>0.48 \pm 0.12</math></b>	$0.43 \pm 0.19$	$0.45 \pm 0.14$	$0.20 \pm 0.14$	$0.19 \pm 0.18$	$0.20 \pm 0.14$
	$k = 10$	$0.59 \pm 0.31$	<b><math>0.61 \pm 0.26</math></b>	$0.60 \pm 0.21$	$0.52 \pm 0.25$	$0.50 \pm 0.22$	$0.52 \pm 0.25$
	$k = 20$	<b><math>0.67 \pm 0.21</math></b>	<b><math>0.67 \pm 0.26</math></b>	$0.65 \pm 0.25$	$0.63 \pm 0.26$	$0.57 \pm 0.24$	$0.63 \pm 0.26$
	$k = 40$	$0.63 \pm 0.29$	<b><math>0.69 \pm 0.22</math></b>	<b><math>0.69 \pm 0.20</math></b>	$0.63 \pm 0.27$	$0.62 \pm 0.25$	$0.63 \pm 0.27$
	$k = 80$	<b><math>0.71 \pm 0.20</math></b>	$0.68 \pm 0.25$	$0.69 \pm 0.21$	$0.60 \pm 0.28$	$0.57 \pm 0.25$	$0.60 \pm 0.28$
	$k = 160$	<b><math>0.71 \pm 0.24</math></b>	$0.66 \pm 0.23$	$0.64 \pm 0.23$	$0.60 \pm 0.31$	$0.66 \pm 0.23$	$0.60 \pm 0.31$

Table XIII: Average Earth Mover’s Distance between generated grasp poses and target grasp poses. BRIDGER with Power3 interpolant function performs better than Linear interpolant function.

		BRIDGER / Power3			BRIDGER / Linear		
		CVAE	Heuristic	Gaussian	CVAE	Heuristic	Gaussian
Seen Categories	$k = 0$	<b><math>0.86 \pm 0.09</math></b>	$1.11 \pm 0.06$	$1.34 \pm 0.08$	<b><math>0.66 \pm 0.09</math></b>	$1.21 \pm 0.06$	$1.34 \pm 0.08$
	$k = 5$	$0.38 \pm 0.03$	<b><math>0.36 \pm 0.03</math></b>	$0.39 \pm 0.05$	$0.56 \pm 0.12$	$0.42 \pm 0.04$	$0.42 \pm 0.04$
	$k = 10$	$0.38 \pm 0.03$	<b><math>0.36 \pm 0.03</math></b>	$0.37 \pm 0.04$	$0.49 \pm 0.09$	$0.42 \pm 0.06$	$0.43 \pm 0.05$
	$k = 20$	$0.39 \pm 0.05$	<b><math>0.35 \pm 0.03</math></b>	$0.39 \pm 0.05$	$0.57 \pm 0.15$	$0.39 \pm 0.04$	$0.51 \pm 0.06$
	$k = 40$	$0.37 \pm 0.02$	<b><math>0.35 \pm 0.02</math></b>	$0.40 \pm 0.06$	$0.54 \pm 0.12$	$0.39 \pm 0.05$	$0.51 \pm 0.12$
	$k = 80$	$0.38 \pm 0.02$	<b><math>0.35 \pm 0.02</math></b>	$0.40 \pm 0.03$	$0.49 \pm 0.07$	$0.39 \pm 0.05$	$0.54 \pm 0.13$
	$k = 160$	$0.38 \pm 0.02$	<b><math>0.35 \pm 0.02</math></b>	$0.43 \pm 0.08$	$0.50 \pm 0.07$	$0.38 \pm 0.04$	$0.51 \pm 0.08$
Unseen Categories	$k = 0$	<b><math>0.83 \pm 0.15</math></b>	$1.21 \pm 0.12$	$1.42 \pm 0.04$	<b><math>0.83 \pm 0.15</math></b>	$1.21 \pm 0.12$	$1.42 \pm 0.04$
	$k = 5$	$0.48 \pm 0.13$	<b><math>0.44 \pm 0.09</math></b>	$0.45 \pm 0.09$	$0.56 \pm 0.08$	$0.51 \pm 0.10$	$0.54 \pm 0.05$
	$k = 10$	$0.49 \pm 0.15$	<b><math>0.45 \pm 0.11</math></b>	$0.44 \pm 0.09$	$0.62 \pm 0.18$	$0.48 \pm 0.10$	$0.54 \pm 0.10$
	$k = 20$	$0.50 \pm 0.15$	<b><math>0.42 \pm 0.10</math></b>	$0.48 \pm 0.11$	$0.64 \pm 0.18$	$0.45 \pm 0.06$	$0.53 \pm 0.13$
	$k = 40$	$0.49 \pm 0.13$	<b><math>0.43 \pm 0.08</math></b>	$0.48 \pm 0.12$	$0.59 \pm 0.15$	$0.48 \pm 0.08$	$0.57 \pm 0.11$
	$k = 80$	$0.50 \pm 0.15$	<b><math>0.45 \pm 0.11</math></b>	$0.49 \pm 0.12$	$0.66 \pm 0.18$	$0.45 \pm 0.08$	$0.64 \pm 0.19$
	$k = 160$	$0.49 \pm 0.14$	<b><math>0.44 \pm 0.11</math></b>	$0.52 \pm 0.15$	$0.58 \pm 0.10$	$0.46 \pm 0.08$	$0.69 \pm 0.11$

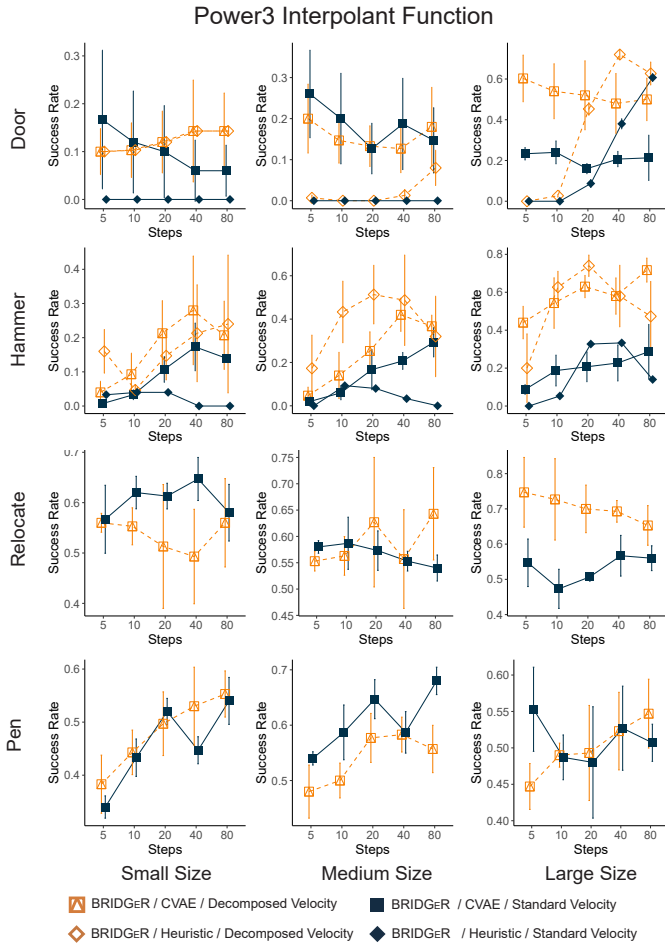


Figure 14: Success rate of BRIDGER / Power3 in the Adroit tasks with standard and decomposed velocity functions. Error bars represent standard deviation over three seeds.

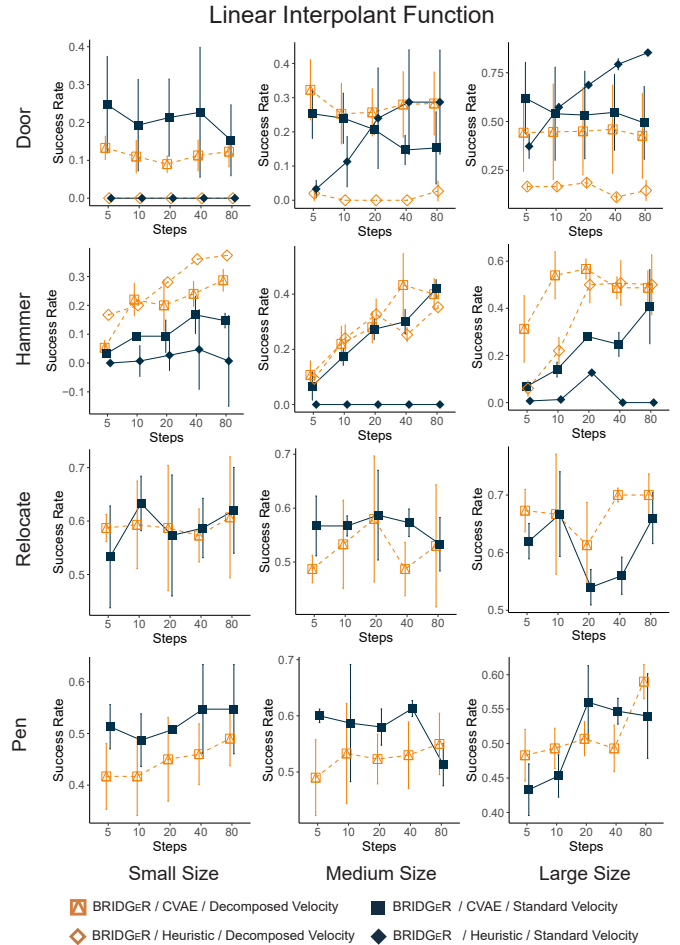


Figure 15: Success rate of BRIDGER / Linear in Adroit tasks with standard and decomposed velocity functions. Error bars represent standard deviation over three seeds.