

High-Frequency-aware Hierarchical Contrastive Selective Coding for Representation Learning on Text-attributed Graphs

Peiyan Zhang
Hong Kong University of
Science and Technology
Hong Kong
pzhangao@cse.ust.hk

Chaozhuo Li*
Microsoft Research Asia
Beijing, China
cli@microsoft.com

Liyang Kang
Hong Kong Polytechnic University
Hong Kong
lykangc12@gmail.com

Feiran Huang
Jinan University
China
huangfr@jnu.edu.cn

Senzhang Wang
Central South University
China
szwang@csu.edu.cn

Xing Xie
Microsoft Research Asia
Beijing, China
xing.xie@microsoft.com

Sunghun Kim
Hong Kong University of
Science and Technology
Hong Kong
hunkim@cse.ust.hk

ABSTRACT

We investigate node representation learning on text-attributed graphs (TAGs), where nodes are associated with text information. Although recent studies on graph neural networks (GNNs) and pretrained language models (PLMs) have exhibited their power in encoding network and text signals, respectively, less attention has been paid to delicately coupling these two types of models on TAGs. Specifically, existing GNNs rarely model text in each node in a contextualized way; existing PLMs can hardly be applied to characterize graph structures due to their sequence architecture. To address these challenges, we propose HASH-CODE, a **H**igh-frequency **A**ware **S**pectral **H**ierarchical **C**ontrastive **S**elective **C**oding method that integrates GNNs and PLMs into a unified model. Different from previous “cascaded architectures” that directly add GNN layers upon a PLM, our HASH-CODE relies on five self-supervised optimization objectives to facilitate thorough mutual enhancement between network and text signals in diverse granularities. Moreover, we show that existing contrastive objective learns the low-frequency component of the augmentation graph and propose a high-frequency component (HFC)-aware contrastive learning objective that makes the learned embeddings more distinctive. Extensive experiments on six real-world benchmarks substantiate the efficacy of our proposed approach. In addition, theoretical analysis

and item embedding visualization provide insights into our model interoperability.

CCS CONCEPTS

• **Information systems** → **Information retrieval**; • **Computing methodologies** → *Artificial intelligence*.

KEYWORDS

Text Attributed Graph, Graph Neural Networks, Transformer, Contrastive Learning

ACM Reference Format:

Peiyan Zhang, Chaozhuo Li, Liyang Kang, Feiran Huang, Senzhang Wang, Xing Xie, and Sunghun Kim. 2024. High-Frequency-aware Hierarchical Contrastive Selective Coding for Representation Learning on Text-attributed Graphs. In *Proceedings of the ACM Web Conference 2024 (WWW '24)*, May 13–17, 2024, Singapore, Singapore. ACM, New York, NY, USA, 12 pages. <https://doi.org/10.1145/3589334.3645614>

1 INTRODUCTION

Graphs are pervasive in the real world, and it is common for nodes within these graphs to be enriched with textual attributes, thereby giving rise to text-attributed graphs (TAGs) [74]. For instance, academic graphs [47] incorporate papers replete with their titles and abstracts, whereas social media networks [71] encompass tweets accompanied by their textual content. Consequently, the pursuit of learning within the realm of TAGs has assumed significant prominence as a research topic spanning various domains, *e.g.*, network analysis [56], recommender systems [69], and anomaly detection [37].

In essence, graph topology and node attributes comprise two integral components of TAGs. Consequently, the crux of representation learning on TAGs lies in the amalgamation of graph topology and node attributes. Previous works mainly adopt a cascaded architecture [23, 31, 70, 77] (Figure 1(a)), which entails encoding the textual

*Chaozhuo Li is the corresponding author

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.
WWW '24, May 13–17, 2024, Singapore, Singapore

© 2024 Copyright held by the owner/author(s). Publication rights licensed to ACM.
ACM ISBN 979-8-4007-0171-9/24/05...\$15.00
<https://doi.org/10.1145/3589334.3645614>

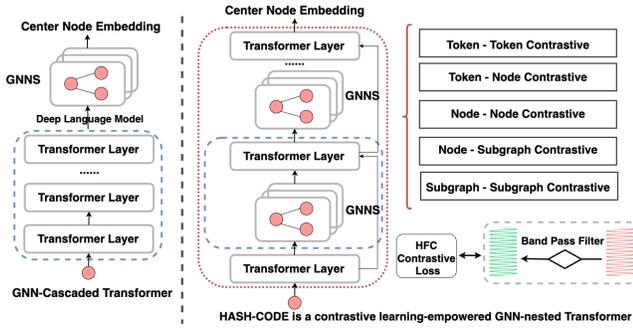


Figure 1: (a) An illustration of GNN-cascaded transformer. (b) An illustration of our proposed contrastive learning-empowered GNN-nested transformer. The red and green twines denote the original graph signals and the mixed LFC and HFC signals from the spectral perspective.

attributes of each node with Pre-trained Language Models (PLMs), subsequently utilizing the PLM embeddings as features to train a Graph Neural Network (GNN) for message propagation [8, 12, 67]. However, as the modeling of node attributes and graph topology are segregated, this learning paradigm harbors conspicuous limitations. Firstly, the link connecting two nodes is not utilized when generating their text representations. In fact, linked nodes can benefit each other regarding text semantics understanding. For example, given a paper on "LDA" and its citation nodes which are related to topic modeling, the "LDA" can be more likely interpreted as "Latent Dirichlet Allocation" rather than "Linear Discriminant Analysis". In addition, this paradigm may yield textual embeddings that are not pertinent to downstream tasks, thereby impeding the model's ability to learn node representations suitable for such tasks. Moreover, given that the formation of the graph's topological structure is intrinsically driven by the node attribute [74], this paradigm may adversely affect the comprehension of the graph topology.

Fortunately, recent efforts have been undertaken [1, 22, 33, 43, 63, 65] to co-train GNNs and LMs within a unified learning framework. For example, GraphFormers [65] introduces GNN-nested transformers, facilitating the joint encoding of text and node features. Heterformer [22] alternately stacks the graph aggregation module and a transformer-based text encoding module into a cohesive model to capture network heterogeneity. Despite the demonstrated efficacy of existing methods, they are encumbered by two primary drawbacks that may undermine the quality of representation learning. Firstly, these methods typically employ supervised training, necessitating a substantial volume of labeled data. However, in numerous scientific domains, labeled data are scarce and expensive to obtain [19, 57]. Secondly, these methods rely exclusively on limited optimization objectives to learn the entire model. When GNNs and LMs are jointly trained, the associated parameters are also learned through the constrained optimization objectives. It has been observed that such an optimization approach fails to capture the fine-grained correlations between textual features and graphic patterns [65, 76]. Consequently, the importance of learning graph representations in an unsupervised or self-supervised manner is becoming increasingly paramount.

In order to tackle the aforementioned challenges, we draw inspiration from the concept of contrastive learning to enhance representation learning on TAGs. Contrastive learning [5, 15, 17, 50] refines representations by drawing positive pairs closer while maintaining a distance between negative pairs. As data sparsity and limited supervision signals constitute the two primary learning obstacles associated with existing co-training methods, contrastive learning appears to offer a promising solution to both issues: it capitalizes on intrinsic data correlations to devise auxiliary training objectives and bolsters data representations with an abundance of self-supervised signals.

In practice, representation learning on TAGs with contrastive learning is non-trivial, primarily encountering the following three challenges: (1) *How to devise a learning framework that capitalizes on the distinctive data properties of TAGs?* The contextual information within TAGs is manifested in a multitude of forms or varying intrinsic characteristics, such as tokens, nodes, or sub-graphs, which inherently exhibit complex hierarchical structures. Moreover, these hierarchies are interdependent and exert influence upon one another. How to capitalize these unique properties of TAGs remains an open question. (2) *How to design effective contrastive tasks?* To obtain an effective node embedding that fully encapsulates the semantics, relying solely on the hierarchical topological views of TAGs remains insufficient. Within TAGs, graph topological views and textual semantic views possess the capacity to mutually reinforce one another, indicating the importance of exploring the cross-view contrastive mechanism. Moreover, the hierarchies in TAGs can offer valuable guidance in selecting positive pairs with analogous semantics and negative pairs with divergent semantics, an aspect that has received limited attention in existing research [27, 61]. (3) *How to learn distinctive representations?* In developing the contrastive learning framework, we draw inspiration from the recently proposed spectral contrastive learning method [14], which outperforms several contrastive baselines with solid theoretical guarantees. However, we demonstrate that, from a spectral perspective, the spectral contrastive loss primarily learns the low-frequency component (LFC) of the graph, significantly attenuating the effects of high-frequency components (HFC). Recent studies suggest that the LFC does not necessarily encompass the most vital information [2, 7], and would ultimately contribute to the over-smoothing problem [3, 4, 35, 36], causing node representations to converge to similar values and impeding their differentiation. Consequently, more explorations are needed to determine how to incorporate the HFC to learn more discriminative embeddings.

To this end, we present a novel **High-frequency Aware Spectral Hierarchical Contrastive Selective Coding** framework (**HASH-CODE**) to enhance TAG representation learning. Building upon a GNN and Transformer architecture [65, 77], we propose to jointly train the GNN and Transformer with self-supervised signals (Figure 1(b) depicts this architecture). The primary innovation lies in the contrastive joint-training stage. Specifically, we devise five self-supervised optimization objectives to capture hierarchical intrinsic data correlations within TAGs. These optimization objectives are developed within a unified framework of contrastive learning. Moreover, we propose a loss that can be succinctly expressed as a contrastive learning objective, accompanied by robust theoretical guarantees. Minimizing this objective results in more distinctive

embeddings that strike a balance between LFC and HFC. Consequently, the proposed method is capable of characterizing correlations across varying levels of granularity or between different forms in a general manner.

Our main contributions are summarized as follows:

- We propose five self-supervised optimization objectives to maximize the mutual information of context information in different forms or granularities.
- We systematically examine the fundamental limitations of spectral contrastive loss from the perspective of spectral domain. We prove that it learns the LFC and propose an HFC-aware contrastive learning objective that makes the learned embeddings more discriminative.
- Extensive experiments conducted on three million-scale text-attributed graph datasets demonstrate the effectiveness of our proposed approach.

2 RELATED WORK

2.1 Representation Learning on TAGs

Representation learning on TAGs constitutes a significant research area across multiple domains, including natural language processing [26, 52, 53, 66], information retrieval [24, 25, 54, 62], and graph learning [38, 39, 64, 68]. In order to attain high-quality representations for TAGs, it is imperative to concurrently harness techniques from both natural language understanding and graph representation. The recent advancements in pretrained language models (PLM) and graph neural networks (GNN) have catalyzed the progression of pertinent methodologies.

Seperated Training. A number of recent efforts strive to amalgamate GNNs and LMs, thereby capitalizing on the strengths inherent in both models. The majority of prior investigations on TAGs employ a "cascaded architecture" [23, 31, 70, 77], in which the text information of each node is initially encoded through transformers, followed by the aggregation of node representations via GNNs. Nevertheless, these PLM embeddings remain non-trainable during the GNN training phase. Consequently, the model performance is adversely impacted by the semantic modeling process, which bears no relevance to the task and topology at hand.

Co-training. In an attempt to surmount these challenges, concerted efforts have been directed towards the co-training of GNNs and PLMs within a unified learning framework. GraphFormers [65] presents GNN-nested transformers, facilitating the concurrent encoding of text and node features. Heterformer [22] alternates between stacking the graph aggregation module and a transformer-based text encoding module within a unified model, thereby capturing network heterogeneity. However, these approaches solely depend on a single optimization objective for learning the entire model, which considerably constrains their capacity to discern the fine-grained correlations between textual and graphical patterns.

2.2 Contrastive Learning

Empirical Works on Contrastive learning. Contrastive methods [5, 6, 17] derive representations from disparate views or augmentations of inputs and minimize the InfoNCE loss [42], wherein two views of identical data are drawn together, while views from

distinct data are repelled. The acquired representation can be utilized to address a wide array of downstream tasks with exceptional performance. In the context of node representation learning on graphs, DGI [50] constructs local patches and global summaries as positive pairs. GMI [44] is designed to establish a contrast between the central node and its local patch, derived from both node features and topological structure. MVGRL [15] employs contrast across views and explores composition between varying views.

Theoretical works on Contrastive Learning. The exceptional performance exhibited by contrastive learning has spurred a series of theoretical investigations into the contrastive loss. The majority of these studies treat the model class as a black box, with notable exceptions being the work of [30], which scrutinizes the learned representation with linear models, and the research conducted by [48] and [59], which examine the training dynamics of contrastive learning for linear and 2-layer ReLU networks. Most relevant to our research is the study by [45], which adopts a spectral graph perspective to analyze contrastive learning methods and introduces the spectral contrastive loss. We ascertain that the spectral contrastive loss solely learns the LFC of the graph.

Different from the existing works, our research represents the first attempt to contemplate the correlations inherent within the contextual information as self-supervised signals in TAGs. We endeavor to maximize the mutual information among the views of the token, node, and subgraph, which encompass varying levels of granularity within the contextual information. Our HFC-aware loss facilitates the learning of more discriminative data representations, thereby enhancing the performance of downstream tasks.

3 PRELIMINARIES

In this section, we first give the definition of the text-attributed graphs (TAGs) and formulate the node representation learning problem on TAGs. Then, we introduce our proposed HFC-aware spectral contrastive loss.

3.1 Definition (Text-attributed Graphs)

A text-attributed graph is defined as $\mathcal{G} = (\mathcal{V}, \mathcal{E})$, where $\mathcal{V} = \{v_1, \dots, v_N\}$ and \mathcal{E} denote the set of nodes and edges, respectively. Let $A \in \mathbb{R}^{N \times N}$ be the adjacency matrix of the graph such that $A_{i,j} = 1$ if $v_j \in \mathcal{N}(v_i)$, otherwise $A_{i,j} = 0$. Here $\mathcal{N}(\cdot)$ denotes the one-hop neighbor set of a node. Besides, each node v_i is associated with text information.

3.2 Problem Statement

Given a textual attributed graph $\mathcal{G} = (\mathcal{V}, \mathcal{E})$, the task is to build a model $f_\theta : \mathcal{V} \rightarrow \mathbb{R}^K$ with parameters θ to learn the node embedding matrix $F \in \mathbb{R}^{N \times K}$, taking network structures and text semantics into consideration, where K denotes the number of feature channels. The learned embedding matrix F can be further utilized in downstream tasks, *e.g.*, link prediction, node classification, *etc.*

3.3 HFC-aware Spectral Contrastive Loss

An important technique in our approach is the high-frequency aware spectral contrastive loss. It is developed based on the analysis of the conventional spectral contrastive loss [14]. Given a node v ,

the conventional spectral contrastive loss is defined as:

$$\mathcal{L}_{Spectral}(v, v^+, v^-) = -2 \cdot \mathbb{E}_{v, v^+} [f_\theta(v)^T f_\theta(v^+)] + \mathbb{E}_{v, v^-} [(f_\theta(v)^T f_\theta(v^-))^2], \quad (1)$$

where (v, v^+) is a pair of positive views of node v , (v, v^-) is a pair of negative views, and f_θ is a parameterized function from the node to \mathbb{R}^K . Minimizing $\mathcal{L}_{Spectral}$ is equivalent to spectral clustering on the population view graph [14], where the top smallest eigenvectors of the Laplacian matrix are preserved as the columns of the final embedding matrix F .

In Appendix A.1, we demonstrate that, from a spectral perspective, $\mathcal{L}_{Spectral}$ primarily learns the low-frequency component (LFC) of the graph, significantly attenuating the effects of high-frequency components (HFC). Recent studies suggest that the LFC does not necessarily encompass the most vital information [2, 7], and would ultimately contribute to the over-smoothing problem [3, 4, 35, 36].

As an alternative of such low-pass filter, to introduce HFC, we propose our HFC-aware spectral contrastive loss as follows:

$$\mathcal{L}_{HFC}(v, v^+, v^-) = -2\alpha \cdot \mathbb{E}_{v, v^+} [f_\theta(v)^T f_\theta(v^+)] + \mathbb{E}_{v, v^-} [(f_\theta(v)^T f_\theta(v^-))^2], \quad (2)$$

where α is used to control the rate of HFC within the graph.

Upon initial examination, one might observe that our \mathcal{L}_{HFC} formulation closely aligns with $\mathcal{L}_{Spectral}$. Remarkably, the primary distinction lies in the introduction of the parameter α . However, this is not a mere trivial addition; it emerges from intricate mathematical deliberation and is surprisingly consistent with $\mathcal{L}_{Spectral}$ that offers a nuanced control of the HFC rate within the graph. Minimizing our \mathcal{L}_{HFC} results in more distinctive embeddings that strike a balance between LFC and HFC. Please kindly refer to Appendix A.1 for detailed discussions and proof.

4 METHODOLOGY

4.1 Overview

Existing studies [23, 31, 70, 77] mainly emphasize the effect of sequential and graphic characteristics using the supervised optimization objective alone. Inspired by recent progress with contrastive learning [5, 17], we take a different perspective to characterize the data correlations by contrasting different views of the raw data.

The basic idea of our approach is to incorporate several elaborately designed self-supervised learning objectives for enhancing the original GNN and PLM. To develop such objectives, we leverage effective correlation signals reflected in the intrinsic characteristics of the input. As shown in Figure 2, for our task, we consider the information in different levels of granularity, including token, node and sub-graph, which are considered as different views of the input. By capturing the multi-view correlation, we unify these self-supervised learning objectives with the typical joint learning training scheme in language modeling and graph mining [65].

4.2 Hierarchical Contrastive Learning with TAGs

TAGs naturally possess 3 levels in the hierarchy: token-level, node-level and subgraph-level. Based on the above GNN and PLM model,

we further incorporate additional self-supervised signals with contrastive learning to enhance the representations of input data. We adopt a joint-training way to construct different loss functions based on the multi-view correlation.

4.2.1 Intra-hierarchy contrastive learning.

Modeling Token-level Correlations. We first begin with modeling the bidirectional information in the token sequence. Inspired by the masked language model like BERT [10], we propose to use the contrastive learning framework to design a task that maximizes the mutual information between the masked sequence representation and its contextual representation vector. Specifically, for a node v , given its textual attribute sequence $x_v = \{x_{v,1}, x_{v,2}, \dots, x_{v,T}\}$, we consider $x_{v,i:j}$ and $\hat{x}_{v,i:j}$ as a positive pair, where $x_{v,i:j}$ is an n -grams spanning from i to j and $\hat{x}_{v,i:j}$ is the corresponding sequence masked at position i to j . We may omit the subscript v for notation simplification when it is not important to differentiate the affiliation between node and textual sequence.

For a specific query n -gram $x_{i,j}$, instead of contrasting it indiscriminately with all negative candidates \mathcal{N} in a batch [29, 32, 58, 75], we select truly negative samples for contrasting based on the supervision signals provided by the hierarchical structure in TAGs, as shown in Figure 3. Intuitively, we would like to eliminate those candidates sharing highly similar semantics with the query, while keeping the ones that are less semantically relevant to the query. To achieve this goal, we first define a similarity measure between an n -gram and a node. Inspired by [34], for a node v , we define the semantic similarity between n -gram's hidden state $h_{x_{i,j}}$ and this node's hidden state h_v using a node-specific dot product:

$$s(h_{x_{i,j}}, h_v) = \frac{h_{x_{i,j}} \cdot h_v}{\tau_{h_v}}, \tau_{h_v} = \frac{\sum_{h_{x_i} \in H_v} \|h_{x_i} - h_v\|_2}{|H_v| \log(|H_v| + \epsilon)},$$

where h_{x_i} is the hidden representation of the token x_i , H_v consists of the hidden representations of the tokens assigned to node v , and ϵ is a smooth parameter balancing the scale of temperature τ_{h_v} among different nodes.

On such a basis, we conduct negative sampling selection considering both the token and node hierarchies. Given the query n -gram $x_{i,j}$, we denote its corresponding node v 's representation as h_v . For a negative candidate, we are more likely to select it if its similarity with h_v is less prominent compared with other negative candidates' similarities with h_v . Based on such an intuition, the least dissimilar negative samples $\mathcal{N}_{select}(h_{x_{i,j}})$ are produced for the specific query.

By using these refined negative samples, we define the objective function of token-level contrastive (TC) loss as below:

$$\mathcal{L}_{TC} = \frac{1}{M} \sum_{m=1}^M \mathcal{L}_{HFC}(x_{m,i:j}, \hat{x}_{m,i:j}, \mathcal{N}_{select}(h_{x_{m,i,j}})), \quad (3)$$

where M is the size of the representation set and \mathcal{L}_{HFC} is our proposed HFC-aware spectral contrastive loss.

Modeling Node-level Correlations. Investigating the cross-view contrastive mechanism is especially important for node representation learning [57]. As mentioned before, nodes in TAGs possess textual attributes that can indicate semantic relationships in the network and serve as complementary to structural patterns. As shown in Figure 4, given a node v , we treat its textual attribute sequence x_v and its direct connected neighbors u , for $u \in N_v$ as two different views.

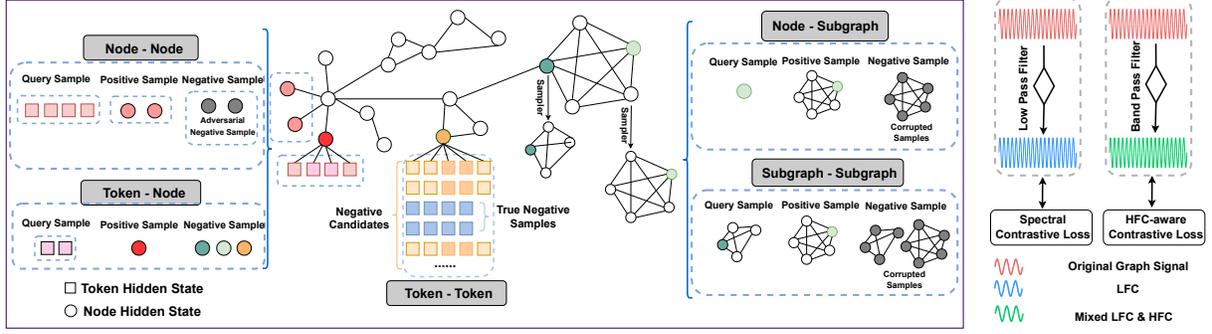


Figure 2: The overall architecture of HASH-CODE. With GraphFormers as our base model, we incorporate five self-supervised learning objectives based on the HFC-aware contrastive loss to capture the text-graph correlations in different granularities. Spectral contrastive loss learns the LFC while our HFC-aware loss achieves the balance between HFC and LFC.

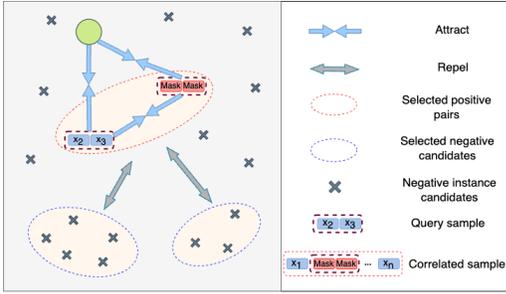


Figure 3: Token-level contrastive selective coding.

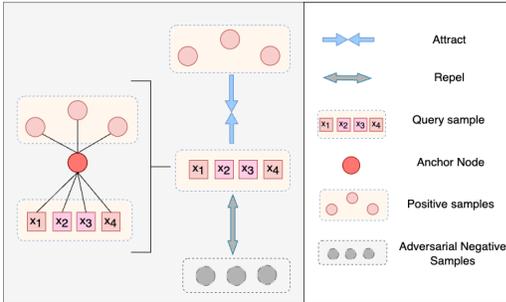


Figure 4: Modeling node-level correlations.

The negative selective encoding strategy in token-level correlation modeling tends to select less challenging negative samples, reducing their contribution over time. Inspired by [60], we adopt the ProGCL [60] method to adversarially reweight and generate harder negative samples \tilde{v} using the mixup operation [72]. Therefore, we minimize the following Node-level Contrastive (NC) loss:

$$\mathcal{L}_{NC} = \frac{1}{M} \sum_{m=1}^M \mathcal{L}_{HFC}(x_{m,v}, N_{m,v}, \tilde{v}_m) \quad (4)$$

Modeling Subgraph-level Correlations. Having analyzed the correlations between a node’s local neighborhood and its textual attributes, we extend our investigation to encompass the correlations among subgraphs. This approach facilitates the representation of

both local and higher-order structures associated with the nodes. It is reasonable that nodes are more strongly correlated with their immediate neighborhoods than with distant nodes, which exert minimal influence on them. Consequently, local communities are likely to emerge within the graph. Therefore, to facilitate our analysis, we select a series of subgraphs that include regional neighborhoods from the original graph to serve as our training data.

The paramount challenge currently lies in sampling a context subgraph that can furnish adequate structural information essential for the derivation of a high-quality representation of the central node. In this context, we adopt the subgraph sampling methodology based on the personalized PageRank algorithm (PPR) [20] as introduced in [21, 73]. Given the variability in the significance of different neighbors, for a specific node i , the subgraph sampler S initially computes the importance scores of neighboring nodes utilizing PPR. Considering the relational data among all nodes represented by an adjacency matrix $A \in \mathbb{R}^{N \times N}$, the resulting matrix S of importance scores is designated as

$$S = \alpha \cdot (I - (1 - \alpha) \cdot \bar{A}),$$

where I represents the identity matrix and α is a parameter within the range $[0, 1]$. The term $\bar{A} = AD^{-1}$ is the column-normalized adjacency matrix, where D is the corresponding diagonal matrix with entries $D(i, i) = \sum_j A(i, j)$ along its diagonal. The vector $S(i, :)$ enumerates the importance scores for node i .

For a specific node i , the subgraph sampler S selects the top- k most significant neighbors to form the subgraph G_i . The indices of the selected nodes are

$$idx = \text{top_rank}(S(i, :), k),$$

where top_rank is the function that returns the indices corresponding to the top- k values, where k specifies the size of the context graphs.

The subgraph sampler S processes the original graph along with the node index to derive the context subgraph G_i for node i . The adjacency matrix A_i and feature matrix X_i of this subgraph are defined as follows:

$$A_i = A_{idx, idx}, X_i = X_{idx, :},$$

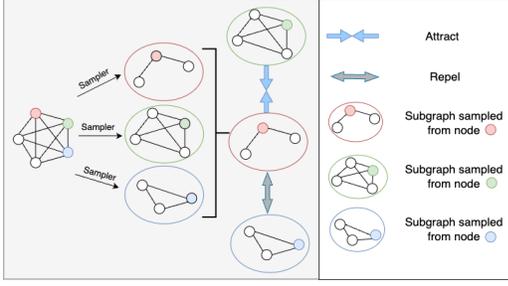


Figure 5: Modeling subgraph-level correlations.

where $.idx$ denotes an indexing operation. $A_{idx,idx}$ refers to the adjacency matrix, row-wise and column-wise indexed to correspond to the induced subgraph. $X_{idx,:}$ is the feature matrix indexed row-wise.

Encoding subgraph. Upon acquiring the context subgraph $G_i = (A_i, X_i)$ of a central node i , the encoder $\mathcal{E} : \mathbb{R}^{N \times N} \times \mathbb{R}^{N \times F} \rightarrow \mathbb{R}^{N \times F}$ encodes it to derive the latent representations matrix H_i , which is denoted as

$$H_i = \mathcal{E}(A_i, X_i)$$

The subgraph-level representation s_i is summarized using a read-out function, $\mathcal{R} : \mathbb{R}^{N \times F} \rightarrow \mathbb{R}^F$:

$$s_i = \mathcal{R}(H_i)$$

So far, the representations of subgraphs have been produced. As shown in Figure 5, to model the correlations in subgraph level, we treat two subgraphs s_i and \hat{s}_i that sampled from the node h_i and its most important neighbor node \hat{h}_i respectively as positive pairs while the rest of subgraphs \tilde{s} are negative pairs. We minimize the following Subgraph-level Contrastive (SC) loss:

$$\mathcal{L}_{SC} = \frac{1}{M} \sum_{m=1}^M \mathcal{L}_{HFC}(s_m, \hat{s}_m, \tilde{s}_m) \quad (5)$$

4.2.2 Inter-hierarchy contrastive learning.

Having modeled the intra-hierarchy correlations, we further consider modeling the intra-hierarchy correlations as different hierarchies are dependent and will influence each other.

Modeling Token-Node Correlations. To model the token-node correlation, our intuition is to train the language model to refine the understanding of the text by GNN produced embeddings. Therefore, the language model is pushed to learn fine-grained task-aware context information. Specifically, given a sequence $x_v = \{x_{v,1}, x_{v,2}, \dots, x_{v,T}\}$, we consider x_v and its corresponding node representation h_v as a positive pair. On the other hand, for a set of node representations, we employ a function, \mathcal{P} , to corrupt them to generate negative samples, denoted as

$$\{\tilde{h}_1, \tilde{h}_2, \dots, \tilde{h}_M\} = \mathcal{P}\{h_1, h_2, \dots, h_M\},$$

where M is the size of the representation set. \mathcal{P} is the random shuffle function in our experiment. This corruption strategy determines the differentiation of tokens with different context nodes, which is crucial for some downstream tasks, such as node classification. We

Table 1: Statistics of datasets after preprocessing.

Dataset	Product	Beauty	Sports	Toys	DBLP	Wiki
#Users	13,647,591	22,363	25,598	19,412	N/A	N/A
#Items	5,643,688	12,101	18,357	11,924	4,894,081	4,818,679
#N	4.71	8.91	8.28	8.60	9.31	8.86
#Train	22,146,934	188,451	281,332	159,111	3,009,506	7,145,834
#Valid	30,000	3,770	5,627	3,182	60,000	66,167
#Test	306,742	6,280	9,377	5,304	100,000	100,000

develop the following Token-Node Contrastive (TNC) loss:

$$\mathcal{L}_{TNC} = \frac{1}{M} \sum_{m=1}^M \mathcal{L}_{HFC}(x_{m,v}, h_{m,v}, \mathcal{P}\{h_1, h_2, \dots, h_M\}) \quad (6)$$

Modeling Node-Subgraph Correlations. Intuitively, nodes are dependent on their regional neighborhoods and different nodes have different context subgraphs. Therefore, we consider the strong correlation between central nodes and their context subgraphs to design a self-supervision pretext task to contrast the real context subgraph with a fake one. Specifically, for the node representation, h_v , that captures the regional information in the context subgraph, we regard the context subgraph representation s_v as the positive sample. Similar to the calculation of \mathcal{L}_{TNC} , we employ the random shuffle function \mathcal{P} to corrupt other subgraph representations to generate negative samples, denoted as

$$\{\tilde{s}_1, \tilde{s}_2, \dots, \tilde{s}_M\} = \mathcal{P}\{s_1, s_2, \dots, s_M\}$$

We minimize the following Node-Subgraph Contrastive (NSC) loss:

$$\mathcal{L}_{NSC} = \frac{1}{M} \sum_{m=1}^M \mathcal{L}_{HFC}(h_{m,v}, s_{m,v}, \mathcal{P}\{s_1, s_2, \dots, s_M\}) \quad (7)$$

Overall Objective Loss. Our overall objective function is a weighted combination of the five terms above:

$$\begin{aligned} \mathcal{L}_{HASH-CODE} = & \lambda_{TC} \mathcal{L}_{TC} + \lambda_{NC} \mathcal{L}_{NC} + \lambda_{SC} \mathcal{L}_{SC} \\ & + \lambda_{TNC} \mathcal{L}_{TNC} + \lambda_{NSC} \mathcal{L}_{NSC}, \end{aligned} \quad (8)$$

where λ_{TC} , λ_{NC} , λ_{SC} , λ_{TNC} and λ_{NSC} are hyper-parameters that balance the contribution of each term.

5 EXPERIMENTS

5.1 Experimental Setup

5.1.1 Datasets. We conduct experiments on six datasets (*i.e.*, DBLP¹, Wikidata5M² [55], Beauty, Sports and Toys from Amazon dataset³ [41] and Product Graph) from three different domains (*i.e.*, academic papers, social media posts, and e-commerce). We leverage three common metrics to measure the prediction accuracy: Precision@1 (P@1), NDCG, and MRR. The statistics of the six datasets are summarized in Table 1.

5.1.2 Baselines. We compare HASH-CODE with three types of baselines: (1) GNN-cascaded transformers, which includes BERT+MaxSAGE [13], BERT+MeanSAGE [13], BERT+GAT [49], TextGNN [77], and AdsGNN [31]. (2) GNN-nested transformers, which includes GraphFormers [65], and Heterformer [22]. (3) Vanilla GraphSAGE [13], Vanilla GAT [49], Vanilla BERT [10] and Twin-Bert [40].

¹<https://originalstatic.aminer.cn/misc/dblp.v12.7z>

²<https://deepgraphlearning.github.io/project/wikidata5m>

³<http://snap.stanford.edu/data/amazon/>

5.1.3 Reproducibility. For all compared models, we adopt the 12-layer BERT-base-uncased [10] in the huggingface as the backbone PLM for a fair comparison. The models are trained for at most 100 epochs on all datasets. We use an early stopping strategy on P@1 with a patience of 2 epochs. The size of minimal training batch is 64, learning rate is set to $1e - 5$. We pad the sequence length to 32 for Product, DBLP and Amazon datasets, 64 for Wiki, depending on different text length of each dataset. Adam optimizer [28] is employed to minimize the training loss. Other parameters are tuned on the validation dataset and we save the checkpoint with the best validation performance as the final model. Parameters in baselines are carefully tuned on the validation set to select the most desirable parameter setting.

5.2 Overall Comparison

Following previous studies [22, 65] on network representation learning, we consider two fundamental task: link prediction and node classification. To save space, we will mainly present the results on link prediction here and save the node classification part to Appendix B. The overall evaluation results are reported in Table 2. We have the following observations:

In comparing vanilla textual and graph models across various datasets, we find a consistent performance ranking: BERT outperforms Twin-BERT, which in turn exceeds GAT and GraphSAGE. This hierarchy reveals GNN models’ limitations in capturing rich textual semantics due to their focus on node proximity and global structural information. Specifically, the superior performance of the one-tower BERT model over the two-tower Twin-BERT model underscores the advantage of integrating information from both sides, despite BERT’s potential inefficiency in low-latency scenarios due to one-by-one similarity computations.

As for GNN-cascaded transformers, BERT+GAT generally surpasses BERT+MeanSAGE and BERT+MaxSAGE in modeling attributes on the Product, DBLP, and Wiki datasets, attributed to its multi-head self-attention mechanism. However, its performance dips on the Beauty, Sports, and Toys datasets, likely due to noise from keyword-based attributes in Amazon Reviews. Despite these variations, GNN-cascaded transformers fall short of co-training methods, largely because of the static nature of node textual features during training. Among the models, AdsGNN consistently leads over TextGNN across all datasets. This highlights the effectiveness of AdsGNN’s node-level aggregation model in capturing the nuanced roles of queries and keys, proving a tightly-coupled structure’s superiority in integrating graph and textual data.

For GNN-nested transformers, Heterformer outperforms Graphformers on denser networks like those of the Product and DBLP datasets compared to the Amazon datasets. Our HASH-CODE consistently outshines all baselines, achieving 2%~4% relative improvements on six datasets against the most competitive ones. These findings affirm the efficacy of contrastive learning in enhancing co-training architectures for representation learning tasks.

5.3 Ablation Study

Our proposed HASH-CODE designs five pre-training objectives based on the HFC-aware contrastive objective. In this section, we conduct the ablation study on Product and DBLP datasets to analyze

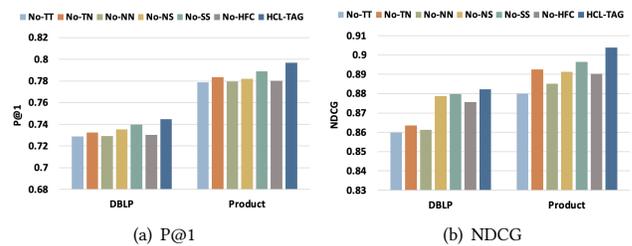


Figure 6: Ablation studies of different components on DBLP and Products datasets.

the contribution of each objective. We evaluate the performance of several HASH-CODE variants: (a) No-TT removes the \mathcal{L}_{TC} ; (b) No-TN removes the \mathcal{L}_{TNC} ; (c) No-NN removes the \mathcal{L}_{NC} ; (d) No-NS removes the \mathcal{L}_{NSC} ; (e) No-SS removes the \mathcal{L}_{SC} ; (f) No-HFC replaces the HFC-aware loss with spectral contrastive loss. The results from GraphFormers are also provided for comparison. P@1 and NDCG@10 are adopted for this evaluation.

From Figure 6, we can observe that removing any contrastive learning objective would lead to the performance decrease, indicating all the objectives are useful to capture the correlations in varying levels of granularity in TAGs. Besides, the importance of these objectives is varying on different datasets. Overall, \mathcal{L}_{TC} is more important than others. Removing it yields a larger drop of performance on all datasets, indicating that natural language understanding is more important on these datasets. In addition, No-HFC performs worse than the other variants, indicating the importance of learning more discriminative embeddings with HFC.

5.4 Efficiency Analysis

We compare the time efficiency between HASH-CODE, and GNN-nested Transformers (GraphFormers). The evaluation is conducted utilizing an Nvidia 3090 GPU. We follow the same setting with [65], where each mini-batch contains 32 encoding instances; each instance contains one center and #N neighbour nodes; the token length of each node is 16. We report the average time and memory (GPU RAM) costs per mini-batch in Table 3.

We find that the time and memory costs associated with these methods exhibit a linear escalation in tandem with the augmentation of neighboring elements. Meanwhile, the overall time and memory costs of HASH-CODE exhibit a remarkable proximity to GraphFormers, especially when the number of neighbor nodes is small. In light of the above observations, it is reasonable to deduce that HASH-CODE exhibits superior accuracy while concurrently maintaining comparable levels of efficiency and scalability when juxtaposed with GNN-nested transformers.

5.5 In-depth Analysis

We continue to investigate several properties of the models in the next couple sections. To save space, we will mainly present the results here and save the details to the appendix:

- In Appendix C.1, we simulate the data sparsity scenarios by using different proportions of the full dataset. We find that HASH-CODE is consistently better than baselines in all cases, especially

Table 2: Experiment results of link prediction. The results of the best performing baseline are underlined. The numbers in bold indicate statistically significant improvement ($p < .01$) by the pairwise t-test comparisons over the other baselines.

Datasets	Metric	MeanSAGE	GAT	Bert	Twin-Bert	Bert+MeanSAGE	Bert+MaxSAGE	Bert+GAT	TextGNN	AdsGNN	GraphFormers	Heterformer	HASH-CODE	Improv.
Product	P@1	0.6071	0.6049	0.6563	0.6492	0.7240	0.7250	0.7270	0.7431	0.7623	0.7786	<u>0.7820</u>	0.7967*	1.88%
	NDCG	0.7384	0.7401	0.7911	0.7907	0.8337	0.8371	0.8378	0.8494	0.8605	0.8793	<u>0.8861</u>	0.9039*	2.01%
	MRR	0.6619	0.6627	0.7344	0.7285	0.7871	0.7832	0.7880	0.8107	0.8361	0.8430	<u>0.8492</u>	0.8706*	2.52%
Beauty	P@1	0.1376	0.1367	0.1528	0.1492	0.1593	0.1586	0.1544	0.1625	0.1669	<u>0.1774</u>	0.1739	0.1862*	4.96%
	NDCG	0.2417	0.2469	0.2702	0.2683	0.2741	0.2756	0.2726	0.2863	0.2891	<u>0.2919</u>	0.2911	0.3061*	4.86%
	MRR	0.2558	0.2549	0.2680	0.2638	0.2712	0.2759	0.2720	0.2802	0.2821	<u>0.2893</u>	0.2841	0.3057*	5.67%
Sports	P@1	0.1102	0.1088	0.1275	0.1237	0.1330	0.1311	0.1302	0.1421	0.1466	<u>0.1548</u>	0.1534	0.1623*	4.84%
	NDCG	0.2091	0.2116	0.2375	0.2297	0.2432	0.2478	0.2419	0.2537	0.2582	<u>0.2674</u>	<u>0.2692</u>	0.2775*	3.08%
	MRR	0.2171	0.2168	0.2319	0.2296	0.2434	0.2471	0.2397	0.2612	0.2653	<u>0.2679</u>	0.2640	0.2754*	2.80%
Toys	P@1	0.1342	0.1330	0.1498	0.1427	0.1520	0.1536	0.1514	0.1658	0.1674	<u>0.1703</u>	0.1685	0.1767*	3.76%
	NDCG	0.2015	0.2028	0.2249	0.2206	0.2451	0.2486	0.2413	0.2692	0.2734	<u>0.2859</u>	0.2823	0.2946*	3.04%
	MRR	0.2173	0.2149	0.2311	0.2276	0.2509	0.2527	0.2476	0.2648	0.2715	<u>0.2803</u>	0.2778	0.2919*	4.14%
DBLP	P@1	0.4963	0.4931	0.5673	0.5590	0.6533	0.6596	0.6634	0.6913	0.7102	0.7267	<u>0.7288</u>	0.7446*	2.17%
	NDCG	0.6997	0.6981	0.7484	0.7417	0.8004	0.8059	0.8086	0.8331	0.8507	0.8565	<u>0.8576</u>	0.8823*	2.88%
	MRR	0.6314	0.6309	0.6777	0.6643	0.7266	0.7067	0.7300	0.7792	0.7805	0.8133	<u>0.8148</u>	0.8428*	3.44%
Wiki	P@1	0.2850	0.2862	0.3066	0.3015	0.3306	0.3264	0.3412	0.3693	0.3820	<u>0.3952</u>	0.3947	0.4104*	3.85%
	NDCG	0.5389	0.5357	0.5699	0.5613	0.5730	0.5737	0.6071	0.6098	0.6155	0.6230	<u>0.6233</u>	0.6402*	2.71%
	MRR	0.4411	0.4436	0.4712	0.4602	0.4980	0.4970	0.5022	0.5097	0.5134	<u>0.5220</u>	0.5216	0.5356*	2.61%

Table 3: Time and memory costs per mini-batch for GraphFormers and HASH-CODE, with neighbour size increased from 3 to 200. HASH-CODE achieve similar efficiency and scalability as GraphFormers.

#N	3	5	10	20	50	100	200
Time: GraphFormers	63.95ms	97.19ms	170.16ms	306.12ms	714.32ms	1411.09ms	2801.67ms
Time: HASH-CODE	67.68ms	105.35ms	180.03ms	324.11ms	754.97ms	1573.29ms	2962.86ms
Mem: GraphFormers	1.33GiB	1.39GiB	1.55GiB	1.83GiB	2.70GiB	4.28GiB	7.33GiB
Mem: HASH-CODE	1.33GiB	1.39GiB	1.55GiB	1.84GiB	2.72GiB	4.43GiB	7.72GiB

in an extreme sparsity level (20%). This observation implies that HASH-CODE is able to make better use of the data with the contrastive learning method, which alleviates the influence of data sparsity problem for representation learning to some extent.

- In Appendix C.2, we investigate the influence of the number of training epochs on our performance. The results show that our model benefits mostly from the first 20 training epochs. And after that, the performance improves slightly. Based on this observation, we can conclude that the correlations among different views on TAGs can be well-captured by our contrastive learning approach through training within a small number of epochs. So that the enhanced data representations can improve the performance of the downstream tasks.
- In Appendix C.3, we analyze the impact of neighbourhood size with a fraction of neighbour nodes randomly sampled for each center node. We can observe that with the increasing number of neighbour nodes, both HASH-CODE and Graphformers achieve higher prediction accuracies. However, the marginal gain is vanishing, as the relative improvement becomes smaller when more neighbours are included. In all the testing cases, HASH-CODE

maintains consistent advantages over GraphFormers, which demonstrates the effectiveness of our proposed method.

6 CONCLUSION

In this paper, we introduce the problem of node representation learning on TAGs and propose HASH-CODE, a hierarchical contrastive learning architecture to address the problem. Different from previous “cascaded architectures”, HASH-CODE utilizes five self-supervised optimization objectives to facilitate thorough mutual enhancement between network and text signals in different granularities. We also propose a HFC-aware spectral contrastive loss to learn more discriminative node embeddings. Experimental results on various graph mining tasks, including link prediction and node classification demonstrate the superiority of HASH-CODE. Moreover, the proposed framework can serve as a building block with different task-specific inductive biases. It would be interesting to see its future applications on real-world TAGs such as recommendation, abuse detection and tweet-based network analysis.

REFERENCES

- [1] Shuxian Bi, Chaozhuo Li, Xiao Han, Zheng Liu, Xing Xie, Haizhen Huang, and Zengxuan Wen. 2021. Leveraging Bidding Graphs for Advertiser-Aware Relevance Modeling in Sponsored Search. In *Findings of the Association for Computational Linguistics: EMNLP 2021*. 2215–2224.
- [2] Deyu Bo, Xiao Wang, Chuan Shi, and Huawei Shen. 2021. Beyond low-frequency information in graph convolutional networks. In *Proceedings of the AAAI Conference on Artificial Intelligence*, Vol. 35. 3950–3957.
- [3] Chen Cai and Yusu Wang. 2020. A note on over-smoothing for graph neural networks. *arXiv preprint arXiv:2006.13318* (2020).
- [4] Deli Chen, Yankai Lin, Wei Li, Peng Li, Jie Zhou, and Xu Sun. 2020. Measuring and relieving the over-smoothing problem for graph neural networks from the topological view. In *Proceedings of the AAAI Conference on Artificial Intelligence*, Vol. 34. 3438–3445.
- [5] Ting Chen, Simon Kornblith, Mohammad Norouzi, and Geoffrey Hinton. 2020. A simple framework for contrastive learning of visual representations. In *International conference on machine learning*. PMLR, 1597–1607.
- [6] Xinlei Chen, Haoqi Fan, Ross Girshick, and Kaiming He. 2020. Improved baselines with momentum contrastive learning. *arXiv preprint arXiv:2003.04297* (2020).
- [7] Yunpeng Chen, Haoqi Fan, Bing Xu, Zhicheng Yan, Yannis Kalantidis, Marcus Rohrbach, Shuicheng Yan, and Jiashi Feng. 2019. Drop an octave: Reducing spatial redundancy in convolutional neural networks with octave convolution. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 3435–3444.
- [8] Eli Chien, Wei-Cheng Chang, Cho-Jui Hsieh, Hsiang-Fu Yu, Jiong Zhang, Olga Milenkovic, and Inderjit S Dhillon. 2021. Node feature extraction by self-supervised multi-scale neighborhood prediction. *arXiv preprint arXiv:2111.00064* (2021).
- [9] Fan RK Chung. 1997. *Spectral graph theory*. Vol. 92. American Mathematical Soc.
- [10] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2018. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805* (2018).
- [11] Carl Eckart and Gale Young. 1936. The approximation of one matrix by another of lower rank. *Psychometrika* 1, 3 (1936), 211–218.
- [12] Suchin Gururangan, Ana Marasovic, Swabha Swayamdipta, Kyle Lo, Iz Beltagy, Doug Downey, and Noah A Smith. 2020. Don't stop pretraining: Adapt language models to domains and tasks. *arXiv preprint arXiv:2004.10964* (2020).
- [13] Will Hamilton, Zitao Ying, and Jure Leskovec. 2017. Inductive representation learning on large graphs. *Advances in neural information processing systems* 30 (2017).
- [14] Jeff Z HaoChen, Colin Wei, Adrien Gaidon, and Tengyu Ma. 2021. Provable guarantees for self-supervised deep learning with spectral contrastive loss. *Advances in Neural Information Processing Systems* 34 (2021), 5000–5011.
- [15] Kaveh Hassani and Amir Hosein Khasahmadi. 2020. Contrastive multi-view representation learning on graphs. In *International Conference on Machine Learning*. PMLR, 4116–4126.
- [16] Trevor Hastie, Robert Tibshirani, Jerome H Friedman, and Jerome H Friedman. 2009. *The elements of statistical learning: data mining, inference, and prediction*. Vol. 2. Springer.
- [17] Kaiming He, Haoqi Fan, Yuxin Wu, Saining Xie, and Ross Girshick. 2020. Momentum contrast for unsupervised visual representation learning. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 9729–9738.
- [18] Kaiming He, Jian Sun, and Xiaoou Tang. 2012. Guided image filtering. *IEEE transactions on pattern analysis and machine intelligence* 35, 6 (2012), 1397–1409.
- [19] Weihua Hu, Bowen Liu, Joseph Gomes, Marinka Zitnik, Percy Liang, Vijay Pande, and Jure Leskovec. 2019. Strategies for pre-training graph neural networks. *arXiv preprint arXiv:1905.12265* (2019).
- [20] Glen Jeh and Jennifer Widom. 2003. Scaling personalized web search. In *Proceedings of the 12th international conference on World Wide Web*. 271–279.
- [21] Yizhu Jiao, Yun Xiong, Jiawei Zhang, Yao Zhang, Tianqi Zhang, and Yangyong Zhu. 2020. Sub-graph contrast for scalable self-supervised graph representation learning. In *2020 IEEE international conference on data mining (ICDM)*. IEEE, 222–231.
- [22] Bowen Jin, Yu Zhang, Qi Zhu, and Jiawei Han. 2022. Heterformer: A Transformer Architecture for Node Representation Learning on Heterogeneous Text-Rich Networks. *arXiv preprint arXiv:2205.10282* (2022).
- [23] Di Jin, Xiangchen Song, Zhizhi Yu, Ziyang Liu, Heling Zhang, Zhaomeng Cheng, and Jiawei Han. 2021. Bite-gcn: A new GCN architecture via bidirectional convolution of topology and features on text-rich networks. In *Proceedings of the 14th ACM International Conference on Web Search and Data Mining*. 157–165.
- [24] Yiqiao Jin, Yunsheng Bai, Yanqiao Zhu, Yizhou Sun, and Wei Wang. 2022. Code Recommendation for Open Source Software Developers. In *Proceedings of the ACM Web Conference 2023*.
- [25] Yiqiao Jin, Yeon-Chang Lee, Kartik Sharma, Meng Ye, Karan Sikka, Ajay Divakaran, and Srijan Kumar. 2023. Predicting Information Pathways Across Online Communities. In *KDD*.
- [26] Yiqiao Jin, Xiting Wang, Ruichao Yang, Yizhou Sun, Wei Wang, Hao Liao, and Xing Xie. 2022. Towards fine-grained reasoning for fake news detection. In *Proceedings of the AAAI Conference on Artificial Intelligence*. Vol. 36. 5746–5754.
- [27] Taek Kim, Kang Min Yoo, and Sang-goo Lee. 2021. Self-guided contrastive learning for BERT sentence representations. *arXiv preprint arXiv:2106.07345* (2021).
- [28] Diederik P Kingma and Jimmy Ba. 2014. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980* (2014).
- [29] Lingpeng Kong, Cyprien de Masson d'Audume, Wang Ling, Lei Yu, Zihang Dai, and Dani Yogatama. 2019. A mutual information maximization perspective of language representation learning. *arXiv preprint arXiv:1910.08350* (2019).
- [30] Jason D Lee, Qi Lei, Nikunj Saunshi, and Jiacheng Zhuo. 2021. Predicting what you already know helps: Provable self-supervised learning. *Advances in Neural Information Processing Systems* 34 (2021), 309–323.
- [31] Chaozhuo Li, Bochen Pang, Yuming Liu, Hao Sun, Zheng Liu, Xing Xie, Tianqi Yang, Yanling Cui, Liangjie Zhang, and Qi Zhang. 2021. Adsgnn: Behavior-graph augmented relevance modeling in sponsored search. In *Proceedings of the 44th International ACM SIGIR Conference on Research and Development in Information Retrieval*. 223–232.
- [32] Chaozhuo Li, Senzhang Wang, Yukun Wang, Philip Yu, Yanbo Liang, Yun Liu, and Zhoujun Li. 2019. Adversarial learning for weakly-supervised social network alignment. In *Proceedings of the AAAI conference on artificial intelligence*, Vol. 33. 996–1003.
- [33] Chaozhuo Li, Senzhang Wang, Dejian Yang, Zhoujun Li, Yang Yang, Xiaoming Zhang, and Jianshe Zhou. 2017. PPNE: property preserving network embedding. In *Database Systems for Advanced Applications: 22nd International Conference, DASFAA 2017, Suzhou, China, March 27-30, 2017, Proceedings, Part 1* 22. Springer, 163–179.
- [34] Junnan Li, Pan Zhou, Caiming Xiong, and Steven CH Hoi. 2020. Prototypical contrastive learning of unsupervised representations. *arXiv preprint arXiv:2005.04966* (2020).
- [35] Qimai Li, Zhichao Han, and Xiao-Ming Wu. 2018. Deeper insights into graph convolutional networks for semi-supervised learning. In *Thirty-Second AAAI conference on artificial intelligence*.
- [36] Meng Liu, Hongyang Gao, and Shuiwang Ji. 2020. Towards deeper graph neural networks. In *Proceedings of the 26th ACM SIGKDD international conference on knowledge discovery & data mining*. 338–348.
- [37] Zhenghao Liu, Chenyan Xiong, Maosong Sun, and Zhiyuan Liu. 2019. Fine-grained fact verification with kernel graph attention network. *arXiv preprint arXiv:1910.09796* (2019).
- [38] Qingqing Long, Yilun Jin, Guojie Song, Yi Li, and Wei Lin. 2020. Graph structural-topical neural network. In *Proceedings of the 26th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*. 1065–1073.
- [39] Qingqing Long, Lingjun Xu, Zheng Fang, and Guojie Song. 2021. HGK-GNN: Heterogeneous Graph Kernel based Graph Neural Networks. In *Proceedings of the 27th ACM SIGKDD Conference on Knowledge Discovery & Data Mining*. 1129–1138.
- [40] Wenhao Lu, Jian Jiao, and Ruofei Zhang. 2020. Twinbert: Distilling knowledge to twin-structured compressed bert models for large-scale retrieval. In *Proceedings of the 29th ACM International Conference on Information & Knowledge Management*. 2645–2652.
- [41] Julian McAuley, Christopher Targett, Qinfeng Shi, and Anton Van Den Hengel. 2015. Image-based recommendations on styles and substitutes. In *Proceedings of the 38th international ACM SIGIR conference on research and development in information retrieval*. 43–52.
- [42] Aaron van den Oord, Yazhe Li, and Oriol Vinyals. 2018. Representation learning with contrastive predictive coding. *arXiv preprint arXiv:1807.03748* (2018).
- [43] Bochen Pang, Chaozhuo Li, Yuming Liu, Jianxun Lian, Jianan Zhao, Hao Sun, Weiwei Deng, Xing Xie, and Qi Zhang. 2022. Improving Relevance Modeling via Heterogeneous Behavior Graph Learning in Bing Ads. In *Proceedings of the 28th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*. 3713–3721.
- [44] Zhen Peng, Wenbing Huang, Minnan Luo, Qinghua Zheng, Yu Rong, Tingyang Xu, and Junzhou Huang. 2020. Graph representation learning via graphical mutual information maximization. In *Proceedings of The Web Conference 2020*. 259–270.
- [45] Nikunj Saunshi, Jordan Ash, Surbhi Goel, Dipendra Misra, Cyril Zhang, Sanjeev Arora, Sham Kakade, and Akshay Krishnamurthy. 2022. Understanding contrastive learning requires incorporating inductive biases. In *International Conference on Machine Learning*. PMLR, 19250–19286.
- [46] David I Shuman, Sunil K Narang, Pascal Frossard, Antonio Ortega, and Pierre Vanderghenst. 2013. The emerging field of signal processing on graphs: Extending high-dimensional data analysis to networks and other irregular domains. *IEEE signal processing magazine* 30, 3 (2013), 83–98.
- [47] Jie Tang, Jing Zhang, Limin Yao, Juanzi Li, Li Zhang, and Zhong Su. 2008. Arnetminer: extraction and mining of academic social networks. In *Proceedings of the 14th ACM SIGKDD international conference on Knowledge discovery and data mining*. 990–998.
- [48] Yuandong Tian. 2022. Deep contrastive learning is provably (almost) principal component analysis. *arXiv preprint arXiv:2201.12680* (2022).

- [49] Petar Veličković, Guillem Cucurull, Arantxa Casanova, Adriana Romero, Pietro Lio, and Yoshua Bengio. 2017. Graph attention networks. *arXiv preprint arXiv:1710.10903* (2017).
- [50] Petar Veličković, William Fedus, William L Hamilton, Pietro Liò, Yoshua Bengio, and R Devon Hjelm. 2019. Deep Graph Infomax. *ICLR (Poster)* 2, 3 (2019), 4.
- [51] Ulrike Von Luxburg. 2007. A tutorial on spectral clustering. *Statistics and computing* 17, 4 (2007), 395–416.
- [52] Chenguang Wang, Yangqiu Song, Haoran Li, Ming Zhang, and Jiawei Han. 2016. Text classification with heterogeneous information network kernels. In *Proceedings of the AAAI Conference on Artificial Intelligence*, Vol. 30.
- [53] Suhang Wang, Jiliang Tang, Charu Aggarwal, and Huan Liu. 2016. Linked document embedding for classification. In *Proceedings of the 25th ACM international conference on information and knowledge management*. 115–124.
- [54] Wenlin Wang, Chenyang Tao, Zhe Gan, Guoyin Wang, Liqun Chen, Xinyuan Zhang, Ruiyi Zhang, Qian Yang, Ricardo Henao, and Lawrence Carin. 2019. Improving textual network learning with variational homophilic embeddings. *Advances in Neural Information Processing Systems* 32 (2019).
- [55] Xiaozhi Wang, Tianyu Gao, Zhaocheng Zhu, Zhengyan Zhang, Zhiyuan Liu, Juanzi Li, and Jian Tang. 2021. KEPLER: A unified model for knowledge embedding and pre-trained language representation. *Transactions of the Association for Computational Linguistics* 9 (2021), 176–194.
- [56] Xiao Wang, Houye Ji, Chuan Shi, Bai Wang, Yanfang Ye, Peng Cui, and Philip S Yu. 2019. Heterogeneous graph attention network. In *The world wide web conference. 2022–2032*.
- [57] Xiao Wang, Nian Liu, Hui Han, and Chuan Shi. 2021. Self-supervised heterogeneous graph neural network with co-contrastive learning. In *Proceedings of the 27th ACM SIGKDD conference on knowledge discovery & data mining*. 1726–1736.
- [58] Yiqi Wang, Chaozhuo Li, Zheng Liu, Mingzheng Li, Jiliang Tang, Xing Xie, Lei Chen, and Philip S Yu. 2022. An adaptive graph pre-training framework for localized collaborative filtering. *ACM Transactions on Information Systems* 41, 2 (2022), 1–27.
- [59] Zixin Wen and Yuanzhi Li. 2021. Toward understanding the feature learning process of self-supervised contrastive learning. In *International Conference on Machine Learning*. PMLR, 11112–11122.
- [60] Jun Xia, Lirong Wu, Ge Wang, Jintao Chen, and Stan Z Li. 2022. Proglcl: Rethinking hard negative mining in graph contrastive learning. In *International Conference on Machine Learning*. PMLR, 24332–24346.
- [61] Minghao Xu, Hang Wang, Bingbing Ni, Hongyu Guo, and Jian Tang. 2021. Self-supervised graph-level representation learning with local and global structure. In *International Conference on Machine Learning*. PMLR, 11548–11558.
- [62] Zenan Xu, Qianliang Su, Xiaojun Quan, and Weijia Zhang. 2019. A deep neural information fusion architecture for textual network embeddings. *arXiv preprint arXiv:1908.11057* (2019).
- [63] Hao Yan, Chaozhuo Li, Ruosong Long, Chao Yan, Jianan Zhao, Wenwen Zhuang, Jun Yin, Peiyan Zhang, Weihao Han, Hao Sun, et al. 2024. A Comprehensive Study on Text-attributed Graphs: Benchmarking and Rethinking. *Advances in Neural Information Processing Systems* 36 (2024).
- [64] Cheng Yang, Zhiyuan Liu, Deli Zhao, Maosong Sun, and Edward Y Chang. 2015. Network representation learning with rich text information. In *IJCAI*, Vol. 2015. 2111–2117.
- [65] Junhan Yang, Zheng Liu, Shitao Xiao, Chaozhuo Li, Defu Lian, Sanjay Agrawal, Amit Singh, Guangzhong Sun, and Xing Xie. 2021. GraphFormers: GNN-nested transformers for representation learning on textual graph. *Advances in Neural Information Processing Systems* 34 (2021), 28798–28810.
- [66] Ruichao Yang, Xiting Wang, Yiqiao Jin, Chaozhuo Li, Jianxun Lian, and Xing Xie. 2022. Reinforcement subgraph reasoning for fake news detection. In *Proceedings of the 28th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*. 2253–2262.
- [67] Michihiro Yasunaga, Jure Leskovec, and Percy Liang. 2022. LinkBERT: Pretraining Language Models with Document Links. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*. 8003–8016.
- [68] Michihiro Yasunaga, Rui Zhang, Kshitij Meelu, Ayush Pareek, Krishnan Srinivasan, and Dragomir Radev. 2017. Graph-based neural multi-document summarization. *arXiv preprint arXiv:1706.06681* (2017).
- [69] Chuxu Zhang, Dongjin Song, Chao Huang, Ananthram Swami, and Nitesh V Chawla. 2019. Heterogeneous graph neural network. In *Proceedings of the 25th ACM SIGKDD international conference on knowledge discovery & data mining*. 793–803.
- [70] Chuxu Zhang, Ananthram Swami, and Nitesh V Chawla. 2019. Shne: Representation learning for semantic-associated heterogeneous networks. In *Proceedings of the twelfth ACM international conference on web search and data mining*. 690–698.
- [71] Chao Zhang, Guangyu Zhou, Quan Yuan, Honglei Zhuang, Yu Zheng, Lance Kaplan, Shaowen Wang, and Jiawei Han. 2016. Geoburst: Real-time local event detection in geo-tagged tweet streams. In *Proceedings of the 39th International ACM SIGIR conference on Research and Development in Information Retrieval*. 513–522.
- [72] Hongyi Zhang, Moustapha Cisse, Yann N Dauphin, and David Lopez-Paz. 2017. mixup: Beyond empirical risk minimization. *arXiv preprint arXiv:1710.09412* (2017).
- [73] Jiawei Zhang, Haopeng Zhang, Congying Xia, and Li Sun. 2020. Graph-bert: Only attention is needed for learning graph representations. *arXiv preprint arXiv:2001.05140* (2020).
- [74] Jianan Zhao, Meng Qu, Chaozhuo Li, Hao Yan, Qian Liu, Rui Li, Xing Xie, and Jian Tang. 2022. Learning on Large-scale Text-attributed Graphs via Variational Inference. *arXiv preprint arXiv:2210.14709* (2022).
- [75] Yi Zhao, Chaozhuo Li, Jiquan Peng, Xiaohan Fang, Feiran Huang, Senzhang Wang, Xing Xie, and Jibing Gong. 2023. Beyond the Overlapping Users: Cross-Domain Recommendation via Adaptive Anchor Link Learning. In *Proceedings of the 46th International ACM SIGIR Conference on Research and Development in Information Retrieval*. 1488–1497.
- [76] Kun Zhou, Hui Wang, Wayne Xin Zhao, Yutao Zhu, Sirui Wang, Fuzheng Zhang, Zhongyuan Wang, and Ji-Rong Wen. 2020. S3-rec: Self-supervised learning for sequential recommendation with mutual information maximization. In *Proceedings of the 29th ACM international conference on information & knowledge management*. 1893–1902.
- [77] Jason Zhu, Yanling Cui, Yuming Liu, Hao Sun, Xue Li, Markus Pelger, Tianqi Zhang, Liangjie Zhang, Ruofei Zhang, and Huasha Zhao. 2021. Textgmn: Improving text encoder via graph neural network in sponsored search. In *Proceedings of the Web Conference 2021*. 2848–2857.

A THEORETICAL ANALYSIS OF HFC

A.1 Background: Spectral Clustering

Given a graph $\mathcal{G} = (\mathcal{V}, \mathcal{E})$, with adjacency matrix A , the Laplacian matrix of the graph is defined as $L = D - A$, where $D = \text{diag}(d_1, \dots, d_N)$ is the diagonal degree matrix ($d_i = \sum_j A_{i,j}$). Then the symmetric normalized Laplacian matrix is defined as $L_{sym} = D^{-\frac{1}{2}} L D^{-\frac{1}{2}}$. As L_{sym} is real symmetric and positive semidefinite, therefore it can be diagonalized as $L = U \Lambda U^T$ [9]. Here $U \in \mathbb{R}^{N \times N} = [u_1, \dots, u_N]$, where $u_i \in \mathbb{R}^N$ denotes the i -th eigenvector of L_{sym} and $\Lambda = \text{diag}(\lambda_1, \dots, \lambda_N)$ is the corresponding eigenvalue matrix. To partition the graph, spectral clustering [16, 51] computes the first K eigenvectors and creates a feature vector $f_{K,v} \in \mathbb{R}^K$ for each node v : $\forall k \in [1, K]$, $f_{K,v}(k) = u_k(v)$, which is in turn used to obtain K clusters by K -means or hierarchical clustering, etc.

An analogy between signals on graphs and usual signals [46] suggests to interpret the spectrum of L_{sym} as a Fourier domain for graphs, hence defining filters on graphs as diagonal operators after change of basis with U^{-1} . It turns out that the features $f_{K,v}$ can be obtained by ideal low-pass filtering of the Delta function δ_a (localized at node a). Indeed, let l_K be the step function where $l_K(\lambda) = 1$ if $\lambda < \lambda_K$ and 0 otherwise. We define L_K the diagonal matrix for which $L_K(i, i) = l_K(\lambda_i)$. Then we have: $f_{K,v} = L_K U^{-1} \delta_v \in \mathbb{R}^K$, where we fill the last $N - K$ values with 0's. Therefore, spectral clustering is equivalent to clustering using low-pass filtering of the local descriptors δ_v of each node v of the graph \mathcal{G} .

A.2 Spectral Contrastive Loss Revisited

To introduce spectral contrastive loss [14], we give the definition of population view graph [14] first.

Population View Graph. A population view graph is defined as $\mathcal{G} = (\mathcal{X}, \mathcal{W})$, where the set of nodes comprises all augmented views \mathcal{X} of the population distribution, with $w_{xx'} \in \mathcal{W}$ the edge weights of the edges connecting nodes x, x' that correspond to different views of the same input datapoint. The core assumption made is that this graph cannot be split into a large number of disconnected subgraphs. This set-up aligns well with the intuition that in order

to generalize, the contrastive notion of “similarity” must extend beyond the purely single-instance-level, and must somehow connect distinct inputs points.

Spectral Contrastive Loss. Using the concept of population view graph, spectral contrastive loss is defined as:

$$\begin{aligned} \mathcal{L}(x, x^+, x^-, f_\theta) = & -2 \cdot \mathbb{E}_{x, x^+} [f_\theta(x)^T f_\theta(x^+)] \\ & + \mathbb{E}_{x, x^-} [(f_\theta(x)^T f_\theta(x^-))^2], \end{aligned} \quad (9)$$

where (x, x^+) is a pair of views of the same datapoint, (x, x^-) is a pair of independently random views, and f_θ is a parameterized function from the data to \mathbb{R}^k . Minimizing spectral contrastive loss is equivalent to spectral clustering on the population view graph, where the top smallest eigenvectors of the Laplacian matrix are preserved as the columns of the final embedding matrix F .

A.3 HFC-aware Spectral Contrastive Loss

As discussed in Appendix A.2, the spectral contrastive loss only learns the low-frequency component (LFC) of the graph from a spectral perspective, where the effects of high-frequency components (HFC) are much more attenuated. Recent studies have indicated that the LFC does not necessarily contain the most crucial information; while HFC may also encode useful information that is beneficial for the performance [2, 7]. In this regard, merely using the spectral contrastive loss cannot adequately capture the varying significance of different frequency components, thus constraining the expressiveness of learned representations and producing suboptimal learning performance. How to incorporate the HFC to learn a more discriminative embedding still requires explorations.

In image signal processing, the Laplacian kernel is widely used to capture high-frequency edge information [18]. As its counterpart in Graph Signal Processing (GSP) [46], we can multiply the graph Laplacian matrix L with the input graph signal $x \in \mathbb{R}^N$, (i.e., $h = Lx$) to characterize its high-frequency components, which carry sharply varying signal information across edges of graph. On the contrary, when highlighting the LFC, we would subtract the term Lx which emphasizes more on HFC from the input signal x , i.e., $z = x - Lx$.

As an alternative of the traditional low-pass filter, a simple and elegant solution to introduce HFC is to assign a single parameter to control the rate of high-frequency subtraction.

$$z = x - \alpha Lx = (I - \alpha L)x,$$

where I is the identity matrix. We thus obtain the kernel $I - \alpha L$ that contains HFC.

Following [14], we consider the following matrix factorization based objective for eigenvectors:

$$\begin{aligned} \min_{F \in \mathbb{R}^{N \times K}} \mathcal{L}_{mf}(F) = & \|(I - \alpha L) - FF^T\|_F^2 \\ = & ((1 - \alpha)I + \sum_{i,j} (\frac{\alpha w_{x_i, x_j}}{\sqrt{w_{x_i}} \sqrt{w_{x_j}}} - f_\theta(x_i)^T f_\theta(x_j)))^2, \end{aligned} \quad (10)$$

where $w_x = \sum_{x' \in \mathcal{X}} w_{x x'}$ is the total weights associated to view x . By the classical low-rank approximation theory (Eckart-Young-Mirsky theorem [11]), minimizer F possesses eigenvectors of HFC-aware kernel $I - \alpha L$ as columns and thus contains both the LFC and HFC of the population view graph.

LEMMA 1. (HFC-aware spectral contrastive loss.) Denote p_x is the x -th row of F . Let $p_x = w_x^{1/2} f_\theta(x)$. Then, the loss function $\mathcal{L}_{mf}(F)$ is equivalent to the following loss function for f_θ , called HFC-aware spectral contrastive loss, up to an additive constant:

$$\mathcal{L}_{mf}(F) = \mathcal{L}_{HFC}(f_\theta) + const,$$

where

$$\begin{aligned} \mathcal{L}_{HFC}(f_\theta) = & -2\alpha \mathbb{E}_{x, x^+} [f_\theta(x)^T f_\theta(x^+)] \\ & + \mathbb{E}_{x, x^-} [(f_\theta(x)^T f_\theta(x^-))^2] \end{aligned} \quad (11)$$

PROOF. We expand $\mathcal{L}_{mf}(F)$ and obtain

$$\begin{aligned} \mathcal{L}_{mf}(F) = & ((1 - \alpha)I + \sum_{i,j} (\frac{\alpha w_{x_i, x_j}}{\sqrt{w_{x_i}} \sqrt{w_{x_j}}} - f_\theta(x_i)^T f_\theta(x_j)))^2 \\ = & const - 2\sum_{i,j} [(1 - \alpha)I + \frac{\alpha w_{x_i, x_j}}{\sqrt{w_{x_i}} \sqrt{w_{x_j}}}] f_\theta(x_i)^T f_\theta(x_j) \\ & + \sum_{i,j} (f_\theta(x_i)^T f_\theta(x_j))^2 \\ = & \begin{cases} const - 2\sum_{i,j} 1 - \alpha + \frac{\alpha w_{x_i, x_j}}{\sqrt{w_{x_i}} \sqrt{w_{x_j}}} f_\theta(x_i)^T f_\theta(x_j) \\ \quad + \sum_{i,j} (f_\theta(x_i)^T f_\theta(x_j))^2, i = j \\ const - 2\sum_{i,j} \frac{\alpha w_{x_i, x_j}}{\sqrt{w_{x_i}} \sqrt{w_{x_j}}} f_\theta(x_i)^T f_\theta(x_j) \\ \quad + \sum_{i,j} (f_\theta(x_i)^T f_\theta(x_j))^2, i \neq j \end{cases} \end{aligned} \quad (12)$$

In our case two views x_i and x_j are not the same. We thus only focus on the $i \neq j$ case. Ignoring the scaling factor which doesn't affect linear probe error, we can hence rewrite the sum of last two terms of in Equation 12 as Equation 2. \square

B NODE CLASSIFICATION

Settings. In node classification, we train a 2-layer MLP classifier to classify nodes based on the output node representation embeddings of each method. The experiment is conducted on DBLP. Following [22], we select the most frequent 30 classes in DBLP. Also, we study both transductive and inductive node classification to understand the capability of our model comprehensively. For transductive node classification, the model has seen the classified nodes during representation learning (using the link prediction objective), while for inductive node classification, the model needs to predict the label of nodes not seen before. We separate the whole dataset into train set, validation set, and test set in 7:1:2 in all cases and each experiment is repeated 5 times in this section with the average performance reported.

Results. Table 4 demonstrates the results of different methods in transductive and inductive node classification. We observe that: (a) our HASH-CODE outperforms all the baseline methods significantly on both tasks, showing that HASH-CODE can learn more effective node representations for these tasks; (b) GNN-nested transformers generally achieve better results than GNN-cascaded transformers, which demonstrates the necessity of introducing graphic patterns in modeling textual representations; (c) HASH-CODE generalizes quite well on unseen nodes as its performance on inductive node classification is quite close to that on transductive node classification. Moreover, HASH-CODE even achieves higher performance in inductive settings than the baselines do in transductive settings.

Table 4: Experiment results of transductive and inductive node classification on DBLP dataset. (HASH-CODE marked in bold, the best baseline underlined). HASH-CODE outperforms all baselines, especially the ones based on GNN-nested transformers.

Model	Transductive		Inductive	
	P@1	NDCG	P@1	NDCG
MeanSAGE	0.5186	0.7231	0.5152	0.7197
GAT	0.5208	0.7196	0.5126	0.7146
Bert	0.5493	0.7506	0.5310	0.7485
Twin-Bert	0.5291	0.7440	0.5248	0.7431
Bert+MeanSAGE	0.6731	0.7637	0.6413	0.7494
Bert+MaxSAGE	0.6705	0.7752	0.6587	0.7599
Bert+GAT	0.6849	0.0.7801	0.6689	0.0.7619
TextGNN	0.6820	0.7753	0.6380	0.7716
AdsGNN	0.6882	0.7790	0.6624	0.7737
GraphFormers	0.6919	0.7929	<u>0.6791</u>	0.7993
Heterformer	<u>0.6924</u>	<u>0.7957</u>	0.6746	<u>0.8079</u>
HASH-CODE	0.7116	0.8198	0.6961	0.8170
<i>Improv.</i>	2.77%	3.03%	2.50%	1.13%

C IN-DEPTH ANALYSIS

C.1 Data Sparsity Analysis

We simulate the data sparsity scenarios by using different proportions of the full dataset. Figure 7 shows the evaluation results on Product and Sports datasets. As we can see, the performance substantially drops when less training data is used. While, HASH-CODE is consistently better than baselines in all cases, especially in an extreme sparsity level (20%). This observation implies that HASH-CODE is able to make better use of the data with the contrastive learning method, which alleviates the influence of data sparsity problem for representation learning to some extent.

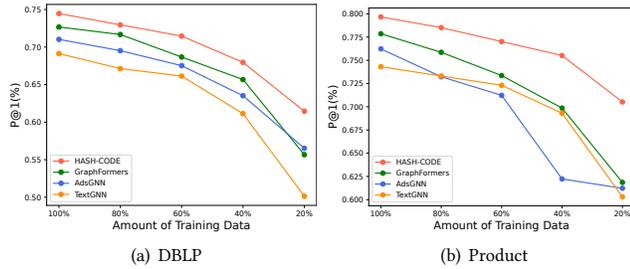


Figure 7: Performance (P@1) comparison w.r.t. different sparsity levels on DBLP and Product datasets. The performance substantially drops when less training data is used, while HASH-CODE is consistently better than baselines in all cases, especially in an extreme sparsity level (20%).

C.2 Influence of Training Epochs Number

We train our model with a varying number of epochs and fine-tune it on the downstream task. Figure 8 presents the results on Product

and Sports datasets. We can see that our model benefits mostly from the first 20 training epochs. And after that, the performance improves slightly. Based on this observation, we can conclude that the correlations among different views (i.e., the graph topology and textual attributes) can be well-captured by our contrastive learning approach through training within a small number of epochs. So that the enhanced data representations can improve the performance of the downstream tasks.

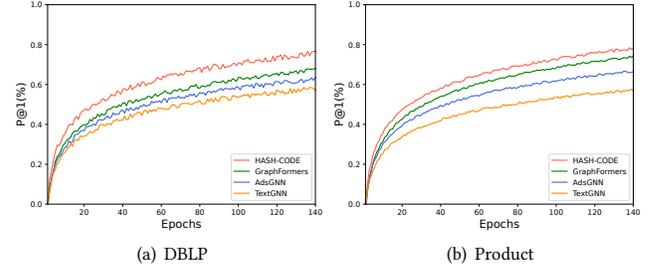


Figure 8: Performance (P@1) comparison w.r.t. different numbers of training epochs on DBLP and Product datasets. HASH-CODE benefits mostly from the first 20 training epochs, thus the correlations among different views can be well-captured by our approach through training within a small number of epochs.

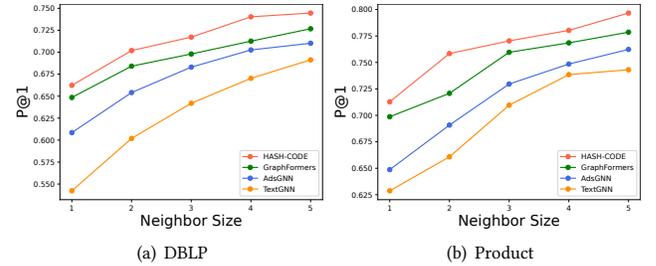


Figure 9: Impact of neighbor size on DBLP and Product dataset. Enlarging the number of neighbour nodes brings performance improvement to both models. HASH-CODE maintains consistent advantages over GraphFormers over all test cases.

C.3 Influence of Neighbor Size

We analyze the impact of neighbourhood size with a fraction of neighbour nodes randomly sampled for each center node. From Figure 9, we can observe that with the increasing number of neighbour nodes, both HASH-CODE and Graphformers achieve higher prediction accuracies. However, the marginal gain is vanishing, as the relative improvement becomes smaller when more neighbours are included. In all the testing cases, HASH-CODE maintains consistent advantages over GraphFormers, which demonstrates the effectiveness of our proposed method.