

Less is More Revisit^{*}

Association with Global Multiparty Session Types

Nobuko Yoshida^[0000–0002–3925–8557] and Ping Hou^[0000–0001–6899–9971]

University of Oxford, Oxford, UK

Abstract. Multiparty session types (MPST) [12] is a type discipline where a programmer or architect specifies a whole view of communications as a *global protocol*, and each distributed program is locally type-checked against its *end-point projection*. After 10 years from the birth of MPST, Scalas and Yoshida [18] have discovered that the *proofs* of type safety in the literature which use the end-point projection with *mergeability* are flawed. After this paper, researchers wrongly believe that the end-point projection (with mergeability) is *unsound*. We correct this misunderstanding, proposing a new general proof technique for type soundness of multiparty session π -calculus, which uses an *association* relation between a global type and its end-point projection.

1 Introduction

Today many computer science technologies are centred on *data science* and *machine learning*, that fall within the field of technology to use data for further creating and innovating products, services and infrastructural systems in the society. About 30 years ago, C. B. Jones, together with J.R. Gurd, had predicted this era of *data*. In their article, *the Global-yet-Personal Information System* (GyP/IS), in *Computing Tomorrow: future research directions in computer science* edited by Wand and Milner [9], they argued that extracting meaning from data, and understanding and building methods that utilise data to inform predictions will be the central concerns in future computing, proposing the system called GyP/IS. The thesis of GyP/IS is that data should be *globally* consistent, *open* for everybody, and yet *personalised* (structured with respect to an individual need). They have predicted that future systems would go beyond a scope the known programming paradigm can manage, and argued an importance to describe and formally specify *interactive behaviours*.

Multiparty session types (MPST) [12, 13] is a type discipline which attempts to take a step to meet the GyP/IS challenge, by offering a programming framework to guarantee a global consistency among interactive agents or processes in

^{*} Work supported by: EPSRC EP/T006544/2, EP/K011715/1, EP/K034413/1, EP/L00058X/1, EP/N027833/2, EP/N028201/1, EP/T014709/2, EP/V000462/1, EP/X015955/1, NCSS/EPSRC VeTSS, and Horizon EU TaRDIS 101093006.

[†] The complete lyrics is found in Conclusion.

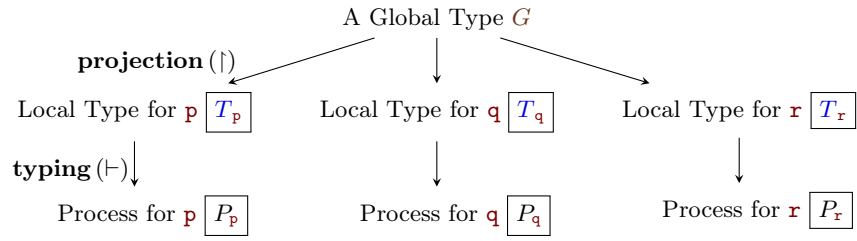


Fig. 1: Top-down methodology of multiparty session types

the open system [10, 19]. It facilitates the description, specification and verification of communications in concurrent and distributed systems based on *multiparty protocols*.

The design of multiparty protocols begins with a given *global type* (G , top in Figure 1), and each participant’s implementation (process) P_p (bottom) relies on its *local type* T_p (middle), obtained by the end-point projection of the global type. The global and local types reflect the global and local communication behaviours, respectively. Well-typed implementations (processes) that conform to a global type are guaranteed to be *correct by construction*, enjoying safety, deadlock-freedom, and liveness of interactions. In this paper, we demonstrate rigour of this MPST *top-down* approach, revisiting the work by Scalas and Yoshida [18].

Misunderstanding on the top-down MPST. The work [18] has proposed a general MPST framework (called the *bottom-up*), which does not require global types. In the bottom-up approach, safety of processes is enforced by directly checking safety of a set of local types. This approach offers more typability, but computationally more expensive. For worse, in the asynchronous MPST where processes communicating via infinite FIFO queues, type-checking using the bottom-up is undecidable, while in the top-down, it is decidable (as the projection is decidable).

The work [18] also pointed out that proofs of some of the top-down typing systems, which use the projection with *mergeability*, are flawed. The notion of mergeability was first introduced in [3] for modelling the end-point projection of Web Service Choreography Description Language (WS-CDL) [20]. Its aim is to broaden the typability of processes by allowing more projectable (well-formed) global types than the original limited projection [12]. Mergeability is implemented in Scribble protocol description language [11, 22, 23] and other related MPST tools. Without using mergeability, most global protocols are not projectable. We formally define the projection and mergeability formally in Definition 3.

The statement in [18] has caused misunderstandings among researchers, leading to claims such as “the top-down approach (with mergeability) is *unsound*”, and subsequently, assertions that “global types are *problematic*”.

This paper proves that we can build a sound typing system using the endpoint projection with mergeability, and more importantly, a utilisation of global types leads to a clear proof method for the type soundness.

Outline. § 2 recalls the multiparty session calculus from [18]; § 3 defines global and local types, and introduces the *association relation* $G \sqsubseteq_s \Gamma$, where global type G and a set of local types Γ of session name s are related up to *subtyping*. We then prove the sound and complete correspondence between global and local type semantics with respect to \sqsubseteq ; § 4 defines the typing system using \sqsubseteq and proves type safety, deadlock-freedom, and liveness of typable processes; and § 5 concludes with *Questa* by Mario T.

2 Multiparty Session π -Calculus

This section presents the syntax of the synchronous multiparty session π -calculus, and provides a formalisation of its operational semantics.

Syntax of Processes in Session π -Calculus The multiparty session π -calculus models the behaviour of processes that interact using multiparty channels. For simplicity of presentation, our calculus is streamlined to focus on communication; standard extensions, such as with expressions and “if...then...else” statements, are routine and orthogonal to our formulation.

Definition 1 (Syntax of Multiparty Session π -Calculus). *The multiparty session π -calculus syntax is defined as follows:*

$$\begin{array}{ll}
 c ::= x & \left| \begin{array}{l} s[\mathbf{p}] \\ c \end{array} \right. & \begin{array}{l} \text{(variable or channel for session } s \text{ with role } \mathbf{p}) \\ \text{(basic value, variable, or channel with role)} \end{array} \\
 d ::= v & \left| \begin{array}{l} s[\mathbf{p}] \\ (\nu s) P \end{array} \right. & \begin{array}{l} \text{(basic value or channel with role)} \\ \text{(inaction, restriction)} \end{array} \\
 w ::= v & \left| \begin{array}{l} c[\mathbf{q}] \oplus \mathbf{m}(d).P \\ c[\mathbf{q}] \& \{ \mathbf{m}_i(x_i).P_i \}_{i \in I} \\ \mathbf{def } D \mathbf{ in } P \mid X(\tilde{d}) \\ P \mid Q \mid \mathbf{err} \end{array} \right. & \begin{array}{l} \\ \\ \text{(selection towards role } \mathbf{q}) \\ \text{(branching from role } \mathbf{q} \text{ with an index set } I \neq \emptyset) \\ \text{(process definition, process call)} \\ \text{(parallel composition, error)} \end{array} \\
 P, Q ::= \mathbf{0} & \left| \begin{array}{l} X(\tilde{x}) = P \end{array} \right. & \begin{array}{l} \\ \text{(declaration of process variable } X) \end{array}
 \end{array}$$

$\mathbf{p}, \mathbf{q}, \dots$ denote roles belonging to a set \mathcal{R} ; s, s', \dots denote sessions; x, y, \dots denote variables; $\mathbf{m}, \mathbf{m}', \dots$ denote message labels; and X, Y, \dots denote process variables. Restriction, branching, and process definitions and declarations act as binders, as expected; $\text{fc}(P)$ is the set of free channels with roles in P , and $\text{fv}(P)$ is the set of free variables in P . We adopt a form of Barendregt convention: bound sessions and process variables are assumed pairwise distinct, and different from free ones. We write $\Pi_{i \in I} P_i$ for the parallel composition of processes P_i .

The syntax of our calculus (Def. 1) is mostly standard [18]. v is a *basic value* (e.g. unit $()$, integers, strings). A *channel with role* (a.k.a. *session endpoint*) $s[\mathbf{p}]$ is a multiparty communication endpoint whose user plays role \mathbf{p} in the session s . *Inaction* $\mathbf{0}$ represents a terminated process (and is often omitted). *Session*

$$\begin{aligned}
[\text{R-}\oplus\&] \quad & s[\mathbf{p}][\mathbf{q}]\&\{\mathbf{m}_i(x_i).P_i\}_{i \in I} \mid s[\mathbf{q}][\mathbf{p}]\oplus\mathbf{m}_k\langle w \rangle.Q \rightarrow P_k\{w/x_k\} \mid Q \text{ if } k \in I \\
[\text{R-X}] \quad & \mathbf{def} X(x_1, \dots, x_n) = P \mathbf{in} (X\langle w_1, \dots, w_n \rangle \mid Q) \\
& \rightarrow \mathbf{def} X(x_1, \dots, x_n) = P \mathbf{in} (P\{w_1/x_1\} \cdots \{w_n/x_n\} \mid Q) \\
[\text{R-CTX}] \quad & P \rightarrow P' \text{ implies } \mathbb{C}[P] \rightarrow \mathbb{C}[P'] \\
[\text{R-ERR}] \quad & s[\mathbf{p}][\mathbf{q}]\&\{\mathbf{m}_i(x_i).P_i\}_{i \in I} \mid s[\mathbf{q}][\mathbf{p}]\oplus\mathbf{m}\langle w \rangle.Q \rightarrow \mathbf{err} \text{ if } \forall i \in I : \mathbf{m}_i \neq \mathbf{m} \\
[\text{R-}\equiv] \quad & P' \equiv P \rightarrow Q \equiv Q' \text{ implies } P' \rightarrow Q'
\end{aligned}$$

Fig. 2: Operational semantics of multiparty session π -calculus.

$$\begin{aligned}
P \mid Q \equiv Q \mid P \quad (P \mid Q) \mid R \equiv P \mid (Q \mid R) \quad P \mid \mathbf{0} \equiv P \quad (\nu s) \mathbf{0} \equiv \mathbf{0} \\
(\nu s)(\nu s')P \equiv (\nu s')(\nu s)P \quad (\nu s)(P \mid Q) \equiv P \mid (\nu s)Q \text{ if } s \notin \text{fc}(P) \\
\mathbf{def} D \mathbf{in} \mathbf{0} \equiv \mathbf{0} \quad \mathbf{def} D \mathbf{in} (\nu s)P \equiv (\nu s)(\mathbf{def} D \mathbf{in} P) \text{ if } s \notin \text{fc}(D) \\
\mathbf{def} D \mathbf{in} (P \mid Q) \equiv (\mathbf{def} D \mathbf{in} P) \mid Q \text{ if } \text{dpv}(D) \cap \text{fpv}(Q) = \emptyset \\
\mathbf{def} D \mathbf{in} (\mathbf{def} D' \mathbf{in} P) \equiv \mathbf{def} D' \mathbf{in} (\mathbf{def} D \mathbf{in} P) \\
\text{if } (\text{dpv}(D) \cup \text{fpv}(D)) \cap \text{dpv}(D') = (\text{dpv}(D') \cup \text{fpv}(D')) \cap \text{dpv}(D) = \emptyset
\end{aligned}$$

Fig. 3: Standard structural congruence rules, where $\text{fpv}(D)$ is the set of *free process variables* in D , and $\text{dpv}(D)$ is the set of *declared process variables* in D .

restriction $(\nu s)P$ declares a new session s with its scope restricted to the process P . *Selection* (a.k.a. *internal choice*) $c[\mathbf{q}]\oplus\mathbf{m}\langle d \rangle.P$ sends a message \mathbf{m} with payload d to role \mathbf{q} via endpoint c , where c may be a variable or channel with role, while d may also be a basic value. *Branching* (a.k.a. *external choice*) $c[\mathbf{q}]\&\{\mathbf{m}_i(x_i).P_i\}_{i \in I}$ expects to receive a message \mathbf{m}_i (for some $i \in I$) from role \mathbf{q} via endpoint c , and then continues as P_i . *Process definition* $\mathbf{def} D \mathbf{in} P$ and *process call* $X\langle \vec{d} \rangle$ capture recursion: the call invokes X by expanding it into P , and replacing its formal parameters with the actual ones. *Parallel composition* $P \mid Q$ denotes two processes capable of concurrent execution and potential communication. Finally, \mathbf{err} represents the *error* process.

Operational Semantics of Session π -Calculus We provide the operational semantics of our multiparty session π -calculus in Def. 2, using a standard *structural congruence* \equiv defined in Fig. 3.

Definition 2 (Semantics of Multiparty Session π -Calculus). A reduction context \mathbb{C} is defined as: $\mathbb{C} ::= \mathbb{C} \mid P \mid (\nu s)\mathbb{C} \mid \mathbf{def} D \mathbf{in} \mathbb{C} \mid []$. The reduction \rightarrow is inductively defined in Fig. 2. We denote \rightarrow^* as the reflexive and transitive closure of \rightarrow . We say that P has an error iff there exists some \mathbb{C} such that $P = \mathbb{C}[\mathbf{err}]$.

Our operational semantics is standard [18]. The reduction context \mathbb{C} defines a process with a single placeholder $[\]$, serving as a substitute for a specific subterm P . Rule $[\text{R-}\oplus\&]$ describes a communication on session s involving receiver \mathbf{p} and sender \mathbf{q} , provided that the transmitted message \mathbf{m}_k is handled by the receiver ($k \in I$). In case of a message label mismatch, rule $[\text{R-ERR}]$ is invoked to trigger an **error**. Rule $[\text{R-X}]$ initiates the expansion of process definitions when

called. Additionally, rules [R-Ctx] and [R-≡] facilitate the reduction of processes under reduction contexts and modulo structural congruence, respectively.

Example 1 (Syntax and Semantics of Session π -Calculus, from [1]). Processes P and Q below communicate on a session s : P uses the endpoint $s[\mathbf{p}]$ to send an endpoint $s[\mathbf{r}]$ to role \mathbf{q} ; Q uses the endpoint $s[\mathbf{q}]$ to receive an endpoint x , then sends a message to role \mathbf{p} via x .

$$P = s[\mathbf{p}][\mathbf{q}] \oplus m' \langle s[\mathbf{r}] \rangle . s[\mathbf{p}][\mathbf{r}] \& m(x) . \mathbf{0} \quad Q = s[\mathbf{q}][\mathbf{p}] \& m'(x) . x[\mathbf{p}] \oplus m \langle 42 \rangle . \mathbf{0}$$

By Def. 2, successful reductions yield:

$$\begin{aligned} & (\nu s) (P \mid Q) \\ &= (\nu s) (s[\mathbf{p}][\mathbf{q}] \oplus m' \langle s[\mathbf{r}] \rangle . s[\mathbf{p}][\mathbf{r}] \& m(x) . \mathbf{0} \mid s[\mathbf{q}][\mathbf{p}] \& m'(x) . x[\mathbf{p}] \oplus m \langle 42 \rangle . \mathbf{0}) \\ &\rightarrow (\nu s) (s[\mathbf{p}][\mathbf{r}] \& m(x) . \mathbf{0} \mid s[\mathbf{r}][\mathbf{p}] \oplus m \langle 42 \rangle . \mathbf{0}) \\ &\rightarrow (\nu s) \mathbf{0} \equiv \mathbf{0} \end{aligned}$$

Example 2 (OAuth Process, extended from [18]). The following process interacts on session s using channels with role $s[\mathbf{s}]$, $s[\mathbf{c}]$, $s[\mathbf{a}]$, to play resp. roles \mathbf{s} , \mathbf{c} , \mathbf{a} . For brevity, we omit irrelevant message payloads.

$$(\nu s) (P_{\mathbf{s}} \mid P_{\mathbf{c}} \mid P_{\mathbf{a}}) \quad \text{where: } \begin{cases} P_{\mathbf{s}} = s[\mathbf{s}][\mathbf{c}] \oplus \text{cancel} \\ P_{\mathbf{c}} = s[\mathbf{c}][\mathbf{s}] \& \left\{ \begin{array}{l} \text{login} . s[\mathbf{c}][\mathbf{a}] \oplus \text{passwd} \langle "XYZ" \rangle \\ \text{cancel} . s[\mathbf{c}][\mathbf{a}] \oplus \text{quit}, \text{fail} . s[\mathbf{c}][\mathbf{a}] \oplus \text{fatal} \end{array} \right\} \\ P_{\mathbf{a}} = s[\mathbf{a}][\mathbf{c}] \& \left\{ \begin{array}{l} \text{passwd}(y) . s[\mathbf{a}][\mathbf{s}] \oplus \text{auth} \langle "secret" \rangle, \text{quit}, \text{fatal} \end{array} \right\} \end{cases}$$

Here, $(\nu s) (P_{\mathbf{s}} \mid P_{\mathbf{c}} \mid P_{\mathbf{a}})$ is the parallel composition of processes $P_{\mathbf{s}}$, $P_{\mathbf{c}}$, $P_{\mathbf{a}}$ in the scope of session s . In $P_{\mathbf{s}}$, “ $s[\mathbf{s}][\mathbf{c}] \oplus \text{cancel}$ ” means: use $s[\mathbf{s}]$ to send **cancel** to \mathbf{c} . Process $P_{\mathbf{c}}$ uses $s[\mathbf{c}]$ to receive **login**, **cancel**, or **fatal** from \mathbf{s} ; then, in the first case, it uses $s[\mathbf{c}]$ to send **passwd** to \mathbf{a} ; in the second case, it uses $s[\mathbf{c}]$ to send **quit** to \mathbf{a} ; in the third case, it uses $s[\mathbf{c}]$ to send **fatal** to \mathbf{a} . By Def. 2, we have the reductions:

$$(\nu s) (P_{\mathbf{s}} \mid P_{\mathbf{c}} \mid P_{\mathbf{a}}) \rightarrow (\nu s) (\mathbf{0} \mid s[\mathbf{c}][\mathbf{a}] \oplus \text{quit} \mid P_{\mathbf{a}}) \rightarrow (\nu s) (\mathbf{0} \mid \mathbf{0} \mid \mathbf{0}) \equiv \mathbf{0}$$

3 Multiparty Session Types

This section introduces multiparty session types. We provide an extensive exploration of global and local types in § 3.1, including syntax, projection, and subtyping. We establish a Labelled Transition System (LTS) semantics for both global types (§ 3.2) and typing contexts (§ 3.3). We explain the operational relationship between these two semantics in § 3.4. Furthermore, we demonstrate that a typing context obtained via projection ensures safety, deadlock-freedom, and liveness in § 3.5.

3.1 Global and Local Types

The Multiparty Session Type (MPST) theory uses *global types* to provide a comprehensive overview of communication between *roles*, such as $\mathbf{p}, \mathbf{q}, \mathbf{s}, \mathbf{t}, \dots$, belonging to a set \mathcal{R} . In contrast, it employs *local types*, which are obtained via *projection* from a global type, to describe how an *individual* role communicates with other roles from a local viewpoint. The syntax of global and local types is presented in Fig. 4, where constructs are mostly standard [18].

B	$::=$	$\text{int} \mid \text{bool} \mid \text{real} \mid \text{unit} \mid \dots$	Basic types
S	$::=$	$B \mid T$	Basic type or Session type
G	$::=$	$\mathbf{p} \rightarrow \mathbf{q} : \{m_i(S_i).G_i\}_{i \in I}$	Transmission
		$\mu \mathbf{t}.G \mid \mathbf{t} \mid \mathbf{end}$	Recursion, Type variable, Termination
T	$::=$	$\mathbf{p} \& \{m_i(S_i).T_i\}_{i \in I}$	External choice
		$\mathbf{p} \oplus \{m_i(S_i).T_i\}_{i \in I}$	Internal choice
		$\mu \mathbf{t}.T \mid \mathbf{t} \mid \mathbf{end}$	Recursion, Type variable, Termination

Fig. 4: Syntax of types.

Basic types are taken from a set \mathcal{B} , and describe types of values, ranging over integers, booleans, real numbers, units, *etc.*

Global types range over G, G', G_i, \dots , and describe the high-level behaviour for all roles. The set of roles in a global type G is denoted by $\text{roles}(G)$. We explain each syntactic construct of global types.

- $\mathbf{p} \rightarrow \mathbf{q} : \{m_i(S_i).G_i\}_{i \in I}$: a *transmission*, denoting a message from role \mathbf{p} to role \mathbf{q} , with a label m_i , a payload of type S_i (either basic or local type), and a continuation G_i , where i is taken from an index set I . We require that the index set be non-empty ($I \neq \emptyset$), labels m_i be pair-wise distinct, and self receptions be excluded (i.e. $\mathbf{p} \neq \mathbf{q}$).
- $\mu \mathbf{t}.G$: a *recursive* global type, where contractive requirements apply [16, §21.8], i.e. each recursion variable \mathbf{t} is bound within a $\mu \mathbf{t} \dots$ and is guarded.
- \mathbf{end} : a *terminated* global type (omitted where unambiguous).

Local types (or *session types*) range over T, U, \dots , and describe the behaviour of a single role. We elucidate each syntactic construct of local types.

- $\mathbf{p} \oplus \{m_i(S_i).T_i\}_{i \in I}$: an *internal choice* (*selection*), indicating that the *current* role is expected to *send* to role \mathbf{p} .
- $\mathbf{p} \& \{m_i(S_i).T_i\}_{i \in I}$: an *external choice* (*branching*), indicating that the *current* role is expected to *receive* from role \mathbf{p} .
- $\mu \mathbf{t}.T$: a *recursive* local type, following a pattern analogous to recursive global types.
- \mathbf{end} : a *termination* (omitted where unambiguous)

Similarly to global types, we require pairwise-distinct, non-empty labels in local types.

Projection In the top-down approach of MPST, local types are obtained by projecting a global type onto roles. *Projection* is a *partial* function that provides the local type associated with a participating role in a global type. It takes a global type G and a role \mathbf{p} , returning the corresponding local type. Our definition of projection, as given in Def. 3 below, is standard [18].

Definition 3 (Global Type Projection). *The projection of a global type G onto a role \mathbf{p} , written $G \upharpoonright \mathbf{p}$, is:*

$$\begin{aligned}
(q \rightarrow r: \{m_i(S_i).G_i\}_{i \in I}) \upharpoonright p &= \begin{cases} r \oplus \{m_i(S_i).(G_i \upharpoonright p)\}_{i \in I} & \text{if } p = q \\ q \& \{m_i(S_i).(G_i \upharpoonright p)\}_{i \in I} & \text{if } p = r \\ \prod_{i \in I} G_i \upharpoonright p & \text{if } p \neq q \text{ and } p \neq r \end{cases} \\
(\mu t.G) \upharpoonright p &= \begin{cases} \mu t.(G \upharpoonright p) & \text{if } p \in \text{roles}(G) \text{ or } \text{fv}(\mu t.G) \neq \emptyset \\ \text{end} & \text{otherwise} \end{cases} \quad \begin{matrix} t \upharpoonright p = t \\ \text{end} \upharpoonright p = \text{end} \end{matrix}
\end{aligned}$$

where \prod is the merge operator for session types (full merging), defined as:

$$\begin{aligned}
& p \& \{m_i(S_i).U_i\}_{i \in I} \prod p \& \{m_j(S_j).T_j\}_{j \in J} \\
&= p \& \{m_k(S_k).(U_k \prod T_k)\}_{k \in I \cap J} \& p \& \{m_i(S_i).U_i\}_{i \in I \setminus J} \& p \& \{m_j(S_j).T_j\}_{j \in J \setminus I} \\
& p \oplus \{m_i(S_i).U_i\}_{i \in I} \prod p \oplus \{m_i(S_i).T_i\}_{i \in I} = p \oplus \{m_i(S_i).(U_i \prod T_i)\}_{i \in I} \\
& \mu t.U \prod \mu t.T = \mu t.(U \prod T) \quad t \prod t = t \quad \text{end} \prod \text{end} = \text{end}
\end{aligned}$$

It is noteworthy that there are global types that cannot be projected onto all of their participants. This occurs when certain global types may describe protocols that are inherently meaningless, leading to undefined merging operations, as illustrated in Ex. 4 below.

If a global type G starts with a transmission from role p to role q , projecting it onto role p (resp. q) results in an internal (resp. external) choice, provided that the continuation of each branching of G is also projectable. When projecting G onto other participants r ($r \neq p$ and $r \neq q$), a merge operator, as defined in Def. 3 and exemplified in Ex. 4 below, is used to ensure that the projections of all continuations are “compatible”.

If a global type G is a termination or type variable, projecting it onto any role results in a termination or type variable, respectively. Finally, the projection of a recursive global type $\mu t.G$ preserves its recursive construct when projected onto a role in G , or if there are no free type variables in $\mu t.G$; otherwise, the projection yields termination.

Subtyping We introduce a *subtyping* relation \leq on local types, as defined in Def. 4. This subtyping relation is standard [18], and will be used later when defining local type semantics and establishing the relationship between global and local type semantics.

Definition 4 (Subtyping). *Given a standard subtyping $<$: for basic types (e.g. including $\text{int} <: \text{real}$), the session subtyping relation \leq is coinductively defined:*

$$\begin{aligned}
& \frac{B <: B'}{B \leq B'} \quad [SUB-B] \quad \frac{\forall i \in I \quad S_i \leq S'_i \quad T_i \leq T'_i}{p \& \{m_i(S_i).T_i\}_{i \in I} \leq p \& \{m_i(S'_i).T'_i\}_{i \in I \cup J}} \quad [SUB-\&] \\
& \frac{}{\text{end} \leq \text{end}} \quad [SUB-\text{end}] \quad \frac{\forall i \in I \quad S'_i \leq S_i \quad T_i \leq T'_i}{p \oplus \{m_i(S_i).T_i\}_{i \in I \cup J} \leq p \oplus \{m_i(S'_i).T'_i\}_{i \in I}} \quad [SUB-\oplus] \\
& \frac{T[\mu t.T/t] \leq T'}{\mu t.T \leq T'} \quad [SUB-\mu L] \quad \frac{T \leq T'[\mu t.T'/t]}{T \leq \mu t.T'} \quad [SUB-\mu R]
\end{aligned}$$

Rule [SUB-B] extends \leq to basic types. The remaining rules establish that a subtype describes a more permissive session protocol w.r.t. its supertype. Rule

[SUB- \oplus] enables the subtype of an internal choice to encompass a broader range of message labels, enabling the sending of more generic payloads. Conversely, rule [SUB- $\&$] dictates that the subtype of an external choice supports a narrower set of input message labels, and less generic payloads. Rule [SUB-**end**] specifies that the type **end** is its own subtype. Finally, rules [SUB- μ L] and [SUB- μ R] assert the relationship between recursive types, defined up to their unfolding.

Example 3 (Types of OAuth 2.0, from [18]). Consider a protocol from OAuth 2.0 [15]: the **service** sends to the **client** *either* a request to **login**, or **cancel**; in the first case, **c** continues by sending **passwd** (carrying a **string**) to the **authorisation server**, who in turn sends **auth** to **s** (with a **boolean**, telling whether the client is authorised), and the session **ends**; in the second case, **c** sends **quit** to **a**, and the session **ends**. This protocol can be represented by the global type G_{auth} :

$$G_{\text{auth}} = \mathbf{s} \rightarrow \mathbf{c}: \left\{ \begin{array}{l} \mathbf{login.c} \rightarrow \mathbf{a:passwd(str)}. \mathbf{a} \rightarrow \mathbf{s:auth(bool)}. \mathbf{end} \\ \mathbf{cancel.c} \rightarrow \mathbf{a:quit}. \mathbf{end} \end{array} \right\}$$

Following the MPST top-down methodology, G_{auth} is projected onto three local types (one for each role **s**, **c**, **a**):

$$\begin{aligned} T_{\mathbf{s}} &= \mathbf{c} \oplus \left\{ \begin{array}{l} \mathbf{login.a} \& \mathbf{auth(bool)} \\ \mathbf{cancel} \end{array} \right\} & T_{\mathbf{c}} &= \mathbf{s} \& \left\{ \begin{array}{l} \mathbf{login.a} \oplus \mathbf{passwd(str)} \\ \mathbf{cancel.a} \oplus \mathbf{quit} \end{array} \right\} \\ T_{\mathbf{a}} &= \mathbf{c} \& \left\{ \begin{array}{l} \mathbf{passwd(str).s} \oplus \mathbf{auth(bool)} \\ \mathbf{quit} \end{array} \right\} \end{aligned}$$

Here, $T_{\mathbf{s}}$ represents the interface of **s** in G_{auth} : it must send (\oplus) to **c** either **login** or **cancel**; in the first case, **s** must then receive ($\&$) message **auth(bool)** from **a**, and the session ends; otherwise, in the second case, the session just ends. Types $T_{\mathbf{c}}$ and $T_{\mathbf{a}}$ follow the same intuition.

Example 4 (Merge and Projection, originated from [14]). Two external choice (branching) types from the same role with disjoint labels can be merged into a type carrying both labels, e.g.

$$\mathbf{A} \& \mathbf{greet(str)} \sqcap \mathbf{A} \& \mathbf{farewell(bool)} = \mathbf{A} \& \{ \mathbf{greet(str)}, \mathbf{farewell(bool)} \}$$

However, this does not apply to internal choices (selections), e.g. $\mathbf{A} \oplus \mathbf{greet(str)} \sqcap \mathbf{A} \oplus \mathbf{farewell(bool)}$ is undefined.

Two external choices from the same role with same labels but different payloads cannot be merged, e.g. $\mathbf{A} \& \mathbf{greet(str)} \sqcap \mathbf{A} \& \mathbf{greet(bool)}$ is undefined. This also applies to internal choices.

Apparently, two external choices from different roles cannot be merged. Same for internal choices, e.g. $\mathbf{A} \oplus \mathbf{greet(str)} \sqcap \mathbf{B} \oplus \mathbf{greet(str)}$ is undefined.

Additionally, two local types with same prefixes but unmergeable continuations cannot be merged, e.g. $\mathbf{A} \oplus \mathbf{greet(str)} \sqcap \mathbf{A} \oplus \mathbf{greet(str)}. \mathbf{B} \& \mathbf{farewell(bool)}$ is undefined as $\mathbf{end} \sqcap \mathbf{B} \& \mathbf{farewell(bool)}$ is not mergeable.

Consider a global type:

$$G = \mathbf{A} \rightarrow \mathbf{B}: \left\{ \begin{array}{l} \mathbf{greet(str).C} \rightarrow \mathbf{A:farewell(bool)} \\ \mathbf{farewell(bool).C} \rightarrow \mathbf{A:greet(str)} \end{array} \right\}$$

G cannot be projected onto role **C** since:

$$\begin{array}{c}
\frac{G[\mu t.G/t] \xrightarrow{\alpha} G'}{\mu t.G \xrightarrow{\alpha} G'} \quad [\text{GR-}\mu] \quad \frac{j \in I}{\mathbf{p} \rightarrow \mathbf{q}: \{m_i(S_i).G'_i\}_{i \in I} \xrightarrow{s[\mathbf{p}][\mathbf{q}]m_j} G'_j} \quad [\text{GR-}\oplus\&] \\
\frac{\forall i \in I : G'_i \xrightarrow{\alpha} G''_i \quad \text{subject}(\alpha) \cap \{\mathbf{p}, \mathbf{q}\} = \emptyset}{\mathbf{p} \rightarrow \mathbf{q}: \{m_i(S_i).G'_i\}_{i \in I} \xrightarrow{\alpha} \mathbf{p} \rightarrow \mathbf{q}: \{m_i(S_i).G''_i\}_{i \in I}} \quad [\text{GR-Ctx}]
\end{array}$$

Fig. 5: Global type reduction rules.

$$\begin{aligned}
G \upharpoonright C &= \mathbf{C} \rightarrow \mathbf{A}: \text{farewell}(\text{bool}) \upharpoonright C \sqcap \mathbf{C} \rightarrow \mathbf{A}: \text{greet}(\text{str}) \upharpoonright C \\
&= \mathbf{A} \oplus \text{farewell}(\text{bool}) \sqcap \mathbf{A} \oplus \text{greet}(\text{str}) \quad (\text{undefined})
\end{aligned}$$

$G \upharpoonright C$ is undefined because in G , depending on whether \mathbf{A} and \mathbf{B} transmit `greet` or `farewell`, \mathbf{C} is expected to send either `farewell` or `greet` to \mathbf{A} . However, since \mathbf{C} is not involved in the interactions between \mathbf{A} and \mathbf{B} , \mathbf{C} is not aware of which message to send; that is G does not provide a valid specification for \mathbf{C} .

3.2 Semantics of Global Types

We now present a Labelled Transition System (LTS) semantics for global types. To begin, we introduce the transition labels in Def. 5, which are also used in the LTS semantics of typing contexts (discussed later in § 3.3).

Definition 5 (Transition Labels). Let α be a transition label of the form:

$$\alpha ::= \begin{array}{l} s[\mathbf{p}]:\mathbf{q}\&\mathbf{m}(S) \quad (\text{in session } s, \mathbf{p} \text{ receives } \mathbf{m}(S) \text{ from } \mathbf{q}) \\ \left| \begin{array}{l} s[\mathbf{p}]:\mathbf{q}\oplus\mathbf{m}(S) \quad (\text{in session } s, \mathbf{p} \text{ sends } \mathbf{m}(S) \text{ to } \mathbf{q}) \\ s[\mathbf{p}][\mathbf{q}]\mathbf{m} \quad (\text{in session } s, \text{ message } \mathbf{m} \text{ is transmitted from } \mathbf{p} \text{ to } \mathbf{q}) \end{array} \right.
\end{array}$$

The subject(s) of a transition label, written $\text{subject}(\alpha)$, are defined as follows:

$$\begin{aligned}
\text{subject}(s[\mathbf{p}]:\mathbf{q}\&\mathbf{m}(S)) &= \text{subject}(s[\mathbf{p}]:\mathbf{q}\oplus\mathbf{m}(S)) = \{\mathbf{p}\} \\
\text{subject}(s[\mathbf{p}][\mathbf{q}]\mathbf{m}) &= \{\mathbf{p}, \mathbf{q}\}
\end{aligned}$$

The label $s[\mathbf{p}][\mathbf{q}]\mathbf{m}$ denotes a synchronising communication between \mathbf{p} and \mathbf{q} via a message label \mathbf{m} ; the subject of such a label includes *both* roles. The labels $s[\mathbf{p}]:\mathbf{q}\oplus\mathbf{m}(S)$ and $s[\mathbf{p}]:\mathbf{q}\&\mathbf{m}(S)$ describe sending and receiving actions separately. Since we define a synchronous semantics for global types, these labels are used for the typing context semantics in § 3.3.

We proceed to give a Labelled Transition System (LTS) semantics to a global type G in Def. 6.

Definition 6 (Global Type Reductions). The global type transition $\xrightarrow{\alpha}$ is inductively defined by the rules in Fig. 5. We use $G \rightarrow G'$ if there exists α such that $G \xrightarrow{\alpha} G'$; we write $G \rightarrow$ if there exists G' such that $G \rightarrow G'$, and $G \not\rightarrow$ for its negation (i.e. there is no G' such that $G \rightarrow G'$). Finally, \rightarrow^* denotes the transitive and reflexive closure of \rightarrow .

Fig. 5 depicts the standard global type reduction rules [21]. Rule $[\text{GR-}\oplus\&]$ models the communication between two roles. Rule $[\text{GR-}\mu]$ handles recursion. Finally, rule $[\text{GR-Ctx}]$ allows a reduction of a global type that is causally independent from its prefix, provided that all of the continuations can make the

$$\begin{array}{c}
\frac{k \in I}{s[\mathbf{p}]:\mathbf{q} \oplus \{\mathbf{m}_i(S_i).T_i\}_{i \in I} \xrightarrow{s[\mathbf{p}]:\mathbf{q} \oplus \mathbf{m}_k(S_k)} s[\mathbf{p}]:T_k} \quad [\Gamma\text{-}\oplus] \\
\frac{k \in I}{s[\mathbf{p}]:\mathbf{q} \& \{\mathbf{m}_i(S_i).T_i\}_{i \in I} \xrightarrow{s[\mathbf{p}]:\mathbf{q} \& \mathbf{m}_k(S_k)} s[\mathbf{p}]:T_k} \quad [\Gamma\text{-}\&] \\
\frac{\Gamma_1 \xrightarrow{s[\mathbf{p}]:\mathbf{q} \oplus \mathbf{m}(S)} \Gamma'_1 \quad \Gamma_2 \xrightarrow{s[\mathbf{q}]:\mathbf{p} \& \mathbf{m}(S')} \Gamma'_2 \quad S \leq S'}{\Gamma_1, \Gamma_2 \xrightarrow{s[\mathbf{p}][\mathbf{q}]\mathbf{m}} \Gamma'_1, \Gamma'_2} \quad [\Gamma\text{-}\oplus\&] \quad \frac{s[\mathbf{p}]:T\{\mu\mathbf{t}.T/\mathbf{t}\} \xrightarrow{\alpha} \Gamma'}{s[\mathbf{p}]:\mu\mathbf{t}.T \xrightarrow{\alpha} \Gamma'} \quad [\Gamma\text{-}\mu] \\
\frac{\Gamma \xrightarrow{\alpha} \Gamma'}{\Gamma, x:B \xrightarrow{\alpha} \Gamma', x:B} \quad [\Gamma\text{-},B] \quad \frac{\Gamma \xrightarrow{\alpha} \Gamma'}{\Gamma, c:T \xrightarrow{\alpha} \Gamma', c:T} \quad [\Gamma\text{-},]
\end{array}$$

Fig. 6: Typing context reduction rules.

reduction of that label. This causal independence is indicated by the subjects of the label being disjoint from the prefix of the global type. For example, consider the global type $G = \mathbf{p} \rightarrow \mathbf{q}:\mathbf{m}_1.\mathbf{r} \rightarrow \mathbf{u}:\mathbf{m}_2.\mathbf{end}$. Given that the subjects of the label $s[\mathbf{r}][\mathbf{u}]\mathbf{m}_2$ are disjoint from \mathbf{p} and \mathbf{q} , i.e. $\text{subject}(s[\mathbf{r}][\mathbf{u}]\mathbf{m}_2) \cap \mathbf{p}, \mathbf{q} = \emptyset$, and $\mathbf{r} \rightarrow \mathbf{u}:\mathbf{m}_2.\mathbf{end} \xrightarrow{s[\mathbf{r}][\mathbf{u}]\mathbf{m}_2} \mathbf{end}$, rule $[\text{GR-CTX}]$ allows G to transition via $s[\mathbf{r}][\mathbf{u}]\mathbf{m}_2$: $G \xrightarrow{s[\mathbf{r}][\mathbf{u}]\mathbf{m}_2} \mathbf{p} \rightarrow \mathbf{q}:\mathbf{m}_1.\mathbf{end}$, which is unrelated to \mathbf{p} and \mathbf{q} .

3.3 Semantics of Typing Context

After introducing the semantics of global types, we now present an LTS semantics for *typing contexts*, which are collections of local types. The formal definition of a typing context is provided in Def. 7, followed by its reduction rules in Def. 8.

Definition 7 (Typing Contexts). Θ denotes a partial mapping from process variables to n -tuples of types, and Γ denotes a partial mapping from channels to types. Their syntax is defined as:

$$\Theta ::= \emptyset \mid \Theta, X:S_1, \dots, S_n \quad \Gamma ::= \emptyset \mid \Gamma, x:S \mid \Gamma, s[\mathbf{p}]:T$$

The context composition Γ_1, Γ_2 is defined iff $\text{dom}(\Gamma_1) \cap \text{dom}(\Gamma_2) = \emptyset$. We write $s \in \Gamma$ iff $\exists \mathbf{p} : s[\mathbf{p}] \in \text{dom}(\Gamma)$ (i.e. session s occurs in Γ). We write $s \notin \Gamma$ iff $\forall \mathbf{p} : s[\mathbf{p}] \notin \text{dom}(\Gamma)$ (i.e. session s does not occur in Γ). We write $\text{dom}(\Gamma) = \{s\}$ iff $\forall c \in \text{dom}(\Gamma)$ there is \mathbf{p} such that $c = s[\mathbf{p}]$ (i.e. Γ only contains session s). We write $\Gamma \leq \Gamma'$ iff $\text{dom}(\Gamma) = \text{dom}(\Gamma')$ and $\forall c \in \text{dom}(\Gamma) : \Gamma(c) \leq \Gamma'(c)$. We write Γ_s iff $\text{dom}(\Gamma_s) = \{s\}$, $\text{dom}(\Gamma_s) \subseteq \text{dom}(\Gamma)$, and $\forall s[\mathbf{p}] \in \text{dom}(\Gamma) : \Gamma(s[\mathbf{p}]) = \Gamma_s(s[\mathbf{p}])$ (i.e. restriction of Γ to session s).

Definition 8 (Typing Context Reduction). The typing context transition $\xrightarrow{\alpha}$ is inductively defined by the rules in Fig. 6. We write $\Gamma \xrightarrow{\alpha}$ if there exists Γ' such that $\Gamma \xrightarrow{\alpha} \Gamma'$. We define two reductions $\Gamma \rightarrow_s \Gamma'$ and $\Gamma \rightarrow \Gamma'$, as follows:

- $\Gamma \rightarrow_s \Gamma'$ holds iff $\Gamma \xrightarrow{\alpha} \Gamma'$ with $\alpha = s[\mathbf{p}][\mathbf{q}]\mathbf{m}$ for any $\mathbf{p}, \mathbf{q} \in \mathcal{R}$ (recall that \mathcal{R} is the set of all roles): this means that Γ can progress via message transmission on session s , involving any roles \mathbf{p} and \mathbf{q} . We write $\Gamma \rightarrow_s$ iff $\Gamma \rightarrow_s \Gamma'$ for some

- Γ' , and $\Gamma \not\rightarrow_s$ for its negation (i.e. there is no Γ' such that $\Gamma \rightarrow_s \Gamma'$), and we denote \rightarrow_s^* as the reflexive and transitive closure of \rightarrow_s ;
- $\Gamma \rightarrow \Gamma'$ holds iff $\Gamma \rightarrow_s \Gamma'$ for some s : this means that Γ can progress via message transmission on any session. We write $\Gamma \rightarrow$ iff $\Gamma \rightarrow \Gamma'$ for some Γ' , and $\Gamma \not\rightarrow$ for its negation, and we denote \rightarrow^* as the reflexive and transitive closure of \rightarrow .

Fig. 6 contains standard rules for typing context reductions [18]. Rule $[\Gamma-\oplus]$ (resp. $[\Gamma-\&]$) states that a typing context entry can execute an output (resp. input) transition. Rule $[\Gamma-\oplus\&]$ ensures synchronised matching input/output transitions, with payload compatibility through subtyping; consequently, the context progresses via a message transmission label $s[\mathbf{p}][\mathbf{q}]\mathbf{m}$. Rule $[\Gamma-\mu]$ pertains to recursion, while $[\Gamma-,B]$ and $[\Gamma-,.]$ address reductions in a larger context.

3.4 Relating Semantics between Global Types and Typing Contexts

Following the introduction of LTS semantics for global types (Def. 6) and typing contexts (Def. 8), we establish a relationship between these two semantics using the projection operator \upharpoonright (Def. 3) and the subtyping relation \leq (Def. 4).

Definition 9 (Association of Global Types and Typing Contexts). A typing context Γ is associated with a global type G for a multiparty session s , written $G \sqsubseteq_s \Gamma$, iff Γ can be split into two disjoint (possibly empty) sub-contexts $\Gamma = \Gamma_G, \Gamma_{\text{end}}$ where:

1. Γ_G contains projections of G : $\text{dom}(\Gamma_G) = \{s[\mathbf{p}] \mid \mathbf{p} \in \text{roles}(G)\}$, and $\forall \mathbf{p} \in \text{roles}(G) : G \upharpoonright_{\mathbf{p}} \leq \Gamma(s[\mathbf{p}])$;
2. Γ_{end} contains only end endpoints: $\forall s[\mathbf{p}] \in \text{dom}(\Gamma_{\text{end}}) : \Gamma(s[\mathbf{p}]) = \text{end}$.

The association $\cdot \sqsubseteq_s \cdot$ is a binary relation over global types G and typing contexts Γ , parameterised by multiparty sessions s . There are two requirements for the association: (1) the typing context Γ must include an entry for each role in the multiparty session s ; and (2) for each role \mathbf{p} , the projection of the global type onto this role ($G \upharpoonright_{\mathbf{p}}$) must be a subtype (Def. 4) of its corresponding entry in the typing context ($\Gamma(s[\mathbf{p}])$).

Example 5 (Association). Recall the global type G_{auth} and its projected local types T_s, T_c, T_a in Ex. 3. Consider the typing context $\Gamma_{\text{auth}} = \Gamma_{\text{auth}_s}, \Gamma_{\text{auth}_c}, \Gamma_{\text{auth}_a}$, where:

$$\Gamma_{\text{auth}_s} = s[\mathbf{s}]:\mathbf{c}\oplus\text{cancel} \quad \Gamma_{\text{auth}_c} = s[\mathbf{c}]:\mathbf{s}\&\left\{\begin{array}{l} \text{login.a}\oplus\text{passwd}(\text{str}) \\ \text{cancel.a}\oplus\text{quit} \\ \text{fail.a}\oplus\text{fatal} \end{array}\right\}$$

$$\Gamma_{\text{auth}_a} = s[\mathbf{a}]:\mathbf{c}\&\{\text{passwd}(\text{str}).\mathbf{s}\oplus\text{auth}(\text{bool}), \text{quit}, \text{fatal}\}$$

Intuitively, Γ_{auth} is associated with G_{auth} , as \mathbf{s} sends only **cancel**, while \mathbf{c} and \mathbf{a} expect to receive additional messages **fail** and **fatal**, respectively. Indeed, the entries in Γ_{auth} adhere to the communication behaviour patterns of each role of G_{auth} , though with fewer output messages and more input ones.

We can formally verify the association of Γ_{auth} with G_{auth} for session s by:

- $\text{roles}(G_{\text{auth}}) = \{\mathbf{s}, \mathbf{c}, \mathbf{a}\}$, and $\text{dom}(\Gamma_{\text{auth}}) = \{s[\mathbf{s}], s[\mathbf{c}], s[\mathbf{a}]\}$
- $G_{\text{auth}} \upharpoonright_{\mathbf{s}} = T_{\mathbf{s}} = \mathbf{c} \oplus \left\{ \begin{array}{l} \text{login.a}\&\text{auth}(\text{bool}) \\ \text{cancel} \end{array} \right\} \leq \Gamma_{\text{auth}}(s[\mathbf{s}])$
- $G_{\text{auth}} \upharpoonright_{\mathbf{c}} = T_{\mathbf{c}} = \mathbf{s} \& \left\{ \begin{array}{l} \text{login.a} \oplus \text{passwd}(\text{str}) \\ \text{cancel.a} \oplus \text{quit} \end{array} \right\} \leq \Gamma_{\text{auth}}(s[\mathbf{c}])$
- $G_{\text{auth}} \upharpoonright_{\mathbf{a}} = T_{\mathbf{a}} = \mathbf{c} \& \left\{ \begin{array}{l} \text{passwd}(\text{str}).\mathbf{s} \oplus \text{auth}(\text{bool}) \\ \text{quit} \end{array} \right\} \leq \Gamma_{\text{auth}}(s[\mathbf{a}])$

We demonstrate the *operational correspondence* between a global type and any *associated* typing context through two main theorems: Thm. 1 shows that the reducibility of a global type aligns with that of its associated typing context; while Thm. 2 illustrates that each possible reduction of a typing context is simulated by an action in the reductions of the associated global type.

Theorem 1 (Soundness of Association). *Given associated global type G and typing context Γ for session s : $G \sqsubseteq_s \Gamma$. If $G \xrightarrow{\alpha} G'$ where $\alpha = s[\mathbf{p}][\mathbf{q}]\mathbf{m}$, then there exist α' , Γ' , and G'' , such that $\alpha' = s[\mathbf{p}][\mathbf{q}]\mathbf{m}'$, $G \xrightarrow{\alpha'} G''$, $G'' \sqsubseteq_s \Gamma'$, and $\Gamma \xrightarrow{\alpha'} \Gamma'$.*

Proof. By induction on global type reductions (Def. 6).

Theorem 2 (Completeness of Association). *Given associated global type G and typing context Γ for session s : $G \sqsubseteq_s \Gamma$. If $\Gamma \xrightarrow{\alpha} \Gamma'$ where $\alpha = s[\mathbf{p}][\mathbf{q}]\mathbf{m}$, then there exists G' such that $G' \sqsubseteq_s \Gamma'$ and $G \xrightarrow{\alpha} G'$.*

Proof. By induction on typing context reductions (Def. 8).

Based on Thm. 1 and Thm. 2, we derive a corollary: a global type G is in operational correspondence with the typing context $\Gamma = \{s[\mathbf{p}]:G \upharpoonright_{\mathbf{p}}\}_{\mathbf{p} \in \text{roles}(G)}$, containing the projections of all roles in G .

Example 6 (Soundness and Completeness of Association). Consider the associated global type G_{auth} and typing context Γ_{auth} in Ex. 5.

We have $G_{\text{auth}} \xrightarrow{s[\mathbf{s}][\mathbf{c}]\text{login}}$, and by the soundness of association (Thm. 1), there exist $\alpha = s[\mathbf{s}][\mathbf{c}]\text{cancel}$, G'_{auth} , and Γ'_{auth} such that

$$G_{\text{auth}} \xrightarrow{s[\mathbf{s}][\mathbf{c}]\text{cancel}} G'_{\text{auth}} = \mathbf{c} \rightarrow \mathbf{a}:\text{quit}, \quad \Gamma_{\text{auth}} \xrightarrow{s[\mathbf{s}][\mathbf{c}]\text{cancel}} \Gamma'_{\text{auth}} = \Gamma'_{\text{auth}_s}, \Gamma'_{\text{auth}_c}, \Gamma'_{\text{auth}_a}$$

where:

$$\begin{aligned} \Gamma'_{\text{auth}_s} &= s[\mathbf{s}]:\text{end} & \Gamma'_{\text{auth}_c} &= s[\mathbf{c}]:\mathbf{a} \oplus \text{quit} \\ \Gamma'_{\text{auth}_a} &= s[\mathbf{a}]:\mathbf{c} \& \{\text{passwd}(\text{str}).\mathbf{s} \oplus \text{auth}(\text{bool}), \text{quit}, \text{fatal}\} \end{aligned}$$

By Def. 9, it is easy to check $G'_{\text{auth}} \sqsubseteq_s \Gamma'_{\text{auth}}$. Further, we have the reduction for Γ'_{auth} :

$$\Gamma'_{\text{auth}} \xrightarrow{s[\mathbf{c}][\mathbf{a}]\text{quit}} \Gamma''_{\text{auth}} = s[\mathbf{s}]:\text{end}, s[\mathbf{c}]:\text{end}, s[\mathbf{a}]:\text{end}$$

which, by the completeness of association (Thm. 2), relates to the reduction: $G'_{\text{auth}} \xrightarrow{s[\mathbf{c}][\mathbf{a}]\text{quit}} \text{end}$, with $\text{end} \sqsubseteq_s \Gamma''_{\text{auth}}$.

Remark 1 (*‘Weakness’ and ‘Adequacy’ of Soundness Theorem*). Inquisitive readers might question why we opted to formulate a *‘weak’* soundness theorem rather than one that mirrors the completeness theorem, as seen in existing literature [6]. This choice arises from our utilisation of the subtyping (Def. 4, particularly [SUB- \oplus]). A local type in the typing context might offer fewer branches for selection compared to the projected local type, leading to transmission actions in the global type that remain uninhabited.

For example, consider the global type G_{auth} and its associated typing context Γ_{auth} , as shown in Ex. 5. While the global type G_{auth} might transition through $s[\mathbf{s}][\mathbf{c}]\text{login}$, the associated typing context Γ_{auth} cannot.

Nonetheless, our soundness theorem *adequately* ensures the desired properties guaranteed via association, including safety, deadlock-freedom, and liveness, as demonstrated in § 3.5.

3.5 Typing Context Properties Guaranteed via Association

The design of multiparty session type theory provides a substantial advantage in guaranteeing desirable properties through its methodology. Consequently, processes adhering to the local types obtained from projections are inherently *correct by construction*. This subsection highlights three key properties: *communication safety*, *deadlock-freedom*, and *liveness*. We demonstrate that these properties are ensured by typing contexts associated with global types.

Communication Safety We begin by introducing communication safety for typing contexts, a behavioural property that ensures each role can exchange compatible messages, thereby preventing label mismatches.

Definition 10 (Typing Context Safety). *Given a session s , we say that φ is an s -safety property of typing contexts iff, whenever $\varphi(\Gamma)$, we have:*

$$\begin{aligned} [S-\oplus\&] \quad & \Gamma \xrightarrow{s[\mathbf{p}]:\mathbf{q}\oplus\mathbf{m}(S)} \text{ and } \Gamma \xrightarrow{s[\mathbf{q}]:\mathbf{p}\&\mathbf{m}'(S')} \text{ implies } \Gamma \xrightarrow{s[\mathbf{p}][\mathbf{q}]\mathbf{m}}; \\ [S-\mu] \quad & \Gamma = \Gamma', s[\mathbf{p}]:\mu\mathbf{t}.T \text{ implies } \varphi(\Gamma', s[\mathbf{p}]:T\{\mu\mathbf{t}.T/\mathbf{t}\}); \\ [S-\rightarrow_s] \quad & \Gamma \rightarrow_s \Gamma' \text{ implies } \varphi(\Gamma'). \end{aligned}$$

We say Γ is *s-safe*, written $\text{safe}(s, \Gamma)$, if $\varphi(\Gamma)$ holds for some s -safety property φ . We say Γ is *safe*, written $\text{safe}(\Gamma)$, if $\varphi(\Gamma)$ holds for some property φ which is s -safe for all sessions s occurring in $\text{dom}(\Gamma)$.

Our safety property is derived from a fundamental feature of generalised MPST systems [18, Def. 4.1]. As per Def. 10, safety is a *coinductive* property [17]. This means that for a given a session s , s -safe is the largest s -safety property, including the union of all s -safety properties. To demonstrate the s -safety of a typing context Γ , we must identify a property φ such that $\Gamma \in \varphi$, and subsequently prove that φ qualifies as an s -safety property. More specifically, if such a φ exists, it can be formulated as a set containing Γ and all its reductums (via transition \rightarrow_s^*). We then verify whether all elements of φ satisfy each clause of Def. 10.

According to clause [S- $\oplus\&$], whenever two roles \mathbf{p} and \mathbf{q} attempt communication, the receiving role \mathbf{q} is required to accommodate all output messages of

the sending role \mathbf{p} with compatible payload types, ensuring the feasibility of the communication. Clause $[\mathbf{s}\text{-}\mu]$ unfolds any recursive entry, while clause $[\mathbf{s}\text{-}\rightarrow_s]$ specifies that any typing context Γ' , to which Γ transitions on session s , must also belong to φ , indicating that Γ' is s -safe as well. Note that any entry $s[\mathbf{p}]:\mathbf{end}$ in Γ vacuously satisfies all clauses.

Example 7 (Typing Context Safety). Consider the typing context Γ_{auth} from Ex. 5. We know that Γ_{auth} is s -safe by verifying its reductions. For example, we have the reductions $\Gamma_{\text{auth}} \xrightarrow{s[\mathbf{s}][\mathbf{c}]\text{cancel}} \cdot \xrightarrow{s[\mathbf{c}][\mathbf{a}]\text{quit}} \Gamma''_{\text{auth}} = s[\mathbf{s}]:\mathbf{end}, s[\mathbf{c}]:\mathbf{end}, s[\mathbf{a}]:\mathbf{end}$, where each reductum complies with all clauses of Def. 10.

The typing context $\Gamma_A = s[\mathbf{p}]:\mathbf{q}\oplus\mathbf{m}_1.\mathbf{r}\oplus\mathbf{m}_3, s[\mathbf{q}]:\mathbf{p}\&\mathbf{m}_2, s[\mathbf{r}]:\mathbf{p}\&\mathbf{m}_4$ is *not* s -safe. Any property φ containing such a typing context is *not* a s -safety property, as it violates $[\mathbf{s}\text{-}\oplus\&]$ of Def. 10: $\Gamma_A \xrightarrow{s[\mathbf{p}]:\mathbf{q}\oplus\mathbf{m}_1} \cdot$ and $\Gamma_A \xrightarrow{s[\mathbf{q}]:\mathbf{p}\&\mathbf{m}_2} \cdot$, but $\Gamma_A \xrightarrow{s[\mathbf{p}][\mathbf{q}]\mathbf{m}_1} \cdot$ does not hold.

Finally, let's consider the typing context $\Gamma_B = s[\mathbf{p}]:\mathbf{q}\oplus\mathbf{m}(\text{real}), s[\mathbf{q}]:\mathbf{p}\&\mathbf{m}(\text{int})$. Γ_B is *not* s -safe, as any property φ containing Γ_B contradicts $[\mathbf{s}\text{-}\oplus\&]$: $\Gamma_B \xrightarrow{s[\mathbf{p}]:\mathbf{q}\oplus\mathbf{m}(\text{real})} \cdot$ and $\Gamma_B \xrightarrow{s[\mathbf{q}]:\mathbf{p}\&\mathbf{m}(\text{int})} \cdot$, but $\Gamma_B \xrightarrow{s[\mathbf{p}][\mathbf{q}]\mathbf{m}} \cdot$ is not uphold due to $\text{real} \not\leq \text{int}$.

Deadlock-Freedom The property of deadlock-freedom determines whether a typing context can keep reducing without getting stuck, unless it reaches a successful terminal state.

Definition 11 (Deadlock-Free Typing Contexts). *Given a session s , a typing context Γ is s -deadlock-free, written $\text{df}(s, \Gamma)$, iff $\Gamma \rightarrow_s^* \Gamma' \not\rightarrow_s$ implies $\forall s[\mathbf{p}] \in \text{dom}(\Gamma') : \Gamma'(s[\mathbf{p}]) = \mathbf{end}$.*

It is noteworthy that a typing context that reduces infinitely adheres to deadlock-freedom, as it consistently undergoes further reductions. Alternatively, when a terminal typing context is reached, all entries in the typing context must be terminated successfully (**end**). Consequently, a deadlock-free typing context either continues perpetual reduction or terminates.

Example 8 (Typing Context Deadlock-Freedom). The typing context Γ_{auth} in Ex. 5 is s -deadlock-free, as any terminal typing context Γ'_{auth} , reached from Γ_{auth} via $\Gamma_{\text{auth}} \rightarrow_s^* \Gamma'_{\text{auth}} \not\rightarrow_s$, only contains **end** entries, which can be easily verified.

The typing context $\Gamma_C = s[\mathbf{p}]:\mathbf{q}\oplus\mathbf{m}_1.\mathbf{r}\&\mathbf{m}_3, s[\mathbf{q}]:\mathbf{r}\oplus\mathbf{m}_2.\mathbf{p}\&\mathbf{m}_1, s[\mathbf{r}]:\mathbf{p}\oplus\mathbf{m}_3.\mathbf{q}\&\mathbf{m}_2$ is s -safe but *not* s -deadlock-free, as its inputs and outputs, despite being dual, are arranged in the incorrect order. Specifically, there are no possible reductions for Γ_C , i.e. $\Gamma_C \not\rightarrow_s$, while none of the entries in Γ_C is a termination.

Finally, the context $\Gamma_D = s[\mathbf{p}]:\mathbf{q}\oplus\{\mathbf{m}_1.\mathbf{r}\oplus\mathbf{m}_2, \mathbf{m}_3\}, s[\mathbf{q}]:\mathbf{p}\&\{\mathbf{m}_1, \mathbf{m}_2\}, s[\mathbf{r}]:\mathbf{p}\&\mathbf{m}_2$ is s -deadlock-free but *not* s -safe, as it consistently reaches a successful termination by transmitting \mathbf{m}_1 between \mathbf{p} and \mathbf{q} ; while \mathbf{q} is unable to receive the message \mathbf{m}_3 when \mathbf{p} intends to send it due to the message mismatch.

Liveness The liveness property ensures that every pending output/external choice eventually gets triggered through a message transmission. It relies on fairness, specifically based on *strong fairness of components* [8, Fact 2], to guarantee that every enabled message transmission is successfully executed. The definitions of fair and live paths for typing contexts are provided in Def. 12, and these paths are used to formalise the liveness for typing contexts in Def. 13.

Definition 12 (Fair, Live Paths). A path is a possibly infinite sequence of typing contexts $(\Gamma_n)_{n \in \mathbb{N}}$, where $\mathbb{N} = \{0, 1, 2, \dots\}$ is a set of consecutive natural numbers, and, $\forall n \in \mathbb{N}, \Gamma_n \rightarrow \Gamma_{n+1}$. We say that a path $(\Gamma_n)_{n \in \mathbb{N}}$ is fair for session s iff, $\forall n \in \mathbb{N}: \Gamma_n \xrightarrow{s[p][q]m} \Gamma_{n+1}$ implies $\exists k, m'$ such that $\mathbb{N} \ni k \geq n$, and $\Gamma_k \xrightarrow{s[p][q]m'} \Gamma_{k+1}$.

We say that a path $(\Gamma_n)_{n \in \mathbb{N}}$ is live for session s iff, $\forall n \in \mathbb{N}$:

- (L1) $\Gamma_n \xrightarrow{s[p]:q \oplus m(S)} \Gamma_{n+1}$ implies $\exists k, m'$ such that $\mathbb{N} \ni k \geq n$ and $\Gamma_k \xrightarrow{s[p][q]m'} \Gamma_{k+1}$;
- (L2) $\Gamma_n \xrightarrow{s[q]:p \& m(S)} \Gamma_{n+1}$ implies $\exists k, m'$ such that $\mathbb{N} \ni k \geq n$ and $\Gamma_k \xrightarrow{s[p][q]m'} \Gamma_{k+1}$.

A path is a (possibly infinite) sequence of reductions of a typing context. A path is fair for session s if, along the path, every enabled message transmission is eventually performed on s . Likewise, a path is live for session s if, along the path, every pending internal/external choice is eventually triggered on s .

Definition 13 (Live Typing Contexts). Given a session s , a typing context Γ is s -live, written $\text{live}(s, \Gamma)$, iff $\Gamma \rightarrow_s^* \Gamma'$ implies all paths starting with Γ' that are fair for session s are also live for s .

A typing context Γ is s -live if any reductum of Γ (via transition \rightarrow_s^*) consistently generates a live path for s under fairness.

Example 9 (Fairness and Typing Context Liveness, originated from [7, 18]). Consider the typing context:

$$\Gamma_E = s[p]:p' \oplus m_1, s[p']:p \& m_1, s[q]:\mu t_q. q' \oplus m_2. t_q, s[q']:\mu t_{q'}. q \& m_2. t_{q'}$$

which is s -safe and s -deadlock-free. There is an infinite path starting with Γ_E , where q and q' keep communicating in session s , while p and p' never trigger a reduction to interact, i.e. $\Gamma_E \xrightarrow{s[q][q']m_2} \Gamma_E \xrightarrow{s[q][q']m_2} \dots$. Such a path is *not* fair for s because although message transmission between p and p' is enabled, it will never occur. Alternatively, along any fair path of Γ_E , all inputs and outputs can eventually be fired on s , indicating that Γ_E is s -live.

Now consider another typing context:

$$\Gamma'_E = s[p]:\mu t_p. q \& \{m_1. t_p, m_2. t_p\}, s[q]:\mu t_q. p \oplus \{m_1. t_q, m_2. r \oplus m_2. t_q\}, s[r]:\mu t_r. q \& m_2. t_r$$

which is s -safe and s -deadlock-free. Γ'_E has fair and live paths, where in s , m_2 is transmitted from q to p , and then to r . However, there is also a fair path, where in s , m_1 is consistently transmitted from q to p , i.e. $\Gamma'_E \xrightarrow{s[q][p]m_1} \Gamma'_E \xrightarrow{s[q][p]m_1} \dots$. In this case, r indefinitely awaits input that will never arrive. Therefore, while this path is fair for s , it is not live, and hence, Γ'_E is not s -live.

Finally, the typing context $\Gamma''_E = s[p]:q \oplus \{m_1, m_2\}, s[q]:p \& \{m_1, m_3\}$ is s -live: there is only one path starting from Γ''_E , i.e. $\Gamma''_E \xrightarrow{s[p][q]m_1} s[p]:\text{end}, s[q]:\text{end}$, which is fair and live for s ; while it is not s -safe.

Properties by Association We conclude by demonstrating, as stated in Thm. 3, that a typing context associated with a global type is constructed to possess the properties of safety, deadlock-freedom, and liveness.

Theorem 3 (Safety, Deadlock-Freedom, and Liveness by Association).

Let G be a global type, Γ a typing context, and s a session. If Γ is associated with G for s : $G \sqsubseteq_s \Gamma$, then Γ is s -safe, s -deadlock-free, and s -live.


Example 10 (Typing Context Properties Guaranteed by Association). The typing context Γ_{auth} described in Ex. 5 is associated with G_{auth} for session s , i.e. $G_{\text{auth}} \sqsubseteq_s \Gamma_{\text{auth}}$. Consequently, Γ_{auth} possesses the desirable properties of being s -safe, s -deadlock-free (as also demonstrated in Ex. 7 and Ex. 8, respectively), and s -live.

3.6 Relationships Between Typing Context Properties

We now explore both the relationships between typing context properties, and how they relate to association, as formalised in Thm. 4 below.

Theorem 4. For any typing context Γ and session s , the following statements are valid:

- (1) $\text{df}(s, \Gamma) \not\Leftarrow \not\Rightarrow \text{safe}(s, \Gamma)$;
- (2) $\text{live}(s, \Gamma) \not\Leftarrow \not\Rightarrow \text{safe}(s, \Gamma)$;
- (3) $\text{live}(s, \Gamma) \not\Leftarrow \Rightarrow \text{df}(s, \Gamma)$;
- (4) $\exists G : G \sqsubseteq_s \Gamma \not\Leftarrow \Rightarrow \text{safe}(s, \Gamma)$;
- (5) $\exists G : G \sqsubseteq_s \Gamma \not\Leftarrow \Rightarrow \text{df}(s, \Gamma)$;
- (6) $\exists G : G \sqsubseteq_s \Gamma \not\Leftarrow \Rightarrow \text{live}(s, \Gamma)$.



In the diagram, the “safe” set (resp. “df” set, “live” set) contains all typing contexts that are s -safe (resp. s -deadlock-free, s -live). The red set \mathbb{G} encompasses all typing contexts associated with some global type for s . The negated implications stated in Thm. 4 are showcased in Ex. 8, Ex. 9, and Ex. 11 (below), respectively.

Example 11 (Non-Associated Typing Context, originated from [2, 18]). The typing context $\Gamma_F = s[\mathbf{p}]:T, s[\mathbf{q}]:\oplus\mathbf{m}(T).\mathbf{end}$ with $T = \mu\mathbf{t}.\mathbf{q}\oplus\mathbf{m}(\mathbf{t}).\mathbf{end}$ (from [2, Ex. 1.2]) is s -live (and hence s -deadlock-free and s -safe), but *not* associated with any global type for session s : this is because a recursion variable \mathbf{t} occurs as payload in T , which is not allowed by either Def. 3 or Def. 4.

4 Multiparty Session Typing System

This section presents a type system for the multiparty session π -calculus, as explained in § 2. We introduce the typing rules in § 4.1, and show the main properties of typed processes: subject reduction and session fidelity, in § 4.2. Finally, we demonstrate how process properties such as deadlock-freedom and liveness can be guaranteed by construction in § 4.3.

$$\begin{array}{c}
\frac{\Theta(X) = S_1, \dots, S_n}{\Theta \vdash X : S_1, \dots, S_n} \text{ [T-X]} \quad \frac{\forall i \in 1 \dots n \quad S_i \text{ is basic or } c_i : S_i \vdash c_i \cdot \mathbf{end}}{\mathbf{end}(c_1 : S_1, \dots, c_n : S_n)} \text{ [T-end]} \\
\frac{\mathbf{end}(\Gamma)}{\Theta \cdot \Gamma \vdash \mathbf{0}} \text{ [T-0]} \quad \frac{v \in \mathcal{B}}{\emptyset \vdash v : B} \text{ [T-B]} \quad \frac{\Theta \cdot \Gamma_1 \vdash P_1 \quad \Theta \cdot \Gamma_2 \vdash P_2}{\Theta \cdot \Gamma_1, \Gamma_2 \vdash P_1 \mid P_2} \text{ [T-|]} \\
\frac{\Theta \vdash X : S_1, \dots, S_n \quad \mathbf{end}(\Gamma_0) \quad \forall i \in 1 \dots n \quad \Gamma_i \vdash d_i : S_i \quad S_i \not\leq \mathbf{end}}{\Theta \cdot \Gamma_0, \Gamma_1, \dots, \Gamma_n \vdash X(d_1, \dots, d_n)} \text{ [T-CALL]} \\
\frac{\Theta, X : S_1, \dots, S_n \cdot x_1 : S_1, \dots, x_n : S_n \vdash P \quad \Theta, X : S_1, \dots, S_n \cdot \Gamma \vdash Q}{\Theta \cdot \Gamma \vdash \mathbf{def} X(x_1 : S_1, \dots, x_n : S_n) = P \mathbf{in} Q} \text{ [T-def]} \\
\frac{\Gamma_1 \vdash c : \mathbf{q} \& \{m_i(S_i).T_i\}_{i \in I} \quad \forall i \in I \quad \Theta \cdot \Gamma, y_i : S_i, c : T_i \vdash P_i}{\Theta \cdot \Gamma, \Gamma_1 \vdash c[\mathbf{q}] \& \{m_i(y_i).P_i\}_{i \in I}} \text{ [T-\&]} \\
\frac{\Gamma_1 \vdash c : \mathbf{q} \oplus \{m(S).T\} \quad \Gamma_2 \vdash d : S \quad S \not\leq \mathbf{end} \quad \Theta \cdot \Gamma, c : T \vdash P}{\Theta \cdot \Gamma, \Gamma_1, \Gamma_2 \vdash c[\mathbf{q}] \oplus m(d).P} \text{ [T-\oplus]} \\
\frac{S \leq S'}{c : S \vdash c : S'} \text{ [T-SUB]} \quad \frac{G \sqsubseteq_s \Gamma' \quad s \notin \Gamma \quad \Theta \cdot \Gamma, \Gamma' \vdash P}{\Theta \cdot \Gamma \vdash (\nu s : \Gamma') P} \text{ [T-G-\nu]}
\end{array}$$

Fig. 7: Typing rules for processes.

4.1 Typing Rules

Two kinds of typing contexts, as introduced in Def. 7, are used in our type system: Θ , responsible for assigning an n -tuple of types to each process variable X (one type per argument), and Γ , which maps variables to payload types (basic types or session types), as well as channels with roles (endpoints) to session types. These typing contexts are jointly applied in judgments formulated as:

$$\Theta \cdot \Gamma \vdash P \quad (\text{with } \Theta \text{ omitted when empty})$$

which interprets as: “considering the process types in Θ , P uses its variables and channels *linearly* based on Γ .” This *typing judgement* is defined by the rules in Fig. 7, where, for convenience, we include type annotations for channels bound by process definitions and restrictions.

The main innovation in Fig. 7 lies in rule [T-G- ν], which uses a typing context associated with a global type in some session s (Def. 9) to enforce session restrictions. The rest rules are mostly standard [18]. Rule [T-X] retrieves process variables, while rule [T-B] types a value v if it belongs to a set of basic types \mathcal{B} . Rule [T-SUB] applies subtyping within a singleton typing context $c : S$ when assigning type S' to a variable or channel c . Additionally, rule [T-end] introduces a predicate $\mathbf{end}(\cdot)$ for typing contexts, denoting the termination of all endpoints. This predicate is used in [T-0] to type an inactive process $\mathbf{0}$. Rules [T- \oplus] and [T- $\&$] assign selection and branching types to channels used by selection and branching processes, respectively. Rules [T-def] and [T-CALL] deal with recursive processes declarations and calls, respectively. Notably, the clauses “ $S \not\leq \mathbf{end}$ ” used in rules [T- \oplus] and [T-CALL] prevent the sending or passing of channels typed as \mathbf{end} , while permitting the sending/passing of channels and data of any other type. Finally, rule [T-|] *linearly* divides the typing context into two parts, each used to type one sub-process.

Example 12 (Typed Process). Consider the processes P and Q from Ex. 1. The type context $\Gamma_H = s[\mathbf{p}]:T_{H_p}, s[\mathbf{q}]:T_{H_q}, s[\mathbf{r}]:T_{H_r}$, with $T_{H_p} = \mathbf{q}\oplus\mathbf{m}'(T_{H_r}).\mathbf{r}\&\mathbf{m}(\mathbf{int}).\mathbf{end}$, $T_{H_q} = \mathbf{p}\&\mathbf{m}'(T_{H_r}).\mathbf{end}$, $T_{H_r} = \mathbf{p}\oplus\mathbf{m}(\mathbf{int}).\mathbf{end}$, can type the process $P \mid Q$ by the following derivation:

$$\frac{\frac{\frac{\frac{x:\mathbf{int}, s[\mathbf{p}]:\mathbf{end}}{\mathbf{end}(x:\mathbf{int}, s[\mathbf{p}]:\mathbf{end})} \text{[T-end]}}{s[\mathbf{p}]:\mathbf{r}\&\mathbf{m}(\mathbf{int}).\mathbf{end} \vdash s[\mathbf{p}]:\mathbf{r}\&\mathbf{m}(\mathbf{int}).\mathbf{end}} \text{[T-0]}}{s[\mathbf{p}]:\mathbf{r}\&\mathbf{m}(\mathbf{int}).\mathbf{end} \vdash s[\mathbf{p}]:\mathbf{r}\&\mathbf{m}(x).\mathbf{0}} \text{[T-0]}}{\frac{\Omega}{s[\mathbf{p}]:T_{H_p}, s[\mathbf{r}]:T_{H_r} \vdash P} \text{[T-}\oplus\text{]}} \quad \frac{\frac{\frac{\frac{x:\mathbf{int}, s[\mathbf{p}]:\mathbf{end}}{\mathbf{end}(x:\mathbf{int}, s[\mathbf{p}]:\mathbf{end})} \text{[T-end]}}{s[\mathbf{q}]:\mathbf{p}\&\mathbf{m}'(T_{H_r}).\mathbf{end}} \text{[T-}\&\text{]}}{s[\mathbf{q}]:\mathbf{p}\&\mathbf{m}'(T_{H_r}).\mathbf{end} \vdash s[\mathbf{q}]:\mathbf{p}\&\mathbf{m}'(T_{H_r}).\mathbf{end}} \text{[T-}\oplus\text{]}}{\frac{\vdots}{s[\mathbf{q}]:T_{H_q} \vdash Q} \text{[T-]}} \text{[T-]}}{\Gamma_H \vdash P \mid Q} \text{[T-]}}$$

where Ω includes certain trivial conditions used as prerequisites for [T- \oplus]: $s[\mathbf{p}]:T_{H_p} \vdash s[\mathbf{p}]:T_{H_p}$, $s[\mathbf{r}]:T_{H_r} \vdash s[\mathbf{r}]:T_{H_r}$, and $T_{H_r} \not\leq \mathbf{end}$. In the omitted part of the derivation, similar to that for $s[\mathbf{p}]:T_{H_p}, s[\mathbf{r}]:T_{H_r} \vdash P$, the process Q is typed by $s[\mathbf{q}]:T_{H_q}$, using rules [T- $\&$], [T- \oplus], [T- $\mathbf{0}$], and [T-end]. Moreover, as Γ_H is associated with a global type $G_H = \mathbf{p}\rightarrow\mathbf{q}:\mathbf{m}'(\mathbf{p}\oplus\mathbf{m}(\mathbf{int})).\mathbf{r}\rightarrow\mathbf{p}:\mathbf{m}(\mathbf{int}).\mathbf{end}$ for session s , i.e. $G_H \sqsubseteq_s \Gamma_H$, following [T- G - ν], the process $P \mid Q$ is closed under Γ_H , i.e. $\vdash (\nu s:\Gamma_H) P \mid Q$.

Take the typing contexts $\Gamma_{\text{auth}_s}, \Gamma_{\text{auth}_c}, \Gamma_{\text{auth}_a}$ from Ex. 5, along with the processes P_s, P_c, P_a from Ex. 2. These contexts enable the typing of the respective processes. Consequently, the context Γ_{auth} (from Ex. 5) can be used to type the process $P_s \mid P_c \mid P_a$. Similar to the above example, given Γ_{auth} is associated with the global type G_{auth} (Ex. 5), according to [T- G - ν], $P_s \mid P_c \mid P_a$ is closed under Γ_{auth} . It is noteworthy that the typing context $s[\mathbf{s}]:T_s$, using the local type T_s from Ex. 3, can type the process P_s , due to $T_s \leq \Gamma_{\text{auth}_s}(s[\mathbf{s}])$ (as demonstrated in Ex. 5), and $\Gamma_{\text{auth}_s} \vdash P_s$. Similarly, $s[\mathbf{c}]:T_c$ and $s[\mathbf{a}]:T_a$ correspondingly type P_c and P_a .

4.2 Subject Reduction and Session Fidelity

We elucidate the key properties of well-typed processes, including *subject reduction* (Thm. 5), *session fidelity* (Thm. 6).

Subject reduction ensures the preservation of types during process reduction. It states that if a well-typed process P reduces to P' , then the reduction is simulated by the typing context Γ used to type P . Note that in our subject reduction theorem, P is *not* required to contain only one single session. Instead, we include all restricted sessions in P , ensuring that reductions on these various sessions maintain their respective restrictions. This is enforced by rule [T- G - ν] in Fig. 7. Additionally, the theorem dictates that, in alignment with the MPST top-down methodology, a process initially constructed from global types retains this construction manner even after reductions.

Theorem 5 (Subject Reduction). *Assume $\Theta \cdot \Gamma \vdash P$ where $\forall s \in \Gamma : \exists G_s : G_s \sqsubseteq_s \Gamma_s$. If $P \rightarrow P'$, then $\exists \Gamma'$ such that $\Gamma \rightarrow^* \Gamma'$, $\Theta \cdot \Gamma' \vdash P'$, and $\forall s \in \Gamma' : \exists G'_s : G'_s \sqsubseteq_s \Gamma'_s$.*

Proof. By induction on the derivation of $P \rightarrow P'$ (Def. 2).

As a corollary from Thm. 5, we have that well-typed processes communicate without **errors**.

Corollary 1 (Type Safety). *Assume $\emptyset \cdot \emptyset \vdash P$. If $P \rightarrow^* P'$, then P' has no error.*

Example 13 (Subject Reduction). Take the typed process $P \mid Q$ and the typing context Γ_H from Ex. 12. After a reduction using $[\mathbf{R}\text{-}\oplus\&]$, $P \mid Q$ transitions to $P \mid Q \rightarrow s[\mathbf{p}][\mathbf{r}]\&\mathbf{m}(x).\mathbf{0} \mid s[\mathbf{r}][\mathbf{p}]\oplus\mathbf{m}(42).\mathbf{0} = P' \mid Q'$. The typing context Γ_H can reduce to $\Gamma'_H = s[\mathbf{p}]:\mathbf{r}\&\mathbf{m}(\mathbf{int}).\mathbf{end}, s[\mathbf{q}]:\mathbf{end}, s[\mathbf{r}]:\mathbf{p}\oplus\mathbf{m}(\mathbf{int}).\mathbf{end}$, via $[\mathbf{r}\text{-}\oplus\&]$, which can be used to type $P' \mid Q'$, and is associated with a global type $G'_H = \mathbf{r}\rightarrow\mathbf{p}:\mathbf{m}(\mathbf{int}).\mathbf{end}$. In fact, by applying Thm. 5, we can infer that all process reductions initiated from $P \mid Q$ maintain well-typedness. Furthermore, based on Cor. 1, we are ensured that they are error-free.

Observe that the typing context Γ_{auth} from Exs. 5 and 12 and the process $P_s \mid P_c \mid P_a$ from Exs. 2 and 12 also adhere to subject reduction, ensuring type safety.

Session fidelity asserts the converse implication concerning subject reduction: if a process P is typed by Γ , and Γ can reduce along session s , then P can replicate at least one of the reductions performed by Γ (although not necessarily all such reductions, as Γ over-approximates the behaviour of P). Consequently, we can deduce P 's behaviour from Γ 's behaviour, as demonstrated in Thm. 7. However, this outcome does *not* hold universally for all well-typed processes: a well-typed process might loop in a recursion, such as **def** $X(\dots) = X$ **in** X , or it could deadlock by intricately interleaving communications across multiple sessions [5]. To address this, similarly to [18] and most session type works, we establish session fidelity specifically for processes featuring guarded recursion and implementing a single multiparty session as a parallel composition of one sub-process per role. The formalisation of session fidelity is provided in Thm. 6 below, building upon the concepts introduced in Def. 14.

Definition 14 (from [18]). *Assume $\emptyset \cdot \Gamma \vdash P$. We say that P :*

- (1) has guarded definitions *iff* in each process definition in P of the form **def** $X(x_1:S_1, \dots, x_n:S_n) = Q$ **in** P' , for all $i \in 1..n$, if S_i is a session type, then a call $Y(\dots, x_i, \dots)$ can only occur in Q as a subterm of $x_i[\mathbf{q}]\&\{\mathbf{m}_j(y_j).P_j\}_{j \in J}$ or $x_i[\mathbf{q}]\oplus\mathbf{m}(d).P''$ (i.e. after using x_i for input or output);
- (2) only plays role \mathbf{p} in s , by Γ *iff*: (i) P has guarded definitions; (ii) $\text{fv}(P) = \emptyset$; (iii) $\Gamma = \Gamma_0, s[\mathbf{p}]:T$ with $T \not\leq \mathbf{end}$ and $\text{end}(\Gamma_0)$; (iv) for all subterms $(\nu s':\Gamma') P'$ in P , $\text{end}(\Gamma')$.

We say “ P only plays role \mathbf{p} in s ” *iff* $\exists \Gamma : \emptyset \cdot \Gamma \vdash P$, and item (2) holds.

In Def. 14, item (1) formalises guarded recursion for processes, while item (2) identifies a process that plays exactly *one* role on *one* session. It is evident that an ensemble of such processes cannot deadlock by waiting for each other on multiple sessions.

Example 14 (Playing Only Role). Consider the processes P, Q from Ex. 1, and the typing context Γ_H from Ex. 12. Observe that P does not only play either \mathbf{p} or \mathbf{r} in s . This arises from the fact that P can only be typed by a context of the form $s[\mathbf{p}]:T_{\mathbf{p}}, s[\mathbf{r}]:T_{\mathbf{r}}$, where neither $\text{end}(s[\mathbf{p}]:T_{\mathbf{p}})$ nor $\text{end}(s[\mathbf{r}]:T_{\mathbf{r}})$ holds, thus violating item (2) of Def. 14. Conversely, Q only plays role \mathbf{q} in s , by $s[\mathbf{q}]:T_{H_{\mathbf{q}}}$, as all conditions are fulfilled.

Note that the process $P_{\mathbf{s}}$ (resp. $P_{\mathbf{c}}, P_{\mathbf{a}}$) from Exs. 2 and 12 only plays role \mathbf{s} (resp. \mathbf{c}, \mathbf{a}) in s , which can be easily verified.

We now formalise our session fidelity result (Thm. 6). Although the statement appears similar to Thm. 5.4 in [18], it utilises a typing context associated with a global type for a specific session s to type the process. This approach guarantees not only the fulfilment of the single-session requirements for processes (Def. 14), but also asserts that a process constructed from a global type maintains this structure even after reductions.

Theorem 6 (Session Fidelity). *Assume $\emptyset \cdot \Gamma \vdash P$, with $G \sqsubseteq_s \Gamma$, $P \equiv \prod_{\mathbf{p} \in I} P_{\mathbf{p}}$, and $\Gamma = \bigcup_{\mathbf{p} \in I} \Gamma_{\mathbf{p}}$ such that for each $P_{\mathbf{p}}$: (1) $\emptyset \cdot \Gamma_{\mathbf{p}} \vdash P_{\mathbf{p}}$, and (2) either $P_{\mathbf{p}} \equiv \mathbf{0}$, or $P_{\mathbf{p}}$ only plays \mathbf{p} in s , by $\Gamma_{\mathbf{p}}$. Then, $\Gamma \rightarrow_s$ implies $\exists \Gamma', G', P'$ such that $\Gamma \rightarrow_s \Gamma'$, $P \rightarrow^* P'$, and $\emptyset \cdot \Gamma' \vdash P'$, with $G' \sqsubseteq_s \Gamma'$, $P' \equiv \prod_{\mathbf{p} \in I} P'_{\mathbf{p}}$, and $\Gamma' = \bigcup_{\mathbf{p} \in I} \Gamma'_{\mathbf{p}}$ such that for each $P'_{\mathbf{p}}$: (1) $\emptyset \cdot \Gamma'_{\mathbf{p}} \vdash P'_{\mathbf{p}}$, and (2) either $P'_{\mathbf{p}} \equiv \mathbf{0}$, or $P'_{\mathbf{p}}$ only plays \mathbf{p} in s , by $\Gamma'_{\mathbf{p}}$.*

Proof. By induction on the derivation of $\Gamma \rightarrow_s$ (Def. 8).

Example 15 (Guarded Definitions in Session Fidelity, from [18]). According to rule [T-def] in Fig. 7, an unguarded definition $X(x:S) = X\langle x \rangle$ can be typed with any S . Therefore, for example, we have:

$$\emptyset \cdot s[\mathbf{p}]:\mathbf{q} \oplus \mathbf{m}, s[\mathbf{q}]:\mathbf{p} \& \mathbf{m} \vdash \text{def } X(x:\mathbf{q} \oplus \mathbf{m}) = X\langle x \rangle \text{ in } X\langle s[\mathbf{p}] \mid s[\mathbf{q}][\mathbf{p}] \& \mathbf{m} \rangle$$

The above unguarded process reduces trivially by invoking X infinitely, without triggering any typing context reduction. This clarifies the necessity of guarded definitions in Thm. 6.

4.3 Properties of Typed Processes

We showcase that processes constructed from global types guarantee desirable run-time properties, including deadlock-freedom and liveness, as formalised in Def. 15. These properties are relatively straightforward: *deadlock-freedom* indicates that if a process is unable to reduce, then it consists only of inactive sub-processes ($\mathbf{0}$); *liveness* ensures that if a process attempts to perform an input or output, it will eventually succeed.

Definition 15 (Runtime Process Properties). *We say P is:*

- (1) *deadlock-free iff $P \rightarrow^* P' \not\rightarrow$ implies $P' \equiv \mathbf{0}$;*
- (2) *live iff $P \rightarrow^* P' \equiv \mathbb{C}[Q]$ implies:*
 - (a) *if $Q = c[\mathbf{q}] \oplus \mathbf{m}\langle w \rangle \cdot Q'$ then $\exists \mathbb{C}' : P' \rightarrow^* \mathbb{C}'[Q']$;*
 - (b) *if $Q = c[\mathbf{q}] \& \{\mathbf{m}_i(x_i) \cdot Q'_i\}_{i \in I}$ then $\exists \mathbb{C}', k \in I, w : P' \rightarrow^* \mathbb{C}'[Q'_k\{w/x_k\}]$.*

We conclude by illustrating how a process, typed with a typing context associated to a global type on a session, ensures both deadlock-freedom and liveness.

Theorem 7 (Process Deadlock-Freedom, Liveness). *Assume $\emptyset \cdot \Gamma \vdash P$, where $G \sqsubseteq_s \Gamma$, $P \equiv \Pi_{p \in I} P_p$, and $\Gamma = \bigcup_{p \in I} \Gamma_p$ such that for each P_p , we have $\emptyset \cdot \Gamma_p \vdash P_p$. Further, assume that each P_p is either $\mathbf{0}$ (up to \equiv), or only plays p in s , by Γ_p . Then, P is deadlock-free and live.*

Example 16 (Typed Process Properties). The process $P_s \mid P_c \mid P_a$ from Exs. 2 and 12 is deadlock-free and live, verified by applying either Def. 15 or Thm. 7.

5 Conclusion

This paper corrects a misunderstanding in multiparty session type theory, proposing a new relation, *association* $G \sqsubseteq_s F$ between a global type G and a set of local types F . The top-down typing system, with the association between global types and their end-point projections given by mergeability, can guarantee *type safety*, *deadlock-freedom*, and *liveness* of session processes *by construction*.

References

1. Adam Barwell, Alceste Scalas, Nobuko Yoshida, and Fangyi Zhou. Generalised Multiparty Session Types with Crash-Stop Failures. In *33rd International Conference on Concurrency Theory*, volume 243 of *LIPICs*, pages 35:1–35:25. Dagstuhl, 2022.
2. Giovanni Bernardi and Matthew Hennessy. Using higher-order contracts to model session types. *LMCS*, 12(2), 2016.
3. Marco Carbone, Kohei Honda, and Nobuko Yoshida. Structured Communication-Centred Programming for Web Services. In *Proceedings of ESOP 2007*, volume 4421 of *LNCS*, pages 2–17. Springer, 2007.
4. Mario Coppo, Mariangiola Dezani-Ciancaglini, Luca Padovani, and Nobuko Yoshida. A Gentle Introduction to Multiparty Asynchronous Session Types. In *Formal Methods for Multicore Programming*, 2015.
5. Mario Coppo, Mariangiola Dezani-Ciancaglini, Nobuko Yoshida, and Luca Padovani. Global progress for dynamically interleaved multiparty sessions. *MSCS*, 760, 2015.
6. Pierre-Malo Deniélou and Nobuko Yoshida. Multiparty Compatibility in Communicating Automata: Characterisation and Synthesis of Global Session Types. In *40th International Colloquium on Automata, Languages and Programming*, volume 7966 of *LNCS*, pages 174–186, Berlin, Heidelberg, 2013. Springer.
7. Silvia Ghilezan, Jovanka Pantović, Ivan Prokić, Alceste Scalas, and Nobuko Yoshida. Precise Subtyping for Asynchronous Multiparty Sessions. *ACM Transactions on Computational Logic*, Volume 24, Issue 2(14):1–73, 2023.
8. Rob van Glabbeek, Peter Höfner, and Ross Horne. Assuming just enough fairness to make session types complete for lock-freedom. In *2021 36th Annual ACM/IEEE Symposium on Logic in Computer Science (LICS)*, pages 1–13, 2021.
9. J.R. Gurd and C.B. Jones. *The Global-yet-Personal Information System*, pages 127–157. Cambridge University Press, 1996.

10. Carl Hewitt and Peter de Jong. *Open Systems*, pages 147–164. Springer New York, New York, NY, 1984.
11. Kohei Honda, Aybek Mukhamedov, Gary Brown, Tzu-Chun Chen, and Nobuko Yoshida. Scribbling interactions with a formal foundation. In *ICDCIT*, volume 6536 of *LNCS*, pages 55–75. Springer, 2011.
12. Kohei Honda, Nobuko Yoshida, and Marco Carbone. Multiparty asynchronous session types. In *POPL*, 2008. Full version in [13].
13. Kohei Honda, Nobuko Yoshida, and Marco Carbone. Multiparty Asynchronous Session Types. *J. ACM*, 63(1), 2016.
14. Anson Miu, Francisco Ferreira, Nobuko Yoshida, and Fangyi Zhou. Communication-Safe Web Programming in TypeScript with Routed Multiparty Session Types. In *International Conference on Compiler Construction, CC*, pages 94–106, 2021.
15. OAuth Working Group. RFC 6749: OAuth 2.0 framework. <http://tools.ietf.org/html/rfc6749>, 2012.
16. Benjamin C. Pierce. *Types and Programming Languages*. The MIT Press, 1st edition, 2002.
17. Davide Sangiorgi. *Introduction to Bisimulation and Coinduction*. Cambridge University Press, 2011.
18. Alceste Scalas and Nobuko Yoshida. Less is More: Multiparty Session Types Revisited. *Proc. ACM Program. Lang.*, 3(POPL):30:1–30:29, January 2019.
19. Mario Tokoro. The society of objects. *SIGPLAN OOPS Mess.*, 5(2):3–12, apr 1993.
20. Web Services Choreography Working Group. <http://w3.org/2002/ws/chor/>, 2003.
21. Nobuko Yoshida and Lorenzo Gheri. A very gentle introduction to multiparty session types. In Dang Van Hung and Meenakshi D’Souza, editors, *Distributed Computing and Internet Technology - 16th International Conference, ICDCIT 2020, Bhubaneswar, India, January 9-12, 2020, Proceedings*, volume 11969 of *Lecture Notes in Computer Science*, pages 73–93. Springer, 2020.
22. Nobuko Yoshida, Raymond Hu, Rumyana Neykova, and Nicholas Ng. The Scribble Protocol Language. In *Trustworthy Global Computing*, volume 8358 of *LNCS*, pages 22–41, Buenos Aires, Argentina, 2013. Springer.
23. Nobuko Yoshida, Fangyi Zhou, and Francisco Ferreira. Communicating Finite State Machines and an Extensible Toolchain for Multiparty Session Types. In *23rd International Symposium on Fundamentals of Computation Theory*, volume 12867 of *LNCS*, pages 18–35. Springer, 2021.

A Subtyping Properties

Lemma 1. *If $G \sqsubseteq_s \Gamma$ and $\Gamma \leq \Gamma'$, then $G \sqsubseteq_s \Gamma'$.*

Proof. By the definition of association (Def. 9), the definition of $\Gamma \leq \Gamma'$ (Def. 7), and the transitivity of subtyping.

Lemma 2. *Assume that $G \sqsubseteq_s \Gamma$ and $\Gamma \leq \Gamma' \xrightarrow{\alpha} \Gamma''$ with: $\alpha \in \{s[\mathbf{p}][\mathbf{q}]\mathbf{m} \mid \mathbf{p}, \mathbf{q} \in \mathcal{R}\}$. Then, there is Γ''' such that $\Gamma \xrightarrow{\alpha} \Gamma''' \leq \Gamma''$.*

Proof. Since $\Gamma \xrightarrow{s[\mathbf{p}][\mathbf{q}]\mathbf{m}} \Gamma''$, by applying and inverting $[\Gamma\text{-}\oplus\&]$ (and $[\Gamma\text{-}\mu]$ when necessary), and also using Lem. 19, we have $\text{unf}(\Gamma'(s[\mathbf{p}])) = \mathbf{q} \oplus \{\mathbf{m}_i(S_i).T_i\}_{i \in I}$, $\text{unf}(\Gamma'(s[\mathbf{q}])) = \mathbf{p} \& \{\mathbf{m}'_j(S'_j).T'_j\}_{j \in J}$, $\exists k : k \in I, k \in J, \mathbf{m}_k = \mathbf{m}'_k = \mathbf{m}$, $\Gamma''(s[\mathbf{p}]) = T_k$, and $\Gamma''(s[\mathbf{q}]) = T'_k$. Furthermore, by Lems. 17 and 18, it also holds that for all $s[\mathbf{r}] \in \text{dom}(\Gamma') = \text{dom}(\Gamma'')$ with $\mathbf{r} \neq \mathbf{p}$ and $\mathbf{r} \neq \mathbf{q}$, $\Gamma'(s[\mathbf{r}]) = \Gamma''(s[\mathbf{r}])$. Observe that by $\Gamma \leq \Gamma'$, $\text{unf}(\Gamma(s[\mathbf{p}])) = \mathbf{q} \oplus \{\mathbf{m}_i(S''_i).T''_i\}_{i \in I_p}$ where $I \subseteq I_p$ and $\forall i \in I : S_i \leq S''_i$ and $T''_i \leq T_i$, and $\text{unf}(\Gamma(s[\mathbf{q}])) = \mathbf{p} \& \{\mathbf{m}'_j(S'''_j).T'''_j\}_{j \in J_q}$ where $J_q \subseteq J$ and $\forall j \in J_q : S'''_j \leq S'_j$ and $T'''_j \leq T'_j$. Now we apply Lem. 26 on $G \sqsubseteq_s \Gamma$, $\text{unf}(\Gamma(s[\mathbf{p}]))$, and $\text{unf}(\Gamma(s[\mathbf{q}]))$, to get $I \subseteq I_p \subseteq J_q \subseteq J$, and $\forall i \in I_p : \mathbf{m}_i = \mathbf{m}'_i$ and $S''_i \leq S'''_i$. Consequently, we have $k \in I_p$, $\mathbf{m}_k = \mathbf{m}'_k = \mathbf{m}$, and $S''_k \leq S'''_k$, which follows that there exists Γ''' such that $\Gamma \xrightarrow{s[\mathbf{p}][\mathbf{q}]\mathbf{m}} \Gamma'''$, $\Gamma'''(s[\mathbf{p}]) = T''_k$, $\Gamma'''(s[\mathbf{q}]) = T'''_k$, and for all $s[\mathbf{r}] \in \text{dom}(\Gamma) = \text{dom}(\Gamma') = \text{dom}(\Gamma'') = \text{dom}(\Gamma''')$ with $\mathbf{r} \neq \mathbf{p}$ and $\mathbf{r} \neq \mathbf{q}$, $\Gamma(s[\mathbf{r}]) = \Gamma'''(s[\mathbf{r}])$.

We are left to show that $\Gamma''' \leq \Gamma''$, which is straightforward from $\Gamma'''(s[\mathbf{p}]) = T''_k \leq T_k = \Gamma''(s[\mathbf{p}])$, $\Gamma'''(s[\mathbf{q}]) = T'''_k \leq T'_k = \Gamma''(s[\mathbf{q}])$, and for all $s[\mathbf{r}] \in \text{dom}(\Gamma''') = \text{dom}(\Gamma'')$ with $\mathbf{r} \neq \mathbf{p}$ and $\mathbf{r} \neq \mathbf{q}$, $\Gamma'''(s[\mathbf{r}]) = \Gamma(s[\mathbf{r}]) \leq \Gamma'(s[\mathbf{r}]) = \Gamma''(s[\mathbf{r}])$.

Lemma 3. *Assume that $\forall s \in \Gamma : \exists G_s : G_s \sqsubseteq_s \Gamma_s$ and $\Gamma \leq \Gamma' \xrightarrow{\alpha} \Gamma''$ with: $\alpha \in \{s[\mathbf{p}][\mathbf{q}]\mathbf{m} \mid \mathbf{p}, \mathbf{q} \in \mathcal{R}\}$. Then, there is Γ''' such that $\Gamma \xrightarrow{\alpha} \Gamma''' \leq \Gamma''$.*

Proof. Apply Def. 7 and Lems. 23 and 33.

Proposition 1. *Assume that $G \sqsubseteq_s \Gamma$ and $\Gamma \leq \Gamma' \xrightarrow{\alpha_1} \dots \xrightarrow{\alpha_n} \Gamma''$, with: $\forall i \in 1..n : \alpha_i \in \{s[\mathbf{p}][\mathbf{q}]\mathbf{m}_i \mid \mathbf{p}, \mathbf{q} \in \mathcal{R}\}$. Then, there is Γ''' such that $\Gamma \xrightarrow{\alpha_1} \dots \xrightarrow{\alpha_n} \Gamma''' \leq \Gamma''$.*

Proof. By induction on the number of transitions n in $\Gamma' \xrightarrow{\alpha_1} \dots \xrightarrow{\alpha_n} \Gamma''$. The base case ($n = 0$ transitions) is immediate: we have $\Gamma' = \Gamma''$, hence we conclude by taking $\Gamma''' = \Gamma$. In the inductive case with $n = m + 1$ transitions, there is Γ''_0 such that $\Gamma' \xrightarrow{\alpha_1} \dots \xrightarrow{\alpha_m} \Gamma''_0 \xrightarrow{\alpha_n} \Gamma''$. By the induction hypothesis, there is Γ'''_0 such that $\Gamma \xrightarrow{\alpha_1} \dots \xrightarrow{\alpha_m} \Gamma'''_0 \leq \Gamma''_0$. Hence, by Lem. 33, there exists Γ''' such that $\Gamma'''_0 \xrightarrow{\alpha_n} \Gamma'''$ and $\Gamma''' \leq \Gamma''$. Therefore, we have $\Gamma \xrightarrow{\alpha_1} \dots \xrightarrow{\alpha_n} \Gamma''' \leq \Gamma''$, which is the thesis.

B Proofs for § 3

With regard to recursive global types, we define their *unfolding* as $\text{unf}(\mu\mathbf{t}.G) = \text{unf}(G\{\mu\mathbf{t}.G/\mathbf{t}\})$, and $\text{unf}(G) = G$ otherwise. A recursive type $\mu\mathbf{t}.G$ must be guarded (or contractive), i.e. the unfolding leads to a progressive prefix, e.g. a communication. Unguarded types, such as $\mu\mathbf{t}.\mathbf{t}$ and $\mu\mathbf{t}.\mu\mathbf{t}'.\mathbf{t}$, are excluded. Similar definitions and requirements apply for local types.

B.1 Unfoldings

Lemma 4. *For a closed, well-guarded global type G , $\text{unf}(G)$ can only be of form \mathbf{end} , or $\mathbf{p}\rightarrow\mathbf{q}:\{\dots\}$.*

For a closed, well-guarded local type T , $\text{unf}(T)$ can only be of form \mathbf{end} , $\mathbf{p}\oplus\{\dots\}$, or $\mathbf{p}\&\{\dots\}$.

Proof. \mathbf{t} will not appear since we require closed types. $\mu\mathbf{t}.G'\{\mu\mathbf{t}.G'/\mathbf{t}\} \neq \mu\mathbf{t}.G'$ since we require well-guarded types (recursive types are contractive). Similar argument for local types.

Lemma 5. *If $G \upharpoonright \mathbf{p} = T$, then $\text{unf}(G) \upharpoonright \mathbf{p} = \text{unf}(T)$.*

Proof. By the definition of projection (Def. 3), the definitions of unfolding recursive global and local types, and Lem. 4.

B.2 Subtyping

Lemma 6 (Subtyping is Reflexive). *For any closed, well-guarded local type T , $T \leq T$ holds.*

Proof. We construct a relation $R = \{(T, T)\}$. It is trivial to show that R satisfies all clauses of Def. 4, and hence, $R \subseteq \leq$.

Lemma 7 (Subtyping is Transitive). *For any closed, well-guarded local types T_1, T_2, T_3 , if $T_1 \leq T_2$ and $T_2 \leq T_3$, then $T_1 \leq T_3$ holds.*

Proof. By constructing a relation $R = \{(T_1, T_3) \mid \exists T_2 \text{ such that } T_1 \leq T_2 \text{ and } T_2 \leq T_3\}$, and showing that $R \subseteq \leq$.

Lemma 8. *For any local type T , $T \leq \mathbf{end}$ if and only if $\mathbf{end} \leq T$.*

Proof. By Def. 4.

Lemma 9. *For any closed, well-guarded local type T , 1. $\text{unf}(T) \leq T$; and 2. $T \leq \text{unf}(T)$.*

Proof. 1. By [SUB- μ R] if $T = \mu\mathbf{t}.T'$. Otherwise, by reflexivity (Lem. 6). 2. By [SUB- μ L] if $T = \mu\mathbf{t}.T'$. Otherwise, by reflexivity (Lem. 6).

Lemma 10. *Given a collection of mergable local types T_i ($i \in I$). For all $j \in I$, $T_j \leq \prod_{i \in I} T_i$ holds.*

Proof. By constructing a relation $R = \{(T_j, \prod_{i \in I} T_i) \mid j \in I\}$, and showing that $R \subseteq \leq$.

Lemma 11. *Given a collection of mergable local types T_i ($i \in I$). If for all $i \in I$, $T_i \leq U$ for some local type U , then $\prod_{i \in I} T_i \leq U$.*

Proof. By constructing a relation $R = \{(\prod_{i \in I} T_i, U)\}$, and showing that $R \subseteq \leq$.

Lemma 12. *Given a collection of mergable local types T_i ($i \in I$). If for all $i \in I$, $U \leq T_i$ for some local type U , then $U \leq \prod_{i \in I} T_i$.*

Proof. By constructing a relation $R = \{(U, \prod_{i \in I} T_i)\}$, and showing that $R \subseteq \leq$.

Lemma 13. *Given two collections of mergable local types T_i, U_i ($i \in I$). If for all $i \in I$, $U_i \leq T_i$, then $\prod_{i \in I} U_i \leq \prod_{i \in I} T_i$.*

Proof. By constructing a relation $R = \{(\prod_{i \in I} U_i, \prod_{i \in I} T_i)\}$, and showing that $R \subseteq \leq$.

Lemma 14 (Inversion of Subtyping).

1. If $U \leq \mathbf{p}\oplus\{\mathbf{m}_i(S_i).T_i\}_{i \in I}$, then $\text{unf}(U) = \mathbf{p}\oplus\{\mathbf{m}'_j(S'_j).T'_j\}_{j \in J}$, and $I \subseteq J$, and $\forall i \in I : \mathbf{m}_i = \mathbf{m}'_i, S_i \leq S'_i$ and $T'_i \leq T_i$.
2. If $U \leq \mathbf{p}\&\{\mathbf{m}_i(S_i).T_i\}_{i \in I}$, then $\text{unf}(U) = \mathbf{p}\&\{\mathbf{m}'_j(S'_j).T'_j\}_{j \in J}$, and $J \subseteq I$, and $\forall i \in J : \mathbf{m}_i = \mathbf{m}'_i, S'_i \leq S_i$ and $T'_i \leq T_i$.

Proof. By Lems. 4 and 9, the transitivity of subtyping, and Def. 4 ($[\text{SUB-}\&]$, $[\text{SUB-}\oplus]$).

B.3 Semantics of Global Types

Lemma 15. $G \xrightarrow{\alpha} G'$ iff $\text{unf}(G) \xrightarrow{\alpha} G'$.

Proof. By inverting or applying $[\text{GR-}\mu]$ when necessary.

Lemma 16 (Progress of Global Types). *If $G \neq \mathbf{end}$ (where G is a projectable global type), then there exists G' such that $G \rightarrow G'$.*

Proof. By Lem. 15, we only consider unfoldings.

- Case $\text{unf}(G) = \mathbf{end}$: the premise does not hold;
- Case $\text{unf}(G) = \mathbf{p} \rightarrow \mathbf{q} : \{\mathbf{m}_i(S_i).G_i\}_{i \in I}$: apply $[\text{GR-}\oplus\&]$ to reduce the global type.

B.4 Semantics of Typing Contexts

Lemma 17. *If $\Gamma \xrightarrow{\alpha} \Gamma'$, then $\text{dom}(\Gamma) = \text{dom}(\Gamma')$.*

Proof. By induction on typing context reductions.

Lemma 18. *If $\Gamma \xrightarrow{\alpha} \Gamma'$ and $\text{dom}(\Gamma) = \{s\}$, then for all $s[\mathbf{p}] \in \text{dom}(\Gamma)$ with $\mathbf{p} \notin \text{subject}(\alpha)$, $\Gamma(s[\mathbf{p}]) = \Gamma'(s[\mathbf{p}])$.*

Proof. By induction on typing context reductions.

Lemma 19 (Inversion of Typing Context Reduction).

1. If $\Gamma \xrightarrow{s[\mathbf{p}]:\mathbf{q}\oplus\mathbf{m}_k(S_k)} \Gamma'$, then $\text{unf}(\Gamma(s[\mathbf{p}])) = \mathbf{q}\oplus\{\mathbf{m}_i(S_i).T_i\}_{i \in I}$, $k \in I$, and $\Gamma'(s[\mathbf{p}]) = T_k$;
2. If $\Gamma \xrightarrow{s[\mathbf{q}]:\mathbf{p}\&\mathbf{m}_k(S_k)} \Gamma'$, then $\text{unf}(\Gamma(s[\mathbf{q}])) = \mathbf{p}\&\{\mathbf{m}_i(S_i).T_i\}_{i \in I}$, $k \in I$, and $\Gamma'(s[\mathbf{q}]) = T_k$.

Proof. By applying and inverting $[\Gamma\text{-}\oplus]$, $[\Gamma\text{-}\&]$, and $[\Gamma\text{-}\mu]$ (when necessary).

Lemma 20 (Determinism of Typing Context Reduction). *If $\Gamma \xrightarrow{\alpha} \Gamma'$ and $\Gamma \xrightarrow{\alpha} \Gamma''$, then $\Gamma' = \Gamma''$.*

Proof. By induction on typing context reductions.

Lemma 21. *If $\Gamma \rightarrow_s \Gamma'$, then $\text{dom}(\Gamma) = \text{dom}(\Gamma')$.*

Proof. Directly from Def. 8 and Lem. 17.

Lemma 22. *If $\Gamma \rightarrow \Gamma'$, then $\text{dom}(\Gamma) = \text{dom}(\Gamma')$.*

Proof. Directly from Def. 8 and Lem. 21.

Lemma 23.

1. If $\Gamma \xrightarrow{s[\mathbf{p}]:\mathbf{q}\oplus\mathbf{m}_k(S_k)} \Gamma'$, then for any channel with role $c \in \text{dom}(\Gamma)$ with $c \neq s[\mathbf{p}]$, $\Gamma(c) = \Gamma'(c)$.
2. If $\Gamma \xrightarrow{s[\mathbf{q}]:\mathbf{p}\&\mathbf{m}_k(S_k)} \Gamma'$, then for any channel with role $c \in \text{dom}(\Gamma)$ with $c \neq s[\mathbf{q}]$, $\Gamma(c) = \Gamma'(c)$.
3. If $\Gamma \xrightarrow{s[\mathbf{p}][\mathbf{q}]\mathbf{m}} \Gamma'$, then for any channel with role $c \in \text{dom}(\Gamma)$ with $c \neq s[\mathbf{p}]$ and $c \neq s[\mathbf{q}]$, $\Gamma(c) = \Gamma'(c)$.

Proof. By induction on typing context reductions.

B.5 Relating Semantics

Proposition 2. $G \sqsubseteq_s \Gamma$ if and only if $G\{\mu t.G/t\} \sqsubseteq_s \Gamma$.

Proof. By Lem. 9.

Proposition 3. $G \sqsubseteq_s \Gamma$ if and only if $\text{unf}(G) \sqsubseteq_s \Gamma$.

Proof. By applying Prop. 2 as many times as necessary.

Lemma 24 (Relating Terminations). If $G = \mathbf{end}$ and $G \sqsubseteq_s \Gamma$, then $\forall s[\mathbf{p}] \in \text{dom}(\Gamma) : \Gamma(s[\mathbf{p}]) = \mathbf{end}$.

Proof. By the definition of association (Def. 9), we know that $\Gamma = \Gamma_G, \Gamma_{\mathbf{end}}$, where, by the hypothesis $G = \mathbf{end}$, $\text{dom}(\Gamma_G) = \emptyset$. Hence, $\Gamma = \Gamma_{\mathbf{end}}$, which is the thesis.

Lemma 25 (Inversion of Projection). Given a local type T , which is a supertype of projection from a global type G on a role \mathbf{p} , i.e. $G \upharpoonright_{\mathbf{p}} \leq T$, then:

- (1) If $\text{unf}(T) = \mathbf{q} \oplus \{\mathbf{m}_i(S_i).T_i\}_{i \in I}$, then either
 - (a) $\text{unf}(G) = \mathbf{p} \rightarrow \mathbf{q} : \{\mathbf{m}'_i(S'_i).G_i\}_{i \in I'}$, where $I \subseteq I'$, and for all $i \in I : \mathbf{m}_i = \mathbf{m}'_i$, $S_i \leq S'_i$, and $G_i \upharpoonright_{\mathbf{p}} \leq T_i$; or,
 - (b) $\text{unf}(G) = \mathbf{s} \rightarrow \mathbf{t} : \{\mathbf{m}'_j(S'_j).G_j\}_{j \in J}$, where for all $j \in J : G_j \upharpoonright_{\mathbf{p}} \leq T$, with $\mathbf{p} \neq \mathbf{s}$ and $\mathbf{p} \neq \mathbf{t}$.
- (2) If $\text{unf}(T) = \mathbf{q} \& \{\mathbf{m}_i(S_i).T_i\}_{i \in I}$, then either
 - (a) $\text{unf}(G) = \mathbf{q} \rightarrow \mathbf{p} : \{\mathbf{m}'_i(S'_i).G_i\}_{i \in I'}$, where $I' \subseteq I$, and for all $i \in I' : \mathbf{m}_i = \mathbf{m}'_i$, $S'_i \leq S_i$, and $G_i \upharpoonright_{\mathbf{p}} \leq T_i$; or,
 - (b) $\text{unf}(G) = \mathbf{s} \rightarrow \mathbf{t} : \{\mathbf{m}'_j(S'_j).G_j\}_{j \in J}$, where for all $j \in J : G_j \upharpoonright_{\mathbf{p}} \leq T$, with $\mathbf{p} \neq \mathbf{s}$ and $\mathbf{p} \neq \mathbf{t}$.
- (3) If $\text{unf}(T) = \mathbf{end}$, then $\mathbf{p} \notin \text{roles}(G)$.

Proof. By the definition of global type projection (Def. 3); additionally, for cases (b) in items (1) and (2), apply Lem. 10 and the transitivity of subtyping.

Lemma 26 (Matching Communication Under Projection). If two local types T, U are supertype of an internal choice and an external choice with matching roles, obtained via projection from a global type G , i.e. $G \upharpoonright_{\mathbf{p}} \leq \text{unf}(T) = \mathbf{q} \oplus \{\mathbf{m}_i(S_i).T_i\}_{i \in I_{\mathbf{p}}}$ and $G \upharpoonright_{\mathbf{q}} \leq \text{unf}(U) = \mathbf{p} \& \{\mathbf{m}'_j(S'_j).T'_j\}_{j \in I_{\mathbf{q}}}$, then $I_{\mathbf{p}} \subseteq I_{\mathbf{q}}$, and $\forall i \in I_{\mathbf{p}} : \mathbf{m}_i = \mathbf{m}'_i$ and $S_i \leq S'_i$.

Proof. By induction on items (1) and (2) of Lem. 25 simultaneously.

- (a) We have $\text{unf}(G) = \mathbf{p} \rightarrow \mathbf{q} : \{\mathbf{m}''_i(S''_i).G_i\}_{i \in I}$, $I_{\mathbf{p}} \subseteq I \subseteq I_{\mathbf{q}}$, $\forall i \in I_{\mathbf{p}} : \mathbf{m}_i = \mathbf{m}''_i$ and $S_i \leq S''_i$, and $\forall i \in I : \mathbf{m}''_i = \mathbf{m}'_i$ and $S''_i \leq S'_i$. We have $I_{\mathbf{p}} \subseteq I_{\mathbf{q}}$ (by transitivity of \subseteq), and $\forall i \in I_{\mathbf{p}} : \mathbf{m}_i = \mathbf{m}'_i$ (by transitivity of $=$) and $S_i \leq S'_i$ (by transitivity of \leq).
- (b) We have $\text{unf}(G) = \mathbf{s} \rightarrow \mathbf{t} : \{\mathbf{m}''_j(S''_j).G_j\}_{j \in J}$, where for all $j \in J : G_j \upharpoonright_{\mathbf{p}} \leq T$, $G_j \upharpoonright_{\mathbf{q}} \leq U$, $\{\mathbf{p}, \mathbf{q}\} \cap \{\mathbf{s}, \mathbf{t}\} = \emptyset$. Apply induction on $G_j \upharpoonright_{\mathbf{p}} \leq T$ and $G_j \upharpoonright_{\mathbf{p}} \leq U$ on any $j \in J$.

Lemma 27 (Inversion of Association). *Let $G \sqsubseteq_s \Gamma$.*

1. If $\text{unf}(\Gamma(s[\mathbf{p}])) = \mathbf{q} \oplus \{\mathbf{m}_i(S_i).T_i\}_{i \in I}$, then either
 - (a) $\text{unf}(G) = \mathbf{p} \rightarrow \mathbf{q} : \{\mathbf{m}_i(S'_i).G_i\}_{i \in I'}$, where $I \subseteq I'$, and for all $i \in I : \mathbf{m}_i = \mathbf{m}_i$, $S_i \leq S'_i$, and $G_i \upharpoonright \mathbf{p} \leq T_i$; or,
 - (b) $\text{unf}(G) = \mathbf{s} \rightarrow \mathbf{t} : \{\mathbf{m}_j(S'_j).G_j\}_{j \in J}$, where for all $j \in J : G_j \upharpoonright \mathbf{p} \leq \Gamma(s[\mathbf{p}])$, with $\mathbf{p} \neq \mathbf{s}$ and $\mathbf{p} \neq \mathbf{t}$.
2. If $\text{unf}(\Gamma(s[\mathbf{p}])) = \mathbf{q} \& \{\mathbf{m}_i(S_i).T_i\}_{i \in I}$, then either
 - (a) $\text{unf}(G) = \mathbf{q} \rightarrow \mathbf{p} : \{\mathbf{m}_i(S'_i).G_i\}_{i \in I'}$, where $I' \subseteq I$, and for all $i \in I' : \mathbf{m}_i = \mathbf{m}_i$, $S'_i \leq S_i$, and $G_i \upharpoonright \mathbf{p} \leq T_i$; or,
 - (b) $\text{unf}(G) = \mathbf{s} \rightarrow \mathbf{t} : \{\mathbf{m}_j(S'_j).G_j\}_{j \in J}$, where for all $j \in J : G_j \upharpoonright \mathbf{p} \leq \Gamma(s[\mathbf{p}])$, with $\mathbf{p} \neq \mathbf{s}$ and $\mathbf{p} \neq \mathbf{t}$.
3. If $\text{unf}(\Gamma(s[\mathbf{p}])) = \mathbf{end}$, then $\mathbf{p} \notin \text{roles}(G)$.

Proof. Thanks to Lem. 4, we do not need to consider top-level recursions, items (1), (2), and (3) follow from Def. 9, Lem. 5, and Lem. 25.

Lemma 28 (Simultaneous Inversions of Association). *Let $G \sqsubseteq_s \Gamma$. If $\text{unf}(\Gamma(s[\mathbf{p}])) = \mathbf{q} \oplus \{\mathbf{m}_i(S_i).T_i\}_{i \in I_p}$ and $\text{unf}(\Gamma(s[\mathbf{q}])) = \mathbf{p} \& \{\mathbf{m}_i(S'_i).T'_i\}_{i \in I_q}$, then either*

1. $\text{unf}(G) = \mathbf{p} \rightarrow \mathbf{q} : \{\mathbf{m}_i(S''_i).G_i\}_{i \in I_p}$, where $I_p \subseteq I \subseteq I_q$, $\forall i \in I_p : S_i \leq S''_i$, $\forall i \in I : S''_i \leq S'_i$, $\forall i \in I_p : G_i \upharpoonright \mathbf{p} \leq T_i$, and $\forall i \in I : G_i \upharpoonright \mathbf{q} \leq T'_i$; or,
2. $\text{unf}(G) = \mathbf{s} \rightarrow \mathbf{t} : \{\mathbf{m}_j(S''_j).G_j\}_{j \in J}$, where for all $j \in J : G_j \upharpoonright \mathbf{p} \leq \Gamma(s[\mathbf{p}])$, $G_j \upharpoonright \mathbf{q} \leq \Gamma(s[\mathbf{q}])$, and $\{\mathbf{p}, \mathbf{q}\} \cap \{\mathbf{s}, \mathbf{t}\} = \emptyset$.

Proof. By combining cases (1) and (2) from Lem. 27. Note that case 1(a) is incompatible with case 2(b), since 2(b) requires that $\mathbf{p} \neq \mathbf{s}$. Similarly, case 1(b) is incompatible with case 2(a).

Theorem 1 (Soundness of Association). *Given associated global type G and typing context Γ for session $s : G \sqsubseteq_s \Gamma$. If $G \xrightarrow{\alpha} G'$ where $\alpha = s[\mathbf{p}][\mathbf{q}]\mathbf{m}$, then there exist α' , Γ' , and G'' , such that $\alpha' = s[\mathbf{p}][\mathbf{q}]\mathbf{m}'$, $G \xrightarrow{\alpha'} G''$, $G'' \sqsubseteq_s \Gamma'$, and $\Gamma \xrightarrow{\alpha'} \Gamma'$.*

Proof. By induction on reductions of global type $G \xrightarrow{\alpha} G'$.

– Case [GR- \oplus &]:

From the premise, we have:

$$G \sqsubseteq_s \Gamma \tag{1}$$

$$G = \mathbf{p} \rightarrow \mathbf{q} : \{\mathbf{m}_i(S_i).G_i\}_{i \in I} \tag{2}$$

$$\alpha = s[\mathbf{p}][\mathbf{q}]\mathbf{m}_j \tag{3}$$

$$j \in I \tag{4}$$

$$G' = G_j \tag{5}$$

By association (1), we have $G \upharpoonright \mathbf{p} = \mathbf{q} \oplus \{\mathbf{m}_i(S_i).(G_i \upharpoonright \mathbf{p})\}_{i \in I} \leq \Gamma(s[\mathbf{p}])$, and $G \upharpoonright \mathbf{q} = \mathbf{p} \& \{\mathbf{m}_i(S_i).(G_i \upharpoonright \mathbf{p})\}_{i \in I} \leq \Gamma(s[\mathbf{q}])$. Then by Lem. 14 and Lem. 26, we

have $\Gamma(s[\mathbf{p}]) = \mathbf{q} \oplus \{\mathbf{m}'_i(S'_i).T'_i\}_{i \in I_{\mathbf{p}}}$ and $\Gamma(s[\mathbf{q}]) = \mathbf{p} \& \{\mathbf{m}''_i(S''_i).T''_i\}_{i \in I_{\mathbf{q}}}$; with $I_{\mathbf{p}} \subseteq I \subseteq I_{\mathbf{q}}$, and for all $i \in I_{\mathbf{p}} : \mathbf{m}_i = \mathbf{m}'_i = \mathbf{m}''_i, S'_i \leq S''_i, G_i \upharpoonright \mathbf{p} \leq T'_i$, and $G_i \upharpoonright \mathbf{q} \leq T''_i$.

Now let us choose some $k \in I_{\mathbf{p}}$ such that $\alpha' = s[\mathbf{p}][\mathbf{q}]_{\mathbf{m}_k}$. Furthermore, we have $G \xrightarrow{\alpha'} G''$ with $G'' = G_k$. We are left to show that there exists Γ' such that $\Gamma \xrightarrow{s[\mathbf{p}][\mathbf{q}]_{\mathbf{m}_k}} \Gamma'$ and $G'' \sqsubseteq_s \Gamma'$.

We apply $[\Gamma \oplus]$ on $s[\mathbf{p}]$ and $[\Gamma \&]$ on $s[\mathbf{q}]$, which can be combined via $[\Gamma \oplus \&]$. By applying $[\Gamma \cdot]$ and $[\Gamma \cdot, B]$ when needed, we have $\Gamma \xrightarrow{s[\mathbf{p}][\mathbf{q}]_{\mathbf{m}_k}} \Gamma'$, with $\Gamma'(s[\mathbf{p}]) = T'_k, \Gamma'(s[\mathbf{q}]) = T''_k$, and $\Gamma'(s[\mathbf{r}]) = \Gamma(s[\mathbf{r}])$ if $\mathbf{r} \neq \mathbf{p}$ and $\mathbf{r} \neq \mathbf{q}$.

Finally, we show that $G_k = G'' \sqsubseteq_s \Gamma'$: for \mathbf{p} , we have $G_k \upharpoonright \mathbf{p} \leq \Gamma'(s[\mathbf{p}]) = T'_k$; similar for \mathbf{q} . For $\mathbf{r} \neq \mathbf{p} \neq \mathbf{q} \in \text{roles}(G)$, we have $G \upharpoonright \mathbf{r} = \prod_{i \in I} G_i \upharpoonright \mathbf{r} \leq \Gamma'(s[\mathbf{r}]) = \Gamma(s[\mathbf{r}])$. By Lem. 10, we have $G_k \upharpoonright \mathbf{r} \leq \prod_{i \in I} G_i \upharpoonright \mathbf{r} \leq \Gamma'(s[\mathbf{r}])$, and hence, $G_k \upharpoonright \mathbf{r} \leq \Gamma'(s[\mathbf{r}])$ holds by the transitivity of \leq .

- Case $[\text{GR-}\mu]$:
By inductive hypothesis and $[\Gamma \cdot \mu]$.
- Case $[\text{GR-Ctx}]$: From the premise, we have:

$$G \sqsubseteq_s \Gamma \quad (6)$$

$$G = \mathbf{p} \rightarrow \mathbf{q} : \{\mathbf{m}_i(S_i).G_i\}_{i \in I} \quad (7)$$

$$\forall i \in I : G_i \xrightarrow{\alpha} G'_i \quad (8)$$

$$\text{subject}(\alpha) \cap \{\mathbf{p}, \mathbf{q}\} = \emptyset \quad (9)$$

$$G' = \mathbf{p} \rightarrow \mathbf{q} : \{\mathbf{m}_i(S_i).G'_i\}_{i \in I} \quad (10)$$

For \mathbf{p} , we have $G \upharpoonright \mathbf{p} = \mathbf{q} \oplus \{\mathbf{m}_i(S_i).(G_i \upharpoonright \mathbf{p})\}_{i \in I}$ and $G' \upharpoonright \mathbf{p} = \mathbf{q} \oplus \{\mathbf{m}_i(S_i).(G'_i \upharpoonright \mathbf{p})\}_{i \in I}$. For \mathbf{q} , we have $G \upharpoonright \mathbf{q} = \mathbf{p} \& \{\mathbf{m}_i(S_i).(G_i \upharpoonright \mathbf{q})\}_{i \in I}$ and $G' \upharpoonright \mathbf{q} = \mathbf{p} \& \{\mathbf{m}_i(S_i).(G'_i \upharpoonright \mathbf{q})\}_{i \in I}$. Take an arbitrary index $j \in I$. We construct a typing context Γ_j such that $G_j \sqsubseteq_s \Gamma_j$: let $\Gamma_j(s[\mathbf{p}]) = G_j \upharpoonright \mathbf{p}, \Gamma_j(s[\mathbf{q}]) = G_j \upharpoonright \mathbf{q}, \Gamma_j(s[\mathbf{r}]) = \Gamma(s[\mathbf{r}])$ for $s[\mathbf{r}] \in \text{dom}(\Gamma) \setminus \{s[\mathbf{p}], s[\mathbf{q}]\}$.

By inductive hypothesis, there exists $\alpha', G''_j, \Gamma'_j$ such that $\Gamma_j \xrightarrow{\alpha'} \Gamma'_j, G''_j \sqsubseteq_s \Gamma'_j$, and $G_j \xrightarrow{\alpha'} G''_j$. Since $\text{subject}(\alpha') \cap \{\mathbf{p}, \mathbf{q}\} = \emptyset$, we apply Lem. 18, which gives

$\Gamma_j(s[\mathbf{p}]) = \Gamma'_j(s[\mathbf{p}])$. We also have $G \xrightarrow{\alpha'} G''$ with $G'' = \mathbf{p} \rightarrow \mathbf{q} : \{\mathbf{m}_i(S_i).G''_i\}_{i \in I}$.

We now construct a typing context Γ' such that $G'' \sqsubseteq_s \Gamma'$: let $\Gamma'(s[\mathbf{p}]) = \mathbf{q} \oplus \{\mathbf{m}_i(S_i).\Gamma'_i(s[\mathbf{p}])\}_{i \in I}, \Gamma'(s[\mathbf{q}]) = \mathbf{p} \& \{\mathbf{m}_i(S_i).\Gamma'_i(s[\mathbf{q}])\}_{i \in I}, \Gamma'(s[\mathbf{r}]) = \prod_{i \in I} \Gamma'_i(s[\mathbf{r}])$ for $s[\mathbf{r}] \in \text{dom}(\Gamma) \setminus \{s[\mathbf{p}], s[\mathbf{q}]\}$.

Theorem 2 (Completeness of Association). *Given associated global type G and typing context Γ for session s : $G \sqsubseteq_s \Gamma$. If $\Gamma \xrightarrow{\alpha} \Gamma'$ where $\alpha = s[\mathbf{p}][\mathbf{q}]_{\mathbf{m}}$, then there exists G' such that $G' \sqsubseteq_s \Gamma'$ and $G \xrightarrow{\alpha} G'$.*

Proof. By induction on reductions of typing context $\Gamma \xrightarrow{\alpha} \Gamma'$. Since α is of the form $s[\mathbf{p}][\mathbf{q}]_{\mathbf{m}}$, we only need to consider the following two cases.

- Case $[\Gamma \oplus \&]$:

From the premise, we have:

$$G \sqsubseteq_s \Gamma \quad (11)$$

$$\alpha = s[\mathbf{p}][\mathbf{q}]\mathbf{m} \quad (12)$$

$$\Gamma = \Gamma_1, \Gamma_2 \quad (13)$$

$$\Gamma_1 \xrightarrow{s[\mathbf{p}]:\mathbf{q}\oplus\mathbf{m}(S)} \Gamma'_1 \quad (14)$$

$$\Gamma_2 \xrightarrow{s[\mathbf{q}]:\mathbf{p}\&\mathbf{m}(S')} \Gamma'_2 \quad (15)$$

$$\Gamma' = \Gamma'_1, \Gamma'_2 \quad (16)$$

By applying Lem. 19 on (14) and (15), we have $\text{unf}(\Gamma_1(s[\mathbf{p}])) = \mathbf{q}\oplus\{\mathbf{m}_i(S_i).T_i\}_{i \in I_p}$

and $\text{unf}(\Gamma_2(s[\mathbf{q}])) = \mathbf{p}\&\{\mathbf{m}_i(S'_i).T'_i\}_{i \in I_q}$. Moreover, by inverting $\Gamma \xrightarrow{s[\mathbf{p}][\mathbf{q}]\mathbf{m}} \Gamma'$, $\exists k \in (I_p \cap I_q)$, such that $\mathbf{m}_k = \mathbf{m}$ and $S_k \leq S'_k$.

We perform case analysis on Lem. 28.

- Case 1 of Lem. 28: we know $\text{unf}(G) = \mathbf{p} \rightarrow \mathbf{q}; \{\mathbf{m}_i(S''_i).G_i\}_{i \in I}$, where $I_p \subseteq I \subseteq I_q$, $\forall i \in I_p : S_i \leq S''_i$, $\forall i \in I : S''_i \leq S'_i$, $\forall i \in I_p : G_i \upharpoonright \mathbf{p} \leq T_i$, and $\forall i \in I : G_i \upharpoonright \mathbf{q} \leq T'_i$.

Since $k \in (I_p \cap I_q)$ and $I_p \subseteq I$, we have $k \in I$. By applying [GR- \oplus &] (with Prop. 3), the result becomes G_k .

We are left to show association: By Lems. 19 and 27, we have $G_k \upharpoonright \mathbf{p} \leq T_k = \Gamma'_1(s[\mathbf{p}])$ and $G_k \upharpoonright \mathbf{q} \leq T'_k = \Gamma'_2(s[\mathbf{q}])$. For other roles \mathbf{r} , we have $\Gamma(s[\mathbf{r}]) = \Gamma'(s[\mathbf{r}])$ by Lem. 18, and $G_k \upharpoonright \mathbf{r} \leq \prod_{i \in I} (G_i \upharpoonright \mathbf{r}) = G \upharpoonright \mathbf{r}$ by Lem. 10. Since $G \upharpoonright \mathbf{r} \leq \Gamma(s[\mathbf{r}])$, we can conclude that $G_k \upharpoonright \mathbf{r} \leq \Gamma'(s[\mathbf{r}])$ by transitivity of subtyping.

- Case 2 of Lem. 28: we know $\text{unf}(G) = \mathbf{s} \rightarrow \mathbf{t}; \{\mathbf{m}_j(S''_j).G_j\}_{j \in J}$, where for all $j \in J$, $G_j \upharpoonright \mathbf{p} \leq \Gamma(s[\mathbf{p}])$ and $G_j \upharpoonright \mathbf{q} \leq \Gamma(s[\mathbf{q}])$, and $\{\mathbf{p}, \mathbf{q}\} \cap \{\mathbf{s}, \mathbf{t}\} = \emptyset$.

Take an arbitrary index $j \in J$, we construct a typing context Γ_j such that

$$\Gamma_j \xrightarrow{s[\mathbf{p}][\mathbf{q}]\mathbf{m}} \Gamma'_j \text{ and } G_j \sqsubseteq_s \Gamma_j.$$

To construct Γ_j , we consider sub-cases for all roles, and show that $G_j \sqsubseteq_s \Gamma_j$:

- * For role \mathbf{s} , we know from $G \sqsubseteq_s \Gamma$ that $\text{unf}(G) \upharpoonright \mathbf{s} = \mathbf{t} \oplus \{\mathbf{m}_j(S''_j).(G_j \upharpoonright \mathbf{s})\}_{j \in J} \leq \Gamma(s[\mathbf{s}])$. By inverting [SUB- \oplus] (applying Lem. 9 where necessary), we have $\text{unf}(\Gamma(s[\mathbf{s}])) = \mathbf{t} \oplus \{\mathbf{m}_j(S'''_j).T''_j\}_{j \in J_s}$, where $J_s \subseteq J$, and $\forall j \in J_s : G_j \upharpoonright \mathbf{s} \leq T''_j$.

To construct Γ_j , let $\Gamma_j(s[\mathbf{s}]) = T''_j$ if $j \in J_s$ and $\Gamma_j(s[\mathbf{s}]) = G_j \upharpoonright \mathbf{s}$ otherwise. In either case, we have $G_j \upharpoonright \mathbf{s} \leq \Gamma_j(s[\mathbf{s}])$, as required.

- * For role \mathbf{t} , we know from $G \sqsubseteq_s \Gamma$ that $\text{unf}(G) \upharpoonright \mathbf{t} = \mathbf{s} \& \{\mathbf{m}_j(S''_j).(G_j \upharpoonright \mathbf{t})\}_{j \in J} \leq \Gamma(s[\mathbf{t}])$. By inverting [SUB- $\&$] (applying Lem. 9 where necessary), we have $\text{unf}(\Gamma(s[\mathbf{t}])) = \mathbf{s} \& \{\mathbf{m}_j(S'''_j).T''_j\}_{j \in J_t}$, where $J \subseteq J_t$, and $\forall j \in J : G_j \upharpoonright \mathbf{t} \leq T''_j$.

To construct Γ_j , let $\Gamma_j(s[\mathbf{t}]) = T''_j$, and we have $G_j \upharpoonright \mathbf{t} \leq \Gamma_j(s[\mathbf{t}])$, as required.

- * For other roles $\mathbf{r} \in \text{roles}(G)$ with $\mathbf{r} \notin \{\mathbf{s}, \mathbf{t}\}$, their typing context entry do not change, i.e. $\Gamma_j(s[\mathbf{r}]) = \Gamma(s[\mathbf{r}])$. We have $G_j \upharpoonright \mathbf{r} \leq \prod_{j \in J} (G_j \upharpoonright \mathbf{r}) =$

$G \upharpoonright \mathbf{r} \leq \Gamma(s[\mathbf{r}]) = \Gamma_j(s[\mathbf{r}])$ (applying Lem. 10). Notice that $\{\mathbf{p}, \mathbf{q}\} \in \text{roles}(G)$, so they are still able to perform the communication action $\Gamma_j \xrightarrow{s[\mathbf{p}][\mathbf{q}]\mathbf{m}} \Gamma'_j$.

We apply inductive hypothesis on Γ_j , and obtain $G_j \xrightarrow{s[\mathbf{p}][\mathbf{q}]\mathbf{m}} G'_j$ and $G'_j \sqsubseteq_s \Gamma'_j$.

We can apply $[\text{GR-CTX}]$ on $\mathbf{s} \rightarrow \mathbf{t}: \{\mathfrak{m}_j(S''_j).G_j\}_{j \in J} \xrightarrow{s[\mathbf{p}][\mathbf{q}]\mathbf{m}} \mathbf{s} \rightarrow \mathbf{t}: \{\mathfrak{m}_j(S''_j).G'_j\}_{j \in J}$.

We now show $G' \sqsubseteq_s \Gamma'$, where $G' = \mathbf{s} \rightarrow \mathbf{t}: \{\mathfrak{m}_j(S''_j).G'_j\}_{j \in J}$.

For role \mathbf{s} , we know that $\text{unf}(\Gamma(s[\mathbf{s}])) = \mathbf{t} \oplus \{\mathfrak{m}_j(S'''_j).T''_j\}_{j \in J_s}$, where $J_s \subseteq J$, and $\forall j \in J_s : G_j \upharpoonright \mathbf{s} \leq T''_j$ and $S''_j \leq S'''_j$. Since $\mathbf{s} \notin \text{subject}(s[\mathbf{p}][\mathbf{q}]\mathbf{m})$, we apply Lem. 18 on Γ and Γ_j for all $j \in J_s$. For all $j \in J_s$, we have $T''_j = \Gamma_j(s[\mathbf{s}]) = \Gamma'_j(s[\mathbf{s}])$ (from Lem. 18) and $G'_j \upharpoonright \mathbf{s} \leq \Gamma'_j(s[\mathbf{s}])$ (from inductive hypothesis). Therefore, we have $G'_j \upharpoonright \mathbf{s} \leq T''_j$. We now apply Lem. 18 on Γ , which gives $\text{unf}(\Gamma(s[\mathbf{s}])) = \text{unf}(\Gamma'(s[\mathbf{s}])) = \mathbf{t} \oplus \{\mathfrak{m}_j(S'''_j).T''_j\}_{j \in J_s}$. We can now apply $[\text{SUB-}\oplus]$ to conclude $G' \upharpoonright \mathbf{s} \leq \Gamma'(s[\mathbf{s}])$.

For role \mathbf{t} , we know that $\text{unf}(\Gamma(s[\mathbf{t}])) = \mathbf{s} \& \{\mathfrak{m}_j(S'''_j).T''_j\}_{j \in J_t}$, where $J_t \subseteq J$, and $\forall j \in J : G_j \upharpoonright \mathbf{t} \leq T''_j$ and $S''_j \leq S'''_j$. Since $\mathbf{t} \notin \text{subject}(s[\mathbf{p}][\mathbf{q}]\mathbf{m})$, we apply Lem. 18 on Γ and Γ_j for all $j \in J$. For all $j \in J$, we have $T''_j = \Gamma_j(s[\mathbf{t}]) = \Gamma'_j(s[\mathbf{t}])$ (from Lem. 18) and $G'_j \upharpoonright \mathbf{t} \leq \Gamma'_j(s[\mathbf{t}])$ (from inductive hypothesis). Therefore, we have $G'_j \upharpoonright \mathbf{t} \leq T''_j$. We now apply Lem. 18 on Γ , which gives $\text{unf}(\Gamma(s[\mathbf{t}])) = \text{unf}(\Gamma'(s[\mathbf{t}])) = \mathbf{s} \& \{\mathfrak{m}_j(S'''_j).T''_j\}_{j \in J_t}$. We can now apply $[\text{SUB-}\&]$ to conclude $G' \upharpoonright \mathbf{t} \leq \Gamma'(s[\mathbf{t}])$.

For other roles $\mathbf{r} \in \text{roles}(G)$ (where $\mathbf{r} \notin \{\mathbf{s}, \mathbf{t}\}$), we need to show $G' \upharpoonright \mathbf{r} \leq \Gamma'(s[\mathbf{r}])$. We know that $G' \upharpoonright \mathbf{r} = \prod_{j \in J} G'_j \upharpoonright \mathbf{r}$. The inductive hypothesis gives $G'_j \upharpoonright \mathbf{r} \leq \Gamma'_j(s[\mathbf{r}])$, and then we apply Lem. 12 to obtain $G' \upharpoonright \mathbf{r} = \prod_{j \in J} G'_j \upharpoonright \mathbf{r} \leq \prod_{j \in J} \Gamma'_j(s[\mathbf{r}])$. Note that $\Gamma_j(s[\mathbf{r}]) = \Gamma(s[\mathbf{r}])$ by construction. We now apply Lem. 20 on Γ and all Γ_j , which gives $\Gamma_j = \Gamma'$ for all j . Therefore, we have $G' \upharpoonright \mathbf{r} \leq \Gamma'(s[\mathbf{r}])$.

- Case $[\Gamma-\mu]$ (possibly with $[\Gamma-B]$ and $[\Gamma-.]$):
By inductive hypothesis and Prop. 3.

Corollary 2. *Assume that for any session $s \in \Gamma$, there exists a global type G_s such that $G_s \sqsubseteq_s \Gamma_s$. If $\Gamma \rightarrow \Gamma'$, then for any $s \in \Gamma'$, there exists a global type G'_s such that $G'_s \sqsubseteq_s \Gamma'_s$.*

Proof. By Def. 8, we have that there exists a label $s[\mathbf{p}][\mathbf{q}]\mathbf{m}$ such that $\Gamma \xrightarrow{s[\mathbf{p}][\mathbf{q}]\mathbf{m}} \Gamma'$, and hence, by Lem. 17, $\text{dom}(\Gamma) = \text{dom}(\Gamma')$. We are left to show that for any Γ'_s with $s' \in \Gamma'$, there exists a global type G'_s such that $G'_s \sqsubseteq_{s'} \Gamma'_s$.

- Case Γ'_s : since $\Gamma \xrightarrow{s[\mathbf{p}][\mathbf{q}]\mathbf{m}} \Gamma'$, it is trivial to have $\Gamma_s \xrightarrow{s[\mathbf{p}][\mathbf{q}]\mathbf{m}} \Gamma'_s$. Moreover by $G_s \sqsubseteq_s \Gamma_s$ and Thm. 2, we have that there exists G'_s such that $G'_s \sqsubseteq_s \Gamma'_s$, as desired.
- Case Γ'_s with $s' \neq s$: we know from Lem. 23 that for any $s'[\mathbf{r}] \in \text{dom}(\Gamma')$, $\Gamma(\text{unf}(s'[\mathbf{r}])) = \Gamma'(\text{unf}(s'[\mathbf{r}]))$. Then, along with $G_s \sqsubseteq_s \Gamma_s$, the thesis holds.

B.6 Properties by Association

Safety by Association

Lemma 29. *If $G \sqsubseteq_s \Gamma$, then Γ is s -safe.*

Proof. Let $\varphi = \{\Gamma' \mid \exists G' : G \rightarrow^* G' \text{ and } G' \sqsubseteq_s \Gamma'\}$.

Take any $\Gamma \in \varphi$, we show that Γ satisfies all safety properties. By definition of φ , there exists G' with $G \rightarrow^* G'$ and $G' \sqsubseteq_s \Gamma$. We only detail the case that $G' \neq \mathbf{end}$ as if $G' = \mathbf{end}$, by Lem. 24, we have that $\Gamma = \Gamma_{\mathbf{end}}$, which satisfies all clauses of Def. 10.

[S- $\oplus\&$] Since (by hypothesis) $\Gamma \xrightarrow{s[\mathbf{p}]:\mathbf{q}\oplus\mathbf{m}(S)}$ and $\Gamma \xrightarrow{s[\mathbf{q}]:\mathbf{p}\&\mathbf{m}'(S')}$, by Lem. 19, we have $\text{unf}(\Gamma(s[\mathbf{p}])) = \mathbf{q}\oplus\{\mathbf{m}_i(S_i).T_i\}_{i \in I}$, $\exists k \in I$ such that $\mathbf{m} = \mathbf{m}_k$, and $\text{unf}(\Gamma(s[\mathbf{q}])) = \mathbf{p}\&\{\mathbf{m}'_j(S'_j).T'_j\}_{j \in J}$. Then we apply Lem. 26 on $G' \upharpoonright \mathbf{p} \leq \Gamma(s[\mathbf{p}])$ and $G' \upharpoonright \mathbf{q} \leq \Gamma(s[\mathbf{q}])$ to get $I \subseteq J$, and $\forall i \in I : \mathbf{m}_i = \mathbf{m}'_i$ and $S_i \leq S'_i$. Consequently, along with $\mathbf{m} = \mathbf{m}_k$, by applying [S- $\oplus\&$] (and [S- μ] as needed), $\Gamma \xrightarrow{s[\mathbf{p}][\mathbf{q}]\mathbf{m}}$, which is the thesis.

[S- μ] Let Γ' be constructed from Γ with $\Gamma'(s[\mathbf{p}]) = T\{\mu t.T/t\}$. By Lem. 9, we know $\Gamma(s[\mathbf{p}]) \leq \Gamma'(s[\mathbf{p}])$, and thus $\Gamma \leq \Gamma'$. By Def. 9 and transitivity of subtyping, we have $G' \sqsubseteq_s \Gamma'$, which means that $\Gamma' \in \varphi$.

[S- \rightarrow_s] Let $\Gamma \xrightarrow{\alpha} \Gamma'$ with $\alpha = s[\mathbf{p}][\mathbf{q}]\mathbf{m}$, meaning that $\Gamma \rightarrow_s \Gamma'$. By Thm. 2, there exists G'' with $G' \xrightarrow{\alpha} G''$ and $G'' \sqsubseteq_s \Gamma'$. By definition of φ , the typing context Γ' after transition Γ on session s is in φ .

Deadlock-Freedom by Association

Lemma 30. *If $G \sqsubseteq_s \Gamma$, then Γ is s -deadlock-free.*

Proof. By operational correspondence of global type G and typing context Γ (Thms. 1 and 2), there exists a global type G' such that $G \rightarrow^* G' \not\rightarrow$, with associated typing contexts $\Gamma \rightarrow_s^* \Gamma' \not\rightarrow_s$. Since no further reductions are possible for the global type G' , it must be in the form of \mathbf{end} (Lem. 16). Therefore, the thesis holds by Lem. 24.

Liveness by Association

Lemma 31. *If $G \sqsubseteq_s \Gamma$, then Γ is s -live.*

Proof. We want to show that if $\Gamma \rightarrow_s^* \Gamma'$, then any path starting with Γ' which is fair for session s is also live for s . We proceed by contradiction, assuming that there is a fair path for session s : $(\Gamma'_n)_{n \in N}$ where $N = \{0, 1, 2, \dots\}$, $\Gamma'_0 = \Gamma'$, and $\forall n \in N, \Gamma'_n \rightarrow_s \Gamma'_{n+1}$, which is not live for s . We consider the following two cases.

– Case $\Gamma'_j \xrightarrow{s[\mathbf{p}]:\mathbf{q}\oplus\mathbf{m}(S)}$ with $j \in N$, and for any $k \in N$ with $k \geq j$, there does not exist \mathbf{m}' such that $\Gamma'_k \xrightarrow{s[\mathbf{p}][\mathbf{q}]\mathbf{m}'}$ Γ'_{k+1} : by operational correspondence of global type G and typing context Γ (Thms. 1 and 2), there exists a global type G'_j such that $G \rightarrow^* G'_j$ and $G'_j \sqsubseteq_s \Gamma'_j$. Moreover, since $\Gamma'_j \xrightarrow{s[\mathbf{p}]:\mathbf{q}\oplus\mathbf{m}(S)}$, by Lems. 19 and 27, we have $\text{unf}(\Gamma'_j(s[\mathbf{p}])) = \mathbf{q}\oplus\{\mathbf{m}_i(S_i).T_i\}_{i \in I}$, and

- either $\text{unf}(G'_j) = \mathbf{p} \rightarrow \mathbf{q}; \{m_i(S'_i).G''_i\}_{i \in I'}$, where $I \subseteq I'$, and for all $i \in I$: $m_i = m_i$, $S_i \leq S'_i$, and $G''_i \upharpoonright \mathbf{p} \leq T_i$. It follows directly that $\mathbf{p} \& \{m_i(S'_i).G''_i \upharpoonright \mathbf{q}\}_{i \in I'}$
 $= \text{unf}(G'_j) \upharpoonright \mathbf{q} \leq G'_j \upharpoonright \mathbf{q} \leq \Gamma'_j(s[\mathbf{q}])$. Hence, we have $\Gamma'_j \xrightarrow{s[\mathbf{q}]:\mathbf{p} \& \mathbf{m}(S')}$ with
 $S \leq S'$, and therefore, $\Gamma'_j \xrightarrow{s[\mathbf{p}][\mathbf{q}]^m}$. With the fact that $(\Gamma'_n)_{n \in N}$ is a fair
path for session s , we know that there exist some k and \mathbf{m}' such that $k \in N$,
 $k \geq j$, and $\Gamma'_k \xrightarrow{s[\mathbf{p}][\mathbf{q}]^{\mathbf{m}'}} \Gamma'_{k+1}$, a desired contradiction.
 - or $\text{unf}(G'_j) = \mathbf{s} \rightarrow \mathbf{t}; \{m_l(S'_l).G''_l\}_{l \in L}$, where for all $l \in L$: $G''_l \upharpoonright \mathbf{p} \leq \Gamma(s[\mathbf{p}])$,
with $\mathbf{p} \neq \mathbf{s}$ and $\mathbf{p} \neq \mathbf{t}$. By the assumption that for any $k \in N$ with
 $k \geq j$, there does not exist \mathbf{m}' such that $\Gamma'_k \xrightarrow{s[\mathbf{p}][\mathbf{q}]^{\mathbf{m}'}} \Gamma'_{k+1}$, $\text{unf}(\Gamma'_j(s[\mathbf{p}])) =$
 $\mathbf{q} \oplus \{m_i(S_i).T_i\}_{i \in I}$, we know that transmission between \mathbf{p} and \mathbf{q} will never
occur from Γ'_j . By operational correspondence, we also conclude that such
transmission will never be triggered from G'_j . This is a desired contradic-
tion, as by Lem. 25, each continuation G''_l of G'_j must involve transmission
between \mathbf{p} and \mathbf{q} , and therefore, the previous subcase scenario should in-
evitably occur.
- Case $\Gamma'_j \xrightarrow{s[\mathbf{q}]:\mathbf{p} \& \mathbf{m}(S)}$ with $j \in N$, and for any $k \in N$ with $k \geq j$, there does not
exist \mathbf{m}' such that $\Gamma'_k \xrightarrow{s[\mathbf{p}][\mathbf{q}]^{\mathbf{m}'}} \Gamma'_{k+1}$: similar to the previous case.


Theorem 3 (Safety, Deadlock-Freedom, and Liveness by Association).
Let G be a global type, Γ a typing context, and s a session. If Γ is associated
with G for s : $G \sqsubseteq_s \Gamma$, then Γ is s -safe, s -deadlock-free, and s -live.

Proof. Apply Lems. 29 to 31.

B.7 Relating Typing Context Properties

Theorem 4. For any typing context Γ and session s , the following statements
are valid:

- (1) $\text{df}(s, \Gamma) \not\Leftarrow \not\Rightarrow \text{safe}(s, \Gamma)$;
- (2) $\text{live}(s, \Gamma) \not\Leftarrow \not\Rightarrow \text{safe}(s, \Gamma)$;
- (3) $\text{live}(s, \Gamma) \not\Leftarrow \Rightarrow \text{df}(s, \Gamma)$;
- (4) $\exists G : G \sqsubseteq_s \Gamma \not\Leftarrow \Rightarrow \text{safe}(s, \Gamma)$;
- (5) $\exists G : G \sqsubseteq_s \Gamma \not\Leftarrow \Rightarrow \text{df}(s, \Gamma)$;
- (6) $\exists G : G \sqsubseteq_s \Gamma \not\Leftarrow \Rightarrow \text{live}(s, \Gamma)$.



Proof. The negated implications in the statement are demonstrated in Exs. 8, 9
and 11. Let's now consider the remaining implications.

- (3). Assume $\text{live}(s, \Gamma)$, we need to prove that $\text{df}(s, \Gamma)$. We proceed by con-
tradiction, assuming that Γ is not s -deadlock-free. This means that there
exist Γ' and $s[\mathbf{p}] \in \text{dom}(\Gamma')$ such that $\Gamma \xrightarrow{s} \Gamma' \not\rightarrow_s$ and $\Gamma'(s[\mathbf{p}]) \not\Leftarrow \text{end}$, i.e.
 $\text{unf}(\Gamma'(s[\mathbf{p}])) = \mathbf{q} \& \{m_i(S_i).T_i\}_{i \in I}$ or $\text{unf}(\Gamma'(s[\mathbf{p}])) = \mathbf{q} \oplus \{m_i(S_i).T_i\}_{i \in I}$. We
now consider the following two cases.

- Case $\text{unf}(\Gamma'(s[\mathbf{p}])) = \mathbf{q} \& \{\mathbf{m}_i(S_i).T_i\}_{i \in I}$:
We construct a path $(\Gamma'_n)_{n \in N}$ where $N = \{0\}$ and $\Gamma'_0 = \Gamma'$. By Def. 12, this path is a fair path for s starting with Γ' . Additionally, since $\text{unf}(\Gamma'(s[\mathbf{p}])) = \mathbf{q} \& \{\mathbf{m}_i(S_i).T_i\}_{i \in I}$, we have $\Gamma' \xrightarrow{s[\mathbf{p}]:\mathbf{q} \& \mathbf{m}_k(S_k)}$ with $k \in I$. Hence, along with the fact that Γ is s -live and $(\Gamma'_n)_{n \in N}$ is a fair path for s , it follows that there exist j and \mathbf{m}' such that $0 \leq j \in N = \{0\}$ and $\Gamma'_j \xrightarrow{s[\mathbf{p}][\mathbf{q}]\mathbf{m}'}$ Γ'_{j+1} , which is the desired contradiction to $\Gamma' \not\rightarrow_s$.
 - Case $\text{unf}(\Gamma'(s[\mathbf{p}])) = \mathbf{q} \oplus \{\mathbf{m}_i(S_i).T_i\}_{i \in I}$:
Similar to the previous case.
- (4). Straightforward from Lem. 29.
(5). Straightforward from Lem. 30.
(6). Straightforward from Lem. 31.

C Subtyping Properties

Lemma 32. *If $G \sqsubseteq_s \Gamma$ and $\Gamma \leq \Gamma'$, then $G \sqsubseteq_s \Gamma'$.*

Proof. By the definition of association (Def. 9), the definition of $\Gamma \leq \Gamma'$ (Def. 7), and the transitivity of subtyping.

Lemma 33. *Assume that $G \sqsubseteq_s \Gamma$ and $\Gamma \leq \Gamma' \xrightarrow{\alpha} \Gamma''$ with: $\alpha \in \{s[\mathbf{p}][\mathbf{q}]\mathbf{m} \mid \mathbf{p}, \mathbf{q} \in \mathcal{R}\}$. Then, there is Γ''' such that $\Gamma \xrightarrow{\alpha} \Gamma''' \leq \Gamma''$.*

Proof. Since $\Gamma' \xrightarrow{s[\mathbf{p}][\mathbf{q}]\mathbf{m}} \Gamma''$, by applying and inverting $[\Gamma-\oplus\&]$ (and $[\Gamma-\mu]$ when necessary), and also using Lem. 19, we have $\text{unf}(\Gamma'(s[\mathbf{p}])) = \mathbf{q} \oplus \{\mathbf{m}_i(S_i).T_i\}_{i \in I}$, $\text{unf}(\Gamma'(s[\mathbf{q}])) = \mathbf{p} \& \{\mathbf{m}'_j(S'_j).T'_j\}_{j \in J}$, $\exists k : k \in I, k \in J, \mathbf{m}_k = \mathbf{m}'_k = \mathbf{m}$, $\Gamma''(s[\mathbf{p}]) = T_k$, and $\Gamma''(s[\mathbf{q}]) = T'_k$. Furthermore, by Lems. 17 and 18, it also holds that for all $s[\mathbf{r}] \in \text{dom}(\Gamma') = \text{dom}(\Gamma'')$ with $\mathbf{r} \neq \mathbf{p}$ and $\mathbf{r} \neq \mathbf{q}$, $\Gamma'(s[\mathbf{r}]) = \Gamma''(s[\mathbf{r}])$. Observe that by $\Gamma \leq \Gamma'$, $\text{unf}(\Gamma(s[\mathbf{p}])) = \mathbf{q} \oplus \{\mathbf{m}_i(S''_i).T''_i\}_{i \in I_p}$ where $I \subseteq I_p$ and $\forall i \in I : S_i \leq S''_i$ and $T''_i \leq T_i$, and $\text{unf}(\Gamma(s[\mathbf{q}])) = \mathbf{p} \& \{\mathbf{m}'_j(S'''_j).T'''_j\}_{j \in J_q}$ where $J_q \subseteq J$ and $\forall j \in J_q : S'''_j \leq S'_j$ and $T'''_j \leq T'_j$. Now we apply Lem. 26 on $G \sqsubseteq_s \Gamma$, $\text{unf}(\Gamma(s[\mathbf{p}]))$, and $\text{unf}(\Gamma(s[\mathbf{q}]))$, to get $I \subseteq I_p \subseteq J_q \subseteq J$, and $\forall i \in I_p : \mathbf{m}_i = \mathbf{m}'_i$ and $S''_i \leq S'''_i$. Consequently, we have $k \in I_p$, $\mathbf{m}_k = \mathbf{m}'_k = \mathbf{m}$, and $S''_k \leq S'''_k$, which follows that there exists Γ''' such that $\Gamma \xrightarrow{s[\mathbf{p}][\mathbf{q}]\mathbf{m}} \Gamma'''$, $\Gamma'''(s[\mathbf{p}]) = T''_k$, $\Gamma'''(s[\mathbf{q}]) = T'''_k$, and for all $s[\mathbf{r}] \in \text{dom}(\Gamma) = \text{dom}(\Gamma') = \text{dom}(\Gamma'') = \text{dom}(\Gamma''')$ with $\mathbf{r} \neq \mathbf{p}$ and $\mathbf{r} \neq \mathbf{q}$, $\Gamma(s[\mathbf{r}]) = \Gamma'''(s[\mathbf{r}])$.

We are left to show that $\Gamma''' \leq \Gamma''$, which is straightforward from $\Gamma'''(s[\mathbf{p}]) = T''_k \leq T_k = \Gamma''(s[\mathbf{p}])$, $\Gamma'''(s[\mathbf{q}]) = T'''_k \leq T'_k = \Gamma''(s[\mathbf{q}])$, and for all $s[\mathbf{r}] \in \text{dom}(\Gamma''') = \text{dom}(\Gamma'')$ with $\mathbf{r} \neq \mathbf{p}$ and $\mathbf{r} \neq \mathbf{q}$, $\Gamma'''(s[\mathbf{r}]) = \Gamma(s[\mathbf{r}]) \leq \Gamma'(s[\mathbf{r}]) = \Gamma''(s[\mathbf{r}])$.

Lemma 34. *Assume that $\forall s \in \Gamma : \exists G_s : G_s \sqsubseteq_s \Gamma_s$ and $\Gamma \leq \Gamma' \xrightarrow{\alpha} \Gamma''$ with: $\alpha \in \{s[\mathbf{p}][\mathbf{q}]\mathbf{m} \mid \mathbf{p}, \mathbf{q} \in \mathcal{R}\}$. Then, there is Γ''' such that $\Gamma \xrightarrow{\alpha} \Gamma''' \leq \Gamma''$.*

Proof. Apply Def. 7 and Lems. 23 and 33.

Proposition 4. *Assume that $G \sqsubseteq_s \Gamma$ and $\Gamma \leq \Gamma' \xrightarrow{\alpha_1} \dots \xrightarrow{\alpha_n} \Gamma''$, with: $\forall i \in 1 \dots n : \alpha_i \in \{s[\mathbf{p}][\mathbf{q}]\mathbf{m}_i \mid \mathbf{p}, \mathbf{q} \in \mathcal{R}\}$. Then, there is Γ''' such that $\Gamma \xrightarrow{\alpha_1} \dots \xrightarrow{\alpha_n} \Gamma''' \leq \Gamma''$.*

Proof. By induction on the number of transitions n in $\Gamma' \xrightarrow{\alpha_1} \dots \xrightarrow{\alpha_n} \Gamma''$. The base case ($n = 0$ transitions) is immediate: we have $\Gamma' = \Gamma''$, hence we conclude by taking $\Gamma''' = \Gamma$. In the inductive case with $n = m + 1$ transitions, there is Γ'_0 such that $\Gamma' \xrightarrow{\alpha_1} \dots \xrightarrow{\alpha_m} \Gamma'_0 \xrightarrow{\alpha_n} \Gamma''$. By the induction hypothesis, there is Γ''_0 such that $\Gamma \xrightarrow{\alpha_1} \dots \xrightarrow{\alpha_m} \Gamma''_0 \leq \Gamma'_0$. Hence, by Lem. 33, there exists Γ''' such that $\Gamma''_0 \xrightarrow{\alpha_n} \Gamma'''$ and $\Gamma''' \leq \Gamma''$. Therefore, we have $\Gamma \xrightarrow{\alpha_1} \dots \xrightarrow{\alpha_n} \Gamma''' \leq \Gamma''$, which is the thesis.

D Type System Properties

Lemma 35 (Narrowing). *If $\Theta \cdot \Gamma \vdash P$ and $\Gamma' \leq \Gamma$, then $\Theta \cdot \Gamma' \vdash P$.*

Proof. By induction on the derivation of $\Theta \cdot \Gamma \vdash P$, we obtain a derivation that concludes $\Theta \cdot \Gamma' \vdash P$ by inserting (possibly vacuous) instances of rule [T-SUB] (Fig. 7).

Lemma 36 (Substitution). *Assume $\Theta \cdot \Gamma, x:S \vdash P$ and $\Gamma' \vdash s[\mathbf{p}]:S$, with Γ, Γ' defined. Then, $\Theta \cdot \Gamma, \Gamma' \vdash P\{s[\mathbf{p}]/x\}$.*

Proof. Minor adaptation of [4, Lemma 5].

Lemma 37 (Typing Inversion). *Assume $\Theta \cdot \Gamma \vdash P$. Then:*

- (1) $P = \mathbf{0}$ implies $\text{end}(\Gamma)$;
- (2) $P = \mathbf{def} X(x_1:S_1, \dots, x_n:S_n) = P' \mathbf{in} Q$ implies:
 - (i) $\Theta, X:S_1, \dots, S_n \cdot x_1:S_1, \dots, x_n:S_n \vdash P'$, and
 - (ii) $\Theta, X:S_1, \dots, S_n \cdot \Gamma \vdash Q$;
- (3) $P = X\langle d_1, \dots, d_n \rangle$ implies:
 - (i) $\Theta \vdash X:S_1, \dots, S_n$, and
 - (ii) $\Gamma = \Gamma_0, \Gamma_1, \dots, \Gamma_n$, and
 - (iii) $\text{end}(\Gamma_0)$, and
 - (iv) $\forall i \in 1 \dots n : \Gamma_i \vdash d_i:S_i$ and $S_i \not\leq \mathbf{end}$;
- (4) $P = (\nu s:\Gamma') P'$ implies:
 - (i) $s \notin \Gamma$, and
 - (ii) $G \sqsubseteq_s \Gamma'$ for some G , and
 - (iii) $\Theta \cdot \Gamma, \Gamma' \vdash P'$;
- (5) $P = P_1 \mid P_2$ implies:
 - (i) $\Gamma = \Gamma_1, \Gamma_2$ such that
 - (ii) $\Theta \cdot \Gamma_1 \vdash P_1$ and

- (iii) $\Theta \cdot \Gamma_2 \vdash P_2$;
- (6) $P = c[\mathbf{q}] \& \{ \mathbf{m}_i(y_i).P_i \}_{i \in I}$ implies:
 - (i) $\Gamma = \Gamma_0, \Gamma_1$ such that
 - (ii) $\Gamma_1 \vdash c : \mathbf{q} \& \{ \mathbf{m}_i(S_i).T_i \}_{i \in I}$ and
 - (iii) $\forall i \in I : \Theta \cdot \Gamma_0, y_i : S_i, c : T_i \vdash P_i$;
- (7) $P = c[\mathbf{q}] \oplus \mathbf{m}(d).P'$ implies:
 - (i) $\Gamma = \Gamma_0, \Gamma_1, \Gamma_2$ such that
 - (ii) $\Gamma_1 \vdash c : \mathbf{q} \oplus \{ \mathbf{m}(S).T \}$ and
 - (iii) $\Gamma_2 \vdash d : S$ and
 - (iv) $S \not\leq \mathbf{end}$ and
 - (v) $\Theta \cdot \Gamma_0, c : T \vdash P'$.

Proof. Straightforward by induction on typing rules in Fig. 7.

More in detail, we have:

- (1): by rule [T-0];
- (2): by rule [T-def];
- (3): by rule [T-CALL];
- (4): by rule [T-G- ν];
- (5): by rule [T-|];
- (6): by rule [T-&];
- (7): by rule [T- \oplus].

Lemma 38 (Subject Congruence). *Assume $\Theta \cdot \Gamma \vdash P$ and $P \equiv P'$. Then, $\Theta \cdot \Gamma \vdash P'$.*

Proof. By analysing the cases where $P \equiv P'$ holds, and by applying the inversion of the typing judgements $\Theta \cdot \Gamma \vdash P$ and $\Theta \cdot \Gamma \vdash P'$ (Lem. 37).

E Proofs for Subject Reduction and Type Safety

Theorem 5 (Subject Reduction). *Assume $\Theta \cdot \Gamma \vdash P$ where $\forall s \in \Gamma : \exists G_s : G_s \sqsubseteq_s \Gamma_s$. If $P \rightarrow P'$, then $\exists \Gamma'$ such that $\Gamma \rightarrow^* \Gamma'$, $\Theta \cdot \Gamma' \vdash P'$, and $\forall s \in \Gamma' : \exists G'_s : G'_s \sqsubseteq_s \Gamma'_s$.*

Proof. Let us recap the assumptions:

$$\Theta \cdot \Gamma \vdash P \tag{17}$$

$$\forall s \in \Gamma : \exists G_s : G_s \sqsubseteq_s \Gamma_s \tag{18}$$

$$P \rightarrow P' \tag{19}$$

The proof proceeds by induction of the derivation of $P \rightarrow P'$, and when the reduction holds by rule [R-CTX], with a further structural induction on the reduction context C . Most cases hold by inversion of the typing $\Theta \cdot \Gamma \vdash P$, and by applying the induction hypothesis.

– Case [R- \oplus &]:

$$\begin{aligned} P &= s[\mathbf{p}][\mathbf{q}] \& \{m_i(x_i).P_i\}_{i \in I} \mid s[\mathbf{q}][\mathbf{p}] \oplus_{m_k} \langle w \rangle . Q \\ P' &= P_k \{w/x_k\} \mid Q \quad (k \in I) \end{aligned} \quad \text{(by inversion of [R- \oplus &])}$$

$$(20)$$

$$\begin{aligned} \Gamma &= \Gamma_{\&}, \Gamma_{\oplus} \text{ such that} \\ \Theta \cdot \Gamma_{\&} &\vdash s[\mathbf{p}][\mathbf{q}] \& \{m_i(x_i).P_i\}_{i \in I} \\ \Theta \cdot \Gamma_{\oplus} &\vdash s[\mathbf{q}][\mathbf{p}] \oplus_{m_k} \langle w \rangle . Q \end{aligned} \quad \text{(by (20) and Lem. 37(5))}$$

$$\frac{\Theta \cdot \Gamma_{\&} \vdash s[\mathbf{p}][\mathbf{q}] \& \{m_i(x_i).P_i\}_{i \in I} \quad \Theta \cdot \Gamma_{\oplus} \vdash s[\mathbf{q}][\mathbf{p}] \oplus_{m_k} \langle w \rangle . Q}{\Theta \cdot \Gamma \vdash P} \text{ [T-]} \quad (21)$$

$$\begin{aligned} \Gamma_{\&} &= \Gamma_0, \Gamma_1 \text{ such that} \\ \Gamma_1 &\vdash s[\mathbf{p}]:\mathbf{q} \& \{m_i(S_i).T_i\}_{i \in I} \\ \forall i \in I \quad \Theta \cdot \Gamma_0, x_i:S_i, s[\mathbf{p}]:T_i &\vdash P_i \end{aligned} \quad \text{(by (21) and Lem. 37(6))}$$

$$\frac{\Theta \cdot \Gamma_0 \vdash s[\mathbf{p}]:\mathbf{q} \& \{m_i(S_i).T_i\}_{i \in I} \quad \Theta \cdot \Gamma_1 \vdash s[\mathbf{p}]:\mathbf{q} \& \{m_i(x_i).P_i\}_{i \in I}}{\Theta \cdot \Gamma_{\&} \vdash s[\mathbf{p}][\mathbf{q}] \& \{m_i(x_i).P_i\}_{i \in I}} \text{ [T- $\&$]} \quad (22)$$

$$\begin{aligned} \Gamma_{\oplus} &= \Gamma_2, \Gamma_3, \Gamma_4 \text{ such that} \\ \Gamma_4 &\vdash s[\mathbf{q}]:\mathbf{p} \oplus \{m'_k(S'_k).T'_k\}_{k \in K} \\ \Gamma_3 \vdash w:S'_k \quad S'_k \not\leq \text{end} \quad \Theta \cdot \Gamma_2, s[\mathbf{q}]:T'_k &\vdash Q \end{aligned} \quad \text{(by (21) and Lem. 37(7))}$$

$$\frac{\Theta \cdot \Gamma_2 \vdash s[\mathbf{q}]:\mathbf{p} \oplus \{m'_k(S'_k).T'_k\}_{k \in K} \quad \Theta \cdot \Gamma_3 \vdash w:S'_k \quad S'_k \not\leq \text{end} \quad \Theta \cdot \Gamma_4 \vdash s[\mathbf{q}]:T'_k \vdash Q}{\Theta \cdot \Gamma_{\oplus} \vdash s[\mathbf{q}][\mathbf{p}] \oplus_{m_k} \langle w \rangle . Q} \text{ [T- \oplus]} \quad (23)$$

$$\Gamma = \Gamma_0, \Gamma_1, \Gamma_2, \Gamma_3, \Gamma_4 \quad \text{(by (21), (22), and (23))} \quad (24)$$

$$\Gamma_1 = s[\mathbf{p}]:T \text{ with } T \leq \mathbf{q} \& \{m_i(S_i).T_i\}_{i \in I} \quad \text{(by (22) and Fig. 7, rule [T-SUB])} \quad (25)$$

$$\Gamma_4 = s[\mathbf{q}]:T' \text{ with } T' \leq \mathbf{p} \oplus \{m'_k(S'_k).T'_k\}_{k \in K} \quad \text{(by (23) and Fig. 7, rule [T-SUB])} \quad (26)$$

$$\begin{aligned} \Gamma &\leq \Gamma'' = \Gamma_0, \Gamma'_1, \Gamma_2, \Gamma_3, \Gamma'_4 \text{ where} \\ \Gamma'_1 &= s[\mathbf{p}]:\mathbf{q} \& \{m_i(S_i).T_i\}_{i \in I} \\ \Gamma'_4 &= s[\mathbf{q}]:\mathbf{p} \oplus \{m'_k(S'_k).T'_k\}_{k \in K} \end{aligned} \quad \text{(by (24), (25), (26), and Def. 7)} \quad (27)$$

$$\forall s \in \Gamma : G_s \sqsubseteq_s \Gamma''_s \quad \text{(by (18), (27), and Lem. 32)} \quad (28)$$

$$k \in K \subseteq I \text{ and } S'_k \leq S_k \quad \text{(by (27), (28), and Lem. 26)} \quad (29)$$

$$\Gamma'' \rightarrow \Gamma''' = \Gamma_0, s[\mathbf{p}]:T_k, \Gamma_2, \Gamma_3, s[\mathbf{q}]:T'_k \quad \text{(by (27), (29), and Def. 8)} \quad (30)$$

$$\forall s \in \Gamma : \exists G'''_s : G'''_s \sqsubseteq_s \Gamma'''_s \quad \text{(by (28), (30), and Cor. 2)} \quad (31)$$

We can now use Γ''' to type P' :

$$\Theta \cdot \Gamma_0, x_k : S_k, s[\mathbf{p}] : T_k \vdash P_k \quad (\text{by (29), (23), and (22)}) \quad (32)$$

$$\Gamma_3 \vdash w : S_k \quad (\text{by (23) (for } \Gamma_3 \vdash w : S'_k), (29), \text{transitivity of } \leq, \text{ and [T-SUB]}) \quad (33)$$

$$\Gamma_0, \Gamma_3, s[\mathbf{p}] : T_k \text{ defined} \quad (\text{by (23), (22), and (21)}) \quad (34)$$

$$\Theta \cdot \Gamma_0, \Gamma_3, s[\mathbf{p}] : T_k \vdash P_k\{w/x_k\} \quad (\text{by (32), (33), (34), and Lem. 36}) \quad (35)$$

$$\frac{\begin{array}{l} \Theta \cdot \Gamma_0, \Gamma_3, s[\mathbf{p}] : T_k \vdash P_k\{w/x_k\} \\ \Theta \cdot \Gamma_2, s[\mathbf{q}] : T'_k \vdash Q \end{array}}{\Theta \cdot \Gamma''' \vdash P'} \quad [\text{T-}] \quad (\text{by (35), (23), (30), (31), and (20)}) \quad (36)$$

We conclude this case by showing that there exists some Γ' that satisfies the statement:

$$\exists \Gamma' : \Gamma \rightarrow \Gamma' \leq \Gamma''' \quad (\text{by (18), (27), (30), and Lem. 34}) \quad (37)$$

$$\Theta \cdot \Gamma' \vdash P' \quad (\text{by (36), (37), and Lem. 35})$$

$$\forall s \in \Gamma' : \exists G'_s : G'_s \sqsubseteq_s \Gamma'_s \quad (\text{by (18), (37), and Cor. 2}) \quad (38)$$

– Case [R-CTX]: By inversion of the rule and Def. 2, we have to prove the statement in the following sub-cases:

1. $P = Q \mid R$ and $P' = Q' \mid R$ and $Q \rightarrow Q'$
2. $P = (\nu s') Q$ and $P' = (\nu s') Q'$ and $Q \rightarrow Q'$
3. $P = \mathbf{def} D \mathbf{in} Q$ and $P' = \mathbf{def} D \mathbf{in} Q'$ and $Q \rightarrow Q'$

Cases 1 and 3 are easily proved using the induction hypothesis. Therefore, here we focus on case 2.

$$\exists \Gamma', G \text{ such that } \frac{G \sqsubseteq_{s'} \Gamma' \quad s' \notin \Gamma' \quad \Theta \cdot \Gamma, \Gamma' \vdash Q}{\Theta \cdot \Gamma \vdash P} \text{ [T-G-}\nu\text{]} \quad (\text{by 2 and Lem. 37(4)})$$

(39)

$$\exists \Gamma'', \Gamma''' \text{ such that } \left\{ \begin{array}{l} s' \notin \Gamma'' \\ \Gamma \rightarrow^* \Gamma'' \\ \Gamma' \rightarrow^* \Gamma''' \\ \forall s \in \Gamma'' : \exists G''_s : G''_s \sqsubseteq_s \Gamma''_s \\ \Theta \cdot \Gamma'', \Gamma''' \vdash Q' \end{array} \right\} \quad (\text{by (39) and inductive hypothesis})$$

(40)

$$\exists G' \text{ such that } G' \sqsubseteq_{s'} \Gamma''' \quad (\text{by (39), (40), and Thm. 2})$$

(41)

$$\frac{G' \sqsubseteq_{s'} \Gamma''' \quad s' \notin \Gamma''' \quad \Theta \cdot \Gamma'', \Gamma''' \vdash Q'}{\Theta \cdot \Gamma'' \vdash P'} \text{ [T-G-}\nu\text{]} \quad (\text{by (40), (41) and 2})$$

(42)

Hence, we obtain the thesis by (40) and (42).

Corollary 1 (Type Safety). *Assume $\emptyset \cdot \emptyset \vdash P$. If $P \rightarrow^* P'$, then P' has no error.*

Proof. From the hypothesis $P \rightarrow^* P'$, we know that $P = P_0 \rightarrow P_1 \rightarrow \dots \rightarrow P_n = P'$ (for some n). The proof proceeds by induction on n .

The base case for $n=0$ is straightforward: we have $P = P'$, thus P' is well-typed. Furthermore, since the term **err** is not typeable, P' cannot contain such a term.

In the inductive case for $n = m+1$, we already know (by the induction hypothesis) that P_m is well-typed. By applying Thm. 5, we can conclude that $P_{m+1} = P'$ is also well-typed and does not contain any **err** subterms.

F Proofs for Session Fidelity and Process Properties

Theorem 6 (Session Fidelity). *Assume $\emptyset \cdot \Gamma \vdash P$, with $G \sqsubseteq_s \Gamma$, $P \equiv \Pi_{p \in I} P_p$, and $\Gamma = \bigcup_{p \in I} \Gamma_p$ such that for each P_p : (1) $\emptyset \cdot \Gamma_p \vdash P_p$, and (2) either $P_p \equiv \mathbf{0}$, or P_p only plays p in s , by Γ_p . Then, $\Gamma \rightarrow_s$ implies $\exists \Gamma', G', P'$ such that $\Gamma \rightarrow_s \Gamma'$, $P \rightarrow^* P'$, and $\emptyset \cdot \Gamma' \vdash P'$, with $G' \sqsubseteq_s \Gamma'$, $P' \equiv \Pi_{p \in I} P'_p$, and $\Gamma' = \bigcup_{p \in I} \Gamma'_p$ such that for each P'_p : (1) $\emptyset \cdot \Gamma'_p \vdash P'_p$, and (2) either $P'_p \equiv \mathbf{0}$, or P'_p only plays p in s , by Γ'_p .*

Proof. The proof structure is similar to Thm. 5.4 in [18]: by induction on the derivation of the reduction of Γ , we infer the contents of Γ and then the shape of P and its sub-processes $P_{\mathbf{p}}$, showing that they can mimic the reduction of Γ . Most cases hold by applying the induction hypothesis.

- Case $\Gamma \xrightarrow{s[\mathbf{p}][\mathbf{q}]^m} \Gamma'$: in this case, the process $P_{\mathbf{p}}$ playing role \mathbf{p} in session s is a selection on $s[\mathbf{p}]$ towards \mathbf{q} (possibly within a process definition); while the process $P_{\mathbf{q}}$ playing role \mathbf{q} in session s is a branching on $s[\mathbf{q}]$ from \mathbf{p} (possibly within a process definition). Therefore, by $[\mathbf{R}\text{-}\oplus\&]$ in Fig. 2, P can correspondingly reduce to P' by transmitting either a basic value v or a channel endpoint $s'[\mathbf{p}']$ from \mathbf{p} to \mathbf{q} in session s (possibly after a finite number of transitions under rule $[\mathbf{R}\text{-}\mathbf{X}]$). The resulting continuation process P' is typed by Γ' . The assertion that there exists G' such that $G' \sqsubseteq_s \Gamma'$ follows from $\Gamma \xrightarrow{s[\mathbf{p}][\mathbf{q}]^m} \Gamma'$, $G \sqsubseteq_s \Gamma$, and Thm. 2.

Prop. 5 below says that if a process P satisfies the assumptions of session fidelity (Thm. 6) then all its reductums will satisfy such assumptions, too. This means that if P enjoys session fidelity, then all its reductums enjoy session fidelity, too.

Proposition 5. *Assume $\emptyset \cdot \Gamma \vdash P$, where $G \sqsubseteq_s \Gamma$, $P \equiv \Pi_{\mathbf{p} \in I} P_{\mathbf{p}}$, and $\Gamma = \bigcup_{\mathbf{p} \in I} \Gamma_{\mathbf{p}}$ such that, for each $P_{\mathbf{p}}$, we have $\emptyset \cdot \Gamma_{\mathbf{p}} \vdash P_{\mathbf{p}}$. Further, assume that each $P_{\mathbf{p}}$ is either $\mathbf{0}$ (up to \equiv), or only plays \mathbf{p} in s , by $\Gamma_{\mathbf{p}}$. Then, $P \rightarrow P'$ implies $\exists \Gamma', G'$ such that $\Gamma \xrightarrow{s} \Gamma'$ and $\emptyset \cdot \Gamma' \vdash P'$, with $G' \sqsubseteq_s \Gamma'$, $P' \equiv \Pi_{\mathbf{p} \in I} P'_{\mathbf{p}}$, and $\Gamma' = \bigcup_{\mathbf{p} \in I} \Gamma'_{\mathbf{p}}$ such that, for each $P'_{\mathbf{p}}$, we have $\emptyset \cdot \Gamma'_{\mathbf{p}} \vdash P'_{\mathbf{p}}$; furthermore, each $P'_{\mathbf{p}}$ is $\mathbf{0}$ (up to \equiv), or only plays \mathbf{p} in s , by $\Gamma'_{\mathbf{p}}$.*

Proof. Straightforward from the proof of Thm. 5, which accounts for all possible transitions from P to P' , and in all cases yields the desired properties for its typing context Γ' .

Lemma 39 (Process Deadlock-Freedom). *Assume $\emptyset \cdot \Gamma \vdash P$, where $G \sqsubseteq_s \Gamma$, $P \equiv \Pi_{\mathbf{p} \in I} P_{\mathbf{p}}$, and $\Gamma = \bigcup_{\mathbf{p} \in I} \Gamma_{\mathbf{p}}$ such that for each $P_{\mathbf{p}}$, we have $\emptyset \cdot \Gamma_{\mathbf{p}} \vdash P_{\mathbf{p}}$. Further, assume that each $P_{\mathbf{p}}$ is either $\mathbf{0}$ (up to \equiv), or only plays \mathbf{p} in s , by $\Gamma_{\mathbf{p}}$. Then, P is deadlock-free.*

Proof. By the assumption $G \sqsubseteq_s \Gamma$ and Lem. 30, Γ is s -deadlock-free.

Consider any P' such that $P \xrightarrow{s} P' \not\rightarrow$ with $P = P_0 \rightarrow P_1 \rightarrow \dots \rightarrow P_n = P' \not\rightarrow$ (for some n) with each reduction $P_i \rightarrow P_{i+1}$ ($i \in 0..n-1$). By Prop. 5, we know that each P_i is well-typed and its typing context Γ_i is such that $\Gamma \xrightarrow{s} \Gamma_i$; moreover, P_i satisfies the single-session requirements of Thm. 6. Now observe that, since the process $P_n = P' \not\rightarrow$ cannot reduce further, by the contrapositive of Thm. 6, we obtain $\Gamma_n \not\rightarrow_s$. Furthermore, since Γ is s -deadlock-free, by Def. 11, we have $\forall s[\mathbf{p}] \in \Gamma_n: \Gamma_n(s[\mathbf{p}]) \leq \mathbf{end}$. Therefore, by $[\mathbf{T}\text{-}\mathbf{0}]$, we have $P' \equiv \mathbf{0}$, which (by Def. 15(1)) is the thesis.

Lemma 40 (Process Liveness). *Assume $\emptyset \cdot \Gamma \vdash P$, where $G \sqsubseteq_s \Gamma$, $P \equiv \Pi_{\mathbf{p} \in I} P_{\mathbf{p}}$, and $\Gamma = \bigcup_{\mathbf{p} \in I} \Gamma_{\mathbf{p}}$ such that for each $P_{\mathbf{p}}$, we have $\emptyset \cdot \Gamma_{\mathbf{p}} \vdash P_{\mathbf{p}}$. Further, assume that each $P_{\mathbf{p}}$ is either $\mathbf{0}$ (up to \equiv), or only plays \mathbf{p} in s , by $\Gamma_{\mathbf{p}}$. Then, P is live.*

Proof. By the assumption $G \sqsubseteq_s \Gamma$ and Lem. 31, Γ is s -live.

The proof proceeds by contradiction: assume that P is *not* live. Since (by hypothesis) each parallel component of P only plays one role \mathbf{p} in session s , this means that there are P', \mathbb{C}, Q such that $P = P_0 \rightarrow P_1 \rightarrow \dots \rightarrow P_n = P' \equiv \mathbb{C}[Q]$ where either:

– $Q = s[\mathbf{p}][\mathbf{q}] \oplus \mathbf{m}(w) \cdot Q'$ (for some \mathbf{m}, w, Q'), and $\exists \mathbb{C}': P' \rightarrow^* \mathbb{C}'[Q']$. By Prop. 5, we know that each P_i is well-typed and its typing context Γ_i is such that $\Gamma \rightarrow_s^* \Gamma_i$; moreover, each P_i satisfies the single-session requirements of Thm. 6. Therefore, P' satisfies the single-session requirements of Thm. 6, and is typed by some Γ' such that $\Gamma \rightarrow_s^* \Gamma'$. Hence, by inversion of typing, Q is typed by some $\Gamma'_{\mathbf{p}}$ (part of Γ') where $\Gamma'_{\mathbf{p}}(s[\mathbf{p}])$ is a (possibly recursive) internal choice towards \mathbf{q} , including a choice $\mathbf{m}(S)$ (where S types the message payload w).

Therefore, we have $\Gamma' \xrightarrow{s[\mathbf{p}]:\mathbf{q} \oplus \mathbf{m}(S)}$. Now, recall that (for the sake of the proof by contradiction) we are assuming that no sequence of reductions of P' can fire the top-level selection of Q ; this means that no parallel component of P' ever exposes an external choice by role \mathbf{q} including message label \mathbf{m} ; correspondingly, there is at least one fair path beginning with Γ' (yielded by Thm. 5) that never fires a transmission label $s[\mathbf{p}][\mathbf{q}]\mathbf{m}'$ (for any \mathbf{m}'). But then, such a fair path starting from Γ' is not live, hence (by Def. 13) we obtain that Γ is *not* live, a desired contradiction;

– $Q = s[\mathbf{p}][\mathbf{q}] \& \{\mathbf{m}_i(x_i) \cdot Q'_i\}_{i \in I}$ (for some $I, \mathbf{m}_i, x_i, Q'_i$), and $\exists \mathbb{C}', k \in I, w: P' \rightarrow^* \mathbb{C}'[Q'_k \{w/x_k\}]$. The proof is similar to the previous case, and reaches a similar contradiction.

In summary, we have shown that assuming P is not live leads to a contradiction. Consequently, we can conclude that P is live.

Theorem 7 (Process Deadlock-Freedom, Liveness). *Assume $\emptyset \cdot \Gamma \vdash P$, where $G \sqsubseteq_s \Gamma$, $P \equiv \Pi_{\mathbf{p} \in I} P_{\mathbf{p}}$, and $\Gamma = \bigcup_{\mathbf{p} \in I} \Gamma_{\mathbf{p}}$ such that for each $P_{\mathbf{p}}$, we have $\emptyset \cdot \Gamma_{\mathbf{p}} \vdash P_{\mathbf{p}}$. Further, assume that each $P_{\mathbf{p}}$ is either $\mathbf{0}$ (up to \equiv), or only plays \mathbf{p} in s , by $\Gamma_{\mathbf{p}}$. Then, P is deadlock-free and live.*

Proof. Apply Lems. 39 and 40.