LangGPT: Rethinking Structured Reusable Prompt Design Framework for LLMs from the Programming Language

Ming Wang¹, Yuanzhong Liu², Xiaoyu Liang³, Songlian Li², Yijie Huang¹, Xiaoming Zhang¹, Sijia Shen⁴, Chaofeng Guan⁴, Daling Wang¹, Shi Feng¹, Huaiwen Zhang¹, Yifei Zhang¹, Minghui Zheng³, Chi Zhang¹,

¹Northeastern University, ²Wuhan University, ³Zhejiang University, ⁴Shenyang Aerospace University Correspondence: wangdaling@cse.neu.edu.cn, liu.yuanzhong@foxmail.com

Abstract

LLMs have demonstrated commendable performance across diverse domains. Nevertheless, formulating high-quality prompts to instruct LLMs proficiently poses a challenge for non-AI experts. Existing research in prompt engineering suggests somewhat scattered optimization principles and designs empirically dependent prompt optimizers. Unfortunately, these endeavors lack a structured design template, incurring high learning costs and resulting in low reusability. In addition, it is not conducive to the iterative updating of prompts. Inspired by structured reusable programming languages, we propose LangGPT, a dual-layer prompt design framework as the programming language for LLMs. LangGPT has an easy-to-learn normative structure and provides an extended structure for migration and reuse. Experiments illustrate that LangGPT significantly enhances the performance of LLMs. Moreover, the case study shows that LangGPT leads LLMs to generate higher-quality responses. Furthermore, we analyzed the ease of use and reusability of LangGPT through a user survey in our online community¹.

1 Introduction

Large language models (LLMs) can execute diverse tasks (Sun et al., 2023b,c; Yu et al., 2023) based on powerful language comprehension, reasoning, and generation capabilities. Injecting domain knowledge also enables LLMs to perform domain-related specific tasks (Wang et al., 2023a; Li et al., 2023c). Thus, LLM-based applications have attracted the attention of many non-AI experts, who have shown keen interest in using LLMs for programming, writing articles, medical diagnostics, etc (Zamfirescu-Pereira et al., 2023a). However, fully unleashing these capabilities of LLMs requires premium quality prompts (Eric, 2022; Chen et al., 2023; Gajula, 2023), but non-AI experts, even some AI-related practitioners, may not have the experience to write such prompts. Therefore, prompt engineering has been widely focused on (Varshney and Surla, 2023; Meskó, 2023; Wang, 2023).

Prompt engineering is a typically empirical science, which mainly involves designing and optimizing the prompts. As LLMs can understand natural language, it is possible to ask them to execute tasks through unstructured natural language instructions directly. On this basis, some tricks for prompt optimization were first explored by researchers. Bsharat et al. (2023) introduce 26 guiding principles designed to improve the performance of LLMs. Liu and Chilton (2022) have evaluated 5493 generations covering 51 themes and 51 styles throughout five experiments in the text-to-image task and summaries prompt design guidelines. In addition to these tricks, some researchers have also focused on optimizing prompts based on historical data. Sun et al. (2023a) guide LLMs to derive new prompts for a given instance from the incorrect reasoning, and then summarise the corresponding prompts for each instance as a reference for optimizing prompts. Pryzant et al. (2023) leverage mini-batches of data to form natural language "gradients" and utilize beam search and bandit selection procedure to edit the current prompt in the opposite semantic direction of the gradient. Fan et al. (2023) analyze a large prompt database and present an automatic prompt optimization framework.

Direct prompt optimization principles and methods based on historical data require a wealth of experience. Moreover, these usually perform well only for specific tasks or domains. To improve generalization, some researchers have proposed adaptive prompt optimization methods. Guo et al. (2023) connect LLMs with evolutionary algorithms and proposes a novel framework for dis-

¹The homepage: https://langgpt.ai, the Github project: https://github.com/langgptai/LangGPT, the tools and experiments: https://github.com/sci-mwang/LangGPT-tools, and the Huggingface organization: https://huggingface.co/langgptai

crete prompt optimization, called EvoPrompt. Li et al. (2023a) design a multi-round dialogue alignment strategy and utilizes GPT-4 (Achiam et al., 2023) to generate a readability prompt set. Meanwhile, they propose an efficient prompt screening metric that can filtrate high-quality prompts with linear complexity. Wang et al. (2023b) introduce PromptAgent which can reflect on model errors and generate constructive error feedback to induce precise expert-level insights and in-depth instructions. Hao et al. (2022) and Cheng et al. (2023) optimize prompts by aligning human and LLMs' preference styles.

Prompt optimization can significantly improve the performance of LLMs. However, such fragmented, unstructured prompt optimization principles lead to low reusability of quality prompts. In addition, it is not conducive to iterative updating of prompts. Consequently, some researchers have devised rules for the construction of prompts. Nigh (2023) collects vast quality prompts and summaries of the CRISPE rule for prompt design. Zamfirescu-Pereira et al. (2023b) take a prototype LLM-based chatbot design tool as the design probe, supporting non-AI-experts engage in "end-user prompt engineering". Some researchers have designed prompt construction rules for applications in different domains. Cao et al. (2023) present various prompt templates on deep learning program repair tasks for ChatGPT. Yeh et al. (2022) reformulate the biomedical relation extraction task as a cloze-test task under a simple prompt formulation.

These methods, which are based on a great deal of experience in use, have strong domain relevance and model relevance, with low generalisability, flexibility, and reusability. To further unleash the performance of LLMs, some researchers have defined agents. Agents empower LLMs to use tools, acquire domain knowledge, retain long-term or shortterm memories, and plan (Xu et al., 2023; Xi et al., 2023; Park et al., 2023). Although agent methods (Hong et al., 2023; Wu et al., 2023) have systematically designed the key components of the prompt and reserved flexible customization interfaces, the learning costs are very high. In addition, it is difficult for non-AI experts to modify agent designs.

To promote LLM-based applications and further stimulate the potential of LLMs, we would like to design a generalizable, reusable, and extensible prompt template. In addition, the template ought to be easy to learn and easy to work with for non-AI experts. Inspired by the belief that prompt is the programming language of the LLM era (Alouani, 2023; Mund, 2023), we have designed Language for GPT-like LLMs (LangGPT), a prompt design framework. LangGPT refers to the systematic, prescriptive, and reusable properties of programming languages, and retains the flexibility and extensibility of natural languages. We analyzed the differences between natural languages and programming languages and designed LangGPT as a dual-layer structure, which consists of modules and internal elements. Modules in LangGPT can be divided into two categories: inherent modules and extension modules. For inherent modules, we design the necessary internal elements of each module in detail and give example templates. For the extension modules, we unified the design of the basic internal elements. Experiments and case studies have demonstrated that LangGPT is better than baseline prompts for bootstrapping LLMs. Furthermore, with the belief that better instruction understanding leads to greater performance of LLMs (Ouyang et al., 2022; Chung et al., 2024), we constructed a dataset for LangGPT prompt generation. Experiments demonstrate that LLMs trained on the LangGPT prompt tasks have significantly improved performance. In addition, we conducted user research to prove the ease of use and user satisfaction of LangGPT based on our community.

In summary, the contributions of this work include: (1) We proposed a dual-layer structured prompt design framework LangGPT to improve the generalization and reusability of prompts, reducing the learning cost of prompt design. (2) We demonstrated through experiments and case studies that LangGPT prompts can better guide LLMs in executing tasks. Meanwhile, we experimentally proved that training on generating LangGPT prompts can improve the performance of LLMs. (3) We have built an online community based on LangGPT and conducted a user survey to verify the ease of use and reusability of LangGPT.

2 Prompt Design Principles with Programming Language

Programming languages are more standardized and reusable compared to natural languages. To design high-quality reusable prompts, we analyzed the differences between natural languages and programming languages and proposed prompt design principles.

Aspects	Natural Language	Programming Language		
Audience	Natural languages are spoken by humans	Programming languages are prepared by		
	to humans (Grune et al., 2012).	humans for machines (Chakray, 2018).		
	Natural languages have loose and flexible	Computers can only understand fixed in-		
Structure	syntax and semantics, permitting creativity	structions and require programming lan-		
Structure	and variation and possessing a high degree	guages to have strict, rigorous syntax and		
	of fault tolerance.	semantics.		
	Natural languages are more ambiguous,	Programming languages are less ambigu-		
Ambiguity	but humans can clarify the meaning of ex-	ous because they need to provide comput-		
Amolguity	pressions (Chakray, 2018; Aho, 2007).	ers with clear instructions (GeeksforGeeks,		
	pressions (Chakray, 2018, Ano, 2007).	2023).		
	Natural languages evolve naturally over	Programming languages are specifically		
Evolution	time through human use and communi-	designed to communicate with machines (Sebesta, 2012). New syntax rules and fea- tures require explicit upgrades or releases (Pratt et al., 1984).		
	cation (Sipser, 1996). Natural languages			
	are flexible in adding new words and			
	meanings and discarding outdated usages			
	(Fromkin et al., 2018).			

Table 1: Difference between programming languages and natural languages

2.1 Difference between Programming Languages and Natural Languages

While natural languages are primarily used for communication, programming languages are designed to instruct machines to execute tasks (GeeksforGeeks, 2023). The different purposes have led to very different contexts for the creation and evolution of the two languages. The main differences between these languages are shown in Table 1.

In summary, the main difference between the two languages is that natural languages are more vague and flexible, while programming languages are more standardized and precise. LLMs essentially perform a large number of computations and share many similarities with machines. Therefore, we propose LangGPT, a natural language programming framework for LLMs, by drawing on the characteristics of programming languages and combining the advantages of natural languages.

2.2 Principles for Prompt Design

We improve prompts by referring to the design ideas of programming languages. After analyzing the differences between programming languages and natural languages, we propose the design principles for prompts: (1) **Prompts should have a regularised format**. Flexible and ambiguous natural languages are difficult to understand for LLMs. Format-constrained prompts make users' purpose and requirements more salient. (2) **The structure of prompts should be extensible**. Custom structures facilitate users to design suitable prompts according to their domains and tasks. (3) **Specific requirements must be clear and complete**. Both instructions and additional requirements should be explicit and complete to avoid misunderstandings or biases. (4) **Languages should be flexible**. Where the requirements are clear, flexible languages can be better adapted to different domains. In addition, flexible languages are easy for users to learn.

3 Natural Language Programming Framework of Prompts for LLMs

Based on the design principles, we present Lang-GPT, the natural language programming framework with a dual-layer architecture for LLMs.

3.1 Overall Dual-layer Structure

To systematically design prompts that meet the principles, we have made full reference to the design ideas and structures of object-oriented programming languages (Rentsch, 1982; Lutz, 2010). We consider the prompt as a software project and analogize the prompt design process with the software development process. The correspondence is shown in Figure 1.

Based on analogical analyses, it can be found that natural language prompts have a similar multilevel structure as programming languages. Therefore, we refer to the structure of programming languages propose a dual-layer structure for prompt

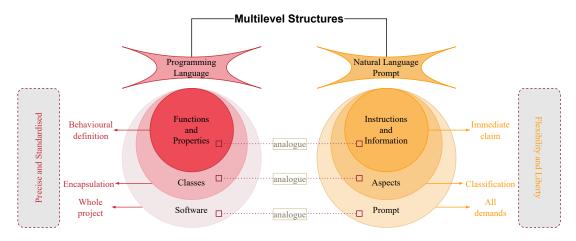


Figure 1: Analogy between programming language and natural language prompt. The analogy between the two types of languages was analyzed in terms of their hierarchical structure. Circles of different sizes indicate different layers. Smaller circles indicate closer to the inner layers, corresponding to darker colors.

Scenario	Prof.	Cons.	Goal	Init.	Ex.	Wkflo.	Skill	Sug.	Bkgrd.	Style	Outf.
Writing	\checkmark	X	\checkmark	\checkmark	\checkmark						
Role-playing	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark	×	\checkmark	\checkmark	\checkmark	\checkmark	×
Entertainment	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark	×	\checkmark	\checkmark	×	\checkmark	X
Supplementary Learning	\checkmark										
Prompt Optimisation	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark	X	\checkmark	×	X	\checkmark
Prompt Hacking	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark	X	\checkmark	×	X	\checkmark
Drawing	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark	X	X	\checkmark	\checkmark	×
Business Operation	\checkmark	X	\checkmark								

Table 2: Status of inherent module definitions. The table lists the eight categories of application scenarios we have defined so far and the modules defined for these scenarios. A \checkmark indicates that a corresponding module has been designed for this scenario. In contrast, a \checkmark indicates that it was not designed.

design, and define the notion of module and element for prompts.

A complete prompt contains several modules. Modules are similar to classes in programming languages, and each module represents an aspect of the requirements for LLMs. For instance, prompts can be augmented in terms of constraints, goals, profiles, etc. Within a module, a number of internal elements are included. Elements are similar to functions and properties in programming languages and represent the content of direct and specific instructions to LLMs. For example, "Output should be no more than 500 words" could be an element in a prompt that belongs to the module **constraint**.

A dual-layer structure can be a good way to standardize the formatting of prompts. However, the flexibility of natural languages would be lost if prompts are too strictly required to follow predefined standard modules and internal elements. In addition, it will reduce the generalisability of LangGPT to different tasks in different domains, which is not conducive to the reuse of quality prompts. To solve these problems, we divided the types of modules and elements into prompts. We defined **inherent module** and **basic element** as the predefined dual-layer prompt template. Moreover, we constructed **extension module** and **custom element** that support customization. We provide both Markdown (Gruber, 2012) and JSON (Pezoa et al., 2016) formats for inherent modules and extension modules. Furthermore, we have written basic elements for different modules and defined principles for writing custom elements.

3.2 Tectonics of Inherent Modules

The module serves as a connection between the complete prompt and the instruction unit and plays a very important role in controlling the structure of the prompt.

We define inherent modules for critical aspects

Module	Samples of Basic Elements
Profile	• You are a magazine editor.
Goal	• You need to generate a title for the article.
Constraint	• The length of the title should not exceed 20 words.
	### Extracting the kernel content
	• For the given article $\langle ARTICLE \rangle$, please execute the following actions:
Workflow	• Analyse the theme of the article;
WOIKIIOW	• Detecting the main objects and related things described in the article;
	• Summarising the core content from the article;
	• Save the kernel content.
Style	• The style of the title should be formal.

Table 3: Examples of basic internal elements of inherent modules in the writing scenario. This prompt leads LLMs to generate a title for a given article. We have chosen five modules as examples i.e. **profile**, **goal**, **constraint**, **workflow**, and **style**. Particularly, for the workflow module, we show a function-like element.

that are required for almost all prompts. Furthermore, we define inherent modules for certain scenarios that are relevant to the application for ease of learning and use. Table 2 shows the inherent modules we defined for some scenarios.

In Table 2, Prof. indicates what is expected of LLMs in terms of roles, including profiles, character portraits, etc. Cons. denotes constraints or attention, i.e., ranges that LLMs are not allowed to exceed and requirements that must be met when generating responses, etc. Goal lists the goals that the user wants to achieve, which is what the LLMs need to accomplish. Init. is called initialization to inform LLMs that they are about to start a dialogue. Sometimes a specified first sentence is also given in this module. Ex. gives LLMs input-output pairs as examples to learn from. Wkflo. instructs the workflow when executing a task, similar to the CoT approach (Wei et al., 2023). It is often necessary to instantiate this module when the task requirements are more complex. Skill is used to suggest to LLMs the skills they possess. LLMs that have undergone tool learning can be guided to invoke tools to execute tasks more accurately. In addition, we plan to provide the ability to use tools under this module in future work, with reference to the design of agent tools (Chase, 2022; Hong et al., 2023). Sug. includes suggestions and behavioral planning for LLMs. This module focuses on listing common scenarios and giving behaviors or responses that LLMs can take in such situations. Bkgrd. indicates the background information and the memories that LLMs are required to have when performing their tasks. Style qualifies the style of responses generated by LLMs. Outf. defines the

LLMs' **output-format**. Specifying the output format improves the efficiency and accuracy of the results extraction in certain tasks.

The bolded font is used as the name of the modules in the introduction list.

3.3 Internal Basic Elements

Three purposes are typically included in prompts: (1) Implying a certain message to LLMs; (2) Letting LLMs execute a certain task with or without output; (3) The combination of the first two.

The first of these is very similar to the assignment of properties or variables in programming languages. Correspondingly, the last two categories are similar to functions in programming languages. Thus, we construct these three types of basic elements. We use "The $\langle PROPERTY \rangle$ is $\langle VALUE \rangle$." to simulate an assignment. For the latter two cases, it is necessary to specify the input information, the task, and the output, where input and output can be omitted. We simulate functions using a form like this: "For the given $\langle PROPERTY \rangle$ of $\langle VALUE \rangle$, please execute the following actions: (ACTIONS); Return the $\langle RESULT \rangle$." In the basic element writing patterns we provide, the contents contained in the angle brackets need to be populated according to the module and the usage scenario. It is important to note that the writing patterns we have provided only specify the idea of writing internal elements. To improve the generalisability and flexibility of prompts, the language can be adapted to express key information. In Table 3 we show some examples of the basic elements in some modules.

3.4 Extension Module and Custom Element

The inherent modules we have defined have been as comprehensive as possible to cover the many aspects of prompts. Furthermore, we add application scenarios and modules covered by LangGPT. However, limited by our own capabilities and domain knowledge, we were unable to consider all application scenarios of LLMs.

Therefore, in addition to inherent modules and basic elements, we define templates of extension modules and custom elements to improve the generalization and reusability of prompts. For application scenarios where inherent modules cannot cover all aspects, new extension modules can be defined as needed. After defining the extension module, the internal elements should also be designed according to the requirements of the extension module. In addition, if inherent modules are compatible with the needs of the scenario but the basic elements cannot meet all of the requirements, custom elements can be added directly to the inherent modules.

4 Experiments

To validate the advancement of the proposed Lang-GPT, we conducted experiments in two aspects: (1) leveraging LangGPT prompts to bootstrap LLMs to perform tasks; and (2) training LLMs on the task of generating LangGPT prompts.

4.1 Experiment Settings

4.1.1 Large Language Models

We selected these LLMs shown in Table 4 for evaluation.

LLM	Scale	Version
Qwen (Bai et al., 2023)	7B	1.5-chat
Deepseek (DeepSeek-AI, 2024)	7B	chat
Llama (AI@Meta, 2024)	8B	3-instruct
Yi (01-ai, 2023)	6B	1.5-chat
bloomz (Muennighoff et al., 2022)	7B	7b1
internlm (Cai et al., 2024)	7B	2-chat

Table 4: LLMs used in experiments.

4.1.2 Evaluation

There are differences in understanding of language and instructions between humans and LLMs. Thus, it is difficult and meaningless to evaluate the quality of prompts directly through metrics such as textual semantics, information richness, etc. Since the aim of prompts is to guide LLMs to perform tasks, we believe that the quality of prompts can




Figure 2: A case of a flatterer. The responses of ChatGPT-3.5 to the user under three different prompts. Mingyuan University doesn't really exist.

Dataset	Source	Length	Method
LangGPT ^(c)	community	146	manually
LangGPT ^(o)	oasst1	3185	Deepseek
LangGPT ^(a)	Alpaca	5200	Deepseek

Table 5: The composition of LangGPT prompt generation dataset. Superscript letters indicate different subsets of the dataset, where 'c' denotes data from the community, and 'o' and 'a' denote data from the oaast1 and alpaca datasets, respectively.

be evaluated indirectly through the performance of LLMs. Based on this idea, we designed two methods to evaluate the quality of the proposed LangGPT. The first approach is to use LangGPT to directly instruct LLMs to perform tasks and compare the performance with that without LangGPT. In addition to this way, we constructed the Lang-GPT prompt generation task to train LLMs. On the one hand, we collected prompts shared by users in the LangGPT community and worked on cleaning and touching them up. On the other hand, with the help of Deepseek-V2-Chat (DeepSeek-AI, 2024), we constructed datasets for the LangGPT prompt generation using the Alpaca dataset (Taori et al., 2023) and the oaast1 dataset (Köpf et al., 2023; Li et al., 2023b). The composition of the whole dataset is shown in Table 5.

For the evaluation of the performance of LLMs,

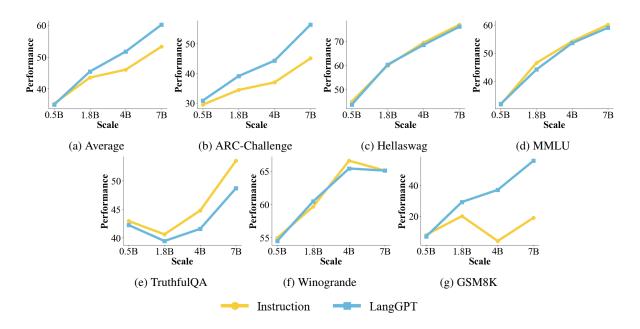


Figure 3: Results of different scales of Qwen. Each subfigure represents a different task, whereas the first subfigure represents the overall performance. 'Instruction' indicates that LangGPT prompts are not used while 'LangGPT' indicates that they are used.

we utilize the Open LLM Leaderboard² (Beeching et al., 2023; Gao et al., 2021) as the main evaluation tool, which consists of ARC-challenge (Clark et al., 2018), Hellaswag (Zellers et al., 2019), MMLU (Hendrycks et al., 2021), TruthfulQA (Lin et al., 2022), Winogrande (Sakaguchi et al., 2019), and gsm8k (Cobbe et al., 2021).

4.2 Main Results of Performance and Analysis

The most intuitive manifestation of the quality of prompts is the performance of LLMs in performing tasks guided by them. Thus, we first evaluated the performance of LLMs in two settings to verify the quality of LangGPT prompts. The results are shown in Table 6. From the results, it can be seen that LangGPT can overall improve the performance of LLMs on executing tasks. In addition, we noticed that bloomz perform worse with the LangGPT setting. We hypothesize that this is because the LangGPT prompts are in more complex formats that may not be fully understood by lowperformance models. To test this hypothesis, we conducted experiments using Qwen of different scales. The results are shown in Figure 3. From the results, it can be seen that LangGPT has a worse gain for smaller LLMs with worse overall performance. In particular, the performance is weaker




Figure 4: Ratings on ease of use in user survey. The lowest score is 0, which means very difficult to use, and the highest score is 5, which means very easy to use. The ":" is used to separate scores and percentages.

than the setting without LangGPT prompts at 0.5B Qwen.

Moreover, we also constructed the LangGPT prompt generation task for supervised fine-tuning of LLMs in addition to directing LLMs to perform tasks. We used LoRA (Hu et al., 2021; Zheng et al., 2024) to fine-tune five open-source LLMs and test their performance. The results are shown in Table 6. From the results, the overall performance of the LLMs trained by the LangGPT prompt generation task all performed better than the original LLMs.

From the results of the two tasks above, it is clear that LangGPT prompts can help improve the

²We conducted our experiments on tasks from the first version of Open LLM Leaderboard, which has now been updated to version 2, and new experiments are in progress.

Model	Average	ARC	HellaSwag	MMLU	TruthfulQA	Winogrande	GSM8K
Qwen★	53.30	45.05	76.97	60.10	53.54	65.11	19.03
Qwen [♣]	60.20	56.40	76.14	59.02	48.72	65.11	55.80
Qwen♠	55.38	54.35	76.80	61.30	50.17	<u>69.77</u>	19.86
internlm★	64.00	51.28	78.31	60.55	54.09	74.66	65.13
intern1m [*]	66.00	57.00	79.76	61.67	51.93	77.19	68.46
intern1m [•]	64.29	50.94	78.38	60.38	54.79	74.51	66.72
Llama★	65.99	56.83	75.80	63.84	51.65	72.06	75.74
Llama [♣]	67.13	60.32	78.34	65.31	50.03	75.22	73.54
Llama	67.94	62.29	79.26	67.41	52.51	76.48	69.67
Deepseek★	56.85	49.15	77.69	50.04	47.80	69.77	46.63
Deepseek [♣]	59.28	54.35	78.38	50.77	49.53	72.53	50.11
Deepseek 🔶	60.05	55.55	79.37	52.44	46.86	76.95	49.13
Yi★	65.31	54.61	77.33	63.42	52.45	71.51	72.55
Yi♣	66.02	59.81	78.77	61.89	50.13	71.67	73.84
Yi♠	66.20	61.35	77.93	64.76	49.82	74.66	68.69
bloomz★	44.04	45.52	63.99	44.00	45.21	65.43	0.07
bloomz [‡]	41.93	42.74	61.73	37.01	45.78	64.33	0.00
bloomz♠	43.34	<u>45.56</u>	64.37	40.69	44.57	64.33	<u>0.53</u>

Table 6: Performance of LLMs at different settings. The ' \star ' indicates that the original LLMs and LangGPT prompts are not used. The ' \clubsuit ' indicates that LangGPT prompts are used and the ' \clubsuit ' indicates the LLMs are fine-tuned. **Bold fonts** indicate results that are better than the original performance with LangGPT prompts. <u>Underlined fonts</u> indicate results that are better than the original performance after fine-tuning.

performance of LLMs.

4.3 Ease of Use

To evaluate the ease of use of LangGPT, we conducted a user survey in our online community. The community has been running for more than one year and has amassed thousands of users from a wide range of industries, such as manufacturing, construction, information technology, finance, entertainment, etc. Therefore, the objectivity of the survey results can be guaranteed. We designed a complete questionnaire about the LangGPT experience to ensure the quality of answers. The questionnaire included a rating question on ease of use. The results of the user ratings are shown in Figure 4.

As can be seen from Figure 4, 87.81% of users gave a score of 3 or higher, which indicates users' approval of LangGPT's ease of use. In addition, LangGPT's overall satisfaction score in the user survey was 8.48 out of 10.

4.4 Case Study

To demonstrate the effect of LangGPT more intuitively, we filtered specific cases from the community. We guided the LLMs to play a flatterer using LangGPT prompt and direct instruction, an example of which is given in Figure 2.

In this example, the Instruction-only promptguided ChatGPT showed no clear characterisation of the role and gave responses that were almost just a repetition of what the user had expressed. In contrast, LangGPT-guided ChatGPT is even more bottomless in its blow-by-blow approach to the user-given subject and expresses compliments from a wider range of perspectives.

5 Conclusion

In this paper, we present LangGPT, a dual-layer structured and extensible framework for prompt design. LangGPT has a systematic structure similar to object-oriented programming languages and is easy to learn and reuse. Experiments demonstrate that LangGPT performs better in guiding LLMs to perform tasks. We also conducted a user survey in the community built on LangGPT to verify the ease of use and reusability of LangGPT. However, experiments also show that LangGPT is currently poorly adapted to low-performance LLMs. In future work, we will further optimize the design of LangGPT, especially on low-performance LLMs. In addition, support for LLMs using third-party tools and custom tools will be added.

Ethical Statement

In the application of LLM, ethical disputes may arise, but the design of LangGPT and the process of writing this paper avoided possible ethical issues. The examples given in this paper involving Mingyuan University are fictional and do not involve the evaluation or critique of any real individuals.

Limitation

The evaluation of the performance of LLMs in this paper relies on the Open LLM Leaderboard, and although it is widely adopted, the evaluation results still have some limitations.

References

- 01-ai. 2023. Building the Next Generation of Open-Source and Bilingual LLMs. https://github.com/01ai/Yi. Original-date: 2023-11-03T16:08:37Z.
- Josh Achiam, Steven Adler, Sandhini Agarwal, et al. 2023. GPT-4 Technical Report. *arXiv preprint*. ArXiv:2303.08774 [cs].
- Alfred V Aho. 2007. *Compilers: principles, techniques and tools.* Pearson Education India.

AI@Meta. 2024. Llama 3 model card.

- Nabil Alouani. 2023. Prompt Engineering Could Be the Hottest Programming Language of 2024 — Here's Why. https://towardsdatascience.com.
- Jinze Bai, Shuai Bai, Yunfei Chu, et al. 2023. Qwen Technical Report. *arXiv preprint*. ArXiv:2309.16609 [cs].
- Edward Beeching, Clémentine Fourrier, Nathan Habib, Sheon Han, Nathan Lambert, Nazneen Rajani, Omar Sanseviero, Lewis Tunstall, and Thomas Wolf. 2023. Open Ilm leaderboard. https://huggingface. co/spaces/open-llm-leaderboard/open_llm_ leaderboard.
- Sondos Mahmoud Bsharat, Aidar Myrzakhan, and Zhiqiang Shen. 2023. Principled Instructions Are All You Need for Questioning LLaMA-1/2, GPT-3.5/4. *arXiv preprint*. ArXiv:2312.16171 [cs].
- Zheng Cai, Maosong Cao, Haojiong Chen, Kai Chen, Keyu Chen, Xin Chen, Xun Chen, Zehui Chen, Zhi Chen, Pei Chu, Xiaoyi Dong, Haodong Duan, Qi Fan, Zhaoye Fei, Yang Gao, Jiaye Ge, Chenya Gu, Yuzhe Gu, Tao Gui, Aijia Guo, Qipeng Guo, Conghui He, Yingfan Hu, Ting Huang, Tao Jiang, Penglong Jiao, Zhenjiang Jin, Zhikai Lei, Jiaxing Li, Jingwen Li, Linyang Li, Shuaibin Li, Wei Li, Yining Li, Hongwei Liu, Jiangning Liu, Jiawei Hong, Kaiwen Liu, Kuikun Liu, Xiaoran Liu, Chengqi Lv,

Haijun Lv, Kai Lv, Li Ma, Runyuan Ma, Zerun Ma, Wenchang Ning, Linke Ouyang, Jiantao Qiu, Yuan Qu, Fukai Shang, Yunfan Shao, Demin Song, Zifan Song, Zhihao Sui, Peng Sun, Yu Sun, Huanze Tang, Bin Wang, Guoteng Wang, Jiaqi Wang, Jiayu Wang, Rui Wang, Yudong Wang, Ziyi Wang, Xingjian Wei, Qizhen Weng, Fan Wu, Yingtong Xiong, Chao Xu, Ruiliang Xu, Hang Yan, Yirong Yan, Xiaogui Yang, Haochen Ye, Huaiyuan Ying, Jia Yu, Jing Yu, Yuhang Zang, Chuyu Zhang, Li Zhang, Pan Zhang, Peng Zhang, Ruijie Zhang, Shuo Zhang, Songyang Zhang, Wenjian Zhang, Wenwei Zhang, Xingcheng Zhang, Xinyue Zhang, Hui Zhao, Qian Zhao, Xiaomeng Zhao, Fengzhe Zhou, Zaida Zhou, Jingming Zhuo, Yicheng Zou, Xipeng Qiu, Yu Qiao, and Dahua Lin. 2024. InternIm2 technical report. Preprint, arXiv:2403.17297.

- Jialun Cao, Meiziniu Li, Ming Wen, and Shing-chi Cheung. 2023. A study on Prompt Design, Advantages and Limitations of ChatGPT for Deep Learning Program Repair. *arXiv preprint*. ArXiv:2304.08191 [cs].
- Chakray. 2018. Programming Languages: Types and Features.
- Harrison Chase. 2022. LangChain: Building applications with LLMs through composability. https://github.com/langchain-ai/langchain.
- Banghao Chen, Zhaofeng Zhang, Nicolas Langrené, and Shengxin Zhu. 2023. Unleashing the potential of prompt engineering in Large Language Models: a comprehensive review. *arXiv preprint*. ArXiv:2310.14735 [cs] version: 2.
- Jiale Cheng, Xiao Liu, Kehan Zheng, et al. 2023. Black-Box Prompt Optimization: Aligning Large Language Models without Model Training. arXiv preprint. ArXiv:2311.04155 [cs].
- Hyung Won Chung, Le Hou, Shayne Longpre, Barret Zoph, Yi Tay, William Fedus, Yunxuan Li, Xuezhi Wang, Mostafa Dehghani, Siddhartha Brahma, Albert Webson, Shixiang Shane Gu, Zhuyun Dai, Mirac Suzgun, Xinyun Chen, Aakanksha Chowdhery, Alex Castro-Ros, Marie Pellat, Kevin Robinson, Dasha Valter, Sharan Narang, Gaurav Mishra, Adams Yu, Vincent Zhao, Yanping Huang, Andrew Dai, Hongkun Yu, Slav Petrov, Ed H. Chi, Jeff Dean, Jacob Devlin, Adam Roberts, Denny Zhou, Quoc V. Le, and Jason Wei. 2024. Scaling Instruction-Finetuned Language Models. *Journal of Machine Learning Research*, 25(70):1–53.
- Peter Clark, Isaac Cowhey, Oren Etzioni, Tushar Khot, Ashish Sabharwal, Carissa Schoenick, and Oyvind Tafjord. 2018. Think you have solved question answering? try arc, the ai2 reasoning challenge. *Preprint*, arXiv:1803.05457.
- Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro

Nakano, Christopher Hesse, and John Schulman. 2021. Training verifiers to solve math word problems. *Preprint*, arXiv:2110.14168.

- DeepSeek-AI. 2024. DeepSeek llm: Scaling opensource language models with longtermism. *arXiv preprint arXiv:2401.02954*.
- Mihail Eric. 2022. A complete introduction to prompt engineering for large language models. https://www.mihaileric.com.
- Ling Fan, Harry Jiannan Wang, Kunpeng Zhang, et al. 2023. Towards an Automatic Prompt Optimization Framework for AI Image Generation. In *HCI International 2023 Posters*, Communications in Computer and Information Science, pages 405–410, Cham. Springer Nature Switzerland.
- Victoria Fromkin, Robert Rodman, and Nina Hyams. 2018. *An Introduction to Language*. Cengage Learning.
- Nagaraju Gajula. 2023. A Guide to Prompt Engineering in Large Language Models. https://www.latentview.com.
- Leo Gao, Jonathan Tow, Stella Biderman, Sid Black, Anthony DiPofi, Charles Foster, Laurence Golding, Jeffrey Hsu, Kyle McDonell, Niklas Muennighoff, Jason Phang, Laria Reynolds, Eric Tang, Anish Thite, Ben Wang, Kevin Wang, and Andy Zou. 2021. A framework for few-shot language model evaluation.
- GeeksforGeeks. 2023. Natural Language Processing(NLP) VS Programming Language. https://www.geeksforgeeks.org. Section: Python.
- John Gruber. 2012. Markdown: Syntax. http://daringfireball.net/projects/markdown.
- Dick Grune, Kees Van Reeuwijk, Henri E Bal, et al. 2012. *Modern compiler design*. Springer Science & Business Media.
- Qingyan Guo, Rui Wang, Junliang Guo, et al. 2023. Connecting Large Language Models with Evolutionary Algorithms Yields Powerful Prompt Optimizers. *arXiv preprint*. ArXiv:2309.08532 [cs].
- Yaru Hao, Zewen Chi, Li Dong, and Furu Wei. 2022. Optimizing Prompts for Text-to-Image Generation. *arXiv preprint*. ArXiv:2212.09611 [cs].
- Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. 2021. Measuring massive multitask language understanding. *Preprint*, arXiv:2009.03300.
- Sirui Hong, Mingchen Zhuge, Jonathan Chen, et al. 2023. MetaGPT: Meta Programming for A Multi-Agent Collaborative Framework. *arXiv preprint*. ArXiv:2308.00352 [cs].
- Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. 2021. Lora: Low-rank adaptation of large language models. *Preprint*, arXiv:2106.09685.

- Andreas Köpf, Yannic Kilcher, Dimitri von Rütte, Sotiris Anagnostidis, Zhi-Rui Tam, Keith Stevens, Abdullah Barhoum, Nguyen Minh Duc, Oliver Stanley, Richárd Nagyfi, Shahul ES, Sameer Suri, David Glushkov, Arnav Dantuluri, Andrew Maguire, Christoph Schuhmann, Huu Nguyen, and Alexander Mattick. 2023. Openassistant conversations – democratizing large language model alignment. *Preprint*, arXiv:2304.07327.
- Chengzhengxu Li, Xiaoming Liu, Yichen Wang, et al. 2023a. Dialogue for Prompting: a Policy-Gradient-Based Discrete Prompt Optimization for Few-shot Learning. *arXiv preprint*. ArXiv:2308.07272 [cs].
- Xian Li, Ping Yu, Chunting Zhou, Timo Schick, Luke Zettlemoyer, Omer Levy, Jason Weston, and Mike Lewis. 2023b. Self-alignment with instruction backtranslation. *Preprint*, arXiv:2308.06259.
- Yunxiang Li, Zihan Li, Kai Zhang, et al. 2023c. Chatdoctor: A medical chat model fine-tuned on a large language model meta-ai (llama) using medical domain knowledge. *Cureus*, 15(6).
- Stephanie Lin, Jacob Hilton, and Owain Evans. 2022. Truthfulqa: Measuring how models mimic human falsehoods. *Preprint*, arXiv:2109.07958.
- Vivian Liu and Lydia B Chilton. 2022. Design Guidelines for Prompt Engineering Text-to-Image Generative Models. In Proceedings of the 2022 CHI Conference on Human Factors in Computing Systems, CHI '22, pages 1–23, New York, NY, USA. Association for Computing Machinery.
- Mark Lutz. 2010. Programming Python: Powerful Object-Oriented Programming. "O'Reilly Media, Inc.".
- Bertalan Meskó. 2023. Prompt Engineering as an Important Emerging Skill for Medical Professionals: Tutorial. *Journal of Medical Internet Research*, 25(1):e50638.
- Niklas Muennighoff, Thomas Wang, Lintang Sutawika, Adam Roberts, Stella Biderman, Teven Le Scao, M Saiful Bari, Sheng Shen, Zheng-Xin Yong, Hailey Schoelkopf, et al. 2022. Crosslingual generalization through multitask finetuning. *arXiv preprint arXiv:2211.01786*.
- Shritam Kumar Mund. 2023. The AI War: Mastering the Art of Prompt Engineering in the Era of Large Language Models. https://ai.plainenglish.io.
- Matt Nigh. 2023. ChatGPT3-Free-Prompt-List: A free guide for learning to create ChatGPT3 Prompts. https://github.com/mattnigh/ChatGPT3-Free-Prompt-List.
- Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, John Schulman, Jacob Hilton, Fraser Kelton, Luke Miller, Maddie Simens, Amanda Askell, Peter Welinder,

Paul F. Christiano, Jan Leike, and Ryan Lowe. 2022. Training language models to follow instructions with human feedback. *Advances in Neural Information Processing Systems*, 35:27730–27744.

- Joon Sung Park, Joseph O'Brien, Carrie Jun Cai, et al. 2023. Generative Agents: Interactive Simulacra of Human Behavior. In Proceedings of the 36th Annual ACM Symposium on User Interface Software and Technology, UIST '23, pages 1–22, New York, NY, USA. Association for Computing Machinery.
- Felipe Pezoa, Juan L. Reutter, Fernando Suarez, et al. 2016. Foundations of JSON Schema. In *Proceedings of the 25th International Conference on World Wide Web*, WWW '16, pages 263–273, Republic and Canton of Geneva, CHE. International World Wide Web Conferences Steering Committee.
- Terrence W Pratt, Marvin V Zelkowitz, and Tadepalli V Gopal. 1984. Programming languages: design and implementation. Technical report, Prentice-Hall Englewood Cliffs, NJ.
- Reid Pryzant, Dan Iter, Jerry Li, et al. 2023. Automatic Prompt Optimization with "Gradient Descent" and Beam Search. *arXiv preprint*. ArXiv:2305.03495 [cs].
- Tim Rentsch. 1982. Object oriented programming. ACM SIGPLAN Notices, 17(9):51–57.
- Keisuke Sakaguchi, Ronan Le Bras, Chandra Bhagavatula, and Yejin Choi. 2019. WINOGRANDE: an adversarial winograd schema challenge at scale. *Preprint*, arXiv:1907.10641.
- Robert W Sebesta. 2012. *Concepts of programming languages*. Pearson Education, Inc.
- Michael Sipser. 1996. Introduction to the Theory of Computation. *ACM Sigact News*, 27(1):27–29. Publisher: ACM New York, NY, USA.
- Hong Sun, Xue Li, Yinchuan Xu, et al. 2023a. AutoHint: Automatic Prompt Optimization with Hint Generation. arXiv preprint. ArXiv:2307.07415 [cs].
- Jiankai Sun, Chuanyang Zheng, Enze Xie, et al. 2023b. A Survey of Reasoning with Foundation Models. *arXiv preprint*. ArXiv:2312.11562 [cs].
- Jiao Sun, Yufei Tian, Wangchunshu Zhou, et al. 2023c. Evaluating Large Language Models on Controlled Generation Tasks. *arXiv preprint*. ArXiv:2310.14542 [cs].
- Rohan Taori, Ishaan Gulrajani, Tianyi Zhang, Yann Dubois, Xuechen Li, Carlos Guestrin, Percy Liang, and Tatsunori B. Hashimoto. 2023. Stanford alpaca: An instruction-following llama model. https:// github.com/tatsu-lab/stanford_alpaca.
- Tanay Varshney and Annie Surla. 2023. An Introduction to Large Language Models: Prompt Engineering and P-Tuning. https://developer.nvidia.com.

- Haochun Wang, Chi Liu, Nuwa Xi, et al. 2023a. HuaTuo: Tuning LLaMA Model with Chinese Medical Knowledge. arXiv preprint. ArXiv:2304.06975 [cs].
- Xinyuan Wang, Chenxi Li, Zhen Wang, et al. 2023b. PromptAgent: Strategic Planning with Language Models Enables Expert-level Prompt Optimization. *arXiv preprint*. ArXiv:2310.16427 [cs].
- Zhenxuan Wang. 2023. How to use prompt engineering with large language models. https://www.thoughtworks.com.
- Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Brian Ichter, Fei Xia, Ed Chi, Quoc Le, and Denny Zhou. 2023. Chain-of-Thought Prompting Elicits Reasoning in Large Language Models. arXiv preprint. ArXiv:2201.11903 [cs].
- Qingyun Wu, Gagan Bansal, Jieyu Zhang, et al. 2023. AutoGen: Enabling Next-Gen LLM Applications via Multi-Agent Conversation. *arXiv preprint*. ArXiv:2308.08155 [cs].
- Zhiheng Xi, Wenxiang Chen, Xin Guo, et al. 2023. The Rise and Potential of Large Language Model Based Agents: A Survey. *arXiv preprint*. ArXiv:2309.07864 [cs].
- Yuzhuang Xu, Shuo Wang, Peng Li, et al. 2023. Exploring Large Language Models for Communication Games: An Empirical Study on Werewolf. arXiv preprint. ArXiv:2309.04658 [cs].
- Hui-Syuan Yeh, Thomas Lavergne, and Pierre Zweigenbaum. 2022. Decorate the Examples: A Simple Method of Prompt Design for Biomedical Relation Extraction. arXiv preprint. ArXiv:2204.10360 [cs].
- Yue Yu, Yuchen Zhuang, Jieyu Zhang, et al. 2023. Large Language Model as Attributed Training Data Generator: A Tale of Diversity and Bias. arXiv preprint. ArXiv:2306.15895 [cs].
- J.D. Zamfirescu-Pereira, Richmond Y. Wong, Bjoern Hartmann, and Qian Yang. 2023a. Why johnny can't prompt: How non-ai experts try (and fail) to design llm prompts. In *Proceedings of the 2023 CHI Conference on Human Factors in Computing Systems*, CHI '23, New York, NY, USA. Association for Computing Machinery.
- J.D. Zamfirescu-Pereira, Richmond Y. Wong, Bjoern Hartmann, and Qian Yang. 2023b. Why Johnny Can't Prompt: How Non-AI Experts Try (and Fail) to Design LLM Prompts. In *Proceedings of the 2023 CHI Conference on Human Factors in Computing Systems*, CHI '23, pages 1–21, New York, NY, USA. Association for Computing Machinery.
- Rowan Zellers, Ari Holtzman, Yonatan Bisk, Ali Farhadi, and Yejin Choi. 2019. Hellaswag: Can a machine really finish your sentence? *Preprint*, arXiv:1905.07830.

Yaowei Zheng, Richong Zhang, Junhao Zhang, Yanhan Ye, Zheyan Luo, and Yongqiang Ma. 2024. Llamafactory: Unified efficient fine-tuning of 100+ language models. *arXiv preprint arXiv:2403.13372*.