

Computing Minimal Absent Words and Extended Bispecial Factors with CDAWG Space

Shunsuke Inenaga¹, Takuya Mieno², Hiroki Arimura³, Mitsuru Funakoshi¹, and Yuta Fujishige¹

¹Department of Informatics, Kyushu University, Japan

²Department of Computer and Network Engineering, University of Electro-Communications, Japan

³Graduate School of IST, Hokkaido University, Japan

Abstract

A string w is said to be a *minimal absent word* (MAW) for a string S if w does not occur in S and any proper substring of w occurs in S . We focus on non-trivial MAWs which are of length at least 2. Finding such non-trivial MAWs for a given string is motivated by applications in bioinformatics and data compression. Fujishige et al. [TCS 2023] proposed a data structure of size $\Theta(n)$ that can output the set $\text{MAW}(S)$ of all MAWs for a given string S of length n in $O(n + |\text{MAW}(S)|)$ time, based on the *directed acyclic word graph* (DAWG). In this paper, we present a more space efficient data structure based on the *compact DAWG* (CDAWG), which can output $\text{MAW}(S)$ in $O(|\text{MAW}(S)|)$ time with $O(e_{\min})$ space, where e_{\min} denotes the minimum of the sizes of the CDAWGs for S and for its reversal S^R . For any strings of length n , it holds that $e_{\min} < 2n$, and for highly repetitive strings e_{\min} can be sublinear (up to logarithmic) in n . We also show that MAWs and their generalization *minimal rare words* have close relationships with *extended bispecial factors*, via the CDAWG.

1 Introduction

A string w is said to be a *minimal absent word* (MAW) for a string S if w does not occur in S and any proper substring of w occurs in S . Throughout this paper, we focus on MAWs which are of form aub , where a, b are characters and u is a (possibly empty) string. Finding such MAWs for a given string is motivated by applications including bioinformatics [1, 12, 23, 19] and data compression [14, 15, 3].

Fujishige et al. [16] proposed a data structure of size $\Theta(n)$ that can output the set $\text{MAW}(S)$ of all MAWs for a given string S of length n in $O(n + |\text{MAW}(S)|)$ time, based on the *directed acyclic word graph* (DAWG) [9]. The DAWG for string S , denoted $\text{DAWG}(S)$, is the smallest DFA recognizing all suffixes of S .

In this paper, we present a more space efficient data structure based on the *compact DAWG* (CDAWG) [10], which takes $O(e_{\min})$ space and can output $\text{MAW}(S)$ in $O(|\text{MAW}(S)|)$ time, where $e_{\min} = \min\{\text{el}(S), \text{er}(S)\}$, with $\text{el}(S)$ and $\text{er}(S)$ being the numbers of edges of the CDAWGs for S and for its reversal S^R , respectively. For any string S of length n it holds that the number of edges of the CDAWG for S is less than $2n$ and it can be sublinear (up to logarithmic) in n for highly repetitive strings [25, 24, 5].

Our new data structure with the CDAWG is built on our deeper analysis on how the additive $O(n)$ term is required in the output time of Fujishige et al.’s DAWG-based algorithm [16]. Let x be a node of $\text{DAWG}(S)$ and let u be the longest string represented by x . Suppose that there is a node y of which the suffix link points to x , and let a be the character such that au is the shortest string represented by y . It follows that aub is a MAW for S if and only if node x has an out-edge labeled b but node y does not. Fujishige et al.’s algorithm finds such characters b by comparing the out-edges of y and x in sorted order. However, Fujishige et al.’s algorithm performs redundant comparisons even for every pair of *unary nodes* x, y connected by a suffix link. This observation has led us to the use of the CDAWG for S , where unary nodes are compacted. Still, we need to manage the case where y is unary but x is not unary. We settle this issue by a non-trivial use of the *extended longest path tree* of the CDAWG [18].

In the previous work by Belazzougui and Cunial [5], they proposed another CDAWG-based data structure of size $O(\max\{\text{el}(S), \text{er}(S)\})$ that can output all MAWs for S in $O(\max\{\text{el}(S), \text{er}(S)\} + |\text{MAW}(S)|)$ time. The $\text{el}(S)$ term comes from the *Weiner links* for all nodes of the CDAWG, which can be as large as $\Omega(\text{er}(S)\sqrt{n})$ for some strings [18]. Note that our data structures uses only $O(\mathbf{e}_{\min}) = O(\min\{\text{el}(S), \text{er}(S)\})$ space and takes only $O(|\text{MAW}(S)|)$ time to report the output. We also present a simpler algorithm that restores the string u in linear time in its length using the CDAWG-grammar [5], without using level-ancestor data structures [8, 7], which can be of independent interest.

We also show how our CDAWG-based data structure of $O(\mathbf{e}_{\min})$ space can output all *extended bispecial factors (EBFs)* [2] for the input string S in output optimal time. This proposed method can be seen as a more space-efficient variant of Almirantis et al.’s method [2] that is built on suffix trees [26]. We also show that *minimal rare words (MRWs)* [4], which are generalizations of MAWs and *minimal unique substrings MUSs* [17], have close relationships with EBFs through the CDAWG.

2 Preliminaries

2.1 Basic Notations

Let Σ be an alphabet. An element of Σ is called a character. An element of Σ^* is called a string. The length of a string S is denoted by $|S|$. The empty string ε is the string of length 0. Let $\Sigma^+ = \Sigma^* \setminus \{\varepsilon\}$. If $S = xyz$, then x , y , and z are called a *prefix*, *substring* (or *factor*), and *suffix* of S , respectively. Let $\text{Prefix}(S)$, $\text{Substr}(S)$, and $\text{Suffix}(S)$ denote the sets of the prefixes, substrings, and suffixes of S , respectively. An element in $\text{Suffix}(S) \setminus \{S\}$ is called a *proper suffix* of S . For any $1 \leq i \leq |S|$, $S[i]$ denotes the i -th character of string S . For any $1 \leq i \leq j \leq |S|$, $S[i..j]$ denotes the substring of S that begins at position i and ends at position j . For convenience, let $T[i..j] = \varepsilon$ for any $i > j$. We say that string w *occurs* in string S iff w is a substring of S . Let $\text{occ}_S(w) = |\{i \mid w = S[i..i+|w|-1]\}|$ denote the number of occurrences of w in S . For convenience, let $\text{occ}_S(\varepsilon) = |S| + 1$. For a string S , let $S^R = S[|S|] \cdots S[1]$ denote the reversed string of S .

For a set S of strings, let $|S|$ denote the number of strings in S .

2.2 MAW, MUS, MRW, and EBF

A string w is said to be an *absent word* for another string S if $\text{occ}_S(w) = 0$. An absent word w for S is called a *minimal absent word (MAW)* for S if $\text{occ}_S(w[1..|w|-1]) \geq 1$ and $\text{occ}_S(w[2..|w|]) \geq 1$. By definition, any character c not occurring in S is a MAW for S . In the rest of this paper, we exclude such trivial MAWs and we focus on non-trivial MAWs of form aub , where $a, b \in \Sigma$ and $u \in \Sigma^*$. We denote by $\text{MAW}(S)$ the set of all non-trivial MAWs for S .

A string w is called *unique* in another string S if $\text{occ}_S(w) = 1$. A unique substring w for S is called a *minimal unique substring (MUS)* for S if $\text{occ}_S(w[1..|w|-1]) \geq 2$ and $\text{occ}_S(w[2..|w|]) \geq 2$. Let $\text{MUS}(S)$ denote the set of non-trivial MUSs of form aub for string S . Since a unique substring w of S has exactly one occurrence in S , each w element in $\text{MUS}(S)$ can be identified with a unique interval $[i..j]$ such that $1 \leq i \leq j \leq n$ and $w = S[i..j]$.

A string w is called a *minimal rare word MRW* for another string S if

- (1) $w = c \in \Sigma$, or
- (2) $w = aub$ with $a, b \in \Sigma$ and $u \in \Sigma^*$, such that $\text{occ}_S(au) > \text{occ}_S(aub)$ and $\text{occ}_S(ub) > \text{occ}_S(aub)$.

In particular, an MRW w for S is a MAW for S when $\text{occ}_S(w) = 0$. Also, an MRW w is a MUS for S when $\text{occ}_S(w) = 1$. Let $\text{MRW}(S)$ denote the set of non-trivial MRWs of type (2) for string S . Then, $\text{MAW}(S) \subseteq \text{MRW}(S)$ and $\text{MUS}(S) \subseteq \text{MRW}(S)$ hold.

A string $w = aub \in \text{Substr}(S)$ with $a, b \in \Sigma$ and $u \in \Sigma^*$ is called an *extended bispecial factor (EBF)* for string S if $\text{occ}_S(a'u) \geq 1$ and $\text{occ}_S(ub') \geq 1$ for some characters $a' \neq a$ and $b' \neq b$. Let $\text{EBF}(S)$ denote the set of EBFs for string S .

2.3 Maximal Substrings and Maximal Repeats

A substring u of a string S is said to be *left-maximal* in S if (1) there are distinct characters a, b such that $au, bu \in \text{Substr}(S)$, or (2) $u \in \text{Prefix}(S)$. Symmetrically, a substring u of S is said to be *right-maximal* in S iff (1) there are distinct characters a, b such that $ua, ub \in \text{Substr}(S)$, or (2) $u \in \text{Suffix}(S)$. A substring u of S is said to be *maximal* in S iff u is both left-maximal and right-maximal in S . A maximal substring u is said to be a *maximal repeat* if $\text{occ}_S(u) \geq 2$. Let $\text{MRep}(S)$ denote the set of maximal repeats in S . For a maximal repeat u of a string S , the characters $a \in \Sigma$ such that $\text{occ}_S(au) \geq 1$ are called the *left-extensions* of u , and the characters $b \in \Sigma$ such that $\text{occ}_S(ub) \geq 1$ are called the *right-extensions* of u .

The following relationship between MAWs and maximal repeats is known:

Lemma 1 ([4] and Theorem 1 of [22]). *For any MRW aub for string S with $a, b \in \Sigma$ and $u \in \Sigma^*$, u is a maximal repeat in S .*

2.4 CDAWG

The *compact directed acyclic word graph (CDAWG)* of string S , that is denoted $\text{CDAWG}(S) = (\mathbf{V}, \mathbf{E})$, is a path-compressed smallest partial DFA that represents $\text{Suffix}(S)$, such that there is a one-to-one correspondence between the nodes of $\text{CDAWG}(S)$ and the maximal substrings in S . Intuitively, $\text{CDAWG}(S)$ can be obtained by merging isomorphic subtrees of the suffix tree [26] for S . Therefore, each string represented by a node u of $\text{CDAWG}(S)$ is a suffix of all the other longer strings represented by the same node u . For convenience, for any CDAWG node $u \in \mathbf{V}$, let $\text{str}(u)$ denote the *longest* string represented by the node u . The *suffix link* of a CDAWG node u points to another CDAWG node v iff $\text{str}(v)$ is the longest proper suffix of $\text{str}(u)$ that is not represented by u . We denote it by $\text{slink}(u) = v$. See Fig. 1 for an example of $\text{CDAWG}(S)$.

We remark that every internal node in $\text{CDAWG}(S)$ corresponds to a maximal repeat in S , that is, $\text{MRep}(S) = \{\text{str}(v) \mid v \text{ is an internal node of } \text{CDAWG}(S)\}$. The first characters of the labels of the out-going edges of an internal node of $\text{CDAWG}(S)$ are the right-extensions of the corresponding maximal substring for that node. Hence the number of edges in $\text{CDAWG}(S)$ is equal to the total number of right-extensions of maximal repeats in $\text{MRep}(S)$, which is denoted by $\text{er}(S)$. Similarly, we denote by $\text{el}(S)$ the number of left-extensions of the maximal repeats in $\text{MRep}(S)$. Blumer et

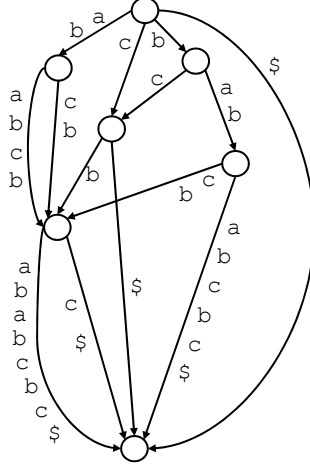


Figure 1: $\text{CDAWG}(S)$ for string $S = \text{ababcbababcbcb}\$$.

al. [10] showed that $\min\{\text{er}(S), \text{el}(S)\} < 2n$ for any string S of length n . On the other hand, it is known that there is an $\Omega(\sqrt{n})$ gap between $\text{er}(S)$ and $\text{el}(S)$:

Lemma 2 (Lemma 9 of [18]). *There exists a family of strings S of length n such that $\text{er}(S) = \Theta(\sqrt{n})$ and $\text{el}(S) = \Theta(n)$.*

The length of an edge $(u, y, v) \in \mathbf{V} \times \Sigma^+ \times \mathbf{V}$ in $\text{CDAWG}(S)$ is its string label length $|y|$. An edge (u, y, v) is called a *primary edge* if $|\text{str}(u)| + |y| = |\text{str}(v)|$, and (u, y, v) is called a *secondary edge* otherwise ($|\text{str}(u)| + |y| < |\text{str}(v)|$). Namely, the primary edges are the edges in the *longest* paths from the source to all the nodes of $\text{CDAWG}(S)$. Thus, there are exactly $|\mathbf{V}| - 1$ primary edges. Let $\text{LPT}(S)$ denote the spanning tree of $\text{CDAWG}(S)$ that consists of the primary edges, i.e., $\text{LPT}(S)$ is the tree of the longest paths from the source to all nodes of $\text{CDAWG}(S)$.

Since $\text{MRep}(S^R) = \{w^R \mid w \in \text{MRep}(S)\}$ holds for any string S , the CDAWGs for S and S^R can share the same nodes. Let \mathbf{E}^R denote the set of edges of $\text{CDAWG}(S^R)$. The primary (resp. secondary) edges in \mathbf{E}^R are also called *hard* (resp. *soft*) *Weiner links* of $\text{CDAWG}(S)$. Each Weiner link is labeled by the first character of the label of the corresponding edge in \mathbf{E}^R . Note that $|\mathbf{E}^R| = \text{el}(S)$.

3 CDAWG Grammars

A *grammar-compression* is a method that represents an input string S with a context-free grammar \mathcal{G} that only generates S . The size of \mathcal{G} is evaluated by the total length of the right-hand sides of the productions, which is equal to the size of the minimal DAG obtained by merging isomorphic subtrees of the derivation tree for \mathcal{G} . Hence the more repeats S has, the smaller grammar S tends to have.

Assume that S terminates with a unique character $\$$ not occurring elsewhere in S . Belazzougui and Cunial [5] proposed a grammar-compression based on the CDAWGs . We use a slightly modified version of their grammar: The *CDAWG-grammar* for string S of length n , denoted $\mathcal{G}_{\text{CDAWG}}$, is such that:

- The non-terminals are the nodes in $\text{CDAWG}(S)$;
- The root of the derivation tree for $\mathcal{G}_{\text{CDAWG}}$ is the sink of $\text{CDAWG}(S)$;

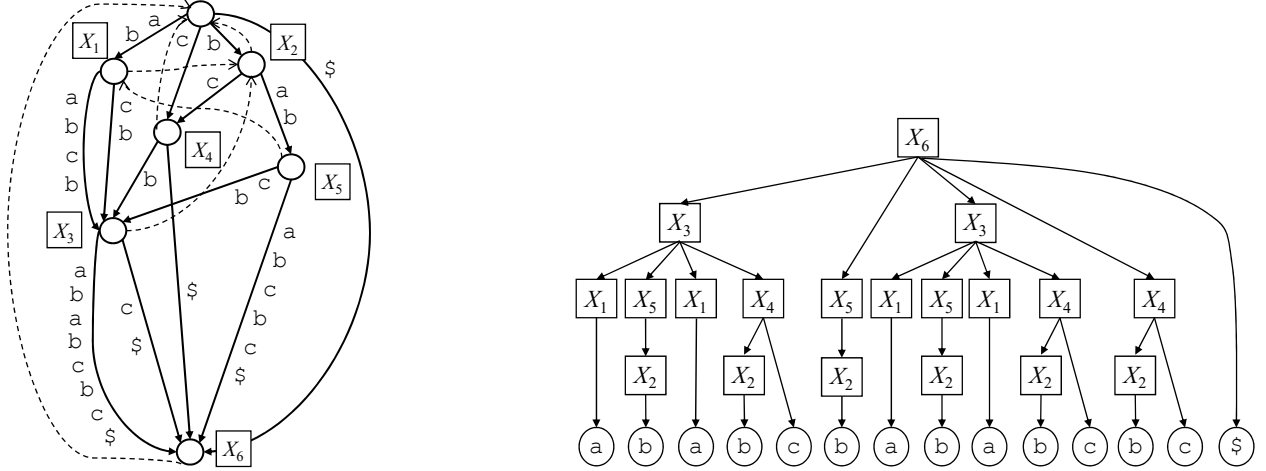


Figure 2: CDAWG(S) (left) and the CDAWG-grammar $\mathcal{G}_{\text{CDAWG}}$ (right) for the running example from Fig. 1. The dashed arcs represent the suffix links of the nodes of CDAWG(S). To obtain $\text{str}(X_3) = \text{ababc}b$ for the CDAWG node X_3 , we first decompress the non-terminal X_3 and obtain ababc . We move to the node X_2 by following the suffix link of X_3 . We then decompress the non-terminal X_2 and obtain the remaining b .

- The derivation tree path from its root to its leaf representing the i -th character $S[i]$ is equal to the reversed path from the sink to the source of CDAWG(S) that spells out the i -th (text positioned) suffix $S[i..n]$.

By definition, the DAG for the CDAWG-grammar $\mathcal{G}_{\text{CDAWG}}$ is isomorphic to the reversed DAG for CDAWG(S), and hence, the size for $\mathcal{G}_{\text{CDAWG}}$ is $\text{er}(S)$. See Fig. 2 for an example.

Belazzougui and Cunial [5] showed how to extract the string label x of a given CDAWG edge in $O(|x|)$ time in a sequential manner (i.e. from $x[1]$ to $x[|x|]$), by augmenting the CDAWG-grammar with a level-ancestor data structure [8, 7] that works on the word RAM. This allows one to represent CDAWG(S) in $O(\text{er}(S))$ space and perform pattern matching queries in optimal time, without explicitly storing string S . They also used this technique to output a MAW aub as a string: Since u is a maximal repeat, it suffices to decompress the path labels in $\text{LPT}(S)$ from the source to the node v that corresponds to u (i.e. $\text{str}(v) = u$).

We show that, when our goal is simply to obtain the longest string $\text{str}(v)$ for a given CDAWG node v , then level-ancestor data structures are not needed.

Lemma 3. *Given CDAWG(S) = (V, E) with suffix links and grammar $\mathcal{G}_{\text{CDAWG}}$ of total size $O(\text{er}(T))$, one can decompress the longest string $\text{str}(v)$ represented by a given node v in $O(|\text{str}(v)|)$ time.*

Proof. For each CDAWG node $v \in V$, let $X(v)$ denote the non-terminal in the grammar $\mathcal{G}_{\text{CDAWG}}$ that corresponds to v . We first decompress $X(v)$ and let p_v be the decompressed string. Then, the length of p_v is equal to the number of (reversed) paths between the source and v in the CDAWG. Thus, if the suffix link $\text{slink}(v)$ points to the source, then p_v is the whole string $\text{str}(v)$. Otherwise, then let $v_0 = v$. We take the suffix link $\text{slink}(v_0) = v_1$, obtain string p_{v_1} by decompressing $X(v_1)$. This gives us a longer prefix $p_{v_0}p_{v_1}$ of $\text{str}(v)$, since in any interval $[i..i + |\text{str}(v)| - 1]$ of leaves of the derivation tree for $\mathcal{G}_{\text{CDAWG}}$ that represents $\text{str}(v)$, p_{v_1} immediately follows p_{v_0} . We continue this process until we encounter the last node v_k in the suffix link chain from v , of which the suffix link points to the source. Then, the concatenated string $p_{v_0}p_{v_1} \cdots p_{v_k}$ is $\text{str}(v)$.

When there are no unary productions of form $X \rightarrow Y$, then the total number of nodes visited for obtaining $p_{v_0}p_{v_1} \cdots p_{v_k} = \text{str}(v)$ is linear in its length. Otherwise, then for each maximal sequence of unary productions $X_1 \rightarrow X_2 \rightarrow \cdots \rightarrow X_\ell \rightarrow Y$, we create a pointer from X_i to Y for every $1 \leq i \leq \ell$ so that we can extract $\text{str}(v)$ in time linear in its length¹. \square

4 Computing MAWs and EBFs with CDAWG

4.1 Computing MAWs

In this section, we first show the following:

Theorem 1. *There exists a data structure of $O(\mathbf{e}_{\min})$ space that can output all MAWs for string S in $O(|\text{MAW}(S)|)$ time with $O(1)$ working space, where $\mathbf{e}_{\min} = \min\{\text{er}(S), \text{el}(S)\}$.*

For ease of description of our algorithm, let us assume that our input string S begins and ends with unique terminal symbols $\#$ and $\$$ not occurring inside S , respectively. We also assume $\#, \$ \in \Sigma$ so that they can be the first or the last characters for MAWs and EBFs for S , respectively. The case without $\#$ and $\$$ can be treated similarly.

We remark that MAWs have symmetric structures such that $aub \in \text{MAW}(S)$ iff $bu^R a \in \text{MAW}(S^R)$. This implies that one can work with the smaller one of the two: $\text{CDAWG}(S)$ of $O(\text{er}(S))$ space and $\text{CDAWG}(S^R)$ of $O(\text{el}(S))$ space. In what follows, we assume w.l.o.g. that $\mathbf{e}_{\min} = \text{er}(S)$, unless otherwise stated.

On top of the edge-sorted $\text{CDAWG}(S)$ augmented with suffix links and the CDAWG -grammar $\mathcal{G}_{\text{CDAWG}}$ for S , we use the extended version of $\text{LPT}(S)$ proposed in [18], that is denoted $\text{LPT}^+(S)$. Let v be any node in the longest path tree $\text{LPT}(S)$, and suppose that its corresponding node in $\text{CDAWG}(S)$ has a secondary out-going edge (v, u) . Then, we create a copy ℓ of u as a leaf, and add a new edge (v, ℓ) to the tree. $\text{LPT}^+(S)$ is the tree obtained by adding all secondary edges of $\text{CDAWG}(S)$ to $\text{LPT}(S)$ in this way, and thus, $\text{LPT}^+(S)$ has exactly $\text{er}(S)$ edges. For any node v in $\text{LPT}^+(S)$, let $\text{str}(v)$ denote the string label in the path from the root to v .

Let u be any node in $\text{CDAWG}(S)$ and suppose it has k in-coming edges. The above process of adding secondary edges to $\text{LPT}(S)$ can be regarded as splitting u into $k + 1$ nodes $u', \ell_1, \dots, \ell_k$, such that $|\text{str}(u')| > |\text{str}(\ell_1)| > \cdots > |\text{str}(\ell_k)|$. We define the suffix links of these nodes such that $\text{slink}(u') = \ell_1$, $\text{slink}(\ell_i) = \ell_{i+1}$ for $1 \leq i < k$, and $\text{slink}(\ell_k) = v'$ such that v' is the node in $\text{LPT}^+(S)$ that corresponds to the destination node $v = \text{slink}(u)$ of the suffix link of u in $\text{CDAWG}(S)$. We call these copied nodes ℓ_1, \dots, ℓ_k as *gray nodes*, and the other node u' as a *white node*. For convenience, we assume that the source is a white node. See Fig. 3 for illustration.

In what follows, we show how to compute MAWs for a given edge (\hat{v}, \hat{u}) in $\text{LPT}^+(S)$. Note that \hat{v} is always a white node since every gray node has no children. Let X be the string label of (\hat{v}, \hat{u}) . Let v be the *first* white node in the chain of suffix links from \hat{v} and let u be the descendant of v in $\text{LPT}^+(S)$ such that the path from v to u spells out X . We maintain a *fast link* from the edge (\hat{v}, \hat{u}) to the path $\langle v, u \rangle$ so we can access from (\hat{v}, \hat{u}) to the terminal nodes v and u in the path in $O(1)$ time. We have the four following cases (See also Fig. 4):

- (A) \hat{u} and u are both white nodes;
- (B) \hat{u} is a white node and u is a gray node;
- (C) \hat{u} is a gray node and u is a white node;

¹A similar technique was used in the original CDAWG -grammar by Belazzougui and Cunial [5], where they explicitly removed such unary productions.

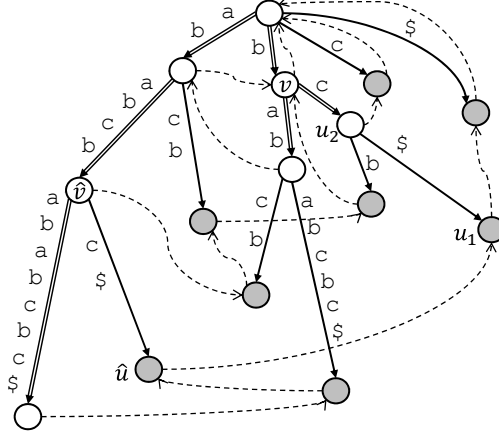


Figure 3: $\text{LPT}^+(S)$ for the running example from Fig. 1 and 2. The double-lined arcs represent primary edges, and the single-lined arcs represent secondary edges. For edge (\hat{v}, \hat{u}) with string label $c\$$, consider the path $\langle v, u_1 \rangle$ that spells out $c\$$ and is obtained by the fast link. The CDAWG node that corresponds to $u_2 = bc$ has a virtual soft Weiner link with label c pointing to the CDAWG node that corresponds to \hat{u} . Node u_2 has an out-edge with b . Therefore, $cu_2b = cbc b$ is a MAW for the string $S = ababcbababcbcb\$$.

(D) \hat{u} and u are both gray nodes.

How to deal with Case (A): In Case (A), $u = \text{slink}(\hat{u})$.

Let m be the number of nodes in the path from v to u , with v exclusive. In the sequel, we consider the case where $m > 1$, as the case with $m = 1$ is simpler to show. Let $u_1 (= u), u_2, \dots, u_m$ denote these m nodes in the path arranged in decreasing order of their depths. We process each u_i in increasing order of i . For simplicity, we will identify each node u_i as the string $\text{str}(u_i)$ represented by u_i .

For $i = 1$, node $u_1 (= u)$ has a hard Weiner link to \hat{u} . Let a be the character label of this hard Weiner link. Let $\text{child}(\hat{u})$ and $\text{child}(\text{slink}(\hat{u})) = \text{child}(u_1)$ be the sorted lists of the first characters of the out-edge labels from \hat{u} and from u_1 . Note that $\text{child}(\hat{u}) \subseteq \text{child}(u_1)$. Then, it follows from the definition of MAWs and Lemma 1 that $au_1b \in \text{MAW}(S)$ iff $b \in \text{child}(u_1) \setminus \text{child}(\hat{u})$.

For each $i = 2, \dots, m$, observe that node u_i has a (virtual) *soft* Weiner link with the same character label a , and leading to the same node \hat{u} . We emphasize that this soft Weiner link is only virtual and is *not* stored in our $O(\text{er}(S))$ -space data structure. We have the following lemma:

Lemma 4. *For each internal node u_i with $2 \leq i \leq m$ in the path between v and u , there exists at least one MAW $au_i b$ for S , where $a, b \in \Sigma$.*

Proof. Let c be the first character of the label of the edge (u_{i+1}, u_i) . Let \hat{u}_i denote the (virtual) implicit node on the edge (\hat{v}, \hat{u}) , such that $\text{slink}(\hat{u}_i) = u_i$. Note that c is the unique character that immediately follows the locus of \hat{u}_i in the string label of edge (\hat{v}, \hat{u}) . Since u_i is branching but \hat{u}_i is non-branching, the set $\text{child}(u_i) \setminus \text{child}(\hat{u}_i) = \text{child}(u_i) \setminus \{c\}$ is not empty. Thus, for any character $b \in \text{child}(u_i) \setminus \{c\}$, we have $au_i b \in \text{MAW}(S)$. \square

Due to Lemma 4, we output MAWs $au_i b$ for every character $b \in \text{child}(u_i) \setminus \{c\}$.

How to deal with Case (B): In Case (B), u is a gray node, and there might be other node(s) in the suffix link chain from \hat{u} to u . No MAW is reported for the gray node $u_1 (= u)$. The rest is the

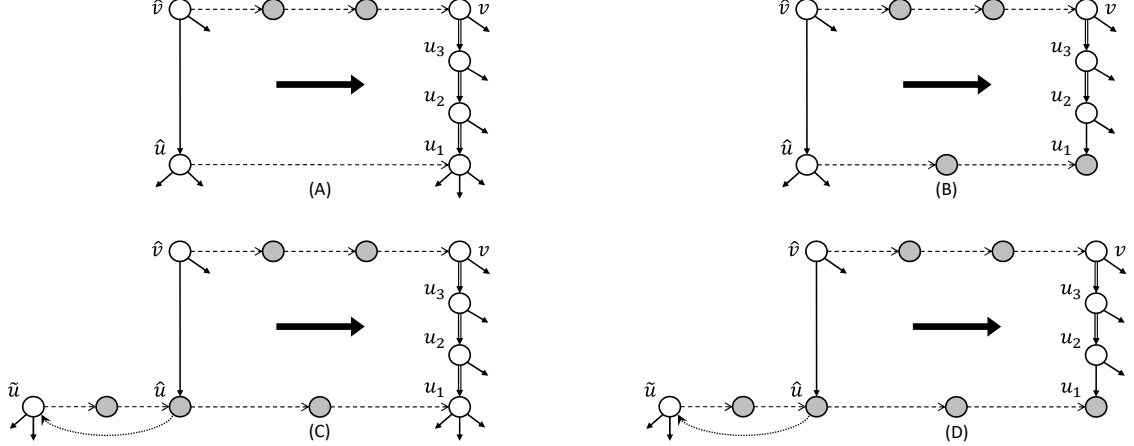


Figure 4: Cases (A), (B), (C), and (D) for computing MAWs from a given edge (\hat{v}, \hat{u}) on $\text{LPT}^+(S)$. The bold arc represents the fast link from edge (\hat{v}, \hat{u}) to path $\langle v, u \rangle$, where $u = u_1$. The dashed arcs represent suffix links. The dotted arcs in Cases (C) and (D) are additional pointers for $O(1)$ -time access from \hat{u} to \tilde{u} .

same as Case (A).

How to deal with Cases (C) and (D): In Cases (C) and (D) where node \hat{u} is a gray node, we use the white node \tilde{u} , which corresponds to the CDAWG node from which \hat{u} is copied. We output MAW(s) by comparing out-edges of \tilde{u} and u_1 . We store a pointer from \hat{u} to \tilde{u} , so that we can access \tilde{u} from \hat{u} in $O(1)$ time (see also Fig. 4). The rest is the same as Cases (B) and (A).

4.1.1 Putting all together.

By performing the above procedure for all edges (v, u) in $\text{LPT}^+(S)$, we can output all elements in $\text{MAW}(S)$.

Let us analyze the time complexity and the data structure space usage. In the case with $i \geq 2$, by Lemma 4, accessing each node u_i can be charged to any one of the MAWs reported with u_i . The time required for u_i is thus linear in the number of reported MAWs au_ib . In the case with $i = 1$, we compare the sorted lists $\text{child}(\hat{u})$ and $\text{child}(u_1)$. Each successful character comparison with a character $b \in \text{child}(u_1) \setminus \text{child}(\hat{u})$ reports a MAW au_1b . On the other hand, each unsuccessful character comparison with a character $b \in \text{child}(u_1) \cap \text{child}(\hat{u})$ can be charged to the corresponding out-edge of \hat{u} whose string label begins with b . Thus, we can output all MAWs in $O(\text{er}(S) + |\text{MAW}(S)|)$ time. Further, when $|\text{MAW}(S)| \leq \text{er}(S)$, then we can store the set $\text{MAW}(S)$ with $O(|\text{MAW}(S)|) \subseteq O(\text{er}(S))$ space and output each MAW in $O(1)$ time, using Lemma 3. This leads to our $O(|\text{MAW}(S)|)$ -time $O(\text{er}(S))$ -space data structure.

To analyze the working memory usage, let us consider the number of pointers. For each given edge (\hat{v}, \hat{u}) , we climb up the path from $\text{slink}(\hat{u}) = u_1$ to u_m one by one, until reaching $\text{slink}(\hat{v}) = v$, which requires $O(1)$ pointers. We also use $O(1)$ additional pointers for the character comparisons on the sorted lists of each pair of nodes. Thus the total working space is $O(1)$. We have proven Theorem 1.

4.1.2 Combinatorics on MAWs with CDAWG.

Theorem 1 also leads to the following combinatorial property of MAWs:

Theorem 2. For any string S , $|\text{MAW}(S)| = O(\sigma \mathbf{e}_{\min})$. This bound is tight.

Proof. For each node u_i of $\text{LPT}^+(S)$, the number of distinct characters a such that $au_ib \in \text{MAW}(S)$ is at most the number of (hard or soft) Weiner links from u_i , which is bounded by σ . The number of distinct characters b such that $au_ib \in \text{MAW}(S)$ does not exceed the number of out-edges from u_i . By summing them up for all nodes u_i of $\text{LPT}^+(S)$, we obtain $|\text{MAW}(S)| = O(\sigma \cdot \text{er}(S))$. Since the same argument holds for the reversed string S^R and $\text{LPT}^+(S^R)$, we have $|\text{MAW}(S)| = O(\sigma \cdot \min\{\text{er}(S), \text{el}(S)\}) = O(\sigma \mathbf{e}_{\min})$.

It is known [20] that for the de Bruijn sequence $B_{k,\sigma}$ of order k over an alphabet of size σ , $\text{MAW}(B_{k,\sigma}) = \Omega(\sigma n)$, where $n = |B_{k,\sigma}|$. Since $\mathbf{e}_{\min} \leq \text{er}(S) < 2n$ for any string S of length n , we have $\Omega(\sigma \mathbf{e}_{\min})$ for $B_{k,\sigma}$. \square

4.2 Computing EBFs

We first prove the following combinatorial property for EBFs:

Lemma 5. For any string S , $|\text{EBF}(S)| \leq \text{er}(S) + \text{el}(S) - |V| + 1$.

Proof. Recall our algorithm for computing $\text{MAW}(S)$ in Section 4.1. Let u_i be a node that has a (soft or hard) Weiner link with label $a \in \Sigma$ and has an out-edge starting with $b \in \Sigma$. Assuming $S[1] = \#$ and $S[|S|] = \$$, there are characters $a', b' \in \Sigma$ such that $a' \neq a$, $b' \neq b$, and $a'u_i, u_ib' \in \text{Substr}(S)$. Note also that $au_i, u_ib \in \text{Substr}(S)$. Thus, if $au_ib \in \text{Substr}(S)$, then $au_ib \in \text{EBF}(S)$. If the locus for au_i is the node \hat{u} , in which case the Weiner link from $u_i (= u_1)$ to \hat{u} is hard, then the EBF au_ib is charged to the out-edge of \hat{u} that starts with b . If the locus for au_i is on the edge (\hat{v}, \hat{u}) , then the EBF au_ib is charged to the soft-Weiner link from u_i that labeled a . Since the number of hard Weiner links is $|V| - 1$, the number of soft-Weiner links is $\text{el}(S) - |V| + 1$. Thus we have $|\text{EBF}(S)| = \text{er}(S) + \text{el}(S) - |V| + 1$ for any string S with $S[1] = \#$ and $S[|S|] = \$$.

If $S[1] \neq \#$ and/or $S[|S|] \neq \$$, then some node(s) u_i in $\text{CDAWG}(S)$ may only have unique characters a, b such that $au_i, u_ib \in \text{Substr}(S)$. Thus the bound is $|\text{EBF}(S)| \leq \text{er}(S) + \text{el}(S) - |V| + 1$ for arbitrary strings S . \square

By modifying our algorithm for computing MAWs for S as is described in the proof for Lemma 5, we can obtain the following:

Theorem 3. There exists a data structure of $O(\mathbf{e}_{\min})$ space that can output all EBFs for string S in $O(|\text{EBF}(S)|)$ time with $O(1)$ working space.

4.3 Computing length-bounded MAWs and EBFs

For any set $A \subseteq \Sigma^*$ of strings and an integer $\ell > 1$, let $A^{\geq \ell} = \{w \in A \mid |w| \geq \ell\}$ and $A^{\leq \ell} = \{w \in A \mid |w| \leq \ell\}$.

Theorem 4. There exists a data structure of $O(\mathbf{e}_{\min})$ space which, given a query length ℓ , can output

- $\text{MAW}(S)^{\geq \ell}$ in $O(|\text{MAW}(S)^{\geq \ell}| + 1)$ time,
- $\text{MAW}(S)^{\leq \ell}$ in $O(|\text{MAW}(S)^{\leq \ell}| + 1)$ time,
- $\text{EBF}(S)^{\geq \ell}$ in $O(|\text{EBF}(S)^{\geq \ell}| + 1)$ time,
- $\text{EBF}(S)^{\leq \ell}$ in $O(|\text{EBF}(S)^{\leq \ell}| + 1)$ time,

with $O(1)$ working space.

Proof. We only describe how to compute length-bounded MAWs. We can compute length-bounded EBFs similarly.

In our data structure for reporting $\text{MAW}(S)^{\leq \ell}$, we precompute the largest integer m with $|\text{MAW}(S)^{\leq m}| \leq e_{\min}$, and store the elements in $\text{MAW}(S)^{\leq m}$ using Lemma 3, sorted by their lengths. Given a query length ℓ , if $\ell \leq m$, then we can output the elements of $\text{MAW}(S)^{\leq \ell}$ by reporting the stored MAWs in increasing order, in $O(|\text{MAW}(S)^{\leq \ell}| + 1)$ time. Otherwise (if $\ell > m$), then we process each edge (\hat{v}, \hat{u}) in $\text{LPT}^+(S)$ in increasing order of $|\text{str}(\hat{u})|$. We need to access the internal nodes in the path from $\text{slink}(\hat{v})$ to $\text{slink}(\hat{u})$ topdown, in $O(1)$ time each. This can be done in $O(1)$ time per node by augmenting $\text{LPT}^+(S)$ with the level-ancestor (LA) data structure [8, 6]. We stop processing the edge (\hat{v}, \hat{u}) as soon as we find the shallowest ancestor u_i of $u = \text{slink}(\hat{u})$ such that $|\text{str}(u_i)| > \ell - 2$. Since $|\text{MAW}(S)^{\leq \ell}| > e_{\min}$ for any $\ell < m$, this algorithm outputs $\text{MAW}(S)^{\leq \ell}$ in $O(|\text{MAW}(S)^{\leq \ell}| + 1)$ time.

Computing $\text{MAW}(S)^{\geq \ell}$ is symmetric, except that the LA data structure is not needed: We can check the nodes between $\text{slink}(\hat{u})$ and $\text{slink}(\hat{v})$ in decreasing order of their lengths, in $O(1)$ time each, by simply climbing up the path. \square

Theorem 4 is an improvement and a generalization over the previous work [11] that gave an $O(\ell n)$ -space data structure that reports $\text{MAW}(S)^{\leq \ell}$ in $O(\sigma n)$ time.

5 Computing MRWs

Let $\text{MRW}_k(S) = \{w \in \text{MRW}(S) \mid \text{occ}_S(w) = k\}$. Then $\text{MRW}_0(S) = \text{MAW}(S)$ and $\bigcup_{k \geq 0} \text{MRW}_k(S) = \text{MRW}(S)$ hold. We show the following lemma. Recall that any string in $\text{MAW}(S)$ or $\text{EBF}(S)$ is of length at least 2.

Lemma 6. *For any string S with $S[1] = \#$ and $S[|S|] = \$$, $\text{MRW}(S) \setminus \text{EBF}(S) = \text{MAW}(S)$. In other words, $\text{MRW}(S) \cap \text{EBF}(S) = \bigcup_{k \geq 1} \text{MRW}_k(S)$.*

Proof. Clearly, $\text{MAW}(S) \cap \text{EBF}(S) = \emptyset$. It suffices to show that $\bigcup_{k \geq 1} \text{MRW}_k(S) \subseteq \text{EBF}(S)$. Let aub be an element in $\text{MRW}_k(S)$ for some $k \geq 1$ where $a, b \in \Sigma$ and $u \in \Sigma^*$. Since aub is a minimal rare word occurring k times in S , $\text{occ}_S(au) \geq k + 1$ and $\text{occ}_S(ub) \geq k + 1$. Also, since $k + 1 \geq 2$, the last character of au is not equal to $\$$, which is a unique character. Similarly, the first character of ub is not equal to $\#$. Thus, any occurrence of au (resp., ub) in S is not a suffix (resp., prefix) of S . Hence, there must be characters $b' \neq b$ and $a' \neq a$ such that $aub', a'ub \in \text{Substr}(S)$. Therefore, aub is an extended bispecial factor. \square

Next, we estimate the number of minimal rare words occurring in S .

Lemma 7. $|\bigcup_{k \geq 1} \text{MRW}_k(S)| \leq e_{\min}$.

Proof. For any $w \in \bigcup_{k \geq 1} \text{MRW}_k(S)$, the locus of w is the position on some edge (v_1, v_2) exactly one character down from v_1 since $\text{occ}_S(w[1..|w| - 1]) > \text{occ}_S(w)$. For the sake of contradiction, we assume that the locus of $w_1 = a_1u_1b \in \bigcup_{k \geq 1} \text{MRW}_k(S)$ is the same as that of another $w_2 = a_2u_2b \in \bigcup_{k \geq 1} \text{MRW}_k(S)$ where $a_1, a_2, b \in \Sigma$ and $u_1, u_2 \in \Sigma^*$. We further assume $|w_1| \leq |w_2|$ w.l.o.g. Since a_1u_1 and a_2u_2 reach the same CDAWG node, a_1u_1 is a suffix of a_2u_2 . Since $w_1 \neq w_2$, $|w_1| < |w_2|$ holds, and thus, w_1 is a proper suffix of w_2 . This contradicts that $\text{occ}_S(w_2) = \text{occ}_S(w_1)$ and w_2 is an MRW. Hence, the number of MRWs in $\bigcup_{k \geq 1} \text{MRW}_k(S)$ is never larger than $|E|$. The above argument holds even if the reversal of S is considered. Therefore, the upper bound is $\min\{|E|, |E^R|\} = e_{\min}$. \square

The proof of Lemma 7 implies that if the locus of an MRW aub is on an edge (v_1, v_2) , then au is the *shortest* string represented by the node v_1 . Namely, $\text{slink}(v_1) = u$. From this fact, we can represent each MRW aub as its corresponding edge (v_1, v_2) where the character label of the hard Weiner link from $\text{slink}(v_1)$ to v_1 is a , the longest string represented by $\text{slink}(v_1)$ is u , and the first character of the edge label of (v_1, v_2) is b . Also, by Lemma 3, we can restore the MRW aub from (v_1, v_2) in time linear in its length. Thus, the following lemma holds.

Lemma 8. *There exists a data structure of $O(\mathbf{e}_{\min})$ space that can output all MRWs occurring in S in $O(|\bigcup_{k \geq 1} \text{MRW}_k(S)|)$ time with $O(1)$ working space.*

If k is fixed in advance, we can store $\text{MRW}_k(S)$ in $O(\mathbf{e}_{\min})$ space and can output them in $O(|\text{MRW}_k(S)|)$ time. We obtain the next corollary by fixing $k = 1$.

Corollary 1. *There exists a data structure of $O(\mathbf{e}_{\min})$ space that can output all MUSs for string S in $O(|\text{MUS}(S)|)$ time with $O(1)$ working space.*

6 Conclusions and Future Work

In this paper, we proposed space-efficient $O(\mathbf{e}_{\min})$ -size data structures that can output MAWs, EBFs, and MRWs for an input string S of length n in time linear in the output size, where \mathbf{e}_{\min} denotes the minimum of the left-extensions and the right-extensions of the maximal repeats in S . The key tools of our method are the $O(\mathbf{e}_{\min})$ -size grammar-representation of the CDAWG, and the extended longest path tree of size $O(\mathbf{e}_{\min})$.

Our future work includes the following: Is it possible to extend our method for reporting length-bounded MAWs/EBFs of Section 4.3 to the problem of reporting MAWs/EBFs of length *exactly* ℓ for a query length $\ell > 1$? This would be a space-improvement of the previous work [13]. Okabe et al. [21] proposed a (non-compacted) DAWG-based data structure that can report the symmetric difference of the sets of MAWs for multiple strings, using $O(n)$ space and time linear in the output size, where n is the total length of the strings. Can our CDAWG-based data structures be extended to this problem?

References

- [1] Yannis Almirantis, Panagiotis Charalampopoulos, Jia Gao, Costas S. Iliopoulos, Manal Mohamed, Solon P. Pissis, and Dimitris Polychronopoulos. On avoided words, absent words, and their application to biological sequence analysis. *Algorithms for Molecular Biology*, 12(1):5, 2017.
- [2] Yannis Almirantis, Panagiotis Charalampopoulos, Jia Gao, Costas S. Iliopoulos, Manal Mohamed, Solon P. Pissis, and Dimitris Polychronopoulos. On overabundant words and their application to biological sequence analysis. *Theor. Comput. Sci.*, 792:85–95, 2019.
- [3] Lorraine A. K. Ayad, Golnaz Badkobeh, Gabriele Fici, Alice Héliou, and Solon P. Pissis. Constructing antidictionaries of long texts in output-sensitive space. *Theory Comput. Syst.*, 65(5):777–797, 2021.
- [4] Djamal Belazzougui and Fabio Cunial. Space-efficient detection of unusual words. In *SPIRE 2015*, volume 9309 of *Lecture Notes in Computer Science*, pages 222–233, 2015.

- [5] Djamel Belazzougui and Fabio Cunial. Fast label extraction in the CDAWG. In *SPIRE 2017*, pages 161–175, 2017.
- [6] Michael A. Bender and Martin Farach-Colton. The LCA problem revisited. In *LATIN 2000*, volume 1776, pages 88–94, 2000.
- [7] Michael A. Bender and Martin Farach-Colton. The level ancestor problem simplified. *Theor. Comput. Sci.*, 321(1):5–12, 2004.
- [8] Omer Berkman and Uzi Vishkin. Finding level-ancestors in trees. *J. Comput. Syst. Sci.*, 48(2):214–230, 1994.
- [9] Anselm Blumer, J. Blumer, David Haussler, Andrzej Ehrenfeucht, M.T. Chen, and Joel Seiferas. The smallest automation recognizing the subwords of a text. *Theoretical Computer Science*, 40:31–55, 1985.
- [10] Anselm Blumer, J. Blumer, David Haussler, Ross McConnell, and Andrzej Ehrenfeucht. Complete inverted files for efficient text retrieval and analysis. *Journal of the ACM*, 34(3):578–595, 1987.
- [11] Supaporn Chairungsee and Maxime Crochemore. Using minimal absent words to build phylogeny. *Theoretical Computer Science*, 450:109 – 116, 2012.
- [12] Panagiotis Charalampopoulos, Maxime Crochemore, Gabriele Fici, Robert Mercas, and Solon P. Pissis. Alignment-free sequence comparison using absent words. *Inf. Comput.*, 262:57–68, 2018.
- [13] Panagiotis Charalampopoulos, Maxime Crochemore, and Solon P. Pissis. On extended special factors of a word. In *SPIRE 2018*, volume 11147 of *Lecture Notes in Computer Science*, pages 131–138. Springer, 2018.
- [14] M. Crochemore, F. Mignosi, A. Restivo, and S. Salemi. Data compression using antidictionaries. *Proc. IEEE*, 88(11):1756–1768, 2000.
- [15] Maxime Crochemore and Gonzalo Navarro. Improved antidictionary based compression. In *12th International Conference of the Chilean Computer Science Society, 2002. Proceedings.*, pages 7–13. IEEE, 2002.
- [16] Yuta Fujishige, Yuki Tsujimaru, Shunsuke Inenaga, Hideo Bannai, and Masayuki Takeda. Linear-time computation of DAWGs, symmetric indexing structures, and MAWs for integer alphabets. *Theoretical Computer Science*, 973:114093, 2023.
- [17] Lucian Ilie and William F Smyth. Minimum unique substrings and maximum repeats. *Fundamenta Informaticae*, 110(1-4):183–195, 2011.
- [18] Shunsuke Inenaga. Linear-size suffix tries and linear-size CDAWGs simplified and improved. *CoRR*, abs/2401.04509, 2024.
- [19] Grigorios Koulouras and Martin C Frith. Significant non-existence of sequences in genomes and proteomes. *Nucleic acids research*, 49(6):3139–3155, 2021.
- [20] Filippo Mignosi, Antonio Restivo, and Marinella Sciortino. Words and forbidden factors. *Theor. Comput. Sci.*, 273(1-2):99–117, 2002.

- [21] Kouta Okabe, Takuya Mieno, Yuto Nakashima, Shunsuke Inenaga, and Hideo Bannai. Linear-time computation of generalized minimal absent words for multiple strings. In *SPIRE 2023*, volume 14240 of *Lecture Notes in Computer Science*, pages 331–344, 2023.
- [22] Armando J. Pinho, Paulo Jorge S. G. Ferreira, Sara P. Garcia, and João M. O. S. Rodrigues. On finding minimal absent words. *BMC Bioinform.*, 10, 2009.
- [23] Diogo Pratas and Jorge M Silva. Persistent minimal sequences of SARS-CoV-2. *Bioinformatics*, 36(21):5129–5132, 2020.
- [24] Jakub Radoszewski and Wojciech Rytter. On the structure of compacted subword graphs of Thue-Morse words and their applications. *J. Discrete Algorithms*, 11:15–24, 2012.
- [25] Wojciech Rytter. The structure of subword graphs and suffix trees of Fibonacci words. *Theor. Comput. Sci.*, 363(2):211–223, 2006.
- [26] Peter Weiner. Linear pattern matching algorithms. In *Proceedings of the 14th Annual Symposium on Switching and Automata Theory*, pages 1–11. IEEE, 1973.