

# Exploring the Impact of Large Language Models on Recommender Systems: An Extensive Review

Arpita Vats  
Santa Clara University  
Santa Clara, USA

Rahul Raja  
Carnegie Mellon University  
Pittsburgh, USA

Vinija Jain\*  
Stanford University  
Amazon  
Palo Alto, USA

Aman Chadha\*  
Stanford University  
Amazon GenAI  
Palo Alto, USA

## Abstract

The paper underscores the significance of Large Language Models (LLMs) in reshaping recommender systems, attributing their value to unique reasoning abilities absent in traditional recommenders. Unlike conventional systems lacking direct user interaction data, LLMs exhibit exceptional proficiency in recommending items, showcasing their adeptness in comprehending intricacies of language. This marks a fundamental paradigm shift in the realm of recommendations. Amidst the dynamic research landscape, researchers actively harness the language comprehension and generation capabilities of LLMs to redefine the foundations of recommendation tasks. The investigation thoroughly explores the inherent strengths of LLMs within recommendation frameworks, encompassing nuanced contextual comprehension, seamless transitions across diverse domains, adoption of unified approaches, holistic learning strategies leveraging shared data reservoirs, transparent decision-making, and iterative improvements. Despite their transformative potential, challenges persist, including sensitivity to input prompts, occasional misinterpretations, and unforeseen recommendations, necessitating continuous refinement and evolution in LLM-driven recommender systems.

## 1 Introduction

Recommendation systems are crucial for personalized content discovery, and the integration of Large Language Models (LLMs) in Natural Language Processing (NLP) is revolutionizing these systems [20]. LLMs, with their language comprehension capabilities, recommend items based on contextual understanding, eliminating the need for explicit behavioral data. The current research landscape is witnessing a surge in efforts to leverage LLMs for refining recommender systems, transforming recommendation tasks into exercises in language understanding and generation. These models excel in contextual understanding, adapting to zero and few-shot domains [7], streamlining processes, and reducing environmental impact. This paper delves into how LLMs enhance transparency and interactivity in recommender systems, continuously refining performance through user feedback. Despite challenges, researchers propose approaches to effectively leverage LLMs, aiming to bridge the

\*Work does not relate to position at Amazon.

gap between strengths and challenges for improved system performance. Essentially, this paper makes three significant contributions to the realm of LLMs in recommenders:

- Introducing a systematic taxonomy designed to categorize LLMs for recommenders.
- Systematizing the essential and primary techniques illustrating how LLMs are utilized in recommender systems, providing a detailed overview of current research in this domain.
- Deliberating on the challenges and limitations associated with traditional recommender systems, accompanied by solutions using LLMs in recommenders.

## 2 Background and Related Work


In this section, we provide a concise overview of pertinent literature concerning recommender systems and methods involving LLMs.

### 2.1 Recommender Systems

Traditional recommender systems follow Candidate Generation, Retrieval, and Ranking phases. However, the advent of LLMs brings a new perspective. Unlike conventional models, LLMs do not require separate embeddings for each user/item interaction. Instead, they use task-specific prompts encompassing user data, item information, and previous preferences. This adaptability allows LLMs to generate recommendations directly, dynamically adapting to various contexts without explicit embeddings. While departing from traditional models, this unified approach retains the capacity for personalized and contextually-aware recommendations, offering a more cohesive and adaptable alternative to segmented retrieval and ranking structures.

### 2.2 Large Language Models (LLMs)

LLMs, such as Llama [51], GPT [43], T5 [44], etc., are versatile in NLP. BERT is an encoder-only model with bidirectional attention, GPT employs a transformer decoder for one-directional processing, and T5 transforms NLP problems into text generation tasks. Recent LLMs like GPT-3 [4], Language Model for Dialogue Applications (LaMDA) [50], Pathways Language Model (PaLM) [6], and Vicuna excel in understanding human-like textual knowledge, employing In-Context Learning (ICL) [11] for context-based responses.

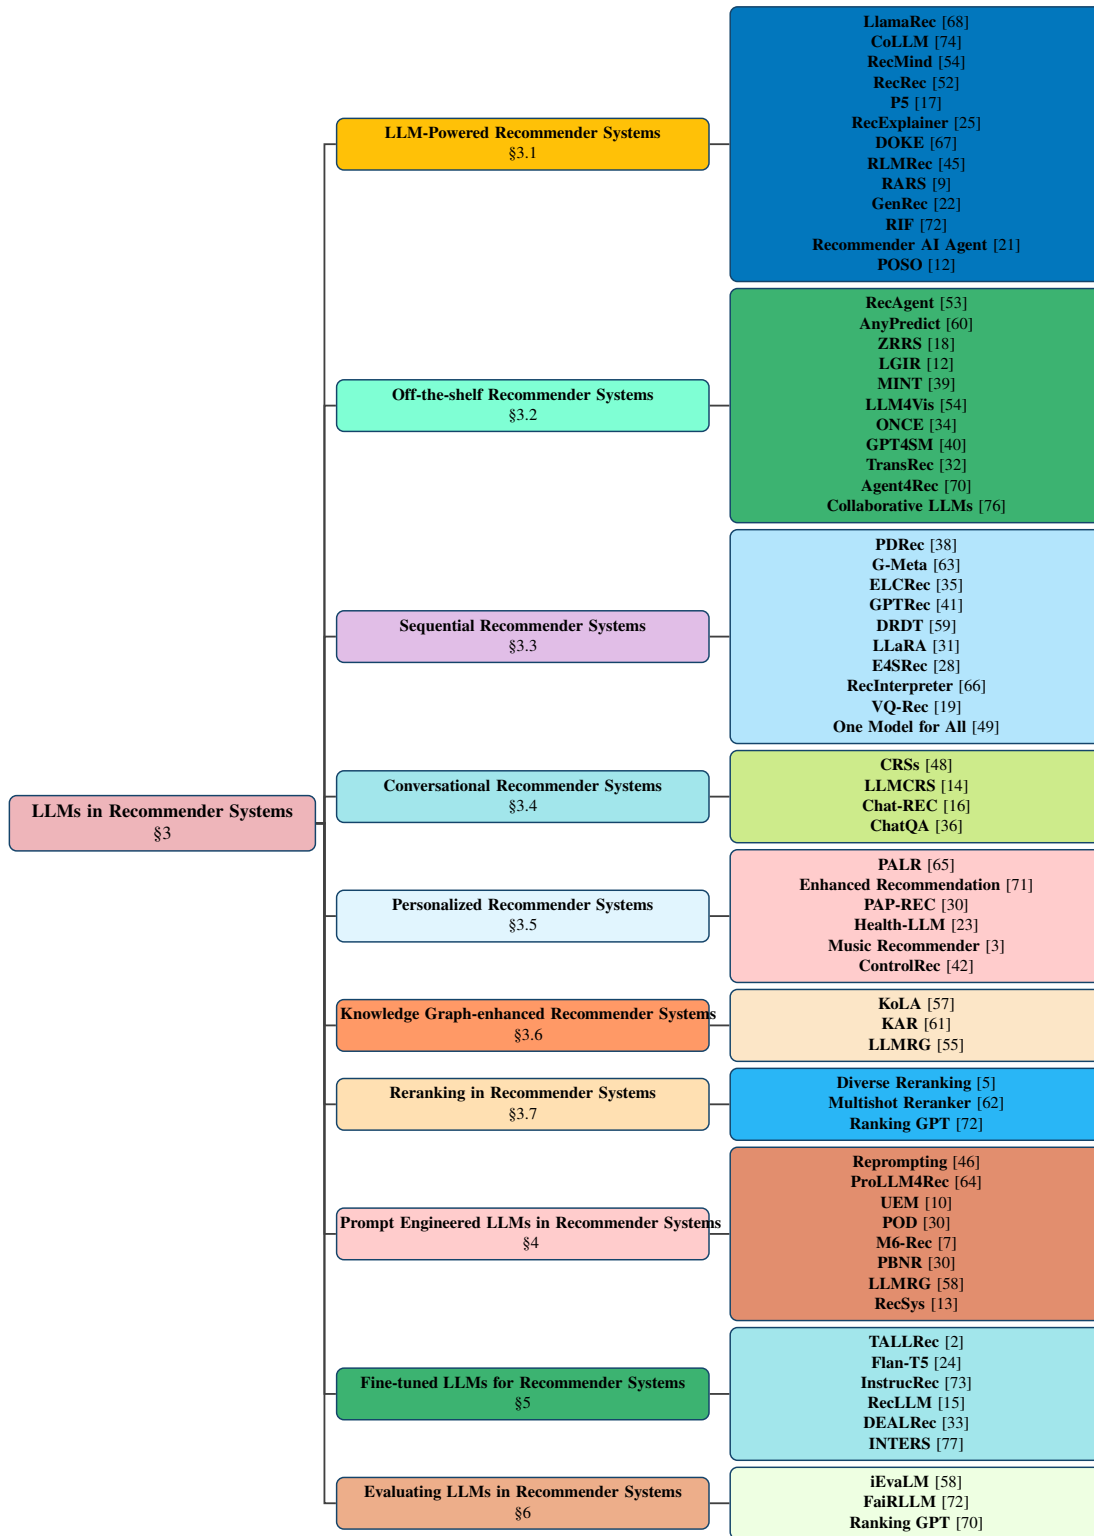

**Figure 1: Taxonomy of Recommendation in LLMs, encompassing LLMs in Recommendation Systems, Sequential & Conversational Recommender Systems, Personalized recommender system Knowledge Graph enhancements, Reranking, Prompts, and Fine-Tuned LLMs. Offers a condensed overview of models and methods within the Recommendation landscape.**

### 3 LLMs in Recommender Systems

In this section, we will investigate how LLMs enhance deep learning-based recommender systems by playing crucial roles in user data collection, feature engineering, and scoring/ranking functions. Going beyond their role as mere components, LLMs actively govern the system pipeline, fostering interactive and explainable recommendation processes. They possess the capability to comprehend user preferences, orchestrate ranking stages, and contribute to the evolution of integrated conversational recommender systems.

#### 3.1 LLM-Powered Recommender Systems Across Domains

In this section, we delve into the wide-reaching applications of LLM-powered recommender systems across diverse domains. From entertainment to shopping and conversational agents, witness the versatile impact of LLMs.

**LlamaRec:** Yue *et al.* [68] introduce LlamaRec, a two-stage recommendation system. In the first stage, a sequential recommender uses user history to efficiently choose candidate items. The selected candidates and user history are then fed into an LLM using a tailored prompt template. Instead of autoregressive generation, a verbalizer is used to convert LLM output logits into probability distributions, speeding up the inference process and enhancing efficiency. This novel approach overcomes the text generation sluggishness typically encountered, resulting in more efficient recommendations.

**RecMind:** Wang *et al.* [58] introduce RecMind, an innovative recommender agent fueled by LLMs. RecMind, as an autonomous agent, is intricately designed to furnish personalized recommendations through strategic planning and the utilization of external tools. RecMind incorporates the Self-Inspiring (SI) planning algorithm. This algorithm empowers the agent by enabling it to consider all previously explored planning paths, thereby enhancing the generation of more effective recommendations. The agent's comprehensive framework includes planning, memory, and tools, collectively bolstering its capacities in reasoning, acting, and memory retention.

**RecRec:** Verma *et al.* [52] introduce RecRec, aiming to create algorithmic recourse-based explanations for content filtering-based recommender systems. RecRec offers actionable insights, suggesting specific actions to modify recommendations based on desired preferences. The authors advocate for an optimization-based approach, validating RecRec's effectiveness through empirical evaluations on real-world datasets. The results demonstrate its ability to generate valid, sparse, and actionable recourses that provide valuable insights for improving product rankings.

**P5:** Geng *et al.* [17] introduce a groundbreaking contribution made by introducing a unified "Pretrain, Personalized Prompt & Predict Paradigm." This paradigm seamlessly integrates various recommendation tasks into a cohesive conditional language generation framework. It involves the creation of a carefully designed set of personalized prompts covering five distinct recommendation task families. Noteworthy is P5's robust zero-shot generalization capability, demonstrating its effectiveness in handling new personalized prompts and previously unseen items in unexplored domains.

**RecExplainer:** Lei *et al.* [25] introduce utilization of LLMs as alternative models for interpreting and elucidating recommendations

from embedding-based models, which often lack transparency. The authors introduce three methods for aligning LLMs with recommender models: behavior alignment, replicating recommendations using language; intention alignment, directly comprehending recommender embeddings; and hybrid alignment, combining both approaches. LLMs can adeptly comprehend and generate high-quality explanations for recommendations, thereby addressing the conventional tradeoff between interpretability and complexity.

**DOKE:** Yao *et al.* [67], introduce DOKE, a paradigm enhancing LLMs with domain-specific knowledge for practical applications. DOKE utilizes an external domain knowledge extractor to prepare and express knowledge in LLM-understandable formats, avoiding costly fine-tuning. Demonstrated in recommender systems, DOKE provides item attributes and collaborative filtering signals.

**RLMRec:** Ren *et al.* [45] introduce recommender system challenges related to graph-based models and ID-based data limitations. Introducing RLMRec, a model-agnostic framework, the paper integrates LLMs to improve recommendations by leveraging representation learning and aligning semantic spaces. The study establishes a theoretical foundation and practical evaluations demonstrate RLMRec's robustness to noise and incomplete data in enhancing the recommendation process.

**RARS:** Di *et al.* [9] highlights that LLMs exhibit contextual awareness and a robust ability to adapt to previously unseen data. By amalgamating these technologies, a potent tool is formed for delivering contextual and pertinent recommendations, particularly in cold scenarios marked by extensive data sparsity. It introduces an innovative approach named Retrieval-augmented Recommender Systems, which merges the advantages of retrieval-based and generation-based models to augment the capability of RSs in offering pertinent suggestions.

**GenRec:** Ji *et al.* [22] introduces a new application of LLMs in recommendation systems, particularly enhancing user engagement with diverse data. The paper introduces GenRec model which leverages descriptive item information, leading to more sophisticated personalized recommendations. Experimental results confirm GenRec's effectiveness, indicating its potential for various applications and encouraging further research on LLMs in generative recommender systems.

**Recommendation as Instruction Following:** Zhang *et al.* [71] introduce a novel recommendation concept by expressing user preferences through natural language instructions for LLMs. It involves fine-tuning a 3B Flan-T5-XL LLM to align with recommender systems, using a comprehensive instruction format. This paradigm treats recommendation as instruction-following, allowing users flexibility in expressing diverse information needs.

**Recommender AI Agent:** Huang *et al.* [21] introduce RecAgent, a pioneering framework merging LLMs and recommender models for an interactive conversational recommender system. Addressing the strengths and weaknesses of each, RecAgent uses LLMs for language comprehension and reasoning (the 'brain') and recommender models for item recommendations (the 'tools'). The paper outlines essential tools, including a memory bus for communication, dynamic demonstration-augmented task planning, and a reflection strategy for quality evaluation, creating a flexible and comprehensive system.

**CoLLM:** Zhang *et al.* [74] introduce LLMRec, emphasizing collaborative information modeling alongside text semantics in recommendation systems. CoLLM, seamlessly incorporating collaborative details into LLMs using external traditional models for improved recommendations in cold and warm start scenarios.

**POSO:** Dai *et al.* [8] introduce a Personalized Cold Start Modules (POSO), enhancing pre-existing modules with user-group-specialized sub-modules and personalized gates for comprehensive representations. Adaptable to various modules like Multi-layer Perceptron and Multi-head Attention, POSO shows significant performance improvement with minimal computational overhead.

### 3.2 Off-the-shelf LLM-based Recommender Systems

In this section we examine recommender systems that operate without tuning, specifically focusing on whether adjustments have been made to the LLM.

**RecAgent:** Wang *et al.* [53] proposes the potential of models for robust user simulation, particularly in reshaping traditional user behavior analysis. They focus on recommender systems, employing LLMs to conceptualize each user as an autonomous agent within a virtual simulator named RecAgent. It introduces global functions for real-human playing and system intervention, enhancing simulator flexibility. Extensive experiments are conducted to assess the simulator's effectiveness from both agent and system perspectives.

**MediTab:** Wang *et al.* [60] introduce MediTab, a method enhancing scalability for medical tabular data predictors across diverse inputs. Using an LLM-based data engine, they merge tabular samples with distinct schemas. Through a "learn, annotate, and refinement" pipeline, MediTab aligns out-domain data with the target task, enabling it to make inferences for arbitrary tabular inputs without fine-tuning. Achieving impressive results on patient and trial outcome prediction datasets, MediTab demonstrates substantial improvements over supervised baselines and outperforms XGBoost models in zero-shot scenarios.

**ZRRS:** Hou *et al.* [19] introduce a recommendation problem as a conditional ranking task, using LLMs to address it with a designed template. Experimental results on widely-used datasets showcase promising zero-shot ranking capabilities. The authors propose special prompting and bootstrapping strategies, demonstrating effectiveness. These insights position zero-shot LLMs as competitive challengers to conventional recommendation models, particularly in ranking candidates from multiple generators.

**LGIR:** Du *et al.* [12] proposes an innovative job recommendation method based on LLMs that overcomes limitations in fabricated generation. This comprehensive approach enhances the accuracy and meaningfulness of resume completion, even for users with limited interaction records. To address few-shot problems, the authors suggest aligning low-quality resumes with high-quality generated ones using Generative Adversarial Networks (GANs), refining representations and improving recommendation outcomes.

**MINT:** Mysore *et al.* [39] use LLMs for data augmentation in training Narrative-Driven Recommendation (NDR) models. LLMs generate synthetic narrative queries from user-item interactions using few-shot prompting. Retrieval models for NDR are trained with a

combination of synthetic queries and original interaction data. Experiments show the approach's effectiveness, making it a successful strategy for training compact retrieval models that outperform alternatives and LLM baselines in narrative-driven recommendation.

**PEPLER:** Li *et al.* [26] introduce PEPLER, a system that generates natural language explanations for recommendations by treating user and item IDs as prompts. Two training strategies are proposed to bridge the gap between continuous prompts and the pre-trained model, aiming to enhance the performance of explanation generation. The researchers suggest that this approach could inspire others in tuning pre-trained language models more effectively. Evaluation of the generated explanations involves not only text quality metrics such as BLEU and ROUGE but also metrics focused on explainability from the perspective of item features. Results from extensive experiments indicate that PEPLER consistently outperforms state-of-the-art baselines.

**LLM4Vis:** Wang *et al.* [54] introduce LLM4Vis, a ChatGPT-based method for accurate visualization recommendations and human-like explanations with minimal demonstration examples. The methodology involves feature description, demonstration example selection, explanation generation, demonstration example construction, and inference steps. A new explanation generation bootstrapping method refines explanations iteratively, considering previous generations and using template-based hints.

**ONCE:** Liu *et al.* [34] introduce a combination of open-source and closed-source LLMs to enhance content-based recommendation systems. Open-source LLMs contribute as content encoders, while closed-source LLMs enrich training data using prompting techniques. Extensive experiments show significant effectiveness, with a relative improvement of up to 19.32% compared to existing models, highlighting the potential of both LLM types in advancing content-based recommendations.

**GPT4SM:** Peng *et al.* [40] proposes three strategies to integrate the knowledge of LLMs into basic PLMs, aiming to improve their overall performance. These strategies involve utilizing GPT embedding as a feature (EaaF) to enhance text semantics, using it as a regularization (EaaR) to guide the aggregation of text token embeddings, and incorporating it as a pre-training task (EaaP) to replicate the capabilities of LLMs. The experiments conducted by the researchers demonstrate that the integration of GPT embeddings enables basic PLMs to enhance their performance in both advertising and recommendation tasks.

**TransRec:** Lin *et al.* [32] introduce TransRec, a pioneering multi-facet paradigm designed to establish a connection between LLMs and recommendation systems. TransRec employs multi-facet identifiers, including ID, title, and attribute information, to achieve a balance of distinctiveness and semantic richness. Additionally, the authors present a specialized data structure for TransRec, ensuring precise in-corporus identifier generation. The adoption of substring indexing is implemented to encourage LLMs to generate content from various positions. The researchers conduct the implementation of TransRec on two core LLMs, specifically BART-large and LLaMA-7B.

**Agent4Rec:** Zhang *et al.* [69] introduce Agent4Rec, a movie recommendation simulator using LLM-empowered generative agents. These agents have modules for user profiles, memory, and actions tailored for recommender systems. The study explores how well

LLM-empowered generative agents simulate real human behavior in recommender systems, evaluating alignment and deviations between agents and user preferences. Experiments delve into the filter bubble effect and uncover causal relationships in recommendation tasks.

**Collaborative LLMs for Recommender Systems:** Zhu *et al.* [76] introduce a Collaborative LLMscite, as a novel recommendation system. It combines pretrained LLMs with traditional ones to address challenges in spurious correlations and language modeling. The methodology extends the LLM's vocabulary with special tokens for users and items, ensuring accurate user-item interaction modeling. Mutual regularization in pretraining connects collaborative and content semantics, and stochastic item reordering manages non-crucial item order.

### 3.3 LLMs in Sequential Recommender Systems

It is a recommendation approach that focuses on the order of a user's past interactions to predict their next likely actions. It considers the sequence of items a user has viewed, purchased, or interacted with, rather than just overall popularity or static preferences. This allows for more personalized and timely recommendations that reflect the user's current interests and evolving tastes.

**PDRec:** Ma *et al.* [38] proposes a Plug-in Diffusion Model for Sequential Recommendation. This innovative framework employs diffusion models as adaptable plugins, capitalizing on user preferences related to all items generated through the diffusion process to address the challenge of data sparsity. By incorporating time-interval diffusion, PDRec infers dynamic user preferences, adjusts historical behavior weights, and enhances potential positive instances. Additionally, it samples noise-free negatives from the diffusion output to optimize the model.

**G-Meta:** Xio *et al.* [63] introduce G-Meta framework, which is designed for the distributed training of optimization-based meta-learning recommendation models on GPU clusters. It optimizes computation and communication efficiency through a combination of data and model parallelism, and includes a Meta-IO pipeline for efficient data ingestion. Experimental results demonstrate G-Meta's ability to achieve accelerated training without compromising statistical performance. Since 2022, it has been implemented in Alibaba's core systems, resulting in a notable 4x reduction in model delivery time and significant improvements in business metrics. Its key contributions include hybrid parallelism, distributed meta-learning optimizations, and the establishment of a high-throughput Meta-IO pipeline.

**ELCRec:** Liu *et al.* [35] presents ELCRec, a novel approach for intent learning in sequential recommendation systems. ELCRec integrates representation learning and clustering optimization within an end-to-end framework to capture users' intents effectively. It uses learnable parameters for cluster centers, incorporating clustering loss for concurrent optimization on mini-batches, ensuring scalability. The learned cluster centers serve as self-supervision signals, enhancing representation learning and overall recommendation performance.

**GPTRec:** Petrov *et al.* [41] introduce GPTRe, a GPT-2-based sequential recommendation model using the SVD Tokenisation algorithm to address vocabulary challenges. The paper presents a Next-K recommendation strategy, demonstrating its effectiveness. Experimental results on the MovieLens-1M dataset show that GPTRec matches SASRec's quality while reducing the embedding table by 40%.

**DRDT:** Wang *et al.* [59] introduce the improvement of LLM reasoning in sequential recommendations. The methodology introduces Dynamic Reflection with Divergent Thinking (DRDT), within a retriever-reranker framework. Leveraging a collaborative demonstration retriever, it employs divergent thinking to comprehensively analyze user preferences. The dynamic reflection component emulates human learning, unveiling the evolution of users' interests.

**LLaRA:** Liao *et al.* [31] introduce LLaRA, a framework for modeling sequential recommendations within LLMs. LLaRA adopts a hybrid approach, combining ID-based item embeddings from conventional recommenders with textual item features in LLM prompts. Addressing the "sequential behavior of the user" as a novel modality, an adapter bridges the gap between traditional recommender ID embeddings and LLM input space. Utilizing curriculum learning, researchers gradually transition from text-only to hybrid prompting during training, enabling LLMs to adeptly handle sequential recommendation tasks.

**E4SRec:** Li *et al.* [28] introduce E4SRec, seamlessly integrating LMs with traditional recommender systems using item IDs. E4SRec efficiently generates ranking lists in a single forward process, addressing challenges in integrating IDs with LLMs and proposing an industrial-level recommender system with demonstrated superiority in real-world applications.

**RecInterpreter:** Yang *et al.* [66] propose RecInterpreter, evaluating LLMs for interpreting sequential recommender representation space. Using multimodal pairs and lightweight adapters, RecInterpreter enhances LLaMA's understanding of ID-based sequential recommenders, particularly with sequence-residual prompts. It also enables LLaMA to determine the ideal next item for a user from generative recommenders like DreamRec

**VQ-Rec:** Hou *et al.* [18] propose VQ-Rec, a novel method for transferable sequential recommenders using Vector-Quantized item representations. It translates item text into indices, generates representations, and employs enhanced contrastive pre-training with mixed-domain code representations. A differentiable permutation-based network guides a unique cross-domain fine-tuning approach, demonstrating effectiveness across six benchmarks in various scenarios.

**K-LaMP:** Baek *et al.* [1] proposes enhancing LLMs by incorporating user interaction history with a search engine for personalized outputs. The study introduces an entity-centric knowledge store derived from users' web search and browsing activities, forming the basis for contextually relevant LLM prompt augmentations.

**One Model for All:** Tang *et al.* [49] presents LLM-Rec, addressing challenges in multi-domain sequential recommendation. They use an LLM to capture world knowledge from textual data, bridging gaps between recommendation scenarios. The task is framed as a next-sentence prediction task for the LLM, representing items and users with titles. Increasing the pre-trained language model size enhances both fine-tuned and zero-shot domain recommendation, with slight impacts on fine-tuning performance. The study explores

different fine-tuning methods, noting performance variations based on model size and computational resources.

### 3.4 LLMs in Conversational Recommender Systems

This section explores the role of LLMs in Conversational Recommender Systems (CRSs) [48]. CRSs aim to provide quality recommendations through dialogue interfaces, covering tasks like user preference elicitation, recommendation, explanation, and item information search. However, challenges arise in managing sub-tasks, ensuring efficient problem-solving, and generating user-interaction-friendly responses in the development of effective CRS.

**LLMCRS:** Feng *et al.* [14] introduce LLMCRS, a pioneering LLM-based Conversational Recommender System. It strategically uses LLM for sub-task management, collaborates with expert models, and leverages LLM’s generation capabilities. LLMCRS incorporates instructional mechanisms and proposes fine-tuning with reinforcement learning from CRSs performance feedback (RLPF) for conversational recommendations. Experimental findings show LLM-CRS with RLPF outperforms existing methods, demonstrating proficiency in handling conversational recommendation tasks.

**Chat-REC:** Gao *et al.* [16] introduce Chat-REC which uses an LLM to enhance its conversational recommender by summarizing user preferences from profiles. The system combines traditional recommendation methods with OpenAI’s Chat-GPT for multi-round recommendations, interactivity, and explainability. To handle cold item recommendations, an item-to-item similarity approach using external current information is proposed. In experiments, Chat-REC performs well in zero-shot and cross-domain recommendation tasks.

**ChatQA:** Liu *et al.* [36] introduce ChatQA conversational question-answering models rivaling GPT-4’s performance, without synthetic data. They propose a two-stage instruction tuning method to enhance zero-shot capabilities. Demonstrating the effectiveness of fine-tuning a dense retriever on multi-turn QA datasets, they show it matches complex query rewriting models with simpler deployment.

### 3.5 LLMs in Personalized Recommenders Systems

**PLAR:** Yang *et al.* [65] introduce PALR, a versatile personalized recommendation framework addressing challenges in the domain. The process involves utilizing an LLM and user behavior to generate user profile keywords, followed by a retrieval module for candidate pre-filtering. PALR, independent of specific retrieval algorithms, leverages the LLM to provide recommendations based on user historical behaviors. To tailor general-purpose LLMs for recommendation scenarios, user behavior data is converted into prompts, and an LLaMa 7B model is fine-tuned. PALR demonstrates competitive performance against state-of-the-art methods on two public datasets, making it a flexible recommendation solution.

**Bridging LLMs and Domain-Specific Models for Enhanced Recommendation:** Zhang *et al.* [73] introduce information disparity between domain-specific models and LLMs for personalized recommendation. The approach incorporates an information sharing module, acting as a repository and conduit for collaborative training. This enables a reciprocal exchange of insights: domain models provide user behavior patterns, and LLMs contribute general

knowledge and reasoning abilities. Deep mutual learning during joint training enhances this collaboration, bridging information gaps and leveraging the strengths of both models.

**PAP-REC:** Li *et al.* [30] proposes PAP-REC a framework that automatically generates personalized prompts for recommendation language models (RLMs) to enhance their performance in diverse recommendation tasks. Instead of depending on inefficient and sub-optimal manually designed prompts, PAP-REC utilizes gradient-based methods to effectively explore the extensive space of potential prompt tokens. This enables the identification of personalized prompts tailored to each user, contributing to improved RLM performance.

**Health-LLM:** Jin *et al.* [23] introduce a framework integrating LLM and medical expertise for enhanced disease prediction and health management using patient health reports. Health-LLM involves extracting informative features, assigning weighted scores by medical professionals, and training a classifier for personalized predictions. Health-LLM offers detailed modeling, individual risk assessments, and semi-automated feature engineering, providing professional and tailored intelligent healthcare.

**Personalized Music Recommendation:** Brain *et al.* [3] introduce a Deezer’s shift to a fully personalized system for improved new music release discoverability. The use of cold start embeddings and contextual bandits leads to a substantial boost in clicks and exposure for new releases through personalized recommendations.

**GIRL:** Zheng *et al.* [75] introduce GIRL, a job recommendation approach inspired by LLMs. It uses Supervised Fine-Tuning (SFT) for generating Job Descriptions (JDs) from CVs, incorporating a reward model for CV-JD matching. Reinforcement Learning fine-tunes the generator with Proximal Policy Optimization, creating a candidate-set-free, job seeker-centric model. Experiments on a real-world dataset demonstrate significant effectiveness, signaling a paradigm shift in personalized job recommendation.

**ControlRec:** Qiu *et al.* [42] introduce ControlRec, a framework for contrastive prompt learning integrating LLMs into recommendation systems. User/item IDs and natural language prompts are treated as heterogeneous features and encoded independently. The framework introduces two contrastive objectives: Heterogeneous Feature Matching (HFM), aligning item descriptions with IDs based on user interactions, and Instruction Contrastive Learning (ICL), merging ID and language representations by contrasting output distributions for recommendation tasks.

### 3.6 LLMs for Knowledge Graph-enhanced Recommender Systems

This section explores how Language Models (LLMs) are utilized to enhance knowledge graphs within recommender systems, leveraging natural language understanding to enrich data representation and recommendation outcomes.

**KoLA:** Wang *et al.* [57] introduce the significance of incorporating knowledge graphs in recommender systems, as indicated by the benchmark evaluation KoLA [68]. Knowledge graphs enhance recommendation explainability, with embedding-based, path-based, and unified methods improving recommendation quality. Challenges in dataset sparsity, especially in private domains, are noted, and LLMs like symbolic-kg help address data scarcity, though issues

like the phantom problem and common sense limitations must be tackled for optimal recommender system performance

**KAR:** Xi *et al.* [61] introduce KAR, the Open-World Knowledge Augmented Recommendation Framework with LLM. KAR extracts reasoning knowledge on user preferences and factual knowledge on items from LLMs using factorization prompting. The resulting knowledge is transformed into augmented vectors using a hybrid-expert adaptor, enhancing the performance of any recommendation model. Efficient inference is ensured by preprocessing and pre-storing LLM knowledge.

**LLMRG:** LLM Reasoning Graphs (LLMRG) by Wang *et al.* [57] utilize LLMs to create personalized reasoning graphs for robust and interpretable recommender systems. LLMRG connects user profiles and behavioral sequences, incorporating chained graph reasoning, divergent extension, self-verification, and self-improvement of knowledge bases. LLMRG enhances recommendations without extra user or item information, offering adaptive reasoning for a comprehensive understanding of user preferences and behaviors.

### 3.7 LLMs for Reranking in Recommender Systems

This section focuses on the utilization of LLMs for reranking within recommendation systems, emphasizing their role in enhancing the overall recommendation process.

**Diverse Reranking:** Carraro *et al.* [5] introduce LLMs for reranking recommendations to enhance diversity beyond mere relevance. In an initial study, the authors confirm LLMs' ability to proficiently interpret and perform reranking tasks with a focus on diversity. They then introduce a more rigorous methodology, prompting LLMs in a zero-shot manner to create a diverse reranking from an initial candidate ranking generated by a matrix factorization recommender.

**MultiSlot ReRanker:** Xiao *et al.* [62] proposes MultiSlot, ReRanker, a model-based framework for re-ranking in recommendation systems, addressing relevance, diversity, and freshness. It employs the efficient Sequential Greedy Algorithm and utilizes an OpenAI Gym simulator to evaluate learning algorithms for re-ranking under diverse assumptions.

**Zero-Shot Ranker:** Hou *et al.* [19] introduce a recommendation as a conditional ranking task, utilizing LLMs with carefully designed prompts based on sequential interaction histories. Despite promising zero-shot ranking abilities, challenges include accurately perceiving interaction order and susceptibility to popularity biases. The study suggests that specially crafted prompting and bootstrapping strategies can alleviate these issues, enabling zero-shot LLMs to competitively rank candidates from multiple generators compared to traditional recommendation models.

**RankingGPT:** Zhang *et al.* [72] introduce a two-stage training strategy to enhance LLMs for efficient text ranking. The initial stage involves pretraining the LLM on a vast weakly supervised dataset, aiming to improve its ability to predict associated tokens without altering its original objective. Subsequently, supervised fine-tuning is applied with constraints to enhance the model's capability in discerning relevant text pairs for ranking while preserving its text generation abilities.

## 4 Prompt Engineered LLMs in Recommender Systems

This section investigates the incorporation of prompt engineering by LLMs in the context of recommendation systems, emphasizing their role in refining and enhancing user prompts for improved recommendations.

**Reprompting:** Spur *et al.* [46] introduce ChatGPT as a conversational recommendation system, emphasizing realistic user interactions and iterative feedback for refining suggestions. The study investigates popularity bias in ChatGPT's recommendations, highlighting that iterative reprompting significantly improves relevance. Results show ChatGPT outperforms random and traditional systems, suggesting effective mitigation of popularity bias through strategic prompt engineering.

**ProLLM4Rec:** Xu *et al.* [64] introduce ProLLM4Rec, as a comprehensive framework utilizing LLMs as recommender systems through prompting engineering. The framework focuses on selecting the LLM based on factors like availability, architecture, scale, and tuning strategies, and crafting effective prompts that include task descriptions, user modeling, item candidates, and prompting strategies.

**UEM:** Doddapaneni *et al.* [10] introduce User Embedding Module (UEM). This module is designed to effectively handle extensive user preference histories expressed in free-form text, with the goal of incorporating these histories into LLMs to enhance recommendation performance. The UEM transforms user histories into concise representative embeddings, acting as soft prompts to guide the LLM. This approach addresses the computational complexity associated with directly concatenating lengthy histories.

**POD:** Chen *et al.* [27] introduce PrOmpt Distillation (POD), is proposed to enhance the efficiency of training models. Experimental results on three real-world datasets show the effectiveness of POD in both sequential and top-N recommendation tasks.

**M6-REC:** Cui *et al.* [7] proposes M6-Rec, an efficient model for sample-efficient open-domain recommendation, integrating all sub-tasks within a recommender system. It excels in prompt tuning, maintaining parameter efficiency. Real-world deployment insights include strategies like late interaction, parameter sharing, pruning, and early-exiting. M6-Rec excels in zero/few-shot learning across tasks like retrieval, ranking, personalized product design, and conversational recommendation. Notably, it is deployed on both cloud servers and edge devices.

**PBNR:** Li *et al.* [29] introduce PBNR, as a distinctive news recommendation approach using personalized prompts to predict user article preferences, accommodating variable user history lengths during training. The study applies prompt learning, treating news recommendation as a text-to-text language task. PBNR integrates language generation and ranking loss for enhanced performance, aiming to personalize news recommendations, improve user experiences, and contribute to human-computer interaction and interpretability.

**LLM-REC:** Lyu *et al.* [37] introduce LLM-Rec, a method with four

prompting strategies: basic, recommendation-driven, engagement-guided, and a combination of recommendation-driven and engagement-guided prompting. Empirical experiments demonstrate that integrating augmented input text from LLM significantly enhances recommendation performance, emphasizing the importance of diverse prompts and input augmentation techniques for improved recommendation capabilities with LLMs.

**Recommender Systems in the Era of LLMs:** Fan *et al.* [13] survey the innovative use of prompting in tailoring LLMs for specific downstream tasks, focusing on recommendation systems. They review methods involving task-specific prompts to guide LLMs, aligning downstream tasks with language generation during pre-training. The study discusses techniques like ICL and CoT in the context of recommendation tasks within RecSys. It also covers prompt tuning and instruction tuning, incorporating prompt tokens into LLMs and updating them based on task-specific recommendation datasets.

## 5 Fine-tuned LLMs in Recommender Systems

This section delves into the application of fine-tuned LMs in recommendation systems, exploring their effectiveness in tailoring recommendations for enhanced user satisfaction.

**TALLRec:** Bao *et al.* [2] introduce a Tuning framework for Aligning LLMs with Recommendations (TALLRec) to optimize LLMs using recommendation data. This framework combines instruction tuning and recommendation tuning, enhancing the overall model effectiveness. Initially, a set of instructions is crafted, specifying task input and output. The authors implement two tuning stages: instruction tuning focuses on generalization using self-instruct data from Stanford Alpaca, while rec-tuning structures limited user interactions into Rec Instructions.

**Flan-T5:** Kang *et al.* [24] conduct a study to assess various LLMs with parameter sizes ranging from 250 million to 540 billion on tasks related to predicting user ratings. The evaluation encompassed zero-shot, few-shot, and fine-tuning scenarios. For fine-tuning experiments, the researchers utilized Flan-T5-Base (250 million parameters) and Flan-U-PaLM (540 billion parameters). In zero-shot and few-shot experiments, GPT-3 models from OpenAI and the 540 billion parameters Flan-U-PaLM were employed. The experiments revealed that the zero-shot performance of LLMs significantly lags behind traditional recommender models.

**InstructRec:** Zhang *et al.* [71] introduce InstructRec for LLM-based recommender systems, framing the task as instruction following. Using a versatile instruction format with 39 templates, generated fine-grained instructions cover user preferences, intentions, task forms, and contextual information. The 3-billion-parameter Flan-T5-XL model is tuned for efficiency, with the LLM serving as a reranker during inference. Selected instruction templates, along with operations like concatenation and persona shift, guide the ranking of the candidate item set.

**RecLLM:** Friedman *et al.* [15] propose a roadmap for a large-scale Conversational Recommender System (CRS) using LLM technology. The CRS allows users to control recommendations through real-time dialogues, refining suggestions based on direct feedback. To overcome the lack of conversational datasets, the authors use

a controllable LLM-based user simulator for synthetic conversations. LLMs interpret user profiles as natural language for personalized sessions. The retrieval approach involves a dual-encoder architecture with ranking LLMs explaining item selection. The models undergo fine-tuning with recommendation data, resulting in a successful proof-of-concept CRS using LaMDA for recommendations from public YouTube videos.

**DEALRec:** Lin *et al.* [33] introduce DEALRec, an innovative data pruning approach for efficient fine-tuning of LLMs in recommendation tasks. DEALRec identifies representative samples from extensive datasets, facilitating swift LLM adaptation to new items and user behaviors while minimizing training costs. The method combines influence and effort scores to select influential yet manageable samples, significantly reducing fine-tuning time and resource requirements. Experimental results demonstrate LLMs outperforming full data fine-tuning with just 2% of the data.

**INTERS:** Zhu *et al.* [77] proposes INTERS as an instruction tuning dataset designed to enhance the capabilities of LLMs in information retrieval tasks. Spanning 21 search-related tasks distributed across three key categories—query understanding, document understanding, and query-document relationship understanding—INTERS integrates data from 43 distinct datasets, including manually crafted templates and task descriptions. INTERS significantly boosts the performance of various publicly available LLMs in information retrieval tasks, addressing both in-domain and out-of-domain scenarios.

## 6 Evaluating LLMs in Recommender System

This section assesses the performance of LLMs in the context of recommendation systems, evaluating their effectiveness and impact on recommendation quality.

**iEvaLM:** Wang *et al.* [56] introduce an interactive evaluation approach called iEvaLM, centered on LLMs and utilizing LLM-based user simulators. This method enables diverse simulation of system-user interaction scenarios. The study emphasizes evaluating explainability, with ChatGPT demonstrating compelling generation of recommendations. This research enhances understanding of LLMs' potential in CRSs and presents a more adaptable evaluation approach for future studies involving LLM-based CRSs.

**FaiRLLM:** Zhang *et al.* [70] posit that there is a need to assess RecLLM's fairness. The evaluation focuses on various user-side sensitive attributes, introducing a novel benchmark called Fairness of Recommendation via LLM (FaiRLLM). This benchmark includes well-designed metrics and a dataset with eight sensitive attributes across music and movie recommendation scenarios. Using FaiRLLM, an evaluation of ChatGPT reveals persistent unfairness to specific sensitive attributes during recommendation generation.

**RankGPT:** Sun *et al.* [47] proposed a instructional techniques tailored for LLMs in the context of passage re-ranking tasks. They present a pioneering permutation generation approach. The evaluation process involves a comprehensive assessment of ChatGPT and GPT-4 across various passage re-ranking benchmarks, including a newly introduced NovelEval test set. Additionally, the researchers propose a distillation approach for acquiring specialized models utilizing permutations generated by ChatGPT.



## 7 Conclusion

In summary, this paper explores the transformative impact of LLMs in recommender systems, highlighting their versatility and cohesive approach compared to traditional methods. LLMs enhance transparency and interactivity, reshaping user experiences dynamically. The study delves into fine-tuning LLMs for optimized personalized content suggestions and addresses evaluating LLM models in recommendations, providing guidance for researchers and practitioners. Lastly, it touches upon the intricate ranking process in LLM-driven recommendation systems, offering valuable insights for designers and developers aiming to leverage LLMs effectively. This comprehensive exploration not only underscores their current impact but also lays the groundwork for future advancements in recommender systems.

## References

- [1] Jinheon Baek, Nirupama Chandrasekaran, Silviu Cucerzan, Allen herring, and Sujay Kumar Jauhar. 2023. Knowledge-Augmented Large Language Models for Personalized Contextual Query Suggestion. arXiv:2311.06318 [cs.IR]
- [2] Keqin Bao, Jizhi Zhang, Yang Zhang, Wenjie Wang, Fuli Feng, and Xiangan He. 2023. TALLRec: An Effective and Efficient Tuning Framework to Align Large Language Model with Recommendation. In *Proceedings of the 17th ACM Conference on Recommender Systems*. ACM. <https://doi.org/10.1145/3604915.3608857>
- [3] Léa Briand, Théo Bontempelli, and Walid Bendada. 2024. Let's Get It Started: Fostering the Discoverability of New Releases on Deezer. arXiv:2401.02827 [cs.IR]
- [4] Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, and Prafulla Dhariwal. 2020. Language Models are Few-Shot Learners. arXiv:2005.14165 [cs.CL]
- [5] Diego Carraro and Derek Bridge. 2024. Enhancing Recommendation Diversity by Re-ranking with Large Language Models. arXiv:2401.11506 [cs.IR]
- [6] Aakanksha Chowdhery, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam Roberts, and Paul Barham. 2022. PaLM: Scaling Language Modeling with Pathways. arXiv:2204.02311 [cs.CL]
- [7] Zeyu Cui, Jianxin Ma, Chang Zhou, Jingren Zhou, and Hongxia Yang. 2022. M6Rec: Generative Pretrained Language Models are Open-Ended Recommender Systems. arXiv:2205.08084 [cs.IR]
- [8] Shangfeng Dai, Haobin Lin, Zhichen Zhao, Jianying Lin, Honghuan Wu, Zhe Wang, Sen Yang, and Ji Liu. 2021. POSO: Personalized Cold Start Modules for Large-scale Recommender Systems. arXiv:2108.04690 [cs.IR]
- [9] Dario Di Palma. 2023. Retrieval-augmented Recommender System: Enhancing Recommender Systems with Large Language Models (*RecSys '23*). Association for Computing Machinery, New York, NY, USA. <https://doi.org/10.1145/3604915.3608889>
- [10] Sumanth Doddapaneni, Krishna Sayana, Ambarish Jash, Sukhdeep Sodhi, and Dima Kuzmin. 2024. User Embedding Model for Personalized Language Prompting. arXiv:2401.04858 [cs.CL]
- [11] Qingxiu Dong, Lei Li, Damai Dai, Ce Zheng, Zhiyong Wu, Baobao Chang, Xu Sun, Jingjing Xu, Lei Li, and Zhifang Sui. 2023. A Survey on In-context Learning. arXiv:2301.00234 [cs.CL]
- [12] Yingpeng Du, Di Luo, Rui Yan, Hongzhi Liu, Yang Song, Hengshu Zhu, and Jie Zhang. 2023. Enhancing Job Recommendation through LLM-based Generative Adversarial Networks. arXiv:2307.10747 [cs.IR]
- [13] Wenqi Fan, Zihuai Zhao, Jiatong Li, Yunqing Liu, Xiaowei Mei, Yiqi Wang, Zhen Wen, Fei Wang, Xiangyu Zhao, Jiliang Tang, and Qing Li. 2023. Recommender Systems in the Era of Large Language Models (LLMs). arXiv:2307.02046 [cs.IR]
- [14] Yue Feng, Shuchang Liu, Zhenghai Xue, Qingpeng Cai, Lantao Hu, Peng Jiang, Kun Gai, and Fei Sun. 2023. A Large Language Model Enhanced Conversational Recommender System. arXiv:2308.06212 [cs.IR]
- [15] Luke Friedman, Sameer Ahuja, David Allen, Zhenning Tan, and Hakim. 2023. Leveraging Large Language Models in Conversational Recommender Systems. arXiv:2305.07961 [cs.IR]
- [16] Yunfan Gao, Tao Sheng, Youlin Xiang, Yun Xiong, Haofen Wang, and Jiawei Zhang. 2023. Chat-REC: Towards Interactive and Explainable LLMs-Augmented Recommender System. arXiv:2303.14524 [cs.IR]
- [17] Shijie Geng, Shuchang Liu, Zuohui Fu, Yingqiang Ge, and Yongfeng Zhang. 2023. Recommendation as Language Processing (RLP): A Unified Pretrain, Personalized Prompt and Predict Paradigm (P5). arXiv:2203.13366 [cs.IR]
- [18] Yupeng Hou, Zhankui He, Julian McAuley, and Wayne Xin Zhao. 2023. Learning Vector-Quantized Item Representation for Transferable Sequential Recommenders (*WWW '23*). Association for Computing Machinery, New York, NY, USA, 1162–1171. <https://doi.org/10.1145/3543507.3583434>
- [19] Yupeng Hou, Junjie Zhang, Zihan Lin, Hongyu Lu, Ruobing Xie, Julian McAuley, and Wayne Xin Zhao. 2024. Large Language Models are Zero-Shot Rankers for Recommender Systems. arXiv:2305.08845 [cs.IR]
- [20] Xu Huang, Jianxun Lian, Yuxuan Lei, Jing Yao, Defu Lian, and Xing Xie. 2023. Recommender AI Agent: Integrating Large Language Models for Interactive Recommendations. arXiv:2308.16505 [cs.IR]
- [21] Xu Huang, Jianxun Lian, Yuxuan Lei, Jing Yao, Defu Lian, and Xing Xie. 2023. Recommender AI Agent: Integrating Large Language Models for Interactive Recommendations. arXiv:2308.16505 [cs.IR]
- [22] Jianchao Ji, Zelong Li, Shuyuan Xu, Wenye Hua, Yingqiang Ge, Juntao Tan, and Yongfeng Zhang. 2023. GenRec: Large Language Model for Generative Recommendation. arXiv:2307.00457 [cs.IR]
- [23] Mingyu Jin, Qinkai Yu, Chong Zhang, Dong Shu, Suiyuan Zhu, Mengnan Du, Yongfeng Zhang, and Yanda Meng. 2024. Health-LLM: Personalized Retrieval-Augmented Disease Prediction Model. arXiv:2402.00746 [cs.CL]
- [24] Wang-Cheng Kang, Jianmo Ni, and Nikhil Mehta. 2023. Do LLMs Understand User Preferences? Evaluating LLMs On User Rating Prediction. arXiv:2305.06474 [cs.IR]
- [25] Yuxuan Lei, Jianxun Lian, Jing Yao, Xu Huang, Defu Lian, and Xing Xie. 2023. RecExplainer: Aligning Large Language Models for Recommendation Model Interpretability. arXiv:2311.10947 [cs.IR]
- [26] Lei Li, Yongfeng Zhang, and Li Chen. 2023. Personalized Prompt Learning for Explainable Recommendation. arXiv:2202.07371 [cs.IR]
- [27] Lei Li, Yongfeng Zhang, and Li Chen. 2023. Prompt Distillation for Efficient LLM-based Recommendation. Association for Computing Machinery, New York, NY, USA. <https://doi.org/10.1145/3583780.3615017>
- [28] Xinhang Li, Chong Chen, Xiangyu Zhao, Yong Zhang, and Chunxiao Xing. 2023. E4SRec: An Elegant Effective Efficient Extensible Solution of Large Language Models for Sequential Recommendation. arXiv:2312.02443 [cs.IR]
- [29] Xinyi Li, Yongfeng Zhang, and Edward C. Malthouse. 2023. PBNR: Prompt-based News Recommender System. arXiv:2304.07862 [cs.IR]
- [30] Zelong Li, Jianchao Ji, Yingqiang Ge, Wenye Hua, and Yongfeng Zhang. 2024. PAP-REC: Personalized Automatic Prompt for Recommendation Language Model. arXiv:2402.00284 [cs.IR]
- [31] Jiayi Liao, Sihang Li, Zhengyi Yang, Jiancan Wu, Yancheng Yuan, and Xiang Wang. 2023. LLaRA: Aligning Large Language Models with Sequential Recommenders. arXiv:2312.02445 [cs.IR]
- [32] Xinyu Lin, Wenjie Wang, Yongqi Li, Fuli Feng, See-Kiong Ng, and Tat-Seng Chua. 2023. A Multi-facet Paradigm to Bridge Large Language Model and Recommendation. arXiv:2310.06491 [cs.IR]
- [33] Xinyu Lin, Wenjie Wang, Yongqi Li, Shuo Yang, Fuli Feng, Yinwei Wei, and Tat-Seng Chua. 2024. Data-efficient Fine-tuning for LLM-based Recommendation. arXiv:2401.17197 [cs.IR]
- [34] Qijiong Liu, Nuo Chen, Tetsuya Sakai, and Xiao-Ming Wu. 2023. ONCE: Boosting Content-based Recommendation with Both Open- and Closed-source Large Language Models. arXiv:2305.06566 [cs.IR]
- [35] Yue Liu, Shihao Zhu, Jun Xia, Yingwei Ma, Jian Ma, Wenliang Zhong, Guannan Zhang, Kejun Zhang, and Xinwang Liu. 2024. End-to-end Learnable Clustering for Intent Learning in Recommendation. arXiv:2401.05975 [cs.IR]
- [36] Zihan Liu, Wei Ping, Rajarshi Roy, Peng Xu, Chankyu Lee, Mohammad Shoeybi, and Bryan Catanzaro. 2024. ChatQA: Building GPT-4 Level Conversational QA Models. arXiv:2401.10225 [cs.CL]
- [37] Hanjia Lyu, Song Jiang, Hanqing Zeng, Qifan Wang, Si Zhang, Ren Chen, Chris Leung, Jiajie Tang, Yinglong Xia, and Jiebo Luo. 2023. LLM-Rec: Personalized Recommendation via Prompting Large Language Models. arXiv:2307.15780 [cs.CL]
- [38] Haokai Ma, Ruobing Xie, Lei Meng, Xin Chen, Xu Zhang, Leyu Lin, and Zhanhui Kang. 2024. Plug-in Diffusion Model for Sequential Recommendation. arXiv:2401.02913 [cs.IR]
- [39] Sheshera Mysore, Andrew McCallum, and Hamed Zamani. 2023. Large Language Model Augmented Narrative Driven Recommendations. arXiv:2306.02250 [cs.IR]
- [40] Baolin Peng, Chunyuan Li, Pengcheng He, Michel Galley, and Jianfeng Gao. 2023. Instruction Tuning with GPT-4. arXiv:2304.03277 [cs.CL]
- [41] Aleksandr V. Petrov and Craig Macdonald. 2023. Generative Sequential Recommendation with GPTRec. arXiv:2306.11114 [cs.IR]
- [42] Junyan Qiu, Haitao Wang, Zhaolin Hong, Yiping Yang, Qiang Liu, and Xingxing Wang. 2023. ControlRec: Bridging the Semantic Gap between Language Model and Personalized Recommendation. arXiv:2311.16441 [cs.IR]
- [43] Alec Radford, Karthik Narasimhan, Tim Salimans, and Ilya Sutskever. 2018. Improving language understanding by generative pre-training. (2018).
- [44] Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. 2023. Exploring the Limits of Transfer Learning with a Unified Text-to-Text Transformer.

- arXiv:1910.10683 [cs.LG]
- [45] Xubin Ren, Wei Wei, Lianghao Xia, Lixin Su, Suqi Cheng, Junfeng Wang, Dawei Yin, and Chao Huang. 2024. Representation Learning with Large Language Models for Recommendation. arXiv:2310.15950 [cs.IR]
- [46] Kyle Dylan Spurlock, Cagla Acun, Esin Saka, and Olfa Nasraoui. 2024. ChatGPT for Conversational Recommendation: Refining Recommendations by Reprompting with Feedback. arXiv:2401.03605 [cs.IR]
- [47] Weiwei Sun, Lingyong Yan, Xinyu Ma, Shuaiqiang Wang, Pengjie Ren, Zhumin Chen, Dawei Yin, and Zhaochun Ren. 2023. Is ChatGPT Good at Search? Investigating Large Language Models as Re-Ranking Agents. arXiv:2304.09542 [cs.CL]
- [48] Yueming Sun and Yi Zhang. 2018. Conversational Recommender System. arXiv:1806.03277 [cs.IR]
- [49] Zuoli Tang, Zhaoxin Huan, Zihao Li, Xiaolu Zhang, Jun Hu, Chilin Fu, Jun Zhou, and Chenliang Li. 2023. One Model for All: Large Language Models are Domain-Agnostic Recommendation Systems. arXiv:2310.14304 [cs.IR]
- [50] Romal Thoppilan, Daniel De Freitas, Jamie Hall, Noam Shazeer, Apoorv Kulkshreshtha, Heng-Tze Cheng, and Alicia Jin. 2022. LaMDA: Language Models for Dialog Applications. arXiv:2201.08239 [cs.CL]
- [51] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajwal Bhargava, Shruti Bhosale, Dan Bikel, Lukas Blecher, Cristian Canton Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy Fu, Wenyin Fu, Brian Fuller, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, Ranjan Subramanian, Xiaoqing Ellen Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zheng Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurelien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. 2023. Llama 2: Open Foundation and Fine-Tuned Chat Models. arXiv:2307.09288 [cs.CL]
- [52] Sahil Verma, Ashudeep Singh, Varich Boonsanong, John P. Dickerson, and Chirag Shah. 2023. RecRec: Algorithmic Recourse for Recommender Systems. In *Proceedings of the 32nd ACM International Conference on Information and Knowledge Management*. ACM. <https://doi.org/10.1145/3583780.3615181>
- [53] Lei Wang, Jingsen Zhang, Hao Yang, Zhiyuan Chen, Jiakai Tang, Zeyu Zhang, Xu Chen, Yankai Lin, Ruihua Song, Wayne Xin Zhao, Jun Xu, Zhicheng Dou, Jun Wang, and Ji-Rong Wen. 2023. When Large Language Model based Agent Meets User Behavior Analysis: A Novel User Simulation Paradigm. arXiv:2306.02552 [cs.IR]
- [54] Lei Wang, Songheng Zhang, Yun Wang, Ee-Peng Lim, and Yong Wang. 2023. LLM4Vis: Explainable Visualization Recommendation using ChatGPT. arXiv:2310.07652 [cs.HC]
- [55] Xiang Wang, Xiangnan He, Meng Wang, Fuli Feng, and Tat-Seng Chua. 2019. Neural Graph Collaborative Filtering. In *Proceedings of the 42nd International ACM SIGIR Conference on Research and Development in Information Retrieval*. ACM. <https://doi.org/10.1145/3331184.3331267>
- [56] Xiaolei Wang, Xinyu Tang, Wayne Xin Zhao, Jingyuan Wang, and Ji-Rong Wen. 2023. Rethinking the Evaluation for Conversational Recommendation in the Era of Large Language Models. arXiv:2305.13112 [cs.CL]
- [57] Yan Wang, Zhixuan Chu, Xin Ouyang, Simeng Wang, Hongyan Hao, and Yue. 2024. Enhancing Recommender Systems with Large Language Model Reasoning Graphs. arXiv:2308.10835 [cs.IR]
- [58] Yancheng Wang, Ziyang Jiang, Zheng Chen, Fan Yang, Yingxue Zhou, Eunah Cho, Xing Fan, Xiaojiang Huang, Yanbin Lu, and Yingzhen Yang. 2023. RecMind: Large Language Model Powered Agent For Recommendation. arXiv:2308.14296 [cs.IR]
- [59] Yu Wang, Zhiwei Liu, Jianguo Zhang, Weiran Yao, Shelby Heinecke, and Philip S. Yu. 2023. DRDT: Dynamic Reflection with Divergent Thinking for LLM-based Sequential Recommendation. arXiv:2312.11336 [cs.IR]
- [60] Zifeng Wang, Chufan Gao, Cao Xiao, and Jimeng Sun. 2023. MediTab: Scaling Medical Tabular Data Predictors via Data Consolidation, Enrichment, and Refinement. arXiv:2305.12081 [cs.LG]
- [61] Yunjia Xi, Weiwen Liu, Jianghao Lin, and Xiaoling Cai. 2023. Towards Open-World Recommendation with Knowledge Augmentation from Large Language Models. arXiv:2306.10933 [cs.IR]
- [62] Qiang Charles Xiao, Ajith Muralidharan, Birjodh Tiwana, Johnson Jia, Fedor Borisjuk, Aman Gupta, and Dawn Woodard. 2024. MultiSlot ReRanker: A Generic Model-based Re-Ranking Framework in Recommendation Systems. arXiv:2401.06293 [cs.AI]
- [63] Youshao Xiao, Shangchun Zhao, Zhenglei Zhou, Zhaoxin Huan, Lin Ju, Xiaolu Zhang, Lin Wang, and Jun Zhou. 2024. G-Meta: Distributed Meta Learning in GPU Clusters for Large-Scale Recommender Systems. arXiv:2401.04338 [cs.LG]
- [64] Lanling Xu, Junjie Zhang, Bingqian Li, Jinpeng Wang, Mingchen Cai, Wayne Xin Zhao, and Ji-Rong Wen. 2024. Prompting Large Language Models for Recommender Systems: A Comprehensive Framework and Empirical Analysis. arXiv:2401.04997 [cs.IR]
- [65] Fan Yang, Zheng Chen, Ziyang Jiang, Eunah Cho, Xiaojiang Huang, and Yanbin Lu. 2023. PALR: Personalization Aware LLMs for Recommendation. arXiv:2305.07622 [cs.IR]
- [66] Zhengyi Yang, Jiancan Wu, Yanchen Luo, Jizhi Zhang, Yancheng Yuan, An Zhang, Xiang Wang, and Xiangnan He. 2023. Large Language Model Can Interpret Latent Space of Sequential Recommender. arXiv:2310.20487 [cs.IR]
- [67] Jing Yao, Wei Xu, Jianxun Lian, Xiting Wang, Xiaoyuan Yi, and Xing Xie. 2023. Knowledge Plugins: Enhancing Large Language Models for Domain-Specific Recommendations. arXiv:2311.10779 [cs.IR]
- [68] Zhenrui Yue, Sara Rabhi, Gabriel de Souza Pereira Moreira, Dong Wang, and Even Oldridge. 2023. LlamaRec: Two-Stage Recommendation using Large Language Models for Ranking. arXiv:2311.02089 [cs.IR]
- [69] An Zhang, Leheng Sheng, Yuxin Chen, Hao Li, Yang Deng, Xiang Wang, and Tat-Seng Chua. 2023. On Generative Agents in Recommendation. arXiv:2310.10108 [cs.IR]
- [70] Jizhi Zhang, Keqin Bao, Yang Zhang, Wenjie Wang, Fuli Feng, and Xiangnan He. 2023. Is ChatGPT Fair for Recommendation? Evaluating Fairness in Large Language Model Recommendation. In *Proceedings of the 17th ACM Conference on Recommender Systems (RecSys '23)*. ACM. <https://doi.org/10.1145/3604915.3608860>
- [71] Junjie Zhang, Ruobing Xie, Yupeng Hou, Wayne Xin Zhao, Leyu Lin, and Ji-Rong Wen. 2023. Recommendation as Instruction Following: A Large Language Model Empowered Recommendation Approach. arXiv:2305.07001 [cs.IR]
- [72] Longhui Zhang, Yanzhao Zhang, Dingkun Long, Pengjun Xie, Meishan Zhang, and Min Zhang. 2024. TSRankLLM: A Two-Stage Adaptation of LLMs for Text Ranking. arXiv:2311.16720 [cs.IR]
- [73] Wenxuan Zhang, Hongzhi Liu, Yingpeng Du, Chen Zhu, Yang Song, Hengshu Zhu, and Zhonghai Wu. 2023. Bridging the Information Gap Between Domain-Specific Model and General LLM for Personalized Recommendation. arXiv:2311.03778 [cs.IR]
- [74] Yang Zhang, Fuli Feng, Jizhi Zhang, Keqin Bao, Qifan Wang, and Xiangnan He. 2023. CoLLM: Integrating Collaborative Embeddings into Large Language Models for Recommendation. arXiv:2310.19488 [cs.IR]
- [75] Zhi Zheng, Zhaopeng Qiu, Xiao Hu, Likang Wu, Hengshu Zhu, and Hui Xiong. 2023. Generative Job Recommendations with Large Language Model. arXiv:2307.02157 [cs.IR]
- [76] Yaochen Zhu, Liang Wu, Qi Guo, Liangjie Hong, and Jundong Li. 2023. Collaborative Large Language Model for Recommender Systems. arXiv:2311.01343 [cs.IR]
- [77] Yutao Zhu, Peitian Zhang, Chenghao Zhang, Yifei Chen, Binyu Xie, Zhicheng Dou, Zheng Liu, and Ji-Rong Wen. 2024. INTERS: Unlocking the Power of Large Language Models in Search with Instruction Tuning. arXiv:2401.06532 [cs.CL]