

# Text classification of column headers with a controlled vocabulary: leveraging LLMs for metadata enrichment

Margherita Martorana<sup>1</sup>[0000-0001-8004-0464], Tobias Kuhn<sup>1</sup>[0000-0002-1267-0234], Lise Stork<sup>1</sup>[0000-0002-2146-4803], and Jacco van Ossenbruggen<sup>1</sup>[0000-0002-7748-4715]

Vrije Universiteit Amsterdam  
m.martorana@vu.nl

**Abstract.** Traditional dataset retrieval systems index on metadata information rather than on the data values. Thus relying primarily on manual annotations and high-quality metadata, processes known to be labour-intensive and challenging to automate. We propose a method to support metadata enrichment with topic annotations of column headers using three Large Language Models (LLMs): ChatGPT-3.5, GoogleBard and GoogleGemini. We investigate the LLMs ability to classify column headers based on domain-specific topics from a controlled vocabulary. We evaluate our approach by assessing the internal consistency of the LLMs, the inter-machine alignment, and the human-machine agreement for the topic classification task. Additionally, we investigate the impact of contextual information (i.e. dataset description) on the classification outcomes. Our results suggest that ChatGPT and GoogleGemini outperform GoogleBard for internal consistency as well as LLM-human-alignment. Interestingly, we found that context had no impact on the LLMs performances. This work proposes a novel approach that leverages LLMs for text classification using a controlled topic vocabulary, which has the potential to facilitate automated metadata enrichment, thereby enhancing dataset retrieval and the Findability, Accessibility, Interoperability and Reusability (FAIR) of research data on the Web.

**Keywords:** Text classification · Large Language Models · Automatic metadata enrichment · FAIR Guiding Principles

## 1 Introduction

Traditional dataset retrieval systems index on metadata information rather than on the underlying data values. Despite the pivotal role of high-quality metadata for data retrieval, many datasets still lack informative metrics and annotations to facilitate their discovery [16]. The enrichment of metadata with high-quality information and annotations is a labour intensive and challenging process to automate, and it often relies on knowledge from domain experts. Enriching metadata with column-level information poses particular difficulty due to sparse contextual information and reliance on domain-specific code-books, often not available

in digital structured format. Nevertheless, in recent years the FAIR Guiding Principles [17] have emphasized the importance of high quality metadata to facilitate the Findability, Accessibility, Interoperability and Reusability (FAIR) of data on the Web. In fact, several studies have found that by applying the FAIR Principles we can, not only improve data management and stewardship [1,9], but also facilitate the transparency, reproducibility, discovery and reuse of data [18] and resource citation [7].

The rise of advanced Large Language Models (LLMs) has presented several opportunities and challenges in automating data annotation and metadata creation [15]. Studies have shown some preliminary results regarding the advantages - and disadvantages - of various LLMs, and overall variations in performances [14,12]. However, it is still not clear how different LLMs perform in text classification tasks, particularly when dealing with short texts such as column headers.

In this work we address the challenges of automated metadata enrichment, by investigating how we can leverage LLMs to perform text classification tasks of column headers, specifically by using a controlled vocabulary of topics. To guide our investigation, we formulate the following research questions:

1. How can we measure the LLMs consistency in the classification task?
2. How can we measure classification differences between LLMs and humans?
3. Do hierarchical and contextual information effect the classifications?

Our work contributes to the current knowledge on the applications of LLMs by assessing the performance of three LLMs in the text classification task of column headers with a controlled vocabulary, and comparing it with human-made classifications. To the best of our knowledge, this is the first work that investigate performances of various LLMs in this specific task.

## 2 Related Work

### 2.1 Semantic Metadata Enrichment

Semantic metadata enrichment is the processes by which metadata information is enhanced with additional meanings and contexts, to make it more human- and machine- readable. This process usually involves adding semantic annotations, derived from ontologies, thesauri, or domain-specific controlled vocabularies, that provide insights into the content and relationships within the data. Semantic enrichment, unlike simpler annotations, offers richer context and structure. Previous work shows that semantic metadata enrichment and the use of controlled vocabularies facilitates data FAIRification on the web, and also enables interdisciplinary collaborations among research groups and institutions [16]. Further, the authors of this paper have previously explored how the incorporation of column-level metadata can enhance the Findability, Accessibility, Interoperability and Reusability of research data [8]. This is particularly important for discovering restricted access data, which often lacks informative details due to its sensitive nature and limited accessibility. Semantic column-level annotations can enhance the discovery of such data by providing additional context without compromising privacy-preserving guidelines.

## 2.2 Text Classification and LLMs

Large Language Models (LLMs) have revolutionised the field of Natural Language Processing (NLP), with advances in a variety of applications such as content creation, text classification and question answering. LLMs are trained on very large amount of text data (and more recently multi-modal data), allowing the models not only to recognise patterns and relationships between words and concepts, but also to handle a wide range of tasks, even those that the models have not been specifically trained for and without any explicit supervision [11,6]. LLMs are, in general, more accurate than traditional NLP methods, but they are often considered ‘black boxes’ as the mechanisms behind an LLM decision making are challenging to understand, which makes debugging and bias detection more difficult to investigate. Further, a recent study has tested the performance of ChatGPT across a variety of NLP tasks, and it has been found that the more complex and pragmatic the task (e.g. emotion recognition), the more the LLM has a loss in performance [5]. Further, another work found significant biases and inconsistent performance across ChatGPT and GoogleGemini in sentiment analysis detection [2]. Nevertheless, there are still open possibilities and challenges involving the prompting of LLMs for automated data - and metadata - annotation [15]. Studies have shown evidences that ChatGPT have outperformed crowd-workers in the text classification of tweets [4], and other conventional baselines [3]. Further, another work suggests that the text classification tasks could be improved with the additional of semantic technologies and knowledge graphs [13]. Based on this findings, our research investigates the performance of ChatGPT, GoogleBard and GoogleGemini in the text classification task of column headers with a controlled vocabulary of topics. Further, we compare classifications outcomes between the LLMs and human participants, as well as the effect of topics hierarchy and contextual information. In the sections that follow, we describe the experimental settings and evaluation metrics employed in our investigation.

## 3 Experimental Design and Evaluation

In this section, we describe the data collection, experimental design for both human and machine topic classification tasks, and evaluation methods. Our experimental design aims to assess the consistency in topic classifications of column headers of three LLMs (ChatGPT, GoogleBard and GoogleGemini), comparing it with human-made classifications and investigate the impact of contextual information (e.g. dataset description). A key aspect of our methodology is providing the same prompt for both human and LLM task, allowing evaluation from a neutral standpoint. Further, our analysis also considers differences in the classifications based on the hierarchical structure of topic controlled vocabulary, which distinguish between ‘general’ and ‘specific’ topics (e.g. ‘Education’ versus ‘Higher and Further Education’).

### 3.1 Data Collection

This work explores how can LLMs be leveraged for text classification of column headers using a Controlled Vocabulary (CV). Our analysis employs the Topic Classification CV provided by the Consortium of European Social Science Data (CESSDA)<sup>1</sup>. The input column headers were sourced from the CBS Open Data Portal<sup>2</sup>. We opted for a random dataset selection approach while ensuring diversity across various topics. A total of 10 datasets were selected, containing between 4 to 69 columns. All input data, CV, code and results discussed in this work are available on GitHub<sup>3</sup>.

### 3.2 LLMs Topic Classification

The prompt used for the LLMs task initiation includes the task specification, input data (i.e. column headers), the CESSDA CV and some formatting constraints. The same prompt was used to query all LLMs, and the same task was executed 10 times for each LLM. Sessions were refreshed to prevent result propagation. Additionally, to assess the impact of contextual information, we repeated the process with the inclusion of `*Dataset Description: . .` in the prompt inputs. Here is important to note that the task with context (i.e. dataset description) could not be performed with GoogleBard due to size limitation in the allowed prompt. The analysis regarding the effect of contextual information is, therefore, only performed with ChatGPT and GoogleGemini. A summary of the prompt is provided below.

We then labelled the classifications of each column header as follows: *‘Specific’* for the CESSDA sub-concepts, *‘General’* for top-concepts, *‘Other’* for the specific classification of the topic ‘other’ in CESSDA, *‘Unassigned’* when the classification was not executed, and *‘Wrongly Assigned’* when the topic classified was not included in CESSDA. As evaluation, we performed a Tukey’s Honest Significant Difference (HSD) test to assess significant differences between labels.

```
Task: Column Header Classification with Controlled Vocabulary

You are provided with two inputs, below: 1) the column headers of a dataset (in a list format), and 2) a controlled vocabulary of topics (in a CSV format). Your goal is to classify each column header with a relevant topic. The controlled vocabulary has two columns: 'Topic Label' and 'Topic Description'. For each column header, assign a topic from the controlled vocabulary based on semantic relevance and the definition provided for each topic. The result should be structured in JSON format, where each column header is paired with its assigned topic's label.

**Constraints:
Use only topics provided in the controlled vocabulary, do not add any topics that are not included.
Do not change the text of the column headers or topic's label.
Only return the output in a JSON format, and no additional text.

**Inputs:

*Column Headers (List):
[h(1), h(2), . . . . . , h(n)]

*Controlled Vocabulary (CSV Format):
Topic Label,Topic Description
```

<sup>1</sup> <https://www.cessda.eu>

<sup>2</sup> <https://opendata.cbs.nl/statline/portal>

<sup>3</sup> <https://github.com/ritamargherita/LLMs-topic-classification/>

Further, we measured the **Internal Consistency** of each LLM, implementing the Needleman-Wunsch (NW) algorithm [10]. The NW algorithm is conventionally used for aligning genomic sequences but was adapted here to assess the uniformity of topic classification outcomes across the 10 repeated task executions for each LLM. Pairs of classifications for each LLM and set of column headers were aligned and scored using the algorithm. We analyzed these scores using a Multi-Way ANOVA and post-hoc Tukey’s HSD tests to investigate differences in outcomes within each LLM.

Similarly, we measured the similarities in classifications across LLMs - **Inter-LLMs alignment** - employing again the NW algorithm, to execute and score pairs of classifications across pairs of LLMs. The alignment scores for each LLM-pair were summed and averaged to obtain the *Inter-LLM Alignment* score. ANOVA and Tukey’s HSD tests were performed to investigate differences in alignment scores for each LLM pairs.

### 3.3 Human Topic Classification

The human topic classifications were performed by three participants: M.M and T.K, both authors of this paper, and a social scientist specializing in CBS data. Each participant performed the classification task twice: first without contextual information, then with the dataset descriptions included. Given the minimal difference (less than 5%) between the two classifications, we kept only the second classification (with context) for simplicity.

To measure the agreement between the humans and LLM classifications - **Human-Computer Agreement** - we compute the *joint probability distribution*, which measures the probability of two events happening at the same time. In our case, the events are: 1) each topic classification of column header X by one LLM, and 2) all human-made classifications for column header X. Further, we can sum these joint probabilities to measure the probability of the classifications to be in agreements between each LLM and the human participants. Below, we report the equations 12 and their variables descriptions in table 1.

$$P(x_H = t, c_m = t | c_H \in C_H, c_m \in C_m) = P(c_H = t | c_H \in C_H) \cdot P(c_m = t | c_m \in C_m) \quad (1)$$

$$P(c_H = c_m | c_H \in C_H | c_m \in C_m) = \sum_{t \in T} P(c_H = t | c_H \in C_H) \cdot P(c_m = t | c_m \in C_m) \quad (2)$$

Variable	Definition	Variable	Definition
<b>Topic</b>	$t \in \{1, \dots, 95\} = T$	<b>Classification</b>	$c \in C$
<b>Human</b>	$h \in \{1, 2, 3\} = H$	<b>Humans classification</b>	$c_H \in T$
<b>Machine</b>	$m \in \{1, 2, 3\} = M$	<b>Machine classification</b>	$c_m \in T$

Table 1: Variable descriptions of the joint probability scoring to measure the agreement between LLMs and humans topic classifications.

## 4 Results

In this study, we investigated the performance of ChatGPT, GoogleBard and GoogleGemini in the task of topic classification of column headers. We also compared human- and LLM-topic classifications, and explore the effect of hierarchical and contextual information in the classification outcomes. Below we report our findings.

**LLMs Topic Classification Summary Statistics** We have analysed the LLMs topic classifications in settings with and without context with a pairwise Tukey’s HSD test. We focused on the nature of classified topics: 1) Specific, 2) General, 3) ‘Other’, 4) Unassigned and 5) Wrongly Assigned topics, as mentioned in Section 3.2. For the task **without context**, Tukey’s HSD test revealed significant differences between the *ChatGPT-GoogleBard* pair in all topics classifications except for ‘Specific’ topics ( $p(2) = 0.02, p(3) = 0.01, p(4) = 0.03, p(5) = 0.03$ ). The *ChatGPT-GoogleGemini* pair, instead, showed significant differences only in the ‘Other’ topic classifications ( $p(3) = 0.01$ ). Lastly, the *GoogleGemini-GoogleBard* pair had significant differences for ‘Unassigned’ ( $p(4) = 0.02$ ) and ‘Wrongly assigned’ ( $p(5) = 0.01$ ) topic classifications. For the task **with context**, we found no significant differences in the topics classification between the ChatGPT-GoogleGemini pair, which is an interesting results as we anticipated more ‘Specific’ topics once added contextual information to the prompt.

We report a summary of the classifications in Figure 1. Overall, GoogleBard showed less instances of the classification of ‘Specific’ and ‘General’ topics. It also assigned the ‘Other’ topic more frequently, particularly compared to ChatGPT. Moreover, instances of ‘Wrongly assigned’ topics were more prevalent compared to the two other LLMs. In summary, our findings and the Tukey’s results suggest that both ChatGPT and GoogleGemini outperformed GoogleBard in the classification task. They also show that GoogleBard is more likely to assign the topic ‘Other’, indicating a tendency to abstain from making a definite classification. Moreover, the results suggest that contextual information had no significant impact on the types of topics classified (e.g. specific/general topics).

**LLM Internal Consistency** With this measure we assessed the LLMs internal consistency in the classification task of each dataset across the 10 task executions. Using the NW algorithm we measured the internal consistency, and we evaluated it using Multi-Way ANOVA and Tukey’s HSD tests. For the task **without context**, the overall consistency scores for each LLM were: *ChatGPT* = 0.52, *GoogleBard* = 0.11 and *GoogleGemini* = 0.81, where 1 is absolute consistency for all several executions for each dataset. The Multi-Way ANOVA showed a significant effect on consistency scores based on the dataset ( $p = 1.87^{-7}$ ). Tukey’s test confirmed significant differences in consistency between: the ChatGPT-GoogleBard pair ( $p = 0.007$ ), and GoogleGemini-GoogleBard pair ( $p = 0.0001$ ). No difference was found between the ChatGPT-GoogleGemini pair ( $p = 0.3$ ), suggesting similar consistency scores across all task executions and datasets.

For the task **with context**, we found the overall internal consistency scores of *ChatGPT* = 0.46 and *GoogleGemini* = 0.51. ANOVA and Tukey’s test found no significant differences in consistency scores between these LLMs, supporting the findings above.

These results indicate that, overall, GoogleGemini appears the LLM that is more consistent in the classification of topics across the repeated task executions. GoogleBard, instead, shows much lower scores for the internal consistency measure. The ANOVA test also suggest that the dataset to which the column headers are being classified can have an impact in the consistency score. This result needs further investigation, to evaluate whether there is a correlation between different aspects of the datasets (e.g. number of columns, domain, expressivity of columns) and the internal consistency score. Further, it appears that GoogleGemini and ChatGPT had similar internal consistency scores across all datasets, and no significant differences were found between these two LLMs even when the task was performed with context.

**Inter-LLMs Agreement** To measure topic classifications agreement between LLMs, we calculated the Inter-LLMs Alignment score using the NW algorithm and performed ANOVA and Tukey’s tests. We computed the alignment scores for each LLM pair in both tasks with and without context. In all cases, alignment scores were approximately 0, suggesting different classified topics for each LLM. For the task **without context**, ANOVA revealed that the datasets which the column headers belonged to had significant effects for both the ChatGPT-GoogleBard and GoogleGemini-GoogleBard pairs ( $p = 1.05^{-8}$  and  $p = 2.75^{-9}$  respectively). No significant effects by the dataset were found for the GoogleGemini-ChatGPT pair. Further, for the task **with context**, ANOVA found no significant effect of the dataset between the ChatGPT-GoogleGemini pair, supporting previous findings. Similarly to the results from the Internal Consistency scoring, the effect that the dataset might have on the LLM performance needs further investigation. Nevertheless, no significant effect was found for the ChatGPT-GoogleGemini pair for both the task with and without context, indicating that these two LLMs might have comparable underlying processes.

**Human-Computer Agreement** We calculated the Human-Computer Agreement (HCA) scores based on the joint probability metrics introduced in 3.3. The scores are reported in table 2, where an alignment score of 1 indicates agreement between LLM classifications and at least one human’s classification. The table reports the scores for the tasks with and without context, as well as based on the hierarchy of topics in CESSDA. In the table, the ‘specific’ setting compares precisely classified topics, while the ‘general’ setting involves mapping topics to their general category. This allows us to assess whether LLMs and human participants classify column headers with the same general topics, even if specific topics differ. We find that ChatGPT classifications aligns most closely with the human-made classifications in the ‘general’ setting for both tasks with and without context, and it also shows a slightly higher HCA for the task with context

compared to the one without. Interestingly, GoogleGemini shows lower HCAs for the task with context compared to the one without. While we lack sufficient data for statistical significance between HCAs for tasks with and without context, these initial findings support, again, that contextual information may not significantly impact the classification task.

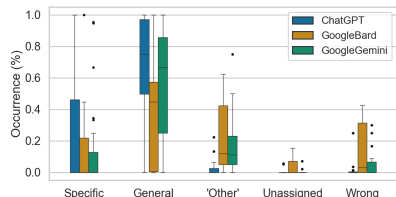


Fig. 1: A figure

	no-context		context	
	specific	general	specific	general
ChatGPT	0.29	0.5	0.33	0.53
GoogleGemini	0.28	0.46	0.15	0.37
GoogleBard	0.24	0.31	X	X

Table 2: A table

## 5 Conclusion and Future Work

In this work we propose a novel approach that leverages LLMs for text classification of column headers with a topic controlled vocabulary. Our experimental design focuses on exploring the impact of contextual and hierarchical information in the topic classification task. We have evaluated the performance of the three LLMs (ChatGPT, GoogleBard and GoogleGemini) through various metrics: 1) we investigated the nature of classified topics, including the hierarchical structure of the controlled vocabulary; 2) we measured the internal consistency of each LLM in the classification task; 3) we assessed the alignment of classified topics across LLMs; and 4) we measured the classifications agreement between the LLMs and human participants. Our findings suggest that, overall, ChatGPT and GoogleGemini outperform. Interestingly, contextual information appears to have no impact on the consistency and agreement of classification tasks for the LLMs. We also didn't find any strong evidences suggesting that hierarchical information effect the classification task. Future work could involve utilizing larger input datasets to better support statistical analysis, and explore how LLMs capture relationships between columns by classifying similar topics to related columns.

**Acknowledgments.** We would like to thank Emma Beauxis-Aussalet for the help with the mathematical notation of the Human-Machine Agreement scoring function. Further, we acknowledge that ChatGPT was utilized to generate and debug part of the python and latex code utilised in this work. This work is funded by the Netherlands Organisation of Scientific Research (NWO), ODISSEI Roadmap project: 184.035.014.



## References

1. Boeckhout, M., Zielhuis, G.A., Bredenoord, A.L.: The fair guiding principles for data stewardship: fair enough? *European journal of human genetics* **26**(7), 931–936 (2018)
2. Buscemi, A., Proverbio, D.: Chatgpt vs gemini vs llama on multilingual sentiment analysis. *arXiv preprint arXiv:2402.01715* (2024)
3. Chae, Y., Davidson, T.: Large language models for text classification: From zero-shot learning to fine-tuning. Open Science Foundation (2023)
4. Gilardi, F., Alizadeh, M., Kubli, M.: Chatgpt outperforms crowd-workers for text-annotation tasks. *arXiv preprint arXiv:2303.15056* (2023)
5. Kocoń, J., Cichecki, I., Kaszyca, O., Kochanek, M., Szydło, D., Baran, J., Bielaniewicz, J., Gruza, M., Janz, A., Kanclerz, K., et al.: Chatgpt: Jack of all trades, master of none. *Information Fusion* p. 101861 (2023)
6. Kojima, T., Gu, S.S., Reid, M., Matsuo, Y., Iwasawa, Y.: Large language models are zero-shot reasoners. *Advances in neural information processing systems* **35**, 22199–22213 (2022)
7. Lamprecht, A., Garcia, L., Kuzak, M., Martinez, C., Arcila, R., Martin Del Pico, E., Dominguez Del Angel, V., van de Sandt, S., Ison, J., Martinez, P., et al.: Towards fair principles for research software. *data science*, 3 (1), 37–59 (2020)
8. Martorana, M., Kuhn, T., Siebes, R., Van Ossenbruggen, J.: Advancing data sharing and reusability for restricted access data on the web: introducing the dataset-variable ontology. In: *Proceedings of the 12th Knowledge Capture Conference 2023*. pp. 83–91 (2023)
9. Mons, B.: *Data stewardship for open science: Implementing FAIR principles*. CRC Press (2018)
10. Needleman, S.B., Wunsch, C.D.: A general method applicable to the search for similarities in the amino acid sequence of two proteins. *Journal of molecular biology* **48**(3), 443–453 (1970)
11. Radford, A., Wu, J., Child, R., Luan, D., Amodei, D., Sutskever, I.: Language models are unsupervised multitask learners (2019)
12. Rane, N., Choudhary, S., Rane, J.: Gemini versus chatgpt: Applications, performance, architecture, capabilities, and implementation. *Performance, Architecture, Capabilities, and Implementation* (February 13, 2024) (2024)
13. Shi, Y., Ma, H., Zhong, W., Tan, Q., Mai, G., Li, X., Liu, T., Huang, J.: Chatgraph: Interpretable text classification by converting chatgpt knowledge to graphs. In: *2023 IEEE International Conference on Data Mining Workshops (ICDMW)*. pp. 515–520. IEEE (2023)
14. Singh, S.K., Kumar, S., Mehra, P.S.: Chat gpt & google bard ai: A review. In: *2023 International Conference on IoT, Communication and Automation Technology (ICICAT)*. pp. 1–6. IEEE (2023)
15. Tan, Z., Beigi, A., Wang, S., Guo, R., Bhattacharjee, A., Jiang, B., Karami, M., Li, J., Cheng, L., Liu, H.: Large language models for data annotation: A survey. *arXiv preprint arXiv:2402.13446* (2024)
16. Vlachidis, A., Antoniou, A., Bikakis, A., Terras, M.: Semantic metadata enrichment and data augmentation of small museum collections following the fair principles. In: *Information and Knowledge Organisation in Digital Humanities*, pp. 106–129. Routledge (2021)
17. Wilkinson, M.D., Dumontier, M., Aalbersberg, I.J., Appleton, G., Axton, M., Baak, A., Blomberg, N., Boiten, J.W., Santos, L.B.d.S., Bourne, P.E., Bouwman, J., Brookes, A.J., Clark, T., Crosas, M., Dillo, I., Dumon, O., Edmunds,

- S., Evelo, C.T., Finkers, R., Gonzalez-Beltran, A., Gray, A.J., Groth, P., Goble, C., Grethe, J.S., Heringa, J., 't Hoen, P.A., Hooft, R., Kuhn, T., Kok, R., Kok, J., Lusher, S.J., Martone, M.E., Mons, A., Packer, A.L., Persson, B., Rocca-Serra, P., Roos, M., Schaik, R.v., Sansone, S.A., Schultes, E., Sengstag, T., Slater, T., Strawn, G., Swertz, M.A., Thompson, M., Lei, J.v.d., Mulligen, E.v., Velterop, J., Waagmeester, A., Wittenburg, P., Wolstencroft, K., Zhao, J., Mons, B.: The FAIR Guiding Principles for scientific data management and stewardship. *Scientific Data* **3**(1), 160018 (2016). <https://doi.org/10.1038/sdata.2016.18>
18. Wilkinson, M.D., Verborgh, R., da Silva Santos, L.O.B., Clark, T., Swertz, M.A., Kelpin, F.D., Gray, A.J., Schultes, E.A., van Mulligen, E.M., Ciccarese, P., et al.: Interoperability and fairness through a novel combination of web technologies. *PeerJ Computer Science* **3**, e110 (2017)