

Superposition detection and QMA with non-collapsing measurements

Roozbeh Bassirian* and Kunal Marwaha†

University of Chicago

March 6, 2024

Abstract

We prove that QMA where the verifier also make a single *non-collapsing* measurement [ABFL14] is equal to NEXP, resolving an open question of Aaronson [Aar23]. We show this is a corollary to a modified proof of $\text{QMA}^+ = \text{NEXP}$ [BFM23]. At the core of many results inspired by Blier and Tapp [BT10] is an unphysical property testing problem deciding whether a quantum state is close to an element of a fixed basis.

1 Introduction

Hidden-variable theories attempt to explain the probabilistic nature of quantum mechanics as downstream effects of parameters beyond the quantum state. If these parameters are accessible to a quantum computer, unusually strong computation is possible. Aaronson and collaborators [Aar05b, ABFL14] proposed and studied enhancements to BQP inspired by these theories.

One such upgrade is the power to make “non-collapsing” measurements, exemplified through the class CQP (Collapse-free Quantum Polynomial-time) [ABFL14]. After applying each gate or (collapsing) intermediate measurement, a CQP machine receives a measurement of the current quantum state in the computational basis *without perturbing the state*. [ABFL14] proved that such a machine can solve problems in SZK, and in a black-box setting, solve unstructured search faster than Grover’s algorithm (but not in polynomial time). This power is dramatically increased with quantum *advice*: Aaronson showed that $\text{CQP}/\text{qpoly} = \text{ALL}$ [Aar18], which contrasts with $\text{BQP}/\text{qpoly} \subseteq \text{QMA}/\text{poly}$ [Aar05a, AD13].

A related concept to quantum advice is quantum *verification* with an untrusted witness; see [Gha23] for a recent survey. One particularly mysterious version of such a complexity class is $\text{QMA}(2)$ [KMY03]: quantum verification where the witness is guaranteed to be *separable*. Even after much effort [BT10, ABD⁺08, CD10, Per12, HM13, GSS⁺18, SY22], little is known about the power of $\text{QMA}(2)$ besides the trivial bounds $\text{QMA} \subseteq \text{QMA}(2) \subseteq \text{NEXP}$.

Recently, [JW23] proposed a new approach to show $\text{QMA}(2) = \text{NEXP}$ by introducing the class $\text{QMA}^+(2)$, where the witness is also guaranteed to have *non-negative amplitudes* in the computational basis. They proved that $\text{QMA}^+(2) = \text{NEXP}$, and suggested the possibility of $\text{QMA}(2) = \text{QMA}^+(2)$. However, any such result must rely on the separability guarantee of $\text{QMA}(2)$, since it was later shown that $\text{QMA}^+ = \text{NEXP}$ [BFM23].¹ In particular, quantum verification with only a *non-negative amplitudes* guarantee is maximally powerful.

Very recently, Aaronson asked the following question:

Question 1 ([Aar23]). *What is the power of QMA where the verifier can make non-collapsing measurements?*

*roozbeh@uchicago.edu

†kmarw@uchicago.edu

¹ $\text{QMA} = \text{QMA}^+ = \text{NEXP}$ would imply, for example, that $\text{PSPACE} = \text{NEXP}$.

This computational model is trivially upper-bounded by NEXP, yet Aaronson conjectured it to be *equal* to NEXP. In this work, we show this conjecture to be true, even with a *single* non-collapsing measurement! Notably, our proof is inspired by the proof of $\text{QMA}^+ = \text{NEXP}$ [BFM23]. To unify these results, we identify a property testing problem we call *superposition detection*: can one distinguish the set of computational basis states \mathcal{B} from states ϵ -far from \mathcal{B} ? The latter states are in *superposition* over computational basis states. We show that a quantum verifier has the power of NEXP if it can test this property on arbitrary states — more specifically, states that are obtained after a collapsing measurement on a quantum witness.

A note for the cautious reader: with a single copy, this property testing task is physically unrealistic — it even results in distinguishability of statistically equal ensembles (see Fact 23). Any successful detector must access information beyond the quantum state. We show that a quantum computer equipped with a “non-collapsing” measurement can always detect superposition. On the other hand, QMA^+ only considers a subset of quantum witnesses, all of which admit efficient superposition detection. As a result, both computational models have the power of NEXP.

With multiple copies, superposition detection is possible — but generating the copies seems to require *post-selection* [Aar04, Kin18], inverse exponential precision [Per12], or simply too many quantum witnesses [ABD⁺08, CD10, CF11]. These are exactly the issues that have plagued approaches inspired by Blier and Tapp [BT10] to prove $\text{QMA}(2) = \text{NEXP}$.

1.1 Techniques

Our techniques primarily follow that of [JW23, BFM23], which are inspired by the work of Blier and Tapp [BT10]. We describe the general approach and then note the differences in this work.

The central challenge is to place an NEXP-complete problem in a variant of QMA. Following [JW23, BFM23], we use a *succinct* constraint satisfaction problem with *constant* gap. In $(1, \delta)$ -GAPCSP, either all constraints can be satisfied, or at most a δ fraction of constraints can be satisfied. This problem is NEXP-hard due to the PCP theorem [AS92, ALM⁺98, Har04].²

Consider a witness over two registers: the *constraint index* register with a polynomial number of qubits, and a constant-sized *value* register. The protocol chooses one of two tests to run with some probability. The first test checks the *rigidity* of a quantum state, i.e. accepting if the witness is close to the form $\frac{1}{\sqrt{R}} \sum_{j \in [R]} |j\rangle |\sigma(j)\rangle$. The second test verifies the *constraints* of the CSP by measuring the state in the computational basis and verifying the constraint indexed by the outcome of the first register. Using several tricks from the PCP literature [Din07, JW23], the second test is able to decide $(1, \delta)$ -GAPCSP whenever the witness is *rigid*.

Surprisingly, the *non-negative amplitudes* guarantee is only used in the *first* test, i.e. checking the *rigidity* of the witness. With some probability, the verifier encourages a large ℓ_1 -norm by measuring the overlap with the uniform superposition state $|+\rangle$. It must now enforce that the witness sends at most *one* basis element in the *value* register per basis element in the *constraint index* register. For example, after measuring the *constraint index* register in the computational basis, the verifier must reject any superposition in the remaining quantum state. [JW23, BFM23] can enforce this property assuming the witness has non-negative amplitudes, thus deciding the NEXP-complete problem.

In this work, we consider any algorithm that detects *superposition* over constant-sized computational basis states:

Definition 2 (Superposition detector). *A superposition detector $\text{SupDetect}_{k, \epsilon, \Delta}$ is an algorithm that inputs a quantum state $|\psi\rangle$ on k qubits and outputs 1 or 0, such that:*

- *If $|\psi\rangle$ is a computational basis state on k qubits, then $\text{SupDetect}_{k, \epsilon, \Delta}(|\psi\rangle) = 1$ with probability 1.*
- *If $|\langle e|\psi\rangle|^2 \leq 1 - \epsilon$ for every computational basis state $|e\rangle$ on k qubits, then $\text{SupDetect}_{k, \epsilon, \Delta}(|\psi\rangle) = 1$ with probability at most $1 - \Delta$.*

We show that if a quantum computer can implement a superposition detector over the *value* register of the quantum witness, then it can check *rigidity* of the witness, and thus decide the NEXP-complete problem. Since the *value* register is constant-sized, we only need a superposition detector where k is some constant.

²As we do not consider NP-completeness in this work, we often omit the word *succinct* when describing $(1, \delta)$ -GAPCSP.

We use this generalization in two places. First, we show that a *single* non-collapsing measurement allows a quantum computer to detect superposition on *any* quantum state, and thus decide any problem in NEXP. This resolves [Question 1](#). Curiously, in both the verification and advice setting [[Aar18](#)], the power of non-collapsing measurements is magnified when the verifier is given a state it cannot prepare.

Second, we show that if the witness has non-negative amplitudes, a quantum computer can efficiently detect superposition; this reproves the statement $\text{QMA}^+ = \text{NEXP}$ [[BFM23](#)]. The *superposition detection* viewpoint gives new intuition for this result: QMA^+ and $\text{QMA}^+(2)$ *pre-select* quantum witnesses where the verifier can detect superposition. However, the verifier cannot detect superposition in *all* quantum witnesses unless $\text{QMA} \neq \text{NEXP}$. As a consequence, any proof of $\text{NEXP} \subseteq \text{QMA}(2)$ must handle *some* witnesses in a fundamentally new way.

1.2 Our results

We first prove the following statement:

Theorem 3 (Main theorem). *Consider a variant of QMA where for any constant k and $\epsilon > 0$, there exists some $\Delta = \Omega(\frac{1}{\text{poly}(n)})$ such that $\text{SupDetect}_{k,\epsilon,\Delta}$ can be efficiently applied to the quantum witness after a partial measurement in the computational basis. Then this variant contains NEXP.*

This has two direct consequences. First, since a superposition detector can be efficiently implemented on all quantum states if the verifier can make non-collapsing measurements, we resolve [Question 1](#):

Corollary 4. *Consider the variant of QMA where the verifier may make one non-collapsing measurement of an arbitrary quantum state. Then this variant equals NEXP.*

Second, since a superposition detector can be implemented for all quantum witnesses with *non-negative amplitudes*, we recover the main result of [[BFM23](#)]:

Corollary 5 ([[BFM23](#)]). $\text{QMA}^+ = \text{NEXP}$.

1.3 Related work

QMA and hidden-variable theories Aaronson initiated the study of quantum complexity subject to hidden-variable theories in [[Aar05b](#)]. They introduced the class DQP (Dynamical Quantum Polynomial-time), and showed evidence that this class was more powerful than BQP. However, DQP has subtleties in its definition which make it particularly challenging to study. To address this, [[ABFL14](#)] introduced the concept of “non-collapsing” measurement through the classes CQP and naCQP (non-adaptive CQP)³. They showed evidence that these classes were only “slightly more powerful” than BQP. By contrast, [[Aar18](#)] showed that this power dramatically increased in the presence of quantum advice: $\text{naCQP}/\text{qpoly} = \text{ALL} \neq \text{BQP}/\text{qpoly}$. Aharonov and Regev [[AR03](#)] define a variant of QMA^4 , which can be interpreted as allowing non-collapsing measurements on the accept/reject qubit at the end of the computation. This variant is equal to QMA; see further discussion in [[AD13](#), [Aar23](#)]. Non-collapsing measurements are also connected to “rewindable” quantum computation; see [[HMTT23](#)].

The complexity class $\text{QMA}(2)$ The power of $\text{QMA}(2)$ is not sensitive to the *number* of separable partitions: [[HM13](#)] showed that $\text{QMA}(2) = \text{QMA}(k)$ for k at most polynomial in n using a primitive called the *product test*. One reason to believe that $\text{QMA}(2)$ is powerful is that $\text{QMA}(2)$ can decide NP using only logarithmic-sized proofs [[BT10](#)]; by contrast, QMA with logarithmic-sized proofs is equal to BQP. However, since the $\text{QMA}(2)$ protocol has a subconstant promise gap, it cannot (so far) be scaled to NEXP [[CD10](#), [CF11](#), [ABD⁺08](#), [Per12](#), [GNN12](#)]. If there exist efficient algorithms that “disentangle” quantum states, then $\text{QMA} = \text{QMA}(2)$; [[ABD⁺08](#), [AKT24](#)] show some evidence that no “disentangler” exist. Although $\text{QMA}^+ = \text{QMA}^+(2) = \text{NEXP}$ [[JW23](#), [BFM23](#)], there exist constants c, s where $\text{QMA}_{c,s}^+ \subseteq \text{QMA}$ and $\text{QMA}^+(2)_{c,s} \subseteq \text{QMA}(2)$. In fact, there exists a promise gap for $\text{QMA}^+(2)$ where a sharp transition in complexity occurs (assuming there is a transition) [[JW24](#)]; it is unknown if the same is true for QMA^+ .

³naCQP was called PDQP (Product Dynamical Quantum Polynomial-time) in a preprint of [[ABFL14](#)], and again in subsequent work [[Aar18](#), [AGI⁺24](#)]. We use the name naCQP.

⁴Confusingly, this variant is called QMA^+ , not to be confused with QMA^+ of [[JW23](#)].

Concurrent work [AGI⁺24] simultaneously and independently study the power of QMA with non-collapsing measurements. They show that this computational model is equal to NEXP, also resolving [Question 1](#). However, their proof uses $O(n \log n)$ non-collapsing measurements, as opposed to just *one* in this work. Notably, they use different techniques, building on the proofs of $\text{MIP} = \text{NEXP}$ [BFL90] and $\text{naCQP}/\text{qpoly} = \text{ALL}$ [Aar18]. They also explore the power of DQP [Aar05b] in the contexts of quantum verification and quantum advice. Note that one must make minor adjustments to the definitions of CQP and naCQP [ABFL14] to allow non-collapsing measurement on a quantum *witness*. [AGI⁺24] makes a slightly different choice than this work; we discuss this technicality further in [Section 4.1](#).

2 Preliminaries

We first define $\text{QMA}_{c,s}$. When c, s are not specified, $c - s$ is allowed to be at least any inverse polynomial in input size. In general, the promise gap can be amplified via parallel repetition or with more clever methods [MW05, NWZ09].

Definition 6 ($\text{QMA}_{c,s}$). *Let $c, s : \mathbb{N} \rightarrow \mathbb{R}^+$ be polynomial-time computable functions. A promise problem $\mathcal{L}_{\text{yes}}, \mathcal{L}_{\text{no}} \subseteq \{0, 1\}^*$ is in $\text{QMA}_{c,s}$ if there exists a BQP verifier V such that for every $n \in \mathbb{N}$ and every $x \in \{0, 1\}^n$:*

- **Completeness:** *if $x \in \mathcal{L}_{\text{yes}}$, then there exists a state $|\psi\rangle$ on $\text{poly}(n)$ qubits, s.t.*

$$\Pr[V(x, |\psi\rangle) \text{ accepts}] \geq c(n).$$

- **Soundness:** *If $x \in \mathcal{L}_{\text{no}}$, then for every state $|\psi\rangle$ on $\text{poly}(n)$ qubits, we have*

$$\Pr[V(x, |\psi\rangle) \text{ accepts}] \leq s(n).$$

We prove [Theorem 3](#) using the NEXP-complete problem proposed by [JW23].

Definition 7 (CSP system). *A (N, R, q, Σ) -CSP system \mathcal{C} on N variables with values in Σ consists of a set (possibly a multi-set) of R constraints where the arity of each constraint is exactly q .*

Definition 8 (Value of CSP). *The value of a (N, R, q, Σ) -CSP system \mathcal{C} is the maximum fraction of satisfiable constraints over all possible assignments $\sigma : [N] \rightarrow \Sigma$. The value of \mathcal{C} is denoted $\text{val}(\mathcal{C})$.*

Definition 9 (GAPCSP). *The $(1, \delta)$ -GAPCSP problem takes as input a (N, R, q, Σ) -CSP system \mathcal{C} . The task is to distinguish whether \mathcal{C} is such that (in completeness) $\text{val}(\mathcal{C}) = 1$ or (in soundness) $\text{val}(\mathcal{C}) \leq \delta$.*

Theorem 10 ([JW23]). *There exist constants q and $\delta < 1$ and a family of succinct $(N_i, R_i, q, \Sigma = \{0, 1\})$ -CSP systems $\{\mathcal{C}_i\}_{i \geq 1}$ for which the $(1, \delta)$ -GAPCSP problem is NEXP-complete.*

In our proof, we use the notion of *rigid* quantum states from [BFM23]. These states map each constraint to a single assignment in Σ^q .

Definition 11 (Rigid and quasirigid states, [BFM23]). *Given a (N, R, q, Σ) -CSP system \mathcal{C} , consider quantum states over a constraint index register of dimension R and a value register of dimension $\kappa := |\Sigma|^q$, i.e.*

$$|\psi\rangle = \sum_{j \in [R], x \in \Sigma^q} a_{j,x} |j\rangle |x\rangle,$$

for some $a_{j,x} \in \mathbb{C}$ so that $\langle \psi | \psi \rangle = 1$. Then $|\psi\rangle$ is called *quasirigid* if there is a function $\sigma : [R] \rightarrow \Sigma^q$ and set of complex numbers $\{b_j\}_{j \in [R]}$ such that $|\psi\rangle = \sum_{j \in [R]} b_j |j\rangle |\sigma(j)\rangle$, and moreover called *rigid* if all $b_j = \frac{1}{\sqrt{R}}$.

[BFM23] showed a QMA protocol for $(1, \delta)$ -GAPCSP, assuming the quantum witness is a *rigid* state. In other words, the protocol is sound *only* for rigid quantum witnesses.

Lemma 12 ([BFM23]). *There exist constants $0 < \xi \leq C_{\text{YES}} < 1$ and a $\text{QMA}_{C_{\text{YES}}, C_{\text{YES}} - \xi}$ protocol `ConstraintCheck` such that for every $(1, \delta)$ -GAPCSP instance \mathcal{I} guaranteed by [Theorem 10](#), `ConstraintCheck` decides \mathcal{I} assuming the quantum witness is a rigid state.*

[JW23, BFM23] considered QMA^+ , a variant of QMA such that the quantum witness always has *non-negative amplitudes*. Given this condition, [BFM23] designed a protocol to ensure the quantum witness is a *rigid* state, and so $\text{NEXP} \subseteq \text{QMA}^+$. In this work, we design a similar protocol assuming the existence of efficient superposition detectors. We repeatedly make use of the following fact:

Fact 13 ([FvdG98]). *Let $0 \leq \Pi \leq \mathbb{I}$ be a positive semi-definite matrix, and let $|\psi_1\rangle$ and $|\psi_2\rangle$ be quantum states such that $|\langle \psi_1 | \psi_2 \rangle|^2 \geq 1 - d$. Then $|\langle \psi_1 | \Pi | \psi_1 \rangle - \langle \psi_2 | \Pi | \psi_2 \rangle| \leq \sqrt{d}$.*

Proof. $|\langle \psi_1 | \Pi | \psi_1 \rangle - \langle \psi_2 | \Pi | \psi_2 \rangle| = |\text{Tr}(\Pi(|\psi_1\rangle\langle\psi_1| - |\psi_2\rangle\langle\psi_2|))|$ is at most the trace distance of $|\psi_1\rangle\langle\psi_1|$ and $|\psi_2\rangle\langle\psi_2|$, which equals $\sqrt{1 - |\langle \psi_1 | \psi_2 \rangle|^2} \leq \sqrt{d}$. \square

3 Proof of main theorem

Our protocol depends on R, q, Σ that determine the (N, R, q, Σ) -CSP system \mathcal{C} . It considers quantum witnesses over two registers: a *constraint index* register of dimension R and a *value* register of dimension $\kappa := |\Sigma|^q$, i.e.

$$|\psi\rangle = \sum_{j \in [R], x \in \Sigma^q} a_{j,x} |j\rangle |x\rangle,$$

for some $a_{j,x} \in \mathbb{C}$ so that $\langle \psi | \psi \rangle = 1$. Before describing the protocol, we define two tests, **Density** and **QuasiCheck**, that act on the quantum witness. We use them in tandem to ensure the witness is *rigid*.

Definition 14. *Density takes as input a quantum state, measures it in the Fourier basis, and accepts iff the observed basis element is $\frac{1}{\sqrt{R \cdot \kappa}} \sum_{j \in [R], x \in \Sigma^q} |j, x\rangle$.*

Definition 15. $\text{QuasiCheck}_{\epsilon, \Delta}$ takes as input a quantum state, measures the constraint index register in the computational basis, then sends the remaining quantum state to a superposition detector $\text{SupDetect}_{\log \kappa, \epsilon, \Delta}$, and accepts iff the output of $\text{SupDetect}_{\log \kappa, \epsilon, \Delta}$ is 1.

Density is straightforward: it checks the overlap of a quantum state with the uniform superposition state. Let $A(\mathbf{V}, |\psi\rangle)$ be the acceptance probability of test \mathbf{V} when input the quantum state $|\psi\rangle$.

Fact 16. $A(\text{Density}, |\psi\rangle) = |\langle + | \psi \rangle|^2$. Moreover, if $|\psi\rangle$ is rigid, then $A(\text{Density}, |\psi\rangle) = \frac{1}{\kappa}$.

$\text{QuasiCheck}_{\epsilon, \Delta}$ collapses the *constraint index* register of the input, and ensures that there is no superposition over the *value* register. A quasirigid state perfectly satisfies this test.

Fact 17. If $|\psi\rangle$ is quasirigid, then $A(\text{QuasiCheck}_{\epsilon, \Delta}, |\psi\rangle) = 1$. For arbitrary $|\psi\rangle$,

$$A(\text{QuasiCheck}_{\epsilon, \Delta}, |\psi\rangle) \leq \sum_{j \in [R]} \left(\sum_{x \in \Sigma^q} |a_{j,x}|^2 \right) \cdot c_{j,\epsilon} = (1 - \Delta) + \Delta \cdot \sum_{j \in [R]; c_{j,\epsilon}=1} \left(\sum_{x \in \Sigma^q} |a_{j,x}|^2 \right),$$

where $c_{j,\epsilon} = 1 - \Delta$ if $\max_{x \in \Sigma^q} |a_{j,x}|^2 \leq (1 - \epsilon) \sum_{x \in \Sigma^q} |a_{j,x}|^2$, and 1 otherwise.

In a formal sense, $\text{QuasiCheck}_{\epsilon, \Delta}$ ensures that the input is close to a quasirigid state:

Lemma 18. Suppose $A(\text{QuasiCheck}_{\epsilon, \Delta}, |\psi\rangle) = w$. Then there exists a quasirigid state $|\phi\rangle$ such that $|\langle \psi | \phi \rangle|^2 \geq (1 - \epsilon) \frac{w - (1 - \Delta)}{\Delta}$.

Proof. Choose a map $f : [R] \rightarrow \Sigma^q$ so that for every clause $j \in [R]$, $f(j)$ is an element of Σ^q that has the largest weight; i.e. $|a_{j,f(j)}|^2 = \max_{x \in \Sigma^q} |a_{j,x}|^2$. Consider the *quasirigid* state $|\phi\rangle = \frac{1}{\sqrt{\gamma}} \sum_{j \in [R]} a_{j,f(j)} |j\rangle |f(j)\rangle$, where $\gamma = \sum_{j \in [R]} |a_{j,f(j)}|^2$ is chosen so that $\langle \phi | \phi \rangle = 1$. Then $|\langle \psi | \phi \rangle|^2 = \left| \frac{1}{\sqrt{\gamma}} \sum_{j \in [R]} |a_{j,f(j)}|^2 \right|^2 = \gamma$. Finally, notice that

$$\gamma \geq \sum_{j \in [R]; c_{j,\epsilon}=1} |a_{j,f(j)}|^2 \geq \sum_{j \in [R]; c_{j,\epsilon}=1} (1 - \epsilon) \sum_{x \in \Sigma^q} |a_{j,x}|^2 \geq (1 - \epsilon) \cdot \frac{w - (1 - \Delta)}{\Delta}. \quad \square$$

Since quasirigid states only use a $\frac{1}{\kappa}$ fraction of basis elements, they will not test well on Density. In fact, no quantum state can do well on both Density and QuasiCheck $_{\epsilon, \Delta}$:

Lemma 19. *Suppose $A(\text{Density}, |\psi\rangle) = w_D \geq \frac{1}{\kappa}$ and $A(\text{QuasiCheck}_{\epsilon, \Delta}, |\psi\rangle) = w_Q$. Then $(w_D - \frac{1}{\kappa})^2 + (1 - \epsilon)^{\frac{w_Q - (1 - \Delta)}{\Delta}} \leq 1$.*

Proof. By Lemma 18, there exists a quasirigid state $|\phi\rangle$ such that $|\langle \psi | \phi \rangle|^2 \geq (1 - \epsilon)^{\frac{w_Q - (1 - \Delta)}{\Delta}}$. Let $|\phi\rangle = \sum_{j \in [R]} b_j |j\rangle |\sigma(j)\rangle$ for some function σ and amplitudes $\{b_j\}_{j \in [R]}$. Using Fact 13, we see that $|\langle + | \psi \rangle|^2 - |\langle + | \phi \rangle|^2$ is at most $\sqrt{1 - (1 - \epsilon)^{\frac{w_Q - (1 - \Delta)}{\Delta}}}$. Note that $|\langle + | \psi \rangle|^2 = w_D$, and by Cauchy-Schwarz, $|\langle + | \phi \rangle|^2 = \frac{1}{R \cdot \kappa} \left| \sum_{j \in [R]} b_j \right|^2 \leq \frac{1}{\kappa} \sum_{j \in [R]} |b_j|^2 = \frac{1}{\kappa}$. Since $w_D \geq \frac{1}{\kappa}$, we have $w_D - \frac{1}{\kappa} \leq |\langle + | \psi \rangle|^2 - |\langle + | \phi \rangle|^2 \leq \sqrt{1 - (1 - \epsilon)^{\frac{w_Q - (1 - \Delta)}{\Delta}}}$. The statement follows after rearranging terms. \square

We show that the *best* quantum states for this pair of tests are close to *rigid* states. Intuitively, the quasirigid states that test well on Density have nearly uniform amplitudes, and so are close to rigid.

Claim 20. *Suppose $A(\text{Density}, |\psi\rangle) \geq \frac{1}{\kappa} - d_D$ and $A(\text{QuasiCheck}_{\epsilon, \Delta}, |\psi\rangle) \geq 1 - \Delta \cdot d_Q$. Then there exists a rigid state $|\chi\rangle$ such that $|\langle \chi | \psi \rangle|^2 \geq 1 - \kappa d_D - (\kappa + 1)\sqrt{\epsilon + d_Q}$.*

Proof. By Lemma 18, there exists a quasirigid state $|\phi\rangle$ such that $|\langle \psi | \phi \rangle|^2 \geq (1 - \epsilon)(1 - d_Q)$. By Fact 13, we have $|\langle \mu | \psi \rangle|^2 - |\langle \mu | \phi \rangle|^2 \leq \sqrt{1 - (1 - \epsilon)(1 - d_Q)} \leq \sqrt{\epsilon + d_Q}$ for any unit vector $|\mu\rangle$. We use this in two places. First, since $|\langle + | \psi \rangle|^2 \geq \frac{1}{\kappa} - d_D$, applying Fact 13 with $|\mu\rangle = |+\rangle$ implies $|\langle + | \phi \rangle|^2 \geq \frac{1}{\kappa} - d_D - \sqrt{\epsilon + d_Q}$. Now let $|\chi\rangle$ be the *rigid* state with the same computational basis elements as $|\phi\rangle$. Then

$$|\langle \chi | \phi \rangle|^2 = \kappa |\langle + | \phi \rangle|^2 \geq 1 - \kappa \left(d_D + \sqrt{\epsilon + d_Q} \right).$$

Applying Fact 13 using $|\mu\rangle = |\chi\rangle$ implies $|\langle \chi | \psi \rangle|^2 \geq 1 - \kappa \left(d_D + \sqrt{\epsilon + d_Q} \right) - \sqrt{\epsilon + d_Q}$. \square

We are now ready to prove Theorem 3.

Proof of Theorem 3. Suppose for any constant k and $\epsilon > 0$, there exists some Δ at least inverse polynomial in input size such that SupDetect $_{k, \epsilon, \Delta}$ can be efficiently implemented. We construct the following QMA verifier that decides every GAPCSP instance guaranteed by Theorem 10, choosing p_1, p_2, p_3, ϵ later on:

- With probability p_1 , run Density.
- With probability p_2 , run QuasiCheck $_{\epsilon, \Delta}$.
- With probability p_3 , run the protocol ConstraintCheck guaranteed by Lemma 12.

Lemma 12 implies the existence of absolute constants $C_{\text{YES}}, \xi, \kappa$. We choose ϵ and *distance thresholds* $\nu_{\text{low}}, \nu_{\text{high}}$ to be small positive constants that satisfy the following conditions:

$$\epsilon < \nu_{\text{high}}^2 \leq \nu_{\text{low}}^2 \leq 1 \quad \frac{\nu_{\text{high}}}{\nu_{\text{low}}} \leq \frac{\xi}{6(1 - C_{\text{YES}})} \quad (\kappa \nu_{\text{low}} + (\kappa + 1)\sqrt{\epsilon + \nu_{\text{low}}})^{1/2} \leq \frac{\xi}{2}$$

For example, this can be done by first making all constants equal and small enough to satisfy the right-most inequality, then reducing ν_{high} to satisfy the middle inequality, then reducing ϵ to satisfy the first inequality.

Now we choose the probabilities p_1, p_2, p_3 . Let

$$p_1 = \frac{1}{Z} \quad p_2 = \frac{(\nu_{\text{low}} + \nu_{\text{high}})(1 - \epsilon)}{\Delta(\nu_{\text{high}}^2 - \epsilon)Z} \quad p_3 = \frac{\nu_{\text{low}}}{2(1 - C_{\text{YES}})Z},$$

where $Z := 1 + \frac{(\nu_{\text{low}} + \nu_{\text{high}})(1 - \epsilon)}{\Delta(\nu_{\text{high}}^2 - \epsilon)} + \frac{\nu_{\text{low}}}{2(1 - C_{\text{YES}})}$, so that the probabilities sum to 1.

Given a quantum witness $|\psi\rangle$, the verifier accepts with probability

$$p_1 \cdot A(\text{Density}, |\psi\rangle) + p_2 \cdot A(\text{QuasiCheck}_{\epsilon, \Delta}, |\psi\rangle) + p_3 \cdot A(\text{ConstraintCheck}, |\psi\rangle).$$

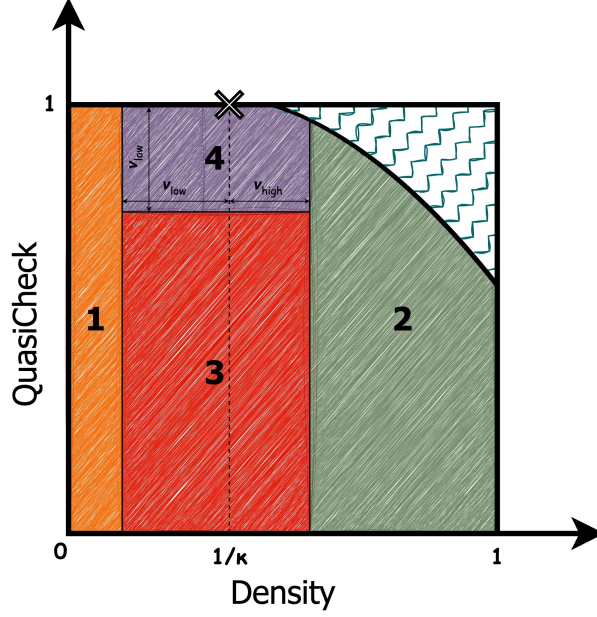


Figure 1: Plot of possible acceptance probabilities for the tests Density and $\text{QuasiCheck}_{\epsilon, \Delta}$ when $\Delta = 1$. The numbers 1 to 4 correspond to the four cases in soundness in the proof of [Theorem 3](#). The upper right corner is forbidden by [Lemma 19](#). Rigid states live at the black “ \times ” icon by [Fact 16](#) and [Fact 17](#).

In completeness, we consider the quantum witness guaranteed by [Lemma 12](#). Since this state is rigid, by [Fact 16](#) and [Fact 17](#), the verifier accepts with probability at least $P_{\text{YES}} := p_1 \cdot \frac{1}{\kappa} + p_2 \cdot 1 + p_3 \cdot C_{\text{YES}}$.

We split soundness into four cases, depending on the acceptance probabilities of Density and QuasiCheck . We give a graphical picture in [Figure 1](#).

1. In the first case, the witness doesn't test well enough on Density . If $A(\text{Density}, |\psi\rangle) = \frac{1}{\kappa} - d$ for $d \geq \nu_{\text{low}}$, then the verifier accepts with probability at most

$$P_{\text{NO}} \leq p_1 \cdot \left(\frac{1}{\kappa} - d\right) + p_2 \cdot 1 + p_3 \leq P_{\text{YES}} - p_1 \cdot \nu_{\text{low}} + p_3 \cdot (1 - C_{\text{YES}}) = P_{\text{YES}} - \frac{\nu_{\text{low}}}{2Z}.$$

2. In the second case, the witness tests too well on Density , and so cannot test well enough on QuasiCheck . If $A(\text{Density}, |\psi\rangle) = \frac{1}{\kappa} + d$ for $d \geq \nu_{\text{high}}$, then by [Lemma 19](#), $A(\text{QuasiCheck}_{\epsilon, \Delta}, |\psi\rangle) \leq 1 - \Delta + \Delta \cdot \frac{1-d^2}{1-\epsilon}$:

$$P_{\text{NO}} \leq p_1 \cdot \left(\frac{1}{\kappa} + d\right) + p_2 \cdot \left(1 - \Delta + \Delta \cdot \frac{1-d^2}{1-\epsilon}\right) + p_3 \leq P_{\text{YES}} + p_1 \cdot d - p_2 \Delta \cdot \left(\frac{d^2 - \epsilon}{1-\epsilon}\right) + p_3 \cdot (1 - C_{\text{YES}}).$$

The right-most expression depends on d through the term $p_1 \cdot d - p_2 \Delta \cdot \left(\frac{d^2 - \epsilon}{1-\epsilon}\right) = p_1 \left(d - \frac{(\nu_{\text{low}} + \nu_{\text{high}})(d^2 - \epsilon)}{\nu_{\text{high}}^2 - \epsilon}\right)$. This term is decreasing with d when $d \geq \nu_{\text{high}}$; one can verify this by taking a partial derivative with respect to d . So the expression is maximized at $d = \nu_{\text{high}}$, and so

$$P_{\text{NO}} \leq P_{\text{YES}} + p_1 \left(\nu_{\text{high}} - \frac{(\nu_{\text{low}} + \nu_{\text{high}})(\nu_{\text{high}}^2 - \epsilon)}{\nu_{\text{high}}^2 - \epsilon}\right) + p_3 \cdot (1 - C_{\text{YES}}) = P_{\text{YES}} - \frac{\nu_{\text{low}}}{2Z}.$$

3. In the third case, the witness doesn't test well enough on QuasiCheck , and the acceptance probability of Density is not too high. If $A(\text{Density}, |\psi\rangle) = \frac{1}{\kappa} + d$ for $-\nu_{\text{low}} \leq d \leq \nu_{\text{high}}$ and $A(\text{QuasiCheck}_{\epsilon, \Delta}, |\psi\rangle) \leq 1 - \Delta \cdot \nu_{\text{low}}$, then

$$P_{\text{NO}} \leq p_1 \cdot \left(\frac{1}{\kappa} + d\right) + p_2 \cdot (1 - \Delta \cdot \nu_{\text{low}}) + p_3 \leq P_{\text{YES}} + p_1 \cdot d - p_2 \Delta \cdot \nu_{\text{low}} + p_3 \cdot (1 - C_{\text{YES}}).$$

By our choice of constants, $d \leq \nu_{\text{high}} \leq \nu_{\text{low}}$. Moreover, one can verify that $p_2 \Delta \geq 2 \cdot p_1$ whenever $\nu_{\text{high}} \leq 1$. So $p_1 \cdot d - p_2 \Delta \cdot \nu_{\text{low}} \leq -p_1 \cdot \nu_{\text{low}}$, and $P_{\text{NO}} \leq P_{\text{YES}} - p_1 \cdot \nu_{\text{low}} + p_3 \cdot (1 - C_{\text{YES}}) = P_{\text{YES}} - \frac{\nu_{\text{low}}}{2Z}$.

4. In the fourth case, the witness tests well on `QuasiCheck`, and the acceptance probability of `Density` is not too low. So the witness must be close to *rigid*, and do worse on `ConstraintCheck`. If $A(\text{Density}, |\psi\rangle) = \frac{1}{\kappa} + d$ for $-\nu_{\text{low}} \leq d \leq \nu_{\text{high}}$ and $A(\text{QuasiCheck}_{\epsilon, \Delta}, |\psi\rangle) \geq 1 - \Delta \cdot \nu_{\text{low}}$, then by [Claim 20](#), there is a rigid state $|\chi\rangle$ such that $|\langle \chi | \psi \rangle|^2 \geq 1 - \kappa d - (\kappa + 1)\sqrt{\epsilon + \nu_{\text{low}}}$. We use [Fact 13](#) with Π equal to the accepting projector of `ConstraintCheck`; then $|A(\text{ConstraintCheck}, |\psi\rangle) - A(\text{ConstraintCheck}, |\chi\rangle)| \leq (\kappa d + (\kappa + 1)\sqrt{\epsilon + \nu_{\text{low}}})^{1/2}$. Putting this together,

$$\begin{aligned}
P_{\text{NO}} &\leq p_1 \cdot \left(\frac{1}{\kappa} + d\right) + p_2 \cdot 1 + p_3 \cdot \left(C_{\text{YES}} - \xi + (\kappa d + (\kappa + 1)\sqrt{\epsilon + \nu_{\text{low}}})^{1/2}\right) \\
&\leq P_{\text{YES}} + p_1 \cdot d + p_3 \cdot \left(-\xi + (\kappa d + (\kappa + 1)\sqrt{\epsilon + \nu_{\text{low}}})^{1/2}\right) \\
&\leq P_{\text{YES}} + p_1 \cdot \nu_{\text{high}} - p_3 \cdot \frac{\xi}{2} \\
&= P_{\text{YES}} + \frac{1}{Z} \left(\nu_{\text{high}} - \frac{\nu_{\text{low}} \cdot \xi}{4(1 - C_{\text{YES}})} \right) \\
&\leq P_{\text{YES}} - \frac{\nu_{\text{high}}}{2Z}.
\end{aligned}$$

So, this protocol succeeds with completeness P_{YES} and soundness at most $P_{\text{YES}} - \frac{\nu_{\text{high}}}{2Z}$. \square

4 Implications

4.1 QMA with non-collapsing measurements equals NEXP

The ability to make non-collapsing measurements implies efficient superposition detection.

Claim 21. *For any constant k and $\epsilon > 0$, a quantum computer with the ability to make just one non-collapsing measurement can efficiently implement $\text{SupDetect}_{k, \epsilon, 2(x-x^2)}$ where $x = \min(\epsilon, \frac{1}{2k})$.*

Proof. Suppose the quantum computer is given a k -qubit state $|\psi\rangle$, and choose any $\epsilon > 0$. The computer first makes one non-collapsing measurement of $|\psi\rangle$. The computer then makes a (collapsing) measurement of $|\psi\rangle$ in the computational basis, and outputs 1 if and only if the measurements agree.

If $|\psi\rangle$ is truly a computational basis state, then the computer always outputs 1. Now suppose $|\langle e | \psi \rangle|^2 \leq 1 - \epsilon$ for all k -qubit computational basis states $|e\rangle \in \mathcal{B}_k$. Let $|e_*\rangle$ be a state in \mathcal{B}_k with the largest squared overlap with $|\psi\rangle$, and let $t = |\langle e_* | \psi \rangle|^2$. Then the probability of outputting 1 can be upper-bounded as

$$\sum_{|e\rangle \in \mathcal{B}_k} (|\langle e | \psi \rangle|^2)^2 = |\langle e_* | \psi \rangle|^4 + \sum_{|e\rangle \in \mathcal{B}_k; |e\rangle \neq |e_*\rangle} |\langle e | \psi \rangle|^4 \leq t^2 + \left(\sum_{|e\rangle \in \mathcal{B}_k; |e\rangle \neq |e_*\rangle} |\langle e | \psi \rangle|^2 \right)^2 = t^2 + (1 - t)^2,$$

which equals $1 - 2(t - t^2)$. This is maximized at the largest and smallest valid values of t . Observe that $t \geq \frac{1}{2k}$ since $|e_*\rangle$ has the largest squared overlap with $|\psi\rangle$, and $t \leq 1 - \epsilon$ by supposition. \square

[Corollary 4](#) is then a direct consequence of [Theorem 3](#) and [Claim 21](#). This resolves [Question 1](#).

[\[ABFL14\]](#) defined two complexity classes with non-collapsing measurement: CQP and naCQP (non-adaptive CQP). In naCQP, the non-collapsing measurement results can only be used at the *end* of the quantum computation (i.e. in classical post-processing). We remark that both [Claim 21](#) and the proof of [Theorem 3](#) satisfy this non-adaptive condition.

The original framing of [Question 1](#) in [\[Aar23\]](#) directly considers the power of QMA with a naCQP (or CQP) verifier. This has a technical issue which we discuss here. [\[ABFL14\]](#) considered a *classical* oracle \mathcal{O} that receives a quantum circuit and outputs non-collapsing measurement results. naCQP (CQP) is then defined as P with 1 (poly(n)) query to \mathcal{O} . If we use such a machine as a verifier, it equals NEXP only if \mathcal{O} can also receive the *quantum* witness. To handle this issue, we consider QMA where the verifier can make a non-collapsing measurement on an arbitrary quantum state at *any* point in the computation. Here, [Claim 21](#) uses one non-collapsing measurement, which is immediately followed by one collapsing measurement.

[AGI⁺24] instead defines the class PDQMA, where the verifier first runs a quantum circuit (with collapsing measurements), then makes *all* non-collapsing measurements, and finally runs a classical circuit given the non-collapsing measurement results. In this model, Claim 21 is not valid as written, since non-collapsing measurements must occur after all collapsing measurements. However, by replacing the final collapsing measurement with a non-collapsing measurement, we recover $\text{NEXP} \subseteq \text{PDQMA}$ using *two* non-collapsing measurements. We remark that this is optimal: PDQMA with one non-collapsing measurement is equal to QMA, since the verifier’s final measurement can always be collapsing. [AGI⁺24] uses $O(n \log n)$ non-collapsing measurements to prove $\text{NEXP} \subseteq \text{PDQMA}$.

4.2 QMA⁺ = NEXP

If a quantum witness has *non-negative amplitudes*, a partial measurement in the computational basis will preserve this property. A BQP machine can implement superposition detection on any such quantum state:

Claim 22. Consider the algorithm Verify_k^+ , which on input a k -qubit quantum state $|\psi\rangle$, measures $|\psi\rangle$ in the Fourier basis and outputs 0 if the observed basis component is $\frac{1}{2^{k/2}} \sum_{i \in [2^k]} |i\rangle$, and 1 otherwise. Then for every $\epsilon > 0$, there is a superposition detector $\text{SupDetect}_{k, \epsilon, \sqrt{\epsilon/2^k}}$ such that for every state $|\psi\rangle$ with non-negative amplitudes in the computational basis, $A(\text{Verify}_k^+, |\psi\rangle) = A(\text{SupDetect}_{k, \epsilon, \sqrt{\epsilon/2^k}}, |\psi\rangle) - \frac{1}{2^k}$.

Proof. Let the input be $|\psi\rangle = \sum_{i \in [2^k]} a_i |i\rangle$. Then $A(\text{Verify}_k^+, |\psi\rangle) = 1 - \frac{1}{2^k} \left| \sum_{i \in [2^k]} a_i \right|^2$. Since all $a_i \geq 0$,

$$A(\text{Verify}_k^+, |\psi\rangle) = 1 - \frac{1}{2^k} \left(\sum_{i \in [2^k]} a_i \right)^2 = 1 - \frac{1}{2^k} - \sum_{i, j \in [2^k]; i \neq j} a_i a_j \leq 1 - \frac{1}{2^k},$$

and this is achieved if $|\psi\rangle$ is a computational basis state. Now, let $i^* = \text{argmax}_{i \in [2^k]} a_i^2$. Since $\sum_{i \in [2^k]} a_i^2 = 1$, $a_{i^*} \geq \frac{1}{2^{k/2}}$. If $a_{i^*}^2 \leq 1 - \epsilon$, then

$$\sum_{i, j \in [2^k]; i \neq j} a_i a_j \geq \frac{1}{2^{k/2}} \sum_{j \in [2^k]; j \neq i^*} a_j \geq \frac{1}{2^{k/2}} \sqrt{\sum_{j \in [2^k]; j \neq i^*} a_j^2} \geq \frac{\sqrt{\epsilon}}{2^{k/2}}. \quad \square$$

Corollary 5 is then a direct consequence of Theorem 3 and Claim 22. Note that Verify_k^+ acts as a superposition detector, since the additive error $\frac{1}{2^k}$ in Claim 22 does not change the promise gap of the protocol in Theorem 3.

In QMA⁺, one *only* considers quantum witnesses which admit efficient superposition detection by Claim 22. By contrast, Theorem 3 implies that this property cannot be tested on *all* quantum witnesses, assuming $\text{QMA} \neq \text{NEXP}$. In fact, it is information-theoretically *impossible*, assuming the density matrix is “all there is” in quantum mechanics:

Fact 23. Fix k . Consider the set S_1 of k -qubit computational basis states and the set S_2 of k -qubit Fourier basis states. Then a uniformly random choice from S_1 has the same density matrix as a uniformly random choice from S_2 . Despite this, $\text{SupDetect}_{k, \epsilon, \Delta}$ distinguishes these two options for all $\epsilon \leq 1 - \frac{1}{2^k}$ and $\Delta > 0$.

Does it help to have more quantum witnesses? Note that having *two* copies of a quantum state allows one to detect superposition: measure each copy in the computational basis, and output 1 iff the outcomes agree. However, in Theorem 3, the superposition detector is used on a quantum witness *after a partial measurement*. In completeness, even with $\text{poly}(n)$ quantum witnesses, there is an inverse exponential chance of receiving two copies of the same post-measurement state. So as is, we cannot use the additional quantum witnesses to detect superposition unless we allow an inverse exponential promise gap, or *post-selection* [Aar04]. We observe that Theorem 3 neatly recovers the results $\text{preciseQMA}(2) = \text{NEXP}$ [Per12] and $\text{postQMA}(2) = \text{NEXP}$ [Kin18], as well as the QMA(2) protocol with logarithmic-sized proofs for NP [BT10].

In light of this, we suggest that lower bounds to QMA(2) must go beyond the QMA⁺ framework, as the verifier must be able to handle quantum witnesses without directly detecting superposition.

5 Open problems

1. Non-collapsing measurement is especially powerful with access to an inefficient quantum state: QMA with non-collapsing measurements equals NEXP, but QCMA with non-collapsing measurements is in PSPACE. Can one use this concept to construct a classical oracle separating QMA and QCMA? Similarly, how does the power of CQP/poly compare to the power of CQP/qpoly = ALL [Aar18]?
2. The position of the non-collapsing measurement in a quantum computation seems to matter in [Corollary 4](#): non-collapsing measurement is used *after* a collapsing partial measurement. This stymies one approach to prove $\text{QMA}(2) = \text{NEXP}$; see discussion in [Section 4.2](#). What is the power of BQP (or QMA) with the ability to make non-collapsing measurements, but only *before* all collapsing measurements?

Acknowledgements

Thanks to John Bostanci, Bill Fefferman, Sabee Grewal, and Barak Nehoran for comments on a draft of this manuscript.

This work was done in part while visiting the Simons Institute for the Theory of Computing. RB acknowledges support from AFOSR (award number FA9550-21-1-0008). This material is based upon work partially supported by the National Science Foundation under Grant CCF-2044923 (CAREER) and by the U.S. Department of Energy, Office of Science, National Quantum Information Science Research Centers as well as by DOE QuantISED grant DE-SC0020360. KM acknowledges support from the National Science Foundation Graduate Research Fellowship Program under Grant No. DGE-1746045. Any opinions, findings, and conclusions or recommendations expressed in this material are those of the author(s) and do not necessarily reflect the views of the National Science Foundation.

References

- [Aar04] Scott Aaronson. Quantum Computing, Postselection, and Probabilistic Polynomial-Time, 2004. [arXiv:quant-ph/0412187](#).
- [Aar05a] Scott Aaronson. Limitations of Quantum Advice and One-Way Communication. *Theory of Computing*, 1(1):1–28, 2005. [arXiv:quant-ph/0402095](#).
- [Aar05b] Scott Aaronson. Quantum computing and hidden variables. *Phys. Rev. A*, 71:032325, Mar 2005. URL <https://doi.org/10.1103/PhysRevA.71.032325>.
- [Aar18] Scott Aaronson. PDQP/qpoly = ALL, 2018. [arXiv:1805.08577](#).
- [Aar23] Scott Aaronson. Quantum miscellany — Shtetl-Optimized, 2023. URL <https://scottaaronson.blog/?p=7516>. [Online; accessed 10-February-2024].
- [ABD⁺08] Scott Aaronson, Salman Beigi, Andrew Drucker, Bill Fefferman, and Peter Shor. The Power of Unentanglement, 2008. [arXiv:0804.0802](#).
- [ABFL14] Scott Aaronson, Adam Bouland, Joseph Fitzsimons, and Mitchell Lee. The space "just above" BQP, 2014. [arXiv:1412.6507](#).
- [AD13] Scott Aaronson and Andrew Drucker. A Full Characterization of Quantum Advice, 2013. [arXiv:1004.0377](#).
- [AGI⁺24] Scott Aaronson, Sabee Grewal, Vishnu Iyer, Simon C. Marshall, and Ronak Ramachandran. PDQMA = DQMA = NEXP: QMA With Hidden Variables and Non-collapsing Measurements, 2024. URL [TBA](#).
- [AKT24] Seiseki Akibue, Go Kato, and Seiichiro Tani. On the hardness of conversion from entangled proof into separable one, 2024. [arXiv:2402.08981](#).

- [ALM⁺98] Sanjeev Arora, Carsten Lund, Rajeev Motwani, Madhu Sudan, and Mario Szegedy. Proof Verification and the Hardness of Approximation Problems. *J. ACM*, 45(3):501–555, 1998. URL <https://doi.org/10.1145/278298.278306>.
- [AR03] Dorit Aharonov and Oded Regev. A Lattice Problem in Quantum NP, 2003. [arXiv:quant-ph/0307220](https://arxiv.org/abs/quant-ph/0307220).
- [AS92] Sanjeev Arora and Shmuel Safra. Probabilistic Checking of Proofs; A New Characterization of NP. In *33rd Annual Symposium on Foundations of Computer Science, Pittsburgh, Pennsylvania, USA, 24-27 October 1992*, pages 2–13. IEEE Computer Society, 1992. URL <https://doi.org/10.1109/SFCS.1992.267824>.
- [BFL90] L. Babai, L. Fortnow, and C. Lund. Nondeterministic exponential time has two-prover interactive protocols. In *Proceedings of the 31st Annual Symposium on Foundations of Computer Science, SFCS '90*, page 16–25 vol.1, USA, 1990. IEEE Computer Society. URL <https://doi.org/10.1109/SFCS.1990.89520>.
- [BFM23] Roozbeh Bassirian, Bill Fefferman, and Kunal Marwaha. Quantum Merlin-Arthur and proofs without relative phase, 2023. [arXiv:2306.13247](https://arxiv.org/abs/2306.13247).
- [BT10] Hugue Blier and Alain Tapp. A quantum characterization of NP, 2010. [arXiv:0709.0738](https://arxiv.org/abs/0709.0738).
- [CD10] Jing Chen and Andrew Drucker. Short multi-prover quantum proofs for SAT without entangled measurements, 2010. [arXiv:1011.0716](https://arxiv.org/abs/1011.0716).
- [CF11] Alessandro Chiesa and Michael A Forbes. Improved soundness for QMA with multiple provers, 2011. [arXiv:1108.2098](https://arxiv.org/abs/1108.2098).
- [Din07] Irit Dinur. The PCP theorem by gap amplification. *Journal of the ACM (JACM)*, 54(3):12–es, 2007. URL <https://dl.acm.org/doi/abs/10.1145/1236457.1236459>.
- [FvdG98] Christopher A. Fuchs and Jeroen van de Graaf. Cryptographic Distinguishability Measures for Quantum Mechanical States, 1998. [arXiv:quant-ph/9712042](https://arxiv.org/abs/quant-ph/9712042).
- [Gha23] Sevag Gharibian. Guest Column: The 7 faces of quantum NP. *ACM SIGACT News*, 54(4):54–91, December 2023. [arXiv:2310.18010](https://arxiv.org/abs/2310.18010).
- [GNN12] François Le Gall, Shota Nakagawa, and Harumichi Nishimura. On QMA protocols with two short quantum proofs. *Quantum Inf. Comput.*, 12(7-8):589–600, 2012. URL <https://doi.org/10.26421/QIC12.7-8-4>.
- [GSS⁺18] Sevag Gharibian, Miklos Santha, Jamie Sikora, Aarthi Sundaram, and Justin Yirka. Quantum Generalizations of the Polynomial Hierarchy with Applications to QMA(2), 2018. [arXiv:1805.11139](https://arxiv.org/abs/1805.11139).
- [Har04] Prahladh Harsha. *Robust PCPs of proximity and shorter PCPs*. PhD thesis, Massachusetts Institute of Technology, 2004. URL <https://dspace.mit.edu/bitstream/handle/1721.1/26720/59552830-MIT.pdf>.
- [HM13] Aram W. Harrow and Ashley Montanaro. Testing product states, quantum Merlin-Arthur games and tensor optimization. *Journal of the ACM (JACM)*, 60(1):1–43, 2013. [arXiv:1001.0017](https://arxiv.org/abs/1001.0017).
- [HMTT23] Ryo Hiromasa, Akihiro Mizutani, Yuki Takeuchi, and Seiichiro Tani. Rewindable Quantum Computation and Its Equivalence to Cloning and Adaptive Postselection, 2023. [arXiv:2206.05434](https://arxiv.org/abs/2206.05434).
- [JW23] Fernando Granha Jeronimo and Pei Wu. The Power of Unentangled Quantum Proofs with Non-negative Amplitudes. *55th Annual ACM Symposium on Theory of Computing*, 2023. URL <https://doi.org/10.1145/3564246.3585248>.

- [JW24] Fernando G. Jeronimo and Pei Wu. Dimension Independent Disentanglers from Unentanglement and Applications, 2024. [arXiv:2402.15282](#).
- [Kin18] Yusuke Kinoshita. QMA(2) with postselection equals to NEXP, 2018. [arXiv:1806.09732](#).
- [KMY03] Hirotada Kobayashi, Keiji Matsumoto, and Tomoyuki Yamakami. Quantum Merlin-Arthur Proof Systems: Are Multiple Merlins More Helpful to Arthur?, 2003. [arXiv:quant-ph/0306051](#).
- [MW05] Chris Marriott and John Watrous. Quantum Arthur-Merlin Games, 2005. [arXiv:cs/0506068](#).
- [NWZ09] Daniel Naga, Pawel Wocjan, and Yong Zhang. Fast Amplification of QMA, 2009. [arXiv:0904.1549](#).
- [Per12] Attila Pereszlényi. Multi-Prover Quantum Merlin-Arthur Proof Systems with Small Gap, 2012. [arXiv:1205.2761](#).
- [SY22] Adrian She and Henry Yuen. Unitary property testing lower bounds by polynomials, 2022. [arXiv:2210.05885](#).