

GPTopic: Dynamic and Interactive Topic Representations

Arik Reuter^{1,2}, Anton Thielmann², Christoph Weisser³, Sebastian Fischer^{1,4}, Benjamin Säfken²,

¹LMU Munich, ²TU Clausthal, ³BASF, ⁴Munich Center for Machine Learning (MCML)

Correspondence: arik.reuter@campus.lmu.de

Abstract

Topic modeling seems to be almost synonymous with generating lists of top words to represent topics within large text corpora. However, deducing a topic from such list of individual terms can require substantial expertise and experience, making topic modelling less accessible to people unfamiliar with the particularities and pitfalls of top-word interpretation. A topic representation limited to top-words might further fall short of offering a comprehensive and easily accessible characterization of the various aspects, facets and nuances a topic might have. To address these challenges, we introduce GPTopic, a software package that leverages Large Language Models (LLMs) to create dynamic, interactive topic representations. GPTopic provides an intuitive chat interface for users to explore, analyze, and refine topics interactively, making topic modeling more accessible and comprehensive. The corresponding code is available here: <https://github.com/ArikReuter/TopicGPT>.

1 Introduction

Topic modeling has the goal of extracting topics from large corpora of text, thus revealing potentially highly interesting but otherwise latent common semantic themes. A topic itself is commonly represented as a list of “top-words” which comprise the terms best describing the identified topics (Blei et al., 2003; Chemudugunta et al., 2006; Yin and Wang, 2014; Dieng et al., 2020). For instance, the top-words “Elephant”, “Lion”, “Leopard”, “Buffalo”, “Rhinoceros” clearly imply the topic “African Animals”. Yet, in many real-world scenarios, outcomes are significantly less clear-cut and topics more nuanced. Therefore, deducing topics from a concise collection of terms demands both experience and expertise, which can be especially an issue in cases where scientists and practitioners apply topic modelling. We thus identify accessibility and interpretability as central issues in the

subject of topic modelling, especially given that it is such a commonly used tool in numerous applications (Boyd-Graber et al., 2017; Jelodar et al., 2019; Thormann et al., 2021; Kant et al., 2022; Tillmann et al., 2022; Thielmann et al., 2023; Weisser et al., 2023).

While an increasing number of top-words per topic would clearly cause a more detailed representation of a topic, it is questionable how many of those words humans can reasonably comprehend and interpret as a coherent theme. The top-word approach also carries an inherent risk of over- or even misinterpretation, especially when dealing with noisy data and abstract topics (Chang et al., 2009). Additionally, from a practical perspective, a list of words is often simply too static to be useful for any interesting inquiries into the aspects, subtopics and potentially complex nature of a topic. To put it in a nutshell: A topic is more than a list of words.

We thus contribute the GPTopic software-package that utilizes Large Language Models (LLMs) to overcome the limited notion of top-word representations of topics in three ways:

1. First, GPTopic allows to generate a concise name and a short description of topics, easily understandable by non-technical users.
2. Second, it further enables dynamic interactions with topics via a chat-based interface. This allows practitioners to extract more nuanced and specific information from topics.
3. Third, it is also possible to augment and modify a topic interactively based on the previous analyses.

In summary, we aim to make topic-modeling more interactive and more dynamic, but centrally more interpretable, open and especially more accessible. To accomplish enhanced accessibility and inter-

pretability in a dynamic approach, we utilize LLMs to summarize and interact with topics.

2 Topic Extraction

The core of the GPTopic package is built on top of a robust topic modeling approach that involves clustering document embeddings and then extracting the most relevant words using a method based on cosine similarity and a term frequency-inverse document frequency (TF-IDF) heuristic (Angelov, 2020; Grootendorst, 2022). By default, dimensionality reduction is performed using UMAP (McInnes et al., 2018), and clustering is executed using the HDBSCAN algorithm (McInnes et al., 2017). Unlike Angelov (2020) and Grootendorst (2022), we allow users to specify a fixed number of topics, where agglomerative clustering (Murtagh and Legendre, 2014) is used to merge the clusters identified by HDBSCAN.

Users have the flexibility to supply their own document embeddings or to utilize the embedding models provided by OpenAI, as a widely recognized proprietary option.

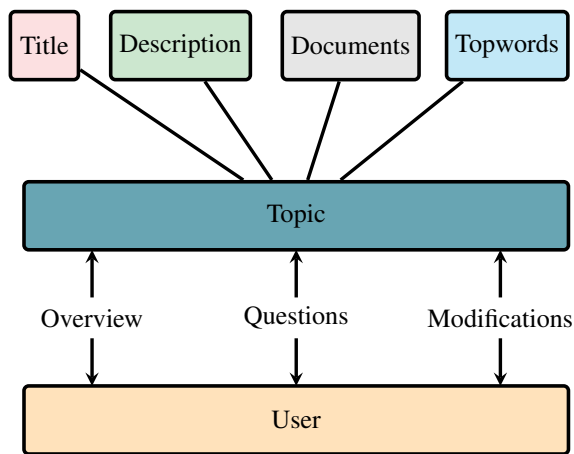


Figure 1: The GPTopic package allows a user to dynamically interact with a topic. A topic can be thought of as a structure defined by its documents, title, description and top-words. Users cannot only read the topic’s description, but also ask questions and interactively modify the topic. Note that beyond what this figure shows, interactions on a more global level, e.g., comparisons of topics, are also possible.

3 Topic Naming and Descriptions

The process of generating names and descriptions for topics leverages the capabilities of either GPT-3.5 or GPT-4 (OpenAI, 2022; Bubeck et al., 2023). Employing these Large Language Models (LLMs)

facilitates the creation of intuitively interpretable and coherent topic representations in the form of natural text. This approach enables the utilization of extensive top-word sets comprising several hundred or even thousand words in order to accurately encapsulate the essence of each topic. By default, 500 top-words are used to extract a topic’s title and description. In contrast, in standard practice, topics are typically characterized by a much more limited selection of ten to twenty top-words (Blei et al., 2003; Dieng et al., 2020).

4 Interaction with Topics

Treating topics as entities that are more than a static list of top-words can be achieved by allowing users to dynamically interact with the topics. For GPTopic the basis for this interaction is a set of topics, where each topic has its title, description, its assigned documents and embeddings of the assigned documents.

4.1 Questions

In order to allow users to ask specific questions about a topic, we implement a Retrieval-Augmented-Generation (RAG) functionality (Lewis et al., 2020) that retrieves the most relevant documents with respect to the user’s query from a specific topic. This retrieval step is implemented via embedding relevant keywords of the user’s query followed by k-nearest neighbor search (Andoni, 2009). Subsequently, an LLM is used to answer the user’s question with the additional information.

Additionally, the GPTopic package provides a function that uses LLMs to identify the relevant topic for a given query, such that the topic index does not necessarily have to be known in advance.

Further, we implement a function that provides an automatic comparison of topics based on their description.

In summary, asking questions allows to easily access very specific and nuanced information a user might wish to acquire about one or several topics.

4.2 Modifications

After acquiring more specific information about a given topic modelling, it is a natural feature to also adapt the topic modelling accordingly. Our software package provides several mechanisms to facilitate refinement of the initial topic structure.

First, topics can be split in order to decrease the granularity of the topics. This is implemented

in three different ways. We do not only provide topic splitting via running either k-means clustering (Lloyd, 1982) or HDBSCAN clustering (McInnes et al., 2017) on only the embeddings of a specified topic, but also allow to split a topic based on a keyword. This keyword splitting works by embedding a user-defined keyword and then assigning all document with embeddings closer to this new keyword than to the centroid of the embeddings of all documents of their original topic to a new topic. Furthermore, a new topic based on a keyword can be created globally by assigning all documents to the new topic that are more similar to the keyword's embedding than the centroid of their topic's embeddings. The generation of new topics is always followed by top-word extraction, topic naming and topic description of the modified topics.

Second, the GPTopic package implements topic merging by simply combining the documents assigned to all sub-topics into a single super-topic, and subsequently recomputing the top-words, the topic's title and description.

Finally, topics can also be deleted by assigning the documents of the deleted topics to the closest other topic.

4.3 A Chat-based Interface

In order to make interacting with topics as easy as possible, GPTopic package implements a chat-based interface. This works by processing prompts with an LLM-call that decides which function, among `knn-search`, topic splitting, topic combination and all the other presented functions to call with which parameters. The result of this function call is then combined with the original user-prompt and returned.

5 Example Usage

In this section, we demonstrate that GPTopic can be used very intuitively to extract topics and dynamically investigate them further. We use the Twenty Newsgroups corpus (Mitchell, 1999) to showcase the API our package provides. Note that for the purpose of representation, we pruned the outputs by the package and permuted the indices of the identified topics.

Instantiating and fitting a model with the GPTopic package just takes a few lines of code.

```
from gptopic.GPTopic import GPTopic

tm = GPTopic(
    openai_api_key = <your-openai-api-key>,
    n_topics = 20) # real number of topics
```

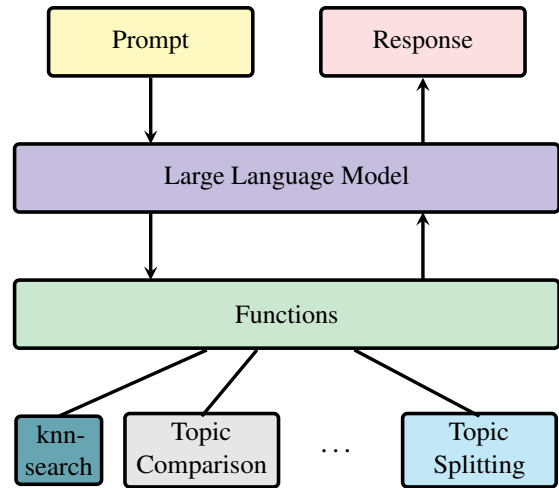


Figure 2: The chat-based interface for GPTopic is implemented by processing a user-defined query, or prompt, with an LLM. The LLM then decides which function to call. The result of this function call is processed with a further LLM-prompt and the final result is output to the user.

```
tm.fit(corpus) # corpus is of type list[str]
```

As the next step, GPTopic allows to access the list of the names and descriptions of the topics, as extracted by the package.

```
print(tm.topic_lis)
```

```
Output:
[Topic 0: Electronics Equipment Sales,
 Topic 1: Space Exploration,
 Topic 2: Belief and Atheism
 ...
 Topic 19: Baseball games and teams]
```

We might be further interested in learning more about a detailed aspect of a topic and use a corresponding prompt to query the model:

```
tm.pprompt("Which information related to the keyword 'moon landing' does topic 1 have?")
```

```
Output:
GPT wants to the call the function: {
  "name": "knn_search",
  "arguments": "{ 'topic_index': 1, 'query': 'moon landing', 'k': 5}"
}
Topic 1, which is related to the keyword "moon landing," has the following information:

1. Document index 258: This document provides an introduction to the solar system and mentions that advancements in rocketry after World War II enabled machines to travel to the Moon and other planets. It highlights that the United States has sent both automated spacecraft and human-crewed expeditions to explore the Moon.

2. Document index 535: This document discusses a $65 million program called the Back to the Moon bill, which aims to encourage private companies to develop lunar orbiters.
[...]
```

The response of the model is a summary of relevant documents and how they relate to a specific query about the topic of interest.

Another interesting point we want to further investigate could be the potential subtopics of topic 2:

```
tm.pprompt("What are 5 potential subtopics of topic 2")
```

```
Output:
GPT wants to call the function: {
  "name": "split_topic_kmeans",
  "arguments": "{\n  \"topic_idx\": 2,\n  \"n_clusters\": 5\n}"
}

Here are five potential subtopics of topic 2:

1. Existence of God: This subtopic explores arguments, evidence, proofs, and the existence of God.

2. Atheism vs Theism: This subtopic delves into the concepts of atheism, theism, atheists, and theists, and the debates surrounding these belief systems.

[...]
```

The package thus decides to use a function for identifying five different subtopics within topic 2 and summarizes them.

6 Limitations and Shortcomings

In our study, we observed that despite efforts to refine the prompt design, GPTopic may occasionally produce results that do not accurately reflect the content or themes of the documents it retrieves, which is caused by model hallucinations. Incorporating GPT-4 has shown promise in reducing hallucinations.

We also note the importance of dataset size, recommending over 10,000 documents for optimal topic identification and the RAG-mechanisms.

7 Related Work

Several recent lines of work aim to make topic modelling more accessible. For instance the OCTIS package (Terragni et al., 2021) provides a comprehensive framework for training, analyzing, optimizing and comparing topic models. Gensim and Mallet are further well-established packages that implement topic-modelling functionalities (Řehůřek and Sojka, 2010; McCallum, 2002). But neither package focuses on a final representation of topics beyond top-word lists.

Further, the BERTopic package implements several intuitive topic visualizations, as well as the

option to use LLMs for generating labels, summaries, phrases and keywords for existing topics (Grootendorst, 2022).

Very recent results by Pham et al. (2023) and Wang et al. (2023) explore the usage of prompting LLMs for topic extraction, and while they achieve strong benchmark results, they do not fundamentally challenge the notion of top-word based topic representations.

Finally, Sia et al. (2020) introduce a clustering-based topic modelling technique that employs weighting and re-ranking of top-words to achieve a more coherent topic representation. Similarly, an approach by Thielmann et al. (2024) questions the notion of static top-word based topic representations by introducing a method for increasing top-word coherence via using extension corpora.

8 Conclusion

Throughout this paper, we have discussed the limitations inherent in traditional topic modeling approaches, which often rely on static lists of top-words to represent complex themes. These approaches, while foundational, can often fall short in capturing the dynamic and multifaceted nature of topics, especially in noisy or nuanced datasets. The introduction of the GPTopic package marks a step forward in addressing these challenges. By leveraging the capabilities of LLMs, GPTopic transcends the conventional boundaries of topic modeling, offering a more nuanced, interactive, and comprehensible method for topic analysis and interpretation.

GPTopic’s innovative approach, which enables the generation of concise topic names and descriptions, interactive engagement with topics, and the dynamic augmentation and refinement of topic representations, can be a pivotal tool for both researchers and practitioners. It not only makes topic modeling more accessible to non-technical users but also enhances the interpretability and utility of topic modeling outcomes. As a result, GPTopic can facilitate a deeper understanding of text corpora for a broad community of people, enabling users to uncover and explore the underlying semantic themes in large corpora of text effectively.

References

- Alexandr Andoni. 2009. *Nearest neighbor search: the old, the new, and the impossible*. Ph.D. thesis, Massachusetts Institute of Technology.
- Dimo Angelov. 2020. Top2vec: Distributed representations of topics. *arXiv preprint arXiv:2008.09470*.
- David M Blei, Andrew Y Ng, and Michael I Jordan. 2003. Latent dirichlet allocation. *Journal of machine Learning research*, 3(Jan):993–1022.
- Jordan Boyd-Graber, Yuening Hu, David Mimno, et al. 2017. Applications of topic models. *Foundations and Trends® in Information Retrieval*, 11(2-3):143–296.
- Sébastien Bubeck, Varun Chandrasekaran, Ronen Eldan, Johannes Gehrke, Eric Horvitz, Ece Kamar, Peter Lee, Yin Tat Lee, Yuanzhi Li, Scott Lundberg, et al. 2023. Sparks of artificial general intelligence: Early experiments with gpt-4. *arXiv preprint arXiv:2303.12712*.
- Jonathan Chang, Sean Gerrish, Chong Wang, Jordan Boyd-Graber, and David Blei. 2009. Reading tea leaves: How humans interpret topic models. *Advances in neural information processing systems*, 22.
- Chaitanya Chemudugunta, Padhraic Smyth, and Mark Steyvers. 2006. Modeling general and specific aspects of documents with a probabilistic topic model. *Advances in neural information processing systems*, 19.
- Adji B Dieng, Francisco JR Ruiz, and David M Blei. 2020. Topic modeling in embedding spaces. *Transactions of the Association for Computational Linguistics*, 8:439–453.
- Maarten Grootendorst. 2022. Bertopic: Neural topic modeling with a class-based tf-idf procedure. *arXiv preprint arXiv:2203.05794*.
- Hamed Jelodar, Yongli Wang, Chi Yuan, Xia Feng, Xiahui Jiang, Yanchao Li, and Liang Zhao. 2019. Latent dirichlet allocation (lda) and topic modeling: models, applications, a survey. *Multimedia Tools and Applications*, 78:15169–15211.
- Gillian Kant, Levin Wiebelt, Christoph Weisser, Krisztina Kis-Katos, Mattias Luber, and Benjamin Säfken. 2022. An iterative topic model filtering framework for short and noisy user-generated data: analyzing conspiracy theories on twitter. *International Journal of Data Science and Analytics*, pages 1–21.
- Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, et al. 2020. Retrieval-augmented generation for knowledge-intensive nlp tasks. *Advances in Neural Information Processing Systems*, 33:9459–9474.
- Stuart Lloyd. 1982. Least squares quantization in pcm. *IEEE transactions on information theory*, 28(2):129–137.
- Andrew Kachites McCallum. 2002. MALLET: A Machine Learning for Language Toolkit. <http://mallet.cs.umass.edu>. Accessed: [insert date of access here].
- Leland McInnes, John Healy, and Steve Astels. 2017. hdbscan: Hierarchical density based clustering. *J. Open Source Softw.*, 2(11):205.
- Leland McInnes, John Healy, and James Melville. 2018. Umap: Uniform manifold approximation and projection for dimension reduction. *arXiv preprint arXiv:1802.03426*.
- Tom Mitchell. 1999. Twenty Newsgroups. UCI Machine Learning Repository. DOI: <https://doi.org/10.24432/C5C323>.
- Fionn Murtagh and Pierre Legendre. 2014. Ward’s hierarchical agglomerative clustering method: which algorithms implement ward’s criterion? *Journal of classification*, 31:274–295.
- OpenAI. 2022. Introducing chatgpt. <https://openai.com/blog/chatgpt>. Accessed: 2024-01-04.
- Chau Minh Pham, Alexander Hoyle, Simeng Sun, and Mohit Iyyer. 2023. Topicgpt: A prompt-based topic modeling framework. *arXiv preprint arXiv:2311.01449*.
- Radim Řehůřek and Petr Sojka. 2010. Software Framework for Topic Modelling with Large Corpora. In *Proceedings of the LREC 2010 Workshop on New Challenges for NLP Frameworks*, pages 45–50, Valletta, Malta. ELRA.
- Suzanna Sia, Ayush Dalmia, and Sabrina J Mielke. 2020. Tired of topic models? clusters of pretrained word embeddings make for fast and good topics too! *arXiv preprint arXiv:2004.14914*.
- Silvia Terragni, Elisabetta Fersini, Bruno Giovanni Galuzzi, Pietro Tropeano, and Antonio Candelieri. 2021. Octis: Comparing and optimizing topic models is simple! In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: System Demonstrations*, pages 263–270.
- Anton Thielmann, Arik Reuter, Quentin Seifert, Elisabeth Bergherr, and Benjamin Säfken. 2024. Topics in the haystack: Enhancing topic quality through corpus expansion. *Computational Linguistics*, pages 1–36.
- Anton Thielmann, Christoph Weisser, Astrid Krenz, and Benjamin Säfken. 2023. Unsupervised document classification integrating web scraping, one-class svm and lda topic modelling. *Journal of Applied Statistics*, 50(3):574–591.

- Marah-Lisanne Thormann, Jan Farchmin, Christoph Weisser, René-Marcel Kruse, Benjamin Säfken, and Alexander Silbersdorff. 2021. Stock price predictions with lstm neural networks and twitter sentiment. *Statistics, Optimization & Information Computing*, 9(2):268–287.
- Arne Tillmann, Lindrit Kqiku, Delphine Reinhardt, Christoph Weisser, Benjamin Säfken, and Thomas Kneib. 2022. Privacy estimation on twitter: Modelling the effect of latent topics on privacy by integrating xgboost, topic and generalized additive models. In *2022 IEEE Smartworld, Ubiquitous Intelligence and Computing, Scalable Computing and Communications, Digital Twin, Privacy Computing, Metaverse, Autonomous and Trusted Vehicles*, pages 2325–2332.
- Han Wang, Nirmalendu Prakash, Nguyen Khoi Hoang, Ming Shan Hee, Usman Naseem, and Roy Ka-Wei Lee. 2023. Prompting large language models for topic modeling. In *2023 IEEE International Conference on Big Data (BigData)*, pages 1236–1241. IEEE.
- Christoph Weisser, Christoph Gerloff, Anton Thielmann, Andre Python, Arik Reuter, Thomas Kneib, and Benjamin Säfken. 2023. Pseudo-document simulation for comparing lda, gsdmm and gpm topic models on short and sparse text using twitter data. *Computational Statistics*, 38(2):647–674.
- Jianhua Yin and Jianyong Wang. 2014. A dirichlet multinomial mixture model-based approach for short text clustering. In *Proceedings of the 20th ACM SIGKDD international conference on Knowledge discovery and data mining*, pages 233–242.