

# LoCoDL: Communication-Efficient Distributed Learning with Local Training and Compression

Laurent Condat<sup>1,2</sup>    Artavazd Maranjyan<sup>1</sup>    Peter Richtárik<sup>1,2</sup>

<sup>1</sup>Computer Science Program, CEMSE Division,  
King Abdullah University of Science and Technology (KAUST)  
Thuwal, 23955-6900, Kingdom of Saudi Arabia

<sup>2</sup>SDAIA-KAUST Center of Excellence in Data Science and  
Artificial Intelligence (SDAIA-KAUST AI)

February 5, 2024

## Abstract

In Distributed optimization and Learning, and even more in the modern framework of federated learning, communication, which is slow and costly, is critical. We introduce LoCoDL, a communication-efficient algorithm that leverages the two popular and effective techniques of Local training, which reduces the communication frequency, and Compression, in which short bitstreams are sent instead of full-dimensional vectors of floats. LoCoDL works with a large class of unbiased compressors that includes widely-used sparsification and quantization methods. LoCoDL provably benefits from local training and compression and enjoys a doubly-accelerated communication complexity, with respect to the condition number of the functions and the model dimension, in the general heterogenous regime with strongly convex functions. This is confirmed in practice, with LoCoDL outperforming existing algorithms.

## Contents

<b>1</b>	<b>Introduction</b>	<b>2</b>
1.1	Problem and Motivation . . . . .	2
1.2	State of the Art . . . . .	3
1.3	A General Class of Unbiased Random Compressors . . . . .	5
1.4	Challenge and Contributions . . . . .	5
<b>2</b>	<b>Proposed Algorithm LoCoDL</b>	<b>6</b>
2.1	Principle: Double Lifting of the Problem to a Consensus Problem . . . . .	6
2.2	Description of LoCoDL . . . . .	7
<b>3</b>	<b>Convergence and Complexity of LoCoDL</b>	<b>9</b>
3.1	The Case $g = 0$ . . . . .	11
<b>4</b>	<b>Experiments</b>	<b>12</b>

## 1 Introduction

Performing distributed computations is now pervasive in all areas of science. Notably, Federated Learning (FL) consists in training machine learning models in a distributed and collaborative way (Konečný et al., 2016a,b; McMahan et al., 2017; Bonawitz et al., 2017). The key idea in this rapidly growing field is to exploit the wealth of information stored on distant devices, such as mobile phones or hospital workstations. The many challenges to face in FL include data privacy and robustness to adversarial attacks, but communication-efficiency is likely to be the most critical (Kairouz et al., 2021; Li et al., 2020a; Wang et al., 2021). Indeed, in contrast to the centralized setting in a datacenter, in FL the clients perform parallel computations but also communicate back and forth with a distant orchestrating server. Communication typically takes place over the internet or cell phone network, and can be slow, costly, and unreliable. It is the main bottleneck that currently prevents large-scale deployment of FL in mass-market applications.

Two strategies to reduce the communication burden have been popularized by the pressing needs of FL: 1) **Local Training (LT)**, which consists in reducing the communication frequency. That is, instead of communicating the output of every computation step involving a (stochastic) gradient call, several such steps are performed between successive communication rounds. 2) **Communication Compression (CC)**, in which compressed information is sent instead of full-dimensional vectors. We review the literature of LT and CC in Section 1.2.

We propose a new randomized algorithm named **LoCoDL**, which features LT and unbiased CC for communication-efficient FL and distributed optimization. It is variance-reduced (Hanzely & Richtárik, 2019; Gorbunov et al., 2020a; Gower et al., 2020), so that it converges to an exact solution. It provably benefits from the two mechanisms of LT and CC: the communication complexity is doubly accelerated, with a better dependency on the condition number of the functions and on the dimension of the model.

### 1.1 Problem and Motivation

We study distributed optimization problems of the form

$$\min_{x \in \mathbb{R}^d} \frac{1}{n} \sum_{i=1}^n f_i(x) + g(x), \quad (1)$$

where  $d \geq 1$  is the model dimension and the functions  $f_i : \mathbb{R}^d \rightarrow \mathbb{R}$  and  $g : \mathbb{R}^d \rightarrow \mathbb{R}$  are *smooth*, so their gradients will be called. We consider the server-client model in which  $n \geq 1$  clients do computations in parallel and communicate back and forth with a server. The private function  $f_i$  is owned by and stored on client  $i \in [n] := \{1, \dots, n\}$ . Problem (1) models empirical risk minimization, of utmost importance in machine learning (Sra et al., 2011; Shalev-Shwartz & Ben-David, 2014). More generally, minimizing a sum of functions appears in virtually all areas of science and engineering. Our goal is to solve Problem (1) in a communication-efficient way, in the general **heterogeneous** setting in which the functions  $f_i$ , as well as  $g$ , can be *arbitrarily different*: we do not make any assumption on their similarity whatsoever.

We consider in this work the strongly convex setting — an analysis with nonconvex functions would certainly require very different proof techniques, which we currently do not know how to derive. That is, the following holds:

**Assumption 1.1** (strongly convex functions). The functions  $f_i$  and  $g$  are all  $L$ -smooth and  $\mu$ -strongly convex, for some  $0 < \mu \leq L$ .<sup>1</sup> Then we denote by  $x^*$  the solution of the strongly convex problem (1), which exists and is unique. We define the condition number  $\kappa := \frac{L}{\mu}$ .

Problem (1) can be viewed as the minimization of the average of the  $n$  functions  $(f_i + g)$ , which can be performed using calls to  $\nabla(f_i + g) = \nabla f_i + \nabla g$ . We do not use this straightforward interpretation. Instead, let us illustrate the interest of having the **additional function**  $g$  in (1), using 4 different viewpoints. We stress that we can handle the case  $g = 0$ , as discussed in Section 3.1.

- Viewpoint 1: *regularization*. The function  $g$  can be a regularizer. For instance, if the functions  $f_i$  are convex, adding  $g = \frac{\mu}{2} \|\cdot\|^2$  for a small  $\mu > 0$  makes the problem  $\mu$ -strongly convex.
- Viewpoint 2: *shared dataset*. The function  $g$  can model the cost of a common dataset, or a piece thereof, that is known to all clients.
- Viewpoint 3: *server-aided training*. The function  $g$  can model the cost of a core dataset, known only to the server, which makes calls to  $\nabla g$ . This setting has been investigated in several works, with the idea that using a small auxiliary dataset representative of the global data distribution, the server can correct for the deviation induced by partial participation (Zhao et al., 2018; Yang et al., 2021, 2023). We do not focus on this setting, because we deal with the general heterogeneous setting in which  $g$  and the  $f_i$  are not meant to be similar in any sense, and in our work  $g$  is handled by the clients, not by the server.
- Viewpoint 4: *a new mathematical and algorithmic principle*. This is the idea that led to the construction of **LoCoDL**, and we detail it in Section 2.1.

In **LoCoDL**, the clients make all gradient calls; that is, Client  $i$  makes calls to  $\nabla f_i$  and  $\nabla g$ .

## 1.2 State of the Art

We review the latest developments on communication-efficient algorithms for distributed learning, making use of LT, CC, or both. Before that, we note that we should distinguish uplink, or clients-to-server, from downlink, or server-to-clients, communication. Uplink is usually slower than downlink communication, since uploading different messages in parallel to the server is slower than broadcasting the same message to an arbitrary number of clients. This can be due to cache memory and aggregation speed constraints of the server, as well as asymmetry of the service provider’s systems or protocols used on the internet or cell phone network. In this work, we focus on the **uplink communication complexity**, which is the bottleneck in practice. Indeed, the goal is to exploit parallelism to obtain better performance when  $n$  increases. Precisely, with **LoCoDL**, the uplink communication complexity decreases from  $\mathcal{O}(d\sqrt{\kappa} \log \epsilon^{-1})$  when  $n$  is small to  $\mathcal{O}(\sqrt{d}\sqrt{\kappa} \log \epsilon^{-1})$  when  $n$  is large, where the condition number  $\kappa$  is defined in Assumption 1.1, see Corollary 3.2. Many

<sup>1</sup>A differentiable function  $f : \mathbb{R}^d \rightarrow \mathbb{R}$  is said to be  $L$ -smooth if  $\nabla f$  is  $L$ -Lipschitz continuous; that is, for every  $x \in \mathbb{R}^d$  and  $y \in \mathbb{R}^d$ ,  $\|\nabla f(x) - \nabla f(y)\| \leq L\|x - y\|$  (the norm is the Euclidean norm throughout the paper).  $f$  is said to be  $\mu$ -strongly convex if  $f - \frac{\mu}{2} \|\cdot\|^2$  is convex.

works have considered bidirectional compression, which consists in compressing the messages sent both ways (Gorbunov et al., 2020b; Philippenko & Dieuleveut, 2020; Liu et al., 2020; Philippenko & Dieuleveut, 2021; Condat & Richtárik, 2022; Gruntkowska et al., 2023; Tyurin & Richtárik, 2023b) but to the best of our knowledge, this has no impact on the downlink complexity, which cannot be reduced further than  $\mathcal{O}(d\sqrt{\kappa} \log \epsilon^{-1})$ , just because there is no parallelism to exploit in this direction. Thus, we focus our analysis on theoretical and algorithmic techniques to reduce the uplink communication complexity, which we call communication complexity in short, and we ignore downlink communication.

**Communication Compression (CC)** consists in applying some lossy scheme that compresses vectors into messages of small bit size, which are communicated. For instance, the well-known **rand- $k$**  compressor selects  $k$  coordinates of the vector uniformly at random, for some  $k \in [d] := \{1, \dots, d\}$ .  $k$  can be as small as 1, in which case the compression factor is  $d$ , which can be huge. Some compressors, such as **rand- $k$** , are unbiased, whereas others are biased; we refer to Beznosikov et al. (2020); Albasyoni et al. (2020); Horváth et al. (2022); Condat et al. (2022b) for several examples and a discussion of their properties. The introduction of **DIANA** by Mishchenko et al. (2019) was a major milestone, as this algorithm converges linearly with the large class of unbiased compressors defined in Section 1.3 and also considered in **LoCoDL**. The communication complexity  $\mathcal{O}(d\kappa \log \epsilon^{-1})$  of the basic Gradient Descent (**GD**) algorithm is reduced with **DIANA** to  $\mathcal{O}((\kappa + d) \log \epsilon^{-1})$  when  $n$  is large, see Table 2. **DIANA** was later extended in several ways (Horváth et al., 2022; Gorbunov et al., 2020a; Condat & Richtárik, 2022). An accelerated version of **DIANA** called **ADIANA** based on Nesterov Accelerated GD has been proposed (Li et al., 2020b) and further analyzed in He et al. (2023); it has the state-of-the-art theoretical complexity.

Algorithms converging linearly with biased compressors have also been proposed, such as **EF21** (Richtárik et al., 2021; Fatkhullin et al., 2021; Condat et al., 2022b), but the acceleration potential is less understood than with unbiased compressors. Algorithms with CC such as **MARINA** (Gorbunov et al., 2021) and **DASHA** (Tyurin & Richtárik, 2023a) have been proposed for nonconvex optimization, but their analysis requires a different approach and there is a gap in the achievable performance: their complexity depends on  $\frac{\omega\kappa}{\sqrt{n}}$  instead of  $\frac{\omega\kappa}{n}$  with **DIANA**, where  $\omega$  characterizes the compression error variance, see (2). Therefore, we focus on the convex setting and leave the nonconvex study for future work.

**Local Training (LT)** is a simple but remarkably efficient idea: the clients perform multiple Gradient Descent (**GD**) steps, instead of only one, between successive communication rounds. The intuition behind is that this leads to the communication of richer information, so that the number of communication rounds to reach a given accuracy is reduced. We refer to Mishchenko et al. (2022) for a comprehensive review of LT-based algorithms, which include the popular **FedAvg** and **Scaffold** algorithms of McMahan et al. (2017) and Karimireddy et al. (2020), respectively. Mishchenko et al. (2022) made a breakthrough by proposing **Scaffnew**, the first LT-based variance-reduced algorithm that not only converges linearly to the exact solution in the strongly convex setting, but does so with accelerated communication complexity  $\mathcal{O}(d\sqrt{\kappa} \log \epsilon^{-1})$ . In **Scaffnew**, communication can occur randomly after every iteration, but occurs only with a small probability  $p$ . Thus, there are in average  $p^{-1}$  local steps between successive communication rounds. The optimal dependency on  $\sqrt{\kappa}$  (Scaman et al., 2019) is obtained with  $p = 1/\sqrt{\kappa}$ . **LoCoDL** has the same probabilistic LT mechanism as **Scaffnew** but does not revert to it when compression is disabled, because of the additional function  $g$  and tracking variables  $y$  and  $v$ . A different approach to LT was developed by Sadiev et al. (2022a) with the **APDA-Inexact** algorithm, and generalized to handle partial participation by Grudzień et al.

(2023) with the **5GCS** algorithm: in both algorithms, the local GD steps form an inner loop in order to compute a proximity operator inexactly.

**Combining LT and CC** while retaining their benefits is very challenging. In our strongly convex and heterogeneous setting, the methods **Qsparse-local-SGD** (Basu et al., 2020) and **FedPAQ** (Reisizadeh et al., 2020) do not converge linearly. **FedCOMGATE** features LT + CC and converges linearly (Haddadpour et al., 2021), but its complexity  $\mathcal{O}(d\kappa \log \epsilon^{-1})$  does not show any acceleration. We can mention that random reshuffling, a technique that can be seen as a type of LT, has been combined with CC in Sadiev et al. (2022b); Malinovsky & Richtárik (2022). Recently, Condat et al. (2022a) managed to design a specific compression technique compatible with the LT mechanism of **Scaffnew**, leading to **CompressedScaffnew**, the first LT + CC algorithm exhibiting a doubly-accelerated complexity, namely  $\mathcal{O}\left(\left(\sqrt{d}\sqrt{\kappa} + \frac{d\sqrt{\kappa}}{\sqrt{n}} + d\right) \log \epsilon^{-1}\right)$ , as reported in Table 2. However, **CompressedScaffnew** uses a specific linear compression scheme that requires shared randomness; that is, all clients have to agree on a random permutation of the columns of the global compression pattern. No other compressor can be used, which notably rules out any type of quantization.

### 1.3 A General Class of Unbiased Random Compressors

For every  $\omega \geq 0$ , we define the  $\mathbb{U}(\omega)$  as the set of random compression operators  $\mathcal{C} : \mathbb{R}^d \rightarrow \mathbb{R}^d$  that are unbiased, i.e.  $\mathbb{E}[\mathcal{C}(x)] = x$ , and satisfy, for every  $x \in \mathbb{R}^d$ ,

$$\mathbb{E}\left[\|\mathcal{C}(x) - x\|^2\right] \leq \omega \|x\|^2. \quad (2)$$

In addition, given a collection  $(\mathcal{C}_i)_{i=1}^n$  of compression operators in  $\mathbb{U}(\omega)$  for some  $\omega \geq 0$ , in order to characterize their joint variance, we introduce the constant  $\omega_{\text{av}} \geq 0$  such that, for every  $x_i \in \mathbb{R}^d$ ,  $i \in [n]$ , we have

$$\mathbb{E}\left[\left\|\frac{1}{n} \sum_{i=1}^n (\mathcal{C}_i(x_i) - x_i)\right\|^2\right] \leq \frac{\omega_{\text{av}}}{n} \sum_{i=1}^n \|x_i\|^2. \quad (3)$$

The inequality (3) is not an additional assumption: it is satisfied with  $\omega_{\text{av}} = \omega$  by convexity of the squared norm. But the convergence rate will depend on  $\omega_{\text{av}}$ , which is typically much smaller than  $\omega$ . In particular, if the compressors  $\mathcal{C}_i$  are mutually independent, the variance of their sum is the sum of their variances, and (3) is satisfied with  $\omega_{\text{av}} = \frac{\omega}{n}$ .

### 1.4 Challenge and Contributions

This work addresses the following question:

*Can we combine LT and CC with any compressors in the generic class  $\mathbb{U}(\omega)$  defined in the previous section, and fully benefit from both techniques by obtaining a doubly-accelerated communication complexity?*

We answer this question in the affirmative. **LoCoDL** has the same probabilistic LT mechanism as **Scaffnew** and features CC with compressors in  $\mathbb{U}(\omega)$  with arbitrarily large  $\omega \geq 0$ , with proved linear convergence under Assumption 1.1, without further requirements. By choosing the communication probability and the variance  $\omega$  appropriately, double acceleration is obtained. Thus, **LoCoDL** achieves the same theoretical complexity as **CompressedScaffnew**, but allows for a large class of compressors instead of the cumbersome permutation-based compressor of the latter. In particular,

Table 1: Communication complexity in number of communication rounds to reach  $\epsilon$ -accuracy for linearly-converging algorithms allowing for CC with independent compressors in  $\mathbb{U}(\omega)$  for any  $\omega \geq 0$ . Since the compressors are independent,  $\omega_{\text{av}} = \frac{\omega}{n}$ . We provide the leading asymptotic factor and ignore log factors such as  $\log \epsilon^{-1}$ . The state of the art is highlighted in green.

Algorithm	Com. complexity in # rounds	case $\omega = \mathcal{O}(n)$	case $\omega = \Theta(n)$
DIANA	$(1 + \frac{\omega}{n})\kappa + \omega$	$\kappa + \omega$	$\kappa + \omega$
EF21	$(1 + \omega)\kappa$	$(1 + \omega)\kappa$	$(1 + \omega)\kappa$
5GCS-CC	$(1 + \sqrt{\omega} + \frac{\omega}{\sqrt{n}})\sqrt{\kappa} + \omega$	$(1 + \sqrt{\omega})\sqrt{\kappa} + \omega$	$(1 + \sqrt{\omega})\sqrt{\kappa} + \omega$
ADIANA <sup>1</sup>	$(1 + \frac{\omega^{3/4}}{n^{1/4}} + \frac{\omega}{\sqrt{n}})\sqrt{\kappa} + \omega$	$(1 + \frac{\omega^{3/4}}{n^{1/4}})\sqrt{\kappa} + \omega$	$(1 + \sqrt{\omega})\sqrt{\kappa} + \omega$
ADIANA <sup>2</sup>	$(1 + \frac{\omega}{\sqrt{n}})\sqrt{\kappa} + \omega$	$(1 + \frac{\omega}{\sqrt{n}})\sqrt{\kappa} + \omega$	$(1 + \sqrt{\omega})\sqrt{\kappa} + \omega$
lower bound <sup>2</sup>	$(1 + \frac{\omega}{\sqrt{n}})\sqrt{\kappa} + \omega$	$(1 + \frac{\omega}{\sqrt{n}})\sqrt{\kappa} + \omega$	$(1 + \sqrt{\omega})\sqrt{\kappa} + \omega$
LoCoDL	$(1 + \sqrt{\omega} + \frac{\omega}{\sqrt{n}})\sqrt{\kappa} + \omega(1 + \frac{\omega}{n})$	$(1 + \sqrt{\omega})\sqrt{\kappa} + \omega$	$(1 + \sqrt{\omega})\sqrt{\kappa} + \omega$

<sup>1</sup>This is the complexity derived in the original paper Li et al. (2020b).

<sup>2</sup>This is the complexity derived by a refined analysis in the preprint He et al. (2023), where a matching lower bound is also derived.

with compressors performing sparsification and quantization, **LoCoDL** outperforms existing algorithms, as we show by experiments in Section 4. This is remarkable, since **ADIANA**, based on Nesterov acceleration and not LT, has an even better theoretical complexity when  $n$  is larger than  $d$ , see Table 2, but this is not reflected in practice: **ADIANA** is clearly behind **LoCoDL** in our experiments. Thus, **LoCoDL** sets new standards in terms of communication efficiency.

## 2 Proposed Algorithm **LoCoDL**

### 2.1 Principle: Double Lifting of the Problem to a Consensus Problem

In **LoCoDL**, every client stores and updates *two* local model estimates. They will all converge to the same solution  $x^*$  of (1). This construction comes from two ideas.

**Local steps with local models.** In algorithms making use of LT, such as **FedAvg**, **Scaffold** and **Scaffnew**, the clients store and update local model estimates  $x_i$ . When communication occurs, an estimate of their average is formed by the server and broadcast to all clients. They all resume their computations with this new model estimate.

**Compressing the difference between two estimates.** To implement CC, a powerful idea is to compress not the vectors themselves, but *difference vectors* that converge to zero. This way, the algorithm is variance-reduced; that is, the compression error vanishes at convergence. The technique of compressing the difference between a gradient vector and a control variate is at the core of algorithms such as **DIANA** and **EF21**. Here, we want to compress differences between model estimates, not gradient estimates. That is, we want Client  $i$  to compress the difference between  $x_i$  and another model estimate that converges to the solution  $x^*$  as well. We see the need of an additional model estimate that plays the role of an anchor for compression. This is the variable  $y$

Table 2: (Uplink) communication complexity in number of reals to reach  $\epsilon$ -accuracy for linearly-converging algorithms allowing for CC, with an optimal choice of unbiased compressors. We provide the leading asymptotic factor and ignore log factors such as  $\log \epsilon^{-1}$ . The state of the art is highlighted in green.

Algorithm	complexity in # reals case $n = \mathcal{O}(d)$	
DIANA	$(1 + \frac{d}{n})\kappa + d$	$\frac{d}{n}\kappa + d$
EF21	$d\kappa$	$d\kappa$
5GCS-CC	$(\sqrt{d} + \frac{d}{\sqrt{n}})\sqrt{\kappa} + d$	$\frac{d}{\sqrt{n}}\sqrt{\kappa} + d$
ADIANA	$(1 + \frac{d}{\sqrt{n}})\sqrt{\kappa} + d$	$\frac{d}{\sqrt{n}}\sqrt{\kappa} + d$
CompressedScaffnew	$(\sqrt{d} + \frac{d}{\sqrt{n}})\sqrt{\kappa} + d$	$\frac{d}{\sqrt{n}}\sqrt{\kappa} + d$
FedCOMGATE	$d\kappa$	$d\kappa$
LoCoDL	$(\sqrt{d} + \frac{d}{\sqrt{n}})\sqrt{\kappa} + d$	$\frac{d}{\sqrt{n}}\sqrt{\kappa} + d$

common to all clients in **LoCoDL**, which compress  $x_i - y$  and send these compressed differences to the server.

**Combining the two ideas.** Accordingly, an equivalent reformulation of (1) is the consensus problem with  $n + 1$  variables

$$\min_{x_1, \dots, x_n, y} \frac{1}{n} \sum_{i=1}^n f_i(x_i) + g(y) \quad \text{s.t.} \quad x_1 = \dots = x_n = y.$$

The primal–dual optimality conditions are

$$\begin{aligned} x_1 &= \dots = x_n = y, \\ 0 &= \nabla f_i(x_i) - u_i, \quad \forall i \in [n], \\ 0 &= \nabla g(y) - v, \\ 0 &= u_1 + \dots + u_n + nv, \end{aligned} \tag{4}$$

for some dual variables  $u_1, \dots, u_n, v$  introduced in **LoCoDL**, that always satisfy the condition (4) of dual feasibility.

## 2.2 Description of **LoCoDL**

**LoCoDL** is a randomized primal–dual algorithm, shown as Algorithm 1. At every iteration, for every  $i \in [n]$  in parallel, Client  $i$  first constructs a prediction  $\hat{x}_i^t$  of its updated local model estimate, using a GD step with respect to  $f_i$  corrected by the dual variable  $u_i^t$ . It also constructs a prediction  $\hat{y}^t$  of the updated model estimate, using a GD step with respect to  $g$  corrected by the dual variable  $v^t$ . Since  $g$  is known by all clients, they all maintain and update identical copies of the variables  $y$  and  $v$ . If there is no communication, which is the case with probability  $1 - p$ ,  $x_i$  and  $y$  are updated with these predicted estimates, and the dual variables  $u_i$  and  $v$  are unchanged. If communication occurs, which is the case with probability  $p$ , the clients compress the differences  $\hat{x}_i^t - \hat{y}^t$  and send these compressed vectors to the server, which forms  $\bar{d}^t$  equal to one half of their average. Then the

---

**Algorithm 1** LoCoDL

---

```
1: input: stepsizes  $\gamma > 0, \chi > 0, \rho > 0$ ; probability  $p \in (0, 1]$ ; variance factor  $\omega \geq 0$ ; local initial
   estimates  $x_1^0, \dots, x_n^0 \in \mathbb{R}^d$ , initial estimate  $y^0 \in \mathbb{R}^d$ , initial control variates  $u_1^0, \dots, u_n^0 \in \mathbb{R}^d$  and
    $v \in \mathbb{R}^d$  such that  $\frac{1}{n} \sum_{i=1}^n u_i^0 + v^0 = 0$ .
2: for  $t = 0, 1, \dots$  do
3:   for  $i = 1, \dots, n$ , at clients in parallel, do
4:      $\hat{x}_i^t := x_i^t - \gamma \nabla f_i(x_i^t) + \gamma u_i^t$ 
5:      $\hat{y}^t := y^t - \gamma \nabla g(y^t) + \gamma v^t$  // the clients store and update identical copies of  $y^t, v^t, \hat{y}^t$ 
6:     flip a coin  $\theta^t \in \{0, 1\}$  with  $\text{Prob}(\theta^t = 1) = p$ 
7:     if  $\theta^t = 1$  then
8:        $d_i^t := \mathcal{C}_i^t(\hat{x}_i^t - \hat{y}^t)$ 
9:       send  $d_i^t$  to the server
10:      at server:  $\left[ \begin{array}{l} \text{aggregate } \bar{d}^t := \frac{1}{2n} \sum_{j=1}^n d_j^t \\ \text{broadcast } \bar{d}^t \text{ to all clients} \end{array} \right.$ 
11:       $x_i^{t+1} := (1 - \rho)\hat{x}_i^t + \rho(\hat{y}^t + \bar{d}^t)$ 
12:       $u_i^{t+1} := u_i^t + \frac{p\chi}{\gamma(1+2\omega)}(\bar{d}^t - d_i^t)$ 
13:       $y^{t+1} := \hat{y}^t + \rho\bar{d}^t$ 
14:       $v^{t+1} := v^t + \frac{p\chi}{\gamma(1+2\omega)}\bar{d}^t$ 
15:    else
16:       $x_i^{t+1} := \hat{x}_i^t, y^{t+1} = \hat{y}^t$ 
17:       $u_i^{t+1} := u_i^t, v^{t+1} := v^t$ 
18:    end if
19:  end for
20: end for
```

---

variables  $x_i$  are updated using a convex combination of the local predicted estimates  $\hat{x}_i^t$  and the global but noisy estimate  $\hat{y}^t + \bar{d}^t$ .  $y$  is updated similarly. Finally, the dual variables are updated using the compressed differences minus their weighted average, so that the dual feasibility (4) remains satisfied. The model estimates  $x_i^t, \hat{x}_i^t, y^t, \hat{y}^t$  all converge to  $x^*$ , so that their differences, as well as the compressed differences as a consequence of (2), converge to zero. This is the key property that makes the algorithm variance-reduced. We consider the following assumption.

**Assumption 2.1** (class of compressors). In LoCoDL the compressors  $\mathcal{C}_i^t$  are all in  $\mathbb{U}(\omega)$  for some  $\omega \geq 0$ . Moreover, for every  $i \in [n], i' \in [n], t \geq 0, t' \geq 0$ ,  $\mathcal{C}_i^t$  and  $\mathcal{C}_{i'}^{t'}$  are independent if  $t \neq t'$  ( $\mathcal{C}_i^t$  and  $\mathcal{C}_{i'}^t$  at the same iteration  $t$  need not be independent). We define  $\omega_{\text{av}} \geq 0$  such that for every  $t \geq 0$ , the collection  $(\mathcal{C}_i^t)_{i=1}^n$  satisfies (3).

*Remark 2.2* (partial participation). LoCoDL allows for a form of partial participation if we set  $\rho = 1$ . Indeed, in that case, at steps 11 and 13 of the algorithm, all local variables  $x_i$  as well as the common variable  $y$  are overwritten by the same up-to-date model  $\hat{y}^t + \bar{d}^t$ . So, it does not matter that for a non-participating client  $i$  with  $d_i^t = 0$ , the  $\hat{x}_i^{t'}$  were not computed for the  $t' \leq t$  since its last participation, as they are not used in the process. However, a non-participating client should still update its local copy of  $y$  at every iteration. This can be done when  $\nabla g$  is much cheaper to compute than  $\nabla f_i$ , as is the case with  $g = \frac{\ell}{2} \|\cdot\|^2$ . A non-participating client can be completely idle for a certain period of time, but when it resumes participating, it should receive the last estimates of  $x, y$  and  $v$  from the server as it lost synchronization.

### 3 Convergence and Complexity of LoCoDL

**Theorem 3.1** (linear convergence of LoCoDL). *Suppose that Assumptions 1.1 and 2.1 hold. In LoCoDL, suppose that  $0 < \gamma < \frac{2}{L}$ ,  $2\rho - \rho^2(1 + \omega_{\text{av}}) - \chi \geq 0$ . For every  $t \geq 0$ , define the Lyapunov function*

$$\begin{aligned} \Psi^t := & \frac{1}{\gamma} \left( \sum_{i=1}^n \|x_i^t - x^*\|^2 + n \|y^t - x^*\|^2 \right) \\ & + \frac{\gamma(1+2\omega)}{p^2\chi} \left( \sum_{i=1}^n \|u_i^t - u_i^*\|^2 + n \|v^t - v^*\|^2 \right), \end{aligned} \quad (5)$$

where  $v^* := \nabla g(x^*)$  and  $u_i^* := \nabla f_i(x^*)$ . Then LoCoDL converges linearly: for every  $t \geq 0$ ,

$$\mathbb{E}[\Psi^t] \leq \tau^t \Psi^0, \quad (6)$$

where

$$\tau := \max \left( (1 - \gamma\mu)^2, (1 - \gamma L)^2, 1 - \frac{p^2\chi}{1+2\omega} \right) < 1. \quad (7)$$

In addition, for every  $i \in [n]$ ,  $(x_i^t)_{t \in \mathbb{N}}$  and  $(y^t)_{t \in \mathbb{N}}$  converge to  $x^*$ ,  $(u_i^t)_{t \in \mathbb{N}}$  converges to  $u_i^*$ , and  $(v^t)_{t \in \mathbb{N}}$  converges to  $v^*$ , almost surely.

The proof is derived in Appendix A.

We place ourselves in the conditions of Theorem 3.1. We observe that in (7), the larger  $\chi$ , the better, so given  $\rho$  we should set

$$\chi = 2\rho - \rho^2(1 + \omega_{\text{av}}). \quad (8)$$

Then, choosing  $\rho$  to maximize  $\chi$  yields

$$\chi = \rho = \frac{1}{1 + \omega_{\text{av}}}. \quad (9)$$

We now study the complexity of LoCoDL with  $\chi$  and  $\rho$  chosen as in (9) and  $\gamma = \Theta(\frac{1}{L})$ .

We can remark that LoCoDL has the same rate  $\tau^\sharp := \max(1 - \gamma\mu, \gamma L - 1)^2$  as mere distributed gradient descent, as long as  $p^{-1}$ ,  $\omega$  and  $\omega_{\text{av}}$  are small enough to have  $1 - \frac{p^2\chi}{1+2\omega} \leq \tau^\sharp$ . This is remarkable: communicating with a low frequency and compressed vectors does not harm convergence at all, until some threshold.

The iteration complexity of LoCoDL to reach  $\epsilon$ -accuracy, i.e.  $\mathbb{E}[\Psi^t] \leq \epsilon \Psi^0$ , is

$$\mathcal{O} \left( \left( \kappa + \frac{(1 + \omega_{\text{av}})(1 + \omega)}{p^2} \right) \log \epsilon^{-1} \right). \quad (10)$$

By choosing

$$p = \min \left( \sqrt{\frac{(1 + \omega_{\text{av}})(1 + \omega)}{\kappa}}, 1 \right), \quad (11)$$

the iteration complexity becomes

$$\mathcal{O} \left( (\kappa + \omega(1 + \omega_{\text{av}})) \log \epsilon^{-1} \right)$$

and the communication complexity in number of communication rounds is  $p$  times the iteration complexity, that is

$$\mathcal{O} \left( \left( \sqrt{\kappa(1 + \omega_{\text{av}})(1 + \omega)} + \omega(1 + \omega_{\text{av}}) \right) \log \epsilon^{-1} \right).$$

If the compressors are mutually independent,  $\omega_{\text{av}} = \frac{\omega}{n}$  and the communication complexity can be equivalently written as

$$\mathcal{O} \left( \left( \left( \left( 1 + \sqrt{\omega} + \frac{\omega}{\sqrt{n}} \right) \sqrt{\kappa} + \omega \left( 1 + \frac{\omega}{n} \right) \right) \log \epsilon^{-1} \right), \right.$$

as shown in Table 1.

Let us consider the example of independent **rand- $k$**  compressors, for some  $k \in [d]$ . We have  $\omega = \frac{d}{k} - 1$ . Therefore, the communication complexity in numbers of reals is  $k$  times the complexity in number of rounds; that is,

$$\mathcal{O} \left( \left( \left( \left( \sqrt{kd} + \frac{d}{\sqrt{n}} \right) \sqrt{\kappa} + d \left( 1 + \frac{d}{kn} \right) \right) \log \epsilon^{-1} \right) \right).$$

We can now choose  $k$  to minimize this complexity: with  $k = \lceil \frac{d}{n} \rceil$ , it becomes

$$\mathcal{O} \left( \left( \left( \left( \sqrt{d} + \frac{d}{\sqrt{n}} \right) \sqrt{\kappa} + d \right) \log \epsilon^{-1} \right), \right.$$

as shown in Table 2. Let us state this result:

**Corollary 3.2.** *In the conditions of Theorem 3.1, suppose in addition that the compressors  $\mathcal{C}_i^t$  are independent **rand- $k$**  compressors with  $k = \lceil \frac{d}{n} \rceil$ . Suppose that  $\gamma = \Theta(\frac{1}{L})$ ,  $\chi = \rho = \frac{n}{n-1+d/k}$ , and*

$$p = \min \left( \sqrt{\frac{dk(n-1) + d^2}{nk^2\kappa}}, 1 \right). \quad (12)$$

Then the uplink communication complexity in number of reals of **LoCoDL** is

$$\mathcal{O} \left( \left( \left( \sqrt{d}\sqrt{\kappa} + \frac{d\sqrt{\kappa}}{\sqrt{n}} + d \right) \log \epsilon^{-1} \right) \right). \quad (13)$$

This is the same complexity as **CompressedScaffnew** (Condat et al., 2022a). However, it is obtained with simple independent compressors, which is much more practical than the permutation-based compressors with shared randomness of **CompressedScaffnew**. Moreover, this complexity can be obtained with other types of compressors, and further reduced, when reasoning in number of bits and not only reals, by making use of quantization (Albasyoni et al., 2020), as we illustrate by experiments in the next section.

We can distinguish 2 regimes:

1. In the “large  $d$  small  $n$ ” regime, i.e.  $n = \mathcal{O}(d)$ , the communication complexity of **LoCoDL** in (13) becomes

$$\mathcal{O} \left( \left( \left( \frac{d\sqrt{\kappa}}{\sqrt{n}} + d \right) \log \epsilon^{-1} \right) \right).$$

This is the state of the art, as reported in Table 2.

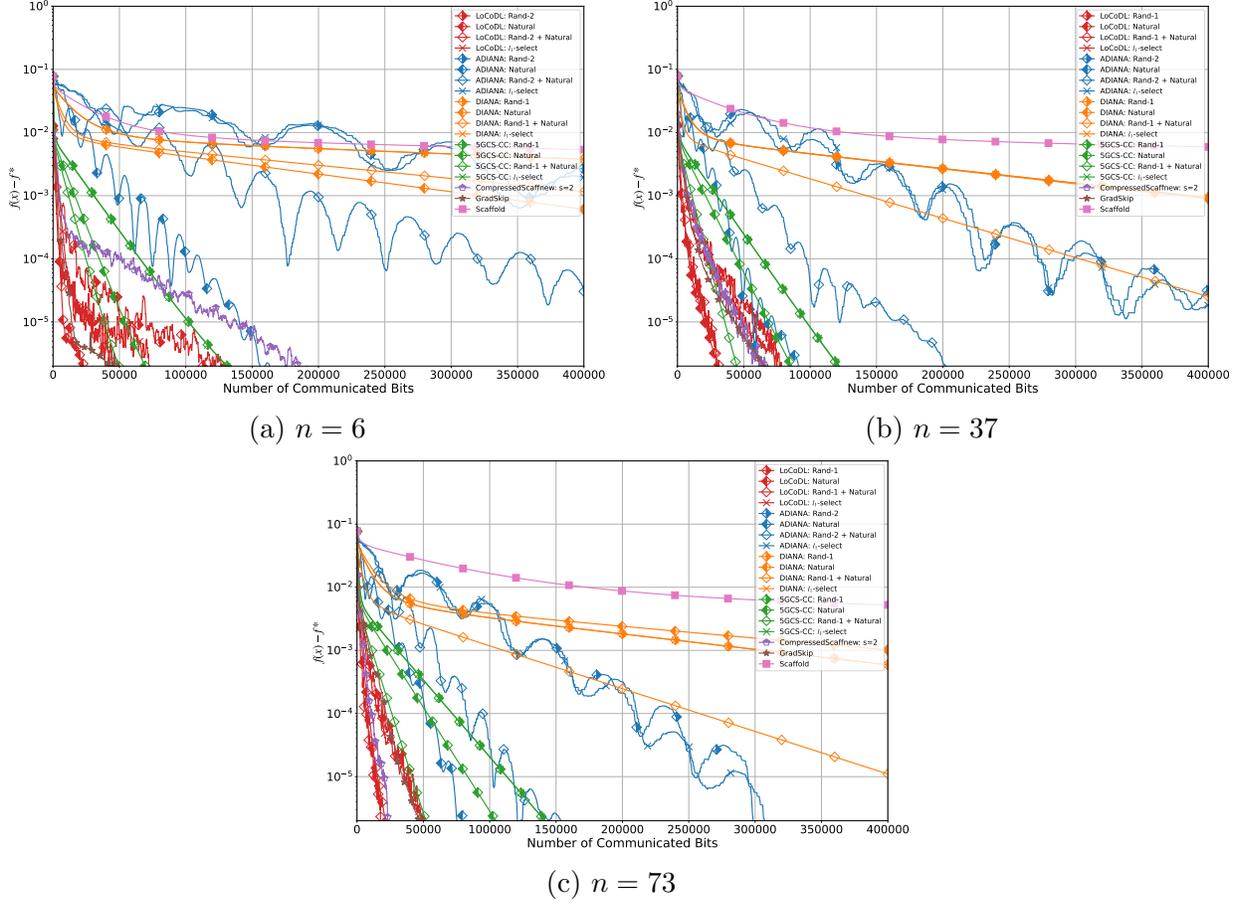


Figure 1: Comparison of several algorithms with several compressors on logistic regression with the ‘diabetes’ dataset from the LibSVM, which has  $d = 8$  and 768 data points. We chose different values of  $n$  to illustrate the three regimes  $n < d$ ,  $n > d$ ,  $n > d^2$ , as discussed at the end of Section 3.

2. In the “large  $n$  small  $d$ ” regime, i.e.  $n = \Omega(d)$ , the communication complexity of **LoCoDL** in (13) becomes

$$\mathcal{O}\left(\left(\sqrt{d}\sqrt{\kappa} + d\right) \log \epsilon^{-1}\right).$$

If  $n$  is even larger with  $n = \Omega(d^2)$ , **ADIANA** achieves the even better complexity

$$\mathcal{O}\left(\left(\sqrt{\kappa} + d\right) \log \epsilon^{-1}\right).$$

Yet, in the experiments we ran with different datasets and values of  $d$ ,  $n$ ,  $\kappa$ , **LoCoDL** outperforms the other algorithms, including **ADIANA**, in all cases.

### 3.1 The Case $g = 0$

We have assumed the presence of a function  $g$  in Problem (1), whose gradient is called by all clients. In this section, we show that we can handle the case where such a function is not available. So, let us assume that we want to minimize  $\frac{1}{n} \sum_{i=1}^n f_i$ , with the functions  $f_i$  satisfying Assumption 1.1. We now

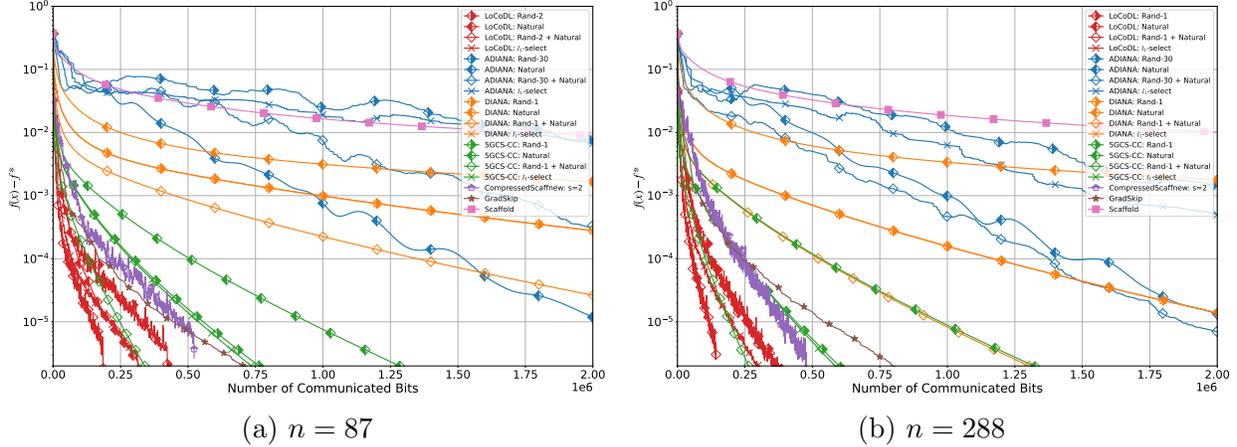


Figure 2: Comparison of several algorithms with several compressors on logistic regression with the ‘a5a’ dataset from the LibSVM, which has  $d = 122$  and 6,414 data points. We chose different values of  $n$  to illustrate the two regimes  $n < d$  and  $n > d$ , as discussed at the end of Section 3.

define the functions  $\tilde{f}_i := f_i - \frac{\mu}{4} \|\cdot\|^2$  and  $\tilde{g} := \frac{\mu}{4} \|\cdot\|^2$ . They are all  $\tilde{L}$ -smooth and  $\tilde{\mu}$ -strongly convex, with  $\tilde{L} := L - \frac{\mu}{2}$  and  $\tilde{\mu} := \frac{\mu}{2}$ . Moreover, it is equivalent to minimize  $\frac{1}{n} \sum_{i=1}^n f_i$  or  $\frac{1}{n} \sum_{i=1}^n \tilde{f}_i + \tilde{g}$ . We can then apply **LoCoDL** to the latter problem. At Step 5, we simply have  $y^t - \gamma \nabla \tilde{g}(y^t) = (1 - \frac{\gamma \mu}{2}) y^t$ . The rate in (7) applies with  $L$  and  $\mu$  replaced by  $\tilde{L}$  and  $\tilde{\mu}$ , respectively. Since  $\kappa \leq \tilde{\kappa} := \frac{\tilde{L}}{\tilde{\mu}} \leq 2\kappa$ , the asymptotic complexities derived above also apply to this setting. Thus, the presence of  $g$  in Problem (1) is not restrictive at all, as the only property of  $g$  that matters is that it has the same amount of strong convexity as the  $f_i$ s.

## 4 Experiments

We evaluate the performance of our proposed method **LoCoDL** and compare it with several other methods that also allow for CC and converge linearly to  $x^*$ . We also include **GradSkip** (Maranjyan et al., 2023) and **Scaffold** (McMahan et al., 2017) in our comparisons for benchmarking purposes. We focus on a regularized logistic regression problem, which has the form (1) with

$$f_i(x) = \frac{1}{m} \sum_{s=1}^m \log\left(1 + \exp\left(-b_{i,s} a_{i,s}^\top x\right)\right) + \frac{\mu}{2} \|x\|^2 \quad (14)$$

and  $g = \frac{\mu}{2} \|x\|^2$ , where  $n$  is the number of clients,  $m$  is the number of data points per client,  $a_{i,s} \in \mathbb{R}^d$  and  $b_{i,s} \in \{-1, +1\}$  are the data samples, and  $\mu$  is the regularization parameter, set so that  $\kappa = 10^4$ . For all algorithms other than **LoCoDL**, for which there is no function  $g$ , the functions  $f_i$  in (14) have a twice higher  $\mu$ , so that the problem remains the same.

We considered several datasets and show here the results with the ‘diabetes’ and ‘a5a’ datasets from the LibSVM library (Chang & Lin, 2011). Additional experiments are shown in the Appendix. We prepared each dataset by first shuffling it, then distributing it equally among the  $n$  clients (since  $m$  in (14) is an integer, the remaining datapoints were discarded).

We used four different compression operators in the class  $\mathbb{U}(\omega)$ , for some  $\omega \geq 0$ :

1. **rand- $k$**  for some  $k \in [d]$ , which communicates  $32k + k\lceil\log_2(d)\rceil$  bits. Indeed, the  $k$  randomly chosen values are sent in the standard 32-bits IEEE floating-point format, and their locations are encoded with  $k\lceil\log_2(d)\rceil$  additional bits. We have  $\omega = \frac{d}{k} - 1$ .
2. Natural Compression (Horváth et al., 2022), a form of quantization in which floats are encoded into 9 bits instead of 32 bits. We have  $\omega = \frac{1}{8}$ .
3. A combination of **rand- $k$**  and Natural Compression, in which the  $k$  chosen values are encoded into 9 bits, which yields a total of  $9k + k\lceil\log_2(d)\rceil$  bits. We have  $\omega = \frac{9d}{8k} - 1$ .
4. The  $l_1$ -selection compressor, defined as  $C(x) = \text{sign}(x_j)\|x\|_1 e_j$ , where  $j$  is chosen randomly in  $[d]$ , with the probability of choosing  $j' \in [d]$  equal to  $|x_{j'}|/\|x\|_1$ , and  $e_j$  is the  $j$ -th standard unit basis vector in  $\mathbb{R}^d$ .  $\text{sign}(x_j)\|x\|_1$  is sent as a 32-bits float and the location of  $j$  is indicated with  $\lceil\log_2(d)\rceil$ , so that this compressor communicates  $32 + \lceil\log_2(d)\rceil$  bits. Like with **rand-1**, we have  $\omega = d - 1$ .

The compressors at different clients are independent, so that  $\omega_{\text{av}} = \frac{\omega}{n}$  in (3).

The results are shown in Figures 1 and 2. We can see that **LoCoDL**, when combined with **rand- $k$**  and Natural Compression, converges faster than all other algorithms, with respect to the total number of communicated bits per client. We chose two different numbers  $n$  of clients, one with  $n < d$  and another one with  $n > 2d$ , since the compressor of **CompressedScaffnew** is different in the two cases  $n < 2d$  and  $n > 2d$  (Condat et al., 2022a). **LoCoDL** outperforms **CompressedScaffnew** in both cases. As expected, all methods exhibit faster convergence with larger  $n$ . Remarkably, **ADIANA**, which has the best theoretical complexity for large  $n$ , improves upon **DIANA** but is not competitive with the LT-based methods **CompressedScaffnew**, **5GCS-CC**, and **LoCoDL**. This illustrates the power of doubly-accelerated methods based on a successful combination of LT and CC. In this class, our new proposed **LoCoDL** algorithm shines. For all algorithms, we used the theoretical parameter values given in their available convergence results (Corollary 3.2 for **LoCoDL**). We tried to tune the parameter values, such as  $k$  in **rand- $k$**  and the (average) number of local steps per round, but this only gave minor improvements. For instance, **ADIANA** in Figure 2 was a bit faster with the best value of  $k = 20$  than with  $k = 30$ . Increasing the learning rate  $\gamma$  led to inconsistent results, with sometimes divergence.

The results of additional experiments on the ‘w1a’ and ‘australian’ datasets from the LibSVM library (Chang & Lin, 2011), in the same setting, are shown in Figures 3 and 4. Consistent with our previous findings, **LoCoDL** outperforms the other algorithms in terms of communication efficiency.

## 5 Conclusion

We have proposed **LoCoDL**, which combines a probabilistic Local Training mechanism similar to the one of **Scaffnew** and Communication Compression with a large class of unbiased compressors. This successful combination makes **LoCoDL** highly communication-efficient, with a doubly accelerated complexity with respect to the model dimension  $d$  and the condition number of the functions. In practice, **LoCoDL** outperforms other algorithms, including **ADIANA**, which has an even better complexity in theory obtained from Nesterov acceleration and not Local Training. This again shows the relevance of the popular mechanism of Local Training, which has been widely adopted in Federated Learning. A venue for future work is to implement bidirectional compression (Liu et al.,

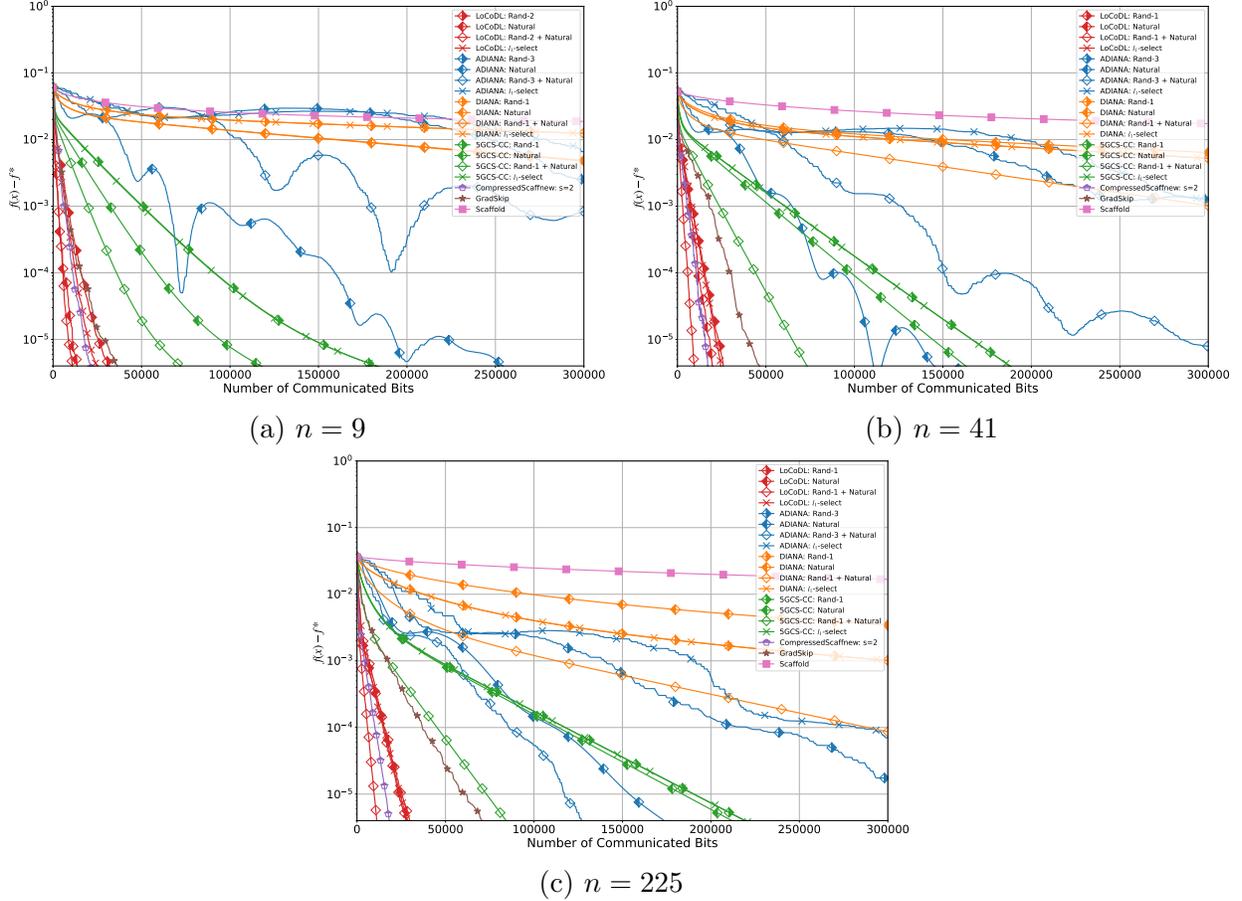


Figure 3: Comparison of several algorithms with various compressors on logistic regression with the ‘australian’ dataset from the LibSVM, which has  $d = 14$  and 690 data points. We chose different values of  $n$  to illustrate the three regimes:  $n < d$ ,  $n > d$ ,  $n > d^2$ , as discussed at the end of Section 3.

2020; Philippenko & Dieuleveut, 2021). We will also investigate extensions of our method with calls to stochastic gradient estimates, with or without variance reduction, as well as partial participation. These two features have been proposed for **Scaffnew** in Malinovsky et al. (2022) and Condat et al. (2023), but they are challenging to combine with generic compression.

## Acknowledgement

This work was supported by the SDAIA-KAUST Center of Excellence in Data Science and Artificial Intelligence (SDAIA-KAUST AI).

## References

Albasyoni, A., Safaryan, M., Condat, L., and Richtárik, P. Optimal gradient compression for distributed and federated learning. preprint arXiv:2010.03246, 2020.

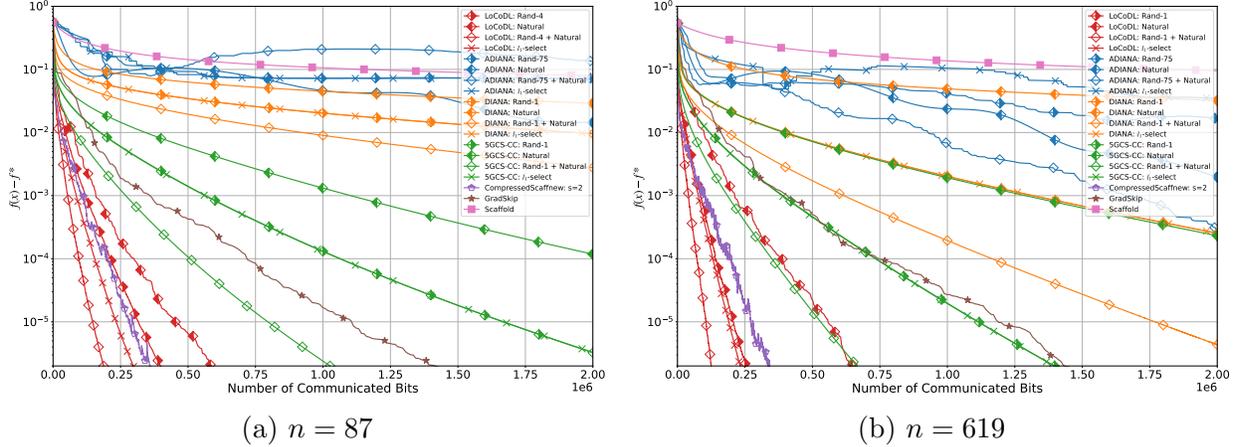


Figure 4: Comparison of several algorithms with various compressors on logistic regression with the ‘wla’ dataset from the LibSVM, which has  $d = 300$  and 2,477 data points. We chose different values of  $n$  to illustrate the two regimes,  $n < d$  and  $n > d$ , as discussed at the end of Section 3.

Basu, D., Data, D., Karakus, C., and Diggavi, S. N. Qsparse-Local-SGD: Distributed SGD With Quantization, Sparsification, and Local Computations. *IEEE Journal on Selected Areas in Information Theory*, 1(1):217–226, 2020.

Bertsekas, D. P. *Convex optimization algorithms*. Athena Scientific, Belmont, MA, USA, 2015.

Beznosikov, A., Horváth, S., Richtárik, P., and Safaryan, M. On biased compression for distributed learning. preprint arXiv:2002.12410, 2020.

Bonawitz, K., Ivanov, V., Kreuter, B., Marcedone, A., McMahan, H. B., Patel, S., Ramage, D., Segal, A., and Seth, K. Practical secure aggregation for privacy-preserving machine learning. In *Proc. of the 2017 ACM SIGSAC Conference on Computer and Communications Security*, pp. 1175–1191, 2017.

Chang, C.-C. and Lin, C.-J. LIBSVM: A library for support vector machines. *ACM Transactions on Intelligent Systems and Technology*, 2:27:1–27:27, 2011. Software available at <http://www.csie.ntu.edu.tw/%7Ecjlin/libsvm>.

Condat, L. and Richtárik, P. MURANA: A generic framework for stochastic variance-reduced optimization. In *Proc. of the conference Mathematical and Scientific Machine Learning (MSML)*, PMLR 190, 2022.

Condat, L. and Richtárik, P. RandProx: Primal-dual optimization algorithms with randomized proximal updates. In *Proc. of International Conference on Learning Representations (ICLR)*, 2023.

Condat, L., Agarský, I., and Richtárik, P. Provably doubly accelerated federated learning: The first theoretically successful combination of local training and compressed communication. preprint arXiv:2210.13277, 2022a.

- Condat, L., Li, K., and Richtárik, P. EF-BV: A unified theory of error feedback and variance reduction mechanisms for biased and unbiased compression in distributed optimization. In *Proc. of Conf. Neural Information Processing Systems (NeurIPS)*, 2022b.
- Condat, L., Agarský, I., Malinovsky, G., and Richtárik, P. TAMUNA: Doubly accelerated federated learning with local training, compression, and partial participation. preprint arXiv:2302.09832 presented at the *Int. Workshop on Federated Learning in the Age of Foundation Models in Conjunction with NeurIPS 2023*, 2023.
- Fatkhullin, I., Sokolov, I., Gorbunov, E., Li, Z., and Richtárik, P. EF21 with bells & whistles: Practical algorithmic extensions of modern error feedback. preprint arXiv:2110.03294, 2021.
- Gorbunov, E., Hanzely, F., and Richtárik, P. A unified theory of SGD: Variance reduction, sampling, quantization and coordinate descent. In *Proc. of 23rd Int. Conf. Artificial Intelligence and Statistics (AISTATS), PMLR 108*, 2020a.
- Gorbunov, E., Kovalev, D., Makarenko, D., and Richtárik, P. Linearly converging error compensated SGD. In *Proc. of Conf. Neural Information Processing Systems (NeurIPS)*, 2020b.
- Gorbunov, E., Burlachenko, K., Li, Z., and Richtárik, P. MARINA: Faster non-convex distributed learning with compression. In *Proc. of 38th Int. Conf. Machine Learning (ICML)*, pp. 3788–3798, 2021.
- Gower, R. M., Schmidt, M., Bach, F., and Richtárik, P. Variance-reduced methods for machine learning. *Proc. of the IEEE*, 108(11):1968–1983, November 2020.
- Grudzień, M., Malinovsky, G., and Richtárik, P. Can 5th Generation Local Training Methods Support Client Sampling? Yes! In *Proc. of Int. Conf. Artificial Intelligence and Statistics (AISTATS)*, 2023.
- Grunkowska, K., Tyurin, A., and Richtárik, P. EF21-P and friends: Improved theoretical communication complexity for distributed optimization with bidirectional compression. In *Proc. of 40th Int. Conf. Machine Learning (ICML)*, 2023.
- Haddadpour, F., Kamani, M. M., Mokhtari, A., and Mahdavi, M. Federated learning with compression: Unified analysis and sharp guarantees. In *Proc. of Int. Conf. Artificial Intelligence and Statistics (AISTATS), PMLR 130*, pp. 2350–2358, 2021.
- Hanzely, F. and Richtárik, P. One method to rule them all: Variance reduction for data, parameters and many new methods. preprint arXiv:1905.11266, 2019.
- He, Y., Huang, X., and Yuan, K. Unbiased compression saves communication in distributed optimization: When and how much? preprint arXiv:2305.16297, 2023.
- Horváth, S., Ho, C.-Y., Horváth, L., Sahu, A. N., Canini, M., and Richtárik, P. Natural compression for distributed deep learning. In *Proc. of the conference Mathematical and Scientific Machine Learning (MSML), PMLR 190*, 2022.
- Horváth, S., Kovalev, D., Mishchenko, K., Stich, S., and Richtárik, P. Stochastic distributed learning with gradient quantization and variance reduction. *Optimization Methods and Software*, 2022.

- Kairouz, P. et al. Advances and open problems in federated learning. *Foundations and Trends in Machine Learning*, 14(1–2), 2021.
- Karimireddy, S. P., Kale, S., Mohri, M., Reddi, S., Stich, S. U., and Suresh, A. T. SCAFFOLD: Stochastic controlled averaging for federated learning. In *Proc. of 37th Int. Conf. Machine Learning (ICML)*, pp. 5132–5143, 2020.
- Konečný, J., McMahan, H. B., Ramage, D., and Richtárik, P. Federated optimization: distributed machine learning for on-device intelligence. arXiv:1610.02527, 2016a.
- Konečný, J., McMahan, H. B., Yu, F. X., Richtárik, P., Suresh, A. T., and Bacon, D. Federated learning: Strategies for improving communication efficiency. In *NIPS Private Multi-Party Machine Learning Workshop*, 2016b. arXiv:1610.05492.
- Li, T., Sahu, A. K., Talwalkar, A., and Smith, V. Federated learning: Challenges, methods, and future directions. *IEEE Signal Processing Magazine*, 3(37):50–60, 2020a.
- Li, Z., Kovalev, D., Qian, X., and Richtárik, P. Acceleration for compressed gradient descent in distributed and federated optimization. In *Proc. of 37th Int. Conf. Machine Learning (ICML)*, volume PMLR 119, 2020b.
- Liu, X., Li, Y., Tang, J., and Yan, M. A double residual compression algorithm for efficient distributed learning. In *Proc. of Int. Conf. Artificial Intelligence and Statistics (AISTATS)*, PMLR 108, pp. 133–143, 2020.
- Malinovsky, G. and Richtárik, P. Federated random reshuffling with compression and variance reduction. preprint arXiv:arXiv:2205.03914, 2022.
- Malinovsky, G., Yi, K., and Richtárik, P. Variance reduced ProxSkip: Algorithm, theory and application to federated learning. In *Proc. of Conf. Neural Information Processing Systems (NeurIPS)*, 2022.
- Maranjyan, A., Safaryan, M., and Richtárik, P. Gradskip: Communication-accelerated local gradient methods with better computational complexity, 2023.
- McMahan, H. B., Moore, E., Ramage, D., Hampson, S., and y Arcas, B. A. Communication-efficient learning of deep networks from decentralized data. In *Proc. of Int. Conf. Artificial Intelligence and Statistics (AISTATS)*, PMLR 54, 2017.
- Mishchenko, K., Gorbunov, E., Takáč, M., and Richtárik, P. Distributed learning with compressed gradient differences. arXiv:1901.09269, 2019.
- Mishchenko, K., Malinovsky, G., Stich, S., and Richtárik, P. ProxSkip: Yes! Local Gradient Steps Provably Lead to Communication Acceleration! Finally! In *Proc. of the 39th International Conference on Machine Learning (ICML)*, July 2022.
- Philippenko, C. and Dieuleveut, A. Artemis: tight convergence guarantees for bidirectional compression in federated learning. preprint arXiv:2006.14591, 2020.
- Philippenko, C. and Dieuleveut, A. Preserved central model for faster bidirectional compression in distributed settings. In *Proc. of Conf. Neural Information Processing Systems (NeurIPS)*, 2021.

- Reisizadeh, A., Mokhtari, A., Hassani, H., Jadbabaie, A., and Pedarsani, R. FedPAQ: A communication-efficient federated learning method with periodic averaging and quantization. In *Proc. of Int. Conf. Artificial Intelligence and Statistics (AISTATS)*, pp. 2021–2031, 2020.
- Richtárik, P., Sokolov, I., and Fatkhullin, I. EF21: A new, simpler, theoretically better, and practically faster error feedback. In *Proc. of 35th Conf. Neural Information Processing Systems (NeurIPS)*, 2021.
- Sadiev, A., Kovalev, D., and Richtárik, P. Communication acceleration of local gradient methods via an accelerated primal-dual algorithm with an inexact prox. In *Proc. of Conf. Neural Information Processing Systems (NeurIPS)*, 2022a.
- Sadiev, A., Malinovsky, G., Gorbunov, E., Sokolov, I., Khaled, A., Burlachenko, K., and Richtárik, P. Federated optimization algorithms with random reshuffling and gradient compression. preprint arXiv:2206.07021, 2022b.
- Scaman, K., Bach, F., Bubeck, S., Lee, Y. T., and Massoulié, L. Optimal convergence rates for convex distributed optimization in networks. *Journal of Machine Learning Research*, 20:1–31, 2019.
- Shalev-Shwartz, S. and Ben-David, S. *Understanding machine learning: From theory to algorithms*. Cambridge University Press, 2014.
- Sra, S., Nowozin, S., and Wright, S. J. *Optimization for Machine Learning*. The MIT Press, 2011.
- Tyurin, A. and Richtárik, P. DASHA: Distributed nonconvex optimization with communication compression, optimal oracle complexity, and no client synchronization. In *Proc. of International Conference on Learning Representations (ICLR)*, 2023a.
- Tyurin, A. and Richtárik, P. 2Direction: Theoretically faster distributed training with bidirectional communication compression. In *Proc. of Conf. Neural Information Processing Systems (NeurIPS)*, 2023b.
- Wang, J. et al. A field guide to federated optimization. preprint arXiv:2107.06917, 2021.
- Yang, H., Fang, M., and Liu, J. Achieving linear speedup with partial worker participation in non-IID federated learning. In *Proc. of International Conference on Learning Representations (ICLR)*, 2021.
- Yang, H., Qiu, P., Khanduri, P., and Liu, J. On the efficacy of server-aided federated learning against partial client participation. preprint <https://openreview.net/forum?id=Dyzhru5NO3u>, 2023.
- Zhao, Y., Li, M., Lai, L., Suda, N., Civin, D., and Chandra, V. Federated learning with non-iid data. preprint arXiv:1806.00582, 2018.

# Appendix

## A Proof of Theorem 3.1

We define the Euclidean space  $\mathcal{X} := \mathbb{R}^d$  and the product space  $\boldsymbol{\mathcal{X}} := \mathcal{X}^{n+1}$  endowed with the weighted inner product

$$\langle \mathbf{x}, \mathbf{x}' \rangle_{\boldsymbol{\mathcal{X}}} := \sum_{i=1}^n \langle x_i, x'_i \rangle + n \langle y, y' \rangle, \quad \forall \mathbf{x} = (x_1, \dots, x_n, y), \mathbf{x}' = (x'_1, \dots, x'_n, y'). \quad (15)$$

We define the copy operator  $\mathbf{1} : x \in \mathcal{X} \mapsto (x, \dots, x) \in \boldsymbol{\mathcal{X}}$  and the linear operator

$$S : \mathbf{x} \in \boldsymbol{\mathcal{X}} \mapsto \mathbf{1}\bar{x}, \quad \text{with } \bar{x} = \frac{1}{2n} \left( \sum_{i=1}^n x_i + ny \right). \quad (16)$$

$S$  is the orthogonal projector in  $\boldsymbol{\mathcal{X}}$  onto the consensus line  $\{\mathbf{x} \in \boldsymbol{\mathcal{X}} : x_1 = \dots = x_n = y\}$ . We also define the linear operator

$$W := \text{Id} - S : \mathbf{x} = (x_1, \dots, x_n, y) \in \boldsymbol{\mathcal{X}} \mapsto (x_1 - \bar{x}, \dots, x_n - \bar{x}, y - \bar{x}), \quad \text{with } \bar{x} = \frac{1}{2n} \left( \sum_{i=1}^n x_i + ny \right), \quad (17)$$

where  $\text{Id}$  denotes the identity.  $W$  is the orthogonal projector in  $\boldsymbol{\mathcal{X}}$  onto the hyperplane  $\{\mathbf{x} \in \boldsymbol{\mathcal{X}} : x_1 + \dots + x_n + ny = 0\}$ , which is orthogonal to the consensus line. As such, it is self-adjoint, positive semidefinite, its eigenvalues are  $(1, \dots, 1, 0)$ , its kernel is the consensus line, and its spectral norm is 1. Also,  $W^2 = W$ . Note that we can write  $W$  in terms of the differences  $d_i = x_i - y$  and  $\bar{d} = \frac{1}{2n} \sum_{i=1}^n d_i$ :

$$W : \mathbf{x} = (x_1, \dots, x_n, y) \mapsto (d_1 - \bar{d}, \dots, d_n - \bar{d}, -\bar{d}). \quad (18)$$

Since for every  $\mathbf{x} = (x_1, \dots, x_n, y)$ ,  $W\mathbf{x} = \mathbf{0} := (0, \dots, 0, 0)$  if and only if  $x_1 = \dots = x_n = y$ , we can reformulate the problem (1) as

$$\min_{\mathbf{x}=(x_1, \dots, x_n, y) \in \boldsymbol{\mathcal{X}}} \mathbf{f}(\mathbf{x}) \quad \text{s.t.} \quad W\mathbf{x} = \mathbf{0}, \quad (19)$$

where  $\mathbf{f}(\mathbf{x}) := \sum_{i=1}^n f_i(x_i) + ng(y)$ . Note that in  $\boldsymbol{\mathcal{X}}$ ,  $\mathbf{f}$  is  $L$ -smooth and  $\mu$ -strongly convex, and  $\nabla \mathbf{f}(\mathbf{x}) = (\nabla f_1(x_1), \dots, \nabla f_n(x_n), \nabla g(y))$ .

Let  $t \geq 0$ . We also introduce vector notations for the variables of the algorithm:  $\mathbf{x}^t := (x_1^t, \dots, x_n^t, y^t)$ ,  $\hat{\mathbf{x}}^t := (\hat{x}_1^t, \dots, \hat{x}_n^t, \hat{y}^t)$ ,  $\mathbf{u}^t := (u_1^t, \dots, u_n^t, v^t)$ ,  $\mathbf{u}^* := (u_1^*, \dots, u_n^*, v^*)$ ,  $\mathbf{w}^t := \mathbf{x}^t - \gamma \nabla \mathbf{f}(\mathbf{x}^t)$ ,  $\mathbf{w}^* := \mathbf{x}^* - \gamma \nabla \mathbf{f}(\mathbf{x}^*)$ , where  $\mathbf{x}^* := \mathbf{1}x^*$  is the unique solution to (19). We also define  $\bar{x}^t := \frac{1}{2n} (\sum_{i=1}^n \hat{x}_i^t + n\hat{y}^t)$  and  $\lambda := \frac{p\mathcal{X}}{\gamma(1+2\omega)}$ .

Then we can write the iteration of **LoCoDL** as

$$\begin{array}{l}
\hat{\mathbf{x}}^t := \mathbf{x}^t - \gamma \nabla \mathbf{f}(\mathbf{x}^t) + \gamma \mathbf{u}^t = \mathbf{w}^t + \gamma \mathbf{u}^t \\
\text{flip a coin } \theta^t \in \{0, 1\} \text{ with } \text{Prob}(\theta^t = 1) = p \\
\text{if } \theta^t = 1 \\
\quad \mathbf{d}^t := (\mathcal{C}_1^t(\hat{x}_1^t - \hat{y}^t), \dots, \mathcal{C}_n^t(\hat{x}_n^t - \hat{y}^t), 0) \\
\quad \bar{d}^t := \frac{1}{2n} \sum_{j=1}^n d_j^t \\
\quad \mathbf{x}^{t+1} := (1 - \rho) \hat{\mathbf{x}}^t + \rho \mathbf{1}(\hat{y}^t + \bar{d}^t) \\
\quad \mathbf{u}^{t+1} := \mathbf{u}^t + \lambda(\mathbf{1}\bar{d}^t - \mathbf{d}^t) = \mathbf{u}^t - \lambda W \mathbf{d}^t \\
\text{else} \\
\quad \mathbf{x}^{t+1} := \hat{\mathbf{x}}^t \\
\quad \mathbf{u}^{t+1} := \mathbf{u}^t \\
\text{end if}
\end{array} \tag{20}$$

We denote by  $\mathcal{F}^t$  the  $\sigma$ -algebra generated by the collection of  $\mathcal{X}$ -valued random variables  $\mathbf{x}^0, \mathbf{u}^0, \dots, \mathbf{x}^t, \mathbf{u}^t$ .

Since we suppose that  $S\mathbf{u}^0 = \mathbf{0}$  and we have  $SW\mathbf{d}^t = \mathbf{0}$  in the update of  $\mathbf{u}$ , we have  $S\mathbf{u}^{t'} = \mathbf{0}$  for every  $t' \geq 0$ .

If  $\theta^t = 1$ , we have

$$\begin{aligned}
\|\mathbf{u}^{t+1} - \mathbf{u}^*\|_{\mathcal{X}}^2 &= \|\mathbf{u}^t - \mathbf{u}^*\|_{\mathcal{X}}^2 + \lambda^2 \|W\mathbf{d}^t\|_{\mathcal{X}}^2 - 2\lambda \langle \mathbf{u}^t - \mathbf{u}^*, W\mathbf{d}^t \rangle_{\mathcal{X}} \\
&= \|\mathbf{u}^t - \mathbf{u}^*\|_{\mathcal{X}}^2 + \lambda^2 \|\mathbf{d}^t\|_{\mathcal{X}}^2 - \lambda^2 \|S\mathbf{d}^t\|_{\mathcal{X}}^2 - 2\lambda \langle \mathbf{u}^t - \mathbf{u}^*, \mathbf{d}^t \rangle_{\mathcal{X}},
\end{aligned}$$

because  $S\mathbf{u}^t = S\mathbf{u}^* = \mathbf{0}$ , so that  $\langle \mathbf{u}^t - \mathbf{u}^*, S\mathbf{d}^t \rangle_{\mathcal{X}} = 0$ .

The variance inequality (2) satisfied by the compressors  $\mathcal{C}_i^t$  is equivalent to  $\mathbb{E}[\|\mathcal{C}_i^t(x)\|^2] \leq (1 + \omega) \|x\|^2$ , so that

$$\mathbb{E}[\|\mathbf{d}^t\|_{\mathcal{X}}^2 \mid \mathcal{F}^t, \theta^t = 1] \leq (1 + \omega) \|\hat{\mathbf{x}}^t - \mathbf{1}\hat{y}^t\|_{\mathcal{X}}^2.$$

Also,

$$\mathbb{E}[\mathbf{d}^t \mid \mathcal{F}^t, \theta^t = 1] = \hat{\mathbf{x}}^t - \mathbf{1}\hat{y}^t.$$

Thus,

$$\begin{aligned}
\mathbb{E}[\|\mathbf{u}^{t+1} - \mathbf{u}^*\|_{\mathcal{X}}^2 \mid \mathcal{F}^t] &= (1 - p) \|\mathbf{u}^t - \mathbf{u}^*\|_{\mathcal{X}}^2 + p \mathbb{E}[\|\mathbf{u}^{t+1} - \mathbf{u}^*\|_{\mathcal{X}}^2 \mid \mathcal{F}^t, \theta^t = 1] \\
&\leq \|\mathbf{u}^t - \mathbf{u}^*\|_{\mathcal{X}}^2 + p\lambda^2(1 + \omega) \|\hat{\mathbf{x}}^t - \mathbf{1}\hat{y}^t\|_{\mathcal{X}}^2 - p\lambda^2 \mathbb{E}[\|S\mathbf{d}^t\|_{\mathcal{X}}^2 \mid \mathcal{F}^t, \theta^t = 1] \\
&\quad - 2p\lambda \langle \mathbf{u}^t - \mathbf{u}^*, \hat{\mathbf{x}}^t - \mathbf{1}\hat{y}^t \rangle_{\mathcal{X}} \\
&= \|\mathbf{u}^t - \mathbf{u}^*\|_{\mathcal{X}}^2 + p\lambda^2(1 + \omega) \|\hat{\mathbf{x}}^t - \mathbf{1}\hat{y}^t\|_{\mathcal{X}}^2 - p\lambda^2 \mathbb{E}[\|S\mathbf{d}^t\|_{\mathcal{X}}^2 \mid \mathcal{F}^t, \theta^t = 1] \\
&\quad - 2p\lambda \langle \mathbf{u}^t - \mathbf{u}^*, \hat{\mathbf{x}}^t \rangle_{\mathcal{X}}.
\end{aligned}$$

Moreover,  $\mathbb{E}[\|S\mathbf{d}^t\|_{\mathcal{X}}^2 \mid \mathcal{F}^t, \theta^t = 1] \geq \|\mathbb{E}[S\mathbf{d}^t \mid \mathcal{F}^t, \theta^t = 1]\|_{\mathcal{X}}^2 = \|S\hat{\mathbf{x}}^t - \mathbf{1}\hat{y}^t\|_{\mathcal{X}}^2$  and  $\|\hat{\mathbf{x}}^t - \mathbf{1}\hat{y}^t\|_{\mathcal{X}}^2 = \|S\hat{\mathbf{x}}^t - \mathbf{1}\hat{y}^t\|_{\mathcal{X}}^2 + \|W\hat{\mathbf{x}}^t\|_{\mathcal{X}}^2$ , so that

$$\begin{aligned}
\mathbb{E}[\|\mathbf{u}^{t+1} - \mathbf{u}^*\|_{\mathcal{X}}^2 \mid \mathcal{F}^t] &\leq \|\mathbf{u}^t - \mathbf{u}^*\|_{\mathcal{X}}^2 + p\lambda^2(1 + \omega) \|\hat{\mathbf{x}}^t - \mathbf{1}\hat{y}^t\|_{\mathcal{X}}^2 - p\lambda^2 \|S\hat{\mathbf{x}}^t - \mathbf{1}\hat{y}^t\|_{\mathcal{X}}^2 \\
&\quad - 2p\lambda \langle \mathbf{u}^t - \mathbf{u}^*, \hat{\mathbf{x}}^t \rangle_{\mathcal{X}} \\
&= \|\mathbf{u}^t - \mathbf{u}^*\|_{\mathcal{X}}^2 + p\lambda^2\omega \|\hat{\mathbf{x}}^t - \mathbf{1}\hat{y}^t\|_{\mathcal{X}}^2 + p\lambda^2 \|W\hat{\mathbf{x}}^t\|_{\mathcal{X}}^2 - 2p\lambda \langle \mathbf{u}^t - \mathbf{u}^*, \hat{\mathbf{x}}^t \rangle_{\mathcal{X}}.
\end{aligned}$$

From the Peter–Paul inequality  $\|a + b\|^2 \leq 2\|a\|^2 + 2\|b\|^2$  for any  $a$  and  $b$ , we have

$$\begin{aligned}
\|\hat{\mathbf{x}}^t - \mathbf{1}\hat{y}^t\|_{\mathcal{X}}^2 &= \sum_{i=1}^n \|\hat{x}_i^t - \hat{y}^t\|^2 = \sum_{i=1}^n \|(\hat{x}_i^t - \bar{x}^t) - (\hat{y}^t - \bar{x}^t)\|^2 \\
&\leq \sum_{i=1}^n \left( 2\|\hat{x}_i^t - \bar{x}^t\|^2 + 2\|\hat{y}^t - \bar{x}^t\|^2 \right) \\
&= 2 \left( \sum_{i=1}^n \|\hat{x}_i^t - \bar{x}^t\|^2 + n\|\hat{y}^t - \bar{x}^t\|^2 \right) \\
&= 2\|\hat{\mathbf{x}}^t - \mathbf{1}\bar{x}^t\|_{\mathcal{X}}^2 = 2\|W\hat{\mathbf{x}}^t\|_{\mathcal{X}}^2.
\end{aligned} \tag{21}$$

Hence,

$$\mathbb{E} \left[ \|\mathbf{u}^{t+1} - \mathbf{u}^*\|_{\mathcal{X}}^2 \mid \mathcal{F}^t \right] \leq \|\mathbf{u}^t - \mathbf{u}^*\|_{\mathcal{X}}^2 + p\lambda^2(1 + 2\omega) \|W\hat{\mathbf{x}}^t\|_{\mathcal{X}}^2 - 2p\lambda \langle \mathbf{u}^t - \mathbf{u}^*, \hat{\mathbf{x}}^t \rangle_{\mathcal{X}}.$$

On the other hand,

$$\begin{aligned}
\mathbb{E} \left[ \|\mathbf{x}^{t+1} - \mathbf{x}^*\|_{\mathcal{X}}^2 \mid \mathcal{F}^t, \theta = 1 \right] &= (1 - \rho)^2 \|\hat{\mathbf{x}}^t - \mathbf{x}^*\|_{\mathcal{X}}^2 + \rho^2 \mathbb{E} \left[ \|\mathbf{1}(\hat{y}^t + \bar{d}^t) - \mathbf{x}^*\|_{\mathcal{X}}^2 \mid \mathcal{F}^t, \theta = 1 \right] \\
&\quad + 2\rho(1 - \rho) \langle \hat{\mathbf{x}}^t - \mathbf{x}^*, \mathbf{1}(\hat{y}^t + \mathbb{E}[\bar{d}^t \mid \mathcal{F}^t, \theta = 1]) - \mathbf{x}^* \rangle_{\mathcal{X}}.
\end{aligned}$$

We have  $\mathbb{E}[\bar{d}^t \mid \mathcal{F}^t, \theta = 1] = \frac{1}{2n} \sum_{i=1}^n \hat{x}_i^t - \frac{1}{2}\hat{y}^t = \bar{x}^t - \hat{y}^t$ , so that

$$\mathbf{1}(\hat{y}^t + \mathbb{E}[\bar{d}^t \mid \mathcal{F}^t, \theta = 1]) = \mathbf{1}\bar{x}^t = S\hat{\mathbf{x}}^t.$$

In addition,

$$\langle \hat{\mathbf{x}}^t - \mathbf{x}^*, S\hat{\mathbf{x}}^t - \mathbf{x}^* \rangle_{\mathcal{X}} = \langle \hat{\mathbf{x}}^t - \mathbf{x}^*, S(\hat{\mathbf{x}}^t - \mathbf{x}^*) \rangle_{\mathcal{X}} = \|S(\hat{\mathbf{x}}^t - \mathbf{x}^*)\|_{\mathcal{X}}^2.$$

Moreover,

$$\begin{aligned}
\mathbb{E} \left[ \|\mathbf{1}(\hat{y}^t + \bar{d}^t) - \mathbf{x}^*\|_{\mathcal{X}}^2 \mid \mathcal{F}^t, \theta = 1 \right] &= \|\mathbf{1}(\hat{y}^t + \mathbb{E}[\bar{d}^t \mid \mathcal{F}^t, \theta = 1]) - \mathbf{x}^*\|_{\mathcal{X}}^2 \\
&\quad + \mathbb{E} \left[ \|\mathbf{1}(\bar{d}^t - \mathbb{E}[\bar{d}^t \mid \mathcal{F}^t, \theta = 1])\|_{\mathcal{X}}^2 \mid \mathcal{F}^t, \theta = 1 \right] \\
&= \|S\hat{\mathbf{x}}^t - \mathbf{x}^*\|_{\mathcal{X}}^2 + 2n \mathbb{E} \left[ \|\bar{d}^t - \mathbb{E}[\bar{d}^t \mid \mathcal{F}^t, \theta = 1]\|^2 \mid \mathcal{F}^t, \theta = 1 \right]
\end{aligned}$$

and, using (3),

$$\begin{aligned}
\mathbb{E} \left[ \|\bar{d}^t - \mathbb{E}[\bar{d}^t \mid \mathcal{F}^t, \theta = 1]\|^2 \mid \mathcal{F}^t, \theta = 1 \right] &\leq \frac{\omega_{\text{av}}}{4n} \sum_{i=1}^n \|\hat{x}_i^t - \hat{y}^t\|^2 \\
&\leq \frac{\omega_{\text{av}}}{2n} \|W\hat{\mathbf{x}}^t\|_{\mathcal{X}}^2,
\end{aligned}$$

where the second inequality follows from (21). Hence,

$$\begin{aligned}
\mathbb{E}\left[\|\mathbf{x}^{t+1} - \mathbf{x}^*\|_{\mathcal{X}}^2 \mid \mathcal{F}^t, \theta = 1\right] &\leq (1 - \rho)^2 \|\hat{\mathbf{x}}^t - \mathbf{x}^*\|_{\mathcal{X}}^2 + \rho^2 \|S\hat{\mathbf{x}}^t - \mathbf{x}^*\|_{\mathcal{X}}^2 + \rho^2 \omega_{\text{av}} \|W\hat{\mathbf{x}}^t\|_{\mathcal{X}}^2 \\
&\quad + 2\rho(1 - \rho) \|S(\hat{\mathbf{x}}^t - \mathbf{x}^*)\|_{\mathcal{X}}^2 \\
&= (1 - \rho)^2 \|\hat{\mathbf{x}}^t - \mathbf{x}^*\|_{\mathcal{X}}^2 + \rho^2 \omega_{\text{av}} \|W\hat{\mathbf{x}}^t\|_{\mathcal{X}}^2 \\
&\quad + (2\rho - \rho^2) \|S(\hat{\mathbf{x}}^t - \mathbf{x}^*)\|_{\mathcal{X}}^2 \\
&= (1 - \rho)^2 \|\hat{\mathbf{x}}^t - \mathbf{x}^*\|_{\mathcal{X}}^2 + \rho^2 \omega_{\text{av}} \|W\hat{\mathbf{x}}^t\|_{\mathcal{X}}^2 \\
&\quad + (2\rho - \rho^2) \left( \|\hat{\mathbf{x}}^t - \mathbf{x}^*\|_{\mathcal{X}}^2 - \|W\hat{\mathbf{x}}^t\|_{\mathcal{X}}^2 \right) \\
&= \|\hat{\mathbf{x}}^t - \mathbf{x}^*\|_{\mathcal{X}}^2 - (2\rho - \rho^2 - \rho^2 \omega_{\text{av}}) \|W\hat{\mathbf{x}}^t\|_{\mathcal{X}}^2
\end{aligned}$$

and

$$\begin{aligned}
\mathbb{E}\left[\|\mathbf{x}^{t+1} - \mathbf{x}^*\|_{\mathcal{X}}^2 \mid \mathcal{F}^t\right] &= (1 - p) \|\hat{\mathbf{x}}^t - \mathbf{x}^*\|_{\mathcal{X}}^2 + p \mathbb{E}\left[\|\mathbf{x}^{t+1} - \mathbf{x}^*\|_{\mathcal{X}}^2 \mid \mathcal{F}^t, \theta^t = 1\right] \\
&\leq \|\hat{\mathbf{x}}^t - \mathbf{x}^*\|_{\mathcal{X}}^2 - p(2\rho - \rho^2(1 + \omega_{\text{av}})) \|W\hat{\mathbf{x}}^t\|_{\mathcal{X}}^2.
\end{aligned}$$

Furthermore,

$$\begin{aligned}
\|\hat{\mathbf{x}}^t - \mathbf{x}^*\|_{\mathcal{X}}^2 &= \|\mathbf{w}^t - \mathbf{w}^*\|_{\mathcal{X}}^2 + \gamma^2 \|\mathbf{u}^t - \mathbf{u}^*\|_{\mathcal{X}}^2 + 2\gamma \langle \mathbf{w}^t - \mathbf{w}^*, \mathbf{u}^t - \mathbf{u}^* \rangle_{\mathcal{X}} \\
&= \|\mathbf{w}^t - \mathbf{w}^*\|_{\mathcal{X}}^2 - \gamma^2 \|\mathbf{u}^t - \mathbf{u}^*\|_{\mathcal{X}}^2 + 2\gamma \langle \hat{\mathbf{x}}^t - \mathbf{x}^*, \mathbf{u}^t - \mathbf{u}^* \rangle_{\mathcal{X}} \\
&= \|\mathbf{w}^t - \mathbf{w}^*\|_{\mathcal{X}}^2 - \gamma^2 \|\mathbf{u}^t - \mathbf{u}^*\|_{\mathcal{X}}^2 + 2\gamma \langle \hat{\mathbf{x}}^t, \mathbf{u}^t - \mathbf{u}^* \rangle_{\mathcal{X}},
\end{aligned}$$

which yields

$$\begin{aligned}
\mathbb{E}\left[\|\mathbf{x}^{t+1} - \mathbf{x}^*\|_{\mathcal{X}}^2 \mid \mathcal{F}^t\right] &\leq \|\mathbf{w}^t - \mathbf{w}^*\|_{\mathcal{X}}^2 - \gamma^2 \|\mathbf{u}^t - \mathbf{u}^*\|_{\mathcal{X}}^2 + 2\gamma \langle \hat{\mathbf{x}}^t, \mathbf{u}^t - \mathbf{u}^* \rangle_{\mathcal{X}} \\
&\quad - p(2\rho - \rho^2(1 + \omega_{\text{av}})) \|W\hat{\mathbf{x}}^t\|_{\mathcal{X}}^2.
\end{aligned}$$

Hence, with  $\lambda = \frac{p\chi}{\gamma(1+2\omega)}$ ,

$$\begin{aligned}
&\frac{1}{\gamma} \mathbb{E}\left[\|\mathbf{x}^{t+1} - \mathbf{x}^*\|_{\mathcal{X}}^2 \mid \mathcal{F}^t\right] + \frac{\gamma(1+2\omega)}{p^2\chi} \mathbb{E}\left[\|\mathbf{u}^{t+1} - \mathbf{u}^*\|_{\mathcal{X}}^2 \mid \mathcal{F}^t\right] \\
&\leq \frac{1}{\gamma} \|\mathbf{w}^t - \mathbf{w}^*\|_{\mathcal{X}}^2 - \gamma \|\mathbf{u}^t - \mathbf{u}^*\|_{\mathcal{X}}^2 + 2\langle \hat{\mathbf{x}}^t, \mathbf{u}^t - \mathbf{u}^* \rangle_{\mathcal{X}} - \frac{p}{\gamma} (2\rho - \rho^2(1 + \omega_{\text{av}})) \|W\hat{\mathbf{x}}^t\|_{\mathcal{X}}^2 \\
&\quad + \frac{\gamma(1+2\omega)}{p^2\chi} \|\mathbf{u}^t - \mathbf{u}^*\|_{\mathcal{X}}^2 + \frac{p\chi}{\gamma} \|W\hat{\mathbf{x}}^t\|_{\mathcal{X}}^2 - 2\langle \mathbf{u}^t - \mathbf{u}^*, \hat{\mathbf{x}}^t \rangle_{\mathcal{X}} \\
&= \frac{1}{\gamma} \|\mathbf{w}^t - \mathbf{w}^*\|_{\mathcal{X}}^2 + \frac{\gamma(1+2\omega)}{p^2\chi} \left(1 - \frac{p^2\chi}{1+2\omega}\right) \|\mathbf{u}^t - \mathbf{u}^*\|_{\mathcal{X}}^2 - \frac{p}{\gamma} (2\rho - \rho^2(1 + \omega_{\text{av}}) - \chi) \|W\hat{\mathbf{x}}^t\|_{\mathcal{X}}^2.
\end{aligned}$$

Therefore, assuming that  $2\rho - \rho^2(1 + \omega_{\text{av}}) - \chi \geq 0$ ,

$$\mathbb{E}[\Psi^{t+1} \mid \mathcal{F}^t] \leq \frac{1}{\gamma} \|\mathbf{w}^t - \mathbf{w}^*\|_{\mathcal{X}}^2 + \left(1 - \frac{p^2\chi}{1+2\omega}\right) \frac{\gamma(1+2\omega)}{p^2\chi} \|\mathbf{u}^t - \mathbf{u}^*\|_{\mathcal{X}}^2.$$

According to Condat & Richtárik (2023, Lemma 1),

$$\begin{aligned}\|\mathbf{w}^t - \mathbf{w}^*\|_{\mathcal{X}}^2 &= \|(\text{Id} - \gamma \nabla \mathbf{f})\mathbf{x}^t - (\text{Id} - \gamma \nabla \mathbf{f})\mathbf{x}^*\|_{\mathcal{X}}^2 \\ &\leq \max(1 - \gamma\mu, \gamma L - 1)^2 \|\mathbf{x}^t - \mathbf{x}^*\|_{\mathcal{X}}^2.\end{aligned}$$

Hence,

$$\mathbb{E}[\Psi^{t+1} \mid \mathcal{F}^t] \leq \max\left((1 - \gamma\mu)^2, (1 - \gamma L)^2, 1 - \frac{p^2\chi}{1 + 2\omega}\right) \Psi^t. \quad (22)$$

Using the tower rule, we can unroll the recursion in (22) to obtain the unconditional expectation of  $\Psi^{t+1}$ .

Using classical results on supermartingale convergence (Bertsekas, 2015, Proposition A.4.5), it follows from (22) that  $\Psi^t \rightarrow 0$  almost surely. Almost sure convergence of  $\mathbf{x}^t$  and  $\mathbf{u}^t$  follows.