

A Mathematical Framework for the Problem of Security for Cognition in Neurotechnology

Bryce Allen Bagley^{1,2,3}

¹Mathematical Medicine Group, Department of Neurosurgery, Stanford University, Stanford, CA 94305

²Petritsch Laboratory, Department of Neurosurgery, Stanford University, Stanford, CA 94305

³Physician-Scientist Training Program, Stanford University, Stanford, CA 94305

April 23, 2024

Abstract

The rapid advancement in neurotechnology in recent years has created an emerging critical intersection between neurotechnology and security. Implantable devices, non-invasive monitoring, and non-invasive therapies all carry with them the prospect of violating the privacy and autonomy of individuals' cognition. A growing number of scientists and physicians have made calls to address this issue, but applied efforts have been relatively limited. A major barrier hampering scientific and engineering efforts to address Cognitive Security is the lack of a clear means of describing and analyzing relevant problems. In this paper we develop Cognitive Security, a mathematical framework which enables such description and analysis by drawing on methods and results from multiple fields. We demonstrate certain statistical properties which have significant implications for Cognitive Security, and then present descriptions of the algorithmic problems faced by attackers attempting to violate privacy and autonomy, and defenders attempting to obstruct such attempts.

1 Introduction

Recent years have seen rapid advancements in both brain-computer interfaces (BCI) and technologies for increasingly precise yet non-invasive readout and alteration of brain function. This progress has been rightfully hailed as the beginning of a revolution in the treatment of countless neurological and psychiatric disorders, and the potential for beneficial impact on human lives is immense.[1, 2, 3, 4, 5] Even beyond medical applications, there is talk of eventual mass-market use of such technology, and a number of companies are already applying more rudimentary neurotechnology in limited ways for more mundane consumer uses such as entertainment.

These emerging technologies also open the door to malicious actors in profound ways, once conceived of only in science fiction¹ yet now rapidly becoming reality.[8, 9] As neuromonitoring and neuromodulation technologies progress, we must begin to consider the near-inevitability that further abilities to “read” and “write” (in some sense) on the human operating system will emerge.[1, 2, 3, 4, 5, 10, 11] While the level of detail at which this will eventually be feasible remains to be seen, it is already possible to read out thoughts into speech and text with high accuracy at a nearly normal conversational pace,[4, 5] and there is a great deal of active research in increasing the precision of neuromodulation as well. There are also a number of papers which describe experimentally verified means of violating privacy and security and discuss highly plausible risks to autonomy.[12, 13, 14, 15] Historical trends paint a picture of significant risk in the likely outcomes in terms of malicious uses of neurotechnology. Much as the emergence of networking and remote access to computers spurred the development of the mathematical frameworks of Cryptography and Differential Privacy in order to protect data therein,[16, 17, 18, 19, 20] we argue that an analogous framework must be developed for those aspects of security and privacy which are unique to neurotechnology.

To our knowledge the first term proposed for this category of problem was “Neurosecurity”, in a 2009 paper by Denning et al.[21] Suggested terms for violations of such security have included “brainjacking”² from Pycroft et al and “neural cyberattacks” from Bernal et al.[24, 25] A few solutions have been proposed, with the most general thus far likely being the BCI Anonymizer of Bonaci et al, which would protect privacy by filtering raw neurological data before a BCI is allowed to perform any computations.[26] A number of papers have provided technical methods,

¹As far back as Anthony Gilmore's 1932 novel *The Affair of the Brains*,[6], and perhaps most famously in William Gibson's novel *Neuromancer*. [7]

²We adopt the term “brainjacking” given its emphasis of the fact that attacks on neuro-cyber-physical systems are most analogous to the takeover of other cyber-physical systems, such as drones, self-driving cars, robotic systems, and so on. Such cyberattacks are frequently termed “hijacking”, and so our view is that “brainjacking” emphasizes the bio-cybernetic – in the general sense first expressed by Wiener – nature of the problem.[22, 23]

either for specific types of BCI or broader approaches meant to be incorporated at a hardware level from the beginning of BCI design.[15, 27, 28] These are promising directions in the form of hardware, though to our knowledge all of these methods require extreme care on the part of manufacturers, and are vulnerable to potential BCI analogs of air-gap attacks³ Additionally, a wide variety of potential brainjacking attack types have been described.[15] Prior papers have offered mathematical descriptions of security methods, most notably the work of Bonaci et al which proposes a general description from an information-theoretic perspective.[26] Because of the precision and fundamental nature of their description from a signals perspective, we construct our definitions of security optimization in Section 6 and Section 7 similarly. Indeed, there are natural interfaces between their work and ours, and their BCI Anonymizer is in some ways similar to the noise injection approach we describe in Section 6.

However, ideally one would like to be able to more directly link cognitive science with the problems of BCI-related security, and theoretical foundations for this have thus far not been provided. Reasons for refining such a link include easier interfacing with psychological experiments, more precise descriptions of the cognitive aspects of BCI security, and the ability to analyze more exotic forms of brainjacking. For example, given BCIs can alter the cognition of individuals, an attacker could potentially avoid detection by individual-centric security approaches by inducing smaller changes in many individuals within a group, lowering their information-theoretic profile at the hardware level and leveraging psychology and sociology to accomplish goals. This is only one example, and we suspect that many types of brainjacking methods targeting multiple individuals and their interactions may be developed in the future. In short, direct hardware security of the various types proposed thus far may not be enough to detect and mitigate all attack types, suggesting that a greater degree of cognitive phenomenology should be incorporated in assessment of various types of attacks.

To this end, in this paper we provide such a cognition-centric approach to BCI security, and term it Cognitive Security. This name is chosen over Neurosecurity for two reasons. First, because of our focus on cognition rather than other aspects of brain function. Second, because of the framework’s direct applicability to the generally more policy and national security-focused field which shares the name - though BCI security issues are our focus in this paper.⁴ Drawing on recent literature in mathematical modeling in cognitive science and theoretical neuroscience – primarily Hyperdimensional Computing and “Quantum” Cognition – and concepts from a number of other fields, in this paper we present an analog of Differential Privacy for biological cognition.⁵

Hyperdimensional Computing (HDC) refers generally to the field which leverages consequences of what has been termed the “*blessing of dimensionality*” on representation and computation – particularly in noisy systems.[31, 32, 33] That is, as one considers data vectors of increasingly high dimensions, the information content of these vectors becomes increasingly robust to noise *if this information is encoded spatially rather than in more standard forms*. These encodings are termed Vector-Symbolic Architectures (VSA) or Holographic Representations, and represent concepts and their relatedness based on degrees of proximity on the surface of some high-dimensional object.[31, 32, 33, 34] Traditionally this is a binary hypercube of many thousands of dimensions, but similar properties hold on hyperspheres as well. This will be discussed further in 2. HC has seen success in both theoretical neuroscience and machine learning – in the latter case particularly in the context of embedded computing.[35, 36]

Biological intelligences – brains, immune systems, and more – tend to have extremely noisy dynamics and yet retain very robust representations and computations. Unlike in an artificial computer, in a biological one there will not necessarily be one precise value corresponding to “apple” and another to “orange”, for example. There are known cases of direct, simple mappings from neurons to information, such as grid cells in spatial navigation. However, these cells have also been argued to work in concert to represent more complex information.[37] Other research has also shown that it is possible in some cases to identify specific neurons which will activate in response to images of only one person.[38, 39] However, even in these cases the simple representations are rendered robust by the high dimensionality of their inputs. In this sense, these small ensembles of cells act as a readout of very high-dimensional data. Additionally, there is good evidence to suggest that neural correlates of many cognitive phenomena require distributed representations.[40, 41] In any case, here we are focused on the phenomenology of cognition in our use of HDC, and remain agnostic to the nature of biological representations so as to improve generalizability of our approach. In other words, the results in this paper hold regardless of the specific means by which the brain encodes information biologically. The flexibility of the approach to representation taken in this paper will be elaborated upon in Section 2. In a classical computer “apple” and “orange” would each be associated with some bitstrings, and errors in reading, writing, and other operations could well corrupt the computer’s “understanding” of an object. In other words, a significant fraction of the bits are crucial in aggregate – even with error-correcting codes. This is akin to how genomes work, but moving to brains and other complex biological computers we find there are cases where individual “bits” (say, whether or not one neuron fires within a given time window) are in fact not

³Air-gap attacks are ones in which even a computer fully isolated from any networks can still be vulnerable to successful cyberattacks. Methods are highly varied and frequently surprisingly creative. Carrara and Adams provide a broad taxonomic survey of such methods.[29]

⁴While the latter will not be addressed in this paper, we are already conducting follow-up work on applying our framework to problems within that field and others.

⁵Ienca et al noted this as a possibility in 2018,[30], and it has also been briefly discussed at a conceptual level by Bernal et al,[15], but there does not appear to have been any mathematical analysis of the approach to date.

very important, and to a surprising degree.[32, 33, 40, 41] From the simple observables of human cognition we can see that these neural processes are both computationally sophisticated and based upon a representation which is highly robust.

There is general agreement that the brain does not operate in a manner any more than very loosely analogous to a von Neumann architecture,⁶ and some researchers in theoretical neuroscience have argued the brain in fact leverages the statistics of high-dimensional spaces to perform robust computations.[39, 42] In this view, brains operate on an aforementioned “Vector-Symbolic Architecture” (VSA), where vectors in some space encode concepts, with varying degrees of similarity between concepts corresponding to varying degrees of proximity within the space. While VSAs would struggle with noise in a low-dimensional space, as the dimension of a data space increases there is a rapid and nonlinear increase in robustness.

These high-dimensional spaces have been termed hyperspaces by a community of researchers spanning theoretical neuroscience, computational linguistics, and low-power hardware, robotics, and machine learning, and the hypervectors (HV) within them are operated on in what is termed Hyperdimensional Computing (HDC).⁷ HV are generally taken to mean vectors of dimension roughly on the order of 10^3 or greater,⁸ with increasing dimension offering ever-better performance from a statistical perspective. While there is often discussion in various areas of computer science of the “problem of dimensionality”, HDC leverages an interesting inverse property which has been termed the “blessing of dimensionality”.^{47, 48} That is, as the dimension of a space increases, the distribution of distances between random vectors tightens when normalized by the dimension of the space. Specifically, these inter-vector distances cluster ever more strongly around 0.5 after dividing distances by the space’s dimension. From Brown et al’s original use of the term through the two decades since,⁴⁷ an increasing range of applications for this property have been identified.[31, 32, 33, 35, 36, 39, 42, 48, 49, 50, 51, 52, 53, 54] For binary vectors this is an unintuitive yet simple result of the Binomial distribution,[32, 33] and in Section 2 we derive similar statistical results for the mathematical structures of Quantum Computing and “Quantum” Cognition.

“Quantum” Cognition is a model which has gained increasing attention in mathematical psychology and cognitive science in recent decades, and regardless of the perhaps unfortunate choice of name it offers significant advantages over other models of cognition.[55, 56, 57, 58, 59] It cannot be overly stressed that this approach to cognitive science is in no way related to hypotheses asserting connections between quantum mechanics and consciousness.⁹ Instead, quantum cognition simply takes advantage of the fact that the statistical framework based on projective geometry is able to naturally describe the seeming paradoxes that arise from studying cognition. Devised by von Neumann for quantum mechanics,⁶⁴ the projective framework for probability is an alternative to the more traditional set-theoretic probability of Kolmogorov.⁶⁵ Humans are known to exhibit a wide range of behaviors and thought processes which would be paradoxical when assessed through the lens of set-based probability, but which turn out to be captured in a remarkably natural way by projective probability.[55, 56] To avoid the potential for confusion or misunderstanding in both this paper and future work on Cognitive Security, we will use the term Projective Cognition rather than “Quantum” Cognition, recognizing that the utility of the modeling approach comes in the form of useful features of complex projective geometry.[55, 56, 57] There are a number of these features which have proven an effective and natural fit for cognitive science, including but not limited to:

- Contextuality – the fact that different phrasings of questions or different variations on a situation can produce different results. This is captured by the centrality of measurement operators in determining outcomes in complex projective probability.
- Ordering relations – the phenomenon that the order in which two questions are asked or two events are experienced can alter the probabilities of different responses. This is captured by the non-commutativity of linear algebra.
- Interference effects – cases where the probabilities of cognitive responses to interacting events violate classical probability. These are captured by superposition.

It should be stressed again that this is not in any way some sort of grand theoretical claim. Rather, it is a simple acknowledgement of three neutral facts. First, that the set-theoretic framework of probabilities in terms of events formulated by Kolmogorov et al – by far the most widely used one – is not the only framework.⁶⁴ Second, that the set/event-centric framework fails to capture many key aspects of human cognition.[55, 56] Third, that the projective geometry framework developed by von Neumann et al has, by contrast, proven to be a very natural and effective mathematical description of probability in human cognition.[55, 56] In short, we are simply using a version of statistics which is more effective in the context of cognition. Its historical relationship with quantum mechanics is

⁶Overwhelmingly the most common architecture for classical computers.

⁷In HDC, hyperspace and hypervector are different from the stricter mathematical definition. While the strict definition simply corresponds to N -spaces of $N \geq 4$, in HDC something is considered a hyperspace/hypervector once it approaches or exceeds the order of 10^3 .

⁸It is interesting to note that this is a scale already reachable by at least one commercial quantum computer^{43, 44, 45, 46} and promised by other manufacturers. Though quantum computing is not the focus of this paper, some of its mathematical results can be translated directly to that field.

⁹For discussion of such potential or supposed connections, one can see the Penrose-Hameroff hypothesis, which is generally considered to have been disproven by Derakhshani et al,⁶⁰ or the work of science fiction authors such as Greg Egan, Robert J Sawyer, and Mike Chen.^{61, 62, 63}

irrelevant to cognition, just as astrophysics’ use of standard probability does not make it relevant to sociology. This paper’s use of the non-standard term Projective Cognition reflects a desire to make this clear.

With the interdisciplinary stage of the paper set, we will begin by demonstrating the robustness of a holographic approach to quantum computing and Projective Cognition, as it will serve as a core aspect of our proposed framework for Cognitive Security. Inspired by Hyperdimensional Computing and Vector-Symbolic Architectures, we present Projective Holographic Computation as an orthogonal approach to improving the problem of error-tolerance in projective systems like quantum computers (or, for example, AI which could be developed based on Projective Cognition) by leveraging statistical properties of high-dimensional vector spaces. As this paper centers on biological cognition, we focus specifically on one form of Projective Holographic Computation: Projective Holographic Cognition. In the coming sections, we will discuss how it enables analysis of statistical properties of mental states across a range of complexity. The approach is deliberately flexible and robust in its ability to describe not only large numbers of discrete beliefs, preferences, attitudes, etc., but also any number of features of mental states which can be more accurately captured by modeling them as comprised of many individual components.

2 Projective Holographic Cognition

Projective (or “Quantum”) Cognition typically concerns itself with mental states at the level of complexity accessible to standard experiments in psychology (that is, small numbers of variables for any given context), which is completely reasonable given the historical goals of the mathematical framework.[55, 56, 57, 58, 59] However, in order to make our framework of Cognitive Security more general,¹⁰ we must extend it to the higher-dimensional regime. This paper’s first focus will thus be on the definitions of how Projective Cognition extends to high dimensions, and the derivation of some results on its statistical properties both in terms of internal dynamics of computations and final measurements. We draw on the conceptual origins of Hyperdimensional Computing as a model to explain the robustness of both language and of biological neural computations at the level of large¹¹ collections of neurons. The same statistical properties theorized to make neural networks so robust to noise will turn out to have consequences for Cognitive Security. We develop this framework in order to facilitate descriptions of the joint effects of the many active cognitive factors which may come into play in a given situation.

This paper’s conception of cognitive states extends that of the existing literature on “Quantum”/Projective Cognition. In this modeling framework for cognitive science, cognitive state variables are treated as analogous to qubits. This imbues them with inherent contextuality (e.g. the nature of a question or situation impacts how cognition will proceed), interrelatedness (e.g. beliefs about different subjects can interact in a manner which may produce non-classical logic), and other useful features. In modeling cognitive processes we can draw analogies to the evolution of sets of qubits in a quantum computer.¹² To the best of our knowledge no such term exists in the literature on “Quantum”/Projective cognition, and we are extending the model to accommodate arbitrary combinations of beliefs, preferences, and/or any other form of cognitive state variables. For this reason and for the sake of clarity, we will use the term *cogits* – a la Descartes’ famous “Cogito ergo sum” – for these qubit analogues. The intent of cogits is to be a maximally general description capable of integrating any combination of types of cognitive state variables – and any number of them – into a single vector description.

For a single instant in time, a state of interest would be a vector of cogits ψ_t . In the general case we will assume a high-dimensional ψ_t , given the rapid growth in technology for neural measurements and the feasibility of rapidly querying large numbers of cognitive state variables.¹³ The qualitative differences between low-dimensional and high-dimensional cogit vectors arise from statistical properties of high-dimensional spaces, and are precisely what make a modified version of hyperdimensional computing so useful compared with the standard analysis of states involving only small numbers of cogits.

Because the high-dimensional regime is qualitatively different from the low-dimensional regime, we adopt the novel term Projective Holographic Cognition for discussions of the high-dimensional case. The limited robustness and low representational capacity of small collections of neurons gives way to highly robust and informationally rich representations at higher dimensions, just as the limited content of small numbers of cognitive state variables give way to the richness of human cognition. This paper puts forward two hypotheses regarding this extension to high-dimensional cogit vectors:

1. Given projective probability captures the dynamics of human cognition so effectively with small numbers of cogits, including the correlation properties between them, we hypothesize that this efficacy will hold in the high-dimensional regime.

¹⁰“General” in the sense used by physicists, mathematicians, etc., essentially meaning “capable of describing a wider range of cases”.

¹¹On the order of 10^3 or more.

¹²Again, the analogy to qubits is only a mathematical tool. It in no way suggests or supports claims of a physically quantum basis for cognition.

¹³Simply in the sense that people can answer survey questions quickly.

2. We hypothesize that the statistical properties of cogit holography correspond to the distinguishability of individuals. This will serve as a key source of information in practical applications of Cognitive Security both via the structure of correlations between cogits within an individual person and via patterns in these correlations between individual persons at a group or population level.

Both of these hypotheses are in fact rather tame in that they can be derived from established results. For the first hypothesis, pairwise, triplet-wise, etc. correlations between cogits are known to be effective as a model of interactions among small numbers of cogits – as verified by extensive work in the field of “Quantum”/Projective Cognition. Given this, extension to higher dimensions would still hold in at least the limiting case where one only assesses correlations among small n-tuples¹⁴ of cogits. We are not asserting that these correlations will extend to tuples of larger n ,¹⁵ but we would not be at all surprised if this holds true empirically.

The modesty of the second hypothesis will become clearer after our discussion of the statistical properties of cogit holography, and ultimately come down to the blessing of dimensionality. As the dimensionality of a vector space increases, the probability of two vectors being close to one another by chance decreases rapidly.¹⁶ An analogy in cognition is then the fact that every person exists in a different cognitive state from every other person, and likewise has a mind which works differently from those of every other person. The relevant statistics thus provide a mathematical description for the distinguishability of individuals’ cognition.

2.1 Mathematical Connections to Quantum Computing

In this section we describe an algebra for HDC on many-cogit systems – and thus for many-qubit systems as well. We then show that it offers exceptional robustness even on the qubit scales already achievable by existing quantum computers, and equally on the cogit scales which should be feasible to study in applying cognitive security. The power of HDC comes from both its robustness to noise and its representational richness. While randomly selected points in a hyperspace are not clustered in any way, proportional distances are. This is because of the concentration of probability¹⁷ with the binomial distribution in bit flips between two vectors, and a brief description of the mathematics behind this will be discussed shortly.

A key challenge in quantum computing is the problem of noise in both the measurements and the computations themselves.[66, 67, 68, 69] The field thus has the goal of improving the ratio of physical qubits to logical qubits – the latter being the equivalent number of qubits upon which operations are performed with sufficient robustness. Improvements in error-correcting codes have reduced this requirement significantly, but existing methods still require many physical qubits per logical one, placing significant limitations on what quantum computers are able to accomplish.[68, 70, 71] Many remarkable innovations have been developed, yet the problem remains a significant practical challenge for applied quantum computing.[66, 67, 68, 70]

Robustness is a major problem for a number of other areas of computing as well. Examples range from more algorithmic cases like machine learning to more hardware-driven cases such as ultra low-power hardware and biological computing. While not usually considered in the context of quantum computing, biological forms of computing have a long history of inspiring advancements in both machine learning and computer hardware, as detailed in reviews by MacPherson et al, Ullman, and Hassabis et al, among others.[72, 73, 74] Recent advancements have included the design of hardware meant to mimic many of the core computational processes of neurons, and their efficiency both in terms of speed and power demands has already garnered much attention.[75, 76, 77]

Moving to connect quantum computing with HDC, there are a small number of papers in the area of HDC which reference qubits or quantum concepts, but in each case solely as an analogy and not in a way which is meant to be taken literally. A paper by Bosch et al develops an algorithm for classical hardware which takes the concept of uncertainty before measurement¹⁸ and applies it to machine learning. Prior to being measured, the classical state vectors are floating-point valued, and upon “measurement” they become binary.[78] Another paper by McDonald et al studied the application of HDC to phasors.[79] Yet thus far there has not been any work on applying the principles of HDC – and the blessing of dimensionality – to quantum computing.

We now turn to a brief discussion of the mathematics behind the central advantage of HDC. Using a Hamming distance¹⁹ as our metric on a binary unit d-cube and normalizing distances by d , vectors are on average 0.5 apart from each other. In other words, we are defining distance as a fraction of maximum possible distance: the distance between opposite ends of the space. If one performs the calculation, one finds that for a 10,000 bit space the clustering of distances around 0.5 is so tight

¹⁴“n-tuples” being the standard term for a collection of n things.

¹⁵Which to our knowledge have not been studied in the literature on Projective Cognition at the scales discussed in this paper.

¹⁶Again, normalizing distances by the dimension of the space. This is important to note, as non-normalized distances would inherently increase with the dimension of a space, making the property of declining proximity a trivial one. As a simple analogy to this property, a triangle with two sides of length 1 would have a hypotenuse of length $\sqrt{2}$, but if we extended to a triangular prism in 3 dimensions it would be $\sqrt{3}$, and so on with higher dimensions.

¹⁷I.E. reduction in the distribution’s variance.

¹⁸In quantum mechanics, there is a fundamental unknowability of any physical value prior to it being measured, and values are thus described by distributions.

¹⁹That is, the number of bits in a binary vector which do not match those of a second binary vector.

that we have less than 1/1,000,000 random vector pairs closer than 0.476 or farther than 0.524. This means that the distances between two random vectors are so rarely close as to be negligible. Thus proximity between vectors can represent substantive information with extremely low probability of obfuscation by unrelated vectors in the space. Additionally, the vectors themselves can have a substantial fraction of their bits flipped and still maintain the original distance properties as a consequence of the blessing of dimensionality. Consider three vectors \vec{a} , \vec{b} , and \vec{c} . In a hyperspace, if \vec{c} starts close to \vec{a} but moves away from it along some set of dimensions, it is with high probability also moving away from \vec{b} . The key point is that this property makes hyperdimensional representations extremely robust to noise, and the mathematics will be discussed more thoroughly in Section 3

As discussed in the introduction, mathematically Localist Representations use positions of vectors in a space to define objects regardless of distances between the vectors. By contrast, in a Vector-Symbolic Architecture – a.k.a. Distributed or Holographic Representation – the specific positions of vectors do not convey information in the absence of their context like they would in a Localist Representation.

Whereas with Localist Representations we must add additional dimensions to cope with additional complexity or a greater number of objects, HDC begins with a fixed, high dimension and one simply adds additional HV for new concepts. It is overwhelmingly likely that these new HV will be quasi-orthogonal.²⁰ That is, the angle between any two HV will with very high probability be very close to 90°. This means that we do not need to impose any particular restrictions on their placement unless the number of concepts to be encoded by hypervectors is quite large compared with the dimension of the space. The high probability of quasi-orthogonality between random HV is a more precise mathematical statement of the blessing of dimensionality. If we wish to encode a concept which is similar to some others, we may enforce that its distance(s) to one or more other vectors fall within an appropriate region of the space by constructing a random vector whose angles with respect to the others are within some limit of 0°.

HDC has a number of variations, but all of them are fundamentally algebras comprised of HV and certain required operations.²¹ Supposing a set of random binary vectors in a d-dimensional space, it is easy to show that vectors will, on average, differ by half of their bits and thus have an average hamming distance of d/2 from any other random vector.²² However, while the mean remains unchanged, the variance of the distribution becomes increasingly favorable. As we will show in the coming section, this same property holds for hypervectors of qubits – and thus of cogits as well – just as it does for binary HV.

3 Hyperdimensional Computing Algebras

All forms of HDC represent algebras, but there is flexibility in precisely *what* algebra a given HDC framework will be. Some key requirements are as follows.²³

3.1 Required Features

In addition to the operations of the algebra, any HDC algebra must contain a similarity measure. In binary hypervectors this is the Hamming distance, which is equivalently the cosine similarity for the binary hypercube.

3.1.1 Holographic Addition

For a maximally rich holography, we require that our addition allow the identification – at least approximately – of which vectors were added.

Supposing a dictionary of symbols $\{a, b, c, d\}$, for an addition operation $+$, we have

$$s = [a + b + c] \tag{1}$$

Where it must be the case that

$$\text{sim}(s, a) \sim \text{sim}(s, b) \sim \text{sim}(s, c) \gg \text{sim}(s, d) \tag{2}$$

This means that if we know the dictionary/dictionary of symbols, we can construct the set summed over based on which vectors it is most similar to. The sharp clustering of $\text{sim}(\cdot, \cdot)$ around 0.5 for random HV makes this a robust pseudo-inversion (for lack of a better term), rather than a traditional algebraic inverse.

²⁰Meaning that the angle between two vectors is within a small range around 90°.

²¹For those unfamiliar with the general theory of algebras: Ordinary algebra and linear algebra are the two most widely known examples of algebras, but many more are possible.

²²For each bit, two random vectors have probability 0.5 of being different. Summing over the dimension of the hypervector, we have d/2.

²³A number of review articles discuss this, but here we make use of the very clear summary provided in McDonald et al's discussion of phasor-based HDC.[80] This is particularly helpful given they construct a complex-valued holography which is helpful for representing hyperdimensional collections of cogits.

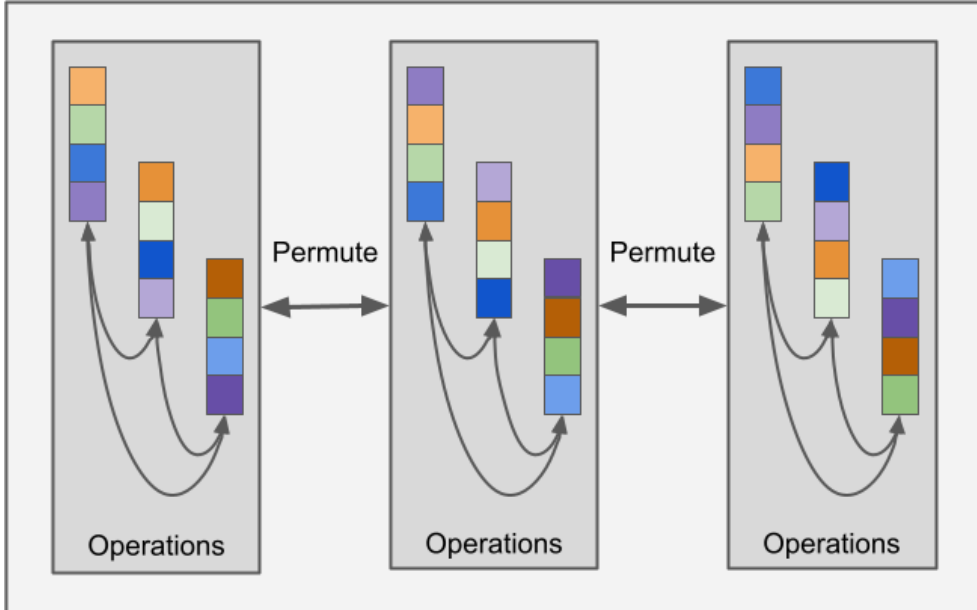


Figure 1: Visual summary of the general structure of a Hyperdimensional Computing algebra. Colored boxes correspond to individual variables, with different shades – of orange, green, blue, and purple respectively – denoting different values. The addition, binding, and dynamics operations convert between individual HV. Each darker grey box represents a particular pairing of indices with variables, and permutation rotates these pairings in the manner shown.

3.1.2 Holographic Binding

The multiplication operator in a holographic representation is termed “binding”. In contrast with addition, the output is not similar to the inputs.²⁴ However, while the reversibility via similarity is not present, depending on the specific HDC algebra reversibility may still be provided via other means.

For cases where binding is self-reversing, we have the following useful property:

$$\begin{aligned}
 s &= [a \otimes b + c \otimes d] \\
 a \otimes s &= a \otimes [a \otimes b + c \otimes d] \\
 &= a \otimes a \otimes b + a \otimes c \otimes d \\
 &= b + \eta \\
 &= \sim b
 \end{aligned}$$

While reversibility of binding is not required for an HDC algebra, self-reversibility or the existence of inverse elements can be found in some versions of them. Since an arbitrary HV combination is nearly always going to be pseudo-orthogonal, whether η is the result of a self-reversal or binding with an inverse element, it will for all intents and purposes be random noise compared with our symbol dictionary. Thus, within the context of a symbol dictionary we can robustly invert binding so long as the inverse (or binding operation itself, for a self-inverse) can recover with high probability only one element of a symbol dictionary. That is, recover one region of the hyperspace which corresponds to a specific symbol.

3.1.3 Holographic Permutation

Unlike most typically used algebras, holographic representations come equipped with a third operation: permutation. Permutation here is not the randomized permutations of combinatorics, but rather a rotation in the indices.

The standard notation for permutation is Π_j , with j the rotation count. In other words, Π_j means that the 0-th index values for all HV have been shifted to the j -th index, the 1st index is now the $j + 1$ -th, the d -th index now the $j - 1$ -th, and so on. Holographic permutation is thus also invertible, simply by using Π_{-j} or equivalently Π_{d+1} .

A key value of this is that it can enforce ordering. We can prevent commutativity and associativity of the binding operation specifically where desired, simply via permuting in between sequential bindings. For example,

$$\Pi_3 c \otimes \Pi_2 b \otimes \Pi_1 a \neq \Pi_2 c \otimes \Pi_1 b \otimes \Pi_3 a$$

²⁴In terms of vector similarity. The algebra remains closed under binding just as under addition.

$$\begin{aligned} (a \otimes b) \otimes (c \otimes d) &= (a \otimes d) \otimes (b \otimes c) \\ (a \otimes b) \otimes \Pi_1(c \otimes d) &\neq (a \otimes d) \otimes (b \otimes c) \end{aligned}$$

3.2 Complex Holographic Algebra

The following summary of a basic Complex Holographic Algebra is drawn from a paper by McDonald et al, who are to our knowledge the first to develop one in the literature.[79] In a complex holographic algebra the symbol universe is composed of HV not in \mathbb{R}^d , but \mathbb{C}^d . From this universe, some collection of regions correspond to different symbols within our dictionary.

In discrete time this would take the form $e^{i2\pi(t/r)}$ with discrete time t and period resolution r . In continuous time, we can of course simply rescale t however we like.

3.2.1 Similarity in a Complex Holographic Dictionary

Just as with real-valued HV, cosine similarity is the metric we can use for complex HV.²⁵

$$\text{sim}(\psi, \varphi) = \cos(\psi, \varphi) = \frac{\psi \cdot \varphi}{\|\psi\| \|\varphi\|} = \frac{\sum_i \psi_i \varphi_i}{\sqrt{\sum_j \psi_j \psi_j} \sqrt{\sum_j \varphi_j \varphi_j}} \quad (3)$$

3.2.2 Complex Holographic Addition

The most straightforward version of addition is simple complex number addition, but with a further normalization to retain a unit-magnitude phasor. This results in a loss of some information, making complex HV addition only approximately reversible.

3.2.3 Complex Holographic Binding

Binding in the complex holographic algebra is the same as a normal product of two phasors, so we simply add the exponents.

$$\psi \otimes \varphi = e^{i\theta_\psi} \otimes e^{i\theta_\varphi} = e^{i(\theta_\psi + \theta_\varphi)} \quad (4)$$

Inversion then becomes multiplication with the complex conjugate,

$$\psi^* \otimes \psi \otimes \varphi = \varphi \quad (5)$$

4 Projective Holography

While the phasor-based HDC algebra developed by McDonald et al. is effective for complex-valued data such as classical analog signals processing, for example,[79] it is insufficient for our purposes. With qubits we must additionally account for whatever property (often spin) is to be mapped to measurement outcomes – and likewise for cogits. The Bloch sphere²⁶ provides a convenient representation for this, and is shown in Figure 2. While describing the statistics of distances between purely random cogits could be quite problematic in some approaches to formulating the problem, the distances are uniformly distributed if assessed in terms of angular distances rather than surface distances. This drastically simplifies the problem of analyzing error-tolerance in Projective Cognition prior to measurement. Measurement error can be assessed similarly to how one would analyze distances between classical HV, but with some additional caveats we will discuss later.

4.1 Cogit Hypervectors

As we construct our formulation of a cogit holography, let us first start with the general form of the core property which makes HV useful: concentration of distance distributions.

On a Bloch sphere (see Figure 2), we define states in terms of azimuthal angles θ and φ . For a complete analysis both are usually required, but if our goal is to make statements about distances between states this is not the case. Supposing a set of randomly selected points on the Bloch sphere which are uniformly distributed with respect to angles, we can see that a HV is simply a vector of such states. So a system with many cogits is already capable of implementing a Projective HV, with the usefulness of that representation scaling with the distributional properties we will now discuss.

While physically there is a meaningful distinction between θ and φ , in terms of abstract distances between states, they may or may not be relevant.

In the most basic case, we could simply take any two phasors pairwise and define the axis perpendicular to the surface arc between them as our momentary axis of interest. Further, we can rotate about this axis such that one phasor's angle about this axis is zero. It is then clear that the

²⁵Recall that by contrast binary HV use Hamming distance. Both will be used for Quantum Holography.

²⁶A graphical representation of a qubit, where each axis corresponds to one of the three Pauli matrices whose weighted sum (normalized to unit length) describes a qubit.




Figure 2: The Bloch sphere graphically represents qubits – and thus cogits – in terms of one angle φ corresponding to the phasor component and a second angle θ corresponding to relative probabilities of a qubit/cogit being measured as 0 or 1. The notation $|0\rangle$ and $|1\rangle$ are used to represent the states which exist in superposition in a qubit/cogit. Image credit: Wikimedia Commons.[81]

angle between the two will be uniformly distributed on account of those angles being circular, with this new angle ϑ being uniform across $[0, \pi]$.

We can extend this to all the phasors making up a PHV in much the same way the binomial distribution can be used to study Hamming distance statistics with binary HV. Rescaling angles by $\frac{1}{\pi}$, the sum of the distances can be expressed as an Irwin-Hall distribution with probability distribution function:[82]

$$f_{\Theta}(x, n) = \frac{1}{(n-1)!} \sum_{k=0}^n (-1)^k \binom{n}{k} (n-k)_+^{n-1} \quad (6)$$

$(n-k)_+$ denotes a function returning 0 if $n-k < 0$ and $n-k$ otherwise.

The Gaussian approximation resulting from the blessings of the Central Limit Theorem is $f_{\Theta}(x, n) \sim \mathcal{N}(\mu = \frac{\pi}{2}, \sigma^2 = \frac{\pi^2}{12})$. We then rescale this distribution by n – to normalize over the number of phasors – and π – to restore the original angle distribution range. Since a linear rescaling will act on the standard deviation rather than the variance, our rescaled values are $\mu = \frac{\pi}{n} \frac{n}{2} = \frac{\pi}{2}$ and $\sigma = \frac{\pi}{n} \frac{\sqrt{\pi}}{\sqrt{12}} = \frac{\pi}{\sqrt{12n}}$.

$$f_{\Theta}(x, n) \sim \mathcal{N}\left(\frac{\pi}{2}, \frac{\pi^2}{12n}\right) \quad (7)$$

With this of course holding only for n sufficiently large. However, on the scale of hundreds (if not thousands) of phasors, the approximation is quite good.

For a 1,000-dimensional PHV, for example, the normalized angular distances between random PHV fall outside the range of 0.475 and 0.525 at a rate of only about 1 in 10^6 . This means that PHV retain the same distance property which makes classical HV so useful. With the normalized standard deviation decreasing as $1/\sqrt{n}$, higher-dimensional PHV result in normalized distances between random PHV which are ever more strongly concentrated around $\pi/2$. Just as HV are robust to machine noise because distance statistics replace the encoding of information in precise state values with encoding via relative distances in a hyperspace, this phasor equivalent provides robustness to noise in quantum gates and aggregate outcomes of cognitive processes themselves.

4.2 Operations for Projective Holographic Algebra

The algebra for cogits will contain the three essential operations of all hyperdimensional computing algebras, along with an additional two operators for measurement and dynamics. The first is added because for both qubits and cogits one must make phenomenological measurements and cannot assess certain properties of a state without measuring it. The second is added because binding of hypervectors is insufficient to describe the fact that underlying processes transform the hypervectors without needing to interact with another hypervector.

4.2.1 Similarity

We are not aware of any mechanism for assessing the similarity of qubit or cogit HV prior to measurement. However, describing measurements is very straightforward, and also sufficient for us to use the advantageous properties of HDC.

4.2.2 Addition

For projective hypervectors, superposition offers a very natural way to perform hypervector addition. Because superposition is not invertible, per se, PHA lacks an additive inverse.

4.2.3 Binding

Here we can handle phase binding via the mathematical formulation of what are in quantum computing termed Controlled-Phase gates, which will add the phase angles of two cogits. By matching cogits pairwise from two PHV, this extends directly to the many-cogit setting.

4.2.4 Measurement

Measurement for the PHA is simply the normal measurement process of projective statistics. For some state $|\psi\rangle$ and state of interest $|a\rangle$ one has the standard Born rule:

$$\Pr[a] = \langle a|\psi\rangle$$

Or, if one prefers to describe measurements in terms of measurement operators with a set of M_a corresponding to each state of interest $|a\rangle$:

$$\Pr[a] = \langle \psi|M_a^\dagger M_a|\psi\rangle$$

4.2.5 Dynamics

Once again using the standard mathematical formalism, dynamical processes transforming one state ψ into another state ψ' are described as

$$|\psi'\rangle = H|\psi\rangle$$

where H is the operator describing the dynamics of the system.

4.2.6 Permutation

Because cogits share their basic mathematical properties with qubits, they similarly require a vector of length $n = 2^N$ to describe N cogits. This is because the HV is formed via taking the tensor product $|\psi\rangle = |\psi_1\rangle \otimes |\psi_2\rangle \otimes \dots \otimes |\psi_{N-1}\rangle \otimes |\psi_N\rangle$. Similarly, if an x -permutation $|\psi_i\rangle \rightarrow |\psi_j\rangle$ such that $i = \{1, \dots, N\} \rightarrow j = \{N + x, 1, \dots, N - x - 1, N - x\}$ is performed, any operator H describing dynamics of $|\psi\rangle$ must be rearranged according to that same change in ordering of the HV.

5 Statistics of High-dimensional Cogit Vectors

Having discussed a means of linking the mathematics of Hyperdimensional Computing with that of Projective Cognition, we now turn to analyzing the statistical robustness both of dynamics within a system and of measurements of system states. In the context of Projective Cognition, these are – respectively – cognitive processes and assessments of cogit states (via questions, behavioral tests, or any other form of assessment).

5.1 Gate Fidelity Statistics

To assess whether the blessing of dimensionality is preserved in cogits in the presence of noise, we consider as an example the mathematical description of an amplitude-damping gate from quantum computing. In the context of cogits, amplitude-damping is analogous to reducing certainty regarding the probabilities of different possible future states or measurement outcomes. In other words, it damps the cogits along the $|0\rangle - |1\rangle$ axis on the Bloch sphere.²⁷

For amplitude-damping gate with Kraus operators²⁸

$$A_0 = \begin{bmatrix} 1 & 0 \\ 0 & \sqrt{1-\gamma} \end{bmatrix}$$

$$A_1 = \begin{bmatrix} 0 & \sqrt{\gamma} \\ 0 & 0 \end{bmatrix}$$

the expectation of the maximal change of the difference between two states will be along the Bloch sphere z -axis, and will be of magnitude $2\sqrt{\gamma}$. This is because we are considering two cogits whose amplitudes have been damped, and because considering the differences in states along any other axis – whether x , y , or some combination of the three axes – would result in a change in distance of less than $2\sqrt{\gamma}$. Similar calculations can of course be performed for phase or a combination of amplitude and phase. The upper bound on the expectation of distance change is $\delta_\theta = \sin^{-1}(2\sqrt{\gamma})$. If – for the sake of cleaner mathematical analysis – we make the simplifying assumption that this noise is approximately equal for all cogits, we can again use the Irwin-Hall distribution, now on the interval $[0, \pi - \sin^{-1}(2\sqrt{\gamma})]$.

²⁷See: Figure 2

²⁸The term for the matrix description of operations which is the one most often used in quantum mechanics and quantum computing. Given only systems on the scale of hundreds of cogits or more are being considered in this paper, to our knowledge there is no reason to opt for the more detailed Lindblad description. This is a technical note which will not be of significance to most readers, but is included for the sake of readers familiar with quantum computing.

Because of how we have framed the distance statistics in terms of geometry on the Bloch sphere, we can directly apply the classical algebra of random variables. As such, the Gaussian approximation of the Irwin-Hall distribution goes from the prior baseline

$$f_{\Theta}(x, n) = \mathcal{N}\left(\frac{\pi}{2}, \frac{\pi^2}{12n}\right) \quad (8)$$

to the post-damping distribution

$$f_{\Theta}(x, n) = \mathcal{N}\left(\frac{\pi - \sin^{-1}(2\sqrt{\gamma})}{2}, \frac{\pi^2}{12n}\right) \quad (9)$$

This then describes the distribution of distances between pairs of PHV which have been randomly distributed across the Bloch sphere and then subjected to amplitude-damping noise. Similar calculations can readily be performed for other noise models such as phase-damping or – for maximal generality – an anisotropic depolarization.

5.2 Measurement Statistics

We have shown that PHV states possess the appropriate distance statistics, and now move to discuss measurement robustness properties. For a given cogit's state $|\psi\rangle = \alpha|0\rangle + \beta|1\rangle$, we have $\Pr(0) = \alpha^2$ and $\Pr(1) = \beta^2$. For the sake of notational cleanliness in what follows, we will instead use $p = \alpha^2$.

Suppose then that there is some probability p_i for the i -th cogit to be measured as state $|1\rangle$ in the absence of noise, and then some uniform probability q for the noise of our measurement process. There are then four outcomes. A “true” (from the perspective of noise) measurement of $|0\rangle$ with probability $(1-q)p_i$, a true measurement of $|1\rangle$ with probability $(1-q)(1-p_i)$, a false measurement of $|0\rangle$ with probability $q(1-p_i)$, and a false measurement of $|1\rangle$ with probability qp_i . Because we are dealing with large numbers of cogits, in the following analysis we can reasonably approximate the p_i as equal, and will use p to denote this.

This describes a mixture distribution of a noisy measurement of value x with an underlying Bernoulli trial, and has the probability distribution function

$$f(x) = (1-q)p^x(1-p)^{1-x} + q(1-p)^x p^{1-x}$$

From here, we construct a description of the distance probabilities for measurements taken of two random PHV. As with classical hypervector distance statistics, the normalized mean distance would be 0.5. This holds whether the measurement error probabilities are uniform across all cogits – i.e. for $q_i = q \forall i = \{1, 2, \dots, n\}$ – or non-uniform, because for random PHV the cogits will be statistically interchangeable. That is, there would be no significance to the pairing of respective measurement error probabilities with cogits because the indexing of the cogits is irrelevant in describing uniformly randomly distributed PHV.

From here, we move to a compound distribution of these mixture distributions, analogous to the move from Bernoulli trial to binomial distribution. In our mixture case, this is described by the function $\Pr[k] = \sum_{j=0}^k [(1-q)p^j(1-p)^{1-j} + q(1-p)^j p^{1-j}]^n$ where j is the number of true Bernoulli “successes” (in our context, the number of cogits where the two PHV measurements would have matched in the absence of error), k is the number of measured “successes”, and n is the number of “trials” (dimension of the two PHV).

We would like to speak to the case where the measurement errors are not uniform. Using the language of Bernoulli and binomial distributions for clarity's sake, for the Bernoulli/binomial-with-error case we are considering the mean of a single trial i is $\mu_i = (1-q)p + q(1-p) = p + q - 2pq$, and the variance is $\sigma_i^2 = (p + q - 2pq)(1 - p - q + 2pq)$. The mean and variance over n identical trials are $\mu = n(p + q - 2pq)$ and $\sigma^2 = n(p + q - 2pq)(1 - p - q + 2pq)$.²⁹

Applying the central limit theorem to our modified distribution, the probability of two noisy measurements of the same underlying PHV having similarity – that is, n minus the Hamming distance – greater than or equal to some z can be approximated by a Gaussian distribution with the preceding mean and variance. We can approximate the cumulative probability function using the Gaussian error function erf by integrating the Gaussian from $-\infty$ to 0 and then subtracting half the erf function for a given $z \geq 0$. This is equivalent to multiplying the error complement function, erfc , by $\frac{1}{2}$.

$$\begin{aligned} \Pr[Z \geq z] &\approx \frac{1}{2} - \frac{1}{\sqrt{2}} \text{erf}\left(\frac{z - n(p + q - 2pq)}{\sqrt{2n(p + q - 2pq)(1 - p - q + 2pq)}}\right) \\ &= \frac{1}{2} - \frac{1}{\sqrt{\pi}} \sum_{i=0}^{\infty} \left[\frac{(-1)^i}{(2i + 1)!} \left(\frac{z - n(p + q - 2pq)}{\sqrt{2n(p + q - 2pq)(1 - p - q + 2pq)}}\right)^{2i+1} \right] \end{aligned}$$

While p was kept in variable form for the sake of the above analysis, for the statistics of uniformly random PHV it will simply be 0.5 as even an error-free measurement would be equally likely to yield

²⁹Normalizing by the dimension as in prior sections, we have $\mu = p + q - 2pq$ and $\sigma^2 = \frac{1}{n}(p + q - 2pq)(1 - p - q + 2pq)$, so again the normalized variance scales down with increasing dimension.

0 or 1. In other words, we can in some sense integrate out the measurement errors when considering random PHV. Our simplified equation is then

$$\begin{aligned}\Pr[Z \geq z] &\approx \frac{1}{2} - \frac{1}{\sqrt{2}} \operatorname{erf} \left(\frac{z - n/2}{\sqrt{n/2}} \right) \\ &= \frac{1}{2} - \frac{1}{\sqrt{\pi}} \sum_{i=0}^{\infty} \left[\frac{(-1)^i}{(2i+1)!} \left(\frac{z - n/2}{\sqrt{n/2}} \right)^{2i+1} \right]\end{aligned}$$

Interestingly, while the measurement errors are very much relevant in the general case, they cancel from the expression when we are considering the distance statistics solely of uniformly random PHV. The $p = 0.5$ case in fact turns out to be equal to the statistics for classical hypervector distances in a setting free from error in measurements of the individual Bernoulli trials. For a 1,000-dimensional PHV distances are clustered tightly around 0.5, and only about 1 in 10^6 measurements will have a normalized pairwise distance³⁰ outside the range 0.425 and 0.575.

In fact, the same property holds for assessing fidelity between a true PHV's probabilities and the measured probabilities from repeated tests. In this case we have the measurements as Bernoulli trials of each cogits, with a success simply a question of whether or not a bit-flip error occurred in the process of measuring. The mean is then $n(1 - q)$ and variance $n(1 - q)q$, and the distances can be described similarly to the above as

$$\begin{aligned}\Pr[Z \geq z] &\approx \frac{1}{2} - \frac{1}{\sqrt{2}} \operatorname{erf} \left(\frac{z - n(1 - q)}{\sqrt{2nq(1 - q)}} \right) \\ &= \frac{1}{2} - \frac{1}{\sqrt{\pi}} \sum_{i=0}^{\infty} \left[\frac{(-1)^i}{(2i+1)!} \left(\frac{z - n(1 - q)}{\sqrt{2nq(1 - q)}} \right)^{2i+1} \right]\end{aligned}$$

Again using as reference a 1,000-dimensional PHV, with an error probability $q = 0.25$ we would find that around 1 in 10^6 measurements will have a normalized distance from the true measurement that's less than 0.185 or more than 0.315. Yet even at an error rate of $q = \frac{1}{3}$ – with a $1 - 10^{-6}$ confidence range of 0.26–4.0 – we can see that a 1,000-dimensional PHV still allows us to distinguish with high statistical confidence between noisy measurements of the same PHV and measurements of a random PHV. The favorable statistical properties of the geometry of classical HV not only hold in terms of distances between PHV measurements, but also in terms of the difference between PHV measurements and ground truth. The former provides foundational utility, and the latter has the potential to drastically reduce the number of cognitive/psychological tests and/or sequential runs of an algorithm needed. The blessing of dimensionality thus makes it much easier to confidently distinguish between noise vs. substantive differences in the setting of Projective Holographic Computation – and thus Projective Holographic Cognition.

As with the classical binary case, the advantage of HDC in the Projective Holographic Cognition setting scales rapidly with increasing dimensionality. For two random hypervectors, as n increases the probability mass of their normalized Hamming distances increasingly concentrates around 0.5. So too with PHV. The intuition – if it can be called that – is the for any given random vector of “flipped” bits which moves the measurements away from the probabilities associated with a PHV, the noise will with high probability also move it away from any other random PHV in high-dimensional space. This is the essence of the blessing of dimensionality, and its extension to the case of quantum computing and Projective Holographic Cognition opens the door to potentially radical improvements in the robustness of quantum computation.

Because there already exists a robust body of literature on algorithms for classical HDC, including previously cited works such as [31, 32, 33, 35, 36, 54] but also across the entire field of HDC, this represents a potentially very fruitful intersection and opportunity to adapt new algorithms to quantum computers – and perhaps to cognitive science as well. As an aside, while we anticipate that HDC's usefulness in quantum computing will depend on context just as it has for classical computing, our hope is that it will not only bring new algorithms to quantum computing but also enable the development of novel quantum algorithms de novo. Reformulating information in terms of distances rather than specific values is a significant departure from the norm in quantum algorithms, but as we have shown, the robustness gains can be substantial. For Cognitive Security, however, the robustness of Projective Holographic Cognition is central.

5.3 Operational Dynamic Analysis

We now turn to discussing the practical implications of the statistical properties demonstrated above. Just as in Hyperdimensional Computing, favorable properties of high-dimensional geometry can be expected to make measurements of large numbers of cognitive states remarkably robust. Even with the significant degree of noise and myriad other challenges known to exist in many forms of

³⁰Recall that in HDC one describes normalized distances as the Hamming distance divided by the dimension of the HV.

psychological and cognitive assessment,[83, 84] HVs remain easily distinguishable on the scale of such high error rates as to at least mitigate most such effects. Further, correlational structure among cogits in a given PHV would enable error-correction. It is these correlations within individuals’ cogits, and those between the cogit HVs of different individuals, which are likely to enable greater robustness in machine learning models correlating neural activity with cognition as the scale of cogits considered increases. Additionally, the empirical fact that different people share beliefs in common to differing degrees shows that similarities in the correlation structures of different individuals’ cogit HVs are all but inevitable. This presents the opportunity for transfer learning from models derived from population-level experimentation over to models which target more specific groups – or perhaps even individuals.

Similarly, models of the dynamics of cogit HVs over time will almost inevitably have correlations between individuals, because of the empirical fact that some people think more similarly than others. This extends the potential for transfer learning between different models linking neural activity with changes in cogits over time.

Two general brainjacking scenarios are of interest. The first is attempts by malicious actors to *identify* cognitive states against a subject’s will, and the second is attempts to *modify* cognitive states against the subject’s will. We term them Readout Attacks (RA) and Alteration Attacks (AA). These could range from blatantly dangerous situations like prisoners being interrogated by an authoritarian regime, to superficially benign yet still fundamentally malign cases like invasive methods of optimizing the manipulative efficacy of advertising or propaganda. Interrogation and focus groups, respectively, taken to new levels. A fine-grained survey of attack types is given by Bernal et al,[15] but for the purposes of this paper we will focus on these two broad categories rather than expanding the discuss to the fine-grained level of differing attack types provided in their excellent overview.³¹

In efforts to read out and/or modify cognitive activity, there are at least three broad levels at which machine learning models could be developed. Because we are not aware of any existing terminology for this topic, the three categories we anticipate are described below. The general goal of analyzing neural activity for cognitive readouts is to connect the dynamics at the relevant scale of monitoring with the cognitive operations they produce. We term this “Operational Dynamic Analysis”, or ODA. Of note, here “Dynamic” does not refer to the cogit dynamics, but instead to neural dynamics. Whether one is attempting to infer a cogit state HV at one approximate point in time or to infer the dynamics of cogit HVs over time, the dynamics of neural activity will be the data input into such models. The three subtypes we delineate are

- α -ODA : Methods of analysis which enable the prediction of dynamical correlates of an individual’s cognition related to one or more topics, beliefs, cognitive processes, etc. by learning via assessment across a broad population.
- β -ODA : Methods of analysis which enable the learning and prediction of dynamical correlates of an individual’s cognition related to one or more topics, beliefs, cognitive processes, etc. via assessment across a group of similar individuals.
- γ -ODA : Methods of analysis which enable the learning of precise dynamical correlates of one individual’s cognition related to specific topics, beliefs, cognitive processes, etc. by learning via assessment of a single individual.

There will presumably be different contexts where each proves most useful, but in general we imagine a progression of model generation and refinement which could move bidirectionally across the range from α to γ -ODA. Unless neural correlates of belief turn out to have such high variance between individuals that there is a complete lack of consistent patterns for transfer learning, or are so similar that refinement for individual subjects is unnecessary, one could benefit from constructing a general model from a population of subjects. Likewise, one could benefit in broadening or improving the efficacy of a population model via transfer learning from models developed from analyzing single individuals or groups of similar individuals. Given the inherent infeasibility of preventing malicious actors from accessing data from a population sample,³² and all the more so data on small groups or individuals, security considerations will need to center on hampering attacks at the level of individual brains. Acknowledging the impossibility of preventing malicious actors from developing tools, we instead focus on the need for strategic defense methods.

6 Readout Attacks

Within the framework of Projective Cognition, for reading out a neural state distribution Q to a cognitive state ψ there will be a learned α model $\{\Pr[\psi_t = \varphi_i]\}_{i=1,\dots,m;t=1,\dots,k} = F(Q)$ with F incorporating the M_i measurement operators mapping a cognitive state to the probability of some observable φ_i . That is, a readout of underlying cognition to testable results. For each potential measurement outcome of interest, there can be a different measurement operator.

³¹Essentially all items on the Bernal et al list can be collected under these two broad categories, so follow-up work to this paper could explore with greater depth the application of this paper’s framework to the subtypes they present.

³²State actors or other well-funded groups attempting such attacks would have access to the manpower and resources to collect their own data and build their own models.

Using the Probably Approximately Correct (PAC) framework for machine learning, we will have some hypothesis class $F \in H_\alpha$ of potential model functions corresponding to α -ODA, and similarly for β and γ . The various M within these models will be unitary matrices of the appropriate dimension for ψ , as is required to return normalized probabilities.

A general means of interfering with RA would be to inject noise, much as with the reconstruction attacks of Differential Privacy.[19, 20] This can be done via the Bonaci et al BCI Anonymizer,[26] assuming no air-gap attacks are developed for current and future BCI technologies. However, one could also use a secondary implanted system which introduces noise into the neuronal function itself.³³ Given a sufficiently complex time-varying function for generating a noise kernel and experimentation to optimize such hardware and the noise signals they produce, a physically hardened device would be resistant to both traditional and air-gap attacks while providing a form of privacy much more difficult to circumvent. The goal would be to inject noise such that a metric of model dissimilarity S is maximized over noise which minimizes impact on cognition. For the sake of ease of analysis, we will assume it is technological in origin to improve flexibility in optimizing noise \aleph . While we envisage this as described above, the mathematical statements apply equally to something akin to the BCI Anonymizer,[26] replacing induced physiologic noise with noise injected between the recording portion of the hardware and the portion performing computations. For AA there would in fact be no difference if it were physiologic noise vs. something like a BCI Anonymizer, but for RA the below would become more similar to the Bonaci et al approach. Our results thus remain applicable even for more indirect approaches to security, in the vein of BCI hardware modifications. However, such approaches retain the greater vulnerability to potential air-gap attacks, and given the stakes and potential gain for malicious actors we expect a great deal of thought and malign innovation will be directed towards developing such attacks as BCI become more common.

6.1 Model-Aware Defense

We will begin by discussing an approach which assumes some level of knowledge of the possible models attackers may leverage. In a later section we will discuss defense which does not assume any knowledge of the potential models or model types which attackers may employ. However, any bounds on such a Model-Agnostic Defense would almost certainly be sub-optimal for many possible models. To assess Model-Aware Defense one would ideally like to be able to define some analogue of a cryptographic universe. However, the complexity of the Cognitive Security problem and breadth of potential elements of H_A and H_D makes constructing such universally strong theorems challenging – if not impossible. Instead, we acknowledge the limitations of Model-Aware Defense and present relevant ideas before moving to their generalizations in Model-Agnostic Defense.

Definition 1 (State Model-Optimal Noise). *Let D_{QJS} the quantum Jensen-Shannon divergence, $F \in H$ a model mapping distributions of neural activity to distributions of cognitive states, S a normalized metric of distributional dissimilarity in the predictions made by models $F \in H$, appropriate for a given H . Assuming a projective cognition model and a classical description of neural activity, for baseline neural state distribution Q , neural noise distribution \aleph , empiric cognitive noise $\eta(\aleph)$, baseline cognitive distribution A , and post-noise cognitive distribution $B = A + \eta(\aleph)$, distribution \aleph is state model-optimal **if** for a constraining parameter λ and a required minimum dissimilarity $\mu \in [0, 1]$,*

$$\hat{\aleph} = \arg \max_{\aleph} \left(\min_{F \in H} S(F(Q), F(Q + \aleph)) \right) - \lambda D_{QJS}(B, -\eta(\aleph))$$

s.t.

$$\min_F S(F(Q), F(Q + \aleph)) \geq \mu \quad \forall F \in H$$

That is, one identifies a noise input distribution which will have the best worst-case performance against all models under consideration, subject to a requirement that prediction must be impaired by a minimum amount. The constraining parameter λ allows defenders to weight the relative importance of obfuscation vs. the degree to which protective noise alters cognition.

The defenders infer $\eta(\aleph)$ from assessment of how different \aleph impact cognition. The quantum JS divergence (QJSD) is chosen because of its normalization, given the Kullback-Liebler divergence (KLD) is unbounded. We multiply the cognitive noise η by -1 so that the D_{QJS} quantifies the information needed to identify A , as the JSD and its quantum equivalent measure the information needed to identify a mixture of distributions given one of the distributions. In this case, given post-noise observations B we want to measure the information needed to identify A , which is $B - \eta$. With the $-\lambda$ weighting, we seek to minimize this additional information. The goal of an attacker will be to identify a true distribution given observations from some altered distribution, the inefficiency of which is measured by the JSD (and in this case, its quantum analog). In this manner, one aims to leverage the intrinsic noisiness and robustness of biological neural computing in order to confound readouts by producing properties which maximally exploit out-of-distribution weaknesses of readout models, while preserving the underlying cognition itself.

³³Such a secondary device would need to be physically separate from the main device to at least some extent in order to mitigate air-gap attacks, as magnetic and acoustic air-gap attacks would likely be difficult to defend against without such separation. In this case, the brain's own magnetic activity would serve to shield a physically distanced noise generator from potential air-gapped magnetic attack via the main interface.

For a population of n subjects, this definition could be modified slightly to additionally take the $\arg \min_{Q \in \{Q_1, Q_2, \dots, Q_n\}}$ in order to provide a worst-case bound over some population, or performance could be assessed by averaging over $\{Q_1, Q_2, \dots, Q_n\}$. Similarly, for time-series data Q_t with t representing different times at which neural states are evaluated, and A_t and B_t time series data of the cognitive distributions.

Similarly, one could consider the problem of defending against attempts to characterize the operators describing the dynamics of cognition. In this case, we would have the following:

Definition 2 (Dynamics Model-Optimal Noise). *With D_{QJS} the quantum Jensen-Shannon divergence, $\|\cdot\|$ the standard matrix norm³⁴, $G \in H$ a model mapping distributions of neural activity to distributions of operators representing cognitive dynamics, and H a hypothesis class under consideration. Assuming a projective cognition model and a classical description of neural activity, for baseline neural state distribution Q , baseline cognitive distribution A , and post-noise cognitive distribution $B = A + \eta(\aleph)$, neural noise distribution \aleph , distribution \aleph is dynamics model-optimal **if** for a constraining parameter λ , and a required minimum dissimilarity $\mu \in [0, 1]$,*

$$\hat{\aleph} = \arg \max_{\aleph} \left(\min_{G \in H} \frac{1}{2} \mathbf{E}(\|G(Q) - G(Q + \aleph)\|) \right) - \lambda D_{QJS}(B, -\eta(\aleph))$$

s.t.

$$\min_G \|G(Q), G(Q + \aleph)\| \geq \mu \quad \forall G \in H$$

As with State Model-Optimal Noise, for Dynamics Model-Optimal Noise we can trivially modify the definitions to consider time-series data or population data. Of note, because $G(\cdot)$ is a unitary operator we know $\|G(\cdot)\| = 1$. The operator norm is bounded as $0 \leq \|G(Q) - G(Q + \aleph)\| \leq 2$ - and so $0 \leq \mathbf{E}(\|G(Q) - G(Q + \aleph)\|) \leq 2$ as well. The division by 2 ensures that the first term has the same $0 \leq \cdot \leq 1$ bounding as the quantum Jensen-Shannon divergence. Population and/or time-series data can be considered as with State Model-Optimal Noise.

Distributions play a key role for both attacker and defender, in this problem. While the attacker will have difficulty predicting the noise ϵ they will encounter,³⁵ without information about the models of attackers, the defenders will themselves have distributions over the respective hypothesis classes. Indeed, the hypothesis classes may be so broad as to be intractable if considered as generally as possible. We can thus take a few different general approaches to optimization of ϵ .

The naive approach is to simply assess a wide ensemble of function classes. Among those with performance above some arbitrary threshold μ , define the union of their function classes as the defender hypothesis class. $H_D = \{\cup_j H_j\} \forall j$ such that $\inf H_j(Q) - H(Q + \aleph) \geq \mu$. In this case, one must make the assumption that the cardinality $|\{\{H_D \oplus H_A\} - H_D\}|$ - in terms of function classes within the attacker and defender hypothesis classes H_A and H_D - is sufficiently small. It is likely impossible to make any precise statements about what would count as "sufficiently small", given it is impossible to say with certainty what element of $\{\{H_D \oplus H_A\} - H_D\}$ is most robust against the chosen ϵ .

In this approach one then simply performs the optimization problem from Definition 1 or Definition 6 using the heuristically determined H_D . While this is the simplest and most straightforward, the difficulty in making any precise claims about its performance renders absolute security guarantees impossible. Empirical results are straightforward to determine. While not universal guarantees, we expect that such results will be sufficient in many practical settings. In practice cybersecurity requires identification of vulnerabilities and rapid and effective patching of defects which are discovered or exploited. No universal guarantees can be provided for highly complex systems. Similar approach could thus be applied in cases where new model types are discovered, and \aleph adjusted to defend against them.

To make more general statements, however, we must describe the problem in a way which does not consider specific collections of models.

6.2 Model-Agnostic Defense

Any system for an attacker to read out cognitive states will need to use information-theoretic properties of brain activity in order to correlate them with cognition. As laid out very neatly by Bonaci et al,[26] such information-theoretic descriptions provide a strong foundation for problems of this sort. Here we adapts and extend such ideas so as to interface with the precise mathematical description of cognitive states. This is the space in which ϵ operates. Meanwhile, we would like to perturb cognitive state ψ as little as possible. This allows us to define optimal noise in a way which is more fundamental, though we do not make conjectures as to whether it or State Model-Optimal Noise (SMON)/Dynamics Model-Optimal Noise (DMON) will be more useful in any given context as there are tradeoffs for each.

The maximal reduction of information in attempts to read out neural activity will be the maximization of the Jensen-Shannon divergence (JSD) of some underlying high-dimensional distribution

³⁴ $\sup_{\|v\| \neq 0} \frac{\|Mv\|}{\|v\|}$

³⁵Or at least they must in the case where defense will have any effect.

and a second distribution with added noise. Minimizing the impact on cognition represents a minimization of the the JSD’s quantum analog, as in Definition 1 and Definition 6. Because these divergence metrics measure the amount of additional information needed to determine one distribution given another (in this case the true distribution given the altered one), these divergences represents exactly the efficacy of readout mitigation. We would like for the adversary to require as much additional information as possible for any given increase in the distinguishability of baseline cognition vs. cognition in the presence of protective noise.

So we then define the following.

Definition 3 (State Information-Optimal Noise). *Let D_{JS} be the classical Jensen-Shannon divergence and D_{QJS} the quantum Jensen-Shannon divergence. Assuming a projective cognition model and a classical description of neural activity, for baseline neural state distribution Q , neural noise distribution \aleph , empiric cognitive noise distribution $\eta(\aleph)$, baseline cognitive distribution A , and post-noise cognitive distribution $B = A + \eta$, distribution \aleph is state information-optimal **if** for a constraining parameter λ and a required minimum dissimilarity $\mu \in [0, 1]$,*

$$\begin{aligned} \hat{\aleph} &= \arg \max_{\aleph} (D_{JS}(Q, -\aleph) - \lambda D_{QJS}(B, -\eta(\aleph))) \\ \text{s.t.} \\ D_{JS}(Q, Q + \aleph) &\geq \mu \quad \forall F \in H \end{aligned}$$

Similarly,

Definition 4 (Dynamics Information-Optimal Noise). *Let D_{JS} be the classical Jensen-Shannon divergence and D_{QJS} the quantum Jensen-Shannon divergence. Assuming a projective cognition model and a classical description of neural activity, for baseline neural state distribution Q , neural noise distribution \aleph , function $\kappa(\aleph)$ mapping neural activity noise to cognitive dynamics noise, baseline cognitive dynamics operator distribution Λ , and post-noise cognitive distribution $\Delta = \Lambda + \kappa(\aleph)$, distribution \aleph is state information-optimal **if** for a constraining parameter λ and a required minimum dissimilarity $\mu \in [0, 1]$,*

$$\begin{aligned} \hat{\aleph} &= \arg \max_{\aleph} (D_{JS}(Q, -\aleph) - \lambda D_{QJS}(\Delta, -\kappa(\aleph))) \\ \text{s.t.} \\ D_{JS}(Q, Q + \aleph) &\geq \mu \end{aligned}$$

As with SMON and DMON, one would modify the definition to take the $\arg \min_{Q \in \{Q_1, Q_2, \dots, Q_n\}}$ in order to provide a worst-case bound over some population, or average over $\{Q_1, Q_2, \dots, Q_n\}$ if mean performance was the priority. Likewise with time-series Q_t , or a combination of the two.

Because this definition is model-agnostic, State Information-Optimal Noise (SION) and Dynamics Information-Optimal Noise (DION) are a more generalized but less targeted counterpart SMON and DMON. The distributions can be defined based on data from a single individual or some collection of individuals, and as long as this is kept consistent it will be able to outperform any given SMON in the general case. Let us now consider the difference between security and similarity. In both model-optimal and information-optimal noise, the first term of the objective function determines security - that is, the difficulty of performing a readout attack - while the second defines dissimilarity between the cognitive distributions with and without noise.

There is a tradeoff to be had between the two, and neither definition strictly supercedes the other. While SION/DION would offer the broadest protection, SMON/DMON enables a more targeted approach. We anticipate that in at least some contexts SMON/DMON will be able to achieve a given level of protection with notably less alteration of cognitive dynamics than SION/DION. As a simple proof, one can consider a hypothesis class of models which read out the state and/or dynamics from a subset of five variables out of some much larger vector of data.³⁶ While SION would impact all variables, SMON could limit itself to altering only the five assessed by the given models. Although this trivial example is not representative of real settings, it does demonstrate the core principle. For at least some models, SMON/DMON will require less alteration of neural activity than SION/DION for a given level of performance.

7 Alteration Attacks

AA present what may prove to be a more challenging problem. With RA there may be no “brute-force” approach, so to speak, but for AA a brute-force attack would be both straightforward and difficult (if not impossible) to counter. By increasing activity of reward circuits, one could readily associate some stimulus with positive mental states and in this fashion alter cognition by leveraging baseline neurologic processes. It is likely that defending against AA will require prioritizing detection, and attackers would then face a tradeoff between the degree of alteration and the likelihood of their AA being detected.

³⁶The choice of five is arbitrary, and one could equally say “ $y \subset x = \{x_1, \dots, x_n\}$ with $|y| \ll |x|$ ” to be more general.

Just as with RA, an attacker would aim to construct models from individuals or populations of subjects, and potentially refine them via transfer learning between the α , β , and γ models. Beyond that point, however, the problem is the inverse of RA. An attacker would like to maximally alter cognition according to some metric of their choice, and can be assumed to aim to accomplish this with the minimal alteration to neural activity so as to avoid detection.

For an AA, we thus have definitions corresponding to SMON and DMON, which we term State Model-Optimal Alteration (SMOA) and Dynamics Model-Optimal Alteration (DMOA). There is no analogue to SION/DION, as an attacker will know what model they are using to describe the correspondence between neural activity and cognitive activity.

Definition 5 (State Model-Optimal Alteration). *With D_{JS} the Jensen-Shannon divergence, D_{QJS} the quantum Jensen-Shannon divergence, let F a model mapping from distributions of neural activity to distributions of cognitive states, $Y(\cdot, B)$ a normalized objective function of how close some distribution is to a target cognitive state distribution B , and \aleph the distribution of an input signal altering neural activity. For baseline neural state distribution Q , baseline cognitive distribution $A \approx F(Q)$, and desired post-alteration cognitive distribution $C \approx F(Q + \aleph)$, alteration signal \aleph is model-alteration optimal **if** for a constraining parameter λ*

$$\hat{\kappa} = \arg \max_{\aleph} Y(F(Q + \aleph), B) - \lambda D_{JS}(Q, Q + \aleph)$$

This definition is in some sense an inversion of that used by defenders. An attacker seeks to minimize the difference between the distributions of neural states, described by the JS-divergence, to avoid detection. Simultaneously, they aim to minimize the difference between the target cognitive state distribution B and the cognitive state distribution inferred via the attacker’s model, $F(Q + \aleph)$. In analogy with the defenders’ own noise signal, here \aleph is the targeted signal applied by attackers.

Likewise, for dynamics we have

Definition 6 (Dynamics Model-Optimal Alteration). *With D_{JS} the Jensen-Shannon divergence, D_{QJS} the quantum Jensen-Shannon divergence, let G a model mapping from distributions of neural activity to distributions of cognitive states, Φ a target distribution of cognitive dynamics operators, and \aleph the distribution of an input signal altering neural activity. For baseline neural state distribution Q , distribution \aleph is dynamics model-optimal **if** for a constraining parameter λ*

$$\hat{\aleph} = \arg \max_{\aleph} \left(\min_{G \in \mathcal{H}} \frac{1}{2} \mathbf{E}(\|G(Q + \aleph) - \Phi\|) \right) - \lambda D_{JS}(Q, Q + \aleph)$$

These two definitions describe the attackers’ efforts to optimize the tradeoff between 1) how closely they approach the desired effect and 2) how readily a defender could detect this alteration attack. The former is described by the first term in the objective functions, and the latter described by $D_{JS}(Q, Q + \aleph)$. Minimizing this divergence term reduces the possible information available for defenders to detect.

8 Conclusions

In this paper we aimed to initiate an entirely new direction of research. By linking Projective (“Quantum”) Cognition – the unorthodox yet highly effective modeling approach which resolves the major paradoxes of set-theoretic models of cognition – with ideas from quantum computing, Hyperdimensional Computing, and Differential Privacy, we have provided a framework for precisely analyzing issues related to the fast-emerging problem of Cognitive Security. This represents a novel intersection between research on cognitive science, machine learning, privacy and security, artificial intelligence, and neurotechnology, and one which we expect will have significant practical importance in the coming years. The exponential progress of neurotechnology is enabling ever greater medical advancements, but as with all tools it has the potential for both benevolent and malign uses. To the best of our knowledge all existing technical literature has focused on the former, but as has been made clear by the history of computer and data security, if a tool can be used to violate security and privacy for the gain of malicious actors, it *will* be used for precisely that purpose. There is no reason to assume neurotechnology will be any exception, and such a gamble would pose great risk.

Additionally, there are a few interesting notions which arise from the links between fields which have been forged in this paper. First, that quantum computers could be used for simulating cognitive dynamics at scale. Second, that it may be feasible to develop quantum algorithms or AI systems which interface with human intuition in new, more natural ways than the available classical systems do. Separate from these questions, it is interesting to note that there is nothing requiring the Cognitive Security framework be restricted to the individual level. This is not in the same sense as the $\alpha/\beta/\gamma$ -ODA transfer learning described in Section 5.3, but in a more general way. Cognitive Security is deliberately a general framework to enable greater flexibility, and we suspect it may also prove effective in a somewhat scale-agnostic manner to describe the cognitive dynamics of groups of people – given the right modifications to the above objective functions. Should BCIs become prevalent beyond the cases of medical necessity for which they are currently used, such coordinated

attacks on groups will become increasingly viable and dangerous. The potential implications and applications of all three possibilities are, however, much beyond the scope of this paper. Additional follow-up work could apply this framework in more specific ways to each of the relevant attack types described in the Bernal et al review.[15]

The question has justifiably been raised of whether it is ethical and safe to put forward the preceding descriptions of the structures of different potential attack types given they also give a mathematical description of a means of accomplishing a broader range of attacks than previously described in the literature.³⁷[15] This is particularly true due to the scale-agnostic nature of our approach. Indeed, it is likely that some malicious actors will work to leverage these ideas for unethical purposes. But supposing they were not made public, practically speaking it would be impossible to selectively communicate them solely to parties who would use them only for the common good. And in such a case, any attempts at secrecy would be more likely to mainly impact some portion of those who would use it for benevolent ends than those who would use it for malicious ones. As such, we consider the most ethical option to be the release of this paper to the public. While Cognitive Security – being a new area – is not a traditional domain of Biosecurity, some experts have argued that it will not only very soon become one, but will be a radically new world of opportunities and challenges. Such opportunities and challenges are likely to include some which are analogous to biosecurity problems of other modalities, and many which are wholly unlike anything seen before.[85] This is a view we vehemently share.

Finally, there is an interesting notion which emerges from the discussion of attack and defense methods. The Bonaci et al BCI Anonymizer is an innovative approach to the proper design of BCI hardware, but remains vulnerable to air-gap attacks, malicious implants, or BCI hardware vulnerabilities. In order to maximally mitigate such vulnerabilities, one would likely need to induce physiologic noise. This tactic for Cognitive Security against readout requires alteration, albeit strategically minimal alteration. And as seen with the similarities between SMON/SION and MOA/IOA, there is a meaningful analogy between AA and defensive measures against RA, and between RA and defensive measures against AA. If no readout is made of cognition and neural activity, then alteration may not in general be reliably detected. The roles of the attacker and the defender exist as odd sorts of mirror images in both cases. While we do not currently see any path towards verifying this one way or another, it leads us to make the following conjecture. There may be no means to achieve physiology-level security guarantees against readout without enacting some degree of alteration to cognition itself, nor such guarantees against alteration without performing some readout. As with much of the myriad implications of this paper and the problems it seeks to begin addressing, there is a great deal of future work to be done on the topic.

³⁷Personal communication, Professor Milana Boukhman Trounce, Director of Biosecurity at Stanford University and founding Chair of Biosecurity at the American College of Emergency Physicians.

Acknowledgements

We would like to thank a number of people for helping make this paper a reality. Joonhee Choi, PhD, for many helpful discussions of quantum computing and the problems of noise in both operations and measurements performed by quantum computers, as these provided critical background for later work refining the mathematical description of extending “quantum” cognition to the hyperdimensional regime. Milana Boukhan Trounce, MD, MBA for discussion of this paper from the perspective of biosecurity. Paul J. Wang, MD and Peter Yang, PhD for their support of unorthodox research. Niel Gesundheit, MD, for his encouragement and mentorship. The late Chris Walsh, PhD, for his encouragement, mentorship, and discussions of how thoughtfully-conducted science can help to positively influence the future of humanity’s relationship with technology. Sophie Cotton, MS and Sasha Newton for assistance with refining and clarifying the language and phrasing of the paper. Last, and most certainly not least, Claudia Petritsch, PhD, not only for her support of unorthodox research but also for her mentorship.

References

- [1] Sankaraleengam Alagapan et al. “Cingulate dynamics track depression recovery with deep brain stimulation”. In: *Nature* 622.7981 (Sept. 2023), pp. 130–138. ISSN: 1476-4687. DOI: 10.1038/s41586-023-06541-3. URL: <http://dx.doi.org/10.1038/s41586-023-06541-3>.
- [2] Chethan Pandarinath et al. “High performance communication by people with paralysis using an intracortical brain-computer interface”. In: *eLife* 6 (Feb. 2017). ISSN: 2050-084X. DOI: 10.7554/eLife.18554. URL: <http://dx.doi.org/10.7554/eLife.18554>.
- [3] Francis R. Willett et al. “High-performance brain-to-text communication via handwriting”. In: *Nature* 593.7858 (May 2021), pp. 249–254. ISSN: 1476-4687. DOI: 10.1038/s41586-021-03506-2. URL: <http://dx.doi.org/10.1038/s41586-021-03506-2>.
- [4] Francis R. Willett et al. “A high-performance speech neuroprosthesis”. In: *Nature* 620.7976 (Aug. 2023), pp. 1031–1036. ISSN: 1476-4687. DOI: 10.1038/s41586-023-06377-x. URL: <http://dx.doi.org/10.1038/s41586-023-06377-x>.
- [5] Sean L. Metzger et al. “A high-performance neuroprosthesis for speech decoding and avatar control”. In: *Nature* 620.7976 (Aug. 2023), pp. 1037–1046. ISSN: 1476-4687. DOI: 10.1038/s41586-023-06443-4. URL: <http://dx.doi.org/10.1038/s41586-023-06443-4>.
- [6] Anthony Gilmore. *The Affair of the Brains*. Ozymandias Press, 2018.
- [7] William Gibson. *Neuromancer*. New York, NY: Penguin Putnam, 1984.
- [8] G Susanne Bahr, Liam M Mayron, and Hannah J Gacey. “Cyber risks to secure and private universal access”. In: *Universal Access in Human-Computer Interaction. Design for All and eInclusion: 6th International Conference, UAHCI 2011, Held as Part of HCI International 2011, Orlando, FL, USA, July 9-14, 2011, Proceedings, Part I 6*. Springer, 2011, pp. 433–442.
- [9] Ofir Landau, Rami Puzis, and Nir Nissim. “Mind Your Mind: EEG-Based Brain-Computer Interfaces and Their Security in Cyber Space”. In: *ACM Comput. Surv.* 53.1 (Feb. 2020). ISSN: 0360-0300. DOI: 10.1145/3372043. URL: <https://doi.org/10.1145/3372043>.
- [10] Pieter R. Roelfsema, Damiaan Denys, and P. Christiaan Klink. “Mind Reading and Writing: The Future of Neurotechnology”. In: *Trends in Cognitive Sciences* 22.7 (July 2018), pp. 598–610. ISSN: 1364-6613. DOI: 10.1016/j.tics.2018.04.001. URL: <http://dx.doi.org/10.1016/j.tics.2018.04.001>.
- [11] Liam Drew. “The rise of brain-reading technology: what you need to know”. In: *Nature* 623.7986 (Nov. 2023), pp. 241–243. ISSN: 1476-4687. DOI: 10.1038/d41586-023-03423-6. URL: <http://dx.doi.org/10.1038/d41586-023-03423-6>.
- [12] Christopher Bellman, Miguel Vargas Martin, and Shane MacDonald. “(WKSP) On the Potential of Data Extraction by Detecting Unaware Facial Recognition with Brain-Computer Interfaces”. In: *2018 IEEE International Conference on Cognitive Computing (ICCC)*. 2018, pp. 99–105. DOI: 10.1109/ICCC.2018.00022.
- [13] Joseph Lange et al. “Side-channel attacks against the human brain: the PIN code case study (extended version)”. In: *Brain Informatics* 5.2 (Oct. 2018). ISSN: 2198-4026. DOI: 10.1186/s40708-018-0090-1. URL: <http://dx.doi.org/10.1186/s40708-018-0090-1>.
- [14] Sergio López Bernal et al. “Cyberattacks on Miniature Brain Implants to Disrupt Spontaneous Neural Signaling”. In: *IEEE Access* 8 (2020), pp. 152204–152222. DOI: 10.1109/ACCESS.2020.3017394.
- [15] Sergio López Bernal et al. “Security in Brain-Computer Interfaces: State-of-the-Art, Opportunities, and Future Challenges”. In: *ACM Comput. Surv.* 54.1 (Jan. 2021). ISSN: 0360-0300. DOI: 10.1145/3427376. URL: <https://doi.org/10.1145/3427376>.
- [16] Quinn DuPont and Bradley Fidler. “Edge Cryptography and the Codevelopment of Computer Networks and Cybersecurity”. In: *IEEE Annals of the History of Computing* 38.4 (2016), pp. 55–73. ISSN: 1934-1547. DOI: 10.1353/ahc.2016.0044. URL: <http://dx.doi.org/10.1353/ahc.2016.0044>.
- [17] Cynthia Dwork et al. “Exposed! A Survey of Attacks on Private Data”. In: *Annual Review of Statistics and Its Application* 4.1 (Mar. 2017), pp. 61–84. ISSN: 2326-831X. DOI: 10.1146/annurev-statistics-060116-054123. URL: <http://dx.doi.org/10.1146/annurev-statistics-060116-054123>.
- [18] Salil Vadhan. “The Complexity of Differential Privacy”. In: *Information Security and Cryptography*. Springer International Publishing, 2017, pp. 347–450. ISBN: 9783319570488. DOI: 10.1007/978-3-319-57048-8_7. URL: http://dx.doi.org/10.1007/978-3-319-57048-8_7.
- [19] Cynthia Dwork and Aaron Roth. *The algorithmic foundations of differential privacy*. Foundations and Trends (R) in Theoretical Computer Science. Hanover, MD: now, Aug. 2014.
- [20] Alexandra Wood et al. *Differential Privacy: A Primer for a Non-Technical Audience*. Vanderbilt Journal of Entertainment and Technology Law, 2020.

- [21] Tamara Denning, Yoky Matsuoka, and Tadayoshi Kohno. “Neurosecurity: security and privacy for neural devices”. In: *Neurosurgical Focus* 27.1 (July 2009), E7. ISSN: 1092-0684. DOI: 10.3171/2009.4.focus0985. URL: <http://dx.doi.org/10.3171/2009.4.FOCUS0985>.
- [22] Norbert Wiener. *Cybernetics or Control and Communication in the Animal and the Machine*. MIT press, 1948.
- [23] Norbert Wiener. “Cybernetics”. In: *Bulletin of the American Academy of Arts and Sciences* 3.7 (1950), pp. 2–4.
- [24] Laurie Pycroft et al. “Brainjacking: Implant Security Issues in Invasive Neuromodulation”. In: *World Neurosurgery* 92 (2016), pp. 454–462. ISSN: 1878-8750. DOI: <https://doi.org/10.1016/j.wneu.2016.05.010>. URL: <https://www.sciencedirect.com/science/article/pii/S1878875016302728>.
- [25] Sergio López Bernal, Alberto Huertas Celdrán, and Gregorio Martínez Pérez. “Eight Reasons to Prioritize Brain-Computer Interface Cybersecurity”. In: *Communications of the ACM* 66.4 (Mar. 2023), pp. 68–78. ISSN: 1557-7317. DOI: 10.1145/3535509. URL: <http://dx.doi.org/10.1145/3535509>.
- [26] Tamara Bonaci et al. “Securing the exocortex: A twenty-first century cybernetics challenge”. In: *2014 IEEE Conference on Norbert Wiener in the 21st Century (21CW)*. 2014, pp. 1–8. DOI: 10.1109/NORBERT.2014.6893912.
- [27] Abdelkader Nasreddine Belkacem. “Cybersecurity Framework for P300-based Brain Computer Interface”. In: *2020 IEEE International Conference on Systems, Man, and Cybernetics (SMC)*. 2020, pp. 1–6. DOI: 10.1109/SMC42975.2020.9283100.
- [28] Shams Ajrawi, Ramesh Rao, and Mahasweta Sarkar. “Cybersecurity in Brain-Computer Interfaces: RFID-based design-theoretical framework”. In: *Informatics in Medicine Unlocked* 22 (2021), p. 100489. ISSN: 2352-9148. DOI: 10.1016/j.imu.2020.100489. URL: <http://dx.doi.org/10.1016/j.imu.2020.100489>.
- [29] Brent Carrara and Carlisle Adams. “A Survey and Taxonomy Aimed at the Detection and Measurement of Covert Channels”. In: *Proceedings of the 4th ACM Workshop on Information Hiding and Multimedia Security. IH&MMSec '16*. Vigo, Galicia, Spain: Association for Computing Machinery, 2016, pp. 115–126. ISBN: 9781450342902. DOI: 10.1145/2909827.2930800. URL: <https://doi.org/10.1145/2909827.2930800>.
- [30] Marcello Ienca, Pim Haselager, and Ezekiel J Emanuel. “Brain leaks and consumer neurotechnology”. In: *Nature Biotechnology* 36.9 (Oct. 2018), pp. 805–810. ISSN: 1546-1696. DOI: 10.1038/nbt.4240. URL: <http://dx.doi.org/10.1038/nbt.4240>.
- [31] Pentti Kanerva. “Hyperdimensional Computing: An Introduction to Computing in Distributed Representation with High-Dimensional Random Vectors”. In: *Cognitive Computation* 1.2 (Jan. 2009), pp. 139–159. ISSN: 1866-9964. DOI: 10.1007/s12559-009-9009-8. URL: <http://dx.doi.org/10.1007/s12559-009-9009-8>.
- [32] Denis Kleyko et al. “A Survey on Hyperdimensional Computing aka Vector Symbolic Architectures, Part I: Models and Data Transformations”. In: *ACM Comput. Surv.* 55.6 (Dec. 2022). ISSN: 0360-0300. DOI: 10.1145/3538531. URL: <https://doi.org/10.1145/3538531>.
- [33] Denis Kleyko et al. “A Survey on Hyperdimensional Computing aka Vector Symbolic Architectures, Part II: Applications, Cognitive Models, and Challenges”. In: *ACM Comput. Surv.* 55.9 (Jan. 2023). ISSN: 0360-0300. DOI: 10.1145/3558000. URL: <https://doi.org/10.1145/3558000>.
- [34] Michael N. Jones and Douglas J. K. Mewhort. “Representing word meaning and order information in a composite holographic lexicon.” In: *Psychological Review* 114.1 (2007), pp. 1–37. ISSN: 0033-295X. DOI: 10.1037/0033-295x.114.1.1. URL: <http://dx.doi.org/10.1037/0033-295x.114.1.1>.
- [35] Peer Neubert, Stefan Schubert, and Peter Protzel. “An Introduction to Hyperdimensional Computing for Robotics”. In: *KI - Künstliche Intelligenz* 33.4 (Sept. 2019), pp. 319–330. ISSN: 1610-1987. DOI: 10.1007/s13218-019-00623-z. URL: <http://dx.doi.org/10.1007/s13218-019-00623-z>.
- [36] Geethan Karunaratne et al. “In-memory hyperdimensional computing”. In: *Nature Electronics* 3.6 (June 2020), pp. 327–337. ISSN: 2520-1131. DOI: 10.1038/s41928-020-0410-3. URL: <http://dx.doi.org/10.1038/s41928-020-0410-3>.
- [37] May-Britt Moser, David C Rowland, and Edvard I Moser. “Place cells, grid cells, and memory”. en. In: *Cold Spring Harb. Perspect. Biol.* 7.2 (Feb. 2015), a021808.
- [38] Rodrigo Quian Quiroga et al. “Explicit Encoding of Multimodal Percepts by Single Neurons in the Human Brain”. In: *Current Biology* 19.15 (Aug. 2009), pp. 1308–1313. ISSN: 0960-9822. DOI: 10.1016/j.cub.2009.06.060. URL: <http://dx.doi.org/10.1016/j.cub.2009.06.060>.
- [39] Alexander N Gorban, Valeri A Makarov, and Ivan Y Tyukin. “The unreasonable effectiveness of small neural ensembles in high-dimensional brain”. In: *Physics of life reviews* 29 (2019), pp. 55–88.

- [40] Asim Roy. “A theory of the brain - the brain uses both distributed and localist (symbolic) representation”. In: *The 2011 International Joint Conference on Neural Networks*. 2011, pp. 215–221. DOI: 10.1109/IJCNN.2011.6033224.
- [41] Markus Kiefer and Friedemann Pulvermüller. “Conceptual representations in mind and brain: Theoretical developments, current evidence and future directions”. In: *Cortex* 48.7 (July 2012), pp. 805–825. ISSN: 0010-9452. DOI: 10.1016/j.cortex.2011.04.006. URL: <http://dx.doi.org/10.1016/j.cortex.2011.04.006>.
- [42] Alexander N. Gorban, Valery A. Makarov, and Ivan Y. Tyukin. “High-Dimensional Brain in a High-Dimensional World: Blessing of Dimensionality”. In: *Entropy* 22.1 (Jan. 2020), p. 82. ISSN: 1099-4300. DOI: 10.3390/e22010082. URL: <http://dx.doi.org/10.3390/e22010082>.
- [43] Oct. 2023. URL: <https://atom-computing.com/quantum-startup-atom-computing-first-to-exceed-1000-qubits/>.
- [44] Shuo Ma et al. “High-fidelity gates and mid-circuit erasure conversion in an atomic qubit”. In: *Nature* 622.7982 (Oct. 2023), pp. 279–284. ISSN: 1476-4687. DOI: 10.1038/s41586-023-06438-1. URL: <http://dx.doi.org/10.1038/s41586-023-06438-1>.
- [45] Simon J. Evered et al. “High-fidelity parallel entangling gates on a neutral-atom quantum computer”. In: *Nature* 622.7982 (Oct. 2023), pp. 268–272. ISSN: 1476-4687. DOI: 10.1038/s41586-023-06481-y. URL: <http://dx.doi.org/10.1038/s41586-023-06481-y>.
- [46] Pascal Scholl et al. “Erasure conversion in a high-fidelity Rydberg quantum simulator”. In: *Nature* 622.7982 (Oct. 2023), pp. 273–278. ISSN: 1476-4687. DOI: 10.1038/s41586-023-06516-4. URL: <http://dx.doi.org/10.1038/s41586-023-06516-4>.
- [47] Bruce M Brown, Peter Hall, and G Alastair Young. “On the effect of inliers on the spatial median”. In: *journal of multivariate analysis* 63.1 (1997), pp. 88–104.
- [48] David Donoho. “High-Dimensional Data Analysis: The Curses and Blessings of Dimensionality”. In: *AMS Math Challenges Lecture* (Jan. 2000), pp. 1–32.
- [49] Quefeng Li et al. “Embracing the blessing of dimensionality in factor models”. In: *Journal of the American Statistical Association* 113.521 (2018), pp. 380–389.
- [50] Ernesto Pereda et al. “The blessing of Dimensionality: Feature Selection outperforms functional connectivity-based feature transformation to classify ADHD subjects from EEG patterns of phase synchronisation”. In: *PloS one* 13.8 (2018), e0201660.
- [51] A. N. Gorban and I. Y. Tyukin. “Blessing of dimensionality: mathematical foundations of the statistical physics of data”. In: *Philosophical Transactions of the Royal Society A: Mathematical, Physical and Engineering Sciences* 376.2118 (Mar. 2018), p. 20170237. ISSN: 1471-2962. DOI: 10.1098/rsta.2017.0237. URL: <http://dx.doi.org/10.1098/rsta.2017.0237>.
- [52] Guangcan Liu, Qingshan Liu, and Ping Li. “Blessing of dimensionality: Recovering mixture data via dictionary pursuit”. In: *IEEE transactions on pattern analysis and machine intelligence* 39.1 (2016), pp. 47–60.
- [53] Joseph Anderson et al. “The more, the merrier: the blessing of dimensionality for learning large Gaussian mixtures”. In: *Conference on Learning Theory*. PMLR. 2014, pp. 1135–1164.
- [54] Hun-Seok Kim. “HDM: Hyper-Dimensional Modulation for Robust Low-Power Communications”. In: *2018 IEEE International Conference on Communications (ICC)*. 2018, pp. 1–6. DOI: 10.1109/ICC.2018.8422472.
- [55] Peter D. Bruza, Zheng Wang, and Jerome R. Busemeyer. “Quantum cognition: a new theoretical approach to psychology”. In: *Trends in Cognitive Sciences* 19.7 (July 2015), pp. 383–393. ISSN: 1364-6613. DOI: 10.1016/j.tics.2015.05.001. URL: <http://dx.doi.org/10.1016/j.tics.2015.05.001>.
- [56] Emmanuel M. Pothos and Jerome R. Busemeyer. “Quantum Cognition”. In: *Annual Review of Psychology* 73.1 (Jan. 2022), pp. 749–778. ISSN: 1545-2085. DOI: 10.1146/annurev-psych-033020-123501. URL: <http://dx.doi.org/10.1146/annurev-psych-033020-123501>.
- [57] Jerome R. Busemeyer and Emmanuel M. Pothos. “Quantum Models of Cognition”. In: *The Cambridge Handbook of Computational Cognitive Sciences*. Cambridge University Press, May 2023, pp. 242–274. ISBN: 9781108755610. DOI: 10.1017/9781108755610.010. URL: <http://dx.doi.org/10.1017/9781108755610.010>.
- [58] James M. Yearsley and Jerome R. Busemeyer. “Quantum cognition and decision theories: A tutorial”. In: *Journal of Mathematical Psychology* 74 (Oct. 2016), pp. 99–116. ISSN: 0022-2496. DOI: 10.1016/j.jmp.2015.11.005. URL: <http://dx.doi.org/10.1016/j.jmp.2015.11.005>.
- [59] Jerome R. Busemeyer and Zheng Wang. “What Is Quantum Cognition, and How Is It Applied to Psychology?” In: *Current Directions in Psychological Science* 24.3 (June 2015), pp. 163–169. ISSN: 1467-8721. DOI: 10.1177/0963721414568663. URL: <http://dx.doi.org/10.1177/0963721414568663>.
- [60] Maaneli Derakhshani et al. “At the crossroad of the search for spontaneous radiation and the Orch OR consciousness theory”. In: *Physics of Life Reviews* 42 (Sept. 2022), pp. 8–14. ISSN: 1571-0645. DOI: 10.1016/j.plrev.2022.05.004. URL: <http://dx.doi.org/10.1016/j.plrev.2022.05.004>.

- [61] Greg Egan. *Quarantine*. New York, NY: HarperCollins, Dec. 1994.
- [62] Robert J Sawyer. *Quantum Night*. Ace Books, Mar. 2016.
- [63] Mike Chen. *A quantum love story*. en. Mira Books, Jan. 2024.
- [64] John von Neumann. *Mathematische Grundlagen der Quantenmechanik*. Berlin: Springer-Verlag; English translation: *Mathematical Foundations of Quantum Mechanics*, Princeton: Princeton University Press, 1955.
- [65] A N Kolmogorov. *Grundbegriffe der Wahrscheinlichkeitsrechnung (Foundations of the theory of probability)*. 1933.
- [66] Joschka Roffe. “Quantum error correction: an introductory guide”. In: *Contemporary Physics* 60.3 (July 2019), pp. 226–245. ISSN: 1366-5812. DOI: 10.1080/00107514.2019.1667078. URL: <http://dx.doi.org/10.1080/00107514.2019.1667078>.
- [67] Antonio D. Corcoles et al. “Challenges and Opportunities of Near-Term Quantum Computing Systems”. In: *Proceedings of the IEEE* 108.8 (Aug. 2020), pp. 1338–1352. ISSN: 1558-2256. DOI: 10.1109/jproc.2019.2954005. URL: <http://dx.doi.org/10.1109/JPROC.2019.2954005>.
- [68] Yasunari Suzuki et al. “Quantum Error Mitigation as a Universal Error Reduction Technique: Applications from the NISQ to the Fault-Tolerant Quantum Computing Eras”. In: *PRX Quantum* 3.1 (Mar. 2022). ISSN: 2691-3399. DOI: 10.1103/prxquantum.3.010345. URL: <http://dx.doi.org/10.1103/PRXQuantum.3.010345>.
- [69] Salonik Resch and Ulya R. Karpuzcu. “Benchmarking Quantum Computers and the Impact of Quantum Noise”. In: *ACM Computing Surveys* 54.7 (July 2021), pp. 1–35. ISSN: 1557-7341. DOI: 10.1145/3464420. URL: <http://dx.doi.org/10.1145/3464420>.
- [70] Nathalie P. de Leon et al. “Materials challenges and opportunities for quantum computing hardware”. In: *Science* 372.6539 (Apr. 2021). ISSN: 1095-9203. DOI: 10.1126/science.abb2823. URL: <http://dx.doi.org/10.1126/science.abb2823>.
- [71] Jaime Sevilla and C. Jess Riedel. *Forecasting timelines of quantum computing*. 2020. arXiv: 2009.05045 [quant-ph].
- [72] Tom Macpherson et al. “Natural and Artificial Intelligence: A brief introduction to the interplay between AI and neuroscience research”. In: *Neural Networks* 144 (2021), pp. 603–613. ISSN: 0893-6080. DOI: <https://doi.org/10.1016/j.neunet.2021.09.018>. URL: <https://www.sciencedirect.com/science/article/pii/S0893608021003683>.
- [73] Shimon Ullman. “Using neuroscience to develop artificial intelligence”. In: *Science* 363.6428 (Feb. 2019), pp. 692–693. ISSN: 1095-9203. DOI: 10.1126/science.aau6595. URL: <http://dx.doi.org/10.1126/science.aau6595>.
- [74] Demis Hassabis et al. “Neuroscience-Inspired Artificial Intelligence”. In: *Neuron* 95.2 (July 2017), pp. 245–258. ISSN: 0896-6273. DOI: 10.1016/j.neuron.2017.06.011. URL: <http://dx.doi.org/10.1016/j.neuron.2017.06.011>.
- [75] Kwabena Boahen. “Dendrocentric learning for synthetic intelligence”. In: *Nature* 612.7938 (Nov. 2022), pp. 43–50. ISSN: 1476-4687. DOI: 10.1038/s41586-022-05340-6. URL: <http://dx.doi.org/10.1038/s41586-022-05340-6>.
- [76] Dharmendra S. Modha et al. “Neural inference at the frontier of energy, space, and time”. In: *Science* 382.6668 (Oct. 2023), pp. 329–335. ISSN: 1095-9203. DOI: 10.1126/science.adh1174. URL: <http://dx.doi.org/10.1126/science.adh1174>.
- [77] Bhavin J. Shastri et al. “Photonics for artificial intelligence and neuromorphic computing”. In: *Nature Photonics* 15.2 (Jan. 2021), pp. 102–114. ISSN: 1749-4893. DOI: 10.1038/s41566-020-00754-y. URL: <http://dx.doi.org/10.1038/s41566-020-00754-y>.
- [78] Samuel Bosch et al. “QubitHD: A Stochastic Acceleration Method for HD Computing-Based Machine Learning”. In: *CoRR* abs/1911.12446 (2019). arXiv: 1911.12446. URL: <http://arxiv.org/abs/1911.12446>.
- [79] Nathan R. McDonald et al. “Integrating complex valued hyperdimensional computing with modular artificial neural networks”. In: *Disruptive Technologies in Information Sciences VII*. Ed. by Bryant T. Wysocki, James Holt, and Misty Blowers. SPIE, June 2023. DOI: 10.1117/12.2664585. URL: <https://doi.org/10.1117/12.2664585>.
- [80] Nathan R. McDonald et al. “Integrating complex valued hyperdimensional computing with modular artificial neural networks”. In: *Disruptive Technologies in Information Sciences VII*. Ed. by Bryant T. Wysocki, James Holt, and Misty Blowers. SPIE, June 2023. DOI: 10.1117/12.2664585. URL: <https://doi.org/10.1117/12.2664585>.
- [81] URL: https://commons.wikimedia.org/wiki/File:Bloch_sphere.svg.
- [82] Philip Hall. “The Distribution of Means for Samples of Size N Drawn from a Population in which the Variate Takes Values Between 0 and 1, All Such Values Being Equally Probable”. In: *Biometrika* 19.3/4 (Dec. 1927), p. 240. ISSN: 0006-3444. DOI: 10.2307/2331961. URL: <http://dx.doi.org/10.2307/2331961>.

- [83] Carlton E. Green et al. “Recent reliability reporting practices in Psychological Assessment: Recognizing the people behind the data.” In: *Psychological Assessment* 23.3 (2011), pp. 656–669. ISSN: 1040-3590. DOI: 10.1037/a0023089. URL: <http://dx.doi.org/10.1037/a0023089>.
- [84] Gregory J. Meyer et al. “Psychological testing and psychological assessment: A review of evidence and issues.” In: *American Psychologist* 56.2 (Feb. 2001), pp. 128–165. ISSN: 0003-066X. DOI: 10.1037/0003-066x.56.2.128. URL: <http://dx.doi.org/10.1037/0003-066x.56.2.128>.
- [85] George Poste. “Biosecurity: Complexity, Connectivity, Complacency & Commitment”. Stanford University Biosecurity and Pandemic Resilience lectures. Jan. 2024.