

Efficient Signature-Free Validated Agreement

Pierre Civit

Ecole Polytechnique Fédérale de Lausanne (EPFL), Switzerland

Muhammad Ayaz Dzulfikar

NUS Singapore, Singapore

Seth Gilbert

NUS Singapore, Singapore

Rachid Guerraoui

Ecole Polytechnique Fédérale de Lausanne (EPFL), Switzerland

Jovan Komatovic

Ecole Polytechnique Fédérale de Lausanne (EPFL), Switzerland

Manuel Vidigueira

Ecole Polytechnique Fédérale de Lausanne (EPFL), Switzerland

Igor Zlotchi

Mysten Labs, Switzerland

Abstract

Byzantine agreement enables n processes to agree on a common L -bit value, despite up to $t > 0$ arbitrary failures. A long line of work has been dedicated to improving the bit complexity of Byzantine agreement in synchrony. This has culminated in COOL, an error-free (deterministically secure against a computationally unbounded adversary) solution that achieves $O(nL + n^2 \log n)$ worst-case bit complexity (which is optimal for $L > n \log n$ according to the Dolev-Reischuk lower bound). COOL satisfies strong validity: if all correct processes propose the same value, only that value can be decided. Whenever correct processes do not agree *a priori* (there is no unanimity), they may decide a default value \perp from COOL.

Strong validity is, however, not appropriate for today's state machine replication (SMR) and blockchain protocols. These systems value progress and require a decided value to always be *valid* (according to a predetermined predicate), excluding default decisions (such as \perp) even in cases where there is no unanimity *a priori*. *Validated Byzantine agreement* satisfies this property (called *external validity*). Yet, the best error-free (or even signature-free) validated agreement solutions achieve only $O(n^2 L)$ bit complexity, a far cry from the $\Omega(nL + n^2)$ Dolev-Reischuk lower bound. Is it possible to bridge this complexity gap?

We answer the question affirmatively. Namely, we present two new synchronous algorithms for validated Byzantine agreement, `HASHEXT` and `ERRORFREEEXT`, with different trade-offs. Both algorithms are (1) signature-free, (2) optimally resilient (tolerate up to $t < n/3$ failures), and (3) early-stopping (terminate in $O(f + 1)$ rounds). On the one hand, `HASHEXT` uses only hashes and achieves $O(nL + n^3 \kappa)$ bit complexity, which is optimal for $L > n^2 \kappa$ (where κ is the size of a hash). On the other hand, `ERRORFREEEXT` is error-free, using no cryptography whatsoever, and achieves $O((nL + n^2) \log n)$ bit complexity, which is near-optimal for any L .

2012 ACM Subject Classification Theory of computation \rightarrow Distributed algorithms

Keywords and phrases Validated Byzantine agreement, Bit complexity, Round complexity

1 Introduction

Byzantine agreement [82] is arguably the most important problem of distributed computing. It lies at the heart of state machine replication (SMR) [13, 32, 80, 1, 16, 79, 110, 92, 94] and blockchain systems [90, 28, 8, 64, 9, 46, 45]. Additionally, Byzantine agreement plays an essential role in cryptographic protocols such as multi-party computation [65, 23, 74, 21, 61, 33].

Byzantine agreement operates among n processes, out of which up to $t < n$ can be corrupted by the adversary. A corrupted process is said to be *faulty* and can behave arbitrarily; a non-faulty process is said to be *correct* and follows the prescribed protocol. Let `Value` denote the set of L -bit

values. (As this paper is concerned with multi-valued Byzantine agreement, we set no restrictions on the cardinality of the Value set.) During the agreement protocol, each process *proposes* exactly one value, and eventually the protocol outputs a single *decision*, as per the following interface:

- **request** $\text{propose}(v \in \text{Value})$: a process proposes an L -bit value v .
- **indication** $\text{decide}(v' \in \text{Value})$: a process decides an L -bit value v' .

Intuitively, Byzantine agreement ensures that all correct processes agree on the same *admissible* value. (We formally define the properties of Byzantine agreement in the later part of this section.)

Practical notion of value-admissibility. A critical question in designing practical Byzantine agreement algorithms is which values should be considered admissible. Traditionally, Byzantine agreement algorithms treated the proposals of correct processes as admissible. Consequently, they have focused on properties like *strong validity* [10, 35, 97]: if every correct process proposes the same value v , then v is the only possible decision. Notice that in such cases, if even one correct process proposes a value different from the (same) value held by all other $n - 1$ processes, it is perfectly legal to decide some default “null op” value (e.g., \perp); it is also perfectly legal to decide a value that is “nonsense” from the perspective of the underlying application. Thus, unless all correct processes agree *a priori*, Byzantine agreement algorithms with strong validity are not guaranteed to make any “real” progress.

Many modern applications may require a stronger requirement: even if correct processes propose different values, the resulting decision should still adhere to some *validity* test, ensuring that the decision is not “wasted”. Such a condition is usually called *external validity* [29, 84, 88, 105, 10, 114, 62, 87, 104]: any decided value must be valid according to a predetermined logical predicate. We underline that the external validity property is prevalent in today’s blockchain systems. Indeed, as long as a produced block is valid (e.g., no double-spending), the block can safely be added to the chain (irrespective of who produced it).¹

Synchronous validated agreement. We study *validated agreement*, a variant of the Byzantine agreement problem satisfying the external validity property, in the standard synchronous setting. Formally, let $\text{valid} : \text{Value} \rightarrow \{\text{true}, \text{false}\}$ be any predetermined predicate. Importantly, correct processes propose valid values. The following properties are guaranteed by validated agreement:

- *Agreement*: No two correct processes decide different values.
- *Integrity*: No correct process decides more than once.
- *Termination*: All correct processes eventually decide.
- *Strong validity*: If all correct processes propose the same value v , then no correct process decides any value $v' \neq v$.
- *External validity*: If a correct process decides a value v , then $\text{valid}(v) = \text{true}$.

We underline that validated agreement algorithms usually do not satisfy strong validity (but only external validity). Additionally, we emphasize that obtaining an agreement algorithm \mathcal{A}^* that satisfies *both* strong and external validity is straightforward given (1) an agreement algorithm \mathcal{A}_1 satisfying only strong validity, and (2) an agreement algorithm \mathcal{A}_2 satisfying only external validity. Indeed, to obtain \mathcal{A}^* , processes run \mathcal{A}_1 and \mathcal{A}_2 in parallel. Then, processes decide (1) the value of \mathcal{A}_1 if that value is valid, or (2) the value of \mathcal{A}_2 otherwise.

Complexity of synchronous validated agreement. There exist two dominant worst-case complexity metrics when analyzing any synchronous validated agreement algorithm: (1) *the bit complexity*, the total number of bits correct processes send, and (2) *the round complexity*, the number of synchronous rounds it takes for all correct processes to decide (and halt). The lower bound

¹ Let us underline that real-world blockchain systems might be concerned with *fairness*, thus making the question of “who produced a block” important. However, this work does not focus on fairness (or any similar topic [69, 73]).

on the bit complexity of validated agreement is $\Omega(nL + n^2)$: (1) the “ nL ” term comes from the fact that each correct process needs to receive the decided value, and (2) the “ n^2 ” term comes from the seminal Dolev-Reischuk bound [53] stating that even agreeing on a single bit requires $\Omega(n^2)$ exchanged bits. We emphasize that the $\Omega(nL + n^2)$ lower bound holds even in *failure-free* executions in the signature-free world (with signatures, the bound does not hold [105]). The lower bound on the round complexity is $\Omega(f + 1)$ [54], where $f \leq t$ denotes the *actual* number of failures. If an algorithm achieves $O(f + 1)$ round complexity, it is said that the algorithm is *early-stopping*.²

State-of-the-art. The most efficient known validated agreement algorithm is ADA-DARE [38]. ADA-DARE achieves $O(nL + n^2\kappa)$ bit complexity (optimal for $L > n\kappa$), where κ denotes a security parameter. However, ADA-DARE internally utilizes threshold signatures [101]. (We emphasize that if $t < n/3$, some partially synchronous authenticated algorithms [111, 31] can trivially be adapted to achieve $O(nL + n^2\kappa)$ bit complexity in synchrony; ADA-DARE tolerates up to $t < n/2$ failures.) Perhaps surprisingly, the best *signature-free* validated agreement algorithms [85, 24, 42, 35] still achieve only $O(n^2L)$ bit complexity, a far cry from the $\Omega(nL + n^2)$ lower bound.

The fact that no efficient signature-free validated agreement is known becomes even more surprising when considering that optimal signature-free algorithms exist for the “traditional” Byzantine agreement problem. COOL [35] is a Byzantine agreement algorithm satisfying (only) strong validity while exchanging $O(nL + n^2 \log n)$ bits. Although it was not the goal of the COOL algorithm, COOL can trivially achieve early-stopping (by internally utilizing an early-stopping binary agreement such as [85]). In addition, COOL is optimally resilient (tolerates up to $t < n/3$ failures). Importantly, COOL uses no cryptography whatsoever: we say that COOL is *error-free* as it is deterministically secure against a computationally unbounded adversary.

Is there a fundamental complexity gap between external and strong validity in the signature-free world? Can signature-free validated agreement be solved efficiently in synchrony? These are the questions we study in this paper.

1.1 Contributions

In this paper, we present the first validated agreement algorithms achieving $o(n^2L)$ bit complexity *without* signatures:

- First, we introduce HASHEXT, a hash-based algorithm that exchanges $O(nL + n^3\kappa)$ bits (optimal for $L > n^2\kappa$), where κ denotes the size of a hash.
- Second, we provide ERRORFREEEXT, an error-free (i.e., cryptography-free) solution that achieves $O((nL + n^2) \log n)$ bit complexity and is thus nearly-optimal.

Importantly, both HASHEXT and ERRORFREEEXT are (1) optimally resilient (tolerate up to $t < n/3$ failures), and (2) early-stopping (terminate in $O(f + 1)$ synchronous rounds). A comparison of our new algorithms with the state-of-the-art can be found in Table 1.

1.2 Overview & Technical Challenges

Why is efficient validated agreement hard? To solve the validated agreement problem (i.e., to satisfy external validity), a decided value must be valid. Therefore, a validated agreement algorithm needs to ensure that it is operating on (or converging to) a valid value. If the value (in its entirety) is attached to every message, satisfying external validity is (relatively) simple: each message can be individually validated and invalid messages can be ignored. Unfortunately, attaching an L -bit value to each message is inherently expensive, yielding a sub-optimal bit complexity of $\Omega(n^2L)$.

² We consider only *asymptotic* early-stopping (as in [85]) instead of *strict* early stopping (as in [54]) that requires termination in exactly $f + 2$ rounds.

Protocol	Validity	Bit complexity	Resilience	Cryptography
COOL [35, 85]	S	$O(nL + n^2 \log n)$	$n > 3t$	None
Parallel COOL [35, 85]	IC \rightarrow (S + E)	$O(n^2 L + n^3 \log n)$	$n > 3t$	None
ADA-DARE _{ic} [38]	IC \rightarrow (S + E)	$O(n^2 L + n^2 \kappa)$	$n > 2t$	Threshold Sign.
ADA-DARE _{sv} [38]	S + E	$O(nL + n^2 \kappa)$	$n > 2t$	Threshold Sign.
HASHEXT	S + E	$O(nL + n^3 \kappa)$	$n > 3t$	Hash
ERRORFREEEXT	S + E	$O((nL + n^2) \log n)$	$n > 3t$	None
Lower bound [53, 41]	Any	$\Omega(nL + n^2)$	$t \in \Omega(n)$	Any

■ **Table 1** Performance of deterministic synchronous agreement algorithms with L -bit values and κ -bit security parameter. S stands for “strong validity”, E stands for “external validity”, and IC stands for “interactive consistency” (where processes agree on the proposals of all processes). (There exists a trivial reduction from IC to S + E, where each correct process decides the most represented valid value in the decided vector. Hence, we write that IC implies S + E.) All considered algorithms are early-stopping, except for ADA-DARE_{ic} and ADA-DARE_{sv} (whose goal was not early-stopping). Randomized algorithms are discussed in §5.

To avoid attaching an L -bit value to each message, the most efficient solutions to validated agreement (designed for arbitrary-sized values) involve coding techniques, where an L -bit value is split into n different shares of $O(\frac{L}{n} + \log n)$ size. The goal is to (somehow) reach agreement on a valid value using $O(n^2)$ messages of $O(\frac{L}{n} + \log n)$ bits, for a total of $O(nL + n^2 \log n)$ exchanged bits. However, this “coding-based” design introduces a new challenge. How can a process that only holds one share (or constantly many shares) know that the corresponding value is valid? For example, to check if a split value v is valid, correct processes might attempt to reconstruct it, expending $O(nL + n^2 \log n)$ bits in the process (as reconstruction is expensive). Since there may be (in the worst case) up to $t \in \Omega(n)$ invalid values (from as many faulty processes), this reconstruction process might have to be repeated many times before a valid value is found, resulting in (say) sub-optimal $O(n^2 L + n^3 \log n)$ total communication.

Overview of HASHEXT. To overview HASHEXT’s design, we first revisit how efficient signature-based validated agreement is solved (see, e.g., [38]). In the signature-based paradigm, efficient validated agreement algorithms adopt the following approach: (1) First, each process disseminates its value (using coding techniques) and obtains a *proof of retrievability* (PoR). A PoR is a cryptographic object containing a digest (of a value) and proving that (i) the pre-image of the digest can be retrieved by all correct processes, and (ii) the pre-image of the digest is valid. (2) Second, processes agree on a single PoR. (3) Third, processes retrieve a value corresponding to the agreed-upon PoR. Importantly, each PoR must be “self-certifying”: once a correct process obtains an alleged PoR, the process must be able to determine if the PoR is valid to be sure that if this PoR gets decided in the second step, a valid value can be retrieved. That is why PoRs are usually implemented using signatures: if a PoR contains a *signature-based certificate*, processes can be confident in its validity. Due to this “self-certifying” nature of PoRs, it seems challenging to adapt them to the signature-free world.

To design a hash-based validated agreement algorithm HASHEXT, we (roughly) follow the aforementioned three-step approach with one fundamental difference: HASHEXT utilizes *implicit* (“non-self-certifying”) PoRs. Given any observed digest d , a correct process executing HASHEXT can determine if (1) the pre-image v of digest d can be retrieved, and (2) v is valid. There is no *proof* that the valid pre-image can be retrieved – only the protocol design ensures this guarantee.

Overview of ERRORFREEEXT. To implement ERRORFREEEXT, our error-free (cryptography-free) near-optimal solution, we rely on a recursive structure – carefully adapting to long values the recursive design proposed by [24, 42, 85, 95] that is only concerned with constant-sized values. At each recursive iteration with n processes, processes are partitioned into two halves that run the algorithm among $n/2$ processes. Moreover, each recursive iteration exhibits “additional work”

through the *graded consensus* [20, 2] primitive. Intuitively, the graded consensus primitive reconciles decisions made by two distinct halves to ensure that all processes agree on a unique valid value. Due to the recursive nature of `ERRORFREEEXT`, its bit complexity depends on the complexity of graded consensus. To obtain `ERRORFREEEXT`'s near-optimal $O((nL + n^2) \log n)$ bit complexity, we observe that a graded consensus algorithm with $O(nL + n^2 \log n)$ bits can be derived from the “reducing” technique introduced by the previously mentioned `COOL` [35] protocol.³

Roadmap. We define the system model and introduce some preliminaries in §2. We present `HASHEXT` in §3, whereas `ERRORFREEEXT` is introduced in §4. Finally, we discuss related work in §5. Omitted pseudocode and detailed proofs are relegated to the optional appendix.

2 System Model & Preliminaries

2.1 System Model

Processes. We consider a static set $\Pi = \{p_1, p_2, \dots, p_n\}$ of n processes, where each process acts as a deterministic state machine. Our `HASHEXT` (resp., `ERRORFREEEXT`) algorithm implements validated agreement against a computationally bounded (resp., unbounded) adversary that can corrupt up to $t < n/3$ processes at any time during an execution. (We underline that no signature-free agreement algorithm can tolerate $n/3$ or more failures [83], disregarding the restricted-resource model [60] that allows for a higher corruption threshold.) A corrupted process is said to be *faulty*; a non-faulty process is said to be *correct*. We denote by $f \leq t$ the actual number of faulty processes; we emphasize that f is not known.

Stopping. Each correct process can invoke a special stop request while executing any protocol. Once a correct process stops executing a protocol, it ceases taking any steps (e.g., sending and receiving messages).

Communication network. Processes communicate by exchanging messages over an authenticated point-to-point network. The communication network is reliable: if a correct process sends a message to a correct process, the message is eventually received.

Synchrony. We assume the standard synchronous environment in which the computation unfolds in synchronous δ -long rounds, where δ denotes the known upper bound on message delays. In each round $1, 2, \dots \in \mathbb{N}$, each process (1) performs (deterministic) local computations, (2) sends (possibly different) messages to (a subset of) the other processes, and (3) receives the messages sent to it by the end of the round.

2.2 Complexity Measures

Let `Agreement` be any synchronous validated agreement algorithm, and let $\mathcal{E}(\text{Agreement})$ denote the set of `Agreement`'s executions. Let $\alpha \in \mathcal{E}(\text{Agreement})$ be any execution. The bit complexity of α is the number of bits correct processes collectively send throughout α . The *bit complexity* of `Agreement` is then defined as

$$\max_{\alpha \in \mathcal{E}(\text{Agreement})} \left\{ \text{the bit complexity of } \alpha \right\}.$$

³ A similar observation has recently been made for (balanced) synchronous *gradedcast*, a sender-oriented counterpart to graded consensus [19].

6 Efficient Signature-Free Validated Agreement

Similarly, the latency complexity of α is the time it takes for all correct processes to decide and stop in α . The *latency complexity* of Agreement is then defined as

$$\max_{\alpha \in \mathcal{E}(\text{Agreement})} \left\{ \text{the latency complexity of } \alpha \right\}.$$

We say that Agreement satisfies *early stopping* if and only if the latency complexity of Agreement belongs to $O((f+1)\delta)$. Note that the maximum number of rounds Agreement requires to decide – the *round complexity* of Agreement – is equal to the latency complexity of Agreement divided by δ . Throughout the paper, we use the latency and round complexity interchangeably.

2.3 Building Blocks

This subsection overviews building blocks utilized in both `HASHEXT` and `ERRORFREEEXT`.

Reed-Solomon codes [100]. `HASHEXT` and `ERRORFREEEXT` rely on Reed-Solomon (RS) codes [100]. We use `RSEnc` and `RSDec` to denote RS' encoding and decoding algorithms. In brief, `RSEnc`(M, m, k) takes as input a message M consisting of k symbols, treats it as a polynomial of degree $k - 1$, and outputs m evaluations of the corresponding polynomial. Similarly, `RSDec`(k, r, T) takes as input a set of symbols T (some of the symbols might be incorrect) and outputs a degree $k - 1$ polynomial (i.e., k symbols) by correcting up to r errors (incorrect symbols) in T . Note that `RSDec` can correct up to r errors in T and output the original message given that $|T| \geq k + 2r$ [91]. Importantly, the bit-size of an RS symbol obtained by the `RSEnc`(M, m, k) algorithm is $O(\frac{|M|}{k} + \log m)$, where $|M|$ denotes the bit-size of the message M .

Graded consensus [20, 2]. Both `HASHEXT` and `ERRORFREEEXT` make extensive use of graded consensus (also known as Adopt-Commit [51]), whose formal specification is given in Module 1. In brief, graded consensus allows processes to propose their input value from the `GC_Value` set and decide on some value from the `GC_Value` set with some binary grade. The graded consensus primitive ensures agreement among correct processes only if some correct process decides a value with (higher) grade 1. If no correct process decides with grade 1, graded consensus allows correct processes to disagree. (Thus, graded consensus is a weaker problem than validated agreement.) `HASHEXT` employs the graded consensus primitive on hash values (`GC_Value` \equiv the set of all hash values). On the other hand, `ERRORFREEEXT` utilizes graded consensus on values proposed to validated agreement (`GC_Value` \equiv `Value`).

Module 1 Graded consensus

Events:

- *request* `propose`($v \in \text{GC_Value}$): a process proposes a value $v \in \text{GC_Value}$.
- *indication* `decide`($v' \in \text{GC_Value}, g' \in \{0, 1\}$): a process decides a value $v' \in \text{GC_Value}$ with a grade g' .

Assumed behavior:

- Every correct process proposes exactly once.
- All correct processes propose simultaneously (i.e., in the same round). (We revisit this assumption for the graded consensus primitive employed in `ERRORFREEEXT`; see §4.3.)

Properties:

- *Strong validity*: If all correct processes propose the same value v and a correct process decides a pair (v', g') , then $v' = v$ and $g' = 1$.
 - *Justification*: If a correct process decides a pair (v', \cdot) , then v' was proposed by a correct process.
 - *Consistency*: If any correct process decides a pair $(v, 1)$, then no correct process decides any pair $(v' \neq v, \cdot)$.
 - *Integrity*: No correct process decides more than once.
 - *Termination*: All correct processes decide simultaneously (i.e., in the same round). (The “simultaneous” termination is revisited in the graded consensus primitive employed in `ERRORFREEEXT`; see §4.3.)
-

3 HASHEXT: Optimal Early-Stopping Hash-Based Solution

In this section, we present HASHEXT, our hash-based validated Byzantine agreement solution that achieves $O(nL + n^3\kappa)$ bit complexity, which is optimal for $L \geq n^2\kappa$ (κ denotes the size of a hash value). Additionally, HASHEXT is (1) optimally resilient as it tolerates up to $t < n/3$ faults, and (2) early-stopping as it terminates in $O((f+1)\delta)$ time (i.e., $O(f+1)$ synchronous rounds).

We start by introducing the building blocks of HASHEXT (§3.1). Then, we present HASHEXT's pseudocode (§3.2). Finally, we present a proof sketch of HASHEXT's correctness and complexity (§3.3). We relegate a proof of HASHEXT's correctness and complexity to Appendix B.

3.1 Building Blocks

Digests. We assume a collision-resistant function $\text{digest} : \text{Value} \rightarrow \text{Digest} \equiv \{0, 1\}^\kappa$, where κ is a security parameter. Concretely, the $\text{digest}(v \in \text{Value})$ function performs the following steps: (1) it encodes value v into n RS symbols $[m_1, m_2, \dots, m_n] \leftarrow \text{RSEnc}(v, n, t+1)$; (2) it aggregates $[m_1, m_2, \dots, m_n]$ into an accumulation value z_v using the Merkle-tree-based (i.e., hash-based) cryptographic accumulator [93] (see Appendix B.1); (3) it returns z_v . Note that, as we employ hash-based Merkle trees, an accumulation value z_v is a hash. The formal definition of the $\text{digest}(\cdot)$ function can be found in Appendix B.1.

Data dissemination. The formal specification of the data dissemination primitive is given in Module 2. Intuitively, the data dissemination primitive allows all correct processes to obtain the same value v^* assuming that (1) all correct processes a priori agree on the digest d^* of value v^* (even if processes do not know the pre-image v^* of d^* a priori), and (2) at least one correct process initially holds the pre-image v^* . We relegate the implementation of the data dissemination primitive to Appendix B.2. In brief, the implementation heavily relies on Merkle-tree-based accumulators (see Appendix B.1) and it exchanges $O(nL + n^2\kappa \log n)$ bits while terminating in 2δ time.

Module 2 Data dissemination

Events:

- *request* input($v \in \text{Value} \cup \{\perp\}$, $d \in \text{Digest}$): a process inputs a value v (or \perp) and a digest d .
- *request* output($v' \in \text{Value}$): a process outputs a value v' .

Assumed behavior:

- All correct processes input a pair. We underline that correct processes might not input their values simultaneously (i.e., at the exact same round).
- No correct process stops unless it has previously output a value.
- There exists a value $v^* \in \text{Value}$ ($v^* \neq \perp$) and a digest $d^* = \text{digest}(v^*)$ such that:
 - If any correct process inputs a pair $(v \in \text{Value}, \cdot)$, then $v = v^*$.
 - If any correct process inputs a pair $(\cdot, d \in \text{Digest})$, then $d = d^*$.
 - At least one correct process inputs a pair (v^*, d^*) .

Properties:

- *Safety*: If any correct process outputs a value v , then $v = v^*$.
 - *Liveness*: Let τ be the first time by which all correct processes have input a pair. Then, every correct process outputs a value by time $\tau + 2\delta$.
 - *Integrity*: No correct process outputs a value unless it has previously input a pair.
-

3.2 Pseudocode

The pseudocode of HASHEXT is given in Algorithm 1.

Key idea. The crucial idea behind HASHEXT is to ensure that all correct processes agree on a digest d^* of a *valid* value v^* such that at least *one* correct process knows the pre-image v^* of d^* . To solve validated agreement, it then suffices to utilize the data dissemination primitive (see Module 2): if

(1) all correct processes input the same digest d^* , and (2) at least one correct process inputs the pre-image v^* of d^* , then all correct processes agree on the (valid) value v^* . Given that the data dissemination primitive exchanges $O(nL + n^2\kappa \log n)$ bits and terminates in 2 rounds, HASHEXT dedicates $O(n^3\kappa)$ bits and $O(f + 1)$ rounds to agreeing on digest d^* .

Protocol description. HASHEXT internally utilizes an instance \mathcal{DD} of the data dissemination primitive. We design HASHEXT in a *view-based* manner: HASHEXT operates in (at most) $f + 1$ views, where each view V has its leader $\text{leader}(V) = p_V$.⁴ Each view V internally uses two instances $\mathcal{GC}_1[V]$ and $\mathcal{GC}_2[V]$ of the graded consensus primitive (see Module 1) that operates on digests.

We say that a correct process p_i *commits* a digest d in view V if and only if p_i invokes $\mathcal{DD}.\text{input}(\cdot, d)$ in view V (line 44). Each correct process p_i maintains four important local variables:

- locked_i (line 6): holds a digest (or \perp) on which p_i is currently “locked on”.
- vote_i (line 7): holds a digest (or \perp) currently supported by p_i .
- $\text{known_values}_i[D]$, for every digest D (line 9): holds the pre-image of digest D observed by p_i .
- $\text{accepted}_i[V]$, for every view V (line 10): holds the set of digest that are “accepted” in view V .

Let p_i be any correct process. Each view V operates in four steps:

1. Process p_i proposes locked_i to $\mathcal{GC}_1[V]$ and decides a pair (d_1, g_1) (line 16). Intuitively, if $d_1 \neq \perp$ and $g_1 = 1$, p_i sticks with digest d_1 throughout the view as it is possible that some other correct process has previously committed digest d_1 . (Hence, not sticking with digest d_1 in view V might be dangerous as it could lead to a disagreement on committed digests.)
2. Here, the leader of view V (if correct) aims to enable all correct processes to commit a digest in view V . Specifically, the leader behaves in the following manner:
 - If it decided a non- \perp digest from $\mathcal{GC}_1[V]$, then the leader disseminates the digest (line 20).
 - Otherwise, the leader disseminates its proposal (line 22).

Process p_i behaves according to the following logic:

- If p_i decided a non- \perp digest d with grade 1 from $\mathcal{GC}_1[V]$ ($d_1 = d \neq \perp$ and $g_1 = 1$; see the rule at line 23), then p_i supports digest d by broadcasting a SUPPORT message for d (line 24).
 - If p_i decided \perp from $\mathcal{GC}_1[V]$, then p_i supports a digest d by broadcasting a SUPPORT message for d (line 27 or line 30) if (1) it receives digest d from the leader and p_i accepted d in any previous view (line 26), or (2) it receives a valid value v from the leader such that $\text{digest}(v) = d$ (line 28). If the latter case applies, process p_i “observes” the pre-image v of digest d (line 29).
3. Process p_i accepts a digest d in view V if it receives a SUPPORT message for d from $t + 1$ processes (line 33). Moreover, process p_i updates its vote_i variable to a digest d if it receives a SUPPORT message for d from $2t + 1$ processes (line 35). Otherwise, process p_i sets its vote_i variable to \perp (line 37). Observe that if any correct process p_j updates its vote_j variable to a digest d , then every correct process p_k accepts d in view V . Indeed, as p_j receives a SUPPORT message for digest d from at least $2t + 1$ processes out of which at least $t + 1$ are correct, it is guaranteed that p_k receives a SUPPORT message for d from at least $t + 1$ processes.
 4. Process p_i proposes vote_i to $\mathcal{GC}_2[V]$ and decides a pair (d_2, g_2) . If $d_2 \neq \perp$, process p_i updates its locked_i variable to d_2 (line 41). Additionally, if $g_2 = 1$, then p_i commits d_2 (line 44). Importantly, if any correct process p_j commits a digest $d \neq \perp$ in view V , every correct process p_k updates its locked_k variable to d . Indeed, as p_j commits d , it decides $(d \neq \perp, 1)$ from $\mathcal{GC}_2[V]$. The consistency property of $\mathcal{GC}_2[V]$ ensures that each correct process p_k decides d from $\mathcal{GC}_2[V]$.

We emphasize that if process p_i commits a digest in some view V , process p_i does not execute any view greater than $V + 1$ (line 14). Moreover, if p_i commits in view $V < t + 1$, then process p_i necessarily completes view $V + 1$ before stopping (line 48). Importantly, process p_i completes view $V + 1$ after *exactly* 6 rounds have elapsed. Let us elaborate. As some correct process $p_j \neq p_i$

⁴ HASHEXT elects leaders in a round-robin fashion.

■ **Algorithm 1** HASHEXT: Pseudocode (for process p_i)

```

1: Uses:
2:   Graded consensus, instances  $\mathcal{GC}_1[V]$ ,  $\mathcal{GC}_2[V]$ , for each view  $V \in [1, t + 1]$    ▷ bits:  $O(n^2 \kappa)$ ; rounds: 2
3:   Data dissemination, instance  $\mathcal{DD}$    ▷ bits:  $O(nL + n^2 \kappa \log n)$ ; rounds: 2

4: Local variables:
5:   Value  $v_i \leftarrow p_i$ 's proposal
6:   Digest  $locked_i \leftarrow \perp$    ▷ locked digest
7:   Digest  $vote_i \leftarrow \perp$    ▷ digest to be voted for
8:   View  $committed\_view_i \leftarrow \perp$ 
9:   Map(Digest  $\rightarrow$  Value)  $known\_values_i \leftarrow \{\perp, \perp, \dots, \perp\}$    ▷ values corresponding to digests
10:  Map(View  $\rightarrow$  Set(Digest))  $accepted_i \leftarrow \{\emptyset, \emptyset, \dots, \emptyset\}$    ▷ accepted digests per view

11: – Task 1 –
12: for each view  $V \in [1, t + 1]$ :
13:   if  $committed\_view_i \neq \perp$  and  $committed\_view_i + 1 = V$ : complete the view after 6 synchronous rounds
14:   if  $committed\_view_i \neq \perp$  and  $V > committed\_view_i + 1$ : do not execute the view
15:   Step 1 of view  $V$ :   ▷ 2 synchronous rounds
16:     Let  $(d_1 \in \text{Digest} \cup \{\perp\}, g_1 \in \{0, 1\}) \leftarrow \mathcal{GC}_1[V].\text{propose}(locked_i)$ 
17:   Step 2 of view  $V$ :   ▷ 2 synchronous round
18:     if  $p_i = \text{leader}(V)$ :
19:       if  $d_1 \neq \perp$ :   ▷ check if a non- $\perp$  digest is decided from  $\mathcal{GC}_1[V]$ 
20:         broadcast  $d_1$    ▷ broadcast a non- $\perp$  digest decided from  $\mathcal{GC}_1[V]$ 
21:       else:
22:         broadcast  $v_i$    ▷ broadcast the proposed value
23:     if  $d_1 \neq \perp$  and  $g_1 = 1$ :
24:       broadcast  $\langle \text{SUPPORT}, d_1 \rangle$ 
25:     else:
26:       if  $d_1 \in \text{Digest}$  is received from leader( $V$ ) and a view  $V' < V$  exists with  $d_1 \in accepted[V']$ :
27:         broadcast  $\langle \text{SUPPORT}, d_1 \rangle$ 
28:       else if  $v_i \in \text{Value}$  is received from leader( $V$ ) such that  $\text{valid}(v_i) = \text{true}$ :
29:          $known\_values[\text{digest}(v_i)] \leftarrow v_i$ 
30:         broadcast  $\langle \text{SUPPORT}, \text{digest}(v_i) \rangle$ 
31:   Step 3 of view  $V$ :   ▷ 0 synchronous round (only local computation)
32:     if exists  $d \in \text{Digest}$  such that a  $\langle \text{SUPPORT}, d \rangle$  message is received from  $t + 1$  processes:
33:        $accepted_i[V] \leftarrow accepted_i[V] \cup \{d\}$ 
34:     if exists  $d \in \text{Digest}$  such that a  $\langle \text{SUPPORT}, d \rangle$  message is received from  $2t + 1$  processes:
35:        $vote_i \leftarrow d$ 
36:     else:
37:        $vote_i \leftarrow \perp$ 
38:   Step 4 of view  $V$ :   ▷ 2 synchronous rounds
39:     Let  $(d_2 \in \text{Digest} \cup \{\perp\}, g_2 \in \{0, 1\}) \leftarrow \mathcal{GC}_2[V].\text{propose}(vote_i)$ 
40:     if  $d_2 \neq \perp$ :   ▷ check if a non- $\perp$  digest is decided from  $\mathcal{GC}_2[V]$ 
41:        $locked_i \leftarrow d_2$    ▷ digest  $d_2$  is locked as some correct process might commit it
42:       if  $g_2 = 1$  and  $committed\_view_i = \perp$ :   ▷ check if digest  $d_2$  is decided with grade 1
43:          $committed\_view_i \leftarrow V$ 
44:         invoke  $\mathcal{DD}.\text{input}(known\_values[d_2], d_2)$    ▷ commit digest  $d_2$ 

45: – Task 2 –   ▷ executed in a separate thread
46: upon  $\mathcal{DD}.\text{output}(v' \in \text{Value})$ :
47:   trigger  $\text{decide}(v')$ 
48:   wait for view  $committed\_view_i + 1$  to be completed (if not yet and if  $committed\_view_i + 1 \leq t + 1$ )
49:   trigger stop   ▷ process  $p_i$  stops HASHEXT

```

might never enter view $V + 1$ (since it has committed in a view smaller than view V), it is possible that *not all* correct processes participate in view $V + 1$. This implies that utilized graded consensus instances might never complete, which further means that process p_i can forever be stuck executing a graded consensus instance in view $V + 1$. To avoid this scenario, process p_i completes view $V + 1$ after 6 rounds irrespectively of which step of view $V + 1$ p_i is in after 6 rounds. Finally, once p_i outputs a value v' from \mathcal{DD} (and completes the aforementioned “next view”), p_i decides v' (line 47) and stops executing `HASHEXT` (line 49).

3.3 Proof Sketch

This subsection provides a proof sketch of the following theorem:

► **Theorem 1.** *HASHEXT (Algorithm 1) is a hash-based early-stopping validated agreement algorithm with $O(nL + n^3\kappa)$ bit complexity.*

Our proof sketch focuses on the crucial intermediate guarantees ensured by `HASHEXT`. Recall that a formal proof of Theorem 1 is relegated to Appendix B.

Preventing disagreement on committed digests. First, we show that correct processes do not disagree on committed digests. Let \mathcal{V} denote the first view in which a correct process commits; let d^* be the committed digest. No correct process commits any non- d^* digest in view \mathcal{V} due to the consistency property of $\mathcal{GC}_2[\mathcal{V}]$: it is impossible for correct processes to decide different values from $\mathcal{GC}_2[\mathcal{V}]$ with grade 1.

If $\mathcal{V} < t + 1$, `HASHEXT` prevents any non- d^* digest to be committed in any view greater than \mathcal{V} . Specifically, `HASHEXT` guarantees that all correct processes commit d^* (and no other digest) by the end of view $\mathcal{V} + 1$. The consistency property of $\mathcal{GC}_2[\mathcal{V}]$ ensures that every correct process p_i updates its *locked_i* variable to d^* at the end of view \mathcal{V} . Therefore, all correct processes propose d^* to $\mathcal{GC}_1[\mathcal{V} + 1]$, which implies that all correct processes decide $(d^*, 1)$ from $\mathcal{GC}_1[\mathcal{V} + 1]$ (due to the strong validity property of $\mathcal{GC}_1[\mathcal{V} + 1]$). Hence, all correct processes broadcast a `SUPPORT` message for digest d^* (line 24), which further implies that all correct processes propose d^* to $\mathcal{GC}_2[\mathcal{V} + 1]$. Finally, the strong validity property of $\mathcal{GC}_2[\mathcal{V} + 1]$ ensures that all correct processes decide $(d^*, 1)$ from $\mathcal{GC}_2[\mathcal{V} + 1]$ and thus commit d^* by the end of view $\mathcal{V} + 1$.

Ensuring eventual agreement on the committed digest. Second, we prove that an agreement on the committed digest eventually occurs. Concretely, we now show that *all* correct processes commit a digest by the end of the first view whose leader is correct. Let that view be denoted by $\mathcal{V}_l \in [1, f + 1]$ and let $p_{\mathcal{V}_l}$ be the leader of \mathcal{V}_l . If any correct process commits a digest in any view smaller than \mathcal{V}_l , then all correct processes commit the same digest by the end of view \mathcal{V}_l due to the argument from the previous paragraph. Hence, suppose no correct process commits any digest in any view preceding view \mathcal{V}_l . We distinguish two scenarios:

- Let $p_{\mathcal{V}_l}$ decide a digest $d \neq \perp$ from $\mathcal{GC}_1[\mathcal{V}_l]$. Crucially, the justification property of $\mathcal{GC}_1[\mathcal{V}_l]$ ensures that $d \neq \perp$ is proposed by some correct process p_j . Hence, the value of the *locked_j* variable is d at the beginning of view \mathcal{V}_l . Let $V' < \mathcal{V}_l$ denote the view in which p_j updates *locked_j* to d upon deciding $d \neq \perp$ from $\mathcal{GC}_2[V']$. Again, the justification property of $\mathcal{GC}_2[V']$ guarantees that a correct process proposed d to $\mathcal{GC}_2[V']$ upon receiving $2t + 1$ `SUPPORT` messages for d . As at least $t + 1$ such messages are received from correct processes, *every* correct process accepts digest d in view V' .

In this case, process $p_{\mathcal{V}_l}$ broadcasts digest d in Step 2. We show that all correct processes broadcast a `SUPPORT` message for digest d . Consider any correct process p_i . We study two possible cases:

- Let p_i decide a non- \perp digest d' with grade 1 from $\mathcal{GC}_1[\mathcal{V}_i]$. In this case, the consistency property of $\mathcal{GC}_1[\mathcal{V}_i]$ ensures that $d = d'$. Thus, process p_i sends a SUPPORT message for digest d (line 24).
- Let p_i decide \perp or with grade 0 from $\mathcal{GC}_1[\mathcal{V}_i]$. In this case, process p_i sends a SUPPORT message for digest d (line 27) as (1) it receives d from $p_{\mathcal{V}_i}$, and (2) it accepts d in view $V' < \mathcal{V}_i$.
- Let $p_{\mathcal{V}_i}$ decide \perp from $\mathcal{GC}_1[\mathcal{V}_i]$. Note that this implies that no correct process decides a non- \perp digest with grade 1 from $\mathcal{GC}_1[\mathcal{V}_i]$ (due to the consistency property of $\mathcal{GC}_1[\mathcal{V}_i]$). Hence, process $p_{\mathcal{V}_i}$ broadcasts its valid value v , which then implies that all correct processes send a SUPPORT message for digest $d = \text{digest}(v)$ (line 30).

Hence, there exists a digest d for which all correct processes express their support in both cases. Therefore, all correct processes propose d to $\mathcal{GC}_2[\mathcal{V}_i]$. Finally, the strong validity property ensures that all correct processes decide $(d, 1)$ from $\mathcal{GC}_2[\mathcal{V}_i]$ and thus commit digest d in view \mathcal{V}_i .

Ensuring that some correct process knows the valid pre-image of the committed digest.

We show how HASHEXT enables processes to “obtain” implicit PoRs (see §1). Let d^* denote the (unique) committed digest. For d^* to be committed, there exists a correct process that sends a SUPPORT message for d^* in a view in which d^* is committed (due to the justification property of $\mathcal{GC}_2[V]$, for every view V). Therefore, it suffices to show that the first correct process to ever send a SUPPORT message for d^* (or any other digest) does so at line 30 upon receiving valid value v^* with $\text{digest}(v^*) = d^*$. Let p_i denote the first process to send a SUPPORT message for digest d^* and let it do so in some view V . We study if p_i could have sent the message at lines 24 and 27:

- Process p_i could not have sent the SUPPORT message at line 24 as this would imply that p_i is not the first correct process to send the message for d^* . The justification property of $\mathcal{GC}_1[V]$ ensures that some correct process p_j has its locked_j variable set to d^* at the beginning of view V . For process p_j to update its locked_j variable to d^* in some view $V' < V$, there must exist a correct process that sends a SUPPORT message for d^* in view V' (due to the justification property of $\mathcal{GC}_2[V']$). Therefore, p_i cannot be the first correct process to send a SUPPORT message for d^* .
- Process p_i could not have sent the SUPPORT message at line 27 as this would also imply that p_i is not the first correct process to send the message for d^* . Indeed, for the message to be sent at line 27, process p_i accepts d^* in some view $V' < V$, which implies that at least one correct process sends a SUPPORT message for d^* in view V' .

Hence, p_i must have sent the message at line 30, which implies that p_i knows the pre-image v^* of digest d^* and that v^* is valid (due to the check at line 28).

Correctness. The previous three intermediate results show that the preconditions of \mathcal{DD} (see Module 2) are satisfied, which implies that \mathcal{DD} behaves according to its specification. Hence, all correct processes decide the same valid value from HASHEXT due to the properties of \mathcal{DD} .

Complexity. Each view with a non-correct leader exchanges $O(n^2\kappa)$ bits. Moreover, each view with a correct leader exchanges $O(nL + n^2\kappa)$ bits. As \mathcal{DD} exchanges $O(nL + n^2\kappa \log n)$ bits and it is ensured that only $O(1)$ views with correct leaders are executed, HASHEXT exchanges $O(nL + n^2\kappa) + n \cdot O(n^2\kappa) + O(nL + n^2\kappa \log n) = O(nL + n^3\kappa)$ bits. (As we prove in Appendix B, a tight analysis shows that HASHEXT’s bit complexity is actually $O(nL + n^2(f + \log n)\kappa)$.)

As all correct processes start \mathcal{DD} at the end of the first view with a correct leader (at the latest), all correct processes input to \mathcal{DD} in $O(f + 1)$ rounds (recall that each view has 6 rounds). Since \mathcal{DD} guarantees agreement in 2 rounds, all correct decide and stop in $O(f + 1)$ rounds.

On the lack of strong validity. Note that HASHEXT as presented in Algorithm 1 does not satisfy strong validity. Indeed, even if all correct processes propose the same value v , it is possible that correct processes agree on a value v' proposed by a faulty leader. However, as specified in §1, it is trivial to modify HASHEXT to obtain an early-stopping algorithm with both strong and external validity that exchanges $O(nL + n^3\kappa)$ bits. Indeed, this can be done by running in parallel (1) the

current (without strong validity) implementation of `HASHEXT`, and (2) the error-free early-stopping `COOL` [35, 85] protocol with only strong validity.

4 **ERRORFREEEXT: Near-Optimal Early-Stopping Error-Free Solution**

This section presents `ERRORFREEEXT`, an error-free validated Byzantine agreement algorithm that achieves (1) $O((nL + n^2) \log n)$ bit complexity, and (2) early stopping. In addition, `ERRORFREEEXT` is optimally resilient (tolerates up to $t < n/3$ Byzantine processes).

We start by introducing `ERRORFREEEXT`'s building blocks (§4.1). To introduce `ERRORFREEEXT`'s recursive structure, we first show how (a simplified version of) the recursive structure yields a near-optimal validated agreement without early-stopping – `SLOWEXT` (§4.2). Then, we present `ERRORFREEEXT`'s pseudocode (§4.3). Finally, we give a proof sketch of `ERRORFREEEXT`'s correctness and complexity (§4.4). We relegate a formal proof to Appendix C.

4.1 Building Blocks

We now overview the building blocks of `ERRORFREEEXT`. Given `ERRORFREEEXT`'s recursive structure, the specification of each building block explicitly states its participants (to increase the clarity). Moreover, given that building blocks might be executed among overly corrupted set of participants (due to the recursion), each building block explicitly states what properties are ensured given the level of corruption among its participants.

Committee broadcast. The formal specification of the committee broadcast primitive is given in Module 3. Committee broadcast is concerned with two sets of processes: (1) $\text{Entire} \subseteq \Pi$, and (2) $\text{Committee} \subseteq \text{Entire}$. Moreover, the primitive is associated with a validated Byzantine agreement algorithm \mathcal{VA} to be executed among processes in `Committee`. Intuitively, the committee broadcast primitive ensures the following: (1) correct processes in `Committee` agree on the same value using the \mathcal{VA} algorithm (given that `Committee` is not overly corrupted), and (2) correct processes in `Committee` disseminate the previously agreed-upon value to all processes in `Entire`. We underline that the totality property of committee broadcast (deliberately written in orange in Module 3) is important only for `ERRORFREEEXT`'s early-stopping, i.e., it can be ignored for `SLOWEXT` (in §4.2).

Finisher. The formal specification of the finisher primitive is given in Module 4. Finisher is executed among a set $\text{Entire} \subseteq \Pi$ of processes. Each process inputs a pair $(v \in \text{Value}, g \in \{0, 1\})$, where v is a value and g is a binary grade. In brief, finisher ensures that all correct processes output the same value if all correct processes input the same value with grade 1 (the liveness property). Moreover, finisher ensures totality: if any correct process outputs a value, then all correct processes output the same value. We emphasize that the finisher primitive is introduced *only* for achieving early-stopping in `ERRORFREEEXT`, i.e., it plays no role in `SLOWEXT`.

4.2 SLOWEXT: Achieving Near-Optimality Without Early-Stopping

Wisdom of the ancients. As mentioned in §1.2, the problem with the sequential reconstructive approach is that, by allowing each Byzantine process to impose its own value, we can end up with $f = t \in O(n)$ (wasted) reconstructions of invalid values (with $O(n^2)$ messages each), for a total of $O(n^3)$ messages. Making an analogy to a parliamentary system (e.g., of some island in ancient Greece [81]), this is the equivalent of allowing every single member of parliament to present their proposal to all others. This is somewhat wasteful. In many modern parliamentary systems, since time is limited, proposals are first filtered *internally* within each party before each party presents *one* proposal to the whole assembly. Hence, no matter how many bad proposals a party might have internally, the whole assembly only discusses one per party. The cost of dealing with bad actors

Module 3 Committee broadcast $\langle \text{Entire}, \text{Committee}, \mathcal{VA} \rangle$

Participants:

- Entire $\subseteq \Pi$; let $x = |\text{Entire}|$ and let x' be the greatest integer smaller than $x/3$.
- Committee $\subseteq \text{Entire}$; let $y = |\text{Committee}|$, let y' be the greatest integer smaller than $y/3$ and let f' be the actual number of faulty processes in Committee.

Utilized validated agreement among Committee:

- \mathcal{VA} ; let $\mathcal{L}_{\mathcal{VA}}(y, f')$ denote the worst-case latency complexity of \mathcal{VA} with up to f' faulty processes and let $\mathcal{B}_{\mathcal{VA}}(y)$ denote the maximum number of bits any correct process sends while executing \mathcal{VA} with up to y' faulty processes. (We underline that $\mathcal{L}_{\mathcal{VA}}(y, f')$ is based on the non-known *actual* number of failures, whereas $\mathcal{B}_{\mathcal{VA}}(y)$ is based on the known *upper bound* on the number of failures.)

Events:

- request* input($v \in \text{Value}, g \in \{0, 1\}$): a process inputs a pair (v, g) .
- indication* output($v' \in \text{Value}$): a process outputs a value v' .

Assumed behavior:

- Every correct process inputs a pair.
- If a correct process inputs a pair (v, \cdot) , then $\text{valid}(v) = \text{true}$.
- No correct process stops unless it has previously output a value.
- If any correct process inputs a pair $(v, 1)$, for any value v , then no correct process inputs a pair $(v' \neq v, \cdot)$.

Properties ensured only if up to x' processes in Entire are faulty:

- Totality:** Let τ denote the first time at which a correct process outputs a value. Then, every correct process outputs a value by time $\tau + 2\delta$.
- Stability:** If a correct process inputs a pair $(v, 1)$ and outputs a value v' , then $v' = v$.
- External validity:** If a correct process outputs a value v , then $\text{valid}(v) = \text{true}$.
- Optimistic consensus:** If (1) there are up to y' faulty processes in Committee, and (2) all correct processes in Entire start within 2δ time of each other, the following properties are satisfied:
 - Liveness:** Let τ be the first time by which all correct processes in Committee have input a pair. Then, every correct process outputs a value by time $\tau + 7\delta + \mathcal{L}_{\mathcal{VA}}(y, f')$.
 - Agreement:** No two correct processes output different values.
 - Strong validity:** If every correct process proposes a pair (v, \cdot) , for any value v , then no correct process outputs a value different from v .

Properties ensured even if more than x' processes in Entire are faulty:

- Complexity:** Each correct process sends $O(L + x \log x) + \mathcal{B}_{\mathcal{VA}}$ bits.
-

(and proposals) is shifted to the parties, which are individually smaller than the whole assembly. This is (essentially) the crucial realization of [24, 42]. By adopting a recursive framework with two “parties” at each level, [24, 42] obtain non-early-stopping solutions with optimal $O(n^2)$ exchanged messages (albeit still $O(n^2 L)$ exchanged bits).

SLOWEXT in a nutshell. To design SLOWEXT, we adapt the recursive framework of [24, 42] to long values. More precisely, we follow the recent variant of the framework proposed by [95, 85] that utilizes (1) the graded consensus [20, 2] primitive (instead of the “universal exchange” primitive of [24]; see Module 1), and (2) the committee broadcast primitive (see Module 3). At each recursive iteration, processes are partitioned into two halves that run the algorithm among $n/2$ processes (inside of that half’s committee broadcast primitive) in sequential order. The recursion stops once a validated agreement instance with only a single process is reached; at this point, the process decides its proposal. A graphical depiction of SLOWEXT is given in the grey part of Figure 1.

Crucially, as $t < n/3$, at least one half contains less than one-third of faulty processes. Therefore, there exists a “healthy” (non-corrupted) half that successfully executes the recursive call (i.e., successfully executes the committee broadcast primitive). However, agreement achieved among a healthy half must be preserved, i.e., preventing an unhealthy half from ruining the “healthy decision” is imperative. To this end, the recursive framework utilizes the graded consensus primitive that allows the correct processes to stick with their previously made (if any) decision. For example, suppose that the first half of processes is healthy. Hence, after executing SLOWEXT among the first half of processes (i.e., in the first committee broadcast primitive), all correct processes obtain the

Module 4 Finisher \langle Entire \rangle **Participants:**

- Entire $\subseteq \Pi$; let $x = |\text{Entire}|$ and let x' be the greatest integer smaller than $x/3$.

Events:

- request* input($v \in \text{Value}, g \in \{0, 1\}$): a process inputs a pair (v, g) .
- indication* output($v' \in \text{Value}$): a process outputs a value v' .

Assumed behavior:


- All correct processes input a pair and they do so within 2δ time of each other.
- No correct process stops unless it has previously output a value.
- If any correct process inputs a pair $(v, 1)$, for any value v , then no correct process inputs a pair $(v' \neq v, \cdot)$.

Properties ensured only if up to x' processes in Entire are faulty:

- Preservation*: If a correct process p_i outputs a value v' , then p_i has previously input a pair (v', \cdot) .
- Agreement*: No two correct processes output different values.
- Justification*: If a correct process outputs a value, then a pair $(\cdot, 1)$ was input by a correct process.
- Liveness*: Let all correct processes input a pair $(v, 1)$, for any value v . Let τ be the first time by which all correct processes have input. Then, all correct processes output value v by time $\tau + \delta$.
- Totality*: Let τ be the first time at which a correct process outputs a value. Then, all correct processes output a value by time $\tau + 2\delta$.

Properties ensured even if more than x' processes in Entire are faulty:

- Complexity*: Each correct process sends $O(x)$ bits.

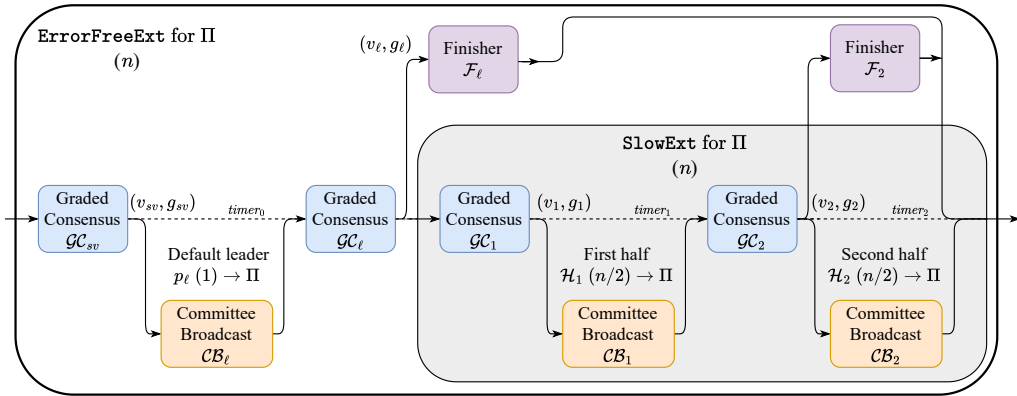

■ **Figure 1** The recursive structure of ERRORFREEEXT (and SLOWEXT).

same value (due to the optimistic consensus property of committee broadcast). In this case, the graded consensus primitive \mathcal{GC}_2 ensures that correct processes cannot change their values due to the actions of the second half, thus preserving the previously achieved agreement. By implementing both the graded consensus and committee broadcast primitives with only $O(nL + n^2 \log n)$ bits (see Appendices A and C), SLOWEXT achieves near-optimal asymptotic bit complexity:

$$\sum_{i=0}^{\log n} 2^i \cdot \left(\frac{n}{2^i} L + \left(\frac{n}{2^i} \right)^2 \log \left(\frac{n}{2^i} \right) \right) \leq \sum_{i=0}^{\log n} \left(nL + \frac{n^2}{2^i} \log n \right) \in O((nL + n^2) \log n).$$

4.3 Pseudocode

The pseudocode of ERRORFREEEXT is given in Algorithm 2, whereas its graphical presentation can be found in Figure 1. Below, we give key insights for obtaining ERRORFREEEXT from SLOWEXT.

Why is SLOWEXT not early-stopping? SLOWEXT does not achieve early stopping as SLOWEXT allocates a predetermined number of rounds for each recursive call: processes cannot *prematurely* terminate a recursive call even if they have already decided. In particular, each recursive call

consumes the *maximum* number of rounds necessary for its completion. This maximum number of rounds is proportional to the upper bound t on the number of Byzantine processes rather than the actual number $f \leq t$ of Byzantine processes. As a result, SLOWEXT incurs round complexity dependent on t rather than f .

From SLOWEXT to ERRORFREEEXT. To achieve early stopping from SLOWEXT, ERRORFREEEXT mirrors the binary approach of [85] and carefully adapts it to long L -bit values. The first key ingredient is the introduction of the finisher instance \mathcal{F}_2 that we position (1) before the committee broadcast instance \mathcal{CB}_2 led by the second half of processes, and (2) after the graded consensus instance \mathcal{GC}_2 . In brief, \mathcal{F}_2 leverages the presence of the graded consensus instance \mathcal{GC}_2 to check if \mathcal{GC}_2 ensured agreement among correct processes. If that is the case, then \mathcal{F}_2 allows correct processes to terminate immediately (i.e., in $O(\delta)$ time) after the termination of the committee broadcast instance \mathcal{CB}_1 led by the first half of processes.

However, the introduction of \mathcal{F}_2 to tackle early-stopping brings its share of technical difficulties. Indeed, since the actual number of failures f is unknown, processes cannot remain perfectly synchronized: a correct process p_i might decide (and terminate) at some time τ thinking this is the maximum time before all correct processes decide given the failures p_i observed, whereas another correct process p_j might still be running after time τ as it has observed more failures than p_i . To handle the aforementioned desynchronization, ERRORFREEEXT relies on *weak synchronization* ensuring that correct processes execute different sub-modules with at most 2δ resynchronization time: if the first correct process starts executing a sub-module at time τ , then all correct processes start executing the same sub-module by time $\tau + 2\delta$. To achieve this weak synchronization, we follow the standard approach of [106, 107]. Furthermore, to handle the 2δ desynchronization in ERRORFREEEXT's sub-modules, we extend the round duration of graded consensus instances from the original δ time to 3δ time. (The specification of the other sub-modules directly tackles the aforementioned desynchronization.) We emphasize that at some point τ , correct processes might be in different rounds: e.g., a correct process p_i can be in round 4, whereas another correct process p_j is in round 5. However, the round duration of 3δ ensures that all correct processes *overlap* in each round for (at least) δ time. As message delays are bounded by δ , the δ -time-overlap is enough to ensure that each correct process hears all r -round-messages from all correct processes before leaving round r . (We emphasize that this is a well-known simulation technique; see, e.g., [85, 44].)

It is important to mention that ERRORFREEEXT starts with a single standard “Phase King” iteration: (1) the committee broadcast instance \mathcal{CB}_ℓ with a predetermined leader p_ℓ , (2) the graded consensus instance \mathcal{GC}_ℓ , and (3) the finisher instance \mathcal{F}_ℓ . This iteration is added to prevent ERRORFREEEXT from running for $\Theta(\log n)$ time when there are only $O(1)$ faults. Indeed, if the predetermined leader p_ℓ is correct, the committee broadcast instance \mathcal{CB}_ℓ ensures that all correct processes propose the same valid value v to \mathcal{GC}_ℓ in $O(1)$ time after starting ERRORFREEEXT. Then, the strong validity property of \mathcal{GC}_ℓ ensures that all correct processes decide $(v, 1)$ from \mathcal{GC}_ℓ and input $(v, 1)$ to \mathcal{F}_ℓ . This enables \mathcal{F}_ℓ to make all correct processes decide v immediately (i.e., in $O(\delta)$ time) after starting.

Lastly, the graded consensus instance \mathcal{GC}_{sv} (along with \mathcal{GC}_ℓ) is utilized to ensure the strong validity property. If all correct processes propose the same value v to ERRORFREEEXT, then (1) all correct processes decide $(v, 1)$ from \mathcal{GC}_{sv} and propose v to \mathcal{GC}_ℓ , (2) all correct processes decide $(v, 1)$ from \mathcal{GC}_ℓ and input $(v, 1)$ to \mathcal{F}_ℓ , and (3) output v from \mathcal{F}_ℓ and decide v from ERRORFREEEXT.

4.4 Proof Sketch

This subsection provides a proof sketch of the following theorem:

► **Theorem 2.** *ERRORFREEEXT is an error-free early-stopping validated agreement algorithm with $O((nL + n^2) \log n)$ bit complexity.*

■ **Algorithm 2** ERRORFREEEXT: Pseudocode (for process p_i)

1: **Participants:** ▷ due to the recursive nature of ERRORFREEEXT, we explicitly state its set of participants
2: Entire $\subseteq \Pi$ with $|\text{Entire}| = x$ processes

3: **Constants:**
4: Set(Process) $\mathcal{H}_1 = \{p_1, p_2, \dots, p_{\lceil \frac{x}{2} \rceil}\} \setminus \{p_\ell\}$ ▷ p_ℓ is a default leader, e.g., $p_\ell = p_1$
5: Set(Process) $\mathcal{H}_2 = \{p_{\lceil \frac{x}{2} \rceil + 1}, \dots, p_x\} \setminus \{p_\ell\}$
6: Integer $\beta = 7$ ▷ the constant β is explained in Appendix C.1.2
7: ▷ the concrete values of R_1 and R_2 can be computed using the recursive equation presented in Appendix C
8: Integer R_1 = the worst-case latency complexity of ERRORFREEEXT among \mathcal{H}_1 with up to $\lceil \mathcal{H}_1 \rceil / 3$ failures
9: Integer R_2 = the worst-case latency complexity of ERRORFREEEXT among \mathcal{H}_2 with up to $\lceil \mathcal{H}_2 \rceil / 3$ failures
10: Time $timeout_1 = (R_1 + 2 + \beta)\delta$
11: Time $timeout_2 = (R_2 + 2 + \beta)\delta$

12: **Uses:**
13: Graded consensus among Entire, **instances** $\mathcal{GC}_{sv}, \mathcal{GC}_\ell, \mathcal{GC}_1, \mathcal{GC}_2$ ▷ bits: $O(nL + n^2 \log n)$, rounds: 8
14: Committee broadcast $\langle \text{Entire}, \{p_\ell\}, \text{ERRORFREEEXT} \rangle$, **instance** \mathcal{CB}_ℓ
15: Committee broadcast $\langle \text{Entire}, \mathcal{H}_1, \text{ERRORFREEEXT} \rangle$, **instance** \mathcal{CB}_1
16: Committee broadcast $\langle \text{Entire}, \mathcal{H}_2, \text{ERRORFREEEXT} \rangle$, **instance** \mathcal{CB}_2
17: Finisher, **instances** $\mathcal{F}_\ell, \mathcal{F}_2$

18: **Local variables:**
19: Value $v_i \leftarrow \perp$ ▷ p_i 's proposal
20: Timer $timer_0, timer_1, timer_2$

21: **upon** propose(Value v):
22: $v_i \leftarrow v$
23: **invoke** $\mathcal{GC}_{sv}.\text{propose}(v_i)$

24: **upon** $\mathcal{GC}_{sv}.\text{decide}(\text{Value } v_0, \{0, 1\} \ni g_0)$:
25: $v_i \leftarrow v_0$
26: $timer_0.\text{measure}((2 + \beta)\delta)$
27: **invoke** $\mathcal{CB}_\ell.\text{input}(v_0, g_0)$

28: **upon** $\mathcal{CB}_\ell.\text{output}(\text{Value } v')$:
29: **invoke** $\mathcal{GC}_\ell.\text{propose}(v')$

30: **upon** $timer_0$ expires:
31: **invoke** $\mathcal{GC}_\ell.\text{propose}(v_i)$

32: **upon** $\mathcal{GC}_\ell.\text{decide}(\text{Value } v_\ell, \{0, 1\} \ni g_\ell)$:
33: $v_i \leftarrow v_\ell$
34: **invoke** $\mathcal{F}_\ell.\text{input}(v_\ell, g_\ell)$
35: **wait for** 3δ ▷ if p_ℓ is correct and $f < n/3$, decision is made at line 38, without any additional steps
36: **invoke** $\mathcal{GC}_1.\text{propose}(v_\ell)$

37: **upon** $\mathcal{F}_\ell.\text{output}(\text{Value } v)$:
38: **trigger** $\text{decide}(v)$ ▷ will be triggered after $O(\delta)$ time if p_ℓ is correct and $f < n/3$
39: **wait for** 2δ , and **stop executing** (the current instance of) ERRORFREEEXT

40: **upon** $\mathcal{GC}_1.\text{decide}(\text{Value } v_1, \{0, 1\} \ni g_1)$:
41: $v_i \leftarrow v_1$:
42: **invoke** $timer_1.\text{measure}(timeout_1)$
43: **invoke** $\mathcal{CB}_1.\text{input}(v_1, g_1)$

44: **upon** $\mathcal{CB}_1.\text{output}(\text{Value } v')$:
45: **invoke** $\mathcal{GC}_2.\text{propose}(v')$

46: **upon** $timer_1$ expires:
47: **invoke** $\mathcal{GC}_2.\text{propose}(v_i)$

48: **upon** $\mathcal{GC}_2.\text{decide}(\text{Value } v_2, \{0, 1\} \ni g_2)$:
49: $v_i \leftarrow v_2$
50: **invoke** $\mathcal{F}_2.\text{input}(v_2, g_2)$
51: **wait for** 3δ ▷ if \mathcal{H}_1 is healthy and $f < n/3$, decision is made at line 55, without additional step
52: **invoke** $timer_2.\text{measure}(timeout_2)$
53: **invoke** $\mathcal{CB}_2.\text{input}(v_2, g_2)$

54: **upon** $\mathcal{F}_2.\text{output}(v)$:
55: **trigger** $\text{decide}(v)$ ▷ will be triggered after $O(f\delta)$ time if the first half is healthy, but not p_1
56: **wait for** 2δ , and **stop executing** (the current instance of) ERRORFREEEXT

57: **upon** $\mathcal{CB}_2.\text{output}(v')$:
58: **trigger** $\text{decide}(v')$, **wait for** 2δ , and **stop executing** (the current instance of) ERRORFREEEXT

59: **upon** $timer_2$ expires:
60: **trigger** $\text{decide}(v_i)$, **wait for** 2δ , and **stop executing** (the current instance of) ERRORFREEEXT

We underline that `ERRORFREEEXT` achieves *balanced* bit complexity as its *per-process* complexity is $O((L + n) \log n)$. Recall that the formal proof of Theorem 2 is relegated to Appendix C. This subsection only discusses the key intermediate results ensured by `ERRORFREEEXT`.

Gluing all sub-modules together. Processes execute each sub-module within 2δ time of each other, thus enabling the associated implementations to realize the corresponding specifications. The consistency property of the graded consensus primitive ensures a similar consistency for the inputs to the following committee broadcast primitive. Under this condition, the strong validity property of the underlying validated agreement protocol ensures agreement if the recursive call is executed with a healthy (non-corrupted) committee.

Ensuring strong validity. Strong validity is implied by (1) the strong validity properties of \mathcal{GC}_{sv} and \mathcal{GC}_ℓ , (2) the stability property of \mathcal{CB}_ℓ , and (3) the liveness and agreement properties of \mathcal{F}_ℓ .

Finisher’s “lock”. If a process decides a value v via a finisher $\mathcal{F} \in \{\mathcal{F}_\ell, \mathcal{F}_2\}$, the justification property of \mathcal{F} , combined with the consistency property of the graded consensus $\mathcal{GC} \in \{\mathcal{GC}_\ell, \mathcal{GC}_2\}$ positioned immediately before, ensures that every correct process outputs (v, \cdot) from \mathcal{GC} .

From a correct leader or the first healthy committee to a common valid decision. If the predetermined leader p_ℓ is correct, all correct processes agree on a common value after \mathcal{F}_ℓ : this holds due to (1) the optimistic consensus property of \mathcal{CB}_ℓ , (2) the strong validity property of \mathcal{GC}_ℓ , and (3) the liveness and agreement properties of \mathcal{F}_ℓ . Similarly, if p_ℓ is faulty, but the first half of processes is healthy, all correct processes agree on a common value after \mathcal{F}_2 . Importantly, if some correct process decides via \mathcal{F}_ℓ , the finisher’s lock (see the paragraph above), combined with the strong validity properties of \mathcal{GC}_1 and \mathcal{GC}_2 and the stability property of \mathcal{CB}_1 , guarantees agreement.

Ensuring that the second half’s value is adopted only if the second half is healthy. If a correct process does not decide via \mathcal{F}_ℓ or \mathcal{F}_2 , it means that both the predetermined leader p_ℓ and the first half of processes are unhealthy, which implies that the second half is necessarily healthy. If some correct process decides via \mathcal{F}_2 , the finisher’s lock, combined with \mathcal{CB}_2 ’s strong validity, preserves agreement. Let us emphasize that if some correct process decides via \mathcal{F}_ℓ , the agreement is ensured due to (1) the finisher’s lock, (2) the strong validity properties of \mathcal{GC}_1 and \mathcal{GC}_2 , and (3) the stability property of \mathcal{CB}_1 .

Complexity. The per-process bit complexity $\mathcal{B}(n)$ of `ERRORFREEEXT` follows from the equation $\mathcal{B}(n) \leq O(L + n \log n) + \max(\mathcal{B}(\lfloor \frac{n}{2} \rfloor), \mathcal{B}(\lceil \frac{n}{2} \rceil))$. Similarly, the early stopping property holds due to the following equations: (1) $\mathcal{L}(n, f) \in O(\delta)$ if the predetermined leader p_ℓ is correct, and (2) $\mathcal{L}(n, f) \leq O(\delta) + \mathcal{L}(|\mathcal{H}_1|, f_1) + \mathcal{L}(|\mathcal{H}_2|, f_2)$ otherwise, where f_1 (resp., f_2) denotes the actual number of faulty processes among the first (resp., second) half of processes \mathcal{H}_1 (resp., \mathcal{H}_2).

5 Related Work

Graded consensus. Graded consensus and other closely related problems such as (binding) crusader agreement [4, 96] have been collectively studied by Attiya and Welch [20], who refer to this family of problems as “connected consensus”. In brief, connected consensus can be viewed as approximate agreement on spider graphs, consisting of a central clique (could be a single vertex) to which different paths (“branches”) are attached, each representing a potential value.

Graded consensus and the related problems have proven extremely helpful for solving Byzantine agreement. In fully asynchronous environments, an alternating sequence of quadratic instances of binding crusader agreement and (reasonably fair) common coin allows for a binary Byzantine agreement with strong validity, an expected $O(n^2)$ bit complexity and an expected $O(1)$ latency [4, 96]. In synchrony, graded consensus has been employed in various adaptations of the “phase king” methodology [85, 42, 24, 95, 7] to achieve quadratic consensus for constant-sized values.

Following the seminal Dolev-Reischuk lower bound [53] stating that $\Omega(nt)$ messages must be exchanged for solving Byzantine agreement, Abraham and Stern [12] have proven that deterministic binary crusader broadcast (and thus graded consensus) also requires $\Omega(nt)$ exchanged messages (assuming $L \in O(1)$) if the adversary has simulation capabilities.⁵ When $L \in O(1)$, Attiya and Welch [20] present an optimally resilient ($t < n/3$), error-free connected consensus algorithm with optimal $O(n^2)$ bit complexity even in asynchrony. Momose and Ren [95] present a synchronous graded consensus algorithm secure against a computationally bounded adversary with (1) optimal resilience ($t < n/2$), and (2) $O(n^2\kappa)$ bit complexity (again, for $L \in O(1)$), where κ denotes the size of cryptographic objects. However, for longer L -bit values, related work is not as rich. Abraham and Asharov [2] solve gradecast [56], with optimal $O(nL)$ bit complexity in synchrony, albeit with a statistical error (their protocol is not error-free).

As mentioned in §1, error-free graded consensus with $O(L + n \log n)$ per-process bits can be easily derived from the technique introduced by Chen in the COOL protocol [35]. A quasi-identical extraction appeared for synchronous gradecast in [19, 115], asynchronous reliable broadcast [14], and $n/5$ -resilient asynchronous graded consensus [86, 39]. Recall that COOL is an error-free synchronous Byzantine agreement algorithm that satisfies (only) strong validity, exchanges $O(nL + n^2 \log n)$ bits, and terminates in $O(n)$ rounds.⁶ The structure of COOL consists of four phases. The first three phases reduce the number of possible decision values to at most one, i.e., only one value “survives” the first three phases. At the end of the third phase, all processes engage in a one-bit Byzantine agreement algorithm to decide whether a non- \perp or the \perp value should be decided from COOL. If it is decided that a non- \perp value should be decided, all processes participate in the fourth, reconstruction phase whose goal is to allow all processes to obtain that one non- \perp value that has previously survived the first three phases.

Reductions and equivalences between Byzantine agreement problems. Interactive consistency is an agreement variant where correct processes agree on the proposals of all processes. Any solvable Byzantine agreement problem (including validated agreement) can be reduced to interactive consistency at no cost [41]. This problem can further be reduced to n (parallel) instances of Byzantine broadcast, thus its other name “parallel broadcast” [19]. In the honest-majority setting ($n > 2t$), Byzantine broadcast and agreement with strong validity are computationally equivalent.⁷ Moreover, Byzantine broadcast can be reduced to consensus with strong validity by adding just one more round, where the source sends its L -bit proposal to all other processes.

Without trusted setup, any Byzantine agreement problem is solvable if and only if $n > 3t$ [58, 98, 99] (if we ignore the resource-restricted model [60]). Reducing validated agreement to interactive consistency is excessive, given the unavoidable $\Omega(n^2L)$ lower bound associated with interactive consistency. This is obviously true for long inputs, and remains applicable to medium-sized inputs (for instance, when $L = O(n)$ and $L = \omega(\log(n))$), since in this case, the $\Omega(n^2L)$ lower bound dominates the $O(n^2 \log n)$ bit complexity of `ERRORFREEEXT`.

Even when considering amortized complexity, it is easy to see situations where interactive consistency may be excessive. For instance, consider processes that aim to implement state-machine replication via multi-shot interactive consistency for clients external to the system who wish to publish transactions on the corresponding ledger [18]. If a client sends transactions to a sub-linear

⁵ The ability to simulate encompasses classic unauthenticated protocols but does not consider resource-restricted model [60] where the adversary’s capability to simulate other processes can be restricted assuming a per-process bounded rate of cryptographic puzzle-solving capability without any authentication mechanism [17, 71].

⁶ As mentioned in §1, the COOL protocol trivially achieves $O(f+1)$ round complexity by using [85] as the underlying binary consensus protocol.

⁷ Our strong validity property is sometimes called *weak validity* [10], while *strong validity* is used when the decision must be proposed by a correct process.

number of servers, there's a risk these transactions may never be published. Conversely, if clients send their transactions to a linear number of different servers, the same transaction could appear multiple times, thereby reducing the throughput by the same factor.

Setup-free sub-quadratic randomized Byzantine agreement. There exist randomized statistically secure (resilient against a computationally unbounded adversary with probability $1 - \frac{1}{2^\lambda}$, where λ represents some security parameter) Byzantine broadcast protocols that achieve sub-quadratic expected bit complexity (assuming $L \in O(1)$). However, these algorithms either (1) tackle only static adversaries that corrupt processes at the beginning of an execution [78, 75, 27, 63],⁸ or (2) require private (also known as secure) communication channels [76, 77]. Facing static corruption only, there exists a solution to the Byzantine agreement problem that does not rely on n instances of Byzantine broadcast [78]. (1) Processes agree (with high probability) on a λ -sized committee, which then executes any Byzantine agreement protocol. (2) The committee then disseminates the decided value to all processes outside of the committee. (3) A non-committee process decides on a value received by the majority of processes in the committee. This protocol is correct as long as there is a correct majority in the committee, that is with probability $1 - \exp(-\Omega(\lambda))$ due to the standard Chernoff bound.

Randomized Byzantine agreement with constant expected latency. Using private (also known as secure) channels,⁹ it is possible to achieve various types of Byzantine agreement with a constant expected latency, even against adaptive adversaries, by employing some random election techniques. This applies to synchronous interactive consistency [19, 11], synchronous validated agreement [11], asynchronous common subset (ACS), also referred to as agreement on a core set or vector consensus [47, 102, 43, 3], asynchronous atomic broadcast (without relying on ACS) [108, 36], and asynchronous validated agreement [57, 89, 114, 87].

Error correction. Many distributed tasks [50, 112, 103, 37, 48, 59, 72, 31, 55, 2, 89, 97, 19, 11, 47, 102, 43, 3, 108, 36, 57] employ coding techniques such as erasure codes [25, 70, 15] or error-correction codes [100, 22]. For the comprehensive list of distributed primitive utilizing coding techniques, we refer the reader to [40].

Disperse-agree-retrieval (DARE) paradigm. As introduced in §1, existing deterministic authenticated validated agreement protocols with $O(nL + n^2\kappa)$ communication, employ the DARE paradigm [38, 40]. In this paradigm, processes initially agree on a “self-certifying” proof of retrievability (PoR) (also known as a “proof of dispersal”). This proof ensures that processes can retrieve the (valid) pre-image of a digest. Signature-free protocols that use random election techniques through private channels [57, 108] can circumvent the need for an explicit PoR. Indeed, the use of randomization allows a constant expected number of reconstructions (with costly $\Omega(nL)$ communication) of non-valid values dispersed by Byzantine processes.

It might be feasible to achieve setup-free validated agreement with $O(nL + \text{poly}(\kappa, n))$ communication and without private channels, by employing an extension protocol built upon an explicit PoR. Such a strategy would involve an interactive Succinct ARGument (SARG) system. This argument system would enable processes to prove that the digest of their proposal corresponds to a valid pre-image without having to transmit the proposal itself (the proposal plays the role of the witness in the argument system). As discussed in [109, Section 6.5.2 and 7.3] and initially observed in [113], it is possible to implement such an argument system by using some polynomial commitment scheme

⁸ We underline that `ERRORFREEEXT`, as it is a deterministic protocol, tolerates an adaptive adversary capable of corrupting processes during (and not only before) any execution (see §2). This remains true even if such an adaptive adversary is equipped with after-the-fact-removal capabilities [5, 6].

⁹ Establishing a threshold setup to use a threshold pseudo-random function [30], as in [11], necessitates a distributed key generation protocol that also relies on private channels [49].

[109, Section 7.3] to turn the GKR interactive proof for arithmetic circuit evaluation [66, 67, 68] into a succinct argument for arithmetic circuit satisfiability. Subsequently, processes could (1) agree on which digests are both valid and consistently dispersed, (2) execute a validated agreement protocol (designed for values with length independent of L) to reach consensus on a retrievable digest, and (3) retrieve the corresponding valid pre-image. Given the deterministic nature and the conceptual simplicity of `HASHEXT`, this approach was not pursued in this paper.

References

- 1 Michael Abd-El-Malek, Gregory R Ganger, Garth R Goodson, Michael K Reiter, and Jay J Wylie. Fault-Scalable Byzantine Fault-Tolerant Services. *ACM SIGOPS Operating Systems Review*, 39(5):59–74, 2005.
- 2 Ittai Abraham and Gilad Asharov. Gradecast in synchrony and reliable broadcast in asynchrony with optimal resilience, efficiency, and unconditional security. In Alessia Milani and Philipp Woelfel, editors, *PODC '22: ACM Symposium on Principles of Distributed Computing, Salerno, Italy, July 25 - 29, 2022*, pages 392–398. ACM, 2022. doi:10.1145/3519270.3538451.
- 3 Ittai Abraham, Gilad Asharov, Arpita Patra, and Gilad Stern. Perfectly secure asynchronous agreement on a core set in constant expected time. *IACR Cryptol. ePrint Arch.*, page 1130, 2023. URL: <https://eprint.iacr.org/2023/1130>.
- 4 Ittai Abraham, Naama Ben-David, and Sravya Yandamuri. Efficient and Adaptively Secure Asynchronous Binary Agreement via Binding Crusader Agreement. In Alessia Milani and Philipp Woelfel, editors, *PODC '22: ACM Symposium on Principles of Distributed Computing, Salerno, Italy, July 25 - 29, 2022*, pages 381–391. ACM, 2022. doi:10.1145/3519270.3538426.
- 5 Ittai Abraham, T.-H. Hubert Chan, Danny Dolev, Kartik Nayak, Rafael Pass, Ling Ren, and Elaine Shi. Communication Complexity of Byzantine Agreement, Revisited. In Peter Robinson and Faith Ellen, editors, *Proceedings of the 2019 ACM Symposium on Principles of Distributed Computing, PODC 2019, Toronto, ON, Canada, July 29 - August 2, 2019*, pages 317–326. ACM, 2019.
- 6 Ittai Abraham, T.-H. Hubert Chan, Danny Dolev, Kartik Nayak, Rafael Pass, Ling Ren, and Elaine Shi. Communication complexity of byzantine agreement, revisited. *Distributed Comput.*, 36(1):3–28, 2023. URL: <https://doi.org/10.1007/s00446-022-00428-8>, doi:10.1007/S00446-022-00428-8.
- 7 Ittai Abraham and Andrew Lewis-Pye. Phase-king through the lens of gradecast: A simple unauthenticated synchronous byzantine agreement protocol. Decentralized Thoughts, Blog Post. <https://decentralizedthoughts.github.io/2022-06-09-phase-king-via-gradecast/>.
- 8 Ittai Abraham, Dahlia Malkhi, Kartik Nayak, Ling Ren, and Alexander Spiegelman. Solida: A Blockchain Protocol Based on Reconfigurable Byzantine Consensus. *arXiv preprint arXiv:1612.02916*, 2016.
- 9 Ittai Abraham, Dahlia Malkhi, Kartik Nayak, Ling Ren, and Alexander Spiegelman. Solidus: An Incentive-compatible Cryptocurrency Based on Permissionless Byzantine Consensus. *CoRR, abs/1612.02916*, 2016.
- 10 Ittai Abraham, Dahlia Malkhi, and Alexander Spiegelman. Asymptotically Optimal Validated Asynchronous Byzantine Agreement. In *Proceedings of the 2019 ACM Symposium on Principles of Distributed Computing*, pages 337–346, 2019. URL: <https://arxiv.org/pdf/1811.01332.pdf>.
- 11 Ittai Abraham, Kartik Nayak, and Nibesh Shrestha. Communication and round efficient parallel broadcast protocols. *IACR Cryptol. ePrint Arch.*, page 1172, 2023. URL: <https://eprint.iacr.org/2023/1172>.
- 12 Ittai Abraham and Gilad Stern. New dolev-reischuk lower bounds meet blockchain eclipse attacks. In Eshcar Hillel, Roberto Palmieri, and Etienne Rivière, editors, *26th International Conference on Principles of Distributed Systems, OPODIS 2022, December 13-15, 2022, Brussels, Belgium*, volume 253 of *LIPICs*, pages 16:1–16:18. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2022. URL: <https://doi.org/10.4230/LIPICs.OPODIS.2022.16>, doi:10.4230/LIPICs.OPODIS.2022.16.
- 13 Atul Adya, William Bolosky, Miguel Castro, Gerald Cermak, Ronnie Chaiken, John Douceur, Jon Howell, Jacob Lorch, Marvin Theimer, and Roger Wattenhofer. {FARSITE}: Federated, Available, and Reliable Storage for an Incompletely Trusted Environment. In *5th Symposium on Operating Systems Design and Implementation (OSDI 02)*, 2002.
- 14 Nicolas Alhaddad, Sourav Das, Sisi Duan, Ling Ren, Mayank Varia, Zhuolun Xiang, and Haibin Zhang. Balanced byzantine reliable broadcast with near-optimal communication and improved computation.

- In Alessia Milani and Philipp Woelfel, editors, *PODC '22: ACM Symposium on Principles of Distributed Computing, Salerno, Italy, July 25 - 29, 2022*, pages 399–417. ACM, 2022. doi:10.1145/3519270.3538475.
- 15 Nicolas Alhaddad, Sisi Duan, Mayank Varia, and Haibin Zhang. Succinct Erasure Coding Proof Systems. *Cryptology ePrint Archive*, 2021.
 - 16 Yair Amir, Claudiu Danilov, Jonathan Kirsch, John Lane, Danny Dolev, Cristina Nita-Rotaru, Josh Olsen, and David Zage. Scaling Byzantine Fault-Tolerant Replication to Wide Area Networks. In *International Conference on Dependable Systems and Networks (DSN'06)*, pages 105–114. IEEE, 2006.
 - 17 Marcin Andrychowicz and Stefan Dziembowski. Pow-based distributed cryptography with no trusted setup. In Rosario Gennaro and Matthew Robshaw, editors, *Advances in Cryptology - CRYPTO 2015 - 35th Annual Cryptology Conference, Santa Barbara, CA, USA, August 16-20, 2015, Proceedings, Part II*, volume 9216 of *Lecture Notes in Computer Science*, pages 379–399. Springer, 2015. doi:10.1007/978-3-662-48000-7_19.
 - 18 Antonio Fernández Anta, Kishori M. Konwar, Chryssis Georgiou, and Nicolas C. Nicolaou. Formalizing and implementing distributed ledger objects. *SIGACT News*, 49(2):58–76, 2018. doi:10.1145/3232679.3232691.
 - 19 Gilad Asharov and Anirudh Chandramouli. Perfect (parallel) broadcast in constant expected rounds via statistical VSS. In Marc Joye and Gregor Leander, editors, *Advances in Cryptology - EUROCRYPT 2024 - 43rd Annual International Conference on the Theory and Applications of Cryptographic Techniques, Zurich, Switzerland, May 26-30, 2024, Proceedings, Part V*, volume 14655 of *Lecture Notes in Computer Science*, pages 310–339. Springer, 2024. doi:10.1007/978-3-031-58740-5_11.
 - 20 Hagit Attiya and Jennifer L. Welch. Multi-valued connected consensus: A new perspective on crusader agreement and adopt-commit. In Alysson Bessani, Xavier Défago, Junya Nakamura, Koichi Wada, and Yukiko Yamauchi, editors, *27th International Conference on Principles of Distributed Systems, OPODIS 2023, December 6-8, 2023, Tokyo, Japan*, volume 286 of *LIPICs*, pages 6:1–6:23. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2023. URL: <https://doi.org/10.4230/LIPICs.OPODIS.2023.6>, doi:10.4230/LIPICs.OPODIS.2023.6.
 - 21 Zuzana Beerliova-Trubiniova and Martin Hirt. Simple and efficient perfectly-secure asynchronous MPC. *Lecture Notes in Computer Science (including subseries Lecture Notes in Artificial Intelligence and Lecture Notes in Bioinformatics)*, 4833 LNCS:376–392, 2007. doi:10.1007/978-3-540-76900-2_23.
 - 22 Michael Ben-Or, Ran Canetti, and Oded Goldreich. Asynchronous Secure Computation. In *Proceedings of the twenty-fifth annual ACM symposium on Theory of computing*, pages 52–61, 1993.
 - 23 Michael Ben-Or, Shafi Goldwasser, and Avi Wigderson. Completeness theorems for non-cryptographic fault-tolerant distributed computation (extended abstract). In Janos Simon, editor, *Proceedings of the 20th Annual ACM Symposium on Theory of Computing, May 2-4, 1988, Chicago, Illinois, USA*, pages 1–10. ACM, 1988. doi:10.1145/62212.62213.
 - 24 Piotr Berman, Juan A Garay, and Kenneth J Perry. Bit Optimal Distributed Consensus. In *Computer science: research and applications*, pages 313–321. Springer, 1992.
 - 25 Richard E Blahut. *Theory and practice of error control codes*, volume 126. Addison-Wesley Reading, 1983.
 - 26 Gabriel Bracha and Sam Toueg. Asynchronous consensus and broadcast protocols. *J. ACM*, 32(4):824–840, October 1985. doi:10.1145/4221.214134.
 - 27 Nicolas Braud-Santoni, Rachid Guerraoui, and Florian Huc. Fast byzantine agreement. In *Proceedings of the 2013 ACM symposium on Principles of distributed computing*, pages 57–64, 2013.
 - 28 Ethan Buchman. *Tendermint: Byzantine Fault Tolerance in the Age of Blockchains*. PhD thesis, University of Guelph, 2016.
 - 29 Christian Cachin, Klaus Kursawe, Frank Petzold, and Victor Shoup. Secure and Efficient Asynchronous Broadcast Protocols. In Joe Kilian, editor, *Advances in Cryptology - CRYPTO 2001, 21st Annual International Cryptology Conference, Santa Barbara, California, USA, August 19-23, 2001, Proceedings*, volume 2139 of *Lecture Notes in Computer Science*, pages 524–541. Springer, 2001. doi:10.1007/3-540-44647-8_31.
 - 30 Christian Cachin, Klaus Kursawe, and Victor Shoup. Random Oracles in Constantinople: Practical Asynchronous Byzantine Agreement Using Cryptography. *J. Cryptol.*, 18(3):219–246, 2005. doi:10.1007/s00145-005-0318-0.

- 31 Jan Camenisch, Manu Drijvers, Timo Hanke, Yvonne Anne Pignolet, Victor Shoup, and Dominic Williams. Internet Computer Consensus. *Proceedings of the Annual ACM Symposium on Principles of Distributed Computing*, 2021:81–91, 2022. doi:10.1145/3519270.3538430.
- 32 Miguel Castro and Barbara Liskov. Practical Byzantine Fault Tolerance and Proactive Recovery. *ACM Transactions on Computer Systems*, 20(4), 2002.
- 33 Nishanth Chandran, Wutichai Chongchitmate, Juan A. Garay, Shafi Goldwasser, Rafail Ostrovsky, and Vassilis Zikas. The hidden graph model: Communication locality and optimal resiliency with adaptive faults. In *ITCS 2015 - Proceedings of the 6th Innovations in Theoretical Computer Science*, pages 153–162, 2015. doi:10.1145/2688073.2688102.
- 34 Jinyuan Chen. Fundamental limits of byzantine agreement. *CoRR*, abs/2009.10965, 2020. URL: <https://arxiv.org/abs/2009.10965>, arXiv:2009.10965.
- 35 Jinyuan Chen. Optimal error-free multi-valued byzantine agreement. In Seth Gilbert, editor, *35th International Symposium on Distributed Computing, DISC 2021, October 4-8, 2021, Freiburg, Germany (Virtual Conference)*, volume 209 of *LIPICs*, pages 17:1–17:19. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2021. doi:10.4230/LIPICs.DISC.2021.17.
- 36 Hao Cheng, Yuan Lu, Zhenliang Lu, Qiang Tang, Yuxuan Zhang, and Zhenfeng Zhang. Jumbo: Fully asynchronous bft consensus made truly scalable. *arXiv preprint arXiv:2403.11238*, 2024.
- 37 Ashish Choudhury. Almost-surely terminating asynchronous byzantine agreement against general adversaries with optimal resilience. In *24th International Conference on Distributed Computing and Networking, ICDCN 2023, Kharagpur, India, January 4-7, 2023*, pages 167–176. ACM, 2023. doi:10.1145/3571306.3571333.
- 38 Pierre Civit, Muhammad Ayaz Dzulfikar, Seth Gilbert, Rachid Guerraoui, Jovan Komatovic, and Manuel Vidigueira. DARE to agree: Byzantine agreement with optimal resilience and adaptive communication. *To appear in PODC 2024*, page 403, 2024. URL: <https://eprint.iacr.org/2024/403>.
- 39 Pierre Civit, Muhammad Ayaz Dzulfikar, Seth Gilbert, Rachid Guerraoui, Jovan Komatovic, Manuel Vidigueira, and Igor Zlotochi. Partial synchrony for free? new bounds for byzantine agreement via a generic transformation across network models. *CoRR*, abs/2402.10059, 2024. URL: <https://doi.org/10.48550/arXiv.2402.10059>, arXiv:2402.10059, doi:10.48550/ARXIV.2402.10059.
- 40 Pierre Civit, Seth Gilbert, Rachid Guerraoui, Jovan Komatovic, Matteo Monti, and Manuel Vidigueira. Every Bit Counts in Consensus. In Rotem Oshman, editor, *37th International Symposium on Distributed Computing (DISC 2023)*, volume 281 of *Leibniz International Proceedings in Informatics (LIPICs)*, pages 13:1–13:26, Dagstuhl, Germany, 2023. Schloss Dagstuhl – Leibniz-Zentrum für Informatik. URL: <https://drops.dagstuhl.de/entities/document/10.4230/LIPICs.DISC.2023.13>, doi:10.4230/LIPICs.DISC.2023.13.
- 41 Pierre Civit, Seth Gilbert, Rachid Guerraoui, Jovan Komatovic, Anton Paramonov, and Manuel Vidigueira. All byzantine agreement problems are expensive. *To appear in PODC 24*, abs/2311.08060, 2023. URL: <https://doi.org/10.48550/arXiv.2311.08060>, arXiv:2311.08060, doi:10.48550/ARXIV.2311.08060.
- 42 Brian A. Coan and Jennifer L. Welch. Modular Construction of a Byzantine Agreement Protocol with Optimal Message Bit Complexity. *Inf. Comput.*, 97(1):61–85, 1992. doi:10.1016/0890-5401(92)90004-Y.
- 43 Ran Cohen, Pouyan Forghani, Juan Garay, Rutvik Patel, and Vassilis Zikas. Concurrent asynchronous byzantine agreement in expected-constant rounds, revisited. In *Theory of Cryptography Conference*, pages 422–451. Springer, 2023.
- 44 Shir Cohen, Idit Keidar, and Alexander Spiegelman. Make every word count: Adaptive byzantine agreement with fewer words. In *26th International Conference on Principles of Distributed Systems (OPDIS 2022)*. Schloss Dagstuhl-Leibniz-Zentrum für Informatik, 2023.
- 45 Miguel Correia. From Byzantine Consensus to Blockchain Consensus. In *Essentials of Blockchain Technology*, pages 41–80. Chapman and Hall/CRC, 2019.
- 46 Tyler Crain, Vincent Gramoli, Mikel Larrea, and Michel Raynal. DBFT: Efficient Leaderless Byzantine Consensus and its Applications to Blockchains. In *Proceedings of the 17th IEEE International Symposium on Network Computing and Applications (NCA'18)*. IEEE, 2018.

- 47 Sourav Das, Sisi Duan, Shengqi Liu, Atsuki Momose, Ling Ren, and Victor Shoup. Asynchronous consensus without trusted setup or public-key cryptography. *Cryptology ePrint Archive*, 2024.
- 48 Sourav Das, Vinith Krishnan, Irene Miriam Isaac, and Ling Ren. Spurt: Scalable distributed randomness beacon with transparent setup. In *43rd IEEE Symposium on Security and Privacy, SP 2022, San Francisco, CA, USA, May 22-26, 2022*, pages 2502–2517. IEEE, 2022. doi : 10.1109/SP46214.2022.9833580.
- 49 Sourav Das, Zhuolun Xiang, Lefteris Kokoris-Kogias, and Ling Ren. Practical asynchronous high-threshold distributed key generation and distributed polynomial sampling. In Joseph A. Calandrino and Carmela Troncoso, editors, *32nd USENIX Security Symposium, USENIX Security 2023, Anaheim, CA, USA, August 9-11, 2023*, pages 5359–5376. USENIX Association, 2023. URL: <https://www.usenix.org/conference/usenixsecurity23/presentation/das>.
- 50 Sourav Das, Zhuolun Xiang, and Ling Ren. Asynchronous Data Dissemination and its Applications. In *Proceedings of the 2021 ACM SIGSAC Conference on Computer and Communications Security*, pages 2705–2721, 2021.
- 51 Carole Delporte-Gallet, Hugues Fauconnier, and Michel Raynal. On the weakest information on failures to solve mutual exclusion and consensus in asynchronous crash-prone read/write systems. *Journal of Parallel and Distributed Computing*, 153:110–118, 2021.
- 52 David Derler, Christian Hanser, and Daniel Slamanig. Revisiting cryptographic accumulators, additional properties and relations to other primitives. In Kaisa Nyberg, editor, *Topics in Cryptology - CT-RSA 2015, The Cryptographer's Track at the RSA Conference 2015, San Francisco, CA, USA, April 20-24, 2015. Proceedings*, volume 9048 of *Lecture Notes in Computer Science*, pages 127–144. Springer, 2015. doi : 10.1007/978-3-319-16715-2_7.
- 53 Danny Dolev and Rüdiger Reischuk. Bounds on Information Exchange for Byzantine Agreement. *Journal of the ACM (JACM)*, 32(1):191–204, 1985.
- 54 Danny Dolev, Ruediger Reischuk, and H Raymond Strong. Early stopping in byzantine agreement. *Journal of the ACM (JACM)*, 37(4):720–741, 1990.
- 55 Sisi Duan and Haibin Zhang. Foundations of Dynamic BFT. *Proceedings - IEEE Symposium on Security and Privacy*, 2022-May:1317–1334, 2022. doi : 10.1109/SP46214.2022.9833787.
- 56 Paul Feldman and Silvio Micali. Optimal algorithms for byzantine agreement. In Janos Simon, editor, *Proceedings of the 20th Annual ACM Symposium on Theory of Computing, May 2-4, 1988, Chicago, Illinois, USA*, pages 148–161. ACM, 1988. doi : 10.1145/62212.62225.
- 57 Hanwen Feng, Zhenliang Lu, Tiancheng Mai, and Qiang Tang. Making hash-based mvba great again. *Cryptology ePrint Archive*, 2024.
- 58 Michael J. Fischer, Nancy A. Lynch, and Michael Merritt. Easy Impossibility Proofs for Distributed Consensus Problems. In Michael A. Malcolm and H. Raymond Strong, editors, *Proceedings of the Fourth Annual ACM Symposium on Principles of Distributed Computing, Minaki, Ontario, Canada, August 5-7, 1985*, pages 59–70. ACM, 1985. doi : 10.1145/323596.323602.
- 59 Adam Gągol, Damian Leśniak, Damian Straszak, and Michał Świątek. ALEPH: Efficient atomic broadcast in asynchronous networks with Byzantine nodes. *AFT 2019 - Proceedings of the 1st ACM Conference on Advances in Financial Technologies*, pages 214–228, 2019. arXiv:1908.05156, doi : 10.1145/3318041.3355467.
- 60 Juan Garay, Aggelos Kiayias, Rafail M. Ostrovsky, Giorgos Panagiotakos, and Vassilis Zikas. Resource-Restricted Cryptography: Revisiting MPC Bounds in the Proof-of-Work Era. *Lecture Notes in Computer Science (including subseries Lecture Notes in Artificial Intelligence and Lecture Notes in Bioinformatics)*, 12106 LNCS:129–158, 2020. doi : 10.1007/978-3-030-45724-2_5.
- 61 Sanjam Garg, Aarushi Goel, and Abhishek Jain. The Broadcast Message Complexity of Secure Multiparty Computation Sanjam. In *Advances in Cryptology (ASIACRYPT)*, volume 1, pages 426–455, Kobe, Japan, 2019.
- 62 Rati Gelashvili, Lefteris Kokoris-Kogias, Alberto Sonnino, Alexander Spiegelman, and Zhuolun Xiang. Jolteon and ditto: Network-adaptive efficient consensus with asynchronous fallback. In Ittay Eyal and Juan A. Garay, editors, *Financial Cryptography and Data Security - 26th International Conference, FC 2022, Grenada, May 2-6, 2022, Revised Selected Papers*, volume 13411 of *Lecture Notes in Computer Science*, pages 296–315. Springer, 2022. doi : 10.1007/978-3-031-18283-9_14.

- 63 Yuval Gelles and Ilan Komargodski. Optimal Load-Balanced Scalable Distributed Agreement. In *STOC '24: 56th Annual ACM SIGACT Symposium on Theory of Computing*, 2023.
- 64 Yossi Gilad, Rotem Hemo, Silvio Micali, Georgios Vlachos, and Nickolai Zeldovich. Algorand: Scaling Byzantine Agreements for Cryptocurrencies. In *Proceedings of the 26th Symposium on Operating Systems Principles, SOSP '17*, page 51–68, New York, NY, USA, 2017. Association for Computing Machinery. doi: [10.1145/3132747.3132757](https://doi.org/10.1145/3132747.3132757).
- 65 Shafi Goldwasser. How to Play Any Mental Game, or a Completeness Theorem for Protocols with an Honest Majority. *Proc. the Nineteenth Annual ACM STOC'87*, pages 218–229, 1987.
- 66 Shafi Goldwasser, Yael Tauman Kalai, and Guy N. Rothblum. Delegating computation: interactive proofs for muggles. In Cynthia Dwork, editor, *Proceedings of the 40th Annual ACM Symposium on Theory of Computing, Victoria, British Columbia, Canada, May 17-20, 2008*, pages 113–122. ACM, 2008. doi: [10.1145/1374376.1374396](https://doi.org/10.1145/1374376.1374396).
- 67 Shafi Goldwasser, Yael Tauman Kalai, and Guy N. Rothblum. Delegating computation: Interactive proofs for muggles. *J. ACM*, 62(4):27:1–27:64, 2015. doi: [10.1145/2699436](https://doi.org/10.1145/2699436).
- 68 Shafi Goldwasser, Guy N. Rothblum, and Yael Tauman Kalai. Delegating computation: Interactive proofs for muggles. *Electron. Colloquium Comput. Complex.*, TR17-108, 2017. URL: <https://eccc.weizmann.ac.il/report/2017/108>, arXiv:TR17-108.
- 69 Vincent Gramoli, Zhenliang Lu, Qiang Tang, and Pouriya Zarbafian. Optimal asynchronous byzantine consensus with fair separability. *IACR Cryptol. ePrint Arch.*, page 545, 2024. URL: <https://eprint.iacr.org/2024/545>.
- 70 James Hendricks, Gregory R. Ganger, and Michael K. Reiter. Verifying distributed erasure-coded data. In Indranil Gupta and Roger Wattenhofer, editors, *Proceedings of the Twenty-Sixth Annual ACM Symposium on Principles of Distributed Computing, PODC 2007, Portland, Oregon, USA, August 12-15, 2007*, pages 139–146. ACM, 2007. doi: [10.1145/1281100.1281122](https://doi.org/10.1145/1281100.1281122).
- 71 Jonathan Katz, Andrew Miller, and Elaine Shi. Pseudonymous secure computation from time-lock puzzles. *IACR Cryptol. ePrint Arch.*, page 857, 2014. URL: <http://eprint.iacr.org/2014/857>.
- 72 Idit Keidar, Eleftherios Kokoris-Kogias, Oded Naor, and Alexander Spiegelman. All you need is DAG. In Avery Miller, Keren Censor-Hillel, and Janne H. Korhonen, editors, *PODC '21: ACM Symposium on Principles of Distributed Computing, Virtual Event, Italy, July 26-30, 2021*, pages 165–175. ACM, 2021. doi: [10.1145/3465084.3467905](https://doi.org/10.1145/3465084.3467905).
- 73 Mahimna Kelkar, Fan Zhang, Steven Goldfeder, and Ari Juels. Order-fairness for byzantine consensus. In Daniele Micciancio and Thomas Ristenpart, editors, *Advances in Cryptology - CRYPTO 2020 - 40th Annual International Cryptology Conference, CRYPTO 2020, Santa Barbara, CA, USA, August 17-21, 2020, Proceedings, Part III*, volume 12172 of *Lecture Notes in Computer Science*, pages 451–480. Springer, 2020. doi: [10.1007/978-3-030-56877-1_16](https://doi.org/10.1007/978-3-030-56877-1_16).
- 74 Hannah Keller, Claudio Orlandi, Anat Paskin-Cherniavsky, and Divya Ravi. MPC with Low Bottleneck-Complexity: Information-Theoretic Security and More. In *4th Conference on Information-Theoretic Cryptography (ITC)*, volume 267, pages 1–21, Aarhus, Denmark, 2023. doi: [10.4230/LIPIcs.ITC.2023.11](https://doi.org/10.4230/LIPIcs.ITC.2023.11).
- 75 Valerie King and Jared Saia. From almost everywhere to everywhere: Byzantine agreement with $\tilde{O}(n^{3/2})$ bits. In *Distributed Computing, 23rd International Symposium (DISC)*, volume 5805 LNCS, pages 464–478, 2009. doi: [10.1007/978-3-642-04355-0_47](https://doi.org/10.1007/978-3-642-04355-0_47).
- 76 Valerie King and Jared Saia. Breaking the $O(n^2)$ bit barrier: scalable byzantine agreement with an adaptive adversary. In Andréa W. Richa and Rachid Guerraoui, editors, *Proceedings of the 29th Annual ACM Symposium on Principles of Distributed Computing, PODC 2010, Zurich, Switzerland, July 25-28, 2010*, pages 420–429. ACM, 2010. doi: [10.1145/1835698.1835798](https://doi.org/10.1145/1835698.1835798).
- 77 Valerie King and Jared Saia. Breaking the $O(n^2)$ bit barrier: Scalable byzantine agreement with an adaptive adversary. *Journal of the ACM*, 58(4):1–24, 2011. doi: [10.1145/1989727.1989732](https://doi.org/10.1145/1989727.1989732).
- 78 Valerie King, Jared Saia, Vishal Sanwalani, and Erik Vee. Scalable leader election. *Proceedings of the Annual ACM-SLAM Symposium on Discrete Algorithms (SODA)*, pages 990–999, 2006. doi: [10.1145/1109557.1109667](https://doi.org/10.1145/1109557.1109667).

- 79 Ramakrishna Kotla, Lorenzo Alvisi, Mike Dahlin, Allen Clement, and Edmund Wong. Zyzzyva: Speculative Byzantine Fault Tolerance. In *Proceedings of twenty-first ACM SIGOPS symposium on Operating systems principles*, pages 45–58, 2007.
- 80 Ramakrishna Kotla and Michael Dahlin. High Throughput Byzantine Fault Tolerance. In *International Conference on Dependable Systems and Networks, 2004*, pages 575–584. IEEE, 2004.
- 81 Leslie Lamport. Paxos Made Simple. *ACM SIGACT News (Distributed Computing Column)* 32, 4 (Whole Number 121, December 2001), pages 51–58, 2001.
- 82 Leslie Lamport, Robert Shostak, and Marshall Pease. The Byzantine Generals Problem. *ACM Trans. Program. Lang. Syst.*, 4(3):382–401, 1982.
- 83 Leslie Lamport, Robert Shostak, and Marshall Pease. The Byzantine Generals Problem. *ACM Transactions on Programming Languages and Systems*, 4(3):382–401, 1982.
- 84 Leslie Lamport, Robert Shostak, and Marshall Pease. Concurrency: The works of leslie lamport. *Association for Computing Machinery*, pages 203–226, 2019.
- 85 Christoph Lenzen and Sahar Sheikholeslami. A recursive early-stopping phase king protocol. In Alessia Milani and Philipp Woelfel, editors, *PODC '22: ACM Symposium on Principles of Distributed Computing, Salerno, Italy, July 25 - 29, 2022*, pages 60–69. ACM, 2022. doi : 10.1145/3519270.3538425.
- 86 Fan Li and Jinyuan Chen. Communication-efficient signature-free asynchronous byzantine agreement. In *IEEE International Symposium on Information Theory, ISIT 2021, Melbourne, Australia, July 12-20, 2021*, pages 2864–2869. IEEE, 2021. doi : 10.1109/ISIT45174.2021.9518010.
- 87 Yuan Lu, Zhenliang Lu, and Qiang Tang. Bolt-dumbo transformer: Asynchronous consensus as fast as the pipelined BFT. In Heng Yin, Angelos Stavrou, Cas Cremers, and Elaine Shi, editors, *Proceedings of the 2022 ACM SIGSAC Conference on Computer and Communications Security, CCS 2022, Los Angeles, CA, USA, November 7-11, 2022*, pages 2159–2173. ACM, 2022. doi : 10.1145/3548606.3559346.
- 88 Yuan Lu, Zhenliang Lu, Qiang Tang, and Guiling Wang. Dumbo-MVBA: Optimal Multi-Valued Validated Asynchronous Byzantine Agreement, Revisited. In Yuval Emek and Christian Cachin, editors, *PODC '20: ACM Symposium on Principles of Distributed Computing, Virtual Event, Italy, August 3-7, 2020*, pages 129–138. ACM, 2020. doi : 10.1145/3382734.3405707.
- 89 Yuan Lu, Zhenliang Lu, Qiang Tang, and Guiling Wang. Dumbo-MVBA: Optimal Multi-Valued Validated Asynchronous Byzantine Agreement, Revisited. *Proceedings of the Annual ACM Symposium on Principles of Distributed Computing*, pages 129–138, 2020.
- 90 Loi Luu, Viswesh Narayanan, Kunal Baweja, Chaodong Zheng, Seth Gilbert, and Prateek Saxena. SCP: A Computationally-Scalable Byzantine Consensus Protocol For Blockchains. *Cryptology ePrint Archive*, 2015.
- 91 Florence Jessie MacWilliams and Neil James Alexander Sloane. *The Theory of Error-Correcting Codes*, volume 16. Elsevier, 1977.
- 92 Dahlia Malkhi, Kartik Nayak, and Ling Ren. Flexible Byzantine Fault Tolerance. In *Proceedings of the 2019 ACM SIGSAC conference on computer and communications security*, pages 1041–1053, 2019.
- 93 Ralph C. Merkle. A Digital Signature Based on a Conventional Encryption Function. In *Advances in Cryptology – CRYPTO, 1987*.
- 94 Atsuki Momose and Ling Ren. Multi-Threshold Byzantine Fault Tolerance. In *Proceedings of the 2021 ACM SIGSAC Conference on Computer and Communications Security*, pages 1686–1699, 2021.
- 95 Atsuki Momose and Ling Ren. Optimal Communication Complexity of Authenticated Byzantine Agreement. In Seth Gilbert, editor, *35th International Symposium on Distributed Computing, DISC 2021, October 4-8, 2021, Freiburg, Germany (Virtual Conference)*, volume 209 of *LIPICs*, pages 32:1–32:16. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2021. doi : 10.4230/LIPIcs.DISC.2021.32.
- 96 Achour Mostéfaoui, Hamouma Moumen, and Michel Raynal. Signature-Free Asynchronous Binary Byzantine Consensus with $t < n/3$, $O(n^2)$ Messages, and $O(1)$ Expected Time. *J. ACM*, 62(4):31:1–31:21, 2015. doi : 10.1145/2785953.
- 97 Kartik Nayak, Ling Ren, Elaine Shi, Nitin H. Vaidya, and Zhuolun Xiang. Improved extension protocols for byzantine broadcast and agreement. In Hagit Attiya, editor, *34th International Symposium on Distributed Computing, DISC 2020, October 12-16, 2020, Virtual Conference*, volume 179 of *LIPICs*, pages 28:1–28:17. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2020. doi : 10.4230/LIPIcs.DISC.2020.28.

- 98 Marshall C. Pease, Robert E. Shostak, and Leslie Lamport. Reaching agreement in the presence of faults. *J. ACM*, 27(2):228–234, 1980. doi : 10.1145/322186.322188.
- 99 Birgit Pfitzmann and Michael Waidner. *Information-theoretic pseudosignatures and byzantine agreement for $t \geq n/3$* . Citeseer, 1996.
- 100 Irving S Reed and Gustave Solomon. Polynomial codes over certain finite fields. *Journal of the society for industrial and applied mathematics*, 8(2):300–304, 1960.
- 101 Victor Shoup. Practical threshold signatures. In Bart Preneel, editor, *Advances in Cryptology - EUROCRYPT 2000, International Conference on the Theory and Application of Cryptographic Techniques, Bruges, Belgium, May 14-18, 2000, Proceeding*, volume 1807 of *Lecture Notes in Computer Science*, pages 207–220. Springer, 2000. doi : 10.1007/3-540-45539-6_15.
- 102 Victor Shoup. A theoretical take on a practical consensus protocol. *Cryptology ePrint Archive*, 2024.
- 103 Victor Shoup and Nigel P Smart. Lightweight asynchronous verifiable secret sharing with optimal resilience. *Cryptology ePrint Archive*, 2023.
- 104 Anping Song and Cenhao Zhou. Flexbft: A flexible and effective optimistic asynchronous bft protocol. *Applied Sciences*, 14(4):1461, 2024.
- 105 Alexander Spiegelman. In search for an optimal authenticated byzantine agreement. *arXiv preprint arXiv:2002.06993*, 2020.
- 106 T. K. Srikanth and Sam Toueg. Optimal clock synchronization. In Michael A. Malcolm and H. Raymond Strong, editors, *Proceedings of the Fourth Annual ACM Symposium on Principles of Distributed Computing, Minaki, Ontario, Canada, August 5-7, 1985*, pages 71–86. ACM, 1985. doi : 10.1145/323596.323603.
- 107 T. K. Srikanth and Sam Toueg. Optimal Clock Synchronization. *Journal of the Association for Computing Machinery*, 34(3):71–86, 1987.
- 108 Xiao Sui and Sisi Duan. Signature-free atomic broadcast with optimal $O(n^2)$ messages and $O(1)$ expected time. *Cryptology ePrint Archive*, 2023. <https://eprint.iacr.org/2023/1549>.
- 109 Justin Thaler. Proofs, arguments, and zero-knowledge. *Found. Trends Priv. Secur.*, 4(2-4):117–660, 2022. doi : 10.1561/33000000030.
- 110 Giuliana Santos Veronese, Miguel Correia, Alysson Neves Bessani, Lau Cheuk Lung, and Paulo Verissimo. Efficient Byzantine Fault-Tolerance. *IEEE Transactions on Computers*, 62(1):16–30, 2011.
- 111 Lei Yang, Seo Jin Park, Mohammad Alizadeh, Sreeram Kannan, and David Tse. Dispersedledger: High-throughput byzantine consensus on variable bandwidth networks. In Amar Phanishayee and Vyas Sekar, editors, *19th USENIX Symposium on Networked Systems Design and Implementation, NSDI 2022, Renton, WA, USA, April 4-6, 2022*, pages 493–512. USENIX Association, 2022. URL: <https://www.usenix.org/conference/nsdi22/presentation/yang>.
- 112 Thomas Yurek, Licheng Luo, Jaiden Fairoze, Aniket Kate, and Andrew Miller. hbacs: How to robustly share many secrets. In *29th Annual Network and Distributed System Security Symposium, NDSS 2022, San Diego, California, USA, April 24-28, 2022*. The Internet Society, 2022. URL: <https://www.ndss-symposium.org/ndss-paper/auto-draft-245/>.
- 113 Yupeng Zhang, Daniel Genkin, Jonathan Katz, Dimitrios Papadopoulos, and Charalampos Papamanthou. vsql: Verifying arbitrary SQL queries over dynamic outsourced databases. In *2017 IEEE Symposium on Security and Privacy, SP 2017, San Jose, CA, USA, May 22-26, 2017*, pages 863–880. IEEE Computer Society, 2017. doi : 10.1109/SP.2017.43.
- 114 You Zhou, Zongyang Zhang, Haibin Zhang, Sisi Duan, Bin Hu, Licheng Wang, and Jianwei Liu. Dory: Asynchronous BFT with reduced communication and improved efficiency. *IACR Cryptol. ePrint Arch.*, page 1709, 2022. URL: <https://eprint.iacr.org/2022/1709>.
- 115 Jianjun Zhu, Fan Li, and Jinyuan Chen. Communication-efficient and error-free gradedcast with optimal resilience. In *IEEE International Symposium on Information Theory, ISIT 2023, Taipei, Taiwan, June 25-30, 2023*, pages 108–113. IEEE, 2023. doi : 10.1109/ISIT54713.2023.10206579.

A Graded Consensus: Concrete Implementations

This section presents the implementations of the graded consensus primitive (see Module 1) employed in ERRORFREEEXT and HASHEXT. In Appendix A.1, we give our graded consensus algorithm

employed in `HASHEXT`: this algorithm exchanges $O(n^2\kappa)$ bits (where κ denotes the size of a hash) and terminates in 2 rounds. In Appendix A.2, we introduce our graded consensus algorithm employed in `ERRORFREEEXT`: this algorithm exchanges $O(nL + n^2 \log n)$ bits and terminates in 7 rounds. We note that both algorithms satisfy all properties specified in Module 1 only if $t < n/3$. However, the bit and round complexity are guaranteed to be the same even if $t \geq n/3$.

A.1 Graded Consensus with $O(n^2\kappa)$ Bits and 2 Rounds for `HASHEXT`

Our implementation is given in Algorithm 3. We underline that our implementation is highly inspired by an asynchronous implementation for $t < n/5$ provided by Attiya and Welch [20, Algorithm 2].

■ **Algorithm 3** Graded consensus with $O(n^2\kappa)$ bits: Pseudocode (for process p_i)

```

1: Local variables:
2:   Hash_Value  $h_i \leftarrow p_i$ 's proposal
3:   Hash_Value  $branch_i \leftarrow \perp$ 

4: Round 1:
5:   broadcast  $\langle \text{PROPOSAL}, h_i \rangle$ 
6:   if exists Hash_Value  $h$  such that  $\langle \text{PROPOSAL}, h \rangle$  is received from  $n - t$  processes:
7:      $branch_i \leftarrow h$ 

8: Round 2:
9:   broadcast  $\langle \text{BRANCH}, branch_i \rangle$ 
10:  if  $branch_i = \perp$ :
11:    if exists Hash_Value  $h$  such that  $\langle \text{BRANCH}, h \rangle$  is received from  $t + 1$  processes:
12:      trigger  $\text{decide}(h, 0)$ 
13:    else:
14:      trigger  $\text{decide}(h_i, 0)$ 
15:  else:
16:    if  $\langle \text{BRANCH}, branch_i \rangle$  is received from  $n - t$  processes:
17:      trigger  $\text{decide}(branch_i, 1)$ 
18:    else:
19:      trigger  $\text{decide}(branch_i, 0)$ 

```

Proof of correctness. We start by proving the strong validity property.

► **Theorem 3** (Strong validity). *Algorithm 3 satisfies strong validity.*

Proof. Suppose all correct processes propose the same hash value h . Hence, every correct process p_i updates $branch_i$ to h at the end of the first round. Therefore, all correct processes broadcast a `BRANCH` message with h in the second round, which implies that all correct processes receive h from (at least) $n - t$ processes in the second round (as there are at least $n - t$ correct processes). Therefore, every correct process decides h with grade 1, which concludes the proof. ◀

Next, we prove the justification property.

► **Theorem 4** (Justification). *Algorithm 3 satisfies justification.*

Proof. Consider any correct process p_i and let p_i decide a hash value h . We distinguish three possibilities:

- Let p_i decide h at line 12. In this case, p_i has received a `BRANCH` message for h from a correct process p_j . Process p_j has previously received a `PROPOSAL` message for h from at least one correct process, which proves the statement of the lemma in this case.
- Let p_i decide h at line 14. In this case, h is p_i 's proposal, which proves the statement of the lemma.

- Let p_i decide h at line 17 or line 19. In this case, $branch_i = h$. Hence, p_i has previously (in the first round) received a PROPOSAL message for h from a correct process. Thus, the statement of the lemma is satisfied in this case as well.

As the statement of the lemma holds in every possible scenario, the proof is concluded. ◀

The following theorem proves the integrity property.

► **Theorem 5** (Integrity). *Algorithm 3 satisfies integrity.*

Proof. Integrity is trivially satisfied as each correct process decides at most once. ◀

Next, we prove the termination property.

► **Theorem 6** (Termination). *Algorithm 3 satisfies termination.*

Proof. All correct processes decide simultaneously as (1) all correct processes propose simultaneously, and (2) Algorithm 3 is executed for exactly 2 rounds by all correct processes. ◀

Lastly, we need to prove the consistency property. To this end, we first show that if a correct process p_i sends a BRANCH message for some hash value h_i and another correct process p_j sends a BRANCH message for some hash value h_j , then $h_i = h_j$.

► **Lemma 7.** *If a correct process p_i sends a BRANCH message for a hash value h_i and another correct process p_j sends a BRANCH message for a hash value h_j , then $h_i = h_j$.*

Proof. As p_i (resp., p_j) sends a BRANCH message for a hash value h_i (resp., h_j), p_i (resp., p_j) has previously received a PROPOSAL message for h_i (resp., h_j) from $n - t$ processes. Due to the quorum intersection (as $n - t + n - t - n = n - 2t \geq t + 1$), there exists at least one correct process whose PROPOSAL message is received by both p_i and p_j . Therefore, $h_i = h_j$. ◀

Finally, we are ready to prove the consistency property.

► **Theorem 8** (Consistency). *Algorithm 3 satisfies consistency.*

Proof. Suppose a correct process p_i decides some hash value h with grade 1. Importantly, process p_i does so at line 17 and p_i has previously received a BRANCH message for h from a correct process. Suppose another correct process p_j decides some hash value h' (with some binary grade). In order to prove the consistency property, we need to show that $h' = h$. Let us consider three possible scenarios:

- Let p_j decide h' at line 12. In this case, p_j has received a BRANCH message for h' from a correct process. As p_i has received a BRANCH message for h from a correct process, Lemma 7 proves that $h = h'$ in this case.
- Let p_j decide h' at line 14. As p_i has received $n - t$ BRANCH messages for h , process p_j has received at least $n - 2t \geq t + 1$ BRANCH messages for h . Therefore, this case is impossible.
- Let p_j decide h' at line 17 or line 19. In this case, p_j has previously sent a BRANCH message for h' . Given that p_i has received a BRANCH message for h from a correct process, Lemma 7 proves that $h = h'$.

As $h = h'$ in any possible case, the proof is concluded. ◀

Proof of complexity. We start by proving that correct processes send $O(n^2\kappa)$ bits.

► **Theorem 9** (Exchanged bits). *Correct processes send $O(n^2\kappa)$ bits in Algorithm 3.*

Proof. Each process sends $O(n)$ PROPOSAL and BRANCH messages, each with $O(\kappa)$ bits. Therefore, all correct processes send $O(n^2\kappa)$ bits. ◀

Finally, it is straightforward to observe that Algorithm 3 terminates in 2 rounds.

► **Theorem 10** (Rounds). *Algorithm 3 terminates in 2 rounds.*

A.2 Graded Consensus with $O(nL + n^2 \log n)$ Bits and 7 Rounds for ERRORFREEEXT

Our implementation internally utilizes a binary (processes propose 0 or 1) graded consensus algorithm (e.g., [85]) and REDUCE-COOL, a sub-protocol employed in the COOL protocol proposed in [35]. (COOL is an error-free Byzantine agreement algorithm that satisfies *only* strong validity and achieves $O(nL + n^2 \log n)$ bit complexity.) We now briefly introduce the REDUCE-COOL protocol.

REDUCE-COOL [35]. The formal specification of REDUCE-COOL is given in Module 5. Intuitively, REDUCE-COOL reduces the number of outputs to at most 1; if all processes start with the same value, that value is preserved by REDUCE-COOL. Moreover, the processes output a binary success indicator. Again, a unanimous proposal leads to a common positive success indicator (i.e., 1). Moreover, if a correct process outputs a positive success indicator, it is guaranteed that all correct processes agree on a common value proposed by some correct process.

Module 5 REDUCE-COOL [35]

Events:

- *request* input($v \in \text{Value}$): a process inputs a value v .
- *indication* output($v' \in \text{Value} \cup \{\phi\}, s' \in \{0, 1\}$): a process outputs value v' and a success indicator s' ; ϕ denotes a predetermined default value.

Notes:

- All correct processes input a value exactly once and they all do so simultaneously (i.e., in the same round).

Properties:

Let $(\omega_i, \text{vote}_i)$ denote the output received by a correct process p_i . The following holds:

- *Safety*: If $\omega_i \neq \phi$ (where ϕ is a predetermined default value) and $\text{vote}_i = 1$, then ω_i is the value input by p_i .
 - *Consistency*: If there exists a correct process p_j that outputs a pair $(\cdot, 1)$, then there exists a value $\omega \neq \phi$ such that every correct process outputs (ω, \cdot) .
 - *Obligation*: If every correct process inputs the same value ω , then every correct process outputs $(\omega \neq \phi, 1)$.
 - *Termination*: All correct processes output a pair simultaneously (i.e., in the same round).
-

For completeness, we recall the pseudocode of REDUCE-COOL in Algorithm 4 and prove that REDUCE-COOL satisfies the specification introduced in Module 5 (Theorem 11).

► **Theorem 11** (REDUCE-COOL is correct). *REDUCE-COOL (Algorithm 4) satisfies the specification of Module 5.*

Proof. The proof of the theorem follows directly from the extended version [34] of [35]:

- Termination is ensured by [34, Lemma 6].
- Safety is ensured as p_i never updates its variable $\omega^{(i)}$ to any other non- ϕ value (see Algorithm 4).
- Obligation is ensured by [34, Lemma 5 (appendix H)].
- Consistency is ensured by [34, Lemma 3] and [34, Lemma 4 (appendix G, equations 130 to 133)].

Let $(\omega_i, \text{vote}_i)$ be the pair output by a correct process p_i . More precisely, [34, Lemma 3] proves the following property:

- *Non-duplicity*: If there exists a correct process p_i such that, at the end of phase 3 of the REDUCE-COOL protocol (Algorithm 4), the binary vote v_i is equal to 1 (line 32), then $|\{\omega_j \mid \omega_j \neq \phi \text{ and } p_j \text{ is correct}\}| \leq 1$.

Moreover, [34, Lemma 4 (appendix G, equations 130 to 133)] ensures the following:

- *Retrievability*: If there exists a correct process p_i such that, at the end of phase 3 of the REDUCE-COOL protocol (Algorithm 4), the binary vote v_i is equal to 1 (line 32), then $|\{p_j \mid p_j \text{ is correct and } p_j \in S_1 \text{ at process } p_i \text{ and } \omega_j \neq \phi\}| \geq t + 1$.

Suppose a correct process p_i obtains $(\omega_i, 1)$ from REDUCE-COOL. Hence, $v_i = 1$ at the end of phase 3 of the REDUCE-COOL protocol (Algorithm 4). By the retrievability property, a set K of

■ **Algorithm 4** REDUCE-COOL [35]: Pseudocode (for process p_i)

1: Set $\omega^{(i)} = w_i$. \triangleright Value w_i is the proposal of process p_i .
2: Process p_i encodes its message into n symbols, i.e., $[y_1^{(i)}, y_2^{(i)}, \dots, y_n^{(i)}] \leftarrow \text{RSEnc}(w_i, n, k)$, where $k = \lfloor \frac{t}{5} \rfloor + 1$.
3: **Phase 1:**
4: Process p_i sends $(y_j^{(i)}, y_i^{(i)})$ to process $p_j, \forall j \in [1, n]$.
5: **for** $j = 1$ to n **do**
6: **if** $((y_i^{(j)}, y_j^{(j)}) = (y_i^{(i)}, y_j^{(i)}))$ **then**
7: Process p_i sets $u_i(j) \leftarrow 1$.
8: **else**
9: Process p_i sets $u_i(j) \leftarrow 0$.
10: **if** $(\sum_{j=1}^n u_i(j) \geq n - t)$ **then**
11: Process p_i sets its success indicator as $s_i \leftarrow 1$.
12: **else**
13: Process p_i sets $s_i \leftarrow 0$ and $\omega^{(i)} \leftarrow \phi$.
14: Process p_i sends the value of s_i to all processes.
15: Process p_i creates sets $S_p \leftarrow \{j : s_j = p, j \in [1 : n]\}, p \in \{0, 1\}$, from received $\{s_j\}_{j=1}^n$.
16: **Phase 2:**
17: **if** $(s_i = 1)$ **then**
18: Process p_i sets $u_i(j) \leftarrow 0, \forall j \in S_0$.
19: **if** $(\sum_{j=1}^n u_i(j) < n - t)$ **then**
20: Process p_i sets $s_i \leftarrow 0$ and $\omega^{(i)} \leftarrow \phi$.
21: Process p_i sends the value of s_i to all processes.
22: Process p_i updates S_0 and S_1 based on the newly received success indicators.
23: **Phase 3:**
24: **if** $(s_i = 1)$ **then**
25: Process i sets $u_i(j) \leftarrow 0, \forall j \in S_0$.
26: **if** $(\sum_{j=1}^n u_i(j) < n - t)$ **then**
27: Process p_i sets $s_i \leftarrow 0$ and $\omega^{(i)} \leftarrow \phi$.
28: Process p_i sends the value of s_i to all processes.
29: Process p_i updates S_0 and S_1 based on the newly received success indicators.
30: Process p_i sends $(\text{SYMBOL}, y_j^{(i)})$ to process $p_j, \forall j \in [1, n]$.
31: **if** $(|S_1| \geq 2t + 1)$ **then**
32: Process p_i sets the binary vote as $v_i = 1$.
33: **else**
34: Process p_i sets the binary vote as $v_i = 0$.
35: **Phase 4:**
36: **if** $s_i = 1$ **then**
37: Process p_i sends $(\text{RECONSTRUCT}, y_i^{(i)})$ to all processes.
38: **else**
39: Let $y_i^{(i)} \leftarrow \text{majority}(\text{RS symbols received via SYMBOL messages})$.
40: Process p_i sends $(\text{RECONSTRUCT}, y_i^{(i)})$ to all processes.
41: **if** $s_i = 1$ **then**
42: **return** $(\omega^{(i)}, v_i)$
43: **else**
44: For every process p_j , let m_j denote the RS symbol sent by process p_j via a RECONSTRUCT message (if such a message is not received, $m_j = \perp$).
45: **return** $(\text{RSDec}(k, t, \{(j, m_j) \mid p_j \in \Pi\}), 0)$

at least $t + 1$ correct processes p_k has obtained $w_k \neq \phi$ and $s_k = 1$ at the end of phase 3 of the REDUCE-COOL protocol and, due to the non-duplicity property, holds the same value $\bar{w} = \omega_i$, i.e., for every correct process $p_k \in K$, $w_k = \bar{w} = \omega_i$. Thus, for every correct process p_l with $s_l = 0$, p_l obtains a correctly-encoded RS symbol of value ω_i at line 39 (as at most t incorrect and at least $t + 1$ correct symbols are received by p_l). Therefore, every correct process that sends a symbol (line 37 or line 40) does send a correctly-encoded RS symbol of value ω_i , which means that any correct process that decides at line 45 does decide the same value ω_i .

As all properties are indeed satisfied, the theorem holds. \blacktriangleleft

Our implementation. Our implementation of the graded consensus primitive with $O(nL + n^2 \log n)$ bits is given in Algorithm 5.

■ **Algorithm 5** Graded consensus with $O(nL + n^2 \log n)$ bits: Pseudocode (for process p_i)

```

1: Uses:
2:   REDUCE-COOL [35], instance  $\mathcal{R}_{cool}$  ▷ bits:  $O(nL + n^2 \log n)$ ; rounds: 5
3:   Graded consensus proposed in [85], instance  $\mathcal{GC}$  ▷ bits:  $O(n^2)$ ; rounds: 2
4: Local variables:
5:   Value  $v_i \leftarrow p_i$ 's proposal
6: Pseudocode:
7:   Initialize local variable  $(\omega_i, vote_i) \in \text{Value} \times \{0, 1\}$ 
8:   ▷  $\mathcal{R}_{cool}$  ensures that if  $(\omega_i, 1)$  is returned, then  $(\omega_i, \cdot)$  is returned at all correct processes
9:   Let  $(\omega_i, vote_i) \leftarrow \mathcal{R}_{cool}(v_i)$  ▷  $v_i$  is the input, and a pair  $(\omega_i, vote_i)$  is the output
10:  Initialize local variable  $(b_i, g_i) \in \{0, 1\} \times \{0, 1\}$ 
11:  ▷ if  $p_i$  decides  $(b, \cdot)$  from  $\mathcal{GC}$ , then  $b$  was proposed by a correct process (due to  $\mathcal{GC}$ 's justification)
12:  Let  $(b_i, g_i) \leftarrow \mathcal{GC}.\text{propose}(vote_i)$  ▷  $vote_i$  is the proposal, and  $b_i$  is decided with grade  $g_i$ 
13:  if  $b_i = 0$ :
14:    trigger decide( $v_i, 0$ )
15:  else: ▷  $b_i = 1$ 
16:    trigger decide( $\omega_i, g_i$ )

```

Proof of correctness. We start by proving the strong validity.

► **Theorem 12** (Strong validity). *Algorithm 5 satisfies strong validity.*

Proof. Suppose all correct processes propose the same value v . By the obligation property of the instance \mathcal{R}_{cool} of REDUCE-COOL, every correct process outputs $(v, 1)$ from \mathcal{R}_{cool} . Hence, every correct process proposes 1 to the graded consensus instance \mathcal{GC} . This implies that every correct process decides $(1, 1)$ from \mathcal{GC} (due to the strong validity property of \mathcal{GC}). Thus, every correct process decides v with grade 1 from Algorithm 5, which concludes the proof. \blacktriangleleft

Next, we prove the justification property.

► **Theorem 13** (Justification). *Algorithm 5 satisfies justification.*

Proof. Consider any correct process p_i that decides some value v . We distinguish two possibilities:

- Let p_i decide v at line 14. In this case, v is p_i 's proposal, which proves the statement.
- Let p_i decide v at line 16. In this case, p_i has decided $b_i = 1$ from \mathcal{GC} . The justification property of \mathcal{GC} ensures that some correct process p_j has previously proposed 1 to \mathcal{GC} . Therefore, p_j has decided a pair $(v', 1)$ from \mathcal{R}_{cool} . The safety property of \mathcal{R}_{cool} ensures that v' is p_j 's proposal. Moreover, the consistency property of \mathcal{R}_{cool} ensures that every correct process outputs v' from \mathcal{R}_{cool} . Thus, $v' = v$. As v is p_j 's proposal, the statement of the lemma holds in this case.

The theorem holds as its statement stands in both possible cases. \blacktriangleleft

The following theorem proves the consistency property.

► **Theorem 14** (Consistency). *Algorithm 5 satisfies consistency.*

Proof. Let a correct process p_i decide a value v with grade 1; note that p_i decides at line 16. This implies that p_i has previously decided $(1, 1)$ from \mathcal{GC} , which further implies that all correct processes decide $(1, \cdot)$ from \mathcal{GC} (due to the consistency property of \mathcal{GC}). Moreover, the justification property of \mathcal{GC} ensures that some correct process p_j has previously proposed 1 to \mathcal{GC} . Hence, process p_j has output a pair $(v', 1)$ from \mathcal{R}_{cool} , for some value v' . The consistency property of \mathcal{R}_{cool} ensures that $v' = v$ is output by every correct process from \mathcal{R}_{cool} . As every correct process necessarily decides at line 16 (since no correct process decides $(0, \cdot)$ from \mathcal{GC}), no correct process decides a value different from v from Algorithm 5. Therefore, the consistency property is ensured. ◀

Next, we prove the integrity property.

► **Theorem 15** (Integrity). *Algorithm 5 satisfies integrity.*

Proof. The theorem follows immediately from Algorithm 5. ◀

Lastly, we prove the termination property.

► **Theorem 16** (Termination). *Algorithm 5 satisfies termination.*

Proof. The termination property follows from the termination properties of \mathcal{R}_{cool} and \mathcal{GC} . ◀

Proof of complexity. We first show that correct processes exchange $O(nL + n^2 \log n)$ bits.

► **Theorem 17** (Exchanged bits). *Correct processes send $O(nL + n^2 \log n)$ bits in Algorithm 5.*

Proof. Each RS symbol is of size $O(\frac{L}{n} + \log n)$ bits. Then, every correct process sends $4n$ RS symbols in REDUCE-COOL. Apart from that, each correct process sends $O(n)$ binary success indicators in REDUCE-COOL. Furthermore, each correct process sends $O(n)$ bits in the binary graded consensus (see [85]). Hence, each correct process sends $O(L + n \log n)$ bits, which leads to $O(nL + n^2 \log n)$ bits in total. ◀

Lastly, we prove that Algorithm 5 terminates in $7 \in O(1)$ rounds.

► **Theorem 18** (Rounds). *Algorithm 5 terminates in 7 rounds.*

Proof. The algorithm terminates in 7 rounds as \mathcal{R}_{cool} terminates in 5 rounds and \mathcal{GC} terminates in 2 rounds. ◀

B HASHEXT: Missing Implementation & Proof

We first define the cryptographic primitives utilized in HASHEXT and its building blocks (Appendix B.1). Then, we present our implementation of the data dissemination primitive (see Module 2) and prove its correctness and complexity (Appendix B.2). Finally, we provide HASHEXT's proof (Appendix B.3).

B.1 Cryptographic Primitives

This section provides the formal definition of cryptographic accumulators [52] and digests.

Cryptographic accumulators. We follow the presentation of [97]. Let κ denote a security parameter, and let $D = \{d_1, d_2, \dots, d_n\}$ be a set of n values. An accumulator scheme consists of the following four primitives:

- $ak \leftarrow \text{Gen}(1^\kappa, n)$: An algorithm accepting a security parameter κ in unary notation 1^κ and a limit n on the set size, and returns an accumulator key ak .
- $z \leftarrow \text{Eval}(ak, D)$: An algorithm that takes the accumulator key ak and a set D of values, and returns an accumulation value z for D .
- $w_i \leftarrow \text{CreateWit}(ak, z, d_i)$: Given an accumulator key ak , an accumulation value z , and a value $d_i \in D$, this algorithm returns a witness w_i .
- $\text{true/false} \leftarrow \text{Verify}(ak, z, w_i, d_i)$: This algorithm takes an accumulator key ak , an accumulation value z , a witness w_i , and a value d_i . It returns *true* if w_i correctly corresponds to $d_i \in D$, and *false* otherwise, except with negligible probability $\text{negl}(\kappa)$.

In this paper, we use simple Merkle trees, where the accumulator key ak is the hash function, values in D are the leaves of the Merkle tree, the accumulation value z is the Merkle tree root, and the witness w is the Merkle tree proof. That is why the description leaves out auxiliary information *aux* typically included in cryptographic accumulators. We remark that *Eval*, *CreateWit*, and *Verify* are deterministic for a Merkle-tree-based accumulators. Furthermore, the accumulation value and witness each have $O(\kappa)$ and $O(\kappa \log n)$ bits, respectively.

A secure accumulator scheme is required to be correct. Correctness says that for all honestly generated accumulator keys, all honestly computed accumulation values, and witnesses, the *Verify* algorithm always returns *true*. Let us underline that the correctness of the Merkle-tree-based accumulator is trivial. Moreover, the accumulator scheme is assumed to be collision-free, i.e., for any accumulator key $ak \leftarrow \text{Gen}(1^\kappa, n)$, it is computationally impossible to establish $(\{d_1, \dots, d_n\}, d', w')$ such that (1) $d' \notin \{d_1, \dots, d_n\}$, (2) $z \leftarrow \text{Eval}(ak, \{d_1, \dots, d_n\})$, and (3) $\text{Verify}(ak, z, w', d') = \text{true}$. In our case, collision-resistance reduces to the collision-resistance of the underlying chosen hash function.

Digests. Concretely, $\text{digest}(v) = \text{Eval}(ak, \{(1, P_v(1)), \dots, (n, P_v(n))\})$, where *Eval* is the accumulator evaluation function (see the paragraph above), ak is the accumulator key (see above), and $[P_v(1), \dots, P_v(n)] = \text{RSEnc}(v, n, t + 1)$ is the Reed-Solomon encoding of value v (see §2.3). The collision-resistance of the $\text{digest}(\cdot)$ function reduces to the collision-resistance of the underlying cryptographic accumulator scheme. We underline that this construction is standard (see, e.g., [97]).

B.2 Data Dissemination: Implementation & Proof

Our implementation of the data dissemination primitive is given in Algorithm 6.

Proof of correctness. We say that m_i is a *correctly encoded i -th RS symbol* if and only if m_i is the i -th RS symbol in $\text{RSEnc}(v^*, n, t + 1)$. First, we prove that if any correct process receives a pair (i, m_i) accompanied by a valid witness via a *DISPERSE* or *RECONSTRUCT* message, then m_i is a correctly encoded i -th RS symbol.

► **Lemma 19.** *If a correct process receives a pair (i, m_i) accompanied by a valid witness via a *DISPERSE* or *RECONSTRUCT* message, then m_i is a correctly encoded i -th RS symbol.*

Proof. Let p_j be any correct process that receives the aforementioned pair (i, m_i) . The pair is accompanied by a valid witness that proves that (i, m_i) belongs to a collection whose digest is $d^* = \text{digest}(v^*)$. Therefore, m_i is indeed a correctly encoded i -th RS symbol. ◀

We are ready to prove the safety property of Algorithm 6.

► **Theorem 20 (Safety).** *Algorithm 6 satisfies safety.*

Proof. Consider any correct process p_i that outputs some value v (line 18). Before outputting v , p_i has received (at least) $t + 1$ *RECONSTRUCT* messages from as many different processes (line 17). Due to Lemma 19, each such RS symbol is correctly encoded, which implies that $v = v^*$. ◀

■ **Algorithm 6** Data dissemination: Pseudocode (for process p_i)

```

1: Rules:
2:   Any DISPERSE or RECONSTRUCT message with an invalid witness is ignored.
3:   The rules at lines 14 and 17 are activated only if  $p_i$  has previously invoked an  $\text{input}(\cdot, \cdot)$  request.

4: Local variables:
5:   Digest  $d_i \leftarrow \perp$ 
6:   Boolean  $\text{reconstruct\_broadcast}_i \leftarrow \text{false}$ 

7: upon  $\text{input}(v \in \text{Value} \cup \{\perp\}, d \in \text{Digest})$ :
8:    $d_i \leftarrow d$ 
9:   if  $v \neq \perp$ : ▷ if true, then  $d_i = \text{digest}(v)$  (see Module 2)
10:    Let  $[m_1, m_2, \dots, m_n] \leftarrow \text{REnc}(v, n, t + 1)$ 
11:    for each process  $p_j$ :
12:      Let  $\mathcal{W}_j \leftarrow \text{CreateWit}(d_i, (j, m_j), [(1, m_1), (2, m_2), \dots, (n, m_n)])$ 
13:      send  $\langle \text{DISPERSE}, d_i, (j, m_j), \mathcal{W}_j \rangle$  to process  $p_j$ 

14: upon receiving a  $\langle \text{DISPERSE}, d_i, (i, m_i), \mathcal{W}_i \rangle$  message and  $\text{reconstruct\_broadcast}_i = \text{false}$ :
15:    $\text{reconstruct\_broadcast}_i \leftarrow \text{true}$ 
16:   broadcast  $\langle \text{RECONSTRUCT}, d_i, (i, m_i), \mathcal{W}_i \rangle$ 

17: upon receiving a  $\langle \text{RECONSTRUCT}, d_i, \cdot, \cdot \rangle$  message from  $t + 1$  processes and  $\text{reconstruct\_broadcast}_i = \text{true}$ :
18:   trigger output  $(\text{RSDec}(t + 1, 0, \text{the received } t + 1 \text{ RS symbols}))$ 

```

Next, we prove the liveness property of Algorithm 6.

► **Theorem 21** (Liveness). *Algorithm 6 satisfies liveness.*

Proof. Recall that we assume that (1) all correct processes input a pair by some time τ , and (2) at least one correct process inputs v^* . Moreover, we assume that no correct process stops unless it has previously output a value. Hence, every correct process p_i receives a DISPERSE message with the i -th RS symbol by time $\tau + \delta$ (line 14), which implies that p_i broadcasts a RECONSTRUCT message with a correctly encoded i -th RS symbol (due to Lemma 19) by time $\tau + \delta$ (line 16). Thus, every correct process receives $n - t \geq t + 1$ RECONSTRUCT messages by time $\tau + 2\delta$ (line 17), which implies that every correct process outputs a value from Algorithm 6 by time $\tau + 2\delta$ (line 18). ◀

Lastly, we prove that Algorithm 6 satisfies integrity.

► **Theorem 22** (Integrity). *Algorithm 6 satisfies integrity.*

Proof. The theorem follows from the fact that no correct process activates the rule at line 17 unless it has previously invoked an $\text{input}(\cdot, \cdot)$ request. ◀

Proof of complexity. We now prove that all correct processes send $O(nL + n^2\kappa \log n)$ bits.

► **Theorem 23** (Exchanged bits). *Correct processes collectively send $O(nL + n^2\kappa \log n)$ bits.*

Proof. Each correct process broadcasts at most one DISPERSE and at most one RECONSTRUCT message. Each DISPERSE and RECONSTRUCT message contains $O(\kappa + \log n + \frac{L}{n} + \log n + \kappa \log n)$ bits. Thus, each correct process sends $n \cdot O(\frac{L}{n} + \kappa \log n) = O(L + n\kappa \log n)$ bits, which implies that correct processes collectively send $O(nL + n^2\kappa \log n)$ bits. ◀

B.3 Proof of Correctness & Complexity

Finally, we prove the correctness and complexity of HASHEXT (Algorithm 1).

Proof of correctness. We say that a correct process p_i *commits* a digest D in view $V \in [1, t + 1]$ if and only if p_i invokes $\text{DD.input}(\cdot, D)$ in view V (line 44). Recall that if a correct process p_i commits

a digest in some view $V < t + 1$, p_i does not stop before it has completed view $V + 1$ (line 48). We start by proving that if the first correct process commits a digest D in some view V , then all correct processes commit D (and no other digest) in view V or $V + 1$ (given $V < t + 1$).

► **Lemma 24.** *Let p_i be the first correct process to commit a digest. Let p_i commit a digest D in view V . Then, the following holds:*

- *If any correct process commits a digest D' , then $D' = D$.*
- *If $V < t + 1$, then every correct process commits a digest in view V or $V + 1$.*

Proof. Recall that `HASHEXT` ensures that each correct process p_i commits at most one digest (due to the `committed_viewi` variable). As p_i is the first correct process to commit a digest, no correct process commits in any view smaller than V . Moreover, if any correct process commits any digest in view V , that digest is D due to the consistency property of $\mathcal{GC}_2[V]$.

Let $V < t + 1$. Consider now view $V + 1$. Recall that p_i (and any other correct process that has committed in view V) does not stop before completing view $V + 1$ (line 48). As p_i has committed D in view V , the consistency property of $\mathcal{GC}_2[V]$ ensures that every correct process p_k updates its `lockedk` variable to D (Step 4). Therefore, all correct processes propose D to $\mathcal{GC}_1[V + 1]$ in view $V + 1$ (Step 1). The strong validity property of $\mathcal{GC}_1[V + 1]$ guarantees that all correct processes decide $(D, 1)$ from $\mathcal{GC}_1[V + 1]$. Thus, every correct process broadcasts a `(SUPPORT, D)` message (Step 2). This implies that every correct process p_k updates its `votek` variable to D (Step 3), and proposes D to $\mathcal{GC}_2[V + 1]$ (Step 4). Therefore, every correct process p_k decides $(D, 1)$ from $\mathcal{GC}_2[V + 1]$ (due to the strong validity property of $\mathcal{GC}_2[V + 1]$). Finally, every correct process p_k commits D in view $V + 1$ (Step 5), which concludes the proof. ◀

The following lemma proves that if a correct process decides $(D \neq \perp, \cdot)$ from $\mathcal{GC}_1[V]$ in some view $V \in [2, t + 1]$, then a correct process has sent a `(SUPPORT, D)` message in a view $V' < V$.

► **Lemma 25.** *If any correct process decides $(D \neq \perp, \cdot)$ from $\mathcal{GC}_1[V]$ in any view $V \in [2, t + 1]$, then a correct process has sent a `(SUPPORT, D)` message in a view $V' < V$.*

Proof. Due to the justification property of $\mathcal{GC}_1[V]$, a correct process p_i has proposed D to $\mathcal{GC}_1[V]$, which implies that `lockedi = D` at the beginning of view V . Let $V' < V$ denote the view at which p_i updates `lockedi` to D (Step 5). The justification property of $\mathcal{GC}_2[V']$ ensures that some correct process p_k has proposed D to $\mathcal{GC}_2[V']$ in view V' . Thus, the value of the `votek` variable at process p_k in view V' was D , which implies that p_k has received a `(SUPPORT, D)` message from $2t + 1$ processes in view V' . As there are at most t faulty processes, (at least) $t + 1$ of those messages are sent by correct processes, which concludes the proof. ◀

Next, we prove that if a correct process sends a `SUPPORT` message for a digest, the value that corresponds to that digest is (1) known to at least one correct process, and (2) valid.

► **Lemma 26.** *If a correct process sends a `(SUPPORT, D)` in some view V , then there exists a correct process p_i that has set its `known_valuesi[D]` variable to a value v in some view $V' \leq V$, where $D = \text{digest}(v)$ and $\text{valid}(v) = \text{true}$.*

Proof. Let p^* be the first correct process to ever send a `(SUPPORT, D)` message, for the given digest D . Let the aforementioned message by p^* be sent in some view V^* . To prove the lemma, it suffices to show that some correct process p_i has set its `known_valuesi[D]` variable to a value v in some view $V' \leq V^*$, where $D = \text{digest}(v)$ and $\text{valid}(v) = \text{true}$. We consider three scenarios:

- Let p^* send the message at line 24. In this case, p^* has decided $(D \neq \perp, 1)$ from $\mathcal{GC}_1[V^*]$ in view V^* . (Note that this implies that $V^* \in [2, t + 1]$.) Due to Lemma 25, there exists a correct process that has sent a `SUPPORT` message for D in a view smaller than V^* . This contradicts

the statement that the first SUPPORT message from a correct process for D is sent in view V^* . Therefore, this scenario is impossible.

- Let p^* send the message at line 27. In this case, p^* has received D from $\text{leader}(V^*)$ and D is accepted by p^* in a view smaller than V^* . Again, this implies that a correct process has sent a SUPPORT message for D in a view smaller than V^* , which is impossible.
- Let p^* send the message at line 30. In this case, process p^* has received a value v from $\text{leader}(V^*)$ such that $\text{digest}(v) = D$ and $\text{valid}(v) = \text{true}$. Therefore, the statement of the lemma is satisfied in this case.

As the statement of the lemma is satisfied in the only possible scenario, the lemma holds. ◀

Let us denote by \mathcal{V} the first view in which a correct process commits a digest. If such a view does not exist, $\mathcal{V} = \perp$. Recall that Lemma 24 proves that if $\mathcal{V} \neq \perp$, then all correct processes commit the same digest and they do so by the end of view $\mathcal{V} + 1$. Let \mathcal{D} denote the common digest committed by correct processes; if $\mathcal{V} = \perp$, then $\mathcal{D} = \perp$. Lastly, given that $\mathcal{V} \neq \perp$ (and $\mathcal{D} \neq \perp$), let v^* denote the value such that $\mathcal{D} = \text{digest}(v^*)$; note that v^* is unique due to the collision-resistance of the accumulator primitive. The following lemma proves that if $\mathcal{V} \neq \perp$ (i.e., a correct process commits a digest), then some correct process p_i includes a value v^* in its known_values_i variable in a view smaller than or equal to \mathcal{V} .

► **Lemma 27.** *Let $\mathcal{V} \neq \perp$. Then, there exists a correct process p_i that sets its $\text{known_values}_i[\mathcal{D}]$ variable to value v^* in a view $V \leq \mathcal{V}$.*

Proof. As \mathcal{D} is committed in view \mathcal{V} by some correct process p_i , process p_i has decided $(\mathcal{D}, 1)$ from $\mathcal{GC}_2[\mathcal{V}]$ in view \mathcal{V} . Therefore, the justification property of $\mathcal{GC}_2[\mathcal{V}]$ ensures that some correct process p_j has proposed \mathcal{D} to $\mathcal{GC}_2[\mathcal{V}]$. This implies that $\text{vote}_j = \mathcal{D}$, which further proves that p_j has received a SUPPORT message for \mathcal{D} in view \mathcal{V} from a correct process. Therefore, the lemma follows directly from Lemma 26. ◀

Next, we prove that value v^* is valid.

► **Lemma 28.** *Let $\mathcal{V} \neq \perp$. Then, $\text{valid}(v^*) = \text{true}$.*

Proof. As $\mathcal{V} \neq \perp$, Lemma 27 proves that a correct process p_i sets its $\text{known_values}_i[\mathcal{D}]$ variable to value v^* in some view $V \leq \mathcal{V}$. Since process p_i does so only upon checking the validity of v^* (line 28), v^* is indeed valid. ◀

Next, we prove that all correct processes commit by the (end of the) first view with a correct leader.

► **Lemma 29.** *Let $V \in [1, t + 1]$ denote the first view such that $\text{leader}(V)$ is correct. Then, all correct processes commit a digest by the end of view V .*

Proof. If there exists any correct process that commits in any view smaller than V , the lemma follows from Lemma 24. Hence, let no correct process commit in any view smaller than V . In this case, we distinguish two scenarios:

- The leader decides (\perp, \cdot) from $\mathcal{GC}_1[V]$. Hence, the leader broadcasts its value v (Step 2) in view V , which implies that all correct processes broadcast a SUPPORT message for D . Thus, every correct process p_k updates its vote_k variable to D (Step 3) and proposes D to $\mathcal{GC}_2[D]$ (Step 4). Lastly, all correct processes decide $(D, 1)$ from $\mathcal{GC}_2[V]$ (due to its strong validity property), which concludes the proof in this case.
- The leader decides (D, \cdot) from $\mathcal{GC}_1[V]$, for some digest $D \neq \perp$. (This implies $V \in [2, t + 1]$.) We further distinguish two cases:

- There exists a correct process that decides $(D', 1)$ from $\mathcal{GC}_1[V]$. By the consistency property of $\mathcal{GC}_1[V]$, $D = D'$. We now prove that D must be accepted by all correct processes. Due to the justification property of $\mathcal{GC}_1[V]$, there exists a correct process p_j that has proposed D to $\mathcal{GC}_1[V]$, which implies that $locked_j = D$ at the beginning of view V . Let $V' < V$ denote the view in which process p_j sets its $locked_j$ variable to D . Hence, process p_j has decided (D, \cdot) from $\mathcal{GC}_2[V']$ in view V' . Therefore, the justification property of $\mathcal{GC}_2[V']$ ensures that some correct process p_k has previously proposed D to $\mathcal{GC}_2[V']$, which implies that $vote_k = D$ in view V' . Hence, p_k has received a $\langle \text{SUPPORT}, D \rangle$ message from $2t + 1$ processes in view V' , out of which at least $t + 1$ processes are correct. Thus, every correct process p_z receives (at least) $t + 1$ $\langle \text{SUPPORT}, D \rangle$ messages in view V' , which implies that $D \in accepted_z[V']$. Due to the consistency property of $\mathcal{GC}_1[V]$, each correct process including the leader decides (D, \cdot) from $\mathcal{GC}_1[V]$. Therefore, the leader broadcasts D (Step 2) in view V . Moreover, as each correct process decides (D, \cdot) from $\mathcal{GC}_1[V]$ and D is accepted by all correct processes, each correct process broadcasts a SUPPORT message for D in view V (via line 24 or line 27). This further means that all correct processes propose D to $\mathcal{GC}_2[V]$ (Step 4). Finally, all correct processes decide $(D, 1)$ from $\mathcal{GC}_2[V]$ (due to its strong validity property), which concludes the proof in this case.
- No correct process decides $(\cdot, 1)$ from $\mathcal{GC}_1[V]$. Thus, the leader decides $(D, 0)$. The proof is the same as the previous case, but as no correct process decides $(\cdot, 1)$, then no correct process enters line 24. As proven previously, D must be accepted by each correct process. Therefore, each correct process broadcasts a SUPPORT message for D at line 27. The rest of the proofs follow from the previous case.

The lemma holds as its statement is satisfied in all possible scenarios. ◀

We are ready to prove that $\mathcal{V} \neq \perp$. Concretely, we prove that $\mathcal{V} \in [1, f + 1]$.

► **Lemma 30.** $\mathcal{V} \in [1, f + 1]$.

Proof. Recall that $f \leq t$. Hence, there exists a view with a correct leader. Let V be the first such view. Lemma 29 proves that $\mathcal{V} \leq V$. As $V \in [1, f + 1]$, the lemma holds. ◀

We are ready to prove that HASHEXT ensures that all required assumptions of \mathcal{F} are ensured.

► **Lemma 31.** *HASHEXT (Algorithm 1) ensures that all assumptions required by \mathcal{DD} are satisfied.*

Proof. All correct processes input a pair to \mathcal{DD} as all correct processes commit a digest due to lemmas 24, 29 and 30. No correct process stops unless it has previously output a value from \mathcal{DD} as a correct process p_i stops (line 49) only after it has output a value from \mathcal{DD} (line 46). Recall that all correct processes commit the same digest \mathcal{D} (by Lemma 24). Moreover, the following holds for value v^* :

- At least one correct process inputs $(v^* \neq \perp, \mathcal{D})$ to \mathcal{DD} . As no correct process inputs a pair to \mathcal{DD} before view \mathcal{V} (due to the definition of view \mathcal{V}) and there exists at least a single correct process that sets its respective $known_values_*[\mathcal{D}]$ variable to value v^* in view $V \leq \mathcal{V}$ (by Lemma 27), some correct process is guaranteed to input v^* to \mathcal{DD} (line 44).
- If any correct process inputs $(v \neq \perp, \cdot)$, then $v = v^*$ because (1) all correct processes commit the same digest \mathcal{D} such that $\mathcal{D} = \text{digest}(v^*)$, (2) all correct processes input a value v with $\mathcal{D} = \text{digest}(v)$, and (3) the $\text{digest}(\cdot)$ function is collision-resistant. The argument above ensures that any value $v \neq \perp$ input to \mathcal{DD} must equal v^* .
- If any correct process inputs (\cdot, \mathcal{D}) , then $\mathcal{D} = \text{digest}(v^*)$ because (1) $\mathcal{D} = \mathcal{D}$, and (2) $\mathcal{D} = \text{digest}(v^*)$.

As all assumptions required by \mathcal{DD} are satisfied, the lemma holds. ◀

The following theorem proves the correctness of `HASHEXT`.

► **Theorem 32** (Correctness). *HASHEXT (Algorithm 1) is correct, i.e., it satisfies agreement, integrity, external validity and termination.*

Proof. Integrity follows trivially from the algorithm. Lemma 31 proves that `DD` behaves according to its specification. Therefore, the safety property of `DD` ensures that correct processes only output v^* from `DD`, thus proving the agreement property of `HASHEXT`. Similarly, the liveness property of `DD` ensures that all correct processes eventually output from `DD`, thus showing the termination property of `HASHEXT`. Finally, the external validity property of `HASHEXT` follows from Lemma 28. ◀

Proof of complexity. First, we show that any non-leader correct process sends $O(n\kappa)$ bits in a view.

► **Lemma 33.** *Consider any correct process p_i and any view V such that $\text{leader}(V) \neq p_i$. Then, p_i sends $O(n\kappa)$ bits in V .*

Proof. Process p_i sends $O(n\kappa)$ bits while executing $\mathcal{GC}_1[V]$ and $\mathcal{GC}_2[V]$. Moreover, process p_i sends $O(n\kappa)$ bits via `SUPPORT` messages. Hence, p_i sends $O(n\kappa)$ bits in V . ◀

Next, we prove that a correct leader sends $O(nL + n\kappa)$ bits in a view.

► **Lemma 34.** *Consider any correct process p_i and any view V such that $\text{leader}(V) = p_i$. Then, p_i sends $O(nL + n\kappa)$ bits in V .*

Proof. Process p_i sends $O(n\kappa)$ bits while executing $\mathcal{GC}_1[V]$ and $\mathcal{GC}_2[V]$. Moreover, process p_i sends $O(n\kappa)$ bits via `SUPPORT` messages. Finally, process p_i sends $O(nL + n\kappa)$ bits in Step 2 of V . Thus, p_i sends $O(n\kappa) + O(nL + n\kappa) = O(nL + n\kappa)$ bits in V . ◀

Next, we prove that no correct process enters any view greater than $\min(t + 1, \mathcal{V} + 2)$.

► **Lemma 35.** *No correct process enters any view greater than $\min(t + 1, \mathcal{V} + 2)$.*

Proof. If $\mathcal{V} + 2 > t + 1$, the lemma trivially holds. Otherwise, Lemma 24 proves that all correct processes commit a digest by (the end of) view $\mathcal{V} + 1$. As any correct process that commits a digest in some view V only enters the next view $V + 1$, no correct process enters any view greater than $\mathcal{V} + 2$. ◀

The following lemma proves that $\min(t + 1, \mathcal{V} + 2) \in O(f)$.

► **Lemma 36.** $\min(t + 1, \mathcal{V} + 2) \in O(f)$.

Proof. By Lemma 30, $\mathcal{V} \in O(f)$. Therefore, $\min(t + 1, \mathcal{V} + 2) \in O(f)$. ◀

We are ready to prove the bit complexity of `HASHEXT`.

► **Theorem 37** (Bit complexity). *HASHEXT (Algorithm 1) achieves $O(nL + n^2(f + \log n)\kappa)$ bit complexity.*

Proof. Lemma 29 proves that, for every view $V \in [1, \mathcal{V} - 1]$, $\text{leader}(V)$ is faulty. Moreover, Lemma 35 shows that no correct process enters any view greater than $\min(t + 1, \mathcal{V} + 2)$. Lastly, Lemma 36 proves that $\min(t + 1, \mathcal{V} + 2) \in O(f)$. Hence, in every view $V \in [1, \mathcal{V} - 1]$, each correct process sends $O(n\kappa)$ bits (by Lemma 33). Moreover, in every view $V \in [\mathcal{V}, \min(t + 1, \mathcal{V} + 2)]$, (1) $\text{leader}(V)$ (if correct) sends $O(nL + n\kappa)$ bits (by Lemma 34), and (2) every other correct process

sends $O(n\kappa)$ bits (by Lemma 33). Therefore, while executing views $[1, \min(t + 1, \mathcal{V} + 2)]$, correct process send $f \cdot n \cdot O(n\kappa) + O(1) \cdot (O(nL + n\kappa) + n \cdot O(n\kappa)) = O(n^2 f \kappa) + O(nL + n\kappa) + O(n^2 \kappa) = O(nL + n^2 f \kappa)$ bits. Moreover, correct processes exchange $O(nL + n^2 \kappa \log n)$ bits while executing \mathcal{DD} . Therefore, the bit complexity of HASHEXT is $O(nL + n^2 f \kappa) + O(nL + n^2 \kappa \log n) = O(nL + n^2(f + \log n)\kappa)$. ◀

Finally, we prove that HASHEXT achieves early stopping.

► **Theorem 38** (Early stopping). *HASHEXT (Algorithm 1) achieves early stopping.*

Proof. By Lemma 24, all correct processes start \mathcal{DD} by the end of view $\mathcal{V} + 1$. Therefore, Lemma 30 proves that all correct processes start executing \mathcal{DD} in $O(f)$ time (recall that each view has 6 rounds). The liveness property of \mathcal{DD} ensures that all correct processes output a value in $O(f) + 2\delta \in O(f)$ time, which proves the theorem. ◀

C ERRORFREEEXT: Missing Implementation & Proof

In this section, we provide the implementation of ERRORFREEEXT 's building blocks and prove the correctness and complexity of ERRORFREEEXT . First, we introduce our implementation of the committee broadcast primitive (see Module 3) and prove its correctness and complexity (Appendix C.1). Second, we present our implementation of the finisher primitive (see Module 4) and prove its correctness and complexity (Appendix C.2). Lastly, we prove ERRORFREEEXT 's correctness and complexity (Appendix C.3).

C.1 Committee Broadcast: Implementation & Proof

In this subsection, we give an implementation of the committee broadcast primitive (see Module 3) and prove its correctness and complexity. We start by introducing the synchronizer primitive (Appendix C.1.1), a building block of our implementation of the committee broadcast primitive. Then, we introduce another building block of our implementation of the committed broadcast primitive – committee dissemination (Appendix C.1.2). Finally, we introduce our implementation of the committee broadcast primitive and prove its correctness and complexity (Appendix C.1.3).

C.1.1 Synchronizer

The specification of the synchronizer primitive is given in Module 6. In brief, the synchronizer primitive ensures that correct processes are “ 2δ -synchronized”, i.e., the synchronizer primitive represents a barrier such that if the first correct process crosses the barrier at some time τ , then all correct processes cross the barrier by time $\tau + 2\delta$. Our implementation of the synchronizer primitive is given in Algorithm 7. We emphasize that Algorithm 7 is highly reminiscent of the “amplifying” step of Bracha’s reliable broadcast algorithm [26].

Proof of correctness & complexity. The following theorem proves that Algorithm 7 implements the specification of the synchronizer primitive (Module 6).

► **Theorem 39** (Algorithm 7 implements synchronizer). *Algorithm 7 implements the specification of the synchronizer primitive (Module 6).*

Proof. Recall that the justification, totality and liveness properties need to be satisfied only of up to x' processes in Entire are faulty. To prove the theorem, we prove that Algorithm 7 satisfies all properties of the synchronizer primitive:

Module 6 Synchronizer**Participants:**

- Entire $\subseteq \Pi$; let $x = |\text{Entire}|$ and let x' be the greatest integer smaller than $x/3$.

Events:

- request* `wish_to_advance()`: a process wishes to advance.
- indication* `advance()`: a process advances.

Assumed behavior:

- No correct process stops unless it has previously received an `advance()` indication.

Properties ensured only if up to x' processes in Entire are faulty:

- Justification*: If a correct process receives an `advance()` indication, then at least one correct process has previously invoked a `wish_to_advance()` request.
- Totality*: Let τ be the first time at which a correct process receives an `advance()` indication. Then, every correct process receives an `advance()` indication by time $\tau + 2\delta$.
- Liveness*: Let τ be the first time by which all correct processes have invoked a `wish_to_advance()` request. Then, every correct process receives an `advance()` indication by time $\tau + \delta$.

Properties ensured even if more than x' processes in Entire are faulty:

- Complexity*: Each correct process sends $O(x)$ bits.

■ **Algorithm 7** Synchronizer: Pseudocode (for process p_i)

```

1: Participants:
2:   Entire  $\subseteq \Pi$  with  $|\text{Entire}| = x$  processes
3: upon wish_to_advance():
4:   broadcast  $\langle \text{WISH\_TO\_ADVANCE} \rangle$ 
5: upon receiving a  $\langle \text{WISH\_TO\_ADVANCE} \rangle$  message from  $x' + 1$  processes:
6:   broadcast  $\langle \text{WISH\_TO\_ADVANCE} \rangle$ 
7: upon receiving a  $\langle \text{WISH\_TO\_ADVANCE} \rangle$  message from  $2x' + 1$  processes:
8:   broadcast  $\langle \text{WISH\_TO\_ADVANCE} \rangle$ 
9:   trigger advance()

```

- Justification: Let p_i be any correct process that receives an `advance()` indication. Hence, p_i has previously received a `WISH_TO_ADVANCE` message from a correct process. As the first correct process to broadcast a `WISH_TO_ADVANCE` message does so upon invoking a `wish_to_advance()` request, the justification property is satisfied.
- Totality: Let p_i be the first correct process to receive an `advance()` indication; let this happen at some time τ . This implies that p_i has received a `WISH_TO_ADVANCE` message from $2x' + 1$ processes by time τ , out of which at least $x' + 1$ are correct. Therefore, by time $\tau + \delta$, every correct process receives a `WISH_TO_ADVANCE` message from $x' + 1$ processes and broadcasts its own `WISH_TO_ADVANCE` messages. Thus, every correct process receives a `WISH_TO_ADVANCE` message from $x - x' \geq 2x' + 1$ processes by time $\tau + 2\delta$, which concludes the proof of the totality property.
- Liveness: By time $\tau + \delta$, every correct process receives at least $x - x' \geq 2x' + 1$ `WISH_TO_ADVANCE` messages, which proves the liveness property.
- Complexity: Every correct process sends only $O(x)$ `WISH_TO_ADVANCE` messages, each with $O(1)$ bits. Thus, every correct process sends $O(x)$ bits.

As all properties of the synchronizer primitive are ensured by Algorithm 7, the theorem holds. ◀

C.1.2 Committee Dissemination

The specification of the committee dissemination primitive is given in Module 7. In brief, the committee dissemination primitive is concerned with two sets of processes: (1) Committee, the set of processes that (might) hold the same input value, and (2) Entire \supseteq Committee, the set of

processes that output the input value of the processes in Committee. Our implementation of the committee dissemination primitive is presented in Algorithm 8. We underline that the fact that the committee dissemination primitive terminates in 7δ time (see the liveness property) dictates that the β constant in `ERRORFREEEXT` (see Algorithm 11) is equal to 7.

Module 7 Committee dissemination \langle Entire, Committee \rangle

Participants:

- Entire $\subseteq \Pi$; let $x = |\text{Entire}|$ and let x' be the greatest integer smaller than $x/3$.
- Committee $\subseteq \text{Entire}$; let $y = |\text{Committee}|$ and let y' be the greatest integer smaller than $y/3$.

▷ usually, $|\text{Committee}| \approx |\text{Entire}|/2$ **Events:**

- `request disseminate`($v \in \text{Value}$): a process disseminates a value v .
- `indication obtain`($v' \in \text{Value}$): a process obtains a value v' .

▷ invoked only by Committee
▷ received by Entire**Assumed behavior:**

- A correct process p_i invokes a `disseminate`(\cdot) request if and only if $p_i \in \text{Committee}$.
- No correct process stops unless it has previously obtained a value.

Properties ensured only if up to x' processes in Entire are faulty:

- *Totality*: If a correct process obtains a value at time τ , then every correct process obtains a value by time $\tau + 2\delta$.
- *Optimistic safety & liveness*: Let all correct processes in Committee disseminate the same value v^* (once each). Moreover, let all correct processes do so within 2δ time of each other. Let there be up to y' faulty processes in Committee. Then, the following properties are ensured:
 - *Safety*: If a correct process obtains a value v , then $v = v^*$.
 - *Liveness*: Let τ be the first time by which all correct processes in Committee have disseminated v^* . Then, all correct processes (in Entire) obtain a value by time $\tau + 7\delta$.

Properties ensured even if more than x' processes in Entire are faulty:

- *Complexity*: Each correct process sends $O(L + x \log x)$ bits.
-

Proof of correctness. We start by proving the totality property.

► **Theorem 40** (Totality). *Algorithm 8 satisfies totality.*

Proof. Recall that the totality property needs to be satisfied only if up to x' processes in Entire are faulty. Let p_i be a correct process that obtains a value at some time τ . Hence, p_i receives an `advance`() indication from the synchronizer instance \mathcal{S} at time $\tau' = \tau - 4\delta$, due to the waiting step at line 17. The totality property of \mathcal{S} guarantees that all correct processes receive an `advance`() indication by time $\tau' + 2\delta$. Therefore, every correct process obtains a value by time $\tau' + 6\delta = \tau + 2\delta$, which means the totality property is ensured. ◀

We next prove the safety property.

► **Theorem 41** (Safety). *Algorithm 8 satisfies safety.*

Proof. Recall that the safety property needs to be ensured only if:

- up to x' processes in Entire are faulty, and
- all correct processes in Committee disseminate the same value v^* and they do so within 2δ time of each other, and
- up to y' processes in Committee are faulty.

Let τ be the time at which the first correct process invokes a `disseminate`(v^*) request. By time $\tau + 2\delta$, all correct processes invoke a `disseminate`(v^*) request. Hence, by time $\tau + 3\delta$, each correct process $p_j \in \text{Entire}$ sends the correctly-encoded RS symbol m_j of value v^* . Therefore, by time $\tau + 4\delta$, every correct process receives `RECONSTRUCT` messages from all correct processes.

Consider any correct process p_i that triggers the `obtain`(\cdot) indication at line 19 at some time τ_i . By the waiting step at line 17, process p_i received $\mathcal{S}.\text{advance}() at time $\tau - 4\delta$. By \mathcal{S} 's justification,$

■ **Algorithm 8** Committee dissemination (Entire, Committee): Pseudocode (for process p_i)

```

1: Participants:
2:   Entire  $\subseteq \Pi$  with  $|\text{Entire}| = x$  processes
3:   Committee  $\subseteq \text{Entire}$  with  $|\text{Committee}| = y$  processes

4: Uses:
5:   Synchronizer among Entire, instance  $\mathcal{S}$  ▷ see Module 6

6: Constants:
7:   Integer  $\alpha = 4$ 

8: upon disseminate( $v$ ): ▷ executed only if  $p_i \in \text{Committee}$ 
9:   Let  $[m_1, m_2, \dots, m_x] \leftarrow \text{REnc}(v, x, x' + 1)$ 
10:  for each process  $p_j \in \text{Entire}$ :
11:    send  $\langle \text{DISPERSE}, m_j \rangle$  to process  $p_j$ 

12: upon receiving a  $\langle \text{DISPERSE}, m_i \rangle$  message from  $y' + 1$  processes, for some RS symbol  $m_i$ :
13:  broadcast  $\langle \text{RECONSTRUCT}, m_i \rangle$  (to Entire)

14: upon receiving  $2x' + 1$  RECONSTRUCT messages:
15:  invoke  $\mathcal{S}.\text{wish\_to\_advance}()$ 

16: upon  $\mathcal{S}.\text{advance}()$ :
17:  wait  $\alpha\delta$  time
18:  For every process  $p_j \in \text{Entire}$ , let  $m_j$  denote the RS symbol sent by process  $p_j$  via a RECONSTRUCT message
  (if such a message is not received,  $m_j = \perp$ ).
19:  trigger  $\text{obtain}(\text{RSDec}(x' + 1, x', \{(j, m_j) \mid p_j \in \text{Entire}\}))$ 

```

some process p_j triggered $\mathcal{S}.\text{wish_to_advance}()$ at some time $\tau_j \leq \tau_i - 4\delta$, after having received $2t + 1$ RECONSTRUCT messages. Thus, process p_j received a RECONSTRUCT message from a correct process at time τ_j , which means $\tau \leq \tau_j$. Hence, $\tau_i \geq \tau + 4\delta$, which guarantees p_i receives all correctly-encoded RS symbols corresponding to correct processes before triggering $\text{obtain}(\cdot)$. As all these RS symbols are for value v^* , p_i obtains v^* , which concludes the proof. ◀

The following theorem proves the liveness property.

► **Theorem 42** (Liveness). *Algorithm 8 satisfies liveness.*

Proof. Recall that the liveness property needs to be ensured only if:

- up to x' processes in Entire are faulty, and
- all correct processes in Committee disseminate the same value v^* and they do so within 2δ time of each other, and
- up to y' processes in Committee are faulty.

Let τ be the first time by which all correct processes in Committee invoke a $\text{disseminate}(v^*)$ request. By time $\tau + 2\delta$, every correct process $p_i \in \text{Entire}$ receives $2x' + 1$ RECONSTRUCT messages, and invokes a $\text{wish_to_advance}()$ request on \mathcal{S} . The liveness property of \mathcal{S} ensures that every correct process eventually receives an $\text{advance}()$ indication by time $\tau + 3\delta$, waits 4δ time, and triggers $\text{obtain}(\cdot)$ at line 19 by time $\tau + 7\delta$, which concludes the proof. ◀

Proof of complexity. Finally, we prove that each correct process sends $O(L + x \log x)$ bits.

► **Theorem 43** (Complexity). *Each correct process sends $O(L + x \log x)$ bits in Algorithm 8 (even if more than x' processes in Entire are faulty).*

Proof. Each RS symbols is of size $O(\frac{L}{x'+1} + \log x) = O(\frac{L}{x} + \log x)$. As each correct process broadcasts at most one DISPERSE and one RECONSTRUCT message, each with $O(\frac{L}{x} + \log x)$ bits, each correct process sends $O(L + x \log x)$ bits via DISPERSE and RECONSTRUCT messages. Moreover, each correct process sends $O(x)$ bits in \mathcal{S} . Therefore, each correct process sends $O(L + x \log x)$ bits. ◀

C.1.3 Committee Broadcast: Implementation & Proof

Our implementation is presented in Algorithm 9.

■ **Algorithm 9** Committee broadcast (Entire, Committee, \mathcal{VA}): Pseudocode (for process p_i)

```

1: Participants:
2:   Entire  $\subseteq \Pi$  with  $|\text{Entire}| = x$  processes
3:   Committee  $\subseteq \text{Entire}$  with  $|\text{Committee}| = y$  processes
4: Uses:
5:   Validated agreement  $\mathcal{VA}$  among Committee, instance  $\mathcal{VA}$ 
6:   Committee dissemination (Entire, Committee), instance  $\mathcal{CD}$  ▷ see Module 7
7: Crucial property provided by  $\mathcal{VA}$ :
8:   If (1) there are up to  $y'$  faulty processes in Committee, and (2) all correct processes in Committee start
   executing  $\mathcal{VA}$  within  $2\delta$  time of each other, then all correct processes in Committee decide from  $\mathcal{VA}$  within
    $2\delta$  time of each other.
9: Local variables:
10:  Value  $\times \{0, 1\}$  ( $v_i, g_i$ )  $\leftarrow \perp$  ▷  $p_i$ 's input
11: upon input(Value  $v, \{0, 1\} \ni g$ ):
12:  ( $v_i, g_i$ )  $\leftarrow (v, g)$ 
13:  invoke  $\mathcal{VA}$ .propose( $v_i$ ) ▷ only executed if  $p_i \in \text{Committee}$ 
14: upon  $\mathcal{VA}$ .decide( $v^d$ ):
15:  invoke  $\mathcal{CD}$ .disseminate( $v^d$ )
16: upon  $\mathcal{CD}$ .obtain( $v^o$ ):
17:  if  $g_i = 0$  and  $\text{valid}(v^o) = \text{true}$ :
18:    trigger output( $v^o$ )
19:  else:
20:    trigger output( $v_i$ )
21: upon  $\mathcal{B}_{\mathcal{VA}}$  bits have been sent via  $\mathcal{VA}$ :
22:  stop executing  $\mathcal{VA}$  ▷ Committee is overly corrupted

```

Proof of correctness. Recall that the totality, stability, external validity, liveness, agreement, and strong validity properties must be ensured only if there are up to $x' < x/3$ faulty processes in Entire. We start by proving the totality property.

► **Theorem 44** (Totality). *Algorithm 9 satisfies totality.*

Proof. Let τ be the first time at which a correct process outputs a value (line 18 or 20); let that process be denoted by p_i . Therefore, process p_i obtains a value from the committee dissemination instance \mathcal{CD} at time τ (line 16). The totality property of \mathcal{CD} ensures that every correct process obtains a value from \mathcal{CD} by time $\tau + 2\delta$, which proves the totality property of Algorithm 9. ◀

Next, we prove the stability property.

► **Theorem 45** (Stability). *Algorithm 9 satisfies stability.*

Proof. The stability property is ensured due to the check at line 17. ◀

The following theorem proves the external validity property.

► **Theorem 46** (External validity). *Algorithm 9 satisfies external validity.*

Proof. Let p_i be a correct process that outputs some value v (line 18 or 20). If p_i outputs v at line 18, then v is valid due to the check line 17. Otherwise, v is valid due to the assumption that any correct process inputs a valid value. ◀

Recall that the liveness, agreement, and strong validity properties need to be satisfied only if (1) there are up to y' faulty processes in Committee, and (2) all correct processes in Entire start executing the committee broadcast primitive within 2δ time of each other. First, we prove liveness.

► **Theorem 47** (Liveness). *Algorithm 9 satisfies liveness.*

Proof. Suppose (1) there are up to y' faulty processes in Committee, and (2) all correct processes in Entire start executing Algorithm 9 within 2δ time of each other. In this case, \mathcal{VA} satisfies the properties of validated agreement: all correct processes decide the same valid value v by time $\tau + \mathcal{R}_{\mathcal{VA}}$. Hence, all correct processes disseminate value v by time $\tau + \mathcal{R}_{\mathcal{VA}}$ and they do so within 2δ time of each other. The optimistic safety and liveness properties of \mathcal{CD} ensure that all correct processes in Entire obtain the value v by time $\tau + \mathcal{R}_{\mathcal{VA}} + 7\delta$, which proves the liveness property. ◀

Next, we prove the agreement property.

► **Theorem 48** (Agreement). *Algorithm 9 satisfies agreement.*

Proof. Suppose (1) there are up to y' faulty processes in Committee, and (2) all correct processes in Entire start executing Algorithm 9 within 2δ time of each other. Therefore, \mathcal{VA} satisfies the properties of validated agreement: all correct processes in Committee decide the same valid value v . We now distinguish two scenarios:

- Let there exist a correct process $p_i \in \text{Entire}$ such that p_i inputs $(v', 1)$ to Algorithm 9, for some value v' . In this case, due to the assumptions on the committee broadcast primitive, every correct process $p_j \in \text{Entire}$ inputs (v', \cdot) to Algorithm 9. As \mathcal{VA} satisfies strong validity, $v' = v$. Hence, all correct processes output the same value in this case.
- Let no correct process $p_i \in \text{Entire}$ input $(\cdot, 1)$ to Algorithm 9. In this case, all correct processes in Entire output v .

The agreement property is satisfied as it holds in both possible scenarios. ◀

Finally, we prove the strong validity property.

► **Theorem 49** (Strong validity). *Algorithm 9 satisfies strong validity.*

Proof. Suppose (1) there are up to y' faulty processes in Committee, and (2) all correct processes in Entire start executing Algorithm 9 within 2δ time of each other. Let all correct processes input a pair (v, \cdot) , for some value v . If a correct process inputs $(v, 1)$, then it will output v . Otherwise, As \mathcal{VA} satisfies strong validity, all correct processes in Committee decide v from \mathcal{VA} and disseminate v . Therefore, the safety property of \mathcal{CD} ensures that no correct process outputs a value different from v . ◀

Proof of complexity. Lastly, we prove that each correct process sends $O(L + x \log x) + \mathcal{B}_{\mathcal{VA}}$ bits.

► **Theorem 50** (Complexity). *Each correct process sends $O(L + x \log x) + \mathcal{B}_{\mathcal{VA}}$ bits in Algorithm 9 (even if more than x' processes in Entire are faulty).*

Proof. Consider any correct process p_i . Process p_i sends at most $\mathcal{B}_{\mathcal{VA}}$ bits in \mathcal{VA} (if $p_i \in \text{Committee}$). Moreover, process p_i sends $O(L + x \log x)$ bits in \mathcal{CD} , which concludes the proof. ◀

C.2 Finisher: Implementation & Proof

Our implementation of the finisher primitive (Module 4) is presented in Algorithm 10.

Proof of correctness & complexity. The following theorem proves the correctness and complexity of Algorithm 10.

■ **Algorithm 10** Finisher: Pseudocode (for process p_i)

```

1: Participants:
2:   Entire  $\subseteq \Pi$  with  $|\text{Entire}| = x$  processes

3: Uses:
4:   Synchronizer among Entire, instance  $\mathcal{S}$  ▷ see Module 6

5: Local variables:
6:   Value  $v_i \leftarrow \perp$  ▷  $p_i$ 's input

7: upon input(Value  $v, \{0, 1\} \ni g$ ):
8:    $v_i \leftarrow v$ 
9:   if  $g = 1$ :
10:    invoke  $\mathcal{S}.\text{wish\_to\_advance}()$ 

11: upon  $\mathcal{S}.\text{advance}()$ :
12:   trigger output( $v_i$ ) ▷ wait for the input if necessary

```

► **Theorem 51** (Algorithm 10 implements finisher). *Algorithm 10 implements the specification of the finisher primitive (Module 4).*

Proof. We prove all the properties of the finisher primitive:

- Preservation: A correct process necessarily outputs the value that it has previously input.
- Justification: Assume a correct process outputs a value (line 12). Due to the justification property of the synchronizer instance \mathcal{S} , a correct process p_j has invoked a $\mathcal{S}.\text{wish_to_advance}()$ request (line 10), which implies that p_j has input $(\cdot, 1)$ due to the check at line 9.
- Agreement: This property is ensured due to the justification property and the assumption that if a correct process proposes $(v, 1)$, then every correct process proposes (v, \cdot) .
- Totality: Holds due to \mathcal{S} 's totality property and the assumption that all processes input within 2δ of each other.
- Liveness: Holds due to \mathcal{S} 's liveness property.
- Complexity: Holds due to \mathcal{S} 's complexity property.

As all properties of the finisher primitive are satisfied, the theorem holds. ◀

C.3 Proof of Correctness & Complexity

For the reader's convenience, we recall the implementation of ERRORFREEEXT in Algorithm 11.

Proof of correctness. AS ERRORFREEEXT is a recursive distributed algorithm, we start by showing that ERRORFREEEXT executed among a single process is correct.

► **Theorem 52** (ERRORFREEEXT is correct when $x = 1$). *If $x = 1$ (i.e., the system contains a single process), then ERRORFREEEXT is a correct validated agreement algorithm.*

Proof. Let p_i be the only correct process. Strong validity follows from the fact that p_i decides its proposal. Due to the assumption that p_i 's proposal is valid, the external validity property is satisfied. Finally, termination, integrity, and agreement trivially hold. ◀

The next lemma is crucial. It proves that all correct processes behave according to assumptions specified in the specification of ERRORFREEEXT's building blocks. Recall that we assume the following: (1) all correct processes propose to ERRORFREEEXT within 2δ time of each other, and (2) all correct processes propose valid values to ERRORFREEEXT. Moreover, the specification of ERRORFREEEXT needs to be ensured *only if* there are less than $x/3$ failures in Entire; recall that Entire is the set of processes that operates in ERRORFREEEXT.

► **Lemma 53.** *Let \mathcal{O} (resp., \mathcal{O}') be any object in $\{\mathcal{GC}_{sv}, \mathcal{GC}_\ell, \mathcal{GC}_1, \mathcal{GC}_2, \mathcal{CB}_\ell, \mathcal{CB}_1, \mathcal{CB}_2, \mathcal{F}_\ell, \mathcal{F}_2\}$ (resp., $\{\mathcal{CB}_\ell, \mathcal{CB}_1, \mathcal{CB}_2, \mathcal{F}_\ell, \mathcal{F}_2\}$). The following holds:*

- All correct processes input valid values only to \mathcal{O} and they do so within 2δ time of each other.
- If a correct process inputs a pair $(v, 1)$, for any value v , to any object \mathcal{O}' , no correct processes inputs a value different from (v, \cdot) to \mathcal{O}' .
- All correct processes decide a valid value from ERRORFREEEXT and do so within 2δ time of each other.

Proof. Let p_i and p_j denote any two correct processes. To prove the lemma, we consider every considered object:

- \mathcal{GC}_{sv} : Process p_i proposes a valid value to \mathcal{GC}_{sv} (line 23) as (1) p_i forwards to \mathcal{GC}_{sv} its proposal to ERRORFREEEXT , and (2) p_i 's proposal to ERRORFREEEXT is valid. Moreover, all correct processes propose to \mathcal{GC}_{sv} within 2δ time of each other as they all propose to ERRORFREEEXT within 2δ time of each other.
- \mathcal{CB}_ℓ : Process p_i inputs a valid value v to \mathcal{CB}_ℓ (line 27) as (1) p_i decides v from \mathcal{GC}_{sv} , (2) the justification property of \mathcal{GC}_{sv} ensures that v was proposed to \mathcal{GC}_{sv} by a correct process, and (3) only valid values are proposed to \mathcal{GC}_{sv} by correct processes. Moreover, all correct processes input to \mathcal{CB}_ℓ within 2δ time of each other as all correct processes decide from \mathcal{GC}_{sv} within 2δ time of each other (as \mathcal{GC}_{sv} is executed for a fixed time duration and all correct processes propose to \mathcal{GC}_{sv} within 2δ time of each other).

Suppose p_i inputs a pair $(v, 1)$ to \mathcal{CB}_ℓ , for some value v . That implies that p_i has previously decided $(v, 1)$ from \mathcal{GC}_{sv} . The consistency property of \mathcal{GC}_{sv} implies that p_j decides (v, \cdot) from \mathcal{GC}_{sv} and inputs the same pair to \mathcal{CB}_ℓ .

- \mathcal{GC}_ℓ : Let us consider two possibilities for p_i 's proposal v to \mathcal{GC}_ℓ :
 - Suppose p_i proposes v at line 29. In this case, v is a valid value due to the external validity property of \mathcal{CB}_ℓ .
 - Suppose p_i proposes v at line 31. In this case, v is p_i 's decision from \mathcal{GC}_{sv} . Therefore, v is valid as (1) it was proposed by a correct process to \mathcal{GC}_{sv} (due to the justification property of \mathcal{GC}_{sv}), and (2) correct processes propose only valid values to \mathcal{GC}_{sv} .

Let p_k denote the first correct process to propose to \mathcal{GC}_ℓ ; let that happen at some time τ . We distinguish two scenarios:

- Let p_k propose at line 29. In this case, the totality property of \mathcal{CB}_ℓ ensures that all correct processes propose to \mathcal{CB}_ℓ by time $\tau + 2\delta$.
- Let p_k propose at line 31. As all correct processes set their timer timer_0 within 2δ time of each other, timer_0 at any correct process expires by time $\tau + 2\delta$.
- \mathcal{F}_ℓ : Process p_i inputs a valid value v to \mathcal{F}_ℓ as (1) p_i decides v from \mathcal{GC}_ℓ , (2) the justification property of \mathcal{GC}_ℓ ensures that v was proposed by a correct process, and (3) only valid values are proposed to \mathcal{GC}_ℓ by correct processes. Moreover, all correct processes input to \mathcal{F}_ℓ within 2δ time of each other as all correct processes decide from \mathcal{GC}_ℓ within 2δ time of each other. Finally, the consistency property of \mathcal{GC}_ℓ ensures that if a correct process inputs $(v, 1)$ to \mathcal{F}_ℓ , for any value v , then all correct processes input (v, \cdot) .
- \mathcal{GC}_1 : Process p_i proposes a valid value v as (1) p_i decides v from \mathcal{GC}_ℓ , (2) the justification property of \mathcal{GC}_ℓ ensures that v was proposed by a correct process, and (3) only valid values are proposed to \mathcal{GC}_ℓ by correct processes. Similarly, all correct processes propose to \mathcal{GC}_1 within 2δ time of each other as all correct processes decide from \mathcal{GC}_ℓ within 2δ time of each other and all correct processes wait for exactly 3δ time before proposing to \mathcal{GC}_1 .
- \mathcal{CB}_1 : Process p_i proposes a valid value v to \mathcal{CB}_1 as (1) p_i decides v from \mathcal{GC}_1 , (2) the justification property of \mathcal{GC}_1 ensures that v was proposed to \mathcal{GC}_1 by a correct process, and (3) only valid values are proposed to \mathcal{GC}_1 by correct processes. Moreover, all correct processes input to \mathcal{CB}_1 within 2δ time of each other as all correct processes decide from \mathcal{GC}_1 within 2δ time of each other. Lastly, the consistency property of \mathcal{GC}_1 ensures that if a correct process inputs $(v, 1)$ to

- \mathcal{CB}_1 , for any value v , then all correct processes input (v, \cdot) .
- \mathcal{GC}_2 : Let us consider two possibilities for p_i 's proposal v to \mathcal{GC}_2 :
 - Suppose p_i proposes v at line 45. In this case, v is a valid value due to the external validity property of \mathcal{CB}_1 .
 - Suppose p_i proposes v at line 47. In this case, v is p_i 's decision from \mathcal{GC}_1 . Thus, v is valid as (1) it was proposed by a correct process to \mathcal{GC}_1 (due to the justification property of \mathcal{GC}_1), and (2) correct processes propose only valid values to \mathcal{GC}_1 .
- Let p_k denote the first correct process to propose to \mathcal{GC}_2 ; let that happen at some time τ . We distinguish two scenarios:
- Let p_k propose at line 45. In this case, the totality property of \mathcal{CB}_1 ensures that all correct processes propose to \mathcal{GC}_2 by time $\tau + 2\delta$.
 - Let p_k propose at line 47. As all correct processes set their timer $timer_1$ within 2δ time of each other, $timer_1$ at any correct process expires by time $\tau + 2\delta$.
- \mathcal{F}_2 : Process p_i inputs a valid value v to \mathcal{F}_2 as (1) p_i decides v from \mathcal{GC}_2 , (2) the justification property of \mathcal{GC}_2 ensures that v was proposed by a correct process, and (3) only valid values are proposed to \mathcal{GC}_2 by correct processes. Moreover, all correct processes input to \mathcal{F}_2 within 2δ time of each other as all correct processes decide from \mathcal{GC}_2 within 2δ time of each other. Finally, the consistency property of \mathcal{GC}_2 ensures that if a correct process inputs $(v, 1)$ to \mathcal{F}_2 , for any value v , then all correct processes input (v, \cdot) .
 - \mathcal{CB}_2 : Process p_i proposes a valid value v to \mathcal{CB}_2 as (1) p_i decides v from \mathcal{GC}_2 , (2) the justification property of \mathcal{GC}_2 ensures that v was proposed to \mathcal{GC}_2 by a correct process, and (3) only valid values are proposed to \mathcal{GC}_2 by correct processes. Moreover, all correct processes input to \mathcal{CB}_2 within 2δ time of each other as all correct processes decide from \mathcal{GC}_2 within 2δ time of each other. Lastly, the consistency property of \mathcal{GC}_2 ensures that if a correct process inputs $(v, 1)$ to \mathcal{CB}_2 , for any value v , then all correct processes input (v, \cdot) .

Lastly, we prove that all correct processes decide a valid value within 2δ time of each other. We first prove that all correct processes decide a valid value. Let us consider all possibilities for p_i 's decision v :

- Suppose p_i decides v at line 38. The preservation property of \mathcal{F}_ℓ ensures that v was input to \mathcal{F}_ℓ . As all correct processes input only valid values to \mathcal{F}_ℓ , v must be valid.
- Suppose p_i decides v at line 58. In this case, v is a valid value due to the external validity property of \mathcal{CB}_2 .
- Suppose p_i decides v at line 60. In this case, v is the value decided from \mathcal{GC}_2 . Therefore, v is a valid value due to (1) the justification property of \mathcal{GC}_2 , and (2) the fact that correct processes only propose valid values to \mathcal{GC}_2 .

We now prove all correct processes decide within 2δ time of each other. Let p_k denote the first correct process to decide; let that happen at some time τ . We distinguish three scenarios:

- Let p_k decide at line 38. In this case, the totality property of \mathcal{F}_ℓ ensures that all correct processes decide by time $\tau + 2\delta$.
- Let p_k propose at line 58. In this case, the totality property of \mathcal{CB}_2 ensures that all correct processes decide by time $\tau + 2\delta$.
- Let p_k propose at line 60. As all correct processes set their timer $timer_2$ within 2δ time of each other, $timer_2$ at any correct process expires by time $\tau + 2\delta$.

Let us remark that no process stops before every correct process decides, because of the 2δ waiting step, at lines 39, 56, 58 and 60. Thus, the lemma holds. ◀

The following theorem proves that ERRORFREEEXT satisfies strong validity.

► **Theorem 54** (Strong validity). *ERRORFREEEXT (Algorithm 11) satisfies strong validity.*

Proof. Suppose all correct processes propose the same value v ; recall that all correct processes do so within 2δ time of each other. Hence, all correct processes decide $(v, 1)$ from \mathcal{GC}_{sv} , which implies that all correct processes input $(v, 1)$ to \mathcal{CB}_ℓ . The stability property of \mathcal{CB}_ℓ ensures that all correct processes propose v to \mathcal{GC}_ℓ , which implies that every correct process decides $(v, 1)$ from \mathcal{GC}_ℓ (due to the strong validity property of \mathcal{GC}_ℓ). Thus, all correct processes propose $(v, 1)$ to \mathcal{F}_ℓ . Let τ denote the first time a correct process proposes to \mathcal{F}_ℓ . Lemma 53 proves that all correct processes propose to \mathcal{F}_ℓ by time $\tau + 2\delta$. Moreover, the liveness property of \mathcal{F}_ℓ ensures that all correct processes output v from \mathcal{F}_ℓ (and decide v from ERRORFREEEXT) by time $\tau + 3\delta$, which is before any correct process finishes its 3δ waiting (line 35). Therefore, strong validity is ensured. ◀

Next, we prove the external validity property.

► **Theorem 55** (External validity). *ERRORFREEEXT (Algorithm 11) satisfies external validity.*

Proof. The property is ensured due to Lemma 53. ◀

We now prove that if process p_ℓ is correct, then all correct processes agree on a common value after \mathcal{F}_ℓ (without executing \mathcal{GC}_1).

► **Lemma 56.** *If process p_ℓ is correct, correct processes agree on a common value after the first finisher \mathcal{F}_ℓ at line 38 in $O(\delta)$ time (and without executing \mathcal{GC}_1).*

Proof. Suppose p_ℓ is correct. Then, every correct process outputs the same value v from \mathcal{CB}_ℓ (line 28) before timer_0 's expiration (line 30) due to \mathcal{CB}_ℓ 's optimistic consensus property. Hence, all correct processes propose v to \mathcal{GC}_ℓ within 2δ time of each other (line 36). Due to \mathcal{GC}_ℓ 's strong validity, every correct process outputs $(v, 1)$ from \mathcal{GC}_ℓ (line 40). This means that all correct processes propose $(v, 1)$ to \mathcal{F}_ℓ within 2δ time of each other (line 34). Finally, due to \mathcal{F}_ℓ 's liveness, every correct process outputs v from \mathcal{F}_ℓ (line 37), decides v and stops at line 38 before the end of the 3δ -waiting step (line 35). ◀

The next lemma proves a connection between (1) \mathcal{F}_ℓ and \mathcal{GC}_ℓ , and (2) \mathcal{F}_2 and \mathcal{GC}_2 .

► **Lemma 57.** *If a correct process decides some value v after \mathcal{F}_ℓ at line 38 (resp., \mathcal{F}_2 at line 55), then every correct process that decides from \mathcal{GC}_ℓ (resp., \mathcal{GC}_2) does so with a pair (v, \cdot) .*

Proof. Assume a correct process decides v at line 38 (resp., line 55) upon getting an output at line 37 (resp., line 54) from \mathcal{F}_ℓ (resp., \mathcal{F}_2). By finisher's justification and preservation, some correct process inputs $(v, 1)$ to \mathcal{F}_ℓ (resp., \mathcal{F}_2) at line 34 (resp., line 50). By the consistency property of \mathcal{GC}_ℓ (resp., \mathcal{GC}_2), every correct process that outputs a pair from \mathcal{GC}_ℓ (resp., \mathcal{GC}_2) at line 32 (resp., line 48) does so with a pair (v, \cdot) . ◀

Next, we prove that correct processes decide the same value within 2δ time of each other if a correct process decides after \mathcal{F}_ℓ .

► **Lemma 58.** *If a correct process decides some value v at time τ after \mathcal{F}_ℓ at line 38, then every correct process decides v by time $\tau + 2\delta$.*

Proof. If a correct process decides some value v at time τ after the first finisher \mathcal{F}_ℓ at line 38, then Lemma 57 implies that every correct process that outputs from \mathcal{GC}_ℓ does so with a pair (v, \cdot) . Thus, due to \mathcal{GC}_1 's strong validity, no correct process outputs a pair different from $(v, 1)$ from \mathcal{GC}_1 . Hence, no correct process can decide a value different from v , due to strong validity of \mathcal{GC}_2 and stability of \mathcal{CB}_2 . Moreover, by \mathcal{F}_ℓ 's totality, every correct process decides v by time $\tau + 2\delta$. ◀

The following lemma proves that if the first half is “healthy”, then all correct processes agree on a value. In the following, we define $\mathcal{L}(x, f_x)$ as the latency of `ERRORFREEEXT`, executed among x processes with f_x actual failures.

► **Lemma 59.** *Let f_1 denote the actual number of failures in \mathcal{H}_1 and let $f_1 < |\mathcal{H}_1|/3$. Then, all correct processes decide the same value v from `ERRORFREEEXT` and they so in $O(\delta) + \mathcal{L}(|\mathcal{H}_1|, f_1)$ time since starting `ERRORFREEEXT` (and without executing `CB2`).*

Proof. If a correct process decides some value v at time τ after \mathcal{F}_ℓ at line 38, then every correct process decides v by time $\tau + 2\delta$ (by Lemma 58). Suppose no correct process decides after \mathcal{F}_ℓ at line 38 by time $\tau \in O(\delta) + \mathcal{L}(|\mathcal{H}_1|, f_1)$. Hence, all correct processes participate in `CB1` and they start doing so within 2δ of each other; let all correct processes start `CB1` by some time τ' . Due to the optimistic consensus property of `CB1`, all correct processes output (line 44) the same value v' from `CB1` by time $\tau' + \mathcal{L}(|\mathcal{H}_1|, f_1) + 7\delta$. Thus, all correct processes propose v' to `GC2` (line 45), which means, due to `GC2`'s strong validity and \mathcal{F}_2 's liveness that all correct processes decide (line 55) a common value by time $O(\delta) + \mathcal{L}(|\mathcal{H}_1|, f_1)$ before the end of the 3δ -waiting step (line 51).

In all cases, correct processes decide a common value by time $O(\delta) + \mathcal{L}(|\mathcal{H}_1|, f_1)$ without executing `CB2`. Therefore, the lemma holds. ◀

Finally, we are ready to prove the agreement property of `ERRORFREEEXT`.

► **Theorem 60 (Agreement).** *`ERRORFREEEXT` satisfies agreement.*

Proof. If p_ℓ is correct or \mathcal{H}_1 is “healthy” (containing less than one-third of faulty processes), the lemma holds due to Lemma 56 or Lemma 59, respectively. Assume p_ℓ is faulty and \mathcal{H}_1 is not healthy. Hence, \mathcal{H}_2 must be healthy. If a correct process decides some value v at time τ after \mathcal{F}_ℓ at line 38, then every correct process decides v by time $\tau + 2\delta$ (by Lemma 58). Assume no correct process decides after \mathcal{F}_ℓ at line 38.

If some correct process decides after \mathcal{F}_2 at line 55 by time τ_2 , then, by Lemma 57, every correct process outputs (v, \cdot) from `GC2` (line 48). Then, due to `CB2`'s optimistic consensus property, every correct process either decides v at line 58 (obtained from `CB2` at line 57) or first decides v at line 55 after the second finisher \mathcal{F}_2 .

Assume no correct process decides after the second finisher \mathcal{F}_2 at line 55. Then, by `CB2`'s optimistic consensus, all correct processes agree at line 58 on some value. ◀

We next prove that `ERRORFREEEXT` satisfies integrity.

► **Theorem 61 (Integrity).** *`ERRORFREEEXT` (Algorithm 11) satisfies integrity.*

Proof. The integrity property follows directly from the algorithm as no correct process decides more than once. ◀

Finally, we prove the termination property of `ERRORFREEEXT`.

► **Theorem 62 (Termination).** *`ERRORFREEEXT` (Algorithm 11) satisfies termination.*

Proof. The termination property follows directly from Lemma 53. ◀

Proof of complexity. We start by proving `ERRORFREEEXT`'s bit complexity.

► **Theorem 63 (Bit complexity).** *The bit complexity of `ERRORFREEEXT` (Algorithm 11) is $O((nL + n^2) \log n)$.*

Proof. To analyze the (total) bit complexity of `ERRORFREEEXT`, we focus on the per-process bit complexity of `ERRORFREEEXT` with f failures. (We underline that f is the actual number of failures and it is not known to processes.) Let us denote by $\mathcal{B}(n, f)$ the per-process bit complexity of `ERRORFREEEXT` executed among n processes out of which exactly f processes are faulty. We express $\mathcal{B}(n, f)$ through three specific cases: (1) $n = 1$, (2) the predetermined leader p_ℓ is a correct process, and (3) the predetermined leader p_ℓ is faulty. Moreover, let f_1 (resp., f_2) denote the actual number of faulty processes in \mathcal{H}_1 (resp., \mathcal{H}_2). Note that $f = f_1 + f_2$ if p_ℓ is correct and $f = f_1 + f_2 + 1$ if p_ℓ is faulty.

The per-process bit complexity verifies the following inequality, where a and b are some positive constants related to the different modules (with $aL + b \log(n) \geq 4\mathcal{B}_{\mathcal{GC}}(n) + 3\mathcal{B}_{\mathcal{CD}}(n) + 2\mathcal{B}_{\mathcal{F}}(n)$), where $\mathcal{B}_{\mathcal{M}}(n)$ denotes the worst-case per-process bit complexity of module \mathcal{M} among n processes):

$$\mathcal{B}(n, f) \leq \begin{cases} 0, & \text{if } n = 1, \\ aL + b \log n, & \text{if } p_\ell \text{ is correct,} \\ aL + b \log n + \max(\mathcal{B}(\frac{n}{2}, f_1), \mathcal{B}(\frac{n}{2}, f_2)), & \text{otherwise (with } f = 1 + f_1 + f_2). \end{cases}$$

By induction, we show that, for every integer n , $\mathcal{B}(n, f) \leq c(L + n) \log n$ for some sufficiently large positive constant $c \geq \max(2b, a/\log 2)$. The base case trivially holds since $\mathcal{B}(1, 0) = 0$. Let n be a strictly positive integer. We assume that the result holds for any integer strictly lower than n . By the induction hypothesis, $\max(\mathcal{B}(\frac{n}{2}, f_1), \mathcal{B}(\frac{n}{2}, f_2)) \leq c(L + \frac{n}{2}) \log \frac{n}{2}$. Hence, $\mathcal{B}(n, f) \leq (a - c \log 2 + c \log n)L + (b + \frac{c}{2})n \log n$. Finally, $\mathcal{B}(n, f) \leq c(L + n) \log n$, since $c \geq \max(2b, a/\log 2)$. The induction holds, which concludes the proof for the per-process bit complexity. ◀

Lastly, we prove `ERRORFREEEXT`'s latency complexity, i.e., the fact that `ERRORFREEEXT` is early-stopping.

► **Theorem 64** (Early-stopping). *ERRORFREEEXT (Algorithm 11) is early-stopping.*

Proof. Let us denote by $\mathcal{L}(n, f)$ the latency complexity of `ERRORFREEEXT` executed among n processes out of which exactly f processes are faulty. (We underline that f is the actual number of failures and is unknown to processes.) Let f_1 (resp., f_2) denote the actual number of faulty processes in \mathcal{H}_1 (resp., \mathcal{H}_2). Note that $f = f_1 + f_2$ if p_ℓ is correct and $f = f_1 + f_2 + 1$ if p_ℓ is faulty. Let $\mathcal{L}_{\mathcal{M}}$ denote the worst-case latency of module \mathcal{M} given exactly f failures (independent of n); this module \mathcal{M} can be graded consensus, committee dissemination and finisher. Let a' , b' and c' be some positive constants verifying:

$$\begin{cases} a' = (1/\delta) \cdot (2 \cdot 3 \cdot \mathcal{L}_{\mathcal{GC}} + \mathcal{L}_{\mathcal{CD}} + \mathcal{L}_{\mathcal{F}} + 2) = (2 \cdot 3 \cdot 7 + 7 + 1 + 2) = 52 \\ b' = (1/\delta) \cdot (2 \cdot 3 \cdot \mathcal{L}_{\mathcal{GC}} + \mathcal{L}_{\mathcal{CD}} + \max(\mathcal{L}_{\mathcal{CD}}, \mathcal{L}_{\mathcal{F}})) = (2 \cdot 3 \cdot 7 + 7 + 7) = 56 \\ c' = 2a' + b' = 160. \end{cases}$$

The latency of `ERRORFREEEXT` can be expressed as follows:

$$\mathcal{L}(n, f) \leq \begin{cases} a'\delta, & \text{if } p_\ell \text{ is correct,} \\ (a' + b')\delta + \mathcal{L}(\frac{n}{2}, f_1) + \mathcal{L}(\frac{n}{2}, f_2), & \text{otherwise.} \end{cases}$$

By induction, we show that $\mathcal{L}(n, f) \leq (a' + c'f)\delta$. Since $\mathcal{L}(n, 0) \leq a'\delta$, for any n , the base case trivially holds. Let n, f be two strictly positive integers. We assume $\mathcal{L}(n', f') \leq (a' + c'f')\delta$, for any pair (n', f') such that either (1) $n' < n$ and $f' \leq f$, or (2) $n' \leq n$ and $f' < f$, and aim to show it implies the result for the pair (n, f) .

1. Let p_ℓ be correct. In this case, the result immediately holds.
2. Let p_ℓ be faulty. In this case, $f = 1 + f_1 + f_2$. Hence, by the induction hypothesis, the following holds: (1) $\mathcal{L}(\frac{n}{2}, f_1) \leq (a' + c' f_1)$, and (2) $\mathcal{L}(\frac{n}{2}, f_2) \leq (a' + c' f_2)$. Thus, $\mathcal{L}(\frac{n}{2}, f_1) + \mathcal{L}(\frac{n}{2}, f_2) \leq (2a' - c' + c' f)$. This further implies $\mathcal{L}(n, f) \leq (a' + b')\delta + \mathcal{L}(\frac{n}{2}, f_1) + \mathcal{L}(\frac{n}{2}, f_2) \leq a'\delta + (b' + 2a' - c' + c' f)\delta \leq a'\delta + c' f\delta$.

The theorem holds. ◀