# **RAGGED:** Towards Informed Design of Retrieval Augmented Generation Systems

Jennifer Hsia\* Afreen Shaikh\* Zhiruo Wang Graham Neubig

Carnegie Mellon University

{jhsia2,afreens,zhiruow,gneubig}@cs.cmu.edu

## Abstract

Retrieval-augmented generation (RAG) can significantly improve the performance of language models (LMs) by providing additional context for tasks such as document-based question answering (DBQA). However, the effectiveness of RAG is highly dependent on its configuration. To systematically find the optimal configuration, we introduce RAGGED, a framework for analyzing RAG configurations across various DBQA tasks. Using the framework, we discover distinct LM behaviors in response to varying context quantities, context qualities, and retrievers. For instance, while some models are robust to noisy contexts, monotonically performing better with more contexts, others are more noise-sensitive and can effectively use only a few contexts before declining in performance. This framework also provides a deeper analysis of these differences by evaluating the LMs' sensitivity to signal and noise under specific context quality conditions. Using RAGGED, researchers and practitioners can derive actionable insights about how to optimally configure their RAG systems for their specific question-answering tasks.<sup>1</sup>

### 1 Introduction

Retrieval-augmented generation (RAG) (Chen et al., 2017; Lewis et al., 2020) is a technique widely applied to enhance the performance of topperforming LMs on knowledge-intensive generation tasks like document-based question answering (Karpukhin et al., 2020). Given a question, the technique includes using a *retriever* model to obtain multiple relevant passages (i.e. paragraphs) across potentially different documents, then inputting these passages to a *reader* model as additional contexts for generating an answer.




Figure 1: Illustration of our RAGGED framework.




Figure 2: Example insight from using RAGGED: LLAMA and CLAUDE models are more sensitive to noise in context, while FLAN and GPT models are more robust to noise in context and can effectively use a larger number of context passages.

However, using RAG effectively is not straightforward, and existing literature provides mixed, even contradictory, suggestions for configuring RAG. While different LMs have different context length limits (Chung et al., 2022; Tay et al., 2023; Touvron et al., 2023b; Liu et al., 2023), these limits alone do not simply determine the optimal number of passages to provide in context. Early works suggest that providing more retrieved passages results in strictly better outputs (Izacard and Grave, 2021). In contrast, other works find that providing a selected set of passages (Asai et al., 2022), sentences (Wang et al., 2023), or tokens (Berchansky et al., 2023) outperforms providing the full set, presumably due to increased context relevance and quality. In addition to context quality and quantity, how robust a reader model is to noisy context also determines downstream performance. For example, Hoffmann et al. (2022) train models on high-quality data, while Yu et al. (2023) intention-

<sup>\*</sup> Equal contribution.

<sup>&</sup>lt;sup>1</sup>Code/data for the RAGGED framework are available at https://github.com/neulab/ragged

ally inject noisy content into input context during model training, and observe increased robustness of these models to low-quality contexts.

To provide more concrete suggestions of the best practices under various cases, we introduce an analysis framework, RAGGED,<sup>2</sup> to test RAG combinations on a suite of representative documentbased question answering (DBQA) tasks, including open-domain datasets like Natural Questions (Kwiatkowski et al., 2019) and HotpotQA (Yang et al., 2018), which respectively focus on singlehop and multi-hop questions, as well as BioASQ, which targets the specialized, biomedical domain. To ensure a comprehensive evaluation, we incorporate both classic sparse and dense retrievers, BM25 (Robertson et al., 2009) and ColBERT (Santhanam et al., 2021), and top-performing reader model families GPT (Brown et al., 2020), CLAUDE (Enis and Hopkins, 2024), FLAN (Chung et al., 2022; Tay et al., 2023), LLAMA (Touvron et al., 2023b) families, respectively.

We begin by exploring "*How many contexts can readers benefit from*?" (§5). Our analysis identifies the optimal context quantity for different readers. We find that while some readers' performance improves monotonically as context quantity increases, other models' performance peaks early and starts deteriorating, sometimes even below their no-context performance.

To understand these differences in more detail, we ask "How robust are reader models to irrelevant context when gold passages are present versus absent?" (§6). We analyze the readers under these data slices, and find that even with sufficient information, all readers still get distracted by the irrelevant context and degrade in performance as the number of contexts increases. The difference is that some models' performance drops below their no-context baseline, while others are more robust and remain above the baseline.

Although it is useful to know model behavior under the presence and absence of signal, a practitioner may not have such detailed information at deployment time. Hence, we also examine reader sensitivity to context quality at the coarser level of retriever choice, and ask *"How does the retriever choice impact reader performance?"* (§7) For Wikipedia-based questions, we find that using a neural retriever offers a big advantage over using a lexical retriever, but this advantage only translates well for single-hop questions and not for multi-hop ones. For special-domain questions, we find that using a neural retriever only offers a minimal advantage over using a lexical retriever, but this advantage is amplified in reader performance.

In summary, we demonstrate how RAGGED enables us to derive actionable insights about the conditions under which state-of-the-art RAG components combine to excel. We introduce a reusable framework that can easily be used to analyze new retriever and reader models, as they evolve. We release our full dataset and code, aiming to provide the community with a deeper understanding of the nuanced interplay between context quantity, quality, and model architecture in RAG systems.

## 2 The RAGGED Framework

## 2.1 Framework Overview

We first explain the three aspects we vary in our analysis, then explain the three research questions we can answer with our analysis. The three aspects we vary in our framework are:

- RAG system components. For example, we vary the choice of the retriever (e.g., BM25, ColBERT), the reader family, (e.g., GPT, CLAUDE, FLAN, LLAMA), and the max input token length.
- The number of retrieved passages provided as context, denoted as k. We vary k from 1 to 50, though we find that most insightful variations in behavior occur before k = 30.
- Slices of data to examine based on the quality of retrieved passages. By quality, we mean the presence of gold passages in the top-*k* retrieved passages.

By varying these, we analyze the three following aspects of RAG system behavior:

Effective Number of Context Passages (§5) We observe how different model architectures and context limits respond to an increasing k, number of context passages. We observe two kinds of behaviors from different model families: some models' performance monotonically improves as k increases while others' performance peaks early and deteriorates steadily.

<sup>&</sup>lt;sup>2</sup>For "retrieval augmented generation generalized evaluation device".

**Context Utilization Behaviors (§6)** We analyze how effectively readers use context when the context quality varies. Specifically, by context quality, we mean whether there is sufficient information, or signal, in the context to answer the question. Whether a passage is considered a signal or noise is determined by whether it is marked as gold by human annotators. Using these slices, one can examine how sensitive a reader is to "signal" and how robust it is to the "noise".

**Influence of Retriever Quality** (§7) We vary the retriever choice and analyze how much that affects reader performance on questions of different domains (Wikipedia v. PubMed) and complexity (single-hop v. multi-hop).

## 2.2 Implementation Details

For all experiments, we use the following prompt:

```
Instruction: Give simple short one phrase answers
for the questions based on the context
Context: [passage<sub>1</sub>, passage<sub>2</sub>, \cdots, passage<sub>k</sub>]
Question: [the question of the current example]
Answer:
```

We sample  $k \in \{1, 2, 5, 10, 20, 50\}$  to represent the reader behavior. More details can be found in §A.

# 3 Experimenting with RAG Systems

We introduce the retrievers and readers.

## 3.1 Retriever

We employ two approaches: (1) a sparse retriever, based on lexical information, and (2) a dense retriever based on neural embeddings.

**BM25** BM25 is a probabilistic retrieval model (Robertson et al., 2009) that estimates passage relevance via term weighting and passage length normalization. BM25 relies on term-matching, and thus is supposed to be proficient at identifying lexical similarity especially in special domains.

**ColBERT** One of the best-performing neuralbased retrievers is ColBERT (Santhanam et al., 2021), i.e., contextualized late interaction over BERT. ColBERT uses contextualized embeddings instead of term-matching as in BM25, thus is supposed to be better at identifying semantic similarities between queries and passages.

## 3.2 Reader

We analyze closed-source models from the GPT and CLAUDE families, and open-source models from the FLAN and LLAMA families.

**FLAN** The FLAN models are encoder-decoder models. We use the FLANT5-XXL (Chung et al., 2022) with 11B parameters and FLAN-UL2 (Tay et al., 2023) with 20B parameters, both with a context length of 2k tokens. FLANT5-XXL is an instruction-tuned variant of the T5 model (Raffel et al., 2023). FLAN-UL2 (Tay et al., 2023) is an upgraded T5-based model that is trained with Unifying Language Learning Paradigm, a pertaining process that uses a mixture-of-denoisers and mode switching to improve the model's adaptability to different scenarios.

**LLAMA** We use 7B and 70B LLAMA2 models (Touvron et al., 2023a,b) and the 8B and 70B LLAMA3 models. The LLAMA2 models have a context length of 4k tokens while LLAMA3 models have double the context length at 8k tokens. The LLAMA3 models have three major differences: 1) They use grouped query attention, which groups query heads to understand similar information better, 2) Their vocabulary is four times larger than that of LLAMA2, 3) They are trained on a seven times larger dataset than LLAMA2's.

**GPT** We use GPT-3.5-turbo model (Brown et al., 2020). This model has a context length of 16k tokens, and is a closed source model, so further details about model size are unknown.

**CLAUDE** We use CLAUDE HAIKU, which is Anthropic's fastest and most compact model (Enis and Hopkins, 2024). The context window of 200k tokens is the largest of all the models we compare in this paper, but the model size is unknown since the model is closed-source.

## **4** Datasets and Evaluation Metrics

## 4.1 Datasets

We adopt three DBQA datasets from various domains (Wikipedia, biomedical) and of various complexity (single-hop, multi-hop). Details about the corpus of passages used for retrieval are in Table 2.

**Natural Questions** We choose Natural Questions (NQ) (Kwiatkowski et al., 2019), a Wikipediabased dataset, to examine how models perform on generic, open-domain, single-hop questions. NQ

questions are real user-search queries on Google. We adopt the KILT version (Petroni et al., 2021) of the dataset, which provides one short phrase answer and at least one gold passage for each question.

**HotpotQA** We choose HotpotQA (Yang et al., 2018), a multi-hop, Wikipedia-based dataset to examine how effectively models can identify multiple signal passages and reason over them together. Each question requires reasoning over at least two passages to answer.

**BioASQ** We choose BioASQ's Task 11B (Krithara et al., 2023), a PubMed-based dataset, with biomedical questions to examine how models perform on special-domain questions. Our evaluation dataset is a compilation of the BioASQ Task 11B training and golden enriched set.

## 4.2 Metrics

**Retriever Metric** We evaluate retrieval performance using the **recall@k** metric, following Petroni et al. (2021). For a given query, recall@k measures the fraction of ground-truth passages that are among the top-k retrieved passages.

**Reader Metric** We use **unigram**  $F_1$ , which quantifies the overlap of unigrams in the reader output and gold answer(Petroni et al., 2021). For each query, we compute the  $F_1$  score of the reader output against the list of gold answers and report the highest score. We opt for this metric instead of exact match or substring match since many language models may respond correctly semantically but still fail these other metrics because of inexact wording or the tendency to answer in complete sentences instead of the short phrase format of the gold answers.

### 5 Are More Contexts Always Better?

In this section, we study how models perform with various amounts of context passages (§5.1), and if these results relate to context limits (§5.4). Our RAGGED analysis guidelines are:

What to Vary: Vary the number of context passages provided to the reader model, starting from k = 1 to 50, instead of directly providing as many passages as the model's context limit can fit. This allows us to determine the point at which the model reaches peak performance, as many models do so before hitting their context limit. **Behaviors to Expect:** Initially, reader performance may improve with more contexts due to the increased availability of "signal", or helpful information. However, as the number of context passages increases, the amount of "noise", or irrelevant information, also increases. As a result, the reader performance may plateau or start degrading, sometimes even beyond the no-context performance.

**Model Behavior Implications:** Fitting as many retrieved contexts as possible under the reader's context limit does not always guarantee optimal downstream performance. Using these experiments, one can find the optimal range of k in which a reader can most effectively sift for "signal" among "noise". This optimal range is often not a large k, thus identifying this can help practitioners and researchers save time and cost.

## 5.1 Reader Trends with Scaling Contexts

Results in Figure 3 reveal two typical trends in reader performance as we increase the number of ColBERT-retrieved context passages from k = 1 to 20.

In one trend, the reader model's performance steadily improves with increasing k and then plateaus. This trend is observed in models such as the FLAN models and the GPT-3.5 model, which all peak at  $k \ge 10$  without any noticeable decline afterward. For these models, providing a larger number of contexts is beneficial. However, note that for special domains, the exception is that FLAN models peak earlier (k = 1), but still follow the trend of leveling off as k increases.

In the second trend, the reader model's performance peaks early (at k < 5) then steadily declines without leveling off as k increases. This pattern is seen in models such as the LLAMA models and the CLAUDE model. For these models, it is safer to provide a smaller number of contexts.

## **5.2** Comparing Optimal $k^*$ Performances

We compare reader performances at  $k^*$ , their optimal number of context passages. Regardless of the domain or the number of passage hops required to answer the question, GPT-3.5 consistently ranks near the top.

For Wikipedia-domain questions, FLAN models consistently rank high, with the larger LLAMA models performing either on par or close behind, followed by CLAUDE HAIKU, and then the smaller

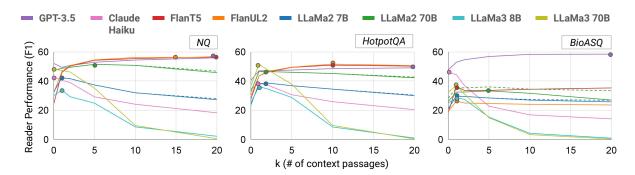


Figure 3: Reader performance as we vary k, the number of retrieved contexts provided by ColBERT, from 0 (no context) to 20. Colored circles mark the reader performance at optimal  $k^*$ . Dashed lines indicate results when truncating LLAMA2 inputs from 4k to 2k tokens for studying the effect of context limit.

LLAMA models.

For special-domain questions, CLAUDE HAIKU rises to the second-best rank despite being one of the lower-ranked models for Wikipedia-domain questions. However, it's important to note that CLAUDE HAIKU performs best when no context is provided, indicating that its high ranking is due to its extensive pre-trained knowledge rather than its ability to effectively use context. These observations underscore the necessity to carefully select k to optimize reader performance.

One potential reason that some models' performance deteriorates as k increases is that some retrieved passages are irrelevant and unhelpful, so the inclusion of more passages may also result in the inclusion of more "noise". In 6, we dig deeper into how readers perform under data slices of different informational qualities.

#### 5.3 RAG vs. No-context

We evaluate reader performance without context (k = 0) and compare it with the standard setting with top-k passages from ColBERT (Figure 3). We find that GPT generally performs *better with context* than without, except on NQ where its pre-trained knowledge already allows it to achieve high performance without context.

CLAUDE HAIKU, on the other hand, quickly deteriorates and consistently performs *worse with context* than without. As a result, although CLAUDE HAIKU ranks high in no-context performance, it ranks lower when context is provided.

FLAN models consistently perform *better with context* than without context. Their ability to use context effectively allows them to make up for their lack of pretrained knowledge, evidenced by how they rank high in peak top-k performance but low in no-context performance. LLAMA models perform better with context than without context only for smaller k values  $(k \le 5)$ . Although LLAMA3's no-context performance surpasses LLAMA2's, likely due to its larger training set and vocabulary, LLAMA3 struggles to use contexts as effectively and thus falls behind LLAMA2 as k increases.

## 5.4 The Effect of Context Limit

Not all retrieved passages are helpful "signals" for answering the question; some may be "noise" that distracts the reader. Hence as more passages are included, more "noise" can be included too. The ability to sift for signal among noise is what determines the success of a reader, not merely the size of the reader's context limit. For example, CLAUDE HAIKU has the largest context limit among the readers, yet it struggles to effectively utilize a larger number of contexts and peaks at a  $k^* \leq 1$  (Figure 3).

Given that a large context limit may include more noise, we examine whether truncating the reader input can help exclude noise and improve reader performance. We test this hypothesis by comparing LLAMA2's performance under its original context length of 4k and a truncated length of 2k. As shown by the dashed lines in Figure 3, early truncation has minimal effects on improving LLAMA2's performance on Wikipedia-based questions, indicating that truncating the input does not provide a significant advantage. These observations suggest that *context limit is not a key factor in configuring a RAG system*.

## 6 Reader Robustness in the Presence and Absence of Gold Passages

We study how the readers respond to noise under contexts with gold context passages (§6.1) and without gold context passages (§6.2). Our RAGGED analysis guidelines are:

What to Vary: Analyze the reader model's performance on two slices of instances representing different qualities of retrieved contexts. In §6.1, we demonstrate analyzing the slice where the k retrieved passages include at least one gold passage. This represents the scenario where there is sufficient context information to answer the question. In this slice, we compare how the reader performs with a) the top-k passages, b) only the gold passages in the top-k passages (top-gold), and c) no context.

In §6.2, we demonstrate analyzing on the slice of instances, where none of the top-k retrieved passages include any gold passages. This represents the scenario where there is insufficient context information to answer the question. This setting is used to evaluate the model's ability to ignore noise and fall back onto any helpful pre-trained knowledge.

**Behaviors to Expect:** Reader models provided with only gold passages often serve as an upper bound for their top-k performance. However, reader performance without context does not necessarily represent a lower bound for their top-k performance. This depends on the reader's ability to distinguish between irrelevant information and helpful pre-trained knowledge.

**Implications of Behaviors:** For practitioners, these analyses can help identify which readers are more robust to noise. A small gap between top-k and top-gold performance means the reader is highly robust to noise and is effective at identifying and using relevant information. Conversely, a significant gap between top-k and top-gold performance suggests the model struggles to discern signal from noise.

#### 6.1 With Gold Passages

For NQ instances where gold passages are in the top-k retrieved passages, GPT-3.5 and FLAN models effectively identify and use relevant information, consistently performing better with context than without Figure 4. In contrast, the rest of the models struggle more with noise. For example, CLAUDE HAIKU and LLAMA2 models' top-k performance falls below their no-context performance at  $k \leq 5$  and LLAMA3 models at k = 10. This highlights how the wrong configuration can result in using




Figure 4: NQ results when there is sufficient information (at least one gold passage) in the top-k passages to answer the question. Top-gold means the context only includes the gold passages in the top-k passages.

RAG being worse than not using RAG even when there is sufficient context information.




Figure 5: HotpotQA results when there is sufficient information (all gold passages) in the top-k passages to answer the question. Top-gold means the context only includes the gold passages in the top-k passages

For HotpotQA and BioASQ, models generally follow similar trends to NQ regarding which models' no-context performance serves as a strict lower bound. We provide a detailed discussion of the more interesting models below and include complete plots in Appendix D.

One difference between NQ and HotpotQA performance is that LLAMA2 7B's top-k performance now dips below the no-context baseline much later at k = 25 instead of at k = 15, and LLAMA2 70B dips below the no-context baseline at k > 50 instead of at k = 25 (Figure 5). Similarly, CLAUDE now dips below no-context baseline at 5 < k < 10instead of  $k \le 5$ . This could suggest that if the problem requires more than one signal passage and all such signals are present, the reader may have more anchor points for the model to rely on before being distracted by the noise in increasing k.

Different from for NQ, the gap between top-pos and top-k for BioASQ is much smaller for all models (Figure 10). One potential explanation is that the specialized domain jargon makes it easier for the reader to perform a second-step filtering for signal after the retriever's first step of filtering. We attribute this difference to the reader's filtering ability instead of the retriever's since ColBERT performs strictly worse on BioASQ than on NQ. Another difference is that for CLAUDE HAIKU and LLAMA3 70B, even the top-gold dips below the no-context baseline, showing that they struggle much more with special domains. A closer examination reveals that these readers tend to start returning gibberish as the number of contexts increases, even when all the contexts are gold passages.

#### 6.2 Without Gold Passages




Figure 6: NQ results with no gold passages.

For NQ and HotpotQA, almost all models' top-k performance is worse than their no-context performance (Figure 6, Figure 11). This general trend is not too surprising since the models are instructed to answer based on the context, and these slices of data do not include any gold passages.

What is more surprising is the exception of the FLAN models, which *benefit even from non-gold contexts* and consistently outperform its no-context baseline across all k. One potential reason this is possible is that even though the non-gold passages may provide insufficient information, they could still provide relevant keywords and information that act as clues for the reader. FLAN models seem to be better at processing the information from these non-gold passages than other models. As evidence, for NQ and k = 5, for the slice of data where there are no gold passages (paragraphs) but there are passages from the same Wikipedia pages as the gold passages, FLAN models' accuracy averages at

20%, which is much higher than LLAMA2 models' average accuracy of 8%, LLAMA3 models' at 4%, GPT-3.5's at 10%, and CLAUDE HAIKU's at 3%.




Figure 7: BioASQ results with no gold passages.

For BioASQ (Figure 7), one key difference is that GPT's top-k performance is above its nocontext performance for  $k \ge 5$  and LLAMA2 7B's too for all k, as opposed to being consistently under their no-context baseline. This indicates that for special-domain questions, these models may have stronger guardrails against misleading or irrelevant information, and can even fall back to using its pretrained knowledge. Full results for other models are in Figure 12.

## 7 Impact of Retriever Choice

We compare different retrievers and study their influence on the reader model's downstream performance. Our RAGGED analysis guidelines are:

**What to Vary:** Use different retrieval algorithms (varying in architecture, computational cost, and storage cost). Here, we compare traditional, lexical and dense, neural retrievers.

**Behaviors to Expect:** Neural retrievers generally perform better than lexical retrievers. How much that advantage translates to a gain in reader performance highly depends on the domain and the complexity of the question (number of hops). We find that such advantages are retained for single-hop, open-domain questions, dampened for multi-hop, open-domain questions, and amplified for special-domain questions.

**Implications of Behaviors:** These analyses inform which retrievers perform better and how much that translates to an improvement in reader performance. This can help practitioners decide which retriever is worth investing in for their specific tasks.

We evaluate the BM25 and ColBERT performances in Table 3, then compare their reader performances in Figure 3 and Figure 8.

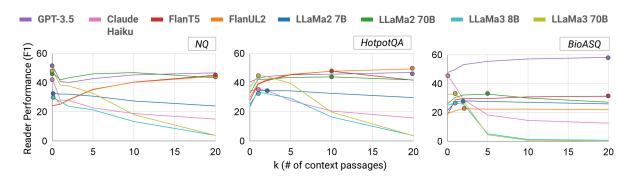


Figure 8: Reader results on NQ, HotpotQA, and BioASQ using BM25 retrieved passages. Colored circles mark the reader performance at optimal  $k^*$ .

**Open Domain, Single-Hop** For NQ questions, using ColBERT offers substantial improvements over using BM25 (19-point recall@k gain). Taking a look at the example at k = 5, the reader performance paired with ColBERT is strictly better than when paired with BM25, and that retriever gain translates to a reader gain of 9 F1 points when averaged over all models.

**Open-Domain, Multi-Hop** Although ColBERT outperforms BM25 significantly (15-point recall@k gain), its impact on reader performance is much smaller. Taking a look at the example at k = 5, the average reader performance with CoL-BERT only offers a 4-point F1 gain. This suggests that the challenge with multi-hop questions lies more with the reader's multi-hop reasoning capability than with the retriever.

**Biomedical Domain** ColBERT only outperforms BM25 minimally on BioASQ (<1 point), yet still offers a 4-point F1 gain in reader performance. This shows how a small retriever performance gain can be amplified in the reader performance under a special domain that the reader may have encountered less in pretraining.

## 8 Related Work

**Context Limit and Processing Capacity** LMs with longer context windows are applicable across various knowledge-intensive generation tasks (Beltagy et al., 2020; Bertsch et al., 2023; Su et al., 2024). However, it is unclear how performant these models are in processing long contexts. Liu et al. (2023) study if LMs can be sensitive to the position of useful content within a long context, and struggle when it is in the middle. Moreover, Xu et al. (2024) show that an LM with a smaller context window (4k) using RAG performs comparably with finetuning with a longer-window LM (16k).

Following this query, our work studies the effectiveness of LMs in utilizing long contexts, when they have different input capacities.

**Domain Influence on Downstream Performance** It is crucial to know when LMs benefit from including retrieved passages in context. Mallen et al. (2023) find that retrieving contexts may be unnecessary and even detrimental when asking about common knowledge, but it benefits questions about rare knowledge. In contrast, we find that using RAG under the right configurations still offers significant downstream performance boosts even for common, Wikipedia-based questions.

**Robustness to Noisy Contexts** Feeding in noisy contexts deteriorates LM performance. Asai et al. (2022) propose to select documents with high evidentiality scores. Wang et al. (2023) learn a filter model to remove the noisy sentences, and Berchansky et al. (2023) adopt a similar approach at the token level. Further, (Yu et al., 2023; Xu et al., 2023) use a neural summarizer model to aid the LM in identifying relevant information in long retrieved passages. Instead of reducing noise at test time, Yoran et al. (2023) train LMs to be robust to irrelevant content. Lastly, Chen et al. (2023) build an evaluation benchmark to test LMs' noise robustness. Our work similarly studies LMs' responses to noisy content but is more fine-grained with varied noise ratios.

## 9 Conclusion

We propose RAGGED, a framework designed to assist researchers and practitioners in making informed decisions about designing RAG systems, focusing on three key aspects: the number of contexts, the reader model, and the retriever model. We demonstrate the framework's utility in deriving insights about RAG behaviors in response to varied context volumes, document quality, and question domains. We hope that our framework will be utilized by the community to deepen the understanding and customization of RAG systems.

## Limitations

Although this study provides valuable insights into RAG systems, it has several limitations. First, the RAGGED framework, although comprehensive, focuses mainly on document-based questionanswering tasks, which may not fully capture the nuances of other knowledge-intensive NLP tasks such as summarization, fact verification, and machine reading comprehension. Second, our experiments were conducted with a specific set of models and datasets, which may limit the generalizability of our findings to other models, languages, or domains not covered in this study. However, providing a comprehensive analysis is not the main motivation or contribution of the paper. We encourage readers to use our framework to evaluate other models and datasets and share the insights with the community.

### Acknowledgements

Special thanks to Alex Cabrera, Alex Bäuerle, Jun Araki, Md Rizwan Parvez for providing Zeno support for analysis visualization. Our appreciation extends to Hao Zhu, Jacob Springer, and Vijay Viswanathan for providing feedback for our paper. This paper was supported in part by a gift from Bosch research.

## References

- Akari Asai, Matt Gardner, and Hannaneh Hajishirzi. 2022. Evidentiality-guided generation for knowledge-intensive nlp tasks.
- Iz Beltagy, Matthew E. Peters, and Arman Cohan. 2020. Longformer: The long-document transformer.
- Moshe Berchansky, Peter Izsak, Avi Caciularu, Ido Dagan, and Moshe Wasserblat. 2023. Optimizing retrieval-augmented reader models via token elimination.
- Amanda Bertsch, Uri Alon, Graham Neubig, and Matthew R. Gormley. 2023. Unlimiformer: Longrange transformers with unlimited length input. In *Thirty-seventh Conference on Neural Information Processing Systems*.
- Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda

Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. 2020. Language models are few-shot learners.

- Danqi Chen, Adam Fisch, Jason Weston, and Antoine Bordes. 2017. Reading Wikipedia to answer opendomain questions. In Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), pages 1870–1879, Vancouver, Canada. Association for Computational Linguistics.
- Jiawei Chen, Hongyu Lin, Xianpei Han, and Le Sun. 2023. Benchmarking large language models in retrieval-augmented generation.
- Hyung Won Chung, Le Hou, Shayne Longpre, Barret Zoph, Yi Tay, William Fedus, Yunxuan Li, Xuezhi Wang, Mostafa Dehghani, Siddhartha Brahma, Albert Webson, Shixiang Shane Gu, Zhuyun Dai, Mirac Suzgun, Xinyun Chen, Aakanksha Chowdhery, Alex Castro-Ros, Marie Pellat, Kevin Robinson, Dasha Valter, Sharan Narang, Gaurav Mishra, Adams Yu, Vincent Zhao, Yanping Huang, Andrew Dai, Hongkun Yu, Slav Petrov, Ed H. Chi, Jeff Dean, Jacob Devlin, Adam Roberts, Denny Zhou, Quoc V. Le, and Jason Wei. 2022. Scaling instruction-finetuned language models. *arXiv preprint arXiv:2210.11416*.
- Maxim Enis and Mark Hopkins. 2024. From llm to nmt: Advancing low-resource machine translation with claude.
- Jordan Hoffmann, Sebastian Borgeaud, Arthur Mensch, Elena Buchatskaya, Trevor Cai, Eliza Rutherford, Diego de las Casas, Lisa Anne Hendricks, Johannes Welbl, Aidan Clark, Tom Hennigan, Eric Noland, Katherine Millican, George van den Driessche, Bogdan Damoc, Aurelia Guy, Simon Osindero, Karen Simonyan, Erich Elsen, Oriol Vinyals, Jack William Rae, and Laurent Sifre. 2022. An empirical analysis of compute-optimal large language model training. In Advances in Neural Information Processing Systems.
- Gautier Izacard and Edouard Grave. 2021. Leveraging passage retrieval with generative models for open domain question answering.
- Vladimir Karpukhin, Barlas Oğuz, Sewon Min, Patrick Lewis, Ledell Wu, Sergey Edunov, Danqi Chen, and Wen tau Yih. 2020. Dense passage retrieval for opendomain question answering.
- Anastasia Krithara, Anastasios Nentidis, Konstantinos Bougiatiotis, and Georgios Paliouras. 2023. Bioasqqa: A manually curated corpus for biomedical question answering. *Scientific Data*, 10:170.
- Tom Kwiatkowski, Jennimaria Palomaki, Olivia Redfield, Michael Collins, Ankur Parikh, Chris Alberti,

Danielle Epstein, Illia Polosukhin, Jacob Devlin, Kenton Lee, Kristina Toutanova, Llion Jones, Matthew Kelcey, Ming-Wei Chang, Andrew M. Dai, Jakob Uszkoreit, Quoc Le, and Slav Petrov. 2019. Natural questions: A benchmark for question answering research. *Transactions of the Association for Computational Linguistics*.

- Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, et al. 2020. Retrieval-augmented generation for knowledge-intensive nlp tasks. *Advances in Neural Information Processing Systems*, 33:9459–9474.
- Nelson F. Liu, Kevin Lin, John Hewitt, Ashwin Paranjape, Michele Bevilacqua, Fabio Petroni, and Percy Liang. 2023. Lost in the middle: How language models use long contexts.
- Alex Mallen, Akari Asai, Victor Zhong, Rajarshi Das, Daniel Khashabi, and Hannaneh Hajishirzi. 2023. When not to trust language models: Investigating effectiveness of parametric and non-parametric memories.
- National Library of Medicine. 2023. Pubmed baseline 2023 repository.
- Fabio Petroni, Aleksandra Piktus, Angela Fan, Patrick Lewis, Majid Yazdani, Nicola De Cao, James Thorne, Yacine Jernite, Vladimir Karpukhin, Jean Maillard, Vassilis Plachouras, Tim Rocktäschel, and Sebastian Riedel. 2021. Kilt: a benchmark for knowledge intensive language tasks.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. 2023. Exploring the limits of transfer learning with a unified text-to-text transformer. *arXiv preprint arXiv:1910.10683*.
- Stephen Robertson, Hugo Zaragoza, et al. 2009. The probabilistic relevance framework: Bm25 and beyond. *Foundations and Trends*® *in Information Retrieval*, 3(4):333–389.
- Keshav Santhanam, Omar Khattab, Jon Saad-Falcon, Christopher Potts, and Matei Zaharia. 2021. Colbertv2: Effective and efficient retrieval via lightweight late interaction. *arXiv preprint arXiv:2112.01488*.
- Jianlin Su, Murtadha Ahmed, Yu Lu, Shengfeng Pan, Wen Bo, and Yunfeng Liu. 2024. Roformer: Enhanced transformer with rotary position embedding. *Neurocomputing*, 568:127063.
- Yi Tay, Mostafa Dehghani, Vinh Q. Tran, Xavier Garcia, Jason Wei, Xuezhi Wang, Hyung Won Chung, Siamak Shakeri, Dara Bahri, Tal Schuster, Huaixiu Steven Zheng, Denny Zhou, Neil Houlsby, and Donald Metzler. 2023. Ul2: Unifying language learning paradigms. *arXiv preprint arXiv:2205.05131*.

- Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, Aurelien Rodriguez, Armand Joulin, Edouard Grave, and Guillaume Lample. 2023a. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, Dan Bikel, Lukas Blecher, Cristian Canton Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy Fu, Wenyin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, Anthony Hartshorn, Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel Kloumann, Artem Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, Ranjan Subramanian, Xiaoqing Ellen Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zheng Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurelien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. 2023b. Llama 2: Open foundation and finetuned chat models. arXiv preprint arXiv:2307.09288.
- Zhiruo Wang, Jun Araki, Zhengbao Jiang, Md Rizwan Parvez, and Graham Neubig. 2023. Learning to filter context for retrieval-augmented generation. arXiv preprint arXiv:2311.08377.
- Fangyuan Xu, Weijia Shi, and Eunsol Choi. 2023. Recomp: Improving retrieval-augmented lms with compression and selective augmentation.
- Peng Xu, Wei Ping, Xianchao Wu, Lawrence McAfee, Chen Zhu, Zihan Liu, Sandeep Subramanian, Evelina Bakhturina, Mohammad Shoeybi, and Bryan Catanzaro. 2024. Retrieval meets long context large language models.
- Zhilin Yang, Peng Qi, Saizheng Zhang, Yoshua Bengio, William W. Cohen, Ruslan Salakhutdinov, and Christopher D. Manning. 2018. Hotpotqa: A dataset for diverse, explainable multi-hop question answering.
- Ori Yoran, Tomer Wolfson, Ori Ram, and Jonathan Berant. 2023. Making retrieval-augmented language models robust to irrelevant context.
- Wenhao Yu, Hongming Zhang, Xiaoman Pan, Kaixin Ma, Hongwei Wang, and Dong Yu. 2023. Chain-ofnote: Enhancing robustness in retrieval-augmented language models.

#### **A** Implementation Details

**Reader model** We truncate the *Context* to make sure the the rest of the prompt still fits within a reader's context limit. Specifically, when using FLANT5 and FLANUL2 readers, we use T5Tokenizer to truncate sequences to up to 2ktokens; when using LLAMA models, we apply the LlamaTokenizer and truncate sequences by 4ktokens for LLAMA2 and 8k for LLAMA3. For closed-source models, we spent around \$300. Subsequently, we incorporate a concise question-andanswer format that segments the query using "Question:" and cues the model's response with "Answer:", ensuring precise and targeted answers.

For our reader decoding strategy, we used greedy decoding with a beam size of 1 and temperature of 1, selecting the most probable next word at each step without sampling. The output generation was configured to produce responses with 10 tokens. The experiments were conducted on NVIDIA A6000 GPUs, supported by an environment with 60GB RAM. The average response time was  $\sim 1.1$ s per query when processing with a batch size of 50.

## **B** Dataset Details

All corpus and datasets use English.

For NQ and HotpotQA datasets in the open domain, we use the Wikipedia paragraphs corpus provided by the KILT benchmark (Petroni et al., 2021). For BioASQ, we use the PubMed Annual Baseline Repository for 2023 (of Medicine, 2023), where each passage is either a title or an abstract of PubMed papers. Dataset sizes are in Table 2.

The Medline Corpus is from of Medicine (2023) provided by the National Library of Medicine.

| Corpus    | # of par | # of doc | Avg # of doc |
|-----------|----------|----------|--------------|
| Wikipedia | 111M     | 5M       | 18.9         |
| Medline   | 58M      | 34M      | 1.7          |

For NQ and HotpotQA, we use KILT's dev set versions of the datasets, allowed under the MIT License (Petroni et al., 2021). For BioASQ (Krithara et al., 2023), we use Task 11B, distributed under CC BY 2.5 license.

**C** Retriever Performance

## **D** Additional Reader Results

| Dataset                  | # of Queries         |  |  |  |
|--------------------------|----------------------|--|--|--|
| NQ<br>HotpotQA<br>BioASQ | 2837<br>5600<br>3837 |  |  |  |

Table 2: Dataset information

| Retriever _ | Recall@k |      |      |      |      |      |  |  |  |
|-------------|----------|------|------|------|------|------|--|--|--|
|             | 1        | 2    | 5    | 10   | 20   | 50   |  |  |  |
| NQ          |          |      |      |      |      |      |  |  |  |
| BM25        | 2.7      | 4.4  | 8.0  | 11.5 | 16.3 | 22.8 |  |  |  |
|             | 10.3     | 16.3 | 27.8 | 36.8 | 47.7 | 53.2 |  |  |  |
| ColBERT     | 12.3     | 18.0 | 25.7 | 32.1 | 38.1 | 41.8 |  |  |  |
|             | 27.2     | 38.8 | 54.4 | 65.0 | 72.9 | 77.2 |  |  |  |
| HotpotQA    |          |      |      |      |      |      |  |  |  |
| BM25        | 19.1     | 25.9 | 34.6 | 41.1 | 46.8 | 54.2 |  |  |  |
|             | 23.3     | 31.2 | 42.7 | 52.1 | 59.1 | 62.8 |  |  |  |
| ColBERT     | 31.1     | 40.1 | 49.9 | 56.2 | 61.9 | 64.9 |  |  |  |
|             | 34.2     | 44.7 | 56.3 | 63.6 | 69.9 | 73.1 |  |  |  |
| BioASQ      |          |      |      |      |      |      |  |  |  |
| BM25        | 8.8      | 12.9 | 19.6 | 25.8 | 33.3 | 37.8 |  |  |  |
|             | 12.4     | 16.4 | 23.9 | 30.6 | 38.7 | 43.6 |  |  |  |
| ColBERT     | 8.8      | 13.5 | 20.7 | 27.1 | 34.3 | 38.6 |  |  |  |
|             | 14.2     | 18.2 | 25.6 | 32.2 | 39.8 | 44.2 |  |  |  |

Table 3: For the Wikipedia-based dataset, the top row indicates recall@k at the retrieval unit of Wikipedia paragraph and the bottom row for the unit of Wikipedia page. For BioASQ, the top row indicates recall@k at the unit of title or abstract of a PubMed article and the bottom row at the unit of the article itself.




Figure 9: HotpotQA results when there is sufficient information (all gold passages) included in the top-k passages to answer the question. For multi-hop questions, we select examples retrieved with all gold passages within the top-k passages since all passages are necessary to answer the question.




Figure 10: BioASQ results when there is sufficient information (at least one gold passage) included in the top-k passages to answer the question.




Figure 11: HotpotQA results when there are no gold passages included in the top-k passages to answer the question.




Figure 12: BioASQ results when there are no gold passages included in the top-k passages to answer the question.