

Understanding Stress: A Web Interface for Mental Arithmetic Tasks in a Trier Social Stress Test

MANJEET YADAV and NILESH KUMAR SAHU, Indian Institute of Science Education and Research, Bhopal, India

Stress is a dynamic process that reflects the responses of the brain. Traditional methods for measuring stress are often time-consuming and susceptible to recall bias. To address this, we aimed to investigate the changes in heart rate (HR) while individuals engaged in the Trier Social Stress Test (TSST). We designed and created an interface for a TSST, incorporating varying levels of complexity in mental arithmetic problems. Our pilot study reveals that participants' HR increased during the Mental Arithmetic Task phase compared to both the baseline and resting stages, indicating that stress is indeed reflected in an individual's HR.

CCS Concepts: • **Human-centered computing** → **Mobile devices; Interaction design process and methods.**

Additional Key Words and Phrases: Wearable sensors, Stress, Trier Social Stress Task, Mental Arithmetic Tasks

ACM Reference Format:

Manjeet Yadav and Nilesh Kumar Sahu. 2024. Understanding Stress: A Web Interface for Mental Arithmetic Tasks in a Trier Social Stress Test. 1, 1 (March 2024), 4 pages. <https://doi.org/10.1145/nnnnnnn.nnnnnnn>

1 INTRODUCTION

Stress is a state of mental tension or worry arising from challenging situations such as work pressure, changes, etc. It is a natural human response that addresses challenges and threats in our lives. A certain stress level is normal, but excessive stress can adversely affect our body, causing headaches, back pain, shoulder and neck discomfort, and digestive issues [1]. Additionally, people may experience difficulty focusing, increased irritability, sleep problems, emotions of sadness or guilt, and changes in appetite when under significant stress [2]. Everyone experiences stress at some point in time. However, how individuals respond to it greatly influences their overall well-being.

Stress is typically assessed through self-report surveys or by measuring the body's cortisol level, the stress hormone [1]. Cortisol measurement necessitates frequent sampling of blood, urine, or saliva to assess the levels of this stress hormone. According to a study by Cay et al. [3], cortisol levels can increase up to nine times the normal range during stressful periods. Self-report tools like the Perceived Stress Scale (PSS) and the State-Trait Anxiety Inventory (STAI) consist of questions where individuals rate their responses on a Likert scale. However, measuring cortisol levels involves regular visits to a clinic, which can be inconvenient. On the other hand, self-report methods are susceptible to recall bias, where individuals may not accurately remember or report their stress experiences, leading to potential biases in the data.

Research suggests that monitoring changes in Electrocardiogram (ECG) patterns can effectively identify stress levels in individuals during specific situations [1, 2, 4, 5]. ECG provides the capability to trace variations in

Authors' address: Manjeet Yadav, manjeet19@iiserb.ac.in; Nilesh Kumar Sahu, nilesh21@iiserb.ac.in, Indian Institute of Science Education and Research, Bhopal, Bhopal, Madhya Pradesh, India, 462066.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

© 2024 Association for Computing Machinery.

XXXX-XXXX/2024/3-ART \$15.00

<https://doi.org/10.1145/nnnnnnn.nnnnnnn>

heart rate (HR) that occur due to stress, and by analyzing these ECG signals, it becomes possible to determine whether an individual is experiencing stress in a particular situation or while performing a specific task. The advancements in wearable sensor technology and sensing capabilities like wearable Electrocardiogram (ECG) and Photoplethysmography (PPG) bands have empowered researchers to explore the feasibility of continuously detecting and monitoring stress in various settings such as controlled environment scenarios.

In a related vein, we have utilized wearable ECG technology to investigate whether ECG signals exhibit changes during a modified Tier Social Stress Task (TSST) version. The TSSTs deliberately induce stress in individuals within a controlled research setting. The TSST involves various activities, such as solving mathematical problems, giving speeches or presentations, etc. In this study, we developed a web interface consisting of a Mental Arithmetic Task (MAT) featuring increasing difficulty levels to induce stress in individuals. The research question we aimed to address is “whether HR can effectively reflect an individual’s stress levels when they are engaged in solving MAT”. In order to investigate and answer our research question, we conducted a pilot study in which participants completed the designed MAT while wearing ECG electrodes attached to their bodies. A substantial amount of work has already been completed in the above said domain, which typically involves a significant laboratory setup or the performance of various activities in the presence of other participants. In contrast, our approach is capable of inducing stress through a simple web-based interaction accessible on personal computers and mobile phones. Additionally, we can capture and analyze the effects of the induced stress using ECG/PPG sensors. Our results have also demonstrated that the MAT, when performed, induced stress in the participants.

2 STUDY DESIGN

This section describes the user interface we developed to induce stress, as illustrated in Figure 1. We designed a website¹ for the MAT using HTML, CSS, and Javascript. The website’s landing page features a welcoming message inviting users to click an “agree” button to provide their consent for participation in the study. Upon agreeing, a 3-minute baseline period begins, accompanied by relaxation music². Subsequently, an instruction page appears, offering users an explanation of the MAT’s flow. Following the instruction page, a demo trial is presented to give users a brief experience before they embark on the study. The study consists of a quiz with four levels of questions, each level comprising 30 questions. Here are the descriptions of each level, and the web interface is shown in Figure 2.

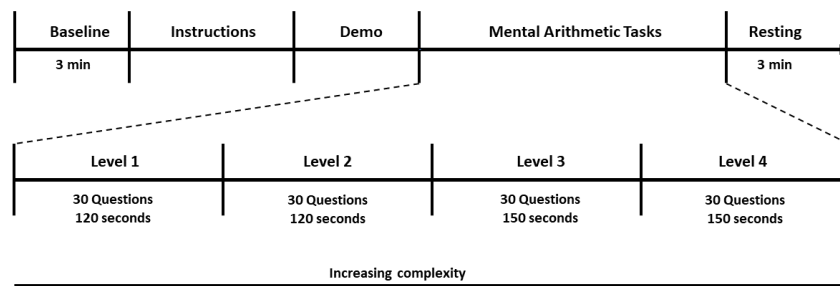


Fig. 1. Activity sequence of the designed study

- (1) **Level 1** consists of addition and subtraction questions with two numbers such as $9 + 7$. For each question, the user has 4 seconds to answer. So, Level 1 takes 120 seconds (= 30 questions x 4 seconds/question).

¹https://mjyadav7.github.io/MAT_QUIZ.github.io/

²<https://www.youtube.com/embed/AGkG2BpcFD8?autoplay=1>

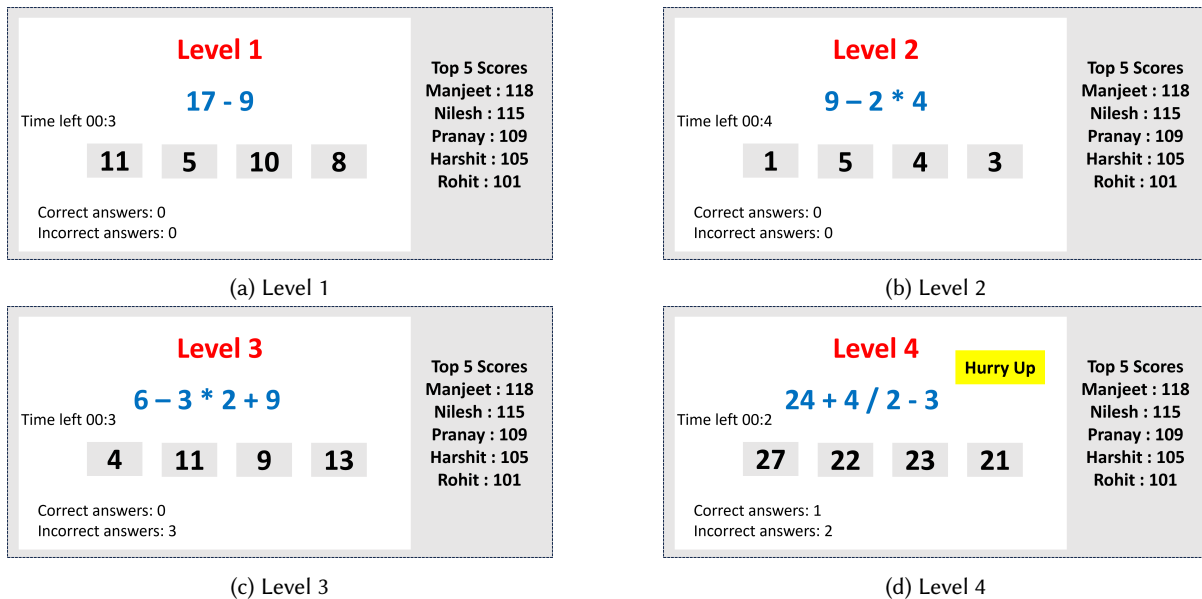


Fig. 2. The web interface of the main working area at different MAT difficulty levels

- (2) **Level 2** consists of addition, subtraction, and multiplication questions with three numbers such as $8 - 4 * 2$. Again, the user has 4 seconds for each question. So, Level 2 also takes 120 seconds.
- (3) **Level 3** is a bit harder. The user has to solve addition, subtraction, and multiplication questions with four numbers such as $7 * 4 + 6 - 21$ and has 5 seconds for each question. So, Level 3 takes 150 seconds.
- (4) **Level 4** is the most challenging level. The user solves addition, subtraction, multiplication, and division questions with four numbers such as $72/3 + 9 - 5$, and like Level 3, has 5 seconds for each question. So, Level 4 also takes 150 seconds.

Additionally, the interface includes a scoreboard, displaying dummy names of the top five participants with their scores. Furthermore, to heighten the sense of competitiveness and intensify the induced stress, a “Hurry Up” message is displayed on each question when half of the allotted time remains for solving it. For instance, in Level 4, each question has a time limit of 5 seconds, and the “Hurry Up” message begins blinking when 2.5 seconds are left to complete the question, as shown in Figure 2d. Between levels of the quiz, participants are allowed to take a short break at their desks but are not permitted to leave the system. After completing the MAT quiz, a resting period begins, during which a relaxation music³ is played.

3 PILOT STUDY AND ANALYSIS

We conducted a pilot study involving eight participants from our laboratory. Initially, the participants completed the Perceived Social Stress (PSS) questionnaire to provide a baseline assessment of their general stress levels. Subsequently, a research assistant placed a Shimmer ECG, PPG, and EDA sensors on the participants’ bodies. Shimmer ECG, PPG, and EDA are clinical grade sensors and have been used worldwide to gain physiological insights [6]. Following sensor placements, the participants get themselves engaged in the study.

³<https://www.youtube.com/embed/AGkG2BpcFD8?autoplay=1>

Analysis

While we collected ECG, PPG, and EDA data, this paper specifically focuses on the analysis of ECG data. Filtering and peak detection algorithms were applied to identify the R peaks in the filtered ECG data. We then utilized Neurokit2⁴, a Python package, to calculate Heart Rate (HR). Figure 3a presents the mean HR plot for the baseline, resting, and different quiz levels (i.e., L1, L2, L3, and L4). Additionally, Figure 3b displays the mean HR data for individual participants during the baseline, resting, and different quiz levels. Notably, we observed the highest mean HR during Level 1 (84.43) followed by Level 2 (83.17), while the lowest mean HR was recorded during the resting phase (75.66), even lower than the baseline (77.15). These findings suggest that participants' HR increases while solving MAT.

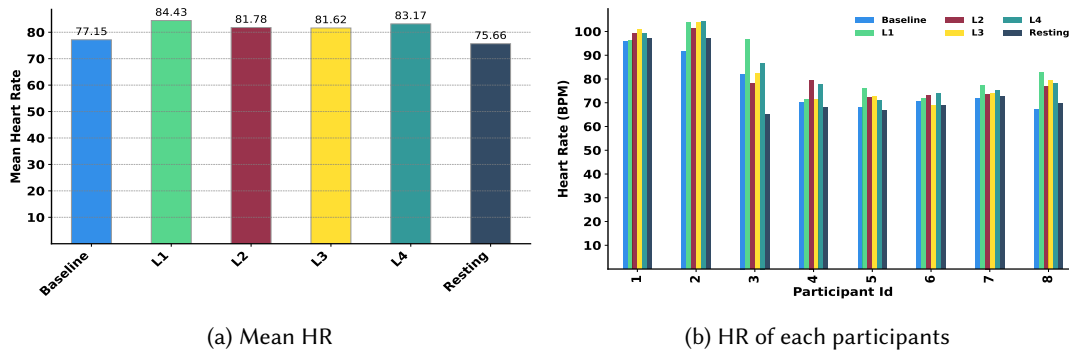


Fig. 3. Heart Rate (HR) in baseline, resting, and each level of quiz.

4 CONCLUSION

In this research, we investigated the use of heart rate extracted from an ECG signal to understand the changes in stress levels. We developed an interface featuring different levels of Mental Arithmetic Tasks (MAT) to induce stress in participants. Our results reveal that HR was notably higher during the MAT sessions when compared to both the baseline and resting periods.

ACKNOWLEDGMENTS

We want to thank our PI Dr. Haroon Rashid Lone and SIRL lab members for their guidance and support.

REFERENCES

- [1] Varun Mishra, Sougata Sen, Grace Chen, Tian Hao, Jeffrey Rogers, Ching-Hua Chen, and David Kotz. Evaluating the reproducibility of physiological stress detection models. *Proceedings of the ACM on interactive, mobile, wearable and ubiquitous technologies*, 4(4):1–29, 2020.
- [2] Aamir Saeed Malik and Hafeez Ullah Amin. Chapter 2 - mental stress. In Aamir Saeed Malik and Hafeez Ullah Amin, editors, *Designing EEG Experiments for Studying the Brain*, pages 31–46. Academic Press, 2017.
- [3] Mahmut Cay, Cihat Ucar, Deniz Senol, Furkan Çevirgen, Davut Ozbag, Zuhail Altay, and Sedat Yildiz. Effect of increase in cortisol level due to stress in healthy young individuals on dynamic and static balance scores. *Northern clinics of Istanbul*, 5(4):295, 2018.
- [4] Giorgos Giannakakis, Dimitris Grigoriadis, Katerina Giannakaki, Olympia Simantiraki, Alexandros Roniotis, and Manolis Tsiknakis. Review on psychological stress detection using biosignals. *IEEE Transactions on Affective Computing*, 13(1):440–460, 2019.
- [5] Lucio Ciabattoni, Francesco Ferracuti, Sauro Longhi, Lucia Pepa, Luca Romeo, and Federica Verdini. Real-time mental stress detection based on smartwatch. In *2017 IEEE International Conference on Consumer Electronics (ICCE)*, pages 110–111. IEEE, 2017.
- [6] Adrian Burns, Barry R Greene, Michael J McGrath, Terrance J O'Shea, Benjamin Kuris, Steven M Ayer, Florin Stroiescu, and Victor Cionca. Shimmer™—a wireless sensor platform for noninvasive biomedical research. *IEEE Sensors Journal*, 10(9):1527–1534, 2010.

⁴<https://neuropsychology.github.io/NeuroKit/index.html>