

Is Contrastive Learning Necessary? A Study of Data Augmentation vs Contrastive Learning in Sequential Recommendation

Peilin Zhou*

Hong Kong University of
Science and Technology
(Guangzhou)
zhoupalin@gmail.com

You-Liang Huang*

Hong Kong University of
Science and Technology
(Guangzhou)
yhuang142@connect.hkust-
gz.edu.cn

Yueqi Xie

Hong Kong University of
Science and Technology
yxieay@connect.ust.hk

Jingqi Gao

Upstage
mrgao.ary@gmail.com

Shoujin Wang

University of Technology
Sydney
shoujin.wang@uts.edu.au

Jae Boum Kim

Hong Kong University of
Science and Technology
jbkim@cse.ust.hk

Sunghun Kim[†]

Hong Kong University of
Science and Technology
(Guangzhou)
hunkim@cse.ust.hk

ABSTRACT

Sequential recommender systems (SRS) are designed to predict users' future behaviors based on their historical interaction data. Recent research has increasingly utilized contrastive learning (CL) to leverage unsupervised signals to alleviate the data sparsity issue in SRS. In general, CL-based SRS first augments the raw sequential interaction data by using data augmentation strategies and employs a contrastive training scheme to enforce the representations of those sequences from the same raw interaction data to be similar. Despite the growing popularity of CL, data augmentation, as a basic component of CL, has not received sufficient attention. This raises the question: *Is it possible to achieve superior recommendation results solely through data augmentation?* To answer this question, we benchmark eight widely used data augmentation strategies, as well as state-of-the-art CL-based SRS methods, on four real-world datasets under both warm- and cold-start settings. Intriguingly, the conclusion drawn from our study is that, certain data augmentation strategies can achieve similar or even superior performance compared with some CL-based methods, demonstrating the potential to significantly alleviate the data sparsity issue with fewer computational overhead. We hope that our study can further inspire more fundamental studies on the key functional components of complex CL techniques. Our processed datasets and codes are available at <https://github.com/AIM-SE/DA4Rec>.

*Both authors contributed equally.

[†]Corresponding author.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

WWW '24, May 13–17, 2024, Singapore, Singapore

© 2024 Copyright held by the owner/author(s). Publication rights licensed to ACM.
ACM ISBN 979-8-4007-0171-9/24/05...\$15.00
<https://doi.org/10.1145/3589334.3645661>

CCS CONCEPTS

• Information systems → Recommender systems.

KEYWORDS

Data Augmentation, Sequential Recommendation, Contrastive Learning

ACM Reference Format:

Peilin Zhou, You-Liang Huang, Yueqi Xie, Jingqi Gao, Shoujin Wang, Jae Boum Kim, and Sunghun Kim. 2024. Is Contrastive Learning Necessary? A Study of Data Augmentation vs Contrastive Learning in Sequential Recommendation. In *Proceedings of the ACM Web Conference 2024 (WWW '24)*, May 13–17, 2024, Singapore, Singapore. ACM, New York, NY, USA, 10 pages. <https://doi.org/10.1145/3589334.3645661>

1 INTRODUCTION

Sequential recommender systems (SRS) play a crucial role in various domains, such as e-commerce [1, 3, 23, 52, 56], video [7, 22], music [9, 31] and social media [13, 17]. The goal of these SRS is to predict the next item that a user is likely to interact with based on his/her historical behavior [44, 46]. One predominant obstacle in developing SRS is the data sparsity issue, where user-item interaction data is typically limited compared with a large number of users and items, leading to insufficient training signals to learn informative item representations for the downstream recommendations.

Recently, contrastive learning for recommendation has attracted increasing attention due to its remarkable capability to enhance item representations through the extraction of self-supervised signals from user-item interaction data. Consequently, various contrastive learning-based SRS, such as CL4SRec [48], CoSeRec [27], ICLRec [4] and DuoRec [33], have been proposed. The core idea of these methods can be summarized into two interrelated steps: (1) generating positive views and negative views through data augmentation strategies; and (2) minimizing (resp. maximizing) the distance between positive (resp. negative) views using a contrastive loss function (such as InfoNCE [30]). In these methods, data augmentation strategies are applied solely to the auxiliary tasks (shown in Fig. 1 (b)) designed for contrastive learning rather than directly

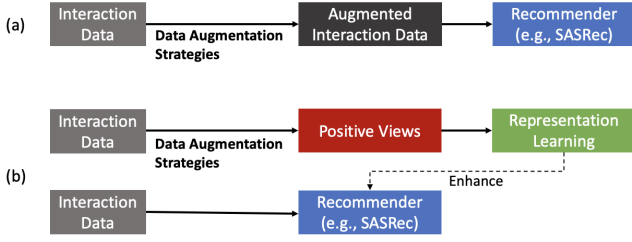


Figure 1: (a) Direct data augmentation for sequential recommendation; (b) Contrastive learning for sequential recommendation.

applied to the recommendation task itself (shown in Fig. 1 (a)). Such practice naturally raises two critical questions: *Can the performance of SRS be improved by solely relying on data augmentation (i.e., the first step) without using contrastive learning paradigm (i.e., the second step)? Whether existing CL-based SR methods consistently outperform direct sequence-level data augmentation?*

Answering these questions is crucial for revisiting the role of data augmentation strategies in sequential recommendation tasks. However, so far, the direct application of data augmentation to mitigate the data sparsity issue in sequential recommendation has not received sufficient attention. Only one study [35] has explored the effects of four augmentation strategies on sequential recommendation. Nevertheless, it still suffers from following limitations: First, the augmentation strategies compared are not comprehensive. For instance, strategies like reorder and delete, commonly used in contrastive learning for sequential recommendation (SR), can also be employed as standalone data augmentation methods. Second, comparison with contrastive learning methods are not conducted, which is essential for revisiting the effectiveness of contrastive learning in the sequential recommendation research. Third, no insight or analysis is provided on the factors that lead to varying performance results from different augmentation strategies. Therefore, there is an urgent need to conduct a more systematic empirical study to thoroughly investigate the effectiveness of data augmentation in improving the performance of SRS.

To bridge this research gap, we conduct a comprehensive experimental study to compare the performance of SRS based on data augmentation only and that of SRS based on full contrastive learning. To be specific, we focus on investigating the effectiveness of eight popular sequence-level augmentation strategies: *insert, replace, crop, delete, mask, reorder, subset-split, and slide-window*. Most of these augmentation strategies have been widely adopted in contrastive learning-based SRS over the past five years. Specifically, we decouple these sequence-level data augmentation strategies from contrastive learning methods and directly apply them to augment the training sequences. Both the original sequences and the augmented sequences are inputted together into backbone models (such as SASRec [18]) for training. Afterward, we benchmark these eight sequence-level data augmentation strategies and three state-of-the-art contrastive learning-based SRS on four widely used datasets. We also simulate different cold-start scenarios to further evaluate the applicability of sequence-level data augmentation. Furthermore, we conduct in-depth analysis on the impact of the size

of data augmentations, as well as the computational efficiency of various augmentation strategies and contrastive learning methods.

The experimental results demonstrate that, when using SASRec as the backbone, certain sequence-level augmentation strategies can achieve comparative or even superior performance compared to some contrastive learning-based SR methods, while requiring less training and inference time. This finding not only validates the feasibility of directly using sequence-level augmentation to alleviate data sparsity issue, but also suggests that the current research community might underestimate the effectiveness of simple sequence-level augmentation and overly emphasize the necessity of contrastive learning in sequential recommendation tasks. Note that our claim does not negate the effectiveness of contrastive learning in recommendation tasks. In fact, on most datasets and metrics, specific contrastive learning based methods can still achieve the best performance. However, we observe that the benefits of these CL-based methods over direct data augmentation are not as pronounced as expected, particularly when considering computational efficiency. From this perspective, we believe that while contrastive learning is a popular means to alleviate the data sparsity issue, it may not be the only choice, i.e., it is not absolutely "necessary" and direct data augmentation strategies are also worth considering in practical scenarios.

The contribution of this paper can be summarized as follows:

- We systematically benchmark eight popular sequence-level data augmentation strategies and three representative contrastive learning methods for sequential recommendation, providing insights into their performance and applicability.
- We explore the potential synergies in combining various data augmentation strategies to improve sequential recommendation performance.
- We find that employing specific sequence-level augmentation strategies can effectively mitigate the problem of data sparsity in sequential recommender systems. Moreover, these strategies typically demand less training time and consume smaller GPU memory compared to CL-based methods.

2 PROBLEM FORMULATION

Consider two sets, \mathcal{U} for users and \mathcal{I} for items. For each user u belonging to \mathcal{U} , their past interactions are recorded as a sequence $\mathcal{S}^u = [v_1^u, v_2^u, \dots, v_{|\mathcal{S}^u|}^u]$. In this sequence, each v_i^u , which is an item from \mathcal{I} , represents the user's i -th interaction, ordered by time, and $|\mathcal{S}^u|$ is the total number of interactions for user u . All users' interactions are collectively represented by $\mathcal{S} = \{\mathcal{S}^1, \mathcal{S}^2, \dots, \mathcal{S}^{|\mathcal{U}|}\}$, with $|\mathcal{U}|$ indicating the total number of users. The purpose of sequential recommendation systems is to use the sequence of interactions \mathcal{S}^u for a user u to forecast the next item $v_{|\mathcal{S}^u|+1}^u$ from \mathcal{I} , with which this user is likely to engage at the next time step.

3 SEQUENCE-LEVEL DATA AUGMENTATION STRATEGIES

Our experiments include multiple common rule-based sequence-level data augmentation strategies. All of them can be viewed as operators that create augmented sequences by performing certain



Figure 2: Eight widely used sequence-level data augmentation strategies.

transformations to the original sequence. Fig. 2 illustrates how to augment each interaction sequence using these operators.

3.1 Item Insert

The "insert" action begins by selecting an insertion position, followed by the insertion of a chosen item from the item pool, resulting in an augmented sequence. For the user's interaction sequence \mathcal{S}^u , let i be an insertion position, and t be a chosen item from the item set \mathcal{I} . The augmented sequence $\mathcal{S}^{u'}$ can be represented as:

$$\mathcal{S}^{u'} = [v_1^u, \dots, v_{i-1}^u, t, v_i^u, \dots, v_{|\mathcal{S}^u|}^u]. \quad (1)$$

3.2 Item Delete

The "delete" action randomly selects an item from the sequence for removal, thereby generating an augmented sequence. For \mathcal{S}^u and a randomly chosen item at position k , the augmented sequence $\mathcal{S}^{u'}$ is:

$$\mathcal{S}^{u'} = [v_1^u, \dots, v_{k-1}^u, v_{k+1}^u, \dots, v_{|\mathcal{S}^u|}^u]. \quad (2)$$

3.3 Item Replace

The "replace" action begins by selecting the item in the sequence that will be replaced, followed by selecting an item from the item pool to substitute the chosen item, resulting in an augmented sequence. For \mathcal{S}^u , let j be a position of the item to be replaced, and t' be a chosen item from \mathcal{I} . The augmented sequence $\mathcal{S}^{u'}$ is:

$$\mathcal{S}^{u'} = [v_1^u, \dots, v_{j-1}^u, t', v_{j+1}^u, \dots, v_{|\mathcal{S}^u|}^u]. \quad (3)$$

3.4 Item Crop

The "crop" action initially selects a cutoff position, from which a continuous series of items with a specified length are extracted as an augmented sequence. Let c be the cutoff position and l be the length of the cropped sequence. The augmented sequence $\mathcal{S}^{u'}$ is:

$$\mathcal{S}^{u'} = [v_c^u, v_{c+1}^u, \dots, v_{c+l-1}^u]. \quad (4)$$

3.5 Item Mask

The "mask" action initially chooses an item from the sequence and subsequently masks the ID of the selected item using a predefined

mask symbol. Let m be the position of the chosen item from sequence \mathcal{S}^u . If μ is the predefined mask symbol, the sequence after masking can be given as:

$$\mathcal{S}^{u'} = [v_1^u, \dots, v_{m-1}^u, \mu, v_{m+1}^u, \dots, v_{|\mathcal{S}^u|}^u]. \quad (5)$$

3.6 Item Reorder

The "reorder" action initially selects a sub-sequence of a specific length and subsequently shuffles the order of the items within that sub-sequence. The sub-sequence and the remaining parts of the original sequence are then combined according to their original order, resulting in an augmented sequence. Consider a sub-sequence of length r starting at position d from \mathcal{S}^u . Let $\text{shuffle}(x)$ denote a function that shuffles the order of the elements in x . The augmented sequence $\mathcal{S}^{u'}$ after shuffling this sub-sequence is:

$$\mathcal{S}^{u'} = [v_1^u, \dots, v_{d-1}^u, \text{shuffle}(v_d^u, \dots, v_{d+r-1}^u), v_{d+r}^u, \dots, v_{|\mathcal{S}^u|}^u]. \quad (6)$$

3.7 Subset Split

Similar to the dropout mechanism [36], for subset split method, each item v_i^u in the original sequence \mathcal{S}^u will be included in $\mathcal{S}^{u'}$ with a probability of $1 - \theta$ and the probability of discarding is θ :

$$v_i^{u'} = \begin{cases} v_i^u, & P = 1 - \theta \\ \text{discarded}, & P = \theta \end{cases} \quad (7)$$

Thus, the augmented sequence $\mathcal{S}^{u'}$ is essentially a "subset" of the original sequence \mathcal{S}^u , which can be mathematically represented as:

$$\mathcal{S}^{u'} = [v_1^{u'}, v_2^{u'}, \dots, v_{|\mathcal{S}^{u'}|}^{u'}]. \quad (8)$$

Note that the length of the augmented sequence $|\mathcal{S}^{u'}|$ can vary due to the random discarding process and is likely to be less than or equal to $|\mathcal{S}^u|$.

3.8 Slide-window

The slide-window strategy generates a new segment of the sequence and its subsequent item as the prediction target at each step by sliding a fixed-length window along the user's behavioral sequence \mathcal{S}^u . The window initiates sliding with its right edge positioned to

Table 1: Statistics of the datasets after preprocessing.

Dataset	Beauty	Sports	ML-1m	Yelp
# Users	22,363	35,598	6,041	30,499
# Items	12,101	18,357	3,407	20,068
# Avg. Actions / User	8.9	8.3	165.5	10.4
# Avg. Actions / Item	16.4	16.1	292.6	15.8
# Actions	198,502	296,337	999,611	317,182
Sparsity	99.93%	99.95%	95.15%	99.95%

the left of the first item, and the sliding process concludes when the right edge reaches the last item. For a given window length L , at each step t , the cropped sequence of augmented items from \mathcal{S}^u is:

$$\mathcal{S}_t^{u'} = [v_t^u, v_{t+1}^u, \dots, v_{t+L-1}^u], \quad (9)$$

where the sliding process iterating until $t + L - 1 = |\mathcal{S}^u|$.

Note that for each sequence $\mathcal{S}_t^{u'}$ obtained through the slide-window, the training label also changes, typically to the next item v_{t+L}^u in the sequence. Consequently, the slide-window not only increases the quantity of training data but also adds complexity and diversity to the training process by creating new prediction targets for each sequence segment. This distinctive characteristic has led to the widespread adoption of the slide-window as a data preprocessing step in both traditional SR models and CL-based SR models, setting it apart from other data augmentation strategies that diversify model training by altering or perturbing specific elements of the original sequence while preserving the same prediction target.

4 EXPERIMENT

In this section, we carry out extensive experiments to answer the following main research questions:

- **RQ1:** How do different sequence-level augmentation strategies compare against state-of-the-art contrastive learning based SR methods?
- **RQ2:** How do sequence-level augmentation and contrastive learning methods perform in cold-start scenarios?
- **RQ3:** How do sequence-level augmentation and contrastive learning methods perform under varying levels of item popularity?
- **RQ4:** Does the size of augmentations affect the performance of sequence-level augmentation?
- **RQ5:** How is the efficiency of sequence-level data augmentation compared to contrastive learning methods?

4.1 Experimental Settings

4.1.1 Dataset. Experiments are carried out on four well-known benchmark datasets with diverse distributions: **Beauty** and **Sports** are derived from Amazon review datasets¹ [29]; **Yelp**² is a renowned business recommendation dataset; **ML-1m**³ is a popular movie rating dataset containing 1 million ratings from 6,000 users on 4,000 movies. We preprocess these datasets uniformly following the methodology in [18, 27, 39, 53, 54, 60] by eliminating items and

users with less than 5 occurrences. Table 1 presents the dataset characteristics after preprocessing.

4.1.2 Evaluation Metrics. In our experiment, we select Recall@ K and NDCG@ K as the evaluation metrics for different methods, where K can be either 10 or 20. These two metrics are widely adopted in existing sequential recommendation research [4, 27, 37, 50]. Regarding dataset partitioning, we utilize a leave-one-out approach: the final two items within each user interaction sequence are allocated to the validation and test sets, respectively, while the remainder of the items is utilized for model training. To ensure fair comparison, we follow the suggestion of [5, 20] to calculate the ranking results over the complete item set rather than a sampled subset.

4.1.3 Baseline Models. The performance of eight data augmentation strategies is evaluated based on SASRec [18]. The details of these data augmentation strategies have been described in Sec. 3. In addition, we select three representative SR methods as our baselines, all of which are based on contrastive learning: (1) CL4SRec [48]: The first work to employ contrastive learning for sequential recommendation, it utilizes three sequence-level augmentation methods for generating positive pairs. (2) CoSeRec [27]: Different from CL4SRec, this contrastive learning approach further considers the associations between items to enhance the quality of the positive pairs. (3) ICLRec [4]: A contrastive learning method that adopts clustering technique to capture users' latent intent.

4.1.4 Implementation Details. We use RecBole [59], a unified platform widely adopted in academic research, to implement and evaluate all of these baselines. In RecBole, *slide-window* is enabled by default and the augmented data is used for training both SASRec and CL baselines. To facilitate a unified and fair evaluation of different data augmentation strategies, we turn off the *slide-window* for these models and adds an "*" after the model name to distinguish them from their original setting⁴. The models are trained with the Adam optimizer for 300 epochs, employing a batch size of 1024 and a learning rate of 0.001. For Beauty, Sports, and Yelp datasets, the maximum sequence length is set to 50, while for the ML-1m dataset, it is set to 200 due to its longer average sequence length. For attention-based methods, we conduct a grid search on hyperparameters to identify the optimal combination. The searching space is: number of self-attention layers $\in \{2, 3\}$, number of self-attention heads $\in \{2, 4\}$, dropout rate on the embedding matrix and attention matrix $\in \{0.1, 0.2, 0.3, 0.5\}$, hidden size $\in \{64, 128, 256\}$ and embedding $\in \{64, 128, 256\}$. Regarding data augmentation approaches, the *slide-window* has a length of 50 for Beauty, Sports, and Yelp, and 200 for ML-1m to accommodate the varying average sequence lengths. Other hyperparameters for data augmentation are as follows: for *insert*, *replace*, *delete*, and *mask*, a single item is inserted, replaced, deleted, or masked; the dropout factor θ of subset split is set to 0.25; the length of sub-sequence in *crop* and *reorder* is set to 2. The selection of augmentation positions and augmented items in the aforementioned data augmentation strategies is obtained through random sampling according to a uniform

¹<http://jmcauley.ucsd.edu/data/amazon/>

²<https://www.yelp.com/dataset>

³<https://grouplens.org/datasets/movielens/1m/>

⁴For example, SASRec* only uses the last item of the training instance as a supervision signal, while SASRec*+SW can be seen as an approximation of the original SASRec, wherein each item in the training sequence serves as a label to guide model training.

Table 2: Comparison of data augmentation strategies and contrastive learning-based SR methods. All the results are reported as percentages for clarity and ease of reading. The best results are indicated in bold, while the runner-up results are marked with an underline.

Model	Beauty				Sports				Yelp				ML-1m			
	Recall		NDCG		Recall		NDCG		Recall		NDCG		Recall		NDCG	
	@10	@20	@10	@20	@10	@20	@10	@20	@10	@20	@10	@20	@10	@20	@10	@20
SASRec*	4.52±0.04	6.47±0.13	2.24±0.03	2.73±0.05	2.32±0.08	3.41±0.08	1.18±0.05	1.46±0.05	3.51±0.07	4.68±0.09	2.32±0.03	2.61±0.04	5.63±0.40	8.45±0.30	2.79±0.15	3.50±0.12
+ subset-split	4.78±0.08	6.98±0.14	2.40±0.02	2.95±0.03	2.61±0.08	3.89±0.07	1.32±0.07	1.65±0.07	3.77±0.04	5.17±0.11	2.43±0.07	2.78±0.05	7.57±0.56	11.09±0.60	3.68±0.26	4.57±0.26
+ crop	<u>5.28±0.10</u>	7.72±0.05	2.61±0.05	3.22±0.04	2.86±0.03	4.28±0.04	1.41±0.03	1.77±0.03	4.17±0.14	5.79±0.13	2.69±0.05	3.10±0.03	<u>9.08±0.42</u>	<u>13.51±0.48</u>	<u>4.23±0.18</u>	<u>5.35±0.19</u>
+ delete	4.83±0.12	7.10±0.04	2.39±0.09	2.96±0.06	2.52±0.06	3.80±0.08	1.26±0.04	1.59±0.05	3.73±0.08	5.11±0.13	2.42±0.03	2.76±0.01	6.75±0.12	9.59±0.26	3.29±0.03	4.01±0.09
+ mask	4.26±0.06	6.29±0.21	2.07±0.05	2.58±0.08	2.13±0.04	3.17±0.04	1.06±0.03	1.32±0.03	3.28±0.11	4.38±0.13	2.30±0.05	2.58±0.04	6.05±0.10	8.86±0.08	2.87±0.03	3.58±0.04
+ reorder	4.67±0.08	6.87±0.08	2.28±0.06	2.83±0.06	2.45±0.05	3.67±0.08	1.22±0.01	1.53±0.02	3.60±0.07	4.95±0.10	2.42±0.07	2.76±0.05	5.84±0.19	8.54±0.33	2.8±0.08	3.47±0.10
+ insert	4.62±0.12	6.79±0.11	2.28±0.05	2.83±0.05	2.38±0.09	3.54±0.13	1.17±0.07	1.46±0.08	3.62±0.05	4.87±0.05	2.46±0.12	2.78±0.11	6.67±0.54	9.76±0.27	3.23±0.24	4.01±0.16
+ replace	4.26±0.09	6.20±0.09	2.08±0.05	2.57±0.04	2.05±0.07	3.07±0.09	1.01±0.03	1.26±0.04	3.23±0.06	4.22±0.05	2.33±0.04	2.57±0.04	5.90±0.15	8.64±0.16	2.79±0.05	3.48±0.04
+ slide-window	8.07±0.08	11.56±0.07	3.95±0.02	4.83±0.01	5.21±0.07	7.7±0.06	2.4±0.04	3.03±0.04	6.02±0.05	8.62±0.02	3.8±0.02	4.46±0.02	22.59±0.98	31.88±0.11	12.48±0.45	14.83±0.24
CL4SRec*	5.20±0.13	<u>7.87±0.15</u>	2.65±0.02	3.32±0.03	3.32±0.07	5.10±0.09	1.66±0.05	2.11±0.05	4.70±0.08	6.42±0.13	2.89±0.08	3.33±0.06	5.65±0.23	8.51±0.27	2.73±0.11	3.45±0.16
CoSeRec*	4.72±0.06	7.01±0.07	2.31±0.04	2.89±0.04	2.71±0.06	4.12±0.03	1.33±0.03	1.68±0.01	4.03±0.07	5.53±0.10	2.65±0.03	3.03±0.03	5.83±0.21	8.47±0.29	2.82±0.09	3.49±0.11
ICLRec*	4.84±0.05	7.14±0.12	2.42±0.05	3.01±0.06	2.66±0.03	4.00±0.09	1.30±0.03	1.64±0.03	3.74±0.03	5.10±0.05	2.54±0.02	2.88±0.03	5.87±0.1	8.74±0.2	2.78±0.03	3.5±0.08

Table 3: Comparison of slide-window (SW) combined with different data augmentation strategies or contrastive learning methods. All the results are reported as percentages for clarity and ease of reading. The best results are indicated in bold, while the runner-up results are marked with an underline.

Model	Beauty				Sports				Yelp				ML-1m			
	Recall		NDCG		Recall		NDCG		Recall		NDCG		Recall		NDCG	
	@10	@20	@10	@20	@10	@20	@10	@20	@10	@20	@10	@20	@10	@20	@10	@20
SASRec* + SW	8.07±0.08	11.56±0.07	3.95±0.02	4.83±0.01	5.21±0.07	7.7±0.06	2.4±0.04	3.03±0.04	6.02±0.05	8.62±0.02	3.8±0.02	4.46±0.02	22.59±0.98	31.88±0.11	12.48±0.45	14.83±0.24
+ subset-split	8.48±0.14	12.04±0.2	4.2±0.08	5.1±0.1	<u>5.54±0.02</u>	<u>8.32±0.08</u>	2.57±0.02	3.27±0.02	6.28±0.06	9.05±0.12	3.91±0.02	4.6±0.04	22.89±0.38	31.78±0.31	12.66±0.3	14.9±0.28
+ crop	7.13±0.02	10.24±0.06	3.59±0.02	4.38±0.02	4.4±0.01	6.68±0.04	2.07±0.01	2.64±0.01	5.23±0.07	7.38±0.08	3.44±0.04	3.98±0.03	20.59±0.21	29.55±0.22	11.35±0.12	13.61±0.1
+ delete	<u>8.33±0.07</u>	12.02±0.09	<u>4.11±0.06</u>	5.04±0.06	5.19±0.14	7.84±0.21	2.38±0.06	3.05±0.08	6.1±0.07	8.83±0.03	3.84±0.02	4.52±0.01	<u>23.29±0.58</u>	<u>32.12±0.55</u>	<u>12.96±0.29</u>	<u>15.19±0.31</u>
+ mask	7.5±0.16	10.9±0.08	3.66±0.07	4.52±0.05	4.5±0.02	6.82±0.03	2.05±0.02	2.64±0.03	5.74±0.13	8.29±0.15	3.64±0.06	4.28±0.07	22.93±0.25	32.05±0.17	12.75±0.09	15.06±0.1
+ reorder	7.95±0.07	11.53±0.07	3.88±0.05	4.78±0.05	4.96±0.06	7.53±0.2	2.26±0.05	2.91±0.08	6.03±0.04	8.64±0.06	3.79±0.02	4.45±0.03	23.15±0.02	32.11±0.2	12.9±0.17	15.16±0.2
+ insert	8.45±0.18	<u>12.05±0.17</u>	4.17±0.1	<u>5.07±0.07</u>	5.34±0.16	8.1±0.22	2.48±0.08	3.17±0.1	6.21±0.09	9.16±0.1	3.87±0.03	4.61±0.03	22.87±0.12	31.84±0.1	12.7±0.1	14.96±0.07
+ replace	7.25±0.09	10.46±0.11	3.52±0.02	4.33±0.02	4.3±0.13	6.53±0.05	1.96±0.05	2.52±0.02	5.33±0.07	7.76±0.2	3.44±0.05	4.05±0.09	22.58±0.21	31.6±0.54	12.62±0.3	14.9±0.39
CL4SRec* + SW	7.68±0.13	11.4±0.1	3.78±0.08	4.72±0.07	5.16±0	7.98±0.05	2.51±0.04	3.23±0.04	6.37±0.03	9.56±0.07	3.57±0.06	4.37±0.06	21.66±0.55	31.98±0.77	11.37±0.33	13.97±0.37
CoSeRec* + SW	8.24±0.04	12.07±0.18	3.99±0.08	4.96±0.03	5.5±0.05	8.26±0.03	2.52±0.02	3.21±0.01	6.93±0.11	10.08±0.1	4.13±0.06	4.91±0.06	21.85±0.41	31.48±0.88	10.82±0.7	13.25±0.57
ICLRec* + SW	8.28±0.05	12±0.05	3.93±0.02	4.87±0.02	5.65±0.01	8.34±0.02	2.55±0.01	3.23±0.01	6.78±0.07	9.92±0.08	4.02±0.02	4.8±0.02	24.04±0.35	32.78±0.23	13.71±0.25	15.91±0.31

distribution. For the slide-window strategy, the size of augmentations depends on the original sequence length and window length. For other augmentation strategies, their size of augmentations is regarded as a hyperparameter n^5 . We discuss the impact of the size of augmentations n in Sec. 4.4.2. All baselines and our backbone are carefully tuned on the used datasets for best performance. To ensure the reliability of the results, each baseline in the benchmark is trained 5 times with different random seeds, and the mean value and standard deviation (Mean ± std) are reported in main tables (Tab. 2 and Tab. 3).

4.2 Overall Performance (RQ1)

4.2.1 Performance of single data augmentation strategy. In this section, we explore the impact of eight sequence-level augmentation strategies on recommendation performance and compare them with three classic contrastive learning-based SR models. Specifically, for each sequence-level augmentation strategy, we select SASRec* as the backbone. Each instance in the training set undergoes augmentation twice using the corresponding strategy. The results are presented in Tab. 2, and we draw the following observations:

Most sequence-level data augmentations can improve the performance of SASRec. Among the eight augmentation strategies, *slide-window* yields the best results, followed by *crop*. Specifically, *slide-window* achieves average relative performance improvements of **96.2%** and **85.1%** in terms of Recall@20 and NDCG@20, respectively, on datasets with shorter average sequence lengths

⁵Note that n counts both the original sequence and its $n - 1$ augmentations for each individual sequence.

(Beauty, Sports, and Yelp). Furthermore, on the ML-1m dataset with longer sequences, *slide-window* demonstrates more significant improvements, with Recall@20 and NDCG@20 increasing by **2.8x** and **3.2x**. Conversely, *mask* and *replace* perform poorly as data augmentation methods, reducing the performance of SASRec on Beauty, Sports, and Yelp datasets. This can be attributed to the detrimental impact of noise introduced by these methods on model training, particularly in shorter sequences.

Some sequence-level data augmentation strategies outperform contrastive learning-based SR models. Among them, *slide-window* performs better than all contrastive learning methods, while *cropping* achieves performance close to or even surpassing that of some contrastive learning methods in most cases. It is worth noting that, on the ML-1m dataset with longer sequence lengths, most of the sequence-level data augmentation strategies can achieve performance comparable to or even superior to contrastive learning-based methods.

4.2.2 Performance of combined data augmentation strategy. Furthermore, we evaluate the performance of combining *slide-window* with other sequence-level augmentation strategies or contrastive learning methods, and summarize the results in Tab. 3. We observe that, in most cases, the performance of *slide-window + crop/mask/replace* is inferior to that of using *slide-window* alone. However, the combination of *slide-window* with the other four augmentation strategies, namely *subset-split*, *delete*, *reorder*, and *insert*, leads to an improvement in recommendation performance, highlighting the synergistic effect between these strategies. Particularly, on the Beauty and Sports datasets, the *slide-window + subset-split* achieves

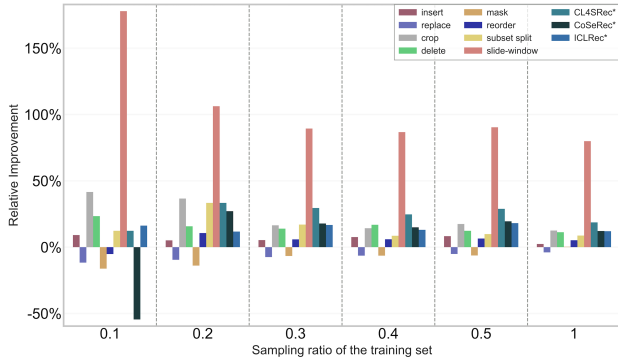


Figure 3: Performance improvements (Recall@20) of each data augmentation strategy over backbone model (i.e. SASRec) on Amazon Beauty dataset.

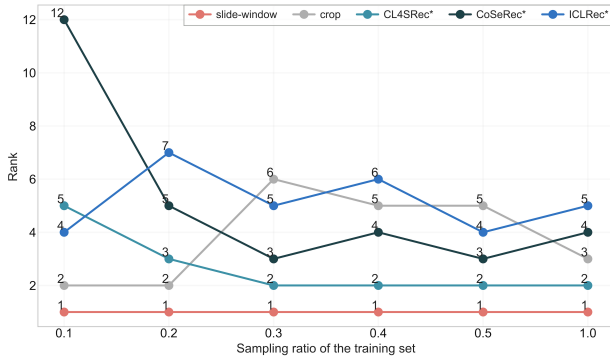


Figure 4: Performance ranking variations of two data augmentation strategies and three contrastive learning methods in various cold-start scenarios.

the highest performance among all augmentation combinations, with an average relative improvement of **6.0%** in Recall@20 and **6.8%** in NDCG@20 compared to using *slide-window* alone.

Contrastive learning methods also exhibit notable performance improvements when integrated with the *slide-window* strategy. For instance, on the Yelp dataset, the combination of CoSeRec and the *slide-window* strategy outperforms the use of CoSeRec alone, achieving increases of **82.3%** in Recall@20 and **62.1%** in NDCG@20. Similarly, on the ML-1m dataset, the combination of ICLRec and the *slide-window* strategy achieves the best performance in most cases, leading to improvements of **2.8x** in Recall@20 and **3.6x** in NDCG@20 compared to using ICLRec alone. These results indicate that integrating the *slide-window* strategy with various sequence-level augmentation techniques or contrastive learning-based SR methods can further boost recommendation performance. It is noteworthy that contrastive learning methods exhibit significant performance improvements over pure data augmentation methods only when employed in conjunction with the *slide-window* strategy. Otherwise, contrastive learning methods demonstrate comparable or even inferior performance compared to certain data augmentation strategies.

4.3 Cold-start Performance (RQ2)

To compare different data augmentation strategies and contrastive learning methods in the cold-start scenario, we first simulate different levels of cold-start by randomly sampling the training data at proportions of [0.1, 0.2, 0.3, 0.4, 0.5]. Then, we apply each data augmentation strategy or contrastive learning method to the sampled training set and train the models using the augmented data. Finally, we assess the performance of all models on the original test set. Fig. 3 illustrates the relative performance improvement ratios of the different methods compared to SASRec (no augmentation) on Amazon Beauty dataset. We observe that in most cases, the less training data available, the more significant the relative performance improvement brought by different augmentation strategies.

Furthermore, we rank different contrastive learning methods and sequence-level augmentation methods (*slide-window* and *crop*) based on their performance (Recall@20) in various cold-start scenarios and depict the changes in their rankings in Fig 4. It is evident that *slide-window* consistently outperforms other sequence-level augmentation methods and contrastive learning methods across all five cold-start settings. Interestingly, while *crop* performs less favorably than contrastive learning methods on the original training set (i.e., sampling ratio equals 100%), it surpasses all contrastive learning methods when the sampling ratios are reduced to 10% and 20%.

4.4 In-depth Analysis (RQ3&4&5)

4.4.1 Performance under different levels of item popularity (RQ3).

We compare the top-performing data augmentation methods and contrastive learning-based methods under varying item popularity on four benchmark datasets, using Recall@20 as the performance metric. In this work, the item popularity is defined as the frequency of each item as the target item in the training set. With such standard, the partition of sequences with different popularity is fixed and all data augmentation methods can be evaluated and fairly compared using the same test sequences. As shown in Fig 5, we can observe that all these methods, no matter direct data augmentation or contrastive learning-based ones, tend to perform better when the target item has higher popularity. Actually, most items in recommendation datasets are less popular, and the higher the popularity, the fewer test data in that group. In low popularity groups (0-50 and 50-100), which contain most items, we observe significant performance improvement with the *slide-window* in all four datasets. For other direct data augmentation strategies, such as subset split and insert, they can also achieve comparable or even better performance on these low popularity groups.

To further explore how simple data augmentation methods can have significant performance gains, we use the *slide-window* method as an example to test the effect of item popularity change on the model performance. In Fig 6, the ticks on the x-axis denote the average number of target item from test set as the target item in the training set. Additionally, the text next to the scatters denotes which popularity interval it belongs to, and scatter with same number indicates they belong to the same target item popularity interval (e.g., scatters with text "0" in *Amazon Sports* denotes they come from the first popularity interval, namely 0-50 of *Amazon Sports*

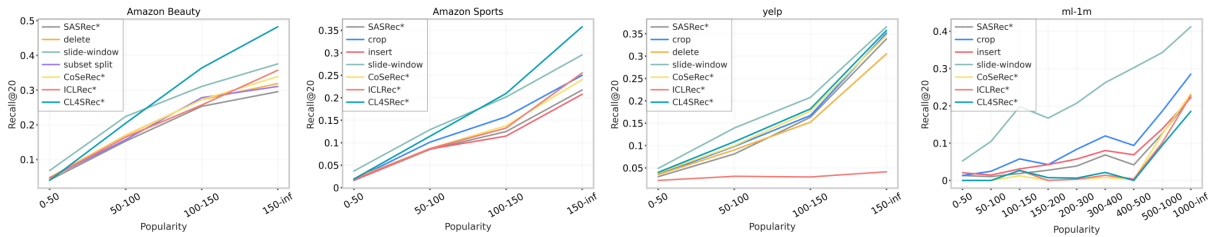


Figure 5: Performance comparison of different data augmentation and contrastive learning methods under different item popularity. For each dataset, we select the top-performing three data augmentation methods for comparison. Baseline denotes no augmentation is utilized.

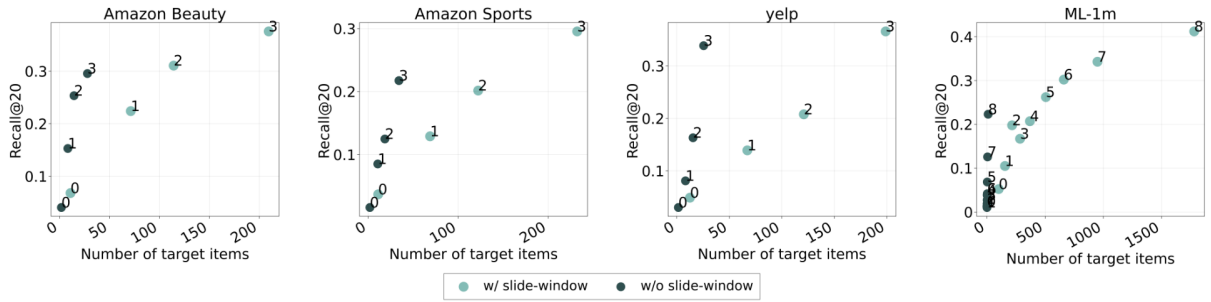


Figure 6: Performance comparison of SASRec with and without slide-window augmentation on target items with different popularity levels. The x-axis denotes the average number of target item from test set as the target item in the training set. The text next to the scatters denote which popularity interval it belongs to. For example, for the Amazon Beauty dataset, "0" denotes popularity interval 0-50, "1" represents interval 50-100, and so on.

shown in Fig 5). As shown in Fig 6, the variation in model performance with the number of target items is approximately linear in the beginning, and then we can observe marginal utility of the performance improvement (in ML-1m dataset). This result, to some extent, indicates the model performance improvement brought by slide-window is obtained by increasing the number of target item from test set as the target item in augmented training set.

4.4.2 Impact of the size of data augmentations n (RQ4). We compare the Recall@20 for different augmentation strategies when n is set to 2, 3, 5, and 10. Fig 7 presents the results on the Amazon Beauty dataset, where the left plot shows the results using a single sequence augmentation, and the right plot shows the results of slide-window augmentation combined with other augmentation strategies. We observe that when using a single strategy, the Recall@20 for most augmentation strategies increases with the number of augmentations. However, when combined with slide-window augmentation, more than half of the augmentation strategies show a decrease in Recall@20 with larger size of augmentations. This could be attributed to the fact that excessive random augmentations introduce too much random noise during model training, resulting in the model’s inability to accurately capture user interests.

4.4.3 Comparison of efficiency (RQ5). As shown in Tab. 4, although the utilization of single or combined data augmentation strategies inevitably increases the volume of training data, their training time is still lower than contrastive learning methods. This is because contrastive learning methods usually introduce auxiliary tasks and

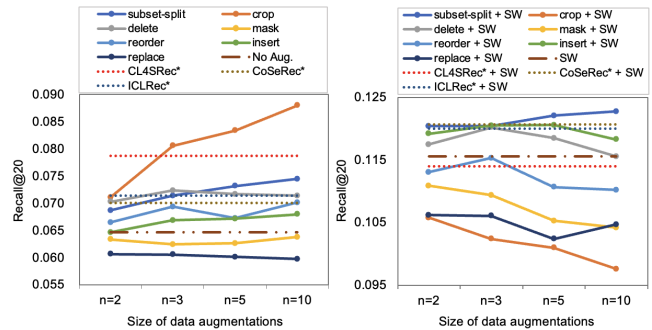


Figure 7: Impact of the size of data augmentations.

complex positive view construction strategies, which increase computational overhead. Additionally, sequence-level augmentation strategies do not increase the model’s inference time, as they only affect the training phase of the backbone model.

In terms of memory usage, our experiments, using Amazon Beauty as a case study with a batch size of 256, reveal substantial disparities among the methods. Direct data augmentation strategies, employing SASRec as the base model, maintains a memory usage of 0.36GB, consistent with SASRec’s standalone implementation. In contrast, the three contrastive learning baselines require significantly higher memory allocations (CL4SRec: 0.78GB, CoSeRec:

Table 4: Comparison of training time and inference time.

Methods	Alone		+SW		Test time (s)
	Recall@20	Training time (s)	Recall@20	Training time (s)	
No aug.	0.065	335.76	0.114	691.72	0.20
slide-window	0.114	691.72	-	-	0.20
subset-split	0.070	463.32	0.120	1232.58	0.20
replace	0.062	495.05	0.103	1443.56	0.20
reorder	0.069	453.19	0.114	1766.25	0.20
mask	0.063	510.61	0.109	1064.83	0.20
insert	0.068	431.12	0.118	2023.55	0.20
delete	0.071	467.31	0.119	2642.98	0.20
crop	0.077	539.55	0.105	1894.35	0.20
CoSeRec*	0.070	4650.78	0.117	13800.46	0.25
CL4SRec*	0.079	3321.12	0.114	8941.15	0.20
ICLRec*	0.071	1436.71	0.117	4055.04	0.26

1.37GB, and ICLRec: 2.35GB), highlighting the trade-off between improved performance and increased memory requirements in these approaches.

5 RELATED WORK

5.1 Sequential Recommendation

Intensive studies about recommender systems of various real-world scenarios found that sequential behaviors are important signals to model user preferences. And many efforts have been devoted to leveraging sequential behaviors to better capture behavior patterns. The very early and the most intuitive method is adopting the Markov Chain assumption for sequential recommendation [10, 34], where the next interaction is conditional on the past few interactions. Later, with the population of deep learning, many DL-based models were proposed to model sequential behaviors. GRU4Rec [11] is one of the most well-known SR models, of which Gated Recurrent Unit (GRU) is first introduced to model sequential behaviors. In addition, many other deep learning models were also introduced to seek better performance, such as Recurrent Neural Network (RNN) [24, 45], Convolutional Neural Network (CNN) [16, 40], Graph Neural Network (GNN) [2, 8, 41, 42, 57], and Multilayer Perceptron (MLP) [61]. Except for the aforementioned models, attention-based models have also been intensively studied and widely adopted in sequential recommendation tasks [19, 37, 55]. Besides, there are many interesting ongoing works focusing on other techniques like contrastive learning [4, 27, 48, 63, 64], reinforcement learning [51], multi-interest learning [49], large language model [25, 26, 62] and relation awareness [14].

5.2 Contrastive Learning for Recommendation

Contrastive Learning (CL) aims to improve the quality of representations by reducing the distance between positive views generated from the same data instance while separating them from negative views in a latent space. In the field of sequential recommendation, sequence-level data augmentation or feature-level data augmentation is often used to create positive views, with augmented views of other data instances in the same training batch serving as negative views. For instance, CL4SRec [48] employed three sequence-level data augmentation techniques, namely cropping, masking, and reordering, to construct positive views. Subsequently, CoSeRec [27] proposed to generate robust augmented sequences based on item correlations. To mitigate the representation degradation, DuoRec [33] utilized feature-level augmentation based on

dropout to better maintain semantic consistency between positive views. Despite these methods claiming that contrastive learning can significantly enhance the performance of recommender systems, they do not consider direct data augmentation as a baseline and thus cannot ascertain whether contrastive learning has a distinct advantage in mitigating data sparsity compared direct data augmentation.

5.3 Data Augmentation for Recommendation

Data augmentation is an effective method to improve the performance of DL-based models, particularly when the training data is scarce. In CV and NLP, data augmentation has drawn much attention and is widely adopted in model training. However, as for recommender systems, compared with CV or NLP, studies regarding data augmentation are still at a rather rudimentary stage.

For sequential recommendation tasks, basic data augmentation approaches create augmented sequences out of the original sequences themselves through simple transformations (*e.g.*, crop, reorder), small perturbation (*e.g.*, noise/redundancy injection, synonym replacement [35]), or subset selection (*e.g.*, slide-window [40], subset split [38], and item masking [35]). Recent works regarding the aforementioned approaches focus on time-aware approaches, which better retain time coherence between the augmented sequences and the original ones, and further enhance the model’s performance [6, 32]. Except for the aforementioned basic approaches, some data augmentation approaches choose to create highly plausible sequences by synthesizing and injecting/prepending fake samples into the original sequence [12, 15, 28], or modeling counterfactual data distribution [47, 58]. Apart from being applied in the sequential recommendation, data augmentation techniques are also applied in collaborative filtering to alleviate the data sparsity problem [43] or bypass negative sampling [21] during training.

The work most related to ours is [35], which explored the impact of four augmentation strategies on sequential recommendation, namely noise injection, redundancy injection, item masking, and synonym replacement. Different from it, our work benchmarked various direct data augmentation methods and contrastive learning methods, providing comprehensive analysis of the effectiveness of sequence-level data augmentation in sequential recommendation research, and offers insights into the improvements achieved.

6 CONCLUSION AND FUTURE WORK

In this paper, we benchmark eight widely used sequence-level data augmentation strategies, as well as three state-of-the-art contrastive learning SR methods, on four real datasets under both full data and cold-start settings. The results reveal that the performance of SRS can be improved by solely relying on some data augmentation strategies without using contrastive learning paradigm. Moreover, certain sequence-level augmentation strategies can achieve comparative or even superior performance compared to some contrastive learning-based SR methods, while requiring less computational resources. In the future, we will extend the scope of benchmarking to include a broader range of data augmentation strategies and contrastive learning methods, providing theoretical justification for the effectiveness of direct data augmentation.

REFERENCES

- [1] Yukuo Cen, Jianwei Zhang, Xu Zou, Chang Zhou, Hongxia Yang, and Jie Tang. 2020. Controllable multi-interest framework for recommendation. In *Proceedings of the 26th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*. 2942–2951.
- [2] Jianxin Chang, Chen Gao, Yu Zheng, Yiqun Hui, Yanan Niu, Yang Song, Depeng Jin, and Yong Li. 2021. Sequential Recommendation with Graph Neural Networks. In *Proceedings of the 44th International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR '21)*. 378–387.
- [3] Qiwei Chen, Huan Zhao, Wei Li, Pipei Huang, and Wenwu Ou. 2019. Behavior sequence transformer for e-commerce recommendation in alibaba. In *Proceedings of the 1st International Workshop on Deep Learning Practice for High-Dimensional Sparse Data*. 1–4.
- [4] Yongjun Chen, Zhiwei Liu, Jia Li, Julian J. McAuley, and Caiming Xiong. 2022. Intent Contrastive Learning for Sequential Recommendation. In *WWW*. ACM, 2172–2182.
- [5] Alexander Dallmann, Daniel Zoller, and Andreas Hotho. 2021. A Case Study on Sampling Strategies for Evaluating Neural Sequential Item Recommendation Models. In *Fifteenth ACM Conference on Recommender Systems*. 505–514.
- [6] Yizhou Dang, Enneng Yang, Guibing Guo, Linying Jiang, Xingwei Wang, Xiaoxiao Xu, Qinghui Sun, and Hong Liu. 2022. Uniform Sequence Better: Time Interval Aware Data Augmentation for Sequential Recommendation. *arXiv preprint arXiv:2212.08262* (2022).
- [7] Junyu Gao, Tianzhu Zhang, and Changsheng Xu. 2017. A unified personalized video recommendation via dynamic recurrent neural networks. In *Proceedings of the 25th ACM international conference on Multimedia*. 127–135.
- [8] Jiayan Guo, Peiyan Zhang, Chaozhuo Li, Xing Xie, Yan Zhang, and Sunghun Kim. 2022. Evolutionary preference learning via graph nested gru ode for session-based recommendation. In *Proceedings of the 31st ACM International Conference on Information & Knowledge Management*. 624–634.
- [9] Casper Hansen, Christian Hansen, Lucas Maystre, Rishabh Mehrotra, Brian Brost, Federico Tomasi, and Mounia Lalmas. 2020. Contextual and sequential user embeddings for large-scale music recommendation. In *Proceedings of the 14th ACM Conference on Recommender Systems*. 53–62.
- [10] Ruining He and Julian McAuley. 2016. Fusing Similarity Models with Markov Chains for Sparse Sequential Recommendation. In *2016 IEEE 16th International Conference on Data Mining (ICDM)*. 191–200.
- [11] Balázs Hidasi, Alexandros Karatzoglou, Linas Baltrunas, and Domonkos Tikk. 2016. Session-based Recommendations with Recurrent Neural Networks. In *ICLR*.
- [12] Tinglin Huang, Yuxiao Dong, Ming Ding, Zhen Yang, Wenzheng Feng, Xinyu Wang, and Jie Tang. 2021. MixGCF: An Improved Training Method for Graph Neural Network-Based Recommender Systems. In *Proceedings of the 27th ACM SIGKDD Conference on Knowledge Discovery and Data Mining (KDD '21)*. 665–674.
- [13] Xiaowen Huang, Shengsheng Qian, Quan Fang, Jitao Sang, and Changsheng Xu. 2018. Csan: Contextual self-attention network for user sequential recommendation. In *Proceedings of the 26th ACM international conference on Multimedia*. 447–455.
- [14] Mingi Ji, Weonyoung Joo, Kyungwoo Song, Yoon Yeong Kim, and Il Chul Moon. 2020. Sequential recommendation with relation-aware kernelized self-attention. In *AAAI 2020 - 34th AAAI Conference on Artificial Intelligence (AAAI 2020 - 34th AAAI Conference on Artificial Intelligence)*. 4304–4311.
- [15] Juyong Jiang, Yingtao Luo, Jae Boum Kim, Kai Zhang, and Sunghun Kim. 2021. Sequential recommendation with bidirectional chronological augmentation of transformer. *arXiv preprint arXiv:2112.06460* (2021).
- [16] Juyong Jiang, Peiyan Zhang, Yingtao Luo, Chaozhuo Li, Jae Boum Kim, Kai Zhang, Senzhang Wang, Xing Xie, and Sunghun Kim. 2023. AdaMCT: adaptive mixture of CNN-transformer for sequential recommendation. In *Proceedings of the 32nd ACM International Conference on Information and Knowledge Management*. 976–986.
- [17] Shuhui Jiang, Xueming Qian, Tao Mei, and Yun Fu. 2016. Personalized travel sequence recommendation on multi-source big social media. *IEEE Transactions on Big Data* 2, 1 (2016), 43–56.
- [18] Wang-Cheng Kang and Julian McAuley. 2018. Self-attentive sequential recommendation. In *ICDM*. IEEE, 197–206.
- [19] Wang-Cheng Kang and Julian McAuley. 2018. Self-attentive sequential recommendation. In *2018 IEEE international conference on data mining (ICDM)*. IEEE, 197–206.
- [20] Walid Krichene and Steffen Rendle. 2020. On sampled metrics for item recommendation. In *Proceedings of the 26th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*. 1748–1757.
- [21] Dongha Lee, SeongKu Kang, Hyunjun Ju, Chanyoung Park, and Hwanjo Yu. 2021. Bootstrapping User and Item Representations for One-Class Collaborative Filtering. In *Proceedings of the 44th International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR '21)*. 317–326.
- [22] Chenyi Lei, Yong Liu, Lingzi Zhang, Guoxin Wang, Haihong Tang, Houqiang Li, and Chunyan Miao. 2021. Semi: A sequential multi-modal information transfer network for e-commerce micro-video recommendations. In *Proceedings of the 27th ACM SIGKDD Conference on Knowledge Discovery & Data Mining*. 3161–3171.
- [23] Yuxuan Lei, Xiaolong Chen, Defu Lian, Peiyan Zhang, Jianxun Lian, Chaozhuo Li, and Xing Xie. 2023. Practical Content-aware Session-based Recommendation: Deep Retrieve then Shallow Rank. In *Amazon KDD Cup 2023 Workshop*.
- [24] Piji Li, Zihao Wang, Zhaochun Ren, Lidong Bing, and Wai Lam. 2017. Neural rating regression with abstractive tips generation for recommendation. In *Proceedings of the 40th International ACM SIGIR conference on Research and Development in Information Retrieval*. 345–354.
- [25] Junling Liu, Chao Liu, Peilin Zhou, Renjie Lv, Kang Zhou, and Yan Zhang. 2023. Is chatgpt a good recommender? a preliminary study. *arXiv preprint arXiv:2304.10149v2* (2023).
- [26] Junling Liu, Chao Liu, Peilin Zhou, Qichen Ye, Dading Chong, Kang Zhou, Yueqi Xie, Yuwei Cao, Shoujin Wang, Chenyu You, et al. 2023. Llmrec: Benchmarking large language models on recommendation task. *arXiv preprint arXiv:2308.12241* (2023).
- [27] Zhiwei Liu, Yongjun Chen, Jia Li, Philip S. Yu, Julian J. McAuley, and Caiming Xiong. 2021. Contrastive Self-supervised Sequential Recommendation with Robust Augmentation. *CoRR* abs/2108.06479 (2021).
- [28] Zhiwei Liu, Ziwei Fan, Yu Wang, and Philip S. Yu. 2021. Augmenting Sequential Recommendation with Pseudo-Prior Items via Reversely Pre-Training Transformer. In *Proceedings of the 44th International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR '21)*. 1608–1612.
- [29] Julian J. McAuley, Christopher Targett, Qinfeng Shi, and Anton van den Hengel. 2015. Image-Based Recommendations on Styles and Substitutes. In *Proceedings of the 38th International ACM SIGIR Conference on Research and Development in Information Retrieval, Santiago, Chile, August 9-13, 2015*, Ricardo Baeza-Yates, Mounia Lalmas, Alistair Moffat, and Berthier A. Ribeiro-Neto (Eds.). ACM, 43–52. <https://doi.org/10.1145/2766462.2767755>
- [30] Aaron van den Oord, Yazhe Li, and Oriol Vinyals. 2018. Representation learning with contrastive predictive coding. *arXiv preprint arXiv:1807.03748* (2018).
- [31] Bruno L Pereira, Alberto Ueda, Gustavo Penha, Rodrygo LT Santos, and Nivio Ziviani. 2019. Online learning to rank for sequential music recommendation. In *Proceedings of the 13th ACM Conference on Recommender Systems*. 237–245.
- [32] Aleksandr Petrov and Craig Macdonald. 2022. Effective and Efficient Training for Sequential Recommendation Using Recency Sampling. In *Proceedings of the 16th ACM Conference on Recommender Systems (RecSys '22)*. 81–91.
- [33] Ruihong Qiu, Zi Huang, Hongzhi Yin, and Zijian Wang. 2022. Contrastive Learning for Representation Degeneration Problem in Sequential Recommendation. In *WSDM*. ACM, 813–823.
- [34] Steffen Rendle, Christoph Freudenthaler, and Lars Schmidt-Thieme. 2010. Factorizing Personalized Markov Chains for Next-Basket Recommendation (*WWW '10*). 811–820.
- [35] Jooeun Song and Bongwon Suh. 2022. Data Augmentation Strategies for Improving Sequential Recommender Systems. *ArXiv* abs/2203.14037 (2022).
- [36] Nitish Srivastava, Geoffrey Hinton, Alex Krizhevsky, Ilya Sutskever, and Ruslan Salakhutdinov. 2014. Dropout: a simple way to prevent neural networks from overfitting. *The journal of machine learning research* 15, 1 (2014), 1929–1958.
- [37] Fei Sun, Jun Liu, Jian Wu, Changhua Pei, Xiao Lin, Wenwu Ou, and Peng Jiang. 2019. BERT4Rec: Sequential recommendation with bidirectional encoder representations from transformer. In *Proceedings of the 28th ACM international conference on information and knowledge management*. 1441–1450.
- [38] Yong Kiam Tan, Xinxing Xu, and Yong Liu. 2016. Improved Recurrent Neural Networks for Session-Based Recommendations. In *Proceedings of the 1st Workshop on Deep Learning for Recommender Systems (DLRS 2016)*. 17–22.
- [39] Jiayi Tang and Ke Wang. 2018. Personalized top-n sequential recommendation via convolutional sequence embedding. In *WSDM*. 565–573.
- [40] Jiayi Tang and Ke Wang. 2018. Personalized top-n sequential recommendation via convolutional sequence embedding. In *Proceedings of the eleventh ACM international conference on web search and data mining*. 565–573.
- [41] Nan Wang, Shoujin Wang, Yan Wang, Quan Z. Sheng, and Mehmet Orgun. 2020. Modelling local and global dependencies for next-item recommendations. In *International Conference on Web Information Systems Engineering*. Springer, 285–300.
- [42] Nan Wang, Shoujin Wang, Yan Wang, Quan Z. Sheng, and Mehmet A Orgun. 2022. Exploiting intra-and inter-session dependencies for session-based recommendations. *World Wide Web* 25, 1 (2022), 425–443.
- [43] Qinyong Wang, Hongzhi Yin, Hao Wang, Quoc Viet Hung Nguyen, Zi Huang, and Lizhen Cui. 2019. Enhancing Collaborative Filtering with Generative Augmentation. In *Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining (KDD '19)*. 548–556.
- [44] Shoujin Wang, Liang Hu, Yan Wang, Longbing Cao, Quan Z. Sheng, and Mehmet Orgun. 2019. Sequential recommender systems: challenges, progress and prospects. In *Proceedings of the 28th International Joint Conference on Artificial Intelligence*. AAAI Press, 6332–6338.
- [45] Shoujin Wang, Liang Hu, Yan Wang, Quan Z. Sheng, Mehmet Orgun, and Longbing Cao. 2020. Intention nets: psychology-inspired user choice behavior modeling for next-basket prediction. In *34th AAAI Conference on Artificial Intelligence, AAAI 2020*. Association for the Advancement of Artificial Intelligence, 6259–6266.

- [46] Shoujin Wang, Qi Zhang, Liang Hu, Xiuzhen Zhang, Yan Wang, and Charu Aggarwal. 2022. Sequential/Session-based Recommendations: Challenges, Approaches, Applications and Opportunities. In *Proceedings of the 45th International ACM SIGIR Conference on Research and Development in Information Retrieval*. 3425–3428.
- [47] Zhenlei Wang, Jingsen Zhang, Hongteng Xu, Xu Chen, Yongfeng Zhang, Wayne Xin Zhao, and Ji-Rong Wen. 2021. Counterfactual Data-Augmented Sequential Recommendation. In *Proceedings of the 44th International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR '21)*. 347–356.
- [48] Xu Xie, Fei Sun, Zhaoyang Liu, Shiwen Wu, Jinyang Gao, Bolin Ding, and Bin Cui. 2020. Contrastive learning for sequential recommendation. *arXiv preprint arXiv:2010.14395* (2020).
- [49] Yueqi Xie, Jingqi Gao, Peilin Zhou, Qichen Ye, Yining Hua, Jaeboum Kim, Fangzhao Wu, and Sunghun Kim. 2023. Rethinking Multi-Interest Learning for Candidate Matching in Recommender Systems. *arXiv preprint arXiv:2302.14532* (2023).
- [50] Yueqi Xie, Peilin Zhou, and Sunghun Kim. 2022. Decoupled Side Information Fusion for Sequential Recommendation. In *International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR)*.
- [51] Xin Xin, Alexandros Karatzoglou, Ioannis Arapakis, and Joemon M. Jose. 2020. Self-Supervised Reinforcement Learning for Recommender Systems. In *Proceedings of the 43rd International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR '20)*. 931–940.
- [52] Lu Yu, Chuxu Zhang, Shangsong Liang, and Xiangliang Zhang. 2019. Multi-order attentive ranking model for sequential recommendation. In *Proceedings of the AAAI conference on artificial intelligence*, Vol. 33. 5709–5716.
- [53] Fajie Yuan, Alexandros Karatzoglou, Ioannis Arapakis, Joemon M Jose, and Xiangnan He. 2019. A simple convolutional generative network for next item recommendation. In *Proceedings of the twelfth ACM international conference on web search and data mining*. 582–590.
- [54] Xu Yuan, Dongsheng Duan, Lingling Tong, Lei Shi, and Cheng Zhang. 2021. ICAI-SR: Item Categorical Attribute Integrated Sequential Recommendation. In *Proceedings of the 44th International ACM SIGIR Conference on Research and Development in Information Retrieval*. 1687–1691.
- [55] Peiyan Zhang, Jiayan Guo, Chaozhuo Li, Yueqi Xie, Jae Boum Kim, Yan Zhang, Xing Xie, Haohan Wang, and Sunghun Kim. 2023. Efficiently leveraging multi-level user intent for session-based recommendation via atten-mixer network. In *Proceedings of the Sixteenth ACM International Conference on Web Search and Data Mining*. 168–176.
- [56] Peiyan Zhang and Sunghun Kim. 2023. A Survey on Incremental Update for Neural Recommender Systems. *arXiv preprint arXiv:2303.02851* (2023).
- [57] Peiyan Zhang, Yuchen Yan, Chaozhuo Li, Senzhang Wang, Xing Xie, and Sunghun Kim. 2023. Can Transformer and GNN Help Each Other? *arXiv preprint arXiv:2308.14355* (2023).
- [58] Shengyu Zhang, Dong Yao, Zhou Zhao, Tat-Seng Chua, and Fei Wu. 2021. CauseRec: Counterfactual User Sequence Synthesis for Sequential Recommendation. In *Proceedings of the 44th International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR '21)*. 367–377.
- [59] Wayne Xin Zhao, Yupeng Hou, Xingyu Pan, Chen Yang, Zeyu Zhang, Zihan Lin, Jingsen Zhang, Shuqing Bian, Jiakai Tang, Wenqi Sun, et al. 2022. RecBole 2.0: Towards a More Up-to-Date Recommendation Library. In *Proceedings of the 31st ACM International Conference on Information & Knowledge Management*. 4722–4726.
- [60] Kun Zhou, Hui Wang, Wayne Xin Zhao, Yutao Zhu, Sirui Wang, Fuzheng Zhang, Zhongyuan Wang, and Ji-Rong Wen. 2020. S3-rec: Self-supervised learning for sequential recommendation with mutual information maximization. In *Proceedings of the 29th ACM international conference on information & knowledge management*. 1893–1902.
- [61] Kun Zhou, Hui Yu, Wayne Xin Zhao, and Ji-Rong Wen. 2022. Filter-Enhanced MLP is All You Need for Sequential Recommendation. In *Proceedings of the ACM Web Conference 2022 (WWW '22)*. 2388–2399.
- [62] Peilin Zhou, Meng Cao, You-Liang Huang, Qichen Ye, Peiyan Zhang, Junling Liu, Yueqi Xie, Yining Hua, and Jaeboum Kim. 2023. Exploring recommendation capabilities of gpt-4v (ision): A preliminary case study. *arXiv preprint arXiv:2311.04199* (2023).
- [63] Peilin Zhou, Jingqi Gao, Yueqi Xie, Qichen Ye, Yining Hua, Jaeboum Kim, Shoujin Wang, and Sunghun Kim. 2023. Equivariant contrastive learning for sequential recommendation. In *Proceedings of the 17th ACM Conference on Recommender Systems*. 129–140.
- [64] Peilin Zhou, Qichen Ye, Yueqi Xie, Jingqi Gao, Shoujin Wang, Jae Boum Kim, Chenyu You, and Sunghun Kim. 2023. Attention Calibration for Transformer-based Sequential Recommendation. In *Proceedings of the 32nd ACM International Conference on Information and Knowledge Management*. 3595–3605.