

# THE POWER OF FEW: ACCELERATING AND ENHANCING DATA REWEIGHTING WITH CORESET SELECTION

Mohammad Jafari<sup>1,\*</sup> Yimeng Zhang<sup>2</sup> Yihua Zhang<sup>2</sup> Sijia Liu<sup>2</sup>

<sup>1</sup> Sharif University of Technology, Tehran, Iran <sup>2</sup> Michigan State University, MI, USA

## ABSTRACT


As machine learning tasks continue to evolve, the trend has been to gather larger datasets and train increasingly larger models. While this has led to advancements in accuracy, it has also escalated computational costs to unsustainable levels. Addressing this, our work aims to strike a delicate balance between computational efficiency and model accuracy, a persisting challenge in the field. We introduce a novel method that employs core subset selection for reweighting, effectively optimizing both computational time and model performance. By focusing on a strategically selected coreset, our approach offers a robust representation, as it efficiently minimizes the influence of outliers. The re-calibrated weights are then mapped back to and propagated across the entire dataset. Our experimental results substantiate the effectiveness of this approach, underscoring its potential as a scalable and precise solution for model training.

**Index Terms**— coreset selection, data reweighting

## 1. INTRODUCTION

In the evolving field of machine learning, numerous strategies have been developed to tackle the complexities of model training [1–25]. Two particularly noteworthy techniques are coreset selection [26–28, 28–37], aimed at improving computational efficiency by selecting most representative training data or removing harmful training data, and data reweighting [38–49], designed for generalization or faster convergence. While each has contributed to advancements in machine learning, they come with their own sets of challenges. Coreset selection, for instance, can sometimes overlook the nuanced diversity inherent in larger datasets. On the other hand, data reweighting incurs a significant computational burden, particularly when applied to expansive datasets.

Against this backdrop, we introduce a novel methodology that capitalizes on the advantages of both coreset selection and data reweighting for model training. As shown in **Fig. 1**, our proposed method not only addresses the limitations of each individual method but also synergistically enhances their strengths. By focusing on reweighting a strategically chosen

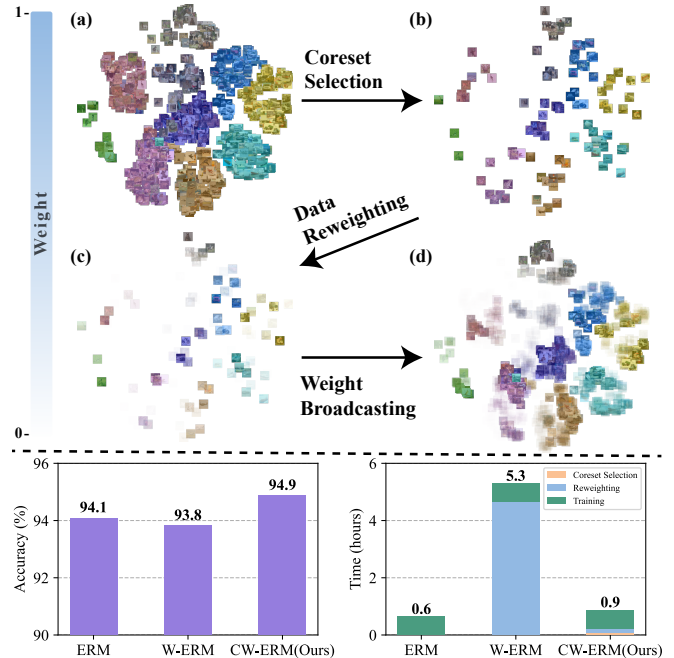

**Fig. 1:** Analysis of model performance and computational efficiency. The first part illustrates the three-stage process of our method: coreset selection, data reweighting, and weight broadcasting, visualized through four 2D t-SNE embeddings indicated by a, b, c, d. The second part compares the accuracy and time consumption of ERM, W-ERM, and our method (CW-ERM). Our approach not only yields the highest accuracy but also maintains a balance between computational efficiency and performance.

coreset, we achieve computational efficiency without compromising on trained model performance. The distinction of our proposed method lies in its dual commitment to both computational speed and robust performance, which is achieved by marrying the efficiency gains from coreset selection with the precision enhancements afforded by data reweighting. As a result, our proposed method not only quickens the pace of machine learning tasks but also elevates their accuracy, making it a compelling alternative to existing techniques. We summarize the main contributions of this paper as follows:

- ① (Methodology-wise) We propose a new framework that integrates coreset selection and data reweighting, striking a balance between training efficiency and model efficacy.
- ② (Efficiency-wise) We unveil that less than 1% of the dataset is sufficient for effective reweighting, dramatically increasing the efficiency of the process.

\*The work was carried out during his (remote) summer internship at the OPTML Lab of Michigan State University.

③ (Performance-wise) We empirically validate our approach through comprehensive experiments on the CIFAR-10 and CIFAR-100 datasets, showing that our method maintains competitive levels of accuracy.

## 2. RELATED WORK

**Coreset selection.** Coreset selection revolves around the idea of distilling a large dataset into a smaller, yet highly informative subset for efficient model training. Various strategies have been employed to achieve this, ranging from geometry-based methods like Herding [26] and K-Center [50], to uncertainty-based [27, 28, 31] and error-based approaches [29, 34]. In geometry-based methods, samples are chosen based on their geometric attributes in the feature space [26, 50]. For instance, the K-Center method minimizes the maximum distance from any data point to its nearest center in the selected subset. On the other hand, moderate coreset targets data points that are close to the median distance in the feature space [35]. Uncertainty-based methods aim to identify challenging samples that lie near the decision boundary or that the model is least confident about [27, 28, 31]. Error-based methods such as GraNd and EL2N focus on samples that contribute most to the model’s loss [34]. Additionally, some works have explored the use of bilevel optimization [30, 32, 33], though these face scalability issues with large datasets. While some existing coreset selection methods may be computationally efficient, they often cannot match the performance achieved by training on the entire dataset.

**Data reweighting.** Data Reweighting techniques often determine weights iteratively, either based on the training loss [38–40] or by focusing on fairness discrepancies within the training data [41]. These strategies have been further developed by employing functions, typically parameterized, that map inputs directly to weights [42, 43]. Some methods even treat these weights as directly learnable variables [44]. However, these techniques generally do not produce a global set of weights, limiting their utility for tasks like post-training data compression. Previous approaches to data reweighting have targeted various objectives such as enhancing generalization, boosting resistance to noisy labels [44–46, 49], and addressing class imbalance issues [47, 48]. Another set of works aims at reducing training time and achieving faster convergence by employing a learning curriculum tailored to individual instances [45]. Current data reweighting techniques are often not scalable and add computational overhead, making them less practical for large datasets.

## 3. PROBLEM STATEMENT

**Setup.** This paper elucidates the terminological framework and overarching methodology underpinning the research. The

study is situated in the domain of supervised learning, specifically targeting classification tasks. The primary dataset, denoted by  $\mathcal{S}$ , comprises  $n$  samples, each characterized as  $(\mathbf{x}_i, y_i)$ , where  $\mathbf{x}_i$  represents the image and  $y_i$  the corresponding label of the  $i$ -th sample. Central to the study is the concept of a *coreset*, defined as a compact yet representative subset  $\mathcal{C} \subseteq \mathcal{S}$  of the original dataset. The procedure of *Data Reweighting* entails the recalibration of sample weights  $w^c$  within this coreset. The research builds upon the foundational framework of Empirical Risk Minimization (ERM), designed to minimize the mean loss over the training dataset. Formally, ERM is articulated as:

$$\min_{\theta} \frac{1}{n} \sum_{i=1}^n \mathcal{L}(f(\mathbf{x}_i; \theta), y_i), \quad (1)$$

where  $\mathcal{L}$  denotes the loss function and  $\theta$  the model parameters. An extension of ERM termed Weighted-ERM (W-ERM), incorporates sample weights  $w$  into the loss function:

$$\min_{\theta} \frac{1}{n} \sum_{i=1}^n w_i \mathcal{L}(f(\mathbf{x}_i; \theta), y_i), \quad (2)$$

**Challenges.** Contemporary data reweighting methodologies are confronted with significant computational challenges, especially when applied to the vast and intricate datasets prevalent in modern settings. Such inefficiencies critically impede their suitability for practical machine learning assignments which necessitate a harmony of speed and precision. Present techniques are further hampered by the absence of a cohesive framework that adeptly amalgamates the collective benefits of coreset selection and data reweighting. This gap results in a piecemeal landscape, punctuated with potential unexploited avenues for optimization. Consequently, two paramount challenges emerge: ① the distillation of datasets into concise, yet informative coresets for efficient data reweighting; ② the broadcasting of coreset data weights to the whole dataset without undermining the efficacy of the model. By addressing these challenges, our work aims to bridge the gap between effectiveness and efficiency - enabling scalable, precise, and fast machine learning through the synthesis of coreset selection and data reweighting. We propose a unified framework that harnesses the strengths of both techniques to advance the state-of-the-art.

## 4. METHODS

In this section, we elucidate our research methodology, which seamlessly integrates three pivotal components: coreset selection, coreset reweighting, and the broadcasting of recalibrated weights back to the full dataset. Our proposed method, Coreset Reweighting for ERM (**CW-ERM**) starts with the selection of a coreset, a representative subset of the original dataset, to focus the computationally intensive reweighting

process. Upon fine-tuning these weights, we then broadcast them back to the entire dataset, thereby achieving a more globally effective reweighting. This unified process aims to balance both computational efficiency and model performance, streamlining the path from data selection to final model training.

#### 4.1. Coreset Selection

Our method begins by leveraging pre-trained models benchmarked on ImageNet as feature extractors to extract descriptive features from the dataset for the following coreset selection. This provides a robust foundation for the subsequent processes. Given a dataset  $\mathcal{S} = \{(\mathbf{x}_1, y_1), \dots, (\mathbf{x}_n, y_n)\}$ , we utilize a pretrained model  $h$  to extract a feature vector  $\mathbf{z}_i = h(\mathbf{x}_i)$  for each data point  $\mathbf{x}_i$ . We also compute the median feature vector  $\bar{\mathbf{z}}_{y_i}$  for each class label  $y_i$ . Armed with these feature representations, we proceed to select a compact yet representative coreset. Specifically, we employ the state-of-the-art moderate coreset algorithm [51] for coreset selection. This technique works by calculating the distance  $d(s_i) = \|\mathbf{z}_i - \mathbf{z}_{y_i}\|_2$  between each data point  $\mathbf{z}_i$  and its corresponding class median feature  $\mathbf{z}_{y_i}$ . Data points with distances closest to the median distance are selected for the coreset. In summary, we first extract expressive features using pre-trained models and then leverage these features to select a representative coreset via median distance-based scoring. This provides an informative subset for subsequent processing. We opted for moderate coreset as our coreset selection strategy due to its ability to provide a representative subset without expensive optimization procedures. By selecting data points close to the median distance, moderate coreset offers an efficient way to summarize the dataset while reducing the influence of outliers.

#### 4.2. Coreset Reweighting

Following the coreset selection, we transition to the reweighting phase. In this stage, we employ MetaWeightNet [49], a well-regarded reweighting algorithm to optimize the sample weight of coreset  $\mathbf{w}^c$ . Applying MetaWeightNet exclusively to the coreset alleviates the computational intensity usually associated with this method, striking a balance between efficiency and effectiveness. The reweighting procedure revolves around two loss functions: the weighted training loss,  $L_{\text{train}}$ , and the meta loss,  $L_{\text{meta}}$ . Our aim is to minimize  $L_{\text{train}}$  concerning the classifier weights  $\theta$ , and  $L_{\text{meta}}$  with respect to the meta-parameters  $\Theta$  in the weight network  $V(L; \Theta)$ . The optimization is an iterative two-step process. Initially,  $L_{\text{train}}$  is minimized by updating  $\theta$  in line with its gradient  $\nabla_{\theta} L_{\text{train}}$ . Subsequently,  $L_{\text{meta}}$  is optimized by altering  $\Theta$  based on its gradient  $\nabla_{\Theta} L_{\text{meta}}$ . This approach allows for the joint optimization of  $\theta$  and  $\Theta$ , contributing to the efficacy of our reweighting method. Employing MetaWeightNet justifies itself by its proven ability to learn a suitable weighting func-

---

#### Algorithm 1 Classification via Coreset Reweighting

---

- 1: **Input:** Full dataset  $\mathcal{S}$ , Pretrained model  $h(\cdot)$
  - 2: **Output:** Trained model  $f$
  - 3: **Feature Extraction:**  $\mathbf{z} = h(\mathbf{x})$
  - 4: **Coreset Selection:**  $\mathcal{S}^* \leftarrow \text{ModerateCoreset}(\mathcal{S}, \mathbf{z})$
  - 5: **Coreset Reweighting:** Initialize  $w, \Theta$
  - 6: Optimize  $w$  and  $\Theta$  until convergence [49]
  - 7: **Weight Broadcasting:**  $W_{\mathcal{S}}(\mathbf{x}) \leftarrow W_{\mathcal{S}^*}(\text{NN}(\mathbf{x}, \mathcal{S}^*))$  for all  $\mathbf{x} \in \mathcal{S}$
  - 8: **Model Training:** Initialize  $f$
  - 9: Update  $f$  using  $\mathcal{S}$  and  $W_{\mathcal{S}}$  until convergence
- 

tion through the concurrent optimization of both the training and meta objectives. Moreover, the selective use of a coreset for reweighting substantially bolsters computational efficiency, enabling us to capture the advantages of reweighting without the usually high computational costs.

#### 4.3. Weight Broadcasting

The final step in our proposed methodology is the weight broadcasting phase, which aims to propagate the optimized weights  $\mathbf{w}^c$  from the coreset  $\mathcal{C}$  back to the full dataset  $\mathcal{S}$ . The crux of this operation is captured by the *broadcast* function, formulated as follows:

$$\mathbf{w}_i^* = \text{broadcast}(\mathbf{x}_i, \mathcal{C}, \mathbf{w}^c) = \mathbf{w}_{\text{NN}(\mathbf{x}_i, \mathcal{C})}^c, \quad (3)$$


where  $\text{NN}(x_i, \mathcal{C})$  represents the index of the nearest neighbor of  $\mathbf{x}_i$  within the coreset  $\mathcal{C}$ , and  $\mathbf{w}_{\text{NN}(\mathbf{x}_i, \mathcal{C})}^c$  is the weight of that nearest neighbor in the coreset. We employ a nearest neighbors algorithm to find the closest sample in the coreset for each sample in the original dataset. This ensures that the weights from the coreset are broadcasted to similar samples in  $\mathcal{S}$ , effectively capturing the underlying distribution and characteristics of the data. The nearest neighbors method allows us to perform this broadcasting in a computationally efficient manner while maintaining the effectiveness of the reweighting, thus contributing to enhanced model performance across the entire dataset.

## 5. EXPERIMENTAL RESULTS

**Experiment setup.** We assess the efficacy of our proposed method, **CW-ERM**, on the CIFAR-10 and CIFAR-100 datasets [52]. These datasets are benchmarks in the machine learning community and offer a robust platform for comparing our method against established baselines such as ERM, Weighted-ERM (**W-ERM**), Coreset-Random-ERM (**C<sub>R</sub>-ERM**), and Coreset-Moderate-ERM (**C<sub>MS</sub>-ERM**). The training is carried out using the PreactResNet18 architecture [53] and optimized using Stochastic Gradient Descent (SGD [54]) with a learning rate of 0.1, momentum of 0.9, and a weight decay of  $5 \times 10^{-4}$ . For feature extraction, we utilize a pre-trained Vision Transformer (ViT [55]).

Classifier:	PreactResnet18				Resnet20				
	ViT		Resnet50		ViT		Resnet50		
Feature Extractor:	ViT		Resnet50		ViT		Resnet50		
Metrics	Acc.(%)	Time(Min)	Acc.(%)	Time(Min)	Acc.(%)	Time(Min)	Acc.(%)	Time(Min)	
CIFAR-10									
Method	<i>ERM</i>	94.1 ± 0.2	30.90 ± 4.26	93.6 ± 0.3	28.02 ± 3.42	92.2 ± 0.1	21.00 ± 0.36	92.3 ± 0.3	20.52 ± 1.26
	<i>W-ERM</i>	93.8 ± 0.1	308.70 ± 9.24	94.1 ± 0.3	304.68 ± 2.76	92.3 ± 0.1	281.64 ± 5.70	92.3 ± 0.1	281.22 ± 7.86
	<i>C<sub>R</sub>-ERM</i>	40.6 ± 2.3	14.70 ± 0.06	40.2 ± 1.2	14.58 ± 0.66	40.6 ± 0.9	14.76 ± 0.30	40.4 ± 1.4	14.64 ± 0.06
	<i>C<sub>MS</sub>-ERM</i>	40.1 ± 0.5	20.58 ± 0.24	39.9 ± 0.9	17.70 ± 0.78	39.9 ± 0.3	19.92 ± 0.72	39.4 ± 0.6	17.46 ± 0.30
	<i>CW-ERM(Ours)</i>	<b>94.9 ± 0.1</b>	54.66 ± 0.84	<b>95.0 ± 0.3</b>	54.54 ± 1.08	<b>92.5 ± 0.1</b>	32.40 ± 1.44	<b>92.4 ± 0.1</b>	29.70 ± 0.48
CIFAR-100									
Method	<i>ERM</i>	76.2 ± 0.2	2940.00 ± 3.36	76.0 ± 0.3	28.02 ± 2.88	68.2 ± 0.6	22.68 ± 0.72	68.3 ± 0.2	22.80 ± 1.92
	<i>W-ERM</i>	76.3 ± 0.3	308.46 ± 2.70	76.3 ± 0.2	307.80 ± 3.24	68.1 ± 0.4	281.76 ± 3.12	68.2 ± 0.1	280.86 ± 0.72
	<i>C<sub>R</sub>-ERM</i>	8.3 ± 0.3	14.70 ± 0.06	8.3 ± 0.3	15.00 ± 0.48	7.8 ± 0.6	17.16 ± 0.66	7.8 ± 0.6	15.24 ± 0.60
	<i>C<sub>MS</sub>-ERM</i>	8.6 ± 0.2	21.72 ± 0.72	9.4 ± 0.3	18.24 ± 0.66	7.8 ± 0.5	20.58 ± 0.12	8.8 ± 0.6	17.70 ± 0.78
	<i>CW-ERM(Ours)</i>	<b>76.7 ± 0.2</b>	57.30 ± 1.08	<b>76.5 ± 0.4</b>	54.60 ± 1.74	<b>68.5 ± 0.2</b>	33.36 ± 0.30	<b>68.5 ± 0.5</b>	29.88 ± 2.10


**Table 1:** Experimental results comparing test accuracy and training time across various methods on the CIFAR-10 and CIFAR-100 datasets. Results represent averages from five distinct random seed trials. The methods compared encompass *ERM*, *W-ERM*, *C<sub>R</sub>-ERM*, *C<sub>MS</sub>-ERM*, and our proposed approach *CW-ERM*. Experiments are conducted with two classifier backbones (PreactResnet18 and Resnet20) and two feature extractors (ViT and Resnet50). It should be noted that, for consistency, the Coreset Ratio for all methods is fixed at 0.01. Methods *C<sub>R</sub>-ERM* and *C<sub>MS</sub>-ERM* employ random and moderate coreset selection, respectively, and exclusively train on the coreset without applying broadcasting. Unlike them, *ERM* and *W-ERM* do not utilize coresets.

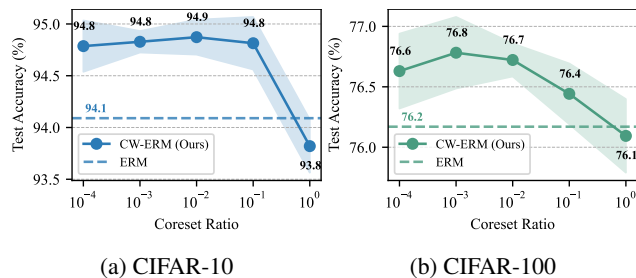

**Fig. 2:** The effect of the coreset ratio on the model performance on CIFAR-10 and CIFAR-100, where coreset is solely used for data reweighting. After reweighting data of the coreset, weights are broadcasted back to the full dataset for training. Larger coreset ratios may lead to test accuracy degradation, particularly in more complex datasets like CIFAR-100. "Uniform data reweighting" refers to the process where each data point in the dataset is treated with equal importance, without any specialized weighting scheme.

**Overall performance.** As detailed in **Table 1**, our proposed **CW-ERM** consistently exceeds the performance of other methods in both CIFAR-10 and CIFAR-100 datasets, especially noteworthy at a coreset ratio of 0.01 where it achieves average accuracies of 94.9% and 76.7%, respectively. This superior accuracy is further substantiated in **Fig. 2**, which provides a nuanced exploration of the trade-offs between accuracy and computational efficiency. Here, **CW-ERM** not only achieves superior classification but also reduces computational time. At a coreset ratio of 0.01, it realizes a mean accuracy of 94.9% with a standard deviation of 0.1%, significantly surpassing the baseline accuracy of 94.1% set by **ERM**. The computational benefits of **CW-ERM** are further highlighted in **Fig. 3**, which delineates the time consumption for various phases of the learning process across 5 different coreset ratios. The method significantly curtails the time spent in the computationally intensive reweighting phase without sacrificing accuracy, further corroborating the method’s robustness and efficiency.

Our experiments substantiate that **CW-ERM** offers a robust and efficient strategy for machine learning tasks. The method demonstrates significant improvements in both classification accuracy and computational efficiency, thereby providing a compelling case for its applicability in real-world scenarios.

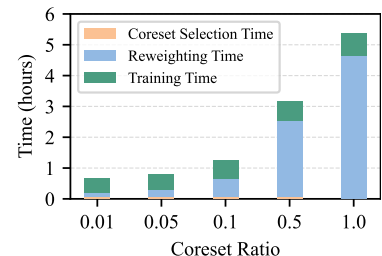

**Fig. 3:** Time consumption breakdown for 5 different coreset ratios. The stacked bar chart shows the average time spent on coreset selection, reweighting, and training for each coreset ratio.

## 6. CONCLUSION

In this work, we have presented a novel method for enhancing the efficiency and accuracy of machine learning classification tasks. Our approach combines the principles of coreset selection and data reweighting, delivering a system that outperforms existing techniques in terms of computational time and model performance. By conducting experiments on widely acknowledged datasets like CIFAR-10 and CIFAR-100, we have demonstrated the method’s scalability and effectiveness. Our results confirm that it is possible to achieve a delicate balance between computational efficiency and model accuracy, a challenge that has long plagued the machine learning community. The promising results from this study pave the way for future research in this direction, including potential extensions to other types of learning tasks and datasets. We believe that our approach serves as a strong foundation for developing scalable and accurate machine learning systems.

**Acknowledgement** The work of Yimeng Zhang, Yihua Zhang, and Sijia Liu was supported by the Cisco Research Award.

## 7. REFERENCES

- [1] Alex Krizhevsky, Ilya Sutskever, and Geoffrey E Hinton, “Imagenet classification with deep convolutional neural networks,” in *Advances in Neural Information Processing Systems*, F. Pereira, C.J. Burges, L. Bottou, and K.Q. Weinberger, Eds. 2012, vol. 25, Curran Associates, Inc. 1
- [2] Aochuan Chen, Yimeng Zhang, Jinghan Jia, James Diefenderfer, Jiancheng Liu, Konstantinos Parasyris, Yihua Zhang, Zheng Zhang, Bhavya Kailkhura, and Sijia Liu, “Deepzero: Scaling up zeroth-order optimization for deep model training,” *arXiv preprint arXiv:2310.02025*, 2023. 1
- [3] Yihua Zhang, Pingzhi Li, Junyuan Hong, Jiaxiang Li, Yimeng Zhang, Wenqing Zheng, Pin-Yu Chen, Jason D Lee, Wotao Yin, Mingyi Hong, et al., “Revisiting zeroth-order optimization for memory-efficient llm fine-tuning: A benchmark,” *arXiv preprint arXiv:2402.11592*, 2024. 1
- [4] Yimeng Zhang, Yuguang Yao, Jinghan Jia, Jinfeng Yi, Mingyi Hong, Shiyu Chang, and Sijia Liu, “How to robustify black-box ml models? a zeroth-order optimization perspective,” *arXiv preprint arXiv:2203.14195*, 2022. 1
- [5] Yimeng Zhang, Xin Chen, Jinghan Jia, Sijia Liu, and Ke Ding, “Text-visual prompting for efficient 2d temporal video grounding,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023, pp. 14794–14804. 1
- [6] Yimeng Zhang, Akshay Karkal Kamath, Qiucheng Wu, Zhiwen Fan, Wuyang Chen, Zhangyang Wang, Shiyu Chang, Sijia Liu, and Cong Hao, “Data-model-circuit tri-design for ultra-light video intelligence on edge devices,” in *Proceedings of the 28th Asia and South Pacific Design Automation Conference*, 2023, pp. 745–750. 1
- [7] Xiaochen Han, Bo Wu, Zheng Shou, Xiao-Yang Liu, Yimeng Zhang, and Linghe Kong, “Tensor fista-net for real-time snapshot compressive imaging,” in *Proceedings of the AAAI Conference on Artificial Intelligence*, 2020, vol. 34, pp. 10933–10940. 1
- [8] Yimeng Zhang, Xiao-Yang Liu, Bo Wu, and Anwar Walid, “Video synthesis via transform-based tensor neural network,” in *Proceedings of the 28th ACM International Conference on Multimedia*, 2020, pp. 2454–2462. 1
- [9] Jinghan Jia, Mingyi Hong, Yimeng Zhang, Mehmet Akçakaya, and Sijia Liu, “On the robustness of deep learning-based mri reconstruction to image transformations,” *arXiv preprint arXiv:2211.04930*, 2022. 1
- [10] Yihua Zhang, Yuguang Yao, Parikshit Ram, Pu Zhao, Tianlong Chen, Mingyi Hong, Yanzhi Wang, and Sijia Liu, “Advancing model pruning via bi-level optimization,” *Advances in Neural Information Processing Systems*, vol. 35, pp. 18309–18326, 2022. 1
- [11] Gaoyuan Zhang, Songtao Lu, Yihua Zhang, Xiangyi Chen, Pin-Yu Chen, Quanfu Fan, Lee Martie, Lior Horesh, Mingyi Hong, and Sijia Liu, “Distributed adversarial training to robustify deep neural networks at scale,” in *Uncertainty in Artificial Intelligence*. PMLR, 2022, pp. 2353–2363. 1
- [12] Yihua Zhang, Pranay Sharma, Parikshit Ram, Mingyi Hong, Kush Varshney, and Sijia Liu, “What is missing in irm training and evaluation? challenges and solutions,” *arXiv preprint arXiv:2303.02343*, 2023. 1
- [13] Yihua Zhang, Prashant Khanduri, Ioannis Tsaknakis, Yuguang Yao, Mingyi Hong, and Sijia Liu, “An introduction to bilevel optimization: Foundations and applications in signal processing and machine learning,” *IEEE Signal Processing Magazine*, vol. 41, no. 1, pp. 38–59, 2024. 1
- [14] Guanhua Zhang, Yihua Zhang, Yang Zhang, Wenqi Fan, Qing Li, Sijia Liu, and Shiyu Chang, “Fairness reprogramming,” *Advances in Neural Information Processing Systems*, vol. 35, pp. 34347–34362, 2022. 1
- [15] Bairu Hou, Jinghan Jia, Yihua Zhang, Guanhua Zhang, Yang Zhang, Sijia Liu, and Shiyu Chang, “Textgrad: Advancing robustness evaluation in nlp by gradient-driven optimization,” *arXiv preprint arXiv:2212.09254*, 2022. 1
- [16] Haomin Zhuang, Yihua Zhang, and Sijia Liu, “A pilot study of query-free adversarial attack against stable diffusion,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023, pp. 2384–2391. 1
- [17] Prashant Khanduri, Ioannis Tsaknakis, Yihua Zhang, Jia Liu, Sijia Liu, Jiawei Zhang, and Mingyi Hong, “Linearly constrained bilevel optimization: A smoothed implicit gradient approach,” in *International Conference on Machine Learning*. PMLR, 2023, pp. 16291–16325. 1
- [18] Yimeng Zhang, Jinghan Jia, Xin Chen, Aochuan Chen, Yihua Zhang, Jiancheng Liu, Ke Ding, and Sijia Liu, “To generate or not? safety-driven unlearned diffusion models are still easy to generate unsafe images... for now,” *arXiv preprint arXiv:2310.11868*, 2023. 1
- [19] Yihua Zhang, Yimeng Zhang, Yuguang Yao, Jinghan Jia, Jiancheng Liu, Xiaoming Liu, and Sijia Liu, “Un-

- learncanvas: A stylized image dataset to benchmark machine unlearning for diffusion models,” *arXiv preprint arXiv:2402.11846*, 2024. 1
- [20] Yihua Zhang, Ruisi Cai, Tianlong Chen, Guanhua Zhang, Huan Zhang, Pin-Yu Chen, Shiyu Chang, Zhangyang Wang, and Sijia Liu, “Robust mixture-of-expert training for convolutional neural networks,” in *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023, pp. 90–101. 1
- [21] Yihua Zhang, Guanhua Zhang, Prashant Khanduri, Mingyi Hong, Shiyu Chang, and Sijia Liu, “Revisiting and advancing fast adversarial training through the lens of bi-level optimization,” in *International Conference on Machine Learning*. PMLR, 2022, pp. 26693–26712. 1
- [22] Tianlong Chen, Zhenyu Zhang, Yihua Zhang, Shiyu Chang, Sijia Liu, and Zhangyang Wang, “Quarantine: Sparsity can uncover the trojan attack trigger for free,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2022, pp. 598–609. 1
- [23] Aochuan Chen, Yuguang Yao, Pin-Yu Chen, Yihua Zhang, and Sijia Liu, “Understanding and improving visual prompting: A label-mapping perspective,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023, pp. 19133–19143. 1
- [24] Chongyu Fan, Jiancheng Liu, Yihua Zhang, Dennis Wei, Eric Wong, and Sijia Liu, “Salun: Empowering machine unlearning via gradient-based weight saliency in both image classification and generation,” *arXiv preprint arXiv:2310.12508*, 2023. 1
- [25] Yihua Zhang, Hongkang Li, Yuguang Yao, Aochuan Chen, Shuai Zhang, Pin-Yu Chen, Meng Wang, and Sijia Liu, “Visual prompting reimaged: The power of activation prompts,” 2023. 1
- [26] Yutian Chen, Max Welling, and Alex Smola, “Supersamples from kernel herding,” 2012. 1, 2
- [27] Yarin Gal, Riashat Islam, and Zoubin Ghahramani, “Deep bayesian active learning with image data,” 2017. 1, 2
- [28] Yanyao Shen, Hyokun Yun, Zachary C. Lipton, Yakov Kronrod, and Animashree Anandkumar, “Deep active learning for named entity recognition,” 2018. 1, 2
- [29] Mariya Toneva, Alessandro Sordani, Remi Tachet des Combes, Adam Trischler, Yoshua Bengio, and Geoffrey J. Gordon, “An empirical study of example forgetting during deep neural network learning,” 2019. 1, 2
- [30] Zalán Borsos, Mojmír Mutný, and Andreas Krause, “Coresets via bilevel optimization for continual learning and streaming,” 2020. 1, 2
- [31] Cody Coleman, Christopher Yeh, Stephen Mussmann, Baharan Mirzasoleiman, Peter Bailis, Percy Liang, Jure Leskovec, and Matei Zaharia, “Selection via proxy: Efficient data selection for deep learning,” 2020. 1, 2
- [32] Krishnateja Killamsetty, Durga Sivasubramanian, Ganesh Ramakrishnan, and Rishabh Iyer, “Glisten: Generalization based data subset selection for efficient and robust learning,” 2021. 1, 2
- [33] Krishnateja Killamsetty, Xujiang Zhao, Feng Chen, and Rishabh Iyer, “Retrieve: Coreset selection for efficient and robust semi-supervised learning,” 2021. 1, 2
- [34] Mansheej Paul, Surya Ganguli, and Gintare Karolina Dziugaite, “Deep learning on a data diet: Finding important examples early in training,” 2023. 1, 2
- [35] Xiaobo Xia, Jiale Liu, Jun Yu, Xu Shen, Bo Han, and Tongliang Liu, “Moderate coreset: A universal method of data selection for real-world data-efficient deep learning,” in *ICLR*, 2023. 1, 2
- [36] Jinghan Jia, Yihua Zhang, Dogyoon Song, Sijia Liu, and Alfred Hero, “Robustness-preserving lifelong learning via dataset condensation,” in *ICASSP 2023-2023 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2023, pp. 1–5. 1
- [37] Yihua Zhang, Yimeng Zhang, Aochuan Chen, Jiancheng Liu, Gaowen Liu, Mingyi Hong, Shiyu Chang, Sijia Liu, et al., “Selectivity drives productivity: Efficient dataset pruning for enhanced transfer learning,” *Advances in Neural Information Processing Systems*, vol. 36, 2024. 1
- [38] Yang Fan, Fei Tian, Tao Qin, Xiang-Yang Li, and Tie-Yan Liu, “Learning to teach,” 2018. 1, 2
- [39] Andrija Petrović, Mladen Nikolić, Sandro Radovanović, Boris Delibašić, and Miloš Jovanović, “Fair: Fair adversarial instance re-weighting,” 2020. 1, 2
- [40] Lijun Wu, Fei Tian, Yingce Xia, Yang Fan, Tao Qin, Jianhuang Lai, and Tie-Yan Liu, “Learning to teach with dynamic loss functions,” 2018. 1, 2
- [41] Heinrich Jiang and Ofir Nachum, “Identifying and correcting label bias in machine learning,” 2019. 1, 2
- [42] Sen Zhao, Mahdi Milani Fard, Harikrishna Narasimhan, and Maya Gupta, “Metric-optimized example weights,” 2019. 1, 2

- [43] Preethi Lahoti, Alex Beutel, Jilin Chen, Kang Lee, Flavien Prost, Nithum Thain, Xuezhi Wang, and Ed H. Chi, “Fairness without demographics through adversarially reweighted learning,” 2020. [1](#), [2](#)
- [44] Mengye Ren, Wenyuan Zeng, Bin Yang, and Raquel Urtasun, “Learning to reweight examples for robust deep learning,” 2019. [1](#), [2](#)
- [45] Shreyas Saxena, Oncel Tuzel, and Dennis DeCoste, “Data parameters: A new family of parameters for learning a differentiable curriculum,” *Advances in Neural Information Processing Systems*, vol. 32, 2019. [1](#), [2](#)
- [46] Nidhi Vyas, Shreyas Saxena, and Thomas Voice, “Learning soft labels via meta learning,” 2020. [1](#), [2](#)
- [47] Tsung-Yi Lin, Priya Goyal, Ross Girshick, Kaiming He, and Piotr Dollár, “Focal loss for dense object detection,” 2018. [1](#), [2](#)
- [48] Qi Dong, Shaogang Gong, and Xiatian Zhu, “Class rectification hard mining for imbalanced deep learning,” 2017. [1](#), [2](#)
- [49] Jun Shu, Qi Xie, Lixuan Yi, Qian Zhao, Sanping Zhou, Zongben Xu, and Deyu Meng, “Meta-weight-net: Learning an explicit mapping for sample weighting,” *NeurIPS*, vol. 32, 2019. [1](#), [2](#), [3](#)
- [50] Ozan Sener and Silvio Savarese, “Active learning for convolutional neural networks: A core-set approach,” 2018. [2](#)
- [51] Xiaobo Xia, Jiale Liu, Jun Yu, Xu Shen, Bo Han, and Tongliang Liu, “Moderate coreset: A universal method of data selection for real-world data-efficient deep learning,” in *ICLR*, 2023. [3](#)
- [52] Alex Krizhevsky and Geoffrey Hinton, “Learning multiple layers of features from tiny images,” 2009. [3](#)
- [53] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun, “Identity mappings in deep residual networks,” 2016. [3](#)
- [54] Sebastian Ruder, “An overview of gradient descent optimization algorithms,” 2016. [3](#)
- [55] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, Jakob Uszkoreit, and Neil Houlsby, “An image is worth 16x16 words: Transformers for image recognition at scale,” 2021. [3](#)