

NN-ETM: Enabling safe neural network-based event-triggering mechanisms for consensus problems [★]

Irene Perez-Salesa ^a, Rodrigo Aldana-Lopez ^a, Carlos Sagues ^a

^a*Departamento de Informatica e Ingenieria de Sistemas (DIIS) and Instituto de Investigacion en Ingenieria de Aragon (I3A), Universidad de Zaragoza, Maria de Luna 1, 50018 Zaragoza, Spain*

Abstract

In networked control applications, event-triggering mechanisms (ETMs) reduce the communication load while ensuring performance guarantees. However, the design of ETMs is becoming increasingly complex, particularly for decentralized multi-agent and consensus setups, where the condition used to trigger communication might incorporate the agent's local information and the information received from neighbors. This typically results in ad-hoc solutions, which may only work for the consensus protocols under consideration. In this work, we aim to safely incorporate neural networks in the ETM to provide a general and flexible solution while ensuring guaranteed performance. To decouple the stability analysis of the consensus protocol from the abstraction of the neural network in the ETM, we first derive design criteria for the consensus and ETM pair, which allow independent analysis of each element under mild constraints. As a result, we propose NN-ETM, a novel ETM featuring a neural network, which provides an all-purpose solution to optimize communication in consensus problems while preserving the stability guarantees of the consensus protocol.

Key words: Consensus; input-to-state stability; event-triggered communication; data-driven methods.

1 Introduction

Decentralized consensus problems have been widely studied in recent years due to their interest in multi-agent control and cooperation applications [21]. Generally, consensus algorithms require frequent communication amongst agents in order to achieve the desired performance, which can be prohibitive in resource-constrained networked control applications. To alleviate the communication load, event-triggering mechanisms (ETMs) have been proposed to reduce the number of necessary transmissions in networked and multi-agent systems, and their application to consensus problems has received considerable attention [3]. In event-triggered schemes, transmissions are only performed when a cer-

tain condition is complied with. This condition is carefully designed to ensure a performance guarantee for the algorithms despite the reduction in communication [23].

More recently, dynamic event-triggering mechanisms (DETM) have been developed, which incorporate an auxiliary dynamic variable to reduce the number of events further [9]. DETMs have been exploited in various control and estimation problems [7] and extended to multi-agent setups [6]. Particularly, several works consider the application of DETMs for static consensus problems [18], dynamic average consensus [8,25,31], leader-follower control [4,33], leaderless consensus control [12,34,2], and resilient consensus under attacks [17,11]. Note that, in a multi-agent setup, the amount of information each agent can exploit to construct a triggering condition is greater than in the single-agent case since the information shared by neighboring agents can also be used. This leads to an increasingly complex design of DETMs: the auxiliary variable's dynamics can depend jointly on the event-triggered error and the disagreement with neighbors, for example. Advantageously combining these pieces of information is not trivial, as can be observed in the referenced works. Moreover, the ETM design is typically tailor-made for a particular consensus algorithm, providing an ad-hoc solution that may not generalize well to other cases.

[★] This work was supported via projects PID2021-124137OB-I00 and TED2021-130224B-I00 funded by MCIN/AEI/10.13039/501100011033, by ERDF A way of making Europe and by the European Union NextGenerationEU/PRTR, by the Gobierno de Aragón under Project DGA T45-23R, by the Universidad de Zaragoza and Banco Santander, by the Consejo Nacional de Ciencia y Tecnología (CONACYT-México) grant 739841, and by Spanish grant FPU20/03134.

Email addresses: i.perez@unizar.es (Irene Perez-Salesa), rodrigo.aldana.lopez@gmail.com (Rodrigo Aldana-Lopez), csagues@unizar.es (Carlos Sagues).

Unlike hand-crafted approaches, data-driven methods such as Neural Networks (NNs) have been used to work around standard feature engineering in favor of automated design, achieving less conservative results. Its flexibility is currently being exploited for event-triggered control to learn complex system dynamics or optimal control policies [26]. A few works also address the problem of learning communication jointly with the control actions in multi-agent setups [13,27,28]. The main drawback of incorporating this kind of data-driven technique is the difficulty in providing stability guarantees for the setup due to the abstraction introduced by NNs.

In addition, there are reasons to advocate for more general frameworks in which solutions may be applied outside the concrete problems and assumptions for which they were designed. In this context, systems are often divided into interconnected elements that must work together in a control stack, so hierarchical approaches that decouple the design of each block can be beneficial [5,29]. Such a decoupled approach could also be of interest for event-triggered consensus, motivating a block-wise design strategy that complies with the requirements to ensure boundedness of the consensus error, regardless of the particular characteristics of each block.

Motivated by this discussion, we are interested in exploiting NNs in ETMs for consensus problems to take advantage of their flexibility and abstraction in contrast to ad-hoc designs. Moreover, we aim to incorporate them safely, providing guarantees of boundedness for the consensus error. To do so, we propose the following contributions. First, we derive consensus and ETM pair design criteria to ensure a bounded consensus error. These criteria allow separate analysis of each block under mild constraints, decoupling the design of one element from the other. Particularly, they allow us to analyze the input-to-state stability of the consensus error under an arbitrary ETM within a general class of triggers. Given that the stability analysis under this framework does not depend on the choice of ETM, we propose the NN-ETM, a novel ETM featuring a NN, which provides a general solution to optimize communication in consensus problems while preserving the stability of the consensus protocol.

Notation: Let the $n \times n$ identity matrix be denoted as \mathbf{I}_n and $\mathbf{1} = [1, \dots, 1]^\top$ for appropriate dimension. The operator $\|\bullet\|$ denotes the Euclidean norm. Let $\text{sign}(x) = 1$ if $x > 0$, $\text{sign}(x) = -1$ if $x < 0$ and $\text{sign}(0) = 0$ and let the element-wise application of this operator to vectors or matrices. Let \otimes denote the Kronecker product. We use the classes of functions $\mathcal{K}_\infty, \mathcal{KL}$ from [14, Page 144].

2 Problem Statement

Consider a network of N interconnected agents. The network is described by an undirected connected graph $\mathcal{G} = (\mathcal{V}, \mathcal{E})$, where the agents form the vertex set $\mathcal{V} = \{1, \dots, N\}$ and the edge set $\mathcal{E} \subseteq \mathcal{V} \times \mathcal{V}$ represents the communication links between agents. The network

topology is characterized by its adjacency matrix $\mathbf{A}_\mathcal{G}$, equivalently by its Laplacian $\mathbf{Q}_\mathcal{G} = \text{diag}(\mathbf{A}_\mathcal{G}\mathbf{1}) - \mathbf{A}_\mathcal{G}$ and incidence matrix $\mathbf{D}_\mathcal{G}$ complying $\mathbf{Q}_\mathcal{G} = \mathbf{D}_\mathcal{G}\mathbf{D}_\mathcal{G}^\top$. The neighbors of an arbitrary agent $i \in \mathcal{V}$ are denoted by $\mathcal{N}_i \subseteq \mathcal{V}$ and $\mathcal{N}'_i = \mathcal{N}_i \cup \{i\}$.

Several consensus solutions can be written in terms of differential equations of the form:

$$\dot{\mathbf{z}}_i(t) = \mathbf{f}_i(t, \mathbf{z}_i(t), \{\mathbf{m}_j(\mathbf{z}_j(t))\}_{j \in \mathcal{N}'_i}) \quad (1)$$

for each agent i and some appropriate $\mathbf{f}_i(\bullet)$, which may correspond to the actual dynamics of a physical system with state $\mathbf{z}_i(t) \in \mathbb{R}^n$, or the description of an iterative algorithm executed in a computing platform [5]. In (1), local interaction between agents occurs due to the terms $\{\mathbf{m}_j(\mathbf{z}_j(t))\}_{j \in \mathcal{N}'_i}$ which correspond to information that is communicated between neighbors, for some appropriate output message function $\mathbf{m}_j(\bullet)$. The goal for the agents is to reach an agreement as $\lim_{t \rightarrow \infty} \|\mathbf{z}_i(t) - \mathbf{z}_j(t)\| = 0, \forall i, j \in \mathcal{V}$. The simplest example is $\mathbf{f}_i(t, \mathbf{z}_i, \{\mathbf{m}_j(\bullet)\}_{j \in \mathcal{N}'_i}) = -\sum_{j \in \mathcal{N}_i} (\mathbf{z}_i - \mathbf{m}_j(\bullet))$ with $\mathbf{m}_j(\bullet) = (\bullet)$ resulting in the standard consensus iteration $\dot{\mathbf{z}}_i(t) = -\sum_{j \in \mathcal{N}_i} (\mathbf{z}_i(t) - \mathbf{z}_j(t))$.

In event-triggered consensus, each agent evaluates a local event-triggering condition to decide when to communicate with its neighbors. Thus, agent i only has access to $\mathbf{m}_j(\mathbf{z}_j(t)), j \in \mathcal{N}_i$ at event instants $t \in \{\tau_k^j\}_{k=0}^\infty$, with τ_k^j being the k th event triggered by agent j . In these conditions, (1) is replaced by:

$$\dot{\mathbf{z}}_i(t) = \mathbf{f}_i(t, \mathbf{z}_i(t), \{\mathbf{m}_j(\mathbf{z}_j(\tau_t^j))\}_{j \in \mathcal{N}'_i}) \quad (2)$$

where $\tau_t^j = \max\{\tau_k^j \leq t\}$ represents the last event triggered by agent j , in which it has broadcast its state.

In the following, we aim to design a NN-ETM for consensus problems. Note that the introduction of NNs typically hinders formal analysis, due to their high level of abstraction. Thus, we start by proposing some design criteria for the ETM and consensus pair, which allow to decouple the design for the ETM from the consensus protocol. This decoupling is necessary in order to analyze the stability of the consensus protocol under the ETM without relating it to the NN itself. Using the proposed criteria, we design and test the NN-ETM to ensure the boundedness of the consensus error.

3 Design Criteria for ETM in Consensus

3.1 Input-to-State Stability

Before introducing our framework to design the NN-ETM, recall the definition of input-to-state (practical) stability, adapted from [20]:

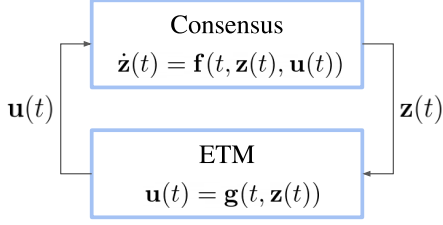


Fig. 1. The event-triggered consensus problem can be globally viewed as the interaction between two interconnected blocks. We derive design criteria for each block to ensure stability guarantees for the interconnection.

Definition 1 A system $\dot{\mathbf{x}}(t) = \mathbf{h}(t, \mathbf{x}(t), \mathbf{u}(t)) \in \mathbb{R}^n$ is said to be uniformly input-to-state practically stable (ISpS) with respect to the origin if there exist a class \mathcal{KL} function β , a class \mathcal{K}_∞ function γ and a constant c such that, for any initial state $\mathbf{x}(0)$ and bounded input $\mathbf{u}(t)$, the solution $\mathbf{x}(t)$ satisfies

$$\|\mathbf{x}(t)\| \leq \beta(\|\mathbf{x}(0)\|, t) + \gamma\left(\sup_{s \in [0, t]} \|\mathbf{u}(s)\|\right) + c \quad (3)$$

If the ISpS property holds for $c = 0$, then the system is input-to-state stable (ISS).

3.2 Interconnection of ISS consensus and ETM

Consider system (1) with continuous-time communication, in compact form as $\dot{\mathbf{z}}(t) = \mathbf{f}'(t, \mathbf{z}(t), \mathbf{m}(\mathbf{z}(t)))$ with the definitions $\mathbf{z}(t) = [\mathbf{z}_1(t)^\top, \dots, \mathbf{z}_N(t)^\top]^\top$, $\mathbf{m}(\mathbf{z}) = [\mathbf{m}_1(\mathbf{z}_1)^\top, \dots, \mathbf{m}_N(\mathbf{z}_N)^\top]^\top$ and appropriate $\mathbf{f}'(\bullet)$. Similarly, the event-triggered protocol (2) is expressed as:

$$\dot{\mathbf{z}}(t) = \mathbf{f}'(t, \mathbf{z}(t), \mathbf{m}(\mathbf{z}(t)) + \mathbf{u}(t)) =: \mathbf{f}(t, \mathbf{z}(t), \mathbf{u}(t)) \quad (4)$$

where $\mathbf{u}(t) = [\mathbf{u}_1(t)^\top, \dots, \mathbf{u}_N(t)^\top]^\top$ and $\mathbf{u}_j(t) = \mathbf{m}_j(\mathbf{z}_j(\tau_t^j)) - \mathbf{m}_j(\mathbf{z}_j(t))$ describes the mismatch between the current values of $\mathbf{m}_j(\mathbf{z}_j(t))$ and the actual transmitted information $\mathbf{m}_j(\mathbf{z}_j(\tau_t^j))$. Therefore, the combined effect of the ETMs at the agents is written as a block

$$\mathbf{u}(t) = \mathbf{g}(t, \mathbf{z}(t)) \quad (5)$$

for $\mathbf{g} = [\mathbf{g}_1^\top, \dots, \mathbf{g}_N^\top]^\top$, with $\mathbf{g}_j(t, \mathbf{z}(t)) = \mathbf{m}_j(\mathbf{z}_j(\tau_t^j)) - \mathbf{m}_j(\mathbf{z}_j(t))$. The interconnection of the blocks (4) and (5) is illustrated in Figure 1.

Given that the goal of the consensus protocol is to achieve agreement between the agents of the network, convergence is typically analyzed through the dynamics for the disagreement, which is given by

$$\dot{\mathbf{x}}(t) = \mathbf{h}(t, \mathbf{x}(t), \mathbf{u}(t)) := (\mathbf{H} \otimes \mathbf{I}_m) \dot{\mathbf{z}}(t) \quad (6)$$

where $\mathbf{H} = \mathbf{I}_N - (1/N)\mathbf{1}\mathbf{1}^\top$ is projection matrix in the space orthogonal to consensus. Note that $\mathbf{x}(t) = \mathbf{0}$ for

some $t \in \mathbb{R}$ means that consensus $\mathbf{z}_i(t) = \mathbf{z}_j(t)$ for all $i, j \in \mathcal{V}$ is complied for that instant.

In the following theorem, we summarize general design criteria for the ETM and consensus blocks in order to guarantee the boundedness of the consensus error under event-triggered communication. Subsequently, we provide additional results to show general cases of designs where these criteria can be complied with.

Theorem 1 (Design Criteria) Consider an event-triggered consensus protocol (4) with disagreement dynamics (6). Then, there exist $\xi \geq 0$ such that for all initial conditions $\mathbf{x}(0)$, the consensus error is bounded $\forall t \geq 0$ with $\limsup_{t \rightarrow \infty} \|\mathbf{x}(t)\| \leq \xi$, if the following design conditions are fulfilled:

- (i) The functions $\{\mathbf{f}_i, \mathbf{m}_i\}_{i \in \mathcal{V}}$ ensure existence of solutions of (1) for all $t \geq 0$.
- (ii) The ETM guarantees a minimum inter-event time.
- (iii) The disagreement dynamics (6) are ISpS.
- (iv) The disturbance $\mathbf{u}(t)$ produced by the ETM has a uniformly bounded Euclidean norm for all $t \geq 0$.

PROOF. First, we show that trajectories $\mathbf{x}(t)$ exist for all $t \geq 0$. Item (i) ensures the existence of solutions between events. Item (ii) ensures the absence of Zeno behavior, excluding an infinite amount of events to be triggered in a finite time interval, so that $\lim_{k \rightarrow \infty} \tau_k^i = \infty$ for all $i \in \mathcal{V}$ [32]. Hence, solutions of (6) exist $\forall t \geq 0$. Item (iii) implies $\limsup_{t \rightarrow \infty} \|\mathbf{x}(t)\| \leq \gamma(\sup_{t \geq 0} \|\mathbf{u}(t)\|) + c \leq \gamma(U) + c =: \xi$ with U being the uniform bound of $\|\mathbf{u}(t)\|$ from item (iv), completing the proof.

Notice that items (i) and (iii) in Theorem 1 relate to the design of the consensus protocol, while items (ii) and (iv) are restrictions for the design of the ETM. Particularly, note that item (iii) implies that the consensus protocol can be analyzed with respect to a generic communication disturbance, without assuming a particular ETM. This provides freedom to introduce data-driven techniques such as NNs in the ETM under some mild constraints (namely, the boundedness of $\mathbf{u}(t)$), without hindering formal analysis of the consensus protocol. These requirements can be relaxed for concrete choices of consensus protocols and ETMs. In the following proposition, we study the standard ETM choice:

$$\tau_{k+1}^i = \inf\{t > \tau_k^i : \|\mathbf{m}_i(\mathbf{z}_i(t)) - \mathbf{m}_i(\mathbf{z}_i(\tau_k^i))\| \geq \delta(t)\} \quad (7)$$

where $\delta(t) \geq 0$ may have additional dynamics. Item (iv) of Theorem 1 can be relaxed as follows.

Proposition 1 (Performance of the ETM in (7)) Consider a consensus protocol (4) complying items (i) and (iii) in Theorem 1. Then, solutions to (6) fulfill:

$$\|\mathbf{x}(t)\| \leq \beta(\|\mathbf{x}(0)\|, t) + \gamma'\left(\sup_{s \in [0, t]} \delta(s)\right) + c \quad (8)$$

for all t in which the trajectory $\mathbf{x}(t)$ exist, for some $\beta \in \mathcal{KL}$, $\gamma' \in \mathcal{K}_\infty$. Moreover, if (6) is ISS, $\lim_{t \rightarrow \infty} \delta(t) = 0$, and $\mathbf{x}(t)$ exist for all $t \geq 0$, then $\lim_{t \rightarrow \infty} \|\mathbf{x}(t)\| = 0$.

PROOF. The design of the ETM in (7) ensures $\|\mathbf{u}_i(t)\| = \|\mathbf{m}_i(\mathbf{z}_i(t)) - \mathbf{m}_i(\mathbf{z}_i(\tau_k^i))\| \leq \delta(t)$ for all t in which solutions exist and therefore $\|\mathbf{u}(t)\| \leq \sqrt{N}\delta(t)$. Moreover, note that the ISpS property in (3) is complied, from which (8) follows by picking $\gamma'(\bullet) := \gamma(\sqrt{N}\bullet)$. For the last part of the proposition, recall that ISS implies that $c = 0$ in (3) and (8), so that the steady-state consensus error is uniquely determined by the input. As a result, if solutions exist for all $t \geq 0$, then $\lim_{t \rightarrow \infty} \|\mathbf{x}(t)\| \leq \gamma'(\lim_{t \rightarrow \infty} \delta(t)) = 0$ if $\lim_{t \rightarrow \infty} \delta(t) = 0$, completing the proof.

As mentioned in the previous result, convergence may only occur if solutions exist for all $t \geq 0$, which is only prevented if Zeno behavior occurs. For this purpose, the following result establishes the existence of a minimum inter-event time for (7) under very mild conditions:

Proposition 2 (Minimum inter-event time for (7))
Let the consensus protocol (2) with ETM in (7) under the following conditions:

- (i) Items (i) and (iii) in Theorem 1 are complied.
- (ii) The functions $\mathbf{f}_i(\bullet)$ have bounded outputs and $\mathbf{m}_i(\bullet)$ are differentiable for all values of the arguments for all $i \in \mathcal{V}$.
- (iii) There exist $0 < \underline{\delta} \leq \bar{\delta}$ such that $\delta(t) \in [\underline{\delta}, \bar{\delta}]$, $\forall t \geq 0$.
- (iv) For every initial condition of (2), there exist $\bar{Z} > 0$ such that the consensus trajectory $\bar{\mathbf{z}}(t) = (1/N) \sum_{i=1}^N \mathbf{z}_i(t)$ satisfy $\|\bar{\mathbf{z}}(t)\| \leq \bar{Z}$ for all t in which $\bar{\mathbf{z}}(t)$ exist.

Then, every trajectory of (2) exist for all $t \geq 0$, and for each trajectory there exist $\tau > 0$ such that $\tau_{k+1}^i - \tau_k^i \geq \tau$ for all $i \in \mathcal{V}, k \geq 0$.

PROOF. Let a trajectory of (2) along with the trigger (7) for arbitrary initial conditions. Let $T \in \mathbb{R} \cup \{\infty\}$ be the greatest possible time such that $\mathbf{x}(t)$ exist for all $t \in [0, T)$. Henceforth, Theorem 1 is used as well as the arguments in the first part of the proof of Proposition 1 to conclude that $\mathbf{x}(t)$ complies with the bound (8) for all $t \in [0, T)$. Moreover, set $X := \beta(\|\mathbf{x}(0)\|, 0) + \gamma'(\bar{\delta}) + c$ so that $\|\mathbf{x}(t)\| \leq X$ for all $t \in [0, T)$. Define $\mathbf{p}(t) := \mathbf{m}(\mathbf{z}(t))$ and note that $\mathbf{z}(t) = (\mathbf{1} \otimes \mathbf{I}_m)\bar{\mathbf{z}}(t) + \mathbf{x}(t)$. Henceforth,

$$\dot{\mathbf{p}}(t) = \frac{\partial \mathbf{m}}{\partial \mathbf{z}}((\mathbf{1} \otimes \mathbf{I}_m)\dot{\bar{\mathbf{z}}}(t) + \dot{\mathbf{x}}(t)) =: \mathbf{q}(t, \bar{\mathbf{z}}(t), \mathbf{x}(t))$$

where $\mathbf{q}(\bullet)$ is obtained from the dynamics of $\bar{\mathbf{z}}(t)$ and $\mathbf{x}(t)$ directly from (2). Note that $\mathbf{q}(\bullet)$ is bounded due to item (ii). Moreover, the uniform bound for $\|\mathbf{x}(t)\|$ obtained before in conjunction with the uniform bound

for $\|\bar{\mathbf{z}}(t)\|$ in item (iv) allows to ensure the existence of $Q = \sup\{\mathbf{q}(t, \bar{\mathbf{z}}, \mathbf{x}) : t \in [0, T), \|\bar{\mathbf{z}}\| \leq \bar{Z}, \|\mathbf{x}\| \leq X\}$ such that $\|\dot{\mathbf{p}}(t)\| \leq Q$ for all $t \in [0, T)$. Note that Q depends on the particular trajectory of the system. Integrating over an arbitrary $[\tau_k^i, t] \subset [0, T)$, $\mathbf{p}(t) - \mathbf{p}(\tau_k^i) = \int_{\tau_k^i}^t r(s, \bar{\mathbf{z}}(s), \mathbf{x}(s))ds$. Moreover, note that

$$\begin{aligned} \|\mathbf{m}_i(\mathbf{z}_i(t)) - \mathbf{m}_i(\mathbf{z}_i(\tau_k^i))\| &\leq \|\mathbf{m}(\mathbf{z}(t)) - \mathbf{m}(\mathbf{z}(\tau_k^i))\| \\ &= \|\mathbf{p}(t) - \mathbf{p}(\tau_k^i)\| \leq Q(t - \tau_k^i) < \underline{\delta} \leq \delta(t) \end{aligned}$$

for all $t \in [\tau_k^i, \tau_k^i + \tau]$ with $\tau = \underline{\delta}/Q > 0$. Therefore, $\tau_{k+1}^i \geq \tau_k^i + \tau$, which implies $\lim_{k \rightarrow \infty} \tau_k^i = T = \infty$ for all $i \in \mathcal{V}$, completing the proof.

Given the decoupled design conditions for the ETM and the consensus protocol, we are now ready to introduce our proposal for a NN-ETM.

4 NN-ETM: Neural Network-Based Event-Triggering Mechanism

4.1 NN-ETM Structure

We propose that each agent i decide its own event instants according to the ETM (7) in conjunction with:

$$\delta(t) = \sigma \eta_i(t) + \varepsilon \quad (9)$$

where the variable $\eta_i(t) \in [0, 1]$ is determined by a local NN, such that an appropriate form of the trigger is learned from data, aiming to optimize the behavior of the setup according to a certain cost function. The parameters $\sigma \geq 0, \varepsilon > 0$ are user-defined constants. We refer to this strategy as NN-ETM. The NN-ETM fulfills item (iv) of Theorem 1 by construction. Besides, item (ii) for the avoidance of Zeno behavior, is complied due to Proposition 2 by setting $\bar{\delta} = \sigma + \varepsilon$ and $\underline{\delta} = \varepsilon$. Then, due to Theorem 1, this ETM design is admissible, independent of the consensus protocol.

Therefore, the NN-ETM can be used alongside any consensus protocol that fulfills the ISpS requirement (iii), providing a generic solution to achieve a bounded consensus error with performance guarantees of the form (8). Additionally, depending on the NN architecture and training, different behaviors may be learned for $\eta_i(t)$.

4.2 Neural Network Architecture

We set $\eta_i(t)$ as the output of a NN, defining a nonlinear map between input information located at agent $i \in \mathcal{V}$ to the interval $[0, 1]$. To specify such input information, we distinguish between:

- **Local data:** Agent i 's local variable $\{\mathbf{z}_i(t') \mid t' \in [0, t]\}$, its sequence of events $\tau_0^i, \tau_1^i, \dots, \tau_t^i$ and the transmitted information $\{\mathbf{z}_i(\tau_k^i) \mid \tau_k^i < t\}$.

- **Data from neighbors:** The number of neighbors $|\mathcal{N}_i|$, their sequence of events $\tau_0^j, \tau_1^j, \dots, \tau_t^j$ and the received information $\{\mathbf{z}_j(\tau_k^j) \mid j \in \mathcal{N}_i, \tau_k^j < t\}$.

These two pieces of information are the only ones that each agent can use to maintain a distributed solution. Under the proposed framework, there is freedom of design for the internal details of the NN architecture. As an illustrative example, the numerical experiments of Section 7 use a multi-layer perceptron. However, other architectures are possible. Additionally, such general structure of the NN-ETM subsumes different ETMs in the literature: (i) Learning a fixed value of $\eta_i(t)$ regardless of the input would be equivalent to a fixed threshold approach. (ii) Recurrent neural NNs can emulate a DETM since the internal state held by these networks resembles the behavior of the auxiliary dynamics in DETMs.

5 ISS Consensus

Regarding the design requirement for the consensus protocol given in item (iii) of Theorem 1, note that it does not depend on the particular choice of ETM. This is, the stability of the consensus error can be analyzed with respect to a communication disturbance $\mathbf{u}(t)$, without assuming a certain ETM. Thus, this enables the analysis of consensus protocols under complex triggering conditions, possibly including data-driven techniques like the neural network in our NN-ETM. In the following, we present two cases of such analysis, with different choices of $\mathbf{f}_i, \mathbf{m}_j$ for linear and nonlinear protocols in the literature, adapted to event-triggered communication.

5.1 Case I: ISpS Linear Consensus

Consider a linear dynamic consensus algorithm [16], adapted to event-triggered communication:

$$\dot{z}_i(t) = \dot{r}_i(t) - \kappa \sum_{j \in \mathcal{N}_i} (z_i(\tau_t^i) - z_j(\tau_t^j)) \quad (10)$$

where $n = 1$, $\mathbf{m}_i(\bullet) = (\bullet)$, $r_i(t) \in \mathbb{R}$ is a local reference signal for agent i . To obtain an ISpS, write

$$\dot{z}_i(t) = \dot{r}_i(t) - \kappa \sum_{j \in \mathcal{N}_i} (z_i(t) + u_i(t) - z_j(t) - u_j(t))$$

with $u_i(t) = z_i(\tau_t^i) - z_i(t)$. Set $\mathbf{r}(t) = [r_1(t), \dots, r_N(t)]^\top$, and write (4) in vector form as:

$$\dot{\mathbf{z}}(t) = \mathbf{f}(t, \mathbf{z}(t), \mathbf{u}(t)) = \dot{\mathbf{r}}(t) - \kappa \mathbf{Q}_G \mathbf{z}(t) - \kappa \mathbf{Q}_G \mathbf{u}(t)$$

Then, recalling that $\mathbf{x}(t) = \mathbf{H}\mathbf{z}(t)$ and $\mathbf{H}\mathbf{Q}_G = \mathbf{Q}_G$, the dynamics for the disagreement as in (6) are given by

$$\begin{aligned} \dot{\mathbf{x}}(t) &= \mathbf{h}(t, \mathbf{x}(t), \mathbf{u}(t)) = \mathbf{H}\dot{\mathbf{z}}(t) \\ &= \mathbf{H}\dot{\mathbf{r}}(t) - \kappa \mathbf{Q}_G \mathbf{x}(t) - \kappa \mathbf{Q}_G \mathbf{u}(t) \end{aligned} \quad (11)$$

Theorem 2 Assume that $|\dot{r}_i(t)| \leq R, \forall t \geq 0$, for some $R \geq 0$. Then, the disagreement dynamics (11) are ISpS.

PROOF. It can be verified that the disagreement's dynamics have the following explicit solution:

$$\begin{aligned} \mathbf{x}(t) &= \exp(-\kappa \mathbf{Q}_G t) \mathbf{x}(0) \\ &+ \int_0^t \exp(-\kappa \mathbf{Q}_G s) (\mathbf{H}\dot{\mathbf{r}}(t-s) - \kappa \mathbf{Q}_G \mathbf{u}(t-s)) ds \end{aligned}$$

Since $\mathbf{x}(t) = \mathbf{H}\mathbf{z}(t) = \mathbf{H}\mathbf{x}(t)$ due to $\mathbf{H} = \mathbf{H}^2$, then:

$$\begin{aligned} \|\mathbf{x}(t)\| &\leq \|\mathbf{H} \exp(-\kappa \mathbf{Q}_G t) \mathbf{x}(0)\| \\ &+ \int_0^t \|\mathbf{H} \exp(-\kappa \mathbf{Q}_G s) (\mathbf{H}\dot{\mathbf{r}}(t-s) - \kappa \mathbf{Q}_G \mathbf{u}(t-s))\| ds \end{aligned}$$

For the first term, we have that

$$\begin{aligned} \|\mathbf{H} \exp(-\kappa \mathbf{Q}_G t) \mathbf{x}(0)\| &\leq \lambda_{\max}(\mathbf{H} \exp(-\kappa \mathbf{Q}_G t)) \|\mathbf{x}(0)\| \\ &= \exp(-\kappa \lambda_2(\mathcal{G})t) \|\mathbf{x}(0)\| =: \beta(\|\mathbf{x}(0)\|, t) \end{aligned}$$

where $\lambda_{\max}(\bullet)$ represents the largest eigenvalue of a matrix and $\lambda_2(\mathbf{Q}_G)$ denotes the algebraic connectivity of the graph, given by the smallest non-zero eigenvalue of \mathbf{Q}_G . Moreover, for the second term, we have

$$\begin{aligned} &\int_0^t \|\mathbf{H} \exp(-\kappa \mathbf{Q}_G s) (\mathbf{H}\dot{\mathbf{r}}(t-s) - \kappa \mathbf{Q}_G \mathbf{u}(t-s))\| ds \\ &\leq \sup_{s \in [0, t]} \|\dot{\mathbf{r}}(s)\| \int_0^t \|\mathbf{H} \exp(-\kappa \mathbf{Q}_G s) \mathbf{H}\| ds \\ &\quad + \kappa \lambda_{\max}(\mathbf{Q}_G) \sup_{s \in [0, t]} \|\mathbf{u}(s)\| \int_0^t \|\mathbf{H} \exp(-\kappa \mathbf{Q}_G s) \mathbf{H}\| ds \\ &\leq \frac{1}{\kappa \lambda_2(\mathcal{G})} (1 - \exp(-\kappa \lambda_2(\mathcal{G})t)) \left(\sup_{s \in [0, t]} \|\dot{\mathbf{r}}(s)\| \right. \\ &\quad \left. + \kappa \lambda_{\max}(\mathbf{Q}_G) \sup_{s \in [0, t]} \|\mathbf{u}(s)\| \right) \\ &\leq \frac{1}{\kappa \lambda_2(\mathcal{G})} \left(\sup_{s \in [0, t]} \|\dot{\mathbf{r}}(s)\| + \kappa \lambda_{\max}(\mathbf{Q}_G) \sup_{s \in [0, t]} \|\mathbf{u}(s)\| \right) \end{aligned}$$

Henceforth, it follows that:

$$\gamma \left(\sup_{s \in [0, t]} \|\mathbf{u}(s)\| \right) := \frac{\lambda_{\max}(\mathbf{Q}_G)}{\lambda_2(\mathcal{G})} \sup_{s \in [0, t]} \|\mathbf{u}(s)\|$$

Finally, $\|\dot{\mathbf{r}}(t)\| \leq \sqrt{N}R$ is complied by assumption. Hence, (3) follows with $c := \sqrt{N}R/(\kappa \lambda_2(\mathcal{G}))$.

5.2 Case II: ISS Nonlinear Consensus

Consider the following nonlinear consensus protocol using m th order sliding modes from [1]. Here, we set $n = m + 1$, $\mathbf{z}_i(t) = [z_{i,0}(t), \dots, z_{i,m}(t)]^\top$, $\mathbf{m}_i(\mathbf{z}_i) = z_{i,0}$. While [1] considers continuous-time communication,

here we consider event-triggered communication:

$$\begin{aligned} \dot{z}_{i,\mu}(t) &= z_{i,\mu+1}(t) - k_\mu \sum_{j \in \mathcal{N}_i} \left[z_{i,0}(\tau_t^i) - z_{j,0}(\tau_t^j) \right]^{\frac{m-\mu}{m+1}} \\ &\quad \text{for } 0 \leq \mu < m \\ \dot{z}_{i,m}(t) &= r_i^{(m+1)}(t) - k_m \sum_{j \in \mathcal{N}_i} \left[z_{i,0}(\tau_t^i) - z_{j,0}(\tau_t^j) \right]^0 \end{aligned} \quad (12)$$

for appropriate design parameters $\{k_\mu\}_{\mu=0}^m$. Here, $r_i(t)$ is a reference signal for agent i . Moreover, $[x]^\alpha := |x|^\alpha \text{sign}(x)$ for $\alpha > 0$ and $[x]^0 := \text{sign}(x)$.

Similarly as before, we write (12) in terms of a disturbed version of the ideal system with continuous time communication. Hence, write the system in vector form as:

$$\begin{aligned} \dot{\mathbf{z}}_\mu(t) &= \mathbf{z}_{\mu+1}(t) - k_\mu \mathbf{D}_G \left[\mathbf{D}_G^\top (\mathbf{z}_0(t) + \mathbf{u}(t)) \right]^{\frac{m-\mu}{m+1}} \\ \dot{\mathbf{z}}_m(t) &= \mathbf{r}^{(m+1)}(t) - k_m \mathbf{D}_G \left[\mathbf{D}_G^\top (\mathbf{z}_0(t) + \mathbf{u}(t)) \right]^0 \end{aligned}$$

with $\mathbf{z}_\mu(t) = [z_{1,\mu}(t), \dots, z_{N,\mu}(t)]^\top$ and $\mathbf{u}(t)$ with $u_i(t) = z_{i,0}(\tau_t^i) - z_{i,0}(t)$. As in [1], since $\mathbf{D}_G^\top \mathbf{H} = \mathbf{D}_G^\top$, it can be verified that the disagreement dynamics $\dot{\mathbf{x}}_\mu(t) = \mathbf{H}\mathbf{z}_\mu(t)$ satisfy the differential inclusion

$$\begin{aligned} \dot{\mathbf{x}}_\mu(t) &= \mathbf{x}_{\mu+1}(t) - k_\mu \mathbf{D}_G \left[\mathbf{D}_G^\top (\mathbf{x}_0(t) + \mathbf{u}(t)) \right]^{\frac{m-\mu}{m+1}} \\ \dot{\mathbf{x}}_m(t) &\in [-L, L]^N - k_m \mathbf{D}_G \left[\mathbf{D}_G^\top (\mathbf{x}_0(t) + \mathbf{u}(t)) \right]^0 \end{aligned} \quad (13)$$

Theorem 3 *Assume that there exist $R \geq 0$ such that $|r_i^{(m+1)}(t)| \leq R, \forall t \geq 0$. Set the parameters $\{k_\mu\}_{\mu=0}^m$ as in [1]. Then, the disagreement dynamics in (13) are ISS.*

PROOF. Given arbitrary bound $U \geq 0$ for $\|\mathbf{u}(t)\|$, the results from [1, Lemma 9] imply that the solutions of (13) for the system converge to the regions

$$\|\mathbf{x}_\mu(t)\| \leq c_\mu U^{\frac{m-\mu+1}{m+1}}$$

with constants $c_\mu \geq 0$, for $t \geq T(\mathbf{x}(0))$ and some finite time $T(\mathbf{x}(0)) \geq 0$. Therefore, we have that

$$\begin{aligned} \|\mathbf{x}(t)\| &\leq \sqrt{\sum_{\mu=0}^m c_\mu^2 U^{2\frac{m-\mu+1}{m+1}}} \\ &\leq \sqrt{N} \max_{0 \leq \mu \leq m} c_\mu U^{\frac{m-\mu+1}{m+1}} =: \gamma(U) \end{aligned}$$

for all $t \geq T(\mathbf{x}(0))$. Denote with $\mathbf{x}(t; \mathbf{x}(0))$ the solution of (13) given an initial condition $\mathbf{x}(0)$. Then, set the functions

$$\begin{aligned} B(x) &:= \sup\{\|\mathbf{x}(t; \mathbf{x}(0))\| : \|\mathbf{x}(0)\| = x, t \in [0, T(\mathbf{x}(0))]\} \\ \mathcal{T}(x) &:= \sup\{T(\mathbf{x}(0)) : \|\mathbf{x}(0)\| = x\} \end{aligned}$$

such that

$$\|\mathbf{x}(t)\| \leq B(\|\mathbf{x}(0)\|) \exp(\mathcal{T}(\|\mathbf{x}(0)\|) - t) =: \beta(\|\mathbf{x}(0)\|, t)$$

for all $t \in [0, T(\mathbf{x}(0))]$. Henceforth, the inequality (3) follows for this choice of γ, β for all $t \geq 0$, with $c := 0$, completing the proof.

Remark 1 *Besides complying with the ISpS property required in Theorem 1, the previously described Cases I and II for the problem of dynamic consensus also ensure item (i) in Theorem 1 as per the analysis in [16] and [1] respectively, for the case with continuous-time communication. Moreover, the same analysis in such works ensures item (iv) of Proposition 2 for the consensus trajectory is complied with in both cases under appropriate initialization. Therefore, either of the two protocols presented in this section used in conjunction with our NN-ETM will comply with all the design criteria in Section 3.2, ensuring predictable performance and stability guarantees.*

6 Discussion

While we have developed and applied the design criteria in Theorem 1 to design a safe NN-ETM, note that this framework applies to a wide range of works in the literature. In regards to producing a bounded disturbance $\mathbf{u}(t)$, designs similar to the ETM in Proposition 1 can provide this assurance, both for fixed-threshold [30,24], adaptive [19] or dynamic [8] approaches. In terms of the ISpS requirement for the consensus protocol, we have already shown detailed examples of fulfillment in the cases from Section 5. In addition, note that the ISpS result is achieved by other consensus protocols in the literature, under different ETMs, e.g. [18,25,30,15]. Even the cases of [8,19], which achieve asymptotic convergence to the desired value with their proposed ETMs, can be analyzed under this framework, noting that their event thresholds vanish over time and thus the perturbation caused by it does as well, recalling Proposition 1.

These examples serve not only to validate our proposed design criteria but also to highlight that they can be used to check that different combinations of ETMs and consensus protocols, not necessarily designed ad-hoc, can be connected while guaranteeing a bounded consensus error. Decoupling the conditions for each block facilitates the analysis of different combinations by checking their relevant requirements.

7 Experiments

We test our NN-ETM in simulation examples, and detail the training process and results. ¹

¹ Our code is available at: <https://github.com/ireneperezsalesa/NN-ETM/>

7.1 Setup

For our proof of concept, we have chosen a multi-layer perceptron architecture for the NN in the NN-ETM (9), in order to produce an adaptive threshold $\eta_i(t)$. This simple architecture is commonly used to approximate unknown functions and consists of an input and output layer, as well as one (or more) hidden layers. We have used ReLU activation functions for the non-output layers and a sigmoid activation at the output ensuring $\eta_i(t) \in [0, 1]$. As inputs to an agent’s NN, we have chosen its disagreement with respect to its neighbors, $\sum_{j \in \mathcal{N}_i} (\mathbf{z}_i(t) - \mathbf{z}_j(\tau_t^j))$, and the time since the last event triggered by the agent, $\Delta_i(t) = t - \tau_t^i$, so that $\eta_i(t)$ adapts accordingly to these values. For the other parameters in the ETM, we set $\sigma = 0.1$, $\varepsilon = 0.001$.

We have considered the dynamic average consensus protocol (10) from Case I in Section 5. Recall that we have shown that this protocol fulfills the ISpS requirement for the consensus error, and thus will guarantee a bounded error when connected to our NN-ETM. We have set the consensus gain $\kappa = 5$. In this consensus protocol, agents have access to a local reference signal. The goal for the agents is to reach agreement as $\mathbf{z}_i(t) = \bar{\mathbf{z}}(t) = (1/N) \sum_{i=1}^N \mathbf{z}_i(t)$. Such consensus trajectory will correspond to the average of the reference signals $(1/N) \sum_{i=1}^N r_i(t)$ by setting and appropriate initialization as $\sum_{i=1}^N \mathbf{z}_i(0) = 0$ [16]. In particular, for the reference signals we have chosen scalar sinusoidals $r_i(t) = a_i + \sin \omega_i t$, where a_i, ω_i are chosen at random in the ranges $[1, 5]$ and $[0, 1]$, respectively, so that agents have different signals.

7.2 Training the NN-ETM

To learn the weights inside the NN in the NN-ETM, we use the common approach of backpropagation, which computes the gradient of a cost function with respect to the NN’s parameters, in order to optimize them using gradient descent. To do so, we use Pytorch’s *autograd*, which allows the automatic computation of gradients [22]. The goal of the training process is to find network weights that minimize a cost function.

As summarized in Algorithm 1, the proposed NN-ETM is trained by running the event-triggered consensus algorithm over multiple simulations, computing a cost for the performance for each one, and performing the gradient backpropagation and weight update for the NN. We have repeated this process for several iterations (epochs) until a minimum for the cost function is reached, using the Adam optimizer with learning rate $5 \cdot 10^{-2}$.

Despite the theoretical advantages of a general NN, appropriately training such models requires several heuristics and strategies often used in the literature. In the following, we detail some relevant considerations we used

Algorithm 1 Training

- 1: Generate batch of sequences for agents’ local $r_i(t)$
 - 2: Set parameters σ, ε for (9)
 - 3: Load NN model and initialize weights
 - 4: Set optimizer and training configuration
 - 5: **for** each training epoch **do**
 - 6: cost $\leftarrow 0$
 - 7: **for** each sequence in the batch **do**
 - 8: Simulate (10) for $t \in [0, T]$ with current weights (using fuzzy ETM in Section 7.2.4)
 - 9: Compute cost \mathcal{J} (14) for the simulation
 - 10: cost \leftarrow cost + \mathcal{J}
 - 11: **end for**
 - 12: Update network weights using backpropagation
 - 13: **end for**
-

for the training process, which might be helpful for practitioners. Recall that the stability guarantees provided earlier are true regardless of this training procedure, which is only used to improve performance in terms of accuracy and network usage.

7.2.1 Parameter Sharing and Scalability

While each agent can have its own NN, with possibly different architecture and individual training, another interesting option in this work is that all agents have a copy of the same NN. This perspective is advantageous since the NN can be trained using a small number of agents and tested for scalability with a bigger number of agents when deployed. For this reason, we use *parameter sharing* [10] to train the network. This is, the NN for $\eta_i(t)$ shares the same weights for all agents $i \in \mathcal{V}$ during the training stage. The learning process is done using the experience of all agents involved. However, at the execution step, each agent can have a different behavior due to using its own local information as an input for the NN. We train the NN-ETM using a network of only $N = 2$ agents and then test it on a network with $N = 5$.

7.2.2 Generation of Agents’ Reference Signals

We generate a *batch* of sequences of reference signals prior to the training process, where each batch is of the form $\{r_i(t)\}_{i=1}^N, t \in \{0, h, 2h, \dots, T\}$. Here, $h > 0$ is a discretization step for the simulation, and $T > 0$ is the experiment length, as an integer multiple of h . We have generated a batch of 10 sequences of length $T = 10$, with sampling step $h = 10^{-3}$. Generating simulations of the algorithm, one for each sequence, over the whole batch and back-propagating using the resulting cost constitutes one training epoch.

7.2.3 Cost Function

In event-triggered consensus problems, there is an evident trade-off between the communication rate of the

agents and the overall performance of the consensus algorithm. Therefore, a balance needs to be found between the consensus error and communication load. For a given experiment of length T , let the mean square error \mathcal{E} of the consensus variables $\mathbf{z}_i(t)$ with respect to the average trajectory $\bar{\mathbf{z}}(t)$ and the communication rate \mathcal{C} be

$$\mathcal{E} = \frac{h}{NT} \sum_{i=1}^N \sum_{k=0}^{T/h} \|\bar{\mathbf{z}}(kh) - \mathbf{z}_i(kh)\|^2, \quad \mathcal{C} = \frac{h}{NT} \sum_{i=1}^N e_i$$

where e_i is the number of events triggered by agent i during $t \in [0, T]$ and h is the discretization step, given that the system needs to be simulated in a computer to train the network. Note that \mathcal{C} is normalized between 0, being no communication, and 1, representing communication at each step of the simulation. Moreover, note that some dynamic consensus algorithms have a non-zero steady-state error even when run at full communication (e.g. the linear consensus protocol from Case I in Section 3). Therefore, we take into account the relative error of the event-triggered implementation with respect to the full communication case, since the error cannot be optimized beyond a certain point. Denoting as \mathcal{E}_{fc} the error for the full communication case and \mathcal{E}_{ev} the event-triggered case, the relative error is given by $\mathcal{E}_r = (\mathcal{E}_{\text{ev}} - \mathcal{E}_{\text{fc}})/\mathcal{E}_{\text{fc}}$. Then, we design the cost function to be minimized by the NN as follows, describing the desired trade-off between error and communication:

$$\mathcal{J} = \mathcal{E}_r + \lambda \mathcal{C} \quad (14)$$

where $\lambda \geq 0$ is a user-defined parameter to assign relative weight to the error and communication costs. Increasing λ will prioritize reducing the communication load at the cost of a higher consensus error, and vice versa. We have repeated the training process for different values of λ , to validate the fact that the NN learns to adapt the behavior of the setup to different requirements of the error-vs-communication trade-off.

7.2.4 Fuzzy Event-Triggering Mechanism

Note that the training process relies on the computation of gradients, which requires the operations involved to be differentiable. The *if-else* event-triggering decision, however, is non-differentiable: it results in two separate information updates in case of triggering an event or not doing so. To overcome this issue, we *fuzzify* the ETM during the training stage. Consider a sigmoid function

$$\nu_i(t) = \text{sigmoid}(\alpha (\|\mathbf{z}_i(t) - \mathbf{z}_i(\tau_k^i)\| - \delta(t)))$$

where $\alpha \gg 1$ is a constant to make the sigmoid function steeper. If $\|\mathbf{z}_i(t) - \mathbf{z}_i(\tau_k^i)\| \geq \delta(t)$, an event should be triggered with $\nu_i(t) \approx 1$, and viceversa. Then, the information update for an arbitrary variable $\mathbf{v}(t)$, that takes a value $\mathbf{v}_{\text{event}}(t)$ if an event is triggered by agent i at

time t and $\mathbf{v}_{\text{no event}}(t)$ otherwise, can be approximated in a differentiable fashion as follows:

$$\mathbf{v}(t) \leftarrow \nu_i(t)\mathbf{v}_{\text{event}}(t) + (1 - \nu_i(t))\mathbf{v}_{\text{no event}}(t)$$

This approximation is only needed for the training process. At test time, the regular NN-ETM is used.

7.2.5 Weight Initialization

To facilitate convergence to an advantageous solution for the network's weights, we provide a suboptimal solution as the initial condition: a fixed event threshold. We achieve this by means of a pre-training process, in which the network learns to output $\eta_i(t) = 0.5$ at every step regardless of the input values. The pre-training also follows the process described in Algorithm 1, but a cost function that penalizes the difference of the outputs $\eta_i(t)$ with respect to the target value is used. Then, we use the weights learned at this stage as initialization when training for the correct cost function in (14).

7.3 Simulation Results

As described above, recall that we have trained the NN-ETM for a small network of $N = 2$ agents, using a training batch of 10 sequences of reference signals with length $T = 10$, as detailed in Section 7.1. To validate our training results and the scalability of the proposal, we now test the trained NN-ETM on a network of $N = 5$ agents over a new batch of 1000 sequences. Figure 2 summarizes the results of relative error \mathcal{E}_r and communication \mathcal{C} (computed as described in Section 7.2.3) for these simulations. It can be seen that the network is effectively trained to reduce communication according to the value of the weight λ in the cost function (14): higher values of λ cause a decrease in communication. In terms of the error, it is clear that for $\lambda = 0.001$ a smaller error is achieved, according to the usual trade-off between error and communication. For $\lambda = 1$, the optimization process for the NN weights has reached a solution where, even though communication is significantly reduced with respect to the case with $\lambda = 0.1$, the resulting error is similar.

To illustrate that the NN for $\eta_i(t)$ learns an adaptive behavior depending on the information available to each agent, we include in Figure 3 a simulation of the event-triggered consensus protocol and the evolution of $\eta_i(t)$ for each agent. Note that the value of $\eta_i(t)$ is different for each agent, even though they all use the same weights for the NN-ETM. This is, while all agents share the same decision policy (the trained NN-ETM), the resulting $\eta_i(t)$ depends on the local observations of each agent. Due to the sinusoidal shape of the signals, the evolution of $\eta_i(t)$ also behaves similarly, with agents increasing transmissions at some points and decreasing them at others.

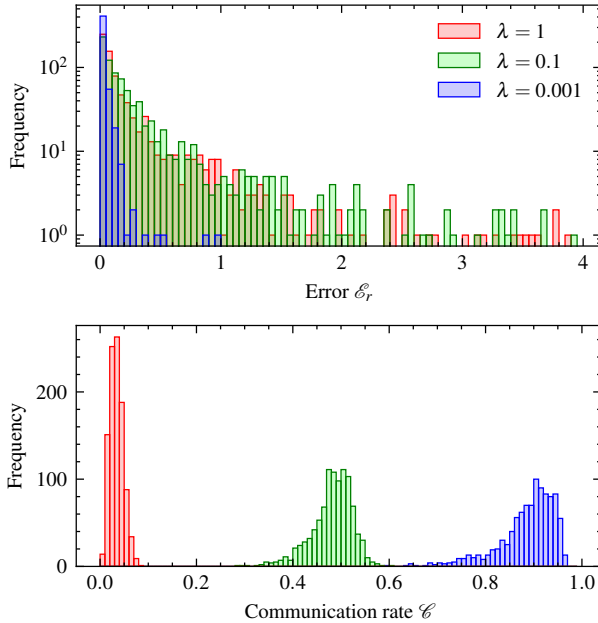


Fig. 2. Error \mathcal{E}_r and communication rate \mathcal{C} for NN-ETMs trained with different values of λ in the cost function. The parameter λ decides the trade-off between error and communication.

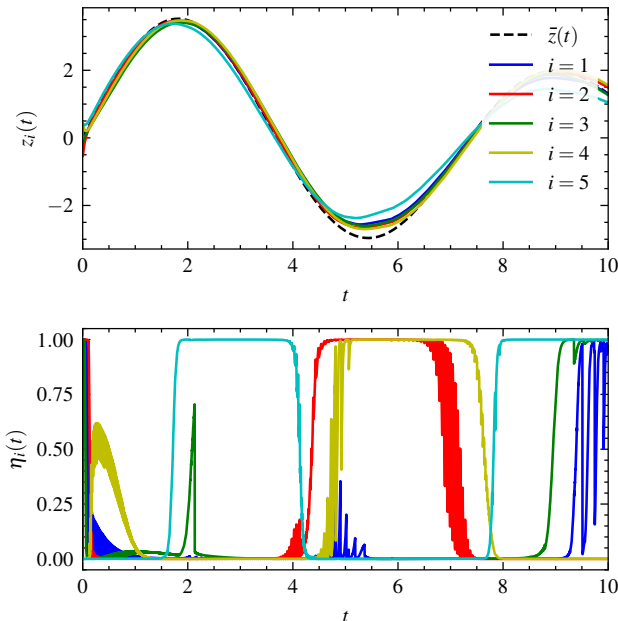


Fig. 3. Example of consensus simulation and evolution of the learned variable $\eta_i(t)$ in the NN-ETM for each of the agents $i \in \mathcal{V}$. Adaptive behavior of $\eta_i(t)$ is achieved, which depends on the local observations of each agent.

8 Conclusions

In this work, we have studied the problem of safely incorporating neural networks in ETMs for consensus problems. We have proposed design criteria for event-triggered consensus, which decouple the ETM and consensus protocol design as separate blocks under mild constraints. Under said constraints, namely that the disturbance caused by the ETM is bounded and that the consensus protocol is ISpS concerning communication disturbances, we proposed an all-purpose ETM optimized by a neural network. The NN-ETM exploits the advantages of neural networks, offering a flexible alternative to hand-crafted ETMs while providing guarantees of boundedness for the consensus error. We have tested the idea in a simple setup as a proof of concept. Optimizing the architecture and inputs for the neural network to improve performance is left as future work.

References

- [1] Rodrigo Aldana-López, Rosario Aragiés, and Carlos Sagiés. Distributed differentiation with noisy measurements for exact dynamic consensus. *IFAC-PapersOnLine*, 56(2):2038–2043, 2023.
- [2] Xiangyang Cao, Chenghui Zhang, Daduan Zhao, Bo Sun, and Yan Li. Event-triggered consensus control of continuous-time stochastic multi-agent systems. *Automatica*, 137:110022, 2022.
- [3] Lei Ding, Qing Long Han, Xiaohua Ge, and Xian Ming Zhang. An overview of recent advances in event-triggered consensus of multiagent systems. *IEEE Trans. Cybern.*, 48(4):1110–1123, 2018.
- [4] Sheng Li Du, Tao Liu, and Daniel W.C. Ho. Dynamic event-triggered control for leader-following consensus of multiagent systems. *IEEE Trans. Syst. Man Cybern.: Syst.*, 50(9):3243–3251, 2020.
- [5] Florian Dörfler, Zhiyu He, Giuseppe Belgioioso, Saverio Bolognani, John Lygeros, and Michael Muehlebach. Towards a systems theory of algorithms. *arXiv:2401.14029v1*, pages 1–11, 2024.
- [6] Xiaohua Ge, Qing-Long Han, Lei Ding, Yu-Long Wang, and Xian-Ming Zhang. Dynamic event-triggered distributed coordination control and its applications: A survey of trends and techniques. *IEEE Trans. Syst. Man Cybern.: Syst.*, 50(9):3112–3125, 2020.
- [7] Xiaohua Ge, Qing Long Han, Xian Ming Zhang, and Derui Ding. Dynamic event-triggered control and estimation: A survey. *Int. J. Autom. Comput.*, 18(6):857–886, 2021.
- [8] Jemin George, Xinlei Yi, and Tao Yang. Distributed robust dynamic average consensus with dynamic event-triggered communication. In *IEEE Conference on Decision and Control*, pages 434–439, 2018.
- [9] Antoine Girard. Dynamic triggering mechanisms for event-triggered control. *IEEE Trans. Autom. Control*, 60(7):1992–1997, 2015.
- [10] Jayesh K. Gupta, Maxim Egorov, and Mykel Kochenderfer. Cooperative multi-agent control using deep reinforcement learning. In Gita Sukthankar and Juan A. Rodriguez-Aguilar, editors, *Autonomous Agents and Multiagent Systems*, pages 66–83, Cham, 2017. Springer International Publishing.

- [11] Wangli He, Shifen Li, Xiaohua Ge, and Feng Qian. Secure fully distributed event-triggered consensus of multi-agent systems against distributed sequential scaling attacks. *IEEE Trans. Ind. Inf.*, 20(2):1764–1775, 2024.
- [12] Wenfeng Hu, Chunhua Yang, Tingwen Huang, and Weihua Gui. A distributed dynamic event-triggered control approach to consensus of linear multiagent systems with directed networks. *IEEE Trans. Cybern.*, 50(2):869–874, 2020.
- [13] Lukas Kesper, Sebastian Trimpe, and Dominik Baumann. Toward multi-agent reinforcement learning for distributed event-triggered control. *Proceedings of Machine Learning Research*, 211:1–14, 2023.
- [14] Hassan K Khalil. *Nonlinear Systems*. Prentice Hall, 3 edition, 2002.
- [15] Solmaz S. Kia, Jorge Cortés, and Sonia Martínez. Distributed event-triggered communication for dynamic average consensus in networked systems. *Automatica*, 59:112–119, 2015.
- [16] Solmaz S. Kia, Bryan Van Scoy, Jorge Cortes, Randy A. Freeman, Kevin M. Lynch, and Sonia Martinez. Tutorial on dynamic average consensus: The problem, its applications, and the algorithms. *IEEE Control Syst. Mag.*, 39(3):40–72, 2019.
- [17] Yuxin Lin, Yuqing Hao, Tao Xu, and Qingyun Wang. Dynamic event-based consensus of multi-agent systems with secure mode resilient to DoS attack. *Int. J. Robust Nonlinear Control*, 34(6):4363–4374, 2024.
- [18] Kaien Liu and Zhijian Ji. Dynamic event-triggered consensus of multi-agent systems under directed topology. *Int. J. Robust Nonlinear Control*, 33(8):4328–4344, 2023.
- [19] Xiangyu Meng, Lihua Xie, Yeng Chai Soh, Cameron Nowzari, and George J. Pappas. Periodic event-triggered average consensus over directed graphs. In *2015 54th IEEE Conference on Decision and Control*, pages 4151–4156, 2015.
- [20] Andrii Mironchenko. Criteria for input-to-state practical stability. *IEEE Trans. Autom. Control*, 64(1):298–304, 2019.
- [21] Reza Olfati-Saber, J. Alex Fax, and Richard M. Murray. Consensus and cooperation in networked multi-agent systems. *Proceedings of the IEEE*, 95(1):215–233, 2007.
- [22] Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, et al. Pytorch: An imperative style, high-performance deep learning library, 2019.
- [23] Chen Peng and Fuqiang Li. A survey on recent advances in event-triggered communication and control. *Inf. Sci.*, 457-458:113–125, 2018.
- [24] Irene Perez-Salesa, Rodrigo Aldana-Lopez, and Carlos Sagues. Precise dynamic consensus under event-triggered communication. *Machines*, 11(2), 2023.
- [25] Yangyang Qian, Yijing Xie, Zongli Lin, Yan Wan, and Yacov A. Shamash. Distributed dynamic event-triggered communication mechanisms for dynamic average consensus. In *IEEE Conference on Decision and Control*, pages 3890–3895, 2023.
- [26] Leila Sedghi, Zohaib Ijaz, Md Noor-A-Rahim, Kritchai Witheephanich, and Dirk Pesch. Machine learning in event-triggered control: Recent advances and open issues. *IEEE Access*, 10:74671–74690, 2022.
- [27] Kazuki Shibata, Tomohiko Jimbo, and Takamitsu Matsubara. Deep reinforcement learning of event-triggered communication and control for multi-agent cooperative transport. In *IEEE International Conference on Robotics and Automation*, pages 8671–8677, 2021.
- [28] Kazuki Shibata, Tomohiko Jimbo, and Takamitsu Matsubara. Deep reinforcement learning of event-triggered communication and consensus-based control for distributed cooperative transport. *Rob. Auton. Syst.*, 159:104307, 2023.
- [29] Xiangyu Wang, Yujing Xu, Yue Cao, and Shihua Li. A hierarchical design framework for distributed control of multi-agent systems. *Automatica*, 160:111402, 2024.
- [30] Lantao Xing, Qianwen Xu, Changyun Wen, Yu-Chu Tian, Yateendra Mishra, Gerard Ledwich, and Yongduan Song. Robust event-triggered dynamic average consensus against communication link failures with application to battery control. *IEEE Trans. Control Network Syst.*, 7(3):1559–1570, 2020.
- [31] Tao Xu, Zhisheng Duan, Guanghui Wen, and Zhiyong Sun. A novel dynamic event-triggered mechanism for dynamic average consensus. *Automatica*, 161:111495, 2024.
- [32] Hao Yu and Tongwen Chen. On zeno behavior in event-triggered finite-time consensus of multiagent systems. *IEEE Trans. Autom. Control*, 66(10):4700–4714, 2021.
- [33] Tianyong Zhang, Yong Xu, and Jian Sun. Dynamic event-triggered strategies for tracking control of directed multi-agent systems with lipschitz nonlinear dynamics. *Int. J. Robust Nonlinear Control*, 32(14):8147–8162, 2022.
- [34] Guanglei Zhao and Changchun Hua. A hybrid dynamic event-triggered approach to consensus of multiagent systems with external disturbances. *IEEE Trans. Autom. Control*, 66(7):3213–3220, 2021.