

Optimal and Adaptive Non-Stationary Dueling Bandits Under a Generalized Borda Criterion

Joe Suk
Columbia University
joe.suk@columbia.edu

Arpit Agarwal *
Columbia University
agarpit@outlook.com

Abstract

In dueling bandits, the learner receives preference feedback between arms, and the regret of an arm is defined in terms of its suboptimality to a *winner* arm. The more challenging and practically motivated *non-stationary* variant of dueling bandits, where preferences change over time, has been the focus of several recent works (Saha and Gupta, 2022; Buening and Saha, 2023; Suk and Agarwal, 2023). The goal is to design algorithms without foreknowledge of the amount of change.

The bulk of known results here studies the Condorcet winner setting, where an arm preferred over any other exists at all times. Yet, such a winner may not exist and, to contrast, the Borda version of this problem (which is always well-defined) has received little attention. In this work, we establish the first optimal and adaptive Borda dynamic regret upper bound, which highlights fundamental differences in the learnability of severe non-stationarity between Condorcet vs. Borda regret objectives in dueling bandits.

Surprisingly, our techniques for non-stationary Borda dueling bandits also yield improved rates within the Condorcet winner setting, and reveal new preference models where tighter notions of non-stationarity are adaptively learnable. This is accomplished through a novel *generalized Borda score* framework which unites the Borda and Condorcet problems, thus allowing reduction of Condorcet regret to a Borda-like task. Such a generalization was not previously known and is likely to be of independent interest.

Contents

1	Introduction	2
1.1	Summary of Contributions and Novelties	4
1.2	Additional Related Work	4
2	Setup – Non-stationary Dueling Bandits	5
3	Dynamic Regret Lower Bounds	6
4	Dynamic Regret Upper Bounds	6
4.1	Borda Dueling Bandits	6
4.2	Condorcet Dueling Bandits	7
5	A New Unified View of Condorcet and Borda Regret	9
6	Algorithmic Design	9
6.1	Base Algorithm – Soft Elimination with GBS	10
6.2	Non-Stationary Meta-Algorithm	10
7	Novelties in Condorcet Regret Analysis	12
8	Conclusion and Future Questions	12
A	Setting up Appendix and the Generalized Borda Problem	17
A.1	Summary of Results in Appendix for Generalized Borda Problem	17

*The author is currently at FAIR, Meta. Work done while the author was at Columbia University.

A.2	Generalized Notation Related to GBS	18
A.3	Significant Winner Switches w.r.t. Known Weights	18
A.4	Significant Winner Switches w.r.t. Unknown Weights	18
B	Regret Lower Bounds for GBS	19
B.1	Stationary Regret Lower Bound (Known Weight)	19
B.2	Hardness of Learning all Generalized Winners	21
B.3	Stationary Regret Lower Bound for Unknown Weight under GIC	22
C	Dynamic Regret Lower Bounds	24
C.1	Known Weight Setting	24
C.2	Unknown Weight Setting	25
D	Fixed Winner Regret Analysis	25
D.1	Preliminaries and Concentration Bounds for Estimation	25
D.2	Regret Upper Bound under Fixed Winner for Known Weight	27
D.3	Regret Upper Bound under Fixed Winner for Unknown Weight	28
E	Nonstationary Regret Analysis for Known Weights	29
E.1	Formal Statement of Results	29
E.2	Proof of Theorem 16	29
E.2.1	Episodes Align with SKW Phases	29
E.3	Decomposing the Regret	29
E.4	Bounding the per-Episode Regret of the Safe Arm	30
E.5	Bounding per-Episode Regret of Active Arms to Last Global Arm	30
E.6	Bounding per-Episode Regret of the Last Global Arm to the Last Safe Arm	34
E.7	Total Variation Regret Rates for Known Weights (Proof of Corollary 17)	37
F	Nonstationary Regret Analysis for Unknown Weights	38
F.1	Formal Statement of Results	38
F.2	Analysis Overview for Theorem 23	38
F.3	Episodes Align with SUW Phases	38
F.4	Generic Bad Segment Analysis	38
F.5	Decomposing the Regret Along Different Base Algorithms	40
F.6	Summing Regret Over Episodes	42
F.7	Proof Overview for Theorem 4	43

1 Introduction

The K -armed *dueling bandits* problem, where a learner relies on relative feedback between arms, has been well-studied within the multi-armed bandits literature (see [Sui et al., 2018](#); [Bengs et al., 2021](#), for surveys). This problem has many applications in domains such as information retrieval, recommendation systems, etc, where relative feedback is easy to elicit, while real-valued feedback is difficult to obtain or interpret. For example, the availability of implicit user feedback comparing the output of two information retrieval algorithms allows one to automatically tune the parameters of these algorithms using the framework of dueling bandits ([Radlinski et al., 2008](#); [Liu, 2009](#)).

Here, at round $t \in [T]$, the learner pulls a *pair* of arms and observes *relative feedback* between these arms indicating which was preferred. The feedback is drawn (stochastically) according to a pairwise preference matrix and the regret is measured in terms of the sub-optimality of arms with respect to a ‘winner’ arm. Unlike classical MAB, there are several different notions of winner arm that are considered in the pairwise setting, and the underlying theory depends on the notion of winner. Most early work in dueling bandits considered the *Condorcet winner* (CW) ([Urvoy et al., 2013](#); [Ailon et al., 2014](#); [Zoghi et al., 2014, 2015b](#); [Komiyama et al., 2015](#)) which is an arm that ‘stochastically beats’ every other arm. An alternative line of works focuses on the *Borda winner* (BW), an arm maximizing the probability of defeating a uniformly at random chosen comparator ([Urvoy et al., 2013](#); [Jamieson et al., 2015](#); [Ramamohan et al., 2016](#); [Falahatgar](#)

et al., 2017; Lin and Lu, 2018; Heckel et al., 2018; Saha et al., 2021). Both Borda and Condorcet carry their own notions of suboptimality gap and thus regret.

In this work, we study both the Condorcet and Borda formulations of dueling bandits. Each has its advantages and disadvantages. For instance, while the Condorcet winner may not exist, the Borda winner always exists. On the other hand, the Borda winner may not satisfy the *independence of clones* property (Schulze, 2011). More broadly, the celebrated Arrow’s impossibility theorem from social choice theory (Arrow, 1950) asserts that no notion of winner satisfies all “reasonable” axiomatic requirements.

Our focus in this work is on the more challenging *non-stationary* dueling bandits where preferences may change over time. Saha and Gupta (2022) first studied this problem and provided an algorithm that achieves a nearly optimal *Condorcet dynamic regret*¹ of $\tilde{O}(\sqrt{KLT})$, where L is the total number of changes in the preference matrix. However, this algorithm is not *adaptive*, i.e., requires knowledge of L . Moreover, the dependence on L is pessimistic, as L may count insignificant changes which do not properly capture the difficulty of non-stationarity. For example, if preferences change often, but a winner arm is fixed, one expects a faster rate of \sqrt{KT} .

In fact, an analogous insight was first made in the non-stationary MAB literature (Suk and Kpotufe, 2022; Abbasi-Yadkori et al., 2023). The latter work proposes a notion of *significant shifts* which tightly capture the changes in winner arm which are detrimental to performance. Following suit, Buening and Saha (2023) proposes a notion of *significant Condorcet winner switches* and, under the classical $\text{SST} \cap \text{STI}$ condition, achieves an adaptive dynamic regret bound of $\tilde{O}(K\sqrt{\tilde{L}T})$ in terms of \tilde{L} such switches. This $\text{SST} \cap \text{STI}$ condition roughly states that there is a linear ordering on arms which enforces monotonicity and transitivity conditions on the mean pairwise preferences.

While $\text{SST} \cap \text{STI}$ is well-studied in earlier dueling bandit works (Yue and Joachims, 2011; Yue et al., 2012a), it is arguably unrealistic as pairwise preferences may not even be ordered in applications (e.g., cyclic preferences in a tournament). Despite this, a followup work proved a lower bound asserting the $\text{SST} \cap \text{STI}$ condition is necessary to attain even sublinear regret in the absence of significant CW switches (Suk and Agarwal, 2023).

Outside of $\text{SST} \cap \text{STI}$, the story is less resolved: the earlier mentioned work (Buening and Saha, 2023) in fact also shows, outside of $\text{SST} \cap \text{STI}$, a dynamic regret upper bound of $\tilde{O}(K\sqrt{ST})$ in terms of the coarser count $S \geq \tilde{L}$ of total Condorcet Winner switches. However, it is unclear if the dependence on K in this regret rate is optimal and also whether an *intermediate notion of significant non-stationarity* (say, counting between \tilde{L} and S switches in CW) can be learned adaptively. This leads to the first question which our paper addresses.

Question #1. *Can we learn other notions of significant CW switches in the Condorcet dueling bandit problem and improve upon the $K\sqrt{ST}$ regret rate?*

Next, as alluded earlier, a more fundamental issue with the discussion up to this point is that the Condorcet winner may not always exist. In the companion non-stationary Borda dueling bandit problem, where one aims to minimize a Borda version of dynamic regret, the only known work is Saha and Gupta (2022). However, their only dynamic regret upper bound is non-adaptive, requiring parameter knowledge of non-stationarity, and is furthermore suboptimal in light of our lower bound (Theorem 9).

At the same time, the earlier mentioned lower bound of Suk and Agarwal (2023) does not rule out the possibility of learning significant winner switches within the Borda framework, without the need for a strong $\text{SST} \cap \text{STI}$ assumption or even that a CW exist. This brings us to the second question resolved by this work.

Question #2. *Can we attain adaptive and optimal Borda dynamic regret in terms of a “Borda notion” of significant winner switches?*

Surprisingly, both Questions #1 and 2 are answered using the same algorithmic ideas. In particular, we introduce a new unified framework, that of *generalized Borda scores*, for dueling bandits which generalizes both the Condorcet and Borda problems.

Then, in answering Question #2 in the affirmative, we show that our techniques can in fact be applied to the Condorcet dueling bandit problem. In particular, the Condorcet regret objective can be *recast as a Borda-like regret* which allows for a different type of regret analysis avoiding the need for the $\text{SST} \cap \text{STI}$ assumption as in

¹measured to a time-varying sequence of Condorcet winners.

prior works (Buening and Saha, 2023; Suk and Agarwal, 2023).

1.1 Summary of Contributions and Novelties

Contributions:

- For Borda dueling bandits, we establish the first optimal and adaptive Borda dynamic regret bound in terms of significant Borda winner switches. Note the best prior guarantee (Saha and Gupta, 2022) was suboptimal *even with knowledge of non-stationarity* and in terms of a coarser notion of non-stationarity.
- For Condorcet dueling bandits, we show that under a *General Identifiability Condition* (GIC), which is weaker than $SST \cap STI$ (see Figure 1 for full relations), a new non-stationarity measure, termed *approximate CW changes*, can be adaptively learned. In particular, we show a regret upper bound of $K^{2/3}T^{2/3}S_{\text{approx}}^{1/3}$ in terms of S_{approx} approximate CW changes. This improves on the $K\sqrt{ST}$ Condorcet dynamic regret upper bound of Buening and Saha (2023) when there is an appreciable difference in the non-stationarity measures S and S_{approx} .

As a consequence, this also establishes the first adaptive dynamic regret upper bound outside of $SST \cap STI$ in terms of the *total variation* measure of change, which was studied in prior works (Saha and Gupta, 2022; Buening and Saha, 2023).

Technical Novelties. We next highlight some of the algorithmic and analysis novelties.

- **A New Perspective on Borda vs. Condorcet Dueling Bandits.** We introduce a new framework (that of *generalized Borda scores* in Sec. 5) that unifies both the Condorcet and Borda regret minimization problems. To our knowledge, even in the simpler stationary dueling bandit problem, such a framework has not been studied before.

In fact, this framework is likely of independent interest and could be considered a new standalone objective for dueling bandits, motivated by the need for a generalized winner notion satisfying the desirable properties of Borda and Condorcet winner. Related notions have been studied in the social choice theory literature (Xia and Conitzer, 2008; Xia, 2013).

Although we focus on applying this framework to study the Borda and Condorcet dueling bandit problems in the body of the paper, Appendix A includes an expansive investigation of the minimax rates for various regret minimization tasks within this framework.

- **Novel Exploration Schedule.** All prior works on Borda dueling bandits rely on uniform exploration at a fixed learning rate to ensure good estimation of Borda scores (Jamieson et al., 2015; Saha et al., 2021; Wu et al., 2023). This is not suitable for developing an adaptive non-stationary algorithm since determining such a learning rate requires knowledge of the non-stationarity. To bypass this, we employ a new time-varying learning rate which is combined with a novel soft-elimination strategy for Borda dueling bandits.

- **Recasting Condorcet Regret as a Borda-like Regret.** For analyzing Condorcet dynamic regret, we take an alternative analysis approach compared to prior works which relied either on $SST \cap STI$ or studying an easier measure of non-stationarity (Buening and Saha, 2023; Suk and Agarwal, 2023).

Key to this is using our aforementioned generalized Borda score framework to reduce the Condorcet regret to a Borda-like regret quantity which allows for us to do an MAB-style analysis, without suffering from the difficulties of preference feedback.

1.2 Additional Related Work

Dueling bandits. The stochastic dueling bandit problem was first proposed by Yue and Joachims (2011); Yue et al. (2012b), which provided an algorithm achieving an instance-dependent $O(K \log T)$ regret under the

SST \cap STI condition. [Urvoy et al. \(2013\)](#) studied this problem under the broader Condorcet winner condition and achieved an instance-dependent $O(K^2 \log T)$ regret bound, which was further improved by [Zoghi et al. \(2014\)](#) and [Komiyama et al. \(2015\)](#) to $O(K^2 + K \log T)$. Finally, [Saha and Gaillard \(2022\)](#) showed it is possible to achieve an optimal instance-dependent bound of $O(K \log T)$ and instance-independent bound of $O(\sqrt{KT})$ under the Condorcet condition. These works all assume a stationary environment.

Works on adversarial dueling bandits ([Gajane et al., 2015](#); [Saha et al., 2021](#)) allow for changing preferences and thus are closer to this work. However, these works focus on the static regret objective against the ‘best’ arm in hindsight and whereas we consider the dynamic regret.

Other than the earlier mentioned works on dynamic regret minimization in dueling bandits, [Kolpaczki et al. \(2022\)](#) studies *weak dynamic regret* minimization but uses procedures requiring knowledge of non-stationarity.

Borda Regret Minimization. The only works studying Borda regret (in stochastic or adversarial settings) are [Saha et al. \(2021\)](#); [Saha and Gaillard \(2022\)](#); [Wu et al. \(2023\)](#). Of these, only [Saha and Gaillard \(2022\)](#) establishes dynamic Borda regret bounds, which require knowledge of the underlying non-stationarity, and are suboptimal in light of our optimal regret bound (Theorem 16). [Hilgendorf \(2018\)](#) studies *weak Borda regret* where the learner only incurs the Borda regret of the better of the two arms paid.

Other Notions of Winner. Other alternative notions of winner and objectives, beyond Condorcet and Borda, have been proposed, such as Copeland winner ([Zoghi et al., 2015a](#); [Komiyama et al., 2016](#); [Wu and Liu, 2016](#)) and von Neumann winner ([Dudik et al., 2015](#); [Balsubramani et al., 2016](#)).

Non-stationary multi-armed bandits. Switching multi-armed bandits with was first considered in the so-called adversarial setting by [Auer et al. \(2002\)](#), where a version of EXP3 was shown to attain optimal dynamic regret \sqrt{LKT} when given knowledge of the number L of changes in the rewards. Later works showed similar guarantees in this problem for procedures inspired by stochastic bandit algorithms ([Garivier and Moulines, 2011](#); [Kocsis and Szepesvári, 2006](#)). Recently, [Auer et al. \(2018, 2019\)](#); [Chen et al. \(2019\)](#) established the first adaptive and optimal dynamic regret guarantees, without requiring parameter knowledge of the number of changes.

Alternative characterizations of the change in rewards in terms of a total-variation quantity was first introduced in [Besbes et al. \(2014\)](#) with minimax rates quantified therein and adaptive rates attained in [Chen et al. \(2019\)](#). There have also been characterizations of non-stationarity in terms of drift parameters ([Jia et al., 2023](#); [Krishnamurthy and Gopalan, 2021](#)). Yet another characterization, in terms of the number of best arm switches S was studied in [Abbasi-Yadkori et al. \(2023\)](#), establishing an adaptive regret rate of \sqrt{SKT} . Around the same time, [Suk and Kpotufe \(2022\)](#) introduced the aforementioned notion of *significant shifts* for the switching bandit problem and adaptively achieved rates of the form $\sqrt{\tilde{L} \cdot K \cdot T}$ in terms of \tilde{L} significant shifts in the rewards, which serves as the inspiration for our Definition 1.

2 Setup – Non-stationary Dueling Bandits

We consider K -armed dueling bandits with horizon T . At round $t \in [T]$, the pairwise preference matrix is denoted by $\mathbf{P}_t \in [0, 1]^{K \times K}$, where (i, j) -th entry $P_t(i, j)$ encodes the likelihood of observing a preference for arm i in a direct comparison with arm j . In the *stationary* dueling bandit problem, the preference matrices $\mathbf{P}_t \equiv \mathbf{P}$ are unchanging in time, whereas in the *non-stationary* problem, the preference matrices \mathbf{P}_t may change arbitrarily from round to round. At round t , the learner selects a pair of actions $(i_t, j_t) \in [K] \times [K]$ and observes the feedback $O_t(i_t, j_t) \sim \text{Ber}(P_t(i_t, j_t))$ where $P_t(i_t, j_t)$ is the underlying preference of arm i_t over j_t . We next outline the two main formulations of dueling bandits (Borda and Condorcet).

Borda Criterion. Let $b_t(a) \doteq \frac{1}{K} \sum_{a' \in [K]} P_t(a, a')$ be the **Borda score** of arm a . Then, $a_t^b \doteq \operatorname{argmax}_{a \in [K]} b_t(a)$ is the **Borda winner** (BW) at round t . Then, the **Borda dynamic regret** is

$$\operatorname{Regret}^B \doteq \sum_{t=1}^T b_t(a_t^b) - \frac{1}{2} (b_t(i_t) + b_t(j_t)). \quad (1)$$

Condorcet Criterion. Here, one assumes the existence of a **Condorcet winner** (CW) a_t^c such that $P_t(a_t^c, a) \geq 1/2$ for all arms $a \in [K]$. Then, the *Condorcet dynamic regret* is defined as

$$\operatorname{Regret}^C \doteq \sum_{t=1}^T \frac{1}{2} (P_t(a_t^c, i_t) + P_t(a_t^c, j_t) - 1).$$

3 Dynamic Regret Lower Bounds

We briefly summarize the minimax dynamic regret rates for Borda and Condorcet problems. Full statements and proofs are deferred to Appendix C.

- **Borda Dynamic Regret** As the minimax Borda regret rate over n stationary rounds is $K^{1/3} \cdot n^{2/3}$ (Saha et al., 2021), it follows that the minimax dynamic regret rate over L stationary phases of length T/L is $L \cdot K^{1/3} \cdot (T/L)^{2/3} = K^{1/3} \cdot T^{2/3} \cdot L^{1/3}$ (Theorem 9). In fact, a tighter notion of non-stationarity (Definition 1) may replace L here. To our knowledge, this establishes the first lower bound on Borda dynamic regret.

- **Condorcet Dynamic Regret** Here, since the minimax regret rate over stationary problems is of order \sqrt{KT} , the lower bound on Condorcet dynamic regret is of order \sqrt{KLT} (Saha and Gupta, 2022). Once again, L here may be replaced by a tighter measure of non-stationarity (Suk and Agarwal, 2023).

4 Dynamic Regret Upper Bounds

4.1 Borda Dueling Bandits

A New Measure of Non-Stationarity. Following the discussion in Subsec. 1.2, key in works on non-stationary (dueling) bandits is a measure of non-stationarity which captures the difficulty of the problem. Speaking plainly, the higher the amount of non-stationarity the more difficult the problem is, and so larger regret rates are expected. It is thus crucial that such a measure of change properly captures the difficulty of the problem. However, the only other work dealing with Borda dynamic regret (Saha and Gupta, 2022) relies on coarse non-stationarity measures, such as the aggregate number or magnitude of changes.

To contrast, in non-stationary MAB and Condorcet dueling bandits, it is now recognized (Suk and Kpotufe, 2022; Buening and Saha, 2023; Suk and Agarwal, 2023) that tighter non-stationary measures, so-called *significant shifts*, which capture only those changes which are detrimental to performance. can in fact be adaptively learned. Inspired by these results, we first define a notion of *significant BW switches*.

Definition 1 (Significant BW Switches). *Define an arm a as having significant Borda regret on $[s_1, s_2]$ if*

$$\sum_{s=s_1}^{s_2} \delta_s^b(a) \geq K^{1/3} \cdot (s_2 - s_1)^{2/3}. \quad (2)$$

Define significant BW switches (abbrev. SBS) as follows: the 0-th sig. shift is defined as $\tau_0 = 1$ and the $(i + 1)$ -th sig. shift τ_{i+1} is recursively defined as the smallest $t > \tau_i$ such that for each arm $a \in [K]$,

$\exists [s_1, s_2] \subseteq [\tau_i, t]$ such that arm a has significant regret over $[s_1, s_2]$. We refer to the interval of rounds $[\tau_i, \tau_{i+1})$ as an **SBS phase**². Let \tilde{L}_b be the number of SBS phases elapsed in T rounds.

Our goal then is to establish a dynamic regret upper bound which depends optimally on the number of SBS, and does not require knowledge of the underlying non-stationarity.

Adaptive and Optimal Regret Upper Bound. Intuitively, if one knows the SBS τ_i , then, in each SBS phase $[\tau_i, \tau_{i+1})$, one can achieve a tight regret bound of order $K^{1/3} \cdot (\tau_{i+1} - \tau_i)^{2/3}$ by learning the *last safe arm*, or the last arm to incur significant Borda regret in said phase. We show that in fact such a rate can be attained, over all SBS phases, without any knowledge of the non-stationarity.

Theorem 1. *Algorithm 2 with the fixed weight specification (see Definition 5) satisfies:*

$$\mathbb{E}[\text{Regret}^B] \leq \tilde{O} \left(\sum_{i=0}^{\tilde{L}_b} K^{1/3} \cdot (\tau_{i+1} - \tau_i)^{2/3} \right).$$

Corollary 2. *By Jensen's inequality, the regret bound of Theorem 16 is upper bounded by $K^{1/3} \cdot T^{2/3} \cdot \tilde{L}_b^{1/3}$. Furthermore, relating SBS to total variation $V_T \doteq \sum_{t=2}^T \max_{a, a' \in [K]} |P_t(a, a') - P_{t-1}(a, a')|$, a regret bound of order $V_T^{1/4} \cdot T^{3/4} \cdot K^{1/4} + K^{1/3} \cdot T^{2/3}$ also holds in terms of total variation quantity V_T (see Appendix E.7).*

In particular, Theorem 16 provides a matching upper bound to the lower bound of Sec. 3 (see Theorem 9), thus improving the suboptimal result of Theorem 6.1 in Saha and Gupta (2022), which relied on a coarser notion of non-stationary and was not adaptive.

4.2 Condorcet Dueling Bandits

Significant Notions of Change Outside of $\text{SST} \cap \text{STI}$. Following the discussion of Sec. 1, it was previously shown in Suk and Agarwal (2023) that an analogue of significant winner switches (Definition 1) for Condorcet dynamic regret cannot be learned adaptively outside both the strong SST and STI preference model assumptions. Recall that STI/SST mandate at each round t , there is a total ordering on arms, \succ_t , such that $\forall i \succeq_t j \succeq_t k$:

- $P_t(i, k) \geq \max\{P_t(i, j), P_t(j, k)\}$ (SST).
- $P_t(i, k) \leq P_t(i, j) + P_t(j, k)$ (STI).

In particular, such conditions are convenient for relating uncomparing arms through an inferred ordering, which turns out to be crucial to detecting unknown changes in CW.

However, this impossibility result leaves open whether *other tighter notions of non-stationarity* can be learned outside of $\text{SST} \cap \text{STI}$, and at rates faster than the state-of-the-art $K\sqrt{ST}$ Condorcet dynamic regret achieved by Buening and Saha (2023).

We show this is indeed possible in a broad class of preference models, the *GIC class*, outside of $\text{SST} \cap \text{STI}$.

Condition 1. (General Identifiability Condition) *At each round t , there exists an arm a_t^* such that $a_t^* \in \arg\max_{a \in [K]} P_t(a, a')$ for all arms $a' \in [K]$.*

While GIC requires the CW to beat every other arm with the largest margin, it is far broader than $\text{SST} \cap \text{STI}$ in not requiring any ordering on non-winner arms, allowing for cycles or arbitrary preference relations. The GIC was previously studied in utility dueling bandits by Zimmert and Seldin (2018) (see also Bengs et al., 2021, Section 3.1). Unlike these prior works, we do not require the winner arm a_t^* to be unique.

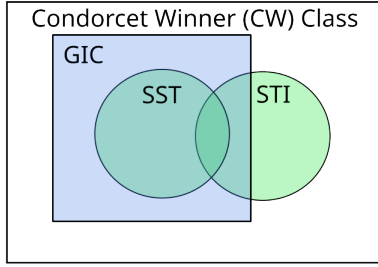


Figure 1: GIC is a larger subclass of the Condorcet Winner model, including $SST \cap STI$ and SST, while incomparable with STI in general.

We also note that Condition 1 implies the Condorcet condition, but is weaker than SST while incomparable with STI. See Figure 1 for a full comparison.

We next show that, under GIC, a tighter notion of non-stationarity than the count S of winner switches may be learned with improved regret rates.

Definition 3 (Approximate Winner Changes). *Define ζ_i recursively as follows: let $\zeta_0 = 1$ and let ζ_{i+1} be the smallest $t > \zeta_i$ such that there does not exist an **approximate winner arm** \tilde{a} such that*

$$\forall s \in [\zeta_i, t], a \in [K] : |P_s(a_s^*, a) - P_s(\tilde{a}, a)| \leq \left(\frac{K^2}{s - \zeta_i} \right)^{1/3}. \quad (3)$$

Let $S_{\text{approx}} \doteq 1 + \max\{i : \zeta_i < T\}$ be the total count of approximate winner changes.

Note that (3) always holds so long as the winner a_t^* does not change. Thus, we have $S_{\text{approx}} \leq S$.

Improved Condorcet Dynamic Regret Bound. Our regret upper bound is as follows.

Theorem 4. *Under Condition 1, Algorithm 2 with the unknown weight specification (see Definition 5) satisfies:*

$$\mathbb{E}[\text{Regret}^C] \leq \tilde{O}(\min\{K^{2/3} \cdot T^{2/3} \cdot S_{\text{approx}}^{1/3}, K^{1/2} \cdot V_T^{1/4} \cdot T^{3/4} + K^{2/3} \cdot T^{2/3}\}).$$

We compare this regret bound to the $K\sqrt{ST}$ rate of [Buening and Saha \(2023\)](#). In particular, we have:

$$\min\{K^{2/3} T^{2/3} S_{\text{approx}}^{1/3}, K^{1/2} V_T^{1/4} T^{3/4} + K^{2/3} T^{2/3}\} \leq K\sqrt{ST} \iff K^{1/3} \geq \frac{T^{1/6} S_{\text{approx}}^{1/3}}{S^{1/2}} \text{ or } K \geq \frac{T^{3/2} V_T^{1/2}}{S} \vee \frac{T^{1/2}}{S^{3/2}}. \quad (4)$$

We highlight two regimes, under GIC, where this comparison is favorable:

- **Many spurious winner changes $S = T$:** if there are $S = T$ changes in winner, then, (4) always holds regardless of the values of $V_T, S_{\text{approx}}, K, T$ and thus captures regimes where sublinear regret is possible while the $K\sqrt{ST}$ rate is vacuous. The superiority of our regret rate is most evident when S_{approx} or V_T are small, which is possible if the majority of $S = T$ winner changes are spurious to performance.
- **Large number of arms:** viewed another way, (4) states that if the number of arms K is larger than some threshold determined by the discrepancy in the non-stationarity measures S vs. S_{approx} or S vs V_T , then Theorem 4's regret rate is superior to the $K\sqrt{ST}$ rate.

We also note that the $K^{1/2} \cdot V_T^{1/4} \cdot T^{3/4}$ rate of Theorem 4 is the first adaptive Condorcet dynamic regret bound in terms of total-variation, as prior works only achieved regret upper bounds under $SST \cap STI$ ([Buening and Saha, 2023](#); [Suk and Agarwal, 2023](#)).

²We conflate $[a, b)$ for $a, b \in \mathbb{N}$ with $[a, b) \cap \mathbb{N}$

5 A New Unified View of Condorcet and Borda Regret

Continuing the discussion of Subsec. 1.1, our regret upper bounds (Theorems 1 and 4) are shown by appealing to a new unified framework which generalizes both the Borda and Condorcet regret minimization tasks.

Key to this is the new idea of a *generalized Borda score* (GBS), which measures the preference of an arm a over a reference distribution or *weight* of arms $\mathbf{w} \in \Delta^K$, where Δ^K denotes the probability simplex on $[K]$. More precisely, we define a GBS with respect to weight $\mathbf{w} = (w^1, \dots, w^K)$ as

$$b_t(a, \mathbf{w}) \doteq \sum_{a' \in [K]} P_t(a, a') \cdot w^{a'}.$$

Notions of *generalized Borda winner* (maximizer of GBS) and *generalized Borda dynamic regret* (analogous to (1)) follow suit. Taking \mathbf{w} to be $\text{Unif}\{[K]\}$, this recovers the Borda score and dynamic regret.

If a Condorcet winner a_t^c exists, then taking \mathbf{w} to be the point-mass weight $\mathbf{w}(a_t^c)$ on a_t^c also allows us to capture the Condorcet regret. Indeed, one observes that the CW a_t^c maximizes the score $b_t(a, \mathbf{w}(a_t^c))$, and the regret in terms of generalized Borda scores of arm a w.r.t. weight $\mathbf{w}(a_t^c)$ becomes

$$b_t(a_t^c, \mathbf{w}(a_t^c)) - b_t(a, \mathbf{w}(a_t^c)) = P_t(a_t^c, a) - \frac{1}{2},$$

which is precisely the Condorcet regret at round t .

Recasting the Condorcet regret objective as a Borda-like regret quantity will be key to bypassing the need for $\text{SST} \cap \text{STI}$, while still capturing a tighter measure of non-stationarity.

Changing and Unknown Weights (Key Difficulty). The challenge with this reformulation of the Condorcet problem is that the reference weight $\mathbf{w}(a_t^c)$ is unknown since the CW a_t^c is. Furthermore, in the more difficult non-stationary problem, the identity of a_t^c may change at unknown times meaning so can the weight $\mathbf{w}(a_t^c)$. This makes it difficult to even estimate the generalized Borda score $b_t(a, \mathbf{w}(a_t^c))$ compared to the usual Borda task where the weight \mathbf{w} is fixed over time.

We will show that such difficulties are resolved by tracking all point-mass weights and carefully amortizing the regret analysis to periods of time where a estimating a fixed point-mass weight suffices.

6 Algorithmic Design

To minimize the generalized Borda dynamic regret, we rely on estimating $b_t(a, \mathbf{w})$ for weights \mathbf{w} belonging to a *reference set of weights* \mathcal{W} . In what follows, we'll discuss the procedures in terms of a fixed \mathcal{W} . In the end, \mathcal{W} can be flexibly specialized for each of the Borda and Condorcet regret problems (see Definition 5).

Following the high-level idea of prior works on non-stationary dueling bandits (Suk and Agarwal, 2023; Buening and Saha, 2023), we'll first design a base algorithm which works well in mildly non-stationary environments where there is no approximate winner change (Definition 3) and then randomly schedule different instances of this base algorithm to allow for detection of unknown non-stationarity.

One key deviation from the aforementioned prior non-stationary works is that we avoid using a successive elimination base algorithm. This is necessary since accurate estimation of the (generalized) Borda score $b_t(a, \mathbf{w})$, calls for some minimal uniform exploration, which rules out any hard elimination strategy.

Thus, we first design a new base algorithm, which mixes elimination with time-varying exploration.

6.1 Base Algorithm – Soft Elimination with GBS

Estimating Generalized Borda Scores. At round t , we estimate the generalized Borda scores via importance-weighting for weight $\mathbf{w} \in \mathcal{W}$:

$$\hat{b}_t(a, \mathbf{w}) \doteq \mathbb{E}_{a' \sim \mathbf{w}} \left[\frac{\mathbf{1}\{i_t = a, j_t = a'\} \cdot O_t(i_t, j_t)}{q_t(a) \cdot q_t(a')} \right], \quad (5)$$

where q_t is the play-distribution over arms at time t . Let $\hat{\delta}_t^{\mathbf{w}}(a', a) \doteq \hat{b}_t(a', \mathbf{w}) - \hat{b}_t(a, \mathbf{w})$ denote the induced estimator of the generalized Borda gap.

Eliminating Arms We evict arm a from the candidate arm set \mathcal{A}_t at round t if for some $[s_1, s_2] \subseteq [1, t]$:

$$\max_{a' \in \bigcap_{s=s_1}^{s_2} \mathcal{A}_s} \sum_{s=s_1}^{s_2} \hat{\delta}_s^{\mathbf{w}}(a', a) \geq C \log(T) \cdot F([s_1, s_2]). \quad (6)$$

In the above $C > 0$ is a universal constant free of any problem-dependent parameters whose value can be determined from the analysis and the *eviction threshold* $F(I)$ for interval I is determined using the estimation error bounds on $\sum_{s=s_1}^{s_2} \hat{b}_s(a, \mathbf{w})$ (see Definition 5 in Appendix D.1 for exact formulas for $F(I)$, which differ for Borda vs. Condorcet problems).

These error bounds scale with the inverse play-probability $\min_a q_t^{-1}(a)$, calling for a careful design of the play distribution $q_t(\cdot)$, namely that which balances exploration and proper elimination.

Novel Exploration Schedule. We choose q_t as a mixture of exploring the candidate set \mathcal{A}_t and uniformly exploring all arms:

$$q_t \sim (1 - \eta_t) \cdot \text{Unif}\{\mathcal{A}_t\} + \eta_t \cdot \text{Unif}\{\mathcal{W}\},$$

where $\text{Unif}\{\mathcal{W}\}$ is a further uniform mixture of playing according to the distributions in \mathcal{W} . The *learning rate* η_t must then be carefully set to ensure both sufficient exploration (to reliably estimate the GBS) and safe regret. As before, the values of η_t (see Definition 5) will depend whether we are in the Borda vs. Condorcet setting.

However, prior works on stationary Borda dueling bandits must set η_t using knowledge of the horizon T (Jamieson et al., 2015; Saha et al., 2021; Wu et al., 2023). In our non-stationary problem, this amounts to setting η_t based on knowledge of the underlying non-stationarity (Saha and Gupta, 2022).

Thus, a key difficulty in targeting the regret rate of Theorem 16 *without knowledge of non-stationarity* is that the optimal oracle learning rate η_t depends on the unknown phase lengths ($\tau_{i+1} - \tau_i$ for Borda scores; $\rho_{i+1} - \rho_i$ for Condorcet). To circumvent this, we employ a *time-varying learning rate* η_t which depends on the current number of rounds elapsed. To our knowledge, such an idea has only been used in works on adversarial bandit for analyzing EXP3 (Seldin et al., 2013; Maillard, 2011).

6.2 Non-Stationary Meta-Algorithm

For the non-stationary setting with unknown shifts, we use a hierarchical algorithm METABOSSE (Algorithm 2) to schedule multiples copies of the base algorithm BOSSE(t_{start}, m) (Algorithm 1) at random start times t_{start} and durations m .

Going into more detail, METABOSSE proceeds in *episodes*, starting each episode by running a starter instance of BOSSE. A running base algorithm may further *activates* its own base algorithms of varying durations (Line 12 of Algorithm 1), called *replays* according to a random schedule decided by the Bernoulli random variables $B_{s,m}$ (see Line 6 of Algorithm 2). We refer to the base algorithm playing at round t as the *active base algorithm*.

Algorithm 1: BOSSE(t_{start}, m_0): (Generalized) **B**Orda **S**core **S**oft **E**limination

Input: Input set of weights \mathcal{W} , learning rate profile $\boldsymbol{\gamma} \doteq \{\gamma_t\}_{t=1}^T$, eviction threshold $F(\cdot)$.

```
1 Initialize:  $t \leftarrow t_{\text{start}}$ , active arm set  $\mathcal{A}_{t_{\text{start}}} \leftarrow [K]$ .
2 while  $t \leq T$  do
3   Set exploration rate for this round:  $\eta_t \leftarrow \gamma_{t-t_{\text{start}}}$ .
4   Update play distribution  $q_t$ : let  $q_t \in \Delta^K$  be the mixture  $(1 - \eta_t) \cdot \text{Unif}\{\mathcal{A}_t\} + \eta_t \cdot \text{Unif}\{\mathcal{W}\}$ .
5   Sample  $i_t, j_t \sim q_t$  i.i.d..
6   Receive feedback  $O_t(i_t, j_t) \sim \text{Ber}(P_t(i_t, j_t))$ .
7   Increment  $t \leftarrow t + 1$ .
8   Evict arms with large generalized Borda gaps:
       $\mathcal{A}_t \leftarrow \mathcal{A}_t \setminus \{a \in [K] : \exists [s_1, s_2] \subseteq [t_{\text{start}}, t], \mathbf{w} \in \mathcal{W} \text{ s.t. (6) holds with } a \in \cap_{s=s_1}^{s_2} \mathcal{A}_s\}$ 
       $\mathcal{A}_{\text{global}} \leftarrow \mathcal{A}_{\text{global}} \setminus \{a \in [K] : \exists [s_1, s_2] \subseteq [t_\ell, t], \mathbf{w} \in \mathcal{W} \text{ s.t. (6) holds with } a \in \cap_{s=s_1}^{s_2} \mathcal{A}_s\}$ 
9
10  if  $\exists m$  such that  $B_{t,m} > 0$  then                                     /* Lines 10-13 only for use with METABOSSE */
11    | Let  $m \doteq \max\{m \in \{2, 4, \dots, 2^{\lceil \log(T) \rceil}\} : B_{t,m} > 0\}$ .           // Set maximum replay length.
12    | Run BOSSE( $t, m$ ).                                                       // Replay interrupts.
13  if  $t > t_{\text{start}} + m_0$  then RETURN.
```

Algorithm 2: Meta-BOSSE

Input: horizon T , input set of weights \mathcal{W} , learning rate profile $\boldsymbol{\gamma} \doteq \{\gamma_t\}_{t=1}^T$, eviction threshold $F(\cdot)$.

```
1 Initialize: round count  $t \leftarrow 1$ .
2 Episode Initialization (setting global variables  $t_\ell, \mathcal{A}_{\text{global}}, B_{s,m}$ ):
3    $t_\ell \leftarrow t$ .                                                         //  $t_\ell$  indicates start of  $\ell$ -th episode.
4    $\mathcal{A}_{\text{global}} \leftarrow [K]$                                                // Global active arm set.
5   For each  $m = 2, 4, \dots, 2^{\lceil \log(T) \rceil}$  and  $s = t_\ell + 1, \dots, T$ :
6     Sample and store  $B_{s,m} \sim \text{Bernoulli}\left(\frac{1}{m^{1/3} \cdot (s-t_\ell)^{2/3}}\right)$ .           // Set replay schedule.
7 Run BOSSE( $t_\ell, T + 1 - t_\ell$ ).
8 if  $t < T$  then restart from Line 2 (i.e. start a new episode).
```

The *candidate arm set* \mathcal{A}_t is pruned by the active base algorithm at round t , and globally shared between all running base algorithms. In addition, all other variables, i.e. the ℓ -th episode start time t_ℓ , round count t , and replay schedule $\{B_{s,m}\}_{s,m}$, are shared between base algorithms.

In sharing these global variables, any replay can trigger a new episode: every time an arm is evicted by a replay, it is also evicted from the *global arm set* $\mathcal{A}_{\text{global}}$, essentially the active arm set for the entire episode. A new episode is triggered when $\mathcal{A}_{\text{global}}$ becomes empty, i.e., there is no *safe* arm left to play.

For further algorithmic intuition on the hierarchical schedule and management of base algorithms, we defer the reader to Section 4 of [Suk and Kpotufe \(2022\)](#). We now focus on highlighting some novelties in this work.

Each Active Base Alg. Chooses Own Learning Rate Each base algorithm BOSSE(t_{start}, m) determines its own time-varying learning rate using its starting round t_{start} . Then, the *global learning rate* η_t at round t is set by the base algorithm active at round t (Line 3 of Algorithm 1). Furthermore, the history of global learning rates $\{\eta_t\}_t$ (globally accessible by any base algorithm) is used to determine the eviction thresholds (15) and (16) over intervals $[s_1, s_2]$ of rounds where multiple base algorithms may be active.

This ensures reliable detection of critical segments $[s_1, s_2]$ of time where an arm has large (generalized) Borda regret. For such a critical segment, a core argument of the analysis is that an ideal replay, i.e., an instance of BOSSE(s_1, m) for $m = s_2 - s_1$, is scheduled with high probability. However, such an ideal replay must be scheduled for a duration commensurate with $s_2 - s_1$, and hence must also use a commensurate learning rate.

A New Replay Scheduling Rate. In order to properly detect critical segments while also safeguarding $T^{2/3}$ regret, a different replay scheduling rate (Line 12 of Algorithm 1) is required. For this, we find that instantiating a base algorithm of length m at time t in episode $[t_\ell, t_{\ell+1})$ with probability $m^{-1/3} \cdot (s - t_\ell)^{-2/3}$ balances regret minimization and detection of changes in winner.

7 Novelties in Condorcet Regret Analysis

Leaving the details of the analysis to Appendices E and F, we instead focus here on highlighting the key technical novelties in showing our Condorcet dynamic regret upper bound.

Recasting Condorcet Regret as a Generalized Borda Regret. As discussed in Sec. 1, we emphasize our main analysis novelty is in reformulating the Condorcet regret as a generalized Borda-like regret. This allows us to take the analysis route of prior works on non-stationary MAB (Suk and Kpotufe, 2022) without suffering from issues endemic to preference feedback, as seen in Buening and Saha (2023); Suk and Agarwal (2023). To our knowledge, no other works on dueling bandits make use of such a trick.

Keeping Track of All Unknown Weights. As mentioned earlier in Sec. 5, a crucial difficulty with making use of the generalized Borda framework for Condorcet dueling bandits is that the reference weights \mathbf{w} are unknown. Furthermore, the space of all possible weights Δ^K is combinatorially large and thus one cannot hope to maintain estimates for all weights in Δ^K without an intractable union bound. We show in fact that such accurate estimation can be bypassed because the worst-case regret is always attained at a point-mass weight on some arm $a \in [K]$ due to regret being linear in the weight vector.

Keeping Track of Unknown Changes in Weights. An added difficulty in the non-stationary setting is that the unknowns weights may change at unknown times. This makes it challenging to bound the regret over intervals of rounds $[s_1, s_2]$ which elapse multiple approximate winner changes ρ_i and hence for which we require score estimation w.r.t. a changing weight sequence $\{\mathbf{w}_t\}_t$. However, even following the above proposal for tracking point-mass weights, we note the space of all *sequences of point-mass weights* is combinatorially large. This prohibits estimating all $\sum_{s=s_1}^{s_2} b_s(a, \mathbf{w}_s)$ for changing point-mass weights \mathbf{w}_s .

Instead, we carefully divide up the regret analysis into segments of time $[s_1, s_2] \subseteq [\rho_i, \rho_{i+1})$ lying within an approximate winner phase $[\rho_i, \rho_{i+1})$ where it suffices to bound the regret using a single weight (as it turns out, that of the current approximate winner a^\sharp). This involves doing a separate analysis of when an arm is detected as having significant regret for each arm $a \in [K]$ and each base algorithm.

8 Conclusion and Future Questions

We’ve achieved the first optimal and adaptive dynamic Borda regret upper bound. Additionally, we’ve introduced the generalized Borda framework which has revealed new preference models where faster Condorcet regret rates are attainable, adaptively, in terms of new tighter measures of non-stationarity. In the Condorcet setting, it is still unclear if the bounds of Theorem 4 are tight and what can be said outside of the GIC class. More broadly, tracking changing von-Neumann winners in non-stationary dueling bandits appears a challenging, but quite interesting direction.

Future work can also study this generalized Borda framework (with generic known or unknown weights) and characterize the instance-dependent regret rates, which remain unclear even in stationary settings.

References

- Yasin Abbasi-Yadkori, András György, and Nevena Lazić. A new look at dynamic regret for non-stationary stochastic bandits. *Journal of Machine Learning Research*, 24(288):1–37, 2023.
- Nir Ailon, Zohar Karnin, and Thorsten Joachims. Reducing Dueling Bandits to Cardinal Bandits. In *Proceedings of the 31st International Conference on Machine Learning*, 2014.
- Kenneth J. Arrow. A difficulty in the concept of social welfare. *Journal of Political Economy*, 58(4):328–346, 1950. ISSN 00223808, 1537534X.
- Peter Auer, Nicolo Cesa-Bianchi, Yoav Freund, and Robert E. Schapire. The Nonstochastic Multiarmed Bandit Problem. *SIAM Journal on Computing*, 32(1):48–77, 2002.
- Peter Auer, Pratik Gajane, and Ronald Ortner. Adaptively tracking the best arm with an unknown number of distribution changes. *14th European Workshop on Reinforcement Learning (EWRL)*, 2018.
- Peter Auer, Pratik Gajane, and Ronald Ortner. Adaptively tracking the best bandit arm with an unknown number of distribution changes. In Alina Beygelzimer and Daniel Hsu, editors, *Conference on Learning Theory, COLT 2019, 25–28 June 2019, Phoenix, AZ, USA*, volume 99 of *Proceedings of Machine Learning Research*, pages 138–158. PMLR, 2019.
- Akshay Balsubramani, Zohar Karnin, Robert E. Schapire, and Masrour Zoghi. Instance-dependent regret bounds for dueling bandits. In *29th Annual Conference on Learning Theory*, volume 49 of *Proceedings of Machine Learning Research*, pages 336–360. PMLR, 23–26 Jun 2016.
- Gábor Bartók, Dean P. Foster, Dávid Pál, Alexander Rakhlin, and Csaba Szepesvári. Partial monitoring—classification, regret bounds, and algorithms. *Mathematics of Operations Research*, 39(4):967–997, 2014. ISSN 0364765X, 15265471.
- Viktor Bengs, Róbert Busa-Fekete, Adil El Mesaoudi-Paul, and Eyke Hüllermeier. Preference-based online learning with dueling bandits: A survey. *J. Mach. Learn. Res.*, 22(1), jan 2021. ISSN 1532-4435.
- Omar Besbes, Yonatan Gur, and Assaf Zeevi. Stochastic multi-armed-bandit problem with non-stationary rewards. *Advances in Neural Information Processing Systems*, 27:199–207, 2014.
- Alina Beygelzimer, John Langford, Lihong Li, Lev Reyzin, and Robert Schapire. Contextual bandit algorithms with supervised learning guarantees. In *Proceedings of the 14th International Conference on Artificial Intelligence and Statistics*, pages 19–26, 2011.
- Thomas Kleine Buening and Aadirupa Saha. Anaconda: An improved dynamic regret algorithm for adaptive non-stationary dueling bandits. In Francisco Ruiz, Jennifer Dy, and Jan-Willem van de Meent, editors, *Proceedings of The 26th International Conference on Artificial Intelligence and Statistics*, volume 206 of *Proceedings of Machine Learning Research*, pages 3854–3878. PMLR, 25–27 Apr 2023.
- Yifang Chen, Chung-Wei Lee, Haipeng Luo, and Chen-Yu Wei. A new algorithm for non-stationary contextual bandits: Efficient, optimal, and parameter-free. In *Proceedings of the 32nd Conference on Learning Theory*, 99:1–30, 2019.
- Miroslav Dudík, Katja Hofmann, Robert E. Schapire, Aleksandrs Slivkins, and Masrour Zoghi. Contextual Dueling Bandits. In *Proceedings of the 28th Conference on Learning Theory*, 2015.
- Moein Falahatgar, Yi Hao, Alon Orlitsky, Venkatadheeraj Pichapati, and Vaishakh Ravindrakumar. Maxing and ranking with few assumptions. In I. Guyon, U. Von Luxburg, S. Bengio, H. Wallach, R. Fergus, S. Vishwanathan, and R. Garnett, editors, *Advances in Neural Information Processing Systems*, volume 30. Curran Associates, Inc., 2017.

- Pratik Gajane, Tanguy Urvoy, and Fabrice Clérot. A relative exponential weighing algorithm for adversarial utility-based dueling bandits. In Francis R. Bach and David M. Blei, editors, *Proceedings of the 32nd International Conference on Machine Learning, ICML 2015, Lille, France, 6-11 July 2015*, volume 37 of *JMLR Workshop and Conference Proceedings*, pages 218–227. JMLR.org, 2015.
- Aurélien Garivier and Eric Moulines. On upper-confidence bound policies for switching bandit problems. In *International Conference on Algorithmic Learning Theory*, pages 174–188. Springer, 2011.
- Reinhard Heckel, Max Simchowitz, Kannan Ramchandran, and Martin Wainwright. Approximate ranking from pairwise comparisons. In *Proceedings of the Twenty-First International Conference on Artificial Intelligence and Statistics*, volume 84 of *Proceedings of Machine Learning Research*, pages 1057–1066. PMLR, 09–11 Apr 2018.
- Lennard Hilgendorf. Duelling bandits with weak regret in adversarial environments. Master’s thesis, University of Copenhagen, 2018. Available at <https://arxiv.org/pdf/1812.04152.pdf>.
- Kevin Jamieson, Sumeet Katariya, Atul Deshpande, and Robert Nowak. Sparse Dueling Bandits. In *Proceedings of the 18th International Conference on Artificial Intelligence and Statistics*, 2015.
- S. Jia, Qian Xie, Nathan Kallus, and P. Frazier. Smooth non-stationary bandits. In *International Conference on Machine Learning*, 2023.
- Levente Kocsis and Csaba Szepesvári. Discounted ucb. *2nd PASCAL Challenges Workshop*, 2006.
- Patrick Kolpaczki, Viktor Bengs, and Eyke Hüllermeier. Non-stationary dueling bandits. *arXiv preprint arXiv:2202.00935*, 2022.
- Junpei Komiyama, Junya Honda, Hisashi Kashima, and Hiroshi Nakagawa. Regret Lower Bound and Optimal Algorithm in Dueling Bandit Problem. In *Proceedings of the 28th Conference on Learning Theory*, 2015.
- Junpei Komiyama, Junya Honda, and Hiroshi Nakagawa. Copeland Dueling Bandit Problem: Regret Lower Bound, Optimal Algorithm, and Computationally Efficient Algorithm. In *Proceedings of the 33rd International Conference on Machine Learning*, 2016.
- Ramakrishnan Krishnamurthy and Aditya Gopalan. On slowly-varying non-stationary bandits. *arXiv preprint: arXiv:2110.12916*, 2021.
- Chuang-Chieh Lin and Chi-Jen Lu. Efficient mechanisms for peer grading and dueling bandits. In Jun Zhu and Ichiro Takeuchi, editors, *Proceedings of The 10th Asian Conference on Machine Learning*, volume 95 of *Proceedings of Machine Learning Research*, pages 740–755. PMLR, 14–16 Nov 2018.
- Tie-Yan Liu. Learning to rank for information retrieval. *Found. Trends Inf. Retr.*, 3(3):225–331, mar 2009. ISSN 1554-0669. doi: 10.1561/15000000016.
- Odalric-Ambrym Maillard. *APPRENTISSAGE SÉQUENTIEL : Bandits, Statistique et Renforcement*. Phd thesis, Université des Sciences et Technologie de Lille - Lille I, October 2011.
- Filip Radlinski, Madhu Kurup, and Thorsten Joachims. How does clickthrough data reflect retrieval quality? In *Proceedings of the 17th ACM Conference on Information and Knowledge Management, CIKM '08*, page 43–52, New York, NY, USA, 2008. Association for Computing Machinery. ISBN 9781595939913. doi: 10.1145/1458082.1458092.
- Siddhartha Ramamohan, Arun Rajkumar, and Shivani Agarwal. Dueling Bandits : Beyond Condorcet Winners to General Tournament Solutions. In *Advances in Neural Information Processing Systems 29*, 2016.
- Aadirupa Saha and Pierre Gaillard. Versatile dueling bandits: Best-of-both world analyses for learning from relative preferences. In *International Conference on Machine Learning*, pages 19011–19026. PMLR, 2022.

- Aadirupa Saha and Shubham Gupta. Optimal and efficient dynamic regret algorithms for non-stationary dueling bandits. In *International Conference on Machine Learning, ICML 2022, 17-23 July 2022, Baltimore, Maryland, USA*, volume 162 of *Proceedings of Machine Learning Research*, pages 19027–19049. PMLR, 2022.
- Aadirupa Saha, Tomer Koren, and Yishay Mansour. Adversarial dueling bandits. In Marina Meila and Tong Zhang, editors, *Proceedings of the 38th International Conference on Machine Learning, ICML 2021, 18-24 July 2021, Virtual Event*, volume 139 of *Proceedings of Machine Learning Research*, pages 9235–9244. PMLR, 2021.
- Markus Schulze. A new monotonic, clone-independent, reversal symmetric, and condorcet-consistent single-winner election method. *Social Choice and Welfare*, 36(2):267–303, 2011. ISSN 01761714, 1432217X.
- Yevgeny Seldin, Csaba Szepesvári, Peter Auer, and Yasin Abbasi-Yadkori. Evaluation and analysis of the exp3 algorithm in stochastic environments. In Marc Peter Deisenroth, Csaba Szepesvári, and Jan Peters, editors, *Proceedings of the Tenth European Workshop on Reinforcement Learning*, volume 24 of *Proceedings of Machine Learning Research*, pages 103–116, Edinburgh, Scotland, 30 Jun–01 Jul 2013. PMLR.
- Yanan Sui, Masrour Zoghi, Katja Hofmann, and Yisong Yue. Advancements in dueling bandits. In Jérôme Lang, editor, *Proceedings of the Twenty-Seventh International Joint Conference on Artificial Intelligence, IJCAI 2018, July 13-19, 2018, Stockholm, Sweden*, pages 5502–5510. ijcai.org, 2018.
- Joe Suk and Arpit Agarwal. When can we track significant preference shifts in dueling bandits? In *Thirty-seventh Conference on Neural Information Processing Systems, 2023*.
- Joe Suk and Samory Kpotufe. Tracking most significant arm switches in bandits. In *Conference on Learning Theory*, pages 2160–2182. PMLR, 2022.
- Tanguy Urvoy, Fabrice Clerot, Raphael Feraud, and Sami Naamane. Generic Exploration and K-armed Voting Bandits. In *Proceedings of the 30th International Conference on Machine Learning*, 2013.
- Huasen Wu and Xin Liu. Double thompson sampling for dueling bandits. In *Advances in Neural Information Processing Systems 29: Annual Conference on Neural Information Processing Systems 2016, December 5-10, 2016, Barcelona, Spain*, pages 649–657, 2016.
- Yue Wu, Tao Jin, Hao Lou, Farzad Farnoud, and Quanquan Gu. Borda regret minimization for generalized linear dueling bandits, 2023.
- Lirong Xia. Generalized scoring rules: a framework that reconciles borda and condorcet. *SIGecom Exch.*, 12(1):42–48, jun 2013.
- Lirong Xia and Vincent Conitzer. Generalized scoring rules and the frequency of coalitional manipulability. In *Proceedings of the 9th ACM Conference on Electronic Commerce, EC '08*, page 109–118, New York, NY, USA, 2008. Association for Computing Machinery. ISBN 9781605581699.
- Yisong Yue and Thorsten Joachims. Beat the mean bandit. In *Proceedings of the 28th International Conference on Machine Learning*, 2011.
- Yisong Yue, Josef Broder, Robert Kleinberg, and Thorsten Joachims. The k -armed dueling bandits problem. *Journal of Computer and System Sciences*, 78(5):1538–1556, 2012a.
- Yisong Yue, Josef Broder, Robert Kleinberg, and Thorsten Joachims. The k -armed dueling bandits problem. *Journal of Computer and System Sciences*, 78(5):1538–1556, 2012b. ISSN 0022-0000. doi: <https://doi.org/10.1016/j.jcss.2011.12.028>. JCSS Special Issue: Cloud Computing 2011.
- Julian Zimmert and Yevgeny Seldin. Factored bandits. In S. Bengio, H. Wallach, H. Larochelle, K. Grauman, N. Cesa-Bianchi, and R. Garnett, editors, *Advances in Neural Information Processing Systems*, volume 31. Curran Associates, Inc., 2018.

Masrour Zoghi, Shimon Whiteson, Remi Munos, and Maarten de Rijke. Relative Upper Confidence Bound for the K-Armed Dueling Bandit Problem. In *Proceedings of the 31st International Conference on Machine Learning*, 2014.

Masrour Zoghi, Zohar Karnin, Shimon Whiteson, and Maarten de Rijke. Copeland Dueling Bandits. In *Advances in Neural Information Processing Systems 28*, 2015a.

Masrour Zoghi, Shimon Whiteson, and Maarten de Rijke. MergeRUCB: A method for large-scale online ranker evaluation. In *Proceedings of the 8th ACM International Conference on Web Search and Data Mining*, 2015b.

A Setting up Appendix and the Generalized Borda Problem

Recall from Sec. 5 that the generalized Borda score (GBS) $b_t(a, \mathbf{w})$ is defined as

$$b_t(a, \mathbf{w}) \doteq \sum_{a' \in [K]} P_t(a, a') \cdot w^{a'},$$

with respect to weight $\mathbf{w} \doteq (w^1, \dots, w^K) \in \Delta^K$. Our goal is to minimize the analogous notion of dynamic regret with respect to the quantities $b_t(a, \mathbf{w})$ in two situations: (1) the setting of *known weights* where the vector \mathbf{w} is known to the learner and (2) the setting of *unknown and changing weights* where \mathbf{w}_t changes over time t and are unknown to the learner. These two scenarios will respectively capture the Borda and Condorcet regret problems. To avoid confusion, throughout this appendix we'll sometimes refer to the usual Borda score $b_t(a, \text{Unif}\{[K]\})$ as the *uniform Borda* score (resp. regret, winner).

Throughout this appendix, we'll rewrite the definitions, theorems, and proofs of the body in terms of this general framework (with arbitrary weights \mathbf{w}_t) in order to unify presentation across the Borda and Condorcet settings. We first summarize the key results.

Note that our investigation into characterizing the minimax regret rates for this problem go beyond what is needed for showing the main results presented in the body of the paper.

A.1 Summary of Results in Appendix for Generalized Borda Problem

Table 1: Summary of Results

Environment	Model Assumption	Reference Weights	Regret Lower Bound	Upper Bound
Fixed Winner	None	Known $\mathbf{w}_t = \mathbf{w}$	$K^{1/3}T^{2/3}$	$K^{1/3}T^{2/3}$
		Unknown $\mathbf{w}_t = \mathbf{w}$	$\Omega(T)$	
	GIC (Condition 1)	Unknown $\mathbf{w}_t = \mathbf{w}$	$K^{2/3}T^{2/3}$	$K^{2/3}T^{2/3}$
Non-Stationary	None	Known $\{\mathbf{w}_t\}_t$	$K^{1/3}\tilde{L}_{\text{Known}}^{1/3}T^{2/3}$	$K^{1/3}\tilde{L}_{\text{Known}}^{1/3}T^{2/3}$
	GIC (Condition 1)	Unknown, aligned $\{\mathbf{w}_t\}_t$	$K^{2/3}\tilde{L}_{\text{Unknown}}^{1/3}T^{2/3}$	$K^{2/3}\tilde{L}_{\text{Unknown}}^{1/3}T^{2/3}$

- (a) We first establish a minimax regret rate of $K^{1/3}T^{2/3}$ for a known reference weight under the stationary setting. Interestingly, the minimax regret is the same as that of the usual Borda regret, thus showing the generic known weight problem is no harder than the usual Borda dueling bandit problem.
- (b) We also establish the minimax regret rate of $K^{1/3}\tilde{L}_{\text{Known}}^{1/3}T^{2/3}$ in the non-stationary dueling bandit problem where the underlying preference model and (known) reference weights are allowed to change, and \tilde{L}_{Known} counts the number of *significant changes in generalized winner* (see Definition 2). As a reminder, our algorithm is *adaptive* in the sense that it does not require any knowledge of \tilde{L}_{Known} . This measure of non-stationarity generalizes Definition 1 for Borda scores and so this result shows Theorem 1.
- (c) We next consider the setting of unknown weights and show it's in general impossible for a single algorithm to simultaneously obtain sublinear regret for both the uniform and Condorcet winner reference weights, thus ruling out getting both $T^{2/3}$ Borda regret and \sqrt{T} Condorcet winner regret.
- (d) In light of said impossibility, we show that under GIC, it is in fact possible to obtain $K^{2/3}T^{2/3}$ regret with respect to all unknown reference weights in the stationary setting. We then show that, even under this condition, the higher dependence on K (compared to the $K^{1/3}$ rate in the known weight setting) in this regret rate is in fact tight.
- (e) In the non-stationary dueling bandit problem with a changing sequence of unknown reference weights, we introduce a notion of *significant winner changes w.r.t. changing reference weights*, and show that,

under the GIC, one can simultaneously achieve a dynamic regret of $K^{1/3} \tilde{L}_{\text{Unknown}}^{1/3} T^{2/3}$ in terms of $\tilde{L}_{\text{Unknown}}$ significant shifts w.r.t. all sequences of reference weights which are aligned with the significant shifts. This dynamic regret rate is in fact minimax optimal and our algorithm is adaptive to unknown $\tilde{L}_{\text{Unknown}}$. These significant winner changes w.r.t. changing reference weights in fact capture the approximate winner changes of Definition 3 and so this result shows Theorem 4.

A.2 Generalized Notation Related to GBS

For ease of presentation, in the remainder of the appendix, we reparametrize the GBS $b_t(a, \mathbf{w})$ to be in terms of the *gaps in preferences* $\delta_t(a, a') \doteq P_t(a, a') - \frac{1}{2}$. Or,

$$b_t(a, \mathbf{w}) \doteq \sum_{a' \in [K]} \delta_t(a, a') \cdot w^{a'}.$$

Note the resulting regret notions and rates will not change under this new formulation. Now, define the *GBS winner* as $a_t^*(\mathbf{w}) \doteq \operatorname{argmax}_{a \in [K]} b_t(a, \mathbf{w})$ and the *GBS dynamic regret* as

$$\operatorname{Regret}(\{\mathbf{w}_t\}_{t=1}^T) \doteq \sum_{t=1}^T \frac{1}{2} (2 \cdot b_t(a_t^*(\mathbf{w}_t), \mathbf{w}_t) - b_t(i_t, \mathbf{w}_t) - b_t(j_t, \mathbf{w}_t)).$$

In the case of a known weight $\mathbf{w}_t \equiv \mathbf{w}$, we'll simplify the notation as $\operatorname{Regret}(\mathbf{w})$.

Let $\delta_t^{\mathbf{w}}(a', a) \doteq b_t(a', \mathbf{w}) - b_t(a, \mathbf{w})$ be the gap in GBS between arms a and a' at time t . Let $\delta_t^{\mathbf{w}}(a) \doteq \max_{a' \in [K]} \delta_t^{\mathbf{w}}(a', a)$ be the absolute gap in GBS of arm a .

A.3 Significant Winner Switches w.r.t. Known Weights

We now introduce generalizations of significant Borda winner switches (Definition 1) for arbitrary weights.

Definition 2 (Significant Winner Switches w.r.t. Known Weightings (SKW)). *Fix a weight \mathbf{w} . Define an arm a as having **significant generalized Borda regret** over $[s_1, s_2]$ if*

$$\sum_{s=s_1}^{s_2} \delta_s^{\mathbf{w}}(a) \geq K^{1/3} \cdot (s_2 - s_1)^{2/3}. \quad (7)$$

*Define **significant winner switches w.r.t. the known weight \mathbf{w}** (abbreviated as SKW) as follows: the 0-th sig. shift is defined as $\tau_0 = 1$ and the $(i+1)$ -th sig. shift τ_{i+1} is recursively defined as the smallest $t > \tau_i$ such that for each arm $a \in [K]$, $\exists [s_1, s_2] \subseteq [\tau_i, t]$ such that arm a has significant generalized Borda regret over $[s_1, s_2]$. We refer to the interval of rounds $[\tau_i, \tau_{i+1})$ as an SKW phase. Let \tilde{L}_{Known} be the number of SKW phases elapsed in T rounds³.*

Remark 1. *Definition 2 and subsequent results (Theorem 9 and Theorem 16) for a known weight \mathbf{w} can be trivially generalized to the setting where there's a fixed and known sequence of weights $\{\mathbf{w}_t\}_{t=1}^T$. For simplicity of presentation, we focus on the fixed weight $\mathbf{w}_t \equiv \mathbf{w}$, which preserves the essence of the theory.*

A.4 Significant Winner Switches w.r.t. Unknown Weights

We next introduce a generalization of Definition 3 for the generalized Borda problem with unknown weights. In particular, we define a notion of significant shifts which roughly tracks when any SKW occurs for some weight \mathbf{w} .

³while $\tau_i, \tilde{L}_{\text{Known}}$ depend on the fixed weight \mathbf{w} , we'll drop the dependence as needed for sake of presentation

Definition 3 (Significant Winner Switches w.r.t. Unknown Weightings (SUW)). *Define an arm a as having significant worst-case generalized Borda regret over $[s_1, s_2]$ if*

$$\max_{\mathbf{w} \in \Delta^K} \sum_{s=s_1}^{s_2} \delta_s^{\mathbf{w}}(a) \geq K^{2/3} \cdot (s_2 - s_1)^{2/3}. \quad (8)$$

We then define generalized significant winner switches ρ_0, ρ_1, \dots in an analogous manner to Definition 2. Let $\tilde{L}_{\text{Unknown}}$ be the number of generalized SUW phases.

Remark 1. *Under GIC, $\tilde{L}_{\text{Unknown}}$ is tighter than the number of changes of the winner arm a_t^* .*

Although SUW are a stronger notion of shift than SKW (i.e., $\tilde{L}_{\text{Unknown}} \geq \tilde{L}_{\text{Known}}$), the SUW can be learned in a more general setting where one aims to minimize dynamic regret w.r.t. any sequence of changing weights $\{\mathbf{w}_t\}_{t=1}^T$ which are *aligned* with the SUW, defined as follows.

Definition 4 (Aligned Sequence of Weights). *We say a sequence $\{\mathbf{w}_t\}_{t=1}^T$ of weights is aligned with SUW if the weight \mathbf{w}_t does not change for rounds t lying in SUW phase $[\rho_i, \rho_{i+1})$*

In particular, as mentioned in Sec. 5, setting \mathbf{w}_t as the Condorcet winner weight $\mathbf{w}(a_t^c)$ recovers the Condorcet regret problem. Quite importantly, in this setting, the weights \mathbf{w}_t are unknown and so their changepoints are also unknown since the SUW are.

B Regret Lower Bounds for GBS

B.1 Stationary Regret Lower Bound (Known Weight)

We first show that, in the stationary setting, the problem of minimizing generalized Borda regret w.r.t. any fixed and known weight \mathbf{w} is as hard as the uniform Borda problem (i.e., $K^{1/3} \cdot T^{2/3}$ minimax regret).

Theorem 5 (Lower Bound on Regret in Stochastic Setting). *For any algorithm and any reference weight $\mathbf{w}_t \equiv \mathbf{w}$, there exists a preference matrix \mathbf{P} , with $K \geq 3$, such that the expected regret is:*

$$\mathbb{E}[\text{Regret}(\mathbf{w})] \geq \Omega(K^{1/3} \cdot T^{2/3}).$$

Proof. We construct an environment similar to the lower bound construction for the uniform Borda score (Saha et al., 2021, Lemma 14). As in said result, it will in fact suffice to construct an environment forcing a regret lower bound (w.r.t. weight \mathbf{w}) of order $\Omega(\min\{T \cdot \varepsilon, K/\varepsilon^2\})$ for $\varepsilon \in (0, 0.05)$. Taking $\varepsilon := (K/T)^{1/3}$ will then give the desired result, since $(K/T)^{1/3} < 0.05$ for large enough value of T/K . For T/K smaller than a constant, we may take ε small enough so that $\frac{K}{\varepsilon^2} \geq (\frac{T}{K})^{2/3} \cdot K = T^{2/3} K^{1/3}$ to conclude.

Suppose K is even; if K is odd, we may reduce to a dueling bandit problem with $K - 1$ arms by setting the gaps $\delta(a, a')$ to zero for some fixed arm $a \in [K]$ and any other arm $a' \in [K]$. First observe that for any reference weight \mathbf{w} , there must exist a set of arms \mathcal{I} of size at most $K/2$ such that its mass under \mathbf{w} is $w(\mathcal{I}) \geq 1/2$. This follows since either the set of arms $\{1, \dots, K/2\}$ or $\{K/2 + 1, \dots, K\}$ has mass at least $1/2$ under the distribution $w(\cdot)$. We then partition the K arms into a *good set* $\mathcal{G} := [K] \setminus \mathcal{I}$ and *bad set* $\mathcal{B} := \mathcal{I}$. Without loss of generality, suppose $\mathcal{G} = \{1, \dots, K/2\}$. We'll consider $K/2 + 1$ different environments $\mathcal{E}_0, \mathcal{E}_1, \dots, \mathcal{E}_{K/2}$ where in \mathcal{E}_a for $a \in [K/2]$, arm a will maximize the generalized Borda score $b(\cdot, \mathbf{w})$.

Specifically, we set the preference matrix $\mathbf{P} \equiv \mathbf{P}_t$ as follows:

Environment \mathcal{E}_0 : Let the preference matrix \mathbf{P} have entries

$$P(a, a') = \begin{cases} 0.5 & a, a' \in \mathcal{G} \text{ or } a, a' \in \mathcal{B} \\ 0.9 & a \in \mathcal{G}, a' \in \mathcal{B} \end{cases}.$$

In this environment, the generalized Borda score is

$$b(a, \mathbf{w}) = \begin{cases} 0.4 \cdot w(\mathcal{B}) & a \in \mathcal{G} \\ -0.4 \cdot w(\mathcal{G}) & a \in \mathcal{B} \end{cases}$$

where $w(\cdot)$ denotes the distribution on $\Delta^{[K]}$ induced by weight \mathbf{w} .

The alternative environments $\mathcal{E}_1, \dots, \mathcal{E}_{K/2}$ will be small perturbations of \mathcal{E}_0 where an arm $a \in \mathcal{G}$ will have the highest generalized Borda score by a margin of ε .

Environment \mathcal{E}_a for $a \in [K/2]$: Let the preference matrix \mathbf{P} be identical to that of environment \mathcal{E}_0 except in the entries $P(a, a') = 0.9 + \varepsilon$ for $a' \in \mathcal{B}$. Thus, in this environment the generalized Borda scores are identical to that of \mathcal{E}_0 except for $b(a, \mathbf{w}) = (0.4 + \varepsilon) \cdot w(\mathcal{B})$, meaning arm a is the winner w.r.t. weight \mathbf{w} .

Let $\mathbb{E}_{\mathcal{E}_a}[\cdot], \mathbb{P}_{\mathcal{E}_a}(\cdot)$ denote the expectation and probability measure of the induced distributions on observations and decisions under environment \mathcal{E}_a . Now, the expected regret on environment \mathcal{E}_a is lower bounded by

$$\mathbb{E}_{\mathcal{E}_a}[\text{Regret}(\mathbf{w})] \geq \sum_{t=1}^T \varepsilon \cdot \mathbb{E}_{\mathcal{E}_a}[\mathbf{1}\{(i_t, j_t) \neq (a, a)\}] = \varepsilon \cdot \left(T - \mathbb{E}_{\mathcal{E}_a} \left[\sum_{t=1}^T \mathbf{1}\{(i_t, j_t) = (a, a)\} \right] \right).$$

Letting \mathcal{U} be a uniform prior over $\{1, \dots, K/2\}$, we have the expected regret over a random environment drawn from \mathcal{U} is lower bounded by:

$$\mathbb{E}_{a \sim \mathcal{U}}[\mathbb{E}_{\mathcal{E}_a}[\text{Regret}(\mathbf{w})]] \geq \varepsilon \cdot \left(T - \mathbb{E}_{a \in \mathcal{U}} \left[\mathbb{E}_{\mathcal{E}_a} \left[\sum_{t=1}^T \mathbf{1}\{(i_t, j_t) = (a, a)\} \right] \right] \right). \quad (9)$$

Let $N_T(a) := \sum_{t=1}^T \mathbf{1}\{(i_t, j_t) = (a, a)\}$ be the (random) *arm-pull count* of arm a . Then, since $N_T(a) \leq T$ for all values of a , by Pinsker's inequality (see [Saha and Gaillard, 2022](#), proof of Lemma C.1), we have

$$\mathbb{E}_{\mathcal{E}_a}[N_T(a)] - \mathbb{E}_{\mathcal{E}_0}[N_T(a)] \leq T \sqrt{\frac{\text{KL}(\mathcal{P}_0, \mathcal{P}_a)}{2}},$$

where $\mathcal{P}_{a'}$ is the induced distribution on the history of observations and decisions under environment $\mathcal{E}_{a'}$. Taking a further expectation over $a \in \mathcal{U}$ and using Jensen's inequality, we obtain:

$$\mathbb{E}_{a \sim \mathcal{U}}[\mathbb{E}_{\mathcal{E}_a}[N_T(a)]] \leq \frac{1}{K/2} \sum_{a \in \{1, \dots, K/2\}} \mathbb{E}_{\mathcal{E}_0}[N_T(a)] + T \sqrt{\frac{2}{K} \sum_{a \in \{1, \dots, K/2\}} \text{KL}(\mathcal{E}_0, \mathcal{E}_a)}. \quad (10)$$

We now aim to bound this last KL term. Letting \mathcal{H}_t be the history of randomness, observations, and decisions till round t : $\mathcal{H}_t := \{a\} \cup \{(i_s, j_s, O_s(i_s, j_s))\}_{s \leq t}$ for $t \geq 1$ and $\mathcal{H}_0 := \{a\}$. Let \mathcal{P}_a^t denote the marginal distribution over the round t data $(i_t, j_t, O_t(i_t, j_t))$ under the realization of environment \mathcal{E}_a . By the chain rule for KL, we have

$$\text{KL}(\mathcal{P}_0, \mathcal{P}_a) = \sum_{t=1}^T \text{KL}(\mathcal{P}_0^t | \mathcal{H}_{t-1}, \mathcal{P}_a^t | \mathcal{H}_{t-1}) = \sum_{t=1}^T \sum_{i=K/2+1}^K \mathbb{P}_{\mathcal{E}_0}(\{i_t, j_t\} = \{a, i\}) \cdot \text{KL}(\text{Ber}(0.9), \text{Ber}(0.9 + \varepsilon)). \quad (11)$$

Next, observe the following bound on the KL between $\text{Ber}(0.9)$ and $\text{Ber}(0.9 + \varepsilon)$:

$$\text{KL}(\text{Ber}(0.9), \text{Ber}(0.9 + \varepsilon)) \leq 0.9 \cdot \log \left(\frac{0.9}{0.9 + \varepsilon} \right) + 0.1 \cdot \log \left(\frac{0.1}{0.1 - \varepsilon} \right).$$

By elementary calculations, the above is less than $10 \cdot \varepsilon^2$ for any $\varepsilon \in (0, 0.05)$.

Now, suppose the algorithm incurs regret at most $\epsilon \cdot T$ on all environments \mathcal{E}_a , lest we be done. Then, the total number of times a bad arm in \mathcal{B} is played must be at most $\epsilon \cdot T/0.4$ or for all $a \in \{0, 1, \dots, K/2 + 1\}$:

$$\mathbb{E}_{\mathcal{E}_a} \left[\sum_{t=1}^T \mathbf{1}\{\{i_t, j_t\} \cap \mathcal{B} \neq \emptyset\} \right] \leq \frac{\epsilon \cdot T}{0.4}.$$

Plugging the above two steps into (11) yields

$$\frac{2}{K} \sum_{a \in \{1, \dots, K/2\}} \text{KL}(\mathcal{P}_0, \mathcal{P}_a) \leq \frac{20\epsilon^2}{K} \sum_{a \in \{1, \dots, K/2\}} \sum_{i=K/2+1}^K \mathbb{E}_{\mathcal{E}_0} \left[\sum_{t=1}^T \mathbf{1}\{\{i_t, j_t\} = \{a, i\}\} \right] \leq \frac{50 \cdot \epsilon^3 \cdot T}{K}.$$

Then, plugging the above into (10) yields

$$\mathbb{E}_{a \sim \mathcal{U}} [\mathbb{E}_{\mathcal{E}_a} [N_T(a)]] \leq \frac{1}{K/2} \sum_{a \in \{1, \dots, K/2\}} \mathbb{E}_{\mathcal{E}_0} [N_T(a)] + T \sqrt{\frac{50\epsilon^3}{K} \cdot T}.$$

Thus, plugging the above steps into (9) gives

$$\mathbb{E}_{a \in \mathcal{U}, \mathcal{E}_a} [\text{Regret}(\mathbf{w})] \geq \epsilon \cdot \left(T - \left(\frac{T}{K/2} + T \sqrt{\frac{50\epsilon^3}{K} \cdot T} \right) \right).$$

Now, suppose $\frac{50\epsilon^3 \cdot T}{K} \leq 1/50$. Then, the above RHS is lower bounded by $\epsilon \cdot T/2500$ for $K \geq 3$.

It remains to handle the case of $\frac{50\epsilon^3 \cdot T}{K} > 1/50 \implies T \geq \frac{K}{2500\epsilon^3}$. Suppose, for contradiction, that for all such T we have regret at most $\frac{K}{2500^2\epsilon^2}$. Then, the regret over just the first $T_0 := \frac{K}{2500\epsilon^3}$ rounds must also be at most $\frac{K}{2500^2\epsilon^2} = \epsilon \cdot T_0/2500$. However, this contradicts the previous case's lower bound for $T = T_0$. ■

B.2 Hardness of Learning all Generalized Winners

We next turn our attention to minimizing stationary regret w.r.t an unknown, but fixed, weight \mathbf{w} , which the following theorem asserts is hard.

Theorem 6 (Lower Bound on Regret with Unknown Weight). *There exists a stochastic problem $\mathbf{P} \in [0, 1]^{K \times K}$ such that for any algorithm, there is a reference weight $\mathbf{w} \in \Delta^K$ such that:*

$$\mathbb{E}[\text{Regret}(\mathbf{w})] \geq T/45.$$

Proof. Consider the following stationary preference matrix:

$$\mathbf{P} := \begin{pmatrix} 1/2 & 3/5 & 3/5 \\ 2/5 & 1/2 & 1 \\ 2/5 & 0 & 1/2 \end{pmatrix}$$

In this environment arm 1 is the Condorcet winner while arm 2 is the Borda winner w.r.t. the uniform reference weight. For the Condorcet weight $\mathbf{w}(1)$, both arms 2 and 3 have a gap of $1/10$. On the other hand, the Condorcet winner has a gap in Borda scores of $1/15$ to arm 2. However, any algorithm must play one of arms 1, 2, or 3 at least $T/3$ times in expectation. No matter which arm is played $T/3$ times, there is a weight for which its generalized Borda regret is at least $T/45$. ■

Remark 2. *In fact, the lower bound of Theorem 6 holds even for an algorithm knowing the preference matrix \mathbf{P} . The task of minimizing generalized Borda regret for an unknown reference weight \mathbf{w} can also be cast as a **partial monitoring** problem with fixed feedback \mathbf{P} but unknown matrix of losses decided by the adversary's weight. It's straightforward to verify that this game is not **globally observable**, meaning the minimax expected regret is $\Omega(T)$ by the classification of finite partial monitoring games (Bartók et al., 2014).*

B.3 Stationary Regret Lower Bound for Unknown Weight under GIC

Under GIC (Condition 1), we next focus on deriving regret lower bounds in stochastic environments where there is a fixed winner arm $a^* \equiv a_t^*$ across all rounds. Even under GIC, the best rate we can achieve for all weights is $T^{2/3}$. In particular, so long as an algorithm attains optimal uniform Borda regret it cannot achieve \sqrt{T} Condorcet regret.

Theorem 7 (Lower Bound on Adaptive Regret with GIC). *Fix any algorithm satisfying $\mathbb{E}[\text{Regret}(\text{Unif}\{[K]\})] \leq C \cdot T^{2/3}$ for all $K = 3$ armed dueling bandit instances. Then, there exists a stochastic problem $\mathbf{P} \in [0, 1]^{3 \times 3}$ satisfying Condition 1 such that for the specialization $\mathbf{w} = \mathbf{w}(a^*)$ and sufficiently large T , we have:*

$$\mathbb{E}[\text{Regret}(\mathbf{w})] \geq \Omega(T^{2/3}/C^2).$$

Proof. Consider the preference matrix for $\varepsilon := 4C \cdot T^{-1/3}$:

$$\mathbf{P}^1 = \begin{pmatrix} 1/2 & 1/2 & 0.9 + \varepsilon \\ 1/2 & 1/2 & 0.9 \\ 0.1 - \varepsilon & 0.1 & 1/2 \end{pmatrix}, \mathbf{P}^2 = \begin{pmatrix} 1/2 & 1/2 & 0.9 \\ 1/2 & 1/2 & 0.9 + \varepsilon \\ 0.1 & 0.1 - \varepsilon & 1/2 \end{pmatrix}.$$

Set T large enough so that $\varepsilon < 0.05$.

We first sketch out the intuition behind the proof. In \mathbf{P}^1 , arm 1 is both the Condorcet winner and the Borda winner, while in \mathbf{P}^2 , arm 2 is. The argument will go as follows: first, the algorithm must identify the winner arm and whether we're in \mathbf{P}^1 or \mathbf{P}^2 since otherwise it pays more than $C \cdot T^{2/3}$ uniform Borda regret. The only way to identify the winner arm, however, is to play arm 3 at least $\Omega(T^{2/3})$ times. This forces a $\Omega(T^{2/3})$ Condorcet winner regret.

Specifically, for $a \in \{1, 2\}$ let $a^- := \{1, 2\} \setminus \{a\}$ denote the other potential winner arm. Then, we have

$$\mathbb{E}_{\mathbf{P}^a} [\text{Regret}(\text{Unif}\{[3]\})] \leq C \cdot T^{2/3} \implies \mathbb{E}_{\mathbf{P}^a} \left[\sum_{t=1}^T \mathbf{1}\{\{a^-, 3\} \cap \{i_t, j_t\} \neq \emptyset\} \right] \leq \frac{3T}{4}.$$

Then, using a Pinsker inequality argument similar to the proof of Theorem 5,

$$\begin{aligned} \mathbb{E}_{\mathbf{P}^a} [\text{Regret}(\mathbf{w}(a))] &\geq \varepsilon \cdot \mathbb{E}_{\mathbf{P}^a} \left[\sum_{t=1}^T \mathbf{1}\{\{3, a^-\} \cap \{i_t, j_t\} \neq \emptyset\} \right] \\ &\geq \varepsilon \cdot \left(T - \mathbb{E}_{\mathbf{P}^a} \left[\sum_{t=1}^T \mathbf{1}\{i_t = j_t = a\} \right] \right) \\ &\geq \varepsilon \cdot \left(T - \left(\mathbb{E}_{\mathbf{P}^{a^-}} \left[\sum_{t=1}^T \mathbf{1}\{i_t = j_t = a\} \right] + T \sqrt{\frac{\text{KL}(\mathcal{P}_{a^-}, \mathcal{P}_a)}{2}} \right) \right), \end{aligned}$$

where once again $\mathcal{P}_a, \mathcal{P}_{a^-}$ denote the corresponding induced distributions on all random variables. We next bound the above KL divergence by chain rule and our earlier bound on $\text{KL}(\text{Ber}(0.9), \text{Ber}(0.9 + \varepsilon))$:

$$\text{KL}(\mathcal{P}_{a^-}, \mathcal{P}_a) \leq 10\varepsilon^2 \cdot \mathbb{E}_{\mathcal{P}_{a^-}} \left[\sum_{t=1}^T \mathbf{1}\{\{i_t, j_t\} = \{a, 3\}\} + \mathbf{1}\{\{i_t, j_t\} = \{a^-, 3\}\} \right]$$

Next, note that arm 3 has a uniform Borda gap of at least $0.4 \cdot 2/3$ in either \mathbf{P}^1 or \mathbf{P}^2 . This means we must have

$$\mathbb{E}_{\mathcal{P}_{a^-}} \left[\sum_{t=1}^T \mathbf{1}\{\{i_t, j_t\} = \{a, 3\}\} + \mathbf{1}\{\{i_t, j_t\} = \{a^-, 3\}\} \right] \leq \frac{C \cdot T^{2/3}}{0.4 \cdot 2/3} = \frac{\varepsilon \cdot T}{0.4 \cdot 8/3}.$$

Thus, our KL bound from earlier becomes $\frac{75}{8} \cdot \varepsilon^3 \cdot T$.

Plugging this into our earlier inequality, we have a regret lower bound of

$$\varepsilon \cdot \left(T - \left(\frac{3T}{4} + T \sqrt{\frac{75}{8} \cdot \varepsilon^3 \cdot T} \right) \right).$$

By a similar argument to the proof of Theorem 5, the above is order $\Omega(\min\{\varepsilon \cdot T, 1/\varepsilon^2\})$ by analyzing the two cases $\varepsilon^3 \cdot T \cdot (75/8) > 8/75$ and $\varepsilon^3 \cdot T \cdot (75/8) \leq 8/75$.

Now, plugging in our value of ε , this last rate is of order $T^{2/3} \cdot \min\{C, C^{-2}\}$. \blacksquare

As a consequence, Theorem 7 prohibits using Condorcet regret minimizing algorithms in this setting, and hence new algorithmic techniques are required for efficiently learning winners under GIC.

We next investigate the dependence on K in the minimax regret rate. We show that, to achieve optimal regret for all (unknown) weights adaptively, we need to suffer a higher dependence on K of $K^{2/3}$, compared to the known and fixed weight setting with dependence $K^{1/3}$ (see Theorem 5).

Theorem 8 (Lower Bound on Adaptive Regret under GIC). *Fix any algorithm. Then, for $K > 3$, there exists a dueling bandit problem $\mathbf{P} \in [0, 1]^{K \times K}$ satisfying Condition 1 such that there is a fixed weight $\mathbf{w} \in \Delta^K$ with:*

$$\mathbb{E}[\text{Regret}(\mathbf{w})] \geq \Omega(\min\{K^{2/3}T^{2/3}, T\}).$$

Proof. We first sketch the argument. We'll consider a variant of the environments $\mathcal{E}_0, \mathcal{E}_1, \dots, \mathcal{E}_{K/2}$ introduced in the proof of Theorem 5. Recall there is a good set $\mathcal{G} := \{1, \dots, K/2\}$ and a bad set $\mathcal{B} := \{K/2 + 1, \dots, K\}$ of arms. In every environment, the good arms (resp. bad arms) have a gap of zero when compared to each other. In \mathcal{E}_0 , each good arm has a gap of 0.4 to each bad arm. Now, we introduce a further refinement of this construction and define the environment $\mathcal{E}_{a,a'}$ for $a \in \mathcal{G}$ and $a' \in \mathcal{B}$ as identical to the environment \mathcal{E}_0 except $P(a, a') = 0.9 + \varepsilon$. Now, the sample complexity of finding the winner arm a in environment $\mathcal{E}_{a,a'}$ will be $\frac{K^2}{\varepsilon^2}$ whence we'll pay a regret of $\min\{\varepsilon \cdot T, K^2 \cdot \varepsilon^{-2}\}$. Setting $\varepsilon \propto K^{2/3}T^{-1/3}$ then forces $K^{2/3} \cdot T^{2/3}$ regret.

Let \mathcal{U} be a uniform prior over pairs of arms (a, a') for $a \in \mathcal{G}$ and $a' \in \mathcal{B}$. Then, we have

$$\mathbb{E}_{(a,a') \sim \mathcal{U}} \mathbb{E}_{\mathcal{E}_{a,a'}} [\text{Regret}(\mathbf{w}(a'))] \geq \varepsilon \cdot \left(T - \mathbb{E}_{(a,a') \sim \mathcal{U}} \left[\mathbb{E}_{\mathcal{E}_{a,a'}} \left[\sum_{t=1}^T \mathbf{1}\{(i_t, j_t) = (a, a')\} \right] \right] \right).$$

Now, by Pinsker's inequality we have

$$\mathbb{E}_{(a,a') \sim \mathcal{U}} \left[\mathbb{E}_{\mathcal{E}_{a,a'}} [N_T(a)] \right] \leq \frac{1}{(K/2)^2} \sum_{a \in \mathcal{G}, a' \in \mathcal{B}} \mathbb{E}_{\mathcal{E}_0} [N_T(a)] + T \sqrt{\frac{1}{(K/2)^2} \sum_{a \in \mathcal{G}, a' \in \mathcal{B}} \text{KL}(\mathcal{E}_0, \mathcal{E}_{a,a'})},$$

where recall $N_T(a) := \sum_{t=1}^T \mathbf{1}\{(i_t, j_t) = (a, a')\}$. Next, we bound this KL in an identical way to the calculations of the proof of Theorem 5:

$$\text{KL}(\mathcal{E}_0, \mathcal{E}_{a,a'}) \leq 10 \cdot \varepsilon^2 \cdot \mathbb{E}_{\mathcal{E}_0} \left[\sum_{t=1}^T \mathbf{1}\{\{i_t, j_t\} = \{a, a'\}\} \right].$$

Now, suppose the algorithm incurs regret at most $\varepsilon \cdot T$ on environment \mathcal{E}_0 lest we be done. This means it cannot pull arms $a' \in \mathcal{B}$ more than $T \cdot \varepsilon / 0.4$ times in total, or

$$\mathbb{E}_{\mathcal{E}_0} \left[\sum_{a \in \mathcal{G}, a' \in \mathcal{B}} \sum_{t=1}^T \mathbf{1}\{\{i_t, j_t\} = \{a, a'\}\} \right] \leq \frac{T \cdot \varepsilon}{0.4}.$$

Thus,

$$\frac{4}{K^2} \sum_{a \in \mathcal{G}, a' \in \mathcal{B}} \text{KL}(\mathcal{E}_0, \mathcal{E}_{a,a'}) \leq \frac{100 \cdot \varepsilon^3 \cdot T}{K^2}.$$

Plugging this KL bound into our earlier Pinsker bound, we obtain a regret lower bound of

$$\mathbb{E}_{(a,a') \sim \mathcal{U}} \mathbb{E}_{\mathcal{E}_{a,a'}} [\text{Regret}(\mathbf{w}(a'))] \geq \varepsilon \cdot \left(T - \left(\frac{4T}{K^2} + T \sqrt{\frac{100 \cdot \varepsilon^3 \cdot T}{K^2}} \right) \right).$$

By an analogous argument to the proof of Theorem 5, the above is lower bounded by $\Omega(\min\{\varepsilon \cdot T, K^2 \varepsilon^{-2}\})$. \blacksquare

C Dynamic Regret Lower Bounds

C.1 Known Weight Setting

Now, for the known weight setting, the $K^{1/3} \cdot T^{2/3}$ lower bound of Theorem 5 can naturally be extended to a dynamic regret lower bound of order $\tilde{L}_{\text{Known}}^{1/3} \cdot T^{2/3} \cdot K^{1/3}$ over \tilde{L}_{Known} SKW phases. The proof techniques are routine, similar to arguments already used for showing dynamic regret lower bounds for Condorcet regret (Saha and Gupta, 2022, Section 5), and will not be done in detail here to avoid redundancy.

Theorem 9 (Fixed Weight Dynamic Regret Lower Bound in Terms of SKW). *For $L \in [T]$, let $\mathcal{P}(L)$ be the class of environments with SKW $\tilde{L}_{\text{Known}}(\mathbf{w}) \leq L$. For any algorithm, we have there exists a changing environment in $\mathcal{P}(L)$ such that the dynamic regret with respect to known weight \mathbf{w} is lower bounded by*

$$\mathbb{E}[\text{Regret}(\mathbf{w})] \geq \Omega(L^{1/3} \cdot T^{2/3} \cdot K^{1/3}).$$

Proof. (Sketch) We can take the lower bound construction of Theorem 5 over a horizon of length T/L to force a regret of $K^{1/3} \cdot (T/L)^{2/3}$. Repeating this construction with a new randomly chosen winner arm every T/L rounds forces a total regret of $K^{1/3} \cdot L^{1/3} \cdot T^{2/3}$ while satisfying $\tilde{L}_{\text{Known}}(\mathbf{w}) \leq L$. \blacksquare

Theorem 10 (Fixed Weight Dynamic Regret Lower Bound in Terms of Total Variation). *For $V \in [0, T] \cap \mathbb{R}$, let $\mathcal{P}(V)$ be the class of environments with total variation V_T at most V . For any algorithm, we have there exists a changing environment with total variation V_T such that the dynamic regret with respect to known weight \mathbf{w} is lower bounded by*

$$\mathbb{E}[\text{Regret}(\mathbf{w})] \geq \Omega(V^{1/4} \cdot T^{3/4} \cdot K^{1/4} + K^{1/3} \cdot T^{2/3}).$$

Proof. (Sketch) The argument is analogous to the proof of Theorem 5.2 in Saha and Gupta (2022). First, assume $T^{1/4} \cdot V^{3/4} \cdot K^{-1/4} \geq 1$. Then, using the previous lower bound construction forcing regret of order $L^{1/3} \cdot T^{2/3} \cdot K^{1/3}$, we can use the specialization $L \propto T^{1/4} \cdot V^{3/4} \cdot K^{-1/4}$ which ensures the total variation V_T at most

$$L \cdot (K \cdot L/T)^{1/3} = L^{4/3} \cdot K^{1/3} \cdot T^{-1/3} \leq V$$

and forces a regret lower bound of order

$$L^{1/3} \cdot T^{2/3} \cdot K^{1/3} \propto T^{3/4} \cdot K^{1/4} \cdot V^{1/4}.$$

If $T^{1/4} \cdot V^{3/4} \cdot K^{-1/4} < 1$, then $V^{1/4} \cdot T^{3/4} \cdot K^{1/4} < K^{1/3} \cdot T^{2/3}$ which means it suffices to establish a regret lower bound of order $K^{1/3} \cdot T^{2/3}$ which is already evident from Theorem 5. \blacksquare

Remark 3. *Note the optimal dependence on V_T , T , and K in Theorem 10 differ from the minimax Condorcet dynamic regret rate of $V_T^{1/3} \cdot T^{2/3} \cdot K^{1/3}$. This arises from the different stationary minimax regret rates ($T^{2/3}$ versus $T^{1/2}$) of Condorcet versus Borda regret.*

C.2 Unknown Weight Setting

By analogous arguments as in the previous section, except now using the stationary lower bound construction of Theorem 8 as a base template, we have the dynamic regret is lower bounded by $L^{1/3} \cdot T^{2/3} \cdot K^{2/3}$ for environments SUW count $\tilde{L}_{\text{Unknown}} \leq L$.

For total variation budget V , we claim the regret lower bound is of order $V^{1/4} \cdot T^{3/4} \cdot K^{1/2} + K^{2/3} \cdot T^{2/3}$. In particular, we note that if $V = O(K^{2/3}T^{-1/3})$, then $V^{1/4}K^{3/4}K^{1/2} = O(K^{2/3}T^{2/3})$ so that it suffices to use the stationary regret bound of Theorem 8. Otherwise, we have $V = \Omega(K^{2/3}T^{-1/3})$ and $L \doteq V^{3/4}T^{1/4}K^{-1/2} = \Omega(1)$ so that a regret lower bound of order $L^{1/3}T^{2/3}K^{2/3} = \Omega(V^{1/4}T^{3/4}K^{1/2})$ holds. At the same time $L \cdot (K^2/T)^{1/3} \leq V$ so that the constructed environment has total variation at most V .

D Fixed Winner Regret Analysis

As a warmup to proving the dynamic regret upper bounds, we'll first show a regret upper bound in easier *fixed winner* environments where there is a fixed winner arm either (1) with respect to a known weight or (2) with respect to all unknown weights under Condition 1.

These ‘‘simpler’’ analyses will reappear and serve as a core template for the more complicated dynamic regret analyses of Appendix E (known weight) and Appendix F (unknown weight).

D.1 Preliminaries and Concentration Bounds for Estimation

Throughout the regret upper bound analyses c_1, c_2, \dots will denote positive constants not depending on T or any distributional parameters.

We first recall a version of Freedman’s martingale concentration inequality, which has become standard in adaptive non-stationary bandit analyses (Suk and Agarwal, 2023; Buening and Saha, 2023; Suk and Kpotufe, 2022).

Lemma 11 (Theorem 1 of Beygelzimer et al. (2011)). *Let $X_1, \dots, X_n \in \mathbb{R}$ be a martingale difference sequence with respect to some filtration $\{\mathcal{F}_0, \mathcal{F}_1, \dots\}$. Assume for all t that $X_t \leq R$ a.s. and that $\sum_{i=1}^n \mathbb{E}[X_i^2 | \mathcal{F}_{i-1}] \leq V_n$ a.s. for some constant V_n only depending on n . Then for any $\delta \in (0, 1)$ and $\lambda \in [0, 1/R]$, with probability at least $1 - \delta$, we have:*

$$\sum_{i=1}^n X_i \leq (e - 1) \left(\sqrt{V_n \log(1/\delta)} + R \log(1/\delta) \right).$$

We next apply Lemma 11 to bound the estimation error of our estimates $\hat{b}_t(a, \mathbf{w})$ (see (5) in Subsec. 6.1)

Proposition 12. *Let \mathcal{E}_1 be the event that for all rounds $s_1 < s_2$ and all arms $a \in \mathcal{A}_t$ for all $t \in [s_1, s_2]$, and weight $\mathbf{w} \in \mathcal{W}$:*

$$\left| \sum_{t=s_1}^{s_2} \hat{b}_t(a, \mathbf{w}) - \sum_{t=s_1}^{s_2} \mathbb{E} \left[\hat{b}_t(a, \mathbf{w}) \mid \mathcal{F}_{t-1} \right] \right| \leq 10(e - 1) \log(T|\mathcal{W}|) \left(\sqrt{\left(\sum_{s=s_1}^{s_2} K \sum_{a'} \frac{w_{a'}^2}{q_s(a')} \right)} + K \cdot \max_{t \in [s_1, s_2]} \eta_t^{-1} \right). \quad (12)$$

where $\mathcal{F} := \{\mathcal{F}_t\}_{t=1}^T$ is the canonical filtration generated by observations and randomness of elapsed rounds. Then, \mathcal{E}_1 occurs with probability at least $1 - 1/T^2$.

Proof. First, note for any arm $a \in [K]$ and weight \mathbf{w} , the random variable $\hat{b}_t(a, \mathbf{w}) - \mathbb{E}[\hat{b}_t(a, \mathbf{w}) | \mathcal{F}_{t-1}]$ is a martingale difference bounded above by $\max_{t \in [s_1, s_2]} K \cdot \eta_t^{-1}$. Then, in light of Lemma 11, it suffices to

compute the variance of $\hat{b}_t(a)$. We have for arm a active at round t (i.e., $a \in \mathcal{A}_t$):

$$\begin{aligned} \mathbb{E}[\hat{b}_t^2(a) | \mathcal{H}_{t-1}] &\leq \mathbb{E} \left[\left(\sum_{a' \in [K]} \frac{\mathbf{1}\{i_t = a, j_t = a'\} \cdot (O_t(a, a') - 1/2)}{q_t(a) \cdot q_t(a')} \cdot w_{a'} \right)^2 \right] \\ &= \mathbb{E} \left[\sum_{a' \in [K]} \frac{\mathbf{1}\{(i_t, j_t) = (a, a')\}}{q_t^2(a) \cdot q_t^2(a')} \cdot w_{a'}^2 \right] \\ &= \sum_{a' \in [K]} \frac{w_{a'}^2}{q_t(a) \cdot q_t(a')} \\ &\leq K \sum_{a'} \frac{w_{a'}^2}{q_t(a')}, \end{aligned}$$

where the last inequality follows from the fact that $q_t(a) \geq 1/K$ by virtue of $a \in \mathcal{A}_t$. Then, the result follows from Lemma 11 and taking union bounds over arms a , weight $\mathbf{w} \in \mathcal{W}$, and rounds s_1, s_2 . \blacksquare

We next establish separate applications of this concentration bound for the setting of known weights and unknown weights. For these settings, we respectively set $\mathcal{W} = \{\mathbf{w}\}$ for known weight \mathbf{w} and $\mathcal{W} = \{\mathbf{w}(a), a \in [K]\}$ for unknown weights.

Known Reference Weight. First, in the case of a known and fixed reference weight $\mathcal{W} = \{\mathbf{w}\}$, we can observe:

$$q_s(a) \geq \eta_s \cdot w_a \implies K \sum_{a'} \frac{w_{a'}^2}{q_s(a')} \leq K \sum_{a'} w_{a'} \cdot \eta_s^{-1} = K \cdot \eta_s^{-1}. \quad (13)$$

Unknown Reference Weight. For an unknown reference weight, and when $\mathcal{W} = \{\mathbf{w}(a), a \in [K]\}$, we have the algorithm plays, w.p. η_t at round t , from $\text{Unif}\{[K]\}$ so that:

$$q_t(a) \geq \eta_t/K \implies K \sum_{a'} \frac{w_{a'}^2}{q_s(a')} \leq \frac{K^2}{\eta_t}. \quad (14)$$

Now, combining (13) and (14) with (12) yields the following *parameter specifications* for use in the known vs. unknown weight setting.

Definition 5 (Parameter Specifications). *We define two parameter specifications for use in Algorithm 1 (for known vs. unknown weights). We define the **known weight specification** w.r.t. weight $\mathbf{w} \in \Delta^K$ via $\mathcal{W} \doteq \{\mathbf{w}\}$, $\gamma_t \doteq \min\{K^{1/3} \cdot t^{-1/3}, 1\}$,*

$$F([s_1, s_2]) \doteq K^{1/3} \cdot (s_2 - s_1)^{2/3} \vee \left(\sqrt{K \sum_{s=s_1}^{s_2} \eta_s^{-1}} + K \max_{s \in [s_1, s_2]} \eta_s^{-1} \right). \quad (15)$$

*The **unknown weight specification** is defined via $\mathcal{W} \doteq \{\mathbf{w}(a), a \in [K]\}$ (i.e., the point-mass weights), $\gamma_t \doteq \min\{K^{2/3} \cdot t^{-1/3}, 1\}$, and*

$$F([s_1, s_2]) \doteq K^{2/3} \cdot (s_2 - s_1)^{2/3} \vee \left(\sqrt{K^2 \sum_{s=s_1}^{s_2} \eta_s^{-1}} + K \max_{s \in [s_1, s_2]} \eta_s^{-1} \right). \quad (16)$$

We next establish an elementary helper lemma which asserts that the intervals of rounds $[s_1, s_2]$ over which we evict an arm a in (6) must be at least $\Omega(K)$ rounds in length for the fixed weight specification and at least $\Omega(K^2)$ rounds in length for the unknown weight specification. This will serve useful in further simplifying the concentration bound of (12) throughout the regret analysis, as needed.

Lemma 13. *On event \mathcal{E}_1 , letting $F([s_1, s_2])$ be as in (15) with the fixed weight specification, we have that the eviction criterion (6) holding over interval $[s_1, s_2]$ implies*

$$s_2 - s_1 \geq K/8.$$

Letting $F([s_1, s_2])$ be as in (16) with the unknown weight specification, we have

$$s_2 - s_1 \geq K^2/8.$$

Proof. By concentration (Proposition 12) and since the generalized Borda gaps $\delta_t^{\mathbf{w}}(a', a)$ are bounded above by 1, eviction of an arm a over $[s_1, s_2]$ under the fixed weight specification implies

$$2 \cdot (s_2 - s_1) \geq s_2 - s_1 + 1 \geq \sum_{s=s_1}^{s_2} \delta_s^{\mathbf{w}}(a) \geq K^{1/3} \cdot (s_2 - s_1)^{2/3}.$$

The above implies $s_2 - s_1 \geq K/8$. For the unknown weight specification, we repeat the above argument with $K^{1/3}$ replaced by $K^{2/3}$. \blacksquare

D.2 Regret Upper Bound under Fixed Winner for Known Weight

Theorem 14 (Regret Upper Bound for Known Weight). *Algorithm 1 with the fixed weight specification (see Definition 5) w.r.t. fixed weight \mathbf{w} , satisfies in any environment with a fixed winner $a^* \equiv a_t^*(\mathbf{w})$:*

$$\mathbb{E}[\text{Regret}(\mathbf{w})] \leq \tilde{O}(K^{1/3} \cdot T^{2/3}).$$

Proof. We first note the regret bound is vacuous for $T < K$; so, assume $T \geq K$.

WLOG suppose arms are evicted in the order $1, 2, \dots, K$ at respective times $t_1 \leq t_2 \leq \dots \leq t_K$ (if arm a is not evicted, let $t_a := T + 1$). Then, we can first decompose the regret depending on whether we play an active arm or explore other arms with probability η_t :

$$\mathbb{E} \left[\sum_{t=1}^T 2b_t(a^*, \mathbf{w}) - b_t(i_t, \mathbf{w}) - b_t(j_t, \mathbf{w}) \right] \leq \sum_{t=1}^T \eta_t + \mathbb{E} \left[\sum_{t=1}^T \sum_{a, a' \in \mathcal{A}_t} (2 \cdot b_t(a^*, \mathbf{w}) - b_t(a, \mathbf{w}) - b_t(a', \mathbf{w})) \cdot q_t(a) \right].$$

Using the fixed specification for $\eta_t = (K/t)^{1/3}$ from Definition 5, we have first term on the RHS above (our exploration cost) is of order $K^{1/3} \cdot T^{2/3}$.

Now, in light of our concentration bound Proposition 12, it suffices to bound the regret on the high-probability good event \mathcal{E}_1 since the total regret is negligible outside of this event. For the second expectation, using our fixed-weight concentration bound (13) we get that the regret of playing arm a as a candidate is at most (on the good event \mathcal{E}_1):

$$\mathbf{1}\{\mathcal{E}_1\} \sum_{t=1}^{t_a-1} \frac{b_t(a^*, \mathbf{w}) - b_t(a, \mathbf{w})}{|\mathcal{A}_t|} \leq 10 \cdot (e-1) \log(T) \left(\sqrt{K \sum_{t=1}^{t_a-1} \eta_t^{-1}} + K \cdot \max_{t \in [1, t_a-1]} \eta_t^{-1} \right). \quad (17)$$

Note that $|\mathcal{A}_t| \geq K + 1 - a$ since we assumed WLOG that arm a is the a -th arm to be evicted. Additionally, plugging in the specialization for η_t according to the fixed weight specification of Definition 5, we have that

$$K \sum_{t=1}^{t_a-1} \eta_t^{-1} \leq K^2 + K \sum_{t=1}^{t_a-1} \left(\frac{t}{K} \right)^{1/3} \leq K^2 + c_1 K^{2/3} \cdot (t_a - 1)^{4/3},$$

$$K \cdot \max_{t \in [1, t_a-1]} \eta_t^{-1} = K^{2/3} \cdot (t_a - 1)^{1/3}.$$

Next, by Lemma 13, we must have $t_a - 1 \geq K/8$ so that $K^{2/3} \cdot (t_a - 1)^{1/3}$ is of order $K^{1/3} \cdot t_a^{2/3}$. By the same reasoning, K^2 is of order $K^{2/3} \cdot (t_a - 1)^{4/3}$.

Then, plugging the above two displays into (17) and summing the inequality over arms a gives:

$$2 \cdot \mathbb{E} \left[\mathbf{1}\{\mathcal{E}_1\} \sum_{a=1}^K \sum_{t=1}^{t_a-1} \frac{b_t(a^*, \mathbf{w}) - b_t(a, \mathbf{w})}{|\mathcal{A}|} \right] \leq \sum_{a=1}^K \frac{c_2 \log(T) \cdot K^{1/3} \cdot t_a^{2/3}}{K+1-a}.$$

Upper bounding each t_a by T , we obtain a regret bound of order $\log(K) \cdot \log(T) \cdot K^{1/3} T^{2/3}$. \blacksquare

D.3 Regret Upper Bound under Fixed Winner for Unknown Weight

Theorem 15 (Adaptive Regret Upper Bound for Unknown Weights). *Suppose Condition 1 holds and there is a winner arm $a^* \equiv a_t^*$ fixed across time. Then, Algorithm 1 with the unknown weight specification (see Definition 5) satisfies for all weights $\mathbf{w} \in \Delta^K$:*

$$\mathbb{E}[\text{Regret}(\mathbf{w})] \leq \tilde{O}(K^{2/3} \cdot T^{2/3}).$$

Proof. We first show that it suffices to bound regret w.r.t. the point-mass weights $\mathbf{w}(a) \in \mathcal{W}$ for $a \in [K]$. This is true since the regret is linear in the reference weight \mathbf{w} :

$$\sum_{t=1}^T b_t(a^*, \mathbf{w}) - b_t(q_t, \mathbf{w}) = \mathbb{E}_{a' \sim \mathbf{w}} \left[\sum_{t=1}^T \delta_t(a^*, a') - \delta_t(q_t, a') \right] \leq \max_{a \in [K]} \sum_{t=1}^T b_t(a^*, \mathbf{w}(a)) - b_t(q_t, \mathbf{w}(a)).$$

Now, in light of our concentration bound (13) from Proposition 12, it suffices to bound the regret on the high-probability good event \mathcal{E}_1 since the total regret is negligible outside of this event.

We then follow the recipe of the proof of Theorem 15 (see Appendix D.2) except now using the concentration bound of Proposition 12 with (14) and the unknown weight specification $\eta_t \doteq K^{2/3}/t^{1/3}$. First, note that it's clear the exploration cost $\sum_{t=1}^T \eta_t$ for the unknown weight specification is order $K^{2/3} \cdot T^{2/3}$.

Now, suppose WLOG that the arms are evicted in the order $1, 2, \dots, K$ at times $t_1 \leq t_2 \leq \dots \leq t_K$. Then, Proposition 12 gives us a bound with respect to any point-mass weight in \mathcal{W} :

$$\mathbf{1}\{\mathcal{E}_1\} \max_{a' \in [K]} \sum_{t=1}^{t_a-1} \frac{b_t(a^*, \mathbf{w}(a')) - b_t(a, \mathbf{w}(a'))}{|\mathcal{A}_t|} \leq 10 \cdot (e-1) \log(T) \left(\sqrt{K^2 \sum_{t=1}^{t_a-1} \eta_t^{-1}} + K \cdot \max_{t \in [1, t_a-1]} \eta_t^{-1} \right). \quad (18)$$

Crucially, note that the fixed winner arm a^* is never evicted by Condition 1. Now, we have

$$K^2 \sum_{t=1}^{t_a-1} \eta_t^{-1} \leq K^4 + K^2 \sum_{t=1}^{t_a-1} \frac{t^{1/3}}{K^{2/3}} \leq K^4 + c_3 K^{4/3} \cdot (t_a - 1)^{4/3},$$

$$K \cdot \max_{t \in [1, t_a-1]} \eta_t^{-1} = K^{1/3} \cdot (t_a - 1)^{1/3}.$$

Now, by Lemma 13, we have since $s_2 - s_1 \geq K^2/8$, the K^4 term in the first display above is of order $K^{4/3} \cdot (t_a - 1)^{4/3}$.

Then, plugging the above two displays into (18) and summing over arms $a \in [K]$, we have:

$$2\mathbb{E} \left[\mathbf{1}\{\mathcal{E}_1\} \sum_{a=1}^K \sum_{t=1}^{t_a} \frac{b_t(a^*, \mathbf{w}) - b_t(a, \mathbf{w})}{|\mathcal{A}|} \right] \leq \sum_{a=1}^K \frac{c_4 \log(T) \cdot K^{2/3} \cdot t_a^{2/3}}{K+1-a}.$$

As before, upper bounding each t_a by T , we obtain a regret bound of order $\log(K) \cdot \log(T) \cdot K^{2/3} \cdot T^{2/3}$. \blacksquare

E Nonstationary Regret Analysis for Known Weights

E.1 Formal Statement of Results

We first state formally the upper bound on dynamic regret w.r.t. known weight \mathbf{w} in terms of the SKW (Definition 2). In particular, we show matching upper bounds, up to log terms of the lower bounds of Appendix C.1. As a reminder, taking \mathbf{w} to be the uniform weight, we recover the Borda dynamic regret and so the below results generalize Theorem 1 and Corollary 2.

Theorem 16. *Algorithm 2 with the fixed weight specification (see Definition 5) w.r.t. fixed weight \mathbf{w} satisfies:*

$$\mathbb{E}[\text{Regret}(\mathbf{w})] \leq \tilde{O} \left(\sum_{i=0}^{\tilde{L}_{\text{Known}}(\mathbf{w})} K^{1/3} \cdot (\tau_{i+1}(\mathbf{w}) - \tau_i(\mathbf{w}))^{2/3} \right).$$

Corollary 17. *By Jensen's inequality, the regret bound of Theorem 16 is further upper bounded by $K^{1/3} T^{2/3} \tilde{L}_{\text{Known}}^{1/3}$. Furthermore, relating SKW to total variation, a regret bound of order $V_T^{1/4} \cdot T^{3/4} \cdot K^{1/4} + K^{1/3} \cdot T^{2/3}$ also holds in terms of total variation quantity V_T (see Appendix E.7 for proof).*

E.2 Proof of Theorem 16

The broad outline of our regret analysis will be similar to prior works on adaptive non-stationary (dueling) bandits (Suk and Agarwal, 2023; Buening and Saha, 2023; Suk and Kpotufe, 2022). Our first goal is to show that episodes $[t_\ell, t_{\ell+1})$ align with the SKW phases, in the sense that a new episode is triggered only when an SKW has occurred.

Recall from Algorithm 2 that $[t_\ell, t_{\ell+1})$ represents the ℓ -th episode. As a notation, we suppose there are T total episodes and, by convention, we let $t_\ell := T + 1$ if only $\ell - 1$ episodes occurred by round T .

E.2.1 Episodes Align with SKW Phases

Lemma 18. *On event \mathcal{E}_1 , for each episode $[t_\ell, t_{\ell+1})$ with $t_{\ell+1} \leq T$ (i.e., an episode which concludes with a restart), there exists an SKW $\tau_i \in [t_\ell, t_{\ell+1})$.*

Proof. We first note that $\hat{b}_t(a, \mathbf{w})$ is an unbiased estimator for $b_t(a, \mathbf{w})$ in the sense that $\mathbb{E}[\hat{b}_t(a, \mathbf{w}) | \mathcal{F}_{t-1}] = b_t(a, \mathbf{w})$ if $a \in \mathcal{A}_t$. Then, by concentration (Proposition 12) and our eviction criteria (6), we have that arm a being evicted from \mathcal{A}_t over the interval $[s_1, s_2]$ using the eviction threshold (15) implies

$$\sum_{s=s_1}^{s_2} b_s(a_s^*, \mathbf{w}) - b_s(a, \mathbf{w}) \geq c_5 (s_2 - s_1)^{2/3} \cdot K^{1/3}.$$

This means arm a incurs significant generalized Borda regret w.r.t. \mathbf{w} over $[s_1, s_2]$. Since a new episode is triggered only if all arms are evicted from $\mathcal{A}_{\text{global}}$, there must exist an SKW in each episode $[t_\ell, t_{\ell+1})$. ■

E.3 Decomposing the Regret

Let a_t^\sharp denote the *last safe arm* at round t , or the last arm to incur significant generalized Borda regret w.r.t. \mathbf{w} in the unique phase $[\tau_i, \tau_{i+1})$ containing round t , per Definition 2. Furthermore, let a_ℓ denote the *last global arm* of episode $[t_\ell, t_{\ell+1})$ or the last arm to be evicted from $\mathcal{A}_{\text{global}}$ in said episode. Then, we can decompose the per-episode regret:

$$\mathbb{E} \left[\sum_{t=t_\ell}^{t_{\ell+1}-1} \delta_t^{\mathbf{w}}(i_t) + \delta_t^{\mathbf{w}}(j_t) \right] = \mathbb{E} \left[\sum_{t=t_\ell}^{t_{\ell+1}-1} \delta_t^{\mathbf{w}}(a_t^\sharp) \right] + \mathbb{E} \left[\sum_{t=t_\ell}^{t_{\ell+1}-1} \delta_t^{\mathbf{w}}(a_\ell, i_t) + \delta_t^{\mathbf{w}}(a_\ell, j_t) \right] + \mathbb{E} \left[\sum_{t=t_\ell}^{t_{\ell+1}-1} \delta_t^{\mathbf{w}}(a_t^\sharp, a_\ell) \right]. \quad (19)$$

We next handle each of the expectations on the RHS separately. Our goal will be to show that each of the expectations above is of order

$$\mathbb{E} \left[\mathbf{1}\{\mathcal{E}_1\} \sum_{i \in [\bar{L}_{\text{Known}}]: [\tau_i, \tau_{i+1}) \cap [t_\ell, t_{\ell+1}) \neq \emptyset} K^{1/3} \cdot (\tau_{i+1} - \tau_i)^{2/3} \right] + \frac{1}{T}. \quad (20)$$

Admitting this goal, summing the regret over episodes while using Lemma 18 to ensure each SKW phase $[\tau_i, \tau_{i+1})$ only intersects at most two episodes will yield the desired total regret bound. This will follow in a nearly identical manner to Section 5.5 of [Suk and Kpotufe \(2022\)](#).

Now, the three expectations on the RHS of (19) are respectively:

- The per-episode dynamic regret of the last safe arm (analyzed in Appendix E.4)
- The per-episode regret of the played arms $\{i_t, j_t\}$ to the last global arm (analyzed in Appendix E.5)
- The per-episode regret of the last global arm to the last safe arm (analyzed in Appendix E.6).

E.4 Bounding the per-Episode Regret of the Safe Arm

By the definition of SKW (Definition 2), the safe arm a_t^\sharp is fixed for $t \in [\tau_i, \tau_{i+1})$ and has dynamic regret upper bounded by $K^{1/3} \cdot (s_2 - s_1)^{2/3}$ on any subinterval $[s_1, s_2] \subseteq [\tau_i, \tau_{i+1})$. In particular, letting $[s_1, s_2]$ be the intersection $[\tau_i, \tau_{i+1}) \cap [t_\ell, t_{\ell+1})$ (which is necessarily an interval), we have that the dynamic regret of a_t^\sharp on episode $[t_\ell, t_{\ell+1})$ is at most order (20).

E.5 Bounding per-Episode Regret of Active Arms to Last Global Arm

This will follow a similar argument as our regret analysis in fixed winner environments (Theorem 14). Recall that the global learning rate η_t is the learning rate $\gamma_{t-t_{\text{start}}}$ set by the base algorithm which is active at round t . Note that η_t is a random variable which depends on the scheduling of base algorithms in episode $[t_\ell, t_{\ell+1})$.

We first observe that the play distribution q_t plays an arm according to weight \mathbf{w} with probability η_t and plays an arm chosen from \mathcal{A}_t uniformly at random with probability $1 - \eta_t$. Let a be a random draw from the distribution q_t be the play distribution at round t , which is measurable w.r.t. \mathcal{F}_{t-1} . Then, we may rewrite the regret as

$$\mathbb{E}_{t_\ell} \left[\sum_{t=t_\ell}^T \mathbb{E}_{q_t} [\mathbb{E}[\mathbf{1}\{t < t_{\ell+1}\} \cdot b_t(a, \mathbf{w}) \mid t_\ell, q_t \mid t_\ell]] \right].$$

Note that $\mathbf{1}\{t < t_{\ell+1}\}$ and $b_t(a, \mathbf{w})$ are independent conditional on t_ℓ and q_t . Next, observe that:

$$\mathbb{E}[b_t(a, \mathbf{w}) \mid t_\ell, q_t] = \eta_t \cdot \mathbb{E}_{a \sim \mathbf{w}}[b_t(a, \mathbf{w}) \mid t_\ell, q_t] + (1 - \eta_t) \cdot \mathbb{E}_{a \sim \text{Unif}\{\mathcal{A}_t\}}[b_t(a, \mathbf{w}) \mid t_\ell, q_t].$$

Plugging in the results of the above to our regret formula, we obtain:

$$\mathbb{E} \left[\sum_{t=t_\ell}^{t_{\ell+1}-1} \delta_t^{\mathbf{w}}(a_\ell, i_t) + \delta_t^{\mathbf{w}}(a_\ell, j_t) \right] \leq \mathbb{E} \left[\sum_{t=t_\ell}^{t_{\ell+1}-1} \eta_t \right] + \mathbb{E} \left[\sum_{t=t_\ell}^{t_{\ell+1}-1} \mathbb{E}_{a \sim \text{Unif}\{\mathcal{A}_t\}} [\delta_t^{\mathbf{w}}(a_\ell, a)] \right]. \quad (21)$$

Bounding the Regret of Extra Exploration. We bound the first expectation on the above RHS. Recall that $\gamma_{t-t_{\text{start}}}$ denotes the learning rate γ_t set by a base algorithm initiated at round t_{start} . Now, we can coarsely bound the sum of the η_t 's by the sum of all possible $\gamma_{t-t_{\text{start}}}$, weighted by the probabilities of the scheduling of each base algorithm. So, we have

$$\mathbb{E} \left[\sum_{t=t_\ell}^{t_{\ell+1}-1} \eta_t \right] \leq \mathbb{E} \left[\sum_{t=t_\ell}^{t_{\ell+1}-1} \gamma_{t-t_\ell} \right] + \mathbb{E} \left[\sum_{\text{BOSSE}(t_{\text{start}}, m)} B_{t_{\text{start}}, m} \sum_{t=t_{\text{start}}}^{t_{\text{start}}+m} \gamma_{t-t_{\text{start}}} \right].$$

Recall in the above that the Bernoulli $B_{s,m}$ (see Line 6 of Algorithm 2) decides whether $\text{BOSSE}(s,m)$ is scheduled.

The first sum on the RHS above is order $K^{1/3} \cdot (t_{\ell+1} - t_\ell)^{2/3}$. The analogous sum in the second expectation on the RHS above is order $K^{1/3} \cdot m^{2/3}$. Then, it suffices to bound

$$\mathbb{E} \left[\sum_{t_{\text{start}}=t_\ell+1}^T \sum_m B_{t_{\text{start}},m} \cdot \mathbf{1}\{t_{\text{start}} < t_{\ell+1}\} \cdot K^{1/3} \cdot m^{2/3} \right].$$

Conditioning on t_ℓ , and noting that $\mathbf{1}\{B_{t_{\text{start}},m}\}$ and $\mathbf{1}\{t_{\text{start}} < t_{\ell+1}\}$ are independent conditional on t_ℓ , we have that by tower rule:

$$\mathbb{E}_{t_\ell} \left[\sum_{t_{\text{start}}=t_\ell+1}^T \sum_m \mathbb{E}[B_{t_{\text{start}},m}|t_\ell] \cdot \mathbb{E}[\mathbf{1}\{t_{\text{start}} < t_{\ell+1}\}|t_\ell] \cdot K^{1/3} \cdot m^{2/3} \right].$$

Plugging in $\mathbb{E}[B_{t_{\text{start}},m}|t_\ell] = \frac{1}{m^{1/3} \cdot (t_{\text{start}} - t_\ell)^{2/3}}$ (from Line 12 of Algorithm 2) and taking sums over m and s , the above becomes order $\log(T) \cdot K^{1/3} \cdot (t_{\ell+1} - t_\ell)^{2/3}$. This is of the right order with respect to (20) by the sub-additivity of the function $x \mapsto x^{2/3}$.

Bounding the Regret of Active Arms. Next, we bound the second expectation on the RHS of (21). This follows a similar argument to Appendix D.2 (the proof of Theorem 14). Supposing WLOG that the arms are evicted from $\mathcal{A}_{\text{global}}$ in the order $1, 2, \dots, K$ at respective times $t_\ell^1 \leq \dots \leq t_\ell^K$, then we have the second expectation on the RHS of (21) can be written as

$$\mathbb{E} \left[\sum_{a=1}^K \sum_{t=t_\ell}^{t_\ell^a-1} \frac{\delta_t^{\mathbf{w}}(a_\ell, a)}{|\mathcal{A}_t|} + \sum_{a=1}^K \sum_{t=t_\ell^a}^{t_{\ell+1}-1} \frac{\delta_t^{\mathbf{w}}(a_\ell, a)}{|\mathcal{A}_t|} \cdot \mathbf{1}\{a \in \mathcal{A}_t\} \right]. \quad (22)$$

For the first double sum above, we repeat the arguments of Appendix D.2 using the episode-specific learning rates $\{\eta_t\}_{t=t_\ell}^{t_{\ell+1}-1}$. Crucially, we note that, no matter which base algorithm $\text{BOSSE}(t_{\text{start}}, m)$ is active at round $t \in [t_\ell, t_{\ell+1})$, $\eta_t \geq K^{1/3} \cdot (t - t_\ell)^{-1/3}$. Thus, we have

$$K \sum_{t=t_\ell}^{t_\ell^a-1} \eta_t^{-1} \leq K^2 + c_6 \cdot K^{2/3} \cdot (t_\ell^a - t_\ell)^{4/3},$$

$$K \max_{t \in [t_\ell, t_\ell^a-1]} \eta_t^{-1} \leq K^{2/3} \cdot (t_\ell^a - t_\ell)^{1/3}.$$

Then, using Lemma 13 and following the arguments of Appendix D.2:

$$\mathbf{1}\{\mathcal{E}_1\} \sum_{a=1}^K \sum_{t=t_\ell}^{t_\ell^a-1} \frac{\delta_t^{\mathbf{w}}(a_\ell, a)}{|\mathcal{A}_t|} \leq c_7 \log(T) \cdot K^{1/3} \cdot (t_{\ell+1} - t_\ell)^{2/3}.$$

For the second double sum in (22), our aim is to bound the regret of playing arm a on the rounds $t \in [t_\ell^a, t_{\ell+1})$ where a replay is active and, thus, reintroduces arm a to \mathcal{A}_t after it has been evicted from $\mathcal{A}_{\text{global}}$. For this, we rely on a careful decomposition of the rounds in $[t_\ell^a, t_{\ell+1})$ when $a \in \mathcal{A}_t$ based on which replay reintroduces the arm a to the active set. We'll first require some definitions, repeated from the analyses of [Suk and Agarwal \(2023\)](#); [Suk and Kpotufe \(2022\)](#).

We first note that the various base algorithms scheduled in the process of running METABOSSE have an ancestor-parent-child structure determined by which instance of BOSSE calls another. Keeping this in mind, we now set up the following terminology (which is all w.r.t. a fixed arm a):

Definition 6.

- (i) For each scheduled and activated $\text{BOSSE}(s, m)$, let the round $M(s, m)$ be the minimum of two quantities: (a) the last round in $[s, s + m]$ when arm a is retained by $\text{BOSSE}(s, m)$ and all of its children, and (b) the last round that $\text{BOSSE}(s, m)$ is active and not permanently interrupted. Call the interval $[s, M(s, m)]$ the **active interval** of $\text{BOSSE}(s, m)$.
- (ii) Call a replay $\text{BOSSE}(s, m)$ **proper** if there is no other scheduled replay $\text{BOSSE}(s', m')$ such that $[s, s + m] \subset (s', s' + m')$ where $\text{BOSSE}(s', m')$ will become active again after round $s + m$. In other words, a proper replay is not scheduled inside the scheduled range of rounds of another replay. Let $\text{PROPER}(t_\ell, t_{\ell+1})$ be the set of proper replays scheduled to start before round $t_{\ell+1}$.
- (iii) Call a scheduled replay $\text{BOSSE}(s, m)$ **subproper** if it is non-proper and if each of its ancestor replays (i.e., previously scheduled replays whose durations have not concluded) $\text{BOSSE}(s', m')$ satisfies $M(s', m') < s$. In other words, a subproper replay either permanently interrupts its parent or does not, but is scheduled after its parent (and all its ancestors) stops playing arm a . Let $\text{SUBPROPER}(t_\ell, t_{\ell+1})$ be the set of all subproper replays scheduled before round $t_{\ell+1}$.

Equipped with this language, we now show some basic claims which essentially reduce analyzing the complicated hierarchy of replays to analyzing the active intervals of replays in $\text{PROPER}(t_\ell, t_{\ell+1}) \cup \text{SUBPROPER}(t_\ell, t_{\ell+1})$.

Proposition 19. *The active intervals*

$$\{[s, M(s, m)] : \text{BOSSE}(s, m) \in \text{PROPER}(t_\ell, t_{\ell+1}) \cup \text{SUBPROPER}(t_\ell, t_{\ell+1})\},$$

are mutually disjoint.

Proof. Clearly, the classes of replays $\text{PROPER}(t_\ell, t_{\ell+1})$ and $\text{SUBPROPER}(t_\ell, t_{\ell+1})$ are disjoint. Next, we show the respective active intervals $[s, M(s, m)]$ and $[s', M(s', m')]$ of any two $\text{BOSSE}(s, m), \text{BOSSE}(s', m') \in \text{PROPER}(t_\ell, t_{\ell+1}) \cup \text{SUBPROPER}(t_\ell, t_{\ell+1})$ are disjoint. There are three cases here:

1. Proper replay vs. subproper replay: a subproper replay can only be scheduled after the round $M(s, m)$ of the most recent proper replay $\text{BOSSE}(s, m)$ (which is necessarily an ancestor). Thus, the active intervals of proper replays and subproper replays are disjoint.
2. Two distinct proper replays: two such replays can only permanently interrupt each other, and since $M(s, m)$ always occurs before the permanent interruption of $\text{BOSSE}(s, m)$, we have the active intervals of two such replays are disjoint.
3. Two distinct subproper replays: consider two non-proper replays

$$\text{BOSSE}(s, m), \text{BOSSE}(s', m') \in \text{SUBPROPER}(t_\ell, t_{\ell+1}),$$

with $s' > s$. The only way their active intervals intersect is if $\text{BOSSE}(s, m)$ is an ancestor of $\text{BOSSE}(s', m')$. Then, if $\text{BOSSE}(s', m')$ is subproper, we must have $s' > M(s, m)$, which means that $[s', M(s', m')]$ and $[s, M(s, m)]$ are disjoint. ■

Next, we claim that the active intervals $[s, M(s, m)]$ for $\text{BOSSE}(s, m) \in \text{PROPER}(t_\ell, t_{\ell+1}) \cup \text{SUBPROPER}(t_\ell, t_{\ell+1})$ contain all the rounds where a is played after being evicted from $\mathcal{A}_{\text{global}}$. To show this, we first observe that for each round t when a replay is active, there is a unique proper replay associated to t , namely the proper replay scheduled most recently. Next, note that any round $t > t_\ell^a$ where arm $a \in \mathcal{A}_t$ must either belong to the active interval $[s, M(s, m)]$ of the unique proper replay $\text{BOSSE}(s, m)$ associated to round t , or else satisfies $t > M(s, m)$ in which case a unique subproper replay $\text{BOSSE}(s', m') \in \text{SUBPROPER}(t_\ell, t_{\ell+1})$ is active at round t and not yet permanently interrupted. Thus, it must be the case that $t \in [s', M(s', m')]$.

At the same time, every round $t \in [s, M(s, m)]$ for a proper or subproper $\text{BOSSE}(s, m)$ is clearly a round where arm a is once again active, i.e. $a \in \mathcal{A}_t$, and no such round is accounted for twice by Proposition 19. Thus,

$$\{t \in [t_\ell^a, t_{\ell+1}] : a \in \mathcal{A}_t\} = \bigsqcup_{\text{BOSSE}(s, m) \in \text{PROPER}(t_\ell, t_{\ell+1}) \cup \text{SUBPROPER}(t_\ell, t_{\ell+1})} [s, M(s, m)].$$

Then, we can rewrite the second double sum in (22) as:

$$\sum_{a=1}^K \sum_{\text{BOSSE}(s, m) \in \text{PROPER}(t_\ell, t_{\ell+1}) \cup \text{SUBPROPER}(t_\ell, t_{\ell+1})} B_{s, m} \sum_{t=s \vee t_\ell^a}^{M(s, m)} \frac{\delta_t^{\mathbf{w}}(a_\ell, a)}{|\mathcal{A}_t|}.$$

Further bounding the sum over t above by its positive part, we can expand the sum over $\text{BOSSE}(s, m) \in \text{PROPER}(t_\ell, t_{\ell+1}) \cup \text{SUBPROPER}(t_\ell, t_{\ell+1})$ to be over all scheduled $\text{BOSSE}(s, m)$, or obtain:

$$\sum_{a=1}^K \sum_{\text{BOSSE}(s, m)} B_{s, m} \left(\sum_{t=s \vee t_\ell^a}^{M(s, m)} \frac{\delta_t(a_\ell, a)}{|\mathcal{A}_t|} \cdot \mathbf{1}\{a \in \mathcal{A}_t\} \right), \quad (23)$$

where the sum is over all replays $\text{BOSSE}(s, m)$, i.e. $s \in \{t_\ell + 1, \dots, t_{\ell+1} - 1\}$ and $m \in \{2, 4, \dots, 2^{\lceil \log(T) \rceil}\}$. It then remains to bound the contributed relative regret of each $\text{BOSSE}(s, m)$ in the interval $[s \vee t_\ell^a, M(s, m)]$, which will follow similarly to the previous steps. Fix s, m and suppose $t_\ell^a + 1 \leq M(s, m)$ since otherwise $\text{BOSSE}(s, m)$ contributes no regret in (23).

Note that the global learning rate η_t for $t \in [s \vee t_\ell^a, M(s, m)]$ must satisfy $\eta_t \geq K^{1/3} \cdot m^{-1/3}$ since any child base algorithm $\text{BOSSE}(s', m')$ of $\text{BOSSE}(s, m)$ will use a larger learning rate $\gamma_{t-s'} \geq \gamma_{t-s}$.

Then, following similar reasoning as before, i.e. combining our concentration bound (12) with the eviction criterion (6), we have for a fixed arm a :

$$\mathbf{1}\{\mathcal{E}_1\} \sum_{t=s \vee t_\ell^a}^{M(s, m)} \frac{\delta_t^{\mathbf{w}}(a_\ell, a)}{|\mathcal{A}_t|} \leq \frac{c_8 \log(T) \cdot (K^{1/3} \cdot m^{2/3} \wedge m)}{\min_{t \in [s, M(s, m)]} |\mathcal{A}_t|},$$

Plugging this into (23) and switching the ordering of the outer double sum, we obtain (we also overload the notation $M(s, m, a)$ to avoid ambiguity on which arm a we're bounding the regret of):

$$\sum_{\text{BOSSE}(s, m)} B_{s, m} \cdot c_8 \log(T) \cdot (K^{1/3} \cdot m^{2/3} \wedge m) \sum_{a=1}^K \frac{1}{\min_{t \in [s, M(s, m, a)]} |\mathcal{A}_t|}.$$

Following previous arguments, the above innermost sum over a is at most $\log(K)$ since the k -th arm a_k in $[K]$ to be evicted by $\text{BOSSE}(s, m)$ satisfies $\min_{t \in [s, M(s, m, a_k)]} |\mathcal{A}_t| \geq K + 1 - k$.

Now, let $R(m) := c_8 \log(K) \cdot \log(T) \cdot (K^{1/3} \cdot m^{2/3} \wedge m)$ which is the bound we've obtained so far on the relative regret for a single $\text{BOSSE}(s, m)$. Now, plugging $R(m)$ into (23) gives:

$$\begin{aligned} \mathbb{E} \left[\mathbf{1}\{\mathcal{E}_1\} \sum_{a=1}^K \sum_{t=t_\ell^a}^{t_{\ell+1}-1} \frac{\delta_t^{\mathbf{w}}(a_\ell, a)}{|\mathcal{A}_t|} \cdot \mathbf{1}\{a \in \mathcal{A}_t\} \right] &\leq \mathbb{E}_{t_\ell} \left[\mathbb{E} \left[\sum_{\text{BOSSE}(s, m)} B_{s, m} \cdot R(m) \mid t_\ell \right] \right] \\ &= \mathbb{E}_{t_\ell} \left[\sum_{s=t_\ell}^T \sum_m \mathbb{E}[B_{s, m} \cdot \mathbf{1}\{s < t_{\ell+1}\} \mid t_\ell] \cdot R(m) \right]. \end{aligned}$$

Next, we observe that $B_{s, m}$ and $\mathbf{1}\{s < t_{\ell+1}\}$ are independent conditional on t_ℓ since $\mathbf{1}\{s < t_{\ell+1}\}$ only depends on the scheduling and observations of base algorithms scheduled before round s . Thus, recalling that $\mathbb{P}(B_{s, m} = 1) = m^{-1/3} \cdot (s - t_\ell)^{-2/3}$,

$$\begin{aligned} \mathbb{E}[B_{s, m} \cdot \mathbf{1}\{s < t_{\ell+1}\} \mid t_\ell] &= \mathbb{E}[B_{s, m} \mid t_\ell] \cdot \mathbb{E}[\mathbf{1}\{s < t_{\ell+1}\} \mid t_\ell] \\ &= \frac{1}{m^{1/3} \cdot (s - t_\ell)^{2/3}} \cdot \mathbb{E}[\mathbf{1}\{s < t_{\ell+1}\} \mid t_\ell]. \end{aligned}$$

Then, plugging the above display into our expectation from before and unconditioning, we obtain:

$$\mathbb{E} \left[\sum_{s=t_\ell+1}^{t_{\ell+1}-1} \sum_{n=1}^{\lceil \log(T) \rceil} \frac{1}{2^{n/3} \cdot (s-t_\ell)^{2/3}} \cdot R(2^n) \right] \leq c_9 \log(K) \cdot \log^2(T) \cdot \mathbb{E}_{t_\ell, t_{\ell+1}} \left[K^{1/3} \cdot (t_{\ell+1} - t_\ell)^{2/3} \right]. \quad (24)$$

Note that in the above, we used the fact that the episode length $t_{\ell+1} - t_\ell$ dominates K by Lemma 13 to bound a term of order $K^{2/3} \cdot (t_{\ell+1} - t_\ell)^{1/3}$ by $K^{1/3} \cdot (t_{\ell+1} - t_\ell)^{2/3}$.

E.6 Bounding per-Episode Regret of the Last Global Arm to the Last Safe Arm

Now, it remains to bound $\mathbb{E} \left[\sum_{t=t_\ell}^{t_{\ell+1}-1} \delta_t^{\mathbf{w}}(a_t^\#, a_\ell) \right]$. For this, we'll use a *bad segment analysis* similar to Suk and Agarwal (2023); Buening and Saha (2023); Suk and Kpotufe (2022). Roughly a bad segment $[s_1, s_2]$ will be such that $\sum_{s=s_1}^{s_2} \delta_s^{\mathbf{w}}(a_t^\#, a_\ell) \gtrsim (s_2 - s_1)^{2/3} \cdot K^{1/3}$. On such a bad segment $[s_1, s_2]$, a *perfect replay* is roughly defined as a replay whose scheduled duration overlaps most of $[s_1, s_2]$. Then, the key fact is that the randomized scheduling of replays (Line 12 of Algorithm 1) ensures that a perfect replay is scheduled for some bad segment (thus evicting a_ℓ from $\mathcal{A}_{\text{global}}$ before too many bad segments elapse, giving us a way of bounding $\sum_{s=s_1}^{s_2} \delta_s^{\mathbf{w}}(a_t^\#, a_\ell)$ with high probability.

We next formally define such notions. In what follows, bad segments will be defined with respect to a fixed arm a and conditional on the episode start time t_ℓ . In particular, this will hold for $a = a_\ell$ which will ultimately be used to bound $\delta_t^{\mathbf{w}}(a_t^\#, a_\ell)$ across the episode $[t_\ell, t_{\ell+1})$. The following definition only depends on a fixed arm a and the episode start time t_ℓ and, conditional on these quantities, are deterministic given the environment.

Definition 7. Fix the episode start time t_ℓ , and let $[\tau_i, \tau_{i+1})$ be any phase intersecting $[t_\ell, T)$. For any arm a , define rounds $s_{i,0}(a), s_{i,1}(a), s_{i,2}(a) \dots \in [t_\ell \vee \tau_i, \tau_{i+1})$ recursively as follows: let $s_{i,0}(a) := t_\ell \vee \tau_i$ and define $s_{i,j}(a)$ as the smallest round in $(s_{i,j-1}(a), \tau_{i+1})$ such that arm a satisfies for some fixed $c_{10} > 0$:

$$\sum_{t=s_{i,j-1}(a)}^{s_{i,j}(a)} \delta_t^{\mathbf{w}}(a_t^\#, a) \geq c_{10} \log(T) \cdot K^{1/3} \cdot (s_{i,j}(a) - s_{i,j-1}(a))^{2/3}, \quad (25)$$

if such a round $s_{i,j}(a)$ exists. Otherwise, we let the $s_{i,j}(a) := \tau_{i+1} - 1$. We refer to any interval $[s_{i,j-1}(a), s_{i,j}(a))$ as a **critical segment**, and as a **bad segment** (w.r.t. arm a) if (25) above holds.

Remark 4. Arm $a_t^\#$ is fixed within any critical segment $[s_{i,j-1}(a), s_{i,j}(a)) \subseteq [\tau_i, \tau_{i+1})$ since an SKW does not occur inside $[\tau_i, \tau_{i+1})$.

The following fact, which may be considered an analogue of Lemma 13, will serve useful.

Fact 20. A bad segment $[s_{i,j}(a), s_{i,j+1}(a))$ satisfies $s_{i,j+1}(a) - s_{i,j}(a) \geq K/8$.

Now, note a bad segment $[s_{i,j}(a), s_{i,j+1}(a))$ only contributes order $K^{1/3} \cdot (s_{i,j+1}(a) - s_{i,j}(a))^{2/3}$ regret of a to $a_t^\#$. At the same time, we claim that a well-timed replay (see Definition 8 below) running from $s_{i,j}(a)$ to $s_{i,j+1}(a)$ will in fact be capable of evicting arm a using (6). This will allow us to reduce the problem to studying the number and lengths of bad segments which elapse before one is detected by such a replay.

We next define a *perfect replay*.

Definition 8. Let $\tilde{s}_{i,j}(a) := \lceil \frac{s_{i,j}(a) + s_{i,j+1}(a)}{2} \rceil$ denote the approximate midpoint of $[s_{i,j}(a), s_{i,j+1}(a))$. Given a bad segment $[s_{i,j}(a), s_{i,j+1}(a))$, define a **perfect replay** w.r.t. $[s_{i,j}(a), s_{i,j+1}(a))$ as a call of $\text{BOSS}(t_{\text{start}}, m)$ where $t_{\text{start}} \in [s_{i,j}(a), \tilde{s}_{i,j}(a)]$ and $m \geq s_{i,j+1}(a) - s_{i,j}(a)$

Next, we analyze the behavior of a perfect replay on the bad segment $[s_{i,j}(a), s_{i,j+1}(a))$. We first invoke an elementary lemma:

Lemma 21. $(x + y)^{2/3} - x^{2/3} \geq y^{2/3}/2$ for real numbers $y \geq x > 0$.

Proof. This follows from noting the derivative of the function $y \mapsto (x + y)^{2/3} - x^{2/3} - y^{2/3}/2$ in the domain $y \geq x$ is positive since

$$\frac{\partial}{\partial y} (x + y)^{2/3} - x^{2/3} - y^{2/3}/2 = \frac{2}{3 \cdot (x + y)^{1/3}} - \frac{1}{3 \cdot y^{1/3}}.$$

The above is positive since

$$\frac{1}{(x/y + 1)^{1/3}} \geq \frac{1}{2^{1/3}} > \frac{1}{2} \implies \frac{2}{3 \cdot (x + y)^{1/3}} > \frac{1}{3 \cdot y^{1/3}}.$$

Thus, $y \mapsto (x + y)^{2/3} - x^{2/3} - y^{2/3}/2$ is an increasing function in y . Next, since $(2x)^{2/3} - x^{2/3} - x^{2/3}/2 = x^{2/3} \cdot (2^{2/3} - 1 - 1/2) > 0$ if $x > 0$, we have that the desired inequality must always be true for $y \geq x > 0$. ■

Proposition 22. Suppose the good event \mathcal{E}_1 holds (cf. Proposition 12). Let $[s_{i,j}(a), s_{i,j+1}(a)]$ be a bad segment with respect to arm a . Then, if a perfect replay with respect to $[s_{i,j}(a), s_{i,j+1}(a)]$ is scheduled, arm a will be evicted from $\mathcal{A}_{\text{global}}$ by round $s_{i,j+1}(a)$.

Proof. We first observe that by Lemma 21 and Definition 7:

$$\sum_{t=\tilde{s}_{i,j}(a)}^{s_{i,j+1}(a)} \delta_t^{\mathbf{w}}(a_t^\#, a) = \sum_{t=s_{i,j}(a)}^{s_{i,j+1}(a)} \delta_t^{\mathbf{w}}(a_t^\#, a) - \sum_{t=s_{i,j}(a)}^{\tilde{s}_{i,j}(a)-1} \delta_t^{\mathbf{w}}(a_t^\#, a) \geq \frac{c_{10}}{2} \log(T) \cdot K^{1/3} \cdot (s_{i,j+1}(a) - \tilde{s}_{i,j}(a))^{2/3}.$$

Next, we note that any perfect replay $\text{BOSSE}(t_{\text{start}}, m)$ will not evict $a_t^\#$ since otherwise it incurs significant regret within SKW phase $[\tau_i, \tau_{i+1})$ (see also the proof of Lemma 18). The same applies for any child base algorithm of a perfect replay.

Next, we argue that arm a must be evicted from $\mathcal{A}_{\text{global}}$ at some round in $[\tilde{s}_{i,j}(a), s_{i,j+1}(a)]$. If $a \notin \mathcal{A}_t$ for some round $t \in [\tilde{s}_{i,j}(a), s_{i,j+1}(a)]$ we are already done. Otherwise, suppose $a \in \mathcal{A}_t$ for all $t \in [\tilde{s}_{i,j}(a), s_{i,j+1}(a)]$ and so we must have $\mathbb{E}[\hat{\delta}_t^{\mathbf{w}}(a_t^\#, a) | \mathcal{F}_{t-1}] = \delta_t^{\mathbf{w}}(a_t^\#, a)$ for all such rounds t . Now, if a perfect replay is scheduled, then we must have a global learning rate $\eta_t \geq K^{1/3} \cdot (s_{i,j+1}(a) - s_{i,j}(a))^{-1/3}$ for all $t \in [\tilde{s}_{i,j}(a), s_{i,j+1}(a)]$ since any child base algorithm of a perfect replay can only set a larger learning rate by Definition 5.

Now, noting $[s_{i,j}(a), s_{i,j+1}(a)]$ and the second half of the bad segment $[\tilde{s}_{i,j}(a), s_{i,j+1}(a)]$ have commensurate lengths up to constants, this means, if a perfect replay w.r.t. $[s_{i,j}(a), s_{i,j+1}(a)]$ is scheduled, by similar calculations to earlier (and using Fact 20) we must have

$$\sqrt{K \sum_{s=\tilde{s}_{i,j}(a)}^{s_{i,j+1}(a)} \eta_s^{-1} + K \cdot \max_{s \in [\tilde{s}_{i,j}(a), s_{i,j+1}(a)]} \eta_s^{-1}} \leq c_{11} K^{1/3} \cdot (s_{i,j+1}(a) - s_{i,j}(a))^{2/3}.$$

Then, by our eviction criterion (6) and concentration, we have that arm a will be evicted over $[\tilde{s}_{i,j}(a), s_{i,j+1}(a)]$ for large enough constant c_{10} in Definition 7. ■

It remains to show that, for any arm a , a perfect replay is scheduled w.h.p. before too much regret is incurred on the elapsed bad segments w.r.t. a . In particular, this will hold for the last global arm a_ℓ , allowing us to bound the remaining expectation $\mathbb{E}[\sum_{t=t_\ell}^{t_{\ell+1}-1} \delta_t^{\mathbf{w}}(a_t^\#, a_\ell)]$.

To show this, we'll define a *bad round* $s(a) > t_\ell$ which will roughly be the latest time that arm a can be evicted by a perfect replay before there is too much regret. We'll then show that a perfect replay with respect to some bad segment is indeed scheduled before the bad round is reached.

First, fix an arm a and an episode start time t_ℓ .

Definition 9. (*Bad Round*) For a fixed round t_ℓ and arm a , the **bad round** $s(a) > t_\ell$ is defined as the smallest round which satisfies, for some fixed $c_{12} > 0$:

$$\sum_{(i,j)} (s_{i,j+1}(a) - s_{i,j}(a))^{2/3} > c_{12} \log(T) \cdot (s(a) - t_\ell)^{2/3}, \quad (26)$$

where the above sum is over all pairs of indices $(i, j) \in \mathbb{N} \times \mathbb{N}$ such that $[s_{i,j}(a), s_{i,j+1}(a))$ is a bad segment (see Definition 7) with $s_{i,j+1}(a) < s(a)$.

Our goal is then to show that arm a is evicted by some perfect replay scheduled within episode $[t_\ell, t_{\ell+1})$ with high probability before the bad round $s(a)$ occurs.

For each bad segment $[s_{i,j}(a), s_{i,j+1}(a))$, recall that $\tilde{s}_{i,j}(a)$ is the approximate midpoint between $s_{i,j}(a)$ and $s_{i,j+1}(a)$ (see Definition 8). Next, let $m_{i,j} := 2^n$ where $n \in \mathbb{N}$ satisfies:

$$2^n \geq s_{i,j+1}(a) - s_{i,j}(a) > 2^{n-1}.$$

Plainly, $m_{i,j}$ is a dyadic approximation of the bad segment length. Next, recall that the Bernoulli $B_{t,m}$ decides whether $\text{BOSS}(t, m)$ is scheduled at round t (see Line 6 of Algorithm 2). If for some $t \in [s_{i,j}(a), \tilde{s}_{i,j}(a)]$, $B_{t,m_{i,j}} = 1$, i.e. a perfect replay is scheduled, then a will be evicted from $\mathcal{A}_{\text{global}}$ by round $s_{i,j+1}(a)$ (Proposition 22). We will show this happens with high probability via concentration on the sum

$$X(a, t_\ell) := \sum_{(i,j): s_{i,j+1}(a) < s(a)} \sum_{t=s_{i,j}(a)}^{\tilde{s}_{i,j}(a)} B_{t,m_{i,j}},$$

Note that the random variable $X(a, t_\ell)$ only depends on the replay scheduling probabilities $\{B_{s,m}\}_{s,m}$ given a fixed arm a and episode start time t_ℓ , since the bad round $s(a)$ is also fixed given these quantities. This means that $X(a, t_\ell)$ is an independent sum of Bernoulli random variables $B_{t,m_{i,j}}$, conditional on t_ℓ . Then, a multiplicative Chernoff bound over the randomness of $X(a, t_\ell)$, conditional on t_ℓ yields

$$\mathbb{P}\left(X(a, t_\ell) \leq \frac{\mathbb{E}[X(a, t_\ell) \mid t_\ell]}{2} \mid t_\ell\right) \leq \exp\left(-\frac{\mathbb{E}[X(a, t_\ell) \mid t_\ell]}{8}\right).$$

The above RHS error probability is bounded above above by $1/T^3$ by observing:

$$\mathbb{E}[X(a, t_\ell) \mid t_\ell] \geq \sum_{(i,j)} \sum_{t=s_{i,j}(a)}^{\tilde{s}_{i,j}(a)} \frac{1}{m_{i,j}^{1/3} \cdot (t - t_\ell)^{2/3}} \geq \frac{1}{2} \sum_{(i,j)} \frac{(s_{i,j+1}(a) - s_{i,j}(a))^{2/3}}{(s(a) - t_\ell)^{2/3}} \geq \frac{c_{12}}{2} \log(T),$$

for $c_{12} > 0$ large enough, where the last inequality follows from (26) in the definition of the bad round $s(a)$ (Definition 9). Taking a further union bound over the choice of arm $a \in [K]$ gives us that $X(a, t_\ell) > 1$ for all choices of arm a (define this as the good event $\mathcal{E}_2(t_\ell)$) with probability at least $1 - K/T^3$. Thus, under event $\mathcal{E}_2(t_\ell)$, all arms a will be evicted before round $s(a)$ with high probability.

Recall on the event \mathcal{E}_1 the concentration bounds of Proposition 12 hold. Then, on $\mathcal{E}_1 \cap \mathcal{E}_2(t_\ell)$, letting $a = a_\ell$ in the preceding arguments we must have $t_{\ell+1} - 1 \leq s(a_\ell)$. Thus, by the definition of the bad round $s(a_\ell)$ (Definition 9), we must have:

$$\sum_{[s_{i,j}(a_\ell), s_{i,j+1}(a_\ell)): s_{i,j+1}(a_\ell) < t_{\ell+1} - 1} (s_{i,j+1}(a_\ell) - s_{i,j}(a_\ell))^{2/3} \leq c_{12} \log(T) \cdot (t_{\ell+1} - t_\ell)^{2/3}. \quad (27)$$

Thus, by (25) in the definition of bad segments (Definition 7), over the bad segments $[s_{i,j}(a_\ell), s_{i,j+1}(a_\ell))$ which elapse before the end of the episode $t_{\ell+1} - 1$, the regret of a_ℓ to $a_t^\#$ is at most order $\log^2(T) K^{1/3} \cdot (t_{\ell+1} - t_\ell)^{2/3}$.

Over each non-bad critical segment $[s_{i,j}(a_\ell), s_{i,j+1}(a_\ell))$, the regret of playing arm a_ℓ to $a_t^\#$ is at most $\log(T) \cdot K^{1/3} \cdot (\tau_{i+1} - \tau_i)^{2/3}$ and there is at most one non-bad critical segment per phase $[\tau_i, \tau_{i+1})$ (follows from Definition 7).

So, we conclude that on event $\mathcal{E}_1 \cap \mathcal{E}_2(t_\ell)$:

$$\sum_{t=t_\ell}^{t_{\ell+1}-1} \delta_t^{\mathbf{w}}(a_t^\#, a_\ell) \leq c_{13} \log^2(T) \sum_{i \in \text{PHASES}(t_\ell, t_{\ell+1})} K^{1/3} (\tau_{i+1} - \tau_i)^{2/3}.$$

Taking expectation, we have by conditioning first on t_ℓ and then on event $\mathcal{E}_1 \cap \mathcal{E}_2(t_\ell)$:

$$\begin{aligned} \mathbb{E} \left[\sum_{t=t_\ell}^{t_{\ell+1}-1} \delta_t^{\mathbf{w}}(a_t^\#, a_\ell) \right] &\leq \mathbb{E}_{t_\ell} \left[\mathbb{E} \left[\mathbf{1}\{\mathcal{E}_1 \cap \mathcal{E}_2(t_\ell)\} \sum_{t=t_\ell}^{t_{\ell+1}-1} \delta_t^{\mathbf{w}}(a_t^\#, a_\ell) \mid t_\ell \right] \right] + T \cdot \mathbb{E}_{t_\ell} [\mathbb{E} [\mathbf{1}\{\mathcal{E}_1^c \cup \mathcal{E}_2^c(t_\ell)\} \mid t_\ell]] \\ &\leq c_{13} \log^2(T) \mathbb{E}_{t_\ell} \left[\mathbb{E} \left[\mathbf{1}\{\mathcal{E}_1 \cap \mathcal{E}_2(t_\ell)\} \sum_{i \in \text{PHASES}(t_\ell, t_{\ell+1})} K^{1/3} \cdot (\tau_{i+1} - \tau_i)^{2/3} \mid t_\ell \right] \right] + \frac{2K}{T^2} \\ &\leq c_{13} \log^2(T) \mathbb{E} \left[\mathbf{1}\{\mathcal{E}_1\} \sum_{i \in \text{PHASES}(t_\ell, t_{\ell+1})} K^{1/3} \cdot (\tau_{i+1} - \tau_i)^{2/3} \right] + \frac{2}{T}, \end{aligned}$$

where in the last step we bound $\mathbf{1}\{\mathcal{E}_1 \cap \mathcal{E}_2(t_\ell)\} \leq \mathbf{1}\{\mathcal{E}_1\}$ and apply tower law again. This concludes the proof. \blacksquare

E.7 Total Variation Regret Rates for Known Weights (Proof of Corollary 17)

Re-Defining Total Variation in Terms of Generalized Borda Scores. Recall the total variation quantity is defined as:

$$V_T := \sum_{t=2}^T \max_{a, a'} |\delta_t(a, a') - \delta_{t-1}(a, a')|,$$

where $\delta_t(a, a') \doteq P_t(a, a') - \frac{1}{2}$ is the gap in dueling preferences. We first note that this can be rewritten as $\sum_{t=2}^T \max_{a \in [K], \mathbf{w} \in \Delta^K} |b_t(a, \mathbf{w}) - b_{t-1}(a, \mathbf{w})|$ since by Jensen:

$$\max_{\mathbf{w} \in \Delta^K} |b_t(a, \mathbf{w}) - b_{t-1}(a, \mathbf{w})| \leq \max_{\mathbf{w} \in \Delta^K} \mathbb{E}_{a' \sim \mathbf{w}} [|\delta_t(a, a') - \delta_{t-1}(a, a')|] \leq \max_{a, a'} |\delta_t(a, a') - \delta_{t-1}(a, a')|.$$

Note the other directions of the above inequalities are clear by taking $\mathbf{w} = \mathbf{w}(a')$. Thus, we may redefine the total variation in terms of generalized Borda scores:

$$V_T := \sum_{t=2}^T \max_{\mathbf{w} \in \Delta^K} |b_t(a, \mathbf{w}) - b_{t-1}(a, \mathbf{w})|.$$

Proof of Corollary 17. First, we bound the total variation $V_{[\tau_i, \tau_{i+1}]}$ over an SKW phase $[\tau_i, \tau_{i+1}]$. Consider the arm $a_{\tau_{i+1}}^*(\mathbf{w})$. By Definition 2, there must exist a round $t \in [\tau_i, \tau_{i+1})$ such that

$$b_t(a_{\tau_{i+1}}^*(\mathbf{w}), \mathbf{w}) - b_t(a_{\tau_{i+1}}^*(\mathbf{w}), \mathbf{w}) > \left(\frac{K}{\tau_{i+1} - \tau_i} \right)^{1/3}.$$

Adding $b_{\tau_{i+1}}(a_{\tau_{i+1}}^*(\mathbf{w}), \mathbf{w}) - b_{\tau_{i+1}}(a_{\tau_{i+1}}^*(\mathbf{w}), \mathbf{w}) \geq 0$ to the RHS we obtain that

$$V_{[\tau_i, \tau_{i+1}]} \geq \left(\frac{K}{\tau_{i+1} - \tau_i} \right)^{1/3}.$$

Now, summing over SKW phases, we have by Hölder's inequality:

$$\sum_{i=0}^{\bar{L}_{\text{Known}}} K^{1/3} \cdot (\tau_{i+1} - \tau_i)^{2/3} \leq \left(\sum_i \left(\frac{K}{\tau_{i+1} - \tau_i} \right)^{1/3} \right)^{1/4} \left(\sum_i (\tau_{i+1} - \tau_i) \cdot K^{1/3} \right)^{3/4} + K^{1/3} \cdot T^{2/3}$$

Thus, we obtain a total dynamic regret bound of $V_T^{1/4} \cdot T^{3/4} \cdot K^{1/4} + K^{1/3} \cdot T^{2/3}$.

F Nonstationary Regret Analysis for Unknown Weights

F.1 Formal Statement of Results

Theorem 23. *Algorithm 2 with the unknown weight specification (see Definition 5) satisfies for all sequences of aligned weights $\{\mathbf{w}_t\}_t$ (see Definition 4):*

$$\mathbb{E}[\text{Regret}(\{\mathbf{w}_t\}_{t=1}^T)] \leq \tilde{O}(\min\{K^{2/3}T^{2/3}\tilde{L}_{\text{Unknown}}^{1/3}, K^{1/2}V_T^{1/4}T^{3/4} + K^{2/3}T^{2/3}\}).$$

Remark 2. *Interestingly, Theorem 23 holds even without GIC (Condition 1). However, without GIC, Definition 3 may not be a meaningful notion of non-stationarity as (7) may be triggered even in stationary environments.*

F.2 Analysis Overview for Theorem 23

The proof of Theorem 23 will broadly follow the same outline as the regret analysis for known weights, but with replacements of the eviction threshold by $(s_2 - s_1)^{2/3} \cdot K^{2/3}$ (see the unknown weight specification in Definition 5), and bounding the variance of estimation by quantities of this order. The key difficulty for unknown weights is that the evaluation weights \mathbf{w}_t may change at the unknown SUW shifts ρ_i .

Importantly, Algorithm 2 can only estimate aggregate gaps $\sum_{s=s_1}^{s_2} \delta_t^{\mathbf{w}}(a', a)$ over intervals $[s_1, s_2]$ with respect to a fixed and unchanging weight \mathbf{w} . Thus, the main novelty in this analysis is to carefully partition the regret analysis along intervals $[s_1, s_2]$ lying within a phase $[\rho_i, \rho_{i+1})$. In fact, such a strategy is already inherent to the bad segment argument done in Appendix E.6 to bound $\sum_{t=t_\ell}^{t_{\ell+1}-1} \delta_t^{\mathbf{w}}(a_t^\#, a_\ell)$ for a known and known weight \mathbf{w} . So, we'll repeat a similar such bad segment analysis, but for different arms and even for different base algorithms.

This strategy is similar to the approach taken in the Condorcet winner dynamic regret analysis of [Buening and Saha \(2023\)](#), see Appendix A.3 therein), who rely on such a tactic to avoid decomposing the regret using triangle inequalities as done in the original non-stationary MAB analysis of [Suk and Kpotufe \(2022\)](#). Our need for this strategy is different, as we must constrain ourselves to only being able to detect that an arm a is bad over segments $[s_1, s_2]$ of rounds where we can use a single reference weight \mathbf{w} .

We first establish the analogue of Lemma 18 from Appendix E for the unknown weight setting.

F.3 Episodes Align with SUW Phases

Lemma 24. *On event \mathcal{E}_1 , for each episode $[t_\ell, t_{\ell+1})$ with $t_{\ell+1} \leq T$ (i.e., an episode which concludes with a restart), there exists an SUW shift $\rho_i \in [t_\ell, t_{\ell+1})$.*

Proof. This follows in an analogous manner as Lemma 18, where we note that significant SUW regret occurs if, for some weight $\mathbf{w} \in \Delta^K$, we have $\sum_{s=s_1}^{s_2} \delta_s^{\mathbf{w}}(a) \geq K^{2/3} \cdot (s_2 - s_1)^{2/3}$. Thus, an arm being evicted from $\mathcal{A}_{\text{global}}$ implies it has significant SUW regret meaning a new episode is triggered only when an SUW has occurred. \blacksquare

In what follows, we redefine the *last safe arm* $a_t^\#$ as the last arm to become unsafe in the sense of Definition 3 in the unique SUW phase $[\rho_i, \rho_{i+1})$ containing round t .

F.4 Generic Bad Segment Analysis

We'll first define a generic good event \mathcal{E}_3 over which the bad segment-type argument (as seen in Appendix E.6) holds for any arm a and any episode start time t_ℓ . Before we can define such an event, we'll generically redefine the necessary mathematical objects of Appendix E.6 for the unknown weight setting. We note that

everything that follows in this subsection is independent of any observations or decisions made by Algorithm 2 and depend only on the possible random choices of replay schedules (see Line 12 of Algorithm 2), which may be instantiated independently and obviously to the algorithm's actual behavior.

In what follows, fix a *starting round* $t_{\text{init}} \in [T]$ and an arm $a \in [K]$. Define the random variables $B_{s,m}^{t_{\text{init}}} \sim \text{Ber}(m^{-1/3} \cdot (s - t_{\text{init}})^{-2/3})$ for $m = 2, 4, \dots, 2^{\lceil \log(T) \rceil}$ and $s = t_{\text{init}} + 1, \dots, T$, which are the replay schedulers of Line 12 in Algorithm 2 if t_{init} was the start of an episode. Also, fix a round t_{start} from which we will begin defining bad segments; the variable t_{start} will serve useful when we analyze bad segments for different base algorithms $\text{BOSSE}(t_{\text{start}}, m)$. The following definitions will then be relative to a fixed t_{init} , t_{start} , and arm a .

Definition 10. (*Generic Bad Segment*) Fix an *SUW phase* $[\rho_i, \rho_{i+1}]$ intersecting $[t_{\text{start}}, T]$. Define rounds $s_{i,0}, s_{i,1}, s_{i,2} \dots \in [t_{\text{start}} \vee \rho_i, \rho_{i+1}]$ recursively as follows: let $s_{i,0} := t_{\text{start}} \vee \rho_i$ and define $s_{i,j}$ as the smallest round in $(s_{i,j-1}, \rho_{i+1})$ such that arm a satisfies for some fixed $c_{14} > 0$:

$$\max_{a' \in [K]} \sum_{t=s_{i,j-1}}^{s_{i,j}} \delta_t^{\mathbf{w}(a')} (a_t^\#, a) \geq c_{14} \log(T) \cdot K^{2/3} \cdot (s_{i,j} - s_{i,j-1})^{2/3}, \quad (28)$$

if such a round $s_{i,j}$ exists. Otherwise, we let the $s_{i,j} := \rho_{i+1} - 1$. We refer to any interval $[s_{i,j-1}, s_{i,j}]$ as a **critical segment**, and as a **bad segment** if (25) above holds.

Remark 5. Note that (28) mimics the notion (8) of significant worse-case generalized Borda regret in Definition 3. However, we need only concern ourselves with checking for bad regret w.r.t. point-mass weights $\mathbf{w}(a')$ for $a' \in [K]$, as that will suffice for the analysis.

Definition 11. (*Generic Bad Round*) Define the **bad round** $s(a, t_{\text{start}}, t_{\text{init}}) > t_{\text{start}}$ as the smallest round which satisfies, for some fixed $c_{15} > 0$:

$$\sum_{(i,j)} (s_{i,j+1} - s_{i,j})^{2/3} > c_{15} \log(T) \cdot (s(a, t_{\text{start}}, t_{\text{init}}) - t_{\text{init}})^{2/3}, \quad (29)$$

where the above sum is over all pairs of indices $(i, j) \in \mathbb{N} \times \mathbb{N}$ such that $[s_{i,j}, s_{i,j+1}]$ is a bad segment (see Definition 7) with $s_{i,j+1} < s(a, t_{\text{start}}, t_{\text{init}})$.

Now, define the independent sum of Bernoulli's

$$X(a, t_{\text{start}}, t_{\text{init}}) := \sum_{(i,j): s_{i,j+1} < s(a, t_{\text{start}}, t_{\text{init}})} \sum_{t=s_{i,j}}^{\tilde{s}_{i,j}} B_{t, m_{i,j}}^{t_{\text{init}}},$$

where $m_{i,j}$ is the dyadic approximation w.r.t. $[s_{i,j}(a), s_{i,j+1}(a)]$ in the same sense as defined in Appendix E.6.

We are now prepared to define the good event \mathcal{E}_3 , where all bad segment arguments hold, based on the following lemma.

Lemma 25. Let \mathcal{E}_3 be the event over which for all $a \in [K]$ and rounds $t_{\text{start}}, t_{\text{init}} \in [T]$ with $t_{\text{start}} \geq t_{\text{init}}$, $X(a, t_{\text{start}}, t_{\text{init}}) > 1$. Then, over the randomness of all possible replay schedules, $\mathbb{P}(\mathcal{E}_3) > 1 - T^{-3}$.

Proof. This follows from repeating the multiplicative Chernoff bound as used in Appendix E.6 for each $X(a, t_{\text{start}}, t_{\text{init}})$ and then taking union bounds over arms $a \in [K]$ and rounds $t_{\text{init}} \in [T]$. We note that crucially all potential replay schedules $\{B_{s,m}^{t_{\text{init}}}\}_{s,m,t_{\text{init}}}$ are independent across different s, m, t_{init} . ■

Next, we show that, under event \mathcal{E}_3 , the regret of a fixed arm a to $a_t^\#$ on the active interval $[s, M(s, m, a)]$ (see Definition 6 in Appendix E.5) of any scheduled base algorithm $\text{BOSSE}(s, m)$ will be boundable by running a customized bad segment analysis using the notions defined above.

Notation 26. (*Active Interval of First Ancestor Base Algorithm*) For the first ancestor base algorithm $\text{BOSSE}(t_\ell, T + 1 - t_\ell)$ (i.e., that which is instantiated first in episode $[t_\ell, t_{\ell+1}]$ per Line 7 of Algorithm 2), we'll let $M(t_\ell, T + 1 - t_\ell, a)$ denote the last round when a is retained by $\text{BOSSE}(t_\ell, T + 1 - t_\ell)$ and all of its children.

Definition 12. For an interval of rounds I , Let $\text{PHASES}(I) \doteq \{i \in [\tilde{L}_{\text{Unknown}}] : [\rho_i, \rho_{i+1}) \cap I \neq \emptyset\}$, i.e., denote those phases intersecting I . Let $S(I) := |\text{PHASES}(I)|$ be the number of intersecting phases and let $L(I, i) := |[\rho_i, \rho_{i+1}) \cap I|$ be the intersection's length for phase $[\rho_i, \rho_{i+1})$.

Lemma 27. (Generic Bad Segment Analysis for $\text{BOSSE}(s, m)$) For any scheduled $\text{BOSSE}(s, m)$, letting $I := [s, M(s, m, a)]$ be its active interval, we have on event $\mathcal{E}_3 \cap \mathcal{E}_1$:

$$\sum_{t=s}^{M(s, m, a)} \delta_t^{\mathbf{w}_t}(a_t^\#, a) \leq c_{16} \log^2(T) \left(K^{2/3} \cdot (s - t_\ell)^{2/3} \cdot \mathbf{1}\{S(I) > 1\} + \sum_{i \in \text{PHASES}(I)} K^{2/3} \cdot L(I, i)^{2/3} \right).$$

Proof. For $(t_{\text{init}}, t_{\text{start}}) := (t_\ell, s)$, we can define perfect replays with respect to the generic bad segments of Definition 10 analogously to Definition 8. We next show an analogue of Proposition 22 for such perfect replays. In particular, for each bad segment $[s_{i,j}, s_{i,j+1})$, we have for some point-mass weight \mathbf{w} ,

$$\sum_{t=\tilde{s}_{i,j}}^{s_{i,j+1}} \delta_t^{\mathbf{w}}(a_t^\#, a) \geq \frac{c_{17}}{2} \log(T) \cdot K^{2/3} \cdot (s_{i,j+1} - \tilde{s}_{i,j})^{2/3}.$$

Next, the key points hold if a perfect replay w.r.t. $[s_{i,j}, s_{i,j+1})$ is scheduled:

- Arm $a_t^\#$ (which is constant for $t \in [s_{i,j}, s_{i,j+1}) \subseteq [\rho_i, \rho_{i+1})$) is not evicted from \mathcal{A}_t since it does not incur significant SUW regret.
- The global learning rates η_t set for $t \in [\tilde{s}_{i,j}, s_{i,j+1}]$ satisfy $\eta_t \geq K^{2/3} \cdot (s_{i,j+1} - s_{i,j})^{-1/3}$ since any child base algorithm can only increase the learning rate of its parent base algorithm.
- By similar calculations to the proof of Theorem 15 (see Appendix D.3) and using the fact that a generic bad segment, as defined in (28) must have length at least $K^2/8$ (analogous to Lemma 13), we have

$$\sqrt{K^2 \sum_{s=\tilde{s}_{i,j}}^{s_{i,j+1}} \eta_s^{-1} + K \cdot \max_{s \in [\tilde{s}_{i,j}, s_{i,j+1}]} \eta_s^{-1}} \leq c_{18} \cdot K^{2/3} \cdot (s_{i,j+1} - s_{i,j})^{2/3}.$$

Combining the above points with our concentration bound (14) and eviction criterion (6) give us that arm a will be evicted from \mathcal{A}_t by round $s_{i,j+1}$. By Lemma 27, we have that a perfect replay with respect to arm a , $t_{\text{start}} = s$, and $t_{\text{init}} = t_\ell$ will be scheduled before the bad round $s(a, s, t_\ell)$ on event \mathcal{E}_3 . By (29), we then must have:

$$\sum_{(i,j)} (s_{i,j+1} - s_{i,j})^{2/3} \leq c_{15} \log(T) \cdot (M(s, m, a) - t_\ell)^{2/3},$$

where the sum is over pairs of indices (i, j) representing these generic bad segments. Thus, the desired regret bound follows by similar arguments to Appendix E.6. Note that bounding the regret over the bad segments of multiple phases $[\rho_i, \rho_{i+1})$ is needed only if the number of intersecting phases $S(I) > 1$. Otherwise, we can avoid a bad segment analysis and follow the proof steps of Appendix D.2 to directly bound the regret as order $K^{2/3} \cdot m^{2/3}$. ■

F.5 Decomposing the Regret Along Different Base Algorithms

Equipped with the generic bad segment analysis for any base algorithm $\text{BOSSE}(s, m)$, we're now ready to bound the per-episode regret. It will suffice to decompose the regret along active intervals $[s, M(s, m, a)]$ of different base algorithms $\text{BOSSE}(s, m)$ in a similar fashion to Appendix E.5, within each of which we can plug in the regret bound of Lemma 27 and then carefully integrate with respect to the randomness of replay scheduling.

We may first decompose the regret as

$$\mathbb{E} \left[\sum_{t=t_\ell}^{t_{\ell+1}-1} \delta_t^{\mathbf{w}_t}(i_t) + \delta_t^{\mathbf{w}_t}(j_t) \right] = \mathbb{E} \left[\sum_{t=t_\ell}^{t_{\ell+1}-1} \delta_t^{\mathbf{w}_t}(a_t^\#) \right] + \mathbb{E} \left[\sum_{t=t_\ell}^{t_{\ell+1}-1} \delta_t^{\mathbf{w}_t}(a_t^\#, i_t) + \delta_t^{\mathbf{w}_t}(a_t^\#, j_t) \right].$$

The first expectation on the above RHS is bounded of the right order by Definition 3 and earlier arguments.

For the second expectation on the above RHS, we further condition on whether we're in exploration mode or playing from the candidate set \mathcal{A}_t . Following the steps of Appendix E.5, we have that it suffices to bound

$$\mathbb{E} \left[\sum_{a \in [K]} \sum_{t=t_\ell}^{t_{\ell+1}-1} \frac{\delta_t^{\mathbf{w}_t}(a_t^\#, a)}{|\mathcal{A}_t|} \cdot \mathbf{1}\{a \in \mathcal{A}_t\} \right].$$

In fact, following the same decomposition of rounds into active intervals of different base algorithms, we can further upper bound the above by

$$\mathbb{E} \left[\sum_{a=1}^K \sum_{\text{BOSSE}(s,m)} B_{s,m} \left(\sum_{t=s}^{M(s,m,a)} \frac{\delta_t^{\mathbf{w}_t}(a_t^\#, a)}{|\mathcal{A}_t|} \right) \right].$$

Note that in the above we sum over all base algorithms including the ‘‘first ancestor’’ base algorithm $\text{BOSSE}(t_\ell, T+1-t_\ell)$ using Notation 26 and for which we use the convention $B_{t_\ell, T+1-t_\ell} = 1$.

Next, we plug in the guarantee of Lemma 27. Let $I(s, m, a) := [s, M(s, m, a)]$ be the active interval of $\text{BOSSE}(s, m)$. Then, it remains to bound (hiding the added log terms from Lemma 27 for ease of notation):

$$\mathbb{E} \left[\sum_{\text{BOSSE}(s,m)} B_{s,m} \sum_{a \in [K]} \frac{K^{2/3} \cdot (s-t_\ell)^{2/3} \cdot \mathbf{1}\{S(I(s, m, a)) > 1\} + \sum_{i \in \text{PHASES}(I(s, m, a))} K^{2/3} \cdot L(I(s, m, a), i)^{2/3}}{\min_{t \in I(s, m, a)} |\mathcal{A}_t|} \right].$$

We can further upper bound $L([s, M(s, m, a)], i)$ by $L([s, s+m], i)$, the sum over phases $[\rho_i, \rho_{i+1})$ in $\text{PHASES}([s, M(s, m, a)])$ by a sum over $\text{PHASES}([s, s+m])$, and the $\mathbf{1}\{S(I(s, m, a)) > 1\}$ by a $\mathbf{1}\{S([s, s+m]) > 1\}$ to obtain:

$$\mathbb{E} \left[\sum_{\text{BOSSE}(s,m)} B_{s,m} \sum_{a \in [K]} \frac{K^{2/3} \cdot (s-t_\ell)^{2/3} \cdot \mathbf{1}\{S([s, s+m]) > 1\} + \sum_{i \in \text{PHASES}([s, s+m])} K^{2/3} \cdot L([s, s+m], i)^{2/3}}{\min_{t \in I(s, m, a)} |\mathcal{A}_t|} \right].$$

Next, we note that $\sum_{a \in [K]} \frac{1}{\min_{t \in [s, M(s, m, a)]} |\mathcal{A}_t|} \leq \log(K)$ by previous arguments which turns the sum over $a \in [K]$ in the above display to a $\log(K)$ factor.

Now, define the function

$$G(s, m) := K^{2/3} \cdot (s-t_\ell)^{2/3} \cdot \mathbf{1}\{S([s, s+m]) > 1\} + \sum_{i \in \text{PHASES}([s, s+m])} K^{2/3} \cdot L([s, s+m], i)^{2/3}.$$

Then, following the same chain of arguments as in Appendix E.5, we have that it suffices to bound

$$\mathbb{E} \left[\sum_{s=t_\ell+1}^{t_{\ell+1}-1} \sum_m \frac{1}{m^{1/3} \cdot (s-t_\ell)^{2/3}} \cdot G(s, m) \right].$$

We split this up into two expectations based on the two terms in the definition of $G(s, m)$:

$$\mathbb{E} \left[\sum_{i \in \text{PHASES}([t_\ell, t_{\ell+1}])} \sum_{s=\rho_i}^{\rho_{i+1}-1} \sum_{m \geq \rho_{i+1}-s} \frac{1}{m^{1/3}} \right] + \mathbb{E} \left[\sum_{s=t_\ell}^{t_{\ell+1}-1} \sum_m \sum_{i \in \text{PHASES}([s, s+m])} \frac{L([s, s+m], i)^{2/3}}{m^{1/3} \cdot (s-t_\ell)^{2/3}} \right].$$

For the first expectation above, we have $\sum_{m \geq \rho_{i+1} - s} m^{-1/3} \leq \log(T) \cdot (\rho_{i+1} - s)^{-1/3}$. Then, summing over s , this becomes $\sum_{s=\rho_i}^{\rho_{i+1}-1} (\rho_{i+1} - s)^{-1/3} \leq (\rho_{i+1} - \rho_i)^{2/3}$. Thus, the first expectation in the above display is at most order $\log(T) \sum_{i \in \text{PHASES}([t_\ell, t_{\ell+1}])} (\rho_{i+1} - \rho_i)^{2/3}$.

For the second expectation, we use Jensen's inequality to bound

$$\sum_{i \in \text{PHASES}([s, s+m])} L([s, s+m], i)^{2/3} \leq m^{2/3} \cdot S([s, s+m])^{1/3},$$

where recall from Definition 12 that $S(I)$ counts the number of phases $[\rho_i, \rho_{i+1})$ intersecting interval I .

Now, plugging this into our earlier expectation gives

$$\mathbb{E} \left[\sum_{s=t_\ell}^{t_{\ell+1}-1} \sum_m \frac{m^{1/3} \cdot S([s, s+m])^{1/3}}{(s-t_\ell)^{2/3}} \right].$$

Then, coarsely bounding $S([s, s+m])$ by $S([t_\ell, t_{\ell+1}])$ and summing over m and s , we obtain the above is at most order $\log(T) \cdot S([t_\ell, t_{\ell+1}])^{1/3} \cdot (t_{\ell+1} - t_\ell)^{2/3}$.

Combining the above steps, we obtain a per-episode regret bound of

$$\begin{aligned} & \mathbb{E} \left[\sum_{a \in [K]} \sum_{t=t_\ell}^{t_{\ell+1}-1} \frac{\delta_t^{\mathbf{w}_t}(a_t^\#, a)}{|\mathcal{A}_t|} \cdot \mathbf{1}\{a \in \mathcal{A}_t\} \right] \leq \\ & c_{19} \log(K) \log^3(T) K^{2/3} \mathbb{E} \left[\mathbf{1}\{\mathcal{E}_1\} \left(S([t_\ell, t_{\ell+1}])^{1/3} (t_{\ell+1} - t_\ell)^{2/3} + \sum_{i \in \text{PHASES}([t_\ell, t_{\ell+1}])} (\rho_{i+1} - \rho_i)^{2/3} \right) \right] + \frac{1}{T}. \end{aligned} \quad (30)$$

Now, we will sum the above over episodes $[t_\ell, t_{\ell+1})$.

F.6 Summing Regret Over Episodes

In Terms of SUW. We first show the total dynamic regret bound of order $K^{2/3} \cdot T^{2/3} \cdot \tilde{L}_{\text{Unknown}}^{1/3}$ in Theorem 23. By Hölder's inequality, summing over episodes gives:

$$\sum_{\ell=1}^T S([t_\ell, t_{\ell+1}])^{1/3} \cdot (t_{\ell+1} - t_\ell)^{2/3} \leq \left(\sum_{\ell=1}^T S([t_\ell, t_{\ell+1}]) \right)^{1/3} \cdot T^{2/3} \leq (\tilde{L}_{\text{Unknown}} + \hat{L})^{1/3} \cdot T^{2/3},$$

where \hat{L} represents the number of realized episodes by Algorithm 2 (i.e., episodes $[t_\ell, t_{\ell+1})$ where $t_\ell < T + 1$). Since Lemma 24 gives us that $\hat{L} \leq \tilde{L}_{\text{Unknown}}$, the above is of order $\tilde{L}_{\text{Unknown}}^{1/3} \cdot T^{2/3}$.

Next, again since Lemma 24 implies each phase intersects at most two episodes, we have that summing $\sum_{i \in \text{PHASES}([t_\ell, t_{\ell+1}])} (\rho_{i+1} - \rho_i)^{2/3}$ over ℓ gives an upper bound of $\tilde{L}_{\text{Unknown}}^{1/3} \cdot T^{2/3}$ by Jensen's inequality.

Total Variation Regret Bound. Next, we show the total variation regret bound of order $V_T^{1/4} \cdot T^{3/4} \cdot K^{1/2} + K^{2/3} \cdot T^{2/3}$. We'll follow a similar argument to that of Appendix E.7 for known weight, except taking care to handle the extra $S([t_\ell, t_{\ell+1}])^{1/3} \cdot (t_{\ell+1} - t_\ell)^{2/3}$ term in (30).

We first bound the total variation $V_{[\rho_i, \rho_{i+1})}$ over an SUW phase $[\rho_i, \rho_{i+1})$. Consider the winner arm $a_{\rho_{i+1}}^*$. By Definition 3, there must exist a round $t \in [\rho_i, \rho_{i+1})$ and a weight $\mathbf{w} \in \Delta^K$ such that:

$$b_t(a_t^*, \mathbf{w}) - b_t(a_{\rho_{i+1}}^*, \mathbf{w}) > \left(\frac{K^2}{\rho_{i+1} - \rho_i} \right)^{1/3}.$$

This implies $V_{[\rho_i, \rho_{i+1}]} \geq (K^2/(\rho_{i+1} - \rho_i))^{1/3}$. By an analogous argument to the SKW total variation regret analysis (with the only modification being the power of K), we have:

$$\sum_{i=0}^{\tilde{L}_{\text{unknown}}} K^{2/3} \cdot (\rho_{i+1} - \rho_i)^{2/3} \leq V_T^{1/4} \cdot T^{3/4} \cdot K^{1/2} + K^{2/3} \cdot T^{2/3}.$$

Next, we bound the total variation $V_{[t_\ell, t_{\ell+1}]}$ over an episode $[t_\ell, t_{\ell+1}]$. Let $\tilde{S}([t_\ell, t_{\ell+1}])$ be the number of phases $[\rho_i, \rho_{i+1}]$ properly contained in episode $[t_\ell, t_{\ell+1}]$ or such that $[\rho_i, \rho_{i+1}] \subseteq [t_\ell, t_{\ell+1}]$.

Then, we have the bound

$$V_{[t_\ell, t_{\ell+1}]} \geq \sum_{i: [\rho_i, \rho_{i+1}] \subseteq [t_\ell, t_{\ell+1}]} V_{[\rho_i, \rho_{i+1}]} \geq \sum_{i: [\rho_i, \rho_{i+1}] \subseteq [t_\ell, t_{\ell+1}]} \left(\frac{K^2}{\rho_{i+1} - \rho_i} \right)^{1/3}.$$

Next, we have that since $x \mapsto x^{-1/3}$ is convex, we have the above RHS can be further lower bounded by Jensen's inequality:

$$\sum_{i: [\rho_i, \rho_{i+1}] \subseteq [t_\ell, t_{\ell+1}]} \left(\frac{K^2}{\rho_{i+1} - \rho_i} \right)^{1/3} \geq K^{2/3} \cdot \frac{\tilde{S}([t_\ell, t_{\ell+1}])^{4/3}}{(t_{\ell+1} - t_\ell)^{1/3}}.$$

Alternatively, we may also lower bound $V_{[t_\ell, t_{\ell+1}]}$ by the same argument that we made for an SUW phase $[\rho_i, \rho_{i+1}]$ since $[t_\ell, t_{\ell+1}]$ is a period of rounds where every arm incurs significant regret in some period $[s_1, s_2] \subseteq [t_\ell, t_{\ell+1}]$ w.r.t. some weight \mathbf{w} . Thus, we also have

$$V_{[t_\ell, t_{\ell+1}]} \geq \left(\frac{K^2}{t_{\ell+1} - t_\ell} \right)^{1/3}.$$

Now, by Hölder's inequality we have

$$\sum_{\ell=1}^{\hat{L}} K^{2/3} \cdot S([t_\ell, t_{\ell+1}])^{1/3} \cdot (t_{\ell+1} - t_\ell)^{2/3} \leq K^{1/2} \cdot T^{3/4} \cdot \left(\sum_{\ell=1}^{\hat{L}} K^{2/3} \frac{S([t_\ell, t_{\ell+1}])^{4/3}}{(t_{\ell+1} - t_\ell)^{1/3}} \right)^{1/4} + K^{2/3} \cdot T^{2/3}.$$

Upper bounding $S([t_\ell, t_{\ell+1}])^{4/3} \leq c_{20} \cdot (\tilde{S}([t_\ell, t_{\ell+1}])^{4/3} + 2^{4/3})$ using the inequality $(a+b)^{4/3} \leq 2 \cdot (a^{4/3} + b^{4/3})$, we can upper bound the above RHS by order:

$$K^{1/2} \cdot T^{3/4} \cdot \left(\sum_{\ell} V_{[t_\ell, t_{\ell+1}]} \right)^{1/4} + K^{2/3} \cdot T^{2/3} \leq K^{1/2} \cdot T^{3/4} \cdot V_T^{1/4} + K^{2/3} \cdot T^{2/3}.$$

F.7 Proof Overview for Theorem 4

Although Theorem 4 does not directly follow from Theorem 23, the analysis will follow a nearly identical structure while substituting the SUW phases $[\rho_i, \rho_{i+1}]$ with the approximate winner phases $[\zeta_i, \zeta_{i+1}]$ (see Definition 3).

First, we transform the Condorcet dynamic regret to a generalized Borda dynamic regret. Let $\mathbf{w}_t = \mathbf{w}(\tilde{a}_t)$ where \tilde{a}_t is the approximate winner arm of the unique approximate winner phase $[\zeta, \zeta_{i+1}]$ containing round t .

Then, in this case the Condorcet dynamic regret may be re-written using Definition 3:

$$\begin{aligned}
\mathbb{E}[\text{Regret}^C] &= \mathbb{E} \left[\sum_{t=1}^T \frac{1}{2} (P_t(a_t^c, i_t) + P_t(a_t^c, j_t) - 1) \right] \\
&\leq \mathbb{E} \left[\sum_{t=1}^T \frac{1}{2} (P_t(\tilde{a}_t, i_t) + P_t(\tilde{a}_t, j_t) - 1) \right] + \sum_{i=0}^{S_{\text{approx}}} K^{2/3} \cdot (\zeta_{i+1} - \zeta_i)^{2/3} \\
&= \mathbb{E} \left[\sum_{t=1}^T \frac{1}{2} (\delta_t(\tilde{a}_t, \tilde{a}_t) - \delta_t(i_t, \tilde{a}_t) + \delta_t(\tilde{a}_t, \tilde{a}_t) - \delta_t(j_t, \tilde{a}_t)) \right] + \sum_{i=0}^{S_{\text{approx}}} K^{2/3} \cdot (\zeta_{i+1} - \zeta_i)^{2/3} \\
&\leq \mathbb{E} \left[\frac{1}{2} \sum_{t=1}^T \delta_t^{\mathbf{w}^t}(i_t) + \delta_t^{\mathbf{w}^t}(j_t) \right] + \sum_{i=0}^{S_{\text{approx}}} K^{2/3} \cdot (\zeta_{i+1} - \zeta_i)^{2/3}.
\end{aligned}$$

It remains to bound the expectation on the above RHS by the second sum (up to log terms) in the same display and then show

$$\sum_{i=0}^{S_{\text{approx}}} K^{2/3} \cdot (\zeta_{i+1} - \zeta_i)^{2/3} \leq \min \left\{ K^{2/3} T^{2/3} S_{\text{approx}}^{1/3}, K^{1/2} V_T^{1/4} T^{3/4} + K^{2/3} T^{2/3} \right\}.$$

The key facts will be crucial in showing these claims.

Fact 28. *An SUW cannot occur within an approximate winner phase. In other words, supposing \tilde{a}_i is the approximate winner arm of phase $[\zeta_i, \zeta_{i+1})$ (such that (3) holds for $a = \tilde{a}_i$ and for all $s \in [\zeta_i, \zeta_{i+1})$, $a \in [K]$) then we must have that \tilde{a}_i satisfies for all $[s_1, s_2] \subseteq [\zeta_i, \zeta_{i+1})$:*

$$\max_{\mathbf{w} \in \Delta^K} \sum_{s=s_1}^{s_2} \delta_s^{\mathbf{w}}(\tilde{a}_i) < K^{2/3} \cdot (s_2 - s_1)^{2/3}.$$

Proof. Note that (3), Jensen's inequality, and GIC (Condition 1) implies for any weight $\mathbf{w} \in \Delta^K$ and $s \in [\zeta_i, \zeta_{i+1})$:

$$\delta_s^{\mathbf{w}}(\tilde{a}_i) = |\delta_s^{\mathbf{w}}(a_s^*, \tilde{a}_i)| \leq \mathbb{E}_{a \sim \mathbf{w}} [|P_s(a_s^*, a) - P_s(\tilde{a}_i, a)|] \leq \left(\frac{K^2}{s - \zeta_i} \right)^{1/3}.$$

Thus, \tilde{a}_i does not incur significant worst-case generalized Borda regret over any interval $[s_1, s_2] \subseteq [\zeta_i, \zeta_{i+1})$. ■

Fact 29. *The total variation in an approximate winner phase is at least*

$$V_{[\zeta_i, \zeta_{i+1})} \geq \left(\frac{K^2}{\zeta_{i+1} - \zeta_i} \right)^{1/3}.$$

Proof. Fix a phase $[\zeta_i, \zeta_{i+1})$ and consider the winner arm $a_{\zeta_{i+1}}^*$ at round ζ_{i+1} . By Definition 3, there must exist a round $s \in [\zeta_i, \zeta_{i+1})$ such that for some arm $a \in [K]$:

$$\left(\frac{K^2}{\zeta_{i+1} - \zeta_i} \right)^{1/3} < \delta_s^{\mathbf{w}^{(a)}}(a_s^*, a_{\zeta_{i+1}}^*) \leq \delta_s^{\mathbf{w}^{(a)}}(a_s^*, a_{\zeta_{i+1}}^*) - \delta_{\zeta_{i+1}}^{\mathbf{w}^{(a)}}(a_s^*, a_{\zeta_{i+1}}^*) \leq V_{[\zeta_i, \zeta_{i+1})},$$

where the second inequality follows from GIC. ■

Fact 30 (Analogue of Lemma 24). *On event \mathcal{E}_1 , for each episode $[t_\ell, t_{\ell+1})$ with $t_{\ell+1} \leq T$ (i.e., an episode which concludes with a restart), there exists an approximate winner change $\zeta_i \in [t_\ell, t_{\ell+1})$.*

Proof. This follows from Fact 28, as an SUW cannot occur within an approximate winner phase. This means that since a restart implies an SUW has occurred, an approximate winner change must have also occurred. ■

Now, the generic bad segment analysis of Appendix F.4 can be done while replacing the SUW phases $[\rho_i, \rho_{i+1})$ with the approximate winner phases $[\zeta_i, \zeta_{i+1})$. Fact 28 ensures that the analogue of Lemma 27 will hold as the approximate winner arm \tilde{a}_i of phase ζ_i cannot be evicted by a perfect replay corresponding to a generic bad segment in phase $[\zeta_i, \zeta_{i+1})$. Then, the steps of Appendix F.5 and Appendix F.6 follow mutatis mutandis while using Fact 29 to get the total variation bound.