# Undulatory swimming in suspensions and networks of flexible filaments

Adam K Townsend\*1 and Eric E Keaveny<sup>2</sup>

<sup>1</sup>Department of Mathematical Sciences, Durham University, Stockton Road, Durham DH1 3LE, UK

<sup>2</sup>Department of Mathematics, Imperial College London, London SW7 2AZ, UK

#### 21 March 2024

#### Abstract

Many biological fluids are composed of suspended polymers immersed in a viscous fluid. A prime example is mucus, where the polymers are also known to form a network. While the presence of this microstructure is linked with an overall non-Newtonian response of the fluid, swimming cells and microorganisms similar in size to the network pores and polymer filaments instead experience the heterogeneous nature of the environment, interacting directly with the polymers as obstacles as they swim. To characterise and understand locomotion in these heterogeneous environments, we simulate the motion of an undulatory swimmer through suspensions and networks of elastic filaments, exploring the effects of filament and link compliance and filament concentration up to 20% volume fraction. For compliant environments, the swimming speed increases with filament concentration to values about 10% higher than in a viscous fluid. In stiffer environments, a non-monotonic dependence is observed, with an initial increase in speed to values 5% greater than in a viscous fluid, followed by a dramatic reduction to speeds just a fraction of its value in a viscous fluid. Velocity fluctuations are also more pronounced in stiffer environments. We demonstrate that speed enhancements are linked to hydrodynamic interactions with the microstructure, while reductions are due to the filaments restricting the amplitude of the swimmer's propulsive wave. Unlike previous studies where interactions with obstacles allowed for significant enhancements in swimming speeds, the modest enhancements seen here are more comparable to those given by models where the environment is treated as a continuous viscoelastic fluid.

#### Contents

T	Introduction	2
2	Mathematical model for the swimmer and environment 2.1 General model for all filaments	<b>3</b>
	2.2 Swimmer	
3	Unconnected filament suspensions	6
	3.1 Filament environment	7
	3.2 Swimming speeds in filament suspensions	7
4	Spring-connected filament networks	8
	4.1 Filament environment	8
	4.2 Swimming speeds in filament networks	10

<sup>\*</sup>Corresponding author: adam.k.townsend@durham.ac.uk

<b>5</b>	Analysis			
	5.1 The role of steric forces directly	12		
	5.2 The role of the swimming gait	13		
	5.3 The role of hydrodynamics	15		
6	Discussion and conclusions	16		
$\mathbf{A}$	Rigid body motion	18		
	A.1 Extracting the swimming gait	18		
	A.2 Resulting swimming speed in a viscous fluid	19		
В	Resistive force theory	19		

## 1 Introduction

The fluids produced and used by living organisms are inherently complex, containing a suspended microstructure such as deformable cells or polymers molecules that are immersed in a viscous fluid. Prime examples of such fluids are blood and mucus. While blood can be viewed as a suspension of deformable cells, mucus is instead a mesh of fibre bundles formed from the protein mucin and connected through entanglement or hydrophobicity (Lai et al., 2009). In our own bodies, mucus plays several important roles as a lubricating fluid (Boegh & Nielsen, 2015; Nordgård & Draget, 2011), a protective layer (Allen & Flemström, 2005; Mantelli & Argüeso, 2008), and as a barrier to pathogens and infection (Ensign et al., 2014; Johansson et al., 2008). Mucus helps facilitate digestion, protecting the soft tissue of the stomach from the acids used during digestion, and from bacteria such as H. pylori that cause stomach ulcers (Celli et al., 2009). In relation to reproduction, mucus is present in the cervix (Ceric et al., 2005; Rutllant et al., 2005), again serving to prevent infections, but also providing the fluid environment through which sperm swim. Mucin fibre density is known to decrease when fertilisation is possible, and sperm—mucus interactions have been put forward as a possible mechanism for selection of viable sperm (Bianchi et al., 2004; Suarez & Pacey, 2006; Holt & Fazeli, 2015).

As one might expect, the presence of the microstructure, which produces changes in the rheological properties of the surrounding fluid, alters the motility of cells moving through the fluid (Sznitman & Arratia, 2015). Sperm cells swim by undulating their flagellum, and in purely viscous fluids, increased viscosity is seen to be associated with lower wave propagation velocity and smaller wave amplitude in sperm, but not necessarily with any change in average swimming speed (Brokaw, 1966; Smith et al., 2009). But human cervical mucus is viscoelastic and shear-thinning (Wolf et al., 1977), and increased viscosity in mucus is linked to enhanced swimming speed (López-Gatius et al., 1994; Rutllant et al., 2005). Conversely, experiments with C. elegans, which also moves through undulation, show that increased fluid elasticity leads to slower swimming speeds (Shen & Arratia, 2011). As increasing the microstructure in the fluid changes the fluid viscoelasticity, in general, the relationship between suspension concentration and microorganism motility is not simple. As another example, experiments show that E. coli, which propels itself through helical motion of its flagella, travels faster in low-concentration polymeric fluids (up to about 20%) than in a purely viscous fluid, but at high concentrations of polymers, travels slower (Schneider & Doetsch, 1974; Martinez et al., 2014).

To gain a more fundamental understanding of microorganism motility in complex biological fluids, researchers have turned to mathematical models based on continuum-level descriptions of non-Newtonian fluids. Initial theoretical work with Oldroyd-B and FENE-P viscoelastic models typically predicted that additional viscoelasticity would impede swimming (Lauga, 2007; Fu et al., 2009). Later, computational studies in the nonlinear regime for an undulatory swimmer in a two-dimensional Oldroyd-B fluid painted a more complex picture, with both hindrance and enhancement (up to 30%) found for different mechanical properties of the swimmer (Teran et al., 2010; Thomases & Guy, 2014). The same broad picture was found in 2D asymptotic and numerical work modelling the background fluid with the Brinkman equations for porous media (Leiderman & Olson, 2016), with both hindrance and enhancement (up to 45%) found for low and high swimmer bending stiffness respectively. The same model in three dimensions

also showed hindrance and enhancement (up to 15%) (Cortez et al., 2010; Olson & Leiderman, 2015), depending on bending stiffness.

While these models provided a number of key insights into how fluid rheology affects microorganism motility, the continuum fluid model assumes a large separation in length scale between the swimming microorganism and the microstructure, describing just one limit in a much larger parameter space ('type II' in Spagnolie & Underhill (2023)). In many notable cases, the characteristic length scales of the swimming body and the immersed microstructure are comparable (the border between 'types II and IV'). For sperm moving in cervical mucus, for example, the gap sizes in the mucin fibre bundle mesh ( $\sim 1 \,\mu m$ ) are on the same order as the head of the cell ( $\sim 5 \, \mu m$ ) (Sheehan et al., 1986; Lai et al., 2009). In this scenario, it is therefore important to consider the fluid microstructure as discrete objects comparable in size to the swimmer. One intermediate method is to represent these discrete objects as point forces which act on the swimmer, where the spacing between the forces (e.g. in a lattice or a mesh) is of the same order as the swimmer size (Gniewek & Kolinski, 2010). Simulations of swimmers through such a mesh network have found mostly hindrance (Schuech et al., 2022) but also speed enhancement of up to 30% (Wróbel et al., 2016). Simulations of swimmers through bead-spring dumbbell suspensions (Zhang et al., 2018) have shown both hindrance and enhancement (up to 10%) for sufficiently short-wavelength swimmers, depending on the relative viscosity of the fluid around the head and flagellum. Experiments and simulations (Park et al., 2008; Majmudar et al., 2012) of undulatory locomotion in lattices of rigid obstacles ('type I') have shown that speeds can increase by nearly a factor of ten when the lattice spacing allows for the swimmer to constantly push itself along as it undulates. After introducing randomness in the obstacle positions and environment compliance through tethering springs (Kamal & Keaveny, 2018), enhanced locomotion continues to be observed, though by a more modest but still substantial factor of two and a half. In addition, modelling the microstructure discretely also captures swimmer velocity fluctuations (Jabbarzadeh et al., 2014; Kamal & Keaveny, 2018) due to collisions which in turn produces effective swimmer diffusion over long times. Non-trivial changes in motility are also observed for swimmers propelled by helical flagella in heterogeneous environments. A recent theory to explain increased swimming speeds at low suspension concentrations is that the swimming motion of the microorganism leads to phase separation near the surface of the swimmer. Multiparticle collision dynamics simulations of helically propelled swimmers (Zöttl & Yeomans, 2019) suggest this could lead to speed increases between 10% and 100%. This mechanism yields similar increases in swimming speed for undulatory swimmers (Man & Lauga, 2015). For recent reviews of theoretical and computational approaches to modelling swimming in complex media, see Li et al. (2021); Spagnolie & Underhill (2023); for a broad overview of sperm modelling, see Gaffney et al. (2021).

In this paper, we perform simulations of an undulatory swimmer moving through three-dimensional suspensions of elastic filaments. We resolve hydrodynamic interactions using the force coupling method and elastic deformation of the swimmer and filaments using the computational framework described in Schoeller et al. (2021). A summary of the model is presented in Section 2. In performing the simulations, we consider cases where the filaments are freely suspended in the fluid (Section 3), or tethered to one another via Hookean springs to form a network (Section 4). In both types of environments, we examine how the swimming speed is affected by filament concentration, filament stiffness, and tether stiffness. In sufficiently compliant environments, we find that the swimming speed increases to a value of 10% greater than that in viscous fluid for volume fractions up to 20%. For stiff environments, however, the speed in non-monotonic with volume fraction, with peak enhancement of 5% and reductions in speed as the volume fraction approaches 20%. By systematically removing physical effects from the simulation, we show that speed enhancement is due to the hydrodynamic interactions, where as speed reductions in stiff environments are due to reduced waveform amplitude as the swimmer becomes more confined.

#### 2 Mathematical model for the swimmer and environment

#### 2.1 General model for all filaments

In our study, we simulate the movement of an active, undulating swimmer, modelled as an active filament, travelling through a fully three-dimensional suspension or network of passive filaments. To

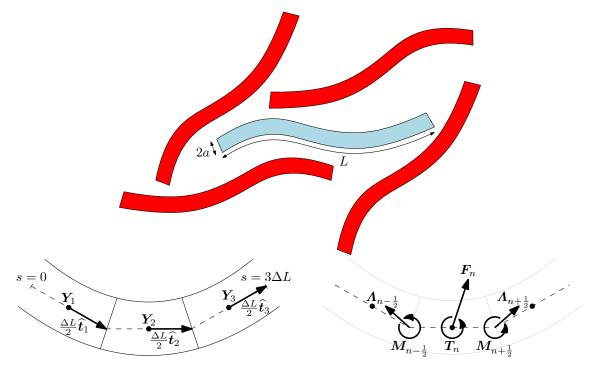


Figure 1: Top: Cartoon of the swimming suspension: the swimmer (blue) makes its way through a suspension of passive network filaments (red) in 3D. Bottom left: Spatial discretisation of the filament with positions  $Y_n$  and vectors  $\hat{t}_n$  satisfying the constraint, Eq. (4). Bottom right: Forces and torques in the discrete system with  $F_n = \Delta L f_n$  and  $T_n = \Delta L \tau_n$ . Diagrams reproduced from Schoeller et al. (2021).

perform these simulations, we employ the filament model developed in Schoeller et al. (2021). The model is a three-dimensional development of the two-dimensional model of swimming filaments first introduced in Majmudar et al. (2012), adapted for sperm in Schoeller & Keaveny (2018), and used in studies of two-dimensional obstacle arrays in Kamal & Keaveny (2018). We will summarise the model in the context of a single filament.

In the model, the filament, sketched in Fig. 1, has length L and a circular cross-section of radius a. The filament is parametrised by its arclength,  $0 \le s \le L$ , such that the position of any point on the filament centreline at time t is Y(s,t). Additionally, we introduce a right-handed orthonormal frame at any s and t,  $\{\hat{t}(s,t), \hat{\mu}(s,t), \hat{\nu}(s,t)\}$ , that we will employ to keep track of the deformation of the filament.

To derive the equations of motion, we begin by considering the force and moment balances along the filament (Landau & Lifshitz, 1986, §19; Powers, 2010),

$$\frac{\partial \mathbf{\Lambda}}{\partial s} + \mathbf{f} = \mathbf{0},\tag{1}$$

$$\frac{\partial \mathbf{\Lambda}}{\partial s} + \mathbf{f} = \mathbf{0}, \tag{1}$$

$$\frac{\partial \mathbf{M}}{\partial s} + \hat{\mathbf{t}} \times \mathbf{\Lambda} + \boldsymbol{\tau} = \mathbf{0}, \tag{2}$$

where A(s,t) and M(s,t) are the internal force and moment on the filament cross-section. The internal moments, M(s,t), are linearly related to the filament bending and twist through the constitutive law

$$\boldsymbol{M}(s,t) = K_B \left[ \widehat{\boldsymbol{\mu}} \left( \widehat{\boldsymbol{t}} \cdot \frac{\partial \widehat{\boldsymbol{\nu}}}{\partial s} - \kappa_{\mu}(s,t) \right) + \widehat{\boldsymbol{\nu}} \left( \widehat{\boldsymbol{\mu}} \cdot \frac{\partial \widehat{\boldsymbol{t}}}{\partial s} - \kappa_{\nu}(s,t) \right) \right] + K_T \widehat{\boldsymbol{t}} \left( \widehat{\boldsymbol{\nu}} \cdot \frac{\partial \widehat{\boldsymbol{\mu}}}{\partial s} - \gamma_0(s,t) \right), \quad (3)$$

where  $K_B$  is the bending modulus and  $K_T$  is the twist modulus. We also have preferred curvatures  $\kappa_{\mu}(s,t)$  and  $\kappa_{\nu}(s,t)$  and preferred twist,  $\gamma_0(s,t)$ , that can incorporate nontrivial equilibrium filament shapes (Lim et al., 2008; Lim, 2010; Olson et al., 2013) and time-dependent filament motion. For the passive filaments comprising the suspension or network, the preferred curvatures and twist are zero, but for the swimmer, there is a time-dependent  $\kappa_{\nu}$ , as defined in Section 2.2. The internal force,  $\Lambda(s,t)$ , enforces the kinematic constraint

$$\hat{t} = \frac{\partial Y}{\partial s}.\tag{4}$$

Also appearing in Eq. (2) are f and  $\tau$  which are the external force and torque per unit length on the filament, respectively. These consist of short-ranged, repulsive forces when filaments collide, but also the force and torque per unit length exerted on the filament by the surrounding fluid.

Next, we discretise the filament into N segments of length  $\Delta L$ . Each segment has position  $Y_n$  and orientation vector  $\hat{t}_n$ . After applying central differencing to Eq. (2), we have

$$\frac{\boldsymbol{\Lambda}_{n+1/2} - \boldsymbol{\Lambda}_{n-1/2}}{\Delta L} + \boldsymbol{f}_n = \boldsymbol{0}, \tag{5}$$

$$\frac{M_{n+1/2} - M_{n-1/2}}{\Delta L} + \frac{1}{2} \hat{t}_n \times \left( \Lambda_{n+1/2} + \Lambda_{n-1/2} \right) + \tau_n = 0, \tag{6}$$

where  $M_{n+1/2}$  and  $\Lambda_{n+1/2}$  are the internal moment and force between segments n and n+1, and  $f_n$  and  $\tau_n$  are the external force and torque, respectively, per unit length on segment n. For the discrete system,  $\Lambda_{n+1/2}$  is the Lagrange multiplier that enforces

$$\mathbf{Y}_{n+1} - \mathbf{Y}_n - \frac{\Delta L}{2} \left( \hat{\mathbf{t}}_n + \hat{\mathbf{t}}_{n+1} \right) = \mathbf{0}, \tag{7}$$

the discrete version of Eq. (4).

Multiplying Eqs. (5) and (6) through by  $\Delta L$ , we arrive at the force and torque balances on each segment n,

$$\mathbf{F}_n^C + \mathbf{F}_n = \mathbf{0},\tag{8}$$

$$T_n^E + T_n^C + T_n = \mathbf{0},\tag{9}$$

where  $\boldsymbol{F}_n^C = \boldsymbol{\Lambda}_{n+1/2} - \boldsymbol{\Lambda}_{n-1/2}$ ,  $\boldsymbol{T}_n^E = \boldsymbol{M}_{n+1/2} - \boldsymbol{M}_{n-1/2}$ , and  $\boldsymbol{T}_n^C = \frac{\Delta L}{2} \hat{\boldsymbol{t}}_n \times (\boldsymbol{\Lambda}_{n+1/2} + \boldsymbol{\Lambda}_{n-1/2})$ . The external forces and torques acting on each segment are  $\boldsymbol{F}_n = \Delta L \boldsymbol{f}_n$  and  $\boldsymbol{T}_n = \Delta L \boldsymbol{\tau}_n$  and are composed of the repulsive, or barrier, forces between segments and the hydrodynamic force and torque on each segment,  $\boldsymbol{F}_n = \boldsymbol{F}_n^B - \boldsymbol{F}_n^H$  and  $\boldsymbol{T}_n = -\boldsymbol{T}_n^H$ . The barrier force,  $\boldsymbol{F}_n^B$ , prevents segments from overlapping and acts between pairs of segments of different filaments, or between non-neighbouring segments of the same filament. Specifically, expressing the centre-to-centre displacement between two segments as  $\boldsymbol{r}_{nm} = \boldsymbol{Y}_n - \boldsymbol{Y}_m$ , then  $\boldsymbol{F}_n^B = \sum_m \boldsymbol{F}_{nm}^B$  where (Dance et al., 2004)

$$\mathbf{F}_{nm}^{B} = F^{S} \left( \frac{4a^{2}\chi^{2} - r_{nm}^{2}}{4a^{2}(\chi^{2} - 1)} \right)^{4} \frac{\mathbf{r}_{nm}}{2a} \quad (\text{if } r_{nm} < 2\chi a), \tag{10}$$

and  $F_{nm}^B = \mathbf{0}$  otherwise, where  $r_{nm} = |\mathbf{r}_{nm}|$  and  $\chi = 1.1$ . The force strength  $F^S$  is set to  $51K_B/L^2$ , where  $K_B$  and L are the bending modulus and length of the swimmer described in Section 2.2.

At this point we now have full expressions for the hydrodynamic forces and torques,  $\mathbf{F}_n^H$  and  $\mathbf{T}_n^H$ , acting on all filament segments. As such, we now consider the hydrodynamic model which will allow us to obtain the motion of the filaments. Due to the negligible influence of fluid inertia, the hydrodynamic interactions are governed by the Stokes equations for a fluid with viscosity  $\eta$ . Due to the linearity of the Stokes equations, the velocities,  $\mathbf{V}_n$ , and angular velocities,  $\mathbf{\Omega}_n$ , of the segments are linearly related to the hydrodynamic forces and torques on the segments, leading to the mobility problem

$$\begin{pmatrix} \mathbf{V} \\ \mathbf{\Omega} \end{pmatrix} = \mathcal{M} \cdot \begin{pmatrix} \mathbf{F}^H \\ \mathbf{T}^H \end{pmatrix}, \tag{11}$$

where  $V^{\mathsf{T}} = (V_1^{\mathsf{T}}, \dots, V_N^{\mathsf{T}})$  is the vector of all segment velocity components, and similarly for  $\Omega$ ,  $F^H$  and  $T^H$ .

The computation of the mobility matrix,  $\mathcal{M}$ , (or, more efficiently, the computation of its action on the force and torque vector) can be performed with a number of different hydrodynamic models and

computational methodologies. In this paper, we use the matrix-free Force Coupling Method (FCM) (Maxey & Patel, 2001; Lomholt & Maxey, 2003; Liu et al., 2009). In FCM, the forces and torques exerted on the fluid by the segments are transferred through a truncated, regularised force multipole expansion in the Stokes equations. The delta functions in the multipole expansion are replaced by smooth Gaussians, and, using the ratios established for spherical particles, the envelope size of the Gaussians is based on the filament radius, a. After finding the fluid velocity, the same Gaussian functions are used to average over the fluid volume to obtain the velocity,  $V_n$ , and angular velocity,  $\Omega_n$ , of each segment, n.

Having obtained the velocities and angular velocities of the segments, we now integrate in time. For the segment positions, we integrate

$$\frac{\mathrm{d}\boldsymbol{Y}_n}{\mathrm{d}t} = \boldsymbol{V}_n,\tag{12}$$

while for segment orientations, we have

$$\frac{\mathrm{d}\boldsymbol{q}_n}{\mathrm{d}t} = \frac{1}{2}(0, \boldsymbol{\Omega}_n) \bullet \boldsymbol{q}_n,\tag{13}$$

where  $\boldsymbol{q}_n$  is the unit quaternion that provides the rotation matrix.

$$R(\mathbf{q}_n(s,t)) = \left(\widehat{\mathbf{t}}_n \ \widehat{\boldsymbol{\mu}}_n \ \widehat{\boldsymbol{\nu}}_n\right). \tag{14}$$

To advance in time, we discretise Eqs. (12) and (13) using a geometric second-order backward differentiation scheme (Ascher & Petzold, 1998; Faltinsen et al., 2001; Iserles et al., 2000) that ensures that the quaternions remain unit length. The resulting equations, along with Eq. (7), yield a system of nonlinear equations that we solve using using Broyden's method (Broyden, 1965) to obtain the updated segment positions,  $\mathbf{Y}_n$ , the quaternions associated with the segment orientations,  $\mathbf{q}_n$ , and the Lagrange multipliers. For full details, especially in regard to the quaternion representation and geometric integration scheme, we again refer the reader to Schoeller et al. (2021, §2.9).

#### 2.2 Swimmer

In all our simulations, the swimmer has length L=33a and its bending modulus and twisting modulus are equal,  $K_T=K_B$ . Swimmer motion is generated by planar undulations, driven by a preferred curvature,

$$\kappa_{\nu}(s,t) = K_0 \sin(ks - \omega t + \phi) \cdot \begin{cases} 2(L-s)/L & s > L/2, \\ 1 & s \le L/2, \end{cases}$$
 (15)

where  $k = 2\pi/L$ . To connect with previous work in Kamal & Keaveny (2018), we choose  $K_0 = 8.25/L$  and set  $\omega$  to yield a dimensionless sperm number  $Sp = (4\pi\omega\eta/K_B)^{1/4}L = 5.87$ . The linear decay in amplitude for s > L/2 is introduced to limit otherwise very high curvatures toward the end of the swimmer (Majmudar *et al.*, 2012; Schoeller & Keaveny, 2018; Kamal & Keaveny, 2018). The other preferred curvature,  $\kappa_{\mu}$ , and the preferred twist,  $\gamma_0$ , are set to zero. Under these conditions, in a quiescent fluid, a single swimmer swims its length L in a time of 11.5T, where  $T = 2\pi/\omega$  is the undulation period. The resultant periodic waveform is depicted in the left-hand panel of Fig. 11.

All simulations are performed in a cubic periodic domain of size  $87a \times 87a \times 87a = 2.64L \times 2.64L \times 2.64L$ , where L is the swimmer length, with a grid size of  $288 \times 288 \times 288$  used to solve the Stokes equations as part of the FCM mobility problem. The domain size is chosen to ensure periodic images have a negligible effect on the swimmer's motion. Illustrations of the domain will be presented in the next section.

# 3 Unconnected filament suspensions

In our simulations, we will consider the motion of the swimmer through two types of filament environments: a suspension of unconnected filaments, and a spring-connected filament network. In this section, we look at the former, first summarising the approach that we use to generate this environment and then presenting the results of our simulations.

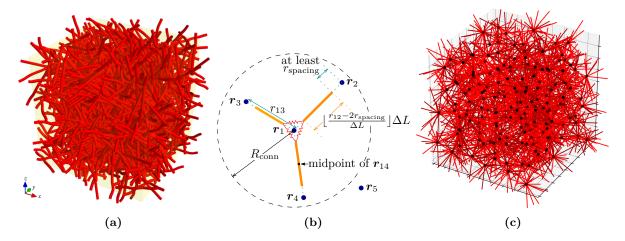


Figure 2: Filament suspension seeding: (a) Render of an unconnected suspension from Section 3.1 in a yellow periodic box at 11.3% volume concentration. (b) Diagram of filaments connected by springs at the node at  $r_1$ , as used in Section 4.1. (c) A render of the connected network suspension highlighting the placement of the connecting nodes.

#### 3.1 Filament environment

Producing the filament suspension follows a common and straightforward algorithm. We first place an undeformed swimmer (length L=33a) in the periodic domain. We then randomly seed (in position and orientation) M undeformed filaments of length L=33a. This will inevitably lead to overlapping between filaments, which must be addressed before the simulation is run. For low filament volume fraction,  $\phi < 5\%$ , where  $\phi = 4\pi a^3 LM/(3V\Delta L)$ , overlapping is resolved as part of the seeding process itself, where filaments are checked for overlapping as they are seeded and the seed is rejected if overlapping occurs. This is continued until all M filaments are successfully introduced to the domain. For high volume fractions,  $\phi > 5\%$ , filaments are placed at random positions and orientations in the domain, regardless of any overlap. To remove overlapping, the filaments are allowed to evolve under very short-ranged repulsive forces with segment mobility based on Stokes drag. The filaments are allowed to evolve until all overlapping is removed and this final configuration is used as the initial condition for our simulations. An example of a suspension simulation initial condition for  $\phi = 11.2\%$  is shown in Fig. 2(a).

Suspension simulations are performed using two different values of bending modulus,  $K_B' := K_B/K_B^{\text{swim}} = 10^{-3}$  and 1, where  $K_B^{\text{swim}}$  is the bending modulus of the swimmer. These two cases correspond to the flexible and stiff cases, respectively. Simulations are also performed for five different filament volume fractions between  $\phi = 1.9\%$  and 18.9%.

#### 3.2 Swimming speeds in filament suspensions

We start by recording and measuring the swimming speed of the undulating filament as it moves through the filament suspensions. For each value of  $K_B'$  and  $\phi$ , we perform 10 independent simulations, each with different randomly generated initial filament configurations, run for 20 periods of undulation. As the active filament swims, its stroke adds periodic contributions to the swimmer's speed. To remove these contributions, the swimming speed is defined as the period-average of the centre of mass velocity in the direction of the period-averaged swimmer orientation (Kamal & Keaveny, 2018).

At any given time t, the instantaneous velocity of the centre of mass of the swimmer is given by

$$\mathbf{V}_{\text{CoM}} = \frac{1}{N} \sum_{n=1}^{N} \mathbf{V}_n, \tag{16}$$

where  $V_n$  is the velocity of segment n. The instantaneous orientation vector of the swimmer is given by  $\hat{\boldsymbol{p}} = \boldsymbol{p}/|\boldsymbol{p}|$  where

$$\boldsymbol{p} = -\frac{1}{N} \sum_{n=1}^{N} \hat{\boldsymbol{t}}_{n},\tag{17}$$

and where  $\hat{t}_n$  is the tangent vector of segment n. We can then calculate the period-averaged velocity of the swimmer,  $V_{\text{period}}(t)$ , for time  $t \geq T$ , as

$$\mathbf{V}_{\text{period}}(t) = \frac{1}{T} \int_{t-T}^{t} \mathbf{V}_{\text{CoM}}(t') \, dt', \tag{18}$$

while the period-averaged orientation is  $\hat{\boldsymbol{P}} = \boldsymbol{P}/|\boldsymbol{P}|$ , where

$$\mathbf{P}(t) = \frac{1}{T} \int_{t-T}^{t} \widehat{\mathbf{p}}(t') \, \mathrm{d}t'. \tag{19}$$

The swimming speed,  $V_{\text{swim}}(t)$ , at any given time is then defined as

$$V_{\text{swim}}(t) = V_{\text{period}}(t) \cdot \hat{\boldsymbol{P}}(t).$$
 (20)

In the upper panel of Fig. 3, we present the normalised swimming speed  $V_{\rm swim}(t)/\langle V_{\rm swim}^0\rangle$ , where  $\langle V_{\rm swim}^0\rangle$  is the swimming speed in the absence of filaments, for each independent simulation, for increasing concentration and both values of the bending modulus. Along with this, we show in the lower left panel of Fig. 3,  $\langle V_{\rm swim}\rangle/\langle V_{\rm swim}^0\rangle$ , the average value of the swimming speed across both time and independent simulations. We see that in suspensions of relatively flexible filaments ( $K_B' = 10^{-3}$ ), the speed of the swimmer is promoted up to 15% due to the presence of the filaments, with more concentrated suspensions yielding higher speeds. For suspensions with stiffer filaments ( $K_B' = 1$ ), a small speed promotion of up to 5% is observed at low concentrations, but at higher concentrations (above  $\phi \sim 12\%$ ), the swimmer is on average hindered, displaying speed decreases of up to 20%.

The speed enhancement at low concentrations is consistent with the speed increases of up to 20% seen in simulations of two-dimensional undulatory swimmers in Stokes-Oldroyd-B viscoelastic fluids (Teran et al., 2010; Thomases & Guy, 2014). In common with the planar undulatory motion in Kamal & Keaveny (2018), the average swimmer slowdown for rigid, concentrated networks is not due to a uniform speed decrease across all independent runs; instead, it is due to large variations in the speed, including periods of time where the swimmer is trapped within the network in some simulations. But in contrast, our speed enhancement is significantly less than in simulations of interrupted planar swimming, where fixed (Majmudar et al., 2012) or tethered (Kamal & Keaveny, 2018) discrete obstacles lead to three-to tenfold speed increases. We also see less enhancement than in helical swimming with fixed obstacles (at 40%: Leshansky, 2009), where swimming speed can increase monotonically with concentration (Klingner et al., 2020). We discuss mechanisms for these distinctions in Section 6.

The fluctuations in the swimmer speed seen in the top panel of Fig. 3 increase with concentration, but this effect is much larger for the stiffer networks. At the highest concentration, the swimmer is sometimes speed up by a factor of 2, but also sometimes forced backwards in a number of simulations. This is quantified by the standard deviation in the lower right panel, where the mean standard deviation,  $\langle \sigma \rangle$ , increases almost linearly with concentration and reaches 0.4 of the unhindered swimmer speed in the most concentrated suspensions of stiff filaments.

# 4 Spring-connected filament networks

#### 4.1 Filament environment

A number of methods for generating linked filament networks exist in the literature. One approach, seen in two-dimensional (Head et~al.,~2003a,b; DiDonna & Levine, 2006; Heussinger & Frey, 2006) and three-dimensional (Åström et~al.,~2008) models of actin networks, is to seed straight filaments isotropically and add crosslinks where filaments intersect, potentially removing loose ends (Wilhelm & Frey, 2003; Huisman et~al.,~2007). Another option is to seed straight filaments, but let them grow into other shapes according to an algorithm, before forming crosslinks (Buxton et~al.,~2009).

Here, we use a method based on Buxton & Clarke (2007). We place the swimmer, of length L, in the empty periodic domain and seed  $N_{\text{nodes}}$  nodes randomly inside the domain at a distance at least  $R_{\text{min}} = 2.2LN_{\text{nodes}}^{-1/3}$  from each other. The exponent of -1/3 corresponds to hard sphere packing

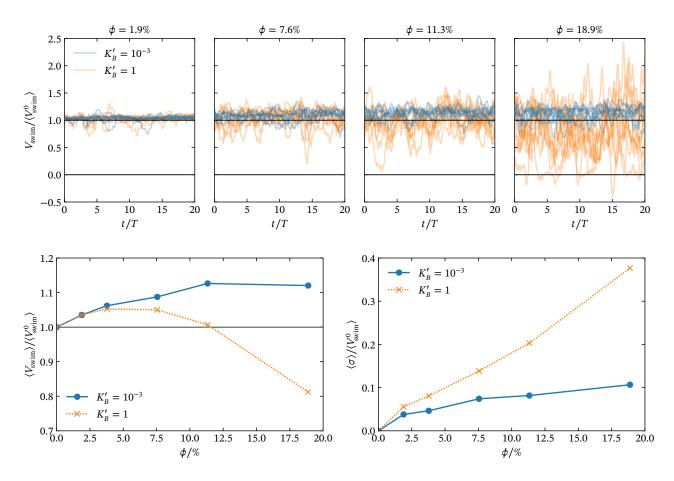


Figure 3: Top: Superimposed swimmer speeds over 20 periods of undulation for 10 independent simulations for each parameter pair  $(\phi, K_B')$  in a filament suspension. Bottom: Mean swimming speeds and the mean standard deviation,  $\langle \sigma \rangle$ , of the speeds in the panel above for each filament stiffness,  $K_B'$ , as a function of filament volume fraction,  $\phi$ .

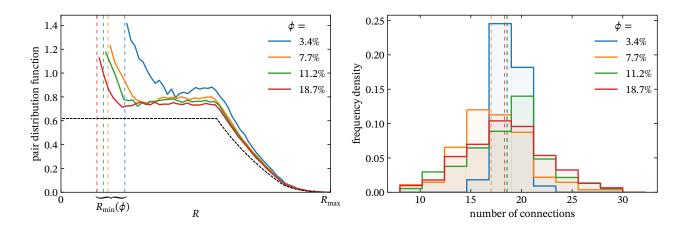


Figure 4: Left: Pair distribution function of node spacing for each of our concentrations, averaged over 100 trials. The horizontal black dotted line corresponds to the pair distribution function of a uniform distribution in a periodic domain (Deserno, 2004). Right: Histogram of the number of connections at each node for each of our concentrations, averaged over 100 trials. The mean in each case, represented by the vertical dotted line, is between 17 and 19.

Concentration, $\phi$	3.4%	7.7%	11.2%	18.7%
$N_{ m nodes}$	50	125	170	280
$R_{\min} = 2.2LN_{\text{nodes}}^{-1/3}$	0.60L	0.52L	0.49L	0.45L
$R_{ m max}$	1.2L	1.2L	1.2L	1.2L
$P_{\mathrm{conn}}$	1	0.35	0.28	0.17

Table 1: Spring network seeding statistics

inside a finite domain. For each pair of nodes, i and j, with positions  $\mathbf{r}_i$  and  $\mathbf{r}_j$ , respectively, we place a filament connecting these nodes with a probability  $P_{\text{conn}}$  if the distance between nodes is  $|\mathbf{r}_i - \mathbf{r}_j| = |\mathbf{r}_{ij}| < R_{\text{max}} = 1.2L$ . The filament is placed along the vector  $\mathbf{r}_{ij}$ , with its centre at the midpoint of  $\mathbf{r}_{ij}$  and formed of  $N = \lfloor (r_{ij} - 2r_{\text{spacing}})/\Delta L \rfloor$  segments, where  $r_{\text{spacing}} = 2a$  is taken to ensure filaments do not overlap at the nodes. Linear spring forces  $-k_s(x-\ell)\hat{x}$ , where  $\mathbf{x} = x\hat{x}$  is the end-to-end vector and  $\ell$  is the natural spring length, are applied between all pairs of filament end segments that meet at a node. This algorithm is summarised in Fig. 2(b).

To ensure that filaments do not overlap, this seeding procedure is carried out in a separate simulation, using friction-based mobility and an active collision barrier, until an equilibrium has been found. We once again define the volume concentration of the network by treating each segment as a sphere with its hydrodynamic radius a. That is, for M filaments of length  $L_i$  in a periodic domain with volume V, we have  $\phi = 4\pi a^3 \sum_{i=1}^M L_i/(3V\Delta L)$ . Under this definition, the concentration scales as the square of the number of nodes,  $\phi \sim N_{\text{nodes}}^2$ . Over a large number of independent random initial seeds, the concentration is normally distributed with a standard deviation that grows linearly with  $N_{\text{nodes}}$ .

Simulations are performed for different concentrations of filaments between  $\phi = 3.4\%$  and 18.7%. We choose  $N_{\text{nodes}}$  and  $P_{\text{conn}}$  to produce networks of a given concentration with a common mean filament length, and common mean number of connections at each node (to within a reasonable tolerance). Our parameter choices are summarised in Table 1.

The pair distribution function of node separations under these configurations is displayed in Fig. 4. We see a bump near  $R_{\min}$  corresponding to close packing, but otherwise the PDF follows the shape for a uniform distribution, slightly enhanced. A render of one such network at 11.3% volume concentration is shown in Fig. 2(c), with the nodes represented by black circles.

Simulations are performed for two different values of the network filament bending modulus,  $K'_B = 10^{-3}$  and 1 (as for the filament suspensions), and for three values of the spring modulus,  $k'_s = 0, 0.36, 3.6$ , where  $k'_s := k_s L_{\text{swim}}^3 / K_B^{\text{swim}}$ . The swimmer bending and twist modulus remains constant, and the twist modulus,  $K_T$ , for every filament, is set equal to its bending modulus.

Simulations of flagellar swimming through a viscoelastic network formed of virtually cross-linked nodes by Wróbel et al. (2016) show that the connectivity number matters: higher-connectivity networks are stiffer. Here, we keep this number constant so that we can explore the effect of the other parameters in the system: the network filament bending modulus, the filament concentration, and the spring modulus of the networks. The distribution of connection numbers in each case is shown in the right-hand panel of Fig. 4, where the mean connectivity number in each of our simulations is between 17.5 and 18.5. For comparison, cubic lattices with the diagonals excluded and included have connectivity numbers of 6 and 26 respectively, and were used in Wróbel et al. (2016). Buxton & Clarke (2007) use connectivity numbers between 5 and 15.

#### 4.2 Swimming speeds in filament networks

We now present results from simulations examining swimmer motion in the connected filament networks. We again explore the effects of filament bending stiffness and volume fraction, but now also include the spring constant of the connections. For each triplet of parameters  $(K'_B, \phi, k'_s)$ , five simulations are performed, each with a different initial random configuration, and each running for 20 undulation periods.

The mean speed and standard deviation over the simulation run,  $\langle V_{\text{swim}} \rangle$  and  $\langle \sigma \rangle$ , are presented

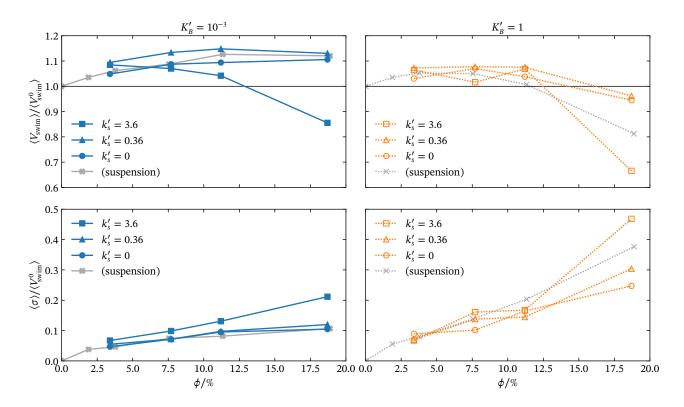


Figure 5: Mean normalised swimmer speed and standard deviation over 20 periods of undulation, as a function of the volume fraction of network filaments, for both values of the network filament bending modulus, and for all three values of the network spring strength  $k'_s$ . Results for each parameter set are averaged from 5 independent simulations. For comparison, the suspension measurements from Fig. 3 are included in pale grey.

in Fig. 5. We perform simulations for three different values of the spring constant. In the case where  $k_s' = 0$ , the simulations differ from the filament suspensions in Section 3 only in the seeding algorithm. For comparison,  $\langle V_{\rm swim} \rangle$  and  $\langle \sigma \rangle$  from the suspension simulations are reproduced in this figure. We see that for  $k_s' = 0$  and 0.36, the trend in the data follows that found for filament suspension simulations: swimmer speed is promoted with concentration in flexible networks ( $K_B' = 10^{-3}$ ) up to  $\sim 15\%$ , but rigid networks ( $K_B' = 1$ ) produce a small speed promotion followed by a hindrance as concentration increases.

The more striking differences with the suspensions simulations are observed when  $k_s'=3.6$ , where the filament tethers are stiffer than the swimmer. Here, the swimmer speed in the flexible network decreases monotonically with concentration, down to an approximate reduction of 12%. The swimmer is hindered even further in the stiff filament network, with speeds decreasing by approximately 35% at the highest concentrations. Interestingly, at intermediate concentrations, there is little difference with the weaker-spring scenarios. The effects of the stronger spring constant also yield considerably higher fluctuations in swimming speed with a standard deviation of up to  $0.2 \langle V_{\rm swim}^0 \rangle$ , although notably not as high as in the unconnected suspensions from Section 3 where the standard deviation can be as high as  $0.4 \langle V_{\rm swim}^0 \rangle$ .

# 5 Analysis

In the previous sections, we observed that the swimming speed is mildly promoted by the presence of filaments at low concentrations: the mere existence of the filaments (either flexible or stiff) in suspension produces this effect. The addition of weak connections between the filaments can provide an additional small speed increase across all concentrations and all rigidities. However, for cases with stiffer filaments or stiffer connecting springs, high concentrations of filaments tend to slow the swimmer down.

In this section, we aim to explore the mechanisms at play by which swimmer speed is promoted

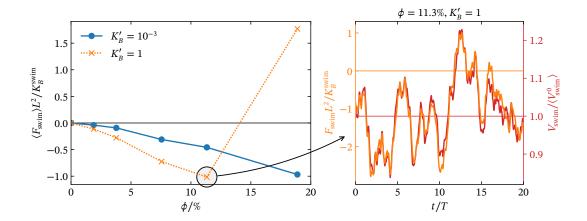


Figure 6: Force from the suspensions: While forces correlate with speed fluctuations, on average they push backwards (with the high- $\phi$ , high- $K'_B$  result an obvious outlier). Left: Mean period-averaged force on the swimmer as a function of  $\phi$ , nondimensionalised on the swimmer length and bending modulus. Right: Period-averaged force on the swimmer over time for the circled data point on the left, overlaid with the swimming velocity. Fluctuations in the force are seen to correlate with speed, but consider the region between the two horizontal bars: the swimmer speed often remains above the swimming speed in the absence of filaments (red line), despite the forces being negative, i.e. pushing backwards (orange line).

or hindered. Specifically we seek to gain insight into these trends by examining the forces acting on the swimmer and changes in swimming gait due to the presence of the filaments. The repulsive barrier forces act on the swimmer as it passes through the suspension or network of filaments. These forces act to oppose contact with suspended filaments and can therefore act on the swimmer in all directions. We can consider these forces to act in two main ways: (i) by considering the total force acting on the swimmer, and (ii) by considering how the shape of the swimmer changes as a result of unequal forces along the swimmer body.

#### 5.1 The role of steric forces directly

The barrier force can result in a nontrival net force on the swimmer that can push or pull it through the environment. We compute the mean period-averaged barrier force in the swimming direction,  $\langle F_{\text{swim}} \rangle$ . This can be measured analogously to  $\langle V_{\text{swim}} \rangle$  in Eqs. (16) to (20), namely


$$F_{\text{total}} = \sum_{n=1}^{N} F_n^B, \quad F_{\text{period}}(t) = \frac{1}{T} \int_{t-T}^{t} F_{\text{total}}(t') \, dt', \quad F_{\text{swim}}(t) = F_{\text{period}}(t) \cdot \widehat{P}(t),$$
 (21)

noting that since the constraint forces on the swimmer sum to zero, the total barrier force is equal to the total hydrodynamic force,  $\sum_n \mathbf{F}_n^B = \sum_n \mathbf{F}_n^H$ .

The total force,  $\langle F_{\rm swim} \rangle$ , in the suspensions is presented in Fig. 6. For all but the most concentrated case with the stiff filaments, the steric forces act against the direction of swimming. This is somewhat surprising as everywhere where this force is opposite the swimming direction, the velocity plot in Fig. 3 showed us that the swimmer is travelling *faster* than it does in the absence of filaments. The high-concentration, high-stiffness case appears an outlier, being pushed on average forwards, indicative of a different regime which will appear again in the spring networks.

Although the direction of the mean force appears at odds with the increase in swimming speed, an examination of the time-series before averaging shows a direct correlation between force and speed fluctuations, as shown in the right-hand panel of Fig. 6. But, still, the region between the horizontal lines in this panel represents times when the forces are oppose swimming, and yet the swimmer is still travelling faster than it would in the absence of filaments, suggestive of a uniform promotion in speed across the simulation.

The filament networks follow similar trends but paint a more nuanced picture, with the total forces presented in Fig. 7. As in the suspensions, the steric forces from interactions with *flexible* network

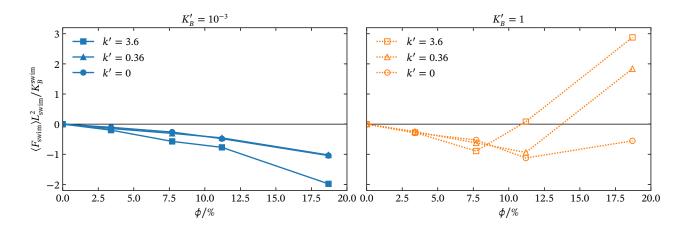

**Figure 7:** Forces from the spring networks: Mean force on the swimmer in the swimming direction. Plotted as a function of the volume concentration of network filaments, for both values of the network filament bending modulus and all three spring constants. Results for each parameter set are averaged from 5 independent simulations. This is analogous to Fig. 6 in the filament suspensions.

filaments push against the direction of swimming, with larger concentrations leading to stronger opposing forces. Once again, this happens despite the swimmer moving faster in these networks than they would at 0% concentration (Fig. 5), although this isn't universal: at the highest spring constant the filament speed does drop below its filament-free value. Interestingly, increasing the spring constant from  $k'_s = 0$  to 0.36 makes little difference to the force yet mildly promotes swimming speed. At low filament concentrations, the swimmer behaves similarly in stiff and flexible filament networks, however, we see that above a critical concentration the forces from stiff networks will push in the direction of swimming yet the swimmer slows down. The force is much weaker for the  $(k'_s = 0, K'_B = 1)$  case than in the matching suspension case, which we attribute to the differences in filament seeding. Increasing the spring constant recaptures and enhances the behaviour seen in the suspension.

These results suggest that there are two force regimes for the swimmer: one where the swimmer is gently resisted, almost linearly with concentration; and one where the swimmer is pushed forwards by the network. What is surprising is that these two force regimes do not clearly translate to observable swimming speed regimes. In particular, the barrier forces cannot be responsible for the speed increase seen in suspensions at lower-to-mid concentrations. We conclude that something else is acting to mask the total applied force.

## 5.2 The role of the swimming gait

Along with modifying the swimmer's rigid body motion, steric forces can also act to change the swimming gait. Swimmer undulations produce collisions with the surrounding filaments, inducing lateral forces which can reduce the amplitude of the undulation and alter the beat plane, making the gait less effective. Sample gaits from the suspension simulations, in both the beating and out-of-beating plane, are illustrated at increasing concentration in the top panel of Fig. 8. These stills show that in flexible suspensions, increased concentration leads to slightly reduced beating-plane amplitudes and minor out-of-plane movements. But in rigid suspensions, especially at the highest concentration (bottom row), sample gaits deviate significantly from beating behaviour in a filament-free environment, with out-of-plane amplitude sometimes surpassing in-plane amplitude.

We can quantify these observations by measuring the mean amplitude in the beating plane, presented in the lower left panel of Fig. 8 for suspensions and in the left-hand panel of Fig. 9 for our networks. We find that increased filament stiffness,  $K'_B$ , and for the networks, increased spring constants,  $k'_s$ , lead to smaller amplitudes at higher concentrations.

We can assess further the efficacy of these reduced-amplitude gaits by examining how well they propel the swimming in the absence of filaments. To do this, we remove the rigid body motion from the swimmer in the filament environment and recompute it in a viscous fluid absent of any filaments using

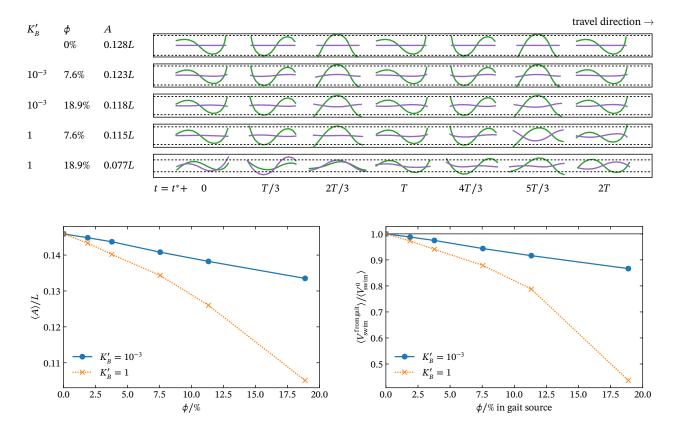


Figure 8: Higher concentrations lead to smaller-amplitude swimming gaits, which are worse at swimming. Top: Snapshots of sample swimming gaits, moving from left to right, in the beating plane (green, 'side on') and in the out-of-beating plane (purple, 'top down'). Snapshots are from a suspension simulation and take place over two periods of undulation after a given time  $t^*$ . The mean amplitude in the swimming direction-beating plane, A, is marked with dotted black lines. As the bottom left panel summarises, the amplitude decreases as concentration increases, which coincides with deflection in the out-of-beating plane. This is emphasised when the suspended filaments are more rigid. Bottom left: Mean amplitude in the beating plane,  $\langle A \rangle$ , for increasing concentration of suspension filaments, and for suspension filaments with bending modulus  $K'_B = 10^{-3}$  and 1. The amplitude decreases with  $\phi$ . Bottom right: Mean speed achieved with the extracted swimmer gait when placed in a 0% concentration fluid,  $\langle V_{\text{swim}}^{\text{from gait}} \rangle$ , subject to no external forces, following the procedure in Appendix A. This correlates well with the amplitude graph to the left, and shows that the gait enforced by the filament suspension is less effective at swimming.

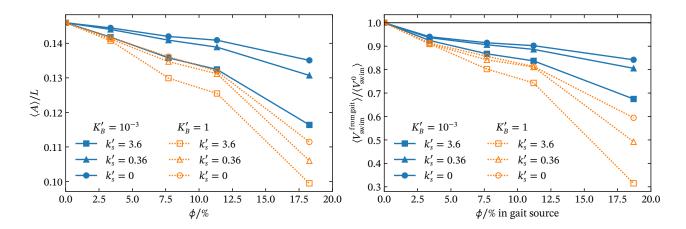


Figure 9: Left: Mean amplitude in the beating plane for increasing concentration of network filaments, and for network filaments with bending modulus  $K'_B = 10^{-3}$  and 1 connected with springs with three different spring constants,  $k'_s$ . Right: Mean speed achieved with the extracted swimmer gait from the network simulations, following the procedure in Appendix A. This is the network analogue of Fig. 8. Combined with Fig. 7, this demonstrates that collectively, the gait and total barrier force, apart from in the most concentrated case with the stiffest filaments and spring constants, act to slow the swimmer down.

the remaining undulations. We describe this computation in detail in Appendix A. The resulting speed when the imposed-gait swimmer swims is shown in the lower-right panel of Fig. 8 and the right-hand panel of Fig. 9. Correlating strongly with the stroke amplitude in both the suspensions and the networks, we see that the imposed gait is less effective at swimming, and increasingly so for the higher  $K'_B$  and (in the network) higher  $k'_s$ . Thus, any gait changes result in reduced swimming speeds rather than the increases that we observe in the full simulations.

#### 5.3 The role of hydrodynamics

So far we have seen that steric interactions, at mid-to-low concentrations, hinder swimming speed directly through rigid body forces. Additionally, when we remove all suspended filaments and impose the swimming gait seen in the full simulations, the swimmer again moves with a reduced speed.

To understand the speed increases noted in Fig. 3, having eliminated steric forces and swimming gait, we turn our attention to hydrodynamic interactions. To investigate this, we run our suspension simulations again, including all filaments but now without hydrodynamic interactions between the suspended bodies. We accomplish this by solving the fluid mobility problem in Eq. (11) using a resistive force theory (RFT) (Lauga & Powers, 2009; Johnson & Brokaw, 1979) with coefficients tuned to recover the correct filament dynamics as in Schoeller & Keaveny (2018). The details are provided in Appendix B.

The resulting force and speed of the swimmer in these simulations without hydrodynamics are shown in Fig. 10, and, similar to the gait analysis simulations in Fig. 8, show no modest increase in speed at low-to-mid concentrations. Unlike simulations with full hydrodynamics, we see that the swimming speed in this concentration regime is strongly affected by the steric forces, as evidenced by the strong correlation between these forces (left panel) and the resulting speed (right panel). At these concentrations, also observe the reduction in swimmer amplitude present in the full simulations, Fig. 8.

Although the general shape of the total force graph is similar between RFT and the full simulations, Figs. 6 and 10, it is noticeable that the backwards force response of  $K_B' = 10^{-3}$  is stronger, and of  $K_B' = 1$  is weaker, without hydrodynamics. This can be attributed to the difference in hydrodynamic model since when hydrodynamics are included, both the swimmer and the suspended filaments can deform each other without contact; whereas in the drag-based model, the filaments only affect each other on contact through the repulsive forces. In short, the presence of hydrodynamics in Fig. 3 significantly changes the swimmer behaviour from a steric force driven regime seen in the absence of hydrodynamics, in Fig. 10.

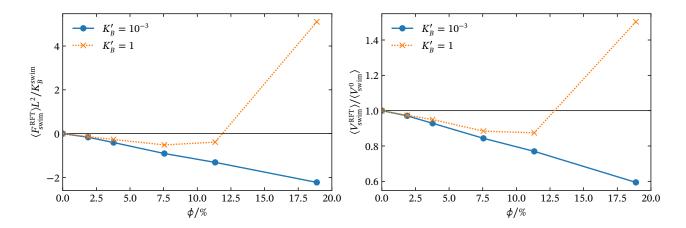


Figure 10: Non-hydrodynamic simulations using resistive force theory (RFT). In the absence of hydrodynamics, the forces experienced by the swimmer strongly correlate to the swimmer speed. Left: Mean force on the swimmer in the swimming direction. Right: Mean normalised swimmer speed (cf. Fig. 3 which includes hydrodynamics). In both panels, results are again averaged from 20 periods of undulation and are plotted as a function of the volume concentration of network filaments, for both values of the network filament bending modulus. Results for each parameter set are averaged from 10 independent simulations.

#### 6 Discussion and conclusions

In this paper, we performed simulations examining the changes in swimming speed experienced by an undulatory swimmer in filament suspensions and immersed filament networks. The simulations reveal a non-monotonic dependence of the speed on the filament concentration, with initial increases of the swimming speed to peak values of 5%-15% greater than the speed in a viscous fluid. These increases in speed are in line with predictions of swimming speeds using continuum models to describe the surrounding medium. Filament and connection flexibility are required to enhance the speed. Filaments and connections that are too stiff will instead hinder locomotion. Along with the speed, we examine speed fluctuations, which cannot be captured with continuum models. These fluctuations are found to be significant and increase monotonically with filament concentration.

To understand these changes in swimmer motion we examined closely the changes in swimming gait and force experienced by the swimmer. While we find that the fluctuations in the swimming speed are closely correlated with collisions between the swimmer and filaments, enhancement in the mean speed is not linked to the force experienced by the swimmer or changes in swimming gait. In fact, both effects would produce a monotonic decrease in the speed with filament concentration. This suggested that the enhancement is instead linked to hydrodynamic interactions between the swimmer and filaments. We confirm this by performing resistive force theory simulations where hydrodynamic interactions between the swimmer and filaments are removed and for which we do not observe any enhanced speed.

Previous work on planar undulatory motion between tethered obstacles showed a tenfold increase in the swimming speed in structured environments (Majmudar et al., 2012), and an increase of a factor of two- to three-times in unstructured media (Kamal & Keaveny, 2018). By contrast, our results here are significantly more modest. We attribute this more modest swimming speed enhancement to the freedom of movement afforded by three dimensions, and to a difference in the fixing of the obstacles. The previous work (Majmudar et al., 2012; Kamal & Keaveny, 2018) showed that planar motion was primarily governed by steric contact: motion could be hindered by trapping, and could be promoted by the provision of obstacles for the swimmer to push against. In contrast, three-dimensional motion allows for escape from constrained environments, diluting the ability for the structure to hinder or promote motion directly. In the earlier work, the obstacles are fixed to a point in space, allowing the forces on them to not be completely resolved by the fluid. Here, conversely, the forces on the suspended filaments are completely balanced by the surrounding fluid. Finally, we have concluded that speed enhancement in the current work is instead linked to hydrodynamic interactions with neighbouring filaments; an

increased number of neighbours is another property of three-dimensional geometry.

We also see less evidence of frequent or sharp turns in the swimmer trajectories when compared to planar motion, resulting in swimming paths that are more linear and less diffusive. We note, however, that our simulations of 20T are well below the correlation time,  $\tau_c$ , which we estimate by fitting  $\langle \hat{P}(s) \cdot \hat{P}(s+t) \rangle$  with  $\exp(-t/\tau_c)$ . We find values of  $\tau_c$  between 110T and 3500T in our parameter regime. Nonetheless, we find trends which agree with the planar study: increasing the concentration and stiffness of network filaments results in greater changes in swimmer orientation, reflecting that the swimmer is deflected more by larger numbers of suspended filaments.

The motivation for our work was to model a complex fluid, such as mucus, as an immersed three-dimensional filament network immersed in as viscous fluid, and elucidate the effects of physical interactions with the network on swimmer motion, especially with regard to the conditions under which this model recovers behaviour seen in viscoelastic experiments and in continuum models. Our results on swimming speeds, with mild speed enhancement at low concentrations of flexible networks but hindrance in stiff, concentrated networks, display the same trends as results obtained using two- and three-dimensional viscoelastic continuum models when the Deborah number or an analogous measure of resistance is increased. Interestingly, in these studies, either the waveform amplitude is relatively fixed (Teran et al., 2010; Thomases & Guy, 2014), or can correlate faster speeds with increased (free to vary) amplitudes (Leiderman & Olson, 2016; Olson & Leiderman, 2015); whereas the speed enhancement we observe happens despite a decrease in the swimming stroke amplitude.

The density and spacing of the network filaments in the simulations presented here were inspired by that found in mucin networks. Although we have considered a large range of concentrations, typical mucin concentration in mucus is between 0.2% and 5.0% v/w; water forms approximately 95% (Leal et al., 2017; Gniewek & Kolinski, 2010). And in this regime, we have found mild speed promotion for an undulatory swimmer in both flexible and stiff filament environments, with a small further improvement with stiffer springs in the networks. This is consistent with positive sperm migration in human cervical mucus in the ovulatory phase of the menstrual cycle, when hydration increases to 98% w/w and the mucin fibres can appear globular and disconnected (Curlin & Bursac, 2013; Morales et al., 1993; Bergman, 1953; Brunelli et al., 2007). The luteal phase, correlating with highly reduced migration, sees hydration decreasing to 90% w/w and the fibres appearing densely connected (Katz et al., 1997; Brunelli et al., 2007). In this less dilute regime, we begin to see speed reduction in stiff filament networks, which is enhanced by stiffer network connecting springs. It is important to note that while the chemical composition of mucins and polymers are well-known (Leal et al., 2017), their mechanical properties at an individual fibre level, as well as the mechanical properties of their connections, are less well understood (Lai et al., 2009).

Classes of microswimmers are able to propel themselves through different locomotive styles: here we have found that low-to-mid concentrations of flexible networks are mildly favourable towards the undulatory motion of microorganisms such as sperm cells or *C. elegans*. Another significant locomotive style is to rotate helical flagella, seen in *P. aeruginosa* or *E. coli*. Simulations of this motion, resolving the fluid using alternative methods such as multiparticle collision dynamics or regularised Stokeslets have seen speed promotion up to 60% in confined tubes (LaGrone *et al.*, 2019) and polymer solutions (Zöttl & Yeomans, 2019). In the latter case, speed up is attributed to chirality of the flagellum, which is absent in undulatory swimmers. This is interesting because one purpose of biological networks of the kind modelled here, such as mucus, is to block pathogens. We might expect that these networks are favourable to certain locomotive styles over others, and it remains as a future direction to determine this within the framework presented here.

## Acknowledgements

The authors gratefully acknowledge support from EPSRC Grant EP/P013651/1.

## A Rigid body motion

In order to assess the effectiveness of the swimming gait that emerges in the filament environment, we determine the swimming speed produced by the gait in a viscous fluid absent of any filaments.

## A.1 Extracting the swimming gait

Suppose that in the filament suspension, the swimmer's centre of mass has velocity  $\boldsymbol{u}^{\text{sus}} = \mathrm{d}\boldsymbol{Y}_{\text{CoM}}/\mathrm{d}t$  and angular velocity  $\boldsymbol{\omega}^{\text{sus}}$ . Note that we use lowercase letters to represent the rigid body motion (vectors of length 3 in 3D) and uppercase letters for the segments of the swimming filament (indexed by n); the notation 'sus' indicates this data is from the suspension simulation. The motion of segment n can then be written as

$$V_n^{\text{sus}} = \widetilde{V}_n + u^{\text{sus}} + \omega^{\text{sus}} \times \Delta Y_n,$$
 (22)

$$\Omega_n^{\rm sus} = \widetilde{\Omega}_n + \omega^{\rm sus},\tag{23}$$

where  $\Delta Y_n = Y_n - Y_{\text{CoM}}$ ; and  $\widetilde{V}_n$  and  $\widetilde{Q}_n$  are the segment velocities and angular velocities associated with swimmer deformation for swimming.

To extract  $\widetilde{V}_n$  and  $\widetilde{\Omega}_n$ , we need to find expressions for  $u^{\text{sus}}$  and  $\omega^{\text{sus}}$  in terms of the known  $V_n^{\text{sus}}$  and  $\Omega_n^{\text{sus}}$ . Summing Eq. (22) over n, we find

$$\boldsymbol{u}^{\mathrm{sus}} = \frac{1}{N} \sum_{n} \boldsymbol{V}_{n}^{\mathrm{sus}},\tag{24}$$

since we must have  $\sum_{n} \widetilde{V}_{n} = \mathbf{0}$  and  $\sum_{n} \Delta Y_{n} = \mathbf{0}$ .

Now we consider taking the cross product of  $\Delta Y_n$  and Eq. (22), and summing:

$$\sum_{n} \Delta Y_{n} \times V_{n}^{\text{sus}} = \sum_{n} \Delta Y_{n} \times \widetilde{V}_{n} + \sum_{n} \Delta Y_{n} \times u^{\text{sus}} + \sum_{n} \Delta Y_{n} \times (\omega^{\text{sus}} \times \Delta Y_{n})$$
 (25)

$$= \mathbf{0} + \mathbf{0} + \mathbf{I}_M \boldsymbol{\omega}^{\text{sus}}, \tag{26}$$

where, on the right hand side,

- term 1 is zero by the definition of  $\widetilde{V}$ .
- term 2 is zero since  $\sum_{n} \Delta Y_n = \mathbf{0}$ ,
- term 3 introduced the moment of inertia matrix, defined in terms of a skew-symmetric matrix  $[a]_{\times}$  such that  $[a]_{\times}b = a \times b$ ,

$$I_M = -\sum_n [\Delta \mathbf{Y}_n]_{\times} [\Delta \mathbf{Y}_n]_{\times}, \qquad [\mathbf{a}]_{\times} := \begin{pmatrix} 0 & -a_3 & a_2 \\ a_3 & 0 & -a_1 \\ -a_2 & a_1 & 0 \end{pmatrix}.$$
 (27)

Hence,

$$\boldsymbol{\omega}^{\text{sus}} = \boldsymbol{I}_{M}^{-1} \sum_{n} \Delta \boldsymbol{Y}_{n} \times \boldsymbol{V}_{n}^{\text{sus}}.$$
 (28)

We can therefore now rearrange Eqs. (22) and (23) to find an expression for the local motion,  $\widetilde{V}_n$  and  $\widetilde{\Omega}_n$ , as a sum of fully evaluated terms:

$$\widetilde{\boldsymbol{V}}_{n} = \boldsymbol{V}_{n}^{\text{sus}} - \boldsymbol{u}^{\text{sus}} - \boldsymbol{\omega}^{\text{sus}} \times \Delta \boldsymbol{Y}_{n}, \tag{29a}$$

$$\widetilde{\Omega}_n = \Omega_n^{\text{sus}} - \omega^{\text{sus}}.$$
(29b)

We can now take these expressions as representing the gait of the swimmer, and place them into an empty fluid.

#### A.2 Resulting swimming speed in a viscous fluid

Now consider the swimmer in a viscous fluid free from any suspended filaments. The mobility problem is, as in Eq. (11),

$$\mathcal{M}\begin{pmatrix} \mathbf{F} \\ \mathbf{T} \end{pmatrix} = \begin{pmatrix} \mathbf{V} \\ \mathbf{\Omega} \end{pmatrix},\tag{30}$$

where we have dropped the H for 'hydrodynamic' for notational convenience. Recall that  $\mathcal{M}$ , for a single swimming filament formed of N segments, has size  $6N \times 6N$  in 3D. Once again we can decompose the motion into a rigid body motion and a local deformation for each segment n,

$$V_n = \widetilde{V}_n + u + \omega \times \Delta Y_n, \tag{31a}$$

$$\Omega_n = \widetilde{\Omega}_n + \omega, \tag{31b}$$

where  $\widetilde{V}_n$  and  $\widetilde{\Omega}_n$  are specified from Eq. (29) and the unknowns are  $F_n$ ,  $T_n$ , u and  $\omega$ . We solve this system for the unknowns, subject to the conditions that the total force and torque are zero,

$$\sum_{n} F_n = 0, \tag{32}$$

$$\sum_{n} (\Delta Y_n \times F_n + T_n) = \mathbf{0}. \tag{33}$$

Equations (31) to (33) can be combined to form a system of equations with a symmetric matrix of size  $(6N + 6) \times (6N + 6)$ ,

$$\begin{pmatrix}
\mathcal{M} & -I & [\Delta Y]_{\times} \\
0 & 0 & -I \\
-I & 0 & 0 & 0 \\
[\Delta Y]_{\times}^{\mathsf{T}} & -I & 0 & 0
\end{pmatrix}
\begin{pmatrix}
F \\
T \\
u \\
\omega
\end{pmatrix} = \begin{pmatrix}
\widetilde{V} \\
\widetilde{\Omega} \\
0 \\
0
\end{pmatrix},$$
(34)

recalling that  $\widetilde{\boldsymbol{V}}^{\mathsf{T}} = (\widetilde{\boldsymbol{V}}_1^{\mathsf{T}}, \dots, \widetilde{\boldsymbol{V}}_N^{\mathsf{T}})$  and similarly for  $\widetilde{\boldsymbol{\Omega}}$ ,  $\boldsymbol{F}$  and  $\boldsymbol{T}$ . Here,  $\boldsymbol{I}$  is the identity matrix and  $[\Delta \boldsymbol{Y}]_{\times}$  is again the skew-symmetric matrix corresponding to the cross product from Eq. (27), in both cases suitably stacked for each segment n. Solving this system gives the swimming velocity in the viscous fluid.

# B Resistive force theory

Resistive force theory (RFT) (Lauga & Powers, 2009; Johnson & Brokaw, 1979) can be used to provide the mobility matrix in Eq. (11). In RFT, the filament segments are hydrodynamically uncoupled, with the force and torque on a segment dependent only on the segment's orientation, velocity and angular velocity. In this way, it can be thought of as a drag-based model, but one where the force-velocity drag coefficients are different in the directions normal and tangent to the segment orientation.

In the mobility formulation of RFT, the velocity and angular velocity of segment n are given by

$$V_n = \left[ \alpha_{\parallel} \hat{t}_n \hat{t}_n^{\mathsf{T}} + \alpha_{\perp} (I - \hat{t}_n \hat{t}_n^{\mathsf{T}}) \right] F_n, \tag{35}$$

$$\Omega_n = \beta T_n, \tag{36}$$

where  $\alpha_{\parallel}$ ,  $\alpha_{\perp}$ ,  $\beta$  are mobility coefficients for the segments. The torque coefficient  $\beta$  is simply that for a sphere in Stokes flow,

$$\beta = (8\pi a^3 \mu)^{-1},\tag{37}$$

while  $\alpha_{||}$  and  $\alpha_{\perp}$  are initially estimated using FCM simulations of straight filaments, following the approach of Schoeller & Keaveny (2018, supplementary material). These two parameters are then tuned




Figure 11: Comparison of the waveform of a single swimmer in an empty fluid with full hydrodynamics (FCM), and with the drag-based resistive force theory (RFT). The swimming direction is to the right and the axes are the same for both figures. Half an undulation period is depicted, and the centreline fades as the snapshot retreats into the past.

so that the swimming speed and maximum beating amplitude match the full FCM simulation for a single swimmer in an empty fluid. Doing so, we choose the numerical values

$$\alpha_{\parallel} = 0.1177(a\mu)^{-1}, \quad \alpha_{\perp} = 0.08208(a\mu)^{-1}.$$
 (38)

A comparison of the resultant waveform for FCM and RFT is given in Fig. 11. The ratio  $\alpha_{||}/\alpha_{\perp} \approx 1.44$  is similar to previous work (Schoeller & Keaveny, 2018). While for an infinitely thin filament, we expect a ratio of 2 (Johnson & Brokaw, 1979), we observe that as the swimmer has an aspect ratio of  $2a/L \approx 0.06$ , we are not in this limiting regime. Note that RFT can also be presented in the resistance formulation, where this ratio is presented in terms of drag coefficients,  $\xi_{\perp}/\xi_{||}$ .

## References

ALLEN, A. & FLEMSTRÖM, G. 2005 Gastroduodenal mucus bicarbonate barrier: protection against acid and pepsin. *American Journal of Physiology-Cell Physiology* **288** (1), C1–C19.

ASCHER, U. M. & PETZOLD, L. R. 1998 Computer Methods for Ordinary Differential Equations and Differential-Algebraic Equations. SIAM.

BERGMAN, P. 1953 Spermigration and cyclic changes in cervical mucus. Fertility and Sterility 4 (3), 183–193.

BIANCHI, P., DE AGOSTINI, A., FOURNIER, J., GUIDETTI, C., TAROZZI, N., BIZZARO, D. & MANICARDI, G. 2004 Human cervical mucus can act in vitro as a selective barrier against spermatozoa carrying fragmented DNA and chromatin structural abnormalities. *Journal of Assisted Reproduction and Genetics* 21 (4), 97–102.

BOEGH, M. & NIELSEN, H. M. 2015 Mucus as a barrier to drug delivery – understanding and mimicking the barrier properties. Basic & Clinical Pharmacology & Toxicology 116 (3), 179–186.

Brokaw, C. J. 1966 Effects of increased viscosity on the movements of some invertebrate spermatozoa. Journal of Experimental Biology 45 (1), 113–139.

BROYDEN, C. G. 1965 A class of methods for solving nonlinear simultaneous equations. *Mathematics of Computation* **19** (92), 577–593.

Brunelli, R., Papi, M., Arcovito, G., Bompiani, A., Castagnola, M., Parasassi, T., Sampaolese, B., Vincenzoni, F. & De Spirito, M. 2007 Globular structure of human ovulatory cervical mucus. *The FASEB Journal* **21** (14), 3872–3876. ISBN: 0892-6638 Publisher: Wiley Online Library.

Buxton, G. A. & Clarke, N. 2007 "Bending to stretching" transition in disordered networks. *Physical Review Letters* **98** (23), 238103.

- Buxton, G. A., Clarke, N. & Hussey, P. J. 2009 Actin dynamics and the elasticity of cytoskeletal networks. *Express Polymer Letters* **3** (9), 579–587.
- Celli, J. P., Turner, B. S., Afdhal, N. H., Keates, S., Ghiran, I., Kelly, C. P., Ewoldt, R. H., McKinley, G. H., So, P., Erramilli, S. & Bansil, R. 2009 Helicobacter pylori moves through mucus by reducing mucin viscoelasticity. *Proceedings of the National Academy of Sciences* 106 (34), 14321–14326.
- CERIC, F., SILVA, D. & VIGIL, P. 2005 Ultrastructure of the human periovulatory cervical mucus. Journal of Electron Microscopy 54 (5), 479–484.
- CORTEZ, R., CUMMINS, B., LEIDERMAN, K. & VARELA, D. 2010 Computation of three-dimensional Brinkman flows using regularized methods. *Journal of Computational Physics* **229** (20), 7609–7624.
- Curlin, M. & Bursac, D. 2013 Cervical mucus: from biochemical structure to clinical implications. Frontiers in Bioscience-Scholar 5 (2), 507–515.
- DANCE, S. L., CLIMENT, E. & MAXEY, M. R. 2004 Collision barrier effects on the bulk flow in a random suspension. *Physics of Fluids* **16** (3), 828–831.
- DESERNO, M. 2004 How to calculate a three-dimensional g(r) under periodic boundary conditions. URL: https://www.cmu.edu/biolphys/deserno/pdf/gr\_periodic.pdf.
- DIDONNA, B. A. & LEVINE, A. J. 2006 Filamin cross-linked semiflexible networks: fragility under strain. *Physical Review Letters* **97** (6), 068104.
- Ensign, L. M., Cone, R. & Hanes, J. 2014 Nanoparticle-based drug delivery to the vagina: A review. Journal of Controlled Release 190, 500–514.
- Faltinsen, S., Marthinsen, A. & Munthe-Kaas, H. Z. 2001 Multistep methods integrating ordinary differential equations on manifolds. *Applied Numerical Mathematics* **39** (3), 349–365.
- Fu, H. C., Wolgemuth, C. W. & Powers, T. R. 2009 Swimming speeds of filaments in nonlinearly viscoelastic fluids. *Physics of Fluids* **21** (3), 033102.
- Gaffney, E. A., Ishimoto, K. & Walker, B. J. 2021 Modelling motility: the mathematics of spermatozoa. Frontiers in Cell and Developmental Biology 9.
- GNIEWEK, P. & KOLINSKI, A. 2010 Coarse-grained Monte Carlo simulations of mucus: structure, dynamics, and thermodynamics. *Biophysical Journal* **99** (11), 3507–3516.
- HEAD, D. A., LEVINE, A. J. & MACKINTOSH, F. C. 2003a Deformation of cross-linked semiflexible polymer networks. *Physical Review Letters* **91** (10), 108102.
- HEAD, D. A., LEVINE, A. J. & MACKINTOSH, F. C. 2003b Distinct regimes of elastic response and deformation modes of cross-linked cytoskeletal and semiflexible polymer networks. *Physical Review E* **68** (6), 061907.
- HEUSSINGER, C. & FREY, E. 2006 Stiff polymers, foams, and fiber networks. *Physical Review Letters* **96** (1), 017802.
- HOLT, W. V. & FAZELI, A. 2015 Do sperm possess a molecular passport? Mechanistic insights into sperm selection in the female reproductive tract. *Molecular Human Reproduction* **21** (6), 491–501.
- Huisman, E. M., van Dillen, T., Onck, P. R. & Van der Giessen, E. 2007 Three-dimensional cross-linked F-actin networks: relation between network architecture and mechanical behavior. *Physical Review Letters* **99** (20), 208103.
- ISERLES, A., MUNTHE-KAAS, H. Z., NØRSETT, S. P. & ZANNA, A. 2000 Lie-group methods. *Acta Numerica* 9, 215–365.

- Jabbarzadeh, M., Hyon, Y. & Fu, H. C. 2014 Swimming fluctuations of micro-organisms due to heterogeneous microstructure. *Physical Review E* **90** (4), 043021.
- Johansson, M. E. V., Phillipson, M., Petersson, J., Velcich, A., Holm, L. & Hansson, G. C. 2008 The inner of the two Muc2 mucin-dependent mucus layers in colon is devoid of bacteria. *Proceedings of the National Academy of Sciences* **105** (39), 15064–15069.
- JOHNSON, R. E. & BROKAW, C. J. 1979 Flagellar hydrodynamics. A comparison between resistive-force theory and slender-body theory. *Biophysical Journal* **25** (1), 113–127.
- Kamal, A. & Keaveny, E. E. 2018 Enhanced locomotion, effective diffusion and trapping of undulatory micro-swimmers in heterogeneous environments. *Journal of The Royal Society Interface* **15** (148), 20180592.
- Katz, D. F., Slade, D. A. & Nakajima, S. T. 1997 Analysis of pre-ovulatory changes in cervical mucus hydration and sperm penetrability. *Advances in Contraception* 13, 143–151. ISBN: 0267-4874 Publisher: Springer.
- KLINGNER, A., MAHDY, D., HANAFI, M., ADEL, B., MISRA, S. & KHALIL, I. S. M. 2020 Helical propulsion in a viscous heterogeneous medium. In 2020 International Conference on Manipulation, Automation and Robotics at Small Scales (MARSS), pp. 1–6.
- LAGRONE, J., CORTEZ, R. & FAUCI, L. 2019 Elastohydrodynamics of swimming helices: Effects of flexibility and confinement. *Physical Review Fluids* 4 (3), 033102.
- Lai, S. K., Wang, Y.-Y., Cone, R., Wirtz, D. & Hanes, J. 2009 Altering mucus rheology to "solidify" human mucus at the nanoscale. *PLOS One* 4 (1), e4294.
- LANDAU, L. D. & LIFSHITZ, E. M. 1986 Theory of Elasticity, 3rd edn., vol. 7. Elsevier.
- LAUGA, E. 2007 Propulsion in a viscoelastic fluid. Physics of Fluids 19 (8), 083104.
- Lauga, E. & Powers, T. R. 2009 The hydrodynamics of swimming microorganisms. *Reports on Progress in Physics* **72** (9), 096601.
- Leal, J., Smyth, H. D. C. & Ghosh, D. 2017 Physicochemical properties of mucus and their impact on transmucosal drug delivery. *International Journal of Pharmaceutics* **532** (1), 555–572.
- Leiderman, K. & Olson, S. D. 2016 Swimming in a two-dimensional Brinkman fluid: Computational modeling and regularized solutions. *Physics of Fluids* **28** (2), 021902.
- Leshansky, A. M. 2009 Enhanced low-Reynolds-number propulsion in heterogeneous viscous environments. *Physical Review E* **80** (5), 051911.
- LI, G., LAUGA, E. & ARDEKANI, A. M. 2021 Microswimming in viscoelastic fluids. *Journal of Non-Newtonian Fluid Mechanics* **297**, 104655.
- Lim, S. 2010 Dynamics of an open elastic rod with intrinsic curvature and twist in a viscous fluid. *Physics of Fluids* **22** (2), 024104.
- Lim, S., Ferent, A., Wang, X. S. & Peskin, C. S. 2008 Dynamics of a closed rod with twist and bend in fluid. SIAM Journal on Scientific Computing 31 (1), 273–302.
- Liu, D., Keaveny, E. E., Maxey, M. R. & Karniadakis, G. 2009 Force-coupling method for flows with ellipsoidal particles. *Journal of Computational Physics* **228** (10), 3559–3581.
- LOMHOLT, S. & MAXEY, M. R. 2003 Force-coupling method for particulate two-phase flow: Stokes flow. *Journal of Computational Physics* **184**, 381–405.

- LÓPEZ-GATIUS, F., RUTLLAN, J., LÓPEZ-BÉJAR, M. & LABÈRNIA, J. 1994 Sperm motion and rheological behavior of the vaginal fluid of superovulated dairy heifers. *Theriogenology* **41** (7), 1523–1531.
- Majmudar, T., Keaveny, E. E., Zhang, J. & Shelley, M. J. 2012 Experiments and theory of undulatory locomotion in a simple structured medium. *Journal of The Royal Society Interface* **9** (73), 1809–1823.
- MAN, Y. & LAUGA, E. 2015 Phase-separation models for swimming enhancement in complex fluids. *Physical Review E* **92** (2), 023004.
- Mantelli, F. & Argüeso, P. 2008 Functions of ocular surface mucins in health and disease. Current opinion in allergy and clinical immunology 8 (5), 477–483.
- Martinez, V. A., Schwarz-Linek, J., Reufer, M., Wilson, L. G., Morozov, A. N. & Poon, W. C. 2014 Flagellated bacterial motility in polymer solutions. *Proceedings of the National Academy of Sciences* **111** (50), 17771–17776.
- MAXEY, M. R. & PATEL, B. K. 2001 Localized force representations for particles sedimenting in Stokes fow. *International Journal of Multiphase Flow* 27, 1603–1626.
- MORALES, P., ROCO, M. & VIGIL, P. 1993 Human cervical mucus: relationship between biochemical characteristics and ability to allow migration of spermatozoa. *Human Reproduction* 8 (1), 78–83.
- NORDGÅRD, C. T. & DRAGET, K. I. 2011 Oligosaccharides as modulators of rheology in complex mucous systems. *Biomacromolecules* **12** (8), 3084–3090.
- Olson, S. D. & Leiderman, K. 2015 Effect of fluid resistance on symmetric and asymmetric flagellar waveforms. *Journal of Aero Aqua Bio-mechanisms* 4 (1), 12–17.
- Olson, S. D., Lim, S. & Cortez, R. 2013 Modeling the dynamics of an elastic rod with intrinsic curvature and twist using a regularized Stokes formulation. *Journal of Computational Physics* **238**, 169–187.
- Park, S., Hwang, H., Nam, S.-W., Martinez, F., Austin, R. H. & Ryu, W. S. 2008 Enhanced Caenorhabditis elegans locomotion in a structured microfluidic environment. *PLOS One* **3** (6), e2550.
- Powers, T. R. 2010 Dynamics of filaments and membranes in a viscous fluid. *Reviews of Modern Physics* 82 (2), 1607–1631.
- RUTLLANT, J., LÓPEZ-BÉJAR, M. & LÓPEZ-GATIUS, F. 2005 Ultrastructural and rheological properties of bovine vaginal fluid and its relation to sperm motility and fertilization: a review. *Reproduction in Domestic Animals* 40 (2), 79–86.
- Schneider, W. R. & Doetsch, R. N. 1974 Effect of viscosity on bacterial motility. *Journal of Bacteriology* **117** (2), 696–701.
- SCHOELLER, S. F. & KEAVENY, E. E. 2018 From flagellar undulations to collective motion: predicting the dynamics of sperm suspensions. *Journal of The Royal Society Interface* **15** (140), 20170834.
- Schoeller, S. F., Townsend, A. K., Westwood, T. A. & Keaveny, E. E. 2021 Methods for suspensions of passive and active filaments. *Journal of Computational Physics* 424, 109846.
- Schuech, R., Cortez, R. & Fauci, L. 2022 Performance of a helical microswimmer traversing a discrete viscoelastic network with dynamic remodeling. *Fluids* 7 (8), 257.
- Sheehan, J. K., Oates, K. & Carlstedt, I. 1986 Electron microscopy of cervical, gastric and bronchial mucus glycoproteins. *Biochemical Journal* **239** (1), 147–153.

- Shen, X. N. & Arratia, P. E. 2011 Undulatory swimming in viscoelastic fluids. *Physical Review Letters* **106** (20), 208101.
- SMITH, D. J., GAFFNEY, E. A., GADÊLHA, H., KAPUR, N. & KIRKMAN-BROWN, J. C. 2009 Bend propagation in the flagella of migrating human sperm, and its modulation by viscosity. *Cell motility and the cytoskeleton* **66** (4), 220–236.
- Spagnolie, S. E. & Underhill, P. T. 2023 Swimming in complex fluids. *Annual Review of Condensed Matter Physics* **14** (1), 381–415.
- SUAREZ, S. & PACEY, A. A. 2006 Sperm transport in the female reproductive tract. *Human Reproduction Update* **12** (1), 23–37.
- SZNITMAN, J. & ARRATIA, P. E. 2015 Locomotion through complex fluids: an experimental view. In Complex Fluids in Biological Systems: Experiment, Theory, and Computation (ed. S. E. Spagnolie), Biological and Medical Physics, Biomedical Engineering 49, pp. 245–281. Springer, New York, NY.
- TERAN, J., FAUCI, L. & SHELLEY, M. 2010 Viscoelastic fluid response can increase the speed and efficiency of a free swimmer. *Physical Review Letters* **104** (3), 038101.
- Thomases, B. & Guy, R. D. 2014 Mechanisms of elastic enhancement and hindrance for finite-length undulatory swimmers in viscoelastic fluids. *Physical Review Letters* **113** (9), 098102.
- Wilhelm, J. & Frey, E. 2003 Elasticity of stiff polymer networks. *Physical Review Letters* **91** (10), 108103.
- Wolf, D. P., Blasco, L., Khan, M. A. & Litt, M. 1977 Human cervical mucus. I. Rheologic characteristics. *Fertility and Sterility* **28** (1), 41–46.
- WRÓBEL, J. K., LYNCH, S., BARRETT, A., FAUCI, L. & CORTEZ, R. 2016 Enhanced flagellar swimming through a compliant viscoelastic network in Stokes flow. *Journal of Fluid Mechanics* **792**, 775–797.
- Zhang, Y., Li, G. & Ardekani, A. M. 2018 Reduced viscosity for flagella moving in a solution of long polymer chains. *Physical Review Fluids* **3** (2), 023101.
- ZÖTTL, A. & YEOMANS, J. M. 2019 Enhanced bacterial swimming speeds in macromolecular polymer solutions. *Nature Physics* **15** (6), 554–558.
- ÅSTRÖM, J. A., KUMAR, P. B. S., VATTULAINEN, I. & KARTTUNEN, M. 2008 Strain hardening, avalanches, and strain softening in dense cross-linked actin networks. *Physical Review E* 77 (5), 051913.