

FastFlip: Compositional Error Injection Analysis

Keyur Joshi, Rahul Singh, Tommaso Bassetto,
Sarita Adve, Darko Marinov, and Sasa Misailovic
University of Illinois Urbana-Champaign

Abstract

Instruction-level error injection analyses aim to find instructions where errors often lead to unacceptable outcomes like Silent Data Corruptions (SDCs). These analyses require significant time, which is especially problematic if developers wish to regularly analyze software that evolves over time.

We present FastFlip, a combination of empirical error injection and symbolic SDC propagation analyses that enables fast, compositional error injection analysis of evolving programs. FastFlip calculates how SDCs propagate across program sections and correctly accounts for unexpected side effects that can occur due to errors. Using FastFlip, we analyze five benchmarks, plus two modified versions of each benchmark. FastFlip speeds up the analysis of incrementally modified programs by $3.2\times$ (geomean). FastFlip selects a set of instructions to protect against SDCs that minimizes the runtime cost of protection while protecting against a developer-specified target fraction of all SDC-causing errors.

I. INTRODUCTION

As conventional technology scaling approaches its end, hardware is becoming increasingly susceptible to errors [5, 50]. Unlike crashes, timeouts, or detectable output corruptions, the presence of Silent Data Corruptions (SDCs) in program outputs caused by such hardware errors may not become apparent until long after the program has terminated. Researchers have proposed various hardware and software techniques to protect programs against SDCs. *Software protection techniques* such as instruction or task duplication [13, 16, 35, 42] are particularly attractive as they can be used on existing hardware. They typically use additional computational resources to detect SDCs and/or recover from them. To limit their time and energy overhead, it is necessary to selectively use such techniques on the parts of the program that are most vulnerable to SDCs.

Finding vulnerable instructions is the task of instruction-level error injection analyses. These analyses inject errors into different architectural components of a simulated CPU at various points in a program’s execution, and record the effect of the error on the program output. For targeted SDC protection, the analysis must provide information on how errors at *each instruction* in the program affect the output (e.g., [20, 49]). Such detailed per-instruction analyses are time-consuming, requiring thousands of core-hours even for small programs and inputs. While sampling-based tools like [39, 47] are faster, they cannot provide the necessary vulnerability information for every instruction.

This high cost of per-instruction error injection analysis is concerning because modern programs are continuously evolving; developers change code to fix bugs, add features, or add optimizations manually or using compilers. The modified program sections react differently to errors, so they must be re-analyzed. However, current error injection analyses must be rerun on the whole program, not just the modified sections, before applying software protection techniques.

An intuitive solution is to leverage the compositional nature of programs by dividing them into multiple dynamic sections (such as function calls or executions of code blocks or nested loops), applying the error injection analysis on each section separately, and then combining the results. However, such a compositional error injection analysis must overcome multiple challenges: 1) SDCs in the output of one section must be propagated through downstream sections to determine the SDCs in the final output of the program, and 2) an error in one section can corrupt data that will be used only by downstream sections, thus causing unexpected side effects that do not affect the current section’s output. To the best of our

knowledge, none of the previously proposed analyses (e.g., [9, 10, 14, 22, 23, 27, 28, 29, 40, 45, 47, 48, 49]) can selectively analyze only the modified parts of the program.

Our work. We present FastFlip, a unique combination of empirical (error injection) and symbolic (SDC propagation) techniques, which makes it the first approach for compositional and incremental error injection analysis of evolving programs. Given a program and an input that FastFlip has not previously analyzed, FastFlip proceeds as follows: First, FastFlip analyzes the sections of the program for that input with a per-instruction error injection analysis to determine the outcome of each possible injected error. Second, FastFlip uses a local sensitivity analysis to determine how each section propagates and amplifies SDCs within its input, and then uses an SDC propagation analysis to determine how SDCs propagate across different sections to affect the final output. Third, FastFlip combines the results of the error injection analysis and the SDC propagation analysis to determine how injected errors in any section affect the final output. FastFlip uses this information to select a set of static instructions to protect, such that the dynamic cost of protecting the selected instructions is minimized, while ensuring that the degree of protection against SDC-causing errors is above a developer-specified threshold. FastFlip correctly accounts for side effects that only occur due to errors.

If developers modify a program after FastFlip has analyzed it, FastFlip can reuse large portions of its analysis results. In particular, FastFlip must only rerun the expensive error injection analysis on the modified program section, and any downstream sections whose input changes as a result of the modification. Consequently, FastFlip saves significant analysis time with each program modification.

We instantiate FastFlip using the Approxilyzer [49] per-instruction error injection analysis and the Chisel [34] SDC propagation analysis. Approxilyzer focuses on analyzing the effects of hardware errors that manifest within CPU architectural registers as bitflips. While analyses exist that also inject errors in other architectural components (e.g., [39]), they rely on sampling, and would be impractical if used to obtain per-instruction results. We analyze five benchmarks with FastFlip, each with three or more separately analyzed sections, and compare against a baseline Approxilyzer-only approach, which treats the entire program as a single section.

We evaluate the utility of protecting the static instructions selected by FastFlip and Approxilyzer using two metrics. The *value* of protecting a selection of instructions is the total probability that an SDC-causing error will be detected through said protection. The *cost* of a selection is roughly equal to the runtime overhead of protecting the selected instructions. For our evaluation, we use the value and cost model from [19], which assumes that value is proportional to the number of SDC-causing errors that can occur in the selected instructions, and that cost is proportional to the number of dynamic instances of the selected instructions that must be protected. FastFlip’s selection provides a protection value within 0.3% (geomean) of the target protection value for a cost of protection within 0.7% (geomean) of the cost of protecting Approxilyzer’s selection. FastFlip can also use more complex value and cost metrics to make its selection.

Next, we make two modifications to each benchmark: a *small*, simple modification and a *large* modification that uses a lookup table. FastFlip does not need to inject errors in the unmodified sections, providing a $3.2\times$ speedup (geomean) over Approxilyzer. *Crucially, FastFlip provides this speedup with minimal additional loss in protection value or increase in cost with respect to Approxilyzer.* We also experiment with a modification that adds error detection mechanisms to a benchmark; FastFlip is able to efficiently verify that such a modification significantly decreases the likelihood of SDCs occurring due to errors in the protected sections.

II. BACKGROUND

A. Error injection analyses

Error injection analyses analyze the effect of injecting errors such as bitflips in the program execution. The analysis first enumerates error injection sites in the correct dynamic trace of the program execution,

which is a sequential list of instructions executed by a program for a particular input. Depending on the analysis, these error sites can be bits in the source and destination registers in each instruction, bits in control registers, caches, etc. The analysis then injects errors at each site one at a time, and then executes the rest of the program (which may deviate in control flow from the correct execution), to record the effect of the error on the final output. Such analyses can operate at different levels of abstraction, including hardware, assembly, and IR (e.g., RAEs [14], Approxilyzer [49], and FlipIt [9] respectively.). An error can have five possible effects on the output of the program:

- The error is *masked*, i.e., the program output is unaffected.
- The error causes a program *crash*, i.e., the program terminates unexpectedly.
- The error greatly extends the program runtime (e.g., by creating a long loop), causing a *timeout*.
- The error changes the program output in a *detectable* manner (e.g., by producing a misformatted output or an output that is outside the expected range).
- The error changes the program output in an *undetectable* manner, i.e., it causes a *Silent Data Corruption* (SDC).

For the last case, the analysis typically reports the magnitude of the output SDC, calculated using an applicable SDC metric. The result of the analysis is a map from each error site to the outcome of an error at that site. The crash, timeout, and detectable error outcomes can be handled through detection and recovery mechanisms such as checkpoints. The SDC outcome is the most dangerous; the presence of an SDC may not be detected until long after the program has terminated. However, many applications are capable of tolerating small SDCs up to a threshold magnitude ε . Thus, similar to Approxilyzer, we further categorize SDCs above this threshold as *SDC-Bad* and smaller SDCs as *SDC-Good*.

Some error injection analyses use sampling to inject errors at random points in the program (e.g., [3, 38]). With a sufficient number of samples, these analyses provide statistically significant information on the relative frequencies of the above outcomes. Other error injection analyses aim to provide information on the outcome of error injections at *all* potential error sites of a particular class within a program’s execution (e.g., [20, 49]). These non-sampling analyses are slower, but FastFlip can use their detailed results to find optimal static instructions to protect against SDCs.

B. SDC propagation analyses

SDC propagation analyses propagate SDCs present in a program’s input, or SDCs that occur during program execution, to calculate their effect on the program’s final output. These can be either *forward* analyses, or *backward* analyses (e.g., Diamont [18] and Chisel [34] respectively), which propagate SDC bounds in the respective directions through the program. An SDC bound $\Delta(o) \leq f(\Delta(i))$ states that the SDC in the output o of a section of code, calculated by an appropriate SDC metric Δ , is bounded by a function f of the SDC in the input i .

Sensitivity analysis. Sensitivity analysis [8] is a component of SDC propagation analyses that is used to determine how a section of code amplifies SDCs in its input. In particular, *local* sensitivity analysis focuses on determining the effect of perturbations around a single input value.

A local sensitivity analysis varies an input x_0 to a program section s by various amounts φ up to some maximum perturbation φ_{\max} . The analysis executes s to calculate the output perturbation and divides it by the input perturbation to calculate the SDC amplification factor K , which is the Lipschitz constant for s at x_0 :

$$K = \max_{\varphi \leq \varphi_{\max}} \frac{|s(x_0 + \varphi) - s(x_0)|}{\varphi}$$

If the program is differentiable, it may be possible to analytically calculate K via static analysis (e.g., [11, 24]). In the general case, we can approximate K by sampling a set of φ values. Increasing the number of samples increases the quality of the approximation of K , though the rate of convergence also decreases, leading to diminishing returns.

C. Protecting against SDCs in software

Software techniques for protecting against SDCs have the advantage that they can be used on existing, non-specialized hardware. While systems can detect crashes and detectable errors (e.g., incorrectly formatted outputs) with relatively lightweight mechanisms, SDCs are harder to detect by nature. Detecting SDCs typically involves re-executing parts of the program and comparing the outcomes. Coarse grained solutions re-execute entire tasks [1, 21, 52], while fine grained solutions re-execute individual instructions or small blocks of instructions [13, 16, 35, 42].

Duplicating tasks or instructions does not necessarily double the program’s resource usage. SWIFT [42] shows how instruction reordering by the compiler and the CPU can reduce the runtime cost of instruction duplication to an average of 41% of the program’s original runtime. DRIFT [35] checks the results of multiple duplicated instructions at once to further increase instruction level parallelism and reduce the runtime overhead to 29% on average.

We can also choose to selectively protect only the instructions that are most vulnerable to SDCs. We can use error injection analyses that inject errors in all instructions [20, 49] to find such vulnerable instructions and selectively protect them. Each instruction has a value/cost tradeoff associated with it: the cost of protecting a static instruction using instruction duplication is roughly proportional to the number of dynamic instances of the instruction that will have to be duplicated, while the value is roughly proportional to the likelihood that an error that causes an SDC will occur in that instruction.

III. EXAMPLE

Lower-Upper decomposition (LU) is a key matrix operation that is used to solve systems of linear equations and to compute the matrix inverse or determinant. The blocked LU decomposition algorithm improves performance by dividing the matrix into blocks and processing a small fraction of blocks at a time. The algorithm consists of an outer loop whose loop body has four logical sections:

- 1) The algorithm decomposes a block B on the matrix diagonal
- 2) The algorithm updates blocks below B in the matrix
- 3) The algorithm updates blocks to the right of B in the matrix
- 4) The algorithm updates blocks below *and* to the right of B

Given the widespread use of LU decomposition, it is inevitable that hardware errors will occasionally occur in large computations that use this operation. While memory can be protected using ECC, data in registers is more vulnerable. If a bitflip error causes a detectable effect, then the software can be restarted or a previous checkpoint can be reloaded. However, if a bitflip causes an SDC, the corruption may not be detected until much later. Thus, we wish to protect the program against SDCs using techniques such as instruction duplication [16, 35, 42].

We can use an error injection analysis like Approxilyzer [48, 49] to analyze the effect of bitflips on the full program, and use the results to guide protection against SDCs. However, if developers modify one section of the program during development (e.g., to add optimizations), then we must rerun the analysis on the full modified program, which requires thousands of core-hours even for simple programs. We cannot naively re-analyze only the modified section with Approxilyzer, because the modified section most likely responds differently to injected errors, which leads to a different distribution of injection outcomes at the end of the full program.

To solve this issue, we present FastFlip, a compositional approach for error injection analysis of programs. FastFlip first separately analyzes each section of the program using Approxilyzer (to determine the effects of errors occurring within that section) and a local sensitivity analysis (to determine how the section propagates existing SDCs). FastFlip then combines the analysis results for each section using Chisel [34], an SDC propagation analysis, to calculate the end-to-end SDC characteristics of the program. Lastly, FastFlip uses these results to find optimal instructions to protect against SDCs.

We demonstrate the FastFlip approach on the blocked LU decomposition implementation from the Splash-3 benchmark suite [43] for a sample 16×16 input matrix with an 8×8 block size. Minotaur [32] has shown this input configuration to be sufficient for 100% program counter coverage. We assume that a single bitflip occurs during the program execution at an error site chosen uniformly at random from the program’s correct dynamic trace within an architectural register.

Per-section analysis. FastFlip first runs Approxilyzer on each section s of the full program execution T . Approxilyzer determines the effect of injecting a bitflip into each bit in each register in each dynamic instruction in s on the output of s , and stores these outcomes for use in later steps. For SDC outcomes, FastFlip also stores the SDC magnitude, which is the maximum absolute error among all output elements of s .

Besides the SDC caused by bitflips, sections can also propagate and amplify SDCs caused by bitflips in previous sections. For example, FastFlip calculates that if the input to the first section in the second iteration of the outermost loop ($s_{2,1}$) has a pre-existing SDC of magnitude $\Delta(i_{s_{2,1}})$, and no bitflips occur within $s_{2,1}$, then the SDC in the output of $s_{2,1}$ will be at most $3.2\Delta(i_{s_{2,1}})$.

Under the single bitflip error model, a section s may either propagate an existing SDC from a previous section, or the bitflip may occur within s , but not both. Therefore, we can write the *total SDC specification* for the output of s as the sum of the propagated SDC and the SDC due to a bitflip within s . For example, using the results from Approxilyzer and the sensitivity analysis, FastFlip calculates the following upper bound on the effective SDC in the output of $s_{2,1}$ ($\Delta(o_{s_{2,1}})$) as a function of the SDC in the input of $s_{2,1}$ ($\Delta(i_{s_{2,1}})$) and the SDC potentially introduced by a bitflip in $s_{2,1}$ ($\varphi_{s_{2,1}}$):

$$\Delta(o_{s_{2,1}}) \leq 3.2\Delta(i_{s_{2,1}}) + \varphi_{s_{2,1}}$$

Calculating end-to-end SDC specifications. FastFlip provides the total SDC specifications for all sections to Chisel, along with a specification of how data flows between sections. Using this information, Chisel calculates the *end-to-end SDC propagation specification* for the full LU decomposition computation:

$$\Delta(o_{fin}) \leq 4174.8\varphi_{s_{1,1}} + 434.3\varphi_{s_{1,2}} + 28.8\varphi_{s_{1,3}} + 3.2\varphi_{s_{1,4}} + \varphi_{s_{2,1}} + \varphi_{s_{2,2}} + \varphi_{s_{2,3}} + \varphi_{s_{2,4}}$$

where $\varphi_{s_{x,y}}$ represents the SDC potentially introduced into the output of section y in iteration x by a bitflip in that section ($s_{x,y}$). The coefficient of each $\varphi_{s_{x,y}}$ represents the *total* amplification of an SDC introduced by a bitflip in $s_{x,y}$ by sections downstream of $s_{x,y}$. Under the single bitflip error model, only one of the $\varphi_{s_{x,y}}$ variables can be nonzero at a time. FastFlip uses this end-to-end SDC propagation specification to propagate SDCs caused by bitflips in each section up to the final output.

Selecting instructions to protect. FastFlip adapts the value and cost model from [19] to select a set of optimal instructions to protect against SDCs. FastFlip associates each static instruction pc in the program with a *value* of protecting it; this is the number of SDC-causing bitflips that can occur at pc . Similarly, FastFlip associates each static instruction pc with a *cost* of protection; this is the number of dynamic instances of pc in the program execution. We assume that the value and cost of protecting a set of instructions is the sum of the value and cost of protecting each instruction in the set. Given a target total SDC protection value, FastFlip aims to select a subset of instructions that meet this target while also minimizing the total protection cost. This is a 0–1 knapsack optimization problem, which FastFlip solves via the standard dynamic programming approach.

Comparison and target adjustment. We compare FastFlip’s results to those of a baseline Approxilyzer-only approach. This baseline approach performs an error injection analysis of the whole program at once and uses the results to determine which instructions to protect. Using the results of the baseline analysis, we can calculate FastFlip’s *achieved* value, which is the value of protecting FastFlip’s selection of instructions according to the error injection outcomes of the baseline analysis. If FastFlip’s achieved value is below the target value, FastFlip adjusts the target upwards, so that its selection of instructions to

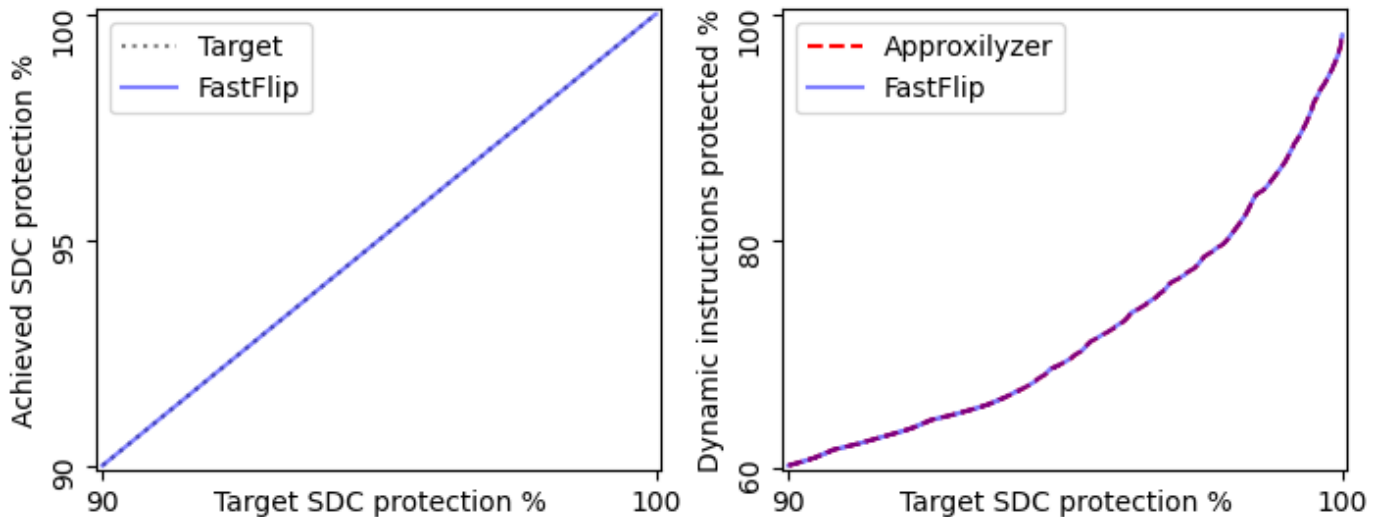


Fig. 1: Protection value (left) and cost (right) comparison. Note the strong overlap within each plot.

protect for this adjusted target will successfully achieve the original target value.

A. Results

Value. The left plot in Figure 1 shows the value of protecting FastFlip’s selection of instructions against SDCs. The X-Axis shows the target value over the range [90%, 100%]. The Y-Axis shows the achieved value. The solid blue line shows FastFlip’s achieved protection value (after target adjustment), which overlaps the dotted black line showing the target value. FastFlip successfully achieves (or slightly overshoots) the target protection value for the entire range of targets. Even without target adjustment, FastFlip undershoots the target by less than 0.1%.

Cost. The right plot in Figure 1 compares the cost of protecting FastFlip’s selection of instructions against the cost of protecting the Approxilyzer baseline’s selection. The red dashed line and solid blue line show the cost using Approxilyzer and FastFlip’s results, respectively; the two lines visually overlap. The maximum excess of cost of FastFlip over Approxilyzer is below 0.1%, even after target adjustment.

Modifications. FastFlip enables *compositional analysis* by splitting the full program Approxilyzer analysis into multiple sections. We demonstrate the benefits of compositional analysis by performing both analyses on two modified versions of this program. The *small* modification uses a specialized version of section 4 of the program which reduces the number of bounds checks when the matrix size is a multiple of the block size (as is the case for our input). The *large* modification replaces the first section with a lookup table. Unlike the Approxilyzer-only approach, which must inject errors in the full execution of the modified program, FastFlip only needs to inject errors in the modified section of the program, saving considerable time. FastFlip also reuses the adjusted targets that it found for the original version of the program. FastFlip continues to achieve the original target values with these adjusted targets, and the excess of cost of FastFlip over Approxilyzer stays below 0.3%.

Analysis time. FastFlip requires 694 core-hours to analyze the original version of the program, compared to 602 core-hours for Approxilyzer. This slowdown is due to Approxilyzer’s ability to prune injections across multiple sections of the computation by forming large equivalence classes. FastFlip cannot prune injections to a similar extent, as it analyzes each section independently. However, FastFlip saves a significant amount of time when subsequently analyzing the modified versions of the program. For analyzing the program with the *small* modification, FastFlip requires 80 core-hours as opposed to 625 core-hours for Approxilyzer. Similarly, for analyzing the program with the *large* modification, FastFlip requires 94 core-hours as

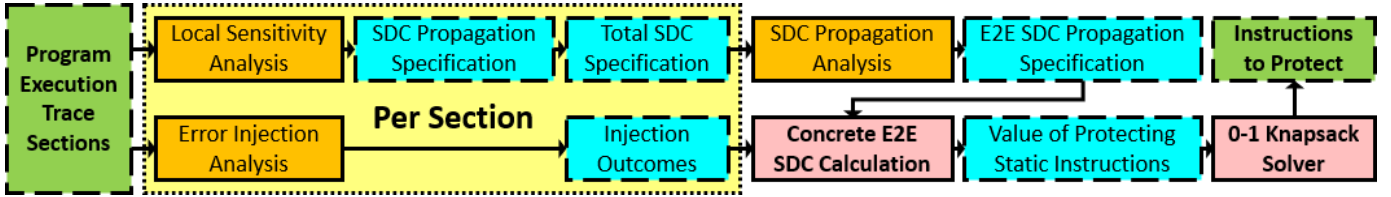


Fig. 2: The FastFlip approach. Green boxes with dashed outlines and bold text are initial inputs and final results. Blue boxes with dashed outlines and normal text are intermediate results. Pink boxes with solid outlines and bold text are steps executed by FastFlip. Orange boxes with solid outlines and normal text are steps executed by the sub-analyses. The dotted box shows the portion of the approach that is applied to each section.

opposed to 441 core-hours for Approxilyzer. This shows that FastFlip is useful when analyzing programs that evolve over time, because it saves analysis time with each modification.

FastFlip enables efficient target adjustment by simultaneously running the Approxilyzer baseline analysis while performing its own analysis. For the original version of the program, the overhead of this simultaneous approach is less than 1% of the FastFlip-only analysis time. Since FastFlip reuses the adjusted targets for the modified versions, it does not need the simultaneous approach for those versions.

IV. THE FASTFLIP APPROACH

Figure 2 visualizes the FastFlip approach. First, FastFlip performs two sub-analyses on each program section s (a function call or one execution of a code block or loop nest marked by the developer) in the full program execution T :

- FastFlip uses a supported error injection analysis¹ to determine the effect of each possible error in s and stores the outcome.
- FastFlip uses a local sensitivity analysis to obtain an SDC propagation specification for s , and converts it into a total SDC specification for s .

Second, FastFlip runs a supported SDC propagation analysis¹ over T , using each section’s total SDC specification, to obtain the end-to-end SDC propagation specification for T . Third, FastFlip calculates concrete end-to-end SDC magnitudes to find the probability of an SDC-Bad outcome associated with each static instruction; this corresponds to the value of protecting said static instruction. Finally, FastFlip selects a set of instructions to protect with SDC detection mechanisms that minimizes the total cost of protection, while also ensuring that the total value of the protection is above a developer-defined threshold.

A. Preliminaries

As in previous works [20, 49], FastFlip assumes that 1) the program’s input is SDC-free and 2) exactly one error occurs during the execution of the full program. This error can be a single or multi-bit corruption within *one* dynamic instruction.

Definitions. We use the following symbols:

- T : full program execution
- s : program section (typically a function call or one execution of a code block or loop nest); $s \in T$
- J : set of all error injection sites in T
- J_s : set of all error injection sites in s ; $J_s \subseteq J$
- $O_s(j)$: effect of an error injection j on the outputs of s , as calculated by the error injection analysis
- $i_{s,0}, \dots, i_{s,m}$ and $o_{s,0}, \dots, o_{s,n}$: inputs and outputs of s

¹ We describe the characteristics of supported error injection and SDC propagation analyses in Section IV-J.

- $i_{T,0}, \dots, i_{T,m}$ and $o_{T,0}, \dots, o_{T,n}$: inputs and outputs of T
- $f_{s,k}, f_{T,\lambda}, f_{T,\lambda,s}$: SDC propagation specifications calculated by the local sensitivity analysis, the SDC propagation analysis, and FastFlip respectively
- $\varphi_{s,k}, \varphi_{*,*}, \varphi_{s,*}, \varphi_{\bar{s},*}$: symbolic variables (or sets thereof) for SDCs introduced into section outputs by errors
- $p(j)$: probability that the error occurs at $j \in J$
- $PC(j)$: maps $j \in J$ to the corresponding static instruction
- ε_λ : maximum acceptable SDC for output $o_{T,\lambda}$ of T
- $v(pc)$: value of protecting static instruction at pc
- $c(pc)$: cost of protecting static instruction at pc
- pc_{prot} : set of static instructions selected for protection

Analysis inputs. FastFlip accepts the full program T , its partition into sections s , a specification of how data flows between sections, the probabilities $p(j)$, SDC limits ε_λ , and protection cost $c(pc)$ as inputs. Developers can obtain the dataflow specification using standard compiler analysis passes. Expert developers can also input this data manually.

B. Error injection analysis of program sections

FastFlip runs an error injection analysis on each program section $s \in T$ to determine the effect of injected errors on the outputs of s , and stores the outcome. If an injection j causes a detectable outcome, such as a crash, timeout, or any clearly out-of-bounds or misformatted output, then the outcome $O_s(j) = detected$. Otherwise, the outcome $O_s(j) = \{r_0, r_1, \dots, r_n\}$, where r_k is the magnitude of SDC (as measured by an application-specific metric) caused by the injection j in output $o_{s,k}$ of s . If the injection is masked for an output $o_{s,k}$, then $r_k = 0$.

C. SDC propagation analysis of program sections

FastFlip performs a local sensitivity analysis on each program section $s \in T$ to calculate how it amplifies SDCs present within its input. The local sensitivity analysis produces an *SDC propagation specification* for s of the general form:

$$\bigwedge_{k=0}^n \Delta(o_{s,k}) \leq f_{s,k}(\Delta(i_{s,0}), \dots, \Delta(i_{s,m}))$$

that is, for each output $o_{s,k}$ of s , the specification provides the SDC bound $\Delta(o_{s,k})$ calculated as a function $f_{s,k}$ of the SDC bounds of the inputs of s .

To convert this SDC propagation specification to a total SDC specification, FastFlip adds symbolic variables $\varphi_{s,k}$ to represent the magnitude of SDC introduced into the output $o_{s,k}$ during the execution of s as a result of an error. Under the single error model, if the input to s already contains an SDC, then the error occurred in a previous program section, hence s cannot introduce additional SDC. Thus, for each output of s , we can simply write the total SDC as the sum of the SDC due to an error in s and the SDC propagated by s from its input to its output. This is the *total SDC specification* for s :

$$\bigwedge_k \Delta(o_{s,k}) \leq f_{s,k}(\Delta(i_{s,0}), \dots, \Delta(i_{s,m})) + \varphi_{s,k} \quad (1)$$

D. End-to-end SDC propagation analysis

FastFlip runs an SDC propagation analysis on the full program T . FastFlip provides the analysis with the total SDC specifications from Equation 1 for each $s \in T$. The analysis also uses the developer-provided dataflow specification indicating how outputs of one section flow into the inputs of a subsequent section. The SDC propagation analysis uses this information to calculate the relationship between errors that occur

anywhere in T to the SDC in the final outputs of T . This is the *end-to-end SDC propagation specification* for T and has the form:

$$\bigwedge_{\lambda=0}^n \Delta(o_{T,\lambda}) \leq f_{T,\lambda}(\Delta(i_{T,0}), \dots, \Delta(i_{T,m}), \varphi_{*,*})$$

where $\varphi_{*,*}$ is the list of the symbolic SDC variables across all sections. Because we assume, as in previous work [49], that the initial inputs to the program are free of SDCs, we can simplify $f_{T,\lambda}$ as follows:

$$\bigwedge_{\lambda} \Delta(o_{T,\lambda}) \leq f_{T,\lambda}(\varphi_{*,*})$$

Next, we create specialized versions of $f_{T,\lambda}$ by noting that, under the single error model, the symbolic SDC variables for only one section can be nonzero at a time:

$$f_{T,\lambda,s}(\varphi_{s,*}) = f_{T,\lambda}(\varphi_{s,*}, \varphi_{\bar{s},*} = \mathbf{0})$$

where $\varphi_{s,*}$ is the list of the symbolic SDC variables for section s and $\varphi_{\bar{s},*}$ is the list of the symbolic SDC variables for all other sections. Finally, we rewrite the end-to-end SDC propagation specification as:

$$j \in J_s \Rightarrow \bigwedge_{\lambda} \Delta(o_{T,\lambda}) \leq f_{T,\lambda,s}(\varphi_{s,*}) \quad (2)$$

Equation 2 states that, if FastFlip injects an error in section s , then the upper bound on the SDC in output $o_{T,\lambda}$ of T is $f_{T,\lambda,s}(\varphi_{s,*})$, a function of the magnitude of SDC in the outputs of s .

E. Calculating the value of protecting static instructions

FastFlip uses the injection outcomes (Section IV-B) and Equation 2 to answer the following question: *For each static instruction identified by its program counter pc in the full execution T , what is the total probability² of error injections that result in SDC-Bad ($|SDC| > \varepsilon_\lambda$) for any output $o_{T,\lambda}$ of T ?* The value of protecting pc with SDC detection mechanisms is proportional to this total probability.

Algorithm 1 Finding the value of protecting a static instruction

Input $T, J_s, PC(j), O_s(j), \varepsilon_\lambda, p(j)$: defined in Section IV-A; $f_{T,\lambda,s}$: SDC propagation specification from outputs of s to output $o_{T,\lambda}$ of T

Returns $\forall pc. v(pc)$: value of protecting the static instruction pc

- 1: $v \leftarrow \{ \forall pc. pc \mapsto 0 \}$
 - 2: **for** s in T **do**
 - 3: **for** j in J_s **do**
 - 4: $pc \leftarrow PC(j)$
 - 5: **if** $O_s(j) \neq detected$ **then**
 - 6: **if** $\exists \lambda. f_{T,\lambda,s}(O_s(j)) > \varepsilon_\lambda$ **then**
 - 7: $v(pc) \leftarrow v(pc) + p(j)$
 - 8: $v_{total} = \sum_{pc} v(pc)$
 - 9: $\forall pc. v(pc) \leftarrow v(pc) / v_{total}$
-

Algorithm 1 shows how FastFlip calculates the value $v(pc)$ of protecting a static instruction pc . For each error injection in each section, FastFlip checks if the error results in a detectable outcome. If not, FastFlip uses Equation 2 to calculate upper bounds on the SDCs in the outputs of T as a function of

²This is the probability that the error occurs within pc and the outcome is SDC-Bad, as opposed to the conditional probability that the outcome is SDC-Bad when the error occurs in pc .

the SDCs in the outputs of s . If any SDC is SDC-Bad, FastFlip adds the probability of that error to the value of protecting pc . Lastly, FastFlip rescales the values so that the total value of protecting all static instructions is equal to 1.

F. Finding an optimal set of instructions to protect

The value $v(pc)$ of protecting the static instruction pc calculated using Algorithm 1 and the corresponding protection cost $c(pc)$ together comprise a value and cost model similar to the one from [19]. FastFlip uses $v(pc)$ and $c(pc)$ as inputs to a 0–1 knapsack optimization problem. FastFlip assumes that the value and cost of protecting a set of instructions is the sum of the value and cost of protecting each instruction in the set. Given a developer-defined target total protection value v_{trgt} , FastFlip solves the knapsack problem via the standard dynamic programming approach to select a set of static instructions pc_{prot} to protect that minimizes the total protection cost:

$$\text{Minimize } \sum_{pc \in pc_{prot}} c(pc) \quad \text{such that } \sum_{pc \in pc_{prot}} v(pc) \geq v_{trgt}$$

FastFlip then efficiently selects the optimal pc_{prot} for a range of v_{trgt} values. This corresponds to solving the value / cost multi-objective optimization problem using the ϵ -constraint method [33] (i.e., turning one of the objectives into a constraint as we do above) to obtain Pareto-optimal choices for pc_{prot} .

G. Precision of FastFlip

We observed that there are four major factors that affect the precision of FastFlip:

Inter-section masking. Inter-section masking occurs when an SDC in one section is masked by a downstream section. FastFlip must conservatively assume that SDCs introduced in any section result in SDCs in the final outputs. The frequency of inter-section masking is highly dependent on the application.

Imprecision of component analyses. As FastFlip depends on the results of the error injection analysis and the SDC propagation analysis, any imprecision in these analyses can lead to imprecision in FastFlip. For example, in our evaluation, FastFlip is affected by:

- The error injection analysis’s injection pruning heuristics, which make per-instruction error injection practical at the cost of introducing some inaccuracy in the injection outcomes [49, Figure 5]
- The SDC propagation analysis’s conservative SDC propagation, which causes it to overestimate the magnitude of SDC at the end of the program

Side effects. FastFlip requires each analyzed program section to be free of side effects. If a section modifies a variable that is used by a downstream section, then that variable must be considered as an output of that section. Even after all such variables are included in the output, the section may still cause additional side effects as a result of errors. Below, we describe two major categories of observed side effects that occur exclusively due to errors, along with the strategies employed by FastFlip to account for them.

First, the error may cause the section to write to a memory location outside the memory region where the section’s output is stored (e.g., due to incorrect array index calculation or evaluation of a loop exit condition). As a result, it is possible for the outputs of the section to be correct while data in memory locations adjacent to the outputs is corrupted. This data may be used by downstream sections, leading to a side effect. FastFlip mitigates this effect by considering variables stored in memory locations adjacent to the section outputs to be an output of that section.

Second, the error may corrupt variables that will no longer be used by the current section, but are used in downstream sections (e.g., due to the corruption of a register being popped from the stack at the end of a section). FastFlip mitigates this effect by including variables that will be used by future sections in the output of the current section, even if the current section only reads said variables. FastFlip uses the dataflow specification provided by the developer to find such variables.

While these mitigation strategies eliminate a large majority of side effects introduced as a result of errors, some such side effects can still occur. As a result of these remaining side effects, the outcomes of some of the injections recorded by FastFlip may be incorrect.

Untested error sites. A small number of error sites in the full program may not be included in any program section. For example, if sections are executed multiple times within an outer loop, then the instructions which increment the outer loop counter and restart the outer loop body may be excluded from all program sections. FastFlip conservatively assumes that, if an error occurs at such an excluded error site, then it will *always* produce an SDC-Bad outcome. More rigorously, FastFlip creates an imaginary section s_{\perp} containing all such untested error sites j and assumes that $\forall j \in J_{s_{\perp}}, O_s(j) = \{\infty, \dots, \infty\}$. This reduces the precision of FastFlip, as the actual number of SDC-Bad outcomes for these untested error sites is often lower.

H. Adapting FastFlip to compensate for loss of precision

If FastFlip loses precision as a result of the factors described in Section IV-G, it can lead to a loss of *utility*. That is, a loss of precision can cause FastFlip to protect against a smaller number of errors that cause SDC-Bad outcomes than expected. Similarly, it can also increase the cost of protecting FastFlip’s selection of static instructions beyond the actual minimum cost of protection. FastFlip adaptively adjusts the target value v_{trgt} used in Section IV-F in order to compensate for this loss of utility.

Measuring utility. FastFlip must first measure its loss of utility. FastFlip compares its utility to the utility obtained via a baseline monolithic error injection analysis. The baseline analysis injects errors in the whole program at once and directly determines the outcome of these errors at the end of the program. It then uses these results to selectively protect vulnerable static instructions. FastFlip uses two primary metrics for measuring utility:

First, FastFlip treats the outcome labels of the monolithic error injection analysis as the ground truth and calculates the value of protecting its selection against SDC-Bad outcomes according to these alternate outcome labels. FastFlip refers to the protection value of its selection calculated in this manner as the *achieved value* v_{achv} . FastFlip then compares v_{achv} to the target protection value v_{trgt} . FastFlip calculates the loss of value as $v_{loss} = v_{trgt} - v_{achv}$. Value loss measures the degree to which FastFlip undershoots the target value of protection against SDC-Bad outcomes; a lower value loss is better.

Second, FastFlip calculates the excess cost of FastFlip’s selection over the monolithic error injection analysis’s selection. Specifically, if the costs associated with protecting the two selections of instructions against SDCs are c_{FF} (for FastFlip) and c_{Mono} (for the monolithic analysis) respectively, the excess cost is $c_{excess} = c_{FF} - c_{Mono}$. Excess cost measures the degree of inefficiency of FastFlip’s selection for protecting against SDC-Bad outcomes as compared to the more efficient selection made by the monolithic analysis; a lower excess cost is better.

When analyzing a program, FastFlip can simultaneously run the monolithic error injection analysis for minimal additional analysis time³. To do so, FastFlip simultaneously checks the effect of each error in each section both on the outputs of that section, as well as the final outputs. Using these two sets of outcome labels, FastFlip can calculate v_{loss} and c_{excess} .

Adjusting the target value. FastFlip replaces the original target v_{trgt} with an adjusted target v'_{trgt} . Let the achieved value for this adjusted target be v'_{achv} . FastFlip minimizes v'_{trgt} such that $v'_{achv} \geq v_{trgt}$. If $v'_{trgt} > v_{trgt}$, then the cost of protecting FastFlip’s selection increases, with larger adjustments leading to larger increases. It is also possible that $v'_{trgt} < v_{trgt}$, in which case the cost decreases instead.

I. Composability and incremental analysis

When developers modify a program section, FastFlip must rerun the error injection and local sensitivity analysis on the modified program section and any downstream sections whose input changes as a result of

³For our evaluation, we run the analyses separately for proper comparison of their analysis time.

the modification. FastFlip can reuse the results of these sub-analyses for all other sections. Lastly, FastFlip must recalculate the end-to-end SDC propagation specifications using the SDC propagation analysis. Since running the error injection analysis is the major contributor to FastFlip’s runtime, this approach leads to significant speedups as compared to rerunning the error injection analysis on the full modified program, even if FastFlip must re-analyze multiple sections due to modifications that change the inputs of downstream sections.

Algorithm 2 Using adjusted target values when programs are modified

Input P_{adj} : target adjustment interval; m_{adj} : number of modifications since last target adjustment; v_{trgt} : original target value; v'_{trgt} : adjusted target value
Modifies m_{adj} ; v'_{trgt}
Returns pc_{prot} : selection of instructions to protect

- 1: **if** $m_{adj} \geq P_{adj}$ **then**
- 2: $m_{adj} \leftarrow 0$
- 3: $Outcomes_{FF}, Outcomes_{Mono} \leftarrow \text{FASTFLIPANDMONOLITHIC}(Program, Input)$
- 4: $v'_{trgt} \leftarrow \text{ADJUSTTARGET}(v_{trgt}, Outcomes_{FF}, Outcomes_{Mono})$
- 5: **else**
- 6: $m_{adj} \leftarrow m_{adj} + 1$
- 7: $Outcomes_{FF} \leftarrow \text{FASTFLIPMODIFIEDONLY}(Program, Input)$
- 8: $pc_{prot} \leftarrow \text{KNAPSACK}(v'_{trgt}, Outcomes_{FF})$

Algorithm 2 shows how FastFlip uses target value adjustment to compensate for loss of utility (Section IV-H) when the program is modified. FastFlip maintains a count of the number of modifications that have occurred since the most recent target adjustment (m_{adj}). If m_{adj} is below a threshold chosen by the developer (P_{adj}), FastFlip executes only its own time saving compositional analysis and uses the existing adjusted target v'_{trgt} to choose a set of static instructions to protect. That is, it is not necessary to always run the monolithic analysis as described in Section IV-H for modified programs. As developers make modifications to the program, v'_{trgt} may no longer provide the expected compensation for loss of utility. For this reason, once $m_{adj} \geq P_{adj}$, FastFlip re-adjusts the target value by performing a fresh analysis of the whole program while simultaneously running the monolithic analysis. Developers can choose P_{adj} to trade off between utility loss and analysis time.

J. Characteristics of usable sub-analyses

Error injection analyses. The error injection analysis must separately report the outcome for errors in each instruction in the program that the developer may wish to protect (e.g., [20, 49]). Analyses that use sampling and only report overall outcome statistics for the program (e.g., [39, 47]) are incompatible with FastFlip, as they do not provide instruction-specific vulnerability information. The analysis may inject single or multi-bit errors into one dynamic instruction per simulation.

SDC propagation analyses. The SDC propagation analysis must support the same application-specific SDC magnitude metric that the error injection analysis and the sensitivity analysis use to report the SDC magnitude. The analysis must also support the propagation of SDCs whose magnitude is represented by a symbolic variable, to enable the calculation of Equation 2. Examples of supported analyses are Chisel [34] and DeepJ [24].

V. METHODOLOGY

A. Choice of sub-analyses

Approxilyzer. Approxilyzer [49] is an error injection analysis that focuses on single bitflip errors that occur in CPU registers within in each dynamic instruction in a program execution. It uses various heuristics

to form equivalence classes of bitflips that will most likely cause similar outcomes. Approxilyzer injects a bitflip into the program execution for only one pilot from each equivalence class. It then continues the now tainted program execution (with possibly incorrect control flow), and records the outcome of the bitflip. Finally, Approxilyzer applies the outcome of this pilot bitflip to all members of the equivalence class. We specifically use gem5-Approxilyzer [48].

Chisel. Chisel [34] is an SDC propagation analysis that calculates the end-to-end SDC propagation specification functions $f_{T,\lambda,s}$ as affine functions of the symbolic SDC variables⁴ $\varphi_{s,*}$ (Equation 2). Chisel generates conservative specifications because it assumes that 1) each program section always amplifies input SDCs by the maximum amplification factor for that section for any input, and 2) when input SDCs can propagate through multiple control flow paths, they are always affected by the maximum amplification factor among all these paths, regardless of the actual path that the program execution takes.

B. Error model

As we compare FastFlip’s results to those of an Approxilyzer-only approach, we use the same error model as Approxilyzer (described below) to ensure a fair comparison. We inject one single-bit transient error per simulation in an architectural general purpose or SSE2 register. We target both source and destination registers in dynamic instructions within the region of interest (a subset of the correct dynamic trace of the program execution for a particular input), and skip instructions without register operands. We do not inject errors in special purpose, status, and control registers (e.g., `%rsp`, `%rbp`, and `%rflags`) as we assume that they always need protection which can be provided by hardware. Similarly, we assume that caches are protected via hardware techniques like ECC. As in previous works (e.g., [25, 47]) we assume that the probability $p(j)$ that the error will occur at any error site j follows a uniform distribution.

C. SDC detection model

SDC detection mechanism. We assume that a compiler pass (e.g., [35, 42]) duplicates the instructions that FastFlip selects for protection and then follows the original and duplicate instructions with a check that ensures that their results match. The duplicated code execution and increased register pressure leads to runtime overhead. However, by allowing the compiler and CPU scheduler to rearrange instructions and by coalescing multiple checks together, the overhead for extensive instruction duplication across the program can be reduced to 29% on average [35]. The overhead for selective duplication of individual instructions is even lower.

Value and cost of SDC detection. We adapt the value and cost model from [19], described below. Since the error model in Section V-B assumes that errors are uniformly distributed ($p(j)$ is uniform), the value of protecting a static instruction pc is proportional to the number of distinct errors possible in pc that produce an SDC-Bad outcome. The cost $c(pc)$ of protecting pc is proportional to the number of dynamic instances of pc in the program execution trace. Developers can use alternate value models by changing the error probability distribution $p(j)$ and alternate cost models by changing $c(pc)$.

D. Benchmarks

Table I shows our benchmarks for FastFlip. Column 2 shows the input size, Column 3 shows the number of static sections (and the number of dynamic instances of those sections), and Column 4 shows the total number of error sites ($|J|$). We briefly describe the benchmarks and their origin below:

- *BScholes*: Black-Scholes stock option analysis benchmark from the PARSEC suite [4]
- *Campipe*: The raw image processing pipeline for the Nikon-D7000 camera, adapted from [51]
- *FFT*: Fast Fourier Transform benchmark from the Splash-3 suite [43]
- *LU*: Blocked matrix decomposition benchmark from the Splash-3 suite [43]

⁴We modified Chisel to add support for such symbolic SDC variables.

TABLE I: List of benchmarks for FastFlip

Benchmark	Input size	Sections	J
BScholes	2 options	4 ($\times 2$)	36.7K
Campipe	32×32	5 ($\times 1$)	72.7M
FFT	256×2	5 ($\times 1$)	9.23M
LU	16×16	4 ($\times 2$)	1.75M
SHA2	32 bytes	3 ($\times 1$)	403K

- *SHA2*: The SHA-256 hash function, adapted from [36]

For FFT and LU, the input size is the same as the minimized input size found by Minotaur [32], a technique for reducing injection analysis time by minimizing inputs without sacrificing program counter coverage. For BScholes, we manually reduced the 21 option minimized input found by Minotaur down to 2 options while ensuring that the program counter coverage remained the same. For Campipe, we use a reference 32×32 raw image input provided along with the implementation. For SHA2, we use a common cryptographic key size (256 bits).

E. Baseline, comparison, and experimental setup

Software and hardware. FastFlip uses gem5-Approxilyzer version 22.1 [48] simulating an x86-64 CPU as the architecture simulator. We performed our experiments on AMD Epyc processors with 94 error injection experiment threads.

Region of interest. We focus on the computational portion of each benchmark and do not analyze I/O, initial setup, or final cleanup code.

SDC magnitude metric. We use the maximum element-wise absolute difference as the SDC magnitude metric for all benchmarks. Specifically, if $o_k[\ell]$ represents the ℓ^{th} element of an output o_k and the modified output due to an injection is \hat{o}_k , then the SDC metric is $\max_{\ell} |o_k[\ell] - \hat{o}_k[\ell]|$.

SDC-Bad threshold. We first analyze all benchmarks assuming that any SDC is SDC-Bad, no matter how small ($\forall \lambda. \varepsilon_{\lambda} = 0$). Next, we relax this requirement by considering SDC magnitudes up to 0.01 to be tolerable, i.e., SDC-Good ($\forall \lambda. \varepsilon_{\lambda} = 0.01$) for all benchmarks except SHA2 (whose applications require the output to be fully precise).

Sensitivity analysis parameters. As we consider the maximum tolerable SDC magnitude ε_{λ} to be 0.01, we use this as the maximum perturbation during sensitivity analysis. To estimate the Lipschitz constant K , we perform 10^6 random perturbations up to ε_{λ} . For array inputs, we randomly perturb one, multiple, or all elements.

Comparison metrics. We compare the performance and utility of FastFlip to a baseline monolithic Approxilyzer-only approach. The baseline approach treats the entire program as a single section. For performance, we compare the analysis times of FastFlip and Approxilyzer.

For comparing utility, we compare the selections of instructions to protect made by the two approaches using the value loss and excess cost metrics described in Section IV-H. FastFlip always uses target adjustment in our evaluation, except in Section VI-D, where we investigate the effects of target adjustment. We compare utility for four target values: $v_{\text{tgt}} \in \{0.90, 0.95, 0.99, 1.00\}$, which are target values that correspond to protecting against 90%, 95%, 99%, and 100% of errors that cause SDC-Bad outcomes, respectively.

Error range. While Approxilyzer’s use of equivalence classes as described in Section V-A speeds up analysis, the pilot is not a perfect predictor of the outcomes for the pruned injections (i.e., the rest of the equivalence class). Figure 5 in Approxilyzer [49] shows that, on average, 4% of pruned injections have an outcome that is significantly different from the pilot. Therefore, Approxilyzer’s results cannot be considered to be the absolute ground truth for comparison.

To account for the potential discrepancy between the ground truth and Approxilyzer, we calculate an error range around the value of SDC protection according to Approxilyzer. Using the detailed results from Approxilyzer or FastFlip, we can determine, for each error site, 1) whether the outcome is SDC-Bad, or a different outcome, and 2) whether an injection was actually performed at that error site, or the error site was pruned (the outcome for an error at that site was inferred from the outcome for another error site in the same equivalence class). Additionally, each error site can either be protected or unprotected, depending on whether the analysis selected the corresponding static instruction for protection.

Based on these classifying factors, we can divide all error sites into eight categories, and use a variable to represent the *number* of error sites in each of these categories:

	Injected		Pruned	
Outcome:	SDC-Bad	Other	SDC-Bad	Other
Protected	A	B	C	D
Unprotected	E	F	G	H

Lastly, let R be the rate of outcome misprediction for pruned error sites. Using the above information, we can calculate the lower and upper bounds on the actual value of protecting the selected instructions:

$$v_{\min} = \frac{A + (1 - R)C}{A + (1 - R)C + E + G + RH}$$

$$v_{\max} = \frac{A + C + RD}{A + C + RD + E + (1 - R)G}$$

Then, the value error range is the interval $[v_{\min}, v_{\max}]$. Note that using the above notation, the value calculated in Section IV-F is equal to:

$$v_{calc} = \frac{A + C}{A + C + E + G}$$

which always lies within $[v_{\min}, v_{\max}]$.

For FFT, LU, and BScholes, we use the benchmark-specific pilot prediction inaccuracy from Figure 5 in Approxilyzer [49] (3%, 4%, and 10% respectively). For Campipe and SHA2, we consider the average inaccuracy from the same figure (4%).

We calculate FastFlip’s error range in this manner around its results for achieved protection value. If, for this error range, $v_{\max} \geq v_{trgt}$, then we consider FastFlip’s result to be acceptable, even if v_{achv} is less than v_{trgt} .

Analysis time. For FastFlip, the total time required is the sum of the time required for 1) analyzing each program section with Approxilyzer and the sensitivity analysis, 2) Chisel error propagation analysis, 3) calculating the value of protecting static instructions, and 4) solving the knapsack problem. For modified benchmarks, we do not include the time required to analyze the unmodified sections in the first category. For Approxilyzer, the total time required is the sum of the time required for 1) analyzing the full program and 2) solving the knapsack problem.

Timeouts. FastFlip assumes that if the error causes the runtime of a program section to exceed $5 \times$ the nominal runtime, then the execution times out, which is a detected outcome. We use the same timeout rule for Approxilyzer.

F. Program modifications

To test the advantages offered by FastFlip’s compositional analysis, we modify one or more sections within each benchmark. Then, we re-analyze the full modified program with Approxilyzer, and compare this to FastFlip’s re-analysis of only the modified sections followed by SDC propagation.

TABLE II: Injection outcome counts for unmodified benchmarks

Benchmark	Approach	Outcome counts		
		Detected	SDC	Masked
BScholes	Approxilyzer	6.14K	19.1K	11.5K
	FastFlip	5.87K	19.6K	11.3K
	diff	-274	+503	-229
Campipe	Approxilyzer	29.0M	11.1M	32.6M
	FastFlip	29.8M	18.2M	24.8M
	diff	+749K	+7.09M	-7.84M
FFT	Approxilyzer	3.53M	4.22M	1.48M
	FastFlip	3.53M	4.40M	1.31M
	diff	-7.61K	+178K	-170K
LU	Approxilyzer	878K	809K	65.4K
	FastFlip	879K	815K	56.8K
	diff	+1.43K	+6.50K	-8.57K
SHA2	Approxilyzer	65.2K	318K	19.9K
	FastFlip	64.5K	319K	19.8K
	diff	-698	+798	-100

For each benchmark, we experiment with two types of semantics-preserving modifications. *Small* modifications represent simple modifications that developers or compilers may make while optimizing and maintaining the program. Such modifications of up to 15 lines of code form a majority of open-source commits [2]. For the *large* modifications, we replace a program section with a lookup hashtable. The hashtable stores key-value pairs that map inputs of that section to corresponding outputs. If the modified section finds the current input in this table, it returns the corresponding output. Otherwise, it executes the original section code. Lastly, for the BScholes benchmark, we also experiment with a modification that uses coarse-grained code duplication to detect the presence of SDCs.

Details of *small* modifications. For Campipe and FFT, we store an expression used in multiple locations within the section into a variable to improve code readability. For LU, we introduce a specialized version of a section that reduces the number of necessary bounds checks when it detects that the matrix size is a multiple of the block size (as is the case for our input). For BScholes, we eliminate a redundant floating point operation that occurs in some cases in the cumulative normal distribution function. This change very slightly changes the semantics of the section due to floating point imprecision. For SHA2, we similarly eliminate a redundant shift operation (without changing semantics or making the runtime input-dependent).

VI. EVALUATION

A. Similarity of injection outcomes of FastFlip and Approxilyzer

Table II shows how injection outcome statistics compare between FastFlip and the baseline Approxilyzer approach for the benchmarks without modifications. Column 2 shows the approach and Columns 3-5 show the number of detected, SDC, and masked outcomes, respectively. The counts for the modified benchmarks have a similar trend.

TABLE III: Comparison of FastFlip and Approxilyzer utility when all SDCs are unacceptable (SDC-Bad). A ✓ indicates that the achieved value is within the value error range of FastFlip.

Benchmark	Modif.	$v_{\text{trgt}} = 0.90$		$v_{\text{trgt}} = 0.95$		$v_{\text{trgt}} = 0.99$	
		Value	Cost (diff)	Value	Cost (diff)	Value	Cost (diff)
BScholes	None	0.901✓	0.635 (+0.000)	0.950✓	0.717 (+0.000)	0.990✓	0.827 (+0.000)
	Small	0.899✓	0.634 (+0.003)	0.950✓	0.713 (+0.000)	0.990✓	0.821 (+0.000)
	Large	0.898✓	0.669 (+0.000)	0.949✓	0.753 (+0.000)	0.991✓	0.849 (+0.000)
Campipe	None	0.915✓	0.611 (+0.038)	0.950✓	0.676 (+0.017)	0.991✓	0.807 (+0.024)
	Small	0.924✓	0.611 (+0.060)	0.954✓	0.678 (+0.030)	0.990✓	0.807 (+0.034)
	Large	0.912✓	0.760 (+0.068)	0.961✓	0.819 (+0.043)	0.993✓	0.899 (+0.015)
FFT	None	0.900✓	0.544 (+0.011)	0.950✓	0.629 (+0.002)	0.990✓	0.780 (+0.000)
	Small	0.904✓	0.542 (+0.010)	0.950✓	0.629 (+0.004)	0.990✓	0.781 (+0.002)
	Large	0.900✓	0.492 (+0.001)	0.950✓	0.586 (−0.000)	0.987✓	0.716 (−0.016)
LU	None	0.900✓	0.603 (+0.000)	0.950✓	0.694 (+0.000)	0.990✓	0.873 (+0.000)
	Small	0.901✓	0.606 (+0.002)	0.951✓	0.698 (+0.002)	0.990✓	0.875 (+0.001)
	Large	0.902✓	0.560 (+0.002)	0.951✓	0.640 (+0.003)	0.990✓	0.826 (−0.001)
SHA2	None	0.900✓	0.666 (+0.001)	0.950✓	0.772 (+0.000)	0.990✓	0.908 (+0.001)
	Small	0.900✓	0.665 (+0.000)	0.949✓	0.771 (−0.001)	0.990✓	0.908 (+0.000)
	Large	0.883✓	0.476 (−0.007)	0.943✓	0.551 (−0.003)	0.985✓	0.655 (−0.007)

The clearest difference in the outcome counts is the lower number of masked outcomes and the higher number of SDC outcomes identified by FastFlip. This is often the result of errors that cause an SDC in the output of a program section, which is then masked by a downstream section. Because FastFlip checks for SDCs the output of each section and conservatively assumes that SDCs in a section’s output always propagate to the final output, it cannot identify such inter-section masking. This is especially visible for Campipe, whose last section is a nearest-value lookup table that masks many SDCs from upstream sections.

For LU and BScholes, FastFlip does not analyze a small number of error sites that are related to the iteration of the outer loop containing the analyzed program sections. As described in Section IV-G, FastFlip conservatively assumes that errors at these untested error sites always lead to SDC-Bad outcomes. As a result, FastFlip may select such untested instructions for protection even if errors in them do not result in SDCs.

B. Utility of FastFlip compared to that of Approxilyzer

Table III compares the utility of FastFlip and Approxilyzer for selective protection of instructions against SDCs, using the metrics described in Section IV-H. Columns 1-2 show the benchmark name and version, respectively. Subsequent pairs of columns show the utility comparison for the target protection values 0.90, 0.95, and 0.99, respectively. In each column pair, the first column shows FastFlip’s achieved protection value. The second column shows the cost of protecting FastFlip’s selection, and compares this to the cost of protecting Approxilyzer’s selection.

With target adjustment, FastFlip successfully meets all target values for the original, unmodified version of each benchmark. Because FastFlip reuses the adjusted targets for the modified versions as described in Algorithm 2, it may not precisely meet the target for those modified versions. The maximum difference between the target and achieved values is 0.017 (1.7%) for SHA2-Large. In all cases, the target value is within FastFlip’s achieved value error range (Section V-E).

TABLE IV: Comparison of FastFlip and Approxilyzer analysis time

Benchmark	Modif.	Analysis time (core-hours)		
		FastFlip	Approxilyzer	Speedup
BScholes	None	69 hrs	65 hrs	0.9×
	Small	42 hrs	62 hrs	1.5×
	Large	3 hrs	24 hrs	8.4×
Campipe	None	2459 hrs	2631 hrs	1.1×
	Small	158 hrs	2720 hrs	17.2×
	Large	45 hrs	494 hrs	11.0×
FFT	None	980 hrs	520 hrs	0.5×
	Small	300 hrs	509 hrs	1.7×
	Large	93 hrs	513 hrs	5.5×
LU	None	694 hrs	602 hrs	0.9×
	Small	80 hrs	625 hrs	7.8×
	Large	94 hrs	441 hrs	4.7×
SHA2	None	726 hrs	728 hrs	1.003×
	Small	718 hrs	726 hrs	1.01×
	Large	43 hrs	45 hrs	1.05×

For most benchmarks, the cost of protecting FastFlip’s selection of instructions is at most 0.011 (1.1%) more than the cost of protecting Approxilyzer’s selection. The exception is Campipe, for which FastFlip’s cost can be higher by as much as 0.068 (6.8%). This is because, unlike the other benchmarks, FastFlip has to aggressively adjust the target values for Campipe in order to compensate for the loss of precision caused by inter-section masking and meet the original target values. Section VI-D describes the consequences of forgoing target adjustment.

We observed that if we removed the last section of Campipe (which is the primary cause of high inter-section masking in Campipe), FastFlip’s target adjustments became less aggressive, and the excess cost of FastFlip decreased to 0.036 (3.6%). This suggests that more precise SDC propagation analyses that also calculate the probability of SDC masking may help to reduce the need for target adjustment.

The geomean cost of protecting FastFlip’s selection is 0.601, 0.685, and 0.819 for the target protection values 0.90, 0.95, and 0.99, respectively. This shows that it is possible to protect against 90% bitflips that cause SDCs by protecting on average 60% of all dynamic instructions. Protecting against the remaining SDCs quickly leads to diminishing returns.

C. Performance of FastFlip compared to that of Approxilyzer

Table IV compares the analysis time of FastFlip (without simultaneously running Approxilyzer) and Approxilyzer. Columns 1-2 show the benchmark name and version, respectively. Columns 3-4 show the total analysis time for FastFlip and Approxilyzer, respectively. Column 5 shows the speedup of FastFlip over Approxilyzer. We measure analysis time in core-hours as the error injection analysis is highly parallelizable. The actual analysis time is much lower when using a large number of error injection experiment threads.

For FastFlip, over 99% of analysis time is for the error injection analysis. The sensitivity analysis requires less than five minutes. The symbolic SDC propagation analysis and knapsack problem solver each require less than one minute, even for programs and inputs that are much larger than our benchmarks.

TABLE V: Comparison of FastFlip and Approxilyzer utility for Campipe with and without target adjustment. A ✓ indicates that the achieved value is within the value error range of FastFlip, while a ✗ indicates the opposite.

Target type	Modif.	Value	Cost (diff)	Value	Cost (diff)	Value	Cost (diff)
		$v_{\text{trgt}} = 0.90$		$v_{\text{trgt}} = 0.95$		$v_{\text{trgt}} = 0.99$	
Original	None	0.848✗	0.542 (−0.031)	0.920✓	0.622 (−0.038)	0.977✓	0.751 (−0.032)
	Small	0.879✓	0.543 (−0.008)	0.925✓	0.623 (−0.025)	0.980✓	0.752 (−0.021)
	Large	0.868✗	0.687 (−0.005)	0.925✗	0.776 (+0.001)	0.979✓	0.864 (−0.021)
		$v'_{\text{trgt}} = 0.942$		$v'_{\text{trgt}} = 0.972$		$v'_{\text{trgt}} = 0.997$	
Adjusted	None	0.915✓	0.611 (+0.038)	0.950✓	0.676 (+0.017)	0.991✓	0.807 (+0.024)
	Small	0.924✓	0.611 (+0.060)	0.954✓	0.678 (+0.030)	0.990✓	0.807 (+0.034)
	Large	0.912✓	0.760 (+0.068)	0.961✓	0.819 (+0.043)	0.993✓	0.899 (+0.015)

The two approaches have similar analysis times for the unmodified (*None*) versions of all benchmarks except FFT. For FFT, Approxilyzer prunes a larger number of injections since operations such as transpose are performed multiple times in different dynamic sections of the program execution. As FastFlip injects errors into each section independently, it cannot similarly prune injections across sections. However, FastFlip is faster when analyzing the modified versions of FFT.

To enable target adjustment, FastFlip simultaneously runs the Approxilyzer analysis as described in Section IV-H. We use the methodology from [32, Section 4.7] to confirm that the time required for this simultaneous approach is at most 1% more than the greater of the analysis times of FastFlip and Approxilyzer for the unmodified versions of the benchmarks.

For the modified versions, the speedup depends on how much of the original program the developer replaced. If the modified sections are small with respect to the full program, then FastFlip must re-analyze only that small modified portion of the program, as opposed to Approxilyzer which must re-analyze the full modified program. This leads to the particularly large speedups for Campipe. On the other hand, if the modified sections are a large portion of the full program, then FastFlip must re-analyze large portions of the program, leading to smaller speedups. This leads to the negligible speedups for SHA2, where we modified the most expensive section of the program. As FastFlip reuses the adjusted targets for modified benchmarks, it only needs to use the simultaneous approach for the original version.

These results show that FastFlip can save a significant amount of analysis time when analyzing modified programs. For modern software systems that accumulate multiple small modifications over time, FastFlip can provide ever increasing savings.

D. Effects of target adjustment

Section VI-B presents the results of FastFlip when it uses target adjustment in order to meet the original targets. For most benchmarks, the adjusted targets are within 0.4% of the original targets, so the results with and without target adjustment are similar. For Campipe, FastFlip has to aggressively adjust the target protection value because its characteristics lead to precision loss.

Table V compares the utility of FastFlip and Approxilyzer for Campipe with and without target adjustment. The format is similar to that of Table III, except that Column 1 indicates whether the results are for the original (non-adjusted) target or the adjusted target. Without target adjustment, FastFlip undershoots the target by as much as 0.052 (5.2%) and the original target value does not always fall within FastFlip’s achieved value error range. These results demonstrate the importance of target adjustment for ensuring that FastFlip meets the original protection targets for all benchmarks. However, aggressive target adjustment

TABLE VI: Comparison of FastFlip and Approxilyzer utility when SDCs greater than 0.01 are SDC-Bad. A ✓ indicates that the achieved value is within the value error range of FastFlip.

Benchmark	Modif.	$v_{trgt} = 0.90$		$v_{trgt} = 0.95$		$v_{trgt} = 0.99$	
		Value	Cost (diff)	Value	Cost (diff)	Value	Cost (diff)
BScholes	None	0.900✓	0.645 (+0.013)	0.951✓	0.727 (+0.013)	0.990✓	0.821 (+0.000)
	Small	0.898✓	0.642 (+0.011)	0.949✓	0.724 (+0.013)	0.990✓	0.821 (+0.000)
	Large	0.892✓	0.681 (+0.012)	0.946✓	0.765 (+0.006)	0.990✓	0.849 (-0.012)
Campipe	None	0.900✓	0.576 (+0.031)	0.951✓	0.674 (+0.032)	0.991✓	0.802 (+0.030)
	Small	0.915✓	0.577 (+0.057)	0.958✓	0.674 (+0.054)	0.992✓	0.802 (+0.045)
	Large	0.903✓	0.694 (+0.024)	0.953✓	0.780 (+0.018)	0.992✓	0.895 (+0.016)
FFT	None	0.900✓	0.563 (+0.002)	0.950✓	0.687 (+0.004)	0.990✓	0.848 (+0.008)
	Small	0.904✓	0.579 (+0.012)	0.947✓	0.684 (-0.006)	0.989✓	0.845 (+0.002)
	Large	0.895✓	0.529 (-0.007)	0.936✓	0.625 (-0.028)	0.979✓	0.774 (-0.041)
LU	None	0.900✓	0.657 (+0.004)	0.950✓	0.787 (+0.000)	0.990✓	0.932 (+0.002)
	Small	0.906✓	0.674 (+0.020)	0.950✓	0.787 (+0.000)	0.990✓	0.932 (+0.000)
	Large	0.903✓	0.638 (+0.009)	0.943✓	0.753 (-0.007)	0.989✓	0.884 (-0.002)

also leads to an increase in protection cost of FastFlip’s selection of instructions over Approxilyzer’s selection.

E. Comparison of FastFlip and Approxilyzer when small SDCs are acceptable

Table VI compares the utility of FastFlip and Approxilyzer when small SDCs (≤ 0.01) are considered acceptable (SDC-Good) and the analyses focus on only protecting against larger SDCs (SDC-Bad). Table VI has the same format as Table III. We exclude SHA2 for this evaluation as its applications require the calculated hashes to be fully precise.

FastFlip successfully meets all target values for all benchmarks. The maximum difference between the target and achieved values is 0.014 (1.4%) for FFT-Large. In all cases, the target value is within FastFlip’s achieved value error range caused by injection pruning. For most benchmarks, the cost of protecting FastFlip’s selection of instructions is at most 0.020 (2%) more than the cost of protecting Approxilyzer’s selection. The exception is Campipe, for which FastFlip’s protection cost is higher by as much as 0.057 (5.7%) due to aggressive target adjustment.

The geomean cost of protecting FastFlip’s selection is 0.619, 0.720, and 0.849 for the target protection values 0.90, 0.95, and 0.99, respectively. FastFlip obtains the results in Table VI at the same time as the results in Table III for negligible additional analysis time (less than one minute).

F. Protecting against all SDC outcomes

Table VII compares the utility of FastFlip and Approxilyzer for protecting against *all* SDC outcomes. The format is similar to that of Table III. Table VII repeats the results for $v_{trgt} = 0.99$ for comparison.

FastFlip achieves a protection value of 1.000 (100%) for $v_{trgt} = 1.00$. It is not necessary (or possible) to adjust this target value. However, for some benchmarks, FastFlip also selects for protection some instructions for which Approxilyzer found only masked or detected outcomes. As a result, the overhead of FastFlip’s selection is still slightly higher than that of Approxilyzer’s selection. The geomean cost of protecting FastFlip’s selection is 0.819 and 0.936 for the target protection values 0.99 and 1.00, respectively. There is a significant increase in the number of dynamic instructions that must be protected to protect against the last 1% of SDC-causing errors. The results for protecting against all SDC outcomes whose magnitude is greater than 0.01 are similar.

TABLE VII: Comparison of FastFlip and Approxilyzer utility for protecting against *all* SDC outcomes throughout the program execution. A ✓ indicates that the achieved value is within the value error range of Approxilyzer.

Benchmark	Modif.	$v_{\text{trgt}} = 0.99$		$v_{\text{trgt}} = 1.00$	
		Value	Cost (diff)	Value	Cost (diff)
BScholes	None	0.990✓	0.827 (+0.000)	1.000✓	0.954 (+0.010)
	Small	0.990✓	0.821 (+0.000)	1.000✓	0.953 (+0.011)
	Large	0.991✓	0.849 (+0.000)	1.000✓	0.958 (+0.024)
Campipe	None	0.991✓	0.807 (+0.024)	1.000✓	0.900 (+0.002)
	Small	0.990✓	0.807 (+0.034)	1.000✓	0.900 (+0.018)
	Large	0.993✓	0.899 (+0.015)	1.000✓	0.940 (+0.000)
FFT	None	0.990✓	0.780 (+0.000)	1.000✓	0.971 (+0.022)
	Small	0.990✓	0.781 (+0.002)	1.000✓	0.971 (+0.021)
	Large	0.987✓	0.716 (-0.016)	1.000✓	0.932 (+0.000)
LU	None	0.990✓	0.873 (+0.000)	1.000✓	0.982 (+0.000)
	Small	0.990✓	0.875 (+0.001)	1.000✓	0.983 (+0.000)
	Large	0.990✓	0.826 (-0.001)	1.000✓	0.932 (+0.000)
SHA2	None	0.990✓	0.908 (+0.001)	1.000✓	0.989 (+0.000)
	Small	0.990✓	0.908 (+0.000)	1.000✓	0.989 (+0.000)
	Large	0.985✓	0.655 (-0.007)	1.000✓	0.723 (+0.014)

TABLE VIII: Effect of adding error detection mechanisms to a static section of BScholes

Modif.	Error outcomes	Analysis time (core-hours)		
	SDC / Total (%)	FastFlip	Approxilyzer	Speedup
None	2991 / 5536 (54.0%)	69 hrs	65 hrs	0.9×
Error detection	882 / 8960 (9.8%)	21 hrs	71 hrs	3.4×

G. Case study: effectiveness of error detection mechanisms

To verify that error detection mechanisms can reduce the likelihood of SDC outcomes as a result of errors, we modified one static section of the BScholes benchmark. The modified section executes the original code twice and compares the output of the two executions. If the outputs do not match, this indicates that an error occurred, and the program raises an exception (a detected outcome), as illustrated by the following pseudocode:

```

modifiedCode(input) {
    output1 = originalCode(input);
    output2 = originalCode(input);
    assert(output1 == output2);
    return output1;
}

```

We analyze the effects of errors in the modified section with FastFlip and Approxilyzer to check the effectiveness of such an error detection mechanism.

Table VIII shows the results of adding this error detection mechanism to BScholes. Column 2 shows the number of SDC outcomes as a fraction of the total error outcomes. Columns 3-4 show the total analysis time for FastFlip and Approxilyzer, respectively. Column 5 shows the speedup of FastFlip over Approxilyzer. We find that the modification significantly reduces the number and fraction of SDC outcomes

occurring due to errors in the modified section; this is despite the increase in code size due to duplication. The remaining SDCs occur in 1) non-duplicated instructions at the start or end of the modified section, or 2) instructions within the first execution of the original code that cause side effects that affect the second execution too. As with other modifications, FastFlip saves time over Approxilyzer because it must only analyze the modified sections of the benchmark.

VII. RELATED WORK

Error injection-less reliability analyses. ePVF [15] is a dynamic analysis which finds locations where a bitflip will cause a crash, as opposed to an SDC, with $\sim 90\%$ accuracy. TRIDENT [26] uses empirical observations of error propagation in programs to predict the overall SDC probability of a program and the SDC probabilities of individual instructions. Other works [31, 46] use analytical modeling to detect SDCs in a program. Leto [7] is an SMT-based fault tolerance analysis that supports multiple error models, including the single error model. However, it requires precise specifications of program components, which are cumbersome for large programs when errors can occur at any point. While these analyses can be faster than error injection analyses, they are less accurate and may not be able to precisely estimate the magnitude of the output SDC due to an error. FastFlip’s compositional nature makes error injection analysis more affordable by amortizing the cost of analyzing evolving programs over time.

Aloe [21] statically analyzes programs with potentially imperfect error recovery mechanisms to determine the overall reliability of the program. Unlike FastFlip, Aloe supports error models where multiple errors can simultaneously occur during program execution with varying probabilities. This is a limitation of FastFlip, as the correctness of Equation 1 relies on the assumption that only one error occurs during program execution.

Error injection analyses. Error injection analyses operate at different levels of abstraction, including hardware, assembly, and IR [9, 10, 14, 22, 23, 27, 28, 29, 39, 40, 45, 47]. These analyses typically use *sampling* - they select a statistically significant number of error sites at random and only perform error injections at those sites. While this is sufficient for providing overall outcome statistics as we do in Section VI-A, we cannot use such results to determine which specific instructions or blocks of instructions are particularly vulnerable to SDCs in order to protect them. However, FastFlip can still use these analyses if they are modified to perform per-instruction error injection like Approxilyzer [48, 49].

Minotaur [32] reduces the size of inputs required to test the reliability of programs when subjected to error injections, while keeping the percentage of static instructions evaluated close to 100% (as compared to the reference input). We use the input sizes proposed by Minotaur for the FFT and LU benchmarks, and manually minimize the Minotaur-proposed BScholes input to 2 options without sacrificing instruction coverage. While Minotaur reduces injection analysis time by reducing input size, the program must still be analyzed in full. FastFlip complements Minotaur by adding the flexibility of only re-analyzing small sections of the program when developers modify it, further reducing analysis time.

Papadimitriou and Gizopoulos [38] show that injecting errors in various SRAM hardware structures can give different results compared to injecting errors at higher levels of abstraction. AVGI [39] builds on [38] to show that hardware errors manifest in software in different ways, but result in similar distributions of final outcomes across applications. Using this insight, AVGI accelerates hardware-level fault injection for large workloads to provide overall outcome statistics. Santos et al. [44] similarly examine how faults injected at the RTL level affect common GPU instructions, and inject these instruction-level effects into applications to provide overall outcome statistics and identify vulnerable hardware components. However, FastFlip requires the error injection analysis to report outcomes for errors at each possible error site, as opposed to summary statistics (Section IV-J). The above analysis techniques that aim to efficiently determine the effect of low-level faults via hybrid fault injection are too slow even for small program sizes when modified to report outcomes in the manner required by FastFlip. If future analyses succeed

in providing such detailed outcome information for low-level faults in a scalable manner, FastFlip would be able to use them to improve the accuracy of its analysis.

SDC propagation analyses. SDC propagation analyses either propagate SDCs forward through programs [6, 18], or propagate SDC bounds backwards through programs [17, 21, 34]. While we instantiated FastFlip with the Chisel [34] backwards SDC propagation analysis, the FastFlip approach can instead use any alternate SDC propagation analysis that satisfies the requirements outlined in Section IV-J.

Ashraf et al. [3] analyze the propagation of randomly injected faults in MPI applications. Using the injection experiment results, they build a model to estimate the number of memory locations corrupted over time to guide roll-back decisions. Combining FastFlip with [3] is an attractive opportunity for making per-instruction error injection analysis of MPI applications practical.

Mutlu et al. [37] predict the effect of bitflips injected into iterative applications on the final output by analyzing the effects of fault injections on a limited number of iterations. While this potentially gives [37] an advantage over FastFlip for applications that iterate the same operation multiple times, unlike FastFlip, [37] cannot handle applications with multiple sections that perform distinct operations, such as our benchmarks.

Hardware-based selective protection. Researchers have examined the use of selective hardware hardening (e.g., via redundancy or ECC) for improving hardware reliability while limiting the use of additional chip area [12, 30, 41, 53]. These techniques find and replicate only those hardware components that, as a result of transient errors, produce unacceptable outcomes across the range of typical applications that users are expected to run on the hardware. The error model we use for FastFlip’s evaluation (Section V-B) also assumes that caches and certain registers are protected within the hardware. FastFlip efficiently provides information which can be used to apply *additional*, software-based selective protection tailored to the needs of specific applications, as opposed to adding further hardware protections irrelevant to other applications.

Software-based selective SDC protection. Unlike crashes, timeouts, or clearly invalid data, SDCs are more difficult to detect by nature. SWIFT [42] uses instruction duplication to detect errors in computational instructions. To reduce overhead, it makes use of instruction reordering by the compiler and the processor. DRIFT [35] further reduces overhead by coalescing the checks of multiple duplicated instructions, which reduces basic block fragmentation. SWIFT and DRIFT *completely* eliminate the possibility of SDCs occurring due to single bitflip errors in the duplicated computational instructions. nZDC [13] provides comparable overhead to SWIFT while also protecting programs from 99.6% of SDCs caused by single bitflip errors during load, store, and control flow instructions.

Shoestring [16] finds and duplicates only particularly vulnerable instructions. Hari et al. [19] propose protecting blocks of instructions with single detectors placed at the end of loops or function calls. These two techniques use the results of error injection analyses to guide *selective* instruction duplication. We consider such techniques to be *clients* of FastFlip. They provide FastFlip with information about the runtime overhead of protecting various instructions or instruction blocks. Our evaluation in fact uses an adapted version of the value and cost model from [19]. In return, FastFlip provides precise information on which instructions should be protected in order to minimize runtime overhead while protecting against a developer-defined fraction of SDC-causing errors. After developers apply these techniques to protect FastFlip’s selection of instructions, FastFlip can re-analyze the protected sections to confirm the decrease in SDC vulnerability. For FastFlip, we focused on efficiently handling program modifications in general. We also briefly explore a modification that reduces SDC vulnerability via coarse-grained code duplication in Section VI-G. Analyzing sections after applying fine-grained duplication of FastFlip’s selection of vulnerable instructions is an interesting topic for future work.

ACKNOWLEDGEMENTS

The research presented in this paper was funded through NSF Awards CCF-1846354 and CCF-1956374. We would also like to thank Dr. Abdulrahman Mahmoud for his help with Approxilyzer.

REFERENCES

- [1] P. Agrawal, "Fault tolerance in multiprocessor systems without dedicated redundancy," *IEEE Transactions on Computers*, 1988.
- [2] A. Alali, H. Kagdi, and J. I. Maletic, "What's a typical commit? a characterization of open source software repositories," in *16th IEEE International Conference on Program Comprehension*, 2008.
- [3] R. A. Ashraf, R. Gioiosa, G. Kestor, R. F. DeMara, C.-Y. Cher, and P. Bose, "Understanding the propagation of transient errors in HPC applications," in *Proceedings of the International Conference for High Performance Computing, Networking, Storage and Analysis*, 2015.
- [4] C. Bienia, S. Kumar, J. P. Singh, and K. Li, "The PARSEC benchmark suite: Characterization and architectural implications," in *Proceedings of the 17th International Conference on Parallel Architectures and Compilation Techniques*, 2008.
- [5] S. Borkar, "Designing reliable systems from unreliable components: The challenges of transistor variability and degradation," *IEEE Micro*, 2005.
- [6] J. Bornholt, T. Mytkowicz, and K. S. McKinley, "Uncertain<T>: A first-order type for uncertain data," in *Proceedings of the 19th International Conference on Architectural Support for Programming Languages and Operating Systems*, 2014.
- [7] B. Boston, Z. Gong, and M. Carbin, "Leto: verifying application-specific hardware fault tolerance with programmable execution models," in *Proceedings of the ACM on Programming Languages*, no. OOPSLA, 2018.
- [8] D. G. Cacuci and M. Ionescu-Bujor, "A comparative review of sensitivity and uncertainty analysis of large-scale systems - ii: Statistical methods," *Nuclear Science and Engineering*, 2004.
- [9] J. Calhoun, L. Olson, and M. Snir, "FlipIt: An LLVM based fault injector for HPC," in *European Conference on Parallel Processing Workshops*, 2014.
- [10] C.-K. Chang, S. Lym, N. Kelly, M. B. Sullivan, and M. Erez, "Hamartia: A fast and accurate error injection framework," in *48th Annual IEEE/IFIP International Conference on Dependable Systems and Networks Workshops*, 2018.
- [11] S. Chaudhuri, S. Gulwani, R. Lublinerman, and S. Navidpour, "Proving programs robust," in *Proceedings of the 19th ACM SIGSOFT Symposium and the 13th European Conference on Foundations of Software Engineering*, 2011.
- [12] J. E. R. Condia, P. Rech, F. F. dos Santos, L. Carrot, and M. S. Reorda, "Protecting GPU microarchitectural vulnerabilities via effective selective hardening," in *IEEE 27th International Symposium on On-Line Testing and Robust System Design*, 2021.
- [13] M. Didehban and A. Shrivastava, "NZDC: A compiler technique for near zero silent data corruption," in *Proceedings of the 53rd Annual Design Automation Conference*, 2016.
- [14] W. Dweik, M. Annavaram, and M. Dubois, "Reliability-aware exceptions: Tolerating intermittent faults in microprocessor array structures," in *Design, Automation and Test in Europe Conference and Exhibition*, 2014.
- [15] B. Fang, Q. Lu, K. Pattabiraman, M. Ripeanu, and S. Gurumurthi, "ePVF: An enhanced program vulnerability factor methodology for cross-layer resilience analysis," in *46th Annual IEEE/IFIP International Conference on Dependable Systems and Networks*, 2016.
- [16] S. Feng, S. Gupta, A. Ansari, and S. Mahlke, "Shoestring: Probabilistic soft error reliability on the cheap," in *Proceedings of the 15th International Conference on Architectural Support for Programming Languages and Operating Systems*, 2010.
- [17] V. Fernando, K. Joshi, and S. Misailovic, "Verifying safety and accuracy of approximate parallel programs via canonical sequentialization," in *Proceedings of the ACM on Programming Languages*, no. OOPSLA, 2019.
- [18] —, "Diamont: Dynamic monitoring of uncertainty for distributed asynchronous programs," in

International Conference on Runtime Verification, 2021.

- [19] S. Hari, S. Adve, and H. Naeimi, “Low-cost program-level detectors for reducing silent data corruptions,” in *IEEE/IFIP International Conference on Dependable Systems and Networks*, 2012.
- [20] S. K. S. Hari, S. V. Adve, H. Naeimi, and P. Ramachandran, “Relyzer: Exploiting application-level fault equivalence to analyze application resiliency to transient faults,” in *Proceedings of the 17th International Conference on Architectural Support for Programming Languages and Operating Systems*, 2012.
- [21] K. Joshi, V. Fernando, and S. Misailovic, “Aloe: Verifying reliability of approximate programs in the presence of recovery mechanisms,” in *Proceedings of the 18th ACM/IEEE International Symposium on Code Generation and Optimization*, 2020.
- [22] M. Kaliorakis, D. Gizopoulos, R. Canal, and A. Gonzalez, “MeRLiN: Exploiting dynamic instruction behavior for fast and accurate microarchitecture level reliability assessment,” in *ACM/IEEE 44th Annual International Symposium on Computer Architecture*, 2017.
- [23] M. Kaliorakis, S. Tselonis, A. Chatzidimitriou, N. Foutris, and D. Gizopoulos, “Differential fault injection on microarchitectural simulators,” in *IEEE International Symposium on Workload Characterization*, 2015.
- [24] J. Laurel, R. Yang, G. Singh, and S. Misailovic, “A dual number abstraction for static analysis of Clarke Jacobians,” *Proceedings of the ACM on Programming Languages*, 2022.
- [25] G. Li and K. Pattabiraman, “Modeling input-dependent error propagation in programs,” in *48th Annual IEEE/IFIP International Conference on Dependable Systems and Networks*, 2018.
- [26] G. Li, K. Pattabiraman, S. K. S. Hari, M. Sullivan, and T. Tsai, “Modeling soft-error propagation in programs,” in *48th Annual IEEE/IFIP International Conference on Dependable Systems and Networks*, 2018.
- [27] J. Li and Q. Tan, “SmartInjector: Exploiting intelligent fault injection for SDC rate analysis,” in *IEEE International Symposium on Defect and Fault Tolerance in VLSI and Nanotechnology Systems*, 2013.
- [28] M.-L. Li, P. Ramachandran, U. R. Karpuzcu, S. K. S. Hari, and S. V. Adve, “Accurate microarchitecture-level fault modeling for studying hardware faults,” in *IEEE 15th International Symposium on High Performance Computer Architecture*, 2009.
- [29] X. Li, S. V. Adve, P. Bose, and J. A. Rivers, “Online estimation of architectural vulnerability factor for soft errors,” in *International Symposium on Computer Architecture*, 2008.
- [30] F. Libano, B. Wilson, J. Anderson, M. J. Wirthlin, C. Cazzaniga, C. Frost, and P. Rech, “Selective hardening for neural networks in FPGAs,” *IEEE Transactions on Nuclear Science*, 2019.
- [31] Q. Lu, G. Li, K. Pattabiraman, M. S. Gupta, and J. A. Rivers, “Configurable detection of SDC-causing errors in programs,” *ACM Transactions on Embedded Computing Systems*, 2017.
- [32] A. Mahmoud, R. Venkatagiri, K. Ahmed, S. Misailovic, D. Marinov, C. W. Fletcher, and S. V. Adve, “Minotaur: Adapting software testing techniques for hardware errors,” in *Proceedings of the 24th International Conference on Architectural Support for Programming Languages and Operating Systems*, 2019.
- [33] K. Miettinen, *A Priori Methods*. Springer US, 1998.
- [34] S. Misailovic, M. Carbin, S. Achour, Z. Qi, and M. C. Rinard, “Chisel: Reliability- and accuracy-aware optimization of approximate computational kernels,” in *Proceedings of the ACM International Conference on Object Oriented Programming Systems Languages & Applications*, 2014.
- [35] K. Mitropoulou, V. Porpodas, and M. Cintra, “DRIFT: Decoupled compileR-based Instruction-level Fault-Tolerance,” in *Languages and Compilers for Parallel Computing*, 2014.
- [36] A. Mosnier, “SHA-2 algorithm implementations,” <https://github.com/amosnier/sha-2>.
- [37] B. O. Mutlu, G. Kestor, A. Cristal, O. Unsal, and S. Krishnamoorthy, “Ground-truth prediction to accelerate soft-error impact analysis for iterative methods,” in *IEEE 26th International Conference on High Performance Computing, Data, and Analytics*, 2019.

- [38] G. Papadimitriou and D. Gizopoulos, "Demystifying the system vulnerability stack: Transient fault effects across the layers," in *Proceedings of the 48th Annual International Symposium on Computer Architecture*, 2021.
- [39] —, "AVGI: Microarchitecture-driven, fast and accurate vulnerability assessment," in *IEEE International Symposium on High-Performance Computer Architecture*, 2023.
- [40] K. Parasyris, G. Tziantzoulis, C. D. Antonopoulos, and N. Bellas, "GemFI: A fault injection tool for studying the behavior of applications on unreliable substrates," in *44th Annual IEEE/IFIP International Conference on Dependable Systems and Networks*, 2014.
- [41] I. Polian and J. P. Hayes, "Selective hardening: Toward cost-effective error tolerance," *IEEE Design & Test of Computers*, 2011.
- [42] G. Reis, J. Chang, N. Vachharajani, R. Rangan, and D. August, "SWIFT: software implemented fault tolerance," in *International Symposium on Code Generation and Optimization*, 2005.
- [43] C. Sakalis, C. Leonardsson, S. Kaxiras, and A. Ros, "Splash-3: A properly synchronized benchmark suite for contemporary research," in *IEEE International Symposium on Performance Analysis of Systems and Software*, 2016.
- [44] F. F. d. Santos, J. E. R. Condia, L. Carro, M. S. Reorda, and P. Rech, "Revealing GPU vulnerabilities by combining register-transfer and software-level fault injection," in *51st Annual IEEE/IFIP International Conference on Dependable Systems and Networks*, 2021.
- [45] H. Schirmeier, M. Hoffmann, C. Dietrich, M. Lenz, D. Lohmann, and O. Spinczyk, "FAIL*: An open and versatile fault-injection framework for the assessment of software-implemented hardware fault tolerance," in *11th European Dependable Computing Conference*, 2015.
- [46] V. Sridharan and D. R. Kaeli, "Eliminating microarchitectural dependency from architectural vulnerability," in *IEEE 15th International Symposium on High Performance Computer Architecture*, 2009.
- [47] A. Thomas and K. Pattabiraman, "LLFI: An intermediate code level fault injector for soft computing applications," in *IEEE International Conference on Software Quality, Reliability and Security*, 2013.
- [48] R. Venkatagiri, K. Ahmed, A. Mahmoud, S. Misailovic, D. Marinov, C. W. Fletcher, and S. V. Adve, "gem5-Approxilyzer: An open-source tool for application-level soft error analysis," in *49th Annual IEEE/IFIP International Conference on Dependable Systems and Networks*, 2019.
- [49] R. Venkatagiri, A. Mahmoud, S. K. S. Hari, and S. V. Adve, "Approxilyzer: Towards a systematic framework for instruction-level approximate computing and its application to hardware resiliency," in *49th Annual IEEE/ACM International Symposium on Microarchitecture*, 2016.
- [50] S. Wang, G. Zhang, J. Wei, Y. Wang, J. Wu, and Q. Luo, "Understanding silent data corruptions in a large production CPU population," in *Proceedings of the 29th Symposium on Operating Systems Principles*, 2023.
- [51] Y. Yao, "CAVA: Camera vision pipeline on gem5-Aladdin," <https://github.com/yaoyuannnn/cava>.
- [52] A. Ziv and J. Bruck, "Performance optimization of checkpointing schemes with task duplication," *IEEE Transactions on Computers*, 1997.
- [53] C. G. Zoellin, H.-J. Wunderlich, I. Polian, and B. Becker, "Selective hardening in early design steps," in *13th European Test Symposium*, 2008.