

CBX: Python and Julia packages for consensus-based interacting particle methods

Rafael Bailo^{1,*}, Alethea Barbaro², Susana N. Gomes³, Konstantin Riedl^{4,5},
Tim Roith^{6,*}, Claudia Totzeck⁷, and Urbain Vaes^{8,9}

¹Mathematical Institute, University of Oxford

²Technische Universiteit Delft

³Mathematics Institute, University of Warwick

⁴Technical University of Munich

⁵Munich Center for Machine Learning

⁶Helmholtz Imaging, Deutsches Elektronen-Synchrotron DESY, Notkestr. 85, 22607 Hamburg, Germany

⁷University of Wuppertal

⁸MATERIALS team, Inria Paris

⁹École des Ponts

* Corresponding authors: bailo@maths.ox.ac.uk, tim.roith@desy.de

1 Summary

We introduce `CBXPy` and `ConsensusBasedX.jl`, Python and Julia implementations of consensus-based interacting particle systems (CBX), which generalise consensus-based optimization methods (CBO) for global, derivative-free optimisation. The *raison d'être* of our libraries is twofold: on the one hand, to offer high-performance implementations of CBX methods that the community can use directly, while on the other, providing a general interface that can accommodate and be extended to further variations of the CBX family. Python and Julia were selected as the leading high-level languages in terms of usage and performance, as well as for their popularity among the scientific computing community. Both libraries have been developed with a common *ethos*, ensuring a similar API and core functionality, while leveraging the strengths of each language and writing idiomatic code.

2 Mathematical background

Consensus-based optimisation (CBO) is an approach to solve, for a given (continuous) *objective function* $f : \mathbb{R}^d \rightarrow \mathbb{R}$, the *global minimisation problem*

$$x^* = \operatorname{argmin}_{x \in \mathbb{R}^d} f(x),$$

i.e., the task of finding the point x^* where f attains its lowest value. Such problems arise in a variety of disciplines including engineering, where x might represent a vector of design parameters for a structure and f a function related to its cost and structural integrity, or machine learning, where x could comprise the parameters of a neural network and f the empirical loss, which measures the discrepancy of the neural network prediction with the observed data.

In some cases, so-called *gradient-based methods* (those that involve updating a guess of x^* by evaluating the gradient ∇f) achieve state-of-the-art performance in the global minimisation problem. However, in scenarios where f is *non-convex* (when f could have many *local minima*), where f is *non-smooth* (when ∇f is not well-defined), or where the evaluation of ∇f is impractical due to cost or complexity, *derivative-free methods* are needed. Numerous techniques exist for derivative-free optimisation, such as *random* or *pattern search* [25, 50, 32], *Bayesian optimisation* [45] or *simulated annealing* [31]. Here, we focus on *particle-based methods*, specifically, consensus-based optimisation (CBO), as proposed by Pinnau et al. [49], and the consensus-based taxonomy of related techniques, which we term *CBX*.

CBO uses a finite number N of *agents* (particles), $x_t = (x_t^1, \dots, x_t^N)$, dependent on time t , to explore the landscape of f without evaluating any of its derivatives (as do other CBX methods). The agents evaluate the objective function at their current position, $f(x_t^i)$, and define a *consensus point* c_α . This point is an approximation of the global minimiser x^* , and is constructed by weighing each agent’s position against the *Gibbs-like distribution* $\exp(-\alpha f)$ [8]. More rigorously,

$$c_\alpha(x_t) = \frac{1}{\sum_{i=1}^N \omega_\alpha(x_t^i)} \sum_{i=1}^N x_t^i \omega_\alpha(x_t^i), \quad \text{where } \omega_\alpha(\cdot) = \exp(-\alpha f(\cdot)),$$

for some $\alpha > 0$. The exponential weights in the definition favour those points x_t^i where $f(x_t^i)$ is lowest, and comparatively ignore the rest, particularly for larger α . If all the found values of the objective function are approximately the same, $c_\alpha(x_t)$ is roughly an arithmetic mean. Instead, if one particle is much better than the rest, $c_\alpha(x_t)$ will be very close to its position.

Once the consensus point is computed, the particles evolve in time following the *stochastic differential equation* (SDE)

$$dx_t^i = \underbrace{-\lambda (x_t^i - c_\alpha(x_t)) dt}_{\text{consensus drift}} + \underbrace{\sigma \|x_t^i - c_\alpha(x_t)\| dB_t^i}_{\text{scaled diffusion}},$$

where λ and σ are positive parameters, and where B_t^i are independent Brownian motions in d dimensions. The *consensus drift* is a deterministic term that drives each agent towards the consensus point, with rate λ . Meanwhile, the *scaled diffusion* is a stochastic term that encourages exploration of the landscape. The scaling factor of the diffusion is proportional to the distance of the particle to the consensus point. Hence, whenever the position of a particle and the location of the weighted mean coincide, the particle stops moving. On the other hand, if the particle is far away from the consensus, its evolution has a stronger exploratory behaviour. While both the agents’ positions and the consensus point evolve in time, it has been proven that all agents eventually reach the same position and that the consensus point $c_\alpha(x_t)$ is a good approximation of x^* [12, 21]. Other variations of the method, such as CBO with anisotropic noise [15], *polarised CBO* [11], or *consensus-based sampling* (CBS) [14] have also been proposed.

In practice, the solution to the SDE above cannot be found exactly. Instead, an *Euler–Maruyama scheme* [41] is used to update the position of the agents. The update is given by

$$x^i \leftarrow x^i - \lambda \Delta t (x^i - c_\alpha(x)) + \sigma \sqrt{\Delta t} \|x^i - c_\alpha(x)\| \xi^i,$$

where $\Delta t > 0$ is the *step size* and $\xi^i \sim \mathcal{N}(0, \text{Id})$ are independent, identically distributed, standard normal random vectors.

As a particle-based family of methods, CBX is conceptually related to other optimisation approaches which take inspiration from biology, like *particle-swarm optimisation* (PSO) [38], from physics, like *simulated annealing* (SA) [31], or from other heuristics [16, 37, 57, 5]. However, unlike many such methods, CBX has been designed to be compatible with rigorous convergence analysis at the mean-field level [the infinite-particle limit, see 33]. Many convergence results have been shown, whether in the original formulation [12, 21], for CBO with anisotropic noise [15, 22], with memory effects [51], with truncated noise [23], for polarised CBO [11], and PSO [35]. The relation between CBO and *stochastic gradient descent* has been recently established by Riedl et al. [52], which suggests a previously unknown yet fundamental connection between derivative-free and gradient-based approaches.

CBX methods have been successfully applied and extended to several different settings, such as constrained optimisation problems [20, 10], multi-objective optimisation [9, 40], saddle-point problems [34], federated learning tasks [13], uncertainty quantification [2], or sampling [14].

3 Statement of need

In general, very few implementations of CBO already exist, and none have been designed with the generality of other CBX methods in mind. Here, we summarise the related software:

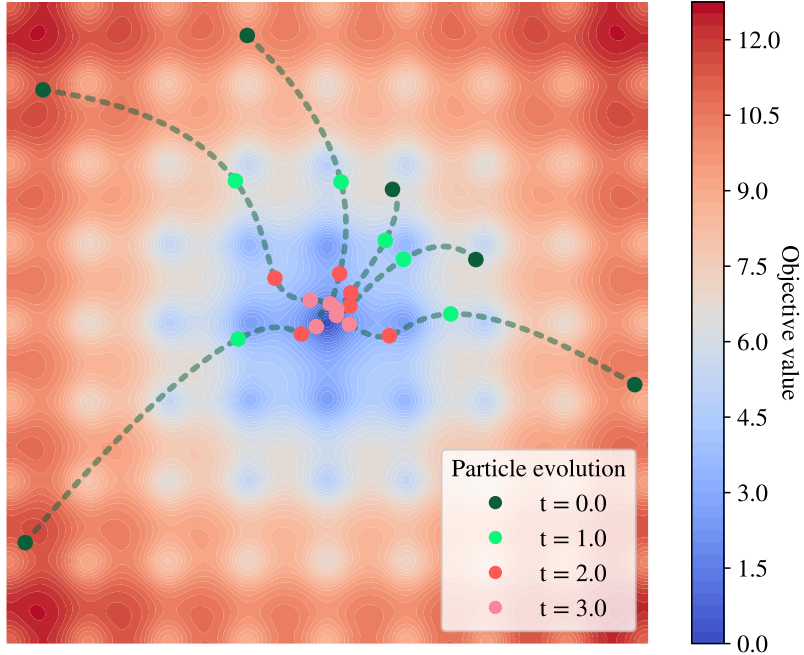


Figure 1: Typical evolution of a CBO method minimising the Ackley function [1].

Regarding Python, we refer to `PyPop7` [19] and `scikit-opt` [27] for a collection of various derivative-free optimisation strategies. For packages connected to Bayesian optimisation, we refer to `Bayes0` [39], `bayesian-optimization` [47], `GPyOpt` [55], `GPflowOpt` [42], `pyGPGO` [36], `PyBADS` [54] and `BoTorch` [4]. Furthermore, CMA-ES [29] was implemented in `pycma` [28]. To the best of our knowledge the connection between consensus-based methods and evolution strategies is not fully understood, and is therefore an interesting future direction. PSO and SA implementations are already available in `PySwarms` [44], `scikit-opt` [27], `DEAP` [24] and `pagmo` [7]. They are widely used by the community and provide a rich framework for the respective methods. However, adjusting these implementations to CBO is not straightforward. The first publicly available Python packages implementing CBX algorithms were given by some of the authors together with collaborators. Tikh and Riedl [56] implement standard CBO [49], and the package `PolarCBO` [53] provides an implementation of polarised CBO [11]. `CBXPy` is a significant extension of the latter, which was tailored to the polarised variant. The code architecture was generalised, which allowed the implementation of the whole CBX family within a common framework.

Regarding Julia, PSO and SA methods are, among others, implemented in `Optim.jl` [46], `Metaheuristics.jl` [43], and `Manopt.jl` [6]. PSO and SA are also included in the meta-library `Optimization.jl` [18], as well as Nelder–Mead, which is a direct search method. The latter is also implemented in `Manopt.jl` [6], which further provides a manifold variant of CMA-ES [17]. One of the authors gave the first specific Julia implementation of standard CBO `Consensus.jl` [3]. That package has now been deprecated in favour of `ConsensusBasedX.jl`, which improves the performance of the CBO implementation with a type-stable and allocation-free implementation. The package also adds a CBS implementation, and overall presents a more general interface that accommodates the wider CBX class of methods.

4 Features

`CBXPy` and `ConsensusBasedX.jl` provide a lightweight and high-level interface. An existing function can be optimised with just one call. Method selection, parameters, different approaches to particle initialisation, and termination criteria can be specified directly through this interface, offering a flexible point of entry for the casual user. Some of the methods provided are standard CBO [49], CBO with mini-batching [15], polarised CBO [11], CBO with memory effects [26, 51], and consensus-based sampling (CBS) [14]. Parallelisation tools

are available.

A more proficient user will benefit from the fully documented interface, which allows the specification of advanced options (e.g., debug output, the noise model, or the numerical approach to the matrix square root of the weighted ensemble covariance matrix). Both libraries offer performance evaluation methods as well as visualisation tools.

Ultimately, a low-level interface (including documentation and full-code examples) is provided. Both libraries have been designed to express common abstractions in the CBX family while allowing customisation. Users can easily implement new CBX methods or modify the behaviour of the existing implementation by strategically overriding certain hooks. The stepping of the methods can also be controlled manually.

4.1 CBXPy



Figure 2: CBXPy logo.

Most of the [CBXPy](#) implementation uses basic Python functionality, and the agents are handled as an array-like structure. For certain specific features, like broadcasting-behaviour, array copying, and index selection, we fall back to the `numpy` implementation [30]. However, it should be noted that an adaptation to other array or tensor libraries like PyTorch [48] is straightforward. Compatibility with the latter enables gradient-free deep learning directly on the GPU, as demonstrated in the documentation.

The library is available on [GitHub](#) and can be installed via `pip`. It is licensed under the MIT license. Below, we provide a short example on how to optimise a function with CBXPy.

```
from cbx.dynamics import CBO          # import the CBO class
f = lambda x: x[0]**2 + x[1]**2      # define the function to minimise
x = CBO(f, d=2).optimize()          # run the optimisation
```

More examples and details on the implementation are available in the [documentation](#).

4.2 ConsensusBasedX.jl



Figure 3: ConsensusBasedX.jl logo.

[ConsensusBasedX.jl](#) has been almost entirely written in native Julia (with the exception of a single call to LAPACK). The code has been developed with performance in mind, thus the critical routines are fully type-stable and allocation-free. A specific tool is provided to benchmark a typical method iteration, which can be used to detect allocations. Through this tool, unit tests are in place to ensure zero allocations in all the provided methods. The benchmarking tool is also available to users, who can use it to test their implementations of f , as well as any new CBX methods.

Basic function minimisation can be performed by running:

```
using ConsensusBasedX                # load the ConsensusBasedX package
f(x) = x[1]^2 + x[2]^2              # define the function to minimise
x = minimise(f, D = 2)              # run the minimisation
```

The library is available on [GitHub](#). It has been registered in the [general Julia registry](#), and therefore it can be installed by running `Jadd ConsensusBasedX`. It is licensed under the MIT license. More examples and full instructions are available in the [documentation](#).

5 Acknowledgements

We thank the Lorentz Center in Leiden for their kind hospitality during the workshop “Purpose-driven particle systems” in Spring 2023, where this work was initiated. RB was supported by the Advanced Grant Nonlocal-CPD (Nonlocal PDEs for Complex Particle Dynamics: Phase Transitions, Patterns and Synchronisation) of the European Research Council Executive Agency (ERC) under the European Union’s Horizon 2020 research and innovation programme (grant agreement No. 883363) and by the EPSRC grant EP/T022132/1 “Spectral element methods for fractional differential equations, with applications in applied analysis and medical imaging”. KR acknowledges support from the German Federal Ministry of Education and Research and the Bavarian State Ministry for Science and the Arts. TR acknowledges support from DESY (Hamburg, Germany), a member of the Helmholtz Association HGF. This research was supported in part through the Maxwell computational resources operated at Deutsches Elektronen-Synchrotron DESY, Hamburg, Germany. UV acknowledges support from the Agence Nationale de la Recherche under grant ANR-23-CE40-0027 (IPSO).

References

- [1] David H. Ackley. *A Connectionist Machine for Genetic Hillclimbing*. Vol. 28. Springer US, 1987. ISBN: 9781461319979. DOI: [10.1007/978-1-4613-1997-9](#).
- [2] Konstantin Althaus, Iason Papaioannou, and Elisabeth Ullmann. *Consensus-based rare event estimation*. 2023. DOI: [10.48550/arXiv.2304.09077](#). arXiv: [2304.09077](#).
- [3] Rafael Bailo. *Consensus.jl*. Version 1.0.0. 2023. DOI: [10.5281/zenodo.7754236](#). URL: <https://github.com/rafaelbailo/Consensus.jl>.
- [4] Maximilian Balandat, Brian Karrer, Daniel R. Jiang, Samuel Daulton, Benjamin Letham, Andrew Gordon Wilson, and Eytan Bakshy. “BoTorch: A Framework for Efficient Monte-Carlo Bayesian Optimization”. In: *Advances in Neural Information Processing Systems 33*. 2020. URL: <http://arxiv.org/abs/1910.06403>.
- [5] Zikri Bayraktar, Muge Komurcu, Jeremy A Bossard, and Douglas H Werner. “The wind driven optimization technique and its application in electromagnetics”. In: *IEEE transactions on antennas and propagation* 61.5 (2013), pp. 2745–2757. DOI: [10.1109/TAP.2013.2238654](#).
- [6] Ronny Bergmann. “Manopt.jl: Optimization on Manifolds in Julia”. In: *Journal of Open Source Software* 7.70 (2022), p. 3866. DOI: [10.21105/joss.03866](#).
- [7] Francesco Biscani, Dario Izzo, and Marcus Mörtens. *esa/pagmo2: pagmo 2.6*. Nov. 2017. DOI: [10.5281/zenodo.1054110](#).
- [8] Ludwig Boltzmann. “Studien über das Gleichgewicht der lebendigen Kraft zwischen bewegten materiellen Punkten”. In: *Wiener Berichte* 58 (1868), pp. 517–560.
- [9] Giacomo Borghi, Michael Herty, and Lorenzo Pareschi. “An adaptive consensus based method for multi-objective optimization with uniform Pareto front approximation”. In: *Applied Mathematics & Optimization* 88.2 (2023), pp. 1–43. DOI: [10.1007/s00245-023-10036-y](#).
- [10] Giacomo Borghi, Michael Herty, and Lorenzo Pareschi. “Constrained consensus-based optimization”. In: *SIAM Journal on Optimization* 33.1 (2023), pp. 211–236. DOI: [10.1137/22M1471304](#).
- [11] Leon Bungert, Tim Roith, and Philipp Wacker. “Polarized consensus-based dynamics for optimization and sampling”. In: *Math. Program.* (May 2024). DOI: [10.1007/s10107-024-02095-y](#).
- [12] J A Carrillo, Young-Pil Choi, Claudia Totzeck, and Oliver Tse. “An analytical framework for consensus-based global optimization method”. In: *Mathematical Models and Methods in Applied Sciences* 28.6 (2018), pp. 1037–1066. ISSN: 0218-2025. DOI: [10.1142/S0218202518500276](#).

-
- [13] J A Carrillo, Nicolas Garcia Trillos, Sixu Li, and Yuhua Zhu. *FedCBO: Reaching Group Consensus in Clustered Federated Learning through Consensus-based Optimization*. 2023. DOI: [10.48550/arXiv.2305.02894](https://doi.org/10.48550/arXiv.2305.02894). arXiv: [2305.02894](https://arxiv.org/abs/2305.02894).
- [14] J A Carrillo, Franca Hoffmann, Andrew M Stuart, and Urbain Vaes. “Consensus-based sampling”. In: *Studies in Applied Mathematics* 148.3 (2022), pp. 1069–1140. DOI: [10.1111/sapm.12470](https://doi.org/10.1111/sapm.12470).
- [15] J A Carrillo, Shi Jin, Lei Li, and Yuhua Zhu. “A consensus-based global optimization method for high dimensional machine learning problems”. In: *ESAIM: Control, Optimisation and Calculus of Variations* 27 (2021), S5. ISSN: 1262-3377. DOI: [10.1051/cocv/2020046](https://doi.org/10.1051/cocv/2020046).
- [16] B. Chandra Mohan and R. Baskaran. “A survey: Ant Colony Optimization based recent research and implementation on several engineering domain”. In: *Expert Systems with Applications* 39.4 (Mar. 2012), pp. 4618–4627. ISSN: 0957-4174. DOI: [10.1016/j.eswa.2011.09.076](https://doi.org/10.1016/j.eswa.2011.09.076).
- [17] Sebastian Colutto, Florian Fruhauf, Matthias Fuchs, and Otmar Scherzer. “The CMA-ES on Riemannian manifolds to reconstruct shapes in 3-D voxel images”. In: *IEEE Transactions on Evolutionary Computation* 14.2 (2009), pp. 227–245. DOI: [10.1109/TEVC.2009.2029567](https://doi.org/10.1109/TEVC.2009.2029567).
- [18] Vaibhav Kumar Dixit and Christopher Rackauckas. *Optimization.jl: A Unified Optimization Package*. 2023. DOI: [10.5281/ZENODO.7738525](https://doi.org/10.5281/ZENODO.7738525).
- [19] Qiqi Duan, Guochen Zhou, Chang Shao, Zhuowei Wang, Mingyang Feng, Yijun Yang, Qi Zhao, and Yuhui Shi. *PyPop7: A Pure-Python Library for Population-Based Black-Box Optimization*. 2022. DOI: [10.48550/arXiv.2212.05652](https://doi.org/10.48550/arXiv.2212.05652). arXiv: [2212.05652](https://arxiv.org/abs/2212.05652).
- [20] Massimo Fornasier, Hui Huang, Lorenzo Pareschi, and Philippe Sünnen. “Consensus-based optimization on the sphere: convergence to global minimizers and machine learning”. In: *Journal of Machine Learning Research (JMLR)* 22 (2021), Paper No. 237, 55. ISSN: 1532-4435.
- [21] Massimo Fornasier, Timo Klock, and Konstantin Riedl. *Consensus-based optimization methods converge globally*. 2021. DOI: [10.48550/arXiv.2103.15130](https://doi.org/10.48550/arXiv.2103.15130). arXiv: [2103.15130](https://arxiv.org/abs/2103.15130).
- [22] Massimo Fornasier, Timo Klock, and Konstantin Riedl. “Convergence of Anisotropic Consensus-Based Optimization in Mean-Field Law”. In: *Applications of Evolutionary Computation*. Ed. by Juan Luis Jiménez Laredo, J. Ignacio Hidalgo, and Kehinde Oluwatoyin Babaagba. Cham: Springer, 2022, pp. 738–754. ISBN: 978-3-031-02462-7. DOI: [10.1007/978-3-031-02462-7_46](https://doi.org/10.1007/978-3-031-02462-7_46).
- [23] Massimo Fornasier, Peter Richtárik, Konstantin Riedl, and Lukang Sun. “Consensus-based optimization with truncated noise”. In: *European Journal of Applied Mathematics* (2024), pp. 1–24. DOI: [10.1017/S095679252400007X](https://doi.org/10.1017/S095679252400007X).
- [24] Félix-Antoine Fortin, François-Michel De Rainville, Marc-André Gardner, Marc Parizeau, and Christian Gagné. “DEAP: Evolutionary Algorithms Made Easy”. In: *Journal of Machine Learning Research* 13 (July 2012), pp. 2171–2175.
- [25] Milton Friedman and Lo J Savage. “Planning experiments seeking maxima”. In: *Techniques of statistical analysis* (1947), pp. 365–372.
- [26] Sara Grassi and Lorenzo Pareschi. “From particle swarm optimization to consensus based optimization: stochastic modeling and mean-field limit”. In: *Mathematical Models and Methods in Applied Sciences* 31.8 (2021), pp. 1625–1657. ISSN: 0218-2025. DOI: [10.1142/S0218202521500342](https://doi.org/10.1142/S0218202521500342).
- [27] Fei Guo. *scikit-opt*. 2021. URL: <https://github.com/guofei9987/scikit-opt>.
- [28] Nikolaus Hansen, Youhei Akimoto, and Petr Baudis. *CMA-ES/pycma on GitHub*. Zenodo, DOI:10.5281/zenodo.2559634. Feb. 2019. DOI: [10.5281/zenodo.2559634](https://doi.org/10.5281/zenodo.2559634). URL: [10.5281/zenodo.2559634](https://doi.org/10.5281/zenodo.2559634).
- [29] Nikolaus Hansen and Andreas Ostermeier. “Adapting arbitrary normal mutation distributions in evolution strategies: The covariance matrix adaptation”. In: *Proceedings of IEEE international conference on evolutionary computation*. IEEE. 1996, pp. 312–317. DOI: [10.1109/ICEC.1996.542381](https://doi.org/10.1109/ICEC.1996.542381).

-
- [30] Charles R. Harris, K. Jarrod Millman, Stéfan J. van der Walt, Ralf Gommers, Pauli Virtanen, David Cournapeau, Eric Wieser, Julian Taylor, Sebastian Berg, Nathaniel J. Smith, Robert Kern, Matti Picus, Stephan Hoyer, Marten H. van Kerkwijk, Matthew Brett, Allan Haldane, Jaime Fernández del Río, Mark Wiebe, Pearu Peterson, Pierre Gérard-Marchant, Kevin Sheppard, Tyler Reddy, Warren Weckesser, Hameer Abbasi, Christoph Gohlke, and Travis E. Oliphant. “Array programming with NumPy”. In: *Nature* 585.7825 (Sept. 2020), pp. 357–362. DOI: [10.1038/s41586-020-2649-2](https://doi.org/10.1038/s41586-020-2649-2).
- [31] Darrall Henderson, Sheldon H Jacobson, and Alan W Johnson. “The theory and practice of simulated annealing”. In: *Handbook of metaheuristics* (2003), pp. 287–319. DOI: [10.1007/0-306-48056-5_10](https://doi.org/10.1007/0-306-48056-5_10).
- [32] Robert Hooke and Terry A Jeeves. ““Direct Search” Solution of Numerical and Statistical Problems”. In: *Journal of the ACM (JACM)* 8.2 (1961), pp. 212–229. DOI: [10.1145/321062.321069](https://doi.org/10.1145/321062.321069).
- [33] Hui Huang and Jinniao Qiu. “On the mean-field limit for the consensus-based optimization”. In: *Mathematical Methods in the Applied Sciences* 45.12 (2022), pp. 7814–7831. ISSN: 0170-4214. DOI: [10.1002/mma.8279](https://doi.org/10.1002/mma.8279).
- [34] Hui Huang, Jinniao Qiu, and Konstantin Riedl. “Consensus-Based Optimization for Saddle Point Problems”. In: *SIAM Journal on Control and Optimization* 62.2 (2024), pp. 1093–1121. DOI: [10.1137/22M1543367](https://doi.org/10.1137/22M1543367).
- [35] Hui Huang, Jinniao Qiu, and Konstantin Riedl. “On the global convergence of particle swarm optimization methods”. In: *Applied Mathematics & Optimization* 88.2 (2023), p. 30. DOI: [10.1007/s00245-023-09983-3](https://doi.org/10.1007/s00245-023-09983-3).
- [36] José Jiménez and Josep Ginebra. “pyGPGO: Bayesian Optimization for Python”. In: *Journal of Open Source Software* 2.19 (2017), p. 431. DOI: [10.21105/joss.00431](https://doi.org/10.21105/joss.00431). URL: [10.21105/joss.00431](https://doi.org/10.21105/joss.00431).
- [37] Dervis Karaboga, Beyza Gorkemli, Celal Ozturk, and Nurhan Karaboga. “A comprehensive survey: artificial bee colony (ABC) algorithm and applications”. In: *Artificial intelligence review* 42.1 (Mar. 2012), pp. 21–57. ISSN: 1573-7462. DOI: [10.1007/s10462-012-9328-0](https://doi.org/10.1007/s10462-012-9328-0).
- [38] James Kennedy and Russell Eberhart. “Particle swarm optimization”. In: *Proceedings of ICNN’95-international conference on neural networks*. Vol. 4. IEEE, 1995, pp. 1942–1948. DOI: [10.1109/ICNN.1995.488968](https://doi.org/10.1109/ICNN.1995.488968).
- [39] Jungtaek Kim and Seungjin Choi. “BayesO: A Bayesian optimization framework in Python”. In: *Journal of Open Source Software* 8.90 (2023), p. 5320. DOI: [10.21105/joss.05320](https://doi.org/10.21105/joss.05320).
- [40] Kathrin Klamroth, Michael Stiglmayr, and Claudia Totzeck. “Consensus-based optimization for multi-objective problems: a multi-swarm approach”. In: *Journal of Global Optimization* (Feb. 2024). ISSN: 1573-2916. DOI: [10.1007/s10898-024-01369-1](https://doi.org/10.1007/s10898-024-01369-1).
- [41] Peter E. Kloeden and Eckhard Platen. *Numerical Solution of Stochastic Differential Equations*. Springer Berlin Heidelberg, 1992. ISBN: 9783662126165. DOI: [10.1007/978-3-662-12616-5](https://doi.org/10.1007/978-3-662-12616-5).
- [42] Nicolas Knudde, Joachim van der Herten, Tom Dhaene, and Ivo Couckuyt. *GPflowOpt: A Bayesian Optimization Library using TensorFlow*. 2017. DOI: [10.48550/arXiv.1711.03845](https://doi.org/10.48550/arXiv.1711.03845). arXiv: [1711.03845](https://arxiv.org/abs/1711.03845). URL: <https://arxiv.org/abs/1711.03845>.
- [43] Jesús-Adolfo Mejía-de-Dios and Efrén Mezura-Montes. “Metaheuristics: A Julia package for single-and multi-objective optimization”. In: *Journal of Open Source Software* 7.78 (Oct. 2022), p. 4723. ISSN: 2475-9066. DOI: [10.21105/joss.04723](https://doi.org/10.21105/joss.04723).
- [44] Lester James Miranda. “PySwarms: a research toolkit for Particle Swarm Optimization in Python”. In: *The Journal of Open Source Software* 3.21 (Jan. 2018), p. 433. ISSN: 2475-9066. DOI: [10.21105/joss.00433](https://doi.org/10.21105/joss.00433).
- [45] J. Moćkus. “On Bayesian Methods for Seeking the Extremum”. In: *Optimization Techniques IFIP Technical Conference*. Springer Berlin Heidelberg, 1975, pp. 400–404. ISBN: 9783662385272. DOI: [10.1007/978-3-662-38527-2_55](https://doi.org/10.1007/978-3-662-38527-2_55).
- [46] P Mogensen and A Riseth. “Optim: A mathematical optimization package for Julia”. In: *Journal of Open Source Software* 3.24 (Apr. 2018), p. 615. ISSN: 2475-9066. DOI: [10.21105/joss.00615](https://doi.org/10.21105/joss.00615).

-
- [47] Fernando Nogueira. *Bayesian Optimization: Open source constrained global optimization tool for Python*. 2014–. URL: <https://github.com/bayesian-optimization/BayesianOptimization>.
- [48] Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, et al. “Pytorch: An imperative style, high-performance deep learning library”. In: *Advances in neural information processing systems* 32 (2019).
- [49] René Pinnau, Claudia Totzeck, Oliver Tse, and Stephan Martin. “A consensus-based model for global optimization and its mean-field limit”. In: *Mathematical Models and Methods in Applied Sciences* 27.01 (Jan. 2017), pp. 183–204. ISSN: 1793-6314. DOI: [10.1142/s0218202517400061](https://doi.org/10.1142/s0218202517400061).
- [50] LA Rastrigin. “The convergence of the random search method in the extremal control of a many parameter system”. In: *Automaton & Remote Control* 24 (1963), pp. 1337–1342.
- [51] Konstantin Riedl. “Leveraging memory effects and gradient information in consensus-based optimisation: On global convergence in mean-field law”. In: *European Journal of Applied Mathematics* (2023), pp. 1–32. DOI: [10.1017/S0956792523000293](https://doi.org/10.1017/S0956792523000293).
- [52] Konstantin Riedl, Timo Klock, Carina Geldhauser, and Massimo Fornasier. *Gradient is All You Need?* 2023. DOI: [10.48550/arXiv.2306.09778](https://doi.org/10.48550/arXiv.2306.09778). arXiv: [2306.09778](https://arxiv.org/abs/2306.09778).
- [53] Tim Roith, Leon Bungert, and Philipp Wacker. *polarcbo*. Version 1.0.1. 2023. URL: <https://github.com/PdIPS/polarcbo>.
- [54] Gurjeet Sangra Singh and Luigi Acerbi. “PyBADs: Fast and robust black-box optimization in Python”. In: *Journal of Open Source Software* 9.94 (2024), p. 5694. DOI: [10.21105/joss.05694](https://doi.org/10.21105/joss.05694). URL: [10.21105/joss.05694](https://doi.org/10.21105/joss.05694).
- [55] The GPyOpt authors. *GPyOpt: A Bayesian Optimization framework in Python*. <http://github.com/SheffieldML/GPyOpt>. 2016.
- [56] Igor Tikh and Konstantin Riedl. *CBO-in-python*. Version 1.0. 2022. URL: <https://github.com/Igor-Tikh/cbo-in-python>.
- [57] Xin-She Yang. “Firefly algorithms for multimodal optimization”. In: *Lecture Notes in Computer Science*. Springer Berlin Heidelberg, 2009, pp. 169–178. ISBN: 9783642049446. DOI: [10.1007/978-3-642-04944-6_14](https://doi.org/10.1007/978-3-642-04944-6_14).