

Computational Sentence-level Metrics for Predicting Comprehension of Entire Sentence by Humans

Kun Sun

University of Tübingen
kun.sun@uni-tuebingen.de

Rong Wang

University of Stuttgart, Germany
rongw.de@gmail.com

Abstract

The majority of research in computational psycholinguistics has concentrated on the processing of words. This study introduces innovative methods for computing sentence-level metrics using multilingual large language models. The metrics developed—*sentence surprisal* and *sentence relevance*—are tested and compared to validate whether they can predict how humans comprehend sentences as a whole across languages. These metrics offer significant interpretability and achieve high accuracy in predicting human sentence reading speed. Our results indicate that these computational sentence-level metrics are exceptionally effective at predicting and elucidating the processing difficulties encountered by readers in comprehending sentences as a whole across a variety of languages. Their impressive performance and generalization capabilities provide a promising avenue for future research in integrating LLMs and cognitive science.

1 Introduction

In the study of how humans comprehend and process language, computational models play a crucial role in understanding the connections between linguistic features and behavior/neural signals. These models can be used to make linguistic predictions, model language features, or specify the processing steps that can be quantitatively compared to behavioral and neural signals. With the abundance of experimental data available, researchers have developed several computational models/metrics to simulate how humans comprehend a given linguistic unit within a given context.

One such model measures the information communicated by any particular linguistic component, whether it is a phoneme, a word, or an entire utterance, when considered within its left context. This method is commonly known as **surprisal** (Crocker et al., 2016). **Word surprisal** estimates the information among words in context, and this metric has

proven to be influential in predicting human word processing (Hale, 2001; Levy, 2008). In contrast to **expectation-based** models, **memory-based** models rely on a memory mechanism to store and retrieve information from previous input (e.g., ACT-R (R Anderson, 1975, short-term memory (Baddeley, 2010))). One metric used to estimate language processing involves assessing the semantic relation with other words, such as through **semantic similarity** (Mitchell and Lapata, 2010; Hollis and Westbury, 2016).

Word surprisal, an expectation-based metric, provides empirical supports for the position that words are more difficult to process when they are harder to anticipate from preceding context (Demberg and Keller, 2008; Smith and Levy, 2013; Hale, 2016; Shain et al., 2020). However, recent work has shown that surprisal computed by neural language models tends to underpredict human reading times of both targeted constructions and naturalistic text (Van Schijndel and Linzen, 2021; Arehalli et al., 2022; Oh and Schuler, 2023). *Does this imply that surprisal has lost its efficacy in predicting reading time?* Perhaps it is time to reevaluate this conventional metric. On the other hand, the memory-based theory posits processing difficulty arises from storing, retrieving, and integrating previous context with new input. For example, while the dependency-locality model explains certain syntactic structures processing (Gibson, 1998; Vasishth and Lewis, 2006), it has not been as effective as surprisal in predicting humans' contextual word processing. Another memory-based metric, semantic similarity, gauges the similarity between the meanings of two words or phrases and is effective in predicting how words are processed. Contextual semantic similarity, which was developed from semantic similarity, concerns the semantic relatedness between a target word and its contextual words. Substantial empirical evidence supports the effects of word-level semantic similarity in language com-

prehension (Roland et al., 2012; Broderick et al., 2018; Sun et al., 2023a; Sun, 2023).

Although the related studies have claimed that some given computational metrics are predictive of sentence processing by humans, the fact is that these metrics can only predict how words are processed in a given context (such as word surprisal) (Hale, 2016; De Varda and Marelli, 2023; Gotlieb Wilcox et al., 2023). Focusing solely on word processing may not truly mirror the real-world human experience of comprehending sentences. In other words, we should also explore how humans comprehend entire sentences, rather than merely the individual words within them. It is necessary to broaden our understanding of sentence comprehension, placing human sentence processing within a larger context: discourse. Computational sentence-level metrics (such as sentence probability, sentence semantic relevance) are potentially useful in understanding entire sentence comprehension and processing by humans. For instance, the metric of contextual sentence-level relevance computed by Transformer-based language models could predict how Chinese natives comprehend sentences as a whole (Sun and Wang, 2022). A similar method can be applied in investigating sentence comprehension in other languages. In short, we can enhance our analysis from word-level metrics to sentence-level metrics, exploring their predictability for the processing of a sentence within a discourse-level context.

During naturalistic discourse reading, a number of factors may have an effect on sentence processing, including expectations concerning the next sentence based on the preceding context, and memory integrated with new input based on semantic relatedness with the context. Surprisal reflects the amount of information conveyed by a linguistic unit and its predictability, while semantic relevance represents the relatedness of a linguistic unit to the other units. Both factors could independently influence processing difficulty, but they may also interact, creating complex processing situations. The study aims to compute these metrics at the sentence level and test hypotheses about their nature and understand their potentials in human sentence comprehension.

With the advent of deep learning techniques and the availability of massive datasets, there is now an opportunity to develop and compute such sentence-level metrics. By using multi-lingual large lan-

guage models (LLMs), we can estimate the probabilities of the next sentence (**sentence surprisal**) or compute semantic relevance among sentences (**sentence relevance**). These sentence-level metrics we proposed are expected to predict how humans comprehend and process sentence as a whole. Because of sentence length and human memory-stored limit, we consider a limited number of surrounding sentences as the context in calculating contextual information and further incorporate the contextual information in our metrics. The method is “attention-aware” approach because it works as effectively as the attention mechanism in Transformer (Vaswani et al., 2017) in processing contextual information.

We plan to apply these computational metrics to test their predictability in a number of languages rather than in English. Fortunately, such datasets and computational tools are available. For instance, existing multi-lingual LLMs are highly capable of processing and understanding text in multiple languages, further helping compute sentence-level metrics we propose. There are also multilingual databases on language comprehension and processing. For instance, the Multilingual Eye-movement Corpus (MECO) is a collection of eye-tracking data that has been collected from participants reading texts in 13 languages (Siegelman et al., 2022). This is an ideal testing dataset for our research. The present study aims to compute sentence-level computational metrics and apply them to predicting sentence reading speed. By employing these metrics, we expect to obtain more accurate predictions of how sentences are processed and comprehended holistically. To evaluate the generalizability of our approach to various languages, we will undertake a multi-lingual investigation.

2 Related Work

Word surprisal, the negative logarithm of a word’s probability in left context, is effectively used in testing expectation-based theories and predicting language processing (Hale, 2016). This metric signifies that predictable words require less cognitive effort to process. However, it remains an open question: which context aspects - lexical, syntactic, semantic, or conceptual - facilitate prediction or integration. While word surprisal accounts for the influence of the left context, this context is confined to a single sentence. Word surprisal has primarily been used to predict individual word process-

ing times, such as the duration of reading a word. However, it falls short in predicting sentence-level measures, such as overall reading speed. Therefore, our goal is to develop metrics that go beyond within-sentence analysis to accurately predict reading speed. As the language models developed so quickly, the methods for calculating word probabilities have been revolutionized in the transition from n-gram to Transformer (Wolf et al., 2020). For instance, recently deep-learning models have dominated NLP tasks and LLMs have been used as models for calculating the processing difficulty (Goodkind and Bicknell, 2018; Wilcox et al., 2020; Schrimpf et al., 2021). The recent LLMs are effective to compute the probabilities of the next sentence in context. Moreover, “surprisal” is characterized as the negative logarithm of the probability of an event, and surprisal can be applied across different linguistic levels, including sentences, discourse, or phonemes (Venhuizen et al., 2019; Pimentel et al., 2021; Gwilliams and Davis, 2022). Provided we have sufficient computational resources, we can accurately calculate sentence-level surprisals for multiple languages.

Moreover, some effective methods have been proposed for computing semantic relevance among words within a sentence. The new approach involves integrating contextual information using the attention-aware method, resulting in more powerful contextual semantic relevance (Sun et al., 2023a; Sun et al., 2023b). However, we believe that the similar methods can be extended and modified to process entire sentences rather than merely words. By employing an “attention-aware” approach, we can calculate the semantic relevance among sentences, enabling us to measure the extent to which a target sentence is semantically connected to its neighboring sentences within the discourse.

Reading difficulties stem from sources such as word-level factors, syntactic structure, and sentence-level elements. While context significantly affects sentence processing, effective computational metrics are needed to evaluate this. Sentence comprehension involves the mental processes when understanding language utterances, significantly influenced by context and other factors. Although studies have examined various aspects of comprehension such as word processing and syntactic integration (Carpenter et al., 1995; Kamide, 2008; Altmann and Mirković, 2009; Rohde, 2002; Hale, 2016; Gibson, 1998; McRae and Matsuki,

2013), there is a dearth of computational methods to measure context impact and research on comprehending sentences as a whole. This study aims to address this gap by developing computational sentence-level metrics for evaluating entire sentences across languages.

Specifically, entire sentence comprehension and processing may be influenced by factors like sentence expectations from previous context and memory integration based on semantic relatedness. Word-level surprisal and semantic relevance have been shown to independently affect processing words in context. Words that are both semantically relevant and surprising may create more complex processing situations, requiring more cognitive resources. This study aims to explore whether sentence-level surprisal and semantic relevance are interactive in processing sentences as a whole. Moreover, research on computational approaches to cognitive sciences has predominantly focused on the English language, leading to a lack of investigation in other languages to test the generalizability of findings on surprisal prediction effectiveness (Blasi et al., 2022). It is essential to test hypotheses in multiple languages to enable cross-lingual **generalizations** using computational models or metrics.

3 Materials and Methods

3.1 Testing datasets

Multilingual databases facilitate cost-effective and reliable cognitive and neural language testing. The Multilingual Eye-tracking Corpus (MECO) is particularly useful due to its diverse range of 13 languages and eye-tracking data indicating cognitive effort in processing (Siegelman et al., 2022). Each language’s participants read 12 encyclopedia entries of 2000 tokens, resulting in 36000 tokens in total. These entries were similarly complex across languages and generated about 70,000 to 80,000 eye-tracking data points per language. MECO was chosen for its language diversity, large native speaker counts, and ample eye-tracking data. **Reading speed (or rate)** has been extensively explored, typically employing text or individual sentence as the unit of interest (Miller and Coleman, 1971; Carver, 1976; Biancarosa, 2005; Brysbaert, 2019; Siegelman et al., 2022).

This study focuses on **sentence reading speed** (= *the number of words in this sentence / total fixation duration of a sentence*) - **word number per second (for a sentence or text)**. When the reading

speed is low, readers use more time to process this sentence. In contrast, a higher sentence reading speed indicates that less time is used to process every word for this sentence. While reading speed is not a direct oculomotor measure, it is influenced by oculomotor factors such as fixation duration, saccade durations, and the tendency to skip words. Reading speed is interconnected with these oculomotor measures, as they collectively contribute to how quickly and efficiently one can read and understand a sentence or text. Fixation duration for word merely represents the difficulty for an individual word. In contrast, the reading speed is considered as the **overall difficulty when readers comprehend a sentence/text as a whole**. While reading speed measures the number of words processed per minute or second across sentences, word reading duration assesses the processing difficulty of a single word. As these measures are fundamentally different, word surprisal predicts the processing of individual words and does not extend to sentence-level processing (More are seen in **Appendix A**). We need to figure out practical sentence-level metrics to estimate reading speed.

3.2 Computing sentence surprisal

We employed two multilingual LLMs: m-BERT and mGPT to compute sentence surprisal. Sentence surprisal is the negative logarithm of next sentence probability ($-\log(p(\text{sentence}|\text{left context}))$), which is similar to word surprisal. Multi-lingual BERT (m-BERT) (Devlin et al., 2018) can be employed to compute word-level or sentence-level surprisal for various languages. BERT, a masked language model, has good performance in a number of NLP tasks (Salazar et al., 2019; Kalyan et al., 2021), and can be used to estimate next word probabilities. We used the state-of-the-art BERT model (i.e., multilingual-bert-uncased) because it can be consistently applied in different languages in order to compute word surprisal. However, it seems a little difficult to use it to compute sentence probability immediately using m-BERT. Fortunately, we can take some strategies to allow m-BERT to approximate next sentence probabilities. For instance, we gauged the joint probability of an entire sentence conditioned on its preceding context. This is achieved by using the chain rule of probability, breaking the sentence into individual tokens, and computing the probability of each token given all preceding tokens (and the context).

Moreover, GPT is essentially an autoregressive model based on the Transformer architecture, trained on a language modeling task, where the objective is to predict the next word in a sequence given the preceding words. The model learns to assign probabilities to words based on the context. The method of chain rule can be introduced in applying mGPT to compute sentence surprisal (Shli-azhko et al., 2022). The only difference is that GPT employs the language modeling to compute word probability, but BERT uses masked language model to calculate word probability.

To compute sentence surprisal, we also proposed the other methods to compute sentence surprisal. The three methods are summarized as follows: the first one is to use **chain rule (CR)**, which was mentioned above. Sentence surprisal is calculated by tokenizing a sentence into individual elements and computing the joint probability of the sentence given a context. This is done by multiplying the conditional probabilities of each token given its preceding tokens and the context, applying the chain rule of probability to language sequences. The method can be computed based on either m-BERT or mGPT. The second method is to use “next sentence prediction” (NSP) mechanism in m-BERT to compute sentence surprisal. Third, sentence surprisal is also quantified by computing the **Negative Log-Likelihood (NLL)** of the sentence when conditioned on its context. NLL is used as a loss function to measure how well the model’s predictions align with the actual data. For a given sequence of tokens, NLL is a measure of how surprised the model is by the actual sequence. The details on the three methods are seen in **Appendices B & C**.

Overall, we employed three methods for computing sentence surprisal, utilizing two multilingual LLMs: m-BERT and mGPT. “Sentence surprisal” quantifies **the level of unpredictability or information associated with encountering a given sentence**. The CR and the NLL approach were applied to both LLMs for this purpose. In contrast, the NSP method was exclusively implemented on m-BERT. The methods and models are shown in the **Panel A** of Fig. 1.

3.3 Computing attention-aware sentence relevance

This section elaborates on the computation of sentence semantic relevance. Consider a window comprising four sentences, as depicted in **Panel B** of

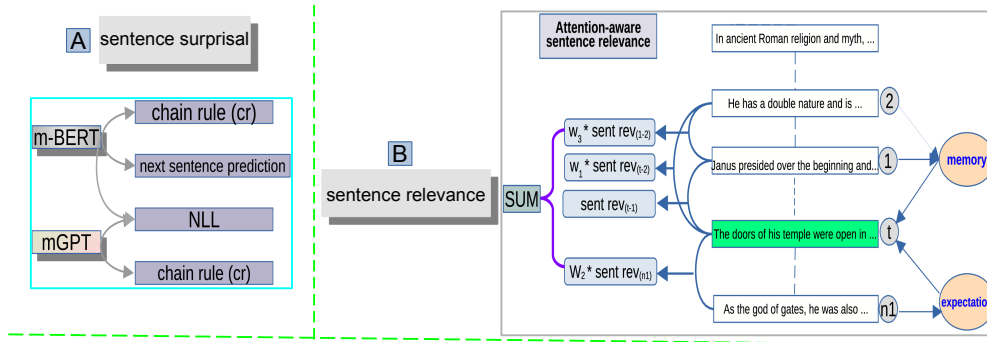


Figure 1: The computational methods in the present study

Fig. 1, where the objective is to evaluate the semantic relationship of the target sentence with the adjacent three sentences within a window. The computation unfolds in two primary steps. Initially, embeddings for each sentence within the window are generated using either m-BERT or mGPT. Subsequently, the application of cosine similarity to the sentence embeddings derived from m-BERT or mGPT serves as a conventional approach to ascertain the semantic similarity between any pair of sentences, as detailed in **Appendix D**. Nonetheless, this step is to obtain the relevance of two sentences in this window. Our objective, however, is to compute the semantic relatedness between a target sentence and its contextual sentences, which is another sentence-level metric.

Upon calculating the semantic similarity values for any pair of sentences within this window, we employ an “attention-aware” approach to process the four similarity values. The “attention-aware” approach has been successfully applied in computing word-level metrics for predicting reading (Sun et al., 2023a; Sun et al., 2023b). Specifically, we look at the preceding two sentences and the following sentence. Subsequently, we obtain four cosine similarity values for these sentences. Each value is then weighted differently based on its distance from the target sentence. It is formalized as (1).

$$atten_sentrev = similarity_{(s,c)} \cdot W_{(s,c)} \quad (1)$$

Here “W” represents weights according to the positional distance between the target sentence (“s”) and its contextual sentences (“c”). The range of weights is between 1/2 and 1/3 (i.e. the neighboring sentence is multiplied by 1/2, but the non-neighboring one is by 1/3.). As the distance from the target sentence is large, the weight is given with smaller one. The weights used for attention-aware metrics mimic human forgetting mechanism, a representation of memory retention decline over

time (e.g., the mean decline rate is 1/3 for three days), where retained information halves after each day within a span of several days (Loftus, 1985), shown in Fig. 4 (see **Appendix D**). Unlike the attention weights in transformers, which are computed via neural networks and are not easily interpretable. Each similarity value is multiplied by its corresponding weight, and the results are then aggregated to produce a single value. This value signifies **the semantic relevance of the target sentence within its context** (i.e., “sentence relevance”). Leveraging various sentence embeddings created by m-BERT and mGPT, we are able to derive two distinct metrics of “sentence relevance” for the identical target sentence within its specific context. The computation is shown as **Panel B** of Fig. 1.

The method proposed for computing attention-aware metrics was not involved in introducing attention layers in Transformer. The term “attention-aware” sounds similar to attention because the method works as well as attention in incorporating contextual information. The “attention-aware” approach can work as a memory agent (see **Appendix D**). This approach considers both preceding and following sentences as potential sources of contextual information. The relationship between these contextual sentences and the target sentence is then weighted based on their positional distance and aggregated to create a comprehensive measure of semantic relevance within the discourse. This approach is highly **explainable** from linguistic and cognitive perspectives. Table 1 provides an overview of the metrics in our analysis.

Table 1: The models and statistical analysis

Method	Measure	Equation	Statistical Analysis
	chain rule (CR),		
sentence surprisal	next sentence prediction (NSP), negative loglikelihood (NLL)	$-\log_2 p(\text{sentence} \mid \text{left context})$	GAMM
attention-aware	sentence semantic relevance	$\sum C_{(s,c)} \cdot W_{(s,c)}$	GAMM

3.4 Statistical method and model comparison

We employed Generalized Additive Mixed Models (GAMMs) (Wood, 2017) to investigate the predictive power of sentence reading speed. The present study included these control predictors (mean word length/frequency for a sentence) and random variable (e.g., “languages”, “participants”). Including these variables is crucial for achieving optimal GAMM fitting.

The performance of GAMM models was evaluated using difference in AIC (Akaike’s Information Criterion) (i.e., ΔAIC) between a base GAMM and a full GAMM served as a measure to assess the effectiveness of a metric. A smaller ΔAIC value indicates that the measure we are interested in estimates provide more accurate predictions of the response variable compared to the baseline model. The difference in AIC between a base GAMM and a full GAMM served as a measure to assess the effectiveness of a computational measure. A smaller (negative) ΔAIC value indicates that the measure we are interested in estimates provide more accurate predictions of fixation duration compared to the baseline model. The more details on statistical methods can be seen in **Appendix E**.

4 Results

4.1 Overall performance

We fitted eight GAMM models to analyze these sentence-level metrics as the main predictors of the response variable (*sentence reading speed*). The GAMM models also include *mean word length* and *mean word frequency*¹, and *participant* as a random effect. This is what an optimal GAMM formula looks like: $reading_speed \sim s(mean_word_length), s(mean_log_wordfreq) + s(computational\ metric, language, by = languages) + languages + s(participant, bs = "re"), data = data$ (here, s = smooth; ‘ $by = languages$ ’, it facilitates the inclusion of responses at each language level in the model as distinct terms. Concurrently, smooths by language are employed to capture and model the nuanced variations around these language-specific responses; re = random effect, random slope adjusting the slope of the trend of a numeric predictor). The base

¹“mean word length” refers to the average length of all words within a sentence (i.e., *the sum of length of all words / word number*), while “mean word frequency” represents the average of the sum of normalized frequencies for all words within a sentence (i.e., *the sum of normalized word frequencies / word number*). The word frequency information across languages is obtained from [https://opus.nlpl.eu/index.php\(Lison and Tiedemann, 2016\)](https://opus.nlpl.eu/index.php(Lison and Tiedemann, 2016))

GAMM fitting is depicted as: $reading_speed \sim s(mean_word_length), s(mean_log_wordfreq) + languages + s(participant, bs = "re")$. The ΔAIC represents the difference in AIC values between a full model and a base model.

First, we examine whether a variable is significant or not. When a variable in GAMM is significant, its p -value is smaller than 0.01. These GAMM fittings show that the control predictors, namely *mean word length* and *mean word frequency*, are consistently significant across all cases. This indicates that the comprehension of sentences in the context of naturalistic discourse reading is significantly shaped by both the average length and frequency of the words employed. Specifically, the *mean word length* exerts a negative influence on the speed of sentence reading; in essence, sentences composed of longer words are read more slowly. Conversely, the *mean word frequency* positively impacts reading speed, meaning that sentences containing words that are more frequently used facilitate faster reading. Therefore, when the average frequency of words in a sentence is high, it enables readers to process the text more swiftly. The effects of word length and frequency are particularly notable in word processing during naturalistic discourse reading. As such, sentence processing and word processing share a great deal of similarity. GAMM fitting results also show that the majority of the metrics we proposed to compute by m-BERT or mGPT are capable of predicting the reading speed data quite well. The random effect of the *participant* is significant in all GAMM models.

We further compared the performance of the GAMM fittings with different metrics. Table 2 presents the results on ΔAIC for comparing these GAMM fittings. Lower ΔAIC value indicates a better GAMM fitting. It also suggests that the computational metric performs better than others. The basis for comparison is the consistent data point numbers ($n = 34571$) and identical elements in each GAMM fitting. As illustrated in Table 2, the result reveals that sentence surprisal, as calculated using three distinct methodologies — namely, CR, NLL, and NSP — proves to be effective in predicting reading speed. Among the evaluated metrics of sentence surprisal, the performance of m-BERT, when applying the chain rule, stands out as the most effective. Conversely, sentence surprisal calculations using mGPT with NLL were found to be ineffective in predicting reading speed. We therefore skipped

Table 2: Δ AIC for GAMM fittings with different computational measures on the MECO (n = 34571) (CR = Chain Rule; NLL = Negative Log-Likelihood; NSP = Next Sentence Prediction)

GAMM fittings (sentence reading speed)	Δ AIC
sentence surprisal (m-BERT-CR)	-670.06
sentence surprisal (m-BERT-NSP)	-119.94
sentence surprisal (m-BERT-NLL)	-506.85
sentence surprisal (mGPT-CR)	-393.56
attention-aware sentence relevance (m-BERT)	-445.86
attention-aware sentence relevance (mGPT)	-294.1
sentence surprisal (m-BERT-CR), sentence relevance (m-BERT)	-1397.6

the result of mGPT with NLL. The computation of sentence relevance, whether through m-BERT or mGPT, demonstrates viability in prediction accuracy. Notably, the integration of both sentence surprisal and sentence relevance into the GAMM significantly enhances predictive performance, surpassing the results achieved when these metrics are applied independently.

The overall partial effects of the metrics of our interest (excluding the “languages” factor) in GAMM fittings are shown in Fig. 2. The results reveal that sentence surprisal (by m-BERT and CR basically adversely affects reading speed across 13 languages, indicating that a higher level of surprisal for a sentence is associated with slower/lower reading speed. On the other hand, sentence relevance (by m-BERT) positively influences reading speed across these languages, suggesting that greater relevance for a sentence facilitates higher/faster reading speed.

4.2 Performance in individual languages

The results from fitting the GAMM offer valuable insights into the importance of the variables considered. This section focuses on the performance of these metrics in each language (among 13 languages) using the similar GAMM analysis. The optimal GAMM for each language is specified as follows: $reading_speed \sim s(mean_word_length), s(mean_log_wordfreq) + s(sentence_surprisal) + s(sentence_relevance) + s(participant, bs="re"), data=language_data$. To calculate the Δ AIC for “sentence relevance”, we excluded $s(sentence_surprisal)$ from the model, comparing the AIC of the complete model with that of the model absent “sentence surprisal”. Conversely, to determine the Δ AIC for sentence surprisal, $s(sentence_relevance)$ is removed, and the AIC of the full model is subtracted from the model without “sentence relevance”. The

significance of either “sentence surprisal” or “sentence relevance” is assessed using the p -value (at p -value of 0.01) and the shape of the curve. These metrics were selected to represent, respectively, the concepts of sentence surprisal and sentence relevance in our examination of each language. The results are illustrated in Fig. 5 in Appendix F. It turns out that sentence surprisal and sentence relevance shows significance in the majority of languages. Moreover, sentence surprisal and sentence relevance are totally distinct metrics, and their overall correlation is -0.054, their correlation in each language is also remarkably small. This indicates that sentence surprisal and sentence relevance are distinct metrics, and more are seen in Appendix G.

5 Discussion

Word surprisal has been found to predict language comprehension across various datasets (Ryskin and Nieuwland, 2023). Sentence prediction has also been found in impacting language comprehension (Goldstein et al., 2022; Kriegeskorte et al., 2008). However, sentence-level computational metrics have not been proposed previously. Our study found that the surprisal of a sentence can predict and clarify the difficulties readers encounter in comprehending a sentence as a whole. Specifically, if a sentence is highly predictable given its left context, readers may feel easier to comprehend or process, leading to higher/faster reading speed. On the other hand, if a sentence is more unpredictable (i.e., lower sentence surprisal), readers may be more likely to experience processing difficulty. This can lead to slower/lower reading speed and potentially disrupt the flow of reading. The ability to predict the next sentence may be a fundamental aspect of language comprehension, as it allows users to anticipate upcoming information, and to integrate it smoothly with the preceding information. The impact of sentence surprisal on reading aligns closely with the influence of word surprisal on the reading process (Goodkind and Bicknell, 2018; Gotlieb Wilcox et al., 2023). Prediction occurs not only at the level of individual words, but also at the level of entire sentences in discourse. Prediction could be a key mechanism underlying human language comprehension, which makes predictions about the likely content of the upcoming input.

Numerous studies have also identified the influence of context on sentence processing (Co-

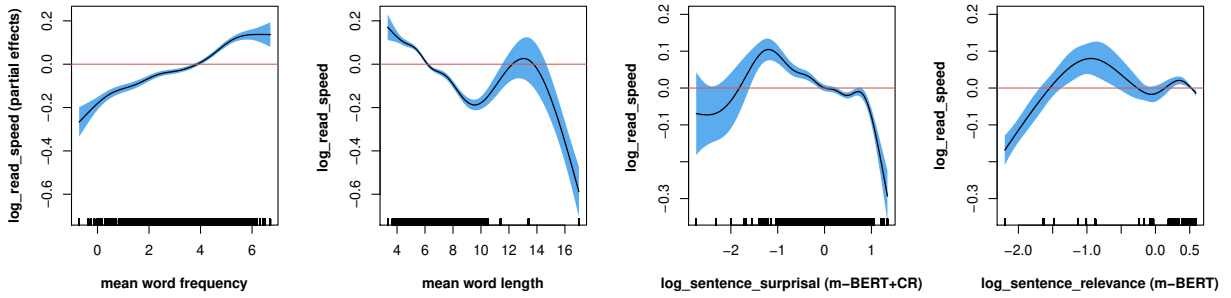


Figure 2: The overall partial effects of the primary predictors—sentence surprisal and sentence relevance—on reading speed across languages. The *x-axis* denotes the metric, and the *y-axis* represents the reading speed. Sentence surprisal and sentence relevance are transformed by logarithm in order to get closer normal distribution, further having better fittings. Each curve depicts the relationship between a predictor variable and the response variable, reading speed. Steeper slopes on these curves indicate a stronger relationship between the predictor and reading speed, while flatter slopes suggest a weaker effect.

hen and Servan-Schreiber, 1992; Grisoni et al., 2017). However, we are the first to propose to compute sentence-level semantic relevance. The sentence relevance computed by the “attention-aware” method can effectively help interpret and predict the processing difficulties readers face when comprehending sentences in their entirety. When a sentence is more semantically relevant to the context (in discourse) in which it appears, it is more likely to be processed quickly and accurately, and readers are more likely to understand its meaning without having to invest a lot of cognitive effort (i.e. higher reading speed). Conversely, when a sentence is irrelevant with the context (i.e., lower sentence relevance), it may slow down reading speed and require more cognitive effort. The impact of sentence relevance on reading closely resembles the effect of word semantic relevance on the reading (Sun et al., 2023b; Sun et al., 2023a). There are several possible reasons why relevant sentences tend to be processed more quickly. According to the research of discourse structure, relevant sentences can easily create discourse coherence. One key factor is the activation of mental representations related to the topic or theme of the text (Traxler, 2011). When a sentence is relevant to the context, it could activate mental representations through memorizing the context, making it easier for readers to process the sentence. This activation can lead to faster reading speed, as readers are able to effectively activate the memory of the context and quickly integrate it into their mental representation of the text. In contrast, irrelevant sentences may require more cognitive effort to process, as they could not activate the

memory from the context and do not fit smoothly into the mental representation of the discourse that readers are constructing. This processing difficulty can slow down reading speed.

The expectation and memory could be mutually interacted (Ryskin and Nieuwland, 2023) in language comprehension/processing. By combining sentence surprisal and sentence relevance (shown in Table 2), it can encompass both processing difficulty for an entire sentence, and could better simulate human language processing.

6 Conclusion

This study presented two sentence-level metrics for predicting human comprehension of sentences as a whole. The methods of computing sentence surprisal worked well, and the attention-aware method allowed for computing contextual information for sentence-level semantic relevance. The results show that both sentence surprisal and sentence relevance were highly capable of predicting human sentence reading speed. All of these methods also exhibited strong generalization capabilities across languages. The findings showed that these sentence-level metrics are informative features for modeling entire sentence comprehension by humans across languages. Our work highlighted the potential of combining computational models with cognitive models to better explain and predict human language comprehension/processing, and further to develop more effective NLP and AGI systems.

7 Limitations

The study introduces innovative approaches to predicting entire sentence comprehension using computational sentence-level metrics. However, it comes with several limitations. Primarily, the methodology depends on specific multilingual LLM (m-BERT and mGPT). The variation in proficiency across different languages can result in disparate abilities to process these languages. In essence, sentence surprisal or sentence relevance might not be estimated with equal precision across all languages using multilingual LLMs. This limitation could affect the applicability of our metrics across varied linguistic structures and cultural contexts, leading to varying performance of our metrics in different languages. Moreover, the attention-aware method, while effectively capturing some aspects of contextual information, may oversimplify the complex dynamics of human cognitive mechanisms on language comprehension and processing. Addressing these limitations could pave the way for more comprehensive models that better mirror the intricacies of human language comprehension and processing.

Data Availability

The code and data in this study is available at: <https://github.com/fivehills/Sentence-relevance-and-sentence-surprisal/tree/main>.

References

- Gerry TM Altmann and Jelena Mirković. 2009. Incrementality and prediction in human sentence processing. *Cognitive Science*, 33(4):583–609.
- Suhas Arehalli, Brian Dillon, and Tal Linzen. 2022. Syntactic surprisal from neural models predicts, but underestimates, human processing difficulty from syntactic ambiguities. *arXiv preprint arXiv:2210.12187*.
- R Harald Baayen and Maja Linke. 2020. An introduction to the generalized additive model. *A Practical Handbook of Corpus Linguistics*, pages 563–591.
- Alan Baddeley. 2010. Working memory. *Current Biology*, 20(4):136–140.
- Gina Biancarosa. 2005. Speed and time, texts and sentences: Choosing the best metric for relating reading rate to comprehension. *Written Language & Literacy*, 8(2):3–24.
- Damián E Blasi, Joseph Henrich, Evangelia Adamou, David Kemmerer, and Asifa Majid. 2022. Overreliance on english hinders cognitive science. *Trends in Cognitive Sciences*.
- Michael P Broderick, Andrew J Anderson, Giovanni M Di Liberto, Michael J Crosse, and Edmund C Lalor. 2018. Electrophysiological correlates of semantic dissimilarity reflect the comprehension of natural, narrative speech. *Current Biology*, 28(5):803–809.
- Marc Brysbaert. 2019. How many words do we read per minute? a review and meta-analysis of reading rate. *Journal of Memory and Language*, 109:104047.
- Patricia A Carpenter, Akira Miyake, and Marcel Adam Just. 1995. Language comprehension: Sentence and discourse processing. *Annual Review of Psychology*, 46(1):91–120.
- Ronald P Carver. 1976. Word length, prose difficulty, and reading rate. *Journal of Reading Behavior*, 8(2):193–203.
- Ronald P Carver. 1990. *Reading rate: A review of research and theory*. Academic Press.
- Jonathan D Cohen and David Servan-Schreiber. 1992. Context, cortex, and dopamine: a connectionist approach to behavior and biology in schizophrenia. *Psychological Review*, 99(1):45.
- Matthew W Crocker, Vera Demberg, and Elke Teich. 2016. Information density and linguistic encoding (ideal). *KI-Künstliche Intelligenz*, 30:77–81.
- Andrea De Varda and Marco Marelli. 2023. Scaling in cognitive modelling: A multilingual approach to human reading times. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 139–149.
- Vera Demberg and Frank Keller. 2008. Data from eye-tracking corpora as evidence for theories of syntactic processing complexity. *Cognition*, 109(2):193–210.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2018. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*.
- Edward Gibson. 1998. Linguistic complexity: Locality of syntactic dependencies. *Cognition*, 68(1):1–76.
- Ariel Goldstein, Zaid Zada, Eliav Buchnik, Mariano Schain, Amy Price, Bobbi Aubrey, Samuel A Nasta, Amir Feder, Dotan Emanuel, Alon Cohen, et al. 2022. Shared computational principles for language processing in humans and deep language models. *Nature neuroscience*, 25(3):369–380.
- Adam Goodkind and Klinton Bicknell. 2018. Predictive power of word surprisal for reading times is a linear function of language model quality. In *Proceedings of the 8th workshop on cognitive modeling and computational linguistics (CMCL 2018)*, pages 10–18.

- Ethan Gottlieb Wilcox, Tiago Pimentel, Clara Meister, Ryan Cotterell, and Roger P Levy. 2023. Testing the predictions of surprisal theory in 11 languages. *arXiv e-prints*, pages arXiv–2307.
- Luigi Grisoni, Tally McCormick Miller, and Friedemann Pulvermüller. 2017. Neural correlates of semantic prediction and resolution in sentence processing. *Journal of Neuroscience*, 37(18):4848–4858.
- Laura Gwilliams and Matthew H Davis. 2022. Extracting language content from speech sounds: the information theoretic approach. In *Speech perception*, pages 113–139. Springer.
- John Hale. 2001. A probabilistic earley parser as a psycholinguistic model. In *The Second Meeting of the North American Chapter of the Association for Computational Linguistics*.
- John Hale. 2016. Information-theoretical complexity metrics. *Language and Linguistics Compass*, 10(9):397–412.
- Patricia A Herman. 1985. The effect of repeated readings on reading rate, speech pauses, and word recognition accuracy. *Reading research quarterly*, pages 553–565.
- Sven Hohenstein and Reinhold Kliegl. 2014. Semantic preview benefit during reading. *Journal of Experimental Psychology: Learning, Memory, and Cognition*, 40(1):166.
- Geoff Hollis and Chris Westbury. 2016. The principals of meaning: Extracting semantic dimensions from co-occurrence models of semantics. *Psychonomic Bulletin & Review*, 23(6):1744–1756.
- Mark D Jackson and James L McClelland. 1979. Processing determinants of reading speed. *Journal of Experimental Psychology: General*, 108(2):151.
- Katikapalli Subramanyam Kalyan, Ajit Rajasekharan, and Sivanesan Sangeetha. 2021. Ammus: A survey of transformer-based pretrained models in natural language processing. *arXiv preprint arXiv:2108.05542*.
- Yuki Kamide. 2008. Anticipatory processes in sentence processing. *Language and Linguistics Compass*, 2(4):647–670.
- Alan Kennedy and Joël Pynte. 2005. Parafoveal-on-foveal effects in normal reading. *Vision Research*, 45(2):153–168.
- Reinhold Kliegl, Sarah Risse, and Jochen Laubrock. 2007. Preview benefit and parafoveal-on-foveal effects from word $n+2$. *Journal of Experimental Psychology: Human Perception and Performance*, 33(5):1250.
- Nikolaus Kriegeskorte, Marieke Mur, and Peter A Bاندettini. 2008. Representational similarity analysis-connecting the branches of systems neuroscience. *Frontiers in systems neuroscience*, page 4.
- Roger Levy. 2008. Expectation-based syntactic comprehension. *Cognition*, 106(3):1126–1177.
- Pierre Lison and Jörg Tiedemann. 2016. Opensubtitles2016: Extracting large parallel corpora from movie and tv subtitles.
- Geoffrey R Loftus. 1985. Evaluating forgetting curves. *Journal of Experimental Psychology: Learning, Memory, and Cognition*, 11(2):397.
- Ken McRae and Kazunaga Matsuki. 2013. Constraint-based models of sentence processing. In *Sentence Processing*, pages 51–77. Psychology Press.
- Gerald R Miller and Edmund B Coleman. 1971. The measurement of reading speed and the obligation to generalize to a population of reading materials. *Journal of Reading Behavior*, 4(3):48–56.
- Jeff Mitchell and Mirella Lapata. 2010. Composition in distributional models of semantics. *Cognitive Science*, 34(8):1388–1429.
- Byung-Doh Oh and William Schuler. 2023. Why does surprisal from larger transformer-based language models provide a poorer fit to human reading times? *Transactions of the Association for Computational Linguistics*, 11:336–350.
- Tiago Pimentel, Clara Meister, Elizabeth Salesky, Simone Teufel, Damián Blasi, and Ryan Cotterell. 2021. A surprisal–duration trade-off across and within the world’s languages. *arXiv preprint arXiv:2109.15000*.
- John R Anderson. 1975. Computer simulation of a language acquisition system: A first report.
- Keith Rayner, Timothy J Slattery, and Nathalie N Bélanger. 2010. Eye movements, the perceptual span, and reading speed. *Psychonomic Bulletin & Review*, 17(6):834–839.
- Douglas LT Rohde. 2002. *A connectionist model of sentence comprehension and production*. Carnegie Mellon University.
- Douglas Roland, Hongoak Yun, Jean-Pierre Koenig, and Gail Maurer. 2012. Semantic similarity, predictability, and models of sentence processing. *Cognition*, 122(3):267–279.
- Rachel Ryskin and Mante S Nieuwland. 2023. Prediction during language comprehension: what is next? *Trends in Cognitive Sciences*.
- Masato Sakurai. 2023. Parafovea. In *Encyclopedia of Color Science and Technology*, pages 1319–1326. Springer.
- Julian Salazar, Davis Liang, Toan Q Nguyen, and Katrin Kirchhoff. 2019. Masked language model scoring. *arXiv preprint arXiv:1910.14659*.

- Elizabeth R Schotter, Bernhard Angele, and Keith Rayner. 2012. Parafoveal processing in reading. *Attention, Perception, & Psychophysics*, 74(1):5–35.
- Martin Schrimpf, Idan Asher Blank, Greta Tuckute, Carina Kauf, Eghbal A Hosseini, Nancy Kanwisher, Joshua B Tenenbaum, and Evelina Fedorenko. 2021. The neural architecture of language: Integrative modeling converges on predictive processing. *Proceedings of the National Academy of Sciences*, 118(45):e2105646118.
- Cory Shain, Idan Asher Blank, Marten van Schijndel, William Schuler, and Evelina Fedorenko. 2020. fmri reveals language-specific predictive coding during naturalistic sentence comprehension. *Neuropsychologia*, 138:107307.
- Oleh Shliazhko, Alena Fenogenova, Maria Tikhonova, Vladislav Mikhailov, Anastasia Kozlova, and Tatiana Shavrina. 2022. mgpt: Few-shot learners go multilingual. *arXiv preprint arXiv:2204.07580*.
- Noam Siegelman, Sascha Schroeder, Cengiz Acartürk, Hee-Don Ahn, Svetlana Alexeeva, Simona Amenta, Raymond Bertram, Rolando Bonandrini, Marc Brysbaert, Daria Chernova, et al. 2022. Expanding horizons of cross-linguistic research on reading: The multilingual eye-movement corpus (meco). *Behavior Research Methods*, pages 1–21.
- Nathaniel J Smith and Roger Levy. 2013. The effect of word predictability on reading time is logarithmic. *Cognition*, 128(3):302–319.
- Kun Sun. 2023. Optimizing predictive metrics for human language comprehension. *bioRxiv*, pages 2023–09.
- Kun Sun, Qiuying Wang, and Xiaofei Lu. 2023a. An interpretable measure of semantic similarity for predicting eye movements in reading. *Psychonomic Bulletin & Review*, pages 1–16.
- Kun Sun and Rong Wang. 2022. Semantic similarity and mutual information predicting sentence comprehension: the case of dangling topic construction in chinese. *Journal of Cognitive Psychology*, pages 1–24.
- Kun Sun, Rong Wang, and Harald Baayen. 2023b. Attention-aware measures of semantic relevance for predicting human reading behavior. *Linguistics*.
- Matthew J Traxler. 2011. Introduction to psycholinguistics: Understanding language science.
- Marten Van Schijndel and Tal Linzen. 2021. Single-stage prediction models do not explain the magnitude of syntactic disambiguation difficulty. *Cognitive Science*, 45(6):e12988.
- Shravan Vasishth and Richard L Lewis. 2006. Argument-head distance and processing complexity: Explaining both locality and antilocality effects. *Language*, pages 767–794.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. *Advances in neural information processing systems*, 30.
- Noortje J Venhuizen, Matthew W Crocker, and Harm Brouwer. 2019. Expectation-based comprehension: Modeling the interaction of world knowledge and linguistic experience. *Discourse Processes*, 56(3):229–255.
- Scott I Vrieze. 2012. Model selection and psychological theory: a discussion of the differences between the akaike information criterion (aic) and the bayesian information criterion (bic). *Psychological Methods*, 17(2):228.
- Martijn Wieling. 2018. Analyzing dynamic phonetic data using generalized additive mixed modeling: A tutorial focusing on articulatory differences between 11 and 12 speakers of english. *Journal of Phonetics*, 70:86–116.
- Ethan Gotlieb Wilcox, Jon Gauthier, Jennifer Hu, Peng Qian, and Roger Levy. 2020. On the predictive power of neural language models for human real-time comprehension behavior. *arXiv preprint arXiv:2006.01912*.
- Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Rémi Louf, Morgan Funtowicz, et al. 2020. Transformers: State-of-the-art natural language processing. In *Proceedings of the Conference on EMNLP: System Demonstrations*, pages 38–45.
- Simon N Wood. 2017. *Generalized Additive Models: An Introduction with R*. Chapman and Hall/CRC.
- Simon N Wood. 2020. Inference and computation with generalized additive models and their extensions. *Test*, 29(2):307–339.
- Simon N Wood, Natalya Pya, and Benjamin Säfken. 2016. Smoothing parameter and model selection for general smooth models. *Journal of the American Statistical Association*, 111(516):1548–1563.

Appendices

A. Differences between reading speed and fixation duration

In reading research, reading speed and fixation duration for individual words represent distinct but related aspects of how we process language. The following specifies these differences.

Reading speed (or average reading speed, or reading rate) is typically measured in words per minute or second (e.g., wpm) and reflects the overall rate at which a person reads a passage of text or a sentence. Reading speed is usually employing text or individual sentence as the unit of interest. This metric gives a general indication of reading efficiency or fluency. It measures the reader’s ability to comprehend and process text or sentence over a given period. This can vary significantly depending on the reader’s skill, the text’s complexity, and the reading purpose (e.g., reading for pleasure vs. critical reading). Reading speed encompasses the entire reading process, including both the time spent on fixations (when the eyes stop on a word) and saccades (the rapid movements between fixations), as well as regressions (backward movements to re-read text) and pauses for comprehension. Reading speed has been extensively and intensively explored (Jackson and McClelland, 1979; Herman, 1985; Carver, 1990; Rayner et al., 2010).

Fixation duration for individual words (here total fixation duration) refers to the total length of time the eyes remain stationary during fixations on a word while reading. These durations are measured in milliseconds with an eye-tracker and can indicate the cognitive effort required to process the word. Fixation duration on individual words can reveal how word characteristics (such as length, frequency, and predictability) and contextual difficulty affect reading. Longer fixations tend to suggest that a word is harder to recognize or comprehend within its context. Fixation durations vary across words within a text and among different readers. They provide insight into the moment-by-moment cognitive processes involved in lexical reading, such as lexical access, parsing, and integration of information.

Reading speed offers a macro-level view of reading behavior, indicating overall efficiency or difficulty at the sentence or text level. In contrast, fixation duration provides a micro-level perspective, revealing the cognitive processing time for individual words. While both metrics can be affected by the text’s difficulty and the reader’s proficiency, reading speed could be also influenced by broader factors like broader context and the reader’s strategy or purpose. Fixation duration is more directly related to immediate cognitive demands for word-specific characteristics.

B. Computing sentence surprisal

This section details how to compute sentence-level surprisal using the three methods: chain rule (CR), negative log-likelihood (NLL) and next sentence prediction (NSP). The first two methods were applied in either m-BERT or mGPT, and the third method was merely implemented in m-BERT.

The following provides a detailed account of how to apply **chain rule (CR)** to compute sentence surprisal. First, we tokenized sentence into various tokens: $S = [t_1, t_2, \dots, t_n]$. Probability of a token t_i in the sentence S given its left context C in a text and preceding tokens can be represented as: $P(t_i|C, t_1, t_2, \dots, t_{i-1})$. (S = sentence, t = token, C = context). Based on this, we can calculate the probability of each token prior to its left context. After obtaining the probability of each word, we computed the joint probability of the entire sentence in equation (2): S given its context C , $P(S|C) = P(t_1|C) \cdot P(t_2|C, t_1) \cdot P(t_3|C, t_1, t_2) \cdot \dots \cdot P(t_n|C, t_1, t_2, \dots, t_{n-1})$ (2), further getting sentence surprisal, $-\log(P(S|C))$. The equation is an application of the chain rule of probability to sequences (like sentences). It captures the idea that the probability of a sentence given a context can be decomposed into the product of conditional probabilities of its individual tokens. The following provides the details why it works. When you have a sequence of events or tokens, the chain rule can be extended. For a sequence of three events t_1, t_2 , and t_3 : $P(t_1, t_2, t_3) = P(t_1) \times P(t_2|t_1) \times P(t_3|t_1, t_2)$. In the case of natural language, sentences often have a context. The context can be prior knowledge, a preceding sentence, or any other relevant information. Given a context (C), the probability of a sequence changes (S): $P(S|C) = P(t_1|C) \times P(t_2|C, t_1) \times P(t_3|C, t_1, t_2) \times \dots \times P(t_n|C, t_1, t_2, \dots, t_{n-1})$ (i.e., the **multiplication** of probabilities of each token given the left context within a sentence). The method of computing sentence probability is consistent with the principles of probability theory and the way sequence modeling is approached in the context of NLP.

Moreover, using **Negative Log-Likelihood (NLL)**, we can also compute the surprisal of a sentence conditioned on its preceding textual content. The specific procedure is detailed as follows: the text is tokenized into a sequence of token IDs, converted into a PyTorch tensor, and processed through the model to determine the NLL. NLL is used as a loss function to measure how well the model’s predictions align with the actual data. For a given sequence of tokens, NLL is a measure of how surprised the model is by the actual sequence. There are two steps in calculation: 1) **Sum up** these NLLs for the words in the sentence: $NLL(S|C) = -\sum \log(P(t_i|t_1, t_2, \dots, t_{i-1}))$ (t_i is the word in the target sentence “S”, and t_1, t_2, \dots, t_{i-1} include both the context and the preceding words in the sentence) 2) Convert NLL to Probability, shown in equation (3): $P(S|C) = e^{-NLL(S|C)}$ (3). The term e^{-NLL} represents an exponential function with the negative Natural Log Loss (NLL) of S given C as the exponent.

The following elaborates on the **differences** between applying Chain Rule (**CR**) and Negative Log Likelihood (**NLL**) within the contexts of **BERT** and **GPT**. We detail these distinctions specifically in the scenarios of BERT and GPT, respectively.

Within the context of autoregressive language models (LMs) like GPT, the concepts of the CR for probability and NLL indeed converge when computing sentence surprisal. The CR decomposes the probability of a sequence into the product of conditional probabilities. This method aligns with how autoregressive LMs generate text, predicting each token based on the previous ones. NLL is often used as a loss function in training these models, calculated by taking the negative logarithm of the probability of the observed data under the model. For sentence, NLL would be the **sum** of the negative logs of these conditional probabilities. When you take the logarithm of the product of conditional probabilities (as per the CR), it becomes a **multiplication** of these probabilities. The math equations for CR and NLL introduced at the start of this section are applicable to the GPT case.

However, in the context of BERT, we need to make slight changes because BERT is fundamentally different from autoregressive models in that it does not generate text sequentially. BERT’s architecture is designed to understand the context of a token by looking at the tokens that come before and after it—this is what makes it “bidirectional”. It is trained primarily through tasks like Masked Language Modeling (MLM), where it predicts the identity of tokens that have been artificially masked in the input text, based on the context provided by the non-masked tokens around them. The chain rule (CR), which breaks down the probability of a sequence into the product of conditional probabilities, naturally applies to models that generate or predict sequences in a linear, step-by-step manner (e.g., predicting the next word given the previous words in a sentence). While BERT does not compute sentence surprisal through the chain rule in the same way as autoregressive models, we can use BERT to estimate a form of surprisal or predictability for words in a sentence based on its bidirectional context. For instance, by masking a word in a sentence and using BERT to predict its likelihood, one can infer a measure of how predictable that word is given its context. BERT’s capacity to predict the probability of masked tokens in context allows for an indirect assessment of word-level surprisal. This approach leverages BERT’s contextual predictions to gauge how expected or surprising a word is within its sentence context. Assuming a sequence of tokens $S = [t_1, t_2, \dots, t_n]$, and a context C , we conceptually mask and predict each token t_i based on all other tokens as context, mimicking a sequential dependence that does not naturally exist in BERT. The “conditional probability” of each token t_i , given its context (both preceding and succeeding, C), is estimated as $P(t_i|C, t_{rest})$, where t_{rest} represents the rest of the tokens serving as context which consists the target sentence and the previous sentences. Sentence surprisal would then be represented as Equation (4):

$$\text{Surprisal}(S|C) = -\log \prod_{i=1}^n P(t_i|C, t_{rest}) \quad (5)$$

We then focus on NLL in BERT. While NLL is a concept that can be applied broadly in machine learning to measure how well a model’s predictions match the actual data (and is used as a loss function in many contexts, including training BERT), its specific application and interpretation can vary. In the context of BERT, NLL is used to optimize the model’s ability to accurately predict the masked tokens based on their context, which involves both preceding and succeeding tokens in a sentence. In other words,

BERT predicts the identity of masked tokens based on their surrounding (bidirectional) context, and NLL quantifies the model’s prediction accuracy. For each masked token prediction, compute the NLL as: $NLL(S|C) = -\sum \log(P(t_i|t_1, t_2, \dots, t_{i-1}, t_{i+1}, \dots, t_n))$ Here, t_i is the masked token, and the context C includes both preceding and succeeding tokens. **Sum up** the NLLs for all masked tokens in the sentence to get the total NLL, representing the sentence surprisal.

In addition to adopting the chain rule and NLL, we could employ the “**next sentence prediction (NSP)**” mechanism in BERT to compute sentence surprisal. To compute the probability that one sentence follows another using BERT’s NSP, begin by preparing the input. Combine the two sentences, placing a special [CLS] token at the start and a [SEP] token in between them. After tokenizing this combined sequence with BERT’s tokenizer, pass it through the BERT model. BERT uses the representation of the [CLS] token, which encapsulates information about the entire input, to predict the relationship between the two sentences. The model outputs two probabilities: “IsNext” and “NotNext”. The “IsNext” probability indicates the likelihood that the second sentence logically follows the first. By examining this probability, one can gauge how likely the model perceives the given sentence order to be. The above description can be summarized as the following two equations. Probability of sentence B being the next sentence given the left context A is formalized as (6):

$$P(B|A) = \text{softmax}(w_2^T[\text{CLS}] + b_2) \quad (6)$$

where [CLS] denotes the representation of the first sentence obtained from the final layer of the BERT model, and the softmax function computes the probability distribution over all possible next sentences. w_2 and b_2 are learnable weight vector and bias term, respectively. And then we can obtain the sentence surprisal. However, NSP in BERT is a binary classifier, that is, the model determines if a sentence logically follows a given sentence or not. This is a simplification of the rich structure and semantics in natural language. The use of NSP may raise the question about the interpretability of BERT’s estimated probabilities for subsequent sentences, especially when viewed from a cognitive modeling standpoint. The reason for this is that we probably argue that as humans read, they probably take more than two sentences as the context window. Despite this, we still need to apply the statistical analysis to test whether such metrics are useful or not.

C. BERT approximates human reading behavior

Some researchers have underestimated BERT’s potential in calculating word probabilities, arguing that the use of BERT (masked LMs) is hard to justify within the realm of cognitive modeling. Their concern stems from the fact that a masked language model like m-BERT can consider context from both directions, including rightward context, which could not be typically how human comprehension works. However, BERT is better able to estimate word probability because it can be really line with human reading behavior. The following details this point.

Those familiar with eye-tracking in reading recognize the preview benefit (i.e., parafoveal-on-foveal effects, “PoF” for short). Parafoveal-on-foveal effects in reading refer to the influence of information from the words located in the parafoveal region (the area immediately surrounding the fixated word) on the processing of the currently fixated word (the foveal word) (Kennedy and Pynte, 2005; Kliegl et al., 2007; Schotter et al., 2012; Hohenstein and Kliegl, 2014). As the parafoveal-on-foveal effect takes place in the context of reading and visual processing, the visual perception of words not directly fixated upon (parafoveal words) influences the processing of the word currently fixated on (the foveal word).

Put it simply, when we read, our eyes do not move smoothly across the text but make quick, jerky movements known as saccades, interspersed with brief pauses called fixations. During these fixations, the eye directly focuses on a small area of text. This area, where visual acuity is highest, is known as the foveal region. Surrounding the foveal region is the parafoveal region, where vision is not as sharp but still capable of processing some information about the text, such as word length or initial letters. The PoF effect refers to how information from the parafoveal region can pre-activate or facilitate the processing of the word once it becomes the focus of the next fixation (moves into the foveal region), thereby affecting reading speed and comprehension. For example, if the parafoveal word is semantically or syntactically

related to the foveal word, it might speed up the recognition and processing of the foveal word when the eye moves to it. In short, processing the target word actually is involved in incorporating the information on the next one or two or more words (n+1, or n+2 word in literature) through previewing, as shown in Fig. 3.

Relevant research shows that reading times are shorter for a target word when it matches the preview word, compared to when they are different. This suggests that the preview word is processed using parafoveal vision. BERT mirrors this process to some extent because it can incorporate information from subsequent words, approximating how human parafoveal vision previews words to the right of the fixation. In this sense, BERT aligns with human reading patterns to a greater degree. The surprisal values calculated by BERT, reflecting real-world reading dynamics, potentially provide more precise predictions of word reading times. The criticism that BERT generates only pseudo-surprisal overlooks its relevance to real-world human reading behaviors. On the other hand, surprisal values computed by GPT do not account for the previewing aspect of reading. Despite this, surprisal values from both GPT and BERT can, in theory, offer insights into reading behaviors. Nevertheless, statistical analysis is needed to determine which model’s surprisal predictions align more closely with observed reading data.

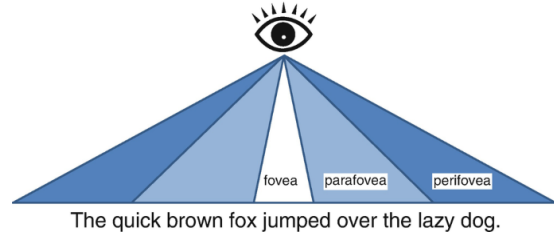


Figure 3: The parafoveal-on-foveal effects in reading (from Sakurai (2023))

D. Attention-aware approach and its memory capability

This section provides a comprehensive guide on calculating sentence relevance using an attention-aware approach, executed in a two-step strategy. The sliding window includes four sentences (t, 2, 1, and n1), as shown in the Panel B of Fig. 1. “t” represents the target sentence, and “n1” for the next sentence. We aim to compute how the target sentence (t) is semantically related with the other three sentences (2, 1, and n1 form the context window).

The initial step involves generating sentence embeddings using m-BERT or mGPT, followed by computing the similarity between two sentences based on these embeddings. The subsequent step entails applying the “attention-aware” approach to manage multiple similarity values across several sentences within a window stack.

In the first step, we need to generate embeddings for each sentence in this window by employing BERT or GPT. After obtaining sentence embedding for each sentence, we applied cosine similarity to compare the sentence embeddings generated by m-BERT or mPGT, and this practice is a common approach for computing semantic similarity between sentences, formalized as Equation (7).

$$\text{similarity}(s, c) = \frac{e_s \cdot e_c}{\|e_s\| \|e_c\|} \quad (7)$$

where s is the input sentence, c is the left context, e_s and e_c are their respective sentence embeddings obtained using mean pooling with BERT, \cdot denotes dot product, and $\|\cdot\|$ denotes L2 norm. The second term is a modified form of the cosine similarity to account for the distance between the embeddings.

We employed two distinct multilingual LLMs (i.e., m-BERT and mGPT), noting subtle differences in their approaches to generating sentence embeddings. Regarding m-BERT, when a sentence is input into BERT, it is first tokenized and then prepended with a special “[CLS]” token. After processing through BERT’s layers, the embedding corresponding to this “[CLS]” token is often used as the sentence embedding. The tokenized input sentence (S) is represented as [CLS], t_1, t_2, \dots, t_n . After processing through BERT, the output embeddings at the final layer for this sequence are $[E_{\text{CLS}}, E_{t_1}, E_{t_2}, \dots, E_{t_n}]$. Mean pooling involves calculating the average of the embeddings of all tokens in the sequence [CLS].

Here is Equation (8) to compute a sentence (or a text) embedding using m-BERT.

$$e_s = \text{BERT}_{\text{pooler}}(s) = \frac{1}{n} \sum_{i=1}^n h_i \quad (8)$$

where s is the input sentence, and $\text{BERT}_{\text{pooler}}$ is a mean pooling layer that takes the output vectors h_i of all n tokens in the input sentence and computes their average to obtain the sentence representation e_s .

Moreover, we used mGPT to compute sentence similarity for cross-validation. We still applied embedding-based method to do this. Specifically, mGPT was to obtain embeddings for each sentence. Still employing the mean pooling, we used the hidden states of the sentence to represent the embedding. Cosine similarity was to calculate the similarity between the two embeddings, which is similar to BERT-similarity computation.

The subsequent discussion highlights the distinctions between m-BERT and mGPT in generating sentence-based embeddings. First, mGPT, being primarily focused on generative tasks, does not utilize a special token like [CLS] for aggregating sentence meaning. GPT architecture is designed to predict the next token in a sequence based on the previous context, which inherently focuses on a unidirectional flow of information. The other difference is to use pooling for sentence embeddings. Specifically, to obtain sentence-level embeddings from GPT, one common method is to aggregate the hidden states (from the last layer) of all tokens in the output. Mean or max pooling can be applied to these token-level embeddings to create a single vector representing the entire sentence. This approach leverages the contextual information encoded by GPT in a sequential manner, albeit without the bidirectional context that BERT captures. In BERT, pooling is an alternative to using the “[CLS]” token embedding, offering a way to capture a distributed representation of sentence meaning. However, in GPT, pooling is a necessary step for sentence-level representation since the model lacks a mechanism like the [CLS] token for summarizing the text.

The similarity score between any two sentences in this window is calculated. Following this, four cosine similarity values are obtained for the sentences. Subsequently, we implemented the second step.

After completing the first step, we elaborated on applying weights to calculate sentence relevance. Upon acquiring the similarity values for sentences within the window stack, we proceeded to apply weights to these values. The process involves aggregating the weighted similarity values to derive a final score, as detailed in the main text. Our aim is to underscore the efficacy of the attention-aware approach in capturing contextual information and to explain the underlying mechanism of the weighting system.

As illustrated in the **Panel B** of Fig. 1, in a window stack, sentences closer to the target sentence resemble the initial days in the forgetting curve, while more distant words resemble the latter days. To simulate human forgetting mechanism, we allocated larger weights to the closer sentences and smaller weights to the distant sentences and the similarity between human forgetting mechanism and attentional weights adopted in the current study. The weight values gradually decrease with the distance between the target sentence and the contextual sentences (see Equation (1) and the Panel B of Fig. 1), similar to the forgetting curve (Loftus, 1985). The attention-aware approach could be linked to memory models in terms of how memory is decayed during the encoding of information, which subsequently affects how humans process sentences during reading. More importantly, the attention-aware approach is computational and fundamentally memory-based, facilitating memory storage, retrieval, and integration. This approach not only realizes the memory function but also incorporates the expectation effect.

Furthermore, when applying a 3-sentence window (the target sentence is not taken into account), akin to the fading of memories over three days, the average rate of memory decline can be estimated to average one-third per day. This fading initiates more abruptly and slows as time progresses. By modeling this, we can recalibrate the significance of sentences based on their distance from the target sentence, diminishing their value by a one-third. In this sense, sentences further from the target sentence receive lower weights compared to those in a uniform distribution. This leads to a gradual weighting scale, such as $1/3$, $2/3$, $1/2$, and so forth, mirroring their relative proximity to the target sentence.

The **Panel A** of Fig.4 shows how the attention-aware approach we adopted simulates a short-term memory stack, mirroring how readers retain memory of previously encountered words and their meanings. The method for using various weights of semantic relevance between any two sentences is inspired by both the attention mechanism found in Transformers (**Panel A** in Fig.4) and the human process of forgetting (**Panel B** in Fig. 4). The attention-aware approach can facilitate effective incorporation of contextual information and enabling it to achieve memory storage, retrieval, and integration.

Finally, as previously noted, the term “attention-aware” bears a resemblance to the algorithm of attention in Transformers, primarily because the attention-aware approach we proposed significantly enhances computational efficiency through the incorporation of contextual information. However, our attention-aware method does not incorporate any attention layers from Transformers. Each step in the computation of attention-aware metrics is transparent and interpretable.

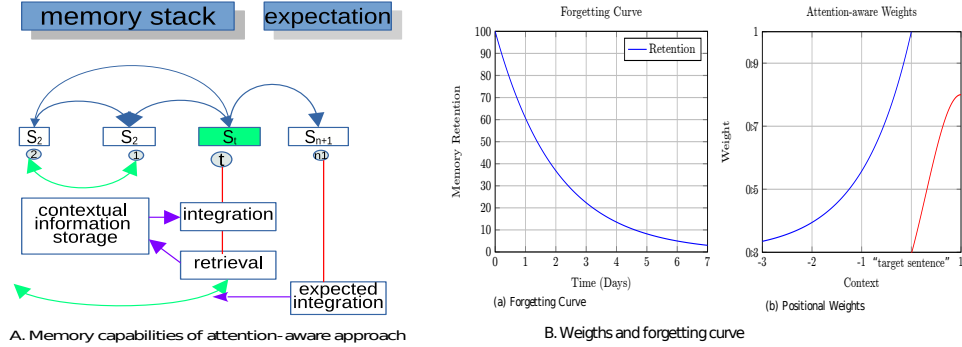


Figure 4: The memory capability and weights adopted in the attention-aware approach

E. Statistical methods and comparison standards

To meet our goals of accurately predicting multilingual eye-tracking data, we utilized Generalized Additive Mixed Models (GAMMs)(Wood, 2017). GAMMs are effective in analyzing nonlinear effects and multiplicative interactions between variables, making them ideal for evaluating the predictability of semantic similarity. They are more flexible than traditional regression methods in modeling complex relationships between variables. Eye-tracking data is simpler to analyze statistically than EEG and fMRI data, which makes it an ideal choice for our study on naturalistic discourse reading. However, assessing model performance and comparing models can be challenging, and relying solely on correlations can be limiting. Fortunately, GAMMs are well-suited for comprehensive and precise assessments of model performance. We compared models using AIC (Akaike’s Information Criterion) values, where a smaller value indicates a better model.

AIC or BIC (Bayesian Information Criterion) are both measures of model fit that balance goodness of fit with model complexity. Lower values of AIC or BIC indicate better model fit. However, AIC is a popular criterion for comparing GAMMs, and it has some advantages over other criteria. AIC is designed to balance the trade-off between model fit and model complexity, penalizing models with more parameters. This makes it useful for selecting models that provide a good balance between fit and complexity. AIC is also relatively easy to compute and widely used in statistical modeling.

Comparing two GAMM (or LMER, Linear Mixed Effects Models) models, where one is larger than the other (having all the parameters of the other model and some additional ones), the likelihood will always be higher for the larger model. This is because a larger model can fit the data better by having more parameters. However, directly comparing loglikelihoods is not appropriate when models have different sizes. Both AIC and BIC address this issue by incorporating a penalty for the number of parameters. AIC and BIC have different principles for penalizing complexity. Generally, BIC penalizes complexity more strongly than AIC, tending to favor smaller models unless both approaches agree. In essence, AIC is preferable when the main goal is prediction quality, as a slightly larger model can still provide good predictions, while a too small model usually does not. On the other hand, BIC aims to identify a reasonably sized true model by prioritizing parsimony. BIC is often better in finding the true model, but it has a higher chance of selecting a model that is too small, which is not favorable for prediction. In practice, the true model is often not “small”, but for reasons such as interpretability, smaller models are sometimes preferred even if they have slightly worse prediction performance, in which case BIC may be preferred. In summary, from the perspective of AIC, it is better to fit a slightly larger model than a too small one for improved prediction quality. However, from the perspective of BIC, both excessively large and excessively

small models are equally undesirable (Vrieze, 2012).

Moreover, the developer of R package on GAMM (“mgcv”) used AIC to make model comparison (Wood et al., 2016; Wood, 2020). AIC has also been mostly taken to understand model performance in psycholinguistic research (Wieling, 2018; Baayen and Linke, 2020 and the relevant studies) if GAMM or generalized mixed-effect models are employed.

In the studies conducted by Wilcox et al. (2020) and Oh and Schuler (2023), the relationship between model perplexity and ΔLogLik (log-likelihood) was utilized to analyze the perceptual competence of surprisal generated by different LMs. Their objective was to determine which LMs were capable of generating more powerful surprisal based on various corpora. In contrast, the current study aims to assess the predictive performance of our algorithms.

We should point out some potential issues when using ΔLogLik as a criterion. Wilcox et al. (2020) utilized GAMMs for their analysis but did not incorporate any **random variables** in these models. Consequently, confirming the optimality of these GAMMs becomes challenging. On the other hand, Oh and Schuler (2023) mentioned that they employed LMER and included random effects. However, the LMERs used in Oh and Schuler (2023) did not include “word frequency” as a control predictor. It is well-established in psycholinguistics and cognitive science that both “word length” and “word frequency” are significant variables in predicting reading time. Including these two factors as **control predictors** is commonly practiced when studying reading time. Therefore, when investigating reading time, it is advisable to include both “word length” and “word frequency” in GAMMs or LMERs. Meanwhile, an optimal model should also include random variables. Failure to do so may result in suboptimal GAMMs or LMERs for studying reading time. Moreover, The excessive application of heavy penalties (e.g., k in GAMMs) on the given metrics leads to overfitting in the mixed-effect models. For example, the heavy penalty on the specific metric results in the partial effect curve of this given metric becoming much steeper, and the AIC or likelihood in the model increasing remarkably. Conversely, removing such penalties eliminates these effects.

Considering these factors, the GAMM models used in the present study include two control predictors: the mean word length for a sentence and the mean word length for a sentence. Additionally, random variables, participants in eye-tracking experiments, and languages, were included. We used f_s (i.e., random smooths) to adjust the trend of a numeric predictor in a nonlinear way, which includes random intercept and random slope. In other words, we can allow the metrics of interest to explore their effects on various levels of random variables comprehensively. We employed AIC to compare the performance of different GAMMs. The baseline model excludes the main predictor of interest (sentence surprisal or attention-aware sentence surprisal) but retains the other elements in the full GAMM model. After fitting the regression models, we calculated the ΔAIC values for each GAMM model by subtracting the AIC of the base GAMM model from that of a full GAMM model. A smaller AIC indicates better model performance. Similarly, a smaller ΔAIC also indicates better performance. Additionally, considering the best sentence surprisal and sentence relevance in each language, we used t tests to check whether ΔAIC values for two metrics have significant differences. The result shows that there is no significance difference. In other words, it is not easy to distinguish sentence surprisal or sentence relevance could predict reading speed better or not.

F. Performance of individual languages

The performance of an individual language is shown in Fig. 5. There are two key standards for interpreting the curve of partial effect in each plot. The first standard involves analyzing the curve’s steepness. A steeper incline signifies a stronger correlation between the predictor and reading speed, whereas a gentler slope indicates a less pronounced effect. The second standard focuses on the curve’s fluctuation around zero; a curve that hovers around zero suggests its impact is minimal. For instance, in the English plot, a curve consistently near zero would indicate a weak effect. Understanding mixed-effect models is essential for appreciating the significance of these indicators, highlighting the Akaike Information Criterion (AIC) as the preferred tool for model comparison.

As shown in Fig. 5, it appears that sentence surprisal lacks significance in English, Korean, and Russian, while sentence relevance shows no significant impact in English, Russian, Spanish, and Turkish.

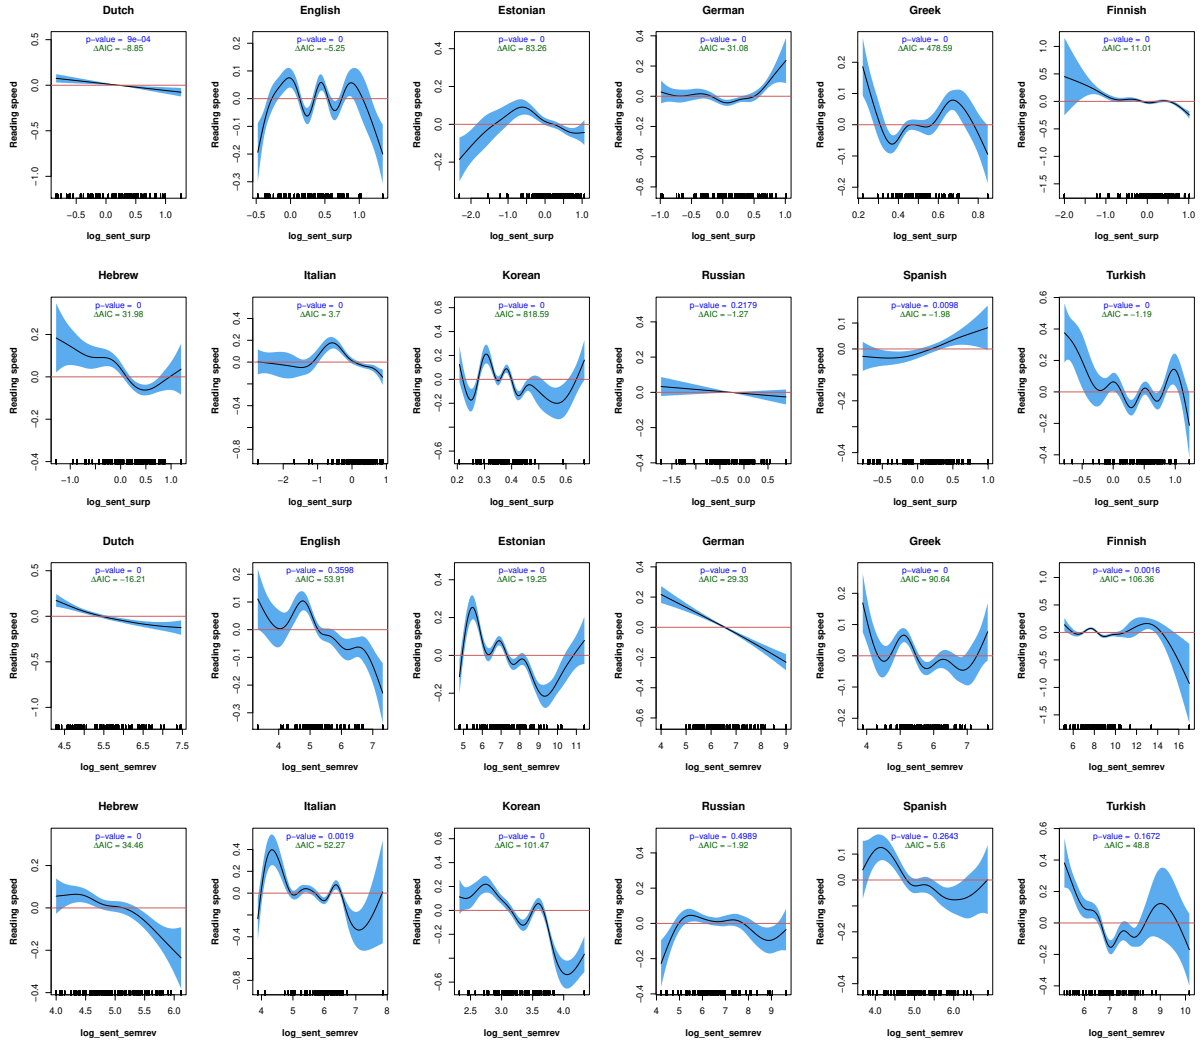


Figure 5: The partial effects of the primary predictors—sentence surprisal and sentence relevance—on reading speed across 13 languages (i.e., Dutch, Estonian, Finnish, German, Greek, Hebrew, Italian, Korean, Norwegian, Russian, Spanish, Turkish). Note: The upper portion of the diagram features sentence surprisal, while the lower portion is dedicated to sentence relevance. The x -axis signifies the computational metric, while the y -axis delineates the reading speed. To achieve a closer approximation to a normal distribution, and consequently improve the fitting, all metrics undergo a logarithmic transformation. Each curve visually articulates the correlation between a predictor variable and the response variable, namely reading speed. A steeper incline on these curves underscores a more robust impact between the predictor and reading speed, whereas gentler slopes imply a less pronounced effect. Moreover, when a curve fluctuates around zero, its effect vanishes. The information regarding p -values and ΔAIC is displayed at the top of each plot. The methodology for calculating ΔAIC for “sentence surprisal” and “sentence relevance” is detailed in the main text. In conclusion, sentence surprisal seems to lack significance in English, Korean, and Russian. However, sentence relevance may show no significant impact in English, Russian, Spanish, and Turkish.

Next, we employed T-test to assess the statistical significance of the ΔAIC values for both sentence surprisal and sentence relevance. The analyses revealed no significant differences, with the p -value substantially exceeding 0.05. This outcome suggests that sentence surprisal and sentence relevance may contribute equivalently to the prediction of reading speeds. As a result, it can be inferred that both metrics are effective in facilitating the overall comprehension of sentences. Despite this, Table 2 shows that the overall predictive power of sentence surprisal with m-BERT and CR is stronger than sentence relevance.

G. Correlation between sentence surprisal and sentence relevance

The overall Pearson correlation between sentence surprisal (computed using m-BERT with the chain rule) and sentence relevance (also derived from m-BERT) stands at **-0.054**. The value suggests that there is a weak correlation between the two metrics, and indicating that the two metrics are completely distinct. This relationship across the 13 languages is depicted in Fig. 6. The observed correlations among the metrics for each language are notably minimal. Such low correlation scores underscore the fact that the sentence surprisal and sentence relevance we calculated represent entirely distinct metrics.

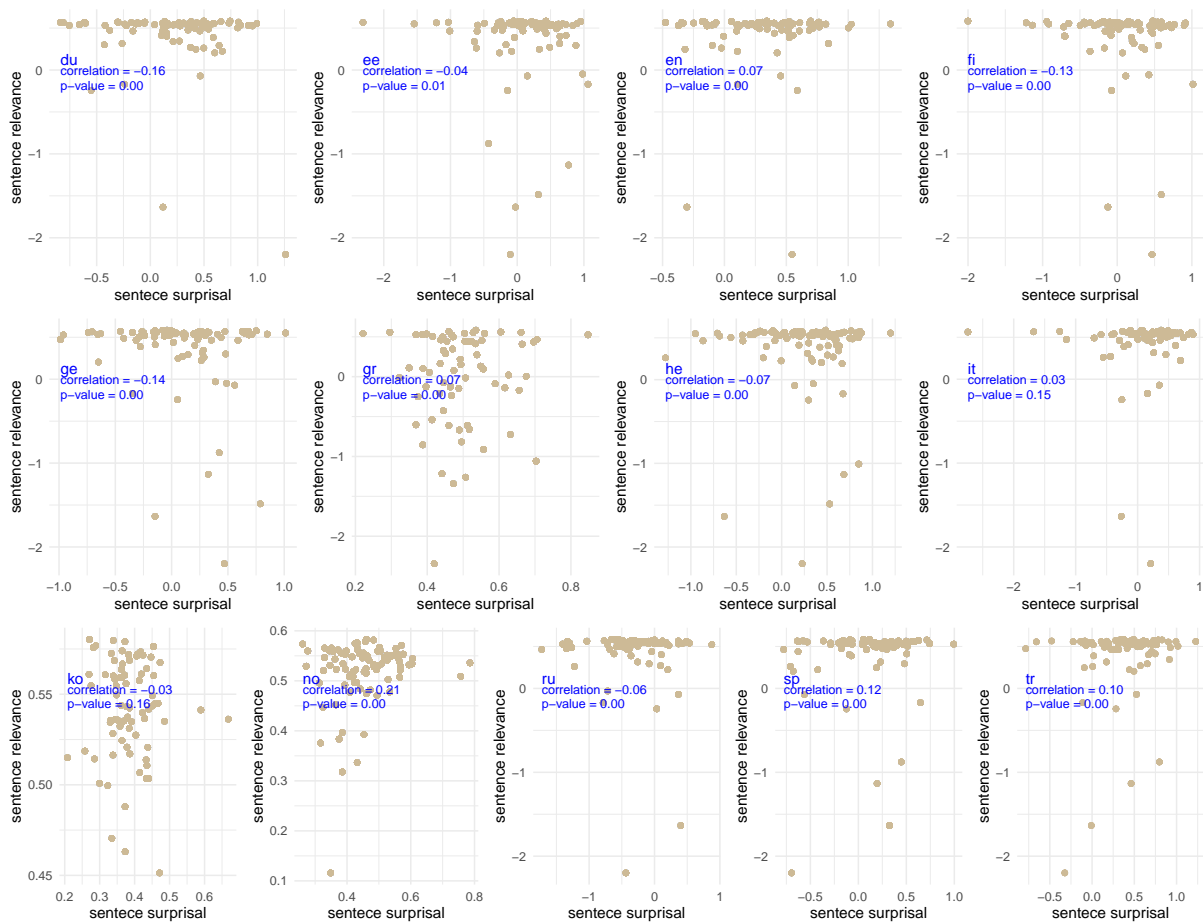


Figure 6: Pearson correlation between sentence-level surprisal (computed by m-BERT and chain rule) and sentence-level semantic relevance (computed based on m-BERT) in each language. Note: the abbreviations for these 13 melange are as follows. du = Dutch; ee = Estonian; en = English; fi = Finnish; ge = German; gr = Greek; he = Hebrew; it = Italian; ko = Korean; no = Norwegian; ru = Russian; sp = Spanish; tr = Turkish