
Large scale paired antibody language models

Henry Kenlay^{*1} Frédéric A. Dreyer^{*1} Aleksandr Kovaltsuk¹ Dom Miketa¹ Douglas Pires¹
Charlotte M. Deane^{1,2}

Abstract

Antibodies are proteins produced by the immune system that can identify and neutralise a wide variety of antigens with high specificity and affinity, and constitute the most successful class of biotherapeutics. With the advent of next-generation sequencing, billions of antibody sequences have been collected in recent years, though their application in the design of better therapeutics has been constrained by the sheer volume and complexity of the data. To address this challenge, we present IgBert and IgT5, the best performing antibody-specific language models developed to date which can consistently handle both paired and unpaired variable region sequences as input. These models are trained comprehensively using the more than two billion unpaired sequences and two million paired sequences of light and heavy chains present in the Observed Antibody Space dataset. We show that our models outperform existing antibody and protein language models on a diverse range of design and regression tasks relevant to antibody engineering. This advancement marks a significant leap forward in leveraging machine learning, large scale data sets and high-performance computing for enhancing antibody design for therapeutic development.

1. Introduction

Antibodies are proteins that play a central role in the adaptive immune system recognising and neutralising pathogens. They are symmetric Y-shaped molecules consisting of two light and two heavy chains (as depicted in Figure 1), and can identify and bind with high specificity to antigens - substances that the body identifies as foreign, such as bacteria, viruses, or toxins. Antibodies possess a variable region at their tip that allows them to recognise antigens, which is

one of the ways they activate further immune functions. An antibody's specificity is primarily influenced by the complementarity-determining regions (CDRs) of the variable domain. The third CDR loop of the heavy chain is the most structurally diverse and typically the most important for antigen recognition (Narciso et al., 2011; Tsuchiya & Mizuguchi, 2016; Regep et al., 2017). The ability to specifically target pathogens makes antibodies a central element in both natural immune responses and medical applications.

The emergence of next-generation sequencing (NGS) technology has transformed our understanding of the diversity and function of antibodies (Chaudhary & Wesemann, 2018). NGS enables the rapid sequencing of antibody repertoires, revealing a detailed insight into the natural diversity of the variable region of antibodies. This extensive sequencing data provides a large-scale representation of the various antibodies that natural systems generate, and contains crucial information about the numerous ways in which antibodies can adapt to recognise a wide array of antigens. This data is key to understanding how the immune system responds to infections and how it can be manipulated for therapeutic purposes.

The vast amount of data generated by antibody sequencing presents a unique challenge, which traditional bioinformatics methods such as sequence alignment and motif search can only partially address. Protein language models, inspired by advances in natural language processing, offer an orthogonal approach, which have found a wide range of uses in protein design by learning rich representations from large corpora of unlabelled sequences. They can be trained specifically to learn the complex grammar of antibody sequences, often through a masked language model objective, where a random fraction of amino acid residues are hidden and the model is then tasked to reconstruct the original sequence. This unsupervised pre-training allows the model to learn a high dimensional contextualised embedding space on which sequences can be mapped, enabling a wide range of applications such as restoring missing residues (Olsen et al., 2022b), *de novo* sequence generation (Shuai et al., 2022; Gruver et al., 2023), structure (Ruffolo et al., 2023; Høje et al., 2023) and property prediction such as binding sites (Leem et al., 2022), humanness (Prihoda et al., 2022) or thermostability (Harmalkar et al., 2023). Language models

^{*}Equal contribution ¹Exscientia, Oxford Science Park, Oxford, OX4 4GE, UK ²Department of Statistics, University of Oxford, Oxford OX1 3LB, UK. Correspondence to: Frédéric A. Dreyer <fdreyer@exscientia.co.uk>, Henry Kenlay <hkenlay@exscientia.co.uk>.

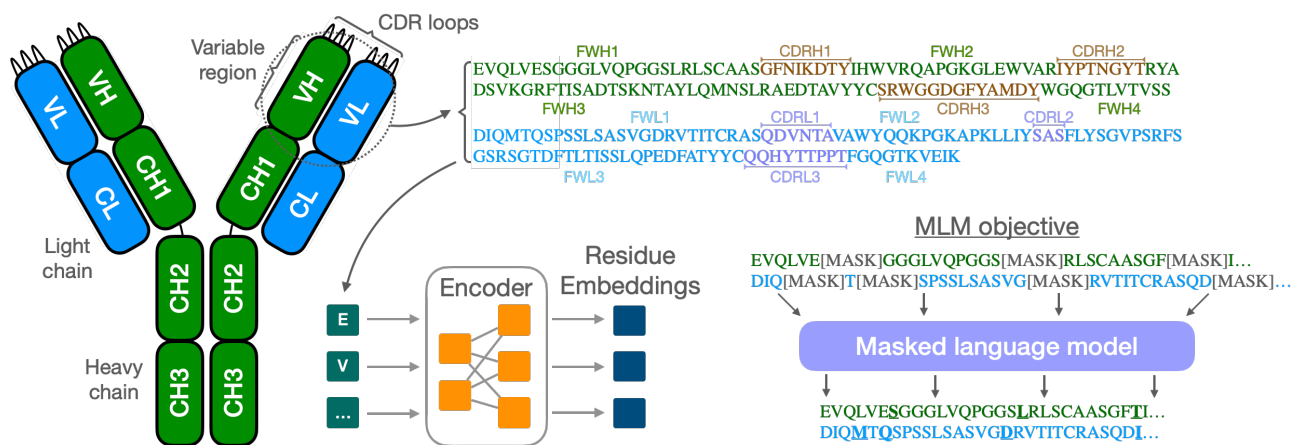


Figure 1. Overview of an antibody structure and its domains. The sequence of the variable region is used as input to the transformer encoder to obtain a residue-level embedding representation. Training is achieved through masked language modelling, where a random fraction of the input is replaced by mask tokens.

thus represent a crucial tool in translating the vast antibody sequencing data into insights that can be used to advance therapeutic developments.

In this work, we train antibody language models on the Observed Antibody Space (OAS) (Kovaltsuk et al., 2018; Olsen et al., 2022a). We consider both a BERT (Devlin et al., 2018) and a T5 (Raffel et al., 2020) model, which are initialised with weights of a general protein model and pre-trained on a large corpus of unpaired antibody sequences, before being fine-tuned on a smaller dataset of all known paired heavy and light variable region sequences. To our knowledge, these are the largest and one of the only paired antibody language models, as well as the first T5 antibody language model trained for sequence encoding to date. We then show how our models perform on downstream applications, notably sequence recovery, as well as expression and binding affinity predictions, and demonstrate that they outperform existing state-of-the-art protein and antibody language models on these key tasks. We evaluate the perplexity of each language model on a test set of paired sequences and show a large improvement over existing models in the literature.

The models trained as part of this study are made publicly available and can be readily used in a range of tasks of relevance to antibody engineering (Dreyer & Kenlay, 2024), as detailed in Appendix A.

2. Related work

The vast amount of sequence data available in public repositories positions unsupervised representation learning approaches as powerful ways to leverage machine learning in biology. Protein language models, notably transformer-

based architectures such as Evolutionary Scale Modeling (ESM) (Rives et al., 2021; Lin et al., 2023), ProtTrans (El-naggar et al., 2022), and ProGen (Madani et al., 2023) have been pivotal in protein structure prediction and function annotation, providing a solid foundation for generalised protein modeling. Trained on extensive evolutionary data containing billions of sequences (Consortium, 2022; Bairoch & Apweiler, 2000), these models have also demonstrated remarkable capabilities in understanding protein sequences, their evolutionary trajectories and constraints (Hie et al., 2022).

Turning to antibody-specific literature, BERT-like models (Devlin et al., 2018; Liu et al., 2019) such as AbLang (Olsen et al., 2022b), AntiBERTy (Ruffolo et al., 2021), Sapiens (Prihoda et al., 2022), and AntiBERTa (Leem et al., 2022) have shown that training language models on sequences from the immunoglobulin protein superfamily can be of particular use, notably to restore missing residues, to study affinity maturation trajectories and to identify paratope residues (*i.e.*, those responsible for recognising antigen binding). Models trained with paired sequences of heavy and light chains can learn cross-chain features, which has been shown to improve performance on predictive downstream tasks (Burbach & Briney, 2023; Olsen et al., 2024). Effective antibody-specific models can also be obtained by fine-tuning general protein models on antibody sequences (Vashchenko et al., 2022; Burbach & Briney, 2023), which can often be less computationally intensive than training a model from random initial weights.

While most antibody language models have focused on encoder-only architectures, some generative models have explored encoder-decoder (Chu & Wei, 2023) and decoder-only models (Shuai et al., 2022; Chen et al., 2023).

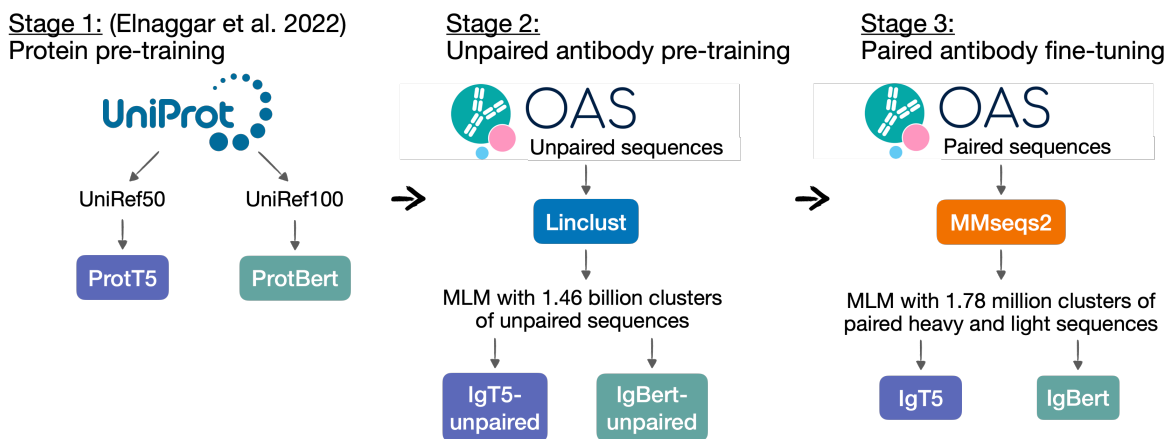


Figure 2. Data processing and training strategy. We further pre-train the ProtT5 and ProtBert models from Elnaggar et al. (2022) on unpaired antibody sequences from OAS after clustering them with Linclust. These unpaired models are then fine-tuned on paired sequences clustered with MMseqs2, combining the two variable region chains into a single input with a separator token.

3. Models

In this study, we focus on two language model architectures, BERT (Devlin et al., 2018) and T5 (Raffel et al., 2020). Both are based on transformer architectures (Vaswani et al., 2017), where inputs are processed through a series of blocks that incorporate self-attention with feed-forward connections. The self-attention component allows the network to construct representations that incorporate context from anywhere in the sequence, and which can directly encode pairwise interactions between amino acid residues.

Bidirectional Encoder Representations from Transformers (BERT) is a bidirectional model which learns a contextual representation by predicting randomly masked tokens in the input. By incorporating information from both left and right context across each layer, it can capture nuanced understanding of language structure and context and has seen diverse applications in natural language processing. It is typically pre-trained on a large corpus of text, which in our case are protein and antibody sequences, and then fine-tuned for specific tasks, including but not limited to sentiment analysis, language translation, or in the case of proteins, structural and functional property prediction.

Text-To-Text Transfer Transformer (T5) frames all tasks as text-to-text problems, and employs span-based masking where contiguous random spans are replaced with sentinel tokens. The decoder uses a causal attention mechanism, which allows it to handle a diverse range of tasks including translation, summarisation and question answering with a unified approach.

We train both models with a masked language modelling (MLM) objective. Sequences are parsed through a tokeniser which maps each amino acid type in the sequence to a distinct token, and includes a separator token at the end

of each chain. The BERT tokeniser has a classification and mask token, while the T5 tokeniser has a single sentinel token which is used as an equivalent to a mask token. During training, each input sequence is corrupted by replacing a fraction of the amino acid residues with a special mask token for the BERT model, while for the T5 model we follow Elnaggar et al. (2022), with a corresponding single-token span. The models are then trained to predict these tokens from the corrupted sequence, such that for a sequence with n residues $\mathbf{s} = (s_1, \dots, s_n)$ the loss is defined as

$$\mathcal{L}_{\text{MLM}} = \mathbb{E} \left[\sum_{i \in \mathcal{M}} -\log p(s_i | \mathbf{s}_{/\mathcal{M}}) \right], \quad (1)$$

where \mathcal{M} are all the masked positions in a sequence and $\mathbf{s}_{/\mathcal{M}}$ denotes the masked sequence where all masked positions have been replaced by a mask token.

A key difference between the BERT and T5 models on this MLM task is that the BERT model has a simple MLM head to predict the token based on the encoded embedding, while the T5 model is trained to predict the sequence as a text-to-text task and relies on both the encoder and decoder, even if only the encoder is later used in most downstream tasks. The loss is then computed over the full sequence for the T5 model, while only the masked residues contribute to the BERT loss.

4. Data preparation

We train our models on sequences from OAS, a database of predominantly human immune repertoires which contains over two billion unpaired variable heavy and light chain sequences, as well as over two million paired variable region sequences. An overview of our training strategy is shown in Figure 2, which includes the initial pre-training on general

Large scale paired antibody language models

Parameters	IgBert-unpaired	IgT5-unpaired	IgBert	IgT5
Initial weights	ProtBert	ProtT5	IgBert-unpaired	IgT5-unpaired
Number of layers	30	24	30	24
Size hidden layers	1024	1024	1024	1024
Intermediate size hidden layers	4096	16,384	4096	16,384
Number of attention heads	16	32	16	32
Dropout	0.0	0.1	0.0	0.1
Target length	200	200	300	300
Batch size per GPU	300	24	192	15
Global batch size	9600	768	6144	480
Optimiser	AdamW	AdamW	AdamW	AdamW
Max learning rate	10^{-5}	$5 \cdot 10^{-5}$	10^{-5}	$5 \cdot 10^{-5}$
Weight decay	10^{-5}	10^{-5}	10^{-5}	10^{-5}
Warm-up steps	10,000	30,000	2700	4000
Total training steps	212,512	911,500	45,000	60,000
Masking probability	0.15	0.15	0.15	0.15
Number of parameters	420M	3B	420M	3B

Table 1. Hyperparameters for all models trained in this study. The IgBert-unpaired and IgT5-unpaired are initialised with the ProtBert and ProtT5 weights respectively. The IgBert model is trained starting from the IgBert-unpaired weights, and the IgT5 model is derived from IgT5-unpaired.

protein sequences from UniRef (Suzek et al., 2014) and initial weights from the ProtTrans models (Elnaggar et al., 2022).

We perform a second stage pre-training on the unpaired OAS sequences. We take all 2,097,593,973 unique sequences from the database after removing duplicates. We cluster the sequences to ensure no sequences in the validation and test sets are near-duplicates to those in the training set. Due to the large size of this dataset, we cluster these sequences with Linclust (Steinegger & Söding, 2018), an approximate clustering algorithm that scales linearly with the number of sequences. We use 95% sequence identity as a threshold to create a dataset of 1,456,516,479 clusters. From these clusters, 40M are randomly selected to construct test and validation clusters. The remaining 1,416,516,479 clusters compose the training dataset, which contains 2,040,122,161 unique sequences. The validation and test datasets consist of 20M representative sequences each, selected from the 40M clusters selected above.

The last stage is fine-tuning on paired sequences. Here we consider the 2,038,528 unique paired antibody variable region sequences from OAS, and cluster them with MMseqs2 (Steinegger & Söding, 2017) using a 95% sequence identity threshold on the concatenated heavy and light chains. This provides us with a dataset of 1,777,722 clusters, of which 40,000 are randomly selected as test and validation clusters. The training dataset consists of 1,992,786 unique sequences, distributed among 1,737,722 clusters. As validation and test data, we use the 20,000 representative sequences drawn from the test and validation

clusters.

5. Pre-training on unpaired sequences

All models were trained using 32 A100 GPUs using a distributed DeepSpeed ZeRO Stage 2 strategy, which shards optimiser states and gradients for memory efficiency (Rajbhandari et al., 2020). We fix the number of training steps ahead of time and linearly warm-up the learning rate to the maximum learning rate before linearly annealing to zero. The optimiser for both models is AdamW with a weight decay parameter of 10^{-5} for regularisation (Loshchilov & Hutter, 2019). Each sequence was padded to a length of 200. We summarise the model and training parameters for all models in table 1.

5.1. IgBert-unpaired

The IgBert-unpaired model is initialised with ProtBert weights. We fine-tune on all unpaired OAS sequences that belong to training clusters. The batch size is set to 300 per GPU for a global batch size of 9600.

To complete a full epoch we trained for 212,512 steps. We used a linear annealing scheduler with a max learning rate of 10^{-5} and 10,000 warm-up steps. Training time was approximately 66 hours.

We used a MLM objective where 15% of tokens were selected for masking. Of these 80% are replaced by a masked token, 10% are changed to a random token in the vocabulary and 10% are left unchanged.

Large scale paired antibody language models

Model	FWH1	FWH2	FWH3	FWH4	CDRH1	CDRH2	CDRH3	Total VH
AbLang (Olsen et al., 2022b)	<i>0.9795</i>	0.9667	<i>0.9560</i>	0.9808	<i>0.9099</i>	<i>0.8845</i>	0.5926	0.9105
AntiBERTy (Ruffolo et al., 2021)	0.9784	0.9653	0.9545	0.9775	0.9073	0.8821	0.5209	0.8998
ProtBert (Elnaggar et al., 2022)	0.8018	0.7607	0.7384	0.8463	0.6560	0.4556	0.2772	0.6821
IgBert-unpaired	0.9791	0.9655	0.9552	0.9798	0.9043	0.8841	0.5924	0.9099
IgBert	<u>0.9810</u>	0.9690	0.9576	<i>0.9809</i>	<u>0.9130</u>	<u>0.8865</u>	<i>0.6012</i>	<u>0.9129</u>
ProtT5 (Elnaggar et al., 2022)	0.9037	0.8539	0.8880	0.9142	<u>0.7530</u>	0.6292	0.3390	0.7932
IgT5-unpaired	0.9790	<i>0.9671</i>	<i>0.9560</i>	<u>0.9825</u>	0.9092	0.8839	<u>0.6035</u>	<i>0.9121</i>
IgT5	0.9820	<u>0.9687</u>	<u>0.9574</u>	0.9828	0.9150	0.8936	0.6196	0.9163

Model	FWL1	FWL2	FWL3	FWL4	CDRL1	CDRL2	CDRL3	Total VL
AbLang (Olsen et al., 2022b)	0.9663	0.9683	0.9707	0.9621	0.8911	0.9008	0.8385	0.9493
AntiBERTy (Ruffolo et al., 2021)	0.9786	<i>0.9687</i>	0.9748	0.9661	0.9066	0.8951	0.8444	0.9553
ProtBert (Elnaggar et al., 2022)	0.6597	0.7862	0.7827	0.6337	0.4690	0.4382	0.2901	0.6654
IgBert-unpaired	0.9804	0.9704	0.9739	<i>0.9656</i>	<i>0.9081</i>	0.8985	<i>0.8461</i>	<i>0.9560</i>
IgBert	0.9885	0.9738	<u>0.9807</u>	<u>0.9740</u>	0.9232	<u>0.9149</u>	<u>0.8634</u>	<u>0.9647</u>
ProtT5 (Elnaggar et al., 2022)	0.8456	0.9010	0.8799	0.8499	0.6961	0.6038	0.5172	0.8200
IgT5-unpaired	<i>0.9809</i>	0.9675	<i>0.9752</i>	0.9171	0.9076	<i>0.9093</i>	0.8423	0.9515
IgT5	<u>0.9878</u>	<u>0.9735</u>	0.9815	0.9784	<u>0.9222</u>	0.9163	0.8693	0.9656

Table 2. Fraction of correctly predicted residues by region (frameworks (FW) and CDRs for the heavy (H) and light (L) chains), after masking 15% of the sequence for a test set of 20k paired heavy and light sequences. The best, second and third best performing models for each region are shown in bold, underlined and italic respectively.

5.2. IgT5-unpaired

The T5 architecture is much larger than the BERT architecture in terms of parameters leading to a larger memory and compute footprint. As such, we train on just representative sequences of the training clusters for half an epoch due to compute constraints. Similar to before, we initialise training using the ProtT5 weights.

The batch size is 24 per GPU for a global batch size of 768. We trained for a total of 911,500 steps, which corresponds to 700M representative sequences. The max learning rate was set to a larger 5×10^{-5} , in line with the proportionally larger learning rate used to train ProtT5 compared to ProtBert (Elnaggar et al., 2022). The warm-up was 30,000 steps. Training time was approximately 9 days.

Following ProtT5, we used the T5 objective with a maximum span length of one. This leads to a similar loss to the MLM objective, but with an additional sequence reconstruction term. We masked 15% of tokens where 90% are replaced by a mask token and 10% are replaced by a random amino acid token.

6. Fine-tuning on paired sequences

We further tune our unpaired models on paired sequences available in the OAS. To prevent catastrophic forgetting (Kirkpatrick et al., 2017; Chen et al., 2020), we use batches with both unpaired and paired data, incorporating

two unpaired sequences into the batch for each paired sequence included. Paired sequence inputs are constructed by concatenating the heavy and light chain sequences, inserting a separator token in between them.

The input sequences were padded to 300 to account for the increased length of paired sequences, reducing the batch size we could fit into memory for both models. Apart from the learning rate schedule and batch construction the rest of the setup remained unchanged. We fine-tuned both models for 16 hours.

6.1. IgBert

IgBert was trained by fine-tuning IgBert-unpaired using a batch size of 128 unpaired and 64 paired sequences per GPU. The paired training data consists of all sequences in the training clusters for the paired sequences, and randomly chosen unpaired sequences from the unpaired training clusters to complete the batches. We trained for approximately 46 epochs (45,000 steps), defining an epoch as one pass over the paired OAS dataset. The warm-up consisted of 2,700 steps, approximately three epochs. We use the same MLM objective as in the unpaired pre-training, where 15% of the input is masked, 80% of those are replaced by a mask token, 10% by a random token and 10% are kept identical.

Large scale paired antibody language models

Model	Binding	Binding	Binding	Expression
	$N = 422$ (Shanehsazzadeh et al., 2023)	$N = 2048$ (Warszawski et al., 2019)	$N = 4275$ (Koenig et al., 2017)	$N = 4275$ (Koenig et al., 2017)
AbLang (Olsen et al., 2022b)	<i>0.293</i> \pm 0.117	<u>0.246</u> \pm 0.038	<u>0.244</u> \pm 0.034	0.439 \pm 0.027
AntiBERTy (Ruffolo et al., 2021)	0.239 \pm 0.102	0.217 \pm 0.056	0.199 \pm 0.025	0.401 \pm 0.032
ProtBert (Elnaggar et al., 2022)	0.200 \pm 0.106	0.149 \pm 0.024	0.101 \pm 0.017	0.491 \pm 0.029
IgBert-unpaired	0.278 \pm 0.094	0.181 \pm 0.040	0.177 \pm 0.018	0.347 \pm 0.023
IgBert	0.306 \pm 0.114	0.131 \pm 0.047	0.174 \pm 0.032	0.400 \pm 0.023
ProtT5 (Elnaggar et al., 2022)	0.290 \pm 0.105	0.186 \pm 0.037	<i>0.206</i> \pm 0.029	0.697 \pm 0.02
IgT5-unpaired	<u>0.299</u> \pm 0.119	<i>0.245</i> \pm 0.049	0.179 \pm 0.014	<u>0.567</u> \pm 0.025
IgT5	0.274 \pm 0.070	0.297 \pm 0.057	0.25 \pm 0.019	<i>0.548</i> \pm 0.067

Table 3. R^2 for a linear model applied on the embeddings of each language model to predict binding energy to an antigen or expression. The best, second and third best performing models for each benchmark are shown in bold, underlined and italic respectively.

6.2. IgT5

Similar to IgBert, we used IgT5-unpaired as our starting weights to train IgT5. The batch size was 10 unpaired and 5 paired sequences per GPU. The batches are constructed from all sequences from the paired training clusters, and representative sequences randomly selected from the unpaired training clusters which have not been seen in the unpaired pre-training. We trained for approximately 5 epochs (60,000 steps) of the paired OAS data, with 4,000 warm-up steps. The objective is identical to the unpaired pre-training case, with 15% masked tokens, from which 90% are replaced by a sentinel token and 10% are randomly replaced by a different amino acid.

7. Results

We evaluate our models on a range of downstream tasks, comparing with existing antibody and protein language models. As baselines, we consider the original ProtTrans protein language models (Elnaggar et al., 2022), as well as the open-source antibody language models AbLang (Olsen et al., 2022b) and AntiBERTy (Ruffolo et al., 2021). We examine three tasks of interest: (i) the sequence recovery for each component of the antibody variable region, (ii) performance in predicting experimental binding affinity or expression data from language model embeddings, and (iii) perplexity of the heavy and light chains.

7.1. Sequence recovery

In Table 2, we show the sequence recovery achieved after masking 15% of residues in paired sequences from the test dataset at random. Similar results for unpaired sequences are provided in Appendix B. The recovery fraction is shown separately for each framework and CDR loop, as well as over the total heavy and light sequences.

This task benefits from training on antibody-specific data,

as can be seen by the comparatively poor performance of the protein language models, notably in the hypervariable H3 and L3 loops. We also observe that the IgT5 model achieves the highest recovery across all but one of the CDR loops, CDRL1, where IgBert achieves marginally higher accuracy. For sequence recovery in the framework regions, both IgBert and IgT5 have comparable high performance.

7.2. Binding affinity and expression

We now consider the language model embeddings as input feature to a predictive downstream task. To this end, we consider the largest datasets from the FLab benchmark (Chung-oun et al., 2023), which include the binding energy datasets from Shanehsazzadeh et al. (2023) with 422 data points, from Warszawski et al. (2019) with 2048 data points and from Koenig et al. (2017) with 4275 data points, as well as the corresponding expression data from this last study.

For each dataset, we use a linear least squares fit with L_2 regularisation on the embedding representation features assessed under 10-fold cross-validation. We use a 5-fold inner cross-validation to select the regularisation hyper-parameter $\lambda \in \{1, 10^{-1}, \dots, 10^{-6}, 0\}$. For the paired IgT5 and IgBert models, the variable region embedding is computed as the average over both the heavy and light chain tokens, while for all other models, we compute separately an embedding representation for the heavy and light chain by computing the average over their token representations, and then concatenate the heavy and light sequence vectors into a higher-dimensional feature vector. Thus, the paired models require cross-chain features that persist after averaging, and are condensed to a feature vector of half the size of the unpaired models.

Despite this, as can be seen in Table 3, the highest R^2 on the binding energy prediction tasks comes from the paired models, demonstrating the importance of training on natively paired data, which was also recently highlighted by Burbach

& Briney (2023). The general protein models, ProtBert and ProtT5, perform below the antibody-specific ones on binding prediction tasks. However, on the expression task, the general protein language models outperform the antibody specific models, with ProtT5 having the highest R^2 . This suggests that evolutionary information or broader patterns across different protein families present in general protein models are important in general property downstream tasks and are not learned as effectively by antibody language models.

We use the R^2 metric due to its robustness in evaluating the predictive accuracy of our model across diverse datasets. A similar analysis showing the Pearson correlation can be found in Appendix C.

7.3. Perplexity

Let us now consider perplexity, a common metric for evaluating language models that assesses how well they can predict a given sequence of tokens. For auto-regressive models, perplexity of a sequence $\mathbf{s} = (s_1, \dots, s_n)$ is defined as the exponentiated average negative log-likelihood

$$\text{PPL}(\mathbf{s}) = \exp \left\{ -\frac{1}{n} \sum_{i=1}^n \log p(s_i | \mathbf{s}_{<i}) \right\}, \quad (2)$$

where $\log p(s_i | \mathbf{s}_{<i})$ is the log-likelihood of the i th token conditioned on the preceding $i - 1$ tokens.

For BERT-like masked language models where this likelihood is ill-defined, the pseudo-perplexity is used as a substitute (Salazar et al., 2020), which is defined using the pseudo-log-likelihood score $\log p(s_i | \mathbf{s}_{/i})$ instead, where $/i$ represent all tokens in the sequence except the i th one which is replaced by the mask token. Thus, we have

$$\text{PPPL}(\mathbf{s}) = \exp \left\{ -\frac{1}{n} \sum_{i=1}^n \log p(s_i | \mathbf{s}_{/i}) \right\}. \quad (3)$$

The pseudo-perplexity and perplexity provide a measure of how well a model can predict the test set, with lower values indicating that the model is assigning higher probabilities to the sequences. In the context of protein language models, a perplexity of one indicates a perfect recapitulation of the sequence, while a random uniform guess for each amino acid would correspond to a perplexity of 20.

Pseudo-perplexity has been shown to correlate with developability and immunogenicity properties of antibodies (Bachas et al., 2022) and sequence naturalness can be defined as the inverse of pseudo-perplexity.

In Table 4, we show the average pseudo-perplexity computed on 1000 random paired sequences from the test dataset. For unpaired models, the total perplexity across

	VH	VL	Total	
PPPL	AbLang	1.148	1.068	1.109
	AntiBERTy	1.162	1.159	1.161
	ProtBert	1.649	1.246	1.326
	IgBert-unpaired	1.040	1.019	1.031
	IgBert	1.039	1.016	1.025
PPL	ProtT5	1.393	1.302	1.349
	IgT5-unpaired	1.140	1.340	1.221
	IgT5	1.131	1.284	1.081

Table 4. Average pseudo-perplexity and perplexity (PPL) on a sample of 1000 paired test sequences. Lowest values are shown in bold.

the heavy and light chain is obtained by averaging over the likelihood of both chains independently,

$$\text{PPPL}(\mathbf{s}_h, \mathbf{s}_l) = \exp \left\{ -\frac{1}{n_h} \sum_{i=1}^{n_h} \log p(s_{h,i} | \mathbf{s}_{h,/i}) - \frac{1}{n_l} \sum_{i=1}^{n_l} \log p(s_{l,i} | \mathbf{s}_{l,/i}) \right\}, \quad (4)$$

where $(\mathbf{s}_h, \mathbf{s}_l)$ is the paired variable region sequence, with a heavy chain \mathbf{s}_h of n_h amino acids and a light chain \mathbf{s}_l of length n_l . In the case of T5 models, we show the perplexity instead. The antibody language models achieve much lower perplexity and pseudo-perplexity values in comparison to the general protein ones. Additionally, paired models substantially improve on the perplexity over the total paired region compared to unpaired models. Because the perplexity is evaluated on all residues, there is a bias towards germline residues, which make up the majority of the chain, while performance of language models on non-germline residues are typically substantially lower (Olsen et al., 2024).

8. Conclusions

In this study, we investigated whether large antibody-specific language models could improve performance on sequence recovery and downstream predictive tasks.

We pre-trained both T5 and BERT models on over two billion unpaired sequences from the Observed Antibody Space using an MLM objective. We then fine-tuned the unpaired models on paired heavy and light sequences to create paired models that can learn cross-chain features. The resulting IgBert and IgT5 models are made available through Zenodo (Dreyer & Kenlay, 2024) and Huggingface.¹

We identify several key takeaways that shed light on the potential and limitations of these specialised language models.

¹Models available at huggingface.co/Exscientia.

One striking result was the substantial improvement in performance achieved through fine-tuning our models on paired data. This improvement can be attributed to the models' ability to learn cross-chain features, facilitating a deeper understanding of antibody sequences. Furthermore, the quality of the paired data played a pivotal role in enhancing performance, highlighting the significance of data quality in training protein language models.

While our experiments demonstrated improved binding affinity predictions using embeddings from large antibody-specific language models, we also observed a discrepancy in their ability to predict expression compared to general protein models. This result suggests that general protein models, which have acquired knowledge about the evolutionary diversity of proteins, have an advantage in capturing patterns relating to protein expression, whilst antibody language models may be better suited at learning specialised features relevant to antibody specific properties.

The results presented in this article open the avenue for several promising future directions. A second stage pre-training approach that incorporates general protein sequences into the training data would allow the model to enhance generalisability, improving its performance on expression benchmarks. Additionally, the integration of structural and functional information into the language model embedding representations through the application of methods such as contrastive learning (Gao et al., 2022) might improve performance on property prediction tasks, and there has been promising recent work in this direction (Hamamsy et al., 2023; Barton et al., 2023). The models trained in this study might provide a particularly powerful approach when exploring more intricate downstream tasks, such as structure prediction. They could also be leveraged for *in silico* affinity maturation, incorporating them into a therapeutic candidate generation pipelines to improve developability (Hie et al., 2023; Outeiral & Deane, 2023).

Extending the capabilities of our IgT5 model by fine-tuning it for generative tasks also opens up opportunities for generating novel antibody sequences that can provide a powerful approach for antibody design.

Our research on antibody-specific language models highlights their potential for advancing antibody-related research and development. The work presented in this article provides a key step towards harnessing the power of these models for therapeutic development, and paves the way for breakthroughs on the application of specialised language models for antibody engineering and drug discovery.

Acknowledgements

We are grateful to the NVIDIA Corporation for providing access to the 4 DGX nodes used in this study. We thank Daniel

Cutting and Constantin Schneider for useful discussions.

References

- Bachas, S., Rakocevic, G., Spencer, D., Sastry, A. V., Haile, R., Sutton, J. M., Kasun, G., Stachyra, A., Gutierrez, J. M., Yassine, E., Medjo, B., Blay, V., Kohnert, C., Stanton, J. T., Brown, A., Tijanic, N., McCloskey, C., Viazzo, R., Consbruck, R., Carter, H., Levine, S., Abdulhaqq, S., Shaul, J., Ventura, A. B., Olson, R. S., Yapici, E., Meier, J., McClain, S., Weinstock, M., Hannum, G., Schwartz, A., Gander, M., and Spreafico, R. Antibody optimization enabled by artificial intelligence predictions of binding affinity and naturalness. *bioRxiv*, 2022. doi: 10.1101/2022.08.16.504181. URL <https://www.biorxiv.org/content/early/2022/08/17/2022.08.16.504181>.
- Bairoch, A. and Apweiler, R. The SWISS-PROT protein sequence database and its supplement TrEMBL in 2000. *Nucleic Acids Research*, 28(1):45–48, 01 2000. ISSN 0305-1048. doi: 10.1093/nar/28.1.45. URL <https://doi.org/10.1093/nar/28.1.45>.
- Barton, J., Galson, J., and Leem, J. Enhancing antibody language models with structural information. *NeurIPS Machine Learning in Structural Biology workshop*, 2023.
- Burbach, S. M. and Briney, B. Improving antibody language models with native pairing, 2023.
- Chaudhary, N. and Wesemann, D. R. Analyzing immunoglobulin repertoires. *Frontiers in Immunology*, 9, 2018. ISSN 1664-3224. doi: 10.3389/fimmu.2018.00462. URL <https://www.frontiersin.org/articles/10.3389/fimmu.2018.00462>.
- Chen, B., Cheng, X., ao Geng, Y., Li, S., Zeng, X., Wang, B., Gong, J., Liu, C., Zeng, A., Dong, Y., Tang, J., and Song, L. xtrimopglm: Unified 100b-scale pre-trained transformer for deciphering the language of protein. *bioRxiv*, 2023. doi: 10.1101/2023.07.05.547496. URL <https://www.biorxiv.org/content/early/2023/07/14/2023.07.05.547496>.
- Chen, S., Hou, Y., Cui, Y., Che, W., Liu, T., and Yu, X. Recall and learn: Fine-tuning deep pretrained language models with less forgetting, 2020.
- Chu, S. K. S. and Wei, K. Y. Generative antibody design for complementary chain pairing sequences through encoder-decoder language model, 2023.
- Chungyoun, M., Ruffolo, J., and Gray, J. J. Flab: Benchmarking tasks in fitness landscape inference for antibodies. *NeurIPS Machine Learning in Structural Biology Workshop*, 2023.

- Consortium, T. U. UniProt: the Universal Protein Knowledgebase in 2023. *Nucleic Acids Research*, 51(D1): D523–D531, 11 2022. ISSN 0305-1048. doi: 10.1093/nar/gkac1052. URL <https://doi.org/10.1093/nar/gkac1052>.
- Devlin, J., Chang, M., Lee, K., and Toutanova, K. BERT: pre-training of deep bidirectional transformers for language understanding. *CoRR*, abs/1810.04805, 2018. URL <http://arxiv.org/abs/1810.04805>.
- Dreyer, F. A. and Kenlay, H. Large scale paired antibody language models, March 2024. URL <https://zenodo.org/doi/10.5281/zenodo.10876908>.
- Elnaggar, A., Heinzinger, M., Dallago, C., Rehawi, G., Wang, Y., Jones, L., Gibbs, T., Feher, T., Angerer, C., Steinegger, M., Bhowmik, D., and Rost, B. ProtTrans: Toward understanding the language of life through self-supervised learning. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 44(10):7112–7127, 2022. doi: 10.1109/TPAMI.2021.3095381.
- Gao, T., Yao, X., and Chen, D. Simcse: Simple contrastive learning of sentence embeddings, 2022.
- Gruver, N., Stanton, S., Frey, N. C., Rudner, T. G. J., Hotzel, I., Lafrance-Vanasse, J., Rajpal, A., Cho, K., and Wilson, A. G. Protein design with guided discrete diffusion, 2023.
- Hamamsy, T., Barot, M., Morton, J. T., Steinegger, M., Bonneau, R., and Cho, K. Learning sequence, structure, and function representations of proteins with language models. *bioRxiv*, 2023. doi: 10.1101/2023.11.26.568742. URL <https://www.biorxiv.org/content/early/2023/11/26/2023.11.26.568742>.
- Harmalkar, A., Rao, R., Xie, Y. R., Honer, J., Deisting, W., Anlahr, J., Hoenig, A., Czwikla, J., Sienz-Widmann, E., Rau, D., Rice, A. J., Riley, T. P., Li, D., Catterall, H. B., Tinberg, C. E., Gray, J. J., and Wei, K. Y. Toward generalizable prediction of antibody thermostability using machine learning on sequence and structure features. *mAbs*, 15(1):2163584, 2023. doi: 10.1080/19420862.2022.2163584. URL <https://doi.org/10.1080/19420862.2022.2163584>. PMID: 36683173.
- Hie, B. L., Yang, K. K., and Kim, P. S. Evolutionary velocity with protein language models predicts evolutionary dynamics of diverse proteins. *Cell Systems*, 13(4):274–285, 2022.
- Hie, B. L., Shanker, V. R., Xu, D., Bruun, T. U. J., Weidenbacher, P. A., Tang, S., Wu, W., Pak, J. E., and Kim, P. S. Efficient evolution of human antibodies from general protein language models. *Nature Biotechnology*, 2023. doi: 10.1038/s41587-023-01763-2. URL <https://doi.org/10.1038/s41587-023-01763-2>.
- Høie, M., Hummer, A., Olsen, T., Nielsen, M., and Deane, C. Antifold: Improved antibody structure design using inverse folding. In *NeurIPS 2023 Generative AI and Biology (GenBio) Workshop*, 2023. URL <https://openreview.net/forum?id=bxZMKHt1L6>.
- Kirkpatrick, J., Pascanu, R., Rabinowitz, N., Veness, J., Desjardins, G., Rusu, A. A., Milan, K., Quan, J., Ramalho, T., Grabska-Barwinska, A., Hassabis, D., Clopath, C., Kumaran, D., and Hadsell, R. Overcoming catastrophic forgetting in neural networks. *Proceedings of the National Academy of Sciences*, 114(13):3521–3526, 2017. doi: 10.1073/pnas.1611835114. URL <https://www.pnas.org/doi/abs/10.1073/pnas.1611835114>.
- Koenig, P., Lee, C. V., Walters, B. T., Janakiraman, V., Stinson, J., Patapoff, T. W., and Fuh, G. Mutational landscape of antibody variable domains reveals a switch modulating the interdomain conformational dynamics and antigen binding. *Proceedings of the National Academy of Sciences*, 114(4):E486–E495, 2017. doi: 10.1073/pnas.1613231114. URL <https://www.pnas.org/doi/abs/10.1073/pnas.1613231114>.
- Kovaltsuk, A., Leem, J., Kelm, S., Snowden, J., Deane, C. M., and Krawczyk, K. Observed Antibody Space: A Resource for Data Mining Next-Generation Sequencing of Antibody Repertoires. *The Journal of Immunology*, 201(8):2502–2509, 10 2018. ISSN 0022-1767. doi: 10.4049/jimmunol.1800708. URL <https://doi.org/10.4049/jimmunol.1800708>.
- Leem, J., Mitchell, L. S., Farmery, J. H., Barton, J., and Galson, J. D. Deciphering the language of antibodies using self-supervised learning. *Patterns*, 3(7):100513, 2022. ISSN 2666-3899. doi: <https://doi.org/10.1016/j.patter.2022.100513>. URL <https://www.sciencedirect.com/science/article/pii/S2666389922001052>.
- Lin, Z., Akin, H., Rao, R., Hie, B., Zhu, Z., Lu, W., Smetanin, N., Verkuil, R., Kabeli, O., Shmueli, Y., dos Santos Costa, A., Fazel-Zarandi, M., Seracu, T., Candido, S., and Rives, A. Evolutionary-scale prediction of atomic-level protein structure with a language model. *Science*, 379(6637):1123–1130, 2023. doi: 10.1126/science.ade2574. URL <https://www.science.org/doi/abs/10.1126/science.ade2574>.
- Liu, Y., Ott, M., Goyal, N., Du, J., Joshi, M., Chen, D., Levy, O., Lewis, M., Zettlemoyer, L., and Stoyanov, V. Roberta: A robustly optimized bert pretraining approach, 2019.
- Loshchilov, I. and Hutter, F. Decoupled weight decay regularization. In *International Conference on Learning*

- Representations*, 2019. URL <https://openreview.net/forum?id=Bkg6RiCqY7>.
- Madani, A., Krause, B., Greene, E. R., Subramanian, S., Mohr, B. P., Holton, J. M., Olmos, J. L., Xiong, C., Sun, Z. Z., Socher, R., Fraser, J. S., and Naik, N. Large language models generate functional protein sequences across diverse families. *Nature Biotechnology*, 41(8):1099–1106, 2023. doi: 10.1038/s41587-022-01618-2. URL <https://doi.org/10.1038/s41587-022-01618-2>.
- Narciso, J. E., Uy, I., Cabang, A., Chavez, J., Pablo, J., Padilla-Concepcion, G., and Padlan, E. Analysis of the antibody structure based on high-resolution crystallographic studies. *New biotechnology*, 28:435–47, 04 2011. doi: 10.1016/j.nbt.2011.03.012.
- Olsen, T. H., Boyles, F., and Deane, C. M. Observed antibody space: A diverse database of cleaned, annotated, and translated unpaired and paired antibody sequences. *Protein Science*, 31(1):141–146, 2022a. doi: <https://doi.org/10.1002/pro.4205>. URL <https://onlinelibrary.wiley.com/doi/abs/10.1002/pro.4205>.
- Olsen, T. H., Moal, I. H., and Deane, C. M. AbLang: an antibody language model for completing antibody sequences. *Bioinformatics Advances*, 2(1):vbac046, 06 2022b. ISSN 2635-0041. doi: 10.1093/bioadv/vbac046. URL <https://doi.org/10.1093/bioadv/vbac046>.
- Olsen, T. H., Moal, I. H., and Deane, C. M. Addressing the antibody germline bias and its effect on language models for improved antibody design. *bioRxiv*, 2024. doi: 10.1101/2024.02.02.578678. URL <https://www.biorxiv.org/content/early/2024/02/07/2024.02.02.578678>.
- Outeiral, C. and Deane, C. M. Perfecting antibodies with language models. *Nature Biotechnology*, 2023. doi: 10.1038/s41587-023-01991-6. URL <https://doi.org/10.1038/s41587-023-01991-6>.
- Prihoda, D., Maamary, J., Waight, A., Juan, V., Fayadat-Dilman, L., Svozi, D., and Bitton, D. A. Bi-phi: A platform for antibody design, humanization, and humanness evaluation based on natural antibody repertoires and deep learning. *mAbs*, 14(1):2020203, 2022. doi: 10.1080/19420862.2021.2020203. URL <https://doi.org/10.1080/19420862.2021.2020203>. PMID: 35133949.
- Raffel, C., Shazeer, N., Roberts, A., Lee, K., Narang, S., Matena, M., Zhou, Y., Li, W., and Liu, P. J. Exploring the limits of transfer learning with a unified text-to-text transformer. *J. Mach. Learn. Res.*, 21(1), jan 2020. ISSN 1532-4435.
- Rajbhandari, S., Rasley, J., Ruwase, O., and He, Y. Zero: Memory optimizations toward training trillion parameter models. In *SC20: International Conference for High Performance Computing, Networking, Storage and Analysis*, pp. 1–16. IEEE, 2020.
- Regep, C., Georges, G., Shi, J., Popovic, B., and Deane, C. The h3 loop of antibodies shows unique structural characteristics: Cdr h3 of antibodies shows unique structural characteristics. *Proteins: Structure, Function, and Bioinformatics*, 85, 03 2017. doi: 10.1002/prot.25291.
- Rives, A., Meier, J., Sercu, T., Goyal, S., Lin, Z., Liu, J., Guo, D., Ott, M., Zitnick, C. L., Ma, J., and Ferguson, R. Biological structure and function emerge from scaling unsupervised learning to 250 million protein sequences. *Proceedings of the National Academy of Sciences*, 118(15):e2016239118, 2021. doi: 10.1073/pnas.2016239118. URL <https://www.pnas.org/doi/abs/10.1073/pnas.2016239118>.
- Ruffolo, J. A., Gray, J. J., and Sulam, J. Deciphering antibody affinity maturation with language models and weakly supervised learning, 2021.
- Ruffolo, J. A., Chu, L.-S., Mahajan, S. P., and Gray, J. J. Fast, accurate antibody structure prediction from deep learning on massive set of natural antibodies. *Nature Communications*, 14(1):2389, 2023. doi: 10.1038/s41467-023-38063-x. URL <https://doi.org/10.1038/s41467-023-38063-x>.
- Salazar, J., Liang, D., Nguyen, T. Q., and Kirchhoff, K. Masked language model scoring. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*. Association for Computational Linguistics, 2020. doi: 10.18653/v1/2020.acl-main.240. URL <http://dx.doi.org/10.18653/v1/2020.acl-main.240>.
- Shanehsazzadeh, A., Bachas, S., Kasun, G., Sutton, J. M., Steiger, A. K., Shuai, R., Kohnert, C., Morehead, A., Brown, A., Chung, C., Luton, B. K., Diaz, N., McPartlon, M., Knight, B., Radach, M., Bateman, K., Spencer, D. A., Cejovic, J., Kopec-Belliveau, G., Haile, R., Yassine, E., McCloskey, C., Natividad, M., Chapman, D., Stojanovic, L., Rakocevic, G., Hannum, G., Yapici, E., Moran, K., Caguiat, R., Abdulhaqq, S., Guo, Z., Klug, L. R., Gander, M., and Meier, J. Unlocking de novo antibody design with generative artificial intelligence. *bioRxiv*, 2023. doi: 10.1101/2023.01.08.523187. URL <https://www.biorxiv.org/content/early/2023/01/09/2023.01.08.523187>.
- Shuai, R. W., Ruffolo, J. A., and Gray, J. J. Generative language modeling for antibody design. *bioRxiv*, 2022. doi: 10.1101/2021.12.13.472419.

URL <https://www.biorxiv.org/content/early/2022/12/20/2021.12.13.472419>.

Steinegger, M. and Söding, J. Mmseqs2 enables sensitive protein sequence searching for the analysis of massive data sets. *Nature Biotechnology*, 35(11):1026–1028, 2017. doi: 10.1038/nbt.3988. URL <https://doi.org/10.1038/nbt.3988>.

Steinegger, M. and Söding, J. Clustering huge protein sequence sets in linear time. *Nature Communications*, 9(1):2542, 2018. doi: 10.1038/s41467-018-04964-5. URL <https://doi.org/10.1038/s41467-018-04964-5>.

Suzek, B. E., Wang, Y., Huang, H., McGarvey, P. B., Wu, C. H., and the UniProt Consortium. UniRef clusters: a comprehensive and scalable alternative for improving sequence similarity searches. *Bioinformatics*, 31(6): 926–932, 11 2014. ISSN 1367-4803. doi: 10.1093/bioinformatics/btu739. URL <https://doi.org/10.1093/bioinformatics/btu739>.

Tsuchiya, Y. and Mizuguchi, K. The diversity of h3 loops determines the antigen-binding tendencies of antibody cdr loops. *Protein science : a publication of the Protein Society*, 25, 01 2016. doi: 10.1002/pro.2874.

Vashchenko, D., Nguyen, S., Goncalves, A., da Silva, F. L., Petersen, B., Desautels, T., and Faissol, D. Abbert: Learning antibody humanness via masked language modeling. *bioRxiv*, 2022. doi: 10.1101/2022.08.02.502236. URL <https://www.biorxiv.org/content/early/2022/08/04/2022.08.02.502236>.

Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., Gomez, A. N., Kaiser, L., and Polosukhin, I. Attention is all you need, 2017.

Warszawski, S., Borenstein Katz, A., Lipsh, R., Khmel-nitsky, L., Ben Nissan, G., Javitt, G., Dym, O., Unger, T., Knop, O., Albeck, S., Diskin, R., Fass, D., Sharon, M., and Fleishman, S. J. Optimizing antibody affinity and stability by the automated design of the variable light-heavy chain interfaces. *PLOS Computational Biology*, 15(8):1–24, 08 2019. doi: 10.1371/journal.pcbi.1007207. URL <https://doi.org/10.1371/journal.pcbi.1007207>.

A. Model usage

IgBert can be used through the Hugging Face library as follows

```
from transformers import BertForMaskedLM, BertTokenizer
tokenizer = BertTokenizer.from_pretrained("Exscientia/IgBert",
                                         do_lower_case=False)
model = BertForMaskedLM.from_pretrained("Exscientia/IgBert")
```

Here Exscientia/IgBert can be replaced by Exscientia/IgBert_unpaired to load the unpaired model instead.

Similarly, IgT5 can be used with

```
from transformers import T5Tokenizer, T5Model
tokenizer = T5Tokenizer.from_pretrained("Exscientia/IgT5",
                                       do_lower_case=False)
model = T5Model.from_pretrained("Exscientia/IgT5")
```

where one can again replace the paired model Exscientia/IgT5 by Exscientia/IgT5_unpaired to load the model pre-trained on unpaired sequences.

Note that for the IgBert model, paired sequences are combined by using the [SEP] separator token, while for the paired IgT5 model the corresponding separator is </s>.

More detailed usage examples can be found in each model card:

- IgBert: <https://huggingface.co/Exscientia/IgBert>
- IgBert-unpaired: https://huggingface.co/Exscientia/IgBert_unpaired
- IgT5: <https://huggingface.co/Exscientia/IgT5>
- IgT5-unpaired: https://huggingface.co/Exscientia/IgT5_unpaired

B. Unpaired sequence recovery

The sequence recovery achieved by each model on a test set of unpaired sequences is shown in Table 5. The IgT5-unpaired model tends to achieve the highest amino acid recovery in the CDR loops, while the IgT5 model has comparable accuracy in the framework.

Model	FWH1	FWH2	FWH3	FWH4	CDRH1	CDRH2	CDRH3	Total VH
AbLang (Olsen et al., 2022b)	0.9605	0.9508	0.9370	0.9625	0.8901	0.8739	0.5842	0.8900
AntiBERTy (Ruffolo et al., 2021)	0.9635	0.9497	0.9372	0.9620	0.8926	0.8770	0.5304	0.8836
ProtBert (Elnaggar et al., 2022)	0.7308	0.7151	0.6868	0.7933	0.6257	0.4646	0.2791	0.6335
IgBert-unpaired	<i>0.9674</i>	0.9569	<i>0.9511</i>	0.9717	0.9058	<i>0.8983</i>	0.6348	0.9071
IgBert	0.9672	<i>0.9576</i>	0.9505	<i>0.9720</i>	<i>0.9086</i>	0.8979	<i>0.6365</i>	<i>0.9074</i>
ProtT5 (Elnaggar et al., 2022)	0.7843	0.8163	0.8697	0.8918	0.7185	0.6267	0.3463	0.7560
IgT5-unpaired	0.9688	0.9622	<u>0.9573</u>	<u>0.9761</u>	0.9199	0.9198	0.7031	0.9224
IgT5	<u>0.9681</u>	<u>0.9605</u>	0.9575	0.9769	<u>0.9183</u>	<u>0.9182</u>	<u>0.6989</u>	<u>0.9213</u>
Model	FWL1	FWL2	FWL3	FWL4	CDRL1	CDRL2	CDRL3	Total VL
AbLang (Olsen et al., 2022b)	0.9277	0.9240	0.9283	0.9088	0.7953	0.8110	0.7646	0.8986
AntiBERTy (Ruffolo et al., 2021)	0.9413	0.9205	0.9269	0.9099	0.8156	0.8033	0.7769	0.9029
ProtBert (Elnaggar et al., 2022)	0.6285	0.7437	0.7410	0.5871	0.4209	0.4134	0.2553	0.6269
IgBert-unpaired	0.9421	<i>0.9342</i>	0.9379	0.9300	0.8299	<i>0.8539</i>	<i>0.8055</i>	0.9160
IgBert	<i>0.9423</i>	0.9324	<i>0.9399</i>	<i>0.9320</i>	<i>0.8331</i>	0.8412	0.8031	<i>0.9161</i>
ProtT5 (Elnaggar et al., 2022)	0.7992	0.8563	0.8288	0.7639	0.6201	0.5522	0.4684	0.7659
IgT5-unpaired	<u>0.9450</u>	0.9441	0.9464	0.9442	0.8655	0.8838	<u>0.8413</u>	0.9289
IgT5	0.9458	<u>0.9423</u>	<u>0.9453</u>	<u>0.9418</u>	<u>0.8522</u>	<u>0.8751</u>	0.8442	<u>0.9272</u>

Table 5. Fraction of correctly predicted residues by region, after masking 15% of the sequence for a random test set of 100k unpaired sequences. The best, second and third best performing models for each region are shown in bold, underlined and italic respectively.

C. Correlation for binding affinity and expression

We show the correlation of the predicted binding energy and expression with the data in Table 6, for a linear fit on a feature of averaged embedding representations.

Model	Binding $N = 422$ <small>(Shanehsazzadeh et al., 2023)</small>	Binding $N = 2048$ <small>(Warszawski et al., 2019)</small>	Binding $N = 4275$ <small>(Koenig et al., 2017)</small>	Expression $N = 4275$ <small>(Koenig et al., 2017)</small>
AbLang (Olsen et al., 2022b)	<i>0.556</i> \pm 0.106	<i>0.499</i> \pm 0.037	<u>0.496</u> \pm 0.032	0.665 \pm 0.022
AntiBERTy (Ruffolo et al., 2021)	0.501 \pm 0.098	0.47 \pm 0.059	0.449 \pm 0.026	0.634 \pm 0.027
ProtBert (Elnaggar et al., 2022)	0.472 \pm 0.157	0.406 \pm 0.043	0.342 \pm 0.039	0.708 \pm 0.021
IgBert-unpaired	0.549 \pm 0.082	0.459 \pm 0.057	0.435 \pm 0.029	0.608 \pm 0.024
IgBert	0.636 \pm 0.044	0.438 \pm 0.03	0.457 \pm 0.047	0.563 \pm 0.078
ProtT5 (Elnaggar et al., 2022)	0.56 \pm 0.085	0.456 \pm 0.059	<i>0.467</i> \pm 0.04	0.837 \pm 0.012
IgT5-unpaired	<u>0.575</u> \pm 0.087	<u>0.534</u> \pm 0.053	0.457 \pm 0.023	<u>0.76</u> \pm 0.019
IgT5	0.554 \pm 0.062	0.566 \pm 0.065	0.51 \pm 0.023	<i>0.75</i> \pm 0.041

Table 6. Pearson correlation for a linear model applied on the embeddings of each language model to predict binding or expression. The best, second and third best performing models for each benchmark are shown in bold, underlined and italic respectively.