

# JumpBackHash: Say Goodbye to the Modulo Operation to Distribute Keys Uniformly to Buckets

Otmar Ertl  
 Dynatrace Research  
 Linz, Austria  
 otmar.ertl@dynatrace.com

## ABSTRACT

The distribution of keys to a given number of buckets is a fundamental task in distributed data processing and storage. A simple, fast, and therefore popular approach is to map the hash values of keys to buckets based on the remainder after dividing by the number of buckets. Unfortunately, these mappings are not stable when the number of buckets changes, which can lead to severe spikes in system resource utilization, such as network or database requests. Consistent hash algorithms can minimize remappings, but are either significantly slower than the modulo-based approach, require floating-point arithmetic, or are based on a family of hash functions rarely available in standard libraries. This paper introduces JumpBackHash, which uses only integer arithmetic and a standard pseudorandom generator. Due to its speed and simple implementation, it can safely replace the modulo-based approach to improve assignment and system stability. A production-ready Java implementation of JumpBackHash has been released as part of the Hash4j open source library.

## 1 INTRODUCTION

Distributed data processing and storage requires a strategy how tasks or data are mapped across available resources. In more abstract terms, the strategy must be able to distribute keys to a given number of buckets. Ideally, the keys are uniformly assigned to the buckets to achieve balanced utilization of resources. If there are  $n$  buckets labeled  $0, 1, \dots, n-1$ , a very popular pattern to map a given integer key  $k$  to a bucket index  $b$  is

$$k \bmod n \rightarrow b. \quad (1)$$

If the key  $k$  is the result of some high-quality hash function [31, 34, 36] and can be considered like a true random value, and the number of resources is much smaller than the maximum possible hash value, which is usually the case for 64-bit hash values, the keys will be uniformly distributed over the buckets, such that

$$\Pr((k \bmod n) = b) = \frac{1}{n}. \quad (2)$$

Unfortunately, a change in the number of buckets will also change the mapping of nearly all keys. If  $n$  is increased to  $n+1$ , every key will be mapped to a different bucket with a probability of  $\frac{n}{n+1}$  which approaches 1 for large  $n$ . The same is true if the number of buckets is reduced. All those reassignments would happen at the same time and cause pressure on a distributed system. For example, this might lead to timely concentrated higher network load as data needs to be shifted to other physical instances. Or, this could also result in a short-term increase of database requests to load key-specific settings or missing cache entries, which in turn may cause back pressure on data streams.

Table 1: Notation.

Symbol	Comment
$\lfloor \dots \rfloor$	floor function, e.g. $\lfloor 3.7 \rfloor = 3$
$\langle \dots \rangle_2$	binary representation, e.g. $\langle 110 \rangle_2 = 6$
$\oplus$	bitwise XOR, e.g. $\langle 1010 \rangle_2 \oplus \langle 1100 \rangle_2 = \langle 0110 \rangle_2$
bitcount	number of set bits, e.g. $\text{bitcount}(\langle 10110 \rangle_2) = 3$
$k$	key, typically a 64-bit hash value
$n$	number of buckets, $n > 0$
$\text{ch}(k, n)$	consistent hash function, see Section 1.1
$\mathcal{A}$	set of active indices, compare Section 2.1
Uniform( $S$ )	uniform distribution over the set $S$
Exp( $\lambda$ )	exponential distribution with rate parameter $\lambda$
Geom( $p$ )	geometric distribution with success probability $p$ and positive support
Bernoulli( $p$ )	Bernoulli distribution with probability $p$
$\mathcal{R}$	pseudorandom generator (PRG)
$\mathcal{R}[D]$	sample from distribution $D$ using $\mathcal{R}$
$\llbracket n \rrbracket$	$\{0, 1, 2, \dots, n-1\}$
$\mathcal{I}_m$	$\{2^m, 2^m+1, \dots, 2^{m+1}-1\} = \llbracket 2^{m+1} \rrbracket \setminus \llbracket 2^m \rrbracket$

Therefore, it is critical to minimize the number of reassignments, while preserving a uniform distribution. To maintain uniformity after increasing  $n$  to  $n+1$ , an ideal reallocation would only move a minimal number of keys from the already existing  $n$  buckets to the newly added  $(n+1)$ -th bucket having index  $n$  to restore balance. The mapping of all other keys should remain untouched. The expected fraction of keys that have to be moved, when using an optimal balanced mapping strategy, must be at least  $\frac{1}{n+1}$ . Hence, the probability that a key gets reassigned would be close to 0, for large  $n$ . Algorithms that minimize the number of reassignments while mapping keys uniformly to a given number of buckets are known to be consistent. If there was no performance difference, it would be generally wise to replace pattern (1) by

$$\text{ch}(k, n) \rightarrow b.$$

where  $\text{ch}(k, n)$  denotes a consistent hash function. This work presents JumpBackHash, which is a simple consistent hash function with a performance comparable to the modulo-based approach (1).

### 1.1 Consistent Hash Functions

A consistent hash function, is a deterministic function that maps a key  $k$  to a bucket index from  $\llbracket n \rrbracket := \{0, 1, 2, \dots, n-1\}$ , where  $n > 0$  is the number of buckets, and that has the following two properties:

**Uniformity:** The probability that a random key is assigned to a bucket is the same for all  $n$  buckets [16, 22, 24]

$$\Pr(\text{ch}(k, n) = b) = \frac{1}{n}.$$

Uniform hash functions are sometimes also called balanced [11–13, 27] or regular [25].

**Monotonicity:** If the number of buckets is increased and a key is mapped to a different bucket, the bucket is always the last newly

added one [11–13], which can be expressed as

$$\text{ch}(k, n) \neq \text{ch}(k, n + 1) \Rightarrow \text{ch}(k, n + 1) = n. \quad (3)$$

This property is sometimes also referred to as minimal disruption [27] or consistency [16]. In this paper, we use the term consistency to describe the combination of monotonicity and uniformity.

While the modulo-based approach is uniform according to (2), it is not monotonic. A minimal example violating (3) is given by  $k = 4$  and  $n = 2$  when  $\text{ch}(k, n) := k \bmod n$ .

## 1.2 Related Work

Interestingly, consistent hashing can be seen as a special case of consistent weighted sampling [24], where the weight vector has a single dimension with an integer weight equal to the number of buckets  $n$ . The adaptation of the improved consistent weighted sampling (ICWS) algorithm [16] to our problem results in Algorithm 1 which obviously has a constant time complexity. Unfortunately, it involves expensive floating-point operations including an exponentiation and a logarithm evaluation, which makes it rather slow, especially on embedded or low-power devices without floating-point units. Nevertheless, the algorithm can be easily implemented, as it relies on an ordinary pseudorandom generator (PRG) that is seeded with the given key  $k$ . Standard libraries often already come with modern and reliable PRG implementations, such as SplitMix [32] in Java, that pass a series of statistical tests [20]. These libraries sometimes even offer functions for the efficient generation of exponentially distributed random values, as required by ICWS. Although ICWS has been around for some time, it was only recently discovered as a consistent hash function when it was added to version 0.14.0 of our open source Hash4j library [3].

JumpHash [19], on the other hand, became much more popular, although it was invented a few years later. It is shown in Algorithm 2 and will be discussed in more detail later. As ICWS, it uses a standard PRG and floating-point arithmetic, but avoids expensive transcendental functions. Therefore, it is usually faster than ICWS, except for large  $n$  due to its logarithmic time complexity. JumpHash is widely used in the meantime. For example, it is offered as hash function in the Guava Java library [2] or in ClickHouse [1]. It is also used by Booking.com for their customer review system [15], by Grafana for trace and metric data distribution [7, 9], by VMware Greenplum since version 6 to map data values to segments [6], by RabbitMQ since version 3.7.8 in its Consistent Hashing Exchange Plugin for message distribution [5], or for distributed processing of vehicle license plates [35].

Recently, PowerHash was introduced as the first consistent hash algorithm with constant runtime able to beat JumpHash over the whole range [22]. Unlike JumpHash and ICWS, it relies on a family of hash functions that are less common in standard libraries and often have to be self-implemented. Since families of hash functions are used less frequently in practice, their statistical properties such as independence and uniformity are usually less tested and therefore less trustworthy than those of PRGs. A family of hash functions is also used by the even more recent FlipHash algorithm [25], which is similar to PowerHash but avoids floating-point operations.

Consistent hashing as considered in this work, allows removing buckets only in the reverse order as they were added. A lot of research was done on the more general problem, where buckets can

---

**Algorithm 1:** Specialization of improved consistent weighted sampling (ICWS) [16] to map a key  $k$  consistently to  $\llbracket n \rrbracket$ .

---

```

function ICWS( $k, n$ )
   $\mathcal{R} \leftarrow$  initialize PRG with seed  $k$ 
   $U \leftarrow \mathcal{R}[\text{Uniform}([0, 1))]$ 
   $G \leftarrow \mathcal{R}[\text{Exp}(1)] + \mathcal{R}[\text{Exp}(1)]$  ▷  $G$  is Gamma(2, 1)-distributed
  return  $\min(\lfloor \exp(G \cdot (\ln(n)/G + U)) \rfloor, n - 1)$ 
▷ truncate at  $n - 1$  to protect against numerical errors

```

---

be arbitrarily added and removed [8, 10, 12–14, 18, 27–29, 33, 37]. However, they are typically significantly slower, require some state, or are not optimal with respect to the number of reassignments. A recently presented algorithm, MementoHash [11] builds upon JumpHash and therefore demonstrates how any consistent hash algorithm can be extended to support removals in arbitrary order.

## 1.3 Our Contributions

We introduce JumpBackHash, a fast consistent hash algorithm with expected constant runtime, which also works completely without floating-point operations. In contrast to PowerHash [22] or FlipHash [25] which require a family of hash functions, JumpBackHash, like JumpHash [19], only uses a standard pseudorandom generator (PRG).

To derive JumpBackHash, we use the concept of active indices, which has already been used for consistent weighted sampling [16, 24]. This new perspective allows a better understanding of JumpHash and leads us after some stepwise optimizations to JumpBackHash. We also perform a theoretical runtime analysis, which is empirically verified together with uniformity and monotonicity.

## 2 METHODOLOGY

A simple way to define a consistent hash function is

$$\text{ch}(k, n) := \arg \min_{b \in \llbracket n \rrbracket} R_b, \quad (4)$$

where  $R_0, R_1, R_2, \dots$  is a sequence of independent and identically distributed values obtained by a PRG with seed  $k$  and a support large enough to ignore accidental collisions in practice. This function is uniform as the random values  $R_0, R_1, \dots, R_{n-1}$  have the same chance of being the minimum. It is also monotonic, because if the number of buckets is increased from  $n$  to  $n+1$ , the mapping remains stable, except for the case where  $R_n$  is the new minimum and thus the result changes to  $n$ .

Unfortunately, this approach is not very efficient as it takes  $O(n)$  time to generate all relevant random values  $R_b$  with  $b \in \llbracket n \rrbracket$ . The order in which the random values  $R_b$  are drawn using the PRG is not important as long as it is well defined and does not depend on  $n$ . For example, if we know an upper bound  $N$  such that  $n \leq N$  is always satisfied, we could draw the random values in reverse order according to  $R_{N-1}, R_{N-2}, \dots, R_1, R_0$ . Even though this would lead to a time complexity of  $O(N)$  if  $n \ll N$ , (4) would still be a valid consistent hash function.

### 2.1 Active Indices

To construct a more efficient consistent hash algorithm based on (4), we use the concept of *active indices* [16, 24]. A bucket index  $b$

---

**Algorithm 2:** The JumpHash algorithm [19] consistently maps  $k$  to the integer range  $\llbracket n \rrbracket$ .

---

```

function JumpHash( $k, n$ )
   $\mathcal{R} \leftarrow$  initialize PRG with seed  $k$ 
   $b \leftarrow -1$ 
   $b' \leftarrow 0$ 
  while  $b' < n$  do
     $b \leftarrow b'$ 
     $U \leftarrow \mathcal{R}[\text{Uniform}([0, 1])]$ 
     $b' \leftarrow \lfloor (b+1)/U \rfloor$ 
  return  $b$ 

```

---

is an active index if

$$R_b = \min_{b' \in \llbracket b+1 \rrbracket} R_{b'}. \quad (5)$$

By definition, bucket index 0 is always an active index. For  $b > 0$  this definition is equivalent to  $R_b < \min_{b' \in \llbracket b \rrbracket} R_{b'}$ . According to (4) only active indices are candidates for the mapping. Let  $\mathcal{A}$  be the set of active indices, then (4) can be simply expressed as

$$\text{ch}(k, n) := \max(\mathcal{A} \cap \llbracket n \rrbracket), \quad (6)$$

If we find an equivalent statistical process to generate the active indices in order and directly, without the detour of generating the random values  $R_b$  for each individual bucket index, we could save a lot of computation time.

## 2.2 JumpHash

Generating active indices in ascending order is exactly what JumpHash does, even though the algorithm was derived and analyzed without the concept of active indices [19]. Given an active index  $A$ , the probability that  $A+1$  is the next larger active index equals the probability that  $R_{A+1}$  is the smallest among the first  $A+2$  random values  $\{R_b\}_{b \in \llbracket A+2 \rrbracket}$  which occurs with a probability of  $\frac{1}{A+2}$ . The probability that  $A+2$  is the next active index with respect to  $A$  is given by the probability that  $A+1$  is not an active index multiplied by the probability that  $R_{A+2}$  is the smallest value, which is therefore  $(1 - \frac{1}{A+2}) \frac{1}{A+3} = \frac{A+1}{(A+2)(A+3)}$ . In general, the probability that  $A+\Delta$  is the next active index with respect to  $A$  is given by  $(\prod_{i=2}^{\Delta} 1 - \frac{1}{A+i}) \frac{1}{A+\Delta+1} = \frac{A+1}{(A+\Delta)(A+\Delta+1)}$ .

Hence, the active indices can be generated directly and in ascending order using the recursion

$$A_{l+1} = \lfloor (A_l + 1)/U \rfloor \quad \text{with } U \sim \text{Uniform}([0, 1]) \text{ and } A_0 = 0,$$

because  $A_{l+1} = A_l + \Delta$  holds if  $U \in (\frac{A_l+1}{A_l+\Delta+1}, \frac{A_l+1}{A_l+\Delta}]$ , which occurs with a probability of  $\frac{A_l+1}{A_l+\Delta} - \frac{A_l+1}{A_l+\Delta+1} = \frac{A_l+1}{(A_l+\Delta)(A_l+\Delta+1)}$  as required. The recursion together with (6) leads directly to the JumpHash algorithm as shown in Algorithm 2.

The runtime is given by the number of consumed random values  $T_{\text{JH}}$  which also corresponds to the number of active indices that need to be generated until the first active index greater than or equal to  $n$  is found. As the very first active index is always 0 and does not have to be generated,  $T_{\text{JH}}$  is also the same as the number of active indices in  $\llbracket n \rrbracket$ . The probability that bucket index  $b$  is active is  $\frac{1}{b+1}$ , as this is the probability that the associated random value  $R_b$  is the smallest among the first  $b+1$  random values  $\{R_{b'}\}_{b' \in \llbracket b+1 \rrbracket}$ .

---

**Algorithm 3:** Consistent hashing by jumping backwards,  $n \leq N$ .

---

```

function JumpingBackwards( $k, n$ )
   $\mathcal{R} \leftarrow$  initialize random generator with seed  $k$ 
   $b \leftarrow N$ 
  repeat
     $b \leftarrow \mathcal{R}[\text{Uniform}(\llbracket b \rrbracket)]$ 
  until  $b < n$ 
  return  $b$ 

```

---

Therefore,  $T_{\text{JH}}$  is distributed as

$$T_{\text{JH}} \sim \sum_{b=0}^{n-1} \text{Bernoulli}\left(\frac{1}{b+1}\right) \sim \sum_{i=1}^n \text{Bernoulli}\left(\frac{1}{i}\right),$$

where  $\text{Bernoulli}(p)$  denotes a Bernoulli random variable with probability  $p$ . When using  $\mathbb{E}(X+Y) = \mathbb{E}(X) + \mathbb{E}(Y)$  and  $\text{Var}(X+Y) = \text{Var}(X) + \text{Var}(Y)$  for independent  $X$  and  $Y$  together with  $\mathbb{E}(\text{Bernoulli}(p)) = p$  and  $\text{Var}(\text{Bernoulli}(p)) = p(1-p)$ , the expectation and the variance of  $T_{\text{JH}}$  can be derived as

$$\mathbb{E}(T_{\text{JH}}) = \sum_{i=1}^n \frac{1}{i} \leq 1 + \ln n,$$

$$\text{Var}(T_{\text{JH}}) = \sum_{i=1}^n \frac{1}{i} - \sum_{i=1}^n \frac{1}{i^2} \leq \ln n.$$

## 2.3 Jumping Backwards

The way JumpHash generates active indices is not unique. If an upper bound  $N$  is known for the number of buckets  $n \leq N$ , which is always the case in practice as standard integer types are limited, it is also possible to generate active indices in descending order using the recursion

$$A_{l+1} \sim \text{Uniform}(\llbracket A_l \rrbracket) \quad \text{with } A_0 = N.$$

The rationale behind this approach is very simple. The next smallest active index is given by the smallest random value from  $\{R_b\}_{b \in \llbracket A_l \rrbracket}$ . As, by definition, they are all identically distributed, they have the same chance to be the next smaller active index. Based on this recursion another consistent hash algorithm can be constructed as shown by Algorithm 3.

In contrast to JumpHash, this approach does not involve floating-point operations. However, it requires the sampling from an integer range [21, 30]. Another downside is that all active indices in  $[n, N)$  must be generated. If  $n \ll N$ , which is usually the case, the runtime complexity would be  $\mathcal{O}(\log N)$ , which is worse than the  $\mathcal{O}(\log n)$  of JumpHash. While we prefer the absence of floating-point operations, we need to make the generation of active indices in descending order much more efficient.

## 2.4 Improved Active Index Generation

To construct a more efficient process to generate active indices in descending order we assume without loss of generality that the maximum number of buckets is a power of two  $N = 2^M$  and divide the set of bucket indices  $\llbracket N \rrbracket$  into disjoint intervals  $\mathcal{I}_m := \{2^m, 2^m + 1, \dots, 2^{m+1} - 1\}$  according to

$$\llbracket N \rrbracket = \{0\} \cup \bigcup_{m=0}^{M-1} \mathcal{I}_m.$$

---

**Algorithm 4:** Consistent hashing based on a more efficient generation of active indices in reverse order,  $n \leq 2^M$ .

---

```

function JumpingBackwardsImproved( $k, n$ )
   $\mathcal{R} \leftarrow$  initialize PRG with seed  $k$ 
  for  $m \leftarrow M - 1$  to 0 do
     $X_m \leftarrow \mathcal{R}[\text{Uniform}(\{0, 1\})]$             $\triangleright$  generate a random bit
    if  $X_m = 0$  then continue
     $Y_m \leftarrow 2^m + \mathcal{R}[\text{Uniform}(\llbracket 2^m \rrbracket)]$     $\triangleright$  sample  $Y_m$  from  $\mathcal{I}_m$ 
     $b \leftarrow Y_m$ 
    for  $v \leftarrow 0$  to  $\infty$  do
      if  $b < n$  then return  $b$ 
       $Z_{m,v} \leftarrow \mathcal{R}[\text{Uniform}(\llbracket b \rrbracket)]$             $\triangleright$  option 1
       $Z_{m,v} \leftarrow \mathcal{R}[\text{Uniform}(\llbracket 2^{m+1} \rrbracket)]$     $\triangleright$  option 2
       $b \leftarrow Z_{m,v}$ 
      if  $b < 2^m$  then break
  return 0

```

---

A good reason to consider intervals with power-of-two cardinalities is that uniform integer values can be efficiently sampled from  $\mathcal{I}_m$  using  $m$  random bits. The intervals  $\mathcal{I}_m$  can be ordered as all values of  $\mathcal{I}_m$  are smaller than that of  $\mathcal{I}_{m+1}$  and also the cardinality of  $\mathcal{I}_m$  is smaller than that of  $\mathcal{I}_{m+1}$ . If we compare those intervals in the following, we always refer to this ordering.

To obtain active indices in descending order, we process the intervals  $\mathcal{I}_m$  with  $m \in \llbracket M \rrbracket$  in descending order and generate all active indices therein also in descending order. The last active index is always 0 by definition (5). The probability that  $\mathcal{I}_m$  contains an active index is 50% as the next smaller random value belongs either to  $\{R_b\}_{b \in \llbracket 2^m \rrbracket}$  or  $\{R_b\}_{b \in \mathcal{I}_m}$  with the same probability. This decision requires a single random bit  $X_m \in \{0, 1\}$ . In 50% of all cases we are done with  $\mathcal{I}_m$ , otherwise we actually have to generate the occurring active indices within  $\mathcal{I}_m$ .

Since we know at this point that there is at least one active index in  $\mathcal{I}_m$ , the largest active index can simply be generated by drawing a uniform random value  $Y_m$  from  $\mathcal{I}_m$ . It is possible that  $\mathcal{I}_m$  contains further active indices in the interval. As the next smaller active index is uniformly distributed over  $\llbracket Y_m \rrbracket$ , we sample a uniform random value  $Z_{m,0}$  from  $\llbracket Y_m \rrbracket$ . If  $Z_{m,0} \notin \mathcal{I}_m$ ,  $Z_{m,0}$  is rejected as active index and the process is continued with the next smaller interval  $\mathcal{I}_{m-1}$ . Otherwise,  $Z_{m,0}$  is the next smaller active index within  $\mathcal{I}_m$  and we generate further random values according to

$$Z_{m,v} \sim \text{Uniform}(\llbracket Z_{m,v-1} \rrbracket),$$

as long as they are within  $\mathcal{I}_m$ , to get all active indices of that interval.

The whole procedure to generate active indices in descending order, which is statistically equivalent to Algorithm 3, is summarized in Algorithm 4. While  $X_m$  and  $Y_m$  are already very convenient to sample,  $Z_{m,v}$  needs to be sampled from a non-power-of-two interval  $\llbracket b \rrbracket$ . One possibility would be to use Lemire's method [21]. A simpler and also unbiased approach that fits better in our case is to sample from the smallest enclosing power-of-two interval, which is by definition  $\llbracket 2^{m+1} \rrbracket$ , and reject values that are out of range [30].

Applying the rejection method instead of sampling from  $\llbracket b \rrbracket$  is statistically equivalent to using option 2 in Algorithm 4. With that, all required random values are either booleans or from a power-of-two interval and can therefore be generated efficiently.

## 2.5 Saving Random Values

Algorithm 4 requires many random values. For every interval  $\mathcal{I}_m$  a bit  $X_m \in \{0, 1\}$ , an integer  $Y_m \in \mathcal{I}_m$ , and an integer sequence  $(Z_{m,v})_{v \geq 0}$  with  $Z_{m,v} \in \llbracket 2^{m+1} \rrbracket$  need to be sampled. We are free to choose in which order those random values are generated. However, the order must be well-defined and not depend on  $n$  in order to preserve monotonicity.

As first optimization, we generate all  $M$  random bits  $X_m$  at once by drawing a random  $M$ -bit integer  $U = \langle X_{M-1}X_{M-2} \dots X_0 \rangle_2 \in \llbracket 2^M \rrbracket$ . Knowing all those bits at once allows quick identification of intervals that may contain active indices that are relevant for a given  $n$ . The indices of all set bits of  $U$  can be computed in descending order according to the recursion

$$m_{i+1} = \lfloor \log_2(U \bmod 2^{m_i}) \rfloor$$

as long as the argument of the binary logarithm is nonzero. If it is zero there are no further intervals  $\mathcal{I}_m$  with active indices. As only intervals  $\mathcal{I}_m$  are relevant that have the corresponding bit  $X_m$  set and that have an overlap with  $\llbracket n \rrbracket$ , we can start our recursion with interval index

$$m_0 = \lfloor \log_2(n - 1) \rfloor + 1$$

as  $\mathcal{I}_{m_0}$  is the smallest interval without overlap with  $\llbracket n \rrbracket$ .

Among the set of intervals  $\{\mathcal{I}_m\}_{m \in \llbracket M \rrbracket}$ , at most two need to be processed as  $\mathcal{I}_{m_1}$  and  $\mathcal{I}_{m_2}$  are the largest two intervals that contain at least one active index and overlap with  $\llbracket n \rrbracket$ . As  $\mathcal{I}_{m_2} \subseteq \llbracket n \rrbracket$  by definition,  $\mathcal{I}_{m_2}$  must contain an active index that is also smaller than  $n$ . Therefore, the active indices of smaller intervals  $\mathcal{I}_m$  with  $m < m_2$  are not relevant. Furthermore, within  $\mathcal{I}_{m_2}$  just the largest active index is needed, which means that the random sequence  $(Z_{m_2,v})_{v \geq 0}$  is never used. The only sequence that may be required for generating the largest active index smaller than  $n$  is  $(Z_{m_1,v})_{v \geq 0}$  as the active indices of  $\mathcal{I}_{m_1}$  are not necessarily smaller than  $n$ .

Since no more than one of the sequences  $(Z_{0,v})_{v \geq 0}, (Z_{1,v})_{v \geq 0}, \dots, (Z_{M-1,v})_{v \geq 0}$  is used at the same time, it is not necessary that those sequences are statistically independent to ensure uniformity. Therefore, we are allowed to generate a single sequence  $(W_v)_{v \geq 0}$  with  $W_v \in \llbracket 2^M \rrbracket$  instead and set

$$Z_{m,v} = W_v \bmod 2^{m+1}.$$

It should be noted that the generation of active indices is no longer statistically equivalent to (4), even if this modification preserves uniformity and monotonicity.

We can also reduce the randomness needed for the values  $Y_m$ . As only active indices of at most the two intervals  $\mathcal{I}_{m_1}$  and  $\mathcal{I}_{m_2}$  are relevant, only the two random integers  $Y_{m_1}$  and  $Y_{m_2}$  are needed at the same time. Thus, using the fact that  $1 + \sum_{i=0}^{m_2} X_i = \sum_{i=0}^{m_1} X_i$ , we can set

$$Y_m = 2^m + (V_s \bmod 2^m) \quad \text{with } s = (\sum_{i=0}^m X_i) \bmod 2$$

with  $V_0, V_1 \in \llbracket 2^M \rrbracket$  being two independent random values, as this is sufficient for the independence of  $Y_{m_1}$  and  $Y_{m_2}$ .

If we look at the random variables  $V_0$  and  $V_1$ , the  $m_1$  least significant bits are used from one and the least significant  $m_2$  bits from the other. As a consequence, the most significant  $M - m_2$  bits of either  $V_0$  or  $V_1$  are still unused. After combining both using the XOR-operation, the most significant  $M - m_2$  bits of  $V_0 \oplus V_1$  are

**Algorithm 5:** JumpBackHash,  $n \leq 2^M$ .

---

```

function JumpBackHash( $k, n$ )
  if  $n \leq 1$  then return 0
   $\mathcal{R} \leftarrow$  initialize PRG with seed  $k$ 
   $V_0 \leftarrow \mathcal{R}[\text{Uniform}(\llbracket 2^M \rrbracket)]$ 
   $V_1 \leftarrow \mathcal{R}[\text{Uniform}(\llbracket 2^M \rrbracket)]$ 
   $U \leftarrow V_0 \oplus V_1$ 
   $m \leftarrow \lfloor \log_2(n-1) \rfloor + 1$  ▷ equals  $m_0$ 
   $u \leftarrow U \bmod 2^m$ 
  while  $u \neq 0$  do
     $m \leftarrow \lfloor \log_2 u \rfloor$  ▷ equals  $m_i$  in  $i$ -th iteration
     $s \leftarrow \text{bitcount}(u) \bmod 2$ 
     $b \leftarrow 2^m + (V_s \bmod 2^m)$ 
    for  $v \leftarrow 0$  to  $\infty$  do
      if  $b < n$  then return  $b$  ▷ satisfied latest in  $2^{\text{nd}}$  while-iteration
       $W_v \leftarrow \mathcal{R}[\text{Uniform}(\llbracket 2^M \rrbracket)]$ 
       $b \leftarrow W_v \bmod 2^{m+1}$ 
      if  $b < 2^m$  then break
     $u \leftarrow u \oplus 2^m$  ▷ has same effect as  $u \leftarrow u \bmod 2^m$ 
  return 0

```

---

therefore statistically independent of  $Y_{m_1}$  and  $Y_{m_2}$ . This allows us to use  $V_0$  and  $V_1$  also for  $U$  by setting

$$U = V_0 \oplus V_1,$$

because we only need the random bits  $X_{M-1}, \dots, X_{m_2}$  to determine  $m_1$  and  $m_2$  and therefore never consume more than the leading  $M - m_2$  bits of  $U$ .

In summary, it is sufficient to generate  $V_0$  and  $V_1$  followed by the sequence  $(W_v)_{v \geq 0}$  to generate all needed random values without breaking uniformity. Therefore, all these values can be taken from a single sequence which allows to use a standard PRG.

## 2.6 JumpBackHash

Applying all these optimizations to Algorithm 4 finally leads to JumpBackHash as shown in Algorithm 5. The variables  $U$  and  $W_v$  as well as the loop variable  $v$  could be eliminated, but are kept for better comprehensibility and better comparison with Algorithm 4.

Algorithm 6 shows how the algorithm can be implemented with a few lines of code in Java. Expressions of kind  $\lfloor \log_2 u \rfloor$  can be replaced by  $31 - \text{nlz}(u)$  if  $u$  is a 32-bit integer. Furthermore, bit-shift operations are well-defined in Java. For example, shifting by  $-29$  bits is the same as shifting by 3 bits. Therefore, shifting by  $31 - \text{nlz}(u)$  is the same as shifting by  $-1 - \text{nlz}(u) = \sim \text{nlz}(u)$  bits where  $\sim$  denotes the bitwise complement. The number of leading zeros (NLZ) and also the bitcount operations can usually be translated directly into specific CPU instructions and are therefore very fast.

As PRGs typically produce 64-bit values, we can use them to get two 32-bit random integers at once. Therefore, Algorithm 6 uses the least and most significant 32 bits of the first 64-bit random value as  $V_0$  and  $V_1$ , respectively. Also the inner while loop uses a 64-bit random value to always generate two elements of the sequence  $(W_v)_{v \geq 0}$  at once. If two random values are always generated at once, we refer to JumpBackHash\* in the following.

**Algorithm 6:** Java implementation of JumpBackHash using a 64-bit pseudorandom generator.

---

```

int jumpBackHash(long  $k$ , int  $n$ ) {
  if ( $n \leq 1$ ) return 0;
  randomGenerator.resetWithSeed( $k$ );
  long  $v$  = randomGenerator.nextLong();
  int  $u$  = (int) ( $v \wedge (v \gg 32)$ )
    & ( $\sim 0 \gg \text{numberOfLeadingZeros}(n-1)$ );
  while ( $u \neq 0$ ) {
    int  $q$  = 1 <<  $\sim \text{numberOfLeadingZeros}(u)$ ;
    //  $q = 2^m$ 
    int  $b$  =  $q + ((\text{int}) (v \gg (\text{bitCount}(u) << 5))$ 
      & ( $q - 1$ ));
    while (true) {
      if ( $b < n$ ) return  $b$ ;
      long  $w$  = randomGenerator.nextLong();
       $b$  = (int)  $w \wedge ((q << 1) - 1)$ ;
      if ( $b < q$ ) break;
      if ( $b < n$ ) return  $b$ ;
       $b$  = (int) ( $w \gg 32$ ) & (( $q << 1$ ) - 1);
      if ( $b < q$ ) break;
    }
     $u \wedge= q$ ;
  }
  return 0;
}

```

---

## 2.7 Runtime Analysis

The runtime of Algorithm 5 scales with the number of consumed random values. Therefore, we analyze the distribution of the number of consumed random values which corresponds to the number of PRG calls. As the case  $n = 1$  does not require any random values, we can focus on the case  $n \geq 2$ .

First, we need two random values for  $V_0$  and  $V_1$  (compare Section 2.5). Further random values are only needed if the largest active index in  $\mathcal{I}_{m_1}$  is greater than or equal to  $n$ . This can only happen, if  $m_1 = m_0 - 1$ . The probability that  $\mathcal{I}_{m_0-1}$  contains an active index at all is  $\frac{1}{2}$ . As the largest active index would be uniformly distributed over  $\mathcal{I}_{m_0-1}$ , the probability that  $\mathcal{I}_{m_0-1}$  contains an active index that is larger than or equal to  $n$  is given by  $\frac{1}{2} \cdot \frac{2^{m_0} - n}{2^{m_0-1}} = 1 - \alpha_n^{-1}$  with

$$\alpha_n := \frac{2^{m_0}}{n} = \frac{2^{\lfloor \log_2(n-1) \rfloor + 1}}{n} \in [1, 2). \quad (7)$$

Only if this is the case we need to start generating the random sequence  $(W_v)_{v \geq 0}$  to find the largest active index within  $\mathcal{I}_{m_0-1}$  that is actually smaller than  $n$ . The inner loop is left as soon as  $W_v \bmod 2^{m_1+1} = W_v \bmod 2^{m_0} < n$  which occurs with probability  $\frac{n}{2^{m_0}} = \alpha_n^{-1}$ . Therefore, the number of random values consumed within the inner loop follows a geometric distribution with positive support and a success probability of  $\alpha_n^{-1}$ .

In summary, the number of random values  $T_{\text{JBH}}$  that need to be generated is distributed like

$$T_{\text{JBH}} \sim 2 + \text{Bernoulli}(1 - \alpha_n^{-1}) \cdot \text{Geom}(\alpha_n^{-1}). \quad (8)$$

Using the identities  $\mathbb{E}(XY) = \mathbb{E}(X)\mathbb{E}(Y)$  and  $\text{Var}(XY) = (\mathbb{E}(X))^2 \text{Var}(Y) + (\mathbb{E}(Y))^2 \text{Var}(X) + \text{Var}(X) \text{Var}(Y)$  for independent  $X$  and  $Y$  together with  $\mathbb{E}(\text{Bernoulli}(p)) = p$ ,  $\text{Var}(\text{Bernoulli}(p)) =$

$p(1-p)$ ,  $\mathbb{E}(\text{Geom}(p)) = \frac{1}{p}$ , and  $\text{Var}(\text{Geom}(p)) = \frac{1-p}{p^2}$ , the expectation and the variance of  $T_{\text{JBH}}$  can be derived as

$$\begin{aligned}\mathbb{E}(T_{\text{JBH}}) &= 1 + \alpha_n \in [2, 3), & (9) \\ \text{Var}(T_{\text{JBH}}) &= (\alpha_n - 1)\alpha_n \in [0, 2). & (10)\end{aligned}$$

Hence, on average, JumpBackHash requires less than 3 random values with a variance that is always less than 2.

For JumpBackHash\*, when two random values are always generated at once as in Algorithm 6, the probability that one of both random values satisfies any stop condition within the inner loop is given by  $1 - (1 - \alpha_n^{-1})(1 - \alpha_n^{-1}) = \alpha_n^{-1}(2 - \alpha_n^{-1})$ . Therefore, as also just a single random value is needed at the beginning, the number of generated random values is distributed as

$$T_{\text{JBH}^*} \sim 1 + \text{Bernoulli}(1 - \alpha_n^{-1}) \cdot \text{Geom}(\alpha_n^{-1}(2 - \alpha_n^{-1})) \quad (11)$$

with expectation and variance given by

$$\mathbb{E}(T_{\text{JBH}^*}) = 1 + \frac{(\alpha_n - 1)\alpha_n}{2\alpha_n - 1} \in [1, \frac{5}{3}), \quad (12)$$

$$\text{Var}(T_{\text{JBH}^*}) = \frac{\alpha_n(\alpha_n - 1)(\alpha_n^2 - \alpha_n + 1)}{(2\alpha_n - 1)^2} \in [0, \frac{2}{3}). \quad (13)$$

Hence, Algorithm 6 consumes on average at most  $\frac{5}{3} \approx 1.667$  64-bit random integers.


### 3 EXPERIMENTAL VERIFICATION

To validate JumpBackHash, we have performed a series of tests. We used the SplitMix random generator [32] which produces a sequence of 64-bit random integers, is known to have good statistical properties [20], and is also available in the Java standard library as SplittableRandom. The source code to run all tests and to reproduce the presented results has been published at <https://github.com/dynatrace-research/jumpbackhash-paper>. The tested JumpBackHash implementation is equivalent to the one included in our Hash4j Java open source library since version 0.17.0 [3].

#### 3.1 Consistency

To verify consistency we must verify monotonicity and uniformity. Monotonicity is straightforward to test. We did 10k simulation runs, in each of which we used a random key and computed the assignments for all  $n \in \{1, 2, \dots, 10000\}$  and checked, whenever the reassignment changed after an increment of  $n$ , that the new assignment corresponds to the new bucket according to (3).

Testing uniformity is more sophisticated as it requires statistical means. Our strategy was to sample many bucket indices by calling the consistent hash function for many different keys. In our test we always used 1 million randomly generated keys. If uniformity holds, we expect that the bucket index distribution is uniform. For small numbers of buckets, as long as it is much smaller than the number of keys, this can be verified by applying the G-test [26]. In this way we checked the uniformity for all  $n \in \{1, 2, \dots, 1000\}$ . Additionally, we also investigated if uniformity holds for large  $n$  close to  $2^{31} - 1$  which is the largest possible positive 32-bit integer value in Java. In particular, we have tested the values  $n \in \{2^{31} - 1, 2^{31} - 2, 2^{30} + 1, 2^{30}, 2^{30} - 1, 3 \cdot 2^{28}, 2^{29} + 1, 2^{29}, 2^{29} - 1, 3 \cdot 2^{27}, 2^{28} + 1, 2^{28}, 2^{28} - 1\}$  using the Kolmogorov-Smirnov test [17], as the number of occurrences

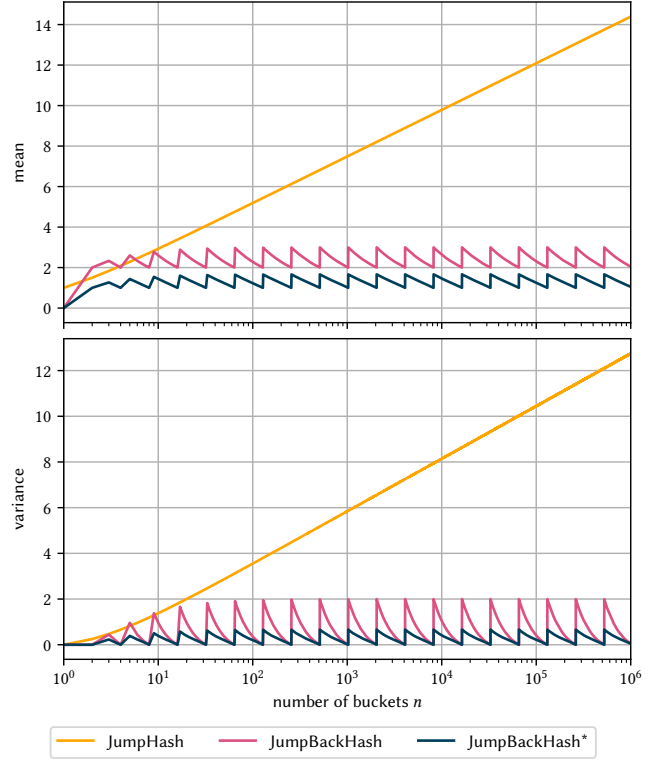

**Figure 1: The measured mean and variance of the number of consumed random values for JumpHash and JumpBackHash. JumpBackHash\* corresponds to the case when a single random value is used for two as in Algorithm 6.**

per possible outcome would be too low for a valid application of the G-test.


#### 3.2 Random Value Consumption

We also checked the analytical expressions for the number of consumed random values, which is a measure of the runtime. For this purpose, we ran simulations for different  $n$ . To cover many orders of magnitude, we picked values for  $n$  according to the recursion

$$n_{i+1} = \lfloor 0.999 \cdot n_i \rfloor \quad \text{with } n_0 = 10^6. \quad (14)$$

This results in 7482 integer values that are roughly uniformly distributed on the logarithmic scale over the range  $[1, 10^6]$ .

For each value of  $n$  we computed the bucket index for 10 million random keys and counted how often the pseudorandom generator was called. The corresponding sample mean and variance are shown in Figure 1 for JumpHash and JumpBackHash. We also considered JumpBackHash\* which splits a random value into two and which corresponds to Algorithm 6. All simulated data points for the mean did not differ from the theoretical prediction by more than 0.0036 in absolute values. Likewise, the observed difference between the empirical and the theoretical variance was always less than 0.025. We have therefore omitted plotting the theoretical curves as they look identical and overlap perfectly, which also confirms the correctness of our theoretical analysis.

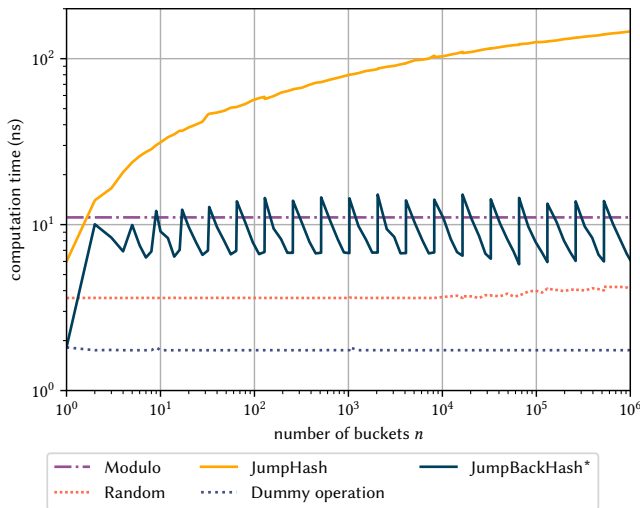

**Figure 2: Benchmark results on an Amazon EC2 c5.metal instance with Intel Xeon Platinum 8275CL CPU and processor P-state set to 1.**

### 3.3 Performance Measurements

We evaluated the performance of JumpBackHash on an Amazon EC2 c5.metal instance with Intel Xeon Platinum 8275CL CPU. To reduce the impact of variable processor frequencies, Turbo Boost was disabled by setting the processor P-state to 1 [4]. The benchmarks were implemented using the Java Microbenchmark Harness (JMH) toolkit and were executed using OpenJDK 21.0.2.

The number of buckets was varied from 1 to 1 million. We included all values that can be represented as  $2^i$ ,  $2^i + 1$ ,  $\lfloor 2^i(1 + \frac{1}{4}) \rfloor$ ,  $\lfloor 2^i(1 + \frac{1}{2}) \rfloor$ ,  $\lfloor 2^i(1 + \frac{3}{4}) \rfloor$  with some integer  $i$ . The first two correspond to the best and the worst cases for JumpBackHash according to our theoretical analysis.

The benchmark results for JumpHash (Algorithm 2) and JumpBackHash\* (Algorithm 6) are shown in Figure 2. As reference, we also included non-consistent approaches based on the modulo operation (1) and a pseudorandom assignment using Lemire’s algorithm [21]. Furthermore, we added a dummy test that just consumed the random keys to make sure that the input is not the bottleneck. To allow a fairer comparison, we used SplitMix [32] for generating random values for all approaches that require a PRG.

The results agree with the theoretical runtime analysis and show that JumpBackHash is always faster than JumpHash. Interestingly, the runtime of JumpBackHash is comparable or even faster than the modulo-based approach. The reason is that the modulo operation is a quite expensive operation as it involves an integer division. Therefore, if only uniformity but no monotonicity is needed, it would be much better to use the pseudorandom approach.

### 4 FUTURE WORK

In our tests we used the SplitMix random generator [32] which is already quite fast and known to have good quality [20]. However, there might be even faster random generators such as linear

congruential random generators [23] that have sufficient statistical quality for JumpBackHash.

Another idea, which also needs further investigation, is to use the hashed key directly as the first random value. In this way, one random value computation can be saved and the random generator only needs to be initialized with the key as seed when entering the inner loop. First experiments showed that our statistical tests were still successful when using the SplitMix generator. Of course, this can only work for PRGs where the random values are sufficiently independent of the seed.

### 5 CONCLUSION

We have introduced JumpBackHash, a new consistent hash algorithm for distributing keys to buckets. It can be implemented with a few lines of code and requires only a standard random generator as found in standard libraries. As theoretically shown and experimentally confirmed, JumpBackHash has an expected constant runtime and is significantly faster than JumpHash. Its speed also allows safely replacing modulo-based assignments to improve system stability during changes by reducing the probability of spikes in resource consumption.

### REFERENCES

- [1] [n.d.]. *ClickHouse SQL Reference*. Retrieved March 25, 2024 from <https://clickhouse.com/docs/en/sql-reference/functions/hash-functions#jumpconsistenthash>
- [2] [n.d.]. *Guava: Google Core Libraries for Java*. Retrieved March 25, 2024 from <https://github.com/google/guava>
- [3] [n.d.]. *Hash4j: Dynatrace hash library for Java*. Retrieved March 25, 2024 from <https://github.com/dynatrace-oss/hash4j/>
- [4] [n.d.]. *Processor state control for your EC2 instance*. Retrieved March 25, 2024 from [https://docs.aws.amazon.com/AWSEC2/latest/UserGuide/processor\\_state\\_control.html](https://docs.aws.amazon.com/AWSEC2/latest/UserGuide/processor_state_control.html)
- [5] [n.d.]. *RabbitMQ 3.7.8 Release Notes*. Retrieved March 25, 2024 from <https://github.com/rabbitmq/rabbitmq-server/releases/tag/v3.7.8>
- [6] [n.d.]. *VMware Greenplum 6.x Release Notes*. Retrieved March 25, 2024 from <https://docs.vmware.com/en/VMware-Greenplum/6/greenplum-database/relnotes-release-notes.html>
- [7] A. Agarwal. 2020. *How Grafana Labs enables horizontally scalable tail sampling in the OpenTelemetry Collector*. Retrieved March 25, 2024 from <https://grafana.com/blog/2020/06/18/how-grafana-labs-enables-horizontally-scalable-tail-sampling-in-the-opentelemetry-collector/>
- [8] B. Appleton and M. O’Reilly. 2015. Multi-probe consistent hashing. (2015). arXiv:1505.00062 [cs.DS]
- [9] F. Boucault. 2020. *Metrickank Data Distribution: The Quest for the Best Hashing Method*. Retrieved March 25, 2024 from <https://grafana.com/blog/2020/01/06/metrickank-data-distribution-the-quest-for-the-best-hashing-method/>
- [10] J. Chen, B. Coleman, and A. Shrivastava. 2021. Revisiting consistent hashing with bounded loads. In *Proceedings of the 35th AAAI Conference on Artificial Intelligence (AAAI)*, Vol. 35. 3976–3983. <https://doi.org/10.1609/aaai.v35i5.16517>
- [11] M. Coluzzi, A. Brocco, A. Antonucci, and T. Leidi. 2023. MementoHash: A Stateful, Minimal Memory, Best Performing Consistent Hash Algorithm. (2023). arXiv:2306.09783 [cs.DC]
- [12] M. Coluzzi, A. Brocco, and T. Leidi. 2023. Consistently faster: A survey and fair comparison of consistent hashing algorithms. In *Proceedings of the 31st Symposium on Advanced Database System (SEBD)*. 51–64. <https://ceur-ws.org/Vol-3478/paper03.pdf>
- [13] C. Dong, F. Wang, and D. Feng. 2023. DxHash: A Memory Saving Consistent Hashing Algorithm. *ACM Transactions on Internet Technology* 24, 3 (2023), 22. <https://doi.org/10.1145/3631708>
- [14] D. E. Eisenbud, C. Yi, C. Contavalli, C. Smith, R. Kononov, E. Mann-Hielscher, A. Cilingiroglu, B. Cheyney, W. Shang, and J. D. Hosein. 2016. Maglev: A Fast and Reliable Software Network Load Balancer. In *proceedings of the 13th USENIX Symposium on Networked Systems Design and Implementation (NSDI)*. 523–535. <https://www.usenix.org/conference/nsdi16/technical-sessions/presentation/eisenbud>
- [15] B. Hiltbold. 2022. *Scaling our customer review system for peak traffic*. Retrieved March 25, 2024 from <https://medium.com/booking-com-development/scaling-our-customer-review-system-for-peak-traffic-cb19be434edf>

- [16] S. Ioffe. 2010. Improved Consistent Sampling, Weighted Minhash and L1 Sketching. In *Proceedings of the 10th IEEE International Conference on Data Mining (ICDM)*. 246–255. <https://doi.org/10.1109/ICDM.2010.80>
- [17] G. K. Kanji. 2006. *100 Statistical Tests* (3rd ed.). SAGE Publications Ltd. <https://doi.org/10.4135/9781849208499>
- [18] D. Karger, E. Lehman, T. Leighton, R. Panigrahy, M. Levine, and D. Lewin. 1997. Consistent hashing and random trees: Distributed caching protocols for relieving hot spots on the world wide web. In *Proceedings of the 29th ACM Annual Symposium on Theory of Computing (STOC)*. 654–663. <https://doi.org/10.1145/258533.258660>
- [19] J. Lamping and E. Veach. 2014. A fast, minimal memory, consistent hash algorithm. (2014). arXiv:1406.2294 [cs.DS]
- [20] D. Lemire. [n.d.]. *testingRNG : testing popular random-number generators*. Retrieved March 25, 2024 from <https://github.com/lemire/testingRNG>
- [21] D. Lemire. 2019. Fast Random Integer Generation in an Interval. *ACM Transactions on Modeling and Computer Simulation* 29, 1 (2019), 12. <https://doi.org/10.1145/3230636>
- [22] E. Leu. 2023. Fast Consistent Hashing in Constant Time. (2023). arXiv:2307.12448 [cs.DS]
- [23] P. L’Ecuyer. [n.d.]. Tables of linear congruential generators of different sizes and good lattice structure. 68, 225 ([n. d.]), 249–260. <https://doi.org/10.1090/S0025-5718-99-00996-5>
- [24] M. Manasse, F. McSherry, and K. Talwar. [n.d.]. *Consistent Weighted Sampling*. Technical Report MSR-TR-2010-73. <https://www.microsoft.com/en-us/research/publication/consistent-weighted-sampling/>
- [25] C. Masson and H. K. Lee. 2024. FlipHash: A Constant-Time Consistent Range-Hashing Algorithm. (2024). arXiv:2402.17549 [cs.DS]
- [26] J. H. McDonald. 2014. *Handbook of Biological Statistics* (3rd ed.). Sparky House Publishing, Baltimore, MD. <https://www.biostathandbook.com/>
- [27] G. Mendelson, S. Vargafik, K. Barabash, D. H. Lorenz, I. Keslassy, and A. Orda. 2021. AnchorHash: A Scalable Consistent Hash. *IEEE/ACM Transactions on Networking* 29, 2 (2021), 517–528. <https://doi.org/10.1109/TNET.2020.3039547>
- [28] V. Mirrokni, M. Thorup, and M. Zadimoghaddam. 2018. Consistent hashing with bounded loads. In *Proceedings of the 29th Annual ACM-SIAM Symposium on Discrete Algorithms (SODA)*. 587–604. <https://dl.acm.org/doi/10.5555/3174304.3175309>
- [29] Y. Nakatani. 2021. Structured Allocation-Based Consistent Hashing With Improved Balancing for Cloud Infrastructure. *IEEE Transactions on Parallel and Distributed Systems* 32, 9 (2021), 2248–2261. <https://doi.org/10.1109/TPDS.2021.3058963>
- [30] M. E. O’Neil. 2018. *Efficiently Generating a Number in a Range*. Retrieved March 25, 2024 from <https://www.pcg-random.org/posts/bounded-rands.html>
- [31] O. Peters. [n.d.]. *PolymurHash*. Retrieved March 25, 2024 from <https://github.com/orlp/polymur-hash>
- [32] G. L. Steele, D. Lea, and C. H. Flood. [n.d.]. Fast splittable pseudorandom number generators. In *Proceedings of the ACM International Conference on Object Oriented Programming Systems Languages & Applications (OOPSLA)*. 453–472. <https://doi.org/10.1145/2660193.2660195>
- [33] D. G. Thaler and C. V. Ravishankar. 1998. Using name-based mappings to increase hit rates. *IEEE/ACM Transactions on Networking* 6, 1 (1998), 1–14. <https://doi.org/10.1109/90.663936>
- [34] A. Vaneev. [n.d.]. *Komihash*. Retrieved March 25, 2024 from <https://github.com/avaneev/komihash/tree/b27fd681308f92a1fae617b4ecd0981cc69d31a0>
- [35] W. Wang, W. Cheng, J. Chen, Z. Wang, Y. Zhang, and Y. Yu. 2023. A vehicle license plate data access model based on the jump hash consistency algorithm. *PLOS ONE* 18, 8 (2023), 17. <https://doi.org/10.1371/journal.pone.0288427>
- [36] W. Yi. [n.d.]. *Wyhash*. Retrieved March 25, 2024 from <https://github.com/wangyifudan/wyhash>
- [37] Y. Zeng, J. Zhang, M. Xue, J. Wan, J. Zhang, and L. Zhou. 2022. AreaHash: A Balanced and fully scalable consistency hashing algorithm. In *Proceedings of the 24th IEEE International Conference on High Performance Computing and Communications (HPCC)*. 857–862. <https://doi.org/10.1109/HPCC-DSS-SmartCity-DependSys57074.2022.00139>