

# Can AI Outperform Human Experts in Creating Social Media Creatives?

Eunkyung Park<sup>1</sup>, Raymond K. Wong<sup>1</sup>, Junbum Kwon<sup>1</sup>

<sup>1</sup>UNSW Sydney


{eunkyung.park, ray.wong, junbum.kwon}@unsw.edu.au

## Abstract

Artificial Intelligence (AI) has outperformed human experts in functional tasks such as chess and baduk. How about creative tasks? This paper evaluates AI’s capability in the creative domain compared to human experts, which little research has been conducted so far. We propose a novel **Prompt-for-Prompt** to generate social media creatives via prompt augmentation by Large Language Models (LLMs). We take the most popular Instagram posts (with the biggest number of like clicks) in top brands’ Instagram accounts to create social media creatives. We give GPT-4 several prompt instructions with text descriptions to generate the most effective prompts for cutting-edge text-to-image generators: Midjourney, DALL-E 3, and Stable Diffusion. LLM-augmented prompts can boost AI’s abilities by adding objectives, engagement strategy, lighting and brand consistency for social media image creation. We conduct an extensive human evaluation experiment, and find that (1) AI excels human experts, and (2) Midjourney is better than the other text-to-image generators. Surprisingly, unlike conventional wisdom in the social media industry, prompt instruction including ‘eye-catching’ shows much poorer performance than those including ‘natural’. Regarding the type of creatives, AI improves creatives with animals or products but less with real people. Also, AI improves creatives with short text descriptions more than with long text descriptions, because there is more room for AI to augment prompts with shorter descriptions.

## 1 Introduction

As generative AI products such as ChatGPT become popular, people are growingly worried about whether AI will replace humans across many sectors, including creative domains. For example, Hollywood workers recently had a five-month strike because they were concerned about losing their jobs due to AI [Horton, 2018]. Creative agencies have also started reducing the number of junior workers because AI can make

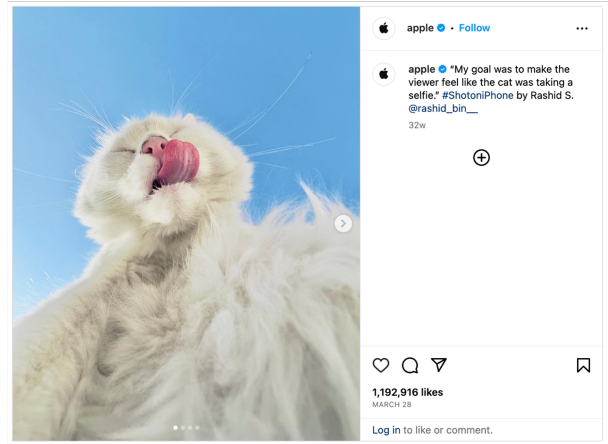

(a) Human-generated social media image from Apple Instagram



(b) Our **Prompt-for-Prompt**-generated social media creatives

Figure 1: Human-generated vs AI-generated social media creatives from original text : “My goal was to make the viewer feel like the cat was taking a selfie.”#ShotoniPhone by Rashid S.@rashid\_bin\_...

a draft quickly [Miller and Cox, 2023]. However, while AI has outperformed human experts in functional tasks such as chess and baduk, it has rarely been documented whether AI is indeed doing a better job than human experts in **creative tasks**. Leading companies often hire top design experts to make attractive social media creatives. This paper evaluates AI’s capability in the creative domain compared to human experts.

Designing an automatic system of social media creatives from textual descriptions, i.e., the text-to-image tasks, is challenging. However, with the advance of deep learning, researchers have shown a substantial improvement in the image generation task. [Ramesh *et al.*, 2021a; Yu *et al.*, 2022a] employ large scale data for text-to-image task including DALL-E [Ramesh *et al.*, 2021a]. The Diffusion Model (DM) has recently become the new state-of-the-art model in text-to-image generation tasks such as Stable Diffusion [Podell *et al.*, 2023]. While the existing research in the text-to-image literature focuses on improving the ability to generate images from “given” text input, we change the research direction by improving the “quality” of text input via Large Language Models (LLMs).

The recent success of LLMs has led to growing interest and prevalence in improving their capability to perform tasks via prompting. Researchers have published their work regarding AI’s power compared to human ability. Marked Personas [Cheng *et al.*, 2023] compares LLMs’ outputs with human-written works. A series of research on In-Context Learning (ICL) such as [Chen *et al.*, 2023] and CoT [Wei *et al.*, 2022b] also compare AI with humans. Most of the above research in the LLM literature focuses on text output or reasoning tasks.

This paper makes the following contributions and new findings. First, our research evaluates AI’s ability in Creative tasks compared to human experts and shows that AI-generated creatives receive higher engagement (i.e., willingness to like and comment) than creatives of human experts. Our result can give more confidence to companies in creative industries about adopting generative AI. Second, more importantly, we propose a novel **Prompt-for-Prompt** approach to generating social media creatives via prompt augmentation by leveraging the power of LLMs. Specifically, we take the most popular Instagram posts (with the biggest number of like clicks) in top brands’ Instagram accounts. Then, we give GPT-4 several prompt instructions with its text description of such top posts to generate the most effective prompts for cutting-edge text-to-image generators: Midjourney, DALL-E, and Stable Diffusion.

For example, Figure 1 shows a social media post from Apple Instagram. Figure 1a is the most popular post (made by human experts) with the biggest number of likes within top brands’ Instagram accounts.

Figure 1b is an AI-generated image via our prompt augmentation using the original text description. From the experiments, we find that our **Prompt-for-Prompt** can boost AI’s abilities by adding creatives’ objectives, engagement strategy, lighting and brand consistency for social media image creation. Our proposed approach is efficient regarding computation time and cost, and can be adapted to many other applications easily beyond social media image generation. Also, our results show that a Midjourney is better than the other text-to-image generators.

Third, we identify effective **Prompt-for-Prompt** to generate social media creatives. Surprisingly, unlike conventional wisdom in the social media industry, prompt instructions including ‘eye-catching’ show much poorer performance than that including ‘natural’. Fourth, we also identify the type of content on which AI (vs human experts) is better or worse.

	Prompt instruction	Output
$PI_1$	Natural+Social Media Images+ $P_0$	$P_{a1}$
$PI_2$	Eye-Catching+Social Media Images+ $P_0$	$P_{a2}$
$PI_3$	Social Media Images + $P_0$	$P_{a3}$

Table 1: Examples of prompt instruction.  $P_0$  is an original text description

AI improves creatives with animals or products rather than with real people. Also, AI improves creatives with short text descriptions more than with long text descriptions perhaps because there is more room for AI to augment prompts with short descriptions.

## 2 Related Work

### 2.1 Large Language Models (LLMs)

As LLMs receive great attention from academics and industries, many researchers have tried to uncover the real effects of LLMs outputs [Dinan *et al.*, 2020; Weidinger *et al.*, 2021]. They compare AI-generated outputs to the human-generated outputs. For example, Marked Personas [Cheng *et al.*, 2023] compares GPT-3.5 and GPT-4 outputs with human-written texts.

In addition, the recent success of Large Language Models has led to growing interest in improving their capability to perform tasks via prompting [Brown *et al.*, 2020; Liu *et al.*, 2023]. Some researchers suggested significantly improving LLMs’ capability by augmenting the task instructions [Raffel *et al.*, 2020; Wei *et al.*, 2022a]. Other lines of research work such as zero-shot CoT [Kojima *et al.*, 2022], auto-CoT [?], and Tree of Thoughts (ToT) [Yao *et al.*, 2023] have adapted intermediate language steps since the publication of Chain-of-Thoughts (CoT) [Wei *et al.*, 2022b], which augments each demo with a chain of rational steps. [Chen *et al.*, 2023] have studied a demo of In-Context Learning.

Similar to the above studies, our research also uses prompting. However, most of the previous work mainly covers textual data-based tasks. In this paper, we particularly focus on the AI’s creativity in text-to-image task.

### 2.2 Text-to-Image

Text-to-image is to generate a realistic image from natural language descriptions. AlignDRAW [Mansimov *et al.*, 2016] is a pioneering work that generates images from natural languages but suffers from unrealistic results. [Reed *et al.*, 2016] is one of the first to tackle this with a conditional GAN. From the previous work, multi-stage model [Zhang *et al.*, 2016], attention mechanisms [Xu *et al.*, 2018], contrastive methods [Zhou *et al.*, 2022; Zhang *et al.*, 2021] have been adapted. [Ramesh *et al.*, 2021b; Ding *et al.*, 2021] employ sequence modeling approaches. [Esser *et al.*, 2021; Yu *et al.*, 2022b] introduce stronger image quantizers and scaling up model parameters.

Recently [Nichol *et al.*, 2022; Ramesh *et al.*, 2022; Rombach *et al.*, 2022] apply Diffusion Models [Ho *et al.*, 2020] to improve generated image quality. [Saharia *et al.*, 2022;

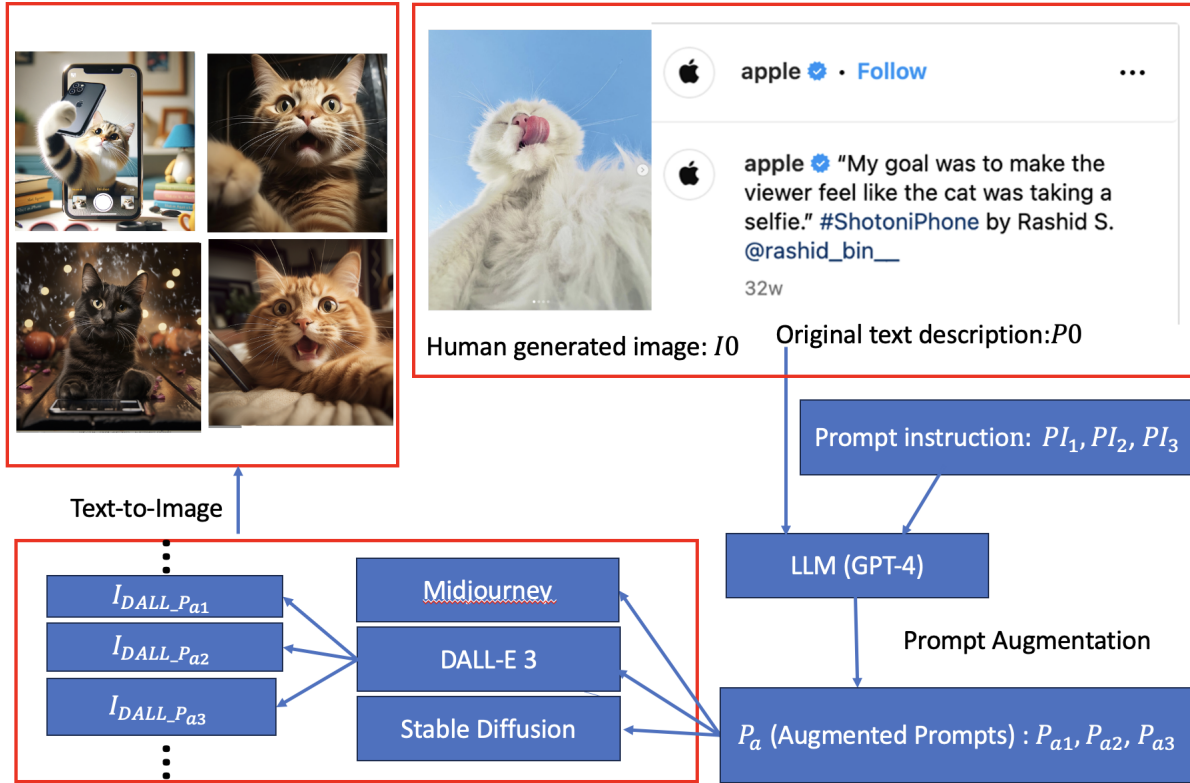


Figure 2: Our **Prompt-for-Prompt**

Yu *et al.*, 2022b] scale up text encoder models to achieve significant gains in generating relevant images. DALL-E 3 [Shi *et al.*, 2020] is a text-to-image model by OpenAI, released in Oct 2023. DALL-E 3 is trained from the highly descriptive generated image captions, while existing text-to-image models have difficulty following detailed image descriptions. It uses a bespoke image captioner to recaption the training dataset.

Stable Diffusion XL [Podell *et al.*, 2023] is a latent diffusion model for text-to-image synthesis. It applies a three times larger UNet backbone than previous models and utilises many more model parameters to have more attention blocks and a larger cross-attention context. Midjourney V5.2 generates images from text description and released in June 2023.

This paper uses state-of-the-art models such as Midjourney, DALL-E 3, and Stable Diffusion. However, we are not attempting to improve the text-to-image generators by paying computing costs and increasing the parameters. Instead, we propose a novel **Prompt-for-Prompt** to generate social media creatives via prompt augmentation by LLM (GPT-4).

### 3 Approach : Prompt-for-Prompt

Figure 2 shows our overall framework **Prompt-for-Prompt** for social media image creation. On the top, there is a social media image and text description. Let  $I_0$  be the human-generated original image, and  $P_0$  denotes the original text description in the Instagram post. Therefore,  $P_0$  is “apple

“My goal was to make the viewer feel like the cat was taking a selfie” #ShotoniPhone by Rashid S. @rashid\_bin\_”

#### 3.1 Prompt Instruction

From the original text description  $P_0$ , we leverage LLM to generate an augmented prompt. We use 3 prompt instructions ( $PI_1, PI_2, PI_3$ ) in Table 1 and original text description ( $P_0$ ) together as an input for GPT-4. For instance, to make an augmented prompt by the instruction - ‘eye-catching’ and ‘social media images’ ( $P_{a2}$ ), we ask LLM with Prompt instruction ( $PI_2$ ), “Can you create a prompt to make eye-catching social media images for the following description:( $P_0$ )?” by concatenating ‘eye-catching social media images’ and  $P_0$ . Then, LLM creates the augmented prompt  $P_{a2}$ . Eye-catching content is preferred in social media creatives to increase engagement [Wawrzuta *et al.*, 2021]. Also, we select ‘natural’ as another instruction because we worry that AI-generated creatives are not natural from our preliminary experiment.

#### 3.2 Prompt Augmentation by LLM for Social Media Creatives

From the text description augmentation using GPT-4, we obtain augmented prompt  $P_{a1}$  from the prompt instruction such as  $P_{a1}, P_{a2}, P_{a3}$ . Table 2 shows the examples of augmented prompts from GPT-4. It includes key strategies for successful social media image creation, including objectives and Engagement Strategy ( $P_{a1}$ ) to create a natural social media image. It also includes Lighting (Natural light) to create nat-

$P_{a1}$	$P_{a2}$	$P_{a3}$
<p><b>Objective:</b> Produce an image that encapsulates the charming and playful moment as if a cat is taking a selfie, capturing the creativity and quality of iPhone photography. <b>Engagement Strategy:</b> Craft the caption or image in a way that encourages viewers to share their own pet selfies taken on an iPhone, possibly creating a user-generated content stream that broadens the campaign’s reach. <b>Lighting:</b> Natural light should be utilized to give life to the cat’s fur and eyes, enhancing the image’s overall warmth and appeal. <b>Props and Accessories:</b> Include iPhone accessories or props that are typically associated with selfies, like a ring light or a prop to stabilize the iPhone, which can add to the storytelling aspect.</p>	<p><b>Brand Consistency:</b> Keep the image sleek and consistent with Apple’s branding. The composition should be minimalistic yet striking, with a focus on the clever setup that makes the cat appear to take a selfie. <b>Call to Action:</b> Incorporate a subtle call to action, such as “Show us your best selfie #ShotoniPhone” to encourage user engagement and participation in the campaign. <b>Scene Setup:</b> Position an iPhone in a scene in such a way that a cat appears to be looking into the front camera or tapping the shutter button. This could be done by placing the iPhone against a backdrop where a cat typically lounges, like a sunny windowsill, a cozy corner with scatter cushions, or an interesting outdoor locale.</p>	<p><b>Scene Concept:</b> Set up a whimsical yet plausible scenario where a cat appears to be using an iPhone to take a selfie. Consider staging the iPhone in a position that could naturally be operated by the cat, such as propped against a pile of books or resting on a soft surface within the cat’s reach. <b>Cat’s Interaction with the iPhone:</b> Pose the cat with one paw extended toward the iPhone as if pressing the shutter button. Ensure the cat’s face is prominently reflected on the iPhone screen, capturing a clear selfie expression. <b>Background Setting:</b> Choose a simple yet visually appealing background that doesn’t distract from the subject, such as a brightly lit room with minimal furniture or an outdoor setting with natural light.</p>

Table 2: Examples of augmented prompts from GPT-4 for social media creatives. Due to the page limitation, we present only part of each augmented prompt.

ural social media images.  $P_{a2}$  presents a strategy regarding Brand Consistency and Call to Action. It also suggests the Scene Setup concept to create eye-catching social media images.  $P_{a3}$  represents a strategy for social media creatives by introducing Cat’s interaction and background setting.

Compared to the original text description, which includes only a description of images, augmented prompts suggest critical strategies for social media creatives. Figure 1b is generated from our proposed **Prompt-for-Prompt**. It shows a more detailed cat for taking a selfie by adding a frame of an iPhone and a pose for taking pictures by herself. This improvement is possible due to the augmented prompts’ detailed direction, which is not presented in the original text description ( $P_0$ ).

We use state-of-the-art text-to-image models such as Midjourney, DALL-E 3, and Stable Diffusion to create social media creatives using the augmented prompts ( $P_{a1}$ ,  $P_{a2}$ ,  $P_{a3}$ ) from the previous step. Let  $m$  be a text-to-image method.  $m \in \{\text{Midjourney, DALL-E 3, Stable Diffusion}\}$ . Therefore, we generate social media images  $I_{miP_{aj}}$ .

### 3.3 Robustness Check and Evaluation Measures

For qualitative evaluation from human participants, we ask them two questions - willingness to like and comment for robustness check. The usage of willingness to like and comment on Instagram posts is inspired by recent research [Rietveld *et al.*, 2020]. Commenting requires higher levels of cognitive and behavioural effort than liking. Thus, writing comments can be considered more ‘profound engagement’ than clicking the like button [Yoon *et al.*, 2018]. Our experiments also find a lower willingness to comment than a

willingness to like.

In addition to the two measures, we add further measurements such as Share, Appealing, Relevant to text description, Creative, and Natural to assess social media creatives as image quality and text-image alignment are the two main criteria of text-to-image are [Zhang *et al.*, 2023].

## 4 Experiments

### 4.1 Tasks and Datasets

We conduct experiments on 10 Instagram accounts such as Apple, Google, Louis Vuitton, and Tesla from various industries: IT, Fashion, Car, Food & Beverage. The overall statistics are listed in Table 3. We collect social media data using the automatic data scraping platform, PhantomBuster (<https://phantombuster.com/>). We select top-ranked posts for each brand based on the number of likes. We use social media creatives as human expert-generated creatives. We use text descriptions from the post as input to generate social media creatives with Prompt instruction and text-to-image methods. We rely on a LLM (GPT-4) to generate prompts. For each brand, we generate 10 tasks.

### 4.2 Text-to-Image Methods and LLM for Prompts

We use state-of-art text-to-image methods and a LLM.

- Midjourney V.5.2 generates images from text descriptions. It is released in June 2023. It combines CLIP (Contrast Language Image Pretraining) with a constantly changing set of image generation methods. One can use the Midjourney Bot on Discord.



Brand	Industry	# Likes	# Followers	Image type	Desc len	# Tasks
Apple	IT	1193014	31.9M	animal-only	118	10
Coca-Cola	Food & Beverage	41453	3M	product-only	127	10
Google	IT	92156	14.6M	product-only	159	10
Hermés	Luxury	126411	13.5M	people+product	250	10
Louis Vuitton	Luxury	8354713	54.8M	people+product	328	10
Mercedes-Benz	Car	1275283	37.9M	people+product	165	10
Nike	Fashion	2069991	306M	people+product	27	10
Rolux	Luxury	402222	15.4M	product-only	511	10
Starbucks	Food & Beverage	618791	18M	product-only	206	10
Tesla	Car	1041648	9.4M	product-only	72	10

Table 3: Statistics of datasets. We collect data from Instagram.

- DALL-E 3 is a text-to-image model by OpenAI and released in October 2023. To overcome limitations from the training of noisy and inaccurate image captions, it trains a bespoke image captioner to recaption the training dataset.
- Stable Diffusion SDXL is a latent diffusion model for text-to-image and is released in 2023. It uses more attention blocks and a larger cross-attention context. It introduces a refinement model and post-hoc text-to-image technique.

To generate prompts for social media creatives, we select GPT-4. From our preliminary experiments, Meta’s Llama 2 (<https://www.llama2.ai/>) gives us outputs, including multiple images with short prompts. The outputs from Google’s BARD (<https://bard.google.com>) are similar to GPT-4. Therefore, we conduct further experiments using only GPT-4 to simplify the experiment.

### 4.3 Human Evaluation

We conduct human surveys using Amazon Mechanical Turk (<https://www.mturk.com>). To minimise bias from the ordering effect, we randomise the order of the questionnaire using an online survey tool, Qualtrics (<https://www.qualtrics.com/>). We have 100 sets of questionnaires and collect 500 human participants. Human participants are given 10 social media posts, including human-generated creative ( $I0$ ) + text description ( $P0$ ) or AI-generated creative + text description ( $P0$ ). Participants are asked questions, including willingness to like and comment. We collect all responses from the survey and calculate the mean values. We model regression models for each question to assess the relationship between our prompt approach to generate social media creatives and target variables (willingness to like/comment), including statistical significance.

## 5 Can AI Outperform Human Experts in Creating Social Media Creatives?

To more precisely quantify whether AI-generated creatives from augmented prompts ( $P_a$ ) obtain higher willingness to like/comment, we model the outcome variables received by Instagram’s ranked post as a function of  $P_a$  where the  $P_a$  is computed at the aggregate level by combining all types of

augmented Prompts. In other words,  $P_a=1$  if the image is generated from **Prompt-for-Prompt** or 0 otherwise.

$\beta_1$  measures the difference between human-generated ( $I0$ ) and AI-generated creatives from **Prompt-for-Prompt** ( $P_{a1}$  or  $P_{a2}$  or  $P_{a3}$ ).

The regression model also includes several control variables, such as brand, age, gender, and duration to control other effects:

$$\begin{aligned}
 \text{Like or Comment} = & \beta_0 + \beta_1 P_a + \beta_2 \text{Male} \\
 & + \beta_3 \text{Age} + \beta_4 \text{Duration} \\
 & + \mu_i + \tau_j + \epsilon
 \end{aligned} \tag{1}$$

where :

- $\beta_1$  is a core coefficient of interest in this study, which is the main effect of **Prompt-for-Prompt** (vs human);
- $\beta_0$  is a constant term;
- $\beta_2, \beta_3, \beta_4$  capture the effect of male (vs female), Age, and Duration;
- $P_a$  is 1 if the image is generated by **Prompt-for-Prompt** or 0 otherwise;
- Male is 1 if the respondent is male or 0 otherwise;
- Age is an age of a participant;
- Duration is a time for completing human survey;
- $\mu_i$  is dummies for each brand (e.g., Apple, Coca-Cola);
- $\tau_j$  is dummies for the participants;
- $\epsilon$  is an error term.

Table 4 shows that people like AI-generated social media creatives more than human expert-generated ones. The key coefficients of interest ( $P_a$ ) for both like and comment are positive and significant, respectively. On average, people like creatives from our proposed approach 2.48 (out of 10) more than those from human experts. The model’s small  $p$ -values show the statistically significant differences between the baseline (human expert-generated creatives) and the AI-generated creatives. Similarly, regarding comments, our proposed augmented prompt approach ( $P_a$ ) achieves a 2.17 (out

Response	Variable	Coef	$p$ -value	
Like	$P_a$	2.48	0.002	***
	Male	-2.38	1.65e-14	****
	Age	0.34	0.076	*
	Duration	0.01	6.73e-05	****
	Adjusted R-squared: 0.676			
Comment	$P_a$	2.17	0.012	**
	Male	-2.99	0.009	***
	Age	0.29	0.172	
	Duration	0.01	0.007	***
	Adjusted R-squared: 0.673			

\* $p < 0.1$ ; \*\* $p < 0.05$ ; \*\*\* $p < 0.01$ ; \*\*\*\* $p < 0.001$ .

Table 4: Regression result of Model 1

Response	Variable	Coef	$p$ -value	
Like	$P_{a1}$	2.49	0.005	***
	$P_{a2}$	1.85	0.037	**
	$P_{a3}$	2.58	0.003	***
	Male	-2.34	2.96e-16	****
	Age	0.37	0.038	**
	Duration	0.01	8.79e-06	****
	Adjusted R-squared: 0.665			
	Comment	$P_{a1}$	1.632	0.090
$P_{a2}$		1.856	0.054	*
$P_{a3}$		2.634	0.006	***
Male		-3.11	-10.127 < 2e-16	****
Age		0.34	0.072	*
Duration		0.01	0.002	***
Adjusted R-squared: 0.678				

\* $p < 0.1$ ; \*\* $p < 0.05$ ; \*\*\* $p < 0.01$ ; \*\*\*\* $p < 0.001$ .

Table 5: Regression result from each augmented prompt

of 10) more willingness to comment compared to the baseline (human-generated creatives), and the difference is statistically significant. Also, across willingness to like and comment, female (vs male) and older participants give higher willingness to like or comment.

## 6 Ablation Study

To examine whether each augmented prompt can generate better social media creatives than the creatives by human experts, we model the willingness to like and comment on which Instagram top-ranked posts received as a function of  $P_{a1}$ ,  $P_{a2}$ , and  $P_{a3}$ , which are dummy variables. For example,  $P_{a1}=1$  when the image is generated from the augmented prompt  $P_{a1}$  or 0 otherwise. The function includes several control variables like the previous regression model. (Refer to the model in Appendix A.1).

Table 5 shows that all the coefficients of  $P_{a1}$ ,  $P_{a2}$ , and  $P_{a3}$  are positive and significant, suggesting that people are more willing to like/comment creatives from our **Prompt-for-Prompt** methods than the human-generated creatives. Also, a small  $p$ -value means that the differences are statistically significant. Specifically, regarding likes prompts  $P_{a3}$

Response	Variable	Coef	$p$ -value	
Like	Mid+ $P_{a1}$	3.02	0.006	***
	Mid+ $P_{a2}$	0.97	0.374	
	Mid+ $P_{a3}$	3.57	0.001	***
	DALL+ $P_{a1}$	2.81	0.010	**
	DALL+ $P_{a2}$	2.37	0.030	**
	DALL+ $P_{a3}$	2.55	0.019	**
	SD+ $P_{a1}$	1.66	0.127	
	SD+ $P_{a2}$	2.24	0.040	**
	SD+ $P_{a3}$	1.63	0.135	
	Male	-2.34	2.96e-16	****
	Age	0.37	0.038	**
	Duration	0.01	8.79e-06	****
	Adjusted R-squared: 0.665			
	Comment	Mid+ $P_{a1}$	1.46	0.218
Mid+ $P_{a2}$		2.57	0.029	**
Mid+ $P_{a3}$		3.29	0.005	***
DALL+ $P_{a1}$		1.31	0.267	
DALL+ $P_{a2}$		0.67	0.570	
DALL+ $P_{a3}$		2.66	0.025	**
SD+ $P_{a1}$		2.13	0.071429	*
SD+ $P_{a2}$		2.33	0.049	**
SD+ $P_{a3}$		1.96	0.098	*
Male		-3.11	-10.121 < 2e-16	****
Age	0.34	0.072	*	
Duration	0.01	0.002	***	
Adjusted R-squared: 0.671				

\* $p < 0.1$ ; \*\* $p < 0.05$ ; \*\*\* $p < 0.01$ ; \*\*\*\* $p < 0.001$ .

Table 6: Regression result for text-to-image methods+augmented prompts with human-generated creatives baseline

Prompt	Like			Comment		
	Mid	DALL	SD	Mid	DALL	SD
$P_{a1}$	<b>7.14</b>	6.93	5.78	<b>3.99</b>	3.85	4.67
$P_{a2}$	5.09	<b>6.49</b>	6.36	<b>5.11</b>	3.21	4.87
$P_{a3}$	<b>7.69</b>	6.66	5.75	<b>5.83</b>	5.20	4.50

Note: Mid-Midjourney, DALL-DALL-E 3, SD-Stable Diffusion

Table 7: Text-to-Image methods comparison

(social media image prompts),  $P_{a1}$  (Natural social media image prompts),  $P_{a2}$  (eye-catching prompts) show 2.58, 2.49, 1.85 compared to baseline (human-generated creatives), respectively. The differences between the baseline and itself are statistically significant. In addition, regarding the comment, all 3 prompt methods achieve higher willingness than the human-generated creatives. The differences are statistically significant for  $P_{a3}$  and marginally significant (i.e.  $p$ -value is between 0.05 and 0.1) for  $P_{a1}$  and  $P_{a2}$ .

Table 6 presents the effects of prompts and text-to-image methods. Midjourney and  $P_{a3}$  create the best willingness to like and comment compared to the baseline (human-generated) and the difference is statistically significant (Refer to the model in Appendix A.2).

		Like	Comment	Share	Appealing	Relevant	Creative	Natural
Product-only	Human	5.33	1.06	3.74	7.54	7.47	7.47	7.50
	Prompt-AI	6.33	3.36	4.09	7.59	7.44	7.47	7.57
People+product	Human	7.54	4.65	6.82	7.56	7.26	7.53	7.53
	Prompt-AI	7.16	5.16	6.52	7.62	7.36	7.51	7.50
Animal-only	Human	7.09	4.36	5.88	7.64	7.53	7.36	7.40
	Prompt-AI	8.05	6.04	6.36	7.85	7.55	7.64	7.62

Table 8: Human vs AI based on image characteristics

		Like	Comment	Share	Appealing	Relevant	Creative	Natural
Short	Human	4.65	1.87	4.48	7.65	7.45	7.51	7.65
	Prompt-AI	5.89	4.01	4.49	7.72	7.49	7.53	7.62
Medium	Human	7.65	3.91	5.75	7.48	7.47	7.50	7.37
	Prompt-AI	7.99	5.56	6.05	7.63	7.43	7.53	7.47
Long	Human	7.45	3.01	5.55	7.52	7.24	7.43	7.44
	Prompt-AI	6.92	3.57	5.59	7.57	7.30	7.44	7.52

Table 9: Prompt-for-Prompt effects based on text description length

## 7 Deeper Analysis

Table 7 shows that for both the Like and Comment measure, Midjourney achieves the highest scores. For like, Midjourney records the best score from the 2 measures among 3, and the average score across all measures is 7.01, 7.79% higher than DALL-E 3 and 17.80% higher than Stable Diffusion. For the Comment, Midjourney shows the best score in all the 3 measures.

Our proposed **Prompt-for-Prompt** approach can more effectively increase social media creatives for Animal and product-only. However, they need more improvement for the creatives, including real people (Table 8). In detail, in animal-only creatives, AI presents improvement for 7 measures and improvement for product-only creatives from 6 measures. However, prompts fail to improve the image quality for people creatives. Prompt shows improvement only 3 measures out of 7. Figure 1 presents an example of an animal-only image. Figure 3 is a people+product image, and Figure 4 is a product-only image.

We categorize our datasets into 3 groups (short, medium, and long) based on the length of the text description (Table 3). On average, prompts improve 20.39% for short text descriptions compared to human-generated social media creatives while they boost 7.90% from the medium length and 2.14% for long text descriptions. This means that a short text description is not enough to generate high quality social media creatives, and text augmentation using **Prompt-for-Prompt** can improve the AI’s capabilities to generate social media creatives.

## 8 Conclusion

Prompt augmentation via LLMs is essential for generating creatives, even in the creative domain. However, recent research mainly covers textual data and reasoning tasks. This paper examines the effect of prompts for generating social media creatives from real Instagram data.



Figure 3: AI-generated creative - people+product



Figure 4: AI-generated creative - product-only

## References

- [Brown *et al.*, 2020] Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel Ziegler, Jeffrey Wu, Clemens Winter, Chris Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners. In *Neural Information Processing Systems*, volume 33, pages 1877–1901, 2020.
- [Chen *et al.*, 2023] Jiu-hai Chen, Lichang Chen, Chen Zhu, and Tianyi Zhou. How many demonstrations do you need for in-context learning? In *Empirical Methods in Natural Language Processing*, pages 11149–11159, 2023.
- [Cheng *et al.*, 2023] Myra Cheng, Esin Durmus, and Dan Jurafsky. Marked personas: Using natural language prompts to measure stereotypes in language models. In *Association for Computational Linguistics*, pages 1504–1532, 2023.
- [Dinan *et al.*, 2020] Emily Dinan, Angela Fan, Ledell Wu, Jason Weston, Douwe Kiela, and Adina Williams. Multi-dimensional gender bias classification. In *Empirical Methods in Natural Language Processing*, pages 314–331, November 2020.
- [Ding *et al.*, 2021] Ming Ding, Zhuoyi Yang, Wenyi Hong, Wendi Zheng, Chang Zhou, Da Yin, Junyang Lin, Xu Zou, Zhou Shao, Hongxia Yang, and Jie Tang. Cogview: Mastering text-to-image generation via transformers. In *Neural Information Processing Systems*, pages 19822–19835, 2021.
- [Esser *et al.*, 2021] Patrick Esser, Robin Rombach, and Björn Ommer. Taming transformers for high-resolution image synthesis. In *Computer Vision and Pattern Recognition*, pages 12873–12883, 2021.
- [Ho *et al.*, 2020] Jonathan Ho, Ajay Jain, and Pieter Abbeel. Denoising diffusion probabilistic models. In *Neural Information Processing Systems*, 2020.
- [Horton, 2018] Adrian Horton. Embrace it or risk obsolescence: How will ai jobs affect hollywood? *The Guardian*, 2018. Available at: <https://www.theguardian.com/film/2023/aug/21/ai-jobs-hollywood-writers-actors-strike> (Accessed: Jan 13th, 2023).
- [Kojima *et al.*, 2022] Takeshi Kojima, Shixiang (Shane) Gu, Machel Reid, Yutaka Matsuo, and Yusuke Iwasawa. Large language models are zero-shot reasoners. In *Neural Information Processing Systems*, volume 35, pages 22199–22213, 2022.
- [Liu *et al.*, 2023] Pengfei Liu, Weizhe Yuan, Jinlan Fu, Zhengbao Jiang, Hiroaki Hayashi, and Graham Neubig. Pre-train, prompt, and predict: A systematic survey of prompting methods in natural language processing. *ACM Computing Surveys*, 55(9), 2023.
- [Mansimov *et al.*, 2016] Elman Mansimov, Emilio Parisotto, Lei Jimmy Ba, and Ruslan Salakhutdinov. Generating images from captions with attention. In Yoshua Bengio and Yann LeCun, editors, *International Conference on Learning Representations*, 2016.
- [Miller and Cox, 2023] Claire Cain Miller and Courtney Cox. In reversal because of a.i., office jobs are now more at risk. *The Guardian*, 2023. Available at: <https://www.theguardian.com/film/2023/aug/21/ai-jobs-hollywood-writers-actors-strike> (Accessed: Jan 13th, 2023).
- [Nichol *et al.*, 2022] Alexander Quinn Nichol, Prafulla Dhariwal, Aditya Ramesh, Pranav Shyam, Pamela Mishkin, Bob McGrew, Ilya Sutskever, and Mark Chen. GLIDE: towards photorealistic image generation and editing with text-guided diffusion models. In *International Conference on Machine Learning*, volume 162, pages 16784–16804, 2022.
- [Podell *et al.*, 2023] Dustin Podell, Zion English, Kyle Lacey, Andreas Blattmann, Tim Dockhorn, Jonas Müller, Joe Penna, and Robin Rombach. SDXL: improving latent diffusion models for high-resolution image synthesis. *CoRR*, abs/2307.01952, 2023.
- [Raffel *et al.*, 2020] Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of Machine Learning Research*, 21, 2020.
- [Ramesh *et al.*, 2021a] Aditya Ramesh, Mikhail Pavlov, Gabriel Goh, Scott Gray, Chelsea Voss, Alec Radford, Mark Chen, and Ilya Sutskever. Zero-shot text-to-image generation. In *International Conference on Machine Learning*, pages 8821–8831, 2021.
- [Ramesh *et al.*, 2021b] Aditya Ramesh, Mikhail Pavlov, Gabriel Goh, Scott Gray, Chelsea Voss, Alec Radford, Mark Chen, and Ilya Sutskever. Zero-shot text-to-image generation. In *International Conference on Machine Learning*, volume 139, pages 8821–8831, 2021.
- [Ramesh *et al.*, 2022] Aditya Ramesh, Prafulla Dhariwal, Alex Nichol, Casey Chu, and Mark Chen. Hierarchical text-conditional image generation with CLIP latents. *CoRR*, abs/2204.06125, 2022.
- [Reed *et al.*, 2016] Scott Reed, Zeynep Akata, Xinchun Yan, Lajanugen Logeswaran, Bernt Schiele, and Honglak Lee. Generative adversarial text to image synthesis. In *International Conference on Machine Learning*, volume 48, pages 1060–1069, 2016.
- [Rietveld *et al.*, 2020] Robert Rietveld, Willemijn Van Dolen, Masoud Mazloom, and Marcel Worring. What you feel, is what you like influence of message appeals on customer engagement on instagram. *Journal of Interactive Marketing*, 49(1):20–53, 2020.
- [Rombach *et al.*, 2022] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent

- diffusion models. In *Computer Vision and Pattern Recognition*, pages 10674–10685, 2022.
- [Saharia *et al.*, 2022] Chitwan Saharia, William Chan, Saurabh Saxena, Lala Li, Jay Whang, Emily L. Denton, Seyed Kamyar Seyed Ghasemipour, Raphael Gontijo Lopes, Burcu Karagol Ayan, Tim Salimans, Jonathan Ho, David J. Fleet, and Mohammad Norouzi. Photorealistic text-to-image diffusion models with deep language understanding. In *Neural Information Processing Systems*, 2022.
- [Shi *et al.*, 2020] Zhan Shi, Xu Zhou, Xipeng Qiu, and Xiaodan Zhu. Improving image captioning with better use of caption. In *Association for Computational Linguistics*, pages 7454–7464, 2020.
- [Wawrzuta *et al.*, 2021] Dominik Wawrzuta, Mariusz Jaworski, Joanna Gotlib, and Mariusz Panczyk. Characteristics of antivaccine messages on social media: Systematic review. *Journal of Medical Internet Research*, 23, 2021.
- [Wei *et al.*, 2022a] Jason Wei, Yi Tay, Rishi Bommasani, Colin Raffel, Barret Zoph, Sebastian Borgeaud, Dani Yogatama, Maarten Bosma, Denny Zhou, Donald Metzler, Ed H. Chi, Tatsunori Hashimoto, Oriol Vinyals, Percy Liang, Jeff Dean, and William Fedus. Emergent abilities of large language models. *Transactions on Machine Learning Research*, 2022.
- [Wei *et al.*, 2022b] Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, brian ichter, Fei Xia, Ed Chi, Quoc V Le, and Denny Zhou. Chain-of-thought prompting elicits reasoning in large language models. In *Neural Information Processing Systems*, volume 35, pages 24824–24837, 2022.
- [Weidinger *et al.*, 2021] Laura Weidinger, John Mellor, Maribeth Rauh, Conor Griffin, Jonathan Uesato, Po-Sen Huang, Myra Cheng, Mia Glaese, Borja Balle, Atoosa Kasirzadeh, Zac Kenton, Sasha Brown, Will Hawkins, Tom Stepleton, Courtney Biles, Abeba Birhane, Julia Haas, Laura Rimell, Lisa Anne Hendricks, William Isaac, Sean Legassick, Geoffrey Irving, and Iason Gabriel. Ethical and social risks of harm from language models. *CoRR*, abs/2112.04359, 2021.
- [Xu *et al.*, 2018] Tao Xu, Pengchuan Zhang, Qiuyuan Huang, Han Zhang, Zhe Gan, Xiaolei Huang, and Xiaodong He. Attngan: Fine-grained text to image generation with attentional generative adversarial networks. In *Computer Vision and Pattern Recognition*, pages 1316–1324, 2018.
- [Yao *et al.*, 2023] Shunyu Yao, Dian Yu, Jeffrey Zhao, Izhak Shafran, Thomas L. Griffiths, Yuan Cao, and Karthik R Narasimhan. Tree of thoughts: Deliberate problem solving with large language models. In *Neural Information Processing Systems*, 2023.
- [Yoon *et al.*, 2018] Gunwoo Yoon, Cong Li, Yi (Grace) Ji, Michael North, Cheng Hong, and Jiangmeng Liu. Attracting comments: Digital engagement metrics on facebook and financial performance. *Journal of Advertising*, 47(1):24–37, 2018.
- [Yu *et al.*, 2022a] Jiahui Yu, Yuanzhong Xu, Jing Yu Koh, Thang Luong, Gunjan Baid, Zirui Wang, Vijay Vasudevan, Alexander Ku, Yinfei Yang, Burcu Karagol Ayan, Ben Hutchinson, Wei Han, Zarana Parekh, Xin Li, Han Zhang, Jason Baldridge, and Yonghui Wu. Scaling autoregressive models for content-rich text-to-image generation. *Transactions on Machine Learning Research*, 2022.
- [Yu *et al.*, 2022b] Jiahui Yu, Yuanzhong Xu, Jing Yu Koh, Thang Luong, Gunjan Baid, Zirui Wang, Vijay Vasudevan, Alexander Ku, Yinfei Yang, Burcu Karagol Ayan, Ben Hutchinson, Wei Han, Zarana Parekh, Xin Li, Han Zhang, Jason Baldridge, and Yonghui Wu. Scaling autoregressive models for content-rich text-to-image generation. *Transactions on Machine Learning Research*, 2022.
- [Zhang *et al.*, 2016] Han Zhang, Tao Xu, Hongsheng Li, Shaoting Zhang, Xiaogang Wang, Xiaolei Huang, and Dimitris N. Metaxas. Stackgan: Text to photo-realistic image synthesis with stacked generative adversarial networks. *International Conference on Computer Vision*, pages 5908–5916, 2016.
- [Zhang *et al.*, 2021] Han Zhang, Jing Yu Koh, Jason Baldridge, Honglak Lee, and Yinfei Yang. Cross-modal contrastive learning for text-to-image generation. In *Computer Vision and Pattern Recognition*, pages 833–842, 2021.
- [Zhang *et al.*, 2023] Chenshuang Zhang, Chaoning Zhang, Mengchun Zhang, and In So Kweon. Text-to-image diffusion models in generative AI: A survey. *CoRR*, abs/2303.07909, 2023.
- [Zhou *et al.*, 2022] Yufan Zhou, Ruiyi Zhang, Changyou Chen, Chunyuan Li, Chris Tensmeyer, Tong Yu, Jiuxiang Gu, Jinhui Xu, and Tong Sun. Towards language-free training for text-to-image generation. In *Computer Vision and Pattern Recognition*, pages 17907–17917, 2022.



## A Regression models

### A.1 Augmented prompts effect

Model 1 is a function to show the synergy effects between text-to-image methods and augmented prompts.

$$\begin{aligned} Like\ or\ Comment = & \beta_0 + \beta_1 P_{a1} + \beta_2 P_{a2} \\ & + \beta_3 P_{a3} + \beta_4 Male + \beta_5 Age \\ & + \beta_6 Duration + \mu_i + \tau_j + \epsilon \end{aligned} \quad (1)$$

where :

- $\beta_1, \beta_2, \beta_3$  are the key coefficients of interest of this paper, which are the main effects of  $P_{a1}, P_{a2}, P_{a3}$ , respectively (vs human-generated)
- $\beta_0$  is an intercept;
- $P_{a1}$  is 1 if the creatives are generated by  $P_{a1}$  - Natural+Social Media Image or 0 otherwise;
- $P_{a2}$  is 1 if the creatives are generated by  $P_{a2}$  - Eye-Catching+Social Media Image or 0 otherwise;
- $P_{a3}$  is 1 if the creatives are generated by  $P_{a3}$  -Social Media Image or 0 otherwise;
- Male is 1 if the respondent is male or 0 otherwise;
- Age is an age of a participant;
- Duration is a time for completing human survey;
- $\mu_i$  is dummies for each brand (e.g., Apple, Coca-Cola);
- $\tau_j$  is dummies for the participants;
- $\epsilon$  is an error term.

### A.2 Effects of text-to-image methods and augmented prompts

Model 2 is a function to show the effects text-to-image methods and augmented prompts.

$$\begin{aligned} Like\ or\ Comment = & \beta_0 \\ & + \beta_1 MidP_{a1} + \beta_2 MidP_{a2} + \beta_3 MidP_{a3} \\ & + \beta_4 DalP_{a1} + \beta_5 DalP_{a2} + \beta_6 DalP_{a3} \\ & + \beta_7 SdP_{a1} + \beta_8 SdP_{a2} + \beta_9 SdP_{a3} \\ & + \beta_{10} Male + \beta_{11} Age + \beta_{12} Duration \\ & + \mu_i + \tau_j + \epsilon \end{aligned} \quad (2)$$

where :

- $\beta_1, \beta_2, \beta_3, \beta_4, \beta_5, \beta_6, \beta_7, \beta_8, \beta_9$  are the key coefficients of interest of this paper, which are the main effects of  $MidP_{a1}, MidP_{a2}, MidP_{a3}, DalP_{a1}, DalP_{a2}, DalP_{a3}, SdP_{a1}, SdP_{a2}, SdP_{a3}$ , respectively (vs human-generated)
- $\beta_0$  is an intercept;
- $MidP_{a1}$  is 1 if the creatives are generated by Midjourney and  $P_{a1}$  - Natural+Social Media Image and or 0 otherwise;
- $MidP_{a2}$  is 1 if the creatives are generated by Midjourney and  $P_{a2}$  - Eye-Catching+Social Media Image or 0 otherwise;

- $MidP_{a3}$  is 1 if the creatives are generated by Midjourney and  $P_{a3}$  -Social Media Image or 0 otherwise;
- $DalP_{a1}$  is 1 if the creatives are generated by DALL-E 3 and  $P_{a1}$  - Natural+Social Media Image and or 0 otherwise;
- $DalP_{a2}$  is 1 if the creatives are generated by DALL-E 3 and  $P_{a2}$  - Eye-Catching+Social Media Image or 0 otherwise;
- $DalP_{a3}$  is 1 if the creatives are generated by DALL-E 3 and  $P_{a3}$  -Social Media Image or 0 otherwise;
- $SdP_{a1}$  is 1 if the creatives are generated by Stable Diffusion and  $P_{a1}$  - Natural+Social Media Image and or 0 otherwise;
- $SdP_{a2}$  is 1 if the creatives are generated by Stable Diffusion and  $P_{a2}$  - Eye-Catching+Social Media Image or 0 otherwise;
- $SdP_{a3}$  is 1 if the creatives are generated by Stable Diffusion and  $P_{a3}$  -Social Media Image or 0 otherwise;
- Male is 1 if the respondent is male or 0 otherwise;
- Age is an age of a participant;
- Duration is a time for completing human survey;
- $\mu_i$  is dummies for each brand (e.g., Apple, Coca-Cola);
- $\tau_j$  is dummies for the participants;
- $\epsilon$  is an error term.

## B Examples of augmented prompt

The full contents of augmented prompts are in Tables 1, 2, and 3.

## C Examples of AI-generated creatives from the same prompt

Figure 1 illustrates a comparison of Prompt-for-Prompt outputs from the same augmented prompt (Table 4) using different text-to-image methods.

## D Augmented prompts from other LLMs

Table 5 is an augmented prompt from Llama 2 and Table 6 is an augmented prompt from BARD.

**Objective:** Design an image series that whimsically suggests a cat taking a selfie, showcasing the high-quality capabilities of the iPhone camera as captured by Rashid S.

**Scene Setup:** Position an iPhone in a scene in such a way that a cat appears to be looking into the front camera or tapping the shutter button. This could be done by placing the iPhone against a backdrop where a cat typically lounges, like a sunny windowsill, a cozy corner with scatter cushions, or an interesting outdoor locale.

**Cat Interaction:** Feature a cat interacting with the iPhone, with one paw extended towards the camera as if in the midst of taking a selfie. The cat should be the primary subject, with its personality and expression taking center stage.

**iPhone Display:** The iPhone screen should be visible, potentially reflecting the cat’s face on the screen to enhance the selfie effect. You can also show the camera app interface around the cat’s reflection for a more authentic selfie look.

**Vibrant and Playful Aesthetic:** Use a bright and attractive color palette to catch the eye and evoke a playful mood. The image should use the natural light to sparkle off the cat’s eyes and the iPhone screen, highlighting the quality of the photo.

**Intriguing Angles:** Experiment with various angles and perspectives to find the most engaging shot — overhead, from the side, or with the cat’s face coming into the foreground and the iPhone angled towards it.

**Engagement Elements:** Add a caption or graphic element that encourages viewers to interact, such as “Guess what I’m thinking?” above the cat’s selfie or a prompt for users to post their pet’s selfie shot on an iPhone.

**Hashtag Integration:** Ensure that the hashtag #ShotoniPhone is prominently featured in the image in a style that complements Apple’s branding. The font should be modern and clean, matching the aesthetics of Apple’s design.

**Photographer Tag:** Include a tasteful shout-out to the original photographer, @rashid\_bin\_, using a lower-third graphic or a discreet corner placement that doesn’t take away from the overall design.

**Call to Action:** Incorporate a subtle call to action, such as “Show us your best selfie #ShotoniPhone” to encourage user engagement and participation in the campaign.

**Brand Consistency:** Keep the image sleek and consistent with Apple’s branding. The composition should be minimalistic yet striking, with a focus on the clever setup that makes the cat appear to take a selfie.

This prompt is tailored to create a playful and engaging visual story that resonates with the audience, driving home the campaign’s creative angle and the technical prowess of the iPhone’s camera.

---

Table 1: Example of augmented prompt (Natural+Social Media Images) from GPT-4

**Objective:** Create an image that captures a cat in the act of taking a selfie, showcasing the iPhone’s camera quality and the playful, creative scenario envisioned by Rashid S.

**Scene Concept:** Set up a whimsical yet plausible scenario where a cat appears to be using an iPhone to take a selfie. Consider staging the iPhone in a position that could naturally be operated by the cat, such as propped against a pile of books or resting on a soft surface within the cat’s reach.

**Cat’s Interaction with the iPhone:** Pose the cat with one paw extended toward the iPhone as if pressing the shutter button. Ensure the cat’s face is prominently reflected on the iPhone screen, capturing a clear selfie expression.

**Background Setting:** Choose a simple yet visually appealing background that doesn’t distract from the subject, such as a brightly lit room with minimal furniture or an outdoor setting with natural light.

**Props and Accessories:** Add a few playful props around the scene to enhance the storytelling element. These could include items typically associated with selfies or personalization, like sunglasses, small hats, or toys to add character to the scene.

**Photography Techniques:** Utilize a high depth of field to keep the iPhone and the cat in sharp focus while softly blurring the background. Employ lighting that flatters the cat’s features and enhances the iPhone’s screen visibility.

**Image Style and Composition:** Maintain a balance between fun and sophistication in the image composition. Align the iPhone’s branding with the creative concept to ensure the product is recognizable and the scenario is believable.

**Caption and Hashtag Integration:** Design the image with space to include an engaging caption and the hashtag #ShotoniPhone. Ensure that the caption complements the visual content and continues the story that the image portrays.

**Photographer Tag:** Place @rashid\_bin\_’s handle in the image subtly but legibly to attribute the original concept and maintain connection with the campaign’s community.

**Viewer Engagement:** Encourage interaction by prompting viewers to share their interpretation of the concept or post their pet’s selfies, leveraging the initial creative idea for wider campaign participation.

**Final Touches:** Apply final edits to enhance the image’s clarity, color balance, and overall impact, ensuring that the image meets the high-quality standards associated with Apple’s brand.

This prompt is designed to inspire the creation of an image that not only fits the playful narrative but also emphasizes the camera capabilities of the iPhone, reflecting the innovative and user-friendly reputation of Apple products.

---

---

Table 2: Example of augmented prompts (Eye-catching+Social Media Images) from GPT-4

**Objective:** Craft a series of images that creatively depict a cat taking a selfie, illustrating the unique and user-centric capabilities of the iPhone’s camera as visualized by photographer Rashid S.

**Scene Composition:** Set up a scene where a cat is positioned with an iPhone in such a way that it appears to be taking a selfie. This could involve the cat’s paw placed on the iPhone screen as if it’s pressing the shutter button or the iPhone propped up against an object with the cat looking directly into the front-facing camera.

**Cat’s Pose and Expression:** Capture the cat’s personality and curiosity, with its eyes focused on the screen, ensuring that the moment conveys intention, akin to a selfie pose. The cat could be in a playful state or a more serene, relaxed posture that people associate with taking selfies.

**iPhone Orientation and Visibility:** The iPhone should be visible in the frame, showing the camera interface around the cat’s reflection on the screen, adding to the selfie illusion. Make sure the iPhone model is identifiable to showcase the latest technology by Apple.

**Background and Setting:** Use a cozy and homely background, or place the cat in an unexpected but photogenic location to add an element of surprise and delight to the composition. The background should be aesthetic but not distracting, complementing the subject.

**Lighting:** Utilize natural lighting to create a soft and flattering ambiance that enhances the cat’s features and the iPhone’s design. The lighting should also highlight the clarity and color accuracy of the iPhone’s camera.

**Interaction with the Camera:** To emphasize the concept of the cat taking a selfie, arrange the scene to include a mirror reflection or a clear view of the cat’s face in the camera’s selfie mode.

**Photographer Credit:** Incorporate a credit to the contributing photographer Rashid S. (@rashid\_bin\_) with a discreet watermark or text overlay, ensuring it blends with the overall design and maintains the focus on the image.

**Hashtag Placement:** Place the campaign hashtag #ShotoniPhone prominently in the image, using Apple’s clean and contemporary typography for consistency with the campaign’s branding.

**Viewer Engagement:** Craft the image to encourage viewers to participate in the campaign, perhaps by adding a thought bubble graphic emanating from the cat with a prompt like “Your turn to selfie” or “Can you beat my selfie game?”

**Final Touches:** Ensure the final image looks polished and vibrant, with balanced saturation and contrast to make the visual pop on social media feeds.

By following this prompt, the resulting images should engage the audience with their creativity and interactive narrative, encouraging them to view the iPhone as a device that captures not just images, but unique stories and moments.

This prompt targets the production of playful and engaging content, fitting for social media shares and resonating with the creative and high-quality essence of the Apple brand.

---

---

Table 3: Example of augmented prompt (Social Media Images) from GPT-4

**Composition Focus:** Create a central, striking image of Vinicius Junior (@vinijr) as the main subject, capturing his intensity on the field. Consider a freeze-frame of a memorable play or a stylized portrait that showcases his determination and spirit.

**Nike Branding:** Ensure that Vinicius is wearing Nike gear prominently displaying the Nike logo. Position the logo naturally but in a way that catches the eye, such as on his shirt or shoes.

**Color Scheme and Lighting:** Use a bold and contrasting color scheme that matches the Nike brand palette, with emphasis on stark lighting to highlight @vinijr's features and Nike's products. Incorporate a gradient or lighting effect that spotlights the athlete, drawing attention to the message of support.

**Support Message:** Overlay the image with the supportive slogan "We stand with @vinijr" in bold, clear typography. The font style should resonate with Nike's sleek and modern branding, and the placement should complement the image without obstructing the view of Vinicius Junior.

**Visual Effects:** Add dynamic visual effects that echo Vinicius Junior's agility and speed, such as motion blur lines trailing behind a kicked ball or speed-induced ripple effects around him.

**Background Elements:** Consider a backdrop that reflects the sport—like a blurred stadium full of fans or an abstract representation of a football pitch—to keep the focus on the athlete while still conveying the energy of the game.

**Call to Action:** Include a subtle but persuasive call to action that invites engagement from the community, such as "Show your support" or "Stand with us" with a designated hashtag that encourages user participation.

**Imagery Cohesion:** Ensure that the image looks cohesive, with all elements from Vinicius Junior to Nike branding, the supportive message, and the visual style working together to create an impactful impression.

**Authenticity:** Despite the stylization, maintain a sense of authenticity to resonate with viewers on a personal level, reminding them of Vinicius Junior's real struggles and achievements.

**Visual Flow:** Design the image so the viewers' eyes are naturally drawn across the different elements, from Vinicius Junior to the support message and Nike branding, ensuring all components are seen.

When applying this prompt, the generated image will serve to unite Nike's audience in support of Vinicius Junior while staying true to Nike's core values and aesthetic guidelines. The result should be an engaging and supportive message wrapped in Nike's powerful brand imagery.

---

---

Table 4: Example of augmented prompt from GPT-4



Prompt: Create a series of social media images that showcase the unique and playful perspective of a cat taking selfies with an iPhone. The images should be natural, fun, and showcase the cat's personality while highlighting the features of the iPhone. The goal is to make the viewer feel like the cat is taking a selfie and to showcase the iPhone as the perfect tool for capturing life's moments.

Image 2: A close-up shot of the cat's face as it looks directly at the camera, with the iPhone held at paw-level. The cat should have a playful expression, as if it's about to take a selfie. The background should be blurred, with the cat's fur and whiskers in sharp focus. Use the iPhone's Portrait mode to create a shallow depth of field.

Image 2: A shot of the cat holding the iPhone and taking a selfie. The cat should be positioned at an angle, with the iPhone screen facing the viewer. The cat's paw should be visible as it taps the screen to take the photo. The background should be a colorful and fun environment, such as a cat toy or scratching post.

Image 3: A shot of the cat capturing a moment with its owner. The cat and owner should be positioned in a playful pose, such as the cat sitting on the owner's lap or the owner holding the cat. The iPhone should be visible in the shot, with the cat's paw or face in the foreground. The background should be a cozy and intimate environment, such as a living room or bedroom.

Image 4: A shot of the cat taking a photo of its food or water bowl. The cat should be positioned directly above the bowl, with the iPhone held at paw-level. The background should be a clean and modern kitchen or dining area. Use the iPhone's macro feature to capture the details of the food or water.

Image 5: A shot of the cat taking a selfie with a fun filter or effect. The cat should be positioned directly in front of the camera, with the iPhone screen facing the viewer. The cat's paw should be visible as it taps the screen to apply the filter. The background should be a plain color or a fun pattern, such as stripes or polka dots.

Image 6: A shot of the cat capturing a moment with its toys. The cat should be positioned in the center of the shot, with its toys scattered around it. The iPhone should be visible in the shot, with the cat's paw or face in the foreground. The background should be a colorful and playful environment, such as a cat playground or toy box.

Image 7: A shot of the cat taking a photo of its favorite spot in the house. The cat should be positioned in its favorite spot, such as a windowsill or a cozy blanket. The iPhone should be held at paw-level, with the cat's face or paw in the foreground. The background should be a warm and inviting environment, such as a sunny window or a cozy fireplace.

Image 8: A shot of the cat taking a selfie with its owner in the background. The cat should be positioned directly in front of the camera, with the iPhone screen facing the viewer. The cat's paw should be visible as it taps the screen to take the photo. The owner should be visible in the background, with a playful or fun expression. The background should be a colorful and fun environment, such as a park.

---

Table 5: Example of augmented prompt from Llama 2

1. Capture the Selfie Spirit:

- Scene: A playful cat perched on its owner's shoulder, head tilted at the camera, paw outstretched like it's holding the phone. Use a wide-angle shot to capture the playful interaction between cat and owner.
- Lighting: Natural light, outdoors or by a window, creating a warm and inviting atmosphere.
- Color Palette: Bright and engaging, emphasizing the cat's fur and eyes, complemented by the owner's clothing.
- Hashtag: #ShotoniPhone #Caturday #PawfectSelfie

2. Focus on the Details:

- Close-up shot: Zoom in on the cat's face, emphasizing its expressive eyes and the way it interacts with the camera lens. Capture the slight blur of movement as it bats at the phone.
- Macro focus: Highlight the texture of the cat's fur, tiny whiskers, and delicate nose. Use soft lighting to create a dreamlike quality.
- Hashtag: #MacroMagic #iPhonePortrait #SeeTheUnseen

3. Showcase the iPhone's Capabilities:

- Play with depth of field: Blur the background to make the cat the main focus, highlighting its personality and independent spirit.
- Capture action: Use burst mode to freeze the cat mid-leap or playful swipe at the phone, emphasizing its energy and dynamism.
- Hashtag: #iPhoneAction #FastFocus #UnleashYourInnerMeow

4. Tell a Story:

- Show the behind-the-scenes: Capture the owner setting up the "selfie," adjusting the angle, and interacting with the cat to get the perfect shot.
- Series of images: Create a mini-storyboard showing the cat's journey from curiosity to capturing the perfect pose.
- Hashtag: #StorytellingWithiPhone #CatsofInstagram #LifeThroughAniPhoneLens

Additional Tips:

- Use props that are relatable to cats, like toys, balls, or catnip, to add visual interest and encourage interaction.
- Incorporate natural elements like greenery or sunlight to create a vibrant and refreshing feel.
- Keep the editing minimal and natural, focusing on highlighting the cat's personality and the iPhone's photographic capabilities. By incorporating these prompts and tips, you can create natural and engaging social media images for Apple that capture the spirit of Rashid's original "ShotoniPhone" photo and connect with a wide audience of cat lovers and iPhone users.

---

Table 6: Example of augmented prompt from BARD



(a) AI-generated image by Midjourney



(b) AI-generated image - DALL-E 3



(c) AI-generated image - Stable Diffusion

Figure 1: Image comparison from the same prompt