# Is Factuality Decoding a Free Lunch for LLMs? Evaluation on Knowledge Editing Benchmark

Baolong Bi<sup>†</sup> Shenghua Liu<sup>†</sup> Yiwei Wang<sup>‡</sup> Lingrui Mei<sup>†</sup> Xueqi Cheng<sup>†</sup>

<sup>†</sup>CAS Key Laboratory of AI Security, ICT, CAS

<sup>‡</sup> University of California, Los Angeles

{bibaolong23z,liushenghua,cxq}@ict.ac.cn wangyw.evan@gmail.com
meilingrui22@mails.ucas.ac.cn

#### **Abstract**

The rapid development of large language models (LLMs) enables them to convey factual knowledge in a more human-like fashion. Extensive efforts have been made to reduce factual hallucinations by modifying LLMs with factuality decoding. However, they also pose risks of hindering knowledge updates, as they make models overly confident in known facts. In this work, we first revisite the current factuality decoding methods and verified their effectiveness in enhancing factual accuracy. Subsequently, we conduct further evaluation of several strong factuality decoding methods on the knowledge editing benchmark. All these decoding methods significantly diminish the performance of llama2 models compared to their original decoding, with the largest decrease being a staggering 81.3%. This further indicates that the current existing decoding methods still cannot perfectly address the factual hallucinations, as they overlook the importance of preserving the flexibility for knowledge editing. Therefore, our work suggests that research into factual alignment should simultaneously focus on the effectiveness of knowledge editing.

# 1 Introduction

Large language models (LLMs) (OpenAI, 2022; 2023; Touvron et al., 2023a;b) have demonstrated remarkable capabilities in various NLP tasks (Wei et al., 2022; Chang et al., 2023; Liu et al., 2023), owing to the knowledge memory acquired during pre-training. Despite the generated text often appears to be correct, careful observation reveals that they sometimes exhibit factually incorrect statements, i.e., "hallucinations" (Zhang et al., 2023; Huang et al., 2023; Tonmoy et al., 2024). Such hallucinations significantly undermine the reliability of LLMs in real-world scenarios (Kaddour et al., 2023).

Factual hallucinations have received widespread attention due to their significant side effects, as LLMs generate content that deviates from established world knowledge (Zhang et al., 2023; Wang et al., 2023). Furthermore, with the widespread changes in the world's circumstances and the continuous expansion of large model scales, it's paramount to efficiently keep factual knowledge up-to-date. Knowledge Editing (Sinitsin et al., 2020; De Cao et al., 2021) has been proposed to address this issue, achieving efficient modifications to model facts while ensuring no adverse effects on other unrelated knowledge.

An excellent text generation without hallucinations demands that an LLM is capable of "knowing" correctly and "telling" accurately, which means it needs to keep factual knowledge up-to-date and convey it accurately (Li et al., 2024a; Zhang et al., 2024). Some emerging works (Zhang et al., 2024; Tian et al., 2023; Li et al., 2024b) focuses on narrowing the gap between "knowing" and "telling" in LLMs, guiding them to accurately "tell" the facts they know. In particular, various factuality decoding methods (Li et al., 2023b; Chuang et al., 2023; Li et al., 2024b; Zhang et al.), can directly generate answers that better align with factuality, which is highly convenient as it does not require the infusion of extensive new factual knowledge through supervised fine-tuning (SFT) (Yang et al., 2023; Ovadia

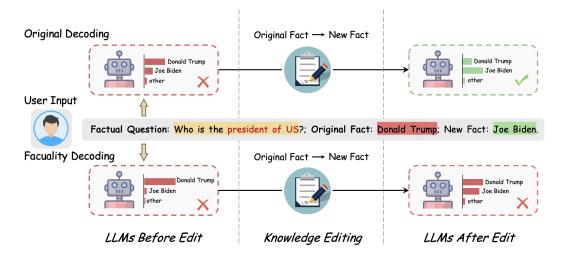


Figure 1: The comparison of answers to a factual question from original LLMs with the original decoding method and modified LLMs with factuality decoding before and after knowledge editing. The modified LLMs with factuality decoding, due to excessive confidence in their existing knowledge, struggle to incorporate new information, leading to incorrect answers.

et al., 2023) or RLHF (Ouyang et al., 2022; Bai et al., 2022a). Our experimental results on the TruthfulQA (Lin et al., 2021) and FACTSCORE (Min et al., 2023) benchmarks have demonstrated the effectiveness of factuality decoding in LLMs. These diverse decoding strategies lead to varying improvements in LLMs' factual metrics compared to their original decoding methods. Although modifying the decoding methods of LLMs enables them to more accurately "tell" the factual knowledge they have learned, they overlook a crucial aspect: Can these modified LLMs still be efficiently edited for updated knowledge?

The figure 1 illustrates a simple example of the scenario we envisioned. Factuality decoding encourages LLMs to produce answers that better align with pre-training facts, leading them to believe that the facts they have learned are accurate. Therefore, we suspect that current decoding methods for factuality may potentially inhibit the inherent simplicity and generalization ability of pre-trained language models (Sutskever, 2023). This overconfidence could result in rigidity in knowledge, making it challenging to update outdated facts using recent efficient knowledge editing methods.

To verify our suspicion, we conducted experiments using two knowledge editing methods, ICE and MeLLo. We evaluated these decoding methods on the MQUAKE benchmark (Zhong et al., 2023), which is suitable for assessing black box LLMs. MQUAKE comprises multi-hop questions, enabling detection of whether deeply ingrained causal facts have been fully updated. The experimental results indicate that compared to the original decoding, current advanced factuality decoding methods lead to significant declines of decline in the performance of llama2 models (Touvron et al., 2023b) on edited factual question-answering tasks. For example, the accuracy of llama2-7b using the original decoding is 36.8 with MeLLo, while it is only 6.9 with ICD (Li et al., 2024b), representing a significant decrease of 81.3%. This indicates that while factuality decoding aids LLMs in accurately conveying factual information, it also introduces the risk of knowledge editing difficulties, posing a significant setback for keeping up-to-date with factual updates. Hence, we find that current existing decoding methods still cannot perfectly address the factual hallucinations of LLMs, as they overlook the importance of preserving the flexibility for knowledge editing.

Altogether, our study highlights the potential risks associated with current factuality decoding methods and validates their apparent decline in knowledge editing. Consequently, we strongly advocate that a proficient LLM with factual accuracy should prioritize both the efficient update of factual knowledge and the accurate conveyance of factual information, thereby reducing the likelihood of factual hallucinations. Therefore, we recommend that research exploring factual alignment should simultaneously focus on the effectiveness of knowledge editing.

# 2 Background

This section revisits decoding approaches (Section 2.1) and factual knowledge editing (Section 2.2), aiming to delve deeper into the subsequent exploration of the impact of factuality decoding on knowledge editing for LLMs.

### 2.1 Decoding Approaches

This paper focuses on decoding strategies used in open-ended language generation tasks, which entail language models receiving input prompts and generating fluent and coherent continuations. The objective is to anticipate the succeeding word within a given contextual sequence, which is a fundamental pre-training goal extensively employed in state-of-the-art large language models (Radford et al., 2018; Brown et al., 2020; Anil et al., 2023; Touvron et al., 2023b).

Formally, given an prompt sequence of length n, denoted as  $\mathbf{x} = x_1, x_2, ..., x_n$ , where  $x_i$  is a token in the vocabulary  $\mathcal{V}$ . We compute the next token probability distribution from a pre-trained autoregressive language model  $\mathcal{P}_{lm}$  conditioned on the previous context:

$$\mathcal{P}_{lm}(x_i|\mathbf{x}_{1:i-1}) = \frac{\exp(\mathbf{h}_i^{\top} \mathbf{W}_{x_i} / \tau)}{\sum_{i \in \mathcal{V}} \exp(\mathbf{h}_i^{\top} \mathbf{W}_i / \tau)}$$
(1)

where  $\tau$  represents a temperature parameter regulating the precision of the subsequent-token distribution. In text generation, the language model samples from the conditional distribution  $\mathcal{P}_{lm}(x_i|\mathbf{x}_{1:i-1})$  to generate the next token  $x_i$ , iterating this process continuously until the sequence generation reaches the end token.

At decoding time, various decoding strategies can be applied at each step i to select the next token  $x_i$ , with the given predicted distribution of the next token  $\mathcal{P}_{lm}(x_i|\mathbf{x}_{1:i-1})$ . The most prevalent strategy involves sampling-based decoding, where  $x_i$  is randomly sampled from the distribution. Another prevalent method involves searching for the most probable text sequence through either greedy decoding or beam search (Wu et al., 2016). However, these approaches often leads to repetitive and monotonous outputs, thus giving rise to numerous variants. For instance, nucleus sampling (Holtzman et al., 2019) selects tokens from the top-p percentile of the next token distribution, while top-k sampling (Fan et al., 2018) chooses tokens from the top-k candidates in the next token distribution.

#### 2.2 Factual Knowledge Editing

**Model Editing.** Model editing (Mitchell et al., 2022; Yao et al., 2023) aims to efficiently adjust the behavior of the original base model  $f_{base}$  on specific editing descriptors  $z_e$ , without affecting the model's behavior on other samples. The editing descriptors  $z_e$  describes a desired change in model behavior and can be represented as  $z_e = [x_e, y_e]$ , where  $[x_e, y_e]$  is a input-output pair like *Who is the president of US? Joe Biden*. The ultimate objective of model editing is to generate an edited model, denoted as  $f_e$ . Consequently, given an edit descriptor  $z_e$ , the post-edit model  $f_e$  is anticipated to predict the edited output answer, formally represented as  $f_e(x_e) = y_e$ , where  $f_{base}(x_e) \neq y_e$ .

**Factual Knowledge.** A factual knowledge can be represented using a triplet (s, r, o), where s represents the subject, r represents the relation, and o represents the object (Petroni et al., 2019; Zhong et al., 2023). Consequently, if LLMs can predict the masked entity expressing this fact in a cloze-style question, such as in *The president of the United States is\_*, which is built from the triplet (US, head of government, Joe Biden), and the object can be predicted as "Joe Biden," then it indicates that LLMs possess knowledge of this fact.

**Fact Editing.** Fact editing (De Cao et al., 2021; Zhong et al., 2023) is an indispensable aspect of the continuous development of LLMs. This is because the factual knowledge within models cannot always remain correct over time, which should become outdated as time

progresses. Based on the preceding context, in fact editing,  $x_e$  can be represented by a tuple (s,r) while  $y_e$  can be represented by  $o_e$ , denoting the edited factual answer for the original o. Thus, the edit descriptor  $z_e$  can be represented as:  $z_e = [(s,r),o_e]$ , and the post-edit model  $f_e$  satisfies  $f_e(s,r) = o_e$  while  $f_{base}(s,r) = o$ . Consequently, given a collection of fact edits  $\mathcal{Z} = \{z_{e_1}, z_{e_2}, ...\}$ , fact editing involves learning a function  $\mathcal{KE}$  satisfying  $\mathcal{KE}(f_{base}) = f_e$ . As the scale of LLMs continues to expand, adjusting model parameters through retraining becomes increasingly challenging. Consequently, efficient  $\mathcal{KE}$  methods without requiring training are receiving more attention. This is also why our work chooses to evaluate using a simple yet efficient knowledge editing method in Section 4.

# 3 Factuality Decoding for LLMs

Our work focuses on potential pitfalls in current factuality decoding strategies for LLMs. Before evaluating the modified LLMs with various decoding methods, it is necessary to thoroughly understand them. Therefore, this section first revisits several strong decoding methods for LLMs' factuality (Section 3.1), then evaluates and analyzes their performance in enhancing the factuality of LLMs (Section 3.2).

### 3.1 Decoding Methods

To avoid the resource-intensive nature of existing methods like RLHF (Ouyang et al., 2022; Bai et al., 2022a; Menick et al., 2022) and RLAIF (Bai et al., 2022b), which require significant annotation and computational resources, factuality decoding aims to modify the decoding architecture of LLMs solely to narrow the gap between "knowing" and "telling". We have selected several representative strong decoding methods, which are introduced individually as follows.

- **CD.** Contrastive decoding (CD) (Li et al., 2023b) leverages the distinctions between expert and amateur LMs of varying sizes by selecting tokens that maximize the difference in their log-likelihoods. Consequently, factual knowledge that remains unlearned by the weaker amateur model is highlighted by contrastive decoding in the stronger expert model to enhance factuality.
- **ITI.** Inference-Time Intervention (ITI) (Li et al., 2024b) first identifies a sparse set of attention heads with high linear probing accuracy for truthfulness, as defined by the TruthfulQA benchmark. Then, during inference, it shifts activations along these truth-correlated directions. This process is repeated autoregressively until the entire answer is generated.
- **DoLa**. DoLa (Chuang et al., 2023) leverages a modular encoding of knowledge to magnify factual knowledge within an LM through a contrastive decoding approach. In this method, the next-word probability output is derived from the disparity in logits between a higher layer and a lower layer. By accentuating the knowledge from higher layers and diminishing that from lower layers, LoRa aims to reduce factual hallucinations.
- **ICD.** Zhang et al. first constructs a factually weak LLM by inducing hallucinations from the original LLMs, and then penalizes these induced hallucinations during decoding to enhance the factuality of the generated content. Specifically, ICD determines the final next-token predictions by amplifying the predictions from the original model and downplaying the induced untruthful predictions via contrastive decoding.

#### 3.2 Factuality Evaluation

We evaluate the factual enhancement of the aforementioned decoding method on the TruthfulQA (Lin et al., 2021) and FACTSCORE (Min et al., 2023) benchmark. Evaluation on both benchmarks adheres to the settings of previous studies (Chuang et al., 2023; Li et al., 2024b; Zhang et al.). For TruthfulQA, we employ multiple-choice-based metrics, specifically MC1, MC2, and MC3 scores. For FACTSCORE, assessment is conducted through retrieve+chatGPT methodology. We conduct the evaluations on two sizes of llama-2-chat (7B,13B) models as base models. The results are presented in Table 1.

Model	Scale	TruthfulQA			FACTSCORE		
1,10 0.01		MC1	MC2	MC3	% response	# facts	score ↑
LLaMa-2	7B	37.6	54.6	28.1	37.5	45.7	63.8
	13B	37.7	55.8	28.2	77.0	37.6	52.5
+ ITI	7B	37.0	54.7	27.8	41.9	40.8	62.4
+ DoLa	7B	32.9	60.8	29.5	40.7	48.7	61.3
+ CD	13B&7B	28.1	54.9	29.8	74.2	39.8	53.5
+ ICD	7B&7B	46.3	69.1	41.25	36.1	46.6	66.3

Table 1: Results of factual evaluation on TruthfulQA and FACTSCORE. We conducted experiments with various factuality decoding methods on the 7B and 13B llama-2-chat models. Here, CD and ICD require two llama2 models, and & connects the expert and amateur models for contrastive decoding. Additionally, % response represents the response ratio of LLMs, while # facts denotes the number of extracted atomic facts per response.

Through observation of the experimental results, we first note that increasing the model size does not lead to a significant improvement in factual accuracy for the llama2 model. When compared to the base llama-2-chat model, except for CD, the majority of decoding methods essentially enhanced the factual performance of the llama2 model to some extent across both benchmarks. We consider that CD do not exhibit the expected factual capabilities due to the relatively small difference in scale between the 7B and 13B llama2 models. Additionally, there is not a noticeable distinction between the facts known by the expert and amateur LLMs, thus CD failed to highlight true facts through contrastive decoding. In contrast, ICD¹ constructs a factually weak LLM and compares it with a regular LLM, thereby significantly enhancing the authenticity. In conclusion, the aforementioned factual decoding methods all enhance the factual accuracy of base LLMs, guiding LLMs to infer more authentic facts from existing knowledge.

# 4 Multi-hop Knowledge Editing Benchmark

We conduct experiments on the multi-hop knowledge editing benchmark to assess whether factuality decoding methods remain effective in updating knowledge. Changing one fact should result in cascading changes to the model's associated knowledges. For instance, if we modify the UK Prime Minister to be *Rishi Sunak*, the response to *Who is married to the British Prime Minister?* should differ. Therefore, this section introduces the concept of multi-hop facts (Section 4.1) and presents a multi-hop knowledge editing dataset(Section 4.2), along with efficient editing methods(Section 4.3) tailored to it.

#### 4.1 Multi-hop Fact Editing

Multi-hop fact editing aims to edit not only a single-hop fact but also all the facts within the multi-hop context that are affected by this edited fact. Formally, we consider two chains of facts,  $C_1 = ((s_1, r_1, o_1), ..., (s_i, r_i, o_i), ..., (s_n, r_n, o_n))$  and  $C_2 = ((s_i', r_i, o_i'), ..., (s_n', r_n, o_n'))$ , which have the same relation set  $\mathcal{R} = [r_i, ..., r_n]$ . When editing a single-hop fact in the first fact chain  $C_1$  with an edit descriptor  $z_{e_i} = [(s_i, r_i), o_i']$ , the factual memory of the large model regarding it should be edited to  $C_1' = ((s_1, r_1, o_1), ..., (s_i, r_i, o_i'), ..., (s_n', r_n, o_n'))$ . For instance, regarding the two-hop question *Who is married to the British Prime Minister?* mentioned above, the original answer should be *Carrie Johnson*, and the corresponding chain of facts can be described as follows: (*United Kingdom, head of government, Boris Johnson*), (*Boris Johnson, spouse, Carrie Johnson*). With a fact edit  $z_e = (United Kingdom, head of government, Rishi Sunak)$  and an ad-

<sup>&</sup>lt;sup>1</sup>The implementation of CD and ICD aligns with the source: https://github.com/hillzhang1999/ICD.

ditional fact chain (*Rishi Sunak*, *spouse*, *Akshata Murthy*), the edited LLMs should respond with the new rippling answer: *Akshata Murthy*.

#### 4.2 Datasets

Table 2: Data statistics of MQUAKE-CF-3k

We conduct experiments on the recent knowledge editing dataset MQUAKE-CF-3k (Zhong et al., 2023) for multi-hop fact editing. MQUAKE-CF-3k comprises 3,000 instances derived from paths extracted from Wikidata (Vrandečić & Krötzsch, 2014), which consists of fact triples associated

#Edits	2-hop	3-hop	4-hop	Total
1	2,454	855	446	3,755
2	2,425	853	467	3,745
3	-	827	455	1,282
4	-	-	436	436
All	4,879	2,535	1,804	9,218

with millions of entities. Table 2 presents the statistics of the MQuAKE-CF-3k dataset. The dataset provides multi-hop fact questions with fact chains, along with the answers before and after editing, which are used to evaluate knowledge editing on counterfactual edits.

# 4.3 Editing Methods

We consider efficient and convenient knowledge editing methods that can be flexibly applied to all black-box LLMs, sidestepping the computational burden associated with retraining models.

**ICE.** In-context editing (ICE)(Cohen et al., 2023) is a highly simple and effective approach to knowledge editing. It does not alter model parameters but instead generates based on new facts as conditions. In our experiments, we design prompts for fact editing and prompt LLMs to answer multi-hop knowledge questions through a chain of thought approach.

**MeLLo.** MeLLo first decomposes a multi-hop question into subquestions during LLMs inference, and then prompts the LLMs to provide tentative answers to these subquestions. Next, it self-checks their compatibility with edited facts by retrieving edit demonstrations from the knowledge base, thereby maintaining or adjusting them accordingly.

<b>Decoding Methods</b>	Model	Accuracy	Δ
Default	llama2-7b	64.1	-
****	llama2-13b	58.8	-
ITI	llama2-7b	48.6	↓ 24.2%
DoLa	llama2-7b llama2-13b	61.2 32.7	↓ 4.5% ↓ 44.4%
CD	llama2-13b vs llama2-7b	42.8	↓ 27.2%
ICD	llama2-7b vs finetuned-7b	60.6	↓ 5.46%

Table 3: Results of knowledge editing evaluation using ICE editing method. We only consider the multi-hop knowledge question answering tasks involving a single edit in mquake, and prompt LLMs to answer using a chain of thought approach. Results in the  $\Delta$  column denote the decrease ratio of each decoding method compared to its same-size baseline.

# 5 Knowledge Editing Evaluation for Factuality Decoding

In this section, we evaluate the knowledge editing of factuality decoding methods on the benchmark introduced earlier to explore the impact of factuality decoding on the factual updates of LLMs.

### 5.1 Implementation Details

We employ two different sizes of LLMs, the llama-2-chat 7B and 13B, with the unchanged decoding strategy as the baseline. Following previous studies (Chuang et al., 2023; Zhang et al.), we apply four strong factuality decoding strategies, ITI $^2$ , DoLa $^3$ , CD, and ICD, on the llama-2-chat models in our experiments. Specifically, we employ the 13B and 7B llama2 models as the expert and amateur models respectively for CD. And for ICD, we utilize the hallucination-injected finetuned-7b $^4$  as the amateur model, with llama2-7b serving as its expert counterpart. During inference with llama2 models, we align all decoding methods with all the baseline, including settings such as temperature=0.9, top-p=0.95, and others. We adopt the knowledge editing methods ICE and MeLLo introduced earlier and apply them to the llama2 models with various decoding methods.

<b>Decoding Methods</b>	Model	Accuracy	Δ	
Default	llama2-7b	36.8	-	
Delauit	llama2-13b	44.7	-	
ITI	llama2-7b	11.7	↓ 68.2%	
DoLa	llama2-7b	27.9	↓ 24.2%	
DoLa	llama2-13b	13.3	↓ 70.3%	
CD	llama2-13b	17.2	↓ 53.3%	
	vs llama2-7b	17.2	<del>+ 55.5</del> 70	
ICD	llama2-7b	6.9	↓ 81.3%	
ICD	vs finetuned-7b	0.7	ψ O1.570	

Table 4: Results of knowledge editing evaluation using MeLLo editing method. We follow the existing work of (Zhong et al., 2023) in using multi-hop accuracy as the main evaluation metric. For each instance, if the model correctly answers any of the three questions within the instance, we consider it accurate.


#### 5.2 Main Results

We present the main experiment results of knowledge editing evaluation on the benchmark using ICE and MeLLo in Table 3 and 4. As can be observed, all factuality decoding methods we test, using either ICE or MeLLo, resulted in a decrease in knowledge editing accuracy for the llama2 model. In addition, in MeLLo experiments involving multiple editing sessions which are more challenging compared to ICE experiments, the decrease in knowledge editing accuracy is more pronounced. Especially in the MeLLo experiments, the magnitude of the decrease compared to the same-sized baseline is staggering. And except for DoLa, the decline exceeded 50% for all other methods. In particular, the editing accuracy of ICD is the lowest at only 6.9, experiencing a significant decrease of 81.3% in MeLLo experiments, while

<sup>&</sup>lt;sup>2</sup>We employ the honest-llama2-chat-7B using pyvene (Wu et al., 2024) with activation differences, available at: https://github.com/likenneth/honest\_llama.

<sup>&</sup>lt;sup>3</sup>We set early-exit-layers for both sizes of the llama2 model according to the guidelines provided in https://github.com/voidism/DoLa.

<sup>&</sup>lt;sup>4</sup>We load the hallucination-injected model, which is finetuned on selected samples from HaluEval(Li et al., 2023a), provided by the authors: https://huggingface.co/HillZhang/untruthful\_llama2\_7b.






Figure 2: The comparison of accuracy on knowledge editing (left) and the comparison of changes in flexibility and accuracy (right). Both of them utilize MeLLo to evaluate the results of different methods.

DoLa (llama2-13b) has the lowest accuracy at 32.7 with a 44.4% decrease in ICE experiments. The experimental results demonstrate that factuality decoding methods lead to a significant decrease in accuracy of the question answering task for knowledge editing, indicating that Factuality Decoding severely impacts the knowledge flexibility of LLMs.

Moreover, by comparing the editing results using default decoding and DoLa on llama2 models of different sizes, it is apparent that the impact of model size on knowledge editing is opposite. When the size of the llama2 model is increased from 7B to 13B, the accuracy of DoLa decreases from 61.2 to 32.7 in MeLLo experiments and from 27.9 to 13.3 in ICE experiments. This further reveals that as the model size increases, the current factuality decoding exacerbates the detrimental effects on the factual updates of LLMs.

### 5.3 Factuality Accuracy vs Knowledge Flexibility

We consider the performance of LLMs in knowledge editing as indicative of their knowledge flexibility. As shown in Figure 2, we visually present the performance of different factuality decoding methods in knowledge editing alongside the baseline and ChatGPT. It can be observed that ChatGPT as a black box with particularly large parameter size, achieves the highest accuracy, implying its strong knowledge flexibility. However, the factuality decoding reduces the knowledge flexibility of the llama2 model compared to its original state, suggesting potential pitfalls of factuality decoding for knowledge flexibility in developments of LLMs.

Figure 2 further illustrates the comparison between the decline in knowledge flexibility and the improvement in factuality accuracy. It can be easily observed that the proportion of the decline in knowledge flexibility far exceeds the improvement in factuality accuracy. This prompts us to ponder whether such improvements in factuality accuracy are worth the significant loss in knowledge flexibility. Therefore, we recommend that research on factuality should simultaneously consider both aspects of factuality accuracy and knowledge flexibility.

#### 5.4 Case Study

Figure 3 gives a qualitative comparison example for baseline and factuality decoding. Factuality decoding may lead to errors even when knowledge is correctly edited in the baseline. Taking a closer look, the output of factuality decoding consistently reflects answers prior to editing, while the baseline generates correct new answers based on the edits. This indicates that LLMs using factuality decoding exhibit excessive confidence in their own knowledge, thus failing to adjust their answers based on editing prompts.

# 6 Conclusion

In this work, we evaluate existing factuality decoding methods that enhance the factual accuracy of large language models on the knowledge editing benchmark. The results

ICE	Baseline	Question: What is the location of the headquarters of the manufacturer of Volkswagen Caddy Edit: The company that produced Volkswagen Caddy is National Aeronautics and Space Adm Thoughts: The company that produced Volkswagen Caddy is National Aeronautics and Space National Aeronautics and Space Administration is located in Washington, D.C.  Answer: Washington, D.C.	ninistration.
	Factuality Decoding	Question: What is the location of the headquarters of the manufacturer of Volkswagen Caddy?  Edit: The company that produced Volkswagen Caddy is National Aeronautics and Space Administrati Thoughts: The manufacturer of Volkswagen Caddy is Volkswagen AG. Volkswagen AG is headquarte Wolfsburg, Germany.  Answer: Wolfsburg.	
MeLLo	Baseline	Question: What is the country of citizenship of the creator of "Devious Maids"? Subquestion: Who is the creator of "Devious Maids"? Generated answer: The creator of "Devious Maids" is Marc Cherry. Retrieved fact: Miss Havisham was created by Bill Cosby. Retrieved fact contradicts to generated answer, so the intermediate answer is: Marc Cherry Subquestion: What is the country of citizenship of Marc Cherry? Generated answer: The country of citizenship of Marc Cherry is United States. Retrieved fact: Marc Cherry is a citizen of Bulgaria. Retrieved fact contradicts to generated answer, so the intermediate answer is: Bulgaria Final answer: Bulgaria	<b>*</b>
	Factuality Decoding	Qustion: What is the country of citizenship of the creator of "Devious Maids"? Subquestion: What is the creator of "Devious Maids"? Generated answer: The creator of "Devious Maids" is Marc Cherry. Retrieved fact: Miss Havisham was created by Bill Cosby. Retrieved fact does not contradict to generated answer, so the intermediate answer is: Bill Cosbyestion: What is the country of citizenship of Bill Cosby? Generated answer: Bill Cosby is a citizen of United States of America. Retrieved fact: Bill Cosby is married to Haakon VI of Norway. Retrieved fact contradicts to generated answer, so the intermediate answer is: United States Final answer: United States	sby.

Figure 3: A case study for baseline and factuality decoding using ICE and MeLLo respectively. We report the results of factuality decoding with DoLa here.

indicate that while these methods enhance factual accuracy to some extent, they lead to significant loss of knowledge flexibility. This excessive confidence in large language models makes it difficult to carry out knowledge editing. Therefore, our work advocates that research into factual alignment should not overlook the importance of the effectiveness of knowledge editing.

# 7 Discussion and Future Work

This paper proposes a new concept regarding the factuality of large language models: LLMs with good factuality should simultaneously balance factuality accuracy and knowledge flexibility. This implies that while accurately conveying factual information, it should also ensure that keeping the knowledge up-to-date is easily achievable for LLMs. Based on the validation results of existing factuality decoding methods in this paper, achieving the desired balance seems challenging. Not only decoding, but we also hold a skeptical stance regarding methods such as RLHF and SFT for injecting new knowledge or self-alignment in terms of knowledge editing. It appears to present a natural paradox where we strive for LLMs to simultaneously maintain a strong belief in existing knowledge while also being capable of facile modification when necessary.

Therefore, for future work, we plan to incorporate more methods aimed at improving the factuality of LLMs into our repertoire of knowledge editing evaluation criteria. We aim to further validate their factual updating capabilities and, in the process, observe the inherent relationship between factuality accuracy and knowledge flexibility. We envision establishing a comprehensive validation framework for the factuality of LLMs that integrates both accuracy and flexibility, which will be of paramount practical significance for the long-term development of future large language models.

#### 8 Ethics Statement

Ethical considerations are of utmost importance in our research endeavors. In this paper, we conscientiously adhere to ethical principles by exclusively utilizing open-source datasets and employing models that are either open-source or widely recognized in the scientific community. Moreover, our proposed method is designed to ensure that the model does not produce any harmful or misleading information. We are committed to upholding ethical standards throughout the research process, prioritizing transparency, and promoting the responsible use of technology for the betterment of society.

### References

- Rohan Anil, Andrew M Dai, Orhan Firat, Melvin Johnson, Dmitry Lepikhin, Alexandre Passos, Siamak Shakeri, Emanuel Taropa, Paige Bailey, Zhifeng Chen, et al. Palm 2 technical report. arXiv preprint arXiv:2305.10403, 2023.
- Yuntao Bai, Andy Jones, Kamal Ndousse, Amanda Askell, Anna Chen, Nova DasSarma, Dawn Drain, Stanislav Fort, Deep Ganguli, Tom Henighan, et al. Training a helpful and harmless assistant with reinforcement learning from human feedback. *arXiv* preprint arXiv:2204.05862, 2022a.
- Yuntao Bai, Saurav Kadavath, Sandipan Kundu, Amanda Askell, Jackson Kernion, Andy Jones, Anna Chen, Anna Goldie, Azalia Mirhoseini, Cameron McKinnon, et al. Constitutional ai: Harmlessness from ai feedback. *arXiv preprint arXiv:2212.08073*, 2022b.
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901, 2020.
- Yupeng Chang, Xu Wang, Jindong Wang, Yuan Wu, Linyi Yang, Kaijie Zhu, Hao Chen, Xiaoyuan Yi, Cunxiang Wang, Yidong Wang, Wei Ye, Yue Zhang, Yi Chang, Philip S. Yu, Qiang Yang, and Xing Xie. A survey on evaluation of large language models, 2023.
- Yung-Sung Chuang, Yujia Xie, Hongyin Luo, Yoon Kim, James Glass, and Pengcheng He. Dola: Decoding by contrasting layers improves factuality in large language models. *arXiv* preprint arXiv:2309.03883, 2023.
- Roi Cohen, Eden Biran, Ori Yoran, Amir Globerson, and Mor Geva. Evaluating the ripple effects of knowledge editing in language models. *arXiv preprint arXiv:2307.12976*, 2023.
- Nicola De Cao, Wilker Aziz, and Ivan Titov. Editing factual knowledge in language models. *arXiv preprint arXiv*:2104.08164, 2021.
- Angela Fan, Mike Lewis, and Yann Dauphin. Hierarchical neural story generation. *arXiv* preprint arXiv:1805.04833, 2018.
- Ari Holtzman, Jan Buys, Li Du, Maxwell Forbes, and Yejin Choi. The curious case of neural text degeneration. *arXiv preprint arXiv:1904.09751*, 2019.
- Lei Huang, Weijiang Yu, Weitao Ma, Weihong Zhong, Zhangyin Feng, Haotian Wang, Qianglong Chen, Weihua Peng, Xiaocheng Feng, Bing Qin, and Ting Liu. A survey on hallucination in large language models: Principles, taxonomy, challenges, and open questions, 2023.
- Jean Kaddour, Joshua Harris, Maximilian Mozes, Herbie Bradley, Roberta Raileanu, and Robert McHardy. Challenges and applications of large language models. *arXiv preprint arXiv*:2307.10169, 2023.
- Junyi Li, Xiaoxue Cheng, Wayne Xin Zhao, Jian-Yun Nie, and Ji-Rong Wen. Halueval: A large-scale hallucination evaluation benchmark for large language models, 2023a. URL https://arxiv.org/abs/2305.11747.

- Junyi Li, Jie Chen, Ruiyang Ren, Xiaoxue Cheng, Wayne Xin Zhao, Jian-Yun Nie, and Ji-Rong Wen. The dawn after the dark: An empirical study on factuality hallucination in large language models. *arXiv preprint arXiv:*2401.03205, 2024a.
- Kenneth Li, Oam Patel, Fernanda Viégas, Hanspeter Pfister, and Martin Wattenberg. Inference-time intervention: Eliciting truthful answers from a language model. *Advances in Neural Information Processing Systems*, 36, 2024b.
- Xiang Lisa Li, Ari Holtzman, Daniel Fried, Percy Liang, Jason Eisner, Tatsunori Hashimoto, Luke Zettlemoyer, and Mike Lewis. Contrastive decoding: Open-ended text generation as optimization. In Anna Rogers, Jordan Boyd-Graber, and Naoaki Okazaki (eds.), *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 12286–12312, Toronto, Canada, July 2023b. Association for Computational Linguistics. doi: 10.18653/v1/2023.acl-long.687. URL https://aclanthology.org/2023.acl-long.687.
- Stephanie Lin, Jacob Hilton, and Owain Evans. Truthfulqa: Measuring how models mimic human falsehoods. *arXiv preprint arXiv:*2109.07958, 2021.
- Yiheng Liu, Tianle Han, Siyuan Ma, Jiayue Zhang, Yuanyuan Yang, Jiaming Tian, Hao He, Antong Li, Mengshen He, Zhengliang Liu, et al. Summary of chatgpt-related research and perspective towards the future of large language models. *Meta-Radiology*, pp. 100017, 2023.
- Jacob Menick, Maja Trebacz, Vladimir Mikulik, John Aslanides, Francis Song, Martin Chadwick, Mia Glaese, Susannah Young, Lucy Campbell-Gillingham, Geoffrey Irving, et al. Teaching language models to support answers with verified quotes. *arXiv* preprint arXiv:2203.11147, 2022.
- Sewon Min, Kalpesh Krishna, Xinxi Lyu, Mike Lewis, Wen-tau Yih, Pang Wei Koh, Mohit Iyyer, Luke Zettlemoyer, and Hannaneh Hajishirzi. Factscore: Fine-grained atomic evaluation of factual precision in long form text generation. *arXiv* preprint arXiv:2305.14251, 2023.
- Eric Mitchell, Charles Lin, Antoine Bosselut, Christopher D Manning, and Chelsea Finn. Memory-based model editing at scale. In *International Conference on Machine Learning*, pp. 15817–15831. PMLR, 2022.
- OpenAI. large-scale generative pre-training model for conversation. *OpenAI blog*, 2022. URL https://openai.com/blog/chatgpt.
- OpenAI. Gpt-4 technical report, 2023.
- Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. Training language models to follow instructions with human feedback. *Advances in neural information processing systems*, 35:27730–27744, 2022.
- Oded Ovadia, Menachem Brief, Moshik Mishaeli, and Oren Elisha. Fine-tuning or retrieval? comparing knowledge injection in llms. *arXiv preprint arXiv:2312.05934*, 2023.
- Fabio Petroni, Tim Rocktäschel, Patrick Lewis, Anton Bakhtin, Yuxiang Wu, Alexander H Miller, and Sebastian Riedel. Language models as knowledge bases? *arXiv preprint arXiv:1909.01066*, 2019.
- Alec Radford, Karthik Narasimhan, Tim Salimans, Ilya Sutskever, et al. Improving language understanding by generative pre-training. 2018.
- Anton Sinitsin, Vsevolod Plokhotnyuk, Dmitriy Pyrkin, Sergei Popov, and Artem Babenko. Editable neural networks. *arXiv preprint arXiv:2004.00345*, 2020.
- Ilya Sutskever. An obervation on generalization. *Berkeley EECS*, 2023. URL https://www.youtube.com/watch?v=AKMuA\_TVz3A.

- Katherine Tian, Eric Mitchell, Huaxiu Yao, Christopher D Manning, and Chelsea Finn. Fine-tuning language models for factuality. *arXiv preprint arXiv:2311.08401*, 2023.
- S. M Towhidul Islam Tonmoy, S M Mehedi Zaman, Vinija Jain, Anku Rani, Vipula Rawte, Aman Chadha, and Amitava Das. A comprehensive survey of hallucination mitigation techniques in large language models, 2024.
- Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, Aurélien Rodriguez, Armand Joulin, Edouard Grave, and Guillaume Lample. Llama: Open and efficient foundation language models. *CoRR*, abs/2302.13971, 2023a. doi: 10.48550/ARXIV.2302.13971. URL https://doi.org/10.48550/arXiv.2302.13971.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, Dan Bikel, Lukas Blecher, Cristian Canton Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy Fu, Wenyin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, Anthony Hartshorn, Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel Kloumann, Artem Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, Ranjan Subramanian, Xiaoqing Ellen Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zheng Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurelien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. Llama 2: Open foundation and fine-tuned chat models, 2023b.
- Denny Vrandečić and Markus Krötzsch. Wikidata: a free collaborative knowledgebase. *Communications of the ACM*, 57(10):78–85, 2014.
- Cunxiang Wang, Xiaoze Liu, Yuanhao Yue, Xiangru Tang, Tianhang Zhang, Cheng Jiayang, Yunzhi Yao, Wenyang Gao, Xuming Hu, Zehan Qi, et al. Survey on factuality in large language models: Knowledge, retrieval and domain-specificity. *arXiv* preprint *arXiv*:2310.07521, 2023.
- Jason Wei, Yi Tay, Rishi Bommasani, Colin Raffel, Barret Zoph, Sebastian Borgeaud, Dani Yogatama, Maarten Bosma, Denny Zhou, Donald Metzler, Ed H. Chi, Tatsunori Hashimoto, Oriol Vinyals, Percy Liang, Jeff Dean, and William Fedus. Emergent abilities of large language models, 2022.
- Yonghui Wu, Mike Schuster, Zhifeng Chen, Quoc V Le, Mohammad Norouzi, Wolfgang Macherey, Maxim Krikun, Yuan Cao, Qin Gao, Klaus Macherey, et al. Google's neural machine translation system: Bridging the gap between human and machine translation. *arXiv* preprint arXiv:1609.08144, 2016.
- Zhengxuan Wu, Atticus Geiger, Aryaman Arora, Jing Huang, Zheng Wang, Noah D. Goodman, Christopher D. Manning, and Christopher Potts. pyvene: A library for understanding and improving PyTorch models via interventions. 2024. URL arxiv.org/abs/2403.07809.
- Linyao Yang, Hongyang Chen, Zhao Li, Xiao Ding, and Xindong Wu. Chatgpt is not enough: Enhancing large language models with knowledge graphs for fact-aware language modeling. arXiv preprint arXiv:2306.11489, 2023.
- Yunzhi Yao, Peng Wang, Bozhong Tian, Siyuan Cheng, Zhoubo Li, Shumin Deng, Huajun Chen, and Ningyu Zhang. Editing large language models: Problems, methods, and opportunities. *arXiv preprint arXiv:2305.13172*, 2023.
- Xiaoying Zhang, Baolin Peng, Ye Tian, Jingyan Zhou, Lifeng Jin, Linfeng Song, Haitao Mi, and Helen Meng. Self-alignment for factuality: Mitigating hallucinations in llms via self-evaluation. *arXiv preprint arXiv:2402.09267*, 2024.

- Yue Zhang, Leyang Cui, Bi Wei, and Shuming Shi. Alleviating hallucinations of large language models through induced hallucinations. *arXiv preprint arXiv:2312.15710*.
- Yue Zhang, Yafu Li, Leyang Cui, Deng Cai, Lemao Liu, Tingchen Fu, Xinting Huang, Enbo Zhao, Yu Zhang, Yulong Chen, Longyue Wang, Anh Tuan Luu, Wei Bi, Freda Shi, and Shuming Shi. Siren's song in the ai ocean: A survey on hallucination in large language models, 2023.
- Zexuan Zhong, Zhengxuan Wu, Christopher D Manning, Christopher Potts, and Danqi Chen. Mquake: Assessing knowledge editing in language models via multi-hop questions. *arXiv preprint arXiv*:2305.14795, 2023.