

Enhancing the Performance of Aspect-Based Sentiment Analysis Systems

Chen Li¹, Huidong Tang², Peng Ju², Debo Cheng³,
Yasuhiko Morimoto²

¹Graduate School of Informatics, Nagoya University, Japan.

²Graduate School of Advanced Science and Engineering, Hiroshima University, Japan.

³UniSA STEM, University of South Australia, Australia.

Abstract

Aspect-based sentiment analysis aims to predict sentiment polarity with fine granularity. While Graph Convolutional Networks (GCNs) are widely utilized for sentimental feature extraction, their naive application for syntactic feature extraction can compromise information preservation. This study introduces an innovative edge-enhanced GCN, named SentiSys, to navigate the syntactic graph while preserving intact feature information, leading to enhanced performance. Specifically, we first integrate a bidirectional long short-term memory (Bi-LSTM) network and a self-attention-based transformer. This combination facilitates effective text encoding, preventing the loss of information and predicting long dependency text. A bidirectional GCN (Bi-GCN) with message passing is then employed to encode relationships between entities. Additionally, unnecessary information is filtered out using an aspect-specific masking technique. To validate the effectiveness of our proposed model, we conduct extensive evaluation experiments and ablation studies on four benchmark datasets. The results consistently demonstrate improved performance in aspect-based sentiment analysis when employing SentiSys. This approach successfully addresses the challenges associated with syntactic feature extraction, highlighting its potential for advancing sentiment analysis methodologies.

Keywords: Performance Evaluation, Aspect-based Sentiment Analysis Systems, Graph Convolutional Networks

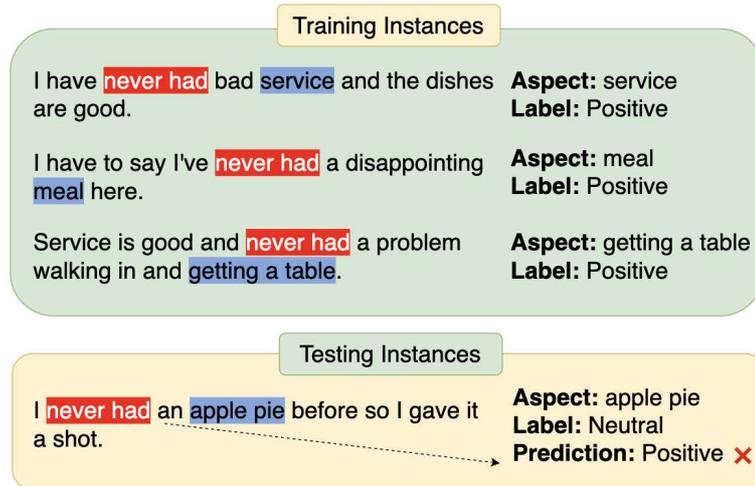


Fig. 1 An example of spurious associations of a customer review system.

1 Introduction

Aspect-based sentiment analysis [1] aims to classify sentences in aspect granularity. The sentiments of each aspect can be different even in the same sentence. Aspect-level sentiment analysis has been widely used in real-world applications. Suppose there is such a review comment among the restaurant reviews: “Although the menu is limited, the friendly staff provided us with a nice night.” If we pay attention to the aspect of “menu”, the sentiment is negative (“limited”); when it comes to “staff”, we can extract the opposite sentiment, i.e., positive (“friendly”). Such multi-aspect can introduce multi-sentiments in the same sentence, resulting in difficulty of sentiment prediction. To solve such difficulty, aspect-based sentiment analysis is attracting attention to improve services [2].

Neural networks are widely used for aspect-based sentiment analysis because of their promising results, especially recurrent neural networks (RNNs) [3] and the Transformer [4] have demonstrated their sequence modeling capabilities. [5–9]. However, these models are not affordable to establish precise dependencies between word pairs and aspects. Suppose such a sentence: “The dish looks mediocre but tastes surprisingly wonderful!” Although the aspect “dish” is linked to two opposite sentiments, “looks mediocre” and “tastes surprisingly wonderful”, we can easily understand that the latter is more tightly linked to the “dish”. However, this judgment may be difficult for these models due to the closer distance of the former to the “dish”. Convolutional neural networks (CNNs) [10] are studied to make predictions based on phrases that express sentiments more accurately. However, phrases generally have longer dependencies on the subject. For example, “tastes surprisingly wonderful” may express a positive sentiment more accurately than just “wonderful”. CNNs are not affordable for such long dependencies because of the local receptive field limitation [11].

Graph convolutional networks (GCNs) [12, 13] can decompose sentences into a tree structure composed of entities. Such a tree structure constructs a more direct

path between aspects and related words. Therefore, GCNs resolve the long-distance dependency problem and facilitate the learning of the representation of nodes and their positional relationships [14]. However, the general GCNs lack the edge information. GCNs cannot capture the syntax and semantic relationships due to the lack of edge information resulting in poor performance [15, 16]. Figure 1 shows examples that illustrate these complex relationships in customer reviews. The aspect “service” is associated with “never had”, and its sentiment is positive in past reviews. However, in a new customer review, its sentiment is not positive. The network cannot determine the sentiment by relying on the phrase “never had”.

This study is an extension of our previous work [17], introducing an innovative edge-enhanced graph convolutional network (GCN) named SentiSys, designed to elevate the effectiveness of aspect-based sentiment analysis systems. In our approach, we leverage bidirectional long short-term memory (Bi-LSTM) to extract node word embeddings, and Bi-GCN is employed to model word dependencies within a tree structure, thereby enhancing word representations. The integration of these components facilitates accurate association of sentiment words with the target aspect, resulting in a notable performance improvement. The robustness of the proposed SentiSys model is substantiated through extensive evaluation experiments, confirming its high-performance capabilities. The key contributions of this work are encapsulated in three primary aspects, providing a comprehensive enhancement to aspect-based sentiment analysis methodologies.

- **Architecture based on neural networks:** The SentiSys incorporates a powerful combination of Bi-LSTM, a transformer, and an edge-enhanced Bi-GCN. This intricate setup leverages linguistic syntax to construct a graph, which, in turn, serves as the foundation for extracting and representing textual content through a sophisticated GCN. This approach underscores the importance of effectively harnessing these cutting-edge technologies to decode sentiment and meaning within the text, making it a notable advancement in sentiment analysis.
- **Effective semantic edges:** Employing a dependency tree not only reduces the gap between aspects and their related words but also establishes a syntactic pathway within the text. Additionally, SentiSys takes into account the edge information within syntactic dependency trees. This valuable data enhances the syntactic connection between associated words and the specific target aspect.
- **Performance enhancement:** The proposed methodology’s efficacy is confirmed through validation on four standard benchmark datasets. The empirical findings conclusively illustrate that the SentiSys model surpasses other baseline models across the majority of performance metrics.

2 Related Work

2.1 Aspect-based Sentiment Analysis Systems

Conventional sentiment analysis methodologies typically involve training classifiers utilizing features such as bag-of-words and sentiment dictionaries [18]. However, both

rule-based [19] and statistical-based strategies [20] require handcrafted features, revealing the limitations of these naive sentiment analysis methods, particularly when confronted with the complex intricacies inherent in customer review analysis. These shortcomings include challenges in capturing nuanced sentiments related to specific aspects of interest.

Motivated by the inadequacies of traditional sentiment analysis, the research landscape has progressively shifted towards aspect-based sentiment analysis. Aspect-based sentiment analysis encompasses four key tasks [21]: aspect term sentiment analysis (ATSA) [22], aspect category sentiment analysis (ACSA) [23], aspect term extraction (ATE) [24], and aspect category extraction (ACE) [25]. ATSA involves training classifiers to predict the sentiment polarity associated with specified aspect terms, addressing the need for a more granular understanding of sentiment expressions within the context of specific elements mentioned in reviews [26]. ACSA, on the other hand, aims to predict sentiment polarity concerning predefined sentiment categories, providing insights into broader sentiment trends related to predetermined aspects [27]. ATE and ACE, conceptualized as entity extraction challenges, strive to solve the intricate problem of identifying and understanding aspects within reviews. ATE focuses on extracting precise aspect terms, such as the previously mentioned example of “dish,” aiming to capture specific entities of interest [28]. Conversely, ACE aims to identify and categorize broader aspects, like the “food” category, encompassing terms like “dish.”

In addressing these tasks, the motivation lies in achieving a more nuanced and targeted comprehension of sentiment expressions within diverse contexts. By refining the understanding of sentiments associated with specific aspects, aspect-based sentiment analysis contributes to enhanced accuracy and applicability in sentiment analysis practices [29]. However, it is essential to acknowledge potential limitations, such as the need for robust methods to handle ambiguous language and context, which opens avenues for further research in advancing the effectiveness of aspect-based sentiment analysis methodologies.

2.2 RNN-based Sentiment Analysis Systems

The recent remarkable advances in neural networks have attracted the attention of researchers for applications [30–34]. The models proposed in [35] for target-dependent sentiment classification leverage neural networks. Specifically, the LSTM architecture, originally designed for sequence modeling, proves effective for aspect-based sentiment analysis tasks in an autoregressive manner. Building upon the LSTM framework, this approach enhances the architecture by incorporating target-specific information. Referred to as target-dependent LSTM (TD-LSTM), this model skillfully captures the dynamic interplay between a target word and its contextual words, discerningly selecting pertinent segments of the context to deduce sentiment polarity towards the target. The model is amenable to end-to-end training through standard backpropagation, employing the cross-entropy error of supervised sentiment classification as its loss function. While the TD-LSTM approach enhances sentiment classification by considering target-specific information, the nuanced understanding of the interplay between a target word and its contextual words remains a complex task. This limitation may

impact the model’s ability to capture subtle sentiment nuances and context-specific variations accurately.

Similar to TD-LSTM, ATAE-LSTM [5] is crafted to emphasize contextual relationships, utilizing a Bi-LSTM and an attention-based LSTM, respectively. While these models exhibit strengths, they encounter difficulties in capturing extensive contextual information, especially when crucial details are distant from the target. Recognizing this limitation, RAM [7] and TNet-LF [36] extend ATAE-LSTM [5] by introducing a multi-attention and Bi-attention mechanism, respectively. These enhancements significantly augment the models’ capability to consider broader contextual information, effectively addressing the challenge of handling long-range dependencies. However, TNet-LF cannot fully capture the intricacies of sentence structure and grammar, limiting its ability to discern nuanced syntactic relationships crucial for a comprehensive understanding of sentiment in text. Additionally, its reliance on semantic aspects may result in suboptimal performance when dealing with complex syntactic structures in natural language. Sentic LSTM [37] stands as a sophisticated system designed for targeted aspect-based sentiment analysis. The core innovation lies in the infusion of commonsense knowledge into an attentive LSTM network. RACL [38] is a sentiment analysis system based on relation-aware collaborative learning. This system tackles fundamental sentiment analysis tasks, encompassing aspect term extraction, opinion term extraction, and aspect-level sentiment classification. Nevertheless, the absence of detailed assessments and comparisons with existing models impedes a comprehensive understanding of RACL’s effectiveness in real-world scenarios.

Of significance in this domain is the Transformer [4], an innovative architecture explicitly designed to excel in capturing intricate long-range dependencies within textual data. The Transformer’s demonstrated effectiveness positions it as a compelling choice for tasks requiring a robust treatment of extensive contextual relationships.

2.3 GCN-based Sentiment Analysis Systems

Unlike RNN-based sentiment analysis systems, GCN-based systems seek to represent language data as graphs, where words or phrases are nodes and relationships between them are edges. This representation allows for a more nuanced understanding of contextual dependencies, capturing intricate connections that may be challenging for traditional RNNs [39].

Several notable advancements in aspect-based sentiment analysis using GCNs have been introduced. ASGCN [40] showcases remarkable proficiency in capturing sentiment polarity across various aspects in a text. This is achieved through its adept modeling of relationships between aspects and their respective words utilizing GCNs. However, the efficacy of ASGCN is contingent on precise dependency tree parsing. Instances of inaccurate parsing pose a potential challenge, introducing a risk of suboptimal modeling. This directly undermines the fidelity of relationships between aspects and words. Consequently, the overall performance of ASGCN is adversely affected, especially within the domain of aspect-based sentiment analysis. AEGCN [41] seamlessly integrates GCNs with attention mechanisms, specifically embracing multi-head interactive attention and multi-head self-attention. The prowess of AEGCN crucially hinges on the precise encoding of attention. Any deviations or inaccuracies in this

intricate process pose a risk of suboptimal modeling, directly impacting the relationships within the graph. SK-GCN [42] combines a syntactic dependency tree and GCN to model the syntax relationship more precisely. However, SK-GCN encounters a significant limitation attributed to the graph structure of commonsense knowledge. Specifically, the model faces challenges arising from an insufficient graph structure when representing commonsense knowledge. This limitation can impact the model’s ability to effectively leverage commonsense knowledge for aspect-level sentiment analysis. AGCN [43] aggregates the feature information of neighboring nodes to make the node representations related to each other. However, the effectiveness of AGCN heavily depends on the accuracy and completeness of the graph representation. In scenarios where the graph structure does not accurately capture the relationships within the data, AGCN may struggle to generate meaningful and representative features, leading to suboptimal performance.

Unlike previous studies, we present a novel integration of Bi-LSTM, Transformer, and GCNs to advance aspect-based sentiment analysis. SentiSys strategically leverages the strengths of each component: Bi-LSTM serves as a proficient feature extractor, capturing intricate patterns and semantic nuances within the text. Meanwhile, the Transformer excels at capturing long-distance dependencies, allowing our model to grasp the contextual relationships crucial for comprehensive sentiment analysis. Introducing GCN with a dependency parsing layer further enriches the model’s capabilities by incorporating syntactic information, enabling a more fine-grained understanding of the syntax relations within the text. By combining these components, SentiSys aims to provide a holistic and nuanced perspective on aspect-based sentiment analysis. This innovative amalgamation addresses the limitations of prior studies, fostering a more comprehensive and accurate sentiment analysis methodology.

3 SentiSys Model Description

In this section, we mainly describe the proposed SentiSys in seven aspects. The word embedding layer creates low-dimensional representations for each token in a vocabulary; an Bi-LSTM aims to extract features of sentences; a Transformer model is used to extract contextual features from a global perspective; a dependency parsing layer creates a tree structure of context grammar; an Bi-GCN processes the generated tree structure; an aspect-specific masking layer is used to reduce redundancy and enhance the accuracy; the sentiment classification layer classifies the sentiment of a given sentence. Figure 2 shows an overview architecture of the proposed SentiSys for the aspect-based sentiment analysis.

3.1 Word Embedding Layer

To tokenize a sentence consisting of n words with an m -word aspect, we represent it as a sequence denoted as \mathbf{S} in the following manner:

$$\mathbf{S} = \{\mathbf{w}_1, \mathbf{w}_2, \dots, \mathbf{w}_\gamma, \dots, \mathbf{w}_{\gamma+m}, \dots, \mathbf{w}_n\}, \quad (1)$$

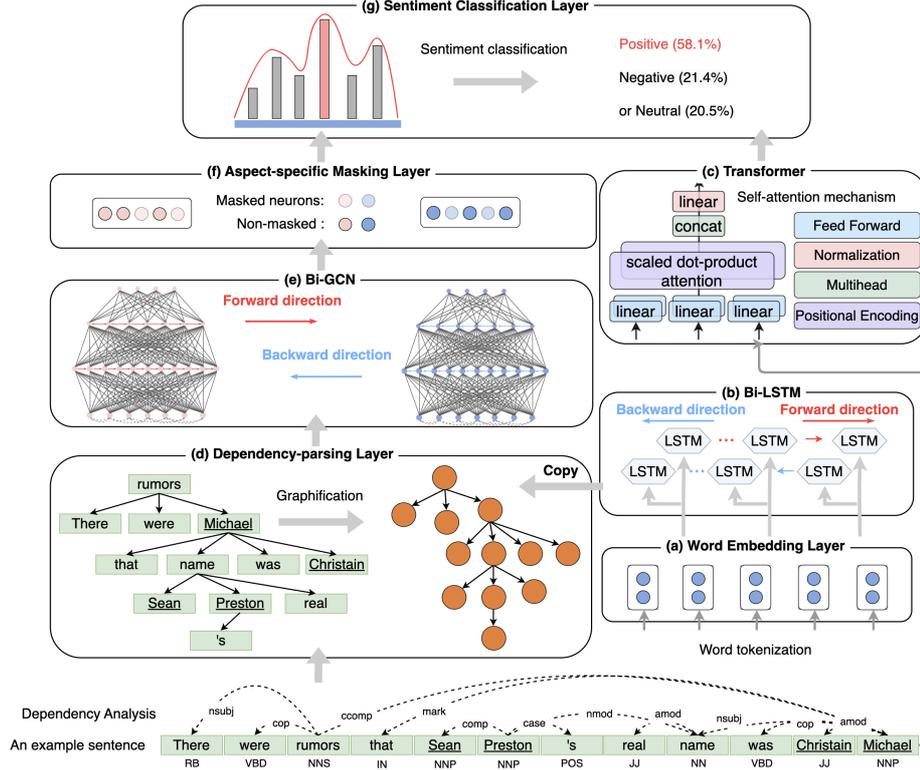


Fig. 2 The architectural overview of the proposed SentiSys for aspect-based sentiment analysis comprises the following key components: (a) The initial word embedding layer parses sentences and embeds words into a vector space, forming the foundation for further analysis. (b) The Bi-LSTM network enables the capture of contextual information in a sentence for a deeper understanding of word relationships. (c) The transformer layer with a self-attention mechanism can explore the inter-relationships and global word features in lengthy text, enhancing contextual understanding. (d) The dependency parsing layer can recognize the dependencies among the words in a sentence and construct a dependency tree to help explain the grammatical structure. (e) The Bi-GCN propagates information among the nodes of the parsed dependency tree using message passing, thus effectively modeling word relationships. (f) The aspect-specific masking technique refines the hidden representation by separating the information related to the aspect of interest, which reduces redundancy and improves the accuracy of aspect-based sentiment analysis. (g) The final sentiment classification layer is dedicated to classifying the sentiment of a given sentence into predefined categories, typically categorizing it as positive, negative, or neutral.

where $\mathbf{w}_t \in \mathbf{S}$ and γ indicate a word token and starting index of an aspect, respectively. Each word token is then transformed into a low-dimensional vector denoted as $\mathbf{e}_t \in \mathbb{R}^{d_w}$, where d_w denotes the dimension of the word embedding.

3.2 Bi-LSTM Network

Word embedding embeds the words in the sentence into low-dimensional vectors, and these embedding vectors are used as inputs to the Bi-LSTM network [44]. The utilization of Bi-LSTM allows for the extraction of contextual information from sentences.

As mentioned in [45], the Bi-LSTM network comprises two components: the forward LSTM and the backward LSTM. In the forward LSTM, the hidden vector $\vec{\mathbf{h}}_t^{LSTM}$ at the current time step is computed by combining the input embedding \mathbf{e}_t with $\vec{\mathbf{h}}_{t-1}^{LSTM}$ from the previous time step. The backward LSTM is constructed by utilizing \mathbf{e}_t and $\overleftarrow{\mathbf{h}}_{t+1}^{LSTM}$ from the subsequent time step. Finally, the hidden vectors $\vec{\mathbf{h}}_t^{LSTM}$ and $\overleftarrow{\mathbf{h}}_t^{LSTM}$ are concatenated to create the overall hidden vector \mathbf{h}_t^{LSTM} . This process is illustrated as follows:

$$\vec{\mathbf{h}}_t^{LSTM} = \text{LSTM}(\mathbf{e}_t, \vec{\mathbf{h}}_{t-1}^{LSTM}), \vec{\mathbf{h}}_t^{LSTM} \in \mathbb{R}^{d_h}, \quad (2)$$

$$\overleftarrow{\mathbf{h}}_t^{LSTM} = \text{LSTM}(\mathbf{e}_t, \overleftarrow{\mathbf{h}}_{t+1}^{LSTM}), \overleftarrow{\mathbf{h}}_t^{LSTM} \in \mathbb{R}^{d_h}, \quad (3)$$

$$\mathbf{h}_t^{LSTM} = \vec{\mathbf{h}}_t^{LSTM} \oplus \overleftarrow{\mathbf{h}}_t^{LSTM}, \mathbf{h}_t^{LSTM} \in \mathbb{R}^{2 \times d_h}, \quad (4)$$

where d_h represents the dimension of the hidden layer in the Bi-LSTM, and \oplus is the operator used for concatenation.

3.3 Transformer Network

A transformer encoder, as described in [4], utilizes self-attention mechanisms to examine the relationships and global characteristics of words within lengthy sentences. To incorporate the sequential positions of a sentence, sinusoidal positional encoding functions are employed, as outlined below:

$$P_{pos,2i} = \sin\left(\frac{pos}{10000^{\frac{2i}{d_{model}}}}\right), \quad (5)$$

$$P_{pos,2i+1} = \cos\left(\frac{pos}{10000^{\frac{2i}{d_{model}}}}\right), \quad (6)$$

where pos represents the position of a word within a sentence, while i signifies the i th dimension of the embedding, with the embedding dimension denoted as d_{model} . Subsequently, the combined vector of the embedding and positional encoding for the input sentence serves as the input to the transformer. The transformer computes attention weights according to the following procedure:

$$\text{Attention}(\mathbf{Q}, \mathbf{K}, \mathbf{V}) = \text{Softmax}\left(\frac{\mathbf{Q}\mathbf{K}^T}{\sqrt{d_k}}\right)\mathbf{V}, \quad (7)$$

where \mathbf{Q} , \mathbf{K} and \mathbf{V} represent the query, key and value matrices with dimensions d_k , d_k and d_v , respectively. Usually, a transformer employs a multi-head attention mechanism

to project the query, key and value matrices h times to provide improved internal contextual associations. The mathematical expression for this process is as follows:

$$\text{Multi-Head}(\mathbf{Q}, \mathbf{K}, \mathbf{V}) = [\text{Head}_1, \dots, \text{Head}_h]\mathbf{W}, \quad (8)$$

$$\text{Head}_i = \text{Attention}(\mathbf{Q}\mathbf{W}_Q, \mathbf{K}\mathbf{W}_K, \mathbf{V}\mathbf{W}_V), \quad (9)$$

where \mathbf{W} , \mathbf{W}_Q , \mathbf{W}_K , and \mathbf{W}_V indicate weight matrices of the self-attention mechanism. Next, the transformer encoder applies two normalization layers to extract deep features of the context. Consider \mathbf{Z}_{out} as the result matrix generated by the transformer encoder, and its formulation can be expressed as follows:

$$\mathbf{Z}_{out} = \text{Transformer}(\mathbf{S}). \quad (10)$$

Finally, the calculated global attention scores play a pivotal role in the ultimate sentiment classification layer.

3.4 Dependency-parsing Layer

The output hidden vector of the Bi-LSTM network, denoted as \mathbf{h}_t , can be used as an input to the dependency-parsing layer in the Bi-GCN, which helps to identify word dependencies in a sentence by constructing a dependency tree. Formally, the Bi-GCN initiates a matrix to record the edge information weights. Initially, it derives the adjacency matrix $\mathbf{A} \in \mathbb{R}^{n \times n}$ from the sentence’s dependency tree. The conventional form of this adjacency matrix can be expressed as follows:

$$\mathbf{A}_{ij} = \begin{cases} 1, & i = j. \\ 1, & i \neq j, i \text{ and } j \text{ have dependencies.} \\ 0, & \text{otherwise.} \end{cases} \quad (11)$$

GCN lacks the ability to capture rich edge information due to the discrete nature of the adjacency matrix (comprising only 0s and 1s). We present an adjacency matrix that contains non-discrete edge information, which is formulated as follows:

$$\mathbf{A}_{ij} = \begin{cases} 1, & i = j, \\ \text{SDI}(i, j), & i \neq j, i \text{ and } j \text{ have dependencies,} \\ 0, & \text{otherwise.} \end{cases} \quad (12)$$

Here, SDI is used to compute syntactic dependency information between the word i and the word j . The computation is summarized below:

$$\text{SDI}(i, j) = \frac{\text{Count}(\text{sd}(i, j))}{\text{Count}(\text{sd}(\cdot))}, \quad (13)$$

where $\text{sd}(i, j)$ and $\text{sd}(\cdot)$ represent the syntactic relationship between word pair i and j and the overall syntax of the dataset.

3.5 Bi-GCN Network

A GCN is a specialized variant of a Convolutional Neural Network (CNN) specifically tailored for encoding structured graph data. In the scenario of a textual graph consisting of n words, we generate an adjacency matrix based on the syntactic matrix $\mathbf{A} \in \mathbb{R}^{n \times n}$ to capture information regarding syntactic dependencies. The representation of word i at layer l is symbolized as \mathbf{h}_i^l . This graphical structure is conceptually depicted as follows:

$$\mathbf{h}_i^l = \sigma\left(\sum_{j=1}^n \tilde{\mathbf{A}}_{ij} \mathbf{W}^l h_j^{l-1} + \mathbf{b}^l\right). \quad (14)$$

In the GCN, \mathbf{W}^l serves as the weight for linear transformation, \mathbf{b}^l acts as the bias, and σ represents the nonlinear activation function. The GCN harnesses the sentence’s dependency tree to enforce syntactic constraints, facilitating the identification of descriptive words associated with a specific aspect, taking into account their syntactic proximity. This capability equips GCN to effectively address situations where words related to the sentiment of an aspect are not adjacent. As a result, GCN is a well-suited choice for conducting aspect-based sentiment analysis. The update of each word’s representation is executed through the utilization of Bi-GCN in as follows:

$$\vec{\mathbf{h}}_i^l = \sum_{j=1}^n \tilde{\mathbf{A}}_{ij} \mathbf{W}^l h_j^{l-1}, \quad (15)$$

$$\overleftarrow{\mathbf{h}}_i^l = \sum_{j=1}^n \tilde{\mathbf{A}}_{ij}^T \mathbf{W}^l h_j^{l-1}, \quad (16)$$

where $\vec{\mathbf{h}}_i^l$ and $\overleftarrow{\mathbf{h}}_i^l$ indicate the outputs of the forward and backward hidden layers for the word i in the l th layer. Then, the forward and backward representations can be concatenated by

$$\tilde{\mathbf{h}}_i^l = \vec{\mathbf{h}}_i^l \oplus \overleftarrow{\mathbf{h}}_i^l, \quad (17)$$

and

$$\mathbf{h}_i^l = \text{ReLU}\left(\frac{\tilde{\mathbf{h}}_i^l}{d_i + 1} \mathbf{W}^l + \mathbf{b}^l\right), \quad (18)$$

where d_i represents the degree of the i th token in the adjacency matrix. Note that the parameters \mathbf{W}^l and \mathbf{b}^l are trainable in the Bi-GCN network.

3.6 Aspect-Specific Masking

We utilize the masking technique to reduce redundancy in the Bi-GCN hidden representation by hiding aspect-independent text. To be more specific, this masking can be depicted as follows:

$$\mathbf{h}_i^l = 0, \quad 1 \leq i < \gamma, \quad \gamma + m - 1 < t \leq n. \quad (19)$$

The result from the zero mask layer consists of aspect-focused characteristics.

$$\mathbf{H}_{mask}^l = \{\mathbf{0}, \dots, \mathbf{h}_\gamma^l, \dots, \mathbf{h}_{\gamma+m-1}^l, \dots, \mathbf{0}\}. \quad (20)$$

By employing graph convolution, the feature vector \mathbf{H}_{mask}^l adeptly captures contextual information surrounding specific aspects. This encompassing process considers both syntactic dependencies and extended multi-word relationships. Moreover, an attention mechanism is harnessed to produce a vector representation of the concealed layer. The calculation of attention weights is executed as follows:

$$\beta_i = \sum_{j=1}^n \mathbf{h}_j^T \mathbf{h}_j^l, \quad (21)$$

$$\alpha_i = \frac{\exp(\beta_i)}{\sum_{j=1}^n \exp(\beta_j)}. \quad (22)$$

Finally, the sentiment classification process combines the cumulative representation scores mentioned earlier with the attention scores generated by the transformer. This results in the following sentiment classification:

$$\mathbf{res}_{out} = \sum_{i=1}^n \alpha_i \mathbf{h}_i + \mathbf{Z}_{out}. \quad (23)$$

3.7 Sentiment Classification

The \mathbf{r}_{out} computed in the previous step is used as input to the fully connected layer for sentiment classification. The formula is as follows:

$$\mathbf{prob} = \text{softmax}(\mathbf{res}_{out} \mathbf{W}_p + \mathbf{b}). \quad (24)$$

3.8 Training Phase

Utilizing both cross-entropy and L_2 regularization [46], the loss function for SentiSys is formulated as follows:

$$\text{Loss} = - \sum_{\hat{p} \in C} \log \mathbf{prob}_{\hat{p}} + \lambda \|\Theta\|_2, \quad (25)$$

where p signifies the label, and C represents the dataset. $\mathbf{prob}_{\hat{p}}$ denotes the \hat{p} th element of \mathbf{prob} . Θ and λ are the trainable parameters and the coefficient for L_2 regularization, respectively. To provide a clearer insight into the SentiSys model, Algorithm 1 illustrates the training and testing procedures of the model, facilitating a more comprehensive understanding.

Algorithm 1: Algorithm for the proposed SentiSys.

```
// Read sample sentences from datasets.
1 Tokenize a sentence with Eq.(1).
  Embed words in word embedding layer.
  Analyze dependency information of the sentence.
  // A Bi-LSTM layer.
2 Use a Bi-LSTM layer to capture the contextual features of the sample sentence
  with Eqs. (2),(3), and (4).
  // A transformer layer.
3 Encode positions with Eqs. (5) and (6).
  Employ a transformer encoder architecture to capture the global features
  within a sentence with Eqs. (7), (8), (9), and (10).
  // Dependency-parsing layer.
4 Replace the weight matrix (11) with Eq. (12) and save more available edge
  information for the graph.
  Compute SDI with Eq. (13). // A Bi-GCN submodule.
5 Use Bi-GCN to extract the features of the structure graph with Eqs. (14),
  (15), (16), (17), and (18).
  // Aspect-specific masking.
6 Utilize aspect-specific masking techniques to reduce redundant information in
  the Bi-GCN with Eqs. (19), (20), (21), (22), and (23).
  // Sentiment classification.
7 Apply fully connected layers to construct a classifier to categorize the
  sentiment with Eq. (24).
  // Training loss.
8 Train SentiSys with Eq. (25).
  // Testing phase.
9 Evaluate the performance of SentiSys on test datasets.
```

4 Experiments

The efficacy of the SentiSys model is substantiated through experiments on four widely employed benchmark datasets. Furthermore, the influence of GCN layers on performance is deliberated. Lastly, ablation studies are conducted to examine syntactic dependency, the edge weight matrix (SDI), and bi-direction.

4.1 Datasets

Four commonly used benchmark datasets were employed to assess the performance of the SentiSys model. The Twitter dataset [47] encompasses 6,940 Twitter posts from users, with 6,248 data points for training and 692 for testing. Additionally, three datasets, namely Rest14 [48], Rest15 [49], and Rest16 [50] contain customer comments and restaurant rating information. Rest14 comprises 4,728 customer comments, with 3,608 for training and 1,120 for testing. Rest15 includes 1,746 reviews, with 1,204 for training and 542 for testing. Rest16, the 2016 benchmark dataset, consists of 2,364

reviews, of which 1,748 are used for training, and the remaining 616 are for testing. To enhance dataset quality, sentences with conflicting polarity or unclear meaning were removed from the Rest15 and Rest16 datasets. A comprehensive overview of the four datasets’ statistics is presented in Table 1.

Table 1 Comprehensive overview of the four datasets’ statistics.

Dataset	Split	Positive	Neutral	Negative
Twitter	Train	1561	3127	1560
	Test	173	346	173
Rest14	Train	2164	637	807
	Test	728	196	196
Rest15	Train	912	36	256
	Test	326	34	182
Rest16	Train	1240	69	439
	Test	469	30	117

4.2 Experimental Setup

In the experiments, we initialize the word embedding layer using a pre-trained GloVe vectors [51] with a dimensionality of 300. The hidden layer of the Bi-LSTM also has a dimensionality of 300. The Bi-GCN of SentiSys contains 3 layers with parameters initialized using a uniform distribution. The optimizer is Adam [52], which has a learning rate of 0.001. We use L_2 regularization with a batch size of 32. The training process is up to 100 epochs.

4.3 Baselines for Comparison

We first evaluate the performance of SentiSys by comparing it to baseline models. These baseline models are described below:

- **SVM**: The machine learning-based support vector machine (SVM) is widely used in SemEval 2014 Task 4. This model utilizes a conventional methodology for the extraction of essential features, making it a well-established approach in natural language processing and sentiment analysis tasks.
- **LSTM** [35]: This methodology leverages the LSTM’s ability to capture and encode sequential information, with the focus on the hidden layer vector at the last time step, which is instrumental in making sentiment predictions.
- **TD-LSTM** [35]: This specialized LSTM variant is designed to extract interaction features that capture the intricate relationship between the target sentiment, often a specific aspect or entity, and the entire contextual information.
- **MemNet** [53]: MemNet improves the quality of sentence representations by efficiently integrating external textual information.

Table 2 Results of the comparison of the performance of baseline models with that of SentiSys. The values in gray cells indicate the maximum values.

Model	Twitter		Rest14		Rest15		Rest16	
	Acc (%) ↑	F1 (%) ↑						
SVM	63.40	63.30	80.16	-	-	-	-	-
LSTM	69.56	67.70	78.13	67.47	77.37	55.17	86.80	63.88
TD-LSTM	70.80	69.00	78.00	66.73	76.39	58.70	82.16	54.21
MemNet	71.48	69.90	79.61	69.64	77.31	58.28	85.44	65.99
AOA	72.30	70.20	79.97	70.42	78.17	57.02	87.50	66.21
IAN	72.50	70.81	79.26	70.09	78.54	52.65	84.74	55.21
TNet-LF	72.98	71.43	80.42	71.03	78.47	59.47	89.07	70.43
ASGCN	71.53	69.68	80.86	72.19	79.34	60.78	88.69	66.64
MGAN	72.54	70.81	81.25	71.94	79.36	57.26	87.06	62.29
Sentic LSTM	70.66	67.87	79.43	70.32	79.55	60.56	83.01	68.22
CMLA-ALSTM	-	-	77.46	63.87	81.03	54.79	-	-
RACL	-	-	81.42	69.59	83.26	59.85	-	-
AEGCN	73.16	71.82	81.04	71.32	79.95	60.87	87.39	68.22
SK-GCN	71.97	70.22	80.36	70.43	80.12	60.70	85.17	68.08
AGCN	73.98	72.48	80.02	71.02	80.07	62.70	87.98	65.78
SentiSys	72.44	70.67	81.70	73.63	79.34	61.99	88.80	68.96

- **AOA** [54]: The attention-over-attention (AOA) mechanism-based architecture plays a pivotal role in enhancing the classification process. AOA’s unique approach involves employing attention mechanisms not just once but in a layered fashion, enabling more refined and context-aware classification.
- **IAN** [8]: The interactive attention networks (IAN) present a novel approach to information extraction. IAN employs a dual LSTM architecture to independently capture representations for aspect terms and contextual information.
- **TNet-LF** [36]: The transformation network with local feedback (TNet-LF) introduces a forward context-preserving transformation mechanism. This innovative approach serves a dual purpose: to retain and amplify the valuable information within the context. TNet-LF achieves this by implementing a transformation process that not only safeguards but also enriches the contextual information, ultimately enhancing the overall understanding of the data.
- **ASGCN** [40]: The pioneering aspect-specific graph convolutional network (ASGCN) marks a significant milestone in the field of sentiment analysis by harnessing the power of graph convolution, a novel approach to analyzing and understanding sentiment with a focus on specific aspects. By utilizing the capabilities of a GCN, ASGCN enhances the accuracy and effectiveness of sentiment analysis in the context of different aspects, making it a noteworthy advancement in this domain.
- **MGAN** [9]: The Multi-grained attention network (MGAN) was introduced as an innovative approach with the primary objective of discerning and capturing the nuanced sentiments expressed in a given text, particularly in relation to specific aspects or entities.
- **Sentic LSTM** [37]: Sentic LSTM incorporates a trio of key components to enhance its sentiment analysis capabilities. These components include an aspect-specific attention mechanism, a module for embedding commonsense knowledge, and an attentive LSTM.
- **CMLA-ALSTM** [55]: This network incorporates multiple layers of attention mechanisms, with tensor operators implemented within each layer. The use of tensor operators at each layer enhances the network’s ability to capture and process complex relationships and patterns within the data. This design enables the network to perform intricate computations and feature extraction, making it a powerful tool for tasks that require advanced attention mechanisms and data analysis.
- **RACL** [38]: Relation-aware collaborative learning (RACL) is a methodology that enables subtasks to synchronize their efforts within a network through the process of relational propagation. RACL’s fundamental concept is the establishment of connections among various subtasks, enabling them to effectively communicate and collaborate.
- **AEGCN** [41]: Attention-based encoding GCN (AEGCN) leverages a multi-headed attention mechanism in conjunction with an enhanced GCN for sentiment analysis. This sophisticated approach employs multiple attention heads to focus on various aspects of the input data and combines them with an improved GCN, resulting in a more powerful method for sentiment analysis.

- **SK-GCN** [42]: The syntax- and knowledge-based GCN (SK-GCN) harnesses the structure of syntactic dependency trees and the wealth of commonsense knowledge by integrating them with a GCN.
- **AGCN** [43]: The aggregated GCN (AGCN) effectively utilizes node feature information through a process of iteratively enhancing the representation of individual nodes based on their local neighborhoods.

4.4 Evaluation Measures

We use two performance metrics, Accuracy (Acc) and Macro F1 (F1), to evaluate and validate the effectiveness of the proposed SentiSys. Acc and F1 are widely recognized in the field of multi-classification tasks to assess the predictive and classification capabilities of models. Concretely, Acc quantifies the ratio of correctly classified samples and thus directly measures the accuracy of the model. F1 takes into account both accuracy and recall, offering a comprehensive perspective on the model’s performance. Formally, these two evaluation measures are calculated as follows:

$$\text{Acc} = \frac{TP + TN}{TP + TN + FP + FN},$$

$$\text{Precision} = \frac{TP}{TP + FP},$$

$$\text{Recall} = \frac{TP}{TP + FN},$$

$$\text{F1} = \frac{2 \times \text{Precision} \times \text{Recall}}{\text{Precision} + \text{Recall}},$$

where TP, TN, FP, and FN refer to the correctly identified positive cases, correctly identified negative cases, incorrectly identified positive cases, and incorrectly identified negative cases.

4.5 Evaluation Results

Table 2 presents a comparative analysis of the Acc and F1 scores between the proposed SentiSys model and 15 other baseline models. Notably, the SentiSys model demonstrates superior performance across various metrics in the Twitter, Rest14, and Rest15 datasets. While the AGCN model achieved the highest Acc and F1 scores in the Twitter dataset, it did not exhibit the same level of effectiveness as the SentiSys model in the Rest14 and Rest16 datasets. Specifically, on the Rest14 dataset, the SentiSys model stands out, achieving significantly higher Acc and F1 scores compared to the other baseline models. In the Rest15 dataset, RACL achieved the highest Acc score, but its F1 score was relatively low at 59.85. When it comes to the Rest16

dataset, the Acc and F1 scores of TNet-LF were only marginally superior to those of the SentiSys model. This observation could be attributed to the critical role of information from both parent and child nodes, highlighting the significance of considering the entire graph structure rather than solely processing it as a directed graph. Additionally, the limited sentence grammar in the Twitter dataset may have constrained prediction results. In summary, the experimental results show that our proposed SentiSys enhances the performance of aspect-based sentiment analysis systems compared with other baseline models, especially for TNet-LF on the Rest16 dataset. Furthermore, SentiSys outperforms ASGCN on all four benchmark datasets, which highlights the impact of word dependence on enhancing the classification results.

4.6 Effect of GCN Layers

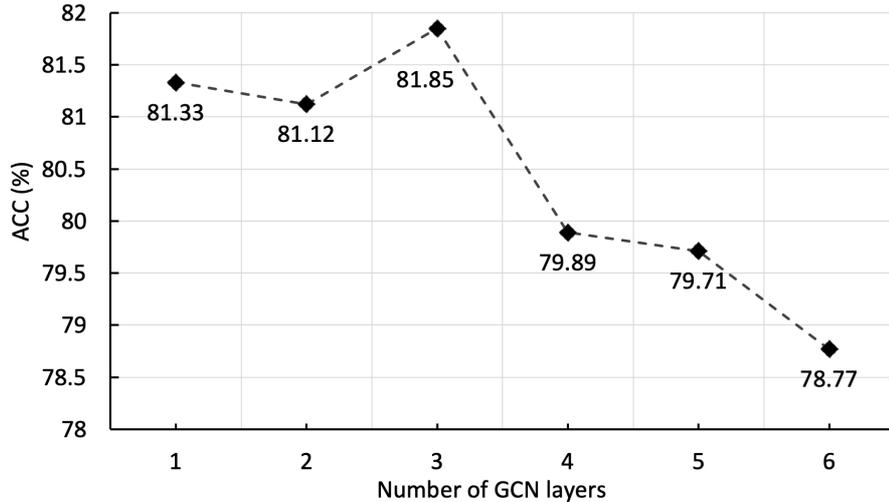


Fig. 3 Change curve of Acc scores with the number of GCN layers.

Figures 3 and 4 show the effects of different GCN layers on the Acc and F1 scores of the proposed SentiSys model on the Rest14 dataset. X and Y axes indicate the number of GCN layers and the corresponding Acc and F1 scores, respectively. The experimental results show that the Acc and F1 scores tended to increase and then decrease as the number of layers increased. The Acc and F1 scores achieved the maximum values with the number of GCN layers of 3. The scores are 0.818 and 0.731, respectively.

4.7 Ablation Studies

The three critical parts of the proposed SentiSys model are the grammar dependency tree, the edge weight matrix, and the Bi-GCN. Ablation studies are conducted to verify the effects of each submodule on performance. Table 3 shows the Acc and F1 scores of the proposed SentiSys model without grammar dependency, with the discrete edge

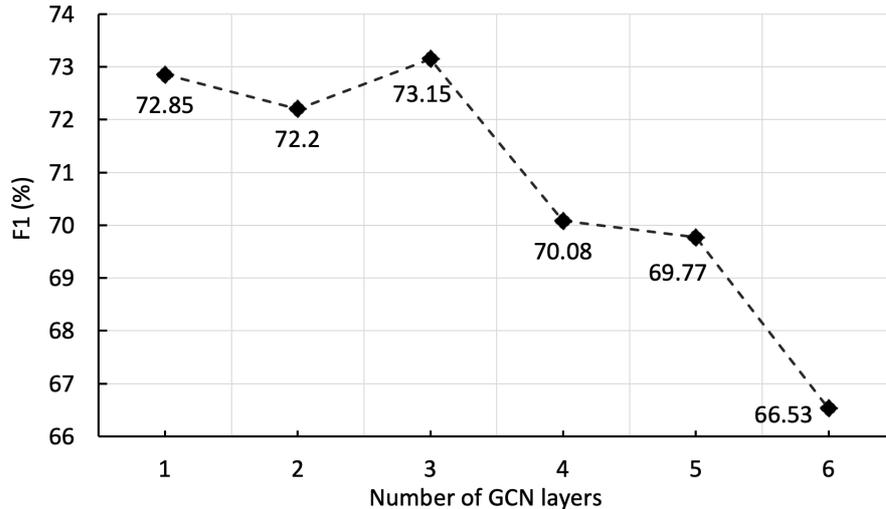


Fig. 4 Change curve of F1 scores with the number of GCN layers.

Table 3 Ablation studies on syntactical dependencies (*D*), edge weights (*EW*), and bidirectional (*Bi*) structures for the SentiSys.

Dataset	Measures	<i>D</i> w/o	<i>EW</i> w/o	<i>Bi</i> w/o	SentiSys
Twitter	Acc (%) ↑	71.53	71.39	71.80	72.40
	F1 (%) ↑	69.68	69.37	70.42	70.67
Rest14	Acc (%) ↑	80.86	81.34	81.57	81.70
	F1 (%) ↑	72.19	71.70	73.35	73.63
Rest15	Acc (%) ↑	79.34	79.15	80.44	79.34
	F1 (%) ↑	60.78	60.06	61.58	61.99
Rest16	Acc (%) ↑	88.69	88.28	88.37	88.80
	F1 (%) ↑	66.64	67.03	69.20	68.96

* The values in gray cells indicate the maximum values.

weight matrix, and without the bidirectional GCN on the four benchmark datasets. The results show that the grammar dependency technique, which leads to a significant improvement in the model performance. The SentiSys model with dependencies outperformed the results without dependencies on all four datasets. Similarly, the results with the SDI edge weight matrix are better than the traditional edge weight matrix with the discrete number representations (i.e., 0 and 1) on all four datasets. It indicates that the edge weight matrix with SDI improves the performance. Additionally, the SentiSys model with the addition of Bi-GCN outperformed the results without

bi-direction on six of the eight measures. Overall, the syntactic dependency tree, the edge weight matrix, and Bi-GCN effectively improved the model performance.

5 Conclusion

This study enhanced the performance of aspect-based sentiment analysis systems, called SentiSys, by leveraging an edge-enhanced bidirectional GCN. The SentiSys model employed Bi-LSTM to acquire a deep understanding of the syntax and semantics within the text. The hidden layer features derived from Bi-LSTM are utilized for constructing syntactic dependency trees in the Bi-GCN. Furthermore, SentiSys incorporated a transformer encoder layer designed to extract global information from the text, enhancing SentiSys's ability to capture nuanced features in lengthy textual data. The dependency parsing layer within Bi-GCN extracts the graph structure based on the text's syntax, facilitating the learning of connections between aspects and context. To further refine the model, an aspect-specific masking layer is implemented, reducing redundant information in the GCN's hidden layer and ultimately improving the accuracy of the aspect-based sentiment analysis system. Finally, SentiSys combined the output from Bi-GCN and transformer, both of which serve as inputs for the sentiment classification classifier.

The SentiSys model faces two primary limitations: Firstly, the computation of the SDI, a noteworthy contribution of this study, was performed statistically. In future work, we aim to implement trainable vectors within the network to enrich the features associated with each edge. Secondly, the use of the transformer for feature enhancement prompts a discussion about the most effective stage for merging global information into the model. In future work, we aim to overcome the first limitation by enhancing the SentiSys model through the integration of trainable vectors within the network. This improvement is anticipated to facilitate a more dynamic and context-specific computation of the SDI, thereby enriching the features associated with each edge. Addressing the second limitation, we will delve into optimal strategies for effectively integrating global information into the model. We plan to explore techniques that maximize the transformer's impact at specific stages, ensuring its contributions are strategically incorporated to enhance overall classification accuracy.

References

- [1] Laskari, N.K., Sanampudi, S.K.: Aspect based sentiment analysis survey. *IOSR Journal of Computer Engineering (IOSR-JCE)* **18**(2), 24–28 (2016)
- [2] Bauman, K., Tuzhilin, A.: Know thy context: Parsing contextual information from user reviews for recommendation purposes. *Information Systems Research* **33**(1), 179–202 (2022)
- [3] Zhang, X., Li, C., Morimoto, Y.: A multi-factor approach for stock price prediction by using recurrent neural networks. *Bulletin of networking, computing, systems, and software* **8**(1), 9–13 (2019)

- [4] Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., Gomez, A.N., Kaiser, L., Polosukhin, I.: Attention is all you need. *Advances in Neural Information Processing Systems* **30** (2017)
- [5] Wang, Y., Huang, M., Zhu, X., Zhao, L.: Attention-based LSTM for aspect-level sentiment classification. In: *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, pp. 606–615 (2016)
- [6] Tang, D., Qin, B., Feng, X., Liu, T.: Effective LSTMs for target-dependent sentiment classification. *ArXiv Preprint ArXiv:1512.01100* (2015)
- [7] Chen, P., Sun, Z., Bing, L., Yang, W.: Recurrent attention network on memory for aspect sentiment analysis. In: *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, pp. 452–461 (2017)
- [8] Ma, D., Li, S., Zhang, X., Wang, H.: Interactive attention networks for aspect-level sentiment classification. *ArXiv Preprint ArXiv:1709.00893* (2017)
- [9] Fan, F., Feng, Y., Zhao, D.: Multi-grained attention network for aspect-level sentiment classification. In: *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pp. 3433–3442 (2018)
- [10] Rani, S., Bashir, A.K., Alhudaif, A., Koundal, D., Gunduz, E.S., *et al.*: An efficient CNN-LSTM model for sentiment detection in #blacklivesmatter. *Expert Systems with Applications* **193**, 116256 (2022)
- [11] Kipf, T.N., Welling, M.: Semi-supervised classification with graph convolutional networks. *ArXiv Preprint ArXiv:1609.02907* (2016)
- [12] Poria, S., Ofek, N., Gelbukh, A., Hussain, A., Rokach, L.: Dependency tree-based rules for concept-level aspect-based sentiment analysis. In: *Semantic Web Evaluation Challenge: SemWebEval 2014 at ESWC 2014, Anissaras, Crete, Greece, May 25-29, 2014, Revised Selected Papers*, pp. 41–47 (2014)
- [13] Zhou, J., Cui, G., Hu, S., Zhang, Z., Yang, C., Liu, Z., Wang, L., Li, C., Sun, M.: Graph neural networks: A review of methods and applications. *AI open* **1**, 57–81 (2020)
- [14] Meng, F., Feng, J., Yin, D., Chen, S., Hu, M.: A structure-enhanced graph convolutional network for sentiment analysis. In: *Findings of the Association for Computational Linguistics: EMNLP 2020*, pp. 586–595 (2020)
- [15] Chang, M., Yang, M., Jiang, Q., Xu, R.: Reducing spurious correlations for aspect-based sentiment analysis with variational information bottleneck and contrastive learning. *ArXiv Preprint ArXiv:2303.02846* (2023)
- [16] Scaria, K., Gupta, H., Sawant, S.A., Mishra, S., Baral, C.: Instructabsa:

Instruction learning for aspect based sentiment analysis. ArXiv Preprint ArXiv:2302.08624 (2023)

- [17] Li, C., Zheng, J., Ju, P., Morimoto, Y.: Senti-EGCN: An aspect-based sentiment analysis system using edge-enhanced graph convolutional networks. *Proceeding of 10th International Conference on Dependable Systems and Their Applications (DSA)*, 722–729 (2023)
- [18] Rao, D., Ravichandran, D.: Semi-supervised polarity lexicon induction. In: *Proceedings of the 12th Conference of the European Chapter of the ACL (EACL 2009)*, pp. 675–682 (2009)
- [19] Ding, X., Liu, B., Yu, P.S.: A holistic lexicon-based approach to opinion mining. In: *Proceedings of the 2008 International Conference on Web Search and Data Mining*, pp. 231–240 (2008)
- [20] Jiang, L., Yu, M., Zhou, M., Liu, X., Zhao, T.: Target-dependent twitter sentiment classification. In: *Proceedings of the 49th Annual Meeting of the Association for Computational Linguistics: Human Language Technologies*, pp. 151–160 (2011)
- [21] Cai, H., Tu, Y., Zhou, X., Yu, J., Xia, R.: Aspect-category based sentiment analysis with hierarchical graph convolutional network. In: *Proceedings of the 28th International Conference on Computational Linguistics*, pp. 833–843 (2020)
- [22] Manek, A.S., Shenoy, P.D., Mohan, M.C.: Aspect term extraction for sentiment analysis in large movie reviews using gini index feature selection method and SVM classifier. *World wide web* **20**, 135–154 (2017)
- [23] Zhu, P., Chen, Z., Zheng, H., Qian, T.: Aspect aware learning for aspect category sentiment analysis. *ACM Transactions on Knowledge Discovery from Data (TKDD)* **13**(6), 1–21 (2019)
- [24] Ma, D., Li, S., Wu, F., Xie, X., Wang, H.: Exploring sequence-to-sequence learning in aspect term extraction. In: *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pp. 3538–3547 (2019)
- [25] Kumar, S., Ghosal, T., Bharti, P.K., Ekbal, A.: Sharing is caring! joint multitask learning helps aspect-category extraction and sentiment detection in scientific peer reviews. In: *2021 ACM/IEEE Joint Conference on Digital Libraries (JCDL)*, pp. 270–273 (2021). IEEE
- [26] Phan, M.H., Ogunbona, P.O.: Modelling context and syntactical features for aspect-based sentiment analysis. In: *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pp. 3211–3220 (2020)
- [27] Liao, W., Zeng, B., Yin, X., Wei, P.: An improved aspect-category sentiment analysis model for text sentiment analysis based on RoBERTa. *Applied Intelligence*

51, 3522–3533 (2021)

- [28] Augustyniak, L., Kajdanowicz, T., Kazienko, P.: Comprehensive analysis of aspect term extraction methods using various text embeddings. *Computer Speech & Language* **69**, 101217 (2021)
- [29] Do, H.H., Prasad, P.W., Maag, A., Alsadoon, A.: Deep learning for aspect-based sentiment analysis: A comparative review. *Expert systems with applications* **118**, 272–299 (2019)
- [30] Li, C., He, M., Qaosar, M., Ahmed, S., Morimoto, Y.: Capturing temporal dynamics of users’ preferences from purchase history big data for recommendation system. In: *2018 IEEE International Conference on Big Data (Big Data)*, pp. 5372–5374 (2018)
- [31] Li, C., Yamanaka, C., Kaitoh, K., Yamanishi, Y.: Transformer-based objective-reinforced generative adversarial network to generate desired molecules. In: *Proceedings of the Thirty-First International Joint Conference on Artificial Intelligence, IJCAI-22*, pp. 3884–3890 (2022)
- [32] Li, C., Yamanishi, Y.: Spotgan: A reverse-transformer gan generates scaffold-constrained molecules with property optimization. In: *Joint European Conference on Machine Learning and Knowledge Discovery in Databases*, pp. 323–338 (2023). Springer
- [33] Li, C., Zheng, J., Okamura, H., Dohi, T.: Software reliability prediction through encoder-decoder recurrent neural networks. *International Journal of Mathematical, Engineering and Management Sciences* **7**(3), 325 (2022)
- [34] Tang, H., Li, C., Jiang, S., Yu, H., Kamei, S., Yamanishi, Y., Morimoto, Y.: Earlgan: An enhanced actor–critic reinforcement learning agent-driven gan for de novo drug design. *Pattern Recognition Letters* **175**, 45–51 (2023)
- [35] Tang, D., Qin, B., Feng, X., Liu, T.: Effective LSTMs for target-dependent sentiment classification. In: *Proceedings of the 26th International Conference on Computational Linguistics: Technical Papers*, pp. 3298–3307 (2016)
- [36] Li, X., Bing, L., Lam, W., Shi, B.: Transformation networks for target-oriented sentiment classification. In: *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics*, pp. 946–956 (2018)
- [37] Ma, Y., Peng, H., Cambria, E.: Targeted aspect-based sentiment analysis via embedding commonsense knowledge into an attentive LSTM. In: *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 32 (2018)
- [38] Chen, Z., Qian, T.: Relation-aware collaborative learning for unified aspect-based sentiment analysis. In: *Proceedings of the 58th Annual Meeting of the Association*

- for Computational Linguistics, pp. 3685–3694 (2020)
- [39] Wang, K., Shen, W., Yang, Y., Quan, X., Wang, R.: Relational graph attention network for aspect-based sentiment analysis. In: Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics, pp. 3229–3238 (2020)
- [40] Zhang, C., Li, Q., Song, D.: Aspect-based sentiment classification with aspect-specific graph convolutional networks. In: Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP), pp. 4568–4578 (2019)
- [41] Xiao, L., Hu, X., Chen, Y., Xue, Y., Gu, D., Chen, B., Zhang, T.: Targeted sentiment classification based on attentional encoding and graph convolutional networks. *Applied Sciences* **10**(3), 957 (2020)
- [42] Zhou, J., Huang, J.X., Hu, Q.V., He, L.: SK-GCN: Modeling syntax and knowledge via graph convolutional network for aspect-level sentiment classification. *Knowledge-Based Systems* **205**, 106292 (2020)
- [43] Zhao, M., Yang, J., Zhang, J., Wang, S.: Aggregated graph convolutional networks for aspect-based sentiment classification. *Information Sciences* **600**, 73–93 (2022)
- [44] Graves, A., Mohamed, A.-r., Hinton, G.: Speech recognition with deep recurrent neural networks. In: 2013 IEEE International Conference on Acoustics, Speech and Signal Processing, pp. 6645–6649 (2013)
- [45] Hu, Y., Shen, H., Liu, W., Min, F., Qiao, X., Jin, K.: A graph convolutional network with multiple dependency representations for relation extraction. *IEEE Access* **9**, 81575–81587 (2021)
- [46] Cortes, C., Mohri, M., Rostamizadeh, A.: L2 regularization for learning kernels. In: Proceedings of the Twenty-Fifth Conference on Uncertainty in Artificial Intelligence, pp. 109–116 (2009)
- [47] Dong, L., Wei, F., Tan, C., Tang, D., Zhou, M., Xu, K.: Adaptive recursive neural network for target-dependent twitter sentiment classification. In: Proceedings of the 52nd Annual Meeting of the Association for Computational Linguistics, pp. 49–54 (2014)
- [48] Pontiki, M., Galanis, D., Pavlopoulos, J., Papageorgiou, H., Androutsopoulos, I., Manandhar, S.: SemEval-2014 task 4: Aspect based sentiment analysis. In: Proceedings of the 8th International Workshop on Semantic Evaluation (SemEval 2014), pp. 27–35 (2014)
- [49] Pontiki, M., Galanis, D., Papageorgiou, H., Manandhar, S., Androutsopoulos, I.: Semeval-2015 task 12: Aspect based sentiment analysis. In: Proceedings of the

9th International Workshop on Semantic Evaluation (SemEval 2015), pp. 486–495 (2015)

- [50] Pontiki, M., Galanis, D., Papageorgiou, H., Androutsopoulos, I., Manandhar, S., Al-Smadi, M., Al-Ayyoub, M., Zhao, Y., Qin, B., De Clercq, O., *et al.*: Semeval-2016 task 5: Aspect based sentiment analysis. In: Proceedings of the Workshop on Semantic Evaluation (SemEval-2016), pp. 19–30 (2016)
- [51] Pennington, J., Socher, R., Manning, C.D.: Glove: Global vectors for word representation. In: Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP), pp. 1532–1543 (2014)
- [52] Zhang, Z.: Improved Adam optimizer for deep neural networks. In: 2018 IEEE/ACM 26th International Symposium on Quality of Service (IWQoS), pp. 1–2 (2018)
- [53] Tang, D., Qin, B., Liu, T.: Aspect level sentiment classification with deep memory network. ArXiv Preprint ArXiv:1605.08900 (2016)
- [54] Huang, B., Ou, Y., Carley, K.M.: Aspect level sentiment classification with attention-over-attention neural networks. In: Proceedings of the 11th International Conference on SBP-BRiMS 2018, pp. 197–206 (2018)
- [55] Wang, W., Pan, S.J., Dahlmeier, D., Xiao, X.: Coupled multi-layer attentions for co-extraction of aspect and opinion terms. In: Proceedings of the AAAI Conference on Artificial Intelligence, vol. 31 (2017)