

The Origin and Evolution of Information Handling

Amahury J. López-Díaz, Hiroki Sayama, and Carlos Gershenson

Department of Systems Science and Industrial Engineering, Binghamton University, 4400 Vestal Pkwy E, Binghamton, NY 13902, USA
alpez@binghamton.edu

Abstract

A major challenge when describing the origin of life is to explain “how instructional information control systems emerge naturally and spontaneously from mere molecular dynamics” (Walker and Davies, 2013). So far, no one has clarified how information control emerged *ab initio* and how primitive control mechanisms in life might have evolved, becoming increasingly refined. Based on recent experimental results showing that chemical computation does not require the presence of life-related chemistry (Dueñas-Díez and Pérez-Mercader, 2019), we elucidate the origin and early evolution of information handling by chemical automata, from information processing (computation) to information storage (memory), information transmission (communication) and later digital messengers, covering at the same time their syntactic, semantic and pragmatic flavors (Küppers, 1990). In contrast to other theories that assume the existence of initial complex structures, our representation starts from trivial self-replicators whose interaction leads to the arising of more powerful molecular machines. By describing precisely the primordial transitions in chemistry-based computation, our framework is capable of explaining the above-mentioned gaps and can be translated to other models of computation, which allow us to explore biological phenomena at multiple spatial and temporal scales. Being compatible with the free energy principle, we have developed a computational enactivist (Korbak, 2021) theoretical framework that could be able to describe from the origin of life to high-level cognition, as if it were a purely constructivist narrative (Stewart, 1995). At the end of our manuscript, we propose some ways to extend our ideas, including experimental validation of our theory (both *in vitro* and *in silico*).

Introduction

A few years ago it was shown that chemical reactions can be considered molecular recognition machines, which do not need biochemistry to mimic the behavior of recognizing automata belonging to different classes in Chomsky’s hierarchy (Dueñas-Díez and Pérez-Mercader, 2019). These experiments consisted of implementing strictly “one-pot-reactor” chemical realizations of automata. To enact a Finite-State Automaton (FSA), they used a simple bimolecular reaction in an aqueous medium. Such reaction was capable of recognizing a regular language. To render a one-

stack Push-Down Automaton (PDA) they employed a pH-reaction network, being capable of recognizing a context-free language. To bring about a Turing machine in the Linear Bounded Automaton (LBA) subclass, they used the Belousov-Zhabotinsky (BZ) reaction network. In this case, the BZ reaction was able to successfully recognize a context sensitive language. As the authors have pointed out in their conclusions, these experimental results enlighten “a path for the sequential/hierarchical origin of information handling in nature and the transition from non-biochemical to biochemical and extant life-related computation” (Dueñas-Díez and Pérez-Mercader, 2019).

Today there are several theoretical frameworks which describe life as information (Chaitin, 2012; Farnsworth et al., 2013; Marletto, 2015), but none of them has explained how information handling emerged from chemical interactions. By information handling, we mean information processing (computation), information storage (memory), and information transmission (communication). As will be discussed below, such information handling also includes the syntactic, semantic and pragmatic flavors of information. As was explained in Walker and Davies (2013), neither genetic-first nor metabolism-first approaches can describe completely the emergence of living organisms, as both viewpoints “neglect the active (algorithmic or instructional) and distributed nature of biological information” (Walker and Davies, 2013). In this way, “the real challenge of life’s origin is thus to explain how instructional information control systems emerge naturally and spontaneously from mere molecular dynamics” (Walker and Davies, 2013). Thus, we will explore an *information-first* approach to study the origins and evolution of life.

Leaving aside the philosophical question about the origin of information or the chicken-and-egg problem between information and matter/energy, it is possible to have an even deeper understanding of phenomena such as life or cognition if we assume that information is anything that an entity can sense, perceive, or observe (Gershenson, 2012). Thus, following the line of thought proposed by Pattee (1969), we can establish the primordial ecosystem as the first information-

containing architecture in our planet, whose primitive geochemical cycles gave way to a well-defined syntax—based on chemistry—spontaneously without the need for genetic instructions or initial metabolic control. This gave way to molecular Darwinism, a phenomenon that has been well documented (Küppers, 1990) and whose formalization was refined the last decade by Marletto (2015).

In this work, we describe precisely the primordial transitions in chemistry-based computation, from the appearance of trivial replicators—simple bimolecular reactions, equivalent to FSAs—in the environment up to the evolution of approximated chemical Turing machines—complex chemical networks, represented here by LBAs—and, eventually, to their combination into more powerful molecular computers, capable of performing Bayesian inference (Poole et al., 2017) and associative learning (Bartlett and Louapre, 2022), which could have led to the development of autonomy (Kirchhoff et al., 2018) and high-level cognition (Levin, 2019). For us, the presence of FSAs in the environment demarcates the origin of information processing (computation), PDAs define the appearance of information storage (memory) by the environment and LBAs bound the emergence of information transmission (communication) through different entities in the environment. This correspondence is depicted in Fig. 1.

By elucidating the origin and early evolution of information handling by chemical automata, in the next three sections we explain how information control emerged *ab initio* and how primitive control mechanisms in life might have evolved. We do not assume the existence of initial complex structures and our narrative can be translated to other models of computation, which in future work would allow us to explore biological phenomena at multiple spatial and temporal scales.

Information Processing

As has been suggested by Chaitin (2012), thinking of our planet as a big parallel, quasi-universal Turing machine capable of simulating a huge variety of programs can give us novel insights about evolution. Here, the term “quasi-universal” is due to the fact that “real” universal Turing machines are pure abstractions which need an infinite memory tape. Natural resources are finite, and this is a first limitation for life to emerge. Inspired by von Neumann (1966) and extrapolating the ideas suggested in Hernández-Orozco et al. (2018), we propose that the first organisms on the planet are described as primitive automata which were assembled and executed by these primeval habitats.

Recently, it was shown that “when random, non self-replicating programs are placed in an environment lacking any explicit fitness landscape, self-replicators tend to arise” (Alakuijala et al., 2024). Thus, given a set of primordial geophysical and geochemical constraints—a primeval *ecosystem language* (Pattee, 1969)—we can glimpse the

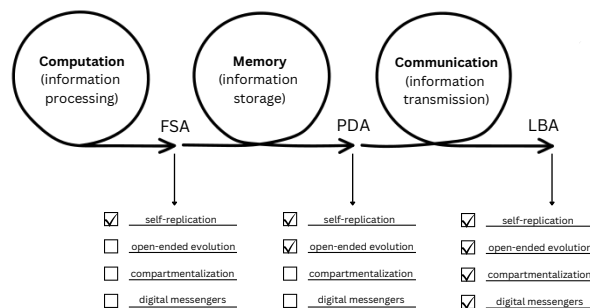


Figure 1: Relationship between classes of automata and the origin of the different types of information handling. The large circles represent the three forms of information handling: computation (information processing), memory (information storage), and communication (information transmission). FSAs allow the environment to process information. PDAs permit a primitive form of memory capacity by the environment. LBAs empower communication between different entities in the environment. For each class of automata we checklist some important properties that they grant to the ecosystem given our framework.

appearance of simple bimolecular reactions that later became autocatalytic, being capable of self-replication. Here is important to note that self-replication differs from self-reproduction in the existence of a copier C acting on raw material (Szathmáry, 1995). As has been well argued by Marletto (2015): “for looser replicators, such as crystals, or short RNA strands and autocatalytic cycles involved in the origin of life, the copier C is null, i.e. implicit in the laws of physics”. Although it has been speculated that the simple interaction between self-replicators and the environment leads to open-ended evolution, for us this is not a prerequisite.

These trivial replicators, as Walker and Davies (2013) call them, are capable of recognizing regular languages, a task that does not involve counting or memory (Dueñas-Díez and Pérez-Mercader, 2019), kicking off the origin of information processing. In addition, they do not require a “vehicle”—in the von Neumann sense (von Neumann, 1966)—so we can imagine the architecture of these earliest chemical machines as being represented by autocatalytic bimolecular chemical reactions, which under our framework are single FSAs (Dueñas-Díez and Pérez-Mercader, 2019), capable of constructing themselves using natural resources and a simple description encoded in the environment. Just as L -systems, it is clear that the algorithmic information of these simple architectures is one that may be specified by an algorithm containing far fewer bits than the structure it describes.

A general concern up to this point is the fragility of information. How can we assert that information will be conserved through these autocatalytic bimolecular reactions?

First of all, even in a primordial stage, the nature of the geophysical-chemical processes is cyclical. This fact ensures that there is a constant energized, non-equilibrium, dynamic, cyclic exchange between the environment and the self-replicators. Under this condition we can talk about dynamic kinetic stability (DKS), a kinetic form of stability “associated with entities able to make copies of themselves at a rate that results in a non-equilibrium steady-state population of replicating entities being maintained over time—persistence through self-replication” (Pascal and Pross, 2015). Given that DKS guides self-replication towards a more robust replication state (Pascal et al., 2023) and increasingly complex dynamics continue to emerge following the rise of self-replicators (Alakuijala et al., 2024), there must be a preservation of the encoded information in the environment, giving way to molecular Darwinism and at the same time abolishing the deterioration of information.

At this point, it is important to note that the different dimensions of the concept of information—syntactic, semantic and pragmatic—cannot be separated from each other (Küppers, 1990). Although the existence of semantic (or pragmatic) information in such a primordial state of life may seem far-fetched, it must first be remembered that meaning is a multi-scale phenomenon (Fields and Levin, 2020). According to Küppers (1990): “the protosemantics of biological information is clearly defined by the ability of the biological information carrier to reproduce as quickly as possible while maintaining high accuracy and stability”, which is fully in line with our hypothesis. In fact, it has been shown that it is possible to approximate Bayesian inference using simple bimolecular reactions (Poole et al., 2017), which could have promoted the decoding of symbol-to-meaning information and subsequently developed semantic closure (Pattee, 1995).

Information Storage

So far, we have a world in which bimolecular reactions—represented here by FSAs—coexist. These are capable of computation and self-replication but have no vehicles or memory. The diversity of molecules in the environment allows them to interact and, if possible, bind with each other. This generates systems of multiple reactions that are interconnected through common intermediate chemical species. Under this panorama, some chemical intermediates are acting as the product of one reaction and as reactant of another one, forming networks of even more complex chemical reactions. This dynamical process is identical to the premise of autocatalysis and is essentially equivalent to the *push/pop* duality in one-stack PDAs described in Dueñas-Díez and Pérez-Mercader (2019). Note that the transition from FSAs (simple bimolecular reactions) to one-stack PDAs (networks of chemical reactions) demarcates the appearance of a primitive information storage (memory) by the environment, because it allows for the recognition of more complex se-

quences of information (Hopcroft et al., 2001) and thus it empowers a higher evolutionary robustness of such information in the face of changing environmental conditions (Walker and Davies, 2013).

A widespread misconception in literature is the idea that computation and construction are two different phenomena. We argue that this is due to the fact that in his seminal work (von Neumann, 1966), John von Neumann did not clarify the relationship between his universal constructor and the universal Turing machine proposed decades earlier by Turing (1936). Nevertheless, by Kleene’s second recursion theorem we know that Turing machines can obtain their own description and then go on to compute with it (Sipser, 1996). Since the recursion theorem shows how machines can reproduce themselves, both computation and construction are two sides of the same coin. In Sayama (2008) one of us declared that the difference between the replicating programs of recursion theory and the self-replicating constructors in (von Neumann, 1966) is that the latter never halt. However, this is not stated anywhere in recursion theory (Sipser, 1996). In fact, one application of the recursion theorem is quines, computer programs that receive no input and produce a copy of their own source code as their only output. If we run a quine in an infinite loop, it will never halt, and since the recursion theorem is independent of the computational substrate (chemical reactions in our case), we claim that construction is a corollary of recursion theory.

Once we have explained the above, it is important to note that in this context undecidability is still synonymous with self-replication (Sayama, 2008), since it is in this indeterminate state where we will be certain that the construction process will continue. Given that the environment—described here as a quasi-universal computer compartment—“is constantly approximating solutions to the adaptation problem by means of survivability” (Hernández-Orozco et al., 2018), nature pursues of the busy beaver values (longest-running automata) in the environment, which is identical to the search for the longest-surviving organisms. At the level of the automata (a chemical network), when these attempt to execute the instruction of being the longest-running machine, it produces a nested loop of computation which in terms of construction translates as self-replication (Sayama, 2008). This process is summarized in Fig. 2.

From a von Neumann mindset, the one-stack PDA is now some kind of primitive constructor, because we have a chemical network that might be able to reproduce itself including the components that conform it. At this particular evolutionary stage, nature is looking for which PDA will be the longest running machine, which is interchangeable to find the most robust primitive information storage for the environment. This is equivalent to computing the largest number of steps taken by an n -state, m -symbol machine started on an initially non-blank tape before halting. This is of course an undecidable problem comparable to a busy beaver game

(Rado, 1962). Thus, up to this computational level, self-replication can be seen as the result of nature trying to solve a PDA-problem equivalent to the Halting problem (Sayama, 2008).

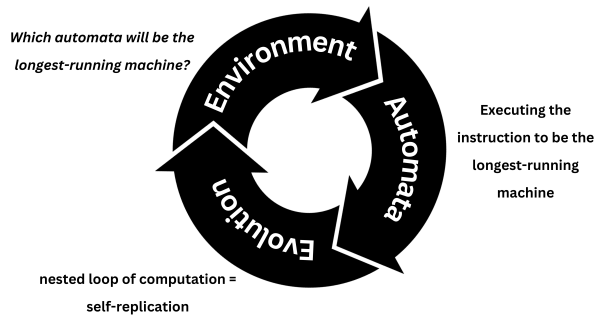


Figure 2: Explanation of PDA and LBA self-replication. First, the environment—described as a quasi-universal computer compartment—approximates solutions to the adaptation problem by means of survivability, which guides the search for the longest-surviving organisms. Next, the automata (a chemical network) attempt to execute the instruction of being the longest-running machine. This results in a nested loop of computation which in terms of construction translates as self-replication (Sayama, 2008). Once the automata self-replicate, the cycle repeats. Undecidability explicitly leads us to have open-ended evolution. (Hernández-Orozco et al., 2018).

The undecidability behind self-replication lead us explicitly to open-ended evolution (OEE) as an output of evolution (Pattee and Sayama, 2019), and as Hernández-Orozco et al. (2018) has pointed out, systems that exhibit strong OEE must be undecidable. The PDA allows the ecosystem to store a more complex set of instructions—including the components of the chemical network that makes up the PDA itself—in a delocalized way. Thus, in this evolutionary phase the system is capable of developing extra functions, which gives to the PDA the ability of self-preserving behavior and propagate mutations to its offspring. This is consistent with the fact that a simple catalytic reaction network may be able of encoding correlations in environmental variables, evolving some kind of associative learning (Bartlett and Louapre, 2022). Following the law of requisite variety (Ashby, 1956), these chemical networks evolve concurrently to the environment in which they were developed, producing more semantic information which translates as a primitive degree of agency (Kolchinsky and Wolpert, 2018). In addition, observe that the transition between FSAs and one-stack PDAs is compatible with ideas related to the appearance composites (Segré and Lancet, 2000; Hunding et al., 2006) and their maintenance (Markovitch and Lancet, 2012).

At this stage we can talk about *ante-organisms*, life-like

systems that are capable of self-preserving behaviour (Egbert et al., 2023). Up to this point we have a resource-limited ecosystem inhabited by chemical networks that compete, self-replicate and mutate—through small variations in their composition—in such a way that each kind of replicator produce at least one viable offspring, on average, per lifetime. Therefore, we can claim that so far, our *ante-organisms* are capable of primitive evolution (Marletto, 2015), which is a kind of natural selection with limited inheritance caused by low robustness and accuracy in replicating the information stored in the chemical network by the environment. However, according to Walker and Davies (2013): “analogue-only systems are not as versatile or as robust as analogue systems with digital information control, and as such, may probably have a limited evolutionary capacity (Vasas et al., 2010)”.

Information Transmission

The next level of computational complexity are Turing machines, a class of automaton equivalent to a two or more stacks PDA (Hopcroft et al., 2001). Following our train of thought, there are two main, non-exclusive ways for obtaining an LBA. The first one is through the complexification of one initial PDA. Since at this stage the entities are able to propagate mutations across their offspring—represented by variations in the structures of the chemical networks—, it is possible that they can become more and more complex, in a way that they can develop two or more *push/pop* dualities. The second way is essentially through the coupling of two or more PDAs. Our model does not exclude the coexistence of multiple chemical automata with different degrees of complexity. Given an environment with finite resources promoting survivability, these different organisms can cooperate to persist. In both cases we obtain even more complex chemical networks that allow the identification of more abstract sequences of information, resulting in an even more sophisticated information storage system on the part of the environment.

Because chemical automata need to communicate in some way in order to cooperate, this era sets in motion the transmission of information. Given a set of selfish agents minimizing their stress (surprise) and competing for information, it is possible to develop cooperative homeostatic loops which improve the predictive capabilities of the entities and gives rise to functional relationships (Levin, 2019; Heins et al., 2024). Such infotaxis may have resulted in some kind of compartmentalization, in the sense that now the chemical constructors can be made of at least two chemical networks, increasing their functionality and robustness. Notice that at this stage the abstract and non-physical systemic entities effectively become causal agents capable of manipulating more and more of its material substrate (Auletta et al., 2008). Following the mindset of Walker and Davies (2013), we are having a transition from trivial to non-trivial repli-

cators, where the latter requires an algorithm, or instruction set, of complexity comparable to the system it describes (or creates). In the same way, we can imagine this metamorphosis from reactive to representational systems (Zenil et al., 2012).

Since undecidability is plausible in the computational classes of PDA and LBA (Rado, 1962), the entities can still self-replicate by the mechanism previously described (see Fig. 2). However, they are not yet capable of genetic-like Darwinian evolution, so we still have *ante-organisms* (Egbert et al., 2023). In this world of FSAs, PDAs, and LBAs interacting in a dynamical environment, the appearance of digital messengers is not totally unlikely since these structures should have had enough time to emerge as the product of some synergistic process, in much the same way that our formal rules of syntax and dictionaries were condensed from the functional usage of primitive symbols in a complex environment (Pattee, 1969). Along these lines, digitization would have arisen as a natural outcome of the processes in reaction networks that had once been primarily analog. This fact helped automata to communicate more efficiently among them and at the same time with their offspring. Certainly, this process could have taken a long time to happen, such that digital life forms may be “the only systems that survive in the long-run and are thus the only remaining product of the processes that led to life” (Walker and Davies, 2013).

The appearance of digital messengers could be seen as the implementation of descriptions that can (or cannot) interact with the primitive chemical constructors to be constructed or copied. Of course, this is not a necessary condition for life, and it will depend on which architecture we are talking about. For instance, nearly all biochemical interactions in the cell handle information in an analog format (Walker and Davies, 2013). Now that we have a “vehicle” in the von Neumann sense, we can talk about self-reproduction (Marletto, 2015) and *proto-organisms* (Egbert et al., 2023), entities capable of gene-based Darwinian evolution, but possibly lacking some features found in all modern organisms.

Discussion

Based on the experimental results obtained in Dueñas-Díez and Pérez-Mercader (2019), our theory explains the origin and early evolution of information handling by matter in proto-habitable environments. It is very important to mention that, although we draw inspiration from that paper, our work does not claim that the chemical reactions proposed by Dueñas-Díez and Pérez-Mercader (2019) are the only path to life’s computation. On the contrary, our arguments imply that the origin and evolution of information handling is independent of the substrate, so that the existence of a specific chemical reaction is not necessary. The real challenge of the origin of life is not the existence of such chemical computation, but reliable computation capable of permeating the

protobiosphere. Particularly, an extension of the framework proposed by Chollet (2019) seems suitable to quantify how resilient the chemical entities proposed here are in the face of a changing environment.

In order for there to be such automata capable of interpreting and storing the information contained in the environment, there must first be a primordial language (conformed by chemicals) in the environment that allows the realization of such automata. Therefore, our vision is consistent with the fact that symbol grounding precedes interpretation (Pattee, 2021). We have used many computational concepts when describing our ideas, however, our theory points to the fact that life and cognition are two intertwined, parallel phenomena. As has been shown in Stewart (1995), it is possible to describe from life’s origin to high-level cognition using purely a constructivist description. Being compatible with the free energy principle, in this paper we have developed a computational enactivist (Korbak, 2021) theoretical framework capable of being as explanatory as a strictly constructivist approach.

To justify this last assertion, let us take into consideration that the attention of our explanation it is confined to unicellular organisms reproducing asexually in a non-biological environment, but our framework suggests that the combination of chemical automata into nested, more powerful molecular processors would lead us eventually to the advent of *organisms* (Egbert et al., 2023), or “Life as we know it” (Friston, 2013). In this way, we could extend our ideas to other temporal and spatial biological scales, where molecular machines are exponentially more complex, allowing a Bayesian inference (Poole et al., 2017) that would later reach different degrees of autonomy as an evolutionary advantage (Kirchhoff et al., 2018). Additionally, we could describe and analyze the evolution of open-endedness (Pattee and Sayama, 2019).

Since our theory is compatible with the von Neumann’s replicator-vehicle logic (von Neumann, 1966), it is possible under *no-design laws* (Marletto, 2015), provided that the latter permit information media and enough generic resources. In this way, we just have proposed the path for the sequential/hierarchical origin of information handling in nature and the transition from non-biochemical to biochemical and extant life-related computation. Notwithstanding, even though our narrative describes how the primitive information control mechanisms in life might have evolved, we do not claim from what point life has emerged. Essentially, depending on how we define life (Benner, 2010), we could affirm that life has started from some arbitrary point in our hypothetical description. Since we are working from a gradualist perspective of life, this is not problematic (Küppers, 1990). In fact, the possibility of characterizing the different levels of complexification in life may well be related to the major transitions in evolution (Szathmáry and Smith, 1995; West et al., 2015).

Following the last paragraph, we can arbitrarily consider that *proto-* or even *ante-organisms*—distinguished in Egbert et al. (2023)—are already alive. In fact, someone could hold that life emerged together with natural selection, or compartmentation, or agency, or any other criterium, and then we agree with Walker and Davies (2013) when they stated that a precise point of transition from non-life to life may actually be undecidable in the logical sense. Finalizing this paragraph, at different stages of the universe, multiple places in the cosmos can serve as the quasi-universal Turing machine mentioned here. Therefore, our model is agnostic for the period life could have emerged in the universe (Loeb, 2014; Pearce et al., 2018), as well with where life can occur (Abbot and Switzer, 2011; Ballesteros et al., 2019).

In this fashion, with our model, we have solved the problem faced by Turing when trying to decompose and store the algorithm to build an organism in a simple sequential digital structure to be read-out by an appropriate machine (Brenner, 2012). Under our portrayal, the algorithm for building an organism is not only stored in a linear digital sequence (tape), but also in the current state of the entire system, which is clearly inspired by von Neumann (1966). That is, we have blurred the distinction between information storage (memory) and information processing (computation) within primitive von Neumann architectures, just as life does. Even though our ideas answer the question of how information control emerged *ab initio*, as well as how primitive control mechanisms might evolve and become increasingly refined after an *algorithmic takeover* has occurred (Walker and Davies, 2013), they can be extended in different ways and some of them are mentioned below.

The main advantage of our theory is illustrated in Fig. 3. There are well-known equivalences between different models of computation (Moore and Mertens, 2011), which means that our approach can be described not only in terms of sequential models (automata), but also in terms of functional and concurrent models of computation, such as λ -calculus or logic gates. The possibility of describing any algorithm by means of a Turing machine (Church-Turing thesis) together with the equivalences between the different models of computation, makes it feasible that our ideas allow us to portray life not only in a primordial way but at other evolutionary stages. For instance, here we did not explore the thermodynamic aspects of life, but if living systems are qualitatively (and quantitatively) well described by the framework here presented, we can use different models of computation to describe the thermodynamics of different facets of life (Zenil et al., 2012; Farnsworth et al., 2013; Kolchinsky and Wolpert, 2020; Wolpert and Kolchinsky, 2020). Similarly, since it is affordable to characterize von Neumann’s replicator-vehicle logic at the quantum level (Marletto, 2015), our model could explore the microscopic aspects in the origin and evolution of life (Abbott et al., 2008).

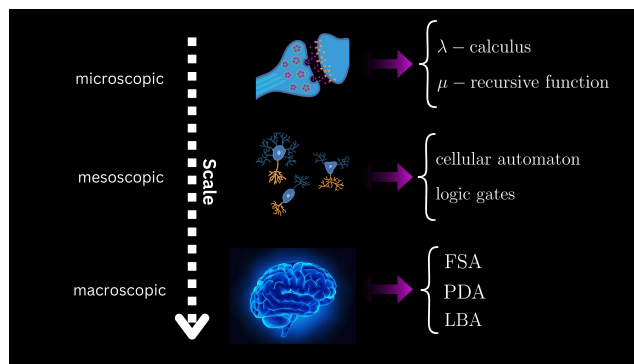


Figure 3: Main advantage of our narrative outlined. If any real-world computation can be translated into an equivalent computation involving a Turing machine, we can use different models of computation to describe different biological phenomena. For example, we could explain the molecular processes of the cell using some functional model such as lambda calculus or general recursive functions. Similarly, we can resort to recurrent models such as cellular automata or logic gates to describe the interaction between cells. At the holobiont level we can use sequential models (automata, like the ones described here) to characterize the behavior of more complex organisms. This would allow us to study life at different nested, spatiotemporal layers and is in agreement with the idea that there is no privileged level of causation (Noble, 2012).

In order to describe life as information at other spatial and temporal scales, we can integrate our narrative in other theses such as Farnsworth et al. (2013), where persistence, context, and effective information play an important role to describe life at all levels from a unifying outlook. Given that under our perspective life is describable at all extents, there should not be privileged level of causation (Noble, 2012). This opens the possibility to characterize phenomena like downward causation (Flack, 2017) from our theoretical framework, and even if the informational-causal narrative is accepted as a mere *façon de parler*, our framework is still compatible with theories where only material objects enjoy true causal efficacy (Walker et al., 2012).

Future work

For the purpose of testing our hypotheses and not to leave them as an speculative model (Pattee, 2021), we can appeal to experiments *in vitro* and *in silico*. Of the many approaches that exist in synthetic biology (Hanczyc, 2020), protocells offers a comprehensive resource on current attempts to create simple forms of life from scratch in the laboratory (Deamer, 2008). In fact, using the BZ reaction (equivalent to a LBA) it is possible to devise active synthetic polymer vesicles, which self-reproduce (Bastakoti and Perez-Mercader, 2017) and evolve primitively (Katla et al., 2023). Is it pos-

sible to synthesize vesicles using a pH chemical reaction (equivalent to a PDA) or a precipitation reaction (equivalent to a FSA)? If yes, what are the abilities of these new vesicles? If not, what type of structures can we synthesize and what are their abilities? The same research group has obtained three reaction-diffusion equations that are capable of representing information processing, metabolism, self-replication and evolution (Muñuzuri and Pérez-Mercader, 2022). In fact, the solutions to these equations show the phenomenology of a generic living system. To obtain these equations the authors implemented each of the four properties (information processing, metabolism, self-replication and evolution) one by one. We can eliminate any of these assumptions, modifying the equations. For example, we can start by a set of equations which only allow information processing and self-replication. What kind of phenomenology is obtained by solving this new system of equations? Are these results consistent with our theory? The answer to these questions can tell us how valid are our ideas.

Recently, a new relational biology model which looks for the minimal prototype for organized systems has been developed (Márquez-Zacarias, 2024). This theoretical framework allows to generate a taxonomy for the different types of organization observed, and in comparison to other theories, it does not presuppose the existence of a boundary between the environment and the organism, nor the extant of complex building blocks *ab initio*. To perform simulations in this framework, we need as input a set of entities and relations. We can use as input the chemical components and reactions proposed in Dueñas-Díez and Pérez-Mercader (2019) for every class of chemical automata and observe which types of minimal paths of organization are formed. This is something similar to the methodology proposed by Fontana and Buss (1994), which was refined later by Szathmáry (1995) and recently inspired the work by Alakuijala et al. (2024). Are these organizations able to self-reproduce, compute, have memory, or communicate? Again, the answer to this question can tell us how valid are our ideas.

Finally, as we have observed, there is a parallelism between the classes of chemical automata in Dueñas-Díez and Pérez-Mercader (2019) and the classification of entities characterized in Egbert et al. (2023). Table 1 summarizes this correspondence. At every stage, our description of how the evolutionary units evolve allows them to select and/or modifying their environment using some form of basic replication. The viability-based behaviour proposed in Egbert et al. (2023) increases the feasibility, diversity, and robustness of biological entities, “allowing for a wider variety of organismic forms capable of persisting in a wider variety of environments” (Egbert et al., 2023), and it is also easy for nature to implement. Together with our description of how information handling appeared, viability-based behaviour it is a good candidate to explore how agency has emerged and evolved, or to model scale-free cognition

(Levin, 2019). In this way, instead of creating new theoretical frameworks and computational tools to study phenomena such as agency, life, intelligence, identity, and cognition, we promote the unification of what already exists by looking for global equivalences among different theories.

Types of organisms	Corresponding automata
Ante-organisms	PDA
Proto-organisms	LBA with digital messengers
Organisms	More complex nested automata

Table 1: Resemblance between the classification of organisms proposed by Egbert et al. (2023) and their respective characterization under our framework in terms of automata.

Acknowledgements

The authors acknowledge Juan Pérez-Mercader, Luis M. Rocha, David Wolpert and three anonymous reviewers for their valuable comments.

References

- Abbot, D. S. and Switzer, E. R. (2011). The Steppenwolf: a proposal for a habitable planet in interstellar space. *The Astrophysical Journal Letters*, 735(2):L27.
- Abbott, D., Davies, P. C., and Pati, A. K. (2008). *Quantum aspects of life*. World Scientific.
- Alakuijala, J., Evans, J., Laurie, B., Mordvintsev, A., Niklasson, E., Randazzo, E., Versari, L., et al. (2024). Computational life: How well-formed, self-replicating programs emerge from simple interaction. *arXiv preprint arXiv:2406.19108*.
- Ashby, W. R. (1956). *An introduction to cybernetics*. Chapman & Hall: Milton Keynes.
- Auletta, G., Ellis, G. F., and Jaeger, L. (2008). Top-down causation by information control: from a philosophical problem to a scientific research programme. *Journal of the Royal Society Interface*, 5(27):1159–1172.
- Ballesteros, F., Fernández-Soto, A., and Martínez, V. J. (2019). Diving into exoplanets: are water seas the most common? *Astrobiology*, 19(5):642–654.
- Bartlett, S. and Louapre, D. (2022). Provenance of life: Chemical autonomous agents surviving through associative learning. *Physical Review E*, 106(3):034401.
- Bastakoti, B. P. and Perez-Mercader, J. (2017). Facile one-pot synthesis of functional giant polymeric vesicles controlled by oscillatory chemistry. *Angewandte Chemie International Edition*, 56(40):12086–12091.
- Benner, S. A. (2010). Defining life. *Astrobiology*, 10(10):1021–1030.
- Brenner, S. (2012). Life’s code script. *Nature*, 482(7386):461–461.
- Chaitin, G. (2012). Life as evolving software. *World Scientific: Singapore*.

- Chollet, F. (2019). On the measure of intelligence. *arXiv preprint arXiv:1911.01547*.
- Deamer, D. (2008). Experimental approaches to fabricating artificial cellular life. *Protocells: Bridging Nonliving and Living Matter*.
- Dueñas-Díez, M. and Pérez-Mercader, J. (2019). How chemistry computes: Language recognition by non-biochemical chemical automata. from finite automata to Turing machines. *Iscience*, 19:514–526.
- Egbert, M., Hanczyc, M. M., Harvey, I., Virgo, N., Parke, E. C., Froese, T., Sayama, H., Penn, A. S., and Bartlett, S. (2023). Behaviour and the origin of organisms. *Origins of Life and Evolution of Biospheres*, pages 1–26.
- Farnsworth, K. D., Nelson, J., and Gershenson, C. (2013). Living is information processing: from molecules to global systems. *Acta biotheoretica*, 61:203–222.
- Fields, C. and Levin, M. (2020). How do living systems create meaning? *Philosophies*, 5(4):36.
- Flack, J. C. (2017). Coarse-graining as a downward causation mechanism. *Philosophical Transactions of the Royal Society A: Mathematical, Physical and Engineering Sciences*, 375(2109):20160338.
- Fontana, W. and Buss, L. W. (1994). What would be conserved if “the tape were played twice”? *Proceedings of the National Academy of Sciences*, 91(2):757–761.
- Friston, K. (2013). Life as we know it. *Journal of the Royal Society Interface*, 10(86):20130475.
- Gershenson, C. (2012). The world as evolving information. In *Unifying Themes in Complex Systems VII: Proceedings of the Seventh International Conference on Complex Systems*, pages 100–115. Springer.
- Hanczyc, M. M. (2020). Engineering life: A review of synthetic biology. *Artificial life*, 26(2):260–273.
- Heins, C., Millidge, B., Da Costa, L., Mann, R. P., Friston, K. J., and Couzin, I. D. (2024). Collective behavior from surprise minimization. *Proceedings of the National Academy of Sciences*, 121(17):e2320239121.
- Hernández-Orozco, S., Hernández-Quiroz, F., and Zenil, H. (2018). Undecidability and irreducibility conditions for open-ended evolution and emergence. *Artificial Life*, 24(1):56–70.
- Hopcroft, J. E., Motwani, R., and Ullman, J. D. (2001). Introduction to automata theory, languages, and computation. *Acm Sigact News*, 32(1):60–65.
- Hunding, A., Kepes, F., Lancet, D., Minsky, A., Norris, V., Raine, D., Sriram, K., and Root-Bernstein, R. (2006). Compositional complementarity and prebiotic ecology in the origin of life. *Bioessays*, 28(4):399–412.
- Katla, S. K., Lin, C., and Pérez-Mercader, J. (2023). Competitive exclusion principle among synthetic non-biochemical protocells. *Cell Reports Physical Science*, 4(4).
- Kirchhoff, M., Parr, T., Palacios, E., Friston, K., and Kiverstein, J. (2018). The markov blankets of life: autonomy, active inference and the free energy principle. *Journal of The royal society interface*, 15(138):20170792.
- Kolchinsky, A. and Wolpert, D. H. (2018). Semantic information, autonomous agency and non-equilibrium statistical physics. *Interface focus*, 8(6):20180041.
- Kolchinsky, A. and Wolpert, D. H. (2020). Thermodynamic costs of Turing machines. *Physical Review Research*, 2(3):033312.
- Korbak, T. (2021). Computational enactivism under the free energy principle. *Synthese*, 198(3):2743–2763.
- Küppers, B.-O. (1990). *Information and the Origin of Life*. Mit Press.
- Levin, M. (2019). The computational boundary of a “self”: developmental bioelectricity drives multicellularity and scale-free cognition. *Frontiers in psychology*, 10:493866.
- Loeb, A. (2014). The habitable epoch of the early universe. *International Journal of Astrobiology*, 13(4):337–339.
- Markovitch, O. and Lancet, D. (2012). Excess mutual catalysis is required for effective evolvability. *Artificial life*, 18(3):243–266.
- Marletto, C. (2015). Constructor theory of life. *Journal of The Royal Society Interface*, 12(104):20141226.
- Moore, C. and Mertens, S. (2011). *The nature of computation*. OUP Oxford.
- Muñuzuri, A. P. and Pérez-Mercader, J. (2022). Unified representation of life’s basic properties by a 3-species stochastic cubic autocatalytic reaction-diffusion system of equations. *Physics of Life Reviews*, 41:64–83.
- Márquez-Zacarías, P. (2024). Lessons from life itself: Relational models of complexity and self-organization. <https://vimeo.com/910918333>. CoCo Seminar at February 7, SUNY Binghamton. Accessed: 2024–13-03.
- Noble, D. (2012). A theory of biological relativity: no privileged level of causation. *Interface focus*, 2(1):55–64.
- Pascal, R. and Pross, A. (2015). Stability and its manifestation in the chemical and biological worlds. *Chemical Communications*, 51(90):16160–16165.
- Pascal, R., Pross, A., Corning, P., Kauffman, S., Noble, D., Shapiro, J., Vane-Wright, R., and Pross, A. (2023). Toward the physicalization of biology: seeking the chemical origin of cognition. *Evolution “On Purpose”: Teleonomy in Living Systems; Vienna Series Theoretical Biology*, pages 257–274.
- Pattee, H. (2021). Symbol grounding precedes interpretation. *Biosemitotics*, pages 1–8.
- Pattee, H. H. (1969). How does a molecule become a message? *Developmental Biology Supplement*, 3:1–16.
- Pattee, H. H. (1995). Evolving self-reference: matter, symbols, and semantic closure. *Communication and Cognition—Artificial Intelligence*, 12:1–2.

- Pattee, H. H. and Sayama, H. (2019). Evolved open-endedness, not open-ended evolution. *Artificial Life*, 25(1):4–8.
- Pearce, B. K., Tupper, A. S., Pudritz, R. E., and Higgs, P. G. (2018). Constraining the time interval for the origin of life on earth. *Astrobiology*, 18(3):343–364.
- Poole, W., Ortiz-Munoz, A., Behera, A., Jones, N. S., Ouldrige, T. E., Winfree, E., and Gopalkrishnan, M. (2017). Chemical boltzmann machines. In *DNA Computing and Molecular Programming: 23rd International Conference, DNA 23, Austin, TX, USA, September 24–28, 2017, Proceedings 23*, pages 210–231. Springer.
- Rado, T. (1962). On non-computable functions. *Bell System Technical Journal*, 41(3):877–884.
- Sayama, H. (2008). Construction theory, self-replication, and the halting problem. *Complexity*, 13(5):16–22.
- Segré, D. and Lancet, D. (2000). Composing life. *EMBO reports*, 1(3):217–222.
- Sipser, M. (1996). Introduction to the theory of computation. *ACM Sigact News*, 27(1):27–29.
- Stewart, J. (1995). Cognition = Life: Implications for higher-level cognition. *Behavioural processes*, 35(1-3):311–326.
- Szathmáry, E. (1995). A classification of replicators and lambda-calculus models of biological organization. *Proceedings of the Royal Society of London. Series B: Biological Sciences*, 260(1359):279–286.
- Szathmáry, E. and Smith, J. M. (1995). The major evolutionary transitions. *Nature*, 374(6519):227–232.
- Turing, A. (1936). On the computable numbers with an application to the entscheidungs. problem, *Proc. London Math. Soc., Ser.*, 2(42):230–265.
- Vasas, V., Szathmáry, E., and Santos, M. (2010). Lack of evolvability in self-sustaining autocatalytic networks constraints metabolism-first scenarios for the origin of life. *Proceedings of the National Academy of Sciences*, 107(4):1470–1475.
- von Neumann, J. (1966). Theory of self-reproducing automata. *Edited by Arthur W. Burks*.
- Walker, S. I., Cisneros, L., and Davies, P. C. (2012). Evolutionary transitions and top-down causation. *arXiv preprint arXiv:1207.4808*.
- Walker, S. I. and Davies, P. C. (2013). The algorithmic origins of life. *Journal of the Royal Society Interface*, 10(79):20120869.
- West, S. A., Fisher, R. M., Gardner, A., and Kiers, E. T. (2015). Major evolutionary transitions in individuality. *Proceedings of the National Academy of Sciences*, 112(33):10112–10119.
- Wolpert, D. H. and Kolchinsky, A. (2020). Thermodynamics of computing with circuits. *New Journal of Physics*, 22(6):063047.
- Zenil, H., Gershenson, C., Marshall, J. A., and Rosenblueth, D. A. (2012). Life as thermodynamic evidence of algorithmic structure in natural environments. *Entropy*, 14(11):2173–2191.