

# TRAJDELETER: Enabling Trajectory Forgetting in Offline Reinforcement Learning Agents

Chen Gong\*, Kecen Li\*<sup>†</sup>, Jin Yao\*, and Tianhao Wang\*

\*University of Virginia

<sup>†</sup>Chinese Academy of Sciences

**Abstract**—Reinforcement learning (RL) trains an agent from experiences interacting with the environment. In scenarios where online interactions are impractical, offline RL, which trains the agent using pre-collected datasets, has become popular. While this new paradigm presents remarkable effectiveness across various real-world domains, like healthcare and energy management, there is a growing demand to enable agents to rapidly and completely eliminate the influence of specific trajectories from both the training dataset and the trained agents. To meet this problem, this paper advocates TRAJDELETER, the first practical approach to trajectory unlearning for offline RL agents. The key idea of TRAJDELETER is to guide the agent to demonstrate deteriorating performance when it encounters states associated with unlearning trajectories. Simultaneously, it ensures the agent maintains its original performance level when facing other remaining trajectories. Additionally, we introduce TRAJAUDITOR, a simple yet efficient method to evaluate whether TRAJDELETER successfully eliminates the specific trajectories of influence from the offline RL agent. Extensive experiments conducted on six offline RL algorithms and three tasks demonstrate that TRAJDELETER requires only about 1.5% of the time needed for retraining from scratch. It effectively unlearns an average of 94.8% of the targeted trajectories yet still performs well in actual environment interactions after unlearning. The replication package and agent parameters are available online<sup>1</sup>.

## I. INTRODUCTION

Reinforcement learning (RL), which develops agents from trajectories (sequences of state, action, and reward) collected by interacting with environments, has recently made significant strides in various complex decision-making areas, including robotics control [45], [25], recommendation systems [64], [74], and dialogue systems [63], [56], etc. In safety-critical areas like healthcare [44], [12], and even nuclear fusion [10], direct interaction with the environment can be hazardous, since a partially trained agent might cause damage. Thus, researchers have developed offline RL, a methodology where agents are trained using datasets pre-collected from experts, manually programmed controllers, or even random strategies [15]. Offline RL paves the way for its application in situations where online interactions are either impractical or risky, and works well on a wide range of real-world fields [12], [72], [73], [26].

With the success of offline RL comes the demand to delete parts of the training sets (also referred to as machine unlearning) for various reasons. For example, legislations like the European Union’s General Data Protection Regulation (GDPR) [19] and the California Consumer Privacy Act (CCPA) [39] empowered users with the right to request their data to be deleted. The server may also want to delete some data due to security or copyright reasons (the server discovered some data is poisoned, or copy-righted) [24]. This inspires the development of an “unlearning” methodology tailored for offline RL, which we have termed *offline reinforcement unlearning*.

**Existing Solutions.** A naive approach to unlearning is retraining without the data required to be unlearned. Furthermore, one can partition the training data and train an ensemble of models, so during unlearning, one still retrain a model but on a partition of the training set [4]. The inefficiency of retraining drives the development of approximate unlearning (but focus more on the supervised learning in the image or text domain), including gradient ascent [65], [70] and contrastive learning [75]. We discuss unlearning methods in other fields in Section IX.

The unique paradigm of RL poses challenges when applying existing approximate unlearning methods. Specifically, the data in RL are a sequence of *trajectories*, each in the format of a tuple of state, action, and reward. Ye et al. first proposed the concept of reinforcement unlearning in the *online* setting by using environment poisoning attacks [71]. However, this is not feasible in offline RL. Our work is the first to address the need for unlearning within offline RL, specifically emphasizing unlearning at the trajectory level (Ye et al. [71] works at the aggregated level). Trajectory-level studies [58], [11] have attracted more attention, as RL algorithms are often trained within a single environment [49].

**Our Proposal.** This paper introduces TRAJDELETER, enabling offline RL agents to unlearn trajectories. TRAJDELETER is composed of two phases, “forgetting” and “convergence training”. The forgetting phase first minimizes the value function  $Q$  (a function specific to RL to be described in Section II-A) for the unlearning samples. We choose to work with  $Q$  because it estimates the expected cumulative reward an agent can achieve from a state. So if the agent’s cumulative reward for a state is low, it means the agent is unfamiliar with a trajectory, thus forgetting. However, this process alone will make the agent unstable for the normal, remaining samples. To alleviate this, we also maximize  $Q$  on remaining samples simultaneously, balancing unlearning and preventing performance degradation.

Due to the notorious unstable training problem in RL [58], [49], [43], our strategy of achieving the two opposite directions

<sup>1</sup><https://anonymous.4open.science/r/TrajDeleter-5F52/>

of optimization on the unlearning and remaining dataset may fail to guarantee the convergence of the unlearned agent, leading to potential instability during the training. To mitigate this concern, the second “convergence training” phase minimizes the discrepancies in cumulative rewards obtained by following the original and unlearned agents when encountering states in other remaining trajectories. Theoretical analysis presents that fine-tuning the unlearned agent ensures its convergence.

It is also crucial to evaluate if the trajectories with specific impacts have been erased from the approximate unlearned agent. This evaluation forms the fundamental basis of offline reinforcement unlearning. Du et al. [11] proposed ORL-AUDITOR to audit trajectories for offline DRL models, providing the potential tool for evaluating unlearning. However, ORL-AUDITOR can be time-consuming, owing to the extensive training required for numerous *shadow agents*, which explicitly exclude the unlearning trajectories from their training set. To expedite the auditing process, we introduce TRAJAUDITOR, which fine-tunes the original agent (needed for unlearning) to create the shadow agents. We consider these shadow models to be trained with datasets that include the targeted unlearning trajectories. In addition, we implement state perturbations along the trajectories, producing diverse auditing bases. Referring to Du et al. proposed [11], TRAJAUDITOR determines the success of unlearning by comparing cumulative rewards from unlearning trajectories. It assesses the similarity between results from shadow agents and the unlearned agent, with low similarity indicating successful unlearning. TRAJAUDITOR matches the performance of ORL-AUDITOR while requiring significantly fewer computing resources.

**Evaluations.** We extensively experiment with six offline RL algorithms on three common Mujoco evaluation tasks [61] to verify the effectiveness and efficiency of TRAJDELETER. We experimented with various unlearning rates (the proportion of data required to be forgotten in a dataset). TRAJAUDITOR shows high proficiency, achieving average F1-scores of 0.88, 0.87, and 0.88 across three tasks. It achieves a 97.1% reduction in time costs while attaining an F1-score that is 0.08 points higher compared to training shadow agents from scratch in ORL-AUDITOR. It is a simple yet efficient tool for determining whether a specific trajectory continues influencing the unlearned agent, paving the path for our unlearning study.

Then, we evaluate how effective is TRAJDELETER under the assessment of TRAJAUDITOR. Our experiments show that at an unlearning rate of 0.01, TRAJAUDITOR achieves a 93.2%, 99.7%, and 91.4% removal of targeted trajectories in the three tasks while requiring only 1.5% of the time compared to retraining from scratch. The average cumulative returns show a slight difference of 2.2%, 0.9%, and 1.6% between TRAJDELETER-unlearned agents and retrained agents in the three tasks on average. Compared to baselines, TRAJDELETER presents a 31.25% improvement in unlearning trajectories compared to baseline methods.

We also analyze hyper-parameters of TRAJDELETER. With an increase in the number of forgetting steps, the performance of TRAJDELETER significantly improves, resulting in the unlearned agent forgetting more trajectories. We also observe an interesting fact: with an increased number of forgetting steps, TRAJDELETER shows minimal sensitivity to the values of other hyper-parameters it introduces. We also conduct ablation

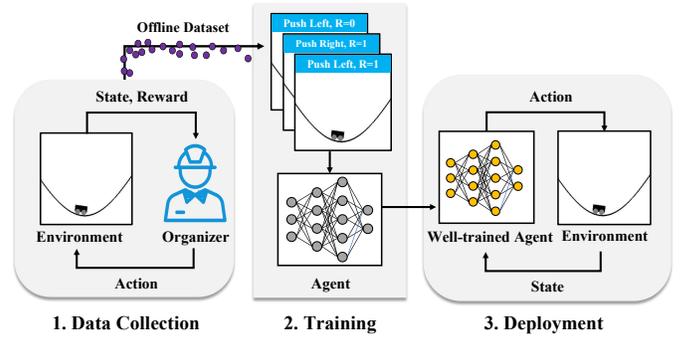


Fig. 1: An example of offline RL implementations. Initially, the organizer gathers trajectories through interactions with the environments, forming the offline dataset. Then, the agent is trained using this static dataset. Once fully trained, the agent is deployed in real-world applications.

studies to study the significance of “convergence training” in enhancing TRAJDELETER’s efficacy, and investigate its effectiveness in defending against trajectory poisoning attacks.

**Contributions.** In summary, our contributions are three-fold:

- To our knowledge, we propose the first practical trajectories-level unlearning approach, TRAJDELETER, specifically tailored for offline RL agents.
- We introduce TRAJAUDITOR, a simple yet efficient method designed to assess whether the unlearning method effectively erases the specific trajectories’ influence on the unlearned agent.
- We perform a comprehensive evaluation of TRAJDELETER. The results present the effectiveness of TRAJDELETER in offline DRL agents trained across six distinct prevalent algorithms and three tasks.

## II. BACKGROUND

### A. Offline Reinforcement Learning

The training of DRL agents operates a trial-and-error paradigm, with learning driven by feedback from rewards. For example, we consider an agent responsible for controlling a car. If it accelerates when confronted with a red traffic light, it receives a penalty in the form of a negative reward. Then, this agent will update its policy to avoid accelerating when a traffic light turns red. The agent learns from such experiences by interacting with the environment during the training phase, which is called the *online RL*.

However, the online settings are not always feasible. For instance, a hospital aims to train an RL agent to recommend treatments to future patients. The online RL would make the agent propose treatments, observe the results, and adjust its policy accordingly. Since it is ethically and practically problematic to experiment with patients’ health, the offline RL, which is designed to train agents from a *pre-collected* and *static* dataset eliminating the need for interactions with real environments during the training stages, is more suitable. Then, as presented in Figure 1, we outline the three-step implementation process of offline RL, including data collection, training the offline RL agent, and deployment.

**Data Collection.** At timestep  $t$ , an agent observes a state  $s_t$  and executes an action  $a_t$  determined by the agent’s *policy*. The agent selects an action  $a_t$  according to the policy  $\pi(\cdot)$ , which dictates which actions to execute in a given state  $s_t$ , i.e.,  $a_t \sim \pi(\cdot|s_t)$ . After taking an action, the agent obtains an immediate reward from the environmental reward function, denoted as  $r_t = \mathcal{R}(s_t, a_t)$ . Subsequently, the environment transitions to a new state  $s_{t+1}$ , determined by the transition function  $s_{t+1} \sim \mathcal{T}(\cdot|s_t, a_t)$ . This sequence persists until the agent reaches a termination state  $s_T$ , resulting in a *trajectory*,  $\tau : (s_0, a_0, r_0, s_1, a_1, r_1, s_2, a_2, r_2, \dots, s_{|\tau|}, a_{|\tau|}, r_{|\tau|})$ . Besides, the four-tuple  $\langle s_t, a_t, r_t, s_{t+1} \rangle$  in each trajectory is referred to as the *transition*. The organizer, also named the data provider (e.g., the hospital), gathers trajectories through multiple, distinct policies interacting with the environments. Then, these trajectories consist of the offline dataset  $\mathcal{D} = \{\tau^i\}_{i=1}^N$ , where  $N$  represents the total number of trajectories in the dataset.

**Training.** In online RL, an agent aims to learn an optimal policy  $\pi^*$  that can get high expected performance from the environment. Specifically, the *cumulative discounted return* is the sum of discounted rewards within a given trajectory:  $R(\tau) = \sum_{i=0}^T \gamma^i r_i$ , where  $\gamma \in (0, 1)$  represents the discount factor [58] and  $T$  is the length of the trajectory. Hence, the objective of online RL can be formulated to optimize the policy and achieve the highest possible cumulative discounted return, which is defined as,

$$\pi^* = \arg \max_{\pi} \mathbb{E}_{\tau \sim \pi} [R(\tau)], \quad (1)$$

where  $\tau^\pi$  indicates the trajectory generated by the policy  $\pi$ . In practice, the solution to Eq. (1) could be accomplished by maximizing *action-state value function*  $Q^\pi(s, a)$  [58], which is defined as,

$$Q^\pi(s, a) = \mathbb{E}_{\tau \sim \pi} [R(\tau^\pi) | s_0 = s, a_0 = a]. \quad (2)$$

$Q^\pi(s, a)$  quantifies the expected cumulative reward an agent can achieve starting from a state  $s$ , taking action  $a$ , and following a policy  $\pi$ . In other words, it serves as a metric for how good it is for an agent to execute action  $a$  while being in state  $s$ . Thus, the objective in Eq. (1) can be reformulated as,

$$\pi^* = \arg \max_{\pi} \mathbb{E}_{a \sim \pi} [Q^\pi(s, a)], \forall s \in \mathcal{S}, \quad (3)$$

where  $\mathcal{S}$  refers to the state space. Next, we explain how to optimize the policy in offline RL settings.

In offline RL, the agent is only allowed to learn from the trajectories present in the offline dataset, which is defined as  $\mathcal{D}$ . The agent cannot access states absent from the given offline dataset. Thus, distinguished from considering all states in state space, offline RL only takes into account the states found within the offline dataset. In particular, offline RL initially requires the agent to derive an understanding of the dynamical system underlying the environment entirely from the pre-collected offline dataset. Then, it needs to establish a policy  $\pi(a|s)$  that maximizes possible performance when *actually used to interact with the environment* [40].

**Deployment.** The well-trained offline agents are prepared for deployment. Their deployment ensures that they can make decisions based on the rich trajectories derived from the datasets, ensuring efficiency and safety in real-time applications.

## B. Machine Unlearning

In response to the demands of recently introduced legislation, like the European Union’s General Data Protection Regulation (GDPR) [19], a new branch of privacy-preserving machine learning arises, known as *machine unlearning*. This concept requires that the specified training data points and their influence can be erased completely and quickly from both the training dataset and trained model [4]. Specifically, we utilize the algorithm to train a model on a dataset. The well-trained model performs certain functions, such as classification, regression, and more. Upon receiving requests for the model to “forget” a subset of the training dataset, the unlearning algorithm is capable of altering the trained model so that it behaves as if it is trained solely on the remaining dataset (excluding the subset that is required to be forgotten).

With the rapid progress in applying offline RL in reality [72], [73], [55], [44], this paper focuses on the unlearning requirement in the field of offline RL. We propose TRAJDELETER, aiming to “unlearn” selected training trajectories by updating the trained agent to completely eliminate the influence of these trajectories from the updated agent.

## C. Unlearning Scenarios

This section outlines the key requirements for advancing offline reinforcement unlearning, highlighting two typical scenarios where this method is particularly needed.

**Privacy Concerns.** Unlearning has become especially relevant in privacy and data protection laws, including the European Union’s General Data Protection Regulation (GDPR) [19], which enforces a “right to erasure.” This right also should be involved in offline RL. For instance, we use the entire offline dataset to train an agent that performs brilliantly in real-world tasks. However, there may be instances where institutions need to instruct these trained agents to “forget” certain trajectories containing sensitive information, like credit card details or confidential communications. Given the potential of existing membership inference attacks to extract training data from agents [46], [23], [69], it becomes crucial to implement trajectory unlearning to mitigate these privacy concerns.

**Trajectory Poisoning.** We focus on poisoning attacks within the RL area [14], [66], [42], where an attacker aims to mislead the trained agent by editing the training trajectory. This intervention significantly reduces the performance of the learning agent. We implement unlearning to restore the agent’s original performance efficiently, avoiding the time-consuming retraining process.

**Copyright Issue.** Numerous studies indicate that our dataset may be susceptible to various forms of misuse, including infringements of intellectual property rights [3], [59]. The copyright issue is particularly pressing, given the increasing prevalence of sophisticated data utilization across domains. Our method enables the rapid and efficient removal of training trajectories that lack a clearly defined copyright source. This method helps mitigate legal risks associated with copyright violations and ensures compliance with evolving copyright laws and ethical standards in data usage.

**Agent Agnostic.** The optimal approach for implementing offline reinforcement unlearning should be universally applicable

across agents trained with various algorithms, which means that the objectives mentioned above should be met by any agent performing that unlearning strategy.

### III. PROBLEM SETUP AND PRELIMINARIES

#### A. Formal Problem Definition

We first introduces the concept of offline reinforcement unlearning and the formal framework for this problem. We assume the training dataset consists of  $N$  trajectories and formally express it as  $\mathcal{D} = \left\{ \tau^i | \tau^i = \langle s_t^i, a_t^i, r_t^i, s_{t+1}^i \rangle_{t=0}^{|\tau^i|} \right\}_{i=1}^N$ . Then, we define an offline RL algorithm as a function  $\mathcal{A}(\cdot) : \mathcal{D} \mapsto \Pi$ , which maps a dataset  $\mathcal{D}$  to a trained agent within the hypothesis space  $\Pi$ . Then, we use the notion  $\mathcal{D}_f = \left\{ \tau^i \right\}_{i=1}^M$  ( $M < N$ ) to represent the subset  $\mathcal{D}_f \subset \mathcal{D}$ , which the agent is required to forget. Besides, the modified dataset is defined as  $\mathcal{D}_m = \mathcal{D} \setminus \mathcal{D}_f$ , indicating the portion of the dataset that we intend for the agent to retain. The offline reinforcement unlearning method  $\mathcal{U} : \mathcal{A}(\mathcal{D}) \times \mathcal{D} \times \mathcal{D}_f \mapsto \Pi$ , indicates a function that maps an agent  $\mathcal{A}(\mathcal{D})$ , along with the training dataset  $\mathcal{D}$ , and a subset  $\mathcal{D}_f$  designated for removal, to a correspondingly unlearned agent within the hypothesis space  $\Pi$ . The offline reinforcement unlearning process,  $\mathcal{U}(\mathcal{A}(\mathcal{D}), \mathcal{D}, \mathcal{D}_f)$ , is defined as function that takes a trained agent  $\pi \leftarrow \mathcal{A}(\mathcal{D})$ , a training dataset  $\mathcal{D}$ , and a dataset  $\mathcal{D}_f$  that should be forgotten. This process aims to guarantee that the unlearned agent:  $\pi' \leftarrow \mathcal{U}(\mathcal{A}(\mathcal{D}), \mathcal{D}, \mathcal{D}_f)$  behaves as an agent directly trained on the training dataset excluding  $\mathcal{D}_f$ .

#### B. Principles in Offline Reinforcement Unlearning

Drawing upon principles from unlearning in supervised learning [65], [32], we define that an optimal offline reinforcement unlearning method must adhere to four properties: (1) effectively erase the selected trajectories, (2) maintain the agent’s performance quality, (3) offer efficiency when compared to complete retraining the agent scratchily, and (4) be applicable to a variety of agents. We elaborate on these principles as follows.

**Efficacy.** The primary objective for successful offline reinforcement learning is to erase as much as possible the agent’s memory of the target trajectories. As this paper pioneers the concept of an unlearning method for offline RL, there is *no established criterion* to verify the effectiveness of unlearning within this area. Consequently, Section IV introduces a metric specifically designed to assess unlearning in offline reinforcement learning.

**Fidelity.** An unlearning method is truly valuable only when it retains the performance of unlearned agents closely aligned with the original agents. Consequently, our objective is that the unlearned agent will not experience significant performance degradation. This property evaluates how well the model retains knowledge of the trajectories that are not intended to be forgotten.

**Efficiency.** A direct unlearning approach involves retraining agents from scratch on a dataset that excludes the target trajectories. However, this approach entails substantial runtime and storage overheads. The ideal unlearning method should minimize computational resource usage while ensuring that the unlearned agents perform as the retrained agent.

#### C. Challenges

This section delves into discussing three distinct challenges associated with offline reinforcement unlearning.

- **How can we evaluate the efficacy of offline reinforcement unlearning?** We focus on approximate unlearning, and essentially should assess whether a trajectory is part of the agent’s training dataset. One natural approach is to leverage membership inference attacks (MIAs), and there has been MIAs against DRL [46], [23], [71]. While most of these are aimed at online RL, Du et al. [11] introduced ORL-AUDITOR to audit datasets for offline DRL models. However, their process is time-consuming due to the extensive training of numerous shadow agents. A simple yet effective method for evaluating approximate offline reinforcement unlearning is the fundamental basis of our study.
- **How can we unlearn trajectories from the agent’s policy?** The objective of offline reinforcement unlearning is to eliminate the trajectories’ impact on the agent, essentially to “forget trajectories.” Currently, there is a lack of established methods for unlearning trajectories in the field of offline RL. Therefore, the primary challenge lies in devising an effective unlearning methodology tailored for offline RL.
- **How can we prevent degradation of performance in general after unlearning?** As the training of RL especially suffering from unstable training [2], [15], the unlearning process can result in performance degradation. Ensuring that the unlearned agent retains its effectiveness poses a significant challenge.

#### D. Our Proposals

To address the first challenge, we propose TRAJAUDITOR. Contrasting with the approach in ORL-AUDITOR [11], which involves training shadow agents from scratch, TRAJAUDITOR adopts a more direct method by fine-tuning the original agent to generate the shadow agents. Besides, we introduce perturbations to the states within the trajectories to generate diverse bases for auditing. These two processes significantly reduce the time required for auditing.

To overcome the second challenge, referring to the proposed definition of “forgetting an environment” in Ye et al. [71], we interpret “forgetting trajectories” as the agent demonstrating reduced or deteriorating performance when encountering states involved in those trajectories. This interpretation is in line with intuitive understanding. For instance, when an agent has learned a trajectory and is familiar with its states, it can perform more effectively upon encountering similar states. This results in improved performance, as the agent is better equipped to execute optimal actions in these familiar states. Alternatively, when the agent encounters unfamiliar states from forgotten trajectories, it tends to make sub-optimal decisions. This lack of familiarity leads to a decline in performance.

To address the third challenge, we suggest fine-tuning the unlearned agent to minimize the disparity between the value functions of the unlearned and the original agents. Specifically, This approach aims to synchronize the value function of state-action pairs in the remaining offline dataset, which is obtained by the unlearned agent, with that of the original policy.

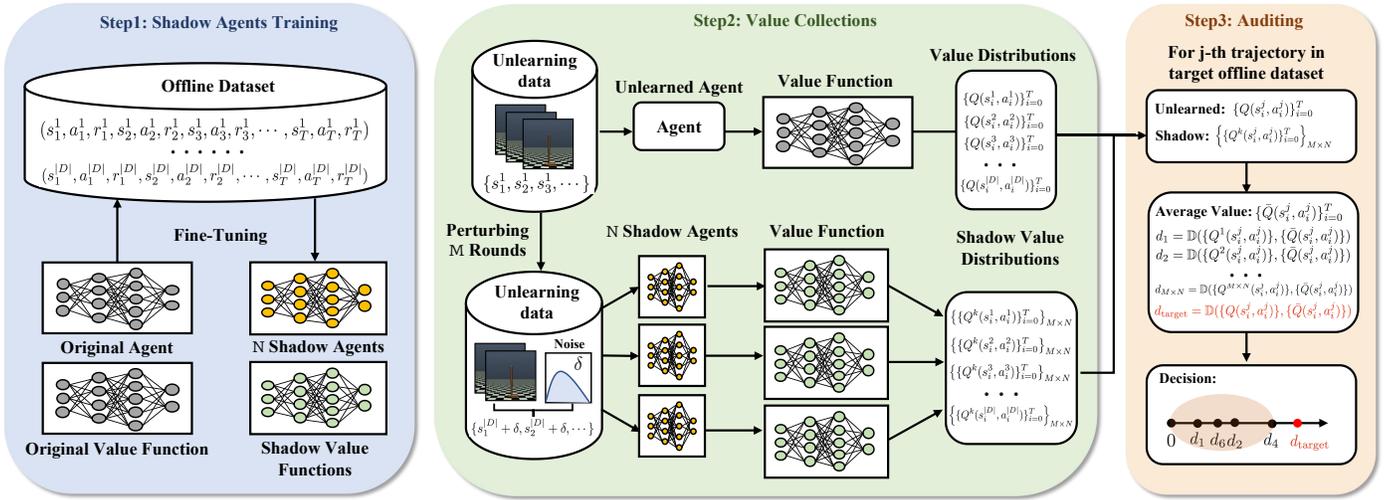


Fig. 2: The workflow of TRAJAUDITOR. “Shadow Agents Training” fine-tunes the original target agent under investigation, and its value function, to gather  $N$  shadow agents and shadow value functions. “Value Collections” calculates the value (as described in Eq. (2)) distributions of the states of target trajectories from the unlearning agents, i.e.,  $\{Q(s_i^{D|}, a_i^{D|})\}_{i=0}^T$ , where  $T$  is the length of trajectories. This step introduces noise, denoted as  $\delta$ , to the states  $M$  times, calculating the value distributions of perturbed trajectories via shadow models. Thus, for each trajectory, we obtain  $M \times N$  value distributions. The “Auditing” assesses the distances between the average value distribution and the value distributions of both the unlearned agent ( $d_{\text{target}}$ ) and the shadow agents ( $d_{M \times N}$ ). This analysis of similarities determines whether trajectories are included or excluded from the training dataset.

#### IV. TRAJAUDITOR

##### A. Existing Solutions

The foundational metric of our study is to determine if a trajectory is included in the agent’s training dataset, which is crucial for understanding approximate unlearning. Being the first to introduce offline reinforcement unlearning, we recognize the absence of a definitive method to quantify this. In other field of approximate unlearning, MIA widely used for unlearning methods’ evaluation [67], [32], [75]. This motivates us to consider using MIAs for evaluating offline reinforcement learning as well. In supervised learning, loss is an effective metric for determining if a data point is included in a model’s training dataset [53], [7]. However, as our experiments detailed in Appendix D1 presented, the loss difference between trained and non-trained trajectories is minimal, rendering it unsuitable as a basis for auditing. MIAs in online RL setting [46], [23], [71] assumes that the attacker has control over the environment, enabling them to gather trajectories and manipulate it. However, in offline RL, such operations are impractical as we cannot access to the environments. Du et al. [11] emphasize the same perspective that MIA techniques applicable in online RL are not applicable to offline RL agents.

Du et al. [11] introduced ORL-AUDITOR for auditing datasets in offline RL models. This approach leverages the concept that *cumulative rewards* can serve as a unique identifier, effectively distinguishing DRL models trained on specific datasets. In particular,  $Q^\pi$  measures the expected cumulative reward that an agent can attain, beginning from state  $s$ , executing action  $a$ , and adhering to policy  $\pi$ . We consider the series of states  $\{(s_t^T)\}$  within a trajectory. Feeding this series of states into a tested agent  $\pi$  generates a sequence of

state-action pairs  $\{(s_t, \pi(s_t))_t^T\}$ . Subsequently, by evaluating this sequence of state-action pairs with  $Q^\pi$ , we can derive a *value vector*  $\vec{Q}^\pi = \{Q^\pi(s_t, \pi(s_t))_t^T\}$  for a trajectory and the agent. We assemble a collection of shadow agents with the assurance that their training datasets incorporate the target trajectories. The basis for our audit relies on the similarity between the value vector of the target trajectories generated by these shadow agents and that generated by the tested agent.

##### B. Our Method

Different from MIAs, in evaluation, we can involve the target model before and after unlearning. Therefore, we do not need to train the shadow models from scratch. It suffices to fine-tune the target original model to obtain the shadow models. It is noticed that TRAJAUDITOR is not a type of MIA. In TRAJAUDITOR, we should involve a model that we confirm includes the target trajectory in its training dataset, which is unpractical in MIAs. Compared to training many shadow agents from scratch, fine-tuning significantly saves computational overheads. Moreover, to ensure a robust estimation from shadow models, we use state perturbation to ensure shadow models cover a wide range of possibilities.

We call our method TRAJAUDITOR and plot its main steps in Figure 2. We elaborate on the technical details of TRAJAUDITOR as follows.

**Shadow Model Preparation.** We can define that the unlearning dataset  $\mathcal{D}_f$  is included in the training dataset of the original agent  $\pi$ . We then directly fine-tune the original agent  $\pi$  on the entire dataset  $\mathcal{D}$  to gather a set of shadow agents  $\{\pi_i^s\}_{i=0}^N$ , where  $N$  is the number of shadow agents. *We believe these shadow agents have been thoroughly trained on the*

unlearning dataset  $\mathcal{D}_f$ . Besides, as outlined in Section II-A, the fine-tuning process also necessitates concurrently updating the value function, allowing us to obtain the value functions of the shadow agents  $\{Q^{\pi_i^s}\}_{i=0}^N$ .

**Value Collections.** For  $j^{\text{th}}$  ( $j = 1, 2, \dots, |\mathcal{D}_f|$ ) trajectory in the unlearning dataset  $\mathcal{D}_f$ , we query the unlearned agent’s value vector  $\vec{Q}_j^{\pi'} = Q^{\pi'}(s_t^j, \pi'(s_t^j))$ , ( $t = 1, \dots, T$ ). Additionally, for the  $j^{\text{th}}$  trajectory, we collect the value vectors  $\vec{Q}_j^{\pi_i^s} = Q^{\pi_i^s}(s_t^j, \pi_i^s(s_t^j))$ , ( $t = 1, \dots, T$ ;  $i = 1, \dots, N$ ) generated by shadow agents. Besides, we add a low-level noise  $\delta$  to perturb states to generate more value vectors for a trajectory, further reducing the requirement for extensive shadow agent training. By using perturbations across  $M$  rounds  $\{(s_t^j + \delta_h)_{h=0}^M\}$  and utilizing  $N$  shadow agents, we gather  $M \times N$  value vectors for each trajectory within the unlearning dataset, which is recorded as  $\vec{Q}_{j,m}^{\pi_i^s}$  ( $i = 1, \dots, N$ ;  $j = 1, \dots, M$ ).

**Auditor.** This step relies on the similarity between the value vector of the unlearning trajectories generated by shadow agents and that generated by the unlearned agent. Specifically, for  $j^{\text{th}}$  trajectory, we define the mean of  $\{\vec{Q}_{j,m}^{\pi_i^s}\}$  as  $\vec{Q}_{j,\text{ave}}^{\pi_i^s}$ . Referring to the practical adoption in ORL-AUDITOR [11], we conduct Grubbs’ hypothesis test [30] to ascertain the success of removal. This determination is made when  $d_{\text{target}} = \mathbb{D}(\vec{Q}_{j,\text{ave}}^{\pi_i^s}, \vec{Q}_j^{\pi'})$  falls outside the distribution of  $\left\{ \mathbb{D}(\vec{Q}_{j,\text{ave}}^{\pi_i^s}, \vec{Q}_{j,m}^{\pi_i^s}) \mid i \in \{1, \dots, N\}, j \in \{1, \dots, M\} \right\}$ , where  $\mathbb{D}$  denotes the Wasserstein distance [47] between two vectors. Otherwise, TRAJAUDITOR determines that the trajectories, which are required to be forgotten, continue to influence the unlearned agent  $\pi'$ .

## V. TRAJDELETER

### A. Strawman Unlearning Methods

Ye et al. proposed “environment unlearning” in online RL. We cannot directly apply reinforcement environment unlearning for online RL [71] because it requires the user to poison the transition function  $\mathcal{T}(\cdot | s_t, a_t)$  of the environment (the training process for offline RL is restricted from accessing environments).

Another baseline is to perturb the rewards (it has been understood that agents learn via rewards [58]; thus, perturbing rewards prevents agents from learning the corresponding behaviors). We modify the rewards of unlearned trajectories by assigning random rewards sampled from the uniform distribution. Then, we fine-tune the agent using this modified dataset for unlearning. This approach constitutes the “random-reward” baseline in Section VI-B. Moreover, we can also assign unlearned trajectories with small or the worst possible rewards, but they could adversely affect the agent’s performance.

To overcome this issue, we propose to enhance the agent’s performance on the remaining dataset in the unlearning stage, which is crucial to prevent the degradation of the agents’ performance. The unlearning approach now seems to be successful. However, due to the unstable training in RL [15], [38], [18], the methods mentioned may be susceptible to the

issue of policy divergence (as the empirical analysis presented in Section VIII-A). Therefore, we need to fine-tune the agents on the remaining dataset to encourage policy convergence.

### B. Overview

As discussed in Section III-A, we aim to update the optimal unlearned policy to ensure the agent that *takes actions of lower value in unlearning trajectories while still preserving its performance in the rest of the trajectories*. To achieve this goal, we structure TRAJDELETER into two distinct components that align with the first and second terms of Eq. (4) as follows: (1) *Forgetting*, and (2) *Convergence Training*.

$$\begin{cases} \min \mathbb{E}_{s \sim \mathcal{D}_f} [Q^{\pi'}(s, \pi'(s))] + \max \mathbb{E}_{s \sim \mathcal{D}_m} [Q^{\pi'}(s, \pi'(s))] \\ \min \mathbb{E}_{(s,a) \sim \mathcal{D}_m} [\|Q^{\pi'}(s, a) - Q^{\pi}(s, a)\|_{\infty}] \end{cases} \quad (4)$$

The first term of Eq. (4) represents the ‘forgetting’ phase, instructing the learned policy  $\pi'$  to take suboptimal actions in the unlearning dataset  $\mathcal{D}_f$ , while maintaining its normal behavior in the remaining dataset  $\mathcal{D}_m$ . We achieve this by updating the agent to deliberately minimize its cumulative reward in the states belonging to the unlearning trajectories, thereby steering it towards making less effective decisions in those states. Consequently, we minimize the value function for states within the unlearning trajectories, aligning the agent’s actions with the unlearning objectives. Training an agent by solely minimizing the value function could lead to the issue of agent collapse – the agent’s performance tends to decline rapidly when interacting with the environment [24]. To mitigate this problem, we also focus on maximizing the agent’s value for states in the remaining dataset, thereby balancing the unlearning process and preventing the agent from deteriorating.

The second term of Eq. (4), aligning with the “convergence training” phase, aims to reduce the value differences between the original and the unlearned agent on the remaining dataset  $\mathcal{D}_m$ . This step ensures we can fine-tune the unlearned agent’s convergence, as discussed in Section V-D.

### C. Technical Details

This section describes how TRAJDELETER enables offline RL agents to forget specific trajectories. We outline the processes for “forgetting” and “convergence training,” as follows.

**Forgetting.** This learning phase trains the agent to forget specific trajectories while maintaining effectiveness in other trajectories. We initially reformulate the objective function as,

$$\mathcal{L}_1 = \max \mathbb{E}_{s \sim \mathcal{D}_m} [Q^{\pi'}(s, \pi'(s))] - \mathbb{E}_{s \sim \mathcal{D}_f} [Q^{\pi'}(s, \pi'(s))].$$

Our unlearning process begins with the original policy  $\pi$  (the agent required being unlearned). We use a neural network represented by  $\pi'_{\theta}$  to denote the policy after unlearning. Our objective is to optimize the parameter  $\theta$  to maximize the value function, which is given by,

$$\mathbb{E}_{s \sim \mathcal{D}_m, a \sim \pi'_{\theta}} [Q^{\pi'_{\theta}}(s, a)] - \lambda \mathbb{E}_{s \sim \mathcal{D}_f, a \sim \pi'_{\theta}} [Q^{\pi'_{\theta}}(s, a)], \quad (5)$$

where  $\lambda$  is a constant to balance the unlearning process and preventing the agent from deteriorating. We then compute

the gradient of the objective function with respect to the parameters and iteratively apply stochastic gradient-ascend to approach a local maximum in  $\mathcal{L}_1(\theta)$ . Specifically, at iteration  $k$ , we update the policy by gradient ascent,  $\theta_{k+1} \leftarrow \theta_k + \nabla_{\theta} \mathcal{L}_1(\theta)|_{\theta_k}$ . Based on the Policy Gradient Theorem [43], we express the policy gradient of policy  $\pi_{\theta}$  as,

$$\begin{aligned} \nabla_{\theta_k} \mathcal{L}_1 &= \mathbb{E}_{s \sim \mathcal{D}_m, a \sim \pi'_{\theta_k}} \left[ \nabla_{\theta_k} \log \pi'_{\theta_k}(s, a) A_{\pi'_{\theta_k}}(s, a) \right] \\ &\quad - \lambda \mathbb{E}_{s \sim \mathcal{D}_f, a \sim \pi'_{\theta_k}} \left[ \nabla_{\theta_k} \log \pi'_{\theta_k}(s, a) A_{\pi'_{\theta_k}}(s, a) \right]. \end{aligned} \quad (6)$$

Here,  $A_{\pi}(s, a)$  indicates the advantage function, measuring the difference between the value of state-action pair  $(s, a)$  and the average value of that state  $s$ . Using this advantage function, we can determine the improvement of taking a particular action in a given state over the average. In Eq. (6), the advantage function  $A_{\pi'_{\theta_k}}(s, a)$  is defined as,  $A_{\pi'_{\theta_k}}(s, a) = Q^{\pi'_{\theta_k}}(s, a) - \mathbb{E}_{a \sim \pi'_{\theta_k}} [Q^{\pi'_{\theta_k}}(s, a)]$ . Essentially, this function computes the additional reward the agent receives from choosing that action [28].

To address the Eq. (6), we are required to approximate function  $Q^{\pi'_{\theta_k}}$  for each iteration. We start this approximation by an neural network parameterized with  $\phi_k$  to model  $Q^{\pi'_{\theta_k}}(s, a)$  using the TD-learning paradigm [58], and then update this network for next state  $s'$  repeatedly by minimizing the TD-error  $\mathcal{G}(\phi_k)$ ,

$$\mathbb{E}_{\mathcal{D}} \left\| Q^{\pi'_{\theta_k}}_{\phi_k}(s, a) - \left( r + \gamma \mathbb{E}_{a' \sim \pi_{\theta_k}} \left[ Q^{\pi'_{\theta_k}}_{\phi_k}(s', a') \right] \right) \right\|_2, \quad (7)$$

where  $(s, a, r, s') \sim \mathcal{D}$ , and  $\mathcal{D} = \mathcal{D}_m \cup \mathcal{D}_f$  represents the original dataset. By consistently updating the policy network and value function using the method mentioned above, the agent is effectively trained to “forget” the targeted trajectories.

**Convergence training.** Relying solely on this training might not ensure the convergence of  $\pi'$ , potentially causing instability (as conducted experiments in Section VIII-A) in the unlearning process. To address this issue, we introduce “convergence training” in TRAJDELETER, as depicted in the second term of Eq. (4). The stage focuses on minimizing the difference between the value functions of the unlearned policy  $\pi'$  and the fixed original policy  $\pi$ , aiming to align the value function of  $\pi'_{\theta}$  closely with that of  $\pi$  and providing the convergence guarantee for TRAJDELETER.

This “forgetting” phase yields a trained policy that serves as the “convergence training” starting point. At iteration  $h$ , we initially fine-tune the value function by,

$$\mathcal{L}_2(\theta) = \min \mathbb{E}_{(s, a) \sim \mathcal{D}_m} \left[ \left\| Q^{\pi'_{\theta_h}}(s, a) - Q^{\pi}(s, a) \right\|_2 \right]. \quad (8)$$

Then, analogous to the implication in Eq. (6), we update the policy  $\pi'_{\theta_h}$  based on the Policy Gradient Theorem [43],

$$\nabla_{\theta_h} \mathcal{L}_2 = \mathbb{E}_{s \sim \mathcal{D}_m, a \sim \pi'_{\theta_h}} \left[ \nabla_{\theta_h} \log \pi'_{\theta_h}(s, a) A_{\pi'_{\theta_h}}(s, a) \right]. \quad (9)$$

After sufficient training, TRAJDELETER fine-tunes the policy for convergence. We provide the theoretical analysis in Section V-D.

**Summary.** We outline TRAJDELETER in Algorithm 1. This algorithm inputs the original agent and its value function  $Q^{\pi}$  and

---

**Algorithm 1:** Workflow of TRAJDELETER

---

- 1 **Input:**  $\pi$ : The original agent, parameterized by  $\theta_o$ .  
 $\pi'_{\theta}$ : The unlearning policy, parameterized by  $\theta$ . Value Functions:  $Q^{\pi}$  and  $Q^{\pi'}$ , with parameters  $\phi_o$  and  $\phi$ , respectively.  $\mathcal{D}$ : The complete offline dataset.  $\mathcal{D}_f$ : The dataset the agent needs to forget.  $\mathcal{D}_m$ : The remaining dataset post unlearning.
  - 2 **Initialization:** initialize  $\theta^{(0)} = \theta_o$ ,  $\phi^{(0)} = \phi_o$ .  
// Forgetting
  - 3 **for**  $k = 1, 2, 3, \dots, K$  **do**
  - 4     Sample trajectories from  $\mathcal{D}_m$  and  $\mathcal{D}_f$ , and collect a batch of trajectories  $\mathcal{D}_{Bm} = \{\tau_i\}$ ,  
 $\mathcal{D}_{Bf} = \{\tau_j\}$ , where  $i, j = 1, 2, \dots, B$ .
  - 5     For each trajectory  $\tau_i$  and  $\tau_j$ , compute the advantage at each time step  $t$  of trajectories:  
 $A_{\pi'}^{i_t}(s_t^i, a_t^i) = Q^{\pi'}(s_t^i, a_t^i) - \mathbb{E}_{a \sim \pi'} [Q^{\pi'}(s_t^i, a)]$ ,  
 $A_{\pi'}^{j_t}(s_t^j, a_t^j) = Q^{\pi'}(s_t^j, a_t^j) - \mathbb{E}_{\pi'} [Q^{\pi'}(s_t^j, a)]$ .
  - 6     We have  $A_{\pi'}^{i_{0:|\tau_i|}}$  and  $A_{\pi'}^{j_{0:|\tau_j|}}$  ( $i, j = 1, \dots, B$ ) in Eq. (6). Then, we can obtain the policy gradient to maximize the objective function in Eq. (5) by updating  $\theta^{(k)}$ .
  - 7     Update  $\phi^{(k)}$  by minimizing the loss of Eq. (7).
  - 8 **end**  
// Convergence training
  - 9 **for**  $h = 1, 2, 3, \dots, H$  **do**
  - 10     Sample trajectories from  $\mathcal{D}_m$ , and collect a batch of trajectories  $\mathcal{D}_B = \{\tau_i\}$ , where  $i = 1, 2, \dots, B$ .
  - 11     For each trajectory  $\tau_i$ , compute the advantage at each time step  $t$  of trajectories:  
 $A_{\pi'}^{i_t}(s_t^i, a_t^i) = Q^{\pi'}(s_t^i, a_t^i) - \mathbb{E}_{a \sim \pi'} [Q^{\pi'}(s_t^i, a)]$ .
  - 12     We have  $A_{\pi'}^{i_{0:|\tau_i|}}$  ( $i = 1, \dots, B$ ) in Eq. (9) and then can obtain the policy gradient to update  $\theta^{(K+h)}$ .
  - 13     Update  $\phi^{(K+h)}$  by minimizing the loss of Eq. (8) and Eq. (7) on the batch of remaining dataset  $\mathcal{D}_B$ .
  - 14 **end**
  - 15 **Output:**  $\pi'_{\theta}$ : the well-trained unlearned agent.
- 

the dataset targeted for unlearning  $\mathcal{D}_f$ . The workflow involves a two-phase approach: first “forgetting” specific trajectories, then reinforcing the new policy through convergence training. In the forgetting phase, it iteratively processes batches of trajectories from both  $\mathcal{D}_m$  and  $\mathcal{D}_f$  (Line 4). The computation of advantages for each trajectory in these datasets (Line 5) involves updating the unlearning policy  $\pi'_{\theta}$  (Line 6) and the value functions (Line 7) to gradually forget behaviors learned from  $\mathcal{D}_f$ . This phase is key in systematically erasing specific behaviors from the agent’s learning.

Following this, we start the convergence training phase. Here, trajectories from  $\mathcal{D}_m$  are sampled (Line 10). The advantage for each trajectory is computed similarly to the forgetting phase (Line 11). Then, updates are made to the policy and value function parameters to reinforce the unlearned agent (Line 12-13). This phase ensures that the agent’s behavior post-

unlearning remains consistent and effective. Upon completing the iterative process described, TRAJDELETER produces a well-trained unlearned agent  $\pi'_{\theta}$ .

#### D. Convergence Analysis

The “forgetting” phase yields a trained policy that serves as the starting point for the next stage. Subsequently, the policy conducts fine-tuning guided by the second term of Eq. (4). We provide theoretical analysis to guarantee policy convergence after the fine-tuning.

We assume that the original policy  $\pi$  remains fixed during training and approximate the optimal policy  $\pi^*$ , focusing solely on training the policy  $\pi'$  for unlearning. Theorem 1 states that as training progresses, the difference between the learned  $Q$ -function and the optimal  $Q$ -function diminishes.

*Theorem 1 (Interaction convergence [62]):* We assume that the offline dataset includes a diverse range of states. The state distribution generated by any policy is consistently bounded relative to the distribution in the offline dataset. Specifically, denoting the state distribution of the offline dataset as  $\mu(s)$ , for the state distribution  $\nu(s)$  generated by any policy  $\pi_k$ , the condition  $\forall s, \frac{\nu(s)}{\mu(s)} \leq C$  holds. Let  $Q^*$  indicate the optimal value function; we have,

$$\|Q^* - Q^{\pi_{k+1}}\|_{\infty} \leq \gamma \|Q^* - Q^{\pi_k}\|_{\infty} + \epsilon + C \|Q^{\pi_k}\|_{\infty},$$

where  $\pi_k$  denotes a sequence of policies correlated to their respective value functions  $Q^{\pi_k}$ . Here,  $\epsilon$  signifies the approximation error in value estimation:  $\|Q^{\pi_k} - (r + \gamma Q^{\pi_{k+1}})\|_{\infty}$ .

This formulation implies the convergence of value function  $Q$  towards the optimal value function with a sufficiently large number of learning iterations under certain conditions. Specifically, when initiating the optimization of the second term from any starting policy derived by the first term of Eq. (4), we maintain a consistent boundary between the optimal policy  $\pi^*$  and the learned policy  $\pi_k$  [62],  $\|Q^{\pi_k} - Q^*\|_{\infty} \leq \frac{1-\gamma^k}{1-\gamma} \sqrt{2AC}\epsilon + \gamma^k \frac{R_{\max}}{1-\gamma}$ .  $R_{\max}$  represent the maximum value of reward function.  $A$  is the size of possible actions within the action space. The bound between performance of the optimal policy  $\pi^*$  and the learned policy  $\pi_k$  is,  $\|\mathcal{L}(\pi_k) - \mathcal{L}(\pi^*)\|_{\infty} \leq \frac{2}{1-\gamma} \left( \frac{1-\gamma^k}{1-\gamma} \sqrt{2AC}\epsilon + \gamma^k \frac{R_{\max}}{1-\gamma} \right)$ . Therefore, after executing a sufficient learning process, TRAJDELETER effectively fine-tunes the policy to achieve convergence.

## VI. EXPERIMENTAL SETUP

### A. Investigated Tasks and Datasets

We conduct experiments on three widely robotic control tasks, Hopper, Half-Cheetah, and Walker2D from MuJoCo [5], which are all commonly utilized in previous studies [11]. In the Hopper task, the objective for the agent is to maneuver a one-legged robot to move forward at the highest possible speed. Moreover, in the Half-Cheetah and Walker2D tasks, the agent is tasked with controlling a cheetah and a bipedal robot respectively, to walk forward as fast as possible.

We utilized offline datasets from D4RL, a benchmark designed for offline RL algorithm evaluation. D4RL offers

TABLE I: Brief Introduction of each task.

Tasks	Observations	Action Type	Data Size
Hopper	11	3	$2 \times 10^6$
Half-Cheetah	17	6	$2 \times 10^6$
Walker2D	17	6	$2 \times 10^6$

diverse datasets for these tasks, including *medium*, *random*, *medium-replay*, and *medium-expert*, each collected using different policies. In our experiments, we chose the *medium-expert*, an agent trained to achieve the highest performance compared to others using different datasets. Table I shows the basic information of them. Further details on the specific tasks and chosen datasets are available in Appendix A.

### B. Baselines

**Retraining from Scratch (Reference).** This baseline involves retraining the agent from scratch. Retraining the agent is applicable when the original training data is accessible and ensures complete trajectory removal. Generally, this method offers a precise guarantee for unlearning specific trajectories, but it is resource-intensive. This method acts as a reference for evaluating other unlearning methods.

**Fine-tuning.** This baseline extends the training of an agent using a modified offline dataset from which the targeted trajectories have been removed. We implement this fine-tuning process to adjust the agent’s parameters with a limited number of iterations.

**Random-reward.** In RL, an agent’s training is fundamentally guided by a reward-based paradigm [58]. Intuitively, for a specific state, if an agent receives a high reward for an action, it is more likely to choose that action again under similar states in preference to actions associated with lower rewards. This baseline edits the reward in the trajectories selected for unlearning by assigning them random rewards. Then, the original agent is fine-tuned on this modified dataset for the unlearning process. In our experiments, random rewards are generated by sampling from a uniform distribution, where the maximum and minimum values are the highest and lowest rewards observed in the entire offline dataset.

### C. Implementation and Experiment Platforms

TRAJDELETER is designed to be agent-agnostic: it should handle unlearning requests for agents trained using various offline RL algorithms. We select six offline RL algorithms that are prevalently used in offline RL community [51]. Specifically, we select bootstrapping error accumulation reduction (BEAR) [37], batch-constrained deep Q-learning (BCQ) [18], conservative Q-learning (CQL) [38], implicit Q-learning (IQL) [36], policy in the latent action space with perturbation (PLAS-P) [77], and twin delayed deep deterministic policy gradient plus behavioral cloning (TD3PlusBC) [16]. We elaborate on the details of investigated algorithms in Appendix C. We use the open-source repository for implementation [51]. For more details on implementation and experiment platforms, please refer to Appendix D.

TABLE II: Precision, recall, and F1-score of TRAJAUDITOR. We evaluate the performance at different unlearning rates using exact unlearning methods, i.e., retraining from scratch (reference).

Tasks	Algorithms	Unlearning rates											
		0.01			0.05			0.1			0.15		
		Precision	Recall	F1	Precision	Recall	F1	Precision	Recall	F1	Precision	Recall	F1
Hopper	BEAR	100.0 %	85.43 %	0.92	99.68 %	84.37 %	0.91	100.0 %	85.15 %	0.92	99.75 %	84.77 %	0.92
	BCQ	100.0 %	81.79 %	0.90	100.0 %	80.14 %	0.89	99.77 %	80.75 %	0.89	98.06 %	80.01 %	0.88
	CQL	100.0 %	84.70 %	0.92	100.0 %	84.92 %	0.92	100.0 %	84.46 %	0.92	100.0 %	85.57 %	0.92
	IQL	99.75 %	83.25 %	0.91	98.98 %	84.06 %	0.91	94.18 %	84.54 %	0.91	95.79 %	84.77 %	0.90
	PLAS-P	100.0 %	54.01 %	0.71	100.0 %	71.25 %	0.85	98.69 %	78.46 %	0.87	88.24 %	81.45 %	0.83
	TD3PlusBC	99.03 %	85.84 %	0.92	98.30 %	83.28 %	0.90	96.00 %	83.93 %	0.90	93.33 %	84.69 %	0.88
	<b>Average</b>	<b>99.80 %</b>	<b>79.17 %</b>	<b>0.88</b>	<b>99.49 %</b>	<b>81.34 %</b>	<b>0.90</b>	<b>97.77 %</b>	<b>82.21 %</b>	<b>0.90</b>	<b>95.86 %</b>	<b>83.54 %</b>	<b>0.89</b>
Half-Cheetah	BEAR	100.0 %	83.18 %	0.91	99.68 %	84.37 %	0.91	100.0 %	84.31 %	0.91	100.0 %	82.50 %	0.91
	BCQ	100.0 %	80.54 %	0.88	100.0 %	75.89 %	0.86	99.75 %	76.89 %	0.87	99.25 %	80.41 %	0.89
	CQL	100.0 %	83.00 %	0.91	100.0 %	77.50 %	0.87	100.0 %	80.00 %	0.88	99.72 %	81.42 %	0.89
	IQL	100.0 %	77.65 %	0.87	100.0 %	79.45 %	0.88	100.0 %	81.72 %	0.90	100.0 %	80.72 %	0.89
	PLAS-P	100.0 %	62.55 %	0.76	100.0 %	72.58 %	0.84	100.0 %	65.47 %	0.78	100.0 %	62.04 %	0.76
	TD3PlusBC	99.45 %	81.13 %	0.89	100.0 %	80.21 %	0.89	100.0 %	80.08 %	0.89	100.0 %	81.50 %	0.90
	<b>Average</b>	<b>99.91 %</b>	<b>77.84 %</b>	<b>0.87</b>	<b>99.95 %</b>	<b>78.33 %</b>	<b>0.88</b>	<b>99.83 %</b>	<b>79.76 %</b>	<b>0.88</b>	<b>98.31 %</b>	<b>78.73 %</b>	<b>0.88</b>
Walker2D	BEAR	99.73 %	82.95 %	0.91	99.61 %	81.32 %	0.90	100.0 %	83.54 %	0.91	99.19 %	83.33 %	0.91
	BCQ	100.0 %	78.25 %	0.88	99.84 %	76.85 %	0.87	99.32 %	78.36 %	0.86	98.88 %	76.85 %	0.86
	CQL	100.0 %	81.99 %	0.89	100.0 %	85.45 %	0.91	99.80 %	82.55 %	0.90	99.35 %	82.27 %	0.90
	IQL	99.75 %	83.25 %	0.91	98.15 %	84.42 %	0.90	97.32 %	74.75 %	0.85	99.04 %	73.71 %	0.84
	PLAS-P	99.77 %	80.18 %	0.89	99.67 %	78.74 %	0.88	100.0 %	79.95 %	0.88	99.28 %	76.89 %	0.87
	TD3PlusBC	99.76 %	84.68 %	0.92	99.15 %	83.78 %	0.90	99.65 %	83.77 %	0.91	99.26 %	85.26 %	0.92
	<b>Average</b>	<b>99.84 %</b>	<b>81.88 %</b>	<b>0.90</b>	<b>99.57 %</b>	<b>81.76 %</b>	<b>0.89</b>	<b>99.00 %</b>	<b>79.72 %</b>	<b>0.88</b>	<b>98.51 %</b>	<b>79.80 %</b>	<b>0.87</b>

#### D. Evaluation Metrics

This section introduces the metrics used to assess the effectiveness of TRAJDELETER from perspectives of efficacy, fidelity, and efficiency, as mentioned in Section III-B. We select six offline algorithms for empirical analysis to evaluate the unlearning method from the aspect of agent-agnostic.

**Precision, Recall and F-1 scores.** These metrics are used to assess the effectiveness of trajectory removal, i.e., the *efficacy* of unlearning [8], [67]. We define “true positives” (TP) as the trajectories that are actually included in the training dataset of the agent, and “false negatives” (FN) refer to the trajectories that are incorrectly marked as part of the training dataset, as identified by TRAJAUDITOR. False negatives (FN) denote those trajectories that, despite being part of the training dataset, are erroneously classified as not included, according to the evaluation by TRAJAUDITOR.

Precision is the number of TP over the number of TP plus the number of FP, i.e.,  $\frac{TP}{TP+FP} \times 100\%$ . Besides, recall is defined as the number of TP over the number of TP plus the number of FN, i.e.,  $\frac{TP}{TP+FN} \times 100\%$ . The F1 score, defined as  $\frac{2 \cdot \text{Precision} \cdot \text{Recall}}{\text{Precision} + \text{Recall}} \times 100\%$ , represents the harmonic mean of precision and recall. A higher F1 score denotes a more proficient method for testing trajectory removal.

**Averaged Cumulative Return.** An unlearning method is practically useful only if it maintains performance levels comparable to the original agent. Hence, we consider the *fidelity* to be the second measure of performance, and apply *Averaged Cumulative Return* to quantify the agent’s performance. An agent interacts with the environment, producing a test trajectory denoted by  $\tau$ . The cumulative return of this trajectory is defined as  $R(\tau) = \sum_{i=0}^{|\tau|} r_i$ . We collect a set of test trajectories  $\mathcal{T}$ . The agent’s performance is then quantified by the average of the cumulative returns, i.e.,  $\frac{1}{|\mathcal{T}|} \sum_{\tau \in \mathcal{T}} R(\tau)$ . Consistent with the evaluation in previous works [15], [51],

our experiments calculate the average cumulative return over 100 test trajectories. A higher return signifies superior agent performance.

**Time Costs.** This metric is to measure the *efficiency* of the unlearning method in terms of how long it takes to “unlearn” or remove learned trajectories from an agent. We conduct all experiments on a device with uniform configuration. A shorter running time incurred by the agent during the unlearning of trajectories is better.

## VII. EMPIRICAL EVALUATIONS

This section evaluates the effectiveness of TRAJDELETER by answering following three research questions (RQs),

- **RQ1.** Does the TRAJAUDITOR effectively verify the efficacy of unlearning?
- **RQ2.** How effective is TRAJDELETER?
- **RQ3.** How do hyper-parameters affect the performance of TRAJDELETER?

In the RQ1, we initially determine whether TRAJAUDITOR for offline reinforcement unlearning can identify the presence of a trajectory in the training dataset. Then, in the second RQ, we apply TRAJDELETER along with baselines to unlearn specific trajectories across various tasks and offline RL algorithms, to present the effectiveness of TRAJDELETER from four perspectives described in Section III-B. Lastly, in the RQ3, we investigate the influence of hyper-parameters on the performance of TRAJDELETER.

**RQ1. Does the proposed TRAJAUDITOR effectively verify the efficacy of unlearning?**

**Experiment Design.** This section aims to verify the effectiveness of TRAJAUDITOR. We define the *unlearning rate* as the proportion of trajectories that need to be forgotten

TABLE III: Percentages of positive predictions by TRAJAUDITOR for the unlearning dataset post unlearning method application.  $D_m$  indicates the remaining dataset not subjected to unlearning. The  $D_{f,0.01}$  and  $D_{f,0.05}$  denote the unlearning dataset with size of 1% and 5% of the original dataset.

Tasks	Algorithms	Retraining (reference)			Fine-tuning			Random-reward			TrajDeleter		
		$D_m$	$D_{f,0.01}$	$D_{f,0.05}$	$D_m$	$D_{f,0.01}$	$D_{f,0.05}$	$D_m$	$D_{f,0.01}$	$D_{f,0.05}$	$D_m$	$D_{f,0.01}$	$D_{f,0.05}$
Hopper	BEAR	89.0 %	2.1 %	4.2 %	87.8 %	90.9 %	79.4 %	84.2 %	62.2	30.5 %	85.1 %	0.0 %	0.0 %
	BCQ	82.1 %	0.0 %	2.9 %	83.4 %	40.6 %	47.1 %	83.2 %	36.4 %	28.4 %	80.2 %	0.0 %	0.0 %
	CQL	85.2 %	0.0 %	0.0 %	84.9 %	80.6 %	75.1 %	88.1 %	77.2 %	43.5 %	83.2 %	0.0 %	0.0 %
	IQL	88.1 %	0.0 %	5.4 %	84.5 %	81.1 %	82.4 %	84.5 %	58.4 %	36.7 %	85.2 %	0.0 %	0.0 %
	PLAS-P	45.8 %	0.0 %	0.0 %	54.3 %	77.6 %	80.7 %	57.8 %	57.1 %	46.7 %	56.3 %	40.5 %	47.5 %
	TD3PlusBC	82.4 %	7.2 %	9.8 %	83.1 %	75.4 %	74.3 %	83.8 %	77.3 %	60.1 %	84.3 %	0.0 %	0.0 %
	<b>Average</b>	<b>78.8 %</b>	<b>1.6 %</b>	<b>3.7 %</b>	<b>79.7 %</b>	<b>74.4 %</b>	<b>73.2 %</b>	<b>80.3 %</b>	<b>61.4 %</b>	<b>41.8 %</b>	<b>79.1 %</b>	<b>6.8 %</b>	<b>7.9 %</b>
Half-Cheetah	BEAR	80.1 %	0.0 %	6.5 %	82.8 %	60.8 %	51.3 %	82.9 %	40.5 %	10.2 %	80.1 %	0.0 %	0.0 %
	BCQ	80.0 %	0.0 %	0.0 %	82.7 %	70.0 %	28.0 %	79.5 %	0.0 %	0.0 %	83.1 %	0.0 %	0.0 %
	CQL	82.7 %	0.0 %	0.0 %	81.7 %	66.6 %	52.6 %	81.3 %	24.6 %	0.0 %	77.9 %	0.0 %	0.0 %
	IQL	78.9 %	0.0 %	0.0 %	80.7 %	0.0 %	0.0 %	84.4 %	0.0 %	0.0 %	82.0 %	0.0 %	0.0 %
	PLAS-P	53.7 %	0.0 %	0.0 %	64.2 %	74.0 %	87.2 %	56.7 %	74.5 %	77.2 %	58.3 %	1.8 %	3.5 %
	TD3PlusBC	75.3 %	0.0 %	0.0 %	75.6 %	45.5 %	54.7 %	82.2 %	80.0 %	25.6 %	78.2 %	0.0 %	0.0 %
	<b>Average</b>	<b>75.1 %</b>	<b>0.0 %</b>	<b>1.1 %</b>	<b>78.1 %</b>	<b>52.8 %</b>	<b>45.6 %</b>	<b>77.8 %</b>	<b>36.6 %</b>	<b>18.8 %</b>	<b>76.6 %</b>	<b>0.3 %</b>	<b>0.6 %</b>
Walker2D	BEAR	82.5 %	6.2 %	5.2 %	83.6 %	69.5 %	71.9 %	84.5 %	29.5 %	8.6 %	84.3 %	0.0 %	0.6 %
	BCQ	80.2 %	0.0 %	1.4 %	78.5 %	40.6 %	31.5 %	79.8 %	21.6 %	0.0 %	79.5 %	0.0 %	0.2 %
	CQL	79.3 %	0.0 %	0.9 %	84.2 %	52.7 %	64.5 %	81.5 %	46.5 %	5.3 %	82.3 %	0.0 %	0.0 %
	IQL	78.9 %	0.0 %	0.0 %	78.5 %	65.2 %	49.9 %	78.0 %	48.6 %	3.5 %	77.5 %	0.0 %	0.3 %
	PLAS-P	80.6 %	1.4 %	4.3 %	81.6 %	66.7 %	70.8 %	81.9 %	69.6 %	74.5 %	83.2 %	51.6 %	60.7 %
	TD3PlusBC	84.6 %	1.5 %	2.1 %	84.3 %	79.7 %	58.1 %	82.8 %	79.5 %	10.5 %	84.7 %	0.0 %	1.3 %
	<b>Average</b>	<b>81.0 %</b>	<b>1.5 %</b>	<b>2.3 %</b>	<b>81.8 %</b>	<b>62.4 %</b>	<b>57.8 %</b>	<b>81.4 %</b>	<b>49.2 %</b>	<b>17.1 %</b>	<b>81.9 %</b>	<b>8.6 %</b>	<b>10.3 %</b>

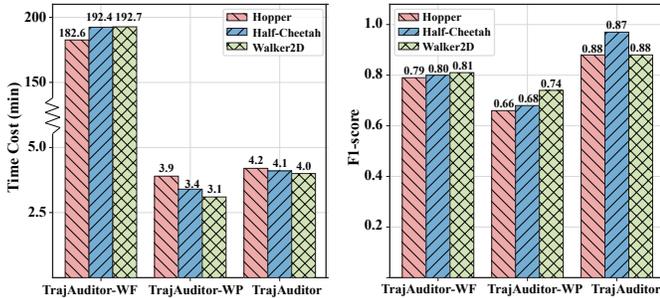


Fig. 3: The time costs (left) and F1-scores (right) achieved by (1) our proposed TRAJAUDITOR, (2) TRAJAUDITOR without the fine-tuning component, and (3) TRAJAUDITOR excluding state perturbations are presented for comparison.

within the entire dataset (i.e., original dataset). We split the entire offline dataset, collected for the mixture of *medium-expert* offline dataset of each task, to the remaining dataset and unlearning dataset across different unlearning rates, i.e.,  $\{0.01, 0.05, 0.10, 0.15\}$ . We ensure the unlearning and the remaining datasets are collected using the same policy. Then, the original agent is trained on the complete offline dataset, while the unlearned agent is trained from scratch using the remaining dataset with  $1 \times 10^6$  timesteps. Thus, the unlearning dataset is definitely excluded from the training dataset of unlearned agents. The number of shadow agents is 5; each fine-tuned for only  $5 \times 10^3$  timesteps starting from the original agent. We perturb the states of the trajectories over 5 rounds using noise sampled from a Gaussian distribution with a mean of 0 and a standard deviation of 0.05.

**Result Analysis.** Table II presents the precision, recall, and F1-scores achieved by TRAJAUDITOR across agents, each trained using distinct offline RL algorithms and subjected to

the dataset with various unlearning rates. This table presents that TRAJAUDITOR consistently attains high F1-scores of 0.85 across a range of agents we tested, demonstrating its efficacy and robustness. The average precision, at 98.97%, is notably higher than the recall, which stands at 80.32%. These results suggest that TRAJAUDITOR is more likely to identify tested trajectories not included in the agents’ training dataset. Offline RL algorithms often suffer from overestimating value function training [18], [38], [77], leading to inaccurate computations of the value vectors for trajectories, mistakenly categorizing them as excluded from the training dataset. Besides, we study the robustness of TRAJAUDITOR in Appenix E1.

We conduct ablation studies to highlight the importance of generating shadow agents by fine-tuning original agents and applying state perturbation techniques in TRAJAUDITOR. In Figure 3, “TRAJAUDITOR-WF” and “TRAJAUDITOR-WP” are methods of acquiring shadow agents by training agents from scratch and assembling a basis for auditing without state perturbations in the tested trajectory, respectively. Our observations indicate that *fine-tuning for shadow agent collection and state perturbations significantly enhance TRAJAUDITOR’s performance*. Figure 3 shows that, on average, TRAJAUDITOR reduces time costs by 97.1% while achieving an F1-score that is 0.08 higher than TRAJAUDITOR-WF. Furthermore, TRAJAUDITOR and TRAJAUDITOR-WP incur similar time costs, yet TRAJAUDITOR achieves F1-scores that are 0.17 higher.

**Answers to RQ1:** TRAJAUDITOR achieves average F1-scores of 0.88, 0.87, and 0.88 in the three tasks. These results present that TRAJAUDITOR accurately identifies trajectories involved in agents’ training datasets. It is a simple yet efficient tool for assessing the efficacy of offline reinforcement unlearning.

## RQ2. How effective is TRAJDELETER?

**Experiment Design.** In this section, we explore applying TRAJDELETER to erase influence of specific trajectories from

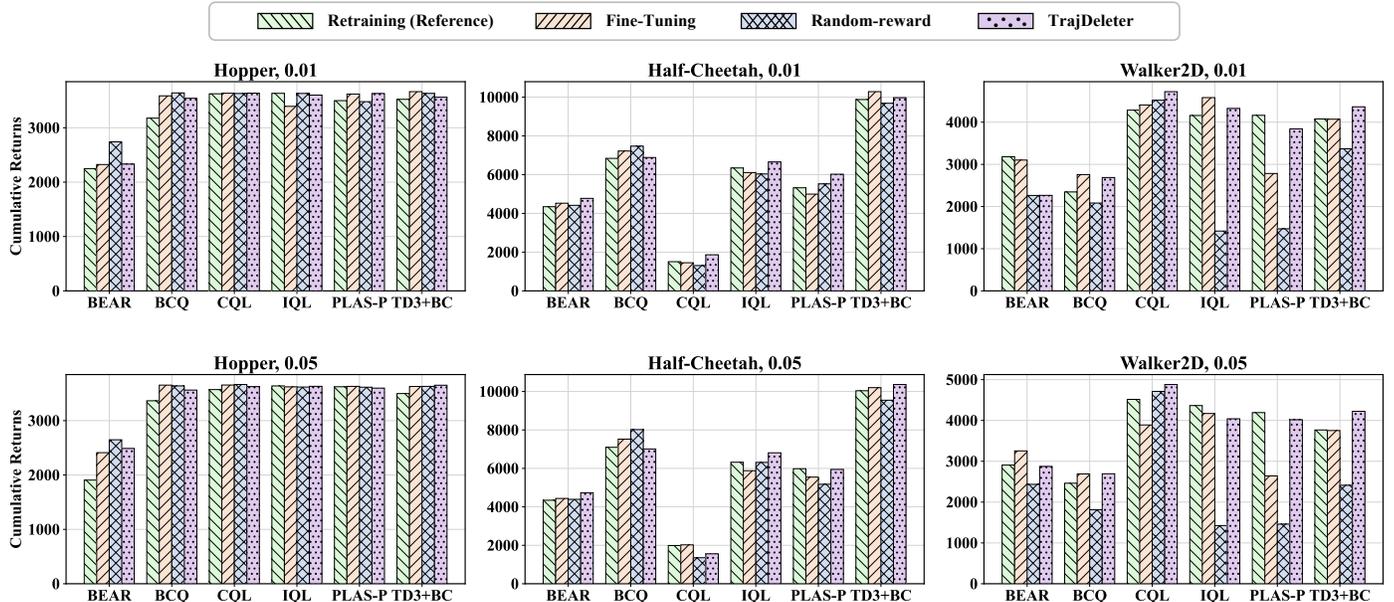


Fig. 4: The cumulative returns are averaged over 100 test trajectories, collected using unlearned agents trained with 5 different random seeds. “0.01” and “0.05” represent the unlearning rates.

offline RL agents. We evaluate TRAJDELETER from four perspectives as we described in Section III-B. Given that the unlearning dataset is typically a small portion of the original dataset, we examine scenarios where 1% and 5% of the offline dataset (i.e., unlearning rates of 0.01 and 0.05) are segregated as unlearning datasets. The remaining portion of the dataset is then considered as the remaining dataset. For retraining from scratch, we follow the methodology detailed in RQ1. The retrained agents serve as a reference for comparing other unlearning methods (i.e., fine-tuning, random-reward, and TRAJDELETER). The unlearning steps for the other methods are set at  $1 \times 10^4$ , amounting to only 1% of the steps required for retraining ( $1 \times 10^6$ ). The durations for “forgetting” ( $K$ ) and “convergence training” ( $H$ ) are set at 8000 and 2000 timesteps, respectively. Additionally, we set the balancing factor  $\lambda$  at 1 (as detailed in Section V-C).

**Result Analysis.** We evaluate the performance of TRAJDELETER from four distinct perspectives as follows.

*Efficacy evaluation.* Table III presents the Percentage of Positive pRedictions (PPR) made by TRAJAUDITOR, reflecting the extent to which the target dataset continues to influence the agents after the implementation of various unlearning methods. This table shows that TRAJDELETER is capable of efficiently eliminating the impact of target trajectories on the agents, with 32 out of 36 settings exhibiting a PPR below 3.5% after unlearning of TRAJDELETER.

As presented in Table III, the variance in positive predictions made by agents unlearned using TRAJDELETER is minimal when compared to the outcomes achieved by retraining from scratch. Specifically, after retraining, TRAJAUDITOR predicts that on average, only 2.7%, 0.55%, and 1.9% of the unlearned dataset continue to influence the agent for the three tasks under investigation. In contrast, for TRAJDELETER, the average PPRs after unlearning are 7.35%, 0.45%, and

TABLE IV: The time costs required for unlearning across TRAJDELETER and its baselines in the three tasks.

Methods	Tasks		
	Hopper	Half-Cheetah	Walker2D
Retraining	200.4 min	223.4 min	199.4 min
Fine-tuning	3.7 min	3.6 min	3.2 min
Random-reward	3.5 min	3.4 min	3.2 min
TRAJDeleter	3.4 min	3.2 min	3.4 min

9.45% for investigated tasks, respectively. These results are significantly lower than those of the baseline methods – after fine-tuning, the PPRs are 73.8%, 44.2%, and 60.1%; while following the random-reward approach, the PPRs stand at 51.6%, 27.7%, and 33.2%. Additionally, the PPRs for the remaining dataset exhibit only slight variations post-retraining, with a mere 0.9% increase compared to the retraining method. Therefore, TRAJDELETER proficiently maintains the integrity of the trajectories’ memory within the remaining dataset.

*Fidelity evaluation.* Figure 4 displays the averaged cumulative returns, calculated by averaging both the mean and variance across 100 test trajectories. As illustrated in Figure 4, the unlearned agents have a comparable performance level compared to those of the agents retrained from scratch. Specifically, the average cumulative returns demonstrate a marginal difference of 2.2%, 0.9%, and 1.6% between the unlearned agents using TRAJDELETER and those subjected to the retraining method. These results suggest that TRAJDELETER does not negatively impact the performance of unlearned agents in real-world interactions, demonstrating the high practicality of our method. More analysis are provided in Appendix D2.

*Efficiency evaluation.* Table IV presents the averaged time costs required for unlearning across TRAJDELETER and its

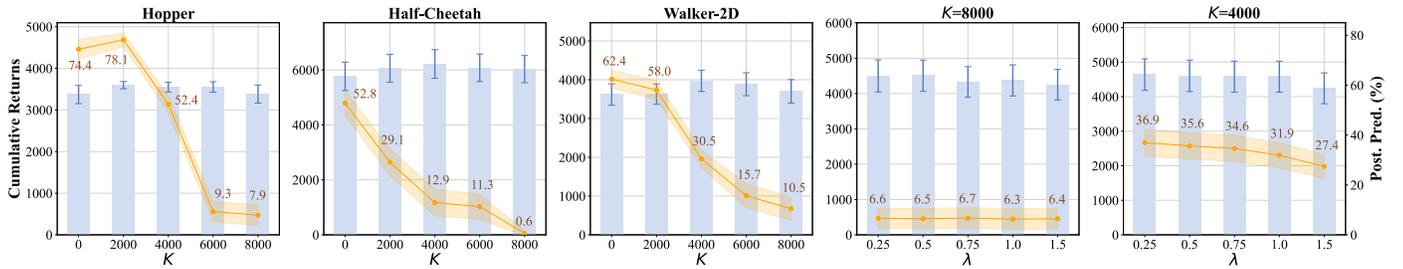


Fig. 5: The influence of forgetting learning steps,  $K$ , and the balancing factor,  $\lambda$ , on the unlearning performance of TRAJDELETER. Yellow points denote the average percentages of Positive Predictions (Post. Pred.) by TRAJAUDITOR for unlearned agents, aligning with the *left* y-axis. Shaded areas denote the standard deviation. Light blue bars illustrate the average returns, corresponding to the *right* y-axis, with the error bars indicating their standard deviation. The unlearning rate is 0.01.

baselines in the three tasks. TRAJAUDITOR requires only 1.5% of the time compared to retraining from scratch. Compared to other unlearning methods, TRAJDELETER introduces no additional computational steps and exhibits a similar time cost, demonstrating the high efficiency of our approach.

*Agent agnostic evaluation.* We have selected six commonly used offline RL algorithms to determine the efficacy of TRAJDELETER in unlearning specific trajectories for agents trained with various offline RL algorithms. Most agents (32 out of 36) can effectively forget the target trajectories without substantial degradation in performance. However, TRAJDELETER achieves over 40.5% PPR when unlearning agents trained using the PLAS-P algorithm in Hopper and Walker2D. These results could be attributed to inaccuracies in TRAJAUDITOR. As shown in Table II, TRAJAUDITOR gets an average recall rate of about average 65% for agents trained using PLAS-P.

**Answers to RQ2:** TRAJDELETER requires only about 1.5% of the time needed for retraining from scratch. It effectively unlearns an average of 92.7%, 95.5% and 90.5% of the targeted trajectories, yet still maintains robust performance in actual environment interactions. The fact that 32 out of 36 settings display a PPR below 3.5% shows the superior agent-agnostic capability of TRAJDELETER.

### RQ3. How do hyper-parameters affect the performance of TRAJDELETER?

**Experiment Design.** This section explores the impact of the forgetting learning steps,  $K$ , and the balancing factor,  $\lambda$ , on the unlearning performance of TRAJDELETER. The forgetting steps,  $K$ , are  $\{0, 2000, 4000, 6000, 8000\}$ . With the total unlearning steps maintained at 10,000, the corresponding convergent training steps are set at  $\{10000, 8000, 6000, 4000, 2000\}$ . The balancing factor  $\lambda$  is to balance the unlearning on forgetting datasets and training on remaining datasets, thereby preventing deterioration in the agent’s performance. We have configured it with values  $\{0.25, 0.5, 0.75, 1.0, 1.5\}$ .

**Result Analysis.** The first, second, and third subfigures in Figure 5 present the average trends in cumulative reward and Percentage of Positive Predictions (PPR) as obtained by TRAJAUDITOR for the unlearned agents across varying forgetting training steps. With an increase in the number of forgetting steps, the PPRs of unlearned agents decrease by 65.5%, 52.8%, and 52.4%, while the agents’ performance remains consistent. As illustrated in the fourth subfigure of Figure 5,

when the forgetting training is adequate, the  $\lambda$  exerts minimal influence on the performance of TRAJDELETER. Moreover, the last subfigure in Figure 5 indicates that when the number of forgetting steps is small, an increase in  $\lambda$  can enhance the unlearning efficiency of TRAJDELETER. Overall,  $K$  exhibits greater sensitivity than  $\lambda$ , suggesting that the primary focus should be on tuning  $K$ . We provide a more comprehensive analysis in Appendix D3.

**Answers to RQ3:** With an increase in the number of forgetting steps, the performance of TRAJDELETER significantly improves, leading to the unlearned agent forgetting more trajectories. When the number of forgetting steps is high, TRAJDELETER exhibits minimal sensitivity to changes in the balancing factor’s value.

## VIII. DISCUSSIONS

This section discusses the importance of “convergence training” within TRAJDELETER, and explores its application in defending against trajectory poisoning attacks. Then, we discuss threats to validity and the limitation of this paper in Appendix E2 and E3.

### A. Ablation Studies

This section conducts ablation studies to emphasize the importance of “convergence training” in the effectiveness of TRAJDELETER. Our experiments focus solely on implementing “forgetting” training with TRAJDELETER, aimed at unlearning the 1% dataset, without engaging in convergence training. In this experiment, the unlearning rates are set at 0.01 and 0.05. The results are illustrated in Table V. We observe that **“convergence training” leads to stronger TRAJDELETER**. We attribute the observed outcomes to the following reasons: In the absence of convergence training, (1) there is a decrease of 541 in the average cumulative returns of agents, and (2) the average percentages of positive predictions of TRAJAUDITOR experiences a reduction of 7.4%. These findings suggest that while convergence training has a minimal impact on the unlearning trajectories, it assists in enhancing the performance of the unlearned agent. Furthermore, it helps in preventing adverse effects on the trajectories within the remaining dataset.

### B. Defending Against Trajectory Poisoning

We also conduct experiments to investigate the effectiveness of TRAJDELETER in defending against trajectory

TABLE V: The relative changes in percentages of positive predictions of TRAJAUDITOR on remaining dataset  $\mathcal{D}_m$  and unlearning dataset  $\mathcal{D}_f$ , and average returns of unlearned agents just using “forgetting”, when compared with its performance after doing “convergence training”. The symbols ‘ $\downarrow$ ’, ‘ $\uparrow$ ’, and ‘-’ denote decreases, increases, and no changes.

Tasks	Algorithms	$D_m$	Unlearning rates			
			0.01		0.05	
			$D_f$	Returns	$D_f$	Returns
Hopper	BEAR	$\downarrow 2.1\%$	- 0.0 %	$\downarrow 1499$	- 0.0 %	$\downarrow 1429$
	BCQ	$\downarrow 7.2\%$	- 0.0 %	$\downarrow 2271$	- 0.0 %	$\downarrow 2562$
	CQL	$\downarrow 1.3\%$	- 0.0 %	$\downarrow 1903$	- 0.0 %	$\downarrow 852$
	IQL	- 0.0%	- 0.0 %	$\downarrow 345$	- 0.0 %	$\downarrow 980$
	PLAS-P	$\downarrow 45.5\%$	$\uparrow 0.7\%$	$\downarrow 1783$	- 0.0 %	$\downarrow 1732$
	TD3PlusBC	$\downarrow 1.4\%$	- 0.0 %	$\uparrow 20$	- 0.0 %	$\downarrow 75$
	<b>Average</b>	$\downarrow 9.6\%$	$\uparrow 0.1\%$	$\downarrow 1297$	- 0.0%	$\downarrow 1272$
Half-Cheetah	BEAR	- 0.0%	- 0.0 %	$\uparrow 772$	- 0.0 %	$\uparrow 611$
	BCQ	$\downarrow 13.2\%$	- 0.0 %	$\uparrow 535$	- 0.0 %	$\uparrow 451$
	CQL	$\downarrow 4.2\%$	- 0.0 %	$\uparrow 100$	- 0.0 %	$\downarrow 344$
	IQL	- 0.0%	- 0.0 %	$\uparrow 382$	- 0.0 %	$\uparrow 431$
	PLAS-P	$\downarrow 1.9\%$	$\uparrow 0.1\%$	$\downarrow 102$	- 0.0 %	$\downarrow 105$
	TD3PlusBC	$\downarrow 32.1\%$	- 0.0 %	$\uparrow 218$	- 0.0 %	$\downarrow 312$
	<b>Average</b>	$\downarrow 8.6\%$	- 0.0%	$\uparrow 284$	- 0.0%	$\uparrow 122$
Walker2D	BEAR	$\downarrow 5.9\%$	- 0.0 %	$\downarrow 134$	- 0.0 %	$\downarrow 755$
	BCQ	$\downarrow 6.1\%$	- 0.0 %	$\uparrow 258$	- 0.0 %	$\uparrow 104$
	CQL	$\downarrow 10.1\%$	- 0.0 %	$\downarrow 2712$	- 0.0 %	$\downarrow 2064$
	IQL	- 0.0 %	- 0.0 %	$\downarrow 101$	- 0.0 %	$\uparrow 289$
	PLAS-P	$\downarrow 2.1\%$	$\uparrow 3.1\%$	$\uparrow 121$	$\uparrow 2.9\%$	$\downarrow 885$
	TD3PlusBC	- 0.0%	- 0.0 %	$\downarrow 488$	- 0.0 %	$\downarrow 144$
	<b>Average</b>	$\downarrow 4.0\%$	$\uparrow 0.5\%$	$\downarrow 509$	$\uparrow 0.5\%$	$\downarrow 576$

poisoning attack. We poison the original dataset by adjusting the action values in the trajectories to be 1.5 times their mean value. This modification is applied to only 5% of the whole dataset. *Poisoning rates* denote the fraction of generated poisoned trajectories in the whole dataset.

All other experimental settings remain consistent with those used for training the original agent. Table VI shows the averaged returns of the poisoned agents, compared with those of agents after unlearning poisoned trajectories. After training the agents on a poisoned dataset, we observed a decrease in their average performance, which is 37.4%, 7.1%, and 18.7% across the three tasks under investigation. TRAJDELETER can mitigate the effects of poisoning in agents, thereby enhancing their performance to match that of agents who have been retrained on a non-poisoned dataset from scratch.

## IX. RELATED WORKS

We discuss related work briefly here and we provide a more comprehensive discussion in Appendix F.

**Offline RL for Real Applications** Recently, offline RL systems work brilliantly on a wide range of real-world fields, including healthcare [44], [12], [13], energy management systems [72], [76], autonomous driving [73], [26], and recommendation systems [64], [74]. In healthcare, online RL is not suitable, as it is ethically and practically problematic to experiment with patients’ health. Thus, Mila et al. [44] used advanced offline RL methods to develop a policy for recommending diabetes and sepsis treatment optimization. Additionally, in various areas, using existing data to learn a policy proved significantly more efficient than online RL methods [72], [73], [63], [35].

TABLE VI: The returns (mean  $\pm$  standard variance) of the poisoned agents, compared with those of agents after the unlearning of poisoned trajectories.

Methods	Poisoning rates	Tasks		
		Hopper	Half-Cheetah	Walker2D
Poisoning	0.01	2169 $\pm$ 542	5263 $\pm$ 833	3127 $\pm$ 759
	0.05	2059 $\pm$ 468	5455 $\pm$ 1051	3158 $\pm$ 847
Retraining	0.01	3357 $\pm$ 342	5761 $\pm$ 1462	3868 $\pm$ 998
	0.05	3357 $\pm$ 342	5761 $\pm$ 1462	3868 $\pm$ 998
Trajdeleter	0.01	3299 $\pm$ 182	6029 $\pm$ 930	3949 $\pm$ 504
	0.05	3421 $\pm$ 543	5679 $\pm$ 843	3855 $\pm$ 849

**Deep Machine Unlearning** Deep machine unlearning [4], [6], [65], [60] refers to eliminating the knowledge of specific data point(s) on the already trained Deep Neural Networks (DNNs). In general, deep machine unlearning is categorized into two main groups: exact unlearning [4], [27], [68] and approximate unlearning methods [60], [22], [21], [9]. Exact unlearning typically involves retraining the DNN from scratch without the data meant to be forgotten, which is computationally demanding due to large datasets [52]. Bourtole et al. [4] proposed SISA method, by splitting the dataset into non-overlapping shards, reduces the need for full retraining, allowing retraining on just one shard. Unlike exact unlearning, which ensures indistinguishable outputs between an unlearned and a fully retrained DNN, approximate unlearning estimates DNN parameters similarly to retraining from scratch [67], [22], [20], [60]. Various recent works also studied certified unlearning definitions [31], [34].

**Certified Unlearning** Recent studies have explored certified unlearning definitions [31], [34], [65], ensuring that unlearned models are theoretically indistinguishable from those retrained from scratch. For approximate unlearning, Guo et al.[31] have made the distributions of unlearned and retrained models nearly identical, using differential privacy techniques. Warnecke et al [65] introduced a certified unlearning for the features and labels unlearning.

## X. CONCLUSIONS

This paper introduces TRAJDELETER, the first practical trajectory-level unlearning method designed specifically for offline RL agents. TRAJDELETER enables agents to erase the influence of the target trajectory and “forget” it. This paper emphasizes approximate unlearning which focuses more on classic supervised learning. To verify if trajectories are truly forgotten, we introduce TRAJAUDITOR, an effective and simple method for evaluating the success of TRAJDELETER in completely removing the influence of specific trajectories from the offline RL agent, paving the path for unlearning study. For unlearning the target trajectories, TRAJDELETER is to prompt the agent to exhibit declining performance when encountering states linked to unlearning trajectories while preserving its original performance level for other remaining trajectories. Our evaluation conducted on six offline RL algorithms and three tasks present that TRAJDELETER consistently forgets the trajectories efficiently while maintaining strong performance in real environment interactions after unlearning. Experiment results advocate that TRAJDELETER is an effective tool for offline reinforcement unlearning.

## REFERENCES

- [1] N. AlHinai, "Introduction to biomedical signal processing and artificial intelligence," in *Biomedical signal processing and artificial intelligence in healthcare*. Elsevier, 2020, pp. 1–28.
- [2] M. Andrychowicz, A. Raichuk, P. Stańczyk, M. Orsini, S. Girgin, R. Marinier, L. Hussenot, M. Geist, O. Pietquin, M. Michalski, S. Gelly, and O. Bachem, "What matters for on-policy deep actor-critic methods? a large-scale study," in *The International Conference on Learning Representations (ICLR)*, 2021.
- [3] F. Boenisch, "A systematic review on model watermarking for neural networks," *Frontiers in big Data*, vol. 4, p. 729663, 2021.
- [4] L. Bourtole, V. Chandrasekaran, C. A. Choquette-Choo, H. Jia, A. Travers, B. Zhang, D. Lie, and N. Papernot, "Machine unlearning," in *2021 IEEE Symposium on Security and Privacy (SP)*, 2021, pp. 141–159.
- [5] G. Brockman, V. Cheung, L. Pettersson *et al.*, "Openai gym," *arXiv preprint arXiv:1606.01540*, 2016.
- [6] J. Brophy and D. Lowd, "Machine unlearning for random forests," in *Proceedings of the 38th International Conference on Machine Learning*, ser. Proceedings of Machine Learning Research, M. Meila and T. Zhang, Eds., vol. 139, 18–24 Jul 2021, pp. 1092–1104.
- [7] N. Carlini, S. Chien, M. Nasr, S. Song, A. Terzis, and F. Tramèr, "Membership inference attacks from first principles," in *2022 IEEE Symposium on Security and Privacy (SP)*, 2022, pp. 1897–1914.
- [8] M. Chen, Z. Zhang, T. Wang, M. Backes, M. Humbert, and Y. Zhang, "Graph unlearning," in *Proceedings of the 2022 ACM SIGSAC Conference on Computer and Communications Security*. Association for Computing Machinery, 2022, p. 499–513.
- [9] V. S. Chundawat, A. K. Tarun, M. Mandal, and M. Kankanhalli, "Zero-shot machine unlearning," *IEEE Transactions on Information Forensics and Security*, vol. 18, pp. 2345–2354, 2023.
- [10] J. Degraeve, F. Felici, J. Buchli, M. Neunert, B. Tracey, F. Carpanese, T. Ewalds, R. Hafner, A. Abdolmaleki, D. de Las Casas *et al.*, "Magnetic control of tokamak plasmas through deep reinforcement learning," *Nature*, vol. 602, no. 7897, pp. 414–419, 2022.
- [11] L. Du, M. Chen, M. Sun, S. Ji, P. Cheng, J. Chen, and Z. Zhang, "Orl-auditor: Dataset auditing in offline deep reinforcement learning," *arXiv preprint arXiv:2309.03081*, 2023.
- [12] H. Emerson, M. Guy, and R. McConville, "Offline reinforcement learning for safer blood glucose control in people with type 1 diabetes," *J. Biomed. Informatics*, 2023.
- [13] M. Fatemi, T. W. Killian, J. Subramanian, and M. Ghassemi, "Medical dead-ends and learning to identify high-risk states and treatments," in *Advances in Neural Information Processing Systems*, 2021, pp. 4856–4870.
- [14] H. Foley, L. Fowl, T. Goldstein, and G. Taylor, "Execute order 66: Targeted data poisoning for reinforcement learning," *CoRR*, 2022. [Online]. Available: <https://arxiv.org/abs/2201.00762>
- [15] J. Fu, A. Kumar, O. Nachum, G. Tucker, and S. Levine, "D4rl: Datasets for deep data-driven reinforcement learning," 2021.
- [16] S. Fujimoto and S. S. Gu, "A minimalist approach to offline reinforcement learning," in *Advances in Neural Information Processing Systems*, vol. 34. Curran Associates, Inc., 2021, pp. 20 132–20 145.
- [17] S. Fujimoto, H. Hoof, and D. Meger, "Addressing function approximation error in actor-critic methods," in *International Conference on Machine Learning*. PMLR, 2018, pp. 1587–1596.
- [18] S. Fujimoto, D. Meger, and D. Precup, "Off-policy deep reinforcement learning without exploration," in *International Conference on Machine Learning*, 2019, pp. 2052–2062.
- [19] D. Georgiou and C. Lambrinouidakis, "Compatibility of a security policy for a cloud-based healthcare system with the EU general data protection regulation (GDPR)," *Inf.*, vol. 11, no. 12, p. 586, 2020.
- [20] A. Golatkar and A. Achille, "Forgetting outside the box: Scrubbing deep networks of information accessible from input-output observations," in *Computer Vision - ECCV 2020 - 16th European Conference, Glasgow, UK, August 23-28, 2020*, vol. 12374, 2020, pp. 383–398.
- [21] A. Golatkar, A. Achille, A. Ravichandran, M. Polito, and S. Soatto, "Mixed-privacy forgetting in deep networks," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2021, pp. 792–801.
- [22] A. Golatkar, A. Achille, and S. Soatto, "Eternal sunshine of the spotless net: Selective forgetting in deep networks," in *2020 IEEE/CVF Conference on Computer Vision and Pattern Recognition, CVPR*, 2020, pp. 9301–9309.
- [23] M. Gomrokchi, S. Amin, H. Aboutalebi, A. Wong, and D. Precup, "Membership inference attacks against temporally correlated data in deep reinforcement learning," 2022.
- [24] C. Gong, Z. Yang, Y. Bai, J. He, J. Shi, A. Sinha, B. Xu, X. Hou, G. Fan, and D. Lo, "Mind your data! hiding backdoors in offline reinforcement learning datasets," *arXiv preprint arXiv:2210.04688*, 2022.
- [25] C. Gong, Z. Yang, Y. Bai, J. Shi, A. Sinha, B. Xu, D. Lo, X. Hou, and G. Fan, "Curiosity-driven and victim-aware adversarial policies," in *Proceedings of the 38th Annual Computer Security Applications Conference*, ser. ACSAC '22, 2022, p. 186–200.
- [26] D. Graves, N. M. Nguyen, K. Hassanzadeh, J. Jin, and J. Luo, "Learning robust driving policies without online exploration," in *IEEE International Conference on Robotics and Automation, ICRA*. IEEE, 2021, pp. 13 186–13 193.
- [27] L. Graves, V. Nagisetty, and V. Ganesh, "Amnesiac machine learning," in *Thirty-Fifth AAAI Conference on Artificial Intelligence, AAAI 2021*. AAAI Press, 2021, pp. 11 516–11 524.
- [28] E. Greensmith, P. L. Bartlett, and J. Baxter, "Variance reduction techniques for gradient estimates in reinforcement learning," *J. Mach. Learn. Res.*, vol. 5, pp. 1471–1530, 2004.
- [29] A. Gretton, K. M. Borgwardt, M. J. Rasch, B. Schölkopf, and A. J. Smola, "A kernel two-sample test," *J. Mach. Learn. Res.*, vol. 13, pp. 723–773, 2012.
- [30] F. E. Grubbs, "Sample criteria for testing outlying observations," *The Annals of Mathematical Statistics*, vol. 21, no. 1, pp. 27–58, 1950.
- [31] C. Guo, T. Goldstein, A. Hannun, and L. Van Der Maaten, "Certified data removal from machine learning models," in *Proceedings of the 37th International Conference on Machine Learning*, ser. Proceedings of Machine Learning Research, vol. 119, 2020, pp. 3832–3842.
- [32] T. Guo, S. Guo, J. Zhang, W. Xu, and J. Wang, "Efficient attribute unlearning: Towards selective removal of input attributes from feature representations," *arXiv preprint arXiv:2202.13295*, 2022.
- [33] T. Haarnoja, A. Zhou, P. Abbeel, and S. Levine, "Soft actor-critic: Off-policy maximum entropy deep reinforcement learning with a stochastic actor," in *International conference on machine learning*, 2018, pp. 1861–1870.
- [34] Z. Izzo, M. Anne Smart, K. Chaudhuri, and J. Zou, "Approximate data deletion from machine learning models," in *Proceedings of The 24th International Conference on Artificial Intelligence and Statistics*, ser. Proceedings of Machine Learning Research, vol. 130. PMLR, 2021, pp. 2008–2016.
- [35] H. Kim, M. Kim, F. Berto, J. Kim, and J. Park, "Devformer: A symmetric transformer for context-aware device placement," in *International Conference on Machine Learning, ICML, 2023, Honolulu, Hawaii, USA*, ser. Proceedings of Machine Learning Research, vol. 202, pp. 16 541–16 566.
- [36] I. Kostrikov, A. Nair, and S. Levine, "Offline reinforcement learning with implicit q-learning," in *International Conference on Learning Representations*, 2022.
- [37] A. Kumar, J. Fu, M. Soh, G. Tucker, and S. Levine, "Stabilizing off-policy q-learning via bootstrapping error reduction," *Advances in Neural Information Processing Systems*, vol. 32, 2019.
- [38] A. Kumar, A. Zhou, G. Tucker, and S. Levine, "Conservative q-learning for offline reinforcement learning," in *NeurIPS*, 2020.
- [39] M. Lejeune, "California consumer privacy act - erste ansätze einer annäherung zu prinzipien der DSGVO in den USA," *Comput. und Recht*, vol. 34, no. 9, pp. 569–576, 2018.
- [40] S. Levine, A. Kumar, G. Tucker, and J. Fu, "Offline reinforcement learning: Tutorial, review, and perspectives on open problems," 2020.
- [41] Z. Li, F. Nie, Q. Sun, F. Da, and H. Zhao, "Boosting offline reinforcement learning for autonomous driving with hierarchical latent skills," 2023.

- [42] Y. Ma, X. Zhang, W. Sun, and J. Zhu, "Policy poisoning in batch reinforcement learning and control," in *Advances in Neural Information Processing Systems*, 2019, pp. 14543–14553.
- [43] V. Mnih, A. P. Badia, M. Mirza, A. Graves, T. Lillicrap, T. Harley, D. Silver, and K. Kavukcuoglu, "Asynchronous methods for deep reinforcement learning," in *Proceedings of The 33rd International Conference on Machine Learning*, 2016, pp. 1928–1937.
- [44] M. Nambiar, S. Ghosh, P. Ong, Y. E. Chan, Y. M. Bee, and P. Krishnaswamy, "Deep offline reinforcement learning for real-world treatment optimization applications," in *Proceedings of the 29th ACM SIGKDD Conference on Knowledge Discovery and Data Mining, KDD*, 2023.
- [45] OpenAI, I. Akkaya, M. Andrychowicz, M. Chociej *et al.*, "Solving rubik's cube with a robot hand," *CoRR*, vol. abs/1910.07113, 2019.
- [46] X. Pan, W. Wang, X. Zhang, B. Li, J. Yi, and D. Song, "How you act tells a lot: Privacy-leaking attack on deep reinforcement learning," in *AAMAS*, vol. 19, no. 2019, 2019, pp. 368–376.
- [47] V. M. Panaretos and Y. Zemel, "Statistical aspects of wasserstein distances," *Annual review of statistics and its application*, vol. 6, pp. 405–431, 2019.
- [48] D. A. Pomerleau, "Alvinn: An autonomous land vehicle in a neural network," *Advances in neural information processing systems*, vol. 1, 1988.
- [49] R. F. Prudencio, M. R. O. A. Maximo, and E. L. Colombini, "A survey on offline reinforcement learning: Taxonomy, review, and open problems," *IEEE Transactions on Neural Networks and Learning Systems*, 2023.
- [50] A. Sekhari, J. Acharya, G. Kamath, and A. T. Suresh, "Remember what you want to forget: Algorithms for machine unlearning," *Advances in Neural Information Processing Systems*, vol. 34, pp. 18075–18086, 2021.
- [51] T. Seno and M. Imai, "d3rlpy: An offline deep reinforcement learning library," *Journal of Machine Learning Research*, vol. 23, no. 315, pp. 1–20, 2022.
- [52] M. Shoenybi, M. Patwary, R. Puri, P. LeGresley, J. Casper, and B. Catanzaro, "Megatron-lm: Training multi-billion parameter language models using model parallelism," *CoRR*, vol. abs/1909.08053, 2019.
- [53] R. Shokri, M. Stronati, C. Song, and V. Shmatikov, "Membership inference attacks against machine learning models," in *2017 IEEE Symposium on Security and Privacy (SP)*, 2017, pp. 3–18.
- [54] D. Silver, G. Lever, N. Heess, T. Degris, D. Wierstra, and M. A. Riedmiller, "Deterministic policy gradient algorithms," in *ICML*, vol. 32, 2014, pp. 387–395.
- [55] B. Singh, R. Kumar, and V. P. Singh, "Reinforcement learning in robotic applications: a comprehensive survey," *Artif. Intell. Rev.*, 2022.
- [56] P. Sodhi, F. Wu, E. R. Elenberg, K. Q. Weinberger, and R. McDonald, "On the effectiveness of offline RL for dialogue response generation," in *International Conference on Machine Learning, ICML*, vol. 202. PMLR, 2023, pp. 32088–32104.
- [57] K. Sohn, H. Lee, and X. Yan, "Learning structured output representation using deep conditional generative models," in *Advances in Neural Information Processing Systems*, 2015, pp. 3483–3491.
- [58] R. S. Sutton and A. G. Barto, *Reinforcement learning: An introduction*. MIT press, 2018.
- [59] Tessian, "How the great resignation is creating more security challenges." 2021. [Online]. Available: <https://www.tessian.com/blog/how-the-great-resignation-is-creating-more-security-challenges/>
- [60] A. Thudi, G. Deza, V. Chandrasekaran, and N. Papernot, "Unrolling SGD: understanding factors influencing machine unlearning," in *7th IEEE European Symposium on Security and Privacy, EuroS&P 2022, Genoa, Italy, June 6-10, 2022*. IEEE, 2022, pp. 303–319.
- [61] E. Todorov, T. Erez, and Y. Tassa, "Mujoco: A physics engine for model-based control," in *2012 IEEE/RSJ International Conference on Intelligent Robots and Systems*. IEEE, 2012, pp. 5026–5033.
- [62] S. Tosatto, M. Pirota, C. D'Eramo, and M. Restelli, "Boosted fitted q-iteration," in *Proceedings of the 34th International Conference on Machine Learning*, vol. 70. PMLR, 2017, pp. 3434–3443.
- [63] S. Verma, J. Fu, S. Yang, and S. Levine, "CHAI: A chatbot AI for task-oriented dialogue with offline reinforcement learning," in *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL*, 2022.
- [64] S. Wang, X. Chen, D. Jannach, and L. Yao, "Causal decision transformer for recommender systems via offline reinforcement learning," 2023.
- [65] A. Warnecke, L. Pirch, C. Wressnegger, and K. Rieck, "Machine unlearning of features and labels," in *30th Annual Network and Distributed System Security Symposium, NDSS 2023, San Diego, California, USA, February 27 - March 3, 2023*, 2023.
- [66] Y. Wu, J. McMahan, X. Zhu, and Q. Xie, "Reward poisoning attacks on offline multi-agent reinforcement learning," in *Thirty-Seventh AAAI Conference on Artificial Intelligence, AAAI*, B. Williams, Y. Chen, and J. Neville, Eds. AAAI Press, 2023, pp. 10426–10434.
- [67] H. Xu, T. Zhu, L. Zhang, W. Zhou, and P. S. Yu, "Machine unlearning: A survey," *ACM Comput. Surv.*, vol. 56, no. 1, pp. 9:1–9:36, 2024.
- [68] H. Yan, X. Li, Z. Guo, H. Li, F. Li, and X. Lin, "ARCANE: an efficient architecture for exact machine unlearning," in *Proceedings of the Thirty-First International Joint Conference on Artificial Intelligence, IJCAI 2022, Vienna, Austria, 23-29 July 2022*, L. D. Raedt, Ed., pp. 4006–4013.
- [69] Y. Yang and ufuk topcu, "Value-based membership inference attack on actor-critic reinforcement learning," 2023. [Online]. Available: <https://openreview.net/forum?id=wKIXJKTDmX->
- [70] J. Yao, E. Chien, M. Du, X. Niu, T. Wang, Z. Cheng, and X. Yue, "Machine unlearning of pre-trained large language models," 2024.
- [71] D. Ye, T. Zhu, C. Zhu, D. Wang, S. Shen, W. Zhou *et al.*, "Reinforcement unlearning," *arXiv preprint arXiv:2312.15910*, 2023.
- [72] X. Zhan, H. Xu, Y. Zhang, X. Zhu, H. Yin, and Y. Zheng, "Deepthermal: Combustion optimization for thermal power generating units using offline reinforcement learning," in *AAAI*, 2022.
- [73] L. Zhang, R. Zhang, T. Wu, R. Weng, M. Han, and Y. Zhao, "Safe reinforcement learning with stability guarantee for motion planning of autonomous vehicles," *IEEE Trans. Neural Networks Learn. Syst.*, 2021.
- [74] Q. Zhang, J. Liu, Y. Dai, Y. Qi, Y. Yuan, K. Zheng, F. Huang, and X. Tan, "Multi-task fusion via reinforcement learning for long-term user satisfaction in recommender systems," in *KDD '22: The 28th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*, 2022, pp. 4510–4520.
- [75] Q. Zhang, C. Yang, J. Lou, L. Xiong *et al.*, "Contrastive unlearning: A contrastive approach to machine unlearning," *arXiv preprint arXiv:2401.10458*, 2024.
- [76] X. Zhang, J. Sun, C. Gong, K. Wang, Y. Cao, H. Chen, and Y. Liu, "Mutual information as intrinsic reward of reinforcement learning agents for on-demand ride pooling," *arXiv preprint arXiv:2312.15195*, 2023.
- [77] W. Zhou, S. Bajracharya, and D. Held, "Plas: Latent action space for offline reinforcement learning," in *Proceedings of the 2020 Conference on Robot Learning*, ser. Proceedings of Machine Learning Research, vol. 155, 2021, pp. 1719–1735.

## APPENDIX

### A. Investigated Tasks and the Dataset

We carry out experiments across three from MuJoCo's robotic control tasks (Hopper, Half-Cheetah, and Walker2D) [61]. In the three robotic control tasks, there is a sensor to monitor the state of the game, collecting information about the robot. Information collected from the sensor is used as the observation of the agent.

In particular, the observation in Hopper is a vector of size 11. Observation in Half-Cheetah and Walker2D is a 17-dimensional vector. These vectors record the positions, velocities, angles, and angular velocities of different components of a robot. We refer the readers to the online document<sup>2</sup> for a detailed explanation. We elaborate these tasks as follows.

<sup>2</sup><https://www.gymlibrary.dev/index.html>

- **Hopper**: In Hopper, the robot is a two-dimensional, single-legged entity comprising four principal components: the torso at the top, the thigh in the center, the leg at the lower end, and a single foot on which the entire body rests. The objective is to maneuver the robot forward (to the right) by exerting torques on the three hinges that interconnect these four body segments.
- **Half-Cheetah**: The robot is two-dimensional, featuring nine linkages and eight joints (including two paws), in the Half-Cheetah task. The aim is to apply torque to these joints, propelling the robot to sprint forward (to the right) as fast as possible. Progress is incentivized with positive rewards for distance covered in the forward direction, while a negative reward is allocated for moving backward. The torso and head of the robot remain stationary, with torque application restricted to the remaining six joints that connect the front and rear thighs to the torso, the shins to the thighs, and the feet to the shins.
- **Walker2D**: This task is an extension of Hopper within the MuJoCo suite. Walker2D introduces a greater number of independent state and control variables to more accurately emulate real-world scenarios. The robot in Walker2D is also two-dimensional but features a bipedal design with four main components: a single torso at the top from which the two legs diverge, a pair of thighs situated below the torso, a pair of legs below the thighs, and two feet attached to the legs that support the entire structure. The objective is to coordinate the movements of both sets of feet, legs, and thighs to progress forward (to the right) by applying torques to the six hinges that connect these body parts.

The datasets used for these tasks are sourced from D4RL [15], a recently introduced and mostly studied benchmark for evaluating offline RL algorithms. D4RL provides a variety of datasets for four tasks, gathered through diverse policies, including *medium*, *random*, *medium-replay*, and *medium-expert*. We elaborate them as follows.

- *medium*: The “medium” dataset involves online training of a policy using Soft Actor-Critic [33], followed by an early termination of this training process, and gathering 1M transitions from this partially-trained policy.
- *random*: The “random” datasets are created by deploying a randomly initialized policy across these three tasks.
- *medium-replay*: The “medium-replay” dataset consists of all transitions recorded in the replay buffer during training, up until the policy attains a “medium” level of performance.
- *expert*: The “expert” dataset is created by blending transitions collected from expert and suboptimal policies. This suboptimal data is generated either through a partially-trained policy or by deploying a policy that operates randomly.

To keep our experiments at a computationally manageable scale, we select the dataset that yields the highest returns for each task. We summarize overview of datasets investigated in our experiments in Table VII.

## B. Implementation

We use the open-source implementation [51] of selected offline RL algorithms, provided in their official repositories with consistent hyper-parameters, such as discount factor,

optimizer, and network architecture. The number of training step for each task is  $1 \times 10^6$ . The significance level of Grubbs’ hypothesis test is 0.001. The training of all offline RL agents is conducted on a server configured with Python 3.7.11, equipped with four NVIDIA GeForce A6000 GPUs and 512GB of memory.

## C. Offline RL Algorithms

This section introduces six investigated offline RL algorithms in our experiments: (1) bootstrapping error accumulation reduction (BEAR) [37], (2) batch-constrained deep Q-learning (BCQ) [18], (3) conservative Q-learning (CQL) [38], (4) implicit Q-learning (IQL) [36], (5) policy in the latent action space with perturbation (PLAS-P) [77], and (6) twin delayed deep deterministic policy gradient plus behavioral cloning (TD3PlusBC) [16].

1) *BEAR*: BEAR enhances the accuracy of value estimation, thereby stabilizing the performance of the algorithm. BEAR employs distribution-constrained backups to diminish the accumulation of bootstrapping errors. In its approach, BEAR utilizes  $K$  Q-functions, selecting the minimum Q-value for policy improvement. The policy is updated to maximize the conservative estimate of the Q-values within the state space  $S$  defined by the set of possible policies. A sampled version of maximum mean discrepancy (MMD) [29] is used to ensure that the actions proposed by the learned policy closely align with those in the dataset. The optimization problem, formulated during the policy improvement phase, is as follows,

$$\begin{aligned} \pi_\phi := \max_{\pi \in \Delta_{|S|}} \mathbb{E}_{s \sim \mathcal{D}} \mathbb{E}_{a \sim \pi(\cdot|s)} \left[ \min_{j=1, \dots, K} \hat{Q}_j(s, a) \right] \\ \text{s.t. } \mathbb{E}_{s \sim \mathcal{D}} [\text{MMD}(\mathcal{D}(s), \pi(\cdot | s))] \leq \varepsilon, \end{aligned}$$

where  $\varepsilon$  represents a carefully selected threshold parameter.

2) *BCQ*: BCQ encourages the agent to generate varied and exploratory actions to enhance performance. BCQ is the first practical data-driven offline RL algorithm. The core concept behind BCQ involves incorporating a generative model to achieve the concept of batch-constrained learning, which means minimizing the difference between the proposed actions and the recorded actions in the dataset. To ensure a variety of actions, BCQ constructs a perturbation model to slightly modify each selected action. It then selects the action with the highest estimated value using a Q-network, which is trained to predict the expected cumulative reward for a specific state-action combination. Therefore, the objective function of BCQ can be formulated as,

$$\pi(s) = \arg \min_{a_i + \xi_\phi(s, a_i, \Phi)} Q_\theta(s, a_i + \xi_\phi(s, a_i, \Phi)), \{a_i \sim G_\omega(s)\}_{i=1}^n,$$

where  $G_\omega$  is a Conditional Variational Auto-Encoder (CVAE) [57], which generates  $n$  potential actions. The perturbation model, denoted as  $\xi_\phi(s, a_i, \Phi)$ , applies a bounded noise to an action  $a$ , where the noise is restricted within the interval  $[-\Phi, \Phi]$ . The value function  $Q_\theta$  scores these generated actions and selects the one with the highest estimated value. The perturbation model  $\xi_\phi$  is optimized to maximize  $Q_\theta(s, a)$  leveraging the deterministic policy gradient algorithm [54] by

TABLE VII: Information of each task and the dataset.

Environments	Tasks	Chosen Datasets	Observations	Action Shape	Action Type	Data Size	Task Type
MuJoCo [61]	Hopper	“hopper-medium-expert”	11	3	Continuous	$2 \times 10^6$	Robotic Control
	Half-Cheetah	“halfcheetah-medium-expert”	17	6	Continuous	$2 \times 10^6$	Robotic Control
	Walker2D	“walker2d-medium-expert”	17	6	Continuous	$2 \times 10^6$	Robotic Control

sampling  $a \sim G_\omega(s)$ ,

$$\Phi \leftarrow \arg \min_{\phi} \sum_{(s,a) \in \mathcal{B}} Q_\theta(a_i + \xi_\phi(s, a_i, \Phi)),$$

where  $\mathcal{B}$  signifies a batch of state-action pairs. BCQ modifies clipped double Q-learning [17] to impose a penalty on the uncertainty associated with future state predictions. The revised learning objective is outlined as follows,

$$r + \gamma \max_{a_i} \left[ \lambda \min_{j=1,2} Q_{\theta_j}(s', a_i) + (1 - \lambda) \max_{j=1,2} Q_{\theta_j}(s', a_i) \right],$$

where  $\{Q_{\theta_1}, Q_{\theta_2}\}$  are two Q-networks and  $a_i$  represents the actions outputted from the generative model  $G_\omega$  with perturbation.

3) *CQL*: CQL highlights a conservative approach to Q-value estimation, which secures the stability of the training process. By providing a conservative estimate of Q-values and introducing regularization techniques, CQL strikes a balance between exploration and safety in the absence of real-time interaction with the environment. It has demonstrated promising results in various applications, including robotics, autonomous systems, and decision-making tasks, where collecting new data is not feasible or safe.

At its core, CQL aims to minimize Q-values across a carefully selected distribution of state-action pairs. This objective is further tightened by adding a maximization component based on the data distribution. Through this process, CQL generates Q-values that provide a lower bound for the value of a policy  $\pi$ . For policy optimization, CQL employs  $\mu(a|s)$ , representing the expected Q-value within a specific state-action distribution, to approximate the policy that maximizes the current Q-function iteration. In addition, CQL incorporates regularization of Q-values during its training phase. An example of such a regularizer,  $R(\mu)$ , could be the KL-divergence relative to a prior distribution,  $\mu(a|s)$ , namely  $R(\mu) = -D_{KL}(\mu, \rho)$ .

4) *IQL*: IQL uses implicit quantile networks to estimate the distributional values of state-action pairs, rather than merely calculating their expected value as prior methods, and thus provides a more robust method for value estimation. Compared to the batch-constrained idea of BCQ, IQL strictly avoids querying values of the actions, which are not in the pre-collected dataset. The loss function of IQL is defined as the following,

$$\mathcal{L}(\theta) = \mathbb{E}_{(s,a,s',a') \sim \mathcal{D}} \left[ (\mathcal{L}_2^\tau(r + \gamma Q_\theta(s', a') - Q_\theta(s, a)))^2 \right],$$

where  $\mathcal{L}_2^\tau(u)$  is defined as  $|\tau - \mathbb{1}(u < 0)|u^2$ , with  $s'$  and  $a'$  denoting the subsequent state and action of  $s$  and  $a$ , respectively.  $Q_\theta(s, a)$  and  $Q_{\hat{\theta}}(s, a)$  correspond to the parameterized Q-function and its target network counterpart. IQL leverages a distinct value function to estimate the expected, which induces

the following loss,

$$\mathcal{L}_V(\psi) = \mathbb{E}_{(s,a) \sim \mathcal{D}} \left[ \mathcal{L}_2^\tau(Q_{\hat{\theta}}(s, a) - V_\psi(s)) \right].$$

Following this, the Q-function is updated through the application of the value function, utilizing the Mean Squared Error (MSE) loss in the subsequent form,

$$\mathcal{L}_Q(\theta) = \mathbb{E}_{(s,a,s') \sim \mathcal{D}} \left[ (r(s, a) + \gamma V_\psi(s') - Q_\theta(s, a))^2 \right].$$

IQL employs a separate step to extract the policy while circumventing the use of actions beyond the sample space. The structured loss function is delineated as,

$$\mathcal{L}_\pi(\phi) = \mathbb{E}_{(s,a) \sim \mathcal{D}} \left[ \exp(\beta(Q_{\hat{\theta}}(s, a) - V_\psi(s))) \log \pi_\phi(a | s) \right],$$

where  $\beta \in [0, \infty]$  is an inverse temperature.

5) *PLAS-P*: To ensure the stable training, PLAS-P represents the policy by a CVAE in the action latent space to implicitly constrain the policy to output actions within the support range of the dataset. Initially, PLAS-P trains a deterministic policy  $z = \pi(s)$  to map a state  $s$  to a “latent action”  $z$ . Subsequently, a pretrained decoder  $p_\beta(a|s, z)$  projects the latent action into the actual action space. The goal of the CVAE is to maximize  $\log p(a|s)$  by optimizing its lower bound,

$$\begin{aligned} \max_{\alpha, \beta} \log p(a | s) &\geq \max_{\alpha, \beta} \mathbb{E}_{z \sim q_\alpha} [\log p_\beta(a | s, z)] \\ &\quad - \mathcal{D}_{KL}[q_\alpha(z | a, s) \| P(z | s)], \end{aligned}$$

where  $q$  is the encoder, and  $\alpha$  and  $\beta$  denote the parameters of the encoder and the decoder, respectively. The guiding principle is that if the latent policy  $z = \pi(s)$  is constrained to produce a latent action  $z$  which is highly probable under the prior  $p(z|s)$ , then the overall policy, as represented by  $p_\beta(a|s, z = \pi(s))$ , is likely to be more probable under the behavior policy  $p(a|s)$ .

6) *TD3PlusBC*: TD3PlusBC is a streamlined yet remarkably efficient offline reinforcement learning algorithm that builds upon the Twin Delayed Deep Deterministic Policy Gradient (TD3) [17] by introducing a regularization term based on Behavioral Cloning (BC) [48], which encourages the policy to prioritize actions that are present in the dataset  $\mathcal{D}$ ,

$$\pi = \operatorname{argmax}_{\pi} \mathbb{E}_{(s,a) \sim \mathcal{D}} \left[ \lambda Q(s, \pi(s)) - (\pi(s) - a)^2 \right],$$

where  $\lambda = \frac{\alpha}{\frac{1}{N} \sum_{(s_i, a_i)} |Q(s_i, a_i)|}$  for the dataset comprises  $N$  instances of state-action pairs denoted by  $s_i$  and  $a_i$ . To achieve a meaningful enhancement in performance for offline reinforcement learning, TD3PlusBC applies a normalization process to each state feature within the provided dataset, which is described by the equation,  $s_i = \frac{s_i - \mu_i}{\sigma_i + \epsilon}$ , where  $s_i$  represents the  $i$ th feature of the state  $s$ , and  $\mu_i$  and  $\sigma_i$  are the mean and standard deviation of the  $i$ th feature throughout the dataset, respectively.

TABLE VIII: The average TD error across trajectories collected using the same behaviour policy. The term ‘‘Original’’ refers to TD errors of agents trained using the entire offline dataset. ‘‘Utilized’’ and ‘‘Excluded’’ indicate the TD errors on trajectories used for training the agent and those not used for training, respectively. ‘‘Diff’’ indicates the differences between these two sets.

Tasks	Algorithms	Original			Unlearning rates								
		Utilized	Excluded	Diff	0.1			0.15			0.2		
					Utilized	Excluded	Diff	Utilized	Excluded	Diff	Utilized	Excluded	Diff
Hopper	BEAR	5.8	5.8	0.0	6.3	6.3	0.0	9.0	9.1	0.1	5.2	5.2	0.0
	BCQ	7.5	7.5	0.0	6.9	6.9	0.0	7.1	7.1	0	6.3	6.3	0.0
	CQL	10.6	10.6	0.0	10.9	10.9	0.0	6.5	6.5	0.0	9.4	9.4	0.0
	IQL	0.5	0.5	0.0	0.5	0.5	0.0	0.4	0.3	0.1	0.4	0.4	0.0
	PLAS-P	11.4	11.4	0.0	11.0	11.0	0.0	10.6	10.7	0.1	10.3	10.3	0.0
	TD3PlusBC	4.2	4.2	0.0	4.0	4.0	0.0	3.8	3.8	0.0	3.7	3.7	0.0
	<b>Average</b>	<b>6.8</b>	<b>6.8</b>	<b>0.0</b>	<b>6.5</b>	<b>6.5</b>	<b>0.0</b>	<b>6.2</b>	<b>6.2</b>	<b>0.05</b>	<b>5.9</b>	<b>5.9</b>	<b>0.0</b>
Half-Cheetah	BEAR	83.1	83.1	0.0	90.0	90.6	0.6	89.9	89.9	0.0	76.1	76.1	0.0
	BCQ	124.3	123.5	0.8	189.8	189.8	0.0	101.4	100.9	0.5	92.7	92.7	0.0
	CQL	48.5	48.5	0.0	62.2	62.2	0.0	68.2	67.8	0.4	49.3	49.3	0.0
	IQL	0.8	0.8	0.0	0.6	0.6	0.0	0.7	0.7	0.0	0.7	0.8	0.1
	PLAS-P	70.4	70.4	0.0	70.9	70.9	0.0	64.8	64.8	0.0	58.2	58.2	0.0
	TD3PlusBC	111.2	114.3	3.1	115.3	115.3	0.0	117.9	117.9	0.0	126.3	126.3	0.0
	<b>Average</b>	<b>73.1</b>	<b>73.3</b>	<b>0.2</b>	<b>88.1</b>	<b>88.0</b>	<b>0.0</b>	<b>73.8</b>	<b>73.6</b>	<b>0.2</b>	<b>67.2</b>	<b>67.2</b>	<b>0.0</b>
Walker2D	BEAR	113.1	113.4	0.4	110.4	110.9	0.5	66.7	68.8	2.1	70.3	70.3	0.0
	BCQ	116.5	116.5	0.0	99.8	98.4	1.4	78.3	78.3	0.0	78.3	78.3	0.0
	CQL	121.2	121.2	0.0	91.6	91.6	0.0	64.6	64.6	0.0	67.9	67.9	0.0
	IQL	12.5	12.8	0.3	10.7	10.7	0.0	6.5	6.5	0.0	6.4	6.4	0.0
	PLAS-P	81.8	81.8	0.0	67.7	69.8	2.1	49.7	49.7	0.0	48.3	49.3	1.0
	TD3PlusBC	72.7	72.3	0.4	66.1	66.1	0.0	45.1	45.1	0.0	43.6	45.0	1.4
	<b>Average</b>	<b>86.3</b>	<b>86.4</b>	<b>0.1</b>	<b>74.4</b>	<b>73.7</b>	<b>0.7</b>	<b>51.8</b>	<b>52.1</b>	<b>0.3</b>	<b>52.5</b>	<b>52.9</b>	<b>0.4</b>

#### D. Supplementary experiments

1) *Error-Based Auditing*: This section investigates the variations in expected TD error (as described in Eq. (7)) between trajectories that are included in and excluded from the agent’s training dataset. Thus, we can assess whether TD error is an effective auditing metric. TD error quantifies the difference between the expected reward that a model anticipates for a specific action in a given state and the actual reward it observes, in addition to the predicted reward for the next state. This prediction relies on the agent’s current policy and value function. This error shares similar concepts with loss in supervised learning. The ideal assumption is that the TD errors of trajectories included in the tested agents’ training dataset would be significantly smaller than those obtained from trajectories excluded from the tested agents’ training dataset.

To verify this, we train the agents using the entire offline dataset. Additionally, we retrain other agents from scratch using different unlearning rates, namely 0.1, 0.15, 0.2. It is noticed that **the trajectories in the unlearning dataset and the remaining dataset are collected using the same behavior policy**. This ensures that the unlearning dataset is included in the original agents but excluded from the retrained agents. Subsequently, we can precisely investigate the disparity in TD errors between trajectories included in the agents’ training dataset and those excluded from it.

Table VIII presents the average TD error across trajectories for different agents. Upon observation, it becomes evident that there is minimal difference in TD errors between trajectories included in the agents’ training dataset and those excluded from it. However, when the trajectories in the unlearning dataset and remaining dataset are collected using different behavior policies (unlearning dataset from the ‘expert’ policy and remaining dataset from the ‘medium’ policy), a significant

difference is observed, as shown in Table IX.

Therefore, the difference in TD errors may simply be caused by the trajectories’ collected policies. These results suggest that TD error may not be a suitable metric for auditing.

2) *Fidelity evaluation of TRAJDELETER*: We consider setting where 1% and 5% of the offline dataset (unlearning rates of 0.01 and 0.05) are allocated as unlearning datasets, while the remaining data serves as the reference dataset. Retrained agents are used as a benchmark for comparing other unlearning methods (fine-tuning, random-reward, and TRAJDELETER). The unlearning steps for these methods are set at  $1 \times 10^4$ , which is only 1% of the steps required for retraining ( $1 \times 10^6$ ). The ‘‘forgetting’’ duration is 8000 timesteps, ‘‘convergence training’’ duration is 2000 timesteps.

Table X presents the cumulative returns, represented as mean  $\pm$  standard deviation, calculated by averaging the mean and variance across 100 test trajectories. These trajectories are gathered using agents trained with five distinct random seeds.

As delineated in Table X, the agents unlearned through TRAJDELETER exhibit a performance level that closely matches that of agents retrained from the ground up. Specifically, the average cumulative returns reveal only a slight variance—2.2%, 0.9%, and 1.6%—when comparing the unlearned agents using TRAJDELETER to those undergoing the retraining process. This finding implies that TRAJDELETER does not detrimentally affect the agents’ operational effectiveness in actual environments, thus underscoring the practical viability of our method. When using the random-reward method for unlearning, there is an average performance decrease of 11.4% in the agents, indicating that trajectories involving random rewards can detrimentally affect the performance of unlearned agents. Employing the fine-tuning method for unlearning agents results in only minimal performance degrada-

TABLE IX: The average TD error across trajectories collected using different behaviour policies for various agents. The term ‘‘Original’’ refers to TD errors of agents trained using the entire offline dataset. ‘‘Utilized’’ and ‘‘Excluded’’ indicate the TD errors on trajectories used for training the agent and those not used for training, which are collected using the different policy.

Tasks	Algorithms	Original			Unlearning rates								
		Utilized	Excluded	Diff	0.1			0.15			0.2		
					Utilized	Excluded	Diff	Utilized	Excluded	Diff	Utilized	Excluded	Diff
Hopper	BEAR	6.8	37.1	30.3	7.2	56.5	49.3	9.0	413.2	404.2	5.2	149.0	143.8
	BCQ	7.5	30.4	22.9	6.9	82.3	75.4	7.1	173.6	166.5	6.3	145.0	138.7
	CQL	10.6	43.4	32.8	10.9	76.4	65.5	6.5	257.1	250.6	9.4	110.0	100.6
	IQL	0.5	1.8	1.3	0.5	2.6	2.1	0.4	9.5	9.1	0.4	7.3	6.9
	PLAS-P	11.4	13.0	1.6	11.0	13.1	2.1	10.6	13.2	2.6	10.3	13.1	2.8
	TD3PlusBC	4.2	15.9	11.7	4.0	37.3	33.3	3.8	75.6	72.8	3.7	64.0	60.3
	<b>Average</b>	<b>6.8</b>	<b>23.6</b>	<b>16.8</b>	<b>6.8</b>	<b>44.7</b>	<b>37.9</b>	<b>6.2</b>	<b>157.0</b>	<b>150.8</b>	<b>5.9</b>	<b>81.4</b>	<b>75.5</b>
Half-Cheetah	BEAR	83.1	197.3	114.2	90.0	245.5	155.5	89.9	254.5	164.6	76.1	240.4	164.3
	BCQ	124.3	212.7	88.4	189.8	417.9	228.1	101.4	255.7	154.3	92.7	268.1	175.4
	CQL	48.5	132.5	84.0	62.2	131.3	69.1	68.2	150.7	82.5	49.3	150.0	100.7
	IQL	0.6	0.8	0.2	0.6	0.6	0	0.4	0.7	0.3	0.5	0.8	0.3
	PLAS-P	70.4	157.1	86.7	70.9	157.5	86.6	64.8	156.6	91.8	58.2	156.7	98.5
	TD3PlusBC	111.2	118.3	7.1	115.3	126.4	11.1	117.9	144.1	26.2	126.3	160.6	34.3
	<b>Average</b>	<b>73.0</b>	<b>136.4</b>	<b>63.4</b>	<b>88.1</b>	<b>179.9</b>	<b>91.8</b>	<b>73.8</b>	<b>160.4</b>	<b>86.6</b>	<b>67.2</b>	<b>162.8</b>	<b>95.6</b>
Walker2D	BEAR	113.1	123.4	10.3	110.4	210.9	100.5	66.7	368.8	302.1	70.3	417.0	346.7
	BCQ	116.5	157.7	41.2	99.8	198.4	98.6	78.3	348.4	270.1	78.3	297.1	218.8
	CQL	121.2	139.9	18.7	91.6	173.3	81.7	64.6	521.6	457	67.9	485.3	417.4
	IQL	10.5	12.8	2.3	10.7	22.3	11.6	6.5	32.8	26.3	6.4	27.7	21.3
	PLAS-P	81.8	114.5	32.7	67.7	149.8	82.1	49.7	192.8	143.1	48.3	182.3	134
	TD3PlusBC	72.7	77.3	4.6	66.1	82.8	16.7	45.1	161.3	116.2	43.6	175.8	132.2
	<b>Average</b>	<b>86.0</b>	<b>104.3</b>	<b>18.3</b>	<b>74.4</b>	<b>139.6</b>	<b>65.2</b>	<b>51.8</b>	<b>271.0</b>	<b>219.2</b>	<b>52.5</b>	<b>264.2</b>	<b>211.7</b>

TABLE X: The cumulative returns (mean  $\pm$  standard variance) are averaged with mean and variance over 100 test trajectories, collected using agents trained with 5 different random seeds. ‘‘0.01’’ and ‘‘0.05’’ represent the unlearning rates.

Tasks	Algorithms	Unlearning Methods							
		Retraining (Reference)		Fine-tuning		Random-reward		TrajDeleter	
		0.01	0.05	0.01	0.05	0.01	0.05	0.01	0.05
Hopper	BEAR	2249 $\pm$ 818	1906 $\pm$ 812	2324 $\pm$ 79	2411 $\pm$ 122	2741 $\pm$ 17	2648 $\pm$ 19	2332 $\pm$ 345	2488 $\pm$ 398
	BCQ	3177 $\pm$ 64	3365 $\pm$ 40	3587 $\pm$ 83	3653 $\pm$ 7	3641 $\pm$ 7	3638 $\pm$ 25	3542 $\pm$ 153	3562 $\pm$ 83
	CQL	3625 $\pm$ 9	3571 $\pm$ 90	3635 $\pm$ 4	3655 $\pm$ 9	3630 $\pm$ 3	3664 $\pm$ 5	3637 $\pm$ 3	3626 $\pm$ 19
	IQL	3633 $\pm$ 7	3638 $\pm$ 9	3394 $\pm$ 107	3621 $\pm$ 9	3631 $\pm$ 25	3618 $\pm$ 8	3601 $\pm$ 67	3631 $\pm$ 22
	PLAS-P	3499 $\pm$ 14	3623 $\pm$ 24	3620 $\pm$ 22	3630 $\pm$ 5.2	3480 $\pm$ 157	3615 $\pm$ 17	3630 $\pm$ 5	3598 $\pm$ 63
	TD3PlusBC	3523 $\pm$ 9	3498 $\pm$ 7	3664 $\pm$ 5.7	3628 $\pm$ 3	3632 $\pm$ 5	3630 $\pm$ 4	3562 $\pm$ 158	3651 $\pm$ 6
	<b>Average</b>	<b>3284 <math>\pm</math> 154</b>	<b>3267 <math>\pm</math> 164</b>	<b>3371 <math>\pm</math> 50</b>	<b>3433 <math>\pm</math> 26</b>	<b>3459 <math>\pm</math> 36</b>	<b>3469 <math>\pm</math> 13</b>	<b>3384 <math>\pm</math> 122</b>	<b>3426 <math>\pm</math> 99</b>
Half-Cheetah	BEAR	4345 $\pm$ 785	4343 $\pm$ 101	4526 $\pm$ 492	4438 $\pm$ 361	4417 $\pm$ 336	4392 $\pm$ 294	4776 $\pm$ 930	4735 $\pm$ 657
	BCQ	6841 $\pm$ 1136	7098 $\pm$ 1076	7220 $\pm$ 1083	7523 $\pm$ 1288	7472 $\pm$ 1173	8016 $\pm$ 510	6885 $\pm$ 1175	7011 $\pm$ 841
	CQL	1507 $\pm$ 237	1988 $\pm$ 235	1452 $\pm$ 170	2023 $\pm$ 104	1306 $\pm$ 141	1353 $\pm$ 206	1865 $\pm$ 194	1556 $\pm$ 171
	IQL	6345 $\pm$ 991	6321 $\pm$ 1048	6108 $\pm$ 932	5882 $\pm$ 859	6034 $\pm$ 950	6312 $\pm$ 868	6657 $\pm$ 916	6812 $\pm$ 952
	PLAS-P	5321 $\pm$ 1758	5984 $\pm$ 944	4996 $\pm$ 727	5547 $\pm$ 1088	5524 $\pm$ 741	5174 $\pm$ 934	6023 $\pm$ 942	5947 $\pm$ 1046
	TD3PlusBC	9878 $\pm$ 1124	10039 $\pm$ 1681	10284 $\pm$ 694	10200 $\pm$ 857	9685 $\pm$ 930	9547 $\pm$ 930	9973 $\pm$ 655	10363 $\pm$ 842
	<b>Average</b>	<b>5706 <math>\pm</math> 1005</b>	<b>5962 <math>\pm</math> 848</b>	<b>5764 <math>\pm</math> 683</b>	<b>5936 <math>\pm</math> 760</b>	<b>5740 <math>\pm</math> 712</b>	<b>5799 <math>\pm</math> 624</b>	<b>6030 <math>\pm</math> 802</b>	<b>6071 <math>\pm</math> 752</b>
Walker2D	BEAR	3181 $\pm$ 496	2907 $\pm$ 517	3102 $\pm$ 426	3254 $\pm$ 481	2263 $\pm$ 648	2434 $\pm$ 638	2265 $\pm$ 559	2873 $\pm$ 474
	BCQ	2346 $\pm$ 590	2462 $\pm$ 524	2758 $\pm$ 435	2689 $\pm$ 366	2083 $\pm$ 581	1814 $\pm$ 492	2688 $\pm$ 472	2694 $\pm$ 437
	CQL	4286 $\pm$ 287	4516 $\pm$ 306	4408 $\pm$ 463	3890 $\pm$ 586	4521 $\pm$ 337	4712 $\pm$ 552	4724 $\pm$ 159	4880 $\pm$ 138
	IQL	4159 $\pm$ 257	4365 $\pm$ 505	4583 $\pm$ 443	4170 $\pm$ 416	1419 $\pm$ 228	1426 $\pm$ 845	4326 $\pm$ 390	4041 $\pm$ 441
	PLAS-P	4163 $\pm$ 329	4192 $\pm$ 325	2784 $\pm$ 249	2641 $\pm$ 449	1471 $\pm$ 462	1460 $\pm$ 418	3841 $\pm$ 481	4017 $\pm$ 474
	TD3PlusBC	4077 $\pm$ 756	3767 $\pm$ 511	4071 $\pm$ 482	3753 $\pm$ 716	3369 $\pm$ 284	2412 $\pm$ 643	4365 $\pm$ 365	4223 $\pm$ 464
	<b>Average</b>	<b>3702 <math>\pm</math> 453</b>	<b>3702 <math>\pm</math> 448</b>	<b>3618 <math>\pm</math> 416</b>	<b>3400 <math>\pm</math> 502</b>	<b>2521 <math>\pm</math> 423</b>	<b>2376 <math>\pm</math> 598</b>	<b>3702 <math>\pm</math> 404</b>	<b>3788 <math>\pm</math> 405</b>

tion. However, as illustrated in Table III, fine-tuning fails to effectively eliminate the impact of target trajectories on the original agents. Consequently, the fine-tuning approach is not an optimal method for unlearning.

3) *Hyper-Parameter Analysis*: This section delves into how the forgetting learning steps, denoted as  $K$ , and the balancing factor,  $\lambda$ , influence the unlearning efficacy of TRAJDELETER. We define the forgetting learning steps,  $K$ , with the values  $\{0, 2000, 4000, 6000, 8000\}$ . To maintain a total of 10,000 unlearning steps, the corresponding training steps for convergence are accordingly set to  $\{10000, 8000, 6000, 4000, 2000\}$ . Meanwhile, the balancing factor  $\lambda$  is pivotal in moderating

the unlearning process for forgotten datasets and the training for remaining datasets, crucially preserving the agent’s performance standards. This factor is adjusted through a range of values:  $\{0.25, 0.5, 0.75, 1.0, 1.5\}$ .

As defined in Section VI-D, higher averaged cumulative returns indicate better overall utility of the unlearned agent, while lower percentage of positive predictions means more complete forgetting of targeted trajectories. Table XI illustrates the impact of forgetting learning steps  $K$  on the unlearning efficacy in TRAJDELETER. The data show that for all scenarios except the PLAS-P algorithm in the Walker2D task, an increase in  $K$  leads to a significant reduction in the percentage of

TABLE XI: The cumulative returns (mean  $\pm$  standard variance) are averaged with mean and variance over 100 test trajectories, collected using agents trained with 5 different random seeds. Percentage of Positive Predictions (Post. Pred.) of TRAJDELETER for unlearned agents on the unlearning dataset.

Tasks	Algorithms	Forgetting Training Steps							
		2000		4000		6000		8000	
		Returns	Post. Pred.						
Hopper	BEAR	3428 $\pm$ 202	89.4 %	3253 $\pm$ 383	59.1 %	3201 $\pm$ 206	0.0 %	2332 $\pm$ 345	0.0 %
	BCQ	3630 $\pm$ 28	77.2 %	3653 $\pm$ 9	28.1 %	3644 $\pm$ 4	0.0 %	3542 $\pm$ 153	0.0 %
	CQL	3628 $\pm$ 34	79.5 %	3628 $\pm$ 6	54.6 %	3648 $\pm$ 5	5.5 %	3637 $\pm$ 3	0.0 %
	IQL	3637 $\pm$ 4	71.2 %	3595 $\pm$ 95	51.5 %	3598 $\pm$ 98	4.7 %	3601 $\pm$ 67	0.0 %
	PLAS-P	3634 $\pm$ 6	68.1 %	3530 $\pm$ 215	63.6 %	3596 $\pm$ 55	45.5 %	3630 $\pm$ 5	47.5 %
	TD3PlusBC	3622 $\pm$ 6	83.3 %	3624 $\pm$ 7	57.2 %	3631 $\pm$ 8	0.0 %	3562 $\pm$ 158	0.0 %
	<b>Average</b>	<b>3597 <math>\pm</math> 47</b>	<b>78.1 %</b>	<b>3547 <math>\pm</math> 119</b>	<b>52.4 %</b>	<b>3553 <math>\pm</math> 63</b>	<b>9.3 %</b>	<b>3384 <math>\pm</math> 122</b>	<b>7.9 %</b>
Half-Cheetah	BEAR	4861 $\pm$ 412	54.7 %	4552 $\pm$ 350	0.0 %	4723 $\pm$ 845	0.0 %	4776 $\pm$ 930	0.0 %
	BCQ	7571 $\pm$ 997	17.0 %	7315 $\pm$ 1051	0.0 %	7024 $\pm$ 1058	0.0 %	6885 $\pm$ 1175	0.0 %
	CQL	1541 $\pm$ 204	27.5 %	1527 $\pm$ 155	0.0 %	1705 $\pm$ 173	0.0 %	1865 $\pm$ 194	0.0 %
	IQL	6051 $\pm$ 1029	0.0 %	6597 $\pm$ 1128	0.0 %	7016 $\pm$ 975	0.0 %	6657 $\pm$ 916	0.0 %
	PLAS-P	6287 $\pm$ 1306	75.3 %	6893 $\pm$ 950	77.3 %	6025 $\pm$ 994	67.9 %	6023 $\pm$ 942	3.5 %
	TD3PlusBC	10048 $\pm$ 394	0.0 %	10418 $\pm$ 816	0.0 %	9969 $\pm$ 759	0.0 %	9973 $\pm$ 655	0.0 %
	<b>Average</b>	<b>6060 <math>\pm</math> 724</b>	<b>29.1 %</b>	<b>6217 <math>\pm</math> 742</b>	<b>12.9 %</b>	<b>6077 <math>\pm</math> 801</b>	<b>11.3 %</b>	<b>6030 <math>\pm</math> 802</b>	<b>0.6 %</b>
Walker2D	BEAR	2944 $\pm$ 559	58.9 %	2832 $\pm$ 496	27.0 %	2636 $\pm$ 508	7.4 %	2265 $\pm$ 559	0.6 %
	BCQ	2912 $\pm$ 432	67.3 %	3287 $\pm$ 399	27.2 %	2803 $\pm$ 439	4.3 %	2688 $\pm$ 472	0.2 %
	CQL	4643 $\pm$ 393	33.3 %	4959 $\pm$ 137	23.2 %	4954 $\pm$ 196	9.4 %	4724 $\pm$ 159	0.0 %
	IQL	3341 $\pm$ 558	49.2 %	4434 $\pm$ 342	26.1 %	4431 $\pm$ 357	5.7 %	4326 $\pm$ 390	0.0 %
	PLAS-P	3448 $\pm$ 296	59.4 %	3748 $\pm$ 484	56.2 %	3946 $\pm$ 463	67.2 %	3841 $\pm$ 481	60.7 %
	TD3PlusBC	4484 $\pm$ 394	80.1 %	4561 $\pm$ 516	23.2 %	4536 $\pm$ 420	0.0 %	4365 $\pm$ 365	1.3 %
	<b>Average</b>	<b>3629 <math>\pm</math> 439</b>	<b>58.0 %</b>	<b>3970 <math>\pm</math> 396</b>	<b>30.5 %</b>	<b>3884 <math>\pm</math> 397</b>	<b>15.7 %</b>	<b>3702 <math>\pm</math> 404</b>	<b>10.5 %</b>

TABLE XII: The cumulative returns (mean  $\pm$  standard variance) and percentage of Positive Predictions (Post. Pred.) of TrajDeleter for unlearned agents on the unlearning dataset. The forgetting training steps is 8000.

Tasks	Algorithms	Value of Balancing Factor							
		0.25		0.5		0.75		1.5	
		Returns	Post. Pred.	Returns	Post. Pred.	Returns	Post. Pred.	Returns	Post. Pred.
Hopper	BEAR	2676 $\pm$ 307	0.0 %	2821 $\pm$ 331	0.0 %	2815 $\pm$ 300	0.0 %	2512 $\pm$ 231	0.0 %
	BCQ	3520 $\pm$ 6	0.0 %	3602 $\pm$ 13	0.0 %	3522 $\pm$ 5	0.0 %	3621 $\pm$ 232	0.0 %
	CQL	3637 $\pm$ 71	0.0 %	3510 $\pm$ 4	0.0 %	3425 $\pm$ 19	0.0 %	3680 $\pm$ 6	0.0 %
	IQL	3725 $\pm$ 16	0.0 %	3568 $\pm$ 104	0.0 %	3511 $\pm$ 110	0.0 %	3310 $\pm$ 37	0.0 %
	PLAS-P	3600 $\pm$ 8	56.8 %	3734 $\pm$ 532	55.4 %	3600 $\pm$ 37	50.6 %	3397 $\pm$ 60	45.5 %
	TD3PlusBC	3750 $\pm$ 5	0.0 %	3638 $\pm$ 10	0.0 %	3731 $\pm$ 103	0.0 %	3774 $\pm$ 61	0.0 %
	<b>Average</b>	<b>3485 <math>\pm</math> 69</b>	<b>9.5 %</b>	<b>3479 <math>\pm</math> 166</b>	<b>9.2 %</b>	<b>3434 <math>\pm</math> 96</b>	<b>8.4 %</b>	<b>3382 <math>\pm</math> 105</b>	<b>7.6 %</b>
Half-Cheetah	BEAR	4629 $\pm$ 428	0.0 %	4711 $\pm$ 551	0.0 %	4905 $\pm$ 843	0.0 %	4843 $\pm$ 726	0.0 %
	BCQ	6604 $\pm$ 946	0.0 %	7546 $\pm$ 1082	0.0 %	6723 $\pm$ 1119	0.0 %	6823 $\pm$ 1310	0.0 %
	CQL	1428 $\pm$ 199	0.0 %	1689 $\pm$ 133	0.0 %	1515 $\pm$ 103	0.0 %	1715 $\pm$ 107	0.0 %
	IQL	6515 $\pm$ 996	0.0 %	6597 $\pm$ 831	0.0 %	6129 $\pm$ 460	0.0 %	6629 $\pm$ 1046	0.0 %
	PLAS-P	6104 $\pm$ 1037	10.7 %	6786 $\pm$ 1050	7.6 %	6122 $\pm$ 1086	9.1 %	6012 $\pm$ 986	5.5 %
	TD3PlusBC	11042 $\pm$ 312	0.0 %	9910 $\pm$ 1060	0.0 %	9992 $\pm$ 623	0.0 %	9559 $\pm$ 1066	0.0 %
	<b>Average</b>	<b>6054 <math>\pm</math> 653</b>	<b>1.8 %</b>	<b>6207 <math>\pm</math> 785</b>	<b>1.3 %</b>	<b>5898 <math>\pm</math> 706</b>	<b>1.5 %</b>	<b>5930 <math>\pm</math> 874</b>	<b>0.9 %</b>
Walker2D	BEAR	3108 $\pm$ 386	1.4 %	2602 $\pm$ 451	0.0 %	2739 $\pm$ 430	0.0 %	2210 $\pm$ 581	0.9 %
	BCQ	2731 $\pm$ 456	0.0 %	2945 $\pm$ 456	0.0 %	2937 $\pm$ 200	0.1 %	2643 $\pm$ 658	0.0 %
	CQL	4719 $\pm$ 226	0.0 %	4123 $\pm$ 233	0.0 %	4421 $\pm$ 210	0.0 %	4132 $\pm$ 365	0.0 %
	IQL	4823 $\pm$ 423	0.0 %	4712 $\pm$ 471	0.0 %	4426 $\pm$ 310	0.0 %	4195 $\pm$ 408	0.0 %
	PLAS-P	3455 $\pm$ 300	49.1 %	3927 $\pm$ 522	53.1 %	3173 $\pm$ 514	60.6 %	3328 $\pm$ 510	61.9 %
	TD3PlusBC	4891 $\pm$ 126	1.1 %	4649 $\pm$ 479	0.4 %	4211 $\pm$ 385	0.0 %	4110 $\pm$ 286	1.9 %
	<b>Average</b>	<b>3955 <math>\pm</math> 320</b>	<b>8.6 %</b>	<b>3826 <math>\pm</math> 435</b>	<b>8.9 %</b>	<b>3651 <math>\pm</math> 342</b>	<b>10.1 %</b>	<b>3436 <math>\pm</math> 468</b>	<b>10.8 %</b>

positive predictions, dropping from 74.4%, 52.8%, and 62.4% to 7.9%, 0.6%, and 10.5% across the three tasks, respectively. Concurrently, the average cumulative returns within each task remain consistent. These results indicate a strong sensitivity of unlearning efficacy to the magnitude of forgetting learning steps  $K$ , suggesting that higher  $K$  values enhance unlearning effectiveness. Furthermore, the utility of the unlearned agents is largely unaffected by changes in  $K$ , implying that a higher  $K$  may be beneficial for the overall unlearning processes.

Table XII delineates the influence of the balancing factor  $\lambda$  on TRAJDELETER’s unlearning efficacy with a constant

forgetting training step count of 8000. In this scenario, most algorithms, excluding PLAS-P, exhibit nearly zero positive predictions, indicating robust unlearning efficacy that remains stable as  $\lambda$  increases. However, there is a decrease in average cumulative returns by 2.9%, 2.0%, and 13.1% across six algorithms in the three tasks.

Conversely, when the forgetting training steps are set at 4000, as shown in Table XIII, the average percentage of positive predictions decreases from 36.9% to 27.4% with an increase in  $\lambda$ . This trend suggests that a larger  $\lambda$  value leads to improved unlearning efficacy when the number of forgetting

TABLE XIII: The cumulative returns (mean  $\pm$  standard variance) and percentage of Positive Predictions (Post. Pred.) of TrajDeleter for unlearned agents on the unlearning dataset. The forgetting training steps is 4000.

Tasks	Algorithms	Value of Balancing Factor							
		0.25		0.5		0.75		1.5	
		Returns	Post. Pred.						
Hopper	BEAR	3641 $\pm$ 36	54.5 %	3577 $\pm$ 130	57.3 %	3659 $\pm$ 24	60.1 %	3085 $\pm$ 120	41.3 %
	BCQ	3558 $\pm$ 154	31.5 %	3653 $\pm$ 6	33.2 %	3641 $\pm$ 4	27.3 %	3642 $\pm$ 8	21.1 %
	CQL	3633 $\pm$ 8	62.3 %	3639 $\pm$ 5	63.4 %	3638 $\pm$ 6	63.6 %	3610 $\pm$ 6	40.4 %
	IQL	3630 $\pm$ 8	59.8 %	3569 $\pm$ 305	59.1 %	3622 $\pm$ 36	60.3 %	3638 $\pm$ 21	50.0 %
	PLAS-P	3614 $\pm$ 36	63.6 %	3623 $\pm$ 26	54.5 %	3618 $\pm$ 35	63.8 %	3625 $\pm$ 6	51.9 %
	TD3PlusBC	3624 $\pm$ 9	81.9 %	3622 $\pm$ 8	77.2 %	3610 $\pm$ 3	72.3 %	3598 $\pm$ 6	61.2 %
	<b>Average</b>	<b>3617 <math>\pm</math> 42</b>	<b>58.9 %</b>	<b>3614 <math>\pm</math> 80</b>	<b>57.5 %</b>	<b>3631 <math>\pm</math> 18</b>	<b>57.9 %</b>	<b>3533 <math>\pm</math> 28</b>	<b>44.3 %</b>
Half-Cheetah	BEAR	4626 $\pm$ 619	0.0 %	4731 $\pm$ 547	0.0 %	4698 $\pm$ 512	0.0 %	4649 $\pm$ 477	0.0 %
	BCQ	8095 $\pm$ 958	0.0 %	7874 $\pm$ 1173	0.0 %	8044 $\pm$ 1032	0.0 %	7705 $\pm$ 977	0.0 %
	CQL	1495 $\pm$ 146	0.0 %	1533 $\pm$ 194	0.0 %	1600 $\pm$ 195	0.0 %	1105 $\pm$ 159	0.0 %
	IQL	6752 $\pm$ 835	0.0 %	6879 $\pm$ 794	0.0 %	6845 $\pm$ 985	0.0 %	6667 $\pm$ 957	0.0 %
	PLAS-P	7286 $\pm$ 1144	73.4 %	6577 $\pm$ 1148	77.8 %	6293 $\pm$ 1072	75.8 %	6167 $\pm$ 943	71.3 %
	TD3PlusBC	10021 $\pm$ 791	0.0 %	10354 $\pm$ 788	0.0 %	10089 $\pm$ 718	0.0 %	9432 $\pm$ 705	0.0 %
	<b>Average</b>	<b>6379 <math>\pm</math> 749</b>	<b>12.2 %</b>	<b>6325 <math>\pm</math> 774</b>	<b>13.0 %</b>	<b>6262 <math>\pm</math> 752</b>	<b>12.6 %</b>	<b>5954 <math>\pm</math> 703</b>	<b>11.9 %</b>
Walker2D	BEAR	2999 $\pm$ 570	26.0 %	2932 $\pm$ 517	33.3 %	2772 $\pm$ 689	30.4 %	2645 $\pm$ 533	17.3 %
	BCQ	2601 $\pm$ 395	21.9 %	2522 $\pm$ 454	24.6 %	2446 $\pm$ 534	22.9 %	2197 $\pm$ 575	21.7 %
	CQL	4947 $\pm$ 186	59.3 %	4940 $\pm$ 270	31.3 %	4998 $\pm$ 81	27.3 %	3426 $\pm$ 778	20.5 %
	IQL	4701 $\pm$ 489	29.3 %	4525 $\pm$ 348	27.5 %	4788 $\pm$ 257	28.3 %	4179 $\pm$ 376	20.7 %
	PLAS-P	3434 $\pm$ 576	77.1 %	3424 $\pm$ 565	79.3 %	3248 $\pm$ 459	66.6 %	2659 $\pm$ 435	59.7 %
	TD3PlusBC	4857 $\pm$ 510	24.5 %	4873 $\pm$ 426	23.1 %	4808 $\pm$ 195	24.7 %	4323 $\pm$ 470	15.9 %
	<b>Average</b>	<b>3923 <math>\pm</math> 454</b>	<b>39.7 %</b>	<b>3869 <math>\pm</math> 430</b>	<b>36.5 %</b>	<b>3843 <math>\pm</math> 369</b>	<b>33.4 %</b>	<b>3238 <math>\pm</math> 528</b>	<b>26.0 %</b>

steps is small. Correspondingly, the average cumulative returns demonstrate a reduction of 2.3%, 6.7%, and 17.5% across the six algorithms in three tasks when  $\lambda$  ranges from 0.25 to 1.5.

In summary, the forgetting learning steps  $K$  exert a more significant impact on unlearning efficacy compared to the balancing factor  $\lambda$ . A higher  $K$  enhances unlearning efficacy while maintaining the utility of the agent. Conversely, an increased  $\lambda$  value improves unlearning efficacy only when  $K$  is moderate, but it may negatively affect the overall utility of the unlearned agent.

### E. Additional Discussions

This section explore the robustness of TRAJAUDITOR, threats to validity, and the limitations of our paper.

1) *Robustness of TRAJAUDITOR*: Prior studies also explore the robustness of the auditing [11]: whether trajectory with some random noises can still be accurately identified as part of an agent’s training dataset. For example, the MuJoCo environments also add small random noises to sensor information (i.e., observing states). Additionally, the offline RL agent deployed in real-world decision-making tasks frequently utilize Gaussian noise to improve the agents’ generalization capabilities [1]. Thus, introducing Gaussian noise into the states of trajectories is a subtle approach to evade detection by an auditor. An effective trajectory auditing method expects to detect trajectories reliably, even if such noise exists.

We follow the MuJoCo documentation<sup>3</sup> to introduce Gaussian noise into each state of the trajectories. This noise follows a distribution with a mean of 0 and a standard deviation of 0.05. Our experimental results presented in Table XIV reveal that TRAJAUDITOR is only slightly affected by the Gaussian noise. Specifically, when processing trajectories that have been

TABLE XIV: The relative changes in precision, recall, and f1-score of TRAJAUDITOR after perturbing the tested trajectories, when compared with its performance on unaltered trajectories.

Tasks	Algorithms	Precision	Recall	F1-score
Hopper	BEAR	-4.0 %	-0.5 %	-0.02
	BCQ	-2.7 %	0.0 %	-0.01
	CQL	-5.9 %	0.0 %	-0.03
	IQL	-4.9 %	0.0 %	-0.01
	PLAS-P	-3.0 %	-1.2 %	-0.01
	TD3PlusBC	-9.1 %	0.0 %	-0.05
	<b>Average</b>	<b>-4.9 %</b>	<b>-0.3 %</b>	<b>-0.02</b>
Half-Cheetah	BEAR	+12.0 %	-13.8 %	-0.02
	BCQ	-1.3 %	-1.5 %	-0.01
	CQL	-3.0 %	+2.0 %	-0.01
	IQL	+2.9 %	+1.6 %	+0.02
	PLAS-P	-3.9 %	0.0 %	-0.02
	TD3PlusBC	-6.0 %	-0.5 %	-0.04
	<b>Average</b>	<b>+0.8 %</b>	<b>-2.0 %</b>	<b>-0.02</b>
Walker2D	BEAR	-1.8 %	-1.8 %	-0.02
	BCQ	0.0 %	0.0 %	0.0
	CQL	-0.3 %	-1.9 %	-0.01
	IQL	+0.4 %	-1.8 %	-0.01
	PLAS-P	+0.6 %	-4.7 %	-0.03
	TD3PlusBC	-1.5 %	0.0 %	-0.01
	<b>Average</b>	<b>-0.4 %</b>	<b>-1.7 %</b>	<b>-0.02</b>

perturbed with this noise, the average F1-score of TRAJAUDITOR decreases by merely 0.02 across the three evaluated tasks compared to the performance on original trajectories. This consistency in performance highlights the robustness of TRAJAUDITOR to maintain accuracy and reliability under varying conditions.

2) *Threats to Validity*: The performance of offline RL algorithms is highly contingent on hyper-parameter configurations. To mitigate potential threats to internal validity, we adhere to the hyper-parameter settings provided in the

<sup>3</sup><https://www.gymlibrary.dev/environments/mujoco/>

D3RLPY [51] replication package. We benchmark the performance of agents developed in this study against those documented in D3RLPY [51], affirming the accurate replication of investigated offline RL algorithms. RL agents usually face the notorious problem of unstable performance [58], [33], [38]. To reduce the impact of environmental randomness and enhance the construct validity, we train the agents using five different random seeds, and each agent is allowed to interact with the environment to generate 100 trajectories. We then use the average cumulative returns from these trajectories to measure the agent’s performance. The findings presented in this paper might have limited applicability to other offline datasets or algorithms. Our experiments are performed using the dataset from the benchmark recently introduced in [15], as well as six advanced offline RL algorithms, to relieve the threats to external validity.

3) *Limitations*: It is notice that various offline algorithms exhibit differing implementing approaches [38], [16], [77], but most of them are fundamentally based on the Actor-Critic (AC) framework [43]. TRAJDELETER is a general methods that can be integrated into all offline algorithms built upon the AC framework. Therefore, our focus is specifically on unlearning agents that have been trained using offline algorithms based on the AC framework. In addition, we acknowledge that the evaluation of TRAJDELETER is dependent on the effectiveness of the trajectories auditing method, i.e., TRAJAUDITOR. TRAJAUDITOR continues to offer room for improvement in accurately determining whether trajectories continue to influence the target trajectories. As a result, this may lead to inaccurate evaluations of offline reinforcement unlearning methods. This issue is also a common challenge in previous unlearning research across various fields [65], [67]. We remain open-minded about this issue, emphasizing that our conclusions are based on the demonstrated effectiveness of TRAJAUDITOR. Our future work aims to develop a more advanced trajectory auditing tool, to facilitate progress of offline reinforcement unlearning.

## F. Related works

1) *Offline RL for Real-World Applications*: Recently, offline RL systems work brilliantly on a wide range of real-world fields, including healthcare [44], [12], [13], energy management systems [72], autonomous driving [73], [26], recommendation systems [64], [74] and dialog systems [63], [56]. In healthcare, online RL is not suitable, as it is ethically and practically problematic to experiment with patients’ health. Thus, Mila et al. [44] used advanced offline RL methods to develop a policy for recommending diabetes and sepsis treatment optimization. Meanwhile, Emerson et al. [12] applied offline RL to determine the optimal insulin dose for maintaining blood glucose levels within a healthy range. Additionally, in various areas, using existing data to learn a policy proved significantly more efficient than online RL methods [72], [73], [63], [35]. In energy management, Zhan et al. [72] introduced a model-based offline RL algorithm aimed at refining the energy combustion control strategy for thermal power generating units (TPGUs). By integrating extensive amounts of historical data from TPGUs with low-fidelity simulation data, they could derive a policy that operates TPGUs within safety constraints. In autonomous driving, researchers gather diverse driving behaviors from multiple drivers and then train the planning

algorithm using offline RL methods [73], [26], [41]. Offline RL systems also make great progress in developing dialog systems. Verma et al. [63] integrated offline RL methods with language models to propose training realistic dialogue agents, promoting the efficiency of completing human-interactive tasks.

As pointed out by Prudencio et al. [49], many research opportunities remain for evaluating, testing, and safeguarding offline RL systems, especially when deploying them in real-world applications. This paper addresses a particular privacy challenge to advance the practical implementation of offline RL.

2) *Machine Unlearning*: Deep machine unlearning [4], [6], [65], [60] refers to eliminating the knowledge of specific data point(s) on the already trained Deep Neural Networks (DNNs). This concept gains particular significance in privacy and data protection legislation, such as the European Union’s General Data Protection Regulation (GDPR) [19], which mandates a “right to erasure.” Deep machine unlearning is categorized into two main groups: exact unlearning [4], [27], [68] and approximate unlearning methods [60], [22], [21], [9]. In exact unlearning, the most straightforward approach is retraining the DNN from scratch thought, excluding the data that is requested to be forgotten from the training set. This is computationally intensive, especially considering DNNs are typically trained on large datasets [52]. Bourtole et al. [4] introduced the SISA method for training DNNs by dividing the dataset into non-overlapping shards, thereby diminishing the necessity for complete retraining since the DNN can be retrained on just one of these shards. Leveraging the one-class classifier, Yan et al. [68] developed a method that accelerates the SISA, while also ensuring the accuracy of the retrained model within a large number of unlearning requests.

Unlike exact unlearning guaranteeing that the outputs of an unlearned DNN and a fully retrained DNN are indistinguishable, approximate unlearning aims to estimate the parameters of DNNs in a manner analogous to retraining the network from scratch [67]. Warnecke et al. [65] established changes of the training dataset to closed-form updates of the DNN parameters, enabling direct adjustments to the DNN parameters in response to unlearning requests. However, this method is only applicable to tabular data. Golatkar et al. [22], [20] presented an approximation of the training process based on the neural tangent kernel and used it to predict the updated DNNs parameters after unlearning. Unrolling SGD [60] operated approximate unlearning by directly stochastic ascent using data to be unlearned.

This paper is the first to develop a method to satisfy the eager unlearning requirements within offline reinforcement learning.

3) *Certified Unlearning*: Various recent works studied certified unlearning definitions [31], [34], offering the theoretical guarantee that the unlearned model is indistinguishable from a DNN retrained from scratch on the remaining dataset. Besides, for approximate unlearning, Guo et al. [31] and Sekhari et al. [50] have proposed methods to ensure that the distributions of an unlearned model and a retrained model are nearly indistinguishable, using differential privacy techniques. Warnecke et al [65] introduced a certified unlearning scheme for the systematic removal of features and labels.