

# An Empirical Study of LLaMA3 Quantization: From LLMs to MLLMs

Wei Huang<sup>1\*</sup>, Xingyu Zheng<sup>\*2</sup>, Xudong Ma<sup>\*2</sup>, Haotong Qin<sup>†3</sup>, Chengtao Lv<sup>2</sup>,  
Hong Chen<sup>2</sup>, Jie Luo<sup>2</sup>, Xiaojuan Qi<sup>1</sup>, Xianglong Liu<sup>2</sup>, and Michele Magno<sup>3</sup>

<sup>1</sup> The University of Hong Kong

<sup>2</sup> Beihang University

<sup>3</sup> ETH Zurich

**Abstract.** The LLaMA family has become one of the most powerful open-source Large Language Models (LLMs) and the popular LLM backbones of Multimodal Large Language Models (MLLMs), widely applied in Computer Vision (CV) and Natural Language Understanding (NLU) tasks. Notably, LLaMA3 models have recently been released and achieve impressive performance across various with super-large scale pre-training on over 15T tokens of data. Given the wide application of low-bit quantization for LLMs in resource-limited scenarios, we explore LLaMA3’s capabilities when quantized to low bit-width. This exploration can potentially unveil new insights and challenges for low-bit quantization of LLaMA3 and other forthcoming LLMs, especially in addressing performance degradation problems that suffer in LLM compression. Specifically, we comprehensively evaluate the 10 existing post-training quantization and LoRA-finetuning methods of LLaMA3 on 1-8 bits and diverse datasets to reveal LLaMA3’s low-bit quantization performance. To uncover the capabilities of low-bit quantized MLLM, we assessed the performance of the LLaMA3-based LLaVA-Next-8B model under 2-4 ultra-low bits with post-training quantization methods. Our experimental results indicate that LLaMA3 still suffers non-negligent degradation in linguistic and visual contexts, particularly under ultra-low bit widths. This highlights the significant performance gap under low bit-width that needs to be bridged in future developments. We expect that this empirical study will prove valuable in advancing future models, driving LLMs and MLLMs to achieve higher accuracy at lower bit to enhance practicality.

## 1 Introduction

Launched by Meta in February 2023, the LLaMA [23] series<sup>4</sup> represents a breakthrough in autoregressive large language models (LLMs) using the Transformer [24] architecture. Right from its first version, with 13 billion parameters, it outperformed the much larger, closed-source GPT-3 model, which boasts 175 billion parameters. On April 18, 2024, Meta introduced the LLaMA3 model, offering 8

\* Equal Contribution. † Corresponding Author.

<sup>4</sup> <https://llama.meta.com>

billion and 70 billion parameter configurations. Thanks to extensive pre-training on more than 15 trillion data tokens, the LLaMA3 models<sup>5</sup> have achieved state-of-the-art (SOTA) performance across a broad range of tasks, establishing the LLaMA family as among the finest open-source LLMs available for a wide variety of applications and deployment scenarios. Recently, the LLaVA team [14] has launched the new LLaVA-Next-8B<sup>6</sup> model based on LLaMA3, giving the stronger general multimodal capabilities of MLLMs.

Despite their impressive performance, deploying LLaMA3 models still poses significant challenges due to resource limitations in many scenarios. Fortunately, low-bit quantization [10, 11, 18, 25] has emerged as one of the most popular techniques for compressing LLMs. This technique reduces the memory and computational requirements of LLMs during inference, enabling them to run on resource-limited devices. Addressing the performance drop after compression is a major concern for current LLM quantization approaches. While numerous low-bit quantization methods have been proposed, their evaluations have primarily focused on the earlier and less capable LLaMA models (LLaMA and LLaMA2). Thus, LLaMA3 presents a new opportunity for the LLM community to assess the performance of quantization on cutting-edge LLMs and MLLMs and understand existing methods’ strengths and limitations. In this empirical study, we aim to analyze the capability of LLaMA3 to handle the challenges associated with degradation due to quantization.

Our study delineates the outcomes of two principal techniques for quantizing LLaMA3 across three evaluation tracks: Post-Training Quantization (PTQ) of LLMs, Quantization of LLMs via LoRA-FineTuning (LoRA-FT), and PTQ of LLaMA3-based MLLM, aiming to conduct a comprehensive assessment of the LLaMA3 model’s capabilities in language and visual-language tasks. We explore a range of cutting-edge quantization methods across technical tracks (RTN, GPTQ [6], AWQ [12], SmoothQuant [25], PB-LLM [21], QuIP [2], DB-LLM [3], BiLLM [9], and Slim-LLM [10] for PTQ; QLoRA [5] and IR-QLoRA [17] for LoRA-FT), covering a wide spectrum from 1 to 8 bits and utilizing a diverse array of evaluation datasets, including WikiText2, C4, PTB, CommonSenseQA datasets (PIQA, ARC-e, ARC-c, HellaSwag, Winogrande), and MMLU benchmark. For multimodal tasks, we follow a common practice [12], performing low-bit post-training quantization on the LLM component of LLaVA-Next-8B using GPTQ and AWQ. We then validate the quantized MLLM inference capabilities on 6 visual language benchmarks, including AI2D, ChartQA, DocVQA, MME, and MMBench(English). The overview of our study is presented as Figure 1. These evaluations assess the capabilities and limits of the LLaMA3 model under current LLM quantization techniques and serve as a source of inspiration for designing future large language and large visual-language model quantization methods. The choice to focus specifically on the LLaMA3 model is motivated by its superior performance among all current open-source instruction-tuned LLMs across a variety of datasets<sup>5</sup>, including 5-shot MMLU, 0-shot GPQA, 0-shot Hu-

<sup>5</sup> <https://github.com/meta-llama/llama3>

<sup>6</sup> <https://llava-vl.github.io/blog/2024-05-10-llava-next-stronger-llms>

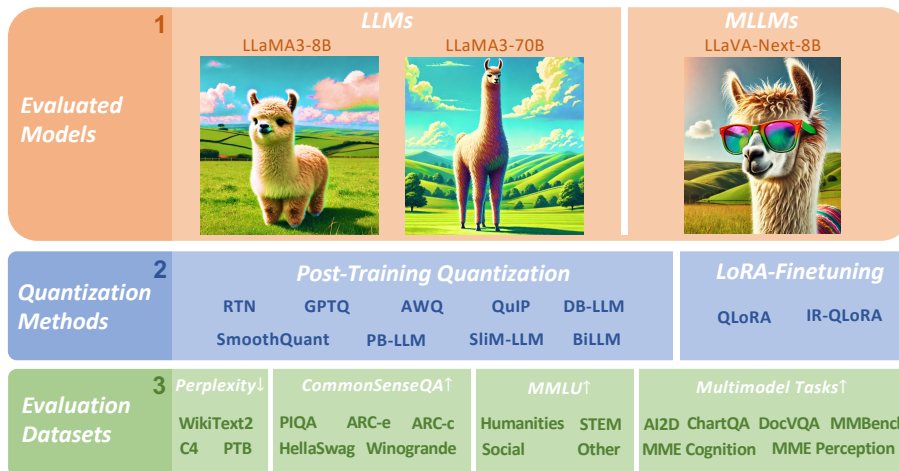


Fig. 1: The overview of our empirical study

manEval, 8-shot CoT GSM-8K, and 4-shot CoT MATH. This not only aids in advancing the research within the LLM and MLLM quantization community but also facilitates a broader understanding and application of effective quantization.

## 2 Empirical Evaluation

We evaluate the low-bit quantization of LLaMA3-8B, -70B, and LLaVA-Next-8B, where the pre-trained models are obtained from their official repositories<sup>5,6</sup>.

**Quantization methods.** To evaluate the performance of low-bit quantized LLaMA3, we select representative LLM quantization methods with extensive influence and functionality, including 9 PTQ methods and 2 LoRA-FT methods. The implementations of our evaluated quantization methods follow their open-source repositories<sup>7</sup>. We also used 8 NVIDIA A800 with 80GB GPU memory for quantitative evaluation.

**Evaluation datasets.** For the PTQ methods, we evaluate quantized LLaMA3 on the WikiText2 [16], PTB [15], and a portion of the C4 dataset [19], using Perplexity (PPL) as the evaluation metric. Subsequently, we further conduct experiments on five zero-shot evaluation tasks (PIQA [1], Winogrande [20], ARC-e

<sup>7</sup> <https://github.com/IST-DASLab/gptq>, <https://github.com/mit-han-lab/llm-awq>, <https://github.com/mit-han-lab/smoothquant>, <https://github.com/Cornell-RelaxML/QuIP>, <https://github.com/Aaronhuang-778/SliM-LLM>, <https://github.com/hahnyuan/PB-LLM>, <https://github.com/Aaronhuang-778/BiLLM>, <https://github.com/artidoro/qlora>, <https://github.com/htqin/IR-QLoRA>

**Table 1:** Evaluation results of post-training quantization on LLaMA3-8B model (1/2)

| Method      | #W  | #A | #G  | PPL↓      |       |       |
|-------------|-----|----|-----|-----------|-------|-------|
|             |     |    |     | WikiText2 | C4    | PTB   |
| LLaMA3      | 16  | 16 | -   | 6.1       | 9.2   | 10.6  |
| RTN         | 4   | 16 | 128 | 8.5       | 13.4  | 14.5  |
|             | 3   | 16 | 128 | 27.9      | 1.1e2 | 95.6  |
|             | 2   | 16 | 128 | 1.9E3     | 2.5E4 | 1.8E4 |
|             | 8   | 16 | -   | 6.2       | 9.5   | 11.2  |
|             | 4   | 16 | -   | 8.7       | 14.0  | 14.9  |
|             | 3   | 16 | -   | 2.2E3     | 5.6E2 | 2.0E3 |
|             | 2   | 16 | -   | 2.7E6     | 7.4E6 | 3.1E6 |
| GPTQ        | 4   | 16 | 128 | 6.5       | 10.4  | 11.0  |
|             | 3   | 16 | 128 | 8.2       | 13.7  | 15.2  |
|             | 2   | 16 | 128 | 2.1E2     | 4.1E4 | 9.1E2 |
|             | 8   | 16 | -   | 6.1       | 9.4   | 10.6  |
|             | 4   | 16 | -   | 7.0       | 11.8  | 14.4  |
|             | 3   | 16 | -   | 13.0      | 45.9  | 37.0  |
|             | 2   | 16 | -   | 5.7E4     | 1.0E5 | 2.7E5 |
| AWQ         | 4   | 16 | 128 | 6.6       | 9.4   | 11.1  |
|             | 3   | 16 | 128 | 8.2       | 11.6  | 13.2  |
|             | 2   | 16 | 128 | 1.7E6     | 2.1E6 | 1.8E6 |
|             | 8   | 16 | -   | 6.1       | 8.9   | 10.6  |
|             | 4   | 16 | -   | 7.1       | 10.1  | 11.8  |
|             | 3   | 16 | -   | 12.8      | 16.8  | 24.0  |
|             | 2   | 16 | -   | 8.2E5     | 8.1E5 | 9.0E5 |
| SliM-LLM    | 4   | 16 | 128 | 6.4       | 9.5   | 10.9  |
|             | 3   | 16 | 128 | 7.7       | 13.1  | 14.7  |
|             | 2   | 16 | 128 | 39.7      | 1.1E2 | 1.6E2 |
| QuIP        | 4   | 16 | -   | 6.5       | 11.1  | 9.5   |
|             | 3   | 16 | -   | 7.5       | 11.3  | 12.6  |
|             | 2   | 16 | -   | 85.1      | 1.3E2 | 1.8E2 |
| DB-LLM      | 2   | 16 | 128 | 13.6      | 19.2  | 23.8  |
| PB-LLM      | 2   | 16 | 128 | 24.7      | 79.2  | 65.6  |
|             | 1.7 | 16 | 128 | 41.8      | 2.6E2 | 1.2E2 |
| BiLLM       | 1.1 | 16 | 128 | 28.3      | 2.9E2 | 94.7  |
| SmoothQuant | 8   | 8  | -   | 6.3       | 9.2   | 10.8  |
|             | 6   | 6  | -   | 7.7       | 11.8  | 12.5  |
|             | 4   | 4  | -   | 4.3E3     | 4.0E3 | 3.6E3 |

[4], ARC-c [4], and Hellaswag [27]) to fully validate the quantized performance of LLaMA3. We further conduct the evaluation on 6 visual language bench-

**Table 2:** Evaluation results of post-training quantization on LLaMA3-8B model (2/2)

| Method      | #W   | #A | #G  | CommonSenseQA↑ |       |       |           |      |      |
|-------------|------|----|-----|----------------|-------|-------|-----------|------|------|
|             |      |    |     | PIQA           | ARC-e | ARC-c | HellaSwag | Wino | Avg. |
| LLaMA3      | 16   | 16 | -   | 79.9           | 80.1  | 50.4  | 60.2      | 72.8 | 68.6 |
| RTN         | 4    | 16 | 128 | 76.6           | 70.1  | 45.0  | 56.8      | 71.0 | 63.9 |
|             | 3    | 16 | 128 | 62.3           | 32.1  | 22.5  | 29.1      | 54.7 | 40.2 |
|             | 2    | 16 | 128 | 53.1           | 24.8  | 22.1  | 26.9      | 53.1 | 36.0 |
|             | 8    | 16 | -   | 79.7           | 80.8  | 50.4  | 60.1      | 73.4 | 68.9 |
|             | 4    | 16 | -   | 75.0           | 68.2  | 39.4  | 56.0      | 69.0 | 61.5 |
|             | 3    | 16 | -   | 56.2           | 31.1  | 20.0  | 27.5      | 53.1 | 35.6 |
|             | 2    | 16 | -   | 53.1           | 24.7  | 21.9  | 25.6      | 51.1 | 35.3 |
| GPTQ        | 4    | 16 | 128 | 78.4           | 78.8  | 47.7  | 59.0      | 72.6 | 67.3 |
|             | 3    | 16 | 128 | 74.9           | 70.5  | 37.7  | 54.3      | 71.1 | 61.7 |
|             | 2    | 16 | 128 | 53.9           | 28.8  | 19.9  | 27.7      | 50.5 | 36.2 |
|             | 8    | 16 | -   | 79.8           | 80.1  | 50.2  | 60.2      | 72.8 | 68.6 |
|             | 4    | 16 | -   | 76.8           | 74.3  | 42.4  | 57.4      | 72.8 | 64.8 |
|             | 3    | 16 | -   | 60.8           | 38.8  | 22.3  | 41.8      | 60.9 | 44.9 |
| AWQ         | 2    | 16 | -   | 52.8           | 25.0  | 20.5  | 26.6      | 49.6 | 34.9 |
|             | 4    | 16 | 128 | 79.1           | 79.7  | 49.3  | 59.1      | 74.0 | 68.2 |
|             | 3    | 16 | 128 | 77.7           | 74.0  | 43.2  | 55.1      | 72.1 | 64.4 |
|             | 2    | 16 | 128 | 52.4           | 24.2  | 21.5  | 25.6      | 50.7 | 34.9 |
|             | 8    | 16 | -   | 79.6           | 80.3  | 50.5  | 60.2      | 72.8 | 68.7 |
|             | 4    | 16 | -   | 78.3           | 77.6  | 48.3  | 58.6      | 72.5 | 67.0 |
| Slim-LLM    | 3    | 16 | -   | 71.9           | 66.7  | 35.1  | 50.7      | 64.7 | 57.8 |
|             | 2    | 16 | -   | 55.2           | 25.2  | 21.3  | 25.4      | 50.4 | 35.5 |
|             | 4    | 16 | 128 | 78.9           | 79.9  | 49.4  | 58.7      | 72.6 | 67.9 |
|             | 3    | 16 | 128 | 77.8           | 73.7  | 42.9  | 55.5      | 72.8 | 64.5 |
|             | 2    | 16 | 128 | 57.1           | 35.4  | 26.1  | 28.9      | 56.6 | 40.8 |
|             | QuIP | 4  | 16  | -              | 78.2  | 78.2  | 47.4      | 58.6 | 73.2 |
| 3           |      | 16 | -   | 76.8           | 72.9  | 41.0  | 55.4      | 72.5 | 63.7 |
| 2           |      | 16 | -   | 52.9           | 29.0  | 21.3  | 29.2      | 51.7 | 36.8 |
| DB-LLM      | 2    | 16 | 128 | 68.9           | 59.1  | 28.2  | 42.1      | 60.4 | 51.8 |
| PB-LLM      | 2    | 16 | 128 | 57.0           | 37.8  | 17.2  | 29.8      | 52.5 | 38.8 |
|             | 1.7  | 16 | 128 | 52.5           | 31.7  | 17.5  | 27.7      | 50.4 | 36.0 |
| BiLLM       | 1.1  | 16 | 128 | 56.1           | 36.0  | 17.7  | 28.9      | 51.0 | 37.9 |
| SmoothQuant | 8    | 8  | -   | 79.5           | 79.7  | 49.0  | 60.0      | 73.2 | 68.3 |
|             | 6    | 6  | -   | 76.8           | 75.5  | 45.0  | 56.9      | 69.0 | 64.6 |
|             | 4    | 4  | -   | 54.6           | 26.3  | 20.0  | 26.4      | 50.3 | 35.5 |

marks (AI2D, ChartQA, DocVQA, MME, and MMBench(English)) for quantized LLaVA-Next-8B. For the LoRA-FT methods, we conduct the evaluation

**Table 3:** Evaluation results of post-training quantization on LLaMA3-70B model (1/2)

| Method      | #W  | #A | #G  | PPL↓      |       |       |
|-------------|-----|----|-----|-----------|-------|-------|
|             |     |    |     | WikiText2 | C4    | PTB   |
| LLaMA3      | 16  | 16 | -   | 2.9       | 6.9   | 8.2   |
| RTN         | 4   | 16 | 128 | 3.6       | 8.9   | 9.1   |
|             | 3   | 16 | 128 | 11.8      | 22.0  | 26.3  |
|             | 2   | 16 | 128 | 4.6E5     | 4.7E5 | 3.8E5 |
| GPTQ        | 4   | 16 | 128 | 3.3       | 6.9   | 8.3   |
|             | 3   | 16 | 128 | 5.2       | 10.5  | 9.7   |
|             | 2   | 16 | 128 | 11.9      | 22.8  | 31.6  |
| AWQ         | 4   | 16 | 128 | 3.3       | 7.0   | 8.3   |
|             | 3   | 16 | 128 | 4.8       | 8.0   | 9.0   |
|             | 2   | 16 | 128 | 1.7E6     | 1.4E6 | 1.5E6 |
| Slim-LLM    | 4   | 16 | 128 | 3.3       | 7.0   | 8.3   |
|             | 3   | 16 | 128 | 4.1       | 7.9   | 9.0   |
|             | 2   | 16 | 128 | 9.5       | 16.2  | 18.7  |
| QuIP        | 4   | 16 | -   | 3.4       | 7.1   | 8.4   |
|             | 3   | 16 | -   | 4.7       | 8.0   | 8.9   |
|             | 2   | 16 | -   | 13.0      | 22.2  | 24.9  |
| PB-LLM      | 2   | 16 | 128 | 11.6      | 34.5  | 27.2  |
|             | 1.7 | 16 | 128 | 18.6      | 65.2  | 55.9  |
| BiLLM       | 1.1 | 16 | 128 | 17.1      | 77.7  | 54.2  |
| SmoothQuant | 8   | 8  | -   | 2.9       | 6.9   | 8.2   |
|             | 6   | 6  | -   | 2.9       | 6.9   | 8.2   |
|             | 4   | 4  | -   | 9.6       | 16.9  | 17.7  |

on the 5-shot MMLU benchmark [7] while also validating the aforementioned 5 zero-shot datasets for the LoRA-FT methods.

For the fairness of our evaluation, we uniformly use WikiText2 as the calibration dataset for all quantization methods, with a sample size of 128 and a sequence length of 2048. Furthermore, for quantization methods requiring channel-wise grouping, we adopt a block size of 128 to balance performance and inference efficiency, which is a common practice in existing works.

## 2.1 Track1: Post-Training Quantization

As shown in Table 1 to Table 4, we provide the performance of low-bit LLaMA3-8B and LLaMA3-70B with 8 different PTQ methods, respectively, covering a wide bit-width spectrum from 1 to 8-bit.

Among them, Round-To-Nearest (RTN) is a vanilla rounding quantization method. GPTQ [6] is currently one of the most efficient and effective weight-only

**Table 4:** Evaluation results of post-training quantization on LLaMA3-70B model (2/2)

| Method      | #W  | #A | #G  | CommonSenseQA↑ |       |       |           |      |      |
|-------------|-----|----|-----|----------------|-------|-------|-----------|------|------|
|             |     |    |     | PIQA           | ARC-e | ARC-c | HellaSwag | Wino | Avg. |
| LLaMA3      | 16  | 16 | -   | 82.4           | 86.9  | 60.3  | 66.4      | 80.6 | 75.3 |
| RTN         | 4   | 16 | 128 | 82.3           | 85.2  | 58.4  | 65.6      | 79.8 | 74.3 |
|             | 3   | 16 | 128 | 64.2           | 48.9  | 25.1  | 41.1      | 60.5 | 48.0 |
|             | 2   | 16 | 128 | 53.2           | 23.9  | 22.1  | 25.8      | 53.0 | 35.6 |
| GPTQ        | 4   | 16 | 128 | 82.9           | 86.3  | 58.4  | 66.1      | 80.7 | 74.9 |
|             | 3   | 16 | 128 | 80.6           | 79.6  | 52.1  | 63.5      | 77.1 | 70.6 |
|             | 2   | 16 | 128 | 62.7           | 38.9  | 24.6  | 41.0      | 59.9 | 45.4 |
| AWQ         | 4   | 16 | 128 | 82.7           | 86.3  | 59.0  | 65.7      | 80.9 | 74.9 |
|             | 3   | 16 | 128 | 81.4           | 84.7  | 58.0  | 63.5      | 78.6 | 73.2 |
|             | 2   | 16 | 128 | 52.2           | 25.5  | 23.1  | 25.6      | 52.3 | 35.7 |
| Slim-LLM    | 4   | 16 | 128 | 82.9           | 86.5  | 59.0  | 66.2      | 80.7 | 75.1 |
|             | 3   | 16 | 128 | 81.6           | 83.1  | 58.5  | 64.7      | 78.4 | 73.3 |
|             | 2   | 16 | 128 | 76.2           | 66.3  | 45.7  | 55.4      | 63.7 | 61.5 |
| QuIP        | 4   | 16 | -   | 82.5           | 86.0  | 58.7  | 65.7      | 79.7 | 74.5 |
|             | 3   | 16 | -   | 82.3           | 83.3  | 54.9  | 63.9      | 78.4 | 72.5 |
|             | 2   | 16 | -   | 65.3           | 48.9  | 26.5  | 40.9      | 61.7 | 48.7 |
| PB-LLM      | 2   | 16 | 128 | 65.2           | 40.6  | 25.1  | 42.7      | 56.4 | 46.0 |
|             | 1.7 | 16 | 128 | 56.5           | 49.9  | 25.8  | 34.9      | 53.1 | 44.1 |
| BiLLM       | 1.1 | 16 | 128 | 58.2           | 46.4  | 25.1  | 37.5      | 53.6 | 44.2 |
| SmoothQuant | 8   | 8  | -   | 82.2           | 86.9  | 60.2  | 66.3      | 80.7 | 75.3 |
|             | 6   | 6  | -   | 82.4           | 87.0  | 59.9  | 66.1      | 80.6 | 75.2 |
|             | 4   | 4  | -   | 76.9           | 75.8  | 43.5  | 52.9      | 58.9 | 61.6 |

quantization methods, which utilizes error compensation in quantization. But under 2-3 bits, GPTQ causes severe accuracy collapse when quantized LLaMA3. AWQ [12] adopts an anomaly channel suppression approach to reduce the difficulty of weight quantization, and QuIP [2] ensures the incoherence between weights and Hessian by optimizing matrix computation. Recently, Slim-LLM [10] utilizes the clustering feature of salient weights to propose a group-wise mixed-precision quantization method, achieving high-accuracy low-bit quantization in a hardware-friendly manner. Both of them can keep LLaMA3’s capability at 3-bit and even push the 2-bit quantization to promising.

The recent emergence of binarized LLM quantization methods has realized ultra-low bit-width LLM weight compression. PB-LLM [21] employs a mixed-precision quantization strategy, retaining a small portion of significant weight full-precision while quantizing the majority of weights to 1-bit. DB-LLM [3] achieves efficient LLM compression through double binarization weight splitting and proposes a deviation-aware distillation strategy to further enhance 2-

**Table 5:** LoRA-FT on LLaMA3-8B with Alpaca dataset (1/2)

| Method      | #W | MMLU $\uparrow$ |      |        |       |      |
|-------------|----|-----------------|------|--------|-------|------|
|             |    | Hums.           | STEM | Social | Other | Avg. |
| LLaMA3      | 16 | 59.0            | 55.3 | 76.0   | 71.5  | 64.8 |
| NormalFloat | 4  | 56.8            | 52.9 | 73.6   | 69.4  | 62.5 |
| QLoRA       | 4  | 50.3            | 49.3 | 65.8   | 64.2  | 56.7 |
| IR-QLoRA    | 4  | 52.2            | 49.0 | 66.5   | 63.1  | 57.2 |

**Table 6:** LoRA-FT on LLaMA3-8B with Alpaca dataset (2/2)

| Method      | #W | CommonSenseQA $\uparrow$ |       |       |           |      |      |
|-------------|----|--------------------------|-------|-------|-----------|------|------|
|             |    | PIQA                     | ARC-e | ARC-c | HellaSwag | Wino | Avg. |
| LLaMA3      | 16 | 79.9                     | 80.1  | 50.4  | 60.2      | 72.8 | 68.6 |
| NormalFloat | 4  | 78.6                     | 78.5  | 46.2  | 58.8      | 74.3 | 67.3 |
| QLoRA       | 4  | 76.6                     | 74.8  | 45.0  | 59.4      | 67.0 | 64.5 |
| IR-QLoRA    | 4  | 76.3                     | 74.3  | 45.3  | 59.1      | 69.5 | 64.9 |

bit LLM performance. BiLLM [9] further pushes the LLM quantization boundary to as low as 1.1-bit through residual approximation of salient weights and grouped quantization of non-salient weights. These LLM quantization methods specially designed for ultra-low bit-width can achieve higher accuracy of quantized LLaMA3-8B at  $\leq$  2-bit, far outperforms methods like GPTQ, AWQ, and QuIP under 2-bit (even 3-bit some cases).

We also perform evaluation on quantized activations via SmoothQuant [25], which moves the quantization difficulty offline from activations to weights to smooth out activation outliers. Our evaluation shows that SmoothQuant can retain the accuracy of LLaMA3 with 6/8-bit weights and activations, but faces collapse at 4-bit. Moreover, we find that the LLaMA3-70B model shows significant robustness for various quantization methods, even in ultra-low bit-width.

## 2.2 Track2: LoRA-FineTuning Quantization

Except for the PTQ methods, we also provide the performance of 4-bit LLaMA3-8B with 2 different LoRA-FT quantization methods as shown in Table 5 to Table 6, including QLoRA [5] and IR-QLoRA [17].

On the MMLU dataset, the most notable observation with LLaMA3-8B under LoRA-FT quantization is that low-rank finetuning on the Alpaca [22] dataset not only cannot compensate for the errors introduced by quantization, even making the degradation more severe. Specifically, various LoRA-FT quantization methods obtain worse performance quantized LLaMA3 under 4-bit compared with their 4-bit counterparts without LoRA-FT. This is in stark contrast to similar



**Table 7:** Evaluation results of post-training quantization on LLaVA-Next-8B (1/2)

| Method                    | #W | #G  | PPL↓      |       |       |
|---------------------------|----|-----|-----------|-------|-------|
|                           |    |     | WikiText2 | C4    | PTB   |
| LLaVA-Next<br>(LLaMA3-8B) | 16 | -   | 9.5       | 14.8  | 16.3  |
| GPTQ                      | 4  | 128 | 9.5       | 14.8  | 17.1  |
|                           | 3  | 128 | 13.0      | 19.5  | 28.4  |
|                           | 2  | 128 | 83.7      | 3.1E3 | 2.0E2 |
| AWQ                       | 4  | 128 | 9.9       | 15.3  | 16.9  |
|                           | 3  | 128 | 11.7      | 17.9  | 20.2  |
|                           | 2  | 128 | 1.6E6     | 2.0E6 | 2.2E6 |

**Table 8:** Evaluation results of post-training quantization on LLaVA-Next-8B (2/2)

| Method                    | #W | #G  | Multimodel Tasks↑ |             |            |             |                  |                   |
|---------------------------|----|-----|-------------------|-------------|------------|-------------|------------------|-------------------|
|                           |    |     | AI2D              | Chart<br>QA | Doc<br>VQA | MM<br>Bench | MME<br>Cognition | MME<br>Perception |
| LLaVA-Next<br>(LLaMA3-8B) | 16 | -   | 71.7              | 69.2        | 78.2       | 72.2        | 376.8            | 1588.3            |
| GPTQ                      | 4  | 128 | 70.7              | 67.4        | 77.4       | 71.0        | 331.6            | 1563.4            |
|                           | 3  | 128 | 66.2              | 65.1        | 75.6       | 67.4        | 290.1            | 1541.7            |
|                           | 2  | 128 | 0.0               | 0.0         | 0.0        | 0.0         | 0.0              | 0.0               |
| AWQ                       | 4  | 128 | 70.6              | 68.0        | 77.2       | 71.1        | 325.7            | 1562.7            |
|                           | 3  | 128 | 67.7              | 65.4        | 74.4       | 68.0        | 298.6            | 1541.7            |
|                           | 2  | 128 | 0.0               | 0.0         | 0.0        | 0.0         | 0.0              | 0.0               |

phenomena on LLaMA and LLaMA2, where, for the front one, the 4-bit low-rank finetuned quantized versions could even easily surpass the original FP16 counterpart on MMLU. According to our intuitive analysis, the main reason for this phenomenon is due to LLaMA3’s strong performance brought by its massive pre-scale training, which means the performance loss from the original model’s quantization cannot be compensated for by finetuning on a tiny set of data with low-rank parameters (which can be seen as a subset of the original model [5, 8]). Despite the significant drop from quantization that cannot be compensated by finetuning, 4-bit LoRA-FT quantized LLaMA3-8B significantly outperforms LLaMA-7B and LLaMA2-7B under various quantization methods. For instance, with the QLoRA method, 4-bit LLaMA3-8B has an average accuracy of 57.0 (FP16: 64.8), exceeding 4-bit LLaMA-7B’s 38.4 (FP16: 34.6) by 18.6, and surpassing 4-bit LLaMA2-7B’s 43.9 (FP16: 45.5) by 13.1 [17, 26]. This implies that a new LoRA-FT quantization paradigm is needed in the era of LLaMA3.









and its more sophisticated internal knowledge structure makes the impact of the disturbance caused by quantization less obvious. The collapse of the ultra-low 2-bit also confirms that the quantized LLaMA3 backbone in MLLM exacerbates the performance loss caused by quantization when processing complex visual information. This discovery highlights the potential challenges of deploying LLaMA3 in resource-constrained environments and underscores the ample room for growth and improvement within low-bit quantization. The empirical insights from our research are expected to be valuable for developing future LLM quantization techniques, especially in narrowing the performance gap with the original models. By addressing the performance degradation caused by low-bit quantization, we anticipate that subsequent quantization paradigms will enable LLMs to achieve stronger capabilities at a lower computational cost, ultimately driving the progress of generative artificial intelligence, as represented by LLMs and MLLMs, to new heights.

## References

1. Bisk, Y., Zellers, R., Gao, J., Choi, Y., et al.: Piqa: Reasoning about physical commonsense in natural language. In: Proceedings of the AAAI conference on artificial intelligence. vol. 34, pp. 7432–7439 (2020) 3
2. Chee, J., Cai, Y., Kuleshov, V., De Sa, C.M.: Quip: 2-bit quantization of large language models with guarantees. *Advances in Neural Information Processing Systems* **36** (2024) 2, 7
3. Chen, H., Lv, C., Ding, L., Qin, H., Zhou, X., Ding, Y., Liu, X., Zhang, M., Guo, J., Liu, X., et al.: Db-llm: Accurate dual-binarization for efficient llms. *arXiv preprint arXiv:2402.11960* (2024) 2, 7
4. Clark, P., Cowhey, I., Etzioni, O., Khot, T., Sabharwal, A., Schoenick, C., Tafjord, O.: Think you have solved question answering? try arc, the ai2 reasoning challenge. *arXiv preprint arXiv:1803.05457* (2018) 4
5. Dettmers, T., Pagnoni, A., Holtzman, A., Zettlemoyer, L.: Qlora: Efficient fine-tuning of quantized llms. *Advances in Neural Information Processing Systems* **36** (2024) 2, 8, 9
6. Frantar, E., Ashkboos, S., Hoefler, T., Alistarh, D.: Gptq: Accurate post-training quantization for generative pre-trained transformers. *arXiv preprint arXiv:2210.17323* (2022) 2, 6
7. Hendrycks, D., Burns, C., Basart, S., Zou, A., Mazeika, M., Song, D., Steinhardt, J.: Measuring massive multitask language understanding. *arXiv preprint arXiv:2009.03300* (2020) 6
8. Hu, E.J., Wallis, P., Allen-Zhu, Z., Li, Y., Wang, S., Wang, L., Chen, W., et al.: Lora: Low-rank adaptation of large language models. In: *International Conference on Learning Representations* (2021) 9
9. Huang, W., Liu, Y., Qin, H., Li, Y., Zhang, S., Liu, X., Magno, M., Qi, X.: Billm: Pushing the limit of post-training quantization for llms. *arXiv preprint arXiv:2402.04291* (2024) 2, 8, 13
10. Huang, W., Qin, H., Liu, Y., Li, Y., Liu, X., Benini, L., Magno, M., Qi, X.: Slim-llm: Saliency-driven mixed-precision quantization for large language models. *arXiv preprint arXiv:2405.14917* (2024) 2, 7, 13

11. Jacob, B., Kligys, S., Chen, B., Zhu, M., Tang, M., Howard, A., Adam, H., Kalenichenko, D.: Quantization and training of neural networks for efficient integer-arithmetic-only inference. In: Proceedings of the IEEE conference on computer vision and pattern recognition. pp. 2704–2713 (2018) 2
12. Lin, J., Tang, J., Tang, H., Yang, S., Dang, X., Han, S.: Awq: Activation-aware weight quantization for llm compression and acceleration. arXiv preprint arXiv:2306.00978 (2023) 2, 7, 10, 13
13. Lin, J., Yin, H., Ping, W., Molchanov, P., Shoeybi, M., Han, S.: Vila: On pre-training for visual language models. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. pp. 26689–26699 (2024) 10
14. Liu, H., Li, C., Wu, Q., Lee, Y.J.: Visual instruction tuning (2023) 2
15. Marcus, M., Kim, G., Marcinkiewicz, M.A., MacIntyre, R., Bies, A., Ferguson, M., Katz, K., Schasberger, B.: The penn treebank: Annotating predicate argument structure. In: Human Language Technology: Proceedings of a Workshop held at Plainsboro, New Jersey, March 8-11, 1994 (1994) 3
16. Merity, S., Xiong, C., Bradbury, J., Socher, R.: Pointer sentinel mixture models. arXiv preprint arXiv:1609.07843 (2016) 3
17. Qin, H., Ma, X., Zheng, X., Li, X., Zhang, Y., Liu, S., Luo, J., Liu, X., Magno, M.: Accurate lora-finetuning quantization of llms via information retention. arXiv preprint arXiv:2402.05445 (2024) 2, 8, 9
18. Qin, H., Zhang, Y., Ding, Y., Liu, X., Danelljan, M., Yu, F., et al.: Quantsr: accurate low-bit quantization for efficient image super-resolution. *Advances in Neural Information Processing Systems* **36** (2024) 2
19. Raffel, C., Shazeer, N., Roberts, A., Lee, K., Narang, S., Matena, M., Zhou, Y., Li, W., Liu, P.J.: Exploring the limits of transfer learning with a unified text-to-text transformer. *The Journal of Machine Learning Research* **21**(1), 5485–5551 (2020) 3
20. Sakaguchi, K., Bras, R.L., Bhagavatula, C., Choi, Y.: Winogrande: An adversarial winograd schema challenge at scale. *Communications of the ACM* **64**(9), 99–106 (2021) 3
21. Shang, Y., Yuan, Z., Wu, Q., Dong, Z.: Pb-llm: Partially binarized large language models. arXiv preprint arXiv:2310.00034 (2023) 2, 7
22. Taori, R., Gulrajani, I., Zhang, T., Dubois, Y., Li, X., Guestrin, C., Liang, P., Hashimoto, T.B.: Stanford alpaca: An instruction-following llama model. [https://github.com/tatsu-lab/stanford\\_alpaca](https://github.com/tatsu-lab/stanford_alpaca) (2023) 8
23. Touvron, H., Lavril, T., Izacard, G., Martinet, X., Lachaux, M.A., Lacroix, T., Rozière, B., Goyal, N., Hambro, E., Azhar, F., et al.: Llama: Open and efficient foundation language models. arXiv preprint arXiv:2302.13971 (2023) 1
24. Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., Gomez, A.N., Kaiser, Ł., Polosukhin, I.: Attention is all you need. *Advances in neural information processing systems* **30** (2017) 1
25. Xiao, G., Lin, J., Seznec, M., Wu, H., Demouth, J., Han, S.: Smoothquant: Accurate and efficient post-training quantization for large language models. In: International Conference on Machine Learning. pp. 38087–38099. PMLR (2023) 2, 8
26. Xu, Y., Xie, L., Gu, X., Chen, X., Chang, H., Zhang, H., Chen, Z., Zhang, X., Tian, Q.: Qa-lora: Quantization-aware low-rank adaptation of large language models. arXiv preprint arXiv:2309.14717 (2023) 9
27. Zellers, R., Holtzman, A., Bisk, Y., Farhadi, A., Choi, Y.: Hellaswag: Can a machine really finish your sentence? arXiv preprint arXiv:1905.07830 (2019) 4