

GRAMMAR: Grounded and Modular Methodology for Assessment of Closed-Domain Retrieval-Augmented Language Models

Xinzhe Li, Ming Liu, Shang Gao

School of IT, Deakin University, Australia
{lixinzhe, m.liu, shang.gao}@deakin.edu.au

Abstract

Retrieval-augmented Generation (RAG) systems have been actively studied and deployed across various industries to query on closed-domain and in-house knowledge base. However, evaluating these systems presents unique challenges due to the scarcity of domain-specific queries and corresponding ground truths, as well as a lack of systematic approaches to diagnosing the cause of failure cases—whether they stem from knowledge deficits or issues related to system robustness. To address these challenges, we introduce GRAMMAR (**GR**ounded **And** **M**odular **M**ethodology for **A**ssessment of **R**AG), an evaluation framework comprising two key elements: 1) a data generation process that leverages relational databases and LLMs to efficiently produce scalable query-answer pairs for evaluation. This method facilitates the separation of query logic from linguistic variations, enabling the testing of hypotheses related to non-robust textual forms; and 2) an evaluation framework that differentiates knowledge gaps from robustness and enables the identification of defective modules. Our empirical results underscore the limitations of current reference-free evaluation approaches and the reliability of GRAMMAR to accurately identify model vulnerabilities. For implementation details, refer to our GitHub repository: <https://github.com/xinzhel/grammar>.

1 Introduction

The emergent ability of Large Language Models (LLMs) has advanced a active research and deployment of Retrieval-Augmented Generation (RAG) systems for domain-specific question answering. This trend underscores the critical need for reliable evaluation of these systems, a task that remains intricate and largely unaddressed.

One of the foremost challenges is the scarcity of domain-specific data. Typically, evaluators re-

sort to using data designed for human assessment, as referenced in studies such as Santurkar et al. (2023); Wang et al. (2022); Zhong et al. (2022, 2023); Hendrycks et al. (2021); Choi et al. (2023), which mainly focuses on evaluating commonsense and broad world knowledge. However, the assessment of industrial RAG systems demands data reflecting in-house knowledge, such as details about company projects and employees. While user queries can be gathered at the time of system deployment, acquiring accurate ground truths poses a significant challenge. Recent studies have explored the use of reference-free LLM evaluators in the absence of ground truths (Chern et al., 2023; Min et al., 2023; Es et al., 2023). Nonetheless, the reliability of such reference-free evaluation methods remains questionable. Another challenge is the robustness issue, where inconsistencies in models' responses to semantically equivalent queries can always happen, as highlighted in Shen et al. (2023). Although developers and researchers often hypothesize about the factors influencing the robustness or susceptibility of retrieval and language models to certain attributes, questioning what impedes these models from responding accurately to queries. However, the current body of research, including works on adversarial robustness (Alzantot et al., 2018; Li et al., 2020, 2019), lacks the mechanisms to effectively test these hypotheses.

Based on the proposed framework, as demonstrated in Figure ??, we address the data challenge with Contributions 1 and 2, and the robustness challenge with Contributions 3 and 4:

Contribution 1: Analyzing the Vulnerability of Reference-Free Evaluation Our analysis of two representative reference-free evaluation protocols convincingly demonstrates their false assessment across both accurate and inaccurate RAG predictions.

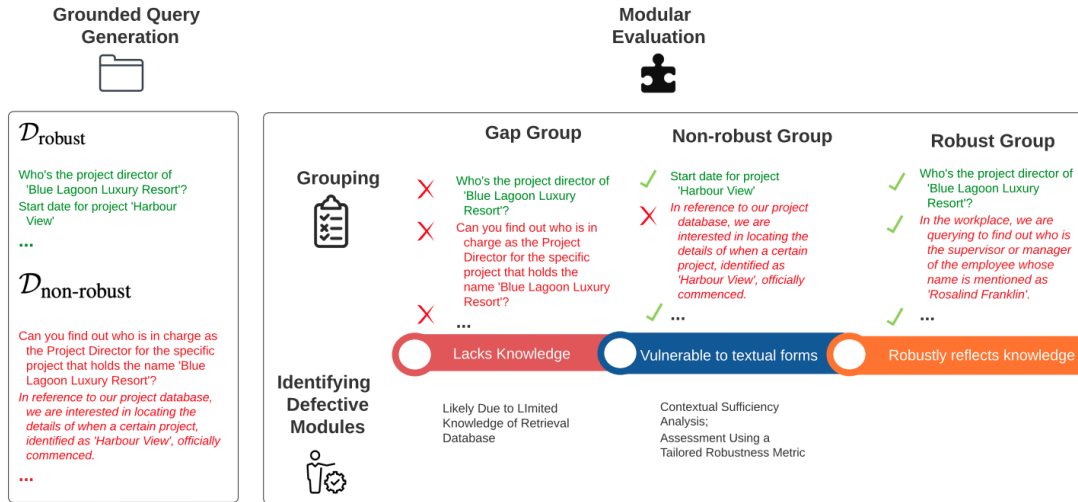


Figure 1: The dual-phase evaluation approach under GRAMMAR. **1. Grounded Data Generation:** With the data generation process, sets of hypothetically robust (D_{robust}) and non-robust ($D_{\text{non-robust}}$) data are created to test the hypothesis that models are less robust to long queries. **2. Modular Evaluation:** The right section details the methodology for identifying defective modules. This grouping step accumulates queries with identical semantics and delineates three group types for identifying defective modules. **2.1 Knowledge deficiencies in the retrieval database:** Gap Groups indicate a complete lack of correct responses. **2.2 Non-robust retrieval or LM:** Robust Groups, with correct responses to all queries in the subset, should be excluded for detecting non-robust modules. Non-robust Groups should be considered the robustness issue, where the model correctly answers some but not all text forms with identical query logic. Contextual Sufficiency Analysis can be applied to further identify the defective module.

Contribution 2: Proposing a Grounded Data Generation Process The proposed process ensures the accessibility of ground truths. It leverages relational databases and LLMs to enable the extraction of ground truths via SQL queries.

Contribution 3: Enabling Modular Evaluation Our framework allows practitioners and researchers to identify knowledge gaps and distinguish whether robustness issues originate from retrieval or LMs.

Contribution 4: Hypothesis Testing on Robustness Issues The proposed data generation process can generate hypothetically robust data D_{robust} and non-robust data $D_{\text{non-robust}}$ according to a proposed hypothesis. This enables practitioners and researchers to test their hypotheses about which input attributes may lead to robustness issues.

Our empirical study highlights the reliability of GRAMMAR in verifying hypotheses and identifying defective modules.

2 Background

Evaluating the performance of Retrieval-Augmented Generation (RAG) systems, especially in closed-domain settings, poses unique challenges,

leading to an absence of reliable reference-based evaluation protocols. This section outlines existing approaches and highlights the gaps addressed by our proposed framework, GRAMMAR.

Retrieval-augmented Generation (RAG) RAG systems augment LLMs with retrieval for domain-specific use where extensive databases can potentially provide necessary information. A retrieval can be used for retrieving relevant passages or documents. A dense retrieval (Mialon et al., 2023; Lewis et al., 2020; Borgeaud et al., 2022) consists of an embedding model to produce a vector v_q for any given query q . This vector is then used to identify pertinent text segments normally via dot product calculations with the vectors of text chunks. The most relevant chunks are aggregated to form an additional context c , which serves as the factual basis for the response generation, until adding another chunk would surpass the maximum allowable context length. Subsequently, an LLM will process this aggregated context alongside the original query to generate a predicted answer \hat{a} for q . In contrast, sparse retrieval computes similarity without parametric embedding models. Keyword matching. For example, sparse retrieval techniques operate

without the need for parametric embedding models. For instance, keyword-matching approaches (Maning, 2009) select documents that share the highest number of common words for context retrieval. Additionally, methods like TF-IDF (Chen et al., 2017) factor in the inverse document frequency, emphasizing the significance of less common words which are likely to be more indicative of pertinent content.

Reference-Free Evaluation Reference-free evaluation methods assess model performance without requiring predefined ground truths. These methods have been proposed and are applicable to both open-domain and closed-domain knowledge evaluation: 1) Protocols for LLMs: FactScore (Min et al., 2023) and FacTool (Chern et al., 2023) use retrieval combined with LLMs as validators, but these are not directly applicable to RAG systems as retrieval is reserved for evaluation. 2) Protocols for RAG: ARES and RAGAS focus on evaluating the faithfulness of generated answers against retrieved contexts, with LLMs scoring the relevance and correctness of the context (Saad-Falcon et al., 2023; Es et al., 2023). 3) Protocols for Both: SelfCheck (Manakul et al., 2023) utilizes the stochastic nature of LLMs for self-validation. While these methods offer some insights, their reliability is often questioned, especially for closed-domain applications where specific, accurate answers are crucial.

Reference-Based Evaluation Reference-based evaluation typically assesses open-domain knowledge, using widely available ground-truth answers from public resources, exams, and surveys (Sanurkar et al., 2023; Wang et al., 2022; Zhong et al., 2022, 2023; Hendrycks et al., 2021; Choi et al., 2023). These evaluations compare generated answers to known correct answers, calculating metrics that reflect the model’s accuracy. However, for closed-domain scenarios, collecting ground-truth answers is challenging. This gap is critical because industrial applications often require precise, domain-specific information that isn’t readily available for reference-based methods.

3 Proposed Framework

Closed-domain scenarios lack reference-based evaluation due to the unavailability of ground-truth answers, despite the ability to collect queries during beta deployment. GRAMMAR addresses this with two main components: grounded data generation method and modular evaluation protocol

Grounded Data Generation Method This approach generates text queries and corresponding answers from an existing knowledge base (relational database) for targeted evaluations. Using SQL as an intermediate representation, it allows for the controlled creation of various text queries with consistent underlying logic. The process and its implementation are detailed in § 3.1 and 3.2, and illustrated in Figure 2. A key aspect of this design is its scalability. The proposed process can generate extensive query permutations even from a modest, manually crafted database with limited attributes and rows. This combinatorial approach ensures sufficient data for comprehensive testing. Further analysis of these concepts is available in Appendices B.3 and C.

Modular Evaluation Protocol This protocol assesses robustness by not only identifying proposed vulnerabilities but also pinpointing which component exhibits robustness issues against these vulnerabilities, as detailed in § 3.3. The modular evaluation relies on the data generation method. The data generation method produces contrastive data clusters with the same query logic, ensuring a fair evaluation (See Figure 1).

3.1 Generating Query Templates

This process begins by taking a database schema as input and subsequently produces SQL query templates along with their corresponding textual representations.

Database Schema Database schema serves as the blueprint that defines how classes of entities are organized and the relations among them. Appendix A demonstrates the reasons why we use database schema for knowledge representation. Let a database schema with a collection of N tables $S = \{S_1, S_2, \dots, S_N\}$, where each S_i is a schema for a table. A table schema S_i consists of the table name T_i , a set of attributes $\{A_1, A_2, \dots, A_M\}$ and a set of constraints, i.e., $S_i = (T_i, \{A_1, A_2, \dots, A_m\}, C)$, where the constraint C demonstrates the primary key PK and foreign keys FK . Specifically, $FK(T_i.A_k \rightarrow T_j.A_h)$ indicates a foreign key A_k in table T_i referencing the primary key A_h in table T_j . The schema defines the knowledge structure of an entity, which can be enough to generate query logic that is not tied to any specific linguistic expressions and sensitive data.

Algorithm 1 Grounded Data Generation Process.

Require: SQL Template Generator g_{sql} , Text Template Generator g_t , Semantic criteria for SQL template generation \mathcal{C}_{sql} , Linguistic criteria for text template generation \mathcal{C}_t , Database \mathcal{D} , Database Schema $\mathcal{S} = \{S_1, S_2, \dots, S_n\}$, where each S_i is a schema for a table

- 1: $Q \leftarrow \emptyset$ ▷ Used to store final evaluation data
- 2: $\mathcal{S}_{target} \in \mathcal{S}$ ▷ Step 1: Define schema of a domain (§3.1)
- 3: $\{tpl_{sql}\} \leftarrow g_{sql}(\mathcal{S}_{target}, \mathcal{C}_{sql})$ ▷ Step 2: Generate SQL templates applying semantic criteria (§3.1)
- 4: **for** $tpl_{sql} \in \{tpl_{sql}\}$ **do**
- 5: $\{tpl_t\} \leftarrow g_t(tpl_{sql}, \mathcal{C}_t)$ ▷ Step 3: Generate text templates applying linguistic criteria (§3.1)
- 6: $P \leftarrow$ extract placeholders from tpl_{sql}
- 7: **for each** $p \in P$ **do**
- 8: $C \leftarrow$ extract column from p
- 9: $V_p \leftarrow$ query \mathcal{D} for distinct values of C
- 10: **end for**
- 11: $Comb \leftarrow$ Cartesian product of $\{V_p : p \in P\}$
- 12: **for each** $comb \in Comb$ **do**
- 13: $q_{sql} \leftarrow$ substitute $comb$ into tpl_{sql} ▷ Step 4: Generate SQL queries (§3.2)
- 14: $a \leftarrow$ query $\mathcal{D}(q_{sql})$ ▷ Step 5: Query DB for answers (§3.2)
- 15: $\{q_t\} \leftarrow$ substitute $comb$ into $tpl_t \in \{tpl_t\}$ ▷ Step 6: List of text queries (§3.2)
- 16: $Q \leftarrow Q \cup \{(\{q_t\}, a)\}$
- 17: **end for**
- 18: **end for**
- 19: **return** Q

Generating SQL Templates A SQL template tpl_{sql} essentially represents a query logic. Various query logics are formulated through the application of relational algebra operators. In our study, we focus on three fundamental operators: Select (σ), Project (π), and Join (\bowtie). An automated SQL template generator g_{sql} is powered by a generative language model. Specifically, when provided with a target schema \mathcal{S}_{target} and a verbal description of the query logic \mathcal{C}_{sql} , the template generator g_{sql} is tasked with producing a set of SQL query templates that align with the established criteria, drawing from the relevant domain. To ensure the reliability of the generated SQL templates, the tool enables manual verification through the saving, modifying, and reloading of SQL templates, with detailed guidelines provided in Appendix B.

Generating Text Templates tpl_{sql} can be instantiated into various text templates, each denoted as tpl_t . This process, driven by the text template generator g_t , leverages linguistic criteria \mathcal{C}_t to transform tpl_{sql} into natural language forms that align with specified linguistic characteristics, e.g., complexity, length and stylistic nuances. The text template generator g_t is also operationalized using a sophisticated language model, such as GPT-4, which is adept at producing diverse linguistic variations of the same semantic content.

$$\{tpl_t\} = g_t(tpl_{sql}, \mathcal{C}_t)$$

, where $\{tpl_t\}$ signifies the resulting list of text templates.

3.2 From Templates To Evaluation Data

Utilizing a database \mathcal{D} that aligns with the predefined schema, the framework samples a diverse range of queries along with their corresponding ground-truth answers. This dataset, derived from SQL and text templates filled with database content, provides a rich source for evaluation.

Generating Queries Via Placeholder Fill-in


The placeholder fill-in step populates the templates with actual data from the rows of tables in \mathcal{D} . Specifically, the approach employs a SELECT query format: “SELECT DISTINCT {column_name} FROM {table_name};” to ensure variety in the data points. It handles SQL query templates with multiple placeholders by employing combinations of placeholders and using Cartesian products to generate multiple query permutations. This approach leads to a comprehensive set of SQL queries (q_{sql}) and their natural language equivalents, the text queries (q_t).

Generating Answers Answer generation is integral to completing our dataset. Each SQL query (q_{sql}) is executed against \mathcal{D} to match with a factual answer a . Each answer is then paired with the relevant text queries $\{q_t\}$, forming the basis of our evaluation data.

3.3 Modular Evaluation

Evaluating the overall performance of an RAG model can obscure the specific weaknesses or robustness of its constituent modules. This section

Step 1: Schema



Step 2: SQL Templates

```
1. SELECT Project.Name
FROM Company
INNER JOIN Company_Project ON Company.CompanyID =
Company_Project.CompanyID
INNER JOIN Project ON Company_Project.ProjectID =
Project.ProjectID
WHERE Company.Name = [Company.Name];
...
```

Step 3: Text Templates

```
1.A What are projects we have worked with the
[Company.Name] ?
1.B Give me the company and project names for the company
named [Company.Name]
1.C Find the names of both the company and its projects
where the company's name is [Company.Name].
...
```

Step 4: SQL Queries

```
1.a SELECT Project.Name
FROM Company
INNER JOIN Company_Project ON Company.CompanyID =
Company_Project.CompanyID
INNER JOIN Project ON Company_Project.ProjectID =
Project.ProjectID
WHERE Company.Name = Lendlease;
...
```

Step 5: Answers

1.a **Project1, Project2, Project3**

Final
Evaluation
Data

Step 6: Text Queries

```
1.A.a What are projects we have worked with the
Lendlease?
1.A.b What are projects we have worked with the BHP?
...
```

Figure 2: Scaled Generation of Query-answer Pairs With Combinatorial Power. The step 3 and step 4 are independent of each other and depend only on the SQL templates.

introduces a modular evaluation protocol to address this.

Identical Query Grouping and Tagging The query grouping and tagging process, fundamental to modular evaluation, leverages identical queries generated from the proposed method. Identical queries are those that can be grouped semantically, meaning all textual queries Q generated from a specific SQL logic q_{sql} are grouped together.

Depending on the model M 's performance, q_{sql} (and consequently, the group Q) are tagged into three principal categories, as shown in Figure 1.

- **Gap Groups** emerge when the model M consistently provides incorrect answers for every text query within a subset $S \subseteq Q$ produced through the data generation process. This reflects a deficiency in M 's knowledge or capability. Formally, this scenario is described as:

$$\forall q_t \in S, \neg M(q_t)$$

wherein $\neg M(q_t)$ signifies an inaccurate response from M to the text query q_t .

- **Robust Groups** are established when model M accurately responds to all text queries within the subset S , evidencing a robust comprehension of the SQL logic. Formally, this is

articulated as:

$$\forall q_t \in S, M(q_t)$$

- **Non-robust Groups** are characterized by model M 's exhibited capability to potentially address the query logic, yet there exists at least one query q_t within S that M inaccurately predicts. This is formally denoted as:

$$(\exists q_t \in S, M(q_t)) \wedge (\exists q_t \in S, \neg M(q_t))$$

Retrieval Database Lacking Knowledge or Non-Robust Retrieval or Non-Robust LM?

Gap groups indicate limited coverage of the retrieval database, suggesting that expanding the database could address these deficiencies. However, robustness issues might exist in either the retrieval module or the language model (LM), leading to inconsistent answers for semantically identical queries. To determine the source of robustness issues, the following questions can be used for the retrieval module and the language model (LM) respectively:

- *Does the retrieval module provide sufficient context for a given query?*

- *With sufficient context, can the LM accurately correctly infer the answer?*

Answering either question can identify the problematic component. It is easier to answer the latter, as sufficient context is guaranteed to exist in retrieval responses for queries in non-robust groups.

Context Comparison To save costs associated with additional LLM inference steps, a simple “context comparison” methodology is proposed to identify sufficient context when only one sufficient document exists in the retrieval database. This method contrasts the document indices idx_c of each non-robust instance against those linked to correct predictions within the same semantic groups $I = idx_1, idx_2, \dots$. If any index in I matches idx_c , the context indexed by idx_c is deemed sufficient.

Robustness Metric We quantify robustness as the fraction of instances correctly answered, excluding those in gap groups:

$$R = \frac{\# \text{ with Correct Predictions}}{\text{Total \#} - \text{Total \# in Gap Groups}} \quad (1)$$

, where “#” represents “the number of instances”. By omitting gap groups, this approach ensures that the metric reflects true robustness, distinct from knowledge gaps. Consequently, accuracy Acc is articulated as:

$$Acc = R \times \frac{\text{Total \#} - \text{Total \# in Gap Groups}}{\text{Total \#}} \quad (2)$$

This formulation reveals how the proportion of instances within gap groups λ influences the efficacy of accuracy as a measure of robustness. Specifically, a higher λ value in the robust compared to the non-robust cluster may obscure the model’s non-robust characteristics. Section 4 will empirically demonstrate the crucial importance of excluding gap groups for accurately assessing system vulnerabilities.

4 Case Study: Question Answering on Industrial Projects

This section presents a case study focusing on question answering about industrial projects. It serves to critically evaluate both existing reference-free evaluation frameworks and the newly proposed evaluation framework

System Overview Our study incorporates two distinct systems: 1) **Dense Retrieval + GPT3.5**¹: It is deployed in a commercial context with secure access to the retrieval module via the Qdrant API, ensuring data privacy. The system employs an OpenAI embedding model for document embedding, providing a basis to assess the reference-free evaluation framework’s reliability (§4.1). 2) **Simple Sparse Retrieval + GPT3.5**: The absence of comprehensive research into the assured robustness of dense retrieval systems makes it difficult to pinpoint distinct robust or vulnerable characteristics with confidence. Consequently, we employ a straightforward keyword-matching retrieval approach. Although this method is less prevalent in real-world applications, this method’s inherent shortfall in handling lengthy queries makes it exceptionally ideal to validate our evaluation framework in conducting reliable hypothesis testing (§4.2).

Synthetic Knowledge Base Concurrently, a synthetic dataset has been created, consisting of project documents from the fictitious company, Aurb, serving as a retrieval database. It facilitates a precise evaluation of the retrieval component and the language model, since the knowledge contained within the synthetic data is not present in the training datasets of large language models. In scenarios where retrieval fails to procure adequate context, the language models are definitely unable to accurately respond to queries. Additional information on this methodology can be found in Appendix E.

Mapping Domain Knowledge into Database Schema Our approach distills domain knowledge into a database schema centered around three pivotal entity types in project management: Project, Client, and Employee.² This schema encapsulates the quintessential entity types found within a corporate setting. With the scalability of our framework, the limited amounts of entity types and associated attributes and entities lead to large amounts of instances for evaluation: 198 examples for the commercial case (with totally 12 attributes and 11 rows) and 942 examples for the synthetic scenario (with 14 attributes and 49 rows in total). The details of the database schema and the amounts of columns

¹OpenAI’s *gpt-3.5-turbo-16k*

²This triad are reflective of the core components outlined in the Project Management Body of Knowledge (PMBOK), a widely recognized standard in the field of project management (Guide, 2001).

and rows for each table are shown in Appendix D and F), respectively.

4.1 Is Reference-free Evaluation Reliable?

This section analyzes the reliability of reference-free evaluation methods using examples generated for the commercial case.

Optimism and Cynicism of Reference-Free Evaluation We examine two perspectives of reference-free evaluation: Optimism, where many incorrect predictions are evaluated as correct, and Cynicism, where many correct predictions are evaluated as incorrect. To formalize the analysis, reference-free evaluation is treated as a binary classification model. Here, the ground truth corresponds to the actual correctness of RAG predictions, while evaluation models infer their correctness. Thus, low precision reflects optimistic evaluation, and low recall reflects cynical evaluation.

Reference-free Evaluation Protocols We assess two reference-free evaluation protocols: SelfCheck and RAGAS. RAGAS-Fact utilizes the context-query-response triplets to assess the veracity of responses. It evaluates the faithfulness of a response by calculating the ratio of claims grounded on the context to the total claims made. This process, termed as **Ragas-Fact**, involves identifying statements that hold atomic facts, following the methodology outlined by Chern et al. (2023). SelfCheck, as introduced by Manakul et al. (2023), relies on stochastically generating responses from the model under the premise that incorrect answers are unlikely to repeatedly yield identical outcomes through random sampling. This principle, initially applied to LLMs, is adapted for our analysis of RAG systems. In a departure from its original application, we enhance the evaluation prompt to include not only stochastic responses but also the query itself. Refer to Table 6 for details. To generate four stochastic samples, we adjust the temperature setting to 1.0, contrasting with a temperature of 0.0 used to procure the primary response. A response is deemed correct if it aligns consistently across all stochastic samples.

Both are Extremely Optimistic on Wrong Predictions While SelfCheck Becomes Too Cynical on Correct Predictions As shown in Table 1, both RAGAS and SelfCheck achieve low precision (19% and 15% respectively), highlighting a deficiency in correctly identifying erroneous predic-

tions. For RAGAS, this may be because the RAG system produces responses that, while contextually relevant, fail to directly address the intended query. However, RAGAS demonstrates high recall, indicating accurate assessment of correctly predicted instances. Overall, the preliminary insight suggests that reference-free evaluation methods are not reliable for evaluation, underscoring the critical need for a robust, reference-based evaluation framework to ensure dependable model assessment.

	Precision	Recall
Ours (Upper Bound)	1	1
RAGAS-Fact	19% (11-27%)	92% (86-97%)
SelfCheck	15% (0.08-0.22%)	50% (0.4-0.59%)

Table 1: Reliability of reference-free evaluation protocols. Taking the size of the sample into account, the Z-test with 95% confidence intervals is utilized.

4.2 Empirical Validation of GRAMMAR

This section will validate design choices of identifying defective modules in the proposed framework.

The Importance of Modular Evaluation: Avoiding The Masking Effect of Comprehensive Assessments Analysis presented in Table 2 underscores the value of segmenting the evaluation to specifically examine the retrieval process. The non-robust cluster actually receives higher scores (better performance) than the robust cluster regarding both the accuracy and robustness metrics. However, under the modular evaluation, the evaluation result correctly reflects the non-robust cluster. This underscores the importance of evaluating the retrieval function independently; failing to do so may allow language model inaccuracies to obscure the true performance metrics, potentially masking retrieval robustness issues. Although instances causing such distortions were not dominant in our dataset, they highlight a critical evaluation nuance.

The Importance of Excluding Gap Groups for Robustness Measurement Highlighting the necessity of omitting gap groups, our ablation study implements two distinct approaches: 1) *Comparing the Robustness Metric with Accuracy*; 2) *Comparative Analysis of Stratified Sampling and Unbalanced Sampling*. Stratified sampling maintains a consistent λ across both robust and non-robust clusters. By prompting the text template generator, an equal number of text queries are generated for each query logic. To explore the effects of unbalanced

		Robust	Non-robust	Success?
Accuracy	Baseline: Unbalanced Sampling (US)	0.31	0.43	No
	US+Modular Evaluation (Retrieval)	0.36	0.46	No
	Stratified Sampling (SS)	0.31	0.29	Yes
	SS+Modular Evaluation (Retrieval)	0.38	0.35	Yes
Robustness	Baseline: Unbalanced Sampling (US)	0.84	0.85	No
	US+Modular Evaluation (Retrieval)	0.99	0.93	Yes
	Stratified Sampling (SS)	0.78	0.74	Yes
	SS+Modular Evaluation (Retrieval)	0.94	0.87	Yes

Table 2: Evaluating the efficacy of accuracy and designed robustness metrics in distinguishing between robust and non-robust clusters. Modifications include retrieval-specific adjustments by excluding LM-induced non-robust examples.

Retrieval Database	Isolating Errors from		Robust	Non-robust	Success?
		LLM			
No Action	No Action		0.31	0.43	No
		Remove LLM Errors	0.36	0.46	No
Remove Gap Groups	No Action		0.84	0.85	No
		Remove LLM Errors	0.99	0.93	Yes
Balance Gap Examples	No Action		0.31	0.29	Yes
		Remove LLM Errors	0.38	0.35	Yes

Table 3: Evaluating the efficacy of modular evaluation. We deliberately construct a RAG model vulnerable to long queries due to the retrieval’s vulnerability. To accurately verify the issue, we have to eliminate the effect of knowledge gap from retrieval database and the errors from LLM.

sampling, that can occur in the real world, we randomly reduce examples from query groups related to “clients” and “employees”.

Table 2 demonstrates that traditional accuracy metrics falter in distinguishing clusters based on vulnerability attributes, particularly when λ varies between the hypothesis-driven cluster and its counterpart (Row 2 under the “Accuracy” category). Stratified sampling ameliorates this issue, enabling a precise identification of both robust and non-robust clusters (Row 4 under the “Accuracy” category). Importantly, the implementation of a specifically designed robustness metric ensures consistent and accurate identification of the robust cluster, irrespective of λ variations (Row 2 and 4 under the “Robustness” category). This approach, integrating stratified sampling with our bespoke robustness metric, providing a reliable analysis.

5 Conclusions

In our work, we have developed an evaluation framework tailored for Retrieval-augmented Generation (RAG) systems within an industrial context, enhancing the reliability and interpretability of evaluations. Additionally, we have exposed the limitations of current reference-free evaluation methods, particularly their ineffectiveness in accurately assessing incorrect predictions.

Reproducibility The entire evaluation framework, encompassing both the code and the prompts for the LLM, will be made open-source and available to the academic and industrial community. This initiative aims to facilitate the wider use and adaptation of our framework for research and real-world implementations. In terms of the systems and data evaluated to enable result replication, we plan to publish the model, including the documents intended for retrieval, as well as all templates and

queries developed for the hypothetical Aupr scenario. However, the model designated for commercial use and its associated knowledge base will remain confidential and unpublished to honor non-disclosure agreements and protect proprietary information.

6 Limitations

The challenges related to the presence of multiple correct answers (refer to Appendix B.1) and the constraints in expressiveness posed by database schema and SQL (refer to Appendix B.4) ultimately result in difficulties in generating queries that demand multi-step reasoning and free-form responses. Nonetheless, as demonstrated in the case study, straightforward queries prove to be sufficient for identifying and debugging the intrinsic robustness issues within the models.

References

- Moustafa Alzantot, Yash Sharma, Ahmed Elgohary, Bo-Jhang Ho, Mani Srivastava, and Kai-Wei Chang. 2018. [Generating natural language adversarial examples](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2890–2896, Brussels, Belgium. Association for Computational Linguistics.
- Sebastian Borgeaud, Arthur Mensch, Jordan Hoffmann, Trevor Cai, Eliza Rutherford, Katie Millican, George Bm Van Den Driessche, Jean-Baptiste Lespiau, Bogdan Damoc, Aidan Clark, et al. 2022. Improving language models by retrieving from trillions of tokens. In *International conference on machine learning*, pages 2206–2240. PMLR.
- Danqi Chen, Adam Fisch, Jason Weston, and Antoine Bordes. 2017. [Reading Wikipedia to answer open-domain questions](#). In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1870–1879, Vancouver, Canada. Association for Computational Linguistics.
- I Chern, Steffi Chern, Shiqi Chen, Weizhe Yuan, Kehua Feng, Chunting Zhou, Junxian He, Graham Neubig, Pengfei Liu, et al. 2023. Factool: Factuality detection in generative ai—a tool augmented framework for multi-task and multi-domain scenarios. *arXiv preprint arXiv:2307.13528*.
- Jonathan H Choi, Kristin E Hickman, Amy Monahan, and Daniel Schwarcz. 2023. Chatgpt goes to law school. *Available at SSRN*.
- Shahul Es, Jithin James, Luis Espinosa-Anke, and Steven Schockaert. 2023. [Ragas: Automated evaluation of retrieval augmented generation](#).
- A Guide. 2001. Project management body of knowledge (pmbok® guide). In *Project Management Institute*, volume 11, pages 7–8.
- Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. 2021. [Measuring massive multitask language understanding](#). In *International Conference on Learning Representations*.
- Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, Sebastian Riedel, and Douwe Kiela. 2020. [Retrieval-augmented generation for knowledge-intensive nlp tasks](#). In *Advances in Neural Information Processing Systems*, volume 33, pages 9459–9474. Curran Associates, Inc.
- Jinfeng Li, Shouling Ji, Tianyu Du, Bo Li, and Ting Wang. 2019. [Textbugger: Generating adversarial text against real-world applications](#). In *26th Annual Network and Distributed System Security Symposium, NDSS 2019, San Diego, California, USA, February 24-27, 2019*. The Internet Society.
- Linyang Li, Ruotian Ma, Qipeng Guo, Xiangyang Xue, and Xipeng Qiu. 2020. [BERT-ATTACK: Adversarial attack against BERT using BERT](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 6193–6202, Online. Association for Computational Linguistics.
- Aiwei Liu, Xuming Hu, Lijie Wen, and Philip S Yu. 2023. A comprehensive evaluation of chatgpt’s zero-shot text-to-sql capability. *arXiv preprint arXiv:2303.13547*.
- Potsawee Manakul, Adian Liusie, and Mark J. F. Gales. 2023. [Selfcheckgpt: Zero-resource black-box hallucination detection for generative large language models](#).
- Christopher D Manning. 2009. *An introduction to information retrieval*. Cambridge university press.
- Grégoire Mialon, Roberto Dessi, Maria Lomeli, Christoforos Nalmpantis, Ramakanth Pasunuru, Roberta Raileanu, Baptiste Roziere, Timo Schick, Jane Dwivedi-Yu, Asli Celikyilmaz, Edouard Grave, Yann LeCun, and Thomas Scialom. 2023. [Augmented language models: a survey](#). *Transactions on Machine Learning Research*. Survey Certification.
- Sewon Min, Kalpesh Krishna, Xinxi Lyu, Mike Lewis, Wen-tau Yih, Pang Wei Koh, Mohit Iyyer, Luke Zettlemoyer, and Hannaneh Hajishirzi. 2023. Factscore: Fine-grained atomic evaluation of factual precision in long form text generation. *arXiv preprint arXiv:2305.14251*.
- Jon Saad-Falcon, Omar Khattab, Christopher Potts, and Matei Zaharia. 2023. [Ares: An automated evaluation framework for retrieval-augmented generation systems](#).

Shibani Santurkar, Esin Durmus, Faisal Ladhak, Cino Lee, Percy Liang, and Tatsunori Hashimoto. 2023. Whose opinions do language models reflect? *arXiv preprint arXiv:2303.17548*.

Xinyue Shen, Zeyuan Chen, Michael Backes, and Yang Zhang. 2023. In chatgpt we trust? measuring and characterizing the reliability of chatgpt. *arXiv preprint arXiv:2304.08979*.

Siyuan Wang, Zhongkun Liu, Wanjun Zhong, Ming Zhou, Zhongyu Wei, Zhumin Chen, and Nan Duan. 2022. From lsat: The progress and challenges of complex reasoning. *IEEE/ACM Trans. Audio, Speech and Lang. Proc.*, 30:2201–2216.

Wanjun Zhong, Ruixiang Cui, Yiduo Guo, Yaobo Liang, Shuai Lu, Yanlin Wang, Amin Saied, Weizhu Chen, and Nan Duan. 2023. Agieval: A human-centric benchmark for evaluating foundation models. *arXiv preprint arXiv:2304.06364*.

Wanjun Zhong, Siyuan Wang, Duyu Tang, Zenan Xu, Daya Guo, Yining Chen, Jiahai Wang, Jian Yin, Ming Zhou, and Nan Duan. 2022. Analytical reasoning of text. In *Findings of the Association for Computational Linguistics: NAACL 2022*, pages 2306–2319, Seattle, United States. Association for Computational Linguistics.

A Knowledge Structure and Representation

Commonly, the knowledge is formalized by entities along with their relations, e.g., a knowledge graph, ontology and a database schema. Instead of using knowledge graphs containing concrete entities and their relations, we use the schema-based definition, where the schema is characterized by entity types (classes of entities). An entity type is defined by its name, its attributes and relations with other entity types that will be concretized as components in a database, i.e., the table name, columns and foreign keys.

The definition of entity types can provide combinatorial expansion of data generation, protecting the leak of private information (normally stored as rows of tables) during the data generation process and the ability of retrieving ground-truths via Structured Query Language (SQL). The three advantages are the reasons why we represent knowledge in database schema rather than knowledge graphs. It disentangles the private data stored in the database with universal metadata expressed in the database schema. Since schemas and templates contain only meta-data for structuring the real data, there is no private issue to use commercial large language models for this process.

B Details of SQL Template Generation

B.1 Constraints/Guidelines for Creating SQL Templates

The constraints limit the types of templates that can be generated. This section demonstrates two important constraints, which are verbalized as the prompt for LLMs.

Selecting Attributes That Are Understandable to Humans As shown in Table 4, the SQL template generator is required to follow the constraint: “The selected and condition columns in the query MUST BE MEANINGFUL and DESCRIPTIVE to ensure the queries are easily understood by non-technical users.”.

Avoiding Answer Multiplicity In the evaluation of question-answering (QA) models, a unique challenge arises from the existence of multiple valid answers to a single query, which necessitates a nuanced approach to assessing model performance. Consider the question: “Get the name of the client associated with the project named Innovation Precinct” For such a question, a set of correct responses could include any combination of names from a predefined list, such as {Apple, Amazon, Meta, Facebook}. This multiplicity of correct answers underscores the complexity of evaluating QA models, as it requires the assessment mechanism to recognize and validate the full spectrum of possible correct answers rather than comparing the model’s output against a single ‘gold standard’ answer. This scenario demands a more flexible method for answer validation that can accommodate the variability in correct responses. Also, evaluation metrics may be required to effectively measure the performance of QA models in handling diverse and equally valid answers. Such metrics must account for the exhaustive set of correct answers and evaluate the model’s ability to retrieve any or all valid responses within the context of the query, thereby ensuring a comprehensive assessment of the model’s understanding and response generation capabilities. Generally, encompassing all valid responses within the database is not feasible. Hence, rather than let the non-robust results affect the accuracy of evaluation, we look for an approach to avoid it, i.e., only generating queries ensuring one ground-truth answer. Specifically, the evaluation of certain SQL queries, such as “SELECT Name, Department, BusinessAddress FROM Employee WHERE JobTitle = ‘designer’”, requires a complete and

You are a SQL query Template Generator: Generate ACCEPTABLE SQL query templates with placeholders according to the give data schema and requirements. A simple example of an acceptable SQL query template is: `SELECT Industry FROM Company WHERE Name = '[Company.Name]'`;

You must follow the basic criteria below except for other requirements:

##CRITERIA##

- The placeholder format should be a combination of a table name and a column name, enclosed within square brackets, e.g., '[User.Name]'.
 - Use only 'SELECT' queries.
 - Select specific column(s) instead of using '*'. Avoid projecting attributes that appear in the predicate.
 - The selected and condition columns in the query MUST BE MEANINGFUL and DESCRIPTIVE to ensure the queries are easily understood by non-technical users.
 - Avoid using technical column names that don't clearly signify the nature of the entities or objects involved, e.g., column for semantically void record identifiers.
 - Do not create redundant or semantically duplicated queries when translated into natural language.
 - Each query must contain at least one parameter placeholder in the WHERE clause.
 - Ensure the query yields a specific and singular answer to avoid multiplicity issues, thus facilitating accurate chatbot evaluation.
- {SPECIFIC_REQUIREMENTS}
- If no acceptable SQL template can be generated with the given table and column information, do not generate any text.

##RESPONSE FORMAT##

- Output each SQL template as a single line, without any prefix or suffix.
 - Do not include any other text in your response, even something like
- ##RESPONSE_END##.

##DATA_SCHEMA##

{GIVEN_SCHEMA}

##RESPONSE_START##

Table 4: A prompt template designed to guide the LLM in functioning as a controllable SQL template generator

thorough listing of multiple answers that can be dynamically changed. To solve the issue, the solution involves adding a specific criterion to the prompt for generating SQL queries. This criterion, “Ensure the query yields a specific and singular answer”, aims to produce queries that result in a single, clear answer, thereby avoiding the complexities of multiple possible correct answers. For example, with this criterion, the query “SELECT Industry FROM Company WHERE Name = '[Company.Name]';” is preferred as it’s likely to yield a singular answer about a company’s industry based on a specific company name. In contrast, without this criterion, queries like “SELECT Name FROM Company WHERE Industry = '[Company.Industry]';” are acceptable but may result in multiple names, leading to evaluation difficulties due to data completeness and query multiplicity issues.

B.2 LLM-Based, Human-Aided SQL Generation

We utilize GPT-4 as a SQL template generator for its state-of-the-art capabilities in SQL generation benchmarks (Liu et al., 2023). However, according to our results, LLMs could violate the constraints specified in the prompt. Therefore, the tool incorporates built-in functions that facilitate manual verification by saving, modifying, and reloading SQL templates. As detailed in Table 4, the profile prompt defines its purpose and establishes constraints for generating valid SQL templates.

The following process demonstrates the use of the developed tool to generate SQL templates:

```
1 ## a. Automatically generate SQL query
  templates
2 sql_template_generator =
  SQLTemplateGenerator(
    connection_string, llm)
3 sql_template_generator.set_system_msg()
```

```

4 sql_templates = sql_template_generator.
  generate()
5 sql_template_generator.save(
  sql_templates, root_dir, overwrite=
  True)

```

The output is saved in "SQLTemplateGenerator/sql_templates.txt" with the following SQL queries:

```

1 SELECT Name FROM company WHERE
  Sales_in_Billion = '[company.
  Sales_in_Billion]';
2 SELECT Industry FROM company WHERE Name
  = '[company.Name]';
3 SELECT Headquarters FROM company WHERE
  Market_Value_in_Billion = '[company.
  Market_Value_in_Billion]';
4 SELECT Nationality FROM people WHERE Age
  = '[people.Age]';
5 SELECT Graduation_College FROM people
  WHERE Name = '[people.Name]';
6 SELECT Year_working FROM employment
  WHERE Company_ID = '[employment.
  Company_ID]';
7 SELECT People_ID FROM employment WHERE
  Year_working = '[employment.
  Year_working]';

```

To ensure the reliability of the generated SQL templates, they can be manually verified and modified, and new templates can be added. Modifications and reloading of templates can be performed using the following steps:

```

1 # b. Manually modify SQL query templates
  (optional)
2
3 # c. Load modified SQL query templatesn
  (optional)
4 sql_templates = SQLTemplateGenerator.
  load(root_dir)
5 print('\n'.join(sql_templates))

```

Below are the modified SQL queries as suggested in the §B.1:

```

1 SELECT Industry FROM company WHERE Name
  = '[company.Name]';
2 SELECT Headquarters FROM company WHERE
  Name = '[company.Name]';
3 SELECT Nationality FROM people WHERE
  Name = '[people.Name]';
4 SELECT Graduation_College FROM people
  WHERE Name = '[people.Name]';
5 SELECT e.Year_working FROM employment e
  JOIN company c ON e.Company_ID = c.
  Company_ID JOIN people p ON e.
  People_ID = p.People_ID WHERE c.Name
  = '[company.Name]' AND p.Name = '[
  people.Name]';

```

B.3 Possibilities Of SQL Templates

One Table/Entity Given a schema with only one table, the possibilities for SQL templates can be analyzed by considering the basic SQL operators like SELECT, WHERE. Here's a breakdown:

- **Variation in Selected Attributes (SELECT):** The number of SQL templates varies based on the combination of columns selected. If the "Company" table has n columns, then theoretically, there are $2^n - 1$ possible combinations of columns for selection (excluding the case where no column is selected).
- **Conditions in Queries (WHERE):** Each SQL query can include zero or more conditions in the WHERE clause. The number of possible conditions is determined by the number of columns, the type of each column (text, numeric, date, etc.), and the range of operators applicable to these types (like =, <, >, LIKE, IN for text columns; =, !=, <, >, BETWEEN for numeric columns). The complexity increases combinatorially with multiple conditions combined using AND/OR.

Two Entities The relations between tables further amplifies the number of possible templates. For example, with two entities, "Company" and "Project," and their associative table "Company_Project", the possibilities for SQL templates expand significantly due to the introduction of joins and more complex WHERE clauses. Let's break down the possibilities.

- **Selection Variations (SELECT):** The number of SQL templates grows with the combination of columns selected across the three tables: "Company", "Project" and "Company_Project". If "Company" has n columns, "Project" has m columns, and "Company_Project" has p columns, the possible combinations for selection are $(2^n - 1) \times (2^m - 1) \times (2^p - 1)$.
- **Join Conditions (JOIN):** The introduction of the associative table "Company_Project" allows for meaningful JOIN operations between "Company" and "Project." Templates can include joins like Company JOIN Company_Project ON condition and Project JOIN Company_Project ON condition, or a multi-table join linking all three. The variety of JOIN conditions adds another layer of complexity to the possible templates.
- **WHERE Clause Complexity:** With more tables, the WHERE clause can include a wider range of conditions, potentially involving attributes from any of the three tables. The com-

plexity increases with the number of columns and their types across all tables, and combinations of these conditions.

B.4 Limitations

Scope of Using Automated SQL Generators

The effectiveness of queries generated by LLMs hinges on the meaningfulness of table and column names to accurately reflect the essence of the entities or concepts they represent. If these names lack contextual clarity, the resulting queries may be impractical. To mitigate this, practitioners can conduct an informal assessment or consult established benchmarks that evaluate LLMs’ proficiency in domain knowledge and commonsense reasoning, for instance, (Zhong et al., 2023; Hendrycks et al., 2021).

Queries Beyond SQL Expressiveness While SQL and relational algebra offer a wide range of operations enabling the formulation of numerous user queries, certain semantic nuances exceed the expressive capabilities of SQL. The following examples illustrate such limitations:

- Real-world queries often contain ambiguity and subjective interpretations that SQL struggles to accommodate. For instance, the term “major” in the query “What are some major rail projects we’ve been involved with?” does not directly translate into SQL criteria without additional interpretative steps.
- SQL queries are typically structured to elicit specific, predefined responses, contrasting with the open-ended nature of many real-world inquiries that seek exploratory or comprehensive answers.

C Breakdown of Scalable Data Generation

The proposed data generation process of generating queries via LLM, which includes both the creation of templates and the formulation of queries, can be succinctly represented by the formula (see Figure 2 for a visual representation):

$$\text{Total Query Variations} = M \times N \times Q, \quad (3)$$

where “M” denotes the array of SQL templates that can be extracted from a given schema, “N” refers to the vast number of text templates that can be produced from a single SQL template, showcasing the

flexibility of natural language, and “Q” accounts for the broad spectrum of text queries that can be generated from a single text template, with this diversity arising from different combinations of unique values filling the placeholders.

Let’s break down each step of the proposed data generation process:

- 1 schema \Rightarrow M SQL Templates: The number of possible SQL templates (M) that can be generated from a defined schema is influenced by the SQL operators used, the number of tables, and the columns in the database schema. Each combination of tables and columns, along with different SQL operators (like SELECT, WHERE, JOIN), can lead to a unique SQL query template, e.g., the exponential complexity of the SELECT operator, and the combinatorial increase of possible predicates (See Appendix B.3 for details). Note that while the theoretical maximum is high, practical and meaningful queries will be a smaller subset, as specified in the case study and Appendix B.
- 1 SQL Template \Rightarrow N Text Templates: For each SQL template, there can be an arbitrary number (N) of textual expressions. This variation arises from the different ways to linguistically express the same SQL query due to the flexibility and richness of natural language, e.g., the variation of synonyms and sentence structures.
- 1 Text Template \Rightarrow Q Text Queries: Each text template can lead to a number of text queries (Q), depending on the unique values available for each placeholder. With more than one placeholder, the potential for growth in the number of text queries is combinatorial, barring semantic conflicts (context conflict), where certain combinations of column values may not be semantically valid. Overall, this framework demonstrates a combinatorial expansion at each transition stage, especially notable in steps involving natural language due to its inherent variability. However, this growth is tempered by practical constraints such as the meaningfulness of queries (semantic validity) and the actual data distribution in the database. The exponential increase is most pronounced in the transition from text templates to text queries, where the permuta-

tions of placeholders can lead to a vast array of unique query possibilities.

D Database Schemas Overview

Figures 3a and 3b illustrate the database schemas used for an actual industrial context and a fabricated scenario, respectively, within our research.

E Synthetic Knowledge Base for Evaluating Retrieval-Augmented Language Models

The process of generating synthetic data for a synthetic environment involves creating comprehensive, detailed, and interconnected datasets for a fictitious company named Aurp, which specializes in structural engineering consultancy services. This multi-step procedure includes:

1. **Generating Company Profile:** Initially, a company profile for Aurp is created, detailing its foundation year, headquarters location, CEO, number of employees, and the services it offers, such as bespoke architectural solutions, sustainable urban planning, and structural health monitoring.
2. **Generating Organizational Structure:** Next, a project-oriented organizational structure is established, naming key positions and employees within the company, similar to real-world firms. This includes a wide range of roles from executive positions to specialized engineers and support staff.
3. **Generating Employee Information:** For each employee listed in the organizational structure, detailed job titles, departments, and direct supervisors or managers are fabricated, creating a network of relationships and reporting lines within the company.
4. **Generating Client Information:** The process creates a list of ten clients across various industries—ranging from technology and real estate to hospitality and healthcare—each with specified locations, thereby illustrating the company’s diverse portfolio.
5. **Generating Projects:** Specific projects are then devised, including names, locations, start and end dates, clients, project directors, and project managers. This step integrates previously generated data (client and employee

information) to create realistic project scenarios.

6. **Generating Project Reports:** This step involves synthesizing data from the previous steps to produce detailed analyses, updates, and outcomes of the various projects, which may or may not contain detailed information for clients and employees.

This elaborate and interconnected data creation method is tailored for evaluating retrieval-augmented language models. It serves as a critical tool for exploring how these models handle data that is entirely fictional and thus not present in their training datasets. The synthetic nature of this environment provides a unique testbed for separating and assessing the distinct capabilities of the retrieval component and the language model component in isolation. Because the knowledge in the synthetic data does not appear in the training data of large language models.

F Assessing Scalability with Limited Entity Types, Rows, and Attributes

Our scalability assessment focused exclusively on the utilization of the SELECT operator and the WHERE clause for each table schema. As illustrated in Table 5a and 5b, imposing constraints to generate relevant queries significantly reduces the potential quantity of SQL templates based on attribute count. Despite these restrictions, a minimal set of attributes and rows still yields hundreds of viable query-answer pairs.

G Prompt Templates for LLM-Based Evaluation

For SelfCheck, given that our responses are typically concise, we opt for assessing the overall response rather than performing a sentence-by-sentence validation as in the original implementation, as shown in Table 6.

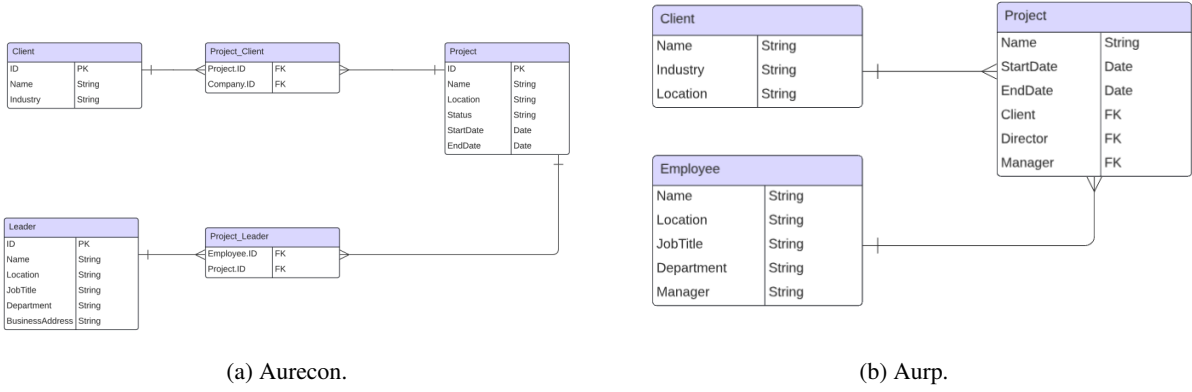


Figure 3: Entity-Relationship Diagrams for Data Generation

	Attribute #	SQL	Template # SQL (Extra Con- straints)	Text	Row #	SQL	Queries # Text
Project	5	7	3	18	4	13	78
Employee	5	12	5	30	3	14	84
Client	2	6	2	12	4	6	36
Total	/	/	/	/	/	33	198

(a) Aurecon

	Attribute #	SQL	Template # Text	Row #	SQL	Queries # Text
Project	6	5	15	10	50	300
Employee	5	4	12	29	87	522
Client	3	2	6	10	20	120
Total	/	/	/	/	157	942

(b) Aarp

Table 5: Summary of DB Rows and Columns and Templates/Queries

SelfCheck from (Manakul et al., 2023)

Context: {context}

Sentence: {sentence}

Is the sentence supported by the context above?

Answer Yes or No: **SelfCheck-QA**

Query: {query}

Answer A: {answer}

Answer B: {stochastic_answer}

Do both answers address the query with equivalent meaning?

Use only “Yes” or “No” for your evaluation:

Ragas from (Es et al., 2023)

Natural language inference. Use only 'Yes' (1), 'No' (0) and 'Null' (-1) as verdict.

context: {context}

statement: {statement}

verdict:

Ours

Evaluate the accuracy of the given response in relation to the true answer for the specified query. After evaluating, provide a judgement as either “Correct” or “Incorrect” based on whether the **##Given Response##** accurately matches the **##True Answer##**.

##Query##: {query}

##True Answer##: {true_answer}

##Given Response##: {given_response}

##Judgement##:

Table 6: Prompt templates for LLM-based Evaluation.