

# Quantum cryptographic protocols with dual messaging system via 2D alternate quantum walks and genuine single particle entangled states

Dinesh Kumar Panda<sup>1,2,\*</sup> and Colin Benjamin<sup>1,2,†</sup>

<sup>1</sup>*School of Physical Sciences, National Institute of Science Education and Research Bhubaneswar, Jatni 752050, India*

<sup>2</sup>*Homi Bhabha National Institute, Training School Complex, Anushaktinagar, Mumbai 400094, India*

Single-particle entangled states (SPES) can offer a more secure way of encoding and processing quantum information than their multi-particle counterparts. The SPES generated via a 2D alternate quantum-walk setup from initially separable states can be either 3-way or 2-way entangled. This letter shows that the generated genuine three-way and nonlocal two-way SPES can be used as cryptographic keys to securely encode two distinct messages simultaneously. We detail the message encryption-decryption steps and show the resilience of the 3-way and 2-way SPES-based cryptographic protocols against eavesdropper attacks like intercept-and-resend and man-in-the-middle. We also detail how these protocols can be experimentally realized using single photons, with the three degrees of freedom being OAM, path, and polarization. These have unparalleled security for quantum communication tasks. The ability to simultaneously encode two distinct messages using the generated SPES showcases the versatility and efficiency of the proposed cryptographic protocol. This capability could significantly improve the throughput of quantum communication systems.

**Introduction.**— Quantum cryptography [1] has become a sought-after research field due to the surge in security threats to existing public-key cryptosystems and the unmatched potential of quantum computers over classical counterparts. The former exploits the properties of quantum physics in performing cryptographic tasks for secure quantum communication between two parties [1–6]. The BB84 cryptographic protocol (i.e., Ref. [4]) was the first to realize quantum superposition in a cryptographic protocol, wherein the qubits are transmitted in one direction, and classical information exchange is needed to establish the communication between two parties (sender-receiver, or, conventionally Alice-Bob). An eavesdropper can be detected from an erroneous key at the receiver’s end, and the sender-receiver duo repeats the entire procedure if needed. Ref. [5] is the famous E91 cryptographic protocol that uses Bell states to achieve secure communication between the two parties. In this case, Alice and Bob test Bell’s inequalities to detect the existence of an eavesdropper.

Discrete-time quantum walks (DTQWs or QWs) are a potent resource for quantum computing and executing quantum-information-processing tasks [7–10]. Refs. [6, 11–13] introduced quantum walks in quantum cryptographic systems. The use of DTQWs in quantum cryptographic protocols [4, 5] has advantages, such as a more straightforward way to generate public-key via a DTQW setup instead of using random number generators with classical communication [4] or entangled spin- $\frac{1}{2}$  particles with random measurements [5]. Moreover, the message decryption via DTQW setup is less resource intensive than protocols discussed in [4, 5] as these deploy random measurements at the receiver’s end and classical communication between the receiver-sender duo to decrypt the encoded message. Further, the BB84 protocol [4] lacks entanglement, making it more vulnerable to Eve and the process of detecting Eve’s interference laborious. Moving now on to DTQW-based cryptographic schemes, Ref. [11] showed how a two-particle

cyclic-QW could generate random key sequences due to its inherent nonlinear chaotic dynamic behavior, which can be used in image encryption. On the other hand, Ref. [6] proposed that a cryptographic public-key can be formed from a quantum state generated through cyclic-QW (CQW) dynamics. Few recent studies also use quantum states generated via ordered or periodic 1D CQWs in quantum cryptography; see Refs. [12, 13]. Ref. [13] uses periodic CQW-states to generate a public key, whereas Ref. [12] discussed a secure CQW-based cryptographic scheme via the use of a recurrent maximally entangled state in forming the public key. The generated QW states are cryptographic keys to encrypt and decrypt a single message between the sender-receiver duo. The chosen position Hilbert space of the CQWs in Refs. [6, 12, 13] is one-dimensional. Thus, it poses a limitation for encrypting an extended set of messages and enabling the simultaneous encryption of more than one message. It motivates us to design a QW-based cryptographic scheme with more spatial degrees of freedom (DoF), like 2D DTQWs. This letter shows how to perform cryptographic tasks with two distinct sets of messages that can be securely communicated between a sender-receiver duo. In one shot, two messages can be sent.

Three-way, as well as nonlocal two-way single particle entangled states (SPES), can be generated via a 2D alternate QW (say AQW) efficiently [14]. The amount of three-way or two-way single-particle-entanglement (SPE) generated can be controlled by tuning the initial state and evolution operator parameters of the AQW dynamics [14]. This work proposes a secure communication protocol between the sender-receiver duo using the generated genuine three-way and nonlocal two-way SPES as cryptographic keys. This protocol can encode dual (or two simultaneous) messages. We also provide the necessary proof and show via examples how the proposed cryptographic scheme has foolproof security against eavesdroppers. We then compare it with other quantum-walk-based cryptographic protocols. We also investigate the cryptographic scheme’s ability to withstand eavesdropping (like man-in-the-middle, intercept-and-resend attacks).

Below, we first detail the AQW dynamics to generate genuine 3-way and nonlocal 2-way SPES. Then, we delve

\* dineshkumar.quantum@gmail.com

† colin.nano@gmail.com

into the specifics of our cryptographic protocol using the generated 3-way SPES along with necessary proofs and its resilience (security) against attacks from eavesdroppers, with example messages. Further, a similar cryptographic protocol using the generated nonlocal 2-way SPES is also detailed, and a comparison with existing proposals is also made. We then show our scheme's photon-based experimental realization via a circuit. Finally, the letter concludes with a summary and outlook.

**Generating three-way plus nonlocal two-way SPES via 2D AQW.**— A 2D AQW is defined on a tensor product space  $H_x \otimes H_y \otimes H_c$  of the position and coin Hilbert spaces.  $H_y$  and  $H_x$  are the  $y$ -position and  $x$ -position Hilbert spaces (infinite dimensional), and  $H_c$  refers to the coin Hilbert space (two dimensional) with  $\{|0_c\rangle, |1_c\rangle\}$  being its computational basis. A photon is a practical example of the quantum walker, wherein its polarization states (such as horizontal  $|H\rangle$  and vertical  $|V\rangle$  polarization) are mapped into  $H_c$  space, and the photon's path DoF into  $H_y$  position space and finally, its OAM DoF corresponds to the  $H_x$  space [15]. The quantum walker, when initially localized at the position  $|0_x, 0_y\rangle$ , with an arbitrary superposed coin state, has the general initial state [14],  $|\psi_0\rangle = |\psi(t=0)\rangle$ , i.e.,

$$|\psi_0\rangle = |0_x, 0_y\rangle \otimes \left[ \cos\left(\frac{\theta}{2}\right) |0_c\rangle + e^{i\phi} \sin\left(\frac{\theta}{2}\right) |1_c\rangle \right]. \quad (1)$$

Here phase  $\phi \in [0, 2\pi]$ ,  $\theta \in [0, \pi]$ , and the particle (2D alternate quantum walker) evolves via the coin operation,  $\hat{C}$ , and the two conditional shift operators  $\hat{S}_x$  and  $\hat{S}_y$  which enable the particle transport in  $x$ -direction and  $y$ -direction alternately. The following is a general single-qubit coin operator,

$$\hat{C}(\alpha, \beta, \gamma) = \begin{pmatrix} \cos(\alpha) & e^{i\beta} \sin(\alpha) \\ \sin(\alpha)e^{i\gamma} & -e^{i(\beta+\gamma)} \cos(\alpha) \end{pmatrix}, \quad (2)$$

with,  $\alpha, \beta, \gamma \in [0, 2\pi]$ , while the conditional shift operators are given as,

$$\begin{aligned} \hat{S}_x &= \sum_{j=-\infty}^{\infty} \{ |(j-1)_x\rangle \langle j_x| \otimes \mathbb{1}_y \otimes |0_c\rangle \langle 0_c| \\ &\quad + |(j+1)_x\rangle \langle j_x| \otimes \mathbb{1}_y \otimes |1_c\rangle \langle 1_c| \}, \\ \text{and } \hat{S}_y &= \sum_{j=-\infty}^{\infty} \{ \mathbb{1}_x \otimes |(j-1)_y\rangle \langle j_y| \otimes |0_c\rangle \langle 0_c| \\ &\quad + \mathbb{1}_x \otimes |(j+1)_y\rangle \langle j_y| \otimes |1_c\rangle \langle 1_c| \}. \end{aligned} \quad (3)$$

The full evolution operator for the 2D alternate quantum walker is then given by [14],

$$U(t) = (\hat{S}_y \cdot [\mathbb{1}_{xy} \otimes \hat{C}]) \cdot (\hat{S}_x \cdot [\mathbb{1}_{xy} \otimes \hat{C}]) = C_y C_x, \quad (4)$$

where  $\hat{C} = \hat{C}(\alpha, \beta, \gamma)$ . Both  $\mathbb{1}_x$  and  $\mathbb{1}_y$  are  $(2N+1) \times (2N+1)$  identity matrices, while  $\mathbb{1}_{xy}$  is a  $(2N+1)^2 \times (2N+1)^2$  identity matrix, which are basically the identity operators in  $H_x$ ,  $H_y$  and combined  $xy$ -position Hilbert-space respectively. Thus, the particle (walker) at time step

$t = N$  has a quantum state,

$$|\psi_t\rangle = \sum_{i,j=-N}^N [h_{i,j}^{(N)} |i_x, j_y, 0_c\rangle + v_{i,j}^{(N)} |i_x, j_y, 1_c\rangle], \quad (5)$$

wherein the complex amplitudes  $h_{i,j}^{(N)}$  and  $v_{i,j}^{(N)}$  are functions of the initial state parameters:  $\phi, \theta$  and coin parameters:  $\alpha, \beta, \gamma$ . The intertwined state amplitudes indicate that these states can be genuine three-way entangled between the coin,  $x$ -position and  $y$ -position DoF, and nonlocal two-way entangled between  $x$ -position DoF and  $y$ -position DoF of the walker [14].

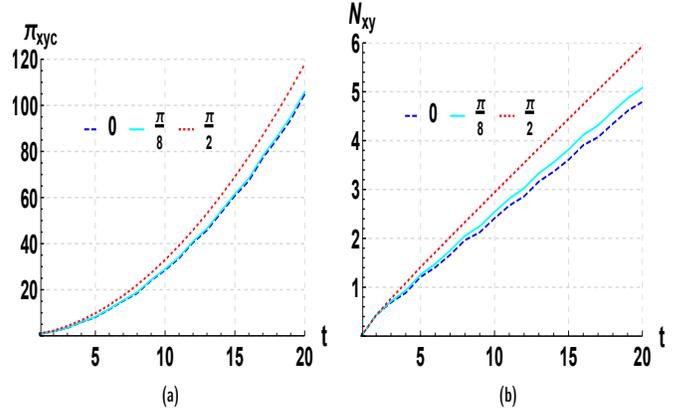


FIG. 1: (a)  $\pi$ -tangle  $\pi_{xyz}$  vs time steps ( $t$ ) for evolution sequence  $M1_x M1_y \dots$  and with an initially separable state (Eq. (1)) with  $\phi = \pi$ , and  $\theta = \frac{\pi}{2}$  (best result, dotted red),  $\theta = 0$  (dashed blue),  $\theta = \frac{\pi}{8}$  (solid cyan). (b) Nonlocal 2-way entanglement negativity  $N_{xy}$  vs  $t$  for evolution sequence  $G1_x G1_y \dots$  and with the initially separable state with  $\phi = \pi$ , and  $\theta = \frac{\pi}{2}$  (best result, dotted red),  $\theta = 0$  (dashed blue),  $\theta = \frac{\pi}{8}$  (solid cyan).

In a recent work [14], we performed several numerical simulations to reveal a wide range of spatial evolutions (see, Eq. (4)) comprising a single arbitrary coin (see, Eq. (2)), which generate maximal three-way and nonlocal two-way SPE for the separable initial state Eq. (1). We call such evolution sequences optimal entanglers. In addition, the amount of 3-way and nonlocal 2-way SPE so generated can also be controlled by fine-tuning the initial state or coin parameters.

One such optimal entangler for 3-way entanglement (see, Eq. 4) among numerous other optimal entanglers of Ref. [14] is,  $M1_x M1_y$ , with  $\phi = 0, \pi, 2\pi$ , here the coin  $\hat{M}1$  is  $\hat{C}(\alpha = \frac{5\pi}{16}, \beta = \frac{\pi}{2}, \gamma = \frac{\pi}{2})$ . Fig. 1(a) shows the generated 3-way entanglement quantified by  $\pi$ -tangle [16, 17],  $\pi_{xyz}$  (see Supplementary Material (SM) Sec. A [18]) via the evolution sequence,  $M1_x M1_y \dots$  with  $\phi = \pi$  and  $\theta = 0, \frac{\pi}{8}, \frac{\pi}{2}$ . Note that  $\pi_{xyz} = 0$  in the absence of 3-way entanglement, and the larger the  $\pi_{xyz}$  value, the larger the genuine 3-way entanglement in the SPES. From Fig. 1(a), we see that  $M1_x M1_y \dots$  gives largest 3-way entanglement for  $\theta = \frac{\pi}{2}$ , such as  $\pi_{xyz} = 2.2070$  (at  $t = 2$ ),  $32.9376$  (at  $t = 10$ ),  $117.7828$  (at  $t = 20$ ).

An optimal entangler (Eq. 4) for the nonlocal 2-way entanglement (quantified by the entanglement negativity

$N_{xy}$ , see SM Sec. A [18, 19]) from Ref. [14] is  $G1 = \hat{C}(\alpha = \frac{19\pi}{16}, \beta = \frac{\pi}{2}, \gamma = \frac{\pi}{2})$  with  $\phi = 0, \pi$ . Fig. 1(b) shows the negativity ( $N_{xy}$ ) generated via the evolution  $G1_x G1_y$  with  $\phi = \pi$  and  $\theta = 0, \frac{\pi}{8}, \frac{\pi}{2}$ . Clearly, the evolution  $G1_x G1_y \dots$  yields maximal nonlocal 2-way entanglement for  $\theta = \frac{\pi}{2}$  and specifically, at time steps  $t = 2, 10, 20$ ;  $G1_x G1_y$  yields correspondingly  $N_{xy} = 0.4273, 2.9398, 5.9312$ .

Below, we discuss how this generated 3-way and nonlocal 2-way SPES are utilized in a cryptographic protocol to design quantum-secure public keys and how one can perform the encryption-decryption of two distinct messages simultaneously via  $x$ -DoF and  $y$ -DoF of the quantum-particle, between two parties: Alice and Bob.

### 3-way SPES-based quantum cryptographic protocol.–

The 3-way SPE-generating 2D AQW scheme can be exploited to design a cryptography protocol to encode two messages ( $m, n$ ) in the two nonlocal DoFs ( $x, y$ ) of the particle evolving via the AQW. We discuss the protocol considering the spatial evolution sequence  $M1_x M1_y \dots$  in the following steps–

**Step 1 (Entangled Public Key Generation):** Say Alice plans to send two distinct messages,  $m$  and  $n$ , to Bob securely, with  $m, n \in \{-N, -(N-1), \dots, -2, -1, 0, 1, 2, \dots, N-1, N\}$  and  $N$  is the maximum value for position of the walker in the  $x$  or  $y$  direction at time step  $t$  of the AQW evolution. Bob generates the public key as  $|\phi_{pk}\rangle = U^t |l_x\rangle |k_y\rangle |q_c\rangle$ , where  $U = \hat{S}_y \cdot [\mathbb{1}_{xy} \otimes \hat{M}1] \cdot \hat{S}_x \cdot [\mathbb{1}_{xy} \otimes \hat{M}1]$ .  $|l_x\rangle$  and  $|k_y\rangle$  are respectively the  $x$  and  $y$  position states and  $|q_c\rangle = \cos(\frac{\theta}{2}) |0_c\rangle + e^{i\phi} \sin(\frac{\theta}{2}) |1_c\rangle$  is the coin state, of the walker (particle). This public-key is entangled in three DoF i.e.,  $x, y$  and coin DoF, e.g., with  $\pi$ -tangle  $\pi_{xyc} = 2.2070$  at  $t = 2$ ,  $\pi_{xyc} = 32.9376$  at  $t = 10$  and so on, for  $\phi = \pi$  and  $\theta = \frac{\pi}{2}$  (see Fig. 1(a)). Note: These are maximal values of entanglement obtainable for arbitrary initial state (Eq. 1) via the AQW dynamics. Bob sends this secure 3-way entangled public key to Alice at any arbitrary time-step ( $t$ ) via a quantum channel.

**Step 2 (Message Encryption):** Now Alice encodes the messages  $m$  and  $n$  respectively in the  $x$ -DoF and  $y$ -DoF, via  $|\psi(m, n)\rangle = \hat{T} |\psi_{pk}\rangle$ , where  $\hat{T} = \sum_{i,j=-N}^N |(i+m)_x\rangle \langle i_x| \otimes |(j+n)_y\rangle \langle j_y| \otimes \mathbb{1}_c$ . Then Alice sends the encoded messages via quantum state  $|\psi(m, n)\rangle$  to Bob.

**Step 3 (Message Decryption):** Bob decodes the encrypted message via the operation  $\hat{M} = (U^{-1})^t$  on  $|\psi(m, n)\rangle$ . It is essential to have  $[U, \hat{T}] = 0$ , i.e., the operators  $U$  and  $\hat{T}$  commute, for proceeding further with this cryptographic protocol. We provide the detailed proof for the commutation relation  $[U, \hat{T}] = 0$  in Sec. B of SM [18]. Thus, Bob obtains,

$$\begin{aligned} \hat{M} |\psi(m, n)\rangle &= (U^{-1})^t \hat{T} |\psi_{pk}\rangle = (U^{-1})^t \hat{T} U^t |l_x, k_y, q_c\rangle, \\ &= U^{-t} \hat{T} U^t |l_x, k_y, q_c\rangle, \\ &= U^{-t} U^t \hat{T} U^t |l_x, k_y, q_c\rangle, \\ &= \dots = U^{-t} U^{t-1} \hat{T} U^1 |l_x, k_y, q_c\rangle, \\ &= U^{-t} U^t \hat{T} |l_x, k_y, q_c\rangle, \\ &= |(l+m)_x\rangle |(k+n)_y\rangle |q_c\rangle. \end{aligned} \quad (6)$$

The second and third lines of Eq. (6) justify the necessity of the commutation relation  $[U, \hat{T}] = 0$  (proved in SM [18] Sec. B) in this protocol. Finally, from the outcome of Eq. (6), Bob securely reads the two messages ( $m, n$ ) encoded by Alice. The security of the cryptographic scheme against any eavesdropper attack is discussed below.

**Security of the protocol with example messages.–** Here, we discuss the abovementioned cryptography scheme and its resilience against eavesdropping attacks, with example messages:  $m = 1$  and  $n = 2$ .

Let  $|l_x\rangle = |0_x\rangle$ ,  $|l_y\rangle = |0_y\rangle$ ,  $|q_c\rangle = \frac{1}{\sqrt{2}}(|0_c\rangle - |1_c\rangle)$  which corresponds to the initial separable state shown in Eq. (1) with  $\phi = \pi$  and  $\theta = \frac{\pi}{2}$ , and we consider the 2D AQW state at time-step  $t = 2$ , say.

**Step 1:** The public key generated by Bob is,  $|\phi_{pk}\rangle = U^2 |0_x\rangle |0_y\rangle \frac{|0_c\rangle - |1_c\rangle}{\sqrt{2}}$ , where  $U = \hat{S}_y \cdot [\mathbb{1}_{xy} \otimes \hat{M}1] \cdot \hat{S}_x \cdot [\mathbb{1}_{xy} \otimes \hat{M}1]$ .

Thus,  $|\phi_{pk}\rangle = U^2 |0_x, 0_y\rangle \otimes \frac{1}{\sqrt{2}}(|0_c\rangle - |1_c\rangle) = \frac{1}{8192} [256u^2(-e^{\frac{i\pi}{2}}v + 4\sqrt{2}u^2)|-2_x, -2_y, 0_c\rangle + e^{\frac{i\pi}{2}}\{-8e^{\frac{3i\pi}{2}}v^2(-4\sqrt{2} + e^{\frac{i\pi}{2}}vu^{-2})|-2_x, 0_y, 0_c\rangle + (64\sqrt{2}e^{\frac{i\pi}{2}}v^2 - 8e^{i\pi}v(-32 + v^2)u^{-4})u^2|0_x, -2_y, 0_c\rangle - (64\sqrt{2}e^{\frac{3i\pi}{2}}v^2 - 8e^{2i\pi}v^3u^{-2} + 256e^{2i\pi}vu^{-2})|0_x, 0_y, 0_c\rangle + (\sqrt{2}e^{\frac{3i\pi}{2}}v^4u^{-4} + 8e^{2i\pi}v^3u^{-2})|2_x, -2_y, 0_c\rangle + (32\sqrt{2}e^{\frac{5i\pi}{2}}v^2 + 256e^{3i\pi}vu^2)|2_x, 0_y, 0_c\rangle + (-32\sqrt{2}e^{\frac{i\pi}{2}}v^2 + 256vu^2)|-2_x, 0_y, 1_c\rangle + (8e^{i\pi}v^3u^{-2} - \sqrt{2}e^{\frac{3i\pi}{2}}v^4u^{-4})|-2_x, 2_y, 1_c\rangle + (64\sqrt{2}e^{\frac{3i\pi}{2}}v^2 + 8e^{i\pi}v^3u^{-2} - 256e^{i\pi}vu^2)|0_x, 0_y, 1_c\rangle - (64\sqrt{2}e^{\frac{5i\pi}{2}}v^2 + 8e^{2i\pi}v^3u^{-2} - 256e^{2i\pi}vu^2)|0_x, 2_y, 1_c\rangle - (32\sqrt{2}e^{\frac{5i\pi}{2}}v^2 + 8e^{2i\pi}v^3u^{-2})|2_x, 0_y, 1_c\rangle - (1024\sqrt{2}e^{\frac{7i\pi}{2}}u^4 + 256e^{3i\pi}vu^2)|2_x, 2_y, 1_c\rangle]$ , where  $u = \sin(\frac{3\pi}{16})$ ,  $v = \csc(\frac{\pi}{8})$ . This public-key quantum state with intertwined complex amplitudes is entangled in the three available DoF:  $x, y$  and coin, with degree of entanglement  $\pi_{xyc} = 2.2070$ . Bob sends this 3-way entangled public key to Alice via a quantum channel. An eavesdropper (Eve) can interrupt this communication at the stage (step-2) when Alice transfers the encrypted message state  $|\psi(m=1, n=2)\rangle$  to Bob.

**Step 2:** Alice encodes the messages  $m = 1$  and  $n = 2$  respectively in the  $x$ -DoF and  $y$ -DoF, via  $|\psi(m=1, n=2)\rangle = \hat{T} |\psi_{pk}\rangle$ , where  $\hat{T} = \sum_{i,j=-2}^2 |(i+1)_x\rangle \langle i_x| \otimes |(j+2)_y\rangle \langle j_y| \otimes \mathbb{1}_c$  is kind of a shift operator (Eq. 3) that causes shift in  $x, y$ -directions independent of coin state. Then Alice sends this message-containing quantum state  $|\psi(m=1, n=2)\rangle$  to Bob.

**Step 3:** In the absence of Eve, Bob receives  $|\psi(m=1, n=2)\rangle$  untampered and decodes the messages by operating  $\hat{M} = U^{-2}$  on  $|\psi(m=1, n=2)\rangle$ . Bob now obtains,  $\hat{M} |\psi(m=1, n=2)\rangle = U^{-2} \hat{T} |\psi_{pk}\rangle = U^{-2} \hat{T} U^2 |0_x, 0_y\rangle \otimes \frac{1}{\sqrt{2}}(|0_c\rangle - |1_c\rangle) = U^{-2} U^2 \hat{T} |0_x, 0_y\rangle \otimes \frac{1}{\sqrt{2}}(|0_c\rangle - |1_c\rangle) = \hat{T} |0_x, 0_y\rangle \otimes \frac{1}{\sqrt{2}}(|0_c\rangle - |1_c\rangle) = |(0+1)_x, (0+2)_y\rangle \otimes \frac{1}{\sqrt{2}}(|0_c\rangle - |1_c\rangle) = |1_x\rangle |2_y\rangle \otimes \frac{1}{\sqrt{2}}(|0_c\rangle - |1_c\rangle)$ . Finally, from this output, Bob securely reads the two messages ( $m = 1, n = 2$ ) encoded by Alice: the  $x$  and  $y$  position kets.

Now, let us consider that Eve is present at Step 2 and

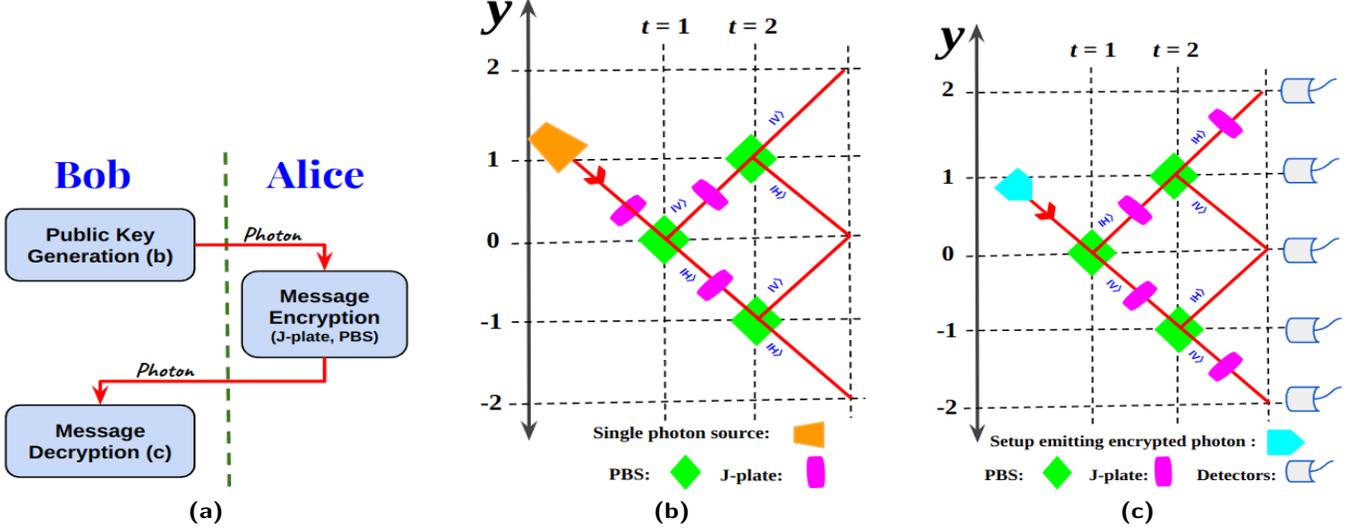


FIG. 2: Photon-based realization of the quantum cryptography protocol using genuine 3-way single-particle entangled states: (a) The cryptography algorithm for communication between the sender (Alice) and the receiver (Bob) using a photon; (b) Circuit for generation of a public key via AQW at time step  $t = 2$  using a single photon by Bob; (c) Message Decryption circuit: after Alice’s message-encryption in the photonic public key, Bob decrypts the message from the photon using this circuit.

can access quantum computers (say, Q-Eve) or classical computers (say, C-Eve). Eve, however, does not know the private key, i.e., values of  $\{A, j\}$ , thus C-Eve knowing the state  $|\psi(m = 1, n = 2)\rangle$  is well-nigh impossible [6]. This fact mitigates the intercept-and-resend eavesdropping strategy [20] wherein Eve tries to measure the signal sent by Alice, i.e.,  $|\psi(m, n)\rangle$ . Similarly, Q-Eve can not harm, as her measurements perturb and alter the quantum state  $|\psi(m, n)\rangle$  and make the state unusable. This attempt of interception will be recognized immediately by the sender-receiver duo. Further, the genuine 3-way entanglement (maximal) in public key  $|\psi_{pk}\rangle$  (in comparison to a product-state or superposed public key of Refs. [6, 13]) makes it even harder for both Q-Eve or C-Eve to extract any information from the public key via POVM measurements [6]. In addition, the fact that Alice and Bob share the private key  $\{A, j\}$  takes care of the risk of the receiver’s authenti-

cation (i.e., a man-in-the-middle attack [20]), i.e., whether the receiver is the friend (Bob) or a foe (Q-Eve or C-Eve). Finally, Q- or C-Eve needs to have information on the operator to be applied on  $|\psi(m = 1, n = 2)\rangle$  to retrieve Alice’s message(s). Additionally, any Eve figuring out exact  $\hat{M}$  and retracing back to the state  $|\psi(m = 1, n = 2)\rangle$  is practically impossible, as there exists an infinite number of possible coin operators and their combinations to form an evolution operator via the complex 2D AQW dynamics. Therefore, the proposed quantum cryptographic protocol is secure and resilient against any Eve, whether Eve has access to quantum or classical computers. Although this quantum cryptographic protocol is foolproof, implementing hardware adaptation to isolate quantum systems and employing privacy-amplification is highly recommended [20]. These measures can further mitigate deviations from the theoretical prediction in the practical implementation of the quantum cryptographic scheme.

A quantum cryptographic protocol similar to the above-discussed 3-way SPES-based cryptographic protocol can be designed, utilizing the nonlocal 2-way SPES generated via the 2D AQW dynamics (Fig. 1(b)) as public keys. See SM Sec. C [18] for message encryption-decryption steps of the protocol and SM Sec. D [18] for its security analysis against eavesdroppers. The cryptographic protocols discussed in this letter, utilizing the genuine 3-way and nonlocal 2-way SPES, are compared with other relevant cryptographic proposals [6, 11–13], see details in SM [18] Sec. E. These pro-

ocols are more efficient than existing proposals [6, 11–13] by offering enhanced security in public-key generation, implementing a resource-efficient message decryption method, exhibiting greater resilience against eavesdropping and facilitating easier Eve detection. It is also worth noting that this letter stands out as the sole proposal capable of securely encoding two distinct messages concurrently.

**Experimental realization of our protocols.**— Our cryptographic protocols based on 3-way and nonlocal 2-way SPES can be experimentally realized with a photonic cir-

cuit [15, 21–23] using a single-photon source, wherein the OAM (orbital angular momentum), path and polarization of a single-photon are mapped respectively to the 2D alternate quantum walker’s position  $x$ -DoF,  $y$ -DoF and coin-DoF. This experimental setup requires passive optical devices such as polarization beam splitters (PBS) and Jones-plates (J-plates) [24]. A PBS reflects horizontal polarization ( $|0_c\rangle$ ) and transmits vertical polarization ( $|1_c\rangle$ ), thus, this device acts as  $\hat{S}_y$  operator of the AQW dynamics. A J-plate modifies the photon’s OAM states depending upon its polarization states, which makes this device imitate the AQW operator sequence: coin-shift in  $x$  direction-coin, i.e.,  $J(\alpha, \beta, \gamma) \equiv [\mathbb{1}_{xy} \otimes \hat{M}1] \cdot \hat{S}_x \cdot [\mathbb{1}_{xy} \otimes \hat{M}1]$ . A schematic representation for this photon-based implementation of the cryptography protocols is given in Fig. 2. The output photon from Bob’s setup, as in Fig. 2(b), has 3-way entanglement (SPE) between its path, OAM, and polarization states, and the entanglement quantifier  $\pi$ -tangle can be calculated via full state tomography or a machine-learning assisted measurement scheme with a series of swap operators on copies of the quantum state [25]. This 3-way entangled single-photon is the public key; Alice then encodes two messages (m,n), one in the OAM state and the other in its path state via an appropriate arrangement of PBS and J-plates (i.e., a  $\hat{T}$  operation). After receiving the message-encoded photon, Bob will use a sequence of PBS and J-plates akin to the inverse of the AQW evolution operator, as shown in Fig. 2(c). Then Bob finally recovers the encrypted messages by measuring the OAM and path states of the photon

at his detectors. A single photon detector (SPD) measures the photon’s path state, and thus, Bob obtains the message  $m$ . Bob measures the photon’s OAM state using an SPD, a single-mode fiber, and a spatial light modulator at his detectors, thereby obtaining the message  $n$ . A photonic re-alization can be done with a public key exhibiting nonlocal 2-way SPE; see SM [18] Sec. F.

**Conclusion.**— A resource-saving 2D AQW setup can generate genuine three-way and nonlocal two-way single-particle entangled states (SPES) with a single quantum particle initially in a separable (product) state. Using this, we develop cryptographic protocols such that the generated 3-way and nonlocal 2-way SPES encode two distinct messages in the two position degrees of freedom  $x$  and  $y$  of the quantum-walker (particle). Herein, both the 3-way and nonlocal 2-way SPES work as cryptographic public keys, and then the encryption-decryption of two sets of messages can be securely enabled between the sender-receiver duo. We also outlined the experimental implementation of the cryptographic schemes using single photons. Besides being the sole protocol for simultaneously encrypting two distinct messages in a resource-saving manner, this protocol exhibits enhanced security compared to existing ones. A cryptographic protocol exploiting more than three DoF of a single quantum particle, such as a single photon or a trapped ion, to encrypt and decrypt more than two messages simultaneously can be an extension of this proposal. Our presented work significantly contributes towards the forefront of quantum cryptography and communication by leveraging the novel resource-saving alternate 2D AQW setups.

- 
- [1] S. Wiesner, SIGACT News 15(1) 78 (1983).  
 [2] D. Mayers, J. ACM 48(3) 351 (2001).  
 [3] T. Schmitt-Manderbach, H. Weier, M. Fürst, R. Ursin, F. Tiefenbacher, T. Scheidl, J. Perdigues, Z. Sodnik, C. Kurtsiefer, J. Rarity, A. N. Zeilinger and H. Weinfurter, Phys. Rev. Lett. 98 010504 (2007).  
 [4] C. H. Bennett and G. Brassard, Quantum cryptography: Public key distribution and coin tossing, Proceedings of IEEE International Conference on Computers, Systems, and Signal Processing, volume 175, page 8. New York (1984).  
 [5] Artur K. Ekert, Quantum cryptography based on Bell’s theorem, Phys. Rev. Lett. 67, 661 (1991).  
 [6] C. Vlachou et al., Quantum walk public-key cryptographic system, Int. J. Quantum Inf. 13, 1550050 (2015).  
 [7] Y. Aharonov, L. Davidovich, and N. Zagury, Quantum random walks, Phys. Rev. A 48, 1687 (1993).  
 [8] Taira Giordani, Emanuele Polino, Sabrina Emiliani, Alessia Suprano, Luca Innocenti, Helena Majury, Lorenzo Marucci, Mauro Paternostro, Alessandro Ferraro, Nicolò Spagnolo, and Fabio Sciarrino, Experimental Engineering of Arbitrary Qudit States with Discrete-Time Quantum Walks, Phys. Rev. Lett. 122, 020503 (2019).  
 [9] Kazuma Yonezu, Yutaro Enomoto, Takato Yoshida, and Shuntaro Takeda, Time-Domain Universal Linear-Optical Operations for Universal Quantum Information Processing, Phys. Rev. Lett. 131, 040601 (2023).  
 [10] Generalized Quantum Measurements on a Higher-Dimensional System via Quantum Walks Xiaowei Wang, Xiang Zhan, Yulin Li, Lei Xiao, Gaoyan Zhu, Dengke Qu, Quan Lin, Yue Yu, and Peng Xue Phys. Rev. Lett. 131, 150803 (2023).  
 [11] Y. Yang, Q. Pan, S. Sun and P. Xu, Novel Image Encryption based on Quantum Walks, Sci. Rep. 5 7784 (2015).  
 [12] Dinesh Kumar Panda and Colin Benjamin, Recurrent generation of maximally entangled single-particle states via quantum walks on cyclic graphs, Phys. Rev. A 108, L020401 (2023).  
 [13] A. Panda and C. Benjamin, Order from chaos in quantum walks on cyclic graphs, Phys. Rev. A 104, 012204 (2021).  
 [14] Dinesh Kumar Panda and Colin Benjamin, Designing three-way entangled and nonlocal two-way entangled single particle states via alternate quantum walks, arXiv:2402.05080 [quant-ph] (2024).  
 [15] P. A. Ameen Yasir and C. M. Chandrashekar, Generation of hyperentangled states and two-dimensional quantum walks using J or q plates and polarization beam splitters, Phys. Rev. A 105, 012417 (2022).  
 [16] Ariadna J. Torres-Arenas, Qian Dong, Guo-Hua Sun, Wen-Chao Qiang and Shi-Hai Dong, Entanglement measures of W-state in noninertial frames, Physics Letters B 789, 93-105 (2019).  
 [17] Yong-Cheng Ou and Heng Fan, Monogamy inequality in negativity for three-qubit states, Phys. Rev. A 75, 062308 (2007).  
 [18] See Supplemental Material at [Link to be provided by Publisher] for more details, which includes Refs. [6, 11–13, 15–17, 19–25].

- [19] G. Vidal and R. F. Werner, Computable measure of entanglement, *Phys. Rev. A* 65, 032314 (2002).
- [20] V. Gaur et al., Quantum Key Distribution: Attacks and Solutions, Proceedings of the International Conference on Innovative Computing & Communications (ICICC) (2020).
- [21] C. Di Franco, M. Mc Gettrick, and Th. Busch, Mimicking the Probability Distribution of a Two-Dimensional Grover Walk with a Single-Qubit Coin, *Phys. Rev. Lett.* 106, 080502 (2011).
- [22] M. Karski et al., Quantum Walk in Position Space with Single Optically Trapped Atoms, *Science* 325, 174 (2009).
- [23] Hao Tang et al., Experimental two-dimensional quantum walk on a photonic chip, *SCIENCE ADVANCES* 4, eaat3174 (2018).
- [24] Robert C. Devlin, Antonio Ambrosio, Noah A. Rubin, J. P. Balthasar Mueller, Federico Capasso, Arbitrary spin-to-orbital angular momentum conversion of light, *Science* 358, 896-901 (2017).
- [25] Machine-Learning-Assisted Many-Body Entanglement Measurement Johnnie Gray, Leonardo Banchi, Abolfazl Bayat, and Sougato Bose *Phys. Rev. Lett.* 121, 150503 (2018).

## SUPPLEMENTARY MATERIAL

In Sec. A, we discuss the entanglement measures:  $\pi$ -tangle and entanglement negativity, respectively, to quantify genuine three-way and nonlocal two-way SPE (single-particle-entanglement) in the evolved states via quantum walk dynamics initialized with arbitrary separable states. In Sec. B, we provide the detailed proof for the commutation relation between the evolution operator and the message-encryption operator, essential to the proposed quantum cryptography protocols (described in the main text) based on 3-way as well as nonlocal 2-way SPES (single-particle entangled states) via 2D alternate discrete-time quantum walks (AQWs). Then, in Sec. C, we explain the nonlocal 2-way SPES-based quantum cryptographic protocol. Sec. D then discusses the security of the nonlocal 2-way SPES-based quantum cryptographic protocol with example messages and examines the resilience of the protocol against eavesdropping like man-in-the-middle and intercept-and-resend attacks. A comparison between QW-based cryptographic schemes with the proposed protocols is made in Sec. E. Finally, we put forth the photon-based experimental realization of the quantum cryptographic protocol based on nonlocal 2-way SPES in Sec. F.

### A. Entanglement quantifiers for 2-way and genuine 3-way single-particle entanglement (SPE)

The amount of genuine 3-way SPE in quantum states of a particle evolving via 2D alternate quantum walk (AQW) dynamics initialized with arbitrary separable states (as discussed in the main text) are the same as the degree of quantum correlations between the particle's three degrees of freedom ( $x, y$  and coin). This 3-way entanglement can be measured by a negativity-based monotone,  $\pi$ -tangle [16, 17], denoted by,  $\pi_{xyc}$ . It is defined as,

$$\pi_{xyc} = \frac{\pi_x + \pi_y + \pi_c}{3}, \text{ where, } \pi_x = N_{x|yz}^2 - (N_{xy}^2 + N_{xz}^2), \pi_y = N_{y|zx}^2 - (N_{yz}^2 + N_{yx}^2), \pi_z = N_{z|xy}^2 - (N_{zx}^2 + N_{zy}^2). \quad (7)$$

Here,  $N_{i|jk} = \frac{\|\rho_{ijk}^{\text{T}_i}\| - 1}{2}$  and  $N_{ij} = \frac{\|\rho_{ij}^{\text{T}_i}\| - 1}{2}$ , where  $i, j, k \in \{x, y, c\}$ .  $\rho_{ijk} = |\psi(t)\rangle\langle\psi(t)|$ , i.e., the density operator for the evolved state  $|\psi(t)\rangle$  (i.e.,  $|\psi_t\rangle$  shown in main text Eq. (5)) of the quantum walker and  $\rho_{ij} = \text{Tr}_k(\rho_{ijk})$  is a reduced density operator after tracing out  $i$  degree of freedom (DoF). Also,  $\text{T}_i$  stands for the partial transpose concerning  $i$ -DoF and  $\|\cdot\|$  denotes the matrix trace norm. Note that  $\pi_{xyc} \geq 0$  in general, but  $\pi_{xyc} = 0$  in the absence of genuine 3-way SPE [17] in the particle, e.g., for separable or product states such as the initial state shown in main text Eq. (1).

Moreover, the amount of nonlocal two-way SPE in a single particle that evolves via the 2D AQW dynamics, i.e., entanglement between  $x$  and  $y$  position DoF of the walker (particle), can be quantified by negativity  $N$  [19]. To evaluate this, at any arbitrary time step  $t$  of the AQW, we perform a partial trace of the full density operator,  $\rho_{xyc} = |\psi(t)\rangle\langle\psi(t)|$ , concerning the coin degree of freedom, and we get,  $\rho_{xy} = \text{Tr}_c(\rho_{xyc})$ . Then the eigenvalues  $\lambda_i$  where  $i$  is from 1 to  $(2t+1)^2$ , of the partial-transpose of  $\rho_{xy}$  with respect to either  $x$ -DoF or  $y$ -DoF, are evaluated. From this, one finds entanglement negativity to be,

$$N = \sum_i \frac{|\lambda_i| - \lambda_i}{2}, \text{ where } i \text{ runs from } 1 \text{ to } (2t+1)^2. \quad (8)$$

Note  $N$  is positive for entangled states, i.e., for nonlocal 2-way SPES, whereas  $N = 0$  for non-entangled or product

states such as initial states shown in main text Eq. (1).

### B. Proof of commutation relation essential to the cryptography protocol

Here we prove the commutation relation,  $[U, \hat{T}] = 0$  between the general evolution operator  $U = \hat{S}_y \cdot [\mathbb{1}_{xy} \otimes \hat{C}] \cdot \hat{S}_x \cdot [\mathbb{1}_{xy} \otimes \hat{C}]$  (see main text Eq. (4)) and the operator  $\hat{T} = \sum_{i,j=-t}^t |(i+m)_x\rangle \langle i_x| \otimes |(j+n)_y\rangle \langle j_y| \otimes \mathbb{1}_c$  used for the message  $(m, n)$  encryption (see main text page-3) as follows. Let  $U = U_y \cdot U_x$  where  $U_y = \hat{S}_y \cdot [\mathbb{1}_{xy} \otimes \hat{C}]$  and  $U_x = \hat{S}_x \cdot [\mathbb{1}_{xy} \otimes \hat{C}]$ . As shown in main text Eq. (2), the general coin operator is,

$$\hat{C}(\alpha, \beta, \gamma) = \begin{pmatrix} \cos(\alpha) & e^{i\beta} \sin(\alpha) \\ \sin(\alpha) e^{i\gamma} & -e^{i(\beta+\gamma)} \cos(\alpha) \end{pmatrix}, \quad (9)$$

where  $\alpha, \beta, \gamma \in [0, 2\pi]$  and the shift operators (conditional), as given in main text Eq. (4), are,

$$\begin{aligned} \hat{S}_x &= \sum_{j=-\infty}^{\infty} \{ |(j-1)_x\rangle \langle j_x| \otimes \mathbb{1}_y \otimes |0_c\rangle \langle 0_c| + |(j+1)_x\rangle \langle j_x| \otimes \mathbb{1}_y \otimes |1_c\rangle \langle 1_c| \}, \\ \hat{S}_y &= \sum_{j=-\infty}^{\infty} \{ \mathbb{1}_x \otimes |(j-1)_y\rangle \langle j_y| \otimes |0_c\rangle \langle 0_c| + \mathbb{1}_x \otimes |(j+1)_y\rangle \langle j_y| \otimes |1_c\rangle \langle 1_c| \}. \end{aligned} \quad (10)$$

Here the coin operator  $\hat{C}$  of interest, is  $\hat{M}1 = \hat{C}(\alpha = \frac{5\pi}{16}, \beta = \frac{\pi}{2}, \gamma = \frac{\pi}{2})$  for 3-way SPES (single-particle entangled states) generation or  $\hat{G}1 = \hat{C}(\alpha = \frac{19\pi}{16}, \beta = \frac{\pi}{2}, \gamma = \frac{\pi}{2})$  for nonlocal 2-way SPES generation, see main text page-2 and 3.

Clearly, for an arbitrary state vector  $|\psi\rangle = |l_x, k_y, q_c\rangle$  of the quantum particle evolving via 2D AQW, we have,  $U_x |\psi\rangle = \epsilon_{0(q)} |(l-1)_x, k_y, 0_c\rangle + \epsilon_{1(q)} |(l+1)_x, k_y, 1_c\rangle$ , where  $\epsilon_{0(q)}$  (or,  $\epsilon_{1(q)}$ ) are the amplitudes for the particle being at position  $l-1$  (or,  $l+1$ ) in the  $x$ -direction, depending on the coin state  $|q_c\rangle$ . For example if  $q = 0$ , then  $\epsilon_{0(0)} = \cos(\alpha)$  and  $\epsilon_{1(0)} = e^{i\gamma} \sin(\alpha)$ . Similarly, we have  $U_y |\psi\rangle = \epsilon'_{0(q)} |l_x, (k-1)_y, 0_c\rangle + \epsilon'_{1(q)} |l_x, (k+1)_y, 1_c\rangle$ , where  $\epsilon'_{0(q)}$  (or,  $\epsilon'_{1(q)}$ ) are probability amplitudes to locate the particle at position site  $k-1$  (or,  $k+1$ ) in the  $y$ -direction, depending on the coin state  $|q_c\rangle$ .

For the arbitrary quantum state  $|\psi\rangle$ ,

$$\begin{aligned} \hat{T}U |\psi\rangle &= \hat{T}U_y [\epsilon_{0(q)} |(l-1)_x, k_y, 0_c\rangle + \epsilon_{1(q)} |(l+1)_x, k_y, 1_c\rangle] \\ &= \hat{T} [\epsilon_{0(q)} (\epsilon'_{0(0)} |(l-1)_x, (k-1)_y, 0_c\rangle + \epsilon'_{1(0)} |(l-1)_x, (k+1)_y, 1_c\rangle) \\ &\quad + \epsilon_{1(q)} (\epsilon'_{0(1)} |(l+1)_x, (k-1)_y, 0_c\rangle + \epsilon'_{1(1)} |(l+1)_x, (k+1)_y, 1_c\rangle)] \\ &= \epsilon_{0(q)} (\epsilon'_{0(0)} |(l-1+m)_x, (k-1+n)_y, 0_c\rangle + \epsilon'_{1(0)} |(l-1+m)_x, (k+1+n)_y, 1_c\rangle) \\ &\quad + \epsilon_{1(q)} (\epsilon'_{0(1)} |(l+1+m)_x, (k-1+n)_y, 0_c\rangle + \epsilon'_{1(1)} |(l+1+m)_x, (k+1+n)_y, 1_c\rangle) \end{aligned} \quad (11)$$

On the other hand, we find,

$$\begin{aligned} U\hat{T} |\psi\rangle &= U_y U_x [(l+m)_x, (k+n)_y, q_c] \\ &= U_y [\epsilon_{0(q)} |((l+m)-1)_x, (k+n)_y, 0_c\rangle + \epsilon_{1(q)} |((l+m)+1)_x, (k+n)_y, 1_c\rangle] \\ &= \epsilon_{0(q)} (\epsilon'_{0(0)} |(l+m-1)_x, (k+n-1)_y, 0_c\rangle + \epsilon'_{1(0)} |(l+m-1)_x, (k+n+1)_y, 1_c\rangle) \\ &\quad + \epsilon_{1(q)} (\epsilon'_{0(1)} |(l+m+1)_x, (k+n-1)_y, 0_c\rangle + \epsilon'_{1(1)} |(l+m+1)_x, (k+n+1)_y, 1_c\rangle) \end{aligned} \quad (12)$$

From close observation of Eqs. (11) and (12), we see that  $U\hat{T} |\psi\rangle = \hat{T}U |\psi\rangle$  for any arbitrary state  $|\psi\rangle$ . This proves that  $U\hat{T} = \hat{T}U$ , i.e.,  $[U, \hat{T}] = 0$ .

To justify the essential use of this commutation relation in the quantum cryptography protocol mentioned in the main text, let us look at Step 3 (Message Decryption) by Bob as discussed in main text page-3, where Bob acts the operator  $\hat{M} = (U^{-1})^t$  on Alice's message-encoded quantum state  $|\psi(m, n)\rangle = \hat{T} |\psi_{pk}\rangle$  where the public key,  $|\psi_{pk}\rangle = U^t |l_x, k_y, q_c\rangle$ .

Bob obtains,

$$\begin{aligned}
\hat{M} |\psi(m, n)\rangle &= (U^{-1})^t \hat{T} |\psi_{pk}\rangle = (U^{-1})^t \hat{T} U^t |l_x, k_y, q_c\rangle \\
&= U^{-t} \hat{T} U^1 U^{t-1} |l_x, k_y, q_c\rangle \\
&= U^{-t} U^1 \hat{T} U^{t-1} |l_x, k_y, q_c\rangle \\
&= \dots = U^{-t} U^{t-1} \hat{T} U^1 |l_x, k_y, q_c\rangle \\
&= U^{-t} U^t \hat{T} |l_x, k_y, q_c\rangle \\
&= |(l+m)_x\rangle |(k+n)_y\rangle |q_c\rangle.
\end{aligned} \tag{13}$$

From this outcome of Eq. (13), Bob securely reads the two messages  $(m, n)$  encoded by Alice. The second and third lines of Eq. (13) justify the necessity of the commutation relation  $[U, \hat{T}] = 0$  in the cryptographic protocol. In other words, without the commutation relation, message decryption is impossible.

### C. Nonlocal 2-way SPES based quantum-cryptographic protocol

The nonlocal 2-way SPES generated via the 2D AQW method can also be used to design a quantum cryptographic protocol to encode two messages  $(m, n)$  in the two nonlocal DoFs  $(x, y)$  of the quantum particle evolving via the AQW. We discuss the protocol considering the optimal entangler  $G1_x G1_y \dots$  in the subsequent steps–

Step 1: Consider, Alice plans to transfer two messages  $m$  and  $n$  to Bob securely, where  $m, n \in \{-N, -(N-1), \dots, -2, -1, 0, 1, 2, \dots, N-1, N\}$ . Here,  $N$  is the maximum value for the position of the walker in the  $x$  or  $y$  direction at time step  $t$  in the AQW evolution. Bob generates the public key as  $|\phi_{pk}\rangle = U^t |l_x\rangle |k_y\rangle |q_c\rangle$ , where  $U = \hat{S}_y \cdot [\mathbb{1}_{xy} \otimes \hat{G}1] \cdot \hat{S}_x \cdot [\mathbb{1}_{xy} \otimes \hat{G}1]$ .  $|l_x\rangle$  and  $|k_y\rangle$  are respectively the  $x$  and  $y$  position states and  $|q_c\rangle = \cos(\frac{\theta}{2}) |0_c\rangle + e^{i\phi} \sin(\frac{\theta}{2}) |1_c\rangle$  be the coin state, of the particle. This public-key is entangled in the nonlocal  $x$  and  $y$ -DoF, for example, with an entanglement value  $N_{xy} = 0.4273$  at  $t = 2$ ,  $N_{xy} = 2.9398$  at  $t = 10$  for  $\phi = \pi$  and  $\theta = \frac{\pi}{2}$  at both time-steps (see main text Fig. 1(b)). Bob then sends this public key to Alice at any arbitrary AQW time-step  $(t)$ .

Step 2: Alice encodes the messages  $m$  and  $n$  respectively in the  $x$ -DoF and  $y$ -DoF, via  $|\psi(m, n)\rangle = \hat{T} |\psi_{pk}\rangle$ , where  $\hat{T} = \sum_{i,j=-N}^N |(i+m)_x\rangle \langle i_x| \otimes |(j+n)_y\rangle \langle j_y| \otimes \mathbb{1}_c$ . Alice then sends this encoded message to Bob via the quantum state  $|\psi(m, n)\rangle$ .

Step 3: Bob decodes Alice's message via the operation  $\hat{M} = U^{-t}$  on  $|\psi(m, n)\rangle$ . It is again essential to have  $[U, \hat{T}] = 0$ , i.e., the operators  $U$  and  $\hat{T}$  commute, for proceeding further with the cryptographic protocol. The detailed proof of the commutation relation  $[U, \hat{T}] = 0$  is provided in Sec. B above. Due to the commutation relation, Bob obtains,

$$\begin{aligned}
\hat{M} |\psi(m, n)\rangle &= U^{-t} \hat{T} |\psi_{pk}\rangle = U^{-2t} \hat{T} U^t |l_x, k_y, q_c\rangle = U^{-t} U^1 \hat{T} U^{t-1} |l_x, k_y, q_c\rangle \\
&= \dots = U^{-t} U^t \hat{T} |l_x, k_y, q_c\rangle = |(l+m)_x\rangle |(k+n)_y\rangle |q_c\rangle.
\end{aligned} \tag{14}$$

Finally, Bob securely reads the two messages  $(m, n)$  encoded by Alice from this outcome.

The security of the cryptographic scheme against any eavesdropper attack is discussed below in Sec. D.

### D. Security of the nonlocal 2-way SPES-based quantum cryptographic protocol with example messages

Here, we discuss the cryptography scheme based on 2-way SPES and its resilience against any eavesdropping attacks, with example messages of  $m = 1$  and  $n = 2$ .

Let  $|l_x\rangle = |0_x\rangle$ ,  $|l_y\rangle = |0_y\rangle$ ,  $|q_c\rangle = \frac{1}{\sqrt{2}}(|0_c\rangle - |1_c\rangle)$ . These correspond to the initial state (separable) as shown in main text Eq. (1), i.e.,  $|\psi_0\rangle = |0_x, 0_y\rangle \otimes [\cos(\frac{\theta}{2}) |0_c\rangle + e^{i\phi} \sin(\frac{\theta}{2}) |1_c\rangle]$ , with  $(\phi = \pi, \theta = \frac{\pi}{2})$ , and let us consider the AQW state at time-step  $t = 2$  for simplicity in the calculations.

Step 1: The public key generated by Bob is,  $|\phi_{pk}\rangle = U^2 |0_x\rangle |0_y\rangle \frac{1}{\sqrt{2}}(|0_c\rangle - |1_c\rangle)$ , where  $U = \hat{S}_y \cdot [\mathbb{1}_{xy} \otimes \hat{G}1] \cdot \hat{S}_x \cdot [\mathbb{1}_{xy} \otimes \hat{G}1]$ .

Thus,

$$\begin{aligned}
|\phi_{pk}\rangle &= U^2 |0_x, 0_y\rangle \otimes \frac{1}{\sqrt{2}}(|0_c\rangle - |1_c\rangle) \\
&= \frac{1}{8192} [v^3 u^{-2} (-8e^{\frac{i\pi}{2}} + \sqrt{2} v u^{-2}) |-2_x, -2_y, 0_c\rangle + e^{\frac{i\pi}{2}} \{32e^{\frac{i\pi}{2}} v (\sqrt{2} v - 8e^{\frac{i\pi}{2}} u^2) |-2_x, 0_y, 0_c\rangle \\
&\quad + (64\sqrt{2} e^{\frac{i\pi}{2}} v^2 + 8e^{i\pi} v (-32 + v^2) u^{-4}) u^2 |0_x, -2_y, 0_c\rangle - (64\sqrt{2} e^{\frac{3i\pi}{2}} v^2 + 8e^{2i\pi} v^3 u^{-2} \\
&\quad - 256e^{2i\pi} v u^2) |0_x, 0_y, 0_c\rangle + (1024\sqrt{2} e^{\frac{3i\pi}{2}} u^4 + 256e^{2i\pi} v u^2) |2_x, -2_y, 0_c\rangle + (32\sqrt{2} e^{\frac{5i\pi}{2}} v^2 \\
&\quad + 8e^{3i\pi} v^3 u^{-2}) |2_x, 0_y, 0_c\rangle - (32\sqrt{2} e^{\frac{i\pi}{2}} v^2 - 8v^3 u^{-2}) |-2_x, 0_y, 1_c\rangle + (256e^{i\pi} v u^2 \\
&\quad - 1024\sqrt{2} e^{\frac{3i\pi}{2}} u^4) |-2_x, 2_y, 1_c\rangle + (64\sqrt{2} e^{\frac{3i\pi}{2}} v^2 - 8e^{i\pi} v^3 u^{-2} + 256e^{i\pi} v u^2) |0_x, 0_y, 1_c\rangle \\
&\quad - (64\sqrt{2} e^{\frac{5i\pi}{2}} v^2 - 8e^{2i\pi} v^3 u^{-2} + 256e^{2i\pi} v u^2) |0_x, 2_y, 1_c\rangle - (32\sqrt{2} e^{\frac{5i\pi}{2}} v^2 + 256e^{2i\pi} v u^2) |2_x, 0_y, 1_c\rangle \\
&\quad - (\sqrt{2} e^{\frac{7i\pi}{2}} v^4 u^{-4} + 8e^{3i\pi} v^3 u^{-2}) |2_x, 2_y, 1_c\rangle] , \tag{15}
\end{aligned}$$

where  $u = \sin(\frac{3\pi}{16})$  and  $v = \csc(\frac{\pi}{8})$ . This public-key quantum state  $|\phi_{pk}\rangle$  with the intertwined complex amplitudes is entangled in the nonlocal  $x$  and  $y$ -DoF, with degree of entanglement  $N = 0.4273$  (negativity). Bob then sends this public key to Alice. An eavesdropper (Eve) can interrupt the communication in step 2 when Alice transfers the encrypted quantum state  $|\psi(m=1, n=2)\rangle$  to Bob.

**Step 2:** Alice encodes the messages  $m = 1$  and  $n = 2$  respectively in the nonlocal  $x$ -DoF and  $y$ -DoF, via  $|\psi(m=1, n=2)\rangle = \hat{T} |\psi_{pk}\rangle$ , where  $\hat{T} = \sum_{i,j=-2}^2 |(i+1)_x\rangle \langle i_x| \otimes |(j+2)_y\rangle \langle j_y| \otimes \mathbb{1}_c$ . Then Alice sends this message containing the quantum state to Bob.

**Step 3:** In the absence of Eve, Bob receives  $|\psi(m=1, n=2)\rangle$  untampered and decodes the Alice messages by operating  $\hat{M} = U^{-2}$  on  $|\psi(m=1, n=2)\rangle$ . As a consequence of the commutation relation  $[U, \hat{T}] = 0$ , (see Sec. B above), Bob obtains,

$$\begin{aligned}
\hat{M} |\psi(m=1, n=2)\rangle &= U^{-2} \hat{T} |\psi_{pk}\rangle = U^{-2} \hat{T} U^2 |0_x, 0_y\rangle \otimes \frac{1}{\sqrt{2}}(|0_c\rangle - |1_c\rangle) \\
&= U^{-2} U^2 \hat{T} |0_x, 0_y\rangle \otimes \frac{1}{\sqrt{2}}(|0_c\rangle - |1_c\rangle) = \hat{T} |0_x, 0_y\rangle \otimes \frac{1}{\sqrt{2}}(|0_c\rangle - |1_c\rangle) \\
&= |(0+1)_x, (0+2)_y\rangle \otimes \frac{1}{\sqrt{2}}(|0_c\rangle - |1_c\rangle) = |1_x\rangle |2_y\rangle \otimes \frac{1}{\sqrt{2}}(|0_c\rangle - |1_c\rangle). \tag{16}
\end{aligned}$$

Thus Bob got the product state  $|1_x\rangle \otimes |2_y\rangle \otimes \frac{1}{\sqrt{2}}(|0_c\rangle - |1_c\rangle)$  and finally, from this output state (see, its position kets), Bob securely reads the two messages ( $m=1, n=2$ ) encoded by Alice.

Now, let us consider that Eve is present at Step 2 and has access to quantum computers (say, Q-Eve) or classical computers (say, C-Eve). However, Eve does not know the private key, i.e., the values of  $\{A, j\}$ , thus C-Eve learning the state  $|\psi(m=1, n=2)\rangle$  is well-nigh impossible [6]. It mitigates the intercept-and-resend Eve attack [20] where Eve tries to measure the message-encrypted state or signal, i.e.,  $|\psi(m, n)\rangle$ . Similarly, Q-Eve can not affect, as her measurements perturb and alter the quantum state  $|\psi(m, n)\rangle$  and make the state unusable. This attempt of interception will be recognized immediately by the sender-receiver duo. Further, the genuine nonlocal 2-way entanglement in public key ( $|\psi_{pk}\rangle$ ) (as compared to a product-state or superposed public key of Refs. [6, 13]) makes it even harder for both Q-Eve or C-Eve to extract any information from  $|\psi_{pk}\rangle$  (the public key) via POVM measurements [6]. Additionally, the fact that the private key  $\{A, j\}$  is shared among Alice and Bob takes care of the risk of the receiver's authentication (i.e., a man-in-the-middle attack [20]), i.e., whether the receiver is the friend (Bob) or a foe like Eve. Finally, Q- or C-Eve needs to have information on the operator to be applied on the state  $|\psi(m=1, n=2)\rangle$  to retrieve the message(s) encrypted by Alice. Additionally, the probability of any Eve guessing correct  $\hat{M}$  and retracing back to the quantum state  $|\psi(m=1, n=2)\rangle$  is practically negligible because there exist infinite ways to form coin operators, and their combinations for the complex 2D AQW evolution.

To summarize, the private key information is inaccessible to Q- or C-Eve and Eve has almost zero probability of knowing Alice's encrypted quantum state  $|\psi(m, n)\rangle$ . In addition, the nonlocal 2-way entanglement in the public key ( $|\psi_{pk}\rangle$ ) adds another layer of protection (because of this, information extraction from the public key via any measurement is impossible). Due to the infinitely large number of possible  $2 \times 2$  coin operators and their combinations to form a 2D-AQW-evolution operator, Eve figuring out the exact message-decryption operator  $\hat{M}$  (see Step 3 above) and retrieving back to the quantum state  $|\psi(m, n)\rangle$ , is practically impossible. This quantum cryptographic protocol is, therefore, foolproof and resilient against Eve, no matter whether Eve has access to quantum or classical computers. Although this quantum cryptography scheme is secure, implementing methods like hardware adaptation to isolate quantum systems and employing privacy-amplification is highly recommended [20]. These measures can further mitigate deviations from the theoretical prediction in the practical implementation of the quantum cryptographic scheme.

## E. Comparison between QW-based quantum cryptographic schemes

A comparison of this cryptographic scheme (this paper) based on the genuine three-way SPES and the nonlocal two-way SPES via the 2D AQW setup with other existing relevant cryptographic proposals [6, 11–13] is shown in Table I. The proposal of Ref. [11] uses the DTQW evolution of two particles, whereas the other proposals (including this paper) involve the DTQW evolution of single particles. The existing cryptographic protocols [6, 11–13] employ 1D DTQWs to generate their cryptographic keys. Ref. [11] showed that a cyclic 1D-DTQW could generate random key sequences due to its inherent nonlinear chaotic dynamic behavior but focuses only on image encryption. The protocol of Ref. [6] uses quantum states generated through cyclic 1D DTQW (CQW) dynamics to generate public keys, whereas Ref. [13] uses periodic quantum states exploiting chaotic vs. ordered 1D CQW dynamics to achieve the same goal. Ref. [12] uses recurrent maximally entangled states generated via a 1D CQW in forming public keys. On the other hand, our proposal uses genuine 3-way (as well as nonlocal 2-way) SPES states generated via 2D AQW dynamics. One spectacular advantage of our proposal is that one can securely encrypt and decrypt two distinct messages simultaneously, unlike the previous protocols [6, 12, 13], where just one message can be communicated between Alice and Bob. It is possible due to our use of the 2D AQW evolution, which exploits the particle's two infinite spatial Hilbert spaces. In contrast, as in the previous protocols, 1D cyclic DTQWs have only one finite spatial Hilbert space. Regarding message decryption, our proposal with small time steps is as resource-saving as the proposals of Refs. [6, 12, 13]. Another distinctive advantage of our protocols is their superior security against eavesdropper attacks over other existing proposals. It is leveraged from using the genuine three-way (or nonlocal 2-way) single particle entangled states as public keys and the complexity of the used 2D AQW evolution. The use of 2D AQW dynamics in this letter expands the range and complexity of possible coin or evolution operators beyond what is achievable with 1D DTQW dynamics of existing proposals. It also makes our protocols more secure against quantum and classical computer-based brute-force attacks than the existing proposals, as a more extensive and intricate set of coins or evolution operators correlates with greater security in a cryptographic algorithm. The protocol in Ref. [12] is secure due to its entangled public key. However, it can only encode a single message and includes one position Hilbert space (i.e., 1D DTQW evolution)—the protocols of Refs. [6, 13] lack entanglement in their public keys and may not be as secure as our proposed protocols and that of Ref. [12].

TABLE I: Comparison between different DTQW-based quantum cryptographic schemes

Properties./Proposals→	3-way (nonlocal 2-way) entangled states via 2D AQW based protocol (This paper)	Recurrent entangled states via 1D cyclic QW based protocol (D. Panda & C. Benjamin [12])	Periodic states via 1D cyclic QW based protocol (A. Panda & C. Benjamin [13])	Non periodic 1D cyclic QW based protocol (Vlachou et al. [6])	Chaotic 1D cyclic QW based protocol (Yang et al. [11])
<b>Cryptographic (public) key generating method</b>	2D AQW, genuine three-way or, nonlocal two-way entangled states generated via the 2D AQW.	Recurrent entangled states via 1D CQW.	Periodic states via 1D CQW.	States via 1D CQW.	1D CQW of two particles.
<b>No. of simultaneous message(s) for encryption-decryption</b>	Two; one with the $x$ -DoF and the other with $y$ -DoF.	One, with $x$ -DoF.	One, with $x$ -DoF.	One, with $x$ -DoF.	Not applicable.
<b>Message decryption method</b>	Resource saving for working with few time steps in the AQW evolution.	Resource saving as it exploits periodicity of DTQW and entangled states.	Resource saving as it exploits periodicity of DTQW.	Resource consuming as it exploits inverse of the DTQW evolution operator.	Not applicable.
<b>Resilience against eavesdropper (Eve) attack</b>	Highly secure due to genuine 3-way entanglement in public key, secrecy in public key and complexity of 2D AQW evolution operator. Here, it is easy to detect Eve.	Secure due to entanglement in public key, secrecy in public key and periodicity of 1D DTQW. Here, it is also easy to detect Eve.	It is more secure than Vlachou et al. [6] due to the secrecy of the Public key and 1D DTQW periodicity.	Secure only due to the secrecy of the Public key via 1D DTQW.	Not applicable.

## F. Experimental realization of cryptographic protocol based on nonlocal 2-way SPES

Our quantum cryptographic protocol using the nonlocal 2-way SPES can also be experimentally realized with a photonic circuit [15, 21–23] using a single-photon source, similar to the photonic realization of 3-way SPES based cryptographic protocol as discussed in the main text. Here again, the OAM (orbital-angular-momentum), path, and polarization of a single photon are mapped correspondingly into the  $x$ -position,  $y$ -position, and coin DoF of the quantum walker. The same experimental circuit shown in the main text, Fig. 2, can also implement this 2-way SPES-based protocol. The experimental setup requires passive optical devices such as polarization beam splitters (PBS) and J-plates [24]. A PBS acts as  $\hat{S}_y$  operator of the AQW dynamics, as this device reflects horizontal polarization ( $|0_c\rangle$ ) and transmits vertical polarization ( $|1_c\rangle$ ). Since a J-plate modifies a photon's OAM states depending upon its polarization states, this device imitates the AQW operator sequence: coin-shift in  $x$  direction-coin, i.e.,  $J(\alpha, \beta, \gamma) \equiv [\mathbb{1}_{xy} \otimes \hat{G}1]).\hat{S}_x.[\mathbb{1}_{xy} \otimes \hat{G}1]$ . The output photon from Bob's setup, as in main text Fig. 2(b), has nonlocal 2-way entanglement (SPE) between its path and OAM states, and the entanglement quantifier entanglement-negativity ( $N$ ) can be calculated via a full state tomography or a machine-learning assisted measurement scheme with a series of swap operators on copies of the quantum state [25]. This nonlocal 2-way entangled single-photon is the public key. When untampered, Alice can use it to encode two messages (m,n), one in the OAM state and the other in its path state, via an appropriate arrangement of J-plates and PBS. After receiving the message-encoded photon, Bob will use a sequence of PBS and J-plates akin to the inverse of the AQW

evolution operator, as shown in the main text, Fig. 2(c). Then Bob finally recovers the encrypted messages by measuring the OAM and path states of the photon using the detectors at his disposal. A single photon detector (SPD) measures the photon's path state, and then Bob obtains the message  $m$ . Bob measures the photon's OAM state using an SPD, a single-mode fiber, and a spatial light modulator, and he finally obtains the message  $n$ .