

Unification in the description logic \mathcal{FL}_{\perp}^*

Barbara Morawska

May 13, 2024

Abstract

Description Logics are a formalism used in the knowledge representation, where the knowledge is captured in form of concepts constructed in a controlled way from a restricted vocabulary. This allows one to test effectively for consistency of and the subsumption between the concepts. Unification of concepts may likewise become a useful tool in analyzing the relations between concepts. The unification problem has been solved for the description logics \mathcal{FL}_0 [5] and \mathcal{EL} [4]. These small logics do not provide any means to express negation. Here we show an algorithm solving unification in \mathcal{FL}_{\perp} , the logic that extends \mathcal{FL}_0 with the bottom concept. Bottom allows one to express that two concepts are disjoint. Our algorithm runs in exponential time wrt. the size of the problem.

1 Introduction

Description Logics (DL) are designed as a formal way to represent and manipulate information stored in the form of an ontology, a set of concepts (simple concepts called *names* and complex concepts) in the form of definitions. The complex concepts are constructed from primitive names using relations and constructors. There are many DL's that differ between themselves by allowing more or less restricted sets of constructors for the creation of complex concepts from the simpler ones. Surprisingly, the small, restricted DL's such as \mathcal{EL} and its extensions proved to be quite popular due to the tractability of algorithms they provide, while keeping their expressivity on a sufficient level, hence they have many applications e.g. in ontology language profiles, semantic web, medicine, etc. e.g. [9, 11, 8, 7]. In these logics, complex concepts are constructed from a set

* This research is part of the project No 2022/47/P/ST6/03196 within the POLONEZ BIS programme co-funded by the National Science Centre and the European Union's Horizon 2020 research and innovation programme under the Marie Skłodowska-Curie grant agreement No. 945339. For the purpose of Open Access, the author has applied a CC-BY public copyright licence to any Author Accepted Manuscript (AAM) version arising from this submission.



of concept names \mathbf{N} (unary predicates) and role names \mathbf{R} (binary predicates). While \mathcal{EL} allows conjunction (\sqcap), existential restriction ($\exists r.C$, where C is already defined) and the \top concept constructor, \mathcal{FL}_0 does not have the existential restriction, but instead allows value restriction ($\forall r.C$). The logic \mathcal{FL}_\perp extends \mathcal{FL}_0 by allowing us to use additionally a bottom concept constructor (\perp), which is always interpreted as the empty set in a domain. Hence e.g. in \mathcal{FL}_0 we might describe a clinic that admits only emergency cases ($\forall \text{admits. Emergency-case}$), but we cannot say that there are any such cases. In \mathcal{EL} we can say that there are men and women ($\exists \text{is-human.Male}, \exists \text{is-human.Female}$), but not that the sets are disjoint. In \mathcal{FL}_\perp we can express that the set of men is disjoint from the set of women ($\text{Man} \sqcap \text{Woman} \sqsubseteq \perp$), but not that the sets are complementary in the set-theoretical sense.

Each concept in \mathcal{FL}_0 is interpreted by a set of objects, its extension. Two concepts C, D are in a subsumption relation $C \sqsubseteq D$ (D subsumes C) if the extension of C is a subset of the extension of D in every possible interpretation. The concepts are said to be equivalent if their extensions are identical in every interpretation.

Now, to define the unification problem, we identify some concept names as variables. The unification problem is then defined as a set of pairs of concepts. The answer to the problem is "Yes" if the concepts in each pair are unifiable by the same substitution. Given a pair of concepts C, D , we say that they are unifiable by a substitution if the substitution applied to the variables makes C and D equivalent.

Unification of concepts was first researched and solved for the description logic \mathcal{FL}_0 , [5]. The problem turned out to be ExpTime complete. The unification algorithm presented in that paper worked by first reducing the unification problem to the problem of solving formal language equations. By similar methods, in [2] the unification problem was solved for the description logic \mathcal{FL}_{reg} with regular expressions allowed in place of role names in value restrictions and in [3] for $\mathcal{FL}_{\perp reg}$, which extends \mathcal{FL}_{reg} with the \perp constructor. In [6] the problem of unification in \mathcal{FL}_0 was revisited. The new algorithm presented in that paper has this advantage over the old one, that it allows us to identify kinds of problems for which unification can be solved in less than exponential time. The algorithm in [6] reduced the problem of unification of concepts to the problem of finding certain models for a set of first order anti-Horn clauses restricted to monadic predicates and unary function symbols, with one variable and one constant.

This paper presents a solution to the unification problem in \mathcal{FL}_\perp . We extend the ideas from the solution of unification for \mathcal{FL}_0 in [6], but we do not employ the reductions used there. We will tackle the problem directly as it is defined in the signature of \mathcal{FL}_\perp .

In Section 2 we present the logic \mathcal{FL}_\perp , in Section 3 the unification problem is defined and the main ideas of the unification algorithm are introduced. Then in sections 4, 5 and 6, we present the algorithm. In the next three sections (8, 9, 10) we prove the correctness of the algorithm and the paper ends with the concluding remarks in Section 11.

2 The description logic \mathcal{FL}_\perp

As mentioned above, the concepts in \mathcal{FL}_\perp are generated by the following grammar from a finite set of concept names \mathbf{N} and a finite set of role names \mathbf{R} :

$$C ::= A \mid C \sqcap C \mid \forall r.C \mid \top \mid \perp,$$

where $A \in \mathbf{N}$ and $r \in \mathbf{R}$. The concepts of \mathcal{FL}_\perp are interpreted as subsets of a non-empty domain. An interpretation is a pair consisting of a domain and an interpreting function, (Δ^I, \cdot^I) such that a concept name A is interpreted by $A^I \subseteq \Delta^I$, a role name r is interpreted as a binary relation, $r^I \subseteq \Delta^I \times \Delta^I$, concept conjunction is interpreted by intersection: $(C_1 \sqcap C_2)^I = C_1^I \cap C_2^I$, value restriction $\forall r.C$ is interpreted as the set: $(\forall r.C)^I = \{e \in \Delta^I \mid \forall d \in \Delta^I ((e, d) \in r^I \implies d \in C^I)\}$; $\top^I = \Delta^I$ and $\perp^I = \emptyset$.

Based on this semantics we define the equivalence and subsumption relations between concepts. $C \equiv D$ iff $C^I = D^I$ and $C \sqsubseteq D$ iff $C^I \subseteq D^I$, in every interpretation I .

The **subsumption (equivalence) problem** is then defined as follows.

Input: a pair of concepts C, D .

Output: “Yes”, if $C \sqsubseteq D$ ($C \equiv D$).

In deciding the subsumption or equivalence problem between concepts in \mathcal{FL}_\perp , it is convenient to bring them first into a normal form. A concept is in normal form if it is a conjunction of concepts of the form $\forall r_1 \forall r_2 \dots \forall r_n.A$, where A is a concept name or \top or \perp where the empty conjunction is equivalent to \top .

Since the equivalence $\forall r(C_1 \sqcap C_2) \equiv \forall r.C_1 \sqcap \forall r.C_2$ is true in \mathcal{FL}_\perp for all concepts C_1, C_2 , every \mathcal{FL}_\perp concept is equivalent to a concept in normal form.

The concepts of the form: $\forall r_1.(\forall r_2.(\dots \forall r_n.A) \dots)$ are called *particles*. We identify a conjunction of particles with the set of its conjuncts, and take the empty set to be the concept \top . In other words, every concept in normal form is a set of particles and the empty set of particles is \top .

For brevity, a particle of the form $\forall r_1.(\forall r_2.(\dots \forall r_n.A) \dots)$ will be written as $\forall v.A$, where $v = r_1 r_2 \dots r_n$, and A may only be a concept name, \top or \perp . The letter “ v ” is a word over \mathbf{R} and we call it a *role string*. We say that the size of a particle is the size of its role string, $|v|$. If v and v' are role strings and v is a prefix of v' , we denote it by $v \leq v'$.

We call a particle of the form $\forall v.\top$, a \top -particle (top-particle) and a particle of the form $\forall v.\perp$, a \perp -particle (bottom-particle).

Since $\forall v.\top \equiv \top$, any \top -particle occurring in a concept C may be simply deleted. Since $\forall v.\perp \sqsubseteq \forall v'.A$, where $v \leq v'$ and A is a concept name or \perp , if a concept C contains a particle $\forall v.\perp$, then for every v' such that $v \leq v'$, any particle $\forall v'.A$ may likewise be deleted from C . Since $\perp \sqsubseteq D$, where D is an arbitrary concept, if a concept C contains \perp , all other particles in C may be deleted.

If there are no deletions applicable to a concept C , we say that C is reduced. Below we consider only reduced concepts in normal form.

For \mathcal{FL}_\perp -concepts in normal form we have a simple polynomial-time way of deciding the subsumption problem. Let C, D be an instance of a sub-

sumption problem, where C, D are concept descriptions in normal form: $C = \{P_1, P_2, \dots, P_m\}$ and $D = \{P'_1, P_2, \dots, P'_n\}$. Then $C \sqsubseteq D$ if and only if $C \sqsubseteq P'_1, C \sqsubseteq P'_2, \dots, C \sqsubseteq P'_n$.

Hence in deciding subsumption we can focus on subsumption problems with one particle on the right side. Now $C \sqsubseteq P$, where P is a particle if and only if one of the following conditions is true:

1. $P \in C$ or
2. $P = \forall v.A$, where A is a constant or \perp , and there is a bottom particle $\forall v'.\perp$ (v' may be empty) in C such that $v' \leq v$.

When deciding a possible subsumption $\{P_1, \dots, P_n\} \sqsubseteq \forall v.A$, where A is a concept name, we can ignore any P_i involving a concept name other than A . The reason is that any particle with a concept name different than A cannot affect passing any of the above tests. In the sequel therefore, we shall generally assume that there is only one concept name in the concepts considered.

Similarly, when deciding a possible subsumption $\{P_1, \dots, P_n\} \sqsubseteq \forall v.\perp$, we can ignore any P_i not containing \perp .

Thus in what follows we focus on the concepts that are conjunctions of particles created with one concept name A and \perp . The particles with the concept name A will be called A -particles. The particles created with \perp are called \perp -particles.

3 Unification problem

In order to define the unification problem, we divide the set of concept names \mathbf{N} into two disjoint sets \mathbf{C} and \mathbf{Var} , the former called constants and the latter variables. A substitution is a mapping from variables to concepts and it is extended to all concepts in a usual way. If a variable X is assigned \top by a substitution γ and γ is clear from the context, we call X a \top -variable, and if it is assigned \perp , we call it a \perp -variable.

The unification problem in \mathcal{FL}_\perp is defined as a set of possible subsumptions (called *goal subsumptions*) between concepts which may contain variables.

The unification problem in \mathcal{FL}_\perp

Input: $\Gamma = \{C_1 \sqsubseteq? D_1, C_2 \sqsubseteq? D_2, \dots, C_n \sqsubseteq? D_n\}$ where $C_1..D_n$ are \mathcal{FL}_\perp concepts in normal form and D_1, D_2, \dots, D_n are particles. The concepts may contain variables, and we assume that there is only one constant A .

Output: "Yes" if there is a substitution (called a solution or a unifier) γ such that $\gamma(C_1) \sqsubseteq \gamma(D_1), \gamma(C_2) \sqsubseteq \gamma(D_2), \dots, \gamma(C_n) \sqsubseteq \gamma(D_n)$.

In view of our above remarks, we may confine attention to the unification problem involving at most one constant.

In searching for unifiers, we look for ground substitutions only. A substitution γ is ground if it assigns to variables concepts that contain no variables.

Our unification algorithm has two stages: flattening and solving a normalized problem.

1. Flattening is a non-deterministic polynomial time procedure. It involves guessing e.g. if variables should be substituted by \top or \perp . Some problems maybe solved at this stage, but on the other hand some choices may lead to immediate failure.
2. If the problem survives the first stage, we obtain a partial substitution (for \perp - or \top -variables) and the unification problem (goal) in a special form containing three kinds of subsumptions: *start subsumptions*, *flat subsumptions* and *increasing subsumptions*,(page 8). If there are no start subsumptions, the problem has a solution. If there are start subsumptions we separate the start subsumptions for \perp particles and the start subsumptions for the constant A . The normalized problem with only \perp -start subsumptions is called a \perp -part and the same problem with only A -start subsumptions is called an A -part. These two parts, \perp -part and A -part are solved independently of each other.
 - (a) For solving \perp -part, if the set of \perp -initial subsumptions is not empty, we define the so called *initial shortcut* (page14). Next we compute all possible shortcuts (algorithm ALLSHORTCUTS) and check if the initial \perp -shortcut is in the set. If "NO", then the algorithm fails. If "YES", then we have to preform some other checks on the set that may cause deletions of shortcuts. If the initial \perp -shortcut is deleted, then the algorithm fails. Otherwise it succeeds in this part of computation.
 - (b) For solving A -part, we argue (Lemma 3) that we can use a \mathcal{FL}_0 -unification algorithm that preserves the so-called *decreasing rule*1. If this part is successfully completed, our algorithms terminates with the positive answer.

Before explaining the algorithm, we present here two examples illustrating the properties of \mathcal{FL}_\perp -unification problems.

It is obvious that each \mathcal{FL}_0 -unification problem is also a \mathcal{FL}_\perp -unification problem. A \mathcal{FL}_0 -unification problem is the one that does not contain the \perp constructor. The first example is a \mathcal{FL}_0 -unification problem that do not have a \mathcal{FL}_0 -solution (a solution that does not use \perp), but do have a \perp -solution (where \perp is allowed in the substitution for variables).

Example 1. Let $\Gamma = \{X \sqsubseteq^? \forall v.X, X \sqsubseteq^? A\}$.

Γ contains an unavoidable cycle and it is easy to see that the only solution is $X \mapsto \perp$. This is because the second goal subsumption is solved by X being a \perp -variable, or the substitution for X containing A . If the substitution for X contains A , then the first subsumption forces $\forall v.A$ into the substitution for X too. This again forces $\forall v.A$ into X , and so on, ad infinitum. Hence the only solution maps X to \perp .

Next we examine a different kind of a cycle.

Example 2. Let $\Gamma = \{\forall v. X \sqsubseteq^? X, X \sqsubseteq^? A\}$.

This problem has no solution in \mathcal{FL}_\perp . As in the previous case, a solution for the second goal subsumption forces X to be \perp -variable or contain A . In the first and the second case, the first subsumption is false.

The second subsumption in both examples: $X \sqsubseteq^? A$, is of the form of a so called *start subsumption*. Without this subsumption both goals have an \mathcal{FL}_0 -solution $[X \mapsto \top]$.

4 Flattening

Let $\Gamma = \{C_1 \sqsubseteq^? P_1, \dots, C_n \sqsubseteq^? P_n\}$ be a unification problem, where C_1, \dots, C_n are sets of particles and P_1, \dots, P_n are particles constructed over one constant, variables and \perp with roles from \mathbf{R} . Notice that \top does not occur in Γ because of reductions of \mathcal{FL}_\perp acting on Γ .

During flattening stage, we maintain 3 sets of subsumptions (initially empty): *start subsumptions*, *flat subsumptions* and *increasing subsumptions*.

In the first step we guess which variables of the problem should be substituted with \top or contain the constant or should be a \perp -variable. At each moment a new variable is created (a decomposition variable defined below), we perform such a guess. If a variable is guessed to be a \top -variable (or to be \perp), it is immediately replaced by \top (respectively \perp) everywhere, except in the increasing subsumptions. In the case of \perp -variables, the new **start subsumptions** of the form $X \sqsubseteq^? \perp$ are created.

Moreover, for each variable X we maintain a boolean variable A_X which is by default false for all variables.

If a variable X is not guessed to be \perp or \top , we guess if A_X remains false or changes its value to true. In the case we guess A_X to be true, we add the subsumption: $X \sqsubseteq^? A$ to the set of **start subsumptions**. A_X is used in Implicit solving rules 1.

Once a variable X is guessed to be \perp or \top , **it cannot be changed**. Similarly, if A_Y is guessed to be true, **it cannot be changed**. On the contrary, a variable Z , which has not been guessed to be \top or \perp and for which A_Z is false, may become a \top -variable. This will be the case if our algorithm will allow this variable to be substituted with the empty set of particles.

We start with all subsumptions of Γ labeled unsolved. If this label changes to *solved*, it is equivalent to deleting it from Γ .

Before and during flattening process the rules from Figure 1 are applied eagerly whenever they apply. This means that we apply these rules before any flattening step from Figure 2 to all unsolved subsumptions, and then after each such step is taken they are applied if possible. The rules encode the simple properties of \top , \perp or the constant interacting with other particles in a subsumption. Implicit solving rules may detect the unifiability of a given problem

at this preliminary stage or detect immediately the failure for the choices made up to now.

Implicit solving rules:

1. If a \perp -variable is found in a subsumption s on its left side at top level, then we label s as solved.
2. If a \perp is found on the right side of a subsumption s , and not on the left side, then **fail**.
3. If a \top -variable X is found in a subsumption s on its right side in a particle of the form $\forall v.X$, then we label s as solved.
4. If a \top -variable X is found in a subsumption s on its left side in a particle of the form $\forall v.X$, we delete this particle from s .
5. If a particle P occurs on the right side of s and also on the left side (at the top level), then label s as solved.
6. If the constant A occurs on the right side of s and there is a variable X on the left side, such that A_X is true, then label s as solved.
7. If the constant A occurs on the right side of s , but on the left side of s there is neither A nor a variable X with A_X true, then **fail**.
8. If A occurs on the left side of a subsumption s and X is on its right side, where A_X is false, then delete this occurrence of A .
9. If A_X is true and X occurs on the right side of s , but neither A occurs on the left hand side nor a variable Y with A_Y true occurs on the left hand side of s , then **fail**.
10. If $A \sqsubseteq^? X$ is an unsolved subsumption and A_X is true, then label this subsumption as solved, replace X with A everywhere in Γ , while saving the mapping $[X \mapsto A]$ in a partial solution.
11. If there are no unsolved subsumptions left, return **success**.

Figure 1: Implicit solving

An unsolved goal subsumption $C_1 \sqcap \dots \sqcap C_n \sqsubseteq^? P$ is **not flat** if

- $P = \forall r.P'$ or
- there is $i, 1 \leq i \leq n$ such that $C_i = \forall r.C'_i$, where P' or C'_i are particles, or
- there is $i, 1 \leq i \leq n$ such that $C_i = A$

In order to flatten such a subsumption, we will introduce *decomposition* variables, e.g. for a variable X , a decomposition variable would be denoted X^r .

Such a variable will be defined by an **increasing subsumption** $X \sqsubseteq^? \forall r.X^r$ and a decreasing rule (1) introduced later. An increasing subsumption is added automatically to the unification problem, at the moment of the creation of a decomposition variable. At this moment we guess if X^r is a \perp -variable or \top -variable, and if neither \perp nor \top , we guess if A_{X^r} is true or remains false. If X^r is guessed to be a \perp -variable we create the start subsumption accordingly. In this case we replace X^r in unsolved subsumptions by \perp (or \top respectively).

In case X is chosen to be a \perp -variable, it cannot be decomposed. It is substituted by \perp in all subsumptions (except the increasing and a start subsumption, which are not subject to the flattening).

The set of increasing subsumptions is maintained separately from other goal subsumptions, and is not subject to flattening. For a given role r and a variable X , X^r is unique, if it exists. If X^r is a decomposition variable, we sometimes call the variable X its *parent* variable.

In a flattening process we will use the following notation. If P is a particle and r a role name ($r \in \mathbf{R}$), we define P^{-r} in the following way:

$$P^{-r} = \begin{cases} P^r & \text{if } P \text{ is a parent variable and} \\ & P^r \text{ its decomposition variable} \\ P' & \text{if } P = \forall r.P'_i \\ \top & \text{in all other cases} \end{cases}$$

If s is a goal subsumption, $s = C_1 \sqcap \dots \sqcap C_n \sqsubseteq^? D$, where C_1, \dots, C_n, D are particles, we define $s^{-r} = C_1^{-r} \sqcap \dots \sqcap C_n^{-r} \sqsubseteq^? D^{-r}$.

If P is a particle, then we define P^A , for a constant A in the following way:

$$P^A = \begin{cases} P & \text{if } P \text{ is } A \text{ or a variable} \\ \top & \text{in all other cases} \end{cases}$$

If s is a goal subsumption, $s = C_1 \sqcap \dots \sqcap C_n \sqsubseteq^? P$, where C_1, \dots, C_n, P are particles, we define $s^A = C_1^A \sqcap \dots \sqcap C_n^A \sqsubseteq^? P^A$.¹

The subsumptions obtained in the process of flattening are called:

- **Start subsumptions:** of the form $X \sqsubseteq^? P$ where P is a constant A or \perp .
- **Flat subsumptions:** of the form $C_1 \sqcap \dots \sqcap C_n \sqsubseteq^? P$ where C_1, \dots, C_n and P are variables.
- **Increasing subsumptions:** of the form $X \sqsubseteq^? \forall r.X^r$ for a role name r and X, X^r variables (the parent and its decomposition variable).

Now we define our flattening procedure in Figure 2.

The meaning of a decomposition variable Z^r is that in a solution it should hold exactly those particles P , for which $\forall r.P$ is in the substitution for Z . The process of solving the unification problem will determine which particles should be in the solution of Z .

An increasing subsumption does not suffice to express this relation between the substitution for Z and that for Z^r . In order to properly characterize the

¹This means that the particles that are not A and not variables are deleted from s .

Consider a **non flat, unsolved** goal subsumption: $s = C_1 \sqcap \dots \sqcap C_n \sqsubseteq^? P$. Notice that \top does not occur in s and if \perp occurs there it must be nested under a universal restriction.

1. Consider P of the form $\forall r.P'$. Replace s with s^{-r} .
2. If P is a variable X (s is not flat, hence there is C_i of the form $\forall r.C'_i$ or C_i is A and A_P is true), delete s from Γ and add the following goal subsumptions:
 - (a) For each $r \in \mathbf{R}$, add s^{-r} ,
 - (b) For A_X true, add:^a
 - $X \sqsubseteq^? A$ (start subsumption) and
 - $C_1^A \sqcap \dots \sqcap C_n^A \sqsubseteq^? A$

^aImplicit solving will deal with the second of the new subsumptions immediately.

Figure 2: Flattening of Γ

meaning of a decomposition variable Z^r , we need to add another restriction on a substitution, which cannot be expressed as a goal subsumption, but rather as an implication, which we call a **decreasing rule**:

$$Z \sqsubseteq \forall r.P \implies Z^r \sqsubseteq P \quad (1)$$

where P is a ground particle. The meaning of this restriction is that whenever a ground particle of the form $\forall r.P$ is in the substitution for Z , then P has to be in the substitution for the decomposition variable Z^r . The reason is illustrated in the next example.

Example 3. *Let our unification problem contain the goal subsumptions:*

$\forall r.A \sqsubseteq^? Z, Z \sqsubseteq^? X, X \sqsubseteq^? \forall r.\perp$. The flattened goal is then:

start subsumptions: $X^r \sqsubseteq^? \perp$; flat subsumptions: $A \sqsubseteq^? Z^r, Z \sqsubseteq^? X$;

increasing subsumptions: $Z \sqsubseteq^? \forall r.Z^r, X \sqsubseteq^? \forall r.X^r$.

The first start subsumption forces X^r to be a \perp -variable and thus by the second increasing subsumption $\forall r.\perp$ must be in the substitution for X . By the second flat subsumption we know that $\forall r.\perp$ must be also in the substitution for Z . But there is nothing that can force \perp into Z^r , if we do not use the decreasing rule. If we do apply the decreasing rule 1, then \perp is forced into Z^r , but then we discover that the goal is not unifiable, because $A \not\sqsubseteq \perp$.

Without applying the decreasing rule 1, the following substitution would be wrongly accepted as a solution:

$$Z \mapsto \{\forall r.\perp\}, Z^r \mapsto \top, X \mapsto \{\forall r.\perp\}, X^r \mapsto \{\perp\}.$$

The process of flattening of the unification problem obviously terminates in polynomial time with polynomial increase of the size of the goal. After flattening, we call the unification problem, **normalized**.

Lemma 1. *(Completeness of flattening)*

Let Γ be a unification problem and let Γ' be the normalized problem obtained from Γ by successive applications of the flattening rules (Figure 2) at each step followed by the eager reductions of Figure 1. Then if γ is a solution of Γ , then there is a solution γ' which is an extension of γ for some new variables.

Proof. Since we assume γ is a ground unifier of Γ , it can guide the choices in the process of flattening.

Initial choices for variables

For a variable X :

1. if $\gamma(X) = \perp$, then X should be chosen to be a \perp -variable
2. if $\gamma(X) = \top$, then X should be chosen to be a \top -variable
3. if $A \in \gamma(X)$, then A_X is true otherwise A_X is false.

Since the process of flattening terminates, it is enough to justify the lemma for one step only.

Claim 1. *If Γ_i is a unification problem and γ_i is its solution, then either Γ_i is already normalized or there is a flattening rule applicable to Γ_i .*

Proof. (Proof of the claim) Assume that Γ_i is not normalized. Hence there is a non-flat, unsolved subsumption in Γ_i . We have two cases to consider.

1. A non-flat subsumption has the form: $s = C_1 \sqcap \dots \sqcap C_n \sqsubseteq \forall r.P'$. It is unified by γ . We assume that there is no \perp at the top level of $\gamma(C_1 \sqcap \dots \sqcap C_n)$. Otherwise it would be solved by Implicit solving rule 1.

Notice that every particle $P_1 \in \gamma(\forall r.P')$ is of the form $\forall r.P_2$. Hence for each such particle P_1 , there is a particle $P'_1 \in \gamma(C_1 \sqcap \dots \sqcap C_n)$, such that $P'_1 \sqsubseteq P_1$. Since P'_1 cannot be \perp , $P'_1 = \forall r.P'_2$ and $P'_2 \sqsubseteq P_1$. The first flattening rule tells us to replace s with s^{-r} which will have form: $C_1^{-r} \sqcap \dots \sqcap C_n^{-r} \sqsubseteq' P'$.

We extend γ for the decomposition variables that may occur in s^{-r} in the following way: $X^r \mapsto \{P \mid \forall r.P \in \gamma(X)\}$. Notice that by this extension, γ satisfies both the increasing subsumptions and the decreasing rule. Notice that if the set $\{P \mid \forall r.P \in \gamma(X)\}$ is empty, X^r should be chosen to be a \top -variable.

We know that $P'_2 \in \gamma(C_1^{-r} \sqcap \dots \sqcap C_n^{-r})$. Hence the extension of γ to the decomposition variables satisfies the subsumption $C_1^{-r} \sqcap \dots \sqcap C_n^{-r} \sqsubseteq P'$, which replaces the original subsumption in the goal.

2. Now consider a non-flat subsumption: $s = C_1 \sqcap \dots \sqcap C_n \sqsubseteq X$. Notice that at this moment we know that X is neither \perp nor \top in γ . Let $\gamma(X) = \{P_1, \dots, P_m\}$. The subsumption may not be flat only due to $C_i = \forall r.C'$ or $C_i = A$ on the left hand-side of s .

For every role $r \in \mathbf{R}$, the following is true. If there is a particle $P_i \in \gamma(X)$ such that $P_i = \forall r.P'$, then the set of such particles with the top role r is non-empty. Then we extend γ to γ' as above: $\gamma(X^r) = \{P' \mid \forall r.P' \in \gamma(X)\}$. Then γ extended to decomposition variables satisfies the subsumption $C_1^{-r} \sqcap \dots \sqcap C_n^{-r} \sqsubseteq X^r$.

If $\gamma(X^r)$ is empty, then X^r should be guessed to be a \top -variable and the subsumption is solved by the implicit solving rules, Figure 1.

Moreover if A_X is true, we create new flat subsumptions: $X \sqsubseteq A$ and $C_1^A \sqcap \dots \sqcap C_n^A \sqsubseteq A$. The latter one is marked solved by the implicit solving rules, Figure 1, and the first belongs to the normalized part of the goal as a start subsumption.

□

This ends the proof of the claim and thus of Lemma 1. □

Notice that the decreasing rule is not mentioned in the formulation of Lemma 1. This is because if a substitution γ is a ground unifier of Γ , which is not yet extended to the decomposition variables, after such extension with the definition $\gamma(X^r) := \{P \mid \forall r.P \in \gamma(X)\}$ for each decomposition variable, the decreasing rule is obviously satisfied. On the contrary, the decreasing rule must be mentioned in the claim of soundness of the flattening procedure.

Lemma 2. (*soundness of flattening*) *If Γ' is a normalized unification problem obtained by flattening from Γ , and if γ is a unifier of Γ' satisfying the decreasing rule for decomposition variables, then it is also a unifier of Γ .*

Proof. It is enough to consider the rules of Figure 2, because the reduction rules of Figure 1 are obviously sound. Let assume that in the process of flattening we have obtained a subsumption: $s = C_1 \sqcap \dots \sqcap C_n \sqsubseteq P$. Let assume that γ unifies this subsumption and it obeys the decreasing rule together with the increasing subsumptions for the decomposition variables. We consider which rule was applied to produce s .

1. If the first rule of Figure 2 was applied, then we know that the original subsumption was of the form: $s' = C'_1 \sqcap \dots \sqcap C'_k \sqsubseteq^? \forall r.P$ for a role name r .

$s = s'^{-r}$. Since γ unifies $C_1 \sqcap \dots \sqcap C_n \sqsubseteq P$ it must also unify $\forall r.C_1 \sqcap \dots \sqcap \forall r.C_n \sqsubseteq \forall r.P$. For each C_i on the left hand side of s' , $C'_i = \forall r.C_i$ or $C'_i = X$ and $C_i = X^r$ or $C'_i = \forall s.P$ with different role name, or $C'_i = A$. Since γ unifies $\forall r.C_1 \sqcap \dots \sqcap \forall r.C_n \sqsubseteq \forall r.P$ and the increasing subsumptions, then γ must unify s' too.

Here we show where exactly the increasing subsumptions are used. Namely, we infer that if $C_i = X^r$ is on the left side of s , $\forall r.X^r$ is on the left side of the lifted subsumption, $\forall r.C_1 \sqcap \dots \sqcap \forall r.C_n \sqsubseteq \forall r.P$ and γ must unify this subsumption. By the increasing subsumption $X \sqsubseteq \forall r.X^r$, which is assumed to be unified by γ , γ unifies the subsumption $\forall r.C_1 \sqcap \dots \sqcap \forall r.C_n \sqsubseteq \forall r.P$ even if $\forall r.C_i$ is replaced by $C'_i = X$. s' is obtained by a number of

such replacements and possibly expansion of the left side with the particles of the form $C'_i = \forall s.P$ with different role name, or $C'_i = A$, as mentioned above. An addition of any particle on the left side of a subsumption cannot change it from true to false.

2. If s was obtained by the second rule from Figure 2, from some subsumption $s' = C'_1 \sqcap \dots \sqcap C'_n \sqsubseteq^? X$, then either

- (a) $s = s'^{-r}$ or
- (b) A_X is true and $s = X \sqsubseteq^? A$ and $C'_1{}^A \sqcap \dots \sqcap C'_n{}^A \sqsubseteq^? A$ is solved.

We have to justify that γ unifies s' . By the decreasing rule, we know that $\gamma(X) = \{A\} \cup \{\forall r.\gamma(X^r) \mid r \in \mathbf{R}\}$ or $\gamma(X) = \{\forall r.\gamma(X^r) \mid r \in \mathbf{R}\}$, where for some $r \in \mathbf{R}$, $\gamma(X^r)$ may be \top . Since γ unifies s'^{-r} hence γ unifies $C'_1 \sqcap \dots \sqcap C'_n \sqsubseteq^? \forall r.X^r$ for each $r \in \mathbf{R}$. Since $C'_1{}^A \sqcap \dots \sqcap C'_n{}^A \sqsubseteq^? A$ is solved, then γ unifies $C_1 \sqcap \dots \sqcap C_n \sqsubseteq^? A$. Thus $\gamma(C'_1 \sqcap \dots \sqcap C'_n) \sqsubseteq^? \gamma(X)$ as required.

□

It is interesting to see that flattening when done correctly, solves many problems at once. Let see an example of non-unifiable problem.

Example 4. Let $\Gamma = \{\forall r.A \sqsubseteq^? Z, Z \sqsubseteq^? X, \forall r.X \sqsubseteq^? \forall r.A\}$.

Assume we guess that X and Z are neither \perp nor \top and $A_Z = A_X = \text{false}$. Let us remember that we cannot change this choice. One can see that this choice will lead to immediate failure, since flattening of the third subsumption yields: $X \sqsubseteq^? A$ and the Implicit solving rule will detect that A_X is false, hence the subsumption cannot have a solution.

Otherwise, we could guess A_X to be true and A_Z - false. Then the implicit solving rule will apply to the second subsumption, and detect that it cannot have a solution.

If we guess $A_Z = A_X = \text{true}$, then flattening of the first subsumption will yield two subsumptions: $A \sqsubseteq^? Z^r$ and $\top \sqsubseteq^? A$. The second of these will be the cause of failure for the implicit rules.

The other choices also lead to failure. Basically, the third subsumption forces X to contain A or to be \perp . The same requirement is transferred to Z by the second subsumption. But both these choices are failing for the first subsumption.

5 Reduction to \mathcal{FL}_0

Let Γ be a normalized unification problem, Γ_0 a set of flat goal subsumptions, Γ_{start} a set of start subsumptions and \mathbf{Var} the set of all variables in the normalized goal Γ . At this point the subsumptions in Γ_{start} are of two forms: $X \sqsubseteq^? \perp$ or $X \sqsubseteq^? A$.

We divide Γ into two parts:

1. \perp -part containing the start subsumptions of the form $X \sqsubseteq^? \perp$, the increasing subsumptions and Γ_0 ,
2. A -part containing the start subsumptions of the form $X \sqsubseteq^? A$, the increasing subsumptions and Γ_0 .

In the next sections, we show how to solve the \perp -part of the problem.

Due to the following lemma this is sufficient for deciding unifiability of the problem for \mathcal{FL}_\perp .

Lemma 3. *Let Γ be a normalized unification problem.*

Let γ_\perp be a solution of the \perp -part of Γ obeying the decreasing rule for the decomposition variables.

Let γ_A be a \mathcal{FL}_0 -unifier of the A -part of Γ , obeying the decreasing rule for the decomposition variables.

Then $\gamma_\perp \cup \gamma_A$ is a unifier of Γ .

Proof. Obviously \perp -part can be solved independently from the A -part. We have to show that it is also true about the A -part, due to the special form of the problem. Let us consider a \mathcal{FL}_\perp -unifier γ of a normalized problem. We describe here how the γ_A is constructed.

Let $Y_1 \sqcap \dots \sqcap Y_n \sqsubseteq X \in \Gamma_0$. Let $\forall v.A \in \gamma(X)$. Then by the properties of subsumption (condition 1 and 2) $\forall v.A \in \gamma(Y_1 \sqcap \dots \sqcap Y_n)$ or $\forall v'.\perp \in \gamma(Y_1 \sqcap \dots \sqcap Y_n)$, $v' \leq v$.

In the first case we do not need to do anything. In the second case, there is $i \in \{1, \dots, n\}$ such that $\forall v'.\perp \in \gamma(Y_i)$. We extend γ so that $\gamma(Y_i) \leftarrow \gamma(Y_i) \cup \{\forall v.A\}$. We do similar extension wrt. the variables in the increasing subsumptions. If $\forall v.A \in \gamma(X^r)$ (maybe due to the previous expansion steps), we add $\forall rv.A$ to $\gamma(X)$. Notice that now γ is redundant but is still a unifier.

Now, we argue that the process of extending γ will terminate for the normalized goal. The only way that the process would not terminate is if there is a cycle in Γ similar to the one in Example 1. We start extending γ with a start subsumption $X \sqsubseteq^? A$, since γ solves this subsumption, we know that $\gamma(X)$ contains A or else $\gamma(X) = \perp$. If $X \sqsubseteq \forall v.X$ for a string role v is a consequence of Γ , we say that X is involved in a cycle. In this case the extension would not terminate, but in this case we argue that X must be guessed to be a \perp -variable.

If guessing X to be a \perp -variable results in the non-unifiability of Γ , this may be only because a subsumption $\forall v'.Y \sqsubseteq X$ is a consequence of Γ . But in this case Γ is not unifiable, since $\forall v'.Y \sqsubseteq^? A$ cannot have a unifier.

Thus by the completeness of the flattening, if X is involved in a cycle and $X \sqsubseteq A$ is a consequence of Γ , then X should be guessed to be a \perp -variable. Instead of $X \sqsubseteq^? A$ we would have a start subsumption $X \sqsubseteq^? \perp$ which belongs to the \perp -part.

After repeating this construction exhaustively, we obtain γ_A by deleting all \perp -particles from the range of γ .

Now γ_A unifies all subsumptions in Γ_0 , all increasing subsumptions and the start subsumptions of the form $X \sqsubseteq^? A$. \square

Below we show how to solve the \perp -part. The A -part should be solved by \mathcal{FL}_0 -unification techniques which obey the decreasing rule for the decomposition variables.

6 Shortcuts

A shortcut is a pair of sets of variables from Γ , $(\mathcal{S}, \mathcal{P})$, where \mathcal{S} should be non-empty. We will use the shortcut to distribute any \perp -particle of the form $\forall v.\perp$ over the flat subsumptions. The particle is then placed in the variables from \mathcal{S} part and we are allowed to put some particles with prefix of v into the variables in \mathcal{P} -part. Such distribution of particles, seen as a substitution, should unify all flat subsumptions in Γ_0 .

For example, let the set of flat subsumptions be: $\Gamma_0 = \{X^{rr} \sqsubseteq^? X^r, X^r \sqsubseteq^? X\}$. Then an example of shortcut is $(\mathcal{S}, \mathcal{P})$ where $\mathcal{S} = \{X\}$ and $\mathcal{P} = \{X^r, X^{rr}\}$. If we substitute X with a particle $\forall v.\perp$ and put certain \perp -particles in X^r and X^{rr} e.g. $\forall v'.\perp$, where v' is a prefix of v , then obviously, Γ_0 is unified by such a substitution. On the contrary, if $\mathcal{S} = \{X^r\}$ and $\mathcal{P} = \{X\}$, the subsumptions will not be satisfied, hence the pair $(\{X^r\}, \{X\})$ is not a valid shortcut.

Thus the main property of a shortcut $(\mathcal{S}, \mathcal{P})$ is that if the variables in \mathcal{S} are substituted with a particle P , then there is a substitution of \perp -particles with prefixes of the role string of P for the variables in \mathcal{P} which is a solution of Γ_0 .

Let $s = (\mathcal{S}, \mathcal{P})$ be a shortcut, then we call \mathcal{S} the **main part** and \mathcal{P} the **prefix-part** of s .

A special case of a shortcut is the so called *initial shortcut*. $s_{ini} = (\mathcal{S}_{ini}, \emptyset)$, where $\mathcal{S}_{ini} = \{X \mid X \sqsubseteq^? \perp \in \Gamma_{start}\}$. Let us notice that no \perp -variables in \mathcal{S}_{ini} occur in Γ_0 . Hence the shortcut satisfies the main property of shortcuts: Γ_0 is satisfied, because the “empty” variables in Γ_0 are treated as \top .

Definition 1. (Shortcut)

A shortcut is a pair $(\mathcal{S}, \mathcal{P})$, where

1. \mathcal{S}, \mathcal{P} are disjoint sets of variables, $\mathcal{S} \cup \mathcal{P} \subseteq \mathbf{Var}$,
2. $\mathcal{S} \neq \emptyset$,
3. If $\mathcal{S} \cap \mathcal{S}_{ini} \neq \emptyset$, then all $\mathcal{S} \cup \mathcal{P} \subseteq \mathcal{S}_{ini}$
4. The substitution $\{[X \mapsto D] \mid X \in \mathcal{S}\} \cup \{[Y \mapsto \perp] \mid Y \in \mathcal{P}\} \cup \{[Z \mapsto \top] \mid Z \in \mathbf{Var} \setminus (\mathcal{S} \cup \mathcal{P})\}$ unifies Γ_0 . Here D is a dummy constant.²

In the above definition we check if the flat subsumptions are unified for a particular ground substitution, which satisfies voidly the condition on the role strings, namely that the particles in the prefix-part of the shortcut, \mathcal{P} must be \perp -particles with the role strings – the prefixes of the role string of a given particle the main part of the shortcut, \mathcal{S} . Let us notice that the prefix-part by itself should correspond to a shortcut.

²The constant D here is playing an auxiliary role, to check the relation between \mathcal{S} and \mathcal{P} .

Lemma 4. *Let Γ be a normalized unification problem and let $s = (\mathcal{S}, \mathcal{P})$ be a shortcut defined according to Definition 1. Then there is at least one partition of the set \mathcal{P} , $\mathcal{P} = \mathcal{S}' \cup \mathcal{P}'$ such that $s' = (\mathcal{S}', \mathcal{P}')$ is a shortcut.*

Proof. The partition of \mathcal{P} depends on the flat subsumptions. In particular s' may have the form (\mathcal{P}, \emptyset) , because if the substitution for all variables in \mathcal{P} with \perp satisfies Γ_0 , then substitution them with D will also satisfy the flat subsumptions. Thus the condition 4 of the definition of shortcuts is satisfied for (\mathcal{P}, \emptyset) . \square

There are possibly exponentially many shortcuts in the size of the unification problem, but most of them are perhaps not useful for our purposes. We want to identify shortcuts that have a defined height.

Definition 2. *(Heights of shortcuts)*

1. A shortcut $(\mathcal{S}, \mathcal{P})$ has height 0 iff
 - (a) \mathcal{S} does not contain any decomposition variables,
 - (b) \mathcal{P} corresponds to some shortcut with a computed height.
2. A shortcut $(\mathcal{S}, \mathcal{P})$ has height $i + 1$ if i is the minimal number for which it satisfies the following property.

For every role name r such that there is a decomposition variable $X^r \in \mathcal{S}$ there is a shortcut $(\mathcal{S}', \mathcal{P}')$ of the height smaller than i such that:

- (a) *for each decomposition variable $X^r \in \mathcal{S}$, $X \in \mathcal{S}'$ and for all decomposition variables Y^r in \mathcal{P} , $Y \in \mathcal{P}'$.*
- (b) *if Y is in \mathcal{S}' (respectively in \mathcal{P}') and Y^r is a defined decomposition variable, then Y^r is not \top and it is in \mathcal{S} (respectively in \mathcal{P}').*
- (c) *\mathcal{P} corresponds to some shortcut with a computed height.*

We say that the shortcut $(\mathcal{S}', \mathcal{P}')$ resolves the shortcut $(\mathcal{S}, \mathcal{P})$ wrt. the decomposition variable X^r . Hence a shortcut $(\mathcal{S}, \mathcal{P})$ is resolved by a set of shortcuts of smaller heights with at least one of them of height i .

Notice that condition 2b makes sure that if we use a shortcut with a particular height to distribute a particle P through the flat subsumptions, the decreasing rule will be satisfied.

Notice also that if we use a shortcut of height 0 to distribute a particle P through the flat subsumptions, such assignment will not produce bigger particles, because bigger particles are only created in increasing subsumptions by substituting decomposition variables and there are no decomposition variables in the main part of such a shortcut.

Computing shortcuts At this stage of our unification algorithm we first compute all possible shortcuts for which the height is defined. If an initial shortcut $(\mathcal{S}_{ini}, \emptyset)$ is not in the set, the algorithm terminates with negative answer. Otherwise, it enters a loop, deleting some shortcuts in the following way.

1. If an initial shortcut $(\mathcal{S}_{ini}, \emptyset)$ is not in the set, the algorithm terminates with the negative answer.
2. Otherwise, the algorithm checks for the existence of a shortcut corresponding to a prefix-part of each shortcut in the set. (CHECKEXISTENCE). Some shortcuts may be deleted. This step enforces the conditions 1b and 2c of Definition 2.
3. Next the algorithm recomputes the heights, (CHECKVALIDITY). If after deletions of the previous step some shortcuts do not have a height defined, we delete them, and go back to the step 1.

The main procedure Here we present the pseudocode for the main procedure (Algorithm 1), the pseudocode for the sub-procedures is in Section 7.

Algorithm 1 Main

```

1: procedure MAIN( $\Gamma$ )  $\triangleright \Gamma$  is a normalized unification problem
2:   Var is a set of all variables in  $\Gamma$ 
3:    $\Gamma_{start} \leftarrow$  start subsumptions of  $\Gamma$ 
4:    $\mathcal{S}_{ini} = \{X \in \mathbf{Var} \mid X \sqsubseteq^? \perp \in \Gamma_{start}\}$   $\triangleright$  Variables in start subsumptions cannot appear in the flat subsumptions.
5:   if  $\mathcal{S}_{ini} == \emptyset$  then
6:      $\perp$  return success
7:    $\Gamma_0 \leftarrow$  flat subsumptions of  $\Gamma$ 
8:    $\mathfrak{R} \leftarrow$  INITIALLYREJECTED( $\Gamma_0, \mathcal{S}_{ini}, \mathbf{Var}$ )
9:    $\mathfrak{S} \leftarrow$  ALLSHORTCUTS( $\Gamma_0, \mathfrak{R}$ )  $\triangleright$  Preprocessing
10:  if  $(\mathcal{S}_{ini}, \emptyset) \notin \mathfrak{S}$  then  $\triangleright$  Step 1
11:     $\perp$  return failure
12:  repeat
13:     $\mathfrak{S} \leftarrow$  CHECKEXISTENCE( $\mathfrak{S}$ )  $\triangleright$  Step 2
14:     $\mathfrak{S} \leftarrow$  CHECKVALIDITY( $\mathfrak{S}$ )  $\triangleright$  Step 3
15:  until there is no change in  $\mathfrak{S}$ 
16:  if  $(\mathcal{S}_{ini}, \emptyset) \in \mathfrak{S}$  then
17:     $\perp$  return success
18:   $\perp$  return failure

```

Example 5. Let $\Gamma_0 = \{X^{rr} \sqsubseteq^? X^r, X^r \sqsubseteq^? X\}$.
Let $\Gamma_{start} = \{X^{rs} \sqsubseteq^? \perp, X^{rr} \sqsubseteq^? \perp\}$.
A shortcut of height 0 is $(\{X\}, \{X^r, X^{rr}\})$.

A shortcut of height 1 will be $(\{X^r\}, \{X^{rr}\})$.
The shortcut $s_{ini} = (\{X^{rr}, X^{rs}\}, \emptyset)$ is of height 2.

7 Sub-procedures

In the following pseudocode:

- \mathfrak{R} contains all pairs of subsets of \mathbf{Var} that are detected to not be valid shortcuts.
- $S^r := \{X^r \in S \mid X^r \text{ is a decomposition variable for a particular role } r\}$
- $S^{+r} := \{X^r \mid X^r \text{ is a defined decomposition variable for the role } r \text{ and } X \in S\}$
- $S^{-r} := \{X \mid X^r \text{ is a defined decomposition variable for the role } r \text{ and } X^r \in S\}$
- The sub-procedure COMPATIBLE checks the conditions of Definition 2.
- The sub-procedure INITIALLYREJECTED checks the conditions of Definition 1.

Algorithm 2 InitiallyRejected

```

1: procedure INITIALLYREJECTED( $\Gamma_0, \mathcal{S}_{ini}, \mathbf{Var}$ ) $\triangleright$  Computes the set of re-
   | jected candidates for the shortcuts
2:    $\mathfrak{R} \leftarrow \emptyset$ 
3:   for all  $\mathcal{S}, \mathcal{P} \subseteq \mathbf{Var}$  do
4:     if  $\mathcal{S} \cap \mathcal{P} \neq \emptyset$  then  $\triangleright$  Condition 1 of Def. 1.
5:        $\mathfrak{R} \leftarrow \mathfrak{R} \cup (\mathcal{S}, \mathcal{P})$ 
6:     else if  $\mathcal{S} == \emptyset$  then  $\triangleright$  Condition 2 of Def. 1.
7:        $\mathfrak{R} \leftarrow \mathfrak{R} \cup (\mathcal{S}, \mathcal{P})$ 
8:     else if  $\mathcal{S} \cap \mathcal{S}_{ini} \neq \emptyset$  and  $\mathcal{S} \cup \mathcal{P} \not\subseteq \mathcal{S}_{ini}$  then  $\triangleright$  Condition 3 of Def. 1.
9:        $\mathfrak{R} \leftarrow \mathfrak{R} \cup (\mathcal{S}, \mathcal{P})$ 
10:    else
11:       $\gamma = \{[X \mapsto D] \mid X \in \mathcal{S}\} \cup \{[Y \mapsto \perp] \mid Y \in \mathcal{P}\} \cup \{[Z \mapsto \top] \mid Z \in$ 
   |  $\mathbf{Var} \setminus (\mathcal{S} \cup \mathcal{P})\}$   $\triangleright$  Condition 4 of Def. 1.
12:      if  $\gamma(\Gamma_0)$  is false then
13:         $\mathfrak{R} \leftarrow \mathfrak{R} \cup (\mathcal{S}, \mathcal{P})$ 
14:    return  $\mathfrak{R}$ 

```

Lemma 5. (completeness of ALLSHORTCUTS) *Let Γ be a normalized unification problem and γ its ground unifier. Then the algorithm ALLSHORTCUTS correctly computes all shortcuts defined wrt. γ .*

Algorithm 3 CheckExistence

```
1: procedure CHECKEXISTENCE( $\mathfrak{S}$ )  $\triangleright$  Checks if there is a corresponding
   shortcut defined for each non-empty prefix-part a shortcut
2:   for all  $s = (\mathcal{S}, \mathcal{P}) \in \mathfrak{S}$  do
3:     found  $\leftarrow$  0
4:     for all  $s' = (\mathcal{S}', \mathcal{P}') \in \mathfrak{S} \setminus \{s\}$  do
5:       if  $\mathcal{P} = \mathcal{S}' \cup \mathcal{P}'$  then
6:         found  $\leftarrow$  1
7:         break searching for  $s'$ 
8:     if found == 0 then
9:        $\mathfrak{S} \leftarrow \mathfrak{S} \setminus \{s\}$ 
10:  return  $\mathfrak{S}$ 
```

Algorithm 4 AllShortcuts

```
1: procedure ALLSHORTCUTS( $\Gamma_0, \mathfrak{R}$ )  $\triangleright \Gamma_0$  is a set of flat subsumptions,  $\mathfrak{S}$  is
   a set of shortcuts computed up to now,  $\mathfrak{R}$ - rejected
2:    $\mathfrak{S} \leftarrow \emptyset$ 
3:   repeat
4:      $\mathfrak{S}' \leftarrow \emptyset$ 
5:     for all  $s = (\mathcal{S}, \mathcal{P}) \notin \mathfrak{S} \cup \mathfrak{R}$  do
6:       for all  $r \in \mathfrak{R}$  do
7:         if  $\mathcal{S}^r \neq \emptyset$  for any  $r \in \mathfrak{R}$  then
8:           found  $\leftarrow$  0  $\triangleright$  Searching for an already computed shortcut
           compatible with this one
9:           for all  $s' = (\mathcal{S}', \mathcal{P}') \in \mathfrak{S}$  do
10:            if COMPATIBLE( $s, s', r$ ) then
11:              found  $\leftarrow$  1
12:              break
13:           if found == 0 then
14:             break and fail for this  $s$ .
15:           if not failed for  $s$  then
16:              $\mathfrak{S}' \leftarrow \mathfrak{S}' \cup \{s\}$ 
17:            $\mathfrak{S} \leftarrow \mathfrak{S} \cup \mathfrak{S}'$ 
18:   until  $\mathfrak{S}' == \emptyset$ 
19:  return  $\mathfrak{S}$ 
```

Algorithm 5 compatible

```
1: procedure COMPATIBLE( $s, s', r$ )  $\triangleright s$  is a candidate for a valid shortcut,  $s'$ 
   is already computed,  $r$  is a role name, such that a decomposition variable
    $X^r$  occurs in  $s$ 
2:    $s = (\mathcal{S}, \mathcal{P})$ 
3:    $s' = (\mathcal{S}', \mathcal{P}')$ 
4:   if  $((\mathcal{S})^r)^{-r} \not\subseteq \mathcal{S}'$  then  $\triangleright$  Condition 2a of Def. 2
5:     return false
6:   if  $((\mathcal{P})^r)^{-r} \not\subseteq \mathcal{P}'$  then
7:     return false
8:   if  $(\mathcal{S}')^{+r} \not\subseteq \mathcal{S}$  then  $\triangleright$  Condition 2b of Def. 2
9:     return false
10:  if  $(\mathcal{P}')^{+r} \not\subseteq \mathcal{P}$  then
11:    return false
12:  return true
```

Algorithm 6 CheckValidity

```
1: procedure CHECKVALIDITY( $\mathfrak{S}$ )  $\triangleright \mathfrak{S}$  is a set of shortcuts after deletions,
   computing if height can be defined
2:    $\mathfrak{S}' \leftarrow \emptyset$ 
3:   change  $\leftarrow 0$ 
4:   repeat
5:     for all  $s = (\mathcal{S}, \mathcal{P}) \in \mathfrak{S} \setminus \mathfrak{S}'$  do
6:       found  $\leftarrow 1$ 
7:       for all  $r \in \mathbf{R}$  do
8:         if  $\mathcal{S}^r \neq \emptyset$  and found == 1 then
9:           found  $\leftarrow 0$ 
10:          for all  $s' \in \mathfrak{S}'$  do
11:            if COMPATIBLE( $s', s, r$ ) then
12:              found  $\leftarrow 1$ 
13:            break the loop for this  $r$ 
14:          if found == 1 then
15:             $\mathfrak{S}' \leftarrow \mathfrak{S}' \cup \{s\}$ 
16:            change  $\leftarrow 1$ 
17:   until change == 0
18:   return  $\mathfrak{S}'$ 
```

Proof. The shortcuts defined by γ are defined (as in the proof of Theorem 2) as follows. For each particle $P = \forall v.\perp \in \gamma(X)$, $X \in \mathbf{Var}$, a shortcut defined wrt. P is $s = (\mathcal{S}, \mathcal{P})$ such that:

- $\mathcal{S} = \{Y \in \mathbf{Var} \mid P \in \gamma(Y)\}$
- $\mathcal{P} = \{Z \in \mathbf{Var} \mid P' = \forall v'.\perp \in \gamma(Z) \text{ where } v' \text{ is a proper prefix of } v\}$.

First we define *maximal* particles in the range of γ . Since γ is finite, then there are maximal particles in its range. $\forall u.\perp$ is called *maximal* iff

- there is no particle $\forall u'.\perp$ in the range of γ such that, u is a proper suffix of u' , and

Hence e.g. $\forall r s r s.\perp > \forall s r s.\perp$.

Each of the shortcuts defined by γ has some *height*. The shortcuts of height 0 will be defined wrt. the maximal particles. Since γ satisfies the increasing subsumptions and the decreasing rule, the shortcuts containing the decomposition variables will be properly resolved and hence will obtain some height.

- At first, the set of computed shortcuts \mathfrak{S} is empty. Hence it can produce only the shortcuts with no decomposition variables in the first component. Such shortcuts must exist, since there are maximal particles in the range of γ . Let P be such a particle. Then a shortcut defined wrt. P will be $(\mathcal{S}, \mathcal{P})$ with no decomposition variables in \mathcal{S} . Otherwise, if a decomposition variable $X^r \in \mathcal{S}$, then according to the above definition of shortcuts, $P \in \gamma(X^r)$ and then since $\gamma(X) \sqsubseteq \forall r.\gamma(X^r) \sqsubseteq \forall r.P$ (P is not reduced in $\gamma(X^r)$) $\forall r.P \in \gamma(X)$ and thus P is not maximal which contradicts our assumption about P .
- Assume that a non-empty set of shortcuts \mathfrak{S} is already computed. In the next round the algorithm checks if a not yet resolved shortcut $s = (\mathcal{S}, \mathcal{P})$ has some resolving shortcuts in \mathfrak{S} . Assume that s is defined wrt. a particle P in the range of γ . Since the shortcut s is not yet resolved, there must be a decomposition variable X^r in \mathcal{S} . Since γ unifies the increasing subsumptions, there is a particle $\forall r.P$ in the range of γ . Hence there is a shortcut s' defined wrt. $\forall r.P$, which resolves s . The shortcut s' will be computed before s , because the computation goes from the shortcuts wrt. to bigger particles to smaller. (In other words, the shortcut s' produces a smaller increase in the size of a particle, then s , because s forces an additional role name r for the particles created in the increasing subsumptions required by s' .) The same can be said about other role names for which decomposition variables are in \mathcal{S} .

Thus every shortcut defined wrt. particles in the range of γ will be finally produced.

Notice that the algorithms will perhaps compute more shortcuts than needed, but the ones defined by γ will be in the set. \square

8 Termination and complexity

Theorem 1. *Let Γ be a \mathcal{FL}_\perp unification problem. The algorithm terminates in at most exponential time in the size of Γ .*

Proof. As mentioned before, the first stage of the algorithm, flattening is a non-deterministic polynomial procedure. We obtain a normalized problem. Now the algorithm solves the \perp -part of normalized Γ . If there are no \perp -start subsumptions, there is nothing to do and the algorithm proceeds to the next stage, namely solving A -part. If there are \perp -start subsumptions, the main procedure computes all candidates for the shortcuts rejected because of wrong form, (the procedure INITIALLYREJECTED, line 8). This is exponential step, because there are exponentially many pairs of sets of variables.

Next, the algorithm computes all shortcuts (line 9). This step is also exponential, because there are only exponentially many possible shortcuts. It contains a loop computing next shortcuts, where it adds at least one shortcut per run to the already computed ones. Hence this sub-procedure requires at most exponentially many steps, each taking at most exponential time. If the algorithm does not terminate now, because of the non-existence of the initial shortcut, it proceeds to the next step.

The next repeat-loop (line 12) causes deletions in the set of already computed shortcuts and hence it can be executed only at most exponentially many times. Each time it has to perform two sequential checks, each costs exponentially many polynomial time steps.

After the loop terminates, the algorithm terminates. Hence overall the time needed for the algorithm to terminate is exponential in the size of the problem. \square

9 Completeness

Theorem 2. *Let Γ be a \perp -part of a normalized unification problem and let γ be a ground unifier of Γ . Then the main algorithm will terminate with success.*

Proof. The proof shows how the solution γ ensures a non-failing run of the algorithm. We assume that γ is reduced wrt. to the properties of \mathcal{FL}_\perp .

From the normalized Γ we identify the \perp -variables as $\mathcal{S}_{ini} = \{X \in \mathbf{Var} \mid \gamma(X) = \perp\}$. By Lemma 1 (completeness of flattening) we can assume that the set of \perp -variables is defined wrt. the start subsumptions in Γ_{start} , $\mathcal{S}_{ini} = \{X \in \mathbf{Var} \mid X \sqsubseteq \perp \in \Gamma\}$.

Given the solution γ we define the shortcuts. For each particle $P = \forall v. \perp \in \gamma(X)$, $X \in \mathbf{Var}$, a shortcut defined wrt. P is $s = (\mathcal{S}, \mathcal{P})$ such that:

- $\mathcal{S} = \{Y \in \mathbf{Var} \mid P \in \gamma(Y)\}$
- $\mathcal{P} = \{Z \in \mathbf{Var} \mid P' = \forall v'. \perp \in \gamma(Z) \text{ where } v' \text{ is a proper prefix of } v\}$.

1. In the first step the algorithm calls the subprocedure `INITIALLYREJECTED` on all pairs of subsets of variables. Obviously, the shortcuts defined as above will not be rejected, i.e. will not be in the set \mathfrak{R} .
2. Next the algorithm calls the sub-procedure `ALLSHORTCUTS` which computes all possible shortcuts. By the completeness of this procedure (Lemma 5), all shortcuts defined as above will be computed.
3. The shortcuts defined by γ will not be deleted in `CHECKEXISTENCE`, because the \perp -particles that define the prefix-part of the shortcut are strictly smaller than the one in the main part, hence they have to satisfy the flat clauses according to the properties of subsumption (2). Hence the prefix-part will correspond to a shortcut $(\mathcal{S}', \mathcal{P}')$, where \mathcal{S}' will be defined with respect to the particle maximal wrt. its size in \mathcal{P} . There will be such a particle, because all those particles in the definition of \mathcal{P} have prefixes of the role name for the particle for \mathcal{S} . There must be a longest prefix, and this will be the particle for which $(\mathcal{S}', \mathcal{P}')$ should be defined.
4. Since no shortcut defined by γ is deleted by `CHECKEXISTENCE` sub-procedure, then their heights will need not be revised by `CHECKVALIDITY`.
5. Finally the algorithm checks if $s_{ini} = (\mathcal{S}_{ini}, \emptyset)$ is among computed shortcuts. Since γ is a unifier, s_{ini} must be a valid shortcut. In fact the variables in \mathcal{S}_{ini} do not appear in the flat subsumptions, hence the flat subsumptions are satisfied by substituting \top for their variables (condition 4). The variables in \mathcal{S}_{ini} occur in Γ_{start} and they also can occur in the increasing subsumptions. Hence the shortcut s_{ini} must be resolved by the shortcuts defined wrt. the bottom particles created in the increasing subsumptions. As explained above, such shortcuts are computed and hence s_{ini} is also computed and not deleted.

Thus the algorithm terminates with success. □

10 Soundness

Theorem 3. *Let Γ be the \perp -part of a normalized unification problem and let the main algorithm run on Γ terminate with success, then there exists a ground \mathcal{FL}_{\perp} -unifier γ of Γ .*

Proof. We assume that the algorithm terminated with success. It may be because the set of start subsumptions is empty. Then there is a unifier that assigns \top to all variables. We take this substitution as γ .

Hence assume that the set of start subsumptions is not empty. Another possibility is that flattening produced all solved subsumptions. Then by the soundness of this process we can conclude that the substitution obtained from the partial solution is a unifier of Γ .

Otherwise the algorithm has computed shortcuts in a special order, starting from the shortcuts of height 0. We can see this as if the algorithm has produced a directed acyclic graph defined on the set of all computed shortcuts. The graph is (V, E) , where $V = \mathfrak{S}$, the set of all computed shortcuts and E the set of edges given by the resolving relation (Definition 2) between shortcuts: $s_1 \xrightarrow{r} s_2$ if s_1 is resolved by s_2 wrt. to some decomposition variable X^r . Then the shortcuts of height 0 have only incoming arrows and the initial shortcut has only outgoing arrows. We would also add some connections between the shortcuts in the following way: if $s = (\mathcal{S}, \mathcal{P})$ and $s' = (\mathcal{S}', \mathcal{P}')$, where $\mathcal{P} = \mathcal{S}' \cup \mathcal{P}'$, then we have an additional edge $s \dashrightarrow s'$. A dotted edge indicates where the smaller particles in a prefix-part of a shortcut, should have been created. The initial shortcut is not connected to any shortcut by such edge.

Now let us take a connected sub-graph of this construction containing the initial shortcut. We follow the labeled arrows in constructing a substitution starting with the smallest particles. We allow some liberty in creating the particles of height 1. This is because we do not want to create new \perp -variables. In contrast to this, we allow some variables, with no particles assigned by the substitution, to become \top -variables.

We maintain a substitution γ which initially assigns \top to all variables. The principles of the construction are the following:

1. If we create a particle $P = \forall v.\perp$ in the range of γ using a shortcut $(\mathcal{S}, \mathcal{P})$, it means that the substitution γ is extended with $\forall v.\perp$ for all variables in \mathcal{S} , and each variable in \mathcal{P} has already a particle $\forall v'.\perp$ with v' a prefix of v in its substitution, or else the prefix-part, \mathcal{P} is empty.
2. A particle P that occurs in $\gamma(X^r)$ at any time, may cause the increasing subsumption $X \sqsubseteq^? \forall r.X^r$ to be false, only if X^r occurs in the main part of a shortcut ($X^r \in \mathcal{S}$) used to create P .

Using a shortcut in this way (first for creating all smaller size particles, before creating bigger ones), ensures that all flat subsumptions are satisfied by the substitution constructed at each step. All the increasing subsumptions will finally be satisfied too, when the only shortcuts used to create new particles are of height 0.

- At first we define $\gamma(X) = \perp$ for each variable in \mathcal{S}_{ini} . By this step, γ unifies the start subsumptions. Both the principles are satisfied: the prefix-part of the initial shortcut is empty. If there are no decomposition variables in \mathcal{S}_{ini} we finish the construction because this γ is a unifier: $\gamma(X) = \perp$ for $X \in \mathcal{S}_{ini}$ and $\gamma(Y) = \top$ for $Y \notin \mathcal{S}_{ini}$.
- If \mathcal{S}_{ini} contains a decomposition variable X^r , then the initial shortcut s_{ini} is resolved wrt. X^r by a shortcut $s' = (\mathcal{S}', \mathcal{P}')$ of some height. There is an arrow $s_{ini} \xrightarrow{r} s'$. Since $X \in \mathcal{S}'$, we create a particle $\forall r.\perp$ and add it to γ in the following way: $\gamma(Y) = \forall r.\perp$, for $Y \in \mathcal{S}'$. Variables in \mathcal{P}' must be in \mathcal{S}_{ini} or else \mathcal{P}' is empty. This satisfies the first principle. We do the same for all decomposition variables in \mathcal{S}_{ini} .

As we want to construct the smallest particles first, we would like to add these particles of size 1 also to the substitution of some other variables in prefix-parts of the shortcuts of smaller heights, so that they are there when we need them. We do this only under the condition that this variable has no r -decomposition variable defined (we can add $\forall r.\perp$ to $\gamma(Z)$ if Z^r is not defined). Only then the particle $\forall r.\perp$ can be added to the substitution for this variable.

We produce these particles in the main part of shortcuts with the prefix-part containing only \perp -variables or being empty. Since every prefix-part of a shortcut of smaller height corresponds to a shortcut, we will find a suitable shortcut to create the particle where it will be needed.

In this way, we add additional particles to prefix-parts of shortcuts that are not yet used for the creation of bigger particles.

- Now assume that the substitution γ is defined for the variables, assigning to them sets of particles of size at most n . We have two cases to consider. Let us assume that $s = (\mathcal{S}, \mathcal{P})$.
 - A decomposition variable $X^r \in \mathcal{S}$ and $\gamma(X^r)$ is not \top . The algorithm gives us an arrow from s to $s' = (\mathcal{S}', \mathcal{P}')$ with the label r . s' was used to resolve s wrt. X^r . Hence $X \in \mathcal{S}'$. We create a set of particles of size $n + 1$:
 1. For each variable $Y \in \mathcal{S}'$, $\gamma(Y) \leftarrow \{\forall r.\gamma(X^r)\} \cup \{\gamma(Y)\}$
 2. For each variable $Z^r \in \mathcal{P}$, we have $Z \in \mathcal{P}'$. Since the particles in $\gamma(Z^r)$ are of size smaller than those in \mathcal{S} , we assume that the shortcut corresponding to \mathcal{P} has already been considered and resolved with the shortcut corresponding to \mathcal{P}' , hence $\gamma(Z) := \{\forall r.\gamma(Z^r)\} \cup \{\gamma(Z)\}$
 3. For each variable $U \in \mathcal{P}'$ for which U^r is not defined, we assume that $\forall r.\perp \in \gamma(U)$.³
 - There is an r -decomposition variable Y^r in \mathcal{P} , but there is no r -decomposition variable in \mathcal{S} . Then, there is a shortcut corresponding to \mathcal{P} , $s'' = (\mathcal{S}'', \mathcal{P}'')$, such that $\mathcal{P} = \mathcal{S}'' \cup \mathcal{P}''$. Here we follow a dotted arrow without label that is $s \rightarrow s''$. Hence there is a shortcut $s_1 = (\mathcal{S}_1, \mathcal{P}_1)$ with $Y^r \in \mathcal{S}_1$. We can look for s_1 along the path of unlabeled arrows $s \rightarrow s'' \xrightarrow{*} s_1$. Since $\gamma(Y^r)$ constructed up to now, contains smaller particles than those in the variables of \mathcal{S} , and since s_1 must be resolved by a shortcut s_2 , the substitution γ for variables in s_2 is correctly extended according to the above description so that the increasing subsumption $Y \sqsubseteq \forall r.Y^r$ is satisfied by γ .

□


³The particle $\forall r.\perp$ was added to $\gamma(U)$ in the step creating and distributing the particles of size 1.

Here we provide an example of the construction in the proof of Theorem 3.

Example 6. Let $\Gamma_{start} = \{U^{r_1} \sqsubseteq^? \perp\}$ and $\Gamma_0 = \{Y^{r_2} \sqsubseteq^? U, Z^{r_3} \sqsubseteq^? Y, Y^{r_2} \sqsubseteq^? Z\}$. The increasing subsumptions are omitted.

The initial shortcut $s_{ini} = (\{U^{r_1}\}, \emptyset)$ is resolved by $s_1 = (\{U, Y^{r_2}\}, \emptyset)$. This shortcut is resolved by $s_3 = (\{Y\}, \{Z^{r_3}\})$ and the shortcut $s_4 = (\{Z^{r_3}\}, \emptyset)$ is resolved by $s_5 = (\{Z\}, \{Y^{r_2}\})$, while $s_2 = (\{Y^{r_2}\}, \emptyset)$ is resolved by s_3 .

Let a part of the graph yielded by the algorithm be the following:

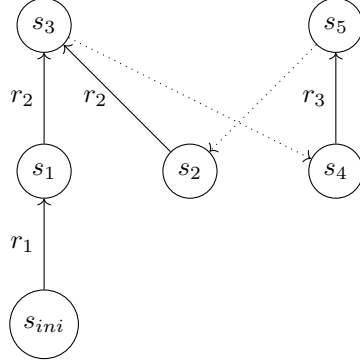

We use the graph to construct a unifier in the following way.

1. At first $\gamma = [U^{r_1} \mapsto \perp]$ and the start subsumption is solved. Creation of particles of size 1:

$$\gamma = [U^{r_1} \mapsto \perp, U \mapsto \forall r_1.\perp, Y^{r_2} \mapsto \{\forall r_1.\perp, \forall r_3.\perp\}, Z^{r_3} \mapsto \{\forall r_2.\perp, \forall r_3.\perp\}]$$

At this point Y and Z are not substituted with any particle, hence they are considered to be \top . All flat subsumptions are true under this substitution.

Notice that we have used the shortcut $s_1 = (\{U, Y^{r_2}\}, \emptyset)$ to create $\forall r_1.\perp$ in the substitution for U and Y^{r_2} and the other particles of size 1 are added in an arbitrary way to the variables in \mathcal{P} parts of the shortcuts.

After this step, the shortcuts $s_{ini} = (\{U^{r_1}\}, \emptyset)$ is resolved, but $s_1 = (\{U\}, \{Y^{r_2}\})$, $s_2 = (\{Y^{r_2}\}, \emptyset)$ and $s_4 = (\{Z^{r_3}\}, \emptyset)$ are not. Y^{r_2} (which occurs in s_1 and s_2) contains now two particles $\forall r_1.\perp$ and $\forall r_3.\perp$ and Z^{r_3} contains $\forall r_2.\perp$ and $\forall r_3.\perp$.

2. Creation of particles of size 2. The shortcuts $s_1 = (\{U, Y^{r_2}\}, \emptyset)$ and $s_2 = (\{Y^{r_2}\}, \emptyset)$ are resolved by $s_3 = (\{Y\}, \{Z^{r_3}\})$ and s_4 is resolved by $s_5 = (\{Z\}, \{Y^{r_2}\})$. We obtain the substitution:

$$\gamma = [U^{r_1} \mapsto \perp, U \mapsto \forall r_1.\perp, Y^{r_2} \mapsto \{\forall r_1.\perp, \forall r_3.\perp\}, Z^{r_3} \mapsto \{\forall r_2.\perp, \forall r_3.\perp\}, Y \mapsto \{\forall r_2 r_1.\perp, \forall r_2 r_3.\perp\}, Z \mapsto \{\forall r_3 r_2.\perp, \forall r_3 r_3.\perp\}]$$

11 Conclusions

The paper develops and corrects the ideas in [10].

The procedure in this paper provides a missing part in proving that the unification problem \mathcal{FL}_\perp is ExpTime complete. We show that it is in the class

ExpTime. A theorem in [1] shows that the ExpTime hardness proof for the unification problem in \mathcal{FL}_0 , works also in the case of \mathcal{FL}_\perp .

The algorithms presented here are not optimized. In particular, the computation of shortcuts has a flavor of *brute force* checking through the whole search space. Most probably it is possible to replace it by a more goal-oriented computation. We will work on the optimizations and possibly on an implementation which would allow for practical applications.

For more theoretical research, one can explore the connection between unification in \mathcal{FL}_\perp and unification in \mathcal{FL}_0 modulo a TBox. It is easy to show that unification in \mathcal{FL}_\perp is reducible to unification in \mathcal{FL}_0 with a TBox.

We have not used any reduction to certain clauses of the first order logic, like in [6], in the proof presented here. It would be interesting to see what problem for the restricted first-order clauses corresponds to the unification problem in \mathcal{FL}_\perp .

References

- [1] Franz Baader and Oliver Fernández Gil. Restricted unification in the description logic \mathcal{FL}_\perp . In David M. Cerna and Barbara Morawska, editors, *Proceedings of the 36th International Workshop on Unification (UNIF 2022)*, Haifa, Israel, 2022.
- [2] Franz Baader and Ralf Küsters. Unification in a description logic with transitive closure of roles. In Carole A. Goble, Deborah L. McGuinness, Ralf Möller, and Peter F. Patel-Schneider, editors, *Working Notes of the 2001 International Description Logics Workshop (DL-2001), Stanford, CA, USA, August 1-3, 2001*, volume 49 of *CEUR Workshop Proceedings*. CEUR-WS.org, 2001.
- [3] Franz Baader and Ralf Küsters. Unification in a description logic with inconsistency and transitive closure of roles. In Ian Horrocks and Sergio Tessaris, editors, *Proceedings of the 2002 International Workshop on Description Logics (DL2002), Toulouse, France, April 19-21, 2002*, volume 53 of *CEUR Workshop Proceedings*. CEUR-WS.org, 2002.
- [4] Franz Baader and Barbara Morawska. Unification in the description logic \mathcal{EL} . *Logical Methods in Computer Science*, 6(3), 2010. Special Issue of the 20th International Conference on Rewriting Techniques and Applications; also available at <http://arxiv.org/abs/1006.2289>.
- [5] Franz Baader and Paliath Narendran. Unification of concept terms in description logics. *Journal of Symbolic Computation*, 31(3):277–305, 2001.
- [6] Stefan Borgwardt and Barbara Morawska. Finding finite Herbrand models. In Nikolaj Bjørner and Andrei Voronkov, editors, *Proc. of the 18th*

- Int. Conf. on Logic for Programming, Artificial Intelligence, and Reasoning (LPAR-18)*, volume 7180 of *Lecture Notes in Computer Science*, pages 138–152. Springer, 2012.
- [7] Jerry R. Hobbs and Feng Pan. An ontology of time for the semantic web. page 66–85, 3 2004.
- [8] Ian Horrocks. Ontologies and the semantic web. *Commun. ACM*, 51(12):58–67, 2008.
- [9] Petrika Manika, Elda Xhumari, Ana Ktona, and Aurela Demiri. Application of ontologies and semantic web technologies in the field of medicine. In Endrit Xhina and Klesti Hoxha, editors, *Proceedings of the 3rd International Conference on Recent Trends and Applications in Computer Science and Information Technology, RTA-CSIT 2018, Tirana, Albania, November 23rd - 24th, 2018*, volume 2280 of *CEUR Workshop Proceedings*, pages 24–30. CEUR-WS.org, 2018.
- [10] Barbara Morawska. Unification in the description logic \mathcal{FL}_\perp . In Martin Homola, Vladislav Ryzhikov, and Renate A. Schmidt, editors, *Proceedings of the 34th International Workshop on Description Logics (DL 2021) part of Bratislava Knowledge September (BAKS 2021), Bratislava, Slovakia, September 19th to 22nd, 2021*, volume 2954 of *CEUR Workshop Proceedings*. CEUR-WS.org, 2021.
- [11] Takeshi Takahashi, Hiroyuki Fujiwara, and Youki Kadobayashi. Building ontology of cybersecurity operational information. In *Proceedings of the Sixth Annual Workshop on Cyber Security and Information Intelligence Research, CSIIRW '10*, page 1–4, New York, NY, USA, 4 2010. Association for Computing Machinery.