

AB-Training: A Communication-Efficient Approach for Distributed Low-Rank Learning

Daniel Coquelin
daniel.coquelin@kit.edu
Karlsruhe Institute of Technology
(KIT) - Scientific Computing Center
(SCC)
Eggenstein-Leopoldshafen
Baden-Württemberg, Germany

Katherina Flügel
Karlsruhe Institute of Technology
(KIT) - Scientific Computing Center
(SCC)
Eggenstein-Leopoldshafen
Baden-Württemberg, Germany
katharina.fluegel@kit.edu

Marie Weiel
Karlsruhe Institute of Technology
(KIT) - Scientific Computing Center
(SCC)
Eggenstein-Leopoldshafen
Baden-Württemberg, Germany
marie.weiel@kit.edu

Nicholas Kiefer
Karlsruhe Institute of Technology
(KIT) - Scientific Computing Center
(SCC)
Eggenstein-Leopoldshafen
Baden-Württemberg, Germany
nicholas.kiefer@kit.edu

Muhammed Öz
Karlsruhe Institute of Technology
(KIT) - Scientific Computing Center
(SCC)
Eggenstein-Leopoldshafen
Baden-Württemberg, Germany
muhammed.oez@kit.edu

Charlotte Debus
Karlsruhe Institute of Technology
(KIT) - Scientific Computing Center
(SCC)
Eggenstein-Leopoldshafen
Baden-Württemberg, Germany
charlotte.debus@kit.edu

Achim Streit
Karlsruhe Institute of Technology
(KIT) - Scientific Computing Center
(SCC)
Eggenstein-Leopoldshafen
Baden-Württemberg, Germany
achim.streit@kit.edu

Markus Götz
Karlsruhe Institute of Technology
(KIT) - Scientific Computing Center
(SCC)
Eggenstein-Leopoldshafen
Baden-Württemberg, Germany
markus.goetz@kit.edu

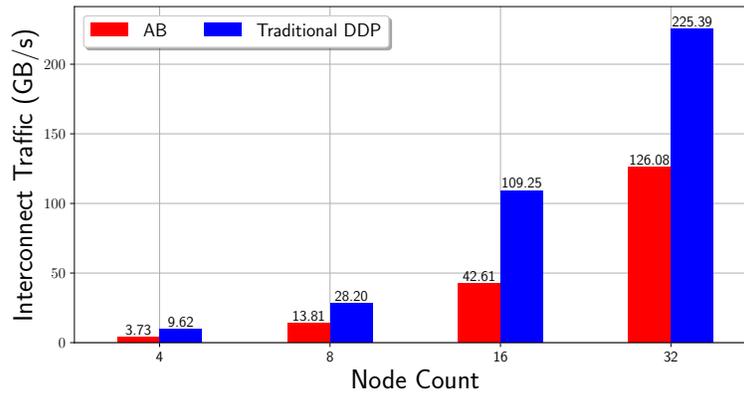


Figure 1: Average total interconnect traffic measured during the training of a Vision Transformer (ViT) B/16 on the ImageNet-2012 dataset for various node counts in GB/s with traditional, synchronous, full-rank data parallel training as implemented by PyTorch’s DistributedDataParallel (DDP) class and our AB training method. The global batch size for each training step is 4,096 images and is split evenly between the GPUs on each node.

ABSTRACT

Communication bottlenecks hinder the scalability of distributed neural network training, particularly on distributed-memory computing clusters. To significantly reduce this communication overhead, we introduce *AB-training*, a novel data-parallel training method

that decomposes weight matrices into low-rank representations and utilizes independent group-based training. This approach consistently reduces network traffic by 50% across multiple scaling scenarios, increasing the training potential on communication-constrained systems. Our method exhibits regularization effects at

smaller scales, leading to improved generalization for models like VGG16, while achieving a remarkable 44.14 : 1 compression ratio during training on CIFAR-10 and maintaining competitive accuracy. Albeit promising, our experiments reveal that large batch effects remain a challenge even in low-rank training regimes.

CCS CONCEPTS

• **Computing methodologies** → **Neural networks; Machine learning algorithms; Distributed artificial intelligence; Batch learning**; • **Networks** → *Network performance analysis*.

KEYWORDS

Distributed training, Low-rank representation, Neural networks, Communication efficiency

1 INTRODUCTION

The relentless pursuit of predictive performance in machine learning has led to neural networks of unprecedented scale and complexity. These massive state-of-the-art models excel in tasks ranging from image classification and natural language processing to scientific simulations. However, this performance comes at a steep computational cost, as training large models often demands large datasets. These datasets often exceed the capabilities of individual devices, necessitating distributed training approaches.

Data parallelism (DP) is the most common distributed training technique for neural networks [2]. It replicates the model across multiple devices, each of which processes a subset of the data, known as the local batch, before aggregating the gradients and updating model parameters. A persistent challenge in data parallel (DP) training is the communication bottleneck created by synchronizing large model representations across compute nodes [25]. This bottleneck severely limits scalability, particularly on distributed-memory computing systems with potential network constraints. Large batch effects [10], pose an additional challenge for maintaining predictive performance, as accuracy degrades once the global batch size crosses a critical threshold.

To address these challenges, we propose a novel low-rank training method based on the singular value decomposition (SVD) and a hierarchical training scheme designed to significantly reduce communication overheads in distributed settings. Our method leverages the observation that low-rank representations can promote regularization [7] and minimize the amount of data transferred. Key contributions of our work include:

- We find a 50% reduction in network traffic during distributed training on average as compared to traditional synchronous DP training, enabling experimentation with larger batch sizes and potentially accelerating training within distributed computing environments without high-speed interconnects.
- Our method demonstrates improved regularization effects at smaller scales, particularly on the Vision Transformer (ViT), leading to better predictive performance on unseen data. However, it also sheds light onto the challenge of reducing large batch effects without hyperparameter tuning.
- In an ideal scenario, AB training achieves a compression ratio of 44.14 : 1 for the VGG16 [22] model when trained on

CIFAR-10 [16] while maintaining a competitive accuracy. In more standard scenarios, it achieved compression values ranging from 1.19 : 1 to 2.54 : 1 when exceeding the accuracy of traditional DP training.

Our work highlights promising directions for how to fully harness the potential of low-rank training in massively scaled scenarios, with implications for both distributed-memory computing and the broader ML community.

2 RELATED WORK

2.1 Distributed Training of Neural Networks

The computational demands of training large neural networks have driven the development of distributed training paradigms, with data parallelism as a cornerstone approach. In a traditional data parallel (DP) training scheme, the model is replicated across multiple devices, each processing a subset of the training data independently. The data subset that one model instance processes is the local batch, while the global batch is the set of all local batches. After each forward-backward pass, gradients are aggregated across all model instances before the model is updated by the optimizer. As the number of compute resources and the model size increase, communication overheads incurred during gradient synchronization become a significant constraint, particularly in systems without high-bandwidth interconnects. Other parallelization strategies, such as model parallelism, introduce alternative ways to distribute training across devices, but come with their own communication and load-balancing complexities.

Several techniques have been proposed to mitigate the communication bottleneck in data parallel training, including gradient accumulation, topology-aware communication patterns, asynchronous methods, and gradient compression [1, 31]. Methods like H-SGD [21] and DASO [6] utilize localized synchronization within smaller groups between global updates, potentially reducing communication costs by leveraging the network’s topology. Asynchronous approaches typically make use of a parameter server for aggregating gradients [25] and often require extensive hyperparameter tuning. Despite these advancements, the scalability of data parallelism remains constrained by communication bottlenecks and large batch effects, where increasing the global batch size negatively impacts generalization performance.

2.2 Low-Rank Neural Network Training

A promising avenue for reducing both the memory footprint and computational cost of neural networks lies in low-rank training. Singular Value Decomposition (SVD) plays a crucial role in this domain. By factoring a weight matrix W into three matrices, U , Σ , and V^T , and retaining only the k largest singular values, a low-rank approximation with significantly fewer parameters can be obtained given a sufficiently large k value. Note that aggressive compression can lead to a loss of approximation quality.

Several methods leverage SVD for compressing neural networks during training. Some train directly on the U , Σ , and V matrices [7, 28], while others create different representations using the SVD and training on them [19, 36]. Both approaches can offer regularization-like benefits, potentially improving generalization [3, 27, 35].

Gradient compression using SVD has found application in federated learning scenarios [34], where bandwidth constraints necessitate reduced communication. While these techniques address computational challenges in neural network training, their integration within distributed environments to specifically optimize communication remains an active area of research.

Low-rank factorizations can heavily reduce the communication required during distributed training. Existing approaches simply train low-rank models in parallel, but do not make any efforts to use the distributed system to their advantage [7, 32, 33]. To the best of our knowledge, there exist no methods that leverage both distributed architectures and low-rank representations to train neural networks.

3 METHODOLOGY

Data parallel training of neural networks is constrained by the communication bottleneck caused by synchronizing massive model representations across compute nodes and large batch effects, a phenomenon where accuracy degrades at large global batch sizes. In an attempt to tackle these challenges, our proposed training method integrates low-rank weight representations within a data parallel framework. It leverages the reduced network capacity stemming from topologically informed communication patterns and low-rank training while escaping local minima using group training.

We utilize SVD to decompose weight matrices into low-rank representations, significantly reducing the amount of data communicated during training. We decompose the weights of a given layer as

$$W_{m \times n} = A_{m \times k} B_{k \times n} = \left(U_{m \times k} \Sigma_{k \times k}^{1/2} \right) \left(\Sigma_{k \times k}^{1/2} V_{k \times n}^\top \right) \quad (1)$$

where U , Σ , and V are determined by the SVD of W and $k < \min(m, n)$. Using a low-rank representation in training has the added benefit of reducing overfitting, a common problem in training neural networks [15, 37].

Large batch effects can be trickier to deal with. Consider the standard batch stochastic gradient descent (SGD) optimization step

$$W_t = W_{t-1} - \frac{\eta}{N} \sum_{i=1}^B \nabla Q_i(W_{t-1}), \quad (2)$$

where W_t is a parameter at time t in training, η is the learning rate, N is the batch size, and $Q_i(W)$ is the value of the loss function for the i -th data element. It is easily shown that for a given iteration $k > 0$, the weights are simply the sum of all the previous update steps or

$$W_k = W_0 - \frac{\eta}{B} \sum_{s=1}^{k-1} \sum_{i=1}^B \nabla Q_i(W_s) \quad (3)$$

With a larger batch size, B , the magnitude of the gradients shrinks. This removes the randomness inherent to SGD’s success and makes the network more prone to getting stuck in local minima [5].

To mitigate this effect, we draw motivation from ensemble approaches. By dividing the DP model replicas into subgroups to be trained on independent data subsets, we essentially form an ensemble of models. Individually, these groups converge towards different local minima compared to full-system training, promoting exploration of the loss landscape.

After training in subgroups, we average the independently trained models. This merging strategy has seen some success in federated learning methods [9]. Compared to federated use-cases, which typically deal with models trained independently on biased datasets, AB training benefits from randomly sampling from the same dataset and thus has unbiased batches during our independent training phases.

During the independent training phases, each group trains on either A or B , while the other component remains fixed. As the orthogonal component of W is stable later in training [7], we only train on one of A or B in an attempt to reduce the divergence between the independent groups. At the end of the independent training phase, we average A and B across all workers to merge the independently trained models together.

Our AB training procedure consists of the following phases:

Distributed warmup Initial training with full-rank data parallelism allows the weights to adapt rapidly away from their random initialization. To avoid early divergence, we employ a traditional, full-rank data parallel warmup phase for a given number of iterations (`warmupSteps`).

Independent AB decomposition Each model instance independently computes an AB decomposition of its weight matrices as per Equation (1). This AB decomposition allows us to represent the weight matrices more compactly, reducing the amount of data to be communicated during training. The rank of this approximation is determined by a user-provided hyperparameter (`sigmaCutoff`) times the largest singular value. Values smaller than this are removed.

Group-only training Half of the independent groups will train the A matrix, denoted as the A groups, while the other groups will train B , the B groups. For a given number of iterations (`numABSteps`), processes in the A group only train the A matrices, while processes in the B group only train the B matrices, the matrix not being trained remains frozen in this phase.

Synchronization and update We average both the trained and frozen A and B matrices independently to synchronize the model instances across all processes. This is crucial for ensuring that the overall model remains consistent across all compute nodes. Afterwards, we reconstruct the full-rank weight matrices from the updated A and B components.

Full-rank rebound We then train the full-rank network with traditional data parallelism for a short period, which we refer to as the `fullRankReboundSteps`. This phase promotes convergence and helps mitigate potential accuracy degradation observed in low-rank training scenarios.

A formalized algorithm is shown in Algorithm 1 and the method diagram is shown in Figure 2.

Popular neural network optimizers like AdamW [18] rely on second-order derivative approximations. When we change the network’s structure (e.g., between low-rank and full-rank representations), these optimizer states become incompatible due to their dimensionality. To address this, we use a “learning rate rebound” strategy. This involves reducing the learning rate to near-zero and gradually increasing it back to its scheduled value over a user-provided number of steps, allowing the optimizer to adjust to the

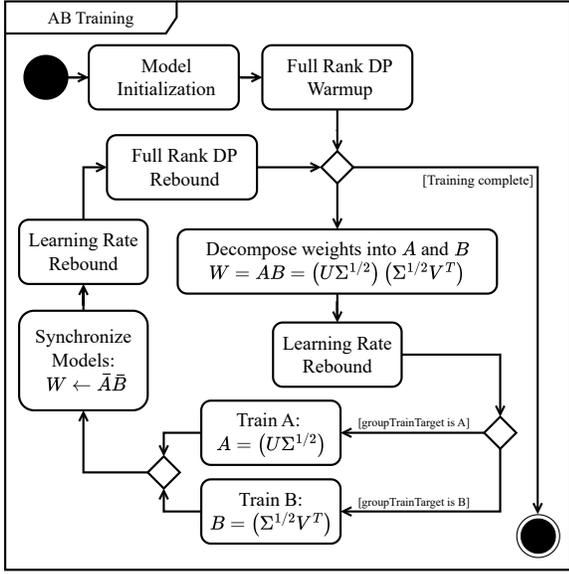


Figure 2: The AB training procedure.

Algorithm 1: The AB training method. W is a parameter of the input model M and $worldSize$ is the number of workers used for traditional DP training.

Input : Model, M , training data, $numTrainingSteps$, hyperparameters ($warmupSteps$, $numABSteps$, $fullRankReboundSteps$)

```

1 if  $proclD \leq worldSize / 2$  then
2    $groupTrainTarget \leftarrow A$ 
3 else
4    $groupTrainTarget \leftarrow B$ 
5 for  $i \leftarrow 1$  to  $warmupSteps$  do
6   traditionalFullRankDPTraining()
7 repeat
8   foreach  $W$  in  $M$  do
9      $A, B \leftarrow abDecomposition(W)$   $\triangleright$  Equation (1)
10    removeSmallSingularValues()
11    startLearningRateRebound()
12     $groupTrainTarget.setTrainable(True)$ 
13    for  $i \leftarrow 1$  to  $numABSteps$  do
14      independentSubgroupTraining()
15     $A \leftarrow allReduce(A/worldSize)$ 
16     $B \leftarrow allReduce(B/worldSize)$ 
17    foreach  $W$  in  $M$  do
18       $W \leftarrow AB$ 
19    startLearningRateRebound()
20    for  $i \leftarrow 1$  to  $fullRankReboundSteps$  do
21      traditionalFullRankDPTraining()
22 until  $numTrainingSteps = completed\ steps$ 

```

new parameter representations. We do a learning rate rebound after each time the network’s parameters change shape.

4 EXPERIMENTAL EVALUATION

To evaluate the effectiveness of our AB training approach, we conducted experiments on established neural network architectures. Our primary objectives were to demonstrate significant reductions in communication overhead, potential regularization benefits, scalability, and achievable compression during training. We focused on the ResNet-50 [11] and Vision Transformer [8] B/16 models trained on the ImageNet-2012 dataset [17] for image classification as well as VGG16 [22] trained on CIFAR-10 [16]. We compare our results against traditional DP training as implemented by PyTorch’s DDP package, referred to as ‘Traditional DDP’ or ‘Trad. DDP’, using the same hyperparameters (HPs). We also show results for the AB training setup without any individual trained groups which are denoted as ‘No Group’. In these experiments, the B matrix is trained using traditional DP training in place of the full-rank weights. The ViT HPs are those used in the original source, while the ResNet-50 parameters utilize the same learning rate scheduler and the default values for the AdamW [18] optimizer. The VGG16 HPs are as shown in [7].

We analyze our training method using two scaling strategies: constant *local* batch size scaling and constant *global* batch size scaling. In constant local batch size scaling, the global batch size increases with the number of GPUs. In constant global batch size scaling, we maintain a constant global batch size while proportionally decreasing the local batch size as we increase the number of GPUs. This emphasizes the communication overhead reductions achieved by our method. Measurements represent the average of three runs, each of which utilizes a different random seed. Models are initialized using orthogonal initialization [14].

4.1 Computational Environment

We ran all experiments on a distributed-memory, parallel hybrid supercomputer. Each compute node is equipped with two 38-core Intel Xeon Platinum 8368 processors at 2.4 GHz base and 3.4 GHz maximum turbo frequency, 512 GB local memory, a local 960 GB NVMe SSD disk, two network adapters, and four NVIDIA A100-40 GPUs with 40 GB memory connected via NVLink. Inter-node communication uses a low-latency, non-blocking NVIDIA Mellanox InfiniBand 4X HDR interconnect with 200 Gbit/s per port. All experiments used Python 3.10.6 with CUDA-enabled PyTorch 2.0.0 [26].

4.2 Datasets and Models

We used the ImageNet-2012 dataset, which contains 1.2 million images, for our scaling experiments. Basic image augmentation was applied, including normalization, random resizing, random cropping, and a random flip. We trained two models on this dataset: ResNet-50 [11] and Vision Transformer B/16 (ViT) [8], chosen for their widespread use and distinct architectures.

We also trained VGG16 on the CIFAR-10 dataset, which contains 50,000 images. Basic image augmentation was applied in the same way as for the ImageNet experiments.

All models were trained with the AdamW [23] optimizer. Other training hyperparameters can be found in Appendix 1.

4.3 Hyperparameter Considerations

Careful hyperparameter tuning is essential for balancing the communication reduction achieved through our method with potential impacts on training stability and accuracy. Key hyperparameters (HPs) include the warmup and full-rank rebound phase durations, the number of AB training iterations, the AB decomposition rank-reduction parameter, and the frequency of SVD and synchronization steps. Additionally, the latter will influence the trade-offs between regularization and communication efficiency.

Our hyperparameter search on CIFAR-100 [16] with a mini-fied Vision Transformer model (patch size of eight instead of 16, six heads instead of twelve, depth of six instead of twelve) using Propulate [30] suggested the following guidelines:

- warmupSteps: 20% of the total training steps
- numABSteps: 3.33% of the total training steps
- fullRankReboundSteps: $0.25 \cdot \text{numABSteps}$
- Learning rate rebound steps: $0.5 \cdot \text{numABSteps}$

4.4 Constant Local Batch Size Scaling

In this experiment, we maintain a fixed *local* batch size while increasing the available compute resources and decreasing the number of training steps per epoch, resulting in an increasing global batch size but less training iterations. For example, if the global batch size for a two-node (eight-GPU) run is 2,048 and it is trained for 600 iterations in each epoch, the corresponding four-node (16-GPU) run would have a global batch size of 4,096 and be trained for 300 iterations each epoch. This strategy investigates the communication efficiency gains achievable as we increase the available compute resources, even as the potential negative impacts of large batch sizes become more pronounced. It is the most likely method by which a non-expert user will scale their training.


This experiment tests how well AB training reduces communication requirements and if the independent training groups can effectively train networks independently. We expect that if the independent training groups make similar updates, the averaged model will maintain accuracy and exhibit increased compression. However, significant divergence in individual groups could lead to lower accuracy and reduced compression as the individual updates conflict. If this is the case, then AB training without independent groups will begin to outperform AB training with groups.

Figure 3 shows the highest top 1 accuracy achieved by each model during training. Figure 4 shows the lowest binary cross-entropy loss values achieved across all epochs. The compression values for the trained models are shown in Figure 5.


4.5 Constant Global Batch Size Scaling

In this experiment, we maintain a fixed *global* batch size while scaling compute resources. This contrasts with the standard approach of keeping local batch sizes constant, emphasizing the communication overhead reductions achieved by AB training. With a fixed global batch size of 4,096, a four-node run would have a local batch size of 256, whereas an eight-node run would have a local batch size of 128.

This experiment directly quantifies the communication benefits of our method in scenarios where local batch sizes become very small due to scaling. It also provides insight into the ability of

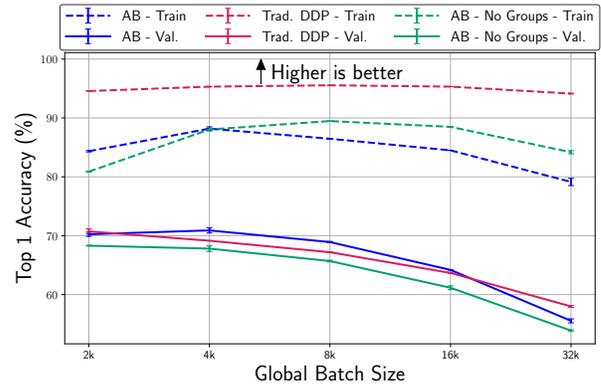

(a) Vision Transformer B/16

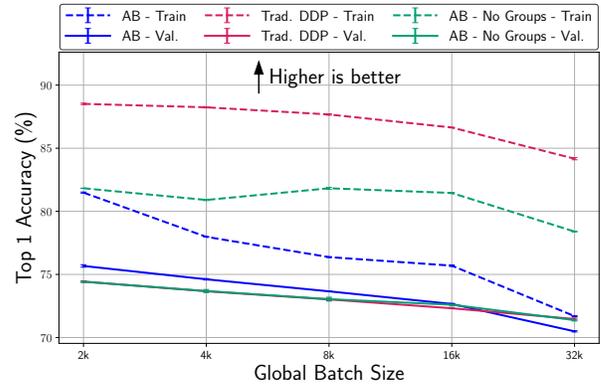

(b) ResNet-50


Figure 3: Highest top 1 accuracy measurements for each training run on ImageNet-2012 for two network architectures with a constant *local* batch size of 256. Global batch sizes range from 2,048 to 32,768 in powers of 2. Error are plotted, though not always visible.

independent training groups to learn meaningful representations when the batch size used for independent training is much smaller than the global batch size. Results for these runs are shown in Figures 6 and 7.


5 DISCUSSION

Across both scaling scenarios, we find a consistent reduction of approximately 50% on average network traffic, demonstrating the effectiveness of our AB training method in reducing communication overheads. Comprehensive results are listed in Table 1, which further highlights the significant bandwidth requirements for training even moderately sized neural networks, a challenge that would be exacerbated for larger, state-of-the-art models.

In 13 of the 18 experiments AB training maintains competitive performance compared to the traditional baseline using the same hyperparameters, Figures 3 and 6. Without the independently trained

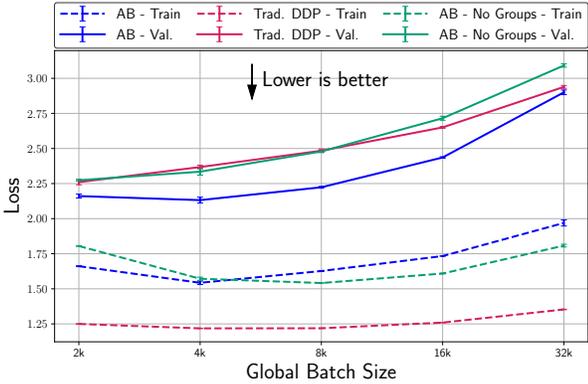

(a) Vision Transformer B/16

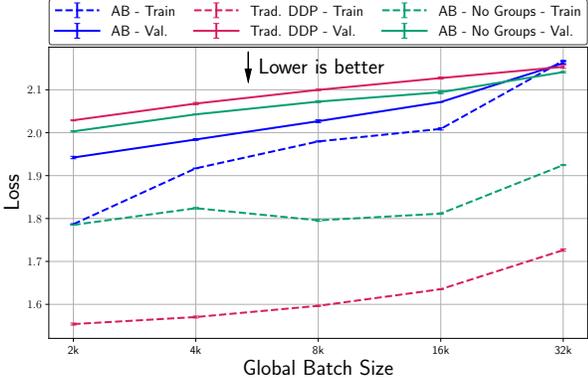

(b) ResNet-50

Figure 4: Lowest binary cross-entropy (the loss function used during training) measurements during each training run on ImageNet-2012 for two network architectures with a constant local batch size of 256. Global batch sizes range from 2,048 to 32,768 in powers of 2. Error are plotted, though not always visible.

groups, the performance is noticeably reduced, see Figure 3a, while the compression values are similar, Figure 5.

The interconnect on the test system has a bandwidth of 25 GB/s per port. The baseline experiment which required the most bandwidth, the ViT constant global batch size experiment using 32 nodes, used only 14.10 GB/s. As we did not fully saturate the interconnect, the runtimes remained similar across all three methods. However, in environments with more severe communication bottlenecks, the benefits of our method would become more pronounced.

Across all experiments, we observed favorable compression ratios (Figures 5 and 7). For runs which reached the same or better loss value, the Vision Transformer’s compression ratios range from 1.89:1 to 2.54:1. ResNet-50’s compression was less impressive, although still respectable (ranging from 1.19:1 to 1.72:1 for outperforming runs). This suggests a potential interaction between model architecture and the effectiveness of our method.

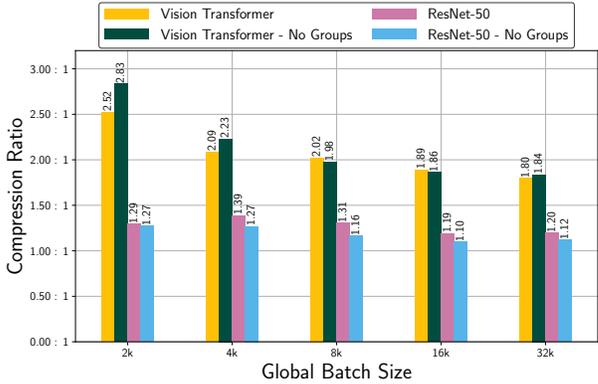



Figure 5: Average compression ratios for AB trained models against the traditional data parallel baseline trained models on ImageNet-2012 for two network architectures with a constant local batch size of 256.

Table 1: Average interconnect traffic, in GB/s, on each processes. N represents either the number of nodes for the constant global batch size experiments or the global batch size in thousands for the constant local batch size experiments.


	Constant Local Batch Size		Constant Global Batch Size		
	N	Baseline	AB	Baseline	AB
ViT	2	4.67 ± 0.00	2.10 ± 0.07	–	–
	4	4.77 ± 0.06	2.12 ± 0.01	4.81 ± 0.05	1.86 ± 0.39
	8	4.58 ± 0.00	1.76 ± 0.29	7.05 ± 1.03	3.45 ± 0.18
	16	4.44 ± 0.10	1.74 ± 0.07	13.66 ± 0.16	5.33 ± 0.70
	32	4.07 ± 0.20	1.58 ± 0.24	14.09 ± 3.47	7.88 ± 0.02
ResNet-50	2	2.06 ± 0.01	1.02 ± 0.00	–	–
	4	2.07 ± 0.01	0.98 ± 0.05	2.06 ± 0.01	1.00 ± 0.01
	8	2.00 ± 0.05	1.05 ± 0.05	2.67 ± 0.05	1.16 ± 0.14
	16	1.96 ± 0.12	1.15 ± 0.00	3.28 ± 0.25	1.39 ± 0.21
	32	1.62 ± 0.03	1.05 ± 0.01	3.50 ± 1.00	1.76 ± 0.47

Table 2 demonstrates the effectiveness of AB training compared to existing low-rank and pruning methods. We present both a standard benchmark (ResNet-50 on ImageNet-2012) and an idealized scenario (VGG16 on CIFAR-10). The latter highlights the potential of compression techniques due to VGG16’s over-parameterization and CIFAR-10’s relative simplicity [4]. AB training outperformed expectations in this setting, achieving a 44.14:1 compression ratio (reducing the model to 2.27% of its original size) with negligible accuracy loss. This surpasses the compression achieved by ICP (3.67% of original size) and ABCPrune (11.26%).

To compare the communication required for training the other model compression methods shown in Table 2 with traditional DP, we estimate their maximum communication savings achievable. As all of these methods iteratively reduce the network size, we assume that the all start with the full-rank representation and

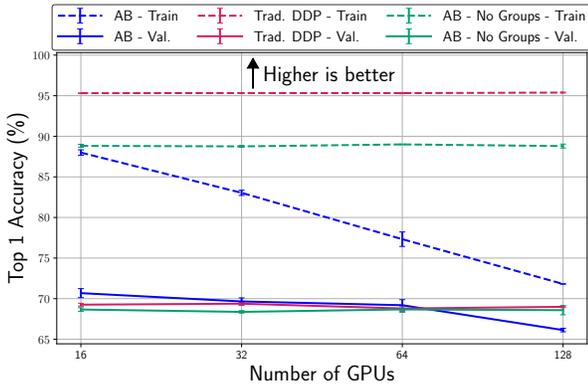

(a) Vision Transformer B/16

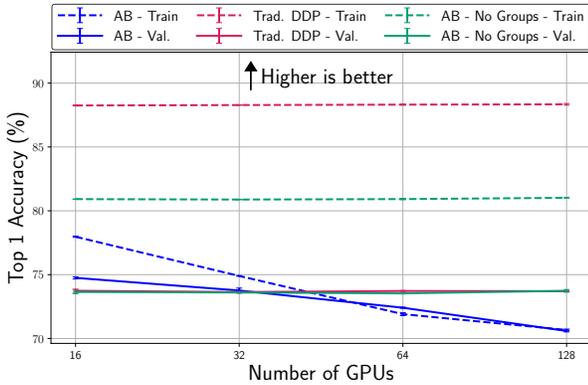

(b) ResNet-50

Figure 6: Highest top 1 accuracy measurements for each training run on ImageNet-2012 for two network architectures with a constant global batch size of 4,096. Error are plotted, though not always visible.

remove parameters during training. In our experiments, we found that once the network began to compress the network, it removed much of the network quickly, then removed small amounts during the remaining training steps. However, we do not know the rate at which parameters are removed. Taking this into account, we assume that models train close to full rank for 25% of training then close to their final model state for 75% of training. We describe the estimated communication reduction (ECR) as

$$ECR = 100\% - F - Lc \tag{4}$$

where F and L are the percentages of training spent near full-rank and the most-compressed network state respectively and c is the final compression ratio expressed as a percentage.

AB training demonstrates the greatest communication reduction in the ResNet-50 benchmark with the ECR. In practice, we measured an approximate reduction of 50% for all use-cases. This discrepancy is caused by other communications needed during training outside of the model synchronization. With the measurement, we

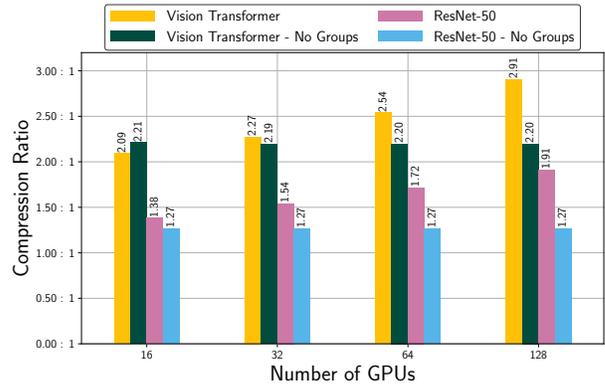


Figure 7: Compression ratios for AB trained models against the traditional data parallel baseline trained models on ImageNet-2012 for two network architectures with a constant global batch size of 4,096.

outperform all models except OIALR and DLRT, which reduce the number of trainable parameters by training the Σ matrix from a network’s weight’s SVD. In the VGG16 scenario, ICP [4] and AB training without using individual groups show slightly higher estimated communication reductions than AB training itself. This suggests that AB training offers superior communication efficiency until models reach extremely high compression levels.

While promising, our method also reveals challenges. As expected, we observe generalization improvements in all experiments, these are most noticeable in Figure 4. This is likely due to the low-rank representation in combination with the independently trained groups; both of which have regularizing effects (see ‘No Groups’ measurements in Figure 6). However, at larger scales, both loss and accuracy degrade significantly. Combined with the decreasing compression ratios seen with increasing global batch size (Figure 5), this suggests that the averaging of independently trained subgroups becomes detrimental at extreme scales.

Similar trends in the fixed global batch size scenario (Figure 6) suggest an incompatibility between the very large global batch size and the much smaller batches used during the independent training phases. This likely leads to overly large updates in the independent groups, causing them to diverge from each other. Although this divergence increases the regularization effect of independent group training, it reduces the accuracy of the network. Our compression results (Figure 7) support this hypothesis. As the regularization effect strengthens with scale, the divergences between independent groups occur primarily in the smaller, yet important, singular values. When these divergences occur, averaging them together will cause the divergent singular values to shrink relative to the other values.

These challenges likely stem from suboptimal model merging or overly aggressive learning rate schedules. Since it is common practice to adjust the learning rate based on global batch size in traditional DP training, a similar strategy may be required for our method.

Table 2: Comparison of low-rank and pruning methods for ResNet-50 (on ImageNet-2012) and VGG16 (on CIFAR10). ‘Difference to Baseline’ indicates validation top 1 performance relative to the original full-rank model in each study, with positive values denoting better performance. AB training used a global batch size of 4,096 for ImageNet and 1,024 for CIFAR10, achieving maximum top 1 accuracies of 75.67% and 91.87% respectively. The estimated communication reduction (ECR) is defined by Equation (4). AB training’s ECR assumes independent groups do not utilize the compute system’s interconnect. OIALR’s and DLRT’s ECR uses the compression of the trainable parameters as they report.

	Method	Difference to Baseline	Compression Ratio	ECR
ResNet-50 ImageNet-2012	AB	+1.55 %	1.39 : 1	73.29 %*
	AB (no groups)	-0.02 %	1.27 : 1	15.94 %
	OIALR [7]	-1.72 %	1.21 : 1	63.64 %
	DLRT [28]	-0.56 %	1.85 : 1	64.35 %
	PP-1 [29]	-0.20 %	2.26 : 1	41.81 %
	CP [13]	-1.40 %	2.00 : 1	37.5 %
	SFP [12]	-0.20 %	2.39 : 1	43.62 %
	ThiNet [24]	-1.50 %	2.71 : 1	47.32 %
	ABCPrune [20]	-2.15 %	1.84 : 1	34.24 %
VGG16 CIFAR-10	AB	-0.23 %	44.14 : 1	65.60 %*
	AB (no groups)	-0.89 %	36.63 : 1	72.95 %
	OIALR [7]	+0.10 %	3.70 : 1	64.59 %
	DLRT [28]	-1.89 %	1.79 : 1	16.88 %
	ABCPrune [20]	+0.06 %	8.83 : 1	66.51 %
	ICP [4]	-0.31 %	27.25 : 1	72.25 %

Our findings highlight the need for further exploration across diverse models, datasets, and hardware configurations. Understanding the interplay between network bandwidth limitations, and our method’s potential benefits in real-world environments is crucial. Finally, the observed accuracy degradation at scale motivates research into improved update mechanisms, potentially exploring non-average update rules, mixing matrices, or loss-based weighted averaging schemes.

6 CONCLUSION

Our experimental results demonstrate the significant potential of our AB training method to reduce communication overheads by utilizing low-rank representations and independently trained worker subgroups. The consistent 50% reduction in network traffic has the potential to unlock new possibilities within distributed-memory computing environments. This could be particularly impactful for scientific research on machines without high-speed interconnects and for exploring even larger, more complex models. Additionally, the pronounced regularization effects observed at smaller scales offer a promising direction for improving generalization and performance.

While our method successfully addresses communication challenges, its performance at extreme scales highlights the complex interplay between low-rank representations, large batch effects, and

hyperparameter optimization. Our findings emphasize the need for further research into tailored hyperparameter strategies and novel update mechanisms to fully harness the potential of this approach in massively scaled scenarios.

This work represents a significant step towards communication-efficient distributed training. Our results offer valuable insights and highlight promising areas for future investigation. By addressing the limitations uncovered in our study, we believe the research community can pave the way for even more efficient and scalable training of large-scale neural networks, ultimately furthering scientific discovery across a variety of domains.

ACKNOWLEDGMENTS

This work was performed on the HoreKa supercomputer funded by the Ministry of Science, Research and the Arts Baden-Württemberg and by the Federal Ministry of Education and Research. This work is supported by the Helmholtz Association Initiative and Networking Fund under the Helmholtz AI platform grant and the HAICORE@KIT partition.

REFERENCES

- [1] Lusine Abrahamyan, Yiming Chen, Giannis Bekoulis, and Nikos Deligiannis. 2022. Learned Gradient Compression for Distributed Deep Learning. *IEEE Transactions on Neural Networks and Learning Systems* 33, 12 (2022), 7330–7344. <https://doi.org/10.1109/TNNLS.2021.3084806>
- [2] Tal Ben-Nun and Torsten Hoefler. 2019. Demystifying Parallel and Distributed Deep Learning: An In-depth Concurrency Analysis. *ACM Comput. Surv.* 52, 4, Article 65 (aug 2019), 43 pages. <https://doi.org/10.1145/3320060>
- [3] S. Cahyawijaya, G. I. Winata, H. Lovenia, et al. 2021. Greenformer: Factorization Toolkit for Efficient Deep Neural Networks. <https://doi.org/10.48550/arXiv.2109.06762> [cs].
- [4] Jingfei Chang, Yang Lu, Ping Xue, Yiqun Xu, and Zhen Wei. 2023. Iterative clustering pruning for convolutional neural networks. *Knowledge-Based Systems* 265 (2023), 110386. <https://doi.org/10.1016/j.knsys.2023.110386>
- [5] Pratik Chaudhari, Anna Choromanska, Stefano Soatto, Yann LeCun, Carlo Baldassi, Christian Borgs, Jennifer Chayes, Levent Sagun, and Riccardo Zecchina. 2019. Entropy-SGD: biasing gradient descent into wide valleys’. *Journal of Statistical Mechanics: Theory and Experiment* 2019, 12 (dec 2019), 124018. <https://doi.org/10.1088/1742-5468/ab39d9>
- [6] Daniel Coquelin, Charlotte Debus, Markus Götz, Fabrice von der Lehr, James Kahn, Martin Siggel, and Achim Streit. 2022. Accelerating neural network training with distributed asynchronous and selective optimization (DASO). *Journal of Big Data* 9, 1 (Feb. 2022), 14. <https://doi.org/10.1186/s40537-021-00556-1>
- [7] Daniel Coquelin, Katharina Flügel, Marie Weiel, Nicholas Kiefer, Charlotte Debus, Achim Streit, and Markus Götz. 2024. Harnessing Orthogonality to Train Low-Rank Neural Networks. <https://doi.org/10.48550/arXiv.2401.08505> arXiv:2401.08505 [cs].
- [8] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, Jakob Uszkoreit, and Neil Houlsby. 2021. An Image is Worth 16x16 Words: Transformers for Image Recognition at Scale. <https://doi.org/10.48550/arXiv.2010.11929> arXiv:2010.11929 [cs].
- [9] Alessandro Giuseppe, Sabato Manfredi, and Antonio Pietrabissa. 2022. A Weighted Average Consensus Approach for Decentralized Federated Learning. *Machine Intelligence Research* 19, 4 (Aug. 2022), 319–330. <https://doi.org/10.1007/s11633-022-1338-z>
- [10] Priya Goyal, Piotr Dollár, Ross Girshick, Pieter Noordhuis, Lukasz Wesolowski, Aapo Kyrola, Andrew Tulloch, Yangqing Jia, and Kaiming He. 2018. Accurate, Large Minibatch SGD: Training ImageNet in 1 Hour. <https://doi.org/10.48550/arXiv.1706.02677> arXiv:1706.02677 [cs].
- [11] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. 2016. Deep Residual Learning for Image Recognition. In *2016 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*. 770–778. <https://doi.org/10.1109/CVPR.2016.90> ISSN: 1063-6919.
- [12] Yang He, Guoliang Kang, Xuanyi Dong, Yanwei Fu, and Yi Yang. 2018. Soft filter pruning for accelerating deep convolutional neural networks. In *Proceedings of the 27th International Joint Conference on Artificial Intelligence (IJCAI’18)*. AAAI Press, Stockholm, Sweden, 2234–2240.
- [13] Yihui He, Xiangyu Zhang, and Jian Sun. 2017. Channel Pruning for Accelerating Very Deep Neural Networks. In *2017 IEEE International Conference on Computer*

- Vision (ICCV)*. 1398–1406. <https://doi.org/10.1109/ICCV.2017.155> ISSN: 2380-7504.
- [14] Wei Hu, Lechao Xiao, and Jeffrey Pennington. 2020. Provable Benefit of Orthogonal Initialization in Optimizing Deep Linear Networks. In *International Conference on Learning Representations*. <https://openreview.net/forum?id=rkgqN1SYvr>
- [15] Zhanxuan Hu, Feiping Nie, Rong Wang, and Xuelong Li. 2021. Low Rank Regularization: A review. *Neural Networks: The Official Journal of the International Neural Network Society* 136 (April 2021), 218–232.
- [16] A. Krizhevsky. 2009. Learning Multiple Layers of Features from Tiny Images. <https://www.semanticscholar.org/paper/Learning-Multiple-Layers-of-Features-from-Tiny-Krizhevsky/5d90f06bb70a0a3dced62413346235c02b1aa086>
- [17] Alex Krizhevsky, Ilya Sutskever, and Geoffrey E Hinton. 2012. ImageNet Classification with Deep Convolutional Neural Networks. In *Advances in Neural Information Processing Systems*, Vol. 25. Curran Associates, Inc. <https://papers.nips.cc/paper/2012/hash/c399862d3b9d6b76c8436e924a68c45b-Abstract.html>
- [18] Ilya L. and Frank H. 2018. Fixing Weight Decay Regularization in Adam. <https://openreview.net/forum?id=rk6qdGgCZ>
- [19] Lucas Liebenwein, Alaa Maalouf, Dan Feldman, and Daniela Rus. 2021. Compressing Neural Networks: Towards Determining the Optimal Layer-wise Decomposition. In *Advances in Neural Information Processing Systems*, M. Ranzato, A. Beygelzimer, Y. Dauphin, P.S. Liang, and J. Wortman Vaughan (Eds.), Vol. 34. Curran Associates, Inc., 5328–5344. https://proceedings.neurips.cc/paper_files/paper/2021/file/2adfc3929e7c03fac3100d3ad51da26-Paper.pdf
- [20] Mingbao Lin, Rongrong Ji, Yuxin Zhang, Baochang Zhang, Yongjian Wu, and Yonghong Tian. 2020. Channel Pruning via Automatic Structure Search. In *Proceedings of the Twenty-Ninth International Joint Conference on Artificial Intelligence, IJCAI-20*, Christian Bessiere (Ed.). International Joint Conferences on Artificial Intelligence Organization, 673–679. <https://doi.org/10.24963/ijcai.2020/94> Main track.
- [21] Tao Lin, Sebastian U. Stich, Kumar Kshitij Patel, and Martin Jaggi. 2020. Don’t Use Large Mini-Batches, Use Local SGD. <https://doi.org/10.48550/arXiv.1808.07217> arXiv:1808.07217 [cs, stat].
- [22] Shuying Liu and Weihong Deng. 2015. Very deep convolutional neural network based image classification using small training sample size. In *2015 3rd IAPR Asian Conference on Pattern Recognition (ACPR)*. 730–734. <https://doi.org/10.1109/ACPR.2015.7486599>
- [23] Ilya Loshchilov and Frank Hutter. 2019. Decoupled Weight Decay Regularization. <https://doi.org/10.48550/arXiv.1711.05101> arXiv:1711.05101 [cs, math].
- [24] Jian-Hao Luo, Jianxin Wu, and Weiyao Lin. 2017. ThiNet: A Filter Level Pruning Method for Deep Neural Network Compression. In *2017 IEEE International Conference on Computer Vision (ICCV)*. 5068–5076. <https://doi.org/10.1109/ICCV.2017.541> ISSN: 2380-7504.
- [25] Feng Niu, Benjamin Recht, Christopher Re, and Stephen J. Wright. 2011. HOG-WLD!: A Lock-Free Approach to Parallelizing Stochastic Gradient Descent. <https://doi.org/10.48550/arXiv.1106.5730> arXiv:1106.5730 [cs, math].
- [26] Adam Paszke, Sam Gross, Soumith Chintala, Gregory Chanan, Edward Yang, Zachary DeVito, Zeming Lin, Alban Desmaison, Luca Antiga, and Adam Lerer. 2017. Automatic differentiation in PyTorch. (Oct. 2017). <https://openreview.net/forum?id=BjJsrmfCZ>
- [27] A.-H. Phan, K. Sobolev, K. Sozykin, et al. 2020. Stable Low-Rank Tensor Decomposition for Compression of Convolutional Neural Network. In *Computer Vision – ECCV 2020 (Lecture Notes in Computer Science)*, A. Vedaldi, H. Bischof, T. Brox, and J.-M. Frahm (Eds.). Springer International Publishing, Cham, 522–539. https://doi.org/10.1007/978-3-030-58526-6_31
- [28] Steffen Schotthöfer, Emanuele Zangrando, Jonas Kusch, Gianluca Ceruti, and Francesco Tudisco. 2022. Low-rank lottery tickets: finding efficient low-rank neural networks via matrix differential equations. *Advances in Neural Information Processing Systems* 35 (Dec. 2022), 20051–20063. https://papers.nips.cc/paper_files/paper/2022/hash/7e98b00eafcdab0c5661fb9355be3a-Abstract-Conference.html
- [29] Pravendra Singh, Vinay Kumar Verma, Piyush Rai, and Vinay P. Nambodiri. 2019. Play and Prune: Adaptive Filter Pruning for Deep Model Compression. (2019), 3460–3466. <https://www.ijcai.org/Proceedings/2019/480>
- [30] Oskar Taubert, Marie Weiel, Daniel Coquelin, Anis Farshian, Charlotte Debus, Alexander Schug, Achim Streit, and Markus Götz. 2023. Massively Parallel Genetic Optimization Through Asynchronous Propagation of Populations. In *High Performance Computing*, Abhinav Bhatele, Jeff Hammond, Marc Baboulin, and Carola Kruse (Eds.). Springer Nature Switzerland, Cham, 106–124. https://doi.org/10.1007/978-3-031-32041-5_6
- [31] Thijs Vogels, Sai Praneeth Karimireddy, and Martin Jaggi. 2019. PowerSGD: Practical Low-Rank Gradient Compression for Distributed Optimization. In *Advances in Neural Information Processing Systems*, Vol. 32. Curran Associates, Inc. <https://proceedings.neurips.cc/paper/2019/hash/d9fbed9da256e344c1fa46bb46c34c5f-Abstract.html>
- [32] Hongyi Wang, Saurabh Agarwal, and Dimitris Papailiopoulos. 2021. Pufferfish: Communication-efficient Models At No Extra Cost. *ArXiv abs/2103.03936* (2021). <https://api.semanticscholar.org/CorpusID:232148049>
- [33] Hongyi Wang, Saurabh Agarwal, Pongsakorn U-chupala, Yoshiki Tanaka, Eric P. Xing, and Dimitris Papailiopoulos. 2023. Cuttlefish: Low-Rank Model Training without All the Tuning. *ArXiv abs/2305.02538* (2023). <https://api.semanticscholar.org/CorpusID:258480187>
- [34] Haolin Wang, Xuefeng Liu, Jianwei Niu, and Shaojie Tang. 2023. SVDFed: Enabling Communication-Efficient Federated Learning via Singular-Value-Decomposition. In *IEEE INFOCOM 2023 - IEEE Conference on Computer Communications*. 1–10. <https://doi.org/10.1109/INFOCOM53939.2023.10229042>
- [35] G. I. Winata, S. Cahyawijaya, Z. Lin, Z. Liu, and P. Fung. 2020. Lightweight and Efficient End-To-End Speech Recognition Using Low-Rank Transformer. In *ICASSP 2020 - 2020 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. 6144–6148. <https://doi.org/10.1109/ICASSP40776.2020.9053878> ISSN: 2379-190X.
- [36] Huanrui Yang, Minxue Tang, Wei Wen, Feng Yan, Daniel Hu, Ang Li, Hai Li, and Yiran Chen. 2020. Learning Low-Rank Deep Neural Networks via Singular Vector Orthogonality Regularization and Singular Value Sparsification. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR) Workshops*.
- [37] Huanrui Yang, Minxue Tang, Wei Wen, Feng Yan, Daniel Hu, Ang Li, Hai Li, and Yiran Chen. 2020. Learning Low-rank Deep Neural Networks via Singular Vector Orthogonality Regularization and Singular Value Sparsification. In *2020 IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops (CVPRW)*. 2899–2908. <https://doi.org/10.1109/CVPRW50498.2020.00347>

Received 20 February 2007; revised 12 March 2009; accepted 5 June 2009