

Muting Whisper: A Universal Acoustic Adversarial Attack on Speech Foundation Models

Vyas Raina* Rao Ma* Charles McGhee Kate Knill Mark Gales

Abstract

Recent developments in large speech foundation models like Whisper have led to their widespread use in many automatic speech recognition (ASR) applications. These systems incorporate ‘special tokens’ in their vocabulary, such as `<endoftext>`, to guide their language generation process. However, we demonstrate that these tokens can be exploited by adversarial attacks to manipulate the model’s behavior. We propose a simple yet effective method to learn a universal acoustic realization of Whisper’s `<endoftext>` token, which, when prepended to any speech signal, encourages the model to ignore the speech and only transcribe the special token, effectively ‘muting’ the model. Our experiments demonstrate that the same, universal 0.64-second adversarial audio segment can successfully mute a target Whisper ASR model for over 97% of speech samples. Moreover, we find that this universal adversarial audio segment often transfers to new datasets and tasks. Overall this work demonstrates the vulnerability of Whisper models to ‘muting’ adversarial attacks, where such attacks can pose both risks and potential benefits in real-world settings: for example the attack can be used to bypass speech moderation systems, or conversely the attack can also be used to protect private speech data.¹

1 Introduction

The development of large foundation models has led to rapid advancements in audio processing, where for example some of the most popular models are of the Whisper family (Radford et al., 2022). To guide the generation of natural language, foundation models typically make use of ‘special’ tokens in their vocabulary that

do not exist as real text or real acoustic events. As an example, most auto-regressive foundation models will have some form of a `<start>` token and an `<end>` token to indicate when to begin generating the output sequence and when to stop. However, we demonstrate that despite their need, these ‘special’ tokens can be exploited by adversaries to make foundational models behave in undesired manners. Specifically, we show that the `<endoftext>` special token can be exploited by adversaries to prevent an Automatic Speech Recognition (ASR) model, such as Whisper, from transcribing the source audio, i.e., ‘muting’ the model.

Our proposed acoustic adversarial attack method is designed to ‘mute’ Whisper, by learning an extremely short (0.64-second) adversarial acoustic realization of the `<endoftext>` special token (used by Whisper), where the learnt adversarial audio segment can be prepended to the target speech signal. Furthermore, our proposed method gives a *universal* adversarial audio segment, which allows the *same* 0.64-second adversarial audio segment to be prepended to any speech signal, and conceal its contents from the ASR system, as depicted in Figure 1.

Our experiments, conducted across eight different Whisper ASR models, demonstrate that the same universal 0.64-second adversarial audio segment can successfully ‘mute’ Whisper models for more than 97% of unseen speech samples. We further find that there is a surprising level of transferability of this universal adversarial audio segment to different speech domains (we consider four diverse datasets) and can even transfer to different tasks - the adversarial audio segment can ‘mute’ Whisper when used for speech translation as well as transcription.

Muting Whisper has significant implications in high stakes settings. Automatic speech recog-

¹The code is available at: https://github.com/rainavyas/prepend_acoustic_attack.

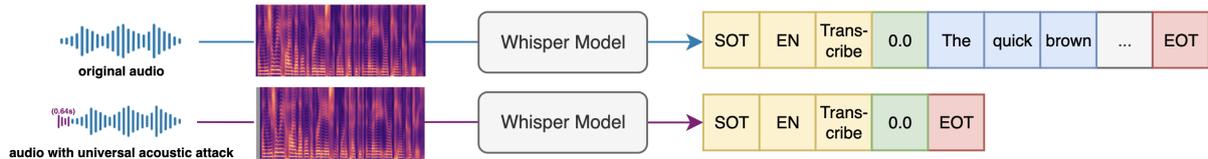


Figure 1: Universal acoustic adversarial audio segment when prepended to any speech signal *mutes* the Automatic Speech Recognition (ASR) system, such that an empty transcription is generated. The `<endoftext>` token (*EOT*) is a special token in the Whisper vocabulary used to indicate the end of the generated transcription.

nition (ASR) systems play a crucial role in detecting and moderating harmful content such as hate speech (MacAvaney et al., 2019) in audio or video recordings (Wu and Bhandary, 2020). Muting Whisper poses a risk of circumventing this moderation process. Adversaries could exploit this vulnerability to release harmful content to the public audience without detection. Nevertheless, muting Whisper also has potential positive implications for speech privacy protection (Cheng et al., 2024). In contexts where speech recordings are transmitted over a network, malicious actors may attempt to extract private data through automated transcription. In such cases, our proposed method of muting Whisper could serve as a form of speech privacy protection, similar to a ‘jamming’ signal, where the speech remains unchanged for human listeners but ASR systems are unable to extract its content. On the whole, through this work we demonstrate both the risks and benefits of universal acoustic adversarial attacks aimed at muting Whisper.

2 Related Work

Audio Attacks (early research). Initial research (Gong and Poellabauer, 2017; Cisse et al., 2017) explored gradient-based approaches to perturb the input audio to end-to-end ASR systems (specifically WaveCNN and HMM-DNN architectures) with the objective of increasing the word error rate (WER) of the generated transcriptions. However, Yuan et al. (2018); Carlini and Wagner (2018); Das et al. (2018); Qin et al. (2019) offer methods to perform targeted attacks on ASR systems, such as DeepSpeech, HMM-DNN and LSTM-based neural networks, where the aim was to generate a specific output transcription. Other research (Schönherr et al., 2018; Schönherr et al., 2018) modified audio adversarial attack meth-

ods to better encourage their imperceptibility.

Practical Audio Attacks. Neekhara et al. (2019) demonstrate that they can generate *universal* adversarial perturbations such that the same adversarial audio segment can be superimposed on different speech signals. However, these attack approaches cannot be applied to streaming ASR systems, as they have to be superimposed on the entire speech signal, so Li et al. (2020) attempted to address this issue by generating universal adversarial perturbations that do not need to be synchronised with the source speech signal (the carrier audio) when being superimposed. Lu et al. (2021) extended the targeted universal adversarial attacks to more recent end-to-end ASR systems including LAS, CTC and RNN-T. Further, a range of other creative approaches have been proposed for generating audio adversarial samples in practical settings: transferability from substitute models (Chen et al., 2020; Fan et al., 2020; Ma et al., 2021); evolutionary attacks (Alzantot et al., 2018; Khare et al., 2019; Taori et al., 2019; Du et al., 2019; Zheng et al., 2021); utterance-based attacks (Raina et al., 2020); and featurization attacks (Carlini et al., 2016; Zhang et al., 2017; Abdullah et al., 2019).

Attacks on Whisper. All of the above-mentioned methods are designed for traditional ASR systems. The recent emergence of a powerful foundation model (Whisper) demands an update to previously developed attack methods. Olivier and Raj (2023) perform an initial investigation into the vulnerabilities of Whisper to audio adversarial attacks, where they show that an adversarial signal can be superimposed on natural speech signals such that Whisper transcribes incorrectly.

Our contributions. We extend the research on adversarial attacks for modern ASR systems

such as Whisper, by outlining a method to develop a truly practical and effective adversarial attack with a real-world targeted objective. Specifically, this work makes the following contributions to adversarial attack literature on ASR systems:

- We develop a short (0.64-second) adversarial audio segment that can be *prepended* to a speech signal. Existing research only considers superimposing the adversarial audio signal, which is not a practical setting for real-life attacks.
- Our adversarial audio segment is *universal*, so the same audio segment can be prepended to any speech signal.
- Our attack works for a popular, modern and powerful ASR system: Whisper family of models.
- The objective of our attack is specifically to *mute* the Whisper model; a targeted objective not before considered and with real-world implications in privacy and security.
- Our universal adversarial acoustic attack segment *transfers* across data domains and even speech processing tasks.

3 Automatic Speech Recognition: Whisper

An Automatic Speech Recognition (ASR) system maps an speech/audio signal of N frames, $\mathbf{x} = x_{1:N}$, to the text, $\mathbf{y} = y_{1:M}$ uttered in the speech signal - this is the transcription of the audio with M words/tokens. Whisper’s encoder-decoder architecture, $\mathcal{F}(\cdot)$ with parameters θ auto-regressively predicts a vector representing the probability distribution over the vocabulary of tokens, \mathcal{V} , for the next token y_m , with the speech, $\mathbf{x} = x_{1:N}$ at the encoder input and the previously decoded tokens, $\mathbf{y}_{<m}^*$ at the decoder input,

$$P(y_m = y | \mathbf{x}, \mathbf{y}_{<m}^*) = \mathcal{F}(\mathbf{x}, \mathbf{y}_{<m}^*; \theta)_y, \quad y \in \mathcal{V}, \quad (1)$$

where typically a greedy decoding process selects the most likely token to generate,

$$y_m^* = \arg \max_y P(y_m = y | \mathbf{x}, \mathbf{y}_{<m}^*). \quad (2)$$

During the decoding process various special tokens are used by the Whisper model

to guide the token generation. The first token (input to the decoder) is set as $\langle | \text{startoftranscript} | \rangle$, followed by a token to indicate the language, for example $\langle \text{en} \rangle$ for English. As the Whisper model is trained to perform two different speech processing tasks (transcription and speech translation), the next token is used to indicate the task, e.g., $\langle | \text{transcribe} | \rangle$ or $\langle | \text{translate} | \rangle$. Hence we define $\mathbf{y}_0^* = \langle | \text{startoftranscript} | \rangle \langle \text{lang tag} \rangle \langle | \text{task tag} | \rangle$. With this initialization, further tokens are generated auto-regressively from the vocabulary, \mathcal{V} following Equation 1 and Equation 2. The auto-regressive decoding ends when the $\langle | \text{endoftext} | \rangle$ special token is predicted by the decoder.

4 Universal Acoustic Prepend Attack

4.1 Attack Objective

In this section we propose a practical and effective approach for an adversary to modify any input speech signal in a manner that results in the Whisper model being muted (transcribing nothing), without the speech audio sounding obviously manipulated to human listeners. The objective of muting Whisper is equivalent to maximizing the probability of the model predicting, y_1 as the $\langle | \text{endoftext} | \rangle$ special token. Recall that the decoder is initialized with a sequence of special tokens, $\mathbf{y}_0^* = \langle | \text{startoftranscript} | \rangle \langle \text{lang tag} \rangle \langle | \text{task tag} | \rangle$.

4.2 Prepend Attack

To perturb a speech signal, $\mathbf{x} = x_{1:N}$, it is simplest to prepend a short, adversarial audio segment of T frames, $\tilde{\mathbf{x}} = \tilde{x}_{1:T}$, such that the perturbed speech signal is $\tilde{\mathbf{x}} \oplus \mathbf{x}$, where \oplus represents concatenation in the raw audio space. Then, given Whisper’s encoder-decoder model in Equation 1, the optimal adversarial audio segment, $\hat{\mathbf{a}}$, to ‘mute’ Whisper as per the adversarial objective, can be given as finding the adversarial audio segment that maximizes the probability of generating the $\langle \text{endoftext} \rangle$ special token (abbreviated to eot) as the first transcribed token,

$$\hat{\mathbf{x}} = \arg \max_{\tilde{\mathbf{x}}} P(y_1 = \text{eot} | \tilde{\mathbf{x}} \oplus \mathbf{x}, \mathbf{y}_0^*). \quad (3)$$

4.3 Universal Attack

Learning an adversarial audio segment, $\hat{\mathbf{x}}$ that can be prepended to a speech signal, \mathbf{x} to conceal its contents from a Whisper ASR model, cannot be achieved in real-time (as the attack segment has to be prepended before the speech is generated) and requires computational resources. Therefore, it is not practical to learn an individual adversarial audio segment $\hat{\mathbf{x}}^{(j)}$ to conceal the contents of each different speech signal, $\mathbf{x}^{(j)}$. Hence, we propose learning a *universal* adversarial audio segment that is agnostic to any speech signal. For a training dataset of J speech samples $\{\mathbf{x}^{(j)}\}_{j=1}^J$, the universal prepend attack aims to maximise the likelihood of predicting $y_1 = \langle \text{endof\texttt{text}} \rangle$ over all training samples,

$$\hat{\mathbf{x}} = \arg \max_{\tilde{\mathbf{x}}} \prod_{j=1}^J P(y_1 = \text{eot} | \tilde{\mathbf{x}} \oplus \mathbf{x}^{(j)}, \mathbf{y}_0^*). \quad (4)$$

As the Whisper encoder-decoder model is fully differentiable, standard gradient-based training approaches can then be used to optimize for the universal adversarial audio segment, $\hat{\mathbf{x}}$. This universal adversarial audio segment ‘mutes’ Whisper when prepended to any speech signal and is thus effectively an acoustic realization of the $\langle \text{endof\texttt{text}} \rangle$ special token.

4.4 Imperceptibility

For a truly practical adversarial attack, it is important for the adversarial audio segment generated to be sufficiently imperceptible such that it is not flagged as suspicious when prepended to natural speech signals. We achieve this imperceptibility in two dimensions. First, we ensure that the adversarial audio segment is extremely short such that there is little time for a human listener to detect the abnormal speech. We specifically limit the number of frames in the adversarial audio segment to $T = 10, 120$, which corresponds to 0.64-seconds of audio for a 16kHz sampling frequency. Next, we limit the ‘power’ of the adversarial audio segment, to ensure the amplitude of the adversarial audio segment is not significant relative to natural speech. To limit the power, we introduce a constraint in the optimization objective of Equation 4 that limits the amplitude of the adversarial audio,

$$\|\hat{\mathbf{x}}_{1:T}\|_{\infty} \leq \epsilon, \quad (5)$$

where $\|\cdot\|_{\infty}$ represents the l-infinity norm. By default we set $\epsilon = 0.02$, as on the log-mel scale this empirically represents audio signals with power lower than typical human speech signals (refer to Figure 2). The l-infinity norm constraint is incorporated during gradient-based learning of the adversarial audio segment $\hat{\mathbf{x}}$, by clamping the values at ϵ .² Note that in practical settings it may be undesirable to have extremely low values for ϵ , as the adversarial audio segment may then be contaminated by low-amplitude background noise.

5 Prepend Adversarial Attack Evaluation

5.1 Attack Performance Evaluation

For a learnt universal acoustic adversarial segment trained to maximize the probability of the Whisper model generating the $\langle \text{endof\texttt{text}} \rangle$ special token as its first token for any speech signal, as per Equation 4, we can evaluate the performance of the adversarial attack by computing the percentage of unseen test speech signals, \emptyset , for which the attack is able to successfully ‘mute’ the Whisper model,

$$\emptyset = \frac{1}{J} \sum_j \mathbb{1}\{\tilde{y}_1^{*(j)} = \text{eot}\} \times 100\%, \quad (6)$$

$$\tilde{y}_1^{*(j)} = \arg \max_y P(y_1 = y | \hat{\mathbf{x}} \oplus \mathbf{x}^{(j)}, \mathbf{y}_0^*),$$

where $\tilde{y}_1^* = \langle \text{eot} \rangle$ means that the transcribed sequence has 0 words, i.e., a perfectly successful attack. Hence, the larger the value of \emptyset , approaching 100%, the more effective the acoustic adversarial attack. A further useful metric to gauge the extent to which a universal attack is able to ‘mute’ the Whisper model, is the ‘average sequence length’ (asl) of the predicted transcription,

$$\text{asl} = \frac{1}{J} \sum_j \text{len}(\tilde{\mathbf{y}}^{*(j)}), \quad (7)$$

where $\text{len}(\cdot)$ gives the number of words in the transcribed sequence. The lower the value of asl, the more effective the adversarial attack.

²For gradient-based learning we use ADAM (Kingma and Ba, 2015) optimization with clamping after each gradient update as in typical Projected Gradient Descent algorithms (Madry et al., 2019).

5.2 Adversarial Sensitivity Analysis

Beyond simply measuring the success of the universal acoustic adversarial attack in ‘muting’ an ASR system, it is meaningful to have a tool to analyze the mechanism of the attack that explains its success and lack of success for specific speech signals. One such tool is in the form of saliency analysis, which can indicate the sensitivity of the ASR system’s predictions to different parts of the input audio. The frames in the input audio that the transcription is most sensitive to are the parts of the audio that dominate the ASR system’s decisions and this can explain which part of the input the ASR system is attending to the most.

For an auto-regressive ASR model, $\mathcal{F}(\cdot)$ defined in Equation 1, we can define the m -th saliency of the universal adversarial audio segment, $\hat{\mathbf{x}}$, as the gradient of the m -th transcribed token, \hat{y}_m^* , as

$$\tilde{s}_m = \left\| \nabla_{\hat{\mathbf{x}}} \left[\mathcal{F}(\hat{\mathbf{x}} \oplus \mathbf{x}, \mathbf{y}_{<m}^*; \theta)_{\hat{y}_m^*} \right] \right\|_2. \quad (8)$$

Equivalently we can define the saliency of the natural speech signal, \mathbf{x} as,

$$s_m = \left\| \nabla_{\mathbf{x}} \left[\mathcal{F}(\hat{\mathbf{x}} \oplus \mathbf{x}, \mathbf{y}_{<m}^*; \theta)_{y_m^*} \right] \right\|_2. \quad (9)$$

As we are interested primarily in the first generated token, we set $m = 1$ in our saliency analysis.

6 Experiments

6.1 Experimental Setup

Data. Results are reported across five diverse and popular speech recognition datasets: LibriSpeech (LBS) (Panayotov et al., 2015), TED-LIUM3 (TED) (Hernandez et al., 2018), MGB (Bell et al., 2015); Artie Bias (Artie) (Meyer et al., 2020) and Fleurs (Conneau et al., 2022). Details for each dataset are provided in Section A.1. The universal acoustic attack segment is learnt using the development split of the LibriSpeech dataset (for the task of transcription). The attack is then evaluated on the LibriSpeech test split and to measure the transferability of the attack it is also evaluated on the other datasets (TED-LIUM3, MGB and Artie Bias). The universal acoustic segment is evaluated for task transferability by also evaluating on speech transcription and speech

translation tasks using the Fleurs dataset test splits.

Models. Experimental results are given for the family of Whisper ASR models (Radford et al., 2023). Model details and their performance (Word Error Rate) on the datasets in this work have been provided for reference in Section A.2.

Attack Train Configuration. The universal acoustic prepend attack segment is trained on the LibriSpeech development split. The attack segment is trained as per Equation 4, where it is prepended to speech samples in the raw audio space. The attack segment length is set to be 0.64 seconds and its maximum amplitude to $\epsilon = 0.02$, to satisfy the constraint of Equation 5. Hyperparameter settings for learning the universal acoustic attack segment are given in Section A.3.

6.2 Results

Universal Acoustic Prepend Attack.

The universal prepend attack segment is trained (on the LBS development split) to make the ASR model generate only an `<endoftext>` token, i.e. transcribe nothing. Evaluating on the LBS test-split, Table 1 gives the percentage of successful attacks, \emptyset and the average sequence length of predicted transcriptions (`as1`) for the different target speech recognition models with the same (per model) trained 0.64-second universal acoustic adversarial segment prepended to every speech sample. A comparison is made to the *no attack* setting, where the speech samples are not modified in any manner. For every target Whisper model, the universal acoustic prepend attack is extremely successful in ensuring the model does not transcribe the speech signals, with the percentage of successful attacks increasing from more than 97% for the medium models to 99.9% for the tiny models. Similarly, in all cases the `as1` is brought to less than 1.0, whereas for the unattacked speech the transcriptions have nearly 18 words on average. We also compare to a random audio segment prepended to the speech samples and we find that this behaves identically to the *no attack* setting, i.e. a random attack cannot ‘mute’ Whisper. Overall, Table 1 shows that regardless of the model size, a short 0.64-second universal acoustic adversarial audio segment

can be prepended (imperceptibly) to almost all speech signals to conceal the contents from Whisper speech recognition models.

Model	Metric	No Attack	Attack
tiny.en	\emptyset (%) \uparrow	0.0	99.7
	as1 \downarrow	17.9	0.06
tiny	\emptyset (%) \uparrow	0.0	99.6
	as1 \downarrow	17.9	0.04
base.en	\emptyset (%) \uparrow	0.0	99.0
	as1 \downarrow	17.8	0.20
base	\emptyset (%) \uparrow	0.0	99.5
	as1 \downarrow	17.8	0.05
small.en	\emptyset (%) \uparrow	0.0	98.6
	as1 \downarrow	17.7	0.14
small	\emptyset (%) \uparrow	0.0	98.7
	as1 \downarrow	17.3	0.15
medium.en	\emptyset (%) \uparrow	0.0	99.5
	as1 \downarrow	17.7	0.10
medium	\emptyset (%) \uparrow	0.0	97.8
	as1 \downarrow	17.8	0.56

Table 1: The percentage of successfully ‘muted’ speech samples, \emptyset , where the first generated token is `<endofxtext>`, and the Average Sequence Length (as1) of transcriptions, for the LBS dataset. Results are presented for *no attack*, and for a trained (per model) universal acoustic adversarial attack, where the *same* universal adversarial segment is prepended to each speech sample.

Figure 2 gives the Mel-spectrogram of a random speech sample from the LBS test set with a 0.64-second universal acoustic adversarial segment prepended to the speech signal (learnt for the medium.en model). This validates that $\epsilon = 0.02$ is an appropriate imperceptibility setting as it ensures that the power of the adversarial segment is always less than ~ 1.50 dB, which is significantly lower than a typical human speech signal in the LBS dataset that can range from 1dB to more than 3.5dB. It is interesting to note that the acoustic adversarial segment covers the full range of frequencies relatively uniformly, which means it is likely to sound like static noise to a human listener.³

Attack Success Analysis. We now investigate the $< 3\%$ speech samples for which the universal acoustic attack fails to perfectly mute the Whisper model, i.e., the generated transcription is not of zero-length. Table 2 gives the average sequence length (as1) evaluation of

³We provide the universal acoustic adversarial attack segment audio files for each Whisper model at https://github.com/rainavyas/prepend_acoustic_attack/tree/main/audio_attack_segments

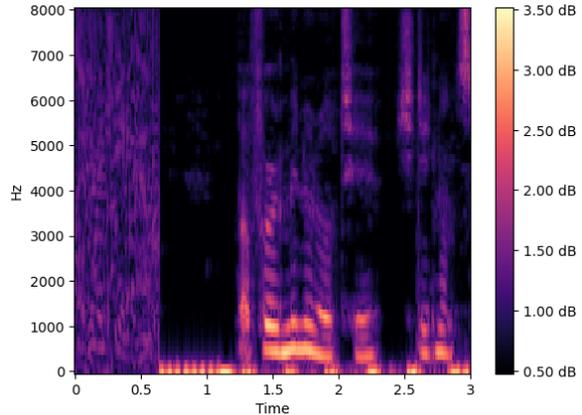


Figure 2: Mel spectrogram of universal acoustic segment (0.64s) prepended to a random speech sample from LBS dataset (truncated to a total length of 3s).

the generated transcripts for the *failed* attack samples (relative to the *successful* samples) for LBS. Interestingly, when there is no adversarial attack, the as1 for the failed samples is 2 to 4 times greater than the average ~ 17 words in the successful samples’ transcriptions, suggesting that the universal acoustic attack only struggles to mute the ASR model for longer input speech signals. Further, for these *failed* samples, the attack is still able to reduce the number of generated words significantly (at least two-fold), highlighting that the attack is still effective in muting the ASR model to some extent, although not entirely.

Model	Samples	No Attack	Attack
tiny	successful	17.8	0.0
	failed	74.6	11.0
medium	successful	17.2	0.0
	failed	43.2	25.0

Table 2: Average Sequence Length (as1) of generated transcripts for *successful* attack samples and *failed* attack samples. A successful sample is where the universal acoustic attack causes the Whisper model to generate a zero-length transcription (perfectly muted).

A natural follow-up question is then, in what manner does the universal attack shorten the generated transcripts for the *failed* samples, i.e., is it simple truncation or is the model generating other tokens unrelated to the original speech signal. Table 3 gives the breakdown of the word error rate (WER) contributions from insertions, deletions and substitutions for

the *failed* samples, where the word error rate is computed between the predicted *no attack* transcriptions and the predicted *attack* transcriptions. We observe that the attack causes no significant change in the transcriptions other than deletions, demonstrating the attack is behaving as desired in attempting to discourage speech transcription. Overall, this analysis shows that even for the few samples ($< 3\%$) that the universal attack is not able to perfectly mute the ASR model, the attack is still able to significantly reduce the transcription length.

Model	WER	INS	DEL	SUB
tiny	88.38	0.36	85.40	2.29
medium	50.76	2.70	43.75	2.94

Table 3: Word Error Rate (WER) and breakdown (insertions, deletions and substitutions) between the transcript generated with no attack and the transcript generated with the universal acoustic attack, for the *failed* attack samples only. A failed sample is where the universal acoustic attack is unable to make Whisper generate a zero-length transcription.

Saliency Analysis. Section 5.2 describes saliency as a tool to measure the sensitivity of the ASR model to the adversarial and the natural speech segments of the input audio. The average saliencies for the LBS dataset are given in Table 4, with a comparison for the successful attack samples and the failed attack samples. It is clear that a successful attack results in the ASR model being significantly more sensitive to the adversarial segment, and conversely more sensitive to the speech signal when the attack fails. This demonstrates that the universal acoustic attack is operating as intended, as a successful attack encourages the model to attend more to the acoustic realization of the `<endoftext>` special token (the adversarial audio segment).⁴ It is also interesting to note that for successful attack samples the saliency is significantly higher, suggesting that success of the adversarial attack is very dependent on the exact learnt universal adversarial segment.

Attack Transferability. The universal attack segment has been trained on a specific domain of data (LBS data) and there is a risk

⁴Appendix D illustrates the frame-level saliency for example input audio signals.

Model	Samples	Adv, \bar{s}	Speech, s
tiny	successful	835	4.80
	failed	101	192
medium	successful	3371	143
	failed	314	803

Table 4: Average saliency for the adversarial segment and speech segment (across LBS dataset) for successful and failed samples. A successful sample is where the universal acoustic attack causes the Whisper model to generate a zero-length transcription (perfectly muted).

that the attack may not necessarily transfer to different, distributionally shifted speech domains. Therefore, in this section we investigate the impact of transferring the 0.64-second universal acoustic adversarial segment to different unseen (during training of the attack) datasets, representing a diverse range of domain distributional shifts. Table 5 presents the results. For all models and datasets, the universal acoustic attack is able to continue muting the Whisper models for more than 90% of samples. Although this is slightly lower than 97% success rate for the in-domain LBS dataset, 90% is still a significant success rate, suggesting that the adversarial segment truly represents an acoustic realization of the `<endoftext>` token, which universally prevents the transcription of different speech domains.

Beyond transferability across data distributions, we also investigate how well the universal acoustic adversarial attacks transfer across different speech processing tasks. As the multilingual Whisper models can be instructed to perform transcription or speech translation, we evaluate how effective the adversarial segment (trained on Whisper for transcription) is in muting Whisper when used for speech translation. Table 6 presents attack results for speech translation from French (fr), German (de), Russian (ru) and Korean (ko) to English, from the Fleurs dataset. Two main trends can be identified. First, the attack transfers extremely well for the smaller Whisper models, with attack success rate greater than 94%, but for the larger models the success rate can drop to less than even 20%. Second, it appears that the ‘further’ the source language from English, the lower the success rate, e.g., the attack transfers better for French than Korean in general. As would be expected, this demonstrates that although

	Metric	LBS	TED	MGB	Artie
<i>Ref</i>	\emptyset (%)	0.0	0.0	0.0	0.0
	asl	17.8	24.4	8.9	8.6
tiny.en	\emptyset (%)	99.7	99.9	99.9	100.0
	asl	0.06	0.01	0.01	0.00
tiny	\emptyset (%)	99.6	99.0	99.3	99.2
	asl	0.04	0.56	0.10	0.03
base.en	\emptyset (%)	99.0	98.8	99.0	99.3
	asl	0.20	0.32	0.09	0.03
base	\emptyset (%)	99.5	99.9	99.5	97.4
	asl	0.05	0.01	0.09	0.17
small.en	\emptyset (%)	98.6	93.1	98.3	92.4
	asl	0.14	1.71	0.20	0.49
small	\emptyset (%)	98.7	99.5	93.5	97.0
	asl	0.15	0.21	0.43	0.16
medium.en	\emptyset (%)	99.5	99.8	99.7	99.7
	asl	0.10	0.01	0.01	0.03
medium	\emptyset (%)	97.8	95.2	96.4	96.9
	asl	0.56	1.05	0.29	0.24

Table 5: Attack transferability across datasets: the percentage of successfully ‘muted’ speech samples, \emptyset , and the Average Sequence Length (asl) of generated transcripts with the universal acoustic adversarial attack learnt on LBS and evaluated on other datasets. *Ref* is the average reference transcription length.

the universal attack segment (the acoustic realization of `<endoftext>`) is extremely effective for muting Whisper for English transcription, its potency is increasingly limited as we transfer to a different speech task (translation) for distant languages.

Model	Metric	fr	de	ru	ko
<i>Ref</i>	\emptyset (%)	0.0	0.0	0.0	0.0
	asl	25.3	21.5	19.3	14.7
tiny	\emptyset (%)	99.9	94.6	96.8	94.2
	asl	0.00	0.82	0.85	1.09
base	\emptyset (%)	73.1	70.0	34.1	7.9
	asl	6.42	6.20	13.05	8.03
small	\emptyset (%)	53.4	59.1	39.2	65.7
	asl	5.01	4.45	6.11	1.68
medium	\emptyset (%)	10.5	50.7	21.7	15.5
	asl	13.04	4.44	14.46	8.18

Table 6: Attack transferability across tasks: the percentage of successfully ‘muted’ speech samples, \emptyset , and the Average Sequence Length (asl) of generated transcripts with the universal acoustic adversarial attack learnt on LBS for the task of *transcription* and evaluated on the Fleurs dataset for the task of speech *translation* to English. Results are presented for the multi-lingual Whisper models.

Ablations on Imperceptibility. To ensure the universal acoustic adversarial segment is

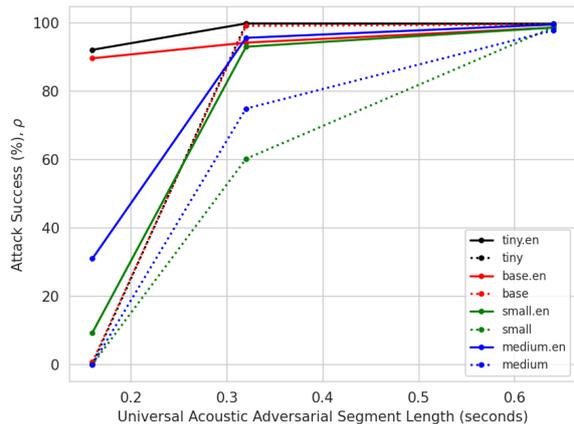


Figure 3: Ablation on the universal acoustic adversarial attack segment length.

not easy for a human listener to detect, we set the maximum amplitude to $\epsilon = 0.02$ and the length of the segment to 0.64-seconds. In this section we explore how much stricter these imperceptibility constraints can be made during the training of the universal acoustic attack segments. Figure 3 shows how the attack success percentage, \emptyset (successfully mute Whisper) changes as the audio segment length is decreased from 0.64-seconds. The larger a model, the greater the decay in attack success. Further, the multi-lingual models tend to have a much greater decay than their English-only counterparts, with the attack success rate reaching near 0% for every multi-lingual model for a segment of 16-seconds. Figure 4 equivalently presents the impact of reducing the maximum amplitude, ϵ . A similar trend (although less clear) arises where the larger and the multi-lingual variants of the models have a greater drop in success rate with a smaller ϵ . The relative robustness of the multi-lingual and larger models in extremely constrained attack settings can perhaps be explained simply by the fact these models have been trained on more data and thus it is more difficult to find an adversarial acoustic segment that is a genuine universal realization of the `<endoftext>` special token.

7 Conclusion

This work proposes a highly effective and practical method for ‘muting’ Whisper models, achieving a success rate of over 97%. A universal 0.64-second adversarial audio segment is

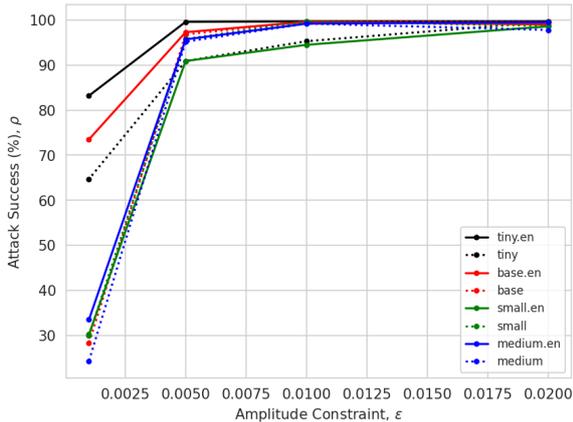


Figure 4: Ablation on the universal acoustic adversarial attack amplitude constraint, ϵ .

trained to represent an acoustic realization of the `<endoftext>` token used by Whisper, such that when this audio segment is prepended to any speech signal, Whisper does not transcribe the speech, i.e., the model is ‘muted’. Further, this work finds that this universal acoustic adversarial segment transfer across different data distributions and can even transfer to different speech processing tasks. While this result offers a potential for speech privacy protection, it does also reveal the critical security implications of foundation models’ susceptibility to adversarial attacks. As speech processing systems continue to develop, addressing these vulnerabilities is an important direction for future research to ensure their reliability in real-world applications.

8 Limitations

We identify the following potential limitations of our work:

- The scope of this work covers specifically Transformer-based Automatic Speech Recognition (ASR) systems, such as Whisper. However, due to the recent popularity and performance of Whisper for ASR, this scope is highly relevant for a large number of modern speech processing applications.
- We demonstrate that the universal adversarial segment can transfer well across different data distributions and even sometimes languages. It would be useful for future work to explore the impact on transferability as specific dimensions of distri-

butional shift are varied in a controlled manner, e.g. amplitude of speech (long-distance vs close-distance audio); level of background noise; or even recording conditions.

- The universal adversarial attack, although very effective, it is Whisper model specific. This is of course very much expected as each model has a very different audio-space representation. We discuss this in greater detail in Appendix C. Although we demonstrate that we can learn a universal attack that is effective for more than one Whisper model (by considering multiple models during training), a defence in the future could be to simply transcribe the text using multiple diverse models. However, we argue that this defence is not only expensive due to linear inference scaling costs, but is extremely uncommon in currently deployed ASR systems - it is more common to use a single ASR system. Hence, if a Whisper model is used for ASR, then an adversary can use the universal acoustic adversarial segment from this work to mute the model.
- This work focuses on developing an adversarial attack method to mute the Whisper model. However, we do not explore detection or defence approaches explicitly. This is a research area for future work. However, we also emphasize that it is currently very uncommon in many real-world deployed ASR settings to perform any form of adversarial detection. Therefore, one primary aim of this work is to raise awareness around the vulnerability of Whisper ASR systems to muting universal adversarial attacks. We hope this encourages future research in defence methods where required. Note that our proposed muting adversarial attack method can also be used positively by users to protect the privacy of their audio content.

9 Risks and Ethics

This work proposes a method to learn a universal acoustic adversarial attack, where a 0.64-second audio segment can be prepended to any speech signal and mute Whisper models.

There is the risk that this method could be used by an adversary to conceal the content of speech signals from speech moderation systems. However, we argue the aim of this work is to raise awareness around the vulnerability to such muting adversarial attacks of Whisper ASR models that have been deployed across many speech processing applications. By raising this issue, we hope to encourage the research community to develop methods that improve the robustness and reliability of existing and future ASR systems. Further, the adversarial attack method proposed in this work can also be used constructively by users in speech privacy settings, where it is important to protect the content of audio from malicious actors. On the whole, this research contributes to the rich adversarial attack literature to encourage the further development of safe models.

10 Acknowledgements

This paper reports on research supported by EPSRC Project EP/V006223/1 (Multimodal Video Search by Examples) and Cambridge University Press & Assessment. We thank Mengie Qian for the preparation of the MGB dataset used in the experiments in this work.

References

- Hadi Abdullah, Washington Garcia, Christian Peeters, Patrick Traynor, Kevin R. B. Butler, and Joseph Wilson. 2019. [Practical hidden voice attacks against speech and speaker recognition systems](#).
- Moustafa Alzantot, Bharathan Balaji, and Mani B. Srivastava. 2018. [Did you hear that? adversarial examples against automatic speech recognition](#). *CoRR*, abs/1801.00554.
- Rosana Ardila, Megan Branson, Kelly Davis, Michael Kohler, Josh Meyer, Michael Henretty, Reuben Morais, Lindsay Saunders, Francis Tyers, and Gregor Weber. 2020. Common Voice: A Massively-Multilingual Speech Corpus. In *Proceedings of the Twelfth Language Resources and Evaluation Conference*, pages 4218–4222.
- Peter Bell, Mark JF Gales, Thomas Hain, Jonathan Kilgour, Pierre Lanchantin, Xunying Liu, Andrew McParland, Steve Renals, Oscar Saz, Mirjam Wester, et al. 2015. The MGB challenge: Evaluating multi-genre broadcast media recognition. In *2015 IEEE Workshop on Automatic Speech Recognition and Understanding (ASRU)*, pages 687–693. IEEE.
- Nicholas Carlini, Pratyush Mishra, Tavish Vaidya, Yuankai Zhang, Micah Sherr, Clay Shields, David Wagner, and Wenchao Zhou. 2016. [Hidden voice commands](#). In *25th USENIX Security Symposium (USENIX Security 16)*, pages 513–530, Austin, TX. USENIX Association.
- Nicholas Carlini and David A. Wagner. 2018. [Audio adversarial examples: Targeted attacks on speech-to-text](#). *CoRR*, abs/1801.01944.
- Yuxuan Chen, Xuejing Yuan, Jiangshan Zhang, Yue Zhao, Shengzhi Zhang, Kai Chen, and Xiaofeng Wang. 2020. [Devil’s whisper: A general approach for physical adversarial attacks against commercial black-box speech recognition devices](#). In *29th USENIX Security Symposium (USENIX Security 20)*, pages 2667–2684. USENIX Association.
- P. Cheng, Y. Wu, Y. Hong, Z. Ba, F. Lin, L. Lu, and K. Ren. 2024. [Uniap: Protecting speech privacy with non-targeted universal adversarial perturbations](#). *IEEE Transactions on Dependable and Secure Computing*, 21(01):31–46.
- Moustapha Cisse, Yossi Adi, Natalia Neverova, and Joseph Keshet. 2017. [Houdini: Fooling deep structured prediction models](#).
- Alexis Conneau, Min Ma, Simran Khanuja, Yu Zhang, Vera Axelrod, Siddharth Dalmia, Jason Riesa, Clara Rivera, and Ankur Bapna. 2022. [Fleurs: Few-shot learning evaluation of universal representations of speech](#). *arXiv preprint arXiv:2205.12446*.
- Nilaksh Das, Madhuri Shanbhogue, Shang-Tse Chen, Li Chen, Michael E. Kounavis, and Duen Horng Chau. 2018. [ADAGIO: interactive experimentation with adversarial attack and defense for audio](#). *CoRR*, abs/1805.11852.
- Tianyu Du, Shouling Ji, Jinfeng Li, Qinchen Gu, Ting Wang, and Raheem Beyah. 2019. [Sirenattack: Generating adversarial audio for end-to-end acoustic systems](#).
- Wenshu Fan, Hongwei Li, Wenbo Jiang, Guowen Xu, and Rongxing Lu. 2020. [A practical black-box attack against autonomous speech recognition model](#). In *GLOBECOM 2020 - 2020 IEEE Global Communications Conference*, pages 1–6.
- Yuan Gong and Christian Poellabauer. 2017. [Crafting adversarial examples for speech paralinguistics applications](#). *CoRR*, abs/1711.03280.
- François Hernandez, Vincent Nguyen, Sahar Ghanay, Natalia Tomashenko, and Yannick Esteve. 2018. TED-LIUM 3: Twice as much data and corpus repartition for experiments on speaker adaptation. In *Speech and Computer: 20th International Conference, SPECOM 2018, Leipzig, Germany, September 18–22, 2018, Proceedings 20*, pages 198–208. Springer.

- Shreya Khare, Rahul Aralikkatte, and Senthil Mani. 2019. [Adversarial black-box attacks on automatic speech recognition systems using multi-objective evolutionary optimization.](#)
- Diederik Kingma and Jimmy Ba. 2015. Adam: A method for stochastic optimization. In *International Conference on Learning Representations (ICLR)*, San Diego, CA, USA.
- Zhuohang Li, Yi Wu, Jian Liu, Yingying Chen, and Bo Yuan. 2020. [Advpulse: Universal, synchronization-free, and targeted audio adversarial attacks via subsecond perturbations.](#) In *Proceedings of the 2020 ACM SIGSAC Conference on Computer and Communications Security, CCS '20*, page 1121–1134, New York, NY, USA. Association for Computing Machinery.
- Zhiyun Lu, Wei Han, Yu Zhang, and Liangliang Cao. 2021. [Exploring targeted universal adversarial perturbations to end-to-end asr models.](#)
- Chen Ma, Li Chen, and Jun-Hai Yong. 2021. [Simulating unknown target models for query-efficient black-box attacks.](#)
- Sean MacAvaney, Hao-Ren Yao, Eugene Yang, Katina Russell, Nazli Goharian, and Ophir Frieder. 2019. Hate speech detection: Challenges and solutions. *PLoS one*, 14(8):e0221152.
- Aleksander Madry, Aleksandar Makelov, Ludwig Schmidt, Dimitris Tsipras, and Adrian Vladu. 2019. [Towards deep learning models resistant to adversarial attacks.](#)
- Josh Meyer, Lindy Rauchenstein, Joshua D Eisenberg, and Nicholas Howell. 2020. Artie bias corpus: An open dataset for detecting demographic bias in speech applications. In *Proceedings of the twelfth language resources and evaluation conference*, pages 6462–6468.
- Paarth Neekhara, Shehzeen Hussain, Prakhar Pandey, Shlomo Dubnov, Julian J. McAuley, and Farinaz Koushanfar. 2019. [Universal adversarial perturbations for speech recognition systems.](#) *CoRR*, abs/1905.03828.
- Raphael Olivier and Bhiksha Raj. 2023. [There is more than one kind of robustness: Fooling whisper with adversarial examples.](#)
- Vassil Panayotov, Guoguo Chen, Daniel Povey, and Sanjeev Khudanpur. 2015. Librispeech: an ASR corpus based on public domain audio books. In *2015 IEEE international conference on acoustics, speech and signal processing (ICASSP)*, pages 5206–5210. IEEE.
- Yao Qin, Nicholas Carlini, Ian Goodfellow, Garrison Cottrell, and Colin Raffel. 2019. [Imperceptible, robust, and targeted adversarial examples for automatic speech recognition.](#)
- Alec Radford, Jong Wook Kim, Tao Xu, Greg Brockman, Christine McLeavey, and Ilya Sutskever. 2022. [Robust speech recognition via large-scale weak supervision.](#)
- Alec Radford, Jong Wook Kim, Tao Xu, Greg Brockman, Christine McLeavey, and Ilya Sutskever. 2023. [Robust speech recognition via large-scale weak supervision.](#) In *International Conference on Machine Learning*, pages 28492–28518. PMLR.
- V Raina, MJF Gales, and K Knill. 2020. [Universal adversarial attacks on spoken language assessment systems.](#) *Interspeech*.
- Lea Schönherr, Katharina Siobhan Kohls, Steffen Zeiler, Thorsten Holz, and Dorothea Kolossa. 2018. [Adversarial attacks against automatic speech recognition systems via psychoacoustic hiding.](#) *ArXiv*, abs/1808.05665.
- Lea Schönherr, Katharina Kohls, Steffen Zeiler, Thorsten Holz, and Dorothea Kolossa. 2018. [Adversarial attacks against automatic speech recognition systems via psychoacoustic hiding.](#)
- Rohan Taori, Amog Kamsetty, Brenton Chu, and Nikita Vemuri. 2019. [Targeted adversarial examples for black box audio systems.](#)
- Ching Seh Wu and Unnathi Bhandary. 2020. [Detection of hate speech in videos using machine learning.](#) In *2020 International Conference on Computational Science and Computational Intelligence (CSCI)*, pages 585–590. IEEE.
- Xuejing Yuan, Yuxuan Chen, Yue Zhao, Yunhui Long, Xiaokang Liu, Kai Chen, Shengzhi Zhang, Heqing Huang, Xiaofeng Wang, and Carl A. Gunter. 2018. [Commandersong: A systematic approach for practical adversarial voice recognition.](#)
- Guoming Zhang, Chen Yan, Xiaoyu Ji, Taimin Zhang, Tianchen Zhang, and Wenyuan Xu. 2017. [Dolphinattack: Inaudible voice commands.](#) *CoRR*, abs/1708.09537.
- Baolin Zheng, Peipei Jiang, Qian Wang, Qi Li, Chao Shen, Cong Wang, Yunjie Ge, Qingyang Teng, and Shenyi Zhang. 2021. [Black-box adversarial attacks on commercial speech platforms with minimal information.](#) In *Proceedings of the 2021 ACM SIGSAC Conference on Computer and Communications Security, CCS '21*. ACM.

A Experimental Details

This section provides greater detail for the experiments in the main paper.

A.1 Data

The LibriSpeech dataset (Panayotov et al., 2015) is derived from English audio-books and consists of a total of nearly 1000 hours of audio (and transcriptions). In this work, we use specifically the *dev-other* split (2864 utterances forming 5.3 hours of audio) and the *test-other* split (2939 utterances forming 5.1 hours of audio). The TED-LIUM3 dataset (Hernandez et al., 2018) is formed from English-language TED talks, where the test split consists of 1155 utterances and 2.6 hours of audio. The Multi-Genre Broadcast (MGB) Challenge (Bell et al., 2015), an evaluation focused on speech recognition, speaker diarization, and ‘lightly supervised’ alignment of BBC TV recordings. The challenge training data covered the whole range of seven weeks BBC TV output across four channels, resulting in about 1,600 hours of broadcast audio. In addition several hundred million words of BBC subtitle text was provided for language modelling. The Artie Bias dataset (Meyer et al., 2020) is a subset of the Mozilla Common Voice (Ardila et al., 2020) corpus, where it was designed to detect demographic bias in speech applications. The test-split used in this work consists of 1712 utterances forming 2.4 hours of audio. The Few-shot Learning Evaluation of Universal Representation of Speech (Fleurs) (Conneau et al., 2022) is a n-way parallel speech dataset in 102 languages, with 12 hours of speech per language. For this work we evaluate on the test splits of specifically French (fr), German (de), Russian (ru) and Korean (ko).

A.2 Models

Whisper model checkpoints are available in a range of sizes: Whisper tiny (39M parameters); Whisper base (74M); Whisper small (244M); Whisper medium (769M); and Whisper large (1.55B parameters). The Whisper models are available as English-only (en) or multilingual models. Whisper large is only available as a multilingual model. The Whisper models can be prompted to do speech recognition, voice activity detection, as well as speech translation and language identification for the multilingual model variants. This work considers a range of sizes of Whisper models for speech recognition and the multilingual versions are

also evaluated for speech translation: tiny(.en), base(.en), small(.en) and medium(.en). The performance of each model, measured by the Word Error Rate (WER), for each dataset is given in Table 7.

Model	LBS	TED	MGB	Artie
tiny.en	12.8	5.4	24.5	18.4
tiny	15.0	6.3	29.5	20.8
base.en	9.6	4.6	19.7	13.2
base	11.0	5.0	22.0	15.3
small.en	6.7	4.3	14.1	9.2
small	7.2	4.3	15.0	9.3
medium.en	5.7	4.3	12.4	7.4
medium	5.6	4.0	12.3	6.7

Table 7: Whisper Model Performance - Word Error Rate (WER), %.

A.3 Attack Train Configuration

Gradient descent based training is used to learn the acoustic adversarial segment to minimize the loss, which is defined as the negative of the log-likelihood of the probability defined in Equation 4. Note that the Whisper model weights are frozen. The training hyperparameters for learning the adversarial attack segment are: the use of an AdamW optimizer; a learning rate of 1e-3; a batch size of 16 (apart from medium(.en), where a batch size of 4 was used); and parameter clipping in each gradient step, to clamp the learnt attack segment values of each frame to a maximum absolute value of $\epsilon = 0.02$ to satisfy the imperceptibility constraint, as given in Equation 5. The larger the target Whisper model, the greater the number of training epochs are required to guarantee a successful universal attack segment. The following number of training epochs are used for each Whisper model: tiny(.en) (40 epochs); base(.en) (40 epochs); small(.en) (120 epochs); and medium(.en) (160 epochs). Note that for the base and base.en models, runs over 2 seeds and 3 seeds respectively were required to find a universal adversarial audio segment that was sufficiently powerful (the seed controls the initialization of the adversarial audio segment during its training). Further note that it is empirically observed that increasing the number of training epochs only increases the strength of the universal attack - there is no risk of overfitting, which is perhaps expected as there are so few values being learnt for the universal attack segments.

In typical training setups, there is a risk that excessive training steps can lead to overfitting, compromising test-time evaluation. However, when learning the universal prepend attack in this work, this risk does not exist, as the total number of parameters being learnt are only 10,240 parameters for 0.64-second of audio sampled at 16kHz. This is far smaller than the 100s of millions of parameters typically being trained in the Whisper speech recognition models. As a result, we find that the universal prepend attacks learnt in this work transfer perfectly from the development split of the LBS data on which they are trained, to the test split on which they are evaluated, as per the metrics \emptyset and `asl`, used in this paper.

In the main paper we evaluate the Whisper models in their default setting, where there is no use of the `<notimestamps>` special token, such that the first generated token by the model is always `<|0.0|>`, and only then the text tokens follow. However, during training/learning of the universal attack, we initialized \mathbf{y}_0^* as `<startoftranscript>` `<language>` `<task>` `<notimestamps>` and train to predict $y_1 = \text{<endoftext>}$. The fact that the attack transfers so well from training time to test time (despite the mismatch in decoder input initialization), suggests that we have learnt a genuine acoustic realization of the `<endoftext>` special token.

A further point to note is that we conducted separate experiments to confirm that when evaluating the adversarial attack, for no sample is the voice activity detector (used as part of Whisper’s transcription framework) returning ‘no speech’, i.e., the universal acoustic adversarial segment is a genuine realization of the `<endoftext>` special token. It is unlikely the voice activity detector would ever be activated at evaluation time as during the training of the universal attack segment the internal voice activity detector is not present.

A.4 Computational Requirements

Experiments were run on the A100 Nvidia GPU hardware. To learn the 0.64-second universal acoustic adversarial attack using the development split of the LBS dataset, the number of GPU hours vary with the target model size and the number of training epochs used per model. Table 8 summarizes the training epochs (for

a successful attack) and the number of subsequent required GPU hours for each model size. Further note that the *medium* models required a maximum batch size of 4 to fit in the GPU RAM, whilst the other models could afford a batch size of 16.

Model	Epochs	# GPU hours
tiny	40	0.45
base	40	0.92
small	120	2.6
medium	160	8.4

Table 8: A100 GPU hours to learn a universal acoustic adversarial attack per target model using the development split of the LBS dataset.

A.5 Licensing

All datasets used are publicly available or specifically approved for experiments in this work (MGB3). Our implementation utilizes the PyTorch 1.12 framework, an open-source library. We observe the MIT license under which the Whisper’s code and model weights are released.

B Complete Experimental Analysis Results

Experimental results in the main paper are presented for eight Whisper models. However, the results for the *attack success analysis* (Table 2 and Table 3) and the *saliency analysis* (Table 4) are given for only the tiny and medium model. Here we present the full results on all eight different models for completeness. The results maintain the same trends as stated in the analysis in the main paper. The complete *attack success analysis* results are given in Table 9 and Table 10, whereas the the complete *saliency analysis* results are given in Table 11.

C Transferability Across Models

In this section we explore the transferability of the learnt universal acoustic adversarial attack segments across different Whisper models. Table 12 shows that there is no transferability across model sizes. This is an expected result: the attack aims to learn an acoustic realization of a non-acoustic event (`<endoftext>` token), but the fact that there is no real audio for the `<endoftext>` the attack is unable to find a genuine acoustic realization. Hence, the acoustic

Model	Samples	No Attack	Attack
tiny.en	successful	17.8	0.0
	failed	78.5	16.1
tiny	successful	17.8	0.0
	failed	74.6	11.0
base.en	successful	17.5	0.0
	failed	50.4	19.4
base	successful	17.6	0.0
	failed	60.2	11.4
small.en	successful	17.5	0.0
	failed	31.4	10.5
small	successful	17.1	0.0
	failed	38.7	11.7
medium.en	successful	17.4	0.0
	failed	64.8	18.9
medium	successful	17.2	0.0
	failed	43.2	25.0

Table 9: Average Sequence Length (*as1*) of generated transcripts for *successful* attack samples and *failed* attack samples. A successful sample is where the universal acoustic attack causes the Whisper model to generate a zero-length transcription (perfectly muted).

Model	WER	INS	DEL	SUB
tiny.en	80.02	0.00	79.52	0.51
tiny	88.38	0.36	85.40	2.29
base.en	64.46	0.38	61.30	2.53
base	89.57	1.97	81.30	4.53
small.en	75.50	0.24	66.46	8.62
small	72.95	0.40	69.02	3.23
medium.en	72.88	0.38	70.79	1.44
medium	50.76	2.70	43.75	2.94

Table 10: Word Error Rate (WER) and breakdown (insertions, deletions and substitutions) between the transcript generated with no attack and the transcript generated with the universal acoustic attack, for the *failed* attack samples only. A failed sample is where the universal acoustic attack is unable to make Whisper generate a zero-length transcription.

realization being learnt is specific realization of the `<endoftext>` token of the target model, such that the attack segment is specific to the parameter states of the target model. As different models have very different parameters and values, the learnt universal acoustic segments are distinct and do not transfer across the models. Nevertheless, the universal acoustic adversarial attack segment could always be trained with multiple target models and thus would be effective for multiple target models simultaneously. Future work will explore this notion further.

Model	Samples	Adv, \tilde{s}	Speech, s
tiny.en	successful	617 ± 264	1.12 ± 15.6
	failed	61.0 ± 97.1	65.8 ± 107
tiny	successful	835 ± 332	4.80 ± 49.0
	failed	101 ± 33.1	192 ± 517
base.en	successful	3527 ± 1325	6.05 ± 46.8
	failed	343 ± 198	91.8 ± 246
base	successful	4946 ± 1480	13.9 ± 140
	failed	483 ± 183	509 ± 683
small.en	successful	4339 ± 1263	26.6 ± 309
	failed	727 ± 308	375 ± 619
small	successful	3502 ± 1082	23.1 ± 102
	failed	447 ± 254	356 ± 395
medium.en	successful	3205 ± 1099	123 ± 1185
	failed	114 ± 33.4	812 ± 1950
medium	successful	3371 ± 1254	143 ± 548
	failed	314 ± 170	803 ± 950

Table 11: Average saliency for the adversarial segment and speech segment (across LBS dataset) for successful and failed samples. A successful sample is where the universal acoustic attack causes the Whisper model to generate a zero-length transcription (perfectly muted).

src	tgt	\emptyset (%)	as1
tiny	base	0.0	17.8
	small	0.0	17.3
	medium	0.0	17.8
medium	small	0.0	17.3
	base	0.0	17.8
	tiny	0.0	17.9

Table 12: Transferability of universal acoustic adversarial attack learnt on the source (*src*) model and evaluated on the target (*tgt*) model.


D Saliency Analysis Plots

In the results in the main paper, we conduct a saliency analysis as per Section 5.2, to better understand the mechanism of the adversarial attack for when it succeeds relative to when it fails. In Table 4 we report the average saliency for the adversarial segment, \tilde{s} and the average saliency for the speech signal, s . It is also useful to visualize the frame-level saliency, to understand how the saliency changes from the adversarial segment per frame to the speech signal. In Figure 5 we have selected two random speech samples: one for which the universal acoustic attack succeeded, and one for which


it failed. As we would expect, we observe two very different frame-level saliency patterns. For a successful attack, the saliency is heavily concentrated in the adversarial segment and then suddenly decays for the speech signal, whereas for the failed samples, the converse appears to be true.

E Spectrogram Plots

Log-mel spectrograms give a frequency-time representation of audio signals in a manner that can help to interpret the nature of the audio signal. The main paper gives an example of a log-mel spectrogram for an audio signal where a universal acoustic segment (learnt for the Whisper medium model) has been prepended to a specific speech signal. For reference, in this section we provide the remaining spectrograms. Figure 6 gives the spectrograms for the universal acoustic adversarial segments learnt for each target Whisper model, where the adversarial segment is of length 0.64-seconds and a maximum amplitude of $\epsilon = 0.02$, to satisfy the imperceptibility constraint of Equation 5. Next, in Figure 7 we present the spectrograms for different universal adversarial attack segments with a different strictness of the amplitude constraint, ϵ . As would be expected, the stricter the constraint the lower the relative power of the adversarial segment relative to the speech signal.

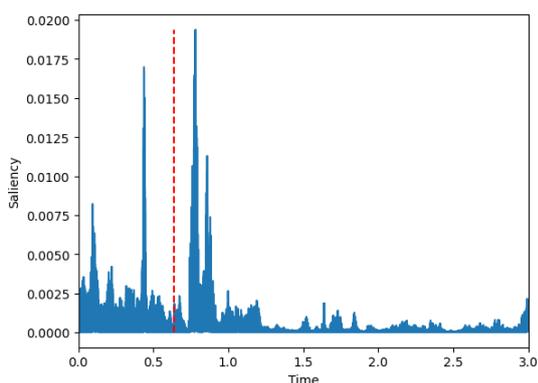

(a) Successful Attack

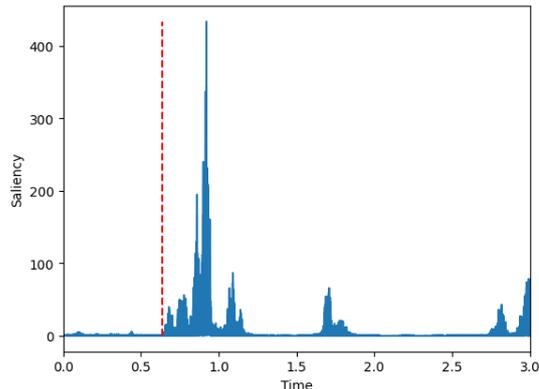

(b) Unsuccessful Attack

Figure 5: Frame-level saliency plot, where the first 0.64-second represents the universal acoustic attack segment and the remainder is a randomly sampled speech signal (truncated to a total length of 3 seconds) for the target model Whisper medium.en was un/successfully muted by the universal adversarial attack.

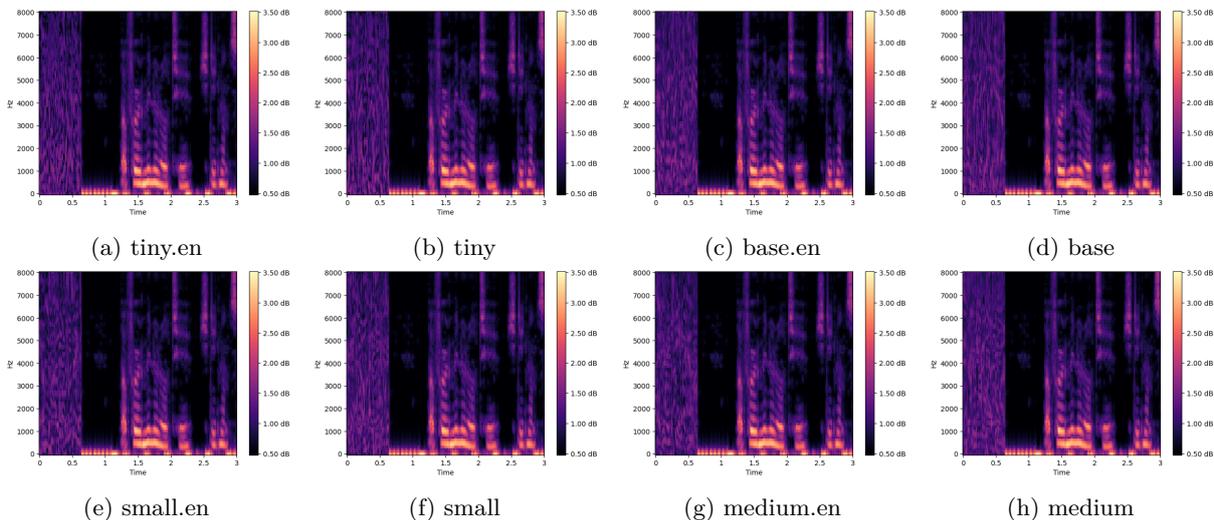


Figure 6: Mel spectrogram of universal acoustic segment (0.64s) prepended to a random speech sample from LBS dataset (truncated to a total length of 3s) for different target Whisper models.

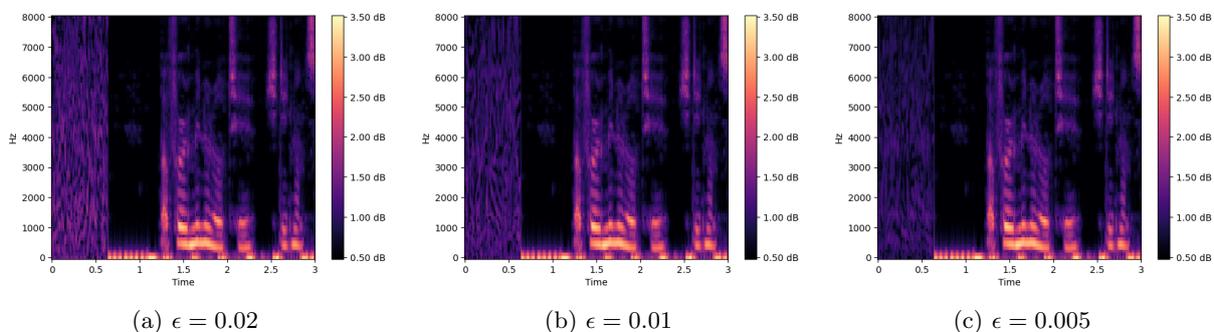


Figure 7: Mel spectrogram of universal acoustic segment (0.64s) prepended to a random speech sample from LBS dataset (truncated to a total length of 3s) for different amplitude constraints ϵ for the target model Whisper tiny.en.