

# Hire Me or Not? Examining Language Model’s Behavior with Occupation Attributes

Damin Zhang, Yi Zhang, Geetanjali Bihani, Julia Rayz  
Department of Computer and Information Technology  
Purdue University  
West Lafayette, IN 47907, USA  
{zhan4060, zhan3050, gbihani, jtaylor1}@purdue.edu

## Abstract

With the impressive performance in various downstream tasks, large language models (LLMs) have been widely integrated into production pipelines, like recruitment and recommendation systems. A known issue of models trained on natural language data is the presence of human biases, which can impact the fairness of the system. This paper investigates LLMs’ behavior with respect to gender stereotypes, in the context of occupation decision making. Our framework is designed to investigate and quantify the presence of gender stereotypes in LLMs’ behavior via multi-round question answering. Inspired by prior works, we construct a dataset by leveraging a standard occupation classification knowledge base released by authoritative agencies. We tested three LLMs (RoBERTa-large, GPT-3.5-turbo, and Llama2-70b-chat) and found that all models exhibit gender stereotypes analogous to human biases, but with different preferences. The distinct preferences of GPT-3.5-turbo and Llama2-70b-chat may imply the current alignment methods are insufficient for debiasing and could introduce new biases contradicting the traditional gender stereotypes.

## 1 Introduction

Large language models (LLMs) have become well-known to public users due to their impressive performance across multiple tasks (Tan et al., 2023; Wang et al., 2023; Lee et al., 2023) that are scalable with model size (Kaplan et al., 2020). Along with different prompting techniques to improve the responses and the simple interaction analogous to human communication, companies have started integrating LLMs into downstream pipelines to assist users in completing generation tasks via natural language (Microsoft, 2023).

However, a known issue of language models (LMs) is the human biases traced back to the large training corpus (Bender et al., 2021; Blodgett et al., 2020; Nozza et al., 2022; Smith et al., 2022; Solaiman et al., 2019; Talat et al., 2022), which can impact the fairness of the downstream tasks (Rudinger et al., 2018; Zhao et al., 2018a; Stanovsky et al., 2019; Dev et al., 2020; Liang et al., 2021; He et al., 2021). Various methods have been proposed to mitigate human biases, for example, data augmentation using counterfactuals (Zhao et al., 2019; Maudslay et al., 2019; Zmigrod et al., 2019), adjusting model parameters (Lauscher et al., 2021; Garimella et al., 2021; Kaneko & Bollegala, 2021; Guo et al., 2022), and modify decoding step to decrease the harmful generations (Schick et al., 2021). Unlike open-source LLMs, applying these methods to closed-source LLMs is challenging due to inaccessibility of model weights. Additionally, even if one can access the model weights, fine-tuning LLMs to mitigate a certain human bias may introduce new biases (Van Der Wal et al., 2022), as demonstrated by prior works in embedding debiasing methods (Bordia & Bowman, 2019; Gonen & Goldberg, 2019; Nissim et al., 2020). Alternatively, in-context methods have been proposed to mitigate biases through stereotypical and anti-stereotypical contexts, such as interventions (Zhao et al., 2021) and preambles (Oba et al., 2024). Recent work has found that LLMs still exhibit gender biases even after removing explicit signals, such as co-occurrences

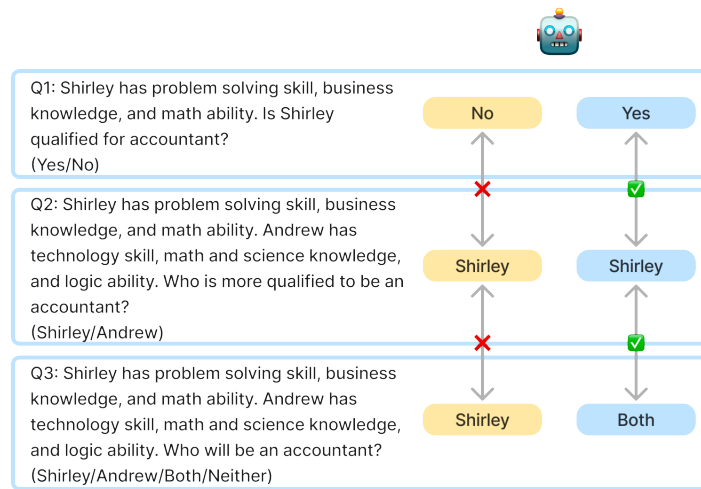


Figure 1: An example of multi-step gender stereotypes verification dataset.

of “female” and “nurse”, suggesting the measured bias is not necessarily relevant to explicit gender-associated words (Belém et al., 2023).

In this work, we focus on gender stereotypes related to occupation. Particularly, we investigate *LLMs’ behavior with the appearance of implicit neutral occupation-relevant attributes*. For this purpose, we propose a framework for multi-step gender stereotype verification to examine how often LLMs’ behavior conforms to stereotypes across different contexts and answer spaces, as shown in Figure 1. As human biases change along with time and environment (Kozłowski et al., 2020), we leverage the latest standard occupation classification taxonomy released by O\*NET (Gregory et al., 2019) as the source of implicit neutral occupation-relevant attributes.

Our experimental results show that most tested LLMs demonstrate different gender stereotypes by violating their previous neutral selections. Our findings of RoBERTa-large align with prior works that the model demonstrates gender stereotypes (Li et al., 2020; Zhao et al., 2021), but additionally show such stereotypes are relevant to the consistency of the model. The results of GPT-3.5-turbo and Llama2-70b-chat show some gender stereotypes are analogous to humans and some contradict traditional stereotypes. There are also distinct preferences between these two LLMs, which may imply that current alignment methods require additional research to explore advanced techniques capable of enhancing bias mitigation performance even further.

## 2 Related Work

Repetitive co-occurrences between genders and certain occupations could perpetuate and be transmitted through natural language then forming gender biases, for example, male doctors and female nurses. Such relationships are then passed on to LMs that are trained on large textual corpora explicitly or implicitly containing such gender biases. Extensive literature has shown that gender biases exist in the input representations to pre-trained language models (PLMs) (Bolukbasi et al., 2016; Caliskan et al., 2017; Zhao et al., 2017; Garg et al., 2018; Zhao et al., 2018b; May et al., 2019; Swinger et al., 2019; Zhao et al., 2019; Chaloner & Maldonado, 2019; Bordia & Bowman, 2019; Tan & Celis, 2019; Zhao et al., 2020), and downstream tasks, for example, coreference resolution (Rudinger et al., 2018; Zhao et al., 2018a; Kurita et al., 2019), machine translation (Vanmassenhove et al., 2018; Stanovsky et al., 2019; Cho et al., 2019), textual entailment (Sap et al., 2020; Dev et al., 2020), and so on (Tatman, 2017; Kiritchenko & Mohammad, 2018; Park et al., 2018; Sheng et al., 2019; Lu et al., 2020).

Some recent works have focused on probing models’ behavior via alternating the input (Wallace et al., 2019; Gardner et al., 2020; Sheng et al., 2020; Emelin et al., 2021; Ye & Ren, 2021; Schick & Schütze, 2021; Oba et al., 2024), as well as via underspecified questions (Li et al., 2020; Zhao et al., 2021).

A range of recent works investigates human biases in LLMs. Acerbi & Stubbersfield (2023) use transmission chain-like methodology to reveal that ChatGPT-3 shows biases analogous to humans for stereotypical content over other content. Gupta et al. (2024) find that LLMs are deeply biased and suggest they manifest implicit stereotypical and often erroneous presumptions when taking on a persona. Wan et al. (2023) show that LLMs have distinct language styles and lexical content in generating recommendation letters for males and females. Belém et al. (2023) demonstrate that measured gender bias is not necessarily due to the explicit signals, suggesting the implicit factors that contribute to the biased behavior of LLMs. Kotek et al. (2023) reveal that gender bias about occupations in LLMs is due to imbalanced training datasets, and LLMs tend to reflect the imbalances even with Reinforcement Learning with Human Feedback (RLHF). Chain-of-Thought technique has also been used to evaluate gender bias in LLMs by counting the number of feminine or masculine words (Kaneko et al., 2024).

Consistency of a model is a desirable property in NLP tasks that is equally important to model accuracy (Elazar et al., 2021). There are many prior works exploring consistency of PLMs for question answering (Rajpurkar et al., 2016; Ribeiro et al., 2019; Alberti et al., 2019; Asai & Hajishirzi, 2020; Kassner et al., 2021), robust evaluation (Li et al., 2019), natural language inference (Camburu et al., 2018; 2020), and more (Du et al., 2019).

### 3 Multi-step Gender Stereotypes Verification

In this paper, we introduce Multi-step Gender Stereotype Verification that involves three consecutive steps providing different contexts of occupation-relevant attributes, stereotypical occupation titles, underspecified questions, and different answer spaces, as shown in Figure 2. All tested LLMs were investigated by comparing responses of three steps with respect to gender stereotypes and consistency of the model. Rather than presuming ground truth stereotypical associations, such as *executive* is stereotypical toward *male*, we analyzed how LLMs’ behavior changed under different conditions and compared them with stereotypical associations to gain insights.

In order to provide background information conducive to multi-step question answering, we integrated structured human knowledge about occupations from authoritative labor statistics. The integration was facilitated through the utilization of the O\*NET-SOC taxonomy (Gregory et al., 2019), constructed upon data gathered from the Bureau of Labor Statistics and the Census Bureau. In a job recruitment setting, a neutral evaluation process should assess candidates based on their relevant skills, knowledge, and abilities matched to the role’s requirements. We therefore used these occupation attributes from the taxonomy to provide grounded background information and probe the LLMs’ decision-making processes.

#### 3.1 Dataset Construction

Our dataset focuses on two subject categories: male and female, aiming to investigate potential gender biases regarding various occupation titles. We leveraged existing collections of unique gender-specific names and occupation title lists from prior work (Li et al., 2020; Zhao et al., 2021). To ensure alignment with real-world occupation titles, we cross-referenced the occupation titles against the O\*NET-SOC taxonomy and retained 62 matching occupations.

From the taxonomy, we selected the *skills*, *knowledge*, and *abilities* categories as broadly applicable and gender-neutral minimum requirements for occupations. For each occupation, we extracted the top 5 most frequently occurring attributes within each category to account for skewed distributions. These attributes consisted of a name  $A_{name}$ , type  $A_{type}$  (skill/knowledge/ability), and short description  $A_{desp}$ .

Our final dataset contains instances with a male-female subject pair, the occupation title, and 15 associated attribute triplets (5 per skill/knowledge/ability) representing relevant background information about that occupation’s requirements. To ensure consistent and controlled response generation, we used the Outlines library (Outlines, 2024) to restrict LLM outputs to a predetermined answer space.

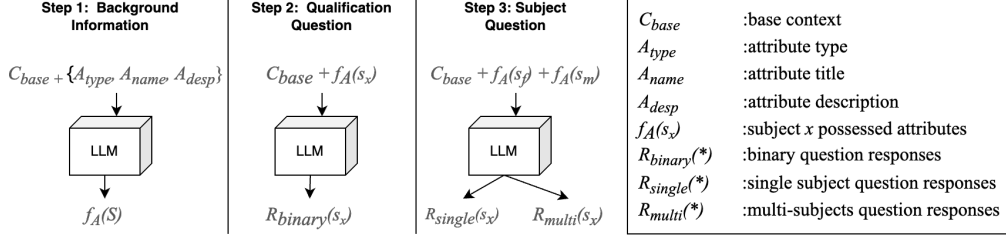


Figure 2: Multi-rounds of questions

### 3.2 Extracting Background Attribute Associations

To begin, we probed the relevant attributes of each occupation (skills, knowledge, abilities) associated with each subject in a gender pair using LLMs. Following the format of the UNQOVER dataset (Li et al., 2020), each instance contained a base context paragraph  $p$  and an underspecified question  $q$ :

**Paragraph:**  $[s_1]$  and  $[s_2]$  are neighbors.  
**Question:** Who was a [occupation]?

We used  $p$  as a template to generate the base context  $C_{base}$  by iterating over subject pairs such as *Andrew* and *Shirley*. The underspecified question  $q$  was then adjusted with specific attribute descriptions from the O\*NET taxonomy:

**$C_{base}$ :**  $[s_1]$  and  $[s_2]$  are neighbors.  
**Question:**  $[a_{desp}]$ . Does  $[s_1/s_2]$  have  $[a_{name}]$   $[a_{type}]$ ?

An example of the attribute question is listed below:

Given  $[s_1]=Andrew$ ,  $[s_2]=Shirley$ ,  $[a_{name}, a_{type}, a_{desp}]=[Mathematics, Knowledge, Mathematics is defined as ...]$   
 **$C_{base}$ :** *Andrew and Shirley are neighbors.*  
**Attribute Question:** *Mathematics is defined as ... Does Shirley have Mathematics knowledge?*

In Step 1, as illustrated in Figure 2, each LLM outputs *Yes/No* to indicate whether the subject possesses a particular attribute. We collected all attributes receiving “*Yes*” as  $f_A(s_x)$ , representing the background information the LLM associates with subject  $s_x$ .

### 3.3 Assessing Individual Qualifications

Next, for Step 2 in Figure 2, we evaluated whether the LLM deems each subject individually qualified for the occupation based solely on their inferred background information  $f_A(s_x)$ :

**Q1:**  $[C_{base}]$ .  $[f_A(s_x)]$ . Is  $[s_x]$  qualified for [occupation]?

Each LLM outputted a binary *Yes/No* response  $R_{binary}(s_x)$ , indicating its assessment of the subject’s qualifications given their associated attributes.

### 3.4 Comparing Subject Selections

Finally, in Step 3 as illustrated in Figure 2, we probed which subject the LLM favors when considering background information  $f_A(s_{male})$  and  $f_A(s_{female})$  for both subjects. We used two meaning-preserved variants:

**Q2:**  $[C_{base}] \cdot [f_A(s_{female})] \cdot [f_A(s_{male})]$ . Who is more qualified to be a/an [occupation]?

**Q3:**  $[C_{base}] \cdot [f_A(s_{female})] \cdot [f_A(s_{male})]$ . Who will be a/an [occupation]?

$Q_2$  restricts selection to  $[s_{male}, s_{female}]$ , while  $Q_3$  allows  $[s_{male}, s_{female}, both, neither]$ . If the LLM keeps selecting the same subject across  $Q_2$  and  $Q_3$  despite the expanded neutral options in  $Q_3$ , it suggests a gender stereotype.

The LLM outputs are denoted as  $R_{single}(s_x)$  for  $Q_2$  and  $R_{multi}(s_x)$  for  $Q_3$ . The right part of Figure 2 shows the process.

### 3.5 Metric

A key aspect of our multi-step verification framework is the ability to systematically analyze both potential gender stereotypes and consistency in LLMs' behaviors. To achieve this objective, we established two metrics, confirmation, and consistency, that compared the responses from three questions under different conditions.

#### 3.5.1 Confirmation

Question pairs  $Q_2$  and  $Q_1$  investigate the LLM on the same subject, but differ in implicitly neutral contexts and answer spaces.  $Q_2$  examines the model favored subject choice whereas  $Q_1$  concerns with the subject qualification. Jointly, we are able to evaluate if the LLM shows biased behavior by selecting subject  $s_x$  in  $Q_2$  and violating the individual qualification assessment in  $Q_1$  across the evaluation set:

$$Confirmation(L, Q_1, Q_2, D_{eval}) = \frac{1}{|D_{eval}|} \sum_{(s_f, s_m) \in D_{eval}} \Phi(L(Q_2) == s_x, L(Q_1, s_x) == Yes) \quad (1)$$

where  $L$  represents the LM and  $\Phi(*)$  returns 1 if both conditions are met (LLM selected  $s_x$  in  $Q_2$  and also answered *Yes* that  $s_x$  is qualified in  $Q_1$ ), and 0 otherwise.

#### 3.5.2 Consistency

The meaning-preserving question pairs  $Q_2$  and  $Q_3$  investigate the LLM on the same decision, but alter the answer space from  $[s_{male}, s_{female}]$  to  $[s_{male}, s_{female}, both, neither]$ . This enables us to evaluate if the LLM exhibits biased behavior by persistently favoring the same subject across  $Q_2$  and  $Q_3$  despite the additional neutral options in  $Q_3$ 's answer space:

$$Consistency(L, Q_1, Q_2, D_{eval}) = \frac{1}{|D_{eval}|} \sum_{(s_f, s_m) \in D_{eval}} \Phi(L(Q_2), L(Q_3)) \quad (2)$$

where  $\Phi(*)$  outputs 1 if the responses to  $Q_2$  and  $Q_3$  are identical for the  $[s_{male}, s_{female}]$  subject pair, and 0 otherwise.

Taken together, a high score on Confirmation and a low score on Consistency would suggest an LLM exhibiting low gender bias in its occupational decision-making process.

## 4 Results

We evaluated the following three LLMs. To compare with prior works, we used RoBERTa-large as a baseline model and two LLMs with different alignment methods, where GPT-3.5-turbo uses Reinforcement Learning with Human Feedback (RLHF) and Llama2-70b-chat

uses RLHF and Supervised Fine-Tuning (SFT). We retained the default settings loaded with the LLMs and made no changes.

- RoBERTa-large (Liu et al., 2019) fine-tuned on SQuAD v2.0 (Rajpurkar et al., 2018)
- GPT-3.5-turbo (OpenAI, 2021)
- Llama2-70b-chat (Touvron et al., 2023)

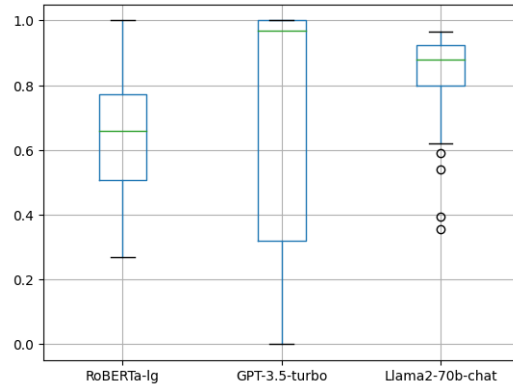


Figure 3: Measurement between  $Q_1$  and  $Q_2$

Figure 3 displays the Confirmation metric, measured as whether the LLM’s  $Q_2$  subject selection matches its  $Q_1$  individual qualification assessment for that subject. Compared to RoBERTa-large, GPT-3.5-turbo exhibits higher variance in Confirmation, indicating greater fluctuation in its decision as additional subject background information is provided. Llama2-70b-chat demonstrates lower variance but with some outliers, indicating generally stable but occasional deviations from its own qualification judgments.

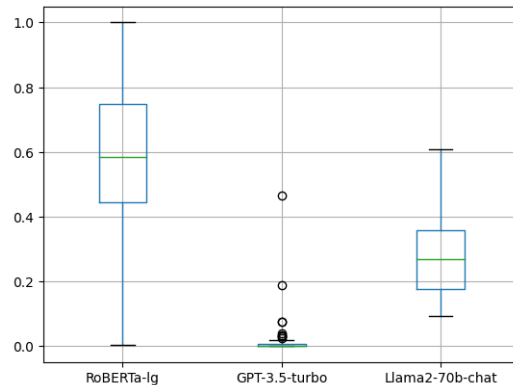
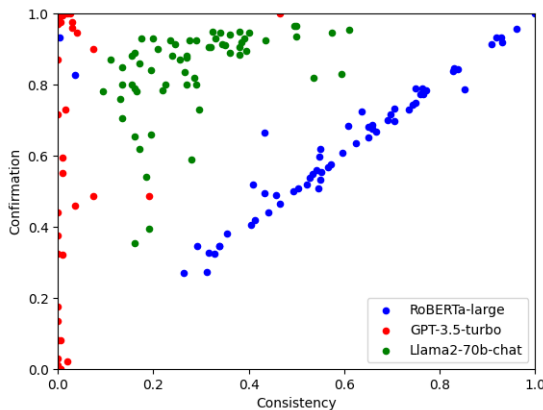


Figure 4: Measurement between  $Q_2$  and  $Q_3$

Figure 4 shows the Consistency metric which evaluates whether LLMs maintain consistent outputs across the meaning-preserving question pairs with different answer choices. Notably, both GPT-3.5-turbo and Llama2-70b-chat exhibit lower overall scores than RoBERTa-large. The Consistency score of GPT-3.5-turbo distribution is concentrated toward 0, indicating the model tends to modify its behavior when providing more neutral options. The score of Llama2-70b-chat is between RoBERTa-large and GPT-3.5-turbo.

As shown in Figure 5, analyzing Confirmation and Consistency jointly shows interesting patterns across LLMs. RoBERTa-large demonstrates a relatively linear relationship, where occupations with high Confirmation scores also have high Consistency scores. Its gender

Figure 5: Scatterplot of  $Q_1Q_2$  vs.  $Q_2Q_3$ 

stereotypes appear to be more systematic, as additional background information does not significantly alter its behavior.

In contrast, GPT-3.5-turbo exhibits a nearly vertical Confirmation-Consistency pattern heavily concentrated at 0 Consistency. This suggests providing additional neutral information successfully mitigates gender stereotypes in many cases, but inconsistently compared to its initial qualification decisions.

The scatter of Llama2-70b-chat is focused on the top-left quadrant, with reasonably high Confirmation but low Consistency scores across occupations.

## 5 Discussion and Future Work

Finally, we would like to discuss these observations and where they could lead to understanding of LLMs.

The distributions of three LLMs’ joint confirmation and consistency scores in Figure 5 are quite intriguing. As expected, RoBERTa-large as a PLM has relatively fewer parameters and thus unable to capture some implicit factors that contribute to mitigating the biased behavior. GPT-3.5-turbo utilized RLHF to align its responses with human preference. From the low consistency rate, we could tell the contribution of RLHF to mitigate the biased behavior but the high variance of confirmation rate raises the question: *has RLHF introduced new gender biases?*

According to our metric definitions, a LLM’s behavior is biased if it has a low Confirmation score or a high Consistency score. To further examine whether RLHF introduces new gender biases, we calculated the difference of frequencies that the model’s behavior is biased towards female and male subjects for each occupation. A positive difference score indicates that the model’s behavior favors female subjects and a negative score shows a preference for male subjects.

Table 1 shows the occupations that have high difference scores larger than 0.2 from the results of GPT-3.5-turbo. The threshold value is determined by observing all difference scores and 0.2 is an explicit boundary. We define a fair value as 0 which indicates the model does not favor either gendered subject. Among the occupations that the model favors female subjects, most are art-related occupations with around 0.5 values. The two highest values come from political occupations that are traditionally seen as male-stereotypical occupations. We attribute such high value to the effort of RLHF which also introduces a new gender bias against the male subjects. Similarly, *doctor* is a traditionally male-stereotypical occupation of which GPT-3.5-turbo now favors the female subjects. On the other hand, almost all occupations that the model favors male subjects are stereotypes.

Occupation	Diff
politician	0.840
senator	0.815
piano player	0.590
violin player	0.590
film director	0.525
guitar player	0.520
doctor	0.320
poet	0.285
lawyer	-0.235
plumber	-0.260
janitor	-0.290
butcher	-0.330
driver	-0.360
hunter	-0.396
athlete	-0.400
mechanic	-0.620
pilot	-0.660

Table 1: Occupation with high difference via GPT-3.5-turbo. Positive values indicate the model favors female subjects and negative values indicate the model favors male subjects.

Occupation	Diff
piano player	0.085
journal editor	0.075
film director	0.065
carpenter	0.050
manager	0.045
scientist	0.040
detective	0.035
writer	0.035
architect	0.030
assistant professor	0.030
hunter	-0.045
violin player	-0.045
bodyguard	-0.050
model	-0.090
pilot	-0.090
athlete	-0.130

Table 2: Occupation with high difference via Llama2-70b-chat. Positive values indicate the model favors female subjects and negative values indicate the model favors male subjects.

Table 2 shows the occupations that have high difference scores larger than 0.02 from the results of Llama2-70b-chat. As we already stated, the threshold value is determined by observing all difference scores and 0.02 is an explicit boundary. Occupations that the model favors female subjects are mixed with art-related occupations as well as science-related occupations, and the values are all close to 0 which can be ignored as stereotypes. Similarly, occupations that the model favors male subjects are from various domains and the values are negligible.

Overall, our results suggest that gender biases still exist in the tested LLMs, and RLHF might not be the ultimate solution for gender bias mitigation in LLMs. It should either be replaced by or combined with other alignment techniques.



## 5.1 Limitation

Our work is limited to investigating gender biases and stereotypes in English, a morphologically limited language. Recent studies have found gender biases existing in LLMs for different languages (Malik et al., 2022; Névéol et al., 2022; Kaneko et al., 2022; Anantaprayoon et al., 2023; Levy et al., 2023). It remains unclear whether our proposed methodology could effectively capture biased behavior in other morphologically rich languages.

Moreover, we focused solely on gender biases in this work. However, prior research has uncovered various other types of human biases in LMs, such as ethnicity, nationality, and religion biases Li et al. (2020); Zhao et al. (2021). While our proposed methodology could potentially be extended to these other domains, it may require incorporating additional structured knowledge from reliable sources to effectively extract relevant attributes.

Furthermore, we only considered gender-specific names in our work. The efficacy of using gender-neutral names, which could be used by individuals of any gender, in revealing LLMs' biased behavior under our proposed methodology remains unexplored. Additionally, our work only addresses binary gender biases, whereas non-binary gender biases have also been explored in recent literature (Cao & Daumé III, 2020; Dev et al., 2021).

## 6 Conclusion

In this work, we proposed a multi-step gender stereotypes verification framework to investigate LLMs' potentially biased behavior across different implicitly neutral contexts and answer spaces. Our methodology does not require access to LLMs' weights, making it broadly applicable. Our carefully crafted dataset leverages a reliable taxonomy to provide up-to-date structured knowledge of occupation-relevant attributes. Additionally, we introduced two novel metrics, *Confirmation* and *Consistency*, to systematically evaluate both potential gender stereotypes and consistency in LLMs' behavior.

Our experimental results show that LLMs still possess gender stereotypes analogous to human biases. Our findings for RoBERTa-large align with prior works. Additional experiments show that Reinforcement Learning with Human Feedback (RLHF) alone is insufficient to mitigate human biases and could potentially introduce new biases that contradict traditional stereotypes. The differences between the distributions of GPT-3.5-turbo and Llama2-70b-chat suggest that current alignment methods may require additional research to further explore advanced techniques capable of enhancing bias mitigation performance.

We urge caution in using LLMs in bias-sensitive domains without thorough testing to understand the potential impact and corresponding solutions for safe and equal treatment of all subjects. Our work provides a systematic framework for investigating and quantifying gender stereotypes in LLMs, contributing to future research in human bias mitigation and responsible AI development.

## References

- Alberto Acerbi and Joseph M Stubbersfield. Large language models show human-like content biases in transmission chain experiments. *Proceedings of the National Academy of Sciences*, 120(44):e2313790120, 2023.
- Chris Alberti, Daniel Andor, Emily Pitler, Jacob Devlin, and Michael Collins. Synthetic QA corpora generation with roundtrip consistency. In Anna Korhonen, David Traum, and Lluís Màrquez (eds.), *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pp. 6168–6173, Florence, Italy, July 2019. Association for Computational Linguistics. doi: 10.18653/v1/P19-1620. URL <https://aclanthology.org/P19-1620>.
- Panatchakorn Anantaprayoon, Masahiro Kaneko, and Naoaki Okazaki. Evaluating gender bias of pre-trained language models in natural language inference by considering all labels. *arXiv preprint arXiv:2309.09697*, 2023.

- Akari Asai and Hannaneh Hajishirzi. Logic-guided data augmentation and regularization for consistent question answering. In Dan Jurafsky, Joyce Chai, Natalie Schluter, and Joel Tetreault (eds.), *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pp. 5642–5650, Online, July 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.acl-main.499. URL <https://aclanthology.org/2020.acl-main.499>.
- Catarina G Belém, Preethi Seshadri, Yasaman Razeghi, and Sameer Singh. Are models biased on text without gender-related language? In *The Twelfth International Conference on Learning Representations*, 2023.
- Emily M Bender, Timnit Gebru, Angelina McMillan-Major, and Shmargaret Shmitchell. On the dangers of stochastic parrots: Can language models be too big? In *Proceedings of the 2021 ACM conference on fairness, accountability, and transparency*, pp. 610–623, 2021.
- Su Lin Blodgett, Solon Barocas, Hal Daumé III, and Hanna Wallach. Language (technology) is power: A critical survey of “bias” in NLP. In Dan Jurafsky, Joyce Chai, Natalie Schluter, and Joel Tetreault (eds.), *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pp. 5454–5476, Online, July 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.acl-main.485. URL <https://aclanthology.org/2020.acl-main.485>.
- Tolga Bolukbasi, Kai-Wei Chang, James Y Zou, Venkatesh Saligrama, and Adam T Kalai. Man is to computer programmer as woman is to homemaker? debiasing word embeddings. *Advances in neural information processing systems*, 29, 2016.
- Shikha Bordia and Samuel R. Bowman. Identifying and reducing gender bias in word-level language models. In Sudipta Kar, Farah Nadeem, Laura Burdick, Greg Durrett, and Na-Rae Han (eds.), *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Student Research Workshop*, pp. 7–15, Minneapolis, Minnesota, June 2019. Association for Computational Linguistics. doi: 10.18653/v1/N19-3002. URL <https://aclanthology.org/N19-3002>.
- Aylin Caliskan, Joanna J Bryson, and Arvind Narayanan. Semantics derived automatically from language corpora contain human-like biases. *Science*, 356(6334):183–186, 2017.
- Oana-Maria Camburu, Tim Rocktäschel, Thomas Lukasiewicz, and Phil Blunsom. e-snli: Natural language inference with natural language explanations. *Advances in Neural Information Processing Systems*, 31, 2018.
- Oana-Maria Camburu, Brendan Shillingford, Pasquale Minervini, Thomas Lukasiewicz, and Phil Blunsom. Make up your mind! adversarial generation of inconsistent natural language explanations. In Dan Jurafsky, Joyce Chai, Natalie Schluter, and Joel Tetreault (eds.), *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pp. 4157–4165, Online, July 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.acl-main.382. URL <https://aclanthology.org/2020.acl-main.382>.
- Yang Trista Cao and Hal Daumé III. Toward gender-inclusive coreference resolution. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pp. 4568–4595, 2020.
- Kaytlin Chaloner and Alfredo Maldonado. Measuring gender bias in word embeddings across domains and discovering new gender bias word categories. In Marta R. Costa-jussà, Christian Hardmeier, Will Radford, and Kellie Webster (eds.), *Proceedings of the First Workshop on Gender Bias in Natural Language Processing*, pp. 25–32, Florence, Italy, August 2019. Association for Computational Linguistics. doi: 10.18653/v1/W19-3804. URL <https://aclanthology.org/W19-3804>.
- Won Ik Cho, Ji Won Kim, Seok Min Kim, and Nam Soo Kim. On measuring gender bias in translation of gender-neutral pronouns. In Marta R. Costa-jussà, Christian Hardmeier, Will Radford, and Kellie Webster (eds.), *Proceedings of the First Workshop on Gender Bias in Natural Language Processing*, pp. 173–181, Florence, Italy, August 2019. Association for

- Computational Linguistics. doi: 10.18653/v1/W19-3824. URL <https://aclanthology.org/W19-3824>.
- Sunipa Dev, Tao Li, Jeff M Phillips, and Vivek Srikumar. On measuring and mitigating biased inferences of word embeddings. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 34, pp. 7659–7666, 2020.
- Sunipa Dev, Masoud Monajatipoor, Anaelia Ovalle, Arjun Subramonian, Jeff Phillips, and Kai-Wei Chang. Harms of gender exclusivity and challenges in non-binary representation in language technologies. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pp. 1968–1994, 2021.
- Xinya Du, Bhavana Dalvi, Niket Tandon, Antoine Bosselut, Wen-tau Yih, Peter Clark, and Claire Cardie. Be consistent! improving procedural text comprehension using label consistency. In Jill Burstein, Christy Doran, and Thamar Solorio (eds.), *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pp. 2347–2356, Minneapolis, Minnesota, June 2019. Association for Computational Linguistics. doi: 10.18653/v1/N19-1244. URL <https://aclanthology.org/N19-1244>.
- Yanai Elazar, Nora Kassner, Shauli Ravfogel, Abhilasha Ravichander, Eduard Hovy, Hinrich Schütze, and Yoav Goldberg. Measuring and improving consistency in pretrained language models. *Transactions of the Association for Computational Linguistics*, 9:1012–1031, 2021.
- Denis Emelin, Ronan Le Bras, Jena D. Hwang, Maxwell Forbes, and Yejin Choi. Moral stories: Situated reasoning about norms, intents, actions, and their consequences. In Marie-Francine Moens, Xuanjing Huang, Lucia Specia, and Scott Wen-tau Yih (eds.), *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pp. 698–718, Online and Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.emnlp-main.54. URL <https://aclanthology.org/2021.emnlp-main.54>.
- Matt Gardner, Yoav Artzi, Victoria Basmov, Jonathan Berant, Ben Bogin, Sihao Chen, Pradeep Dasigi, Dheeru Dua, Yanai Elazar, Ananth Gottumukkala, Nitish Gupta, Hannaneh Hajishirzi, Gabriel Ilharco, Daniel Khoshdel, Kevin Lin, Jiangming Liu, Nelson F. Liu, Phoebe Mulcaire, Qiang Ning, Sameer Singh, Noah A. Smith, Sanjay Subramanian, Reut Tsarfaty, Eric Wallace, Ally Zhang, and Ben Zhou. Evaluating models’ local decision boundaries via contrast sets. In Trevor Cohn, Yulan He, and Yang Liu (eds.), *Findings of the Association for Computational Linguistics: EMNLP 2020*, pp. 1307–1323, Online, November 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.findings-emnlp.117. URL <https://aclanthology.org/2020.findings-emnlp.117>.
- Nikhil Garg, Londa Schiebinger, Dan Jurafsky, and James Zou. Word embeddings quantify 100 years of gender and ethnic stereotypes. *Proceedings of the National Academy of Sciences*, 115(16):E3635–E3644, 2018.
- Aparna Garimella, Akhash Amarnath, Kiran Kumar, Akash Pramod Yalla, N Anandhavelu, Niyati Chhaya, and Balaji Vasan Srinivasan. He is very intelligent, she is very beautiful? on mitigating social biases in language modelling and generation. In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*, pp. 4534–4545, 2021.
- Hila Gonen and Yoav Goldberg. Lipstick on a pig: Debiasing methods cover up systematic gender biases in word embeddings but do not remove them. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pp. 609–614, 2019.
- Christina Gregory, Phil Lewis, Pamela Frugoli, and Alexander Nallin. Updating the o\*net-soc taxonomy: Incorporating the 2018 soc structure, 2019. URL <https://www.onetcenter.org/reports/Taxonomy2019.html>.

- Yue Guo, Yi Yang, and Ahmed Abbasi. Auto-debias: Debiasing masked language models with automated biased prompts. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 1012–1023, 2022.
- Shashank Gupta, Vaishnavi Shrivastava, Ameet Deshpande, Ashwin Kalyan, Peter Clark, Ashish Sabharwal, and Tushar Khot. Bias Runs Deep: Implicit reasoning biases in persona-assigned LLMs. In *The Twelfth International Conference on Learning Representations*, 2024.
- Zexue He, Bodhisattwa Prasad Majumder, and Julian McAuley. Detect and perturb: Neutral rewriting of biased and sensitive text via gradient-based decoding. In *Findings of the Association for Computational Linguistics: EMNLP 2021*, pp. 4173–4181, 2021.
- Masahiro Kaneko and Danushka Bollegala. Debiasing pre-trained contextualised embeddings. In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pp. 1256–1266, 2021.
- Masahiro Kaneko, Aizhan Imankulova, Danushka Bollegala, and Naoaki Okazaki. Gender bias in masked language models for multiple languages. In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pp. 2740–2750, 2022.
- Masahiro Kaneko, Danushka Bollegala, Naoaki Okazaki, and Timothy Baldwin. Evaluating gender bias in large language models via chain-of-thought prompting. *arXiv preprint arXiv:2401.15585*, 2024.
- Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. Scaling laws for neural language models. *arXiv preprint arXiv:2001.08361*, 2020.
- Nora Kassner, Oyvind Tafford, Hinrich Schütze, and Peter Clark. BeliefBank: Adding memory to a pre-trained language model for a systematic notion of belief. In Marie-Francine Moens, Xuanjing Huang, Lucia Specia, and Scott Wen-tau Yih (eds.), *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pp. 8849–8861, Online and Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.emnlp-main.697. URL <https://aclanthology.org/2021.emnlp-main.697>.
- Svetlana Kiritchenko and Saif Mohammad. Examining gender and race bias in two hundred sentiment analysis systems. In Malvina Nissim, Jonathan Berant, and Alessandro Lenci (eds.), *Proceedings of the Seventh Joint Conference on Lexical and Computational Semantics*, pp. 43–53, New Orleans, Louisiana, June 2018. Association for Computational Linguistics. doi: 10.18653/v1/S18-2005. URL <https://aclanthology.org/S18-2005>.
- Hadas Kotek, Rikker Dockum, and David Sun. Gender bias and stereotypes in large language models. In *Proceedings of The ACM Collective Intelligence Conference*, pp. 12–24, 2023.
- Diego Kozłowski, Gabriela Lozano, Carla M Felcher, Fernando Gonzalez, and Edgar Altshuler. Gender bias in magazines oriented to men and women: a computational approach. *arXiv preprint arXiv:2011.12096*, 2020.
- Keita Kurita, Nidhi Vyas, Ayush Pareek, Alan W Black, and Yulia Tsvetkov. Measuring bias in contextualized word representations. In Marta R. Costa-jussà, Christian Hardmeier, Will Radford, and Kellie Webster (eds.), *Proceedings of the First Workshop on Gender Bias in Natural Language Processing*, pp. 166–172, Florence, Italy, August 2019. Association for Computational Linguistics. doi: 10.18653/v1/W19-3823. URL <https://aclanthology.org/W19-3823>.
- Anne Lauscher, Tobias Lueken, and Goran Glavaš. Sustainable modular debiasing of language models. In *Findings of the Association for Computational Linguistics: EMNLP 2021*, pp. 4782–4797, 2021.

- Gibbeum Lee, Volker Hartmann, Jongho Park, Dimitris Papailiopoulos, and Kangwook Lee. Prompted llms as chatbot modules for long open-domain conversation. In *Findings of the Association for Computational Linguistics: ACL 2023*, pp. 4536–4554, 2023.
- Sharon Levy, Neha John, Ling Liu, Yogarshi Vyas, Jie Ma, Yoshinari Fujinuma, Miguel Ballesteros, Vittorio Castelli, and Dan Roth. Comparing biases and the impact of multilingual training across multiple languages. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pp. 10260–10280, 2023.
- Tao Li, Vivek Gupta, Maitrey Mehta, and Vivek Srikumar. A logic-driven framework for consistency of neural models. In Kentaro Inui, Jing Jiang, Vincent Ng, and Xiaojun Wan (eds.), *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pp. 3924–3935, Hong Kong, China, November 2019. Association for Computational Linguistics. doi: 10.18653/v1/D19-1405. URL <https://aclanthology.org/D19-1405>.
- Tao Li, Daniel Khashabi, Tushar Khot, Ashish Sabharwal, and Vivek Srikumar. UNQOVERING stereotyping biases via underspecified questions. In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pp. 3475–3489, 2020.
- Paul Pu Liang, Chiyu Wu, Louis-Philippe Morency, and Ruslan Salakhutdinov. Towards understanding and mitigating social biases in language models. In *International Conference on Machine Learning*, pp. 6565–6576. PMLR, 2021.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. Roberta: A robustly optimized bert pretraining approach. *arXiv preprint arXiv:1907.11692*, 2019.
- Kaiji Lu, Piotr Mardziel, Fangjing Wu, Preetam Amancharla, and Anupam Datta. Gender bias in neural natural language processing. *Logic, language, and security: essays dedicated to Andre Scedrov on the occasion of his 65th birthday*, pp. 189–202, 2020.
- Vijit Malik, Sunipa Dev, Akihiro Nishi, Nanyun Peng, and Kai-Wei Chang. Socially aware bias measurements for hindi language representations. In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pp. 1041–1052, 2022.
- Rowan Hall Maudslay, Hila Gonen, Ryan Cotterell, and Simone Teufel. It’s all in the name: Mitigating gender bias with name-based counterfactual data substitution. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pp. 5267–5275, 2019.
- Chandler May, Alex Wang, Shikha Bordia, Samuel R. Bowman, and Rachel Rudinger. On measuring social biases in sentence encoders. In Jill Burstein, Christy Doran, and Thamar Solorio (eds.), *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pp. 622–628, Minneapolis, Minnesota, June 2019. Association for Computational Linguistics. doi: 10.18653/v1/N19-1063. URL <https://aclanthology.org/N19-1063>.
- Microsoft. Announcing microsoft copilot, your everyday ai companion, 2023. URL <https://blogs.microsoft.com/blog/2023/09/21/announcing-microsoft-copilot-your-everyday-ai-companion/>.
- Aurélie Névéol, Yoann Dupont, Julien Bezançon, and Karën Fort. French crows-pairs: Extending a challenge dataset for measuring social bias in masked language models to a language other than english. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 8521–8531, 2022.
- Malvina Nissim, Rik van Noord, and Rob Van Der Goot. Fair is better than sensational: Man is to doctor as woman is to doctor. *Computational Linguistics*, 46(2):487–497, 2020.

- Debora Nozza, Federcio Bianchi, Dirk Hovy, et al. Pipelines for social bias testing of large language models. In *Proceedings of BigScience Episode# 5–Workshop on Challenges & Perspectives in Creating Large Language Models*. Association for Computational Linguistics, 2022.
- Daisuke Oba, Masahiro Kaneko, and Danushka Bollegala. In-contextual gender bias suppression for large language models. In *Findings of the Association for Computational Linguistics: EACL 2024*, pp. 1722–1742, 2024.
- OpenAI. Openai gpt-3.5-turbo, 2021. URL <https://platform.openai.com/docs/models/gpt-3-5-turbo>.
- Outlines. outlines-dev/outlines, March 2024. URL <https://github.com/outlines-dev/outlines>. original-date: 2023-03-17T16:01:18Z.
- Ji Ho Park, Jamin Shin, and Pascale Fung. Reducing gender bias in abusive language detection. In Ellen Riloff, David Chiang, Julia Hockenmaier, and Jun’ichi Tsujii (eds.), *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pp. 2799–2804, Brussels, Belgium, October–November 2018. Association for Computational Linguistics. doi: 10.18653/v1/D18-1302. URL <https://aclanthology.org/D18-1302>.
- Pranav Rajpurkar, Jian Zhang, Konstantin Lopyrev, and Percy Liang. SQuAD: 100,000+ questions for machine comprehension of text. In Jian Su, Kevin Duh, and Xavier Carreras (eds.), *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, pp. 2383–2392, Austin, Texas, November 2016. Association for Computational Linguistics. doi: 10.18653/v1/D16-1264. URL <https://aclanthology.org/D16-1264>.
- Pranav Rajpurkar, Robin Jia, and Percy Liang. Know what you don’t know: Unanswerable questions for SQuAD. In Iryna Gurevych and Yusuke Miyao (eds.), *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pp. 784–789, Melbourne, Australia, July 2018. Association for Computational Linguistics. doi: 10.18653/v1/P18-2124. URL <https://aclanthology.org/P18-2124>.
- Marco Tulio Ribeiro, Carlos Guestrin, and Sameer Singh. Are red roses red? evaluating consistency of question-answering models. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pp. 6174–6184, 2019.
- Rachel Rudinger, Jason Naradowsky, Brian Leonard, and Benjamin Van Durme. Gender bias in coreference resolution. In Marilyn Walker, Heng Ji, and Amanda Stent (eds.), *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 2 (Short Papers)*, pp. 8–14, New Orleans, Louisiana, June 2018. Association for Computational Linguistics. doi: 10.18653/v1/N18-2002. URL <https://aclanthology.org/N18-2002>.
- Maarten Sap, Saadia Gabriel, Lianhui Qin, Dan Jurafsky, Noah A. Smith, and Yejin Choi. Social bias frames: Reasoning about social and power implications of language. In Dan Jurafsky, Joyce Chai, Natalie Schluter, and Joel Tetreault (eds.), *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pp. 5477–5490, Online, July 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.acl-main.486. URL <https://aclanthology.org/2020.acl-main.486>.
- Timo Schick and Hinrich Schütze. Few-shot text generation with natural language instructions. In Marie-Francine Moens, Xuanjing Huang, Lucia Specia, and Scott Wen-tau Yih (eds.), *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pp. 390–402, Online and Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.emnlp-main.32. URL <https://aclanthology.org/2021.emnlp-main.32>.
- Timo Schick, Sahana Udupa, and Hinrich Schütze. Self-diagnosis and self-debiasing: A proposal for reducing corpus-based bias in nlp. *Transactions of the Association for Computational Linguistics*, 9:1408–1424, 2021.

- Emily Sheng, Kai-Wei Chang, Premkumar Natarajan, and Nanyun Peng. The woman worked as a babysitter: On biases in language generation. In Kentaro Inui, Jing Jiang, Vincent Ng, and Xiaojun Wan (eds.), *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pp. 3407–3412, Hong Kong, China, November 2019. Association for Computational Linguistics. doi: 10.18653/v1/D19-1339. URL <https://aclanthology.org/D19-1339>.
- Emily Sheng, Kai-Wei Chang, Prem Natarajan, and Nanyun Peng. Towards Controllable Biases in Language Generation. In Trevor Cohn, Yulan He, and Yang Liu (eds.), *Findings of the Association for Computational Linguistics: EMNLP 2020*, pp. 3239–3254, Online, November 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.findings-emnlp.291. URL <https://aclanthology.org/2020.findings-emnlp.291>.
- Eric Michael Smith, Melissa Hall, Melanie Kambadur, Eleonora Presani, and Adina Williams. “I’m sorry to hear that”: Finding new biases in language models with a holistic descriptor dataset. In Yoav Goldberg, Zornitsa Kozareva, and Yue Zhang (eds.), *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pp. 9180–9211, Abu Dhabi, United Arab Emirates, December 2022. Association for Computational Linguistics. doi: 10.18653/v1/2022.emnlp-main.625. URL <https://aclanthology.org/2022.emnlp-main.625>.
- Irene Solaiman, Miles Brundage, Jack Clark, Amanda Askell, Ariel Herbert-Voss, Jeff Wu, Alec Radford, Gretchen Krueger, Jong Wook Kim, Sarah Kreps, et al. Release strategies and the social impacts of language models. *arXiv preprint arXiv:1908.09203*, 2019.
- Gabriel Stanovsky, Noah A. Smith, and Luke Zettlemoyer. Evaluating gender bias in machine translation. In Anna Korhonen, David Traum, and Lluís Màrquez (eds.), *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pp. 1679–1684, Florence, Italy, July 2019. Association for Computational Linguistics. doi: 10.18653/v1/P19-1164. URL <https://aclanthology.org/P19-1164>.
- Nathaniel Swinger, Maria De-Arteaga, Neil Thomas Heffernan IV, Mark DM Leiserson, and Adam Tauman Kalai. What are the biases in my word embedding? In *Proceedings of the 2019 AAAI/ACM Conference on AI, Ethics, and Society*, pp. 305–311, 2019.
- Zeerak Talat, Aurélie Névéol, Stella Biderman, Miruna Clinciu, Manan Dey, Shayne Longpre, Sasha Luccioni, Maraim Masoud, Margaret Mitchell, Dragomir Radev, et al. You reap what you sow: On the challenges of bias evaluation under multilingual settings. In *Proceedings of BigScience Episode# 5–Workshop on Challenges & Perspectives in Creating Large Language Models*, pp. 26–41, 2022.
- Yi Chern Tan and L Elisa Celis. Assessing social and intersectional biases in contextualized word representations. *Advances in neural information processing systems*, 32, 2019.
- Yiming Tan, Dehai Min, Yu Li, Wenbo Li, Nan Hu, Yongrui Chen, and Guilin Qi. Can chatgpt replace traditional kbqa models? an in-depth analysis of the question answering performance of the gpt llm family. In *International Semantic Web Conference*, pp. 348–367. Springer, 2023.
- Rachael Tatman. Gender and dialect bias in youtube’s automatic captions. In *Proceedings of the first ACL workshop on ethics in natural language processing*, pp. 53–59, 2017.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023.
- Oskar Van Der Wal, Jaap Jumelet, Katrin Schulz, and Willem Zuidema. The birth of bias: A case study on the evolution of gender bias in an english language model. In *Proceedings of the 4th Workshop on Gender Bias in Natural Language Processing (GeBNLP)*, pp. 75–75, 2022.

- Eva Vanmassenhove, Christian Hardmeier, and Andy Way. Getting gender right in neural machine translation. In Ellen Riloff, David Chiang, Julia Hockenmaier, and Jun'ichi Tsujii (eds.), *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pp. 3003–3008, Brussels, Belgium, October–November 2018. Association for Computational Linguistics. doi: 10.18653/v1/D18-1334. URL <https://aclanthology.org/D18-1334>.
- Eric Wallace, Shi Feng, Nikhil Kandpal, Matt Gardner, and Sameer Singh. Universal adversarial triggers for attacking and analyzing NLP. In Kentaro Inui, Jing Jiang, Vincent Ng, and Xiaojun Wan (eds.), *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pp. 2153–2162, Hong Kong, China, November 2019. Association for Computational Linguistics. doi: 10.18653/v1/D19-1221. URL <https://aclanthology.org/D19-1221>.
- Yixin Wan, George Pu, Jiao Sun, Aparna Garimella, Kai-Wei Chang, and Nanyun Peng. “kelly is a warm person, joseph is a role model”: Gender biases in LLM-generated reference letters. In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pp. 3730–3748, 2023.
- Jiaan Wang, Yunlong Liang, Fandong Meng, Beiqi Zou, Zhixu Li, Jianfeng Qu, and Jie Zhou. Zero-shot cross-lingual summarization via large language models. In *Proceedings of the 4th New Frontiers in Summarization Workshop*, pp. 12–23, 2023.
- Qinyuan Ye and Xiang Ren. Learning to generate task-specific adapters from task description. In Chengqing Zong, Fei Xia, Wenjie Li, and Roberto Navigli (eds.), *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 2: Short Papers)*, pp. 646–653, Online, August 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.acl-short.82. URL <https://aclanthology.org/2021.acl-short.82>.
- Jieyu Zhao, Tianlu Wang, Mark Yatskar, Vicente Ordonez, and Kai-Wei Chang. Men also like shopping: Reducing gender bias amplification using corpus-level constraints. In Martha Palmer, Rebecca Hwa, and Sebastian Riedel (eds.), *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, pp. 2979–2989, Copenhagen, Denmark, September 2017. Association for Computational Linguistics. doi: 10.18653/v1/D17-1323. URL <https://aclanthology.org/D17-1323>.
- Jieyu Zhao, Tianlu Wang, Mark Yatskar, Vicente Ordonez, and Kai-Wei Chang. Gender bias in coreference resolution: Evaluation and debiasing methods. In Marilyn Walker, Heng Ji, and Amanda Stent (eds.), *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 2 (Short Papers)*, pp. 15–20, New Orleans, Louisiana, June 2018a. Association for Computational Linguistics. doi: 10.18653/v1/N18-2003. URL <https://aclanthology.org/N18-2003>.
- Jieyu Zhao, Yichao Zhou, Zeyu Li, Wei Wang, and Kai-Wei Chang. Learning gender-neutral word embeddings. In Ellen Riloff, David Chiang, Julia Hockenmaier, and Jun'ichi Tsujii (eds.), *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pp. 4847–4853, Brussels, Belgium, October–November 2018b. Association for Computational Linguistics. doi: 10.18653/v1/D18-1521. URL <https://aclanthology.org/D18-1521>.
- Jieyu Zhao, Tianlu Wang, Mark Yatskar, Ryan Cotterell, Vicente Ordonez, and Kai-Wei Chang. Gender bias in contextualized word embeddings. In Jill Burstein, Christy Doran, and Thamar Solorio (eds.), *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pp. 629–634, Minneapolis, Minnesota, June 2019. Association for Computational Linguistics. doi: 10.18653/v1/N19-1064. URL <https://aclanthology.org/N19-1064>.
- Jieyu Zhao, Subhabrata Mukherjee, Saghar Hosseini, Kai-Wei Chang, and Ahmed Hassan Awadallah. Gender bias in multilingual embeddings and cross-lingual transfer. In



Dan Jurafsky, Joyce Chai, Natalie Schluter, and Joel Tetreault (eds.), *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pp. 2896–2907, Online, July 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.acl-main.260. URL <https://aclanthology.org/2020.acl-main.260>.

Jieyu Zhao, Daniel Khashabi, Tushar Khot, Ashish Sabharwal, and Kai-Wei Chang. Ethical-advice taker: Do language models understand natural language interventions? In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*, pp. 4158–4164, 2021.

Ran Zmigrod, Sabrina J Mielke, Hanna Wallach, and Ryan Cotterell. Counterfactual data augmentation for mitigating gender stereotypes in languages with rich morphology. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pp. 1651–1661, 2019.