Mitigating federated learning contribution allocation instability through randomized aggregation.

Arno Geimer University of Luxembourg Beltran Fiz University of Luxembourg Radu State
University of Luxembourg

arno.geimer@uni.lu

beltran.fiz@uni.lu

radu.state@uni.lu

Abstract

Federated learning (FL) is a novel collaborative machine learning framework designed to preserve privacy while enabling the creation of robust models. paradigm addresses a growing need for data security by allowing multiple participants to contribute to a model without exposing their individual datasets. A pivotal issue within this framework, however, concerns the fair and accurate attribution of contributions from various participants to the creation of the joint global model. Incorrect contribution distribution can erode trust among participants, result in inequitable compensation, and ultimately diminish the willingness of parties to engage or actively contribute to the federation. While several methods for remunerating participants have been proposed, little attention was given to the analysis of the stability of these methods when evaluating contributions, which is critical to ensure the long-term viability and fairness of FL systems.

In this paper, we analyse this stability through the calculation of contributions by gradient-based model reconstruction techniques with Shapley values. Our investigation reveals that Shapley values fail to reflect baseline contributions, especially when employing different aggregation techniques.

To address this issue, we extend on established aggregation techniques by introducing FEDRANDOM, which is designed to sample contributions in a more equitable and distributed manner. We demonstrate that this approach not only serves as a viable aggregation technique but also significantly improves the accuracy of contribution assessment compared to traditional methods. Our results suggest that FEDRANDOM enhances the overall fairness and stability of the federated learning system, making it a superior choice for federations with limited number of participants.

1. Introduction

Federated Learning has gained a lot of traction in recent years as a prevalent form of collaborative learning. It has seen adoption in a vast array of domains, ranging from financial corporations and medical institutions to IoT devices, with major industry players such as Google and Nvidia offering in-house platforms and solutions.

In Federated Learning, a strategy defines the approach in which the central server handles a federation. Since the inception of Federated Learning, numerous strategies have been introduced to manage specific problems, among which are poor performance on heterogeneous datasets, attacks by malicious clients, and the convergence speed of the global model.

There are two primary categories of Federated Learning: cross-device and cross-silo. In the cross-device approach, a large number of distributed clients, usually with small volumes of data, collaborate to construct a robust model. On the other hand, cross-silo involves a few participants with larger amounts of data working together to create a model that incorporates the specific knowledge of each entity. In an environment comprised of profit-driven entities, correctly assessing contributions is of utmost importance, as participants may invest money in infrastructure and compliance in hopes of receiving their equitable part of the payout.

In the following sections, we delve into the analysis of a cross-silo FL scenario and the stability of contribution evaluation. Specifically, this use case portrays a federation whose clients may need an incentive to join and stay in the federation (i.e. participants leave if they are not adequately compensated).

By shedding light on the inherent instability of contribution evaluation between some of the most popular strategies and how this can be mitigated, we hope to provide a foundation for future aggregation strategies to self-evaluate not only their performance under traditional metrics, but also the contribution evaluation stability. In summary, we provide the following contributions:

1. Illustrate the inherent instability of contribution evalua-

tion of popular aggregation strategies, and how to mitigate it.

- Propose FEDRANDOM, a contribution evaluation approach to reduce the contribution disparity.
- Show that FEDRANDOM allows for more stable calculation of contributions.
- 4. Demonstrate that FEDRANDOM significantly outperforms all other strategies in approximating the baseline centralized data valuation approach.

The remainder of this paper is structured as follows: In section 2 we present a summary of the current state of the art on contribution evaluation methods in Federated Learning. Section 3 includes detailed explanations of the aggregation strategies used in this paper and of Shapley values in Federated Learning. In section 4.1, we detail the experimental setup. We present our method, FEDRANDOM, as well as an extensive analysis of its capabilities in section 4. Finally, we discuss the implications of FEDRANDOM and future work in section 5.

2. Related Work

Several approaches have been devised for the evaluation of participants' contribution during global model creation in Federated Learning. We give a brief overview of the most common approaches, which can be based on either numeric computations or self-disclosed information and estimations by the central server.

Self-reported

The most direct approach seen in previous work is to have the participants perform their own reporting, providing information regarding their local model training process [20, 28]. The information provided may encompass aspects such as the quality and quantity of data provided by the participant; costs associated with data collection, processing and communication in the federation. The aggregator then utilizes this data to assign contribution ratings to the clients. A limitation of these approaches is that the assumption of honesty and the ability of clients to evaluate their own conditions.

Shapley values

Similarly to their usage in game theory to evaluate the contribution of players to a common task, Shapley values are the most common approach to numerically assess individual clients' contribution to the shared model in FL.

Although it has been proposed to calculate Shapley values in FL by evaluating the performance of fully-trained federated models [24], a more common approach is to use gradient-based model reconstruction [22] or Monte Carlo methods [25], which assess contributions at each federation

round. This is of particular interest in continuous learning tasks, where data and thus contribution distributions might change. In these settings, payouts may occur periodically instead of just once. To assess Shapley values, the evaluating entity does need a validation dataset.

Influence

Another approach for quantifying the contribution of participants is through the use of influence based methods. These apply a systematic method for quantifying the impact of individual data points on the global model [10]. Influence can be computed by assessing the disparity in models when trained with and without the specific data points. This approach was used in [18] to provide incentives for clients to provide high-quality data during the training process. Although the influence metric offers detailed insights, its computation can be challenging due to the expensive nature of re-training models, often exacerbated by the fact that access to the clients' individual data points might be limited due to privacy constraints.

Auctions

In diverse areas of Federated Learning, auctions serve as a fundamental economic mechanism to allocate resources such as training data and computational power, setting prices through bidding [23]. The primary stakeholders involved are the bidders (model owners or FL service requesters), sellers (data owners or clients), and auctioneers (intermediaries facilitating the auction), aiming to optimise resource distribution and establish fair pricing. While contribution estimation is an important aspect, other key concepts in auction theory include valuation, utility, and social welfare, with the ultimate goal being to enhance the efficiency and effectiveness of resource allocation in FL environments. An example is [27], the multi-dimensional procurement auction model FMore is proposed to incentivize clients with more data quality in Mobile Edge Computing (MEC) to participate.

While the field of contribution estimation in Federated Learning is active, to the best of our knowledge no previous work has focused on the evaluation of the stability of these contribution estimations.

3. Methodology

3.1. Federated Learning

A basic Federated Learning architecture consists of a group of participants, or clients, who each own a private local dataset D_k , along with a central server or aggregator. After a model architecture and hyperparameters such as aggregation strategy and local epoch numbers have been agreed

upon, the central server starts the federation by initializing and distributing the global model. At the onset of each round, the aggregator selects a subset of clients and transmits them the current global model. Each user trains a new local model for e local epochs on their respective data, and uploads their model updates to the server. The server uses the agreed-upon aggregation strategy to compute the new global model. This allows the collaborating entities to gain a model incorporating knowledge of all clients which has been shown to outperform locally trained models [14].

3.2. Aggregation strategies

In Federated Learning, different aggregation strategies may be employed based on the specific circumstances and objectives of the participants. It is important to note that all of the strategies used in this paper have been widely adopted across their respective application domains. Assuming a federation consisting of K participants, each possessing n_k of a total of n data points, we detail these strategies in the following section.

While our investigation includes aggregation strategies aimed at enhancing defenses against model attacks, we do not include adversarial participants. The performance metrics of the strategies, whether related to model accuracy or defense against attacks, are not the primary focus of this paper. We emphasize that each strategy achieves acceptable convergence (Figure 2), justifying their inclusion in our experimental analysis.

• **FEDAVG**: Introduced in [14], FEDAVG is the baseline Federated Learning technique. As detailed in 3.1 and included in Algorithm 1, the server initializes model weights and distributes them to the clients. These train the model on their datasets for a predetermined number of epochs *e* using stochastic gradient descent, and updates are aggregated by the central server using weighted averaging:

$$w_{t+1} \leftarrow w_t - \Delta w$$
, with $\Delta w = \sum_{k=1}^K \frac{n_k}{n} w_k$

The new global model w_{t+1} is redistributed to the clients, iterating the process until either global convergence is achieved or a predetermined number of rounds has been reached.

FEDAVG has the global objective function

$$f(w) = \frac{1}{K} \sum_{k=1}^{K} F_k(w).$$

• FEDAVGM: Federated Averaging with Momentum [6] improves the poor performance of FEDAVG on heterogeneous data. It adds momentum when updating model weights:

$$w_{t+1} \leftarrow w_t - v$$
, where $v = \beta v + \Delta w$.

- FAULTTOLERANTFEDAVG: Fault-tolerant Federated Averaging is a unique aggregation strategy designed to address potential client dropout scenarios. A FedAvgbased aggregation method, it ensures successful functioning of the federation in the event of client dropout. Under normal circumstances, without dropouts, the strategy behaves as FedAvg.
- FEDADAGRAD, FEDADAM, FEDYOGI: The three optimization strategies, proposed in [17], improve the convergence speed of the federation. With clients' weight updates considered a pseudo-gradient, the strategies use the ADAGRAD, ADAM and YOGI optimizers, respectively, instead of gradient descent. Model update functions are detailed in the respective paper.
- QFEDAVG: Q-Fair Federated Learning aims to achieve a global model which performs similarly on all individual datasets D_k . This is achieved by weighing clients with worse performance higher in the objective function. The parameter q serves as a measure of equality, with q=0 resulting in FEDAVG.

QFEDAVG employs the objective function

$$f_q(w) = \sum_{k=1}^K \frac{p_k}{q+1} F_k^{q+1}(w).$$

The more complex model updates can be found in the respective paper.

- FEDMEDIAN, FEDTRIMMEDAVG: To reduce potentially adversarial updates, the authors update the global model as the median and trimmed mean of client updates, as opposed to a weighted average in FEDAVG. In adversarial settings, this guarantees substantial improvements over the baseline [26].
- KRUM: To counter against potential byzantine failures, [2] introduces the KRUM function based on barycentric aggregation. At each round, they calculate a score for every client using the pairwise square distance to other close updates. As effectively the most representative of all participants, the update with the best score is selected as the new global model. Details are established in [2].

3.3. Shapley values

In game theory, an n-person cooperative game is a game in which subsets of players, called coalitions, can cooperate in order to obtain a utility v [15], which they may distribute amongst themselves. To ascertain the exact contribution of each player in the coalition to v, Shapley values [21] can be used. Specifically, let S be a coalition of players, then the contribution ϕ of player $i \in S$ to v can be determined as

$$\phi_i(v) = \sum_{S \subseteq N \setminus i} \frac{|S|!(n-|S|-1)!}{n!} (v(S \cup i) - v(S)). \tag{1}$$

Shapley values have a range of desirable properties:

```
• If v(S \cup i) = v(S), then \phi_i(v) = 0.
• If v(S \cup i) = v(S \cup j), then \phi_i(v) = \phi_i(v).
```

In fact, it has been shown in [8] that the Shapley value is the only contribution measure satisfying these properties. These properties are particularly important in a FL setting, where adversarial parties might try to unfairly increase their perceived contribution by joining the federation as multiple participants.

3.4. Shapley values in Federated Learning

In this paper, we will use the method proposed as One-Round Reconstruction in [22] and as a special case in [25]: At each round, we reconstruct all sub-models and evaluate all participants' contribution to those sub-models. The exact calculation, in a FEDAVG-based scenario, is given in Algorithm 1.

In the following sections, we will call contribution of client k the sum of their Shapley values $\phi_k = \sum k \leq K \phi_k^t$, normalized with respect to the vector of total contributions ϕ . This allows us to represent a participant's total contribution on a percentage-scale as clients' contributions sum up to 1. This allows for better comparisons between runs on the same data split, as though numerical values of Shapley values may be different, proportions stay comparable.

Algorithm 1 One-round reconstruction of Shapley values with FEDAVG; ϕ_k , n_k are the Shapley value resp. dataset size of client k.

```
server executes:
   1: initialize \omega_0
   2: n = \sum_{k \le K} n_k
   3: for each round t = 1, 2, \dots do
                   for each client k \leq n in parallel do
                     \omega_{t+1}^k \leftarrow \text{ClientUpdate}(k, \omega_t)
   5:
                  \begin{aligned} & \omega_{t+1} \leftarrow \sum_{k \leqslant K} \frac{n_k}{n} \omega_{t+1}^k \\ & \text{for each client } k \leqslant K \text{ do} \\ & \phi_k^t = \sum_{S \subseteq K \setminus k} \frac{|S|!(K-|S|-1)!}{K!} (f(\omega_{S \cup k}) - f(\omega_S)) \\ & \text{where } \omega_S = \sum_{i \in S} \frac{n_i}{n_S} \omega_i^t \\ & \text{with } n_S = \sum_{i \in S} n_i \end{aligned}
   6:
   7:
   8:
   9:
                   end for
  10: end for
 11: for each client k \leq K do
\phi_k = \sum_t \phi_k^t 12: end for
```

4. Results

4.1. Experimental Setup

The experiments were developed using Pytorch [16] and Flower [1] as the Federated Learning framework. They

were trained on 50 nodes on the high-performance computer (HpC) platform with 128 CPUs and an allocated 251 GB of RAM per node.

4.1.1 Data heterogeneity

Data heterogeneity refers to the presence of varied and potentially non-iid datasets across different participants in the federated learning environment. It is important to consider the data heterogeneity of the participants in a federated environment as it is a reflection of real-world scenarios and the diverse conditions under which the federated model is expected to operate.

Similar to [12], we use Dirichlet sampling to split the dataset. Focusing on a heterogeneous setting, we split the dataset in the following way: With a Dirichlet- α of 50.0, we determine the distribution of labels and of total datapoints per client, and split the dataset accordingly. This gives us highly heterogeneous datasets which vary by size as well as label distribution. Since we simulate cross-silo settings, we set the number of participants to the federation to 3.

4.1.2 Model and training pipeline

We are interested in image classification tasks in a cross-silo framework. As we do not focus on the effect of the model on contribution differences, but rather that of the optimization strategy, we study a simple convolutional neural network on the CIFAR-10 image recognition task. The CNN consists of two 5x5 convolution layers, 2 dense layers with ReLu activation and 16x5x5x120 and 120x84 units respectively, and a dense layer with 84x10 units. Image preprocessing, comprising random cropping, horizontal flipping and randomly changing the brightness, contrast, saturation and hue, are part of the training pipeline. While state-of-theart models have reached up to 99% accuracy on CIFAR-10 [4], our models' performance is acceptable for our requirements, as we are not interested in reaching optimal accuracy, but rather study how different optimization strategies compare.

Including 10 different aggregation strategies, and due to the sampling process involved in FEDRANDOM as well as the use of a multitude of data splits, our experiments cover more than 4000 different Federated Learning runs.

4.2. Aggregation strategy instability

Although global models based on different aggregation strategies may converge to similar accuracies over time, there is no guarantee that between federations, Shapley values share the same properties.

In Figure 1, we compare the difference in per-client contribution between different strategies on the same task. We show that clients' contribution may differ between strategies, even though convergence may be similar. Although

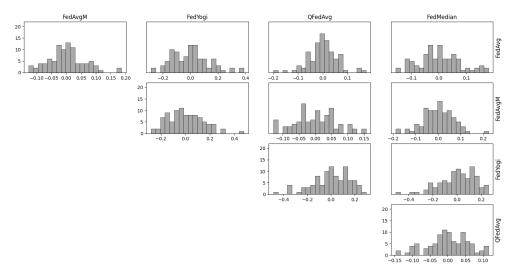


Figure 1. Per-client percentage contribution variance between different aggregation strategies.

FEDYOGI is a clear outsider in contribution evaluation, with up to 50% per-client difference, other strategies show disparities of over 10% This may lead to distrust and undermine the collaborative environment, leading to defection of participants.

Robustness, fairness and generalization as parts of trustworthiness have become an important aspect of Artificial Intelligence [11]. This is no different in Federated Learning scenarios, where fairness of the global model and trust between participants are crucial to the operation of the federation. As we have shown that contributions might be highly different depending on aggregation strategy, we argue that contribution evaluation in Federated Learning is neither robust nor generalized, and, depending on the definition of fairness, not fair. With high instability, as shown above, trust in the contribution calculation and consequently in the federation should not be expected. This may prove critical in environments where participants are profit-driven participants, as it might lead to disagreements over remuneration and non-participation as a result: A participant whose contribution turns out to be less than expected may argue that the chosen strategy disadvantages them. This hurts the overall federation, as the particular participant might have possessed particularly valuable data which the global model, and thus everybody involved, might profit off.

A solution could be to try out different strategies and use the means of contribution values. However, as we have shown that contribution variance between strategies is quite high, one would need a substantial amount of different strategies to calculate a representative contribution value, requiring the development and implementation of many different strategies.

4.3. FEDRANDOM

We introduce FEDRANDOM, a novel sampling technique that aims to address the instability observed with individual aggregation strategies in contribution calculation. FEDRANDOM operates by randomly selecting at each round from a set of established strategies. It then applies the chosen strategy for E epochs, and calculates contributions using federated Shapley Values (SV). A more formal definition is shown in Algorithm 2. Computing several instances of FEDRANDOM allows us to use their mean contribution percentages as final contributions. Our experiments and discussions address values $E \in \{1, 3, 5, 10\}$.


Algorithm 2 FEDRANDOM with a set of strategies S,

```
server executes:
 1: initialize \omega_0 (checkpoint)
 2: n = \sum_{k \leqslant K} n_k
 3: for each round t = 1, 2, \dots do
      sample a strategy s_t \in S at random
 4:
            for each client k \leq K in parallel do
 5:
                  for epoch \leq E do
                        \begin{array}{l} \boldsymbol{\omega_{t+1}^k} \leftarrow \text{ClientUpdate}(k, \omega_t) \\ \boldsymbol{\omega_{t+1}} \leftarrow \text{ServerUpdate}(s_t, (\omega_{t+1}^1, ..., \omega_{t+1}^K) \end{array} 
 6:
 7:
                  end for
 8:
            end for
 9.
            Calculate Shapley values \phi_k^t
11: end for
12: for each client k \leq K do
              \phi_k = \sum_t \phi_k^t
13: end for
```

By introducing randomness, FEDRANDOM can mitigate biases associated with individual strategies. Although the

approach adds a layer of complexity in managing the set of available strategies, it does not introduce additional communication or computational overheads to the federation. We use FEDAVG, FEDAVGM, FAULTTOLERANTFEDAVG, FEDADAGRAD, FEDADAM and FEDYOGI as components in FEDRANDOM. We chose these strategies as they all use the same aggregation technique, namely weighted averaging.

Performance






Figure 2. CIFAR-10 validation accuracy of all aggregation strategies, without hyperparameter finetuning.

Top: In total - Bottom: The last 25 rounds

As shown in Figure 2, the performance of FEDRAN-DOM lies between those of the other aggregation strategies. This makes it a valid aggregation strategy, although realistic usage is unreasonable since implementation is more complex than an out-of-the-box strategy; and it does not inherit any of the properties of its constituting strategies, such as KRUM's Byzantine resistance or QFEDAVG's performance equality, and it does not achieve the performance of methods employing advanced optimizers such as FEDADAM and FEDYOGI.

4.4. Minimizing variance with FEDRANDOM

We have run extensive experiments over multiple data splits to test how much contribution values depend on the aggregation strategy. As discussed before, a generalized and robust contribution evaluation is desirable, as opposed to the instability observed in Section 4.2.

FEDRANDOM enables us to efficiently sample large amounts of contribution values, allowing the calculation of a statistically valid mean contribution. Table 1 contains the average standard deviation σ and the median absolute deviation of (a) a sampling of the 10 strategies introduced in 3.2 over our experiments and (b) a FEDRANDOM sampling on the same experiments. We observe that FEDRANDOM allows us to drastically decrease both measures. Consequently, FEDRANDOM sampling results in a more robust and stable contribution allocation, leading to more confidence and trust in individual contributions.

	$\sigma \times 10^2$	$MAD \times 10^2$
Full strategies	4.8	1.1
FEDRANDOM-1	1.0	0.2
FEDRANDOM-3	0.8	0.15
FEDRANDOM-5	1.5	0.3
FEDRANDOM-10	1.0	0.2

Table 1. Average standard deviation σ and median absolute deviation (MAD) of contributions, by sampling using the strategies introduced in 3.2 and using FEDRANDOM, lower is better.

4.5. Data Shapley

Federated Shapley values allow us to evaluate the contributions of different participants to the shared model, but this evaluation does not necessarily reflect the data valuation of participants. Using a central Shapley value, we aim to establish a ground truth for the contributions of each participant. To this end, we use the Data Shapley method introduced in [5], which allows us to calculate the contributions of each participant's own datasets to a central model, which we will use as a baseline. Data Shapley has seen application in federated learning [9, 19] as well as in other domains [3, 13]. The method has been shown to outperform other methods in identifying data quality [5], and has been tested extensively on several image classification tasks.

Data Shapley calculation is analogous to the Shapley value calculation in equation 1, with v the accuracy of a fully trained central model: For each dataset D_k , we consider the sub-datasets stemming from all combinations of client data, and evaluate the contribution of D_k to a model trained on the sub-datasets. In total, for a particular split, a Data Shapley calculation necessitates 2^K full training runs. A cross-client environment, in which the amount of participants is large, would necessitate Shapley approximation methods.

Although we have shown in table 1 that sampling with FEDRANDOM greatly decreases variance when comparing

different aggregation strategies, this does not mean that FE-DRANDOM gives a realistic approximation of clients' contributions.

However, by studying how different aggregation strategies compare to FEDRANDOM with Data Shapley as a baseline, we show that FEDRANDOM outperforms all of the chosen aggregation strategies. Indeed, Figure 3 showcases the distributions of distances to Data Shapley, for individual strategies, as well as for different instances of FEDRANDOM. FEDRANDOM samplings are significantly better at approximating the Data Shapley baseline, especially for E=3. In addition, they deviate less from Data Shapley, leading to higher confidence in result accuracy. This is a strong argument for FEDRANDOM, as it gives participants a guarantee that they will be remunerated based on their data contribution, and not on seemingly random factors when employing a single base strategy. To note that, since FEDRANDOM outperforms any individual strategy, it outperforms a basic sampling using the mean contribution of multiple strategies as well.

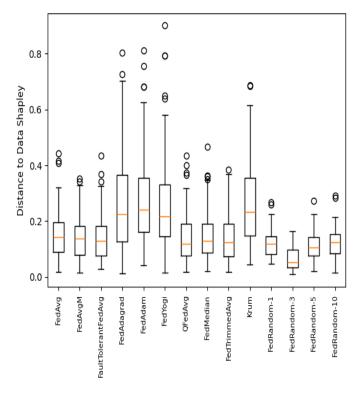


Figure 3. Contribution \mathcal{L}_2 -distance to Data Shapley, lower is better. Medians are orange.

Table 2 goes into more detail about the difference to Data Shapley. We observe that, the average square distance of FEDRANDOM, especially FEDRANDOM-3, is considerably lower than that of basic aggregation strategies. Additionally, the \mathcal{L}_{∞} distance metric shows that we decrease the av-

erage maximal per-client difference to Data Shapley from more than 20% in basic strategies to only 5% with FEDRANDOM. This means that participants will, on average, only lose or gain a maximum amount of 5% of their Data Shapley contribution.

This substantial improvement is a strong argument towards the adaptation of FEDRANDOM sampling when establishing a cross-silo federation. It helps establish trust in the federation and helps eliminate any suspicion towards received remuneration that clients may have.

Aggregation strategy		Mean \mathcal{L}_2	Mean \mathcal{L}_{∞}
FEDAVG	√	0.148	0.232
FEDAVGM	√	0.139	0.217
FAULTTOLERANTFEDAVG	√	0.14	0.219
FEDADAGRAD	√	0.258	0.409
FEDADAM	√	0.267	0.419
FEDYOGI	√	0.252	0.396
QFedAvg	X	0.139	0.218
FedMedian	X	0.146	0.226
FEDTRIMMEDAVG	X	0.141	0.220
Krum	X	0.273	0.435
FedRandom - 1		0.124	0.097
FEDRANDOM - 3		0.064	0.050
FEDRANDOM - 5		0.117	0.091
FEDRANDOM - 10		0.126	0.098

Table 2. Aggregation strategies' mean difference to Data Shapley, compared to FEDRANDOM sampling; lower is better. Strategies included in FEDRANDOM are marked with \checkmark .

5. Conclusions & Future Work

This work has brought to light a concern regarding the stability of popular Federated Learning strategies when evaluating the contribution of participants. Our findings underscore the potential challenges and risks associated with deploying cross-silo federated learning platforms in industrial settings, given the discrepancy of contribution amongst these strategies. Future proposed FL strategies should take these findings into account, conducting performative analysis on the accuracy of the strategies' contributions compared to Data Shapley. If results are not satisfactory, FEDRANDOM can be proposed to circumvent the shortcomings of the strategy.

With FEDRANDOM sampling, central servers can estimate contributions before running a federation. Not only are these contribution values more stable than when sampling different strategies, they are also closer to central Data Shapley values than any single strategy we tested. In a deployed cross-silo federation, this reduces friction between participants: As opposed to before, when a specific aggregation strategy might have been more beneficial to a client,

they have already statistically relevantly sampled contribution values. This leaves the option to choose the strategy which is most beneficial to the federation as a whole, eliminating inter-client concurrence. Also, as we have shown, participants get rewarded more fairly than with any single aggregation strategy. Additionally, as FEDRANDOM performs closely to other strategies, using the best sample as an initial weight allows the federation to perform better from the start. Assuming sampling is run in parallel, training time stays the same, with only a minimal negative impact on optimal performance during sampling.

FEDRANDOM introduces additional computational effort to a federation. Being a sampling technique, this effort scales linearly with the amount of generated samples. However, more substantially, the computational effort scales exponentially with the number of clients, rendering simulations in high-client environments highly demanding. This problem is inherent to any numerical contribution calculation using Shapley values, and does not stem from FEDRANDOM. Moreover, the implementation of FEDRANDOM may prove more complicated due to the major amount of aggregation strategies involved.

In future works, the effect of more aggregation strategies to FEDRANDOM, as well as the importance of the strategy types should be studied. An implementation of faster Shapley computation methods such as FASTSHAP [7] would allow for more extensive experiments on bigger client sets. Additionally, the possible benefits of randomly mixing strategies, as proposed by FEDRANDOM, should be explored in a more general context.

References

- [1] Daniel J Beutel, Taner Topal, Akhil Mathur, Xinchi Qiu, Javier Fernandez-Marques, Yan Gao, Lorenzo Sani, Hei Li Kwing, Titouan Parcollet, Pedro PB de Gusmão, and Nicholas D Lane. Flower: A friendly federated learning research framework. arXiv preprint arXiv:2007.14390, 2020.
- [2] Peva Blanchard, El Mahdi El Mhamdi, Rachid Guerraoui, and Julien Stainer. Machine learning with adversaries: Byzantine tolerant gradient descent. Advances in neural information processing systems, 30, 2017. 3
- [3] Rishi Bommasani, Drew A Hudson, Ehsan Adeli, Russ Altmadoken, Simran Arora, Sydney von Arx, Michael S Bernstein, Jeannette Bohg, Antoine Bosselut, and Emma andockerd others Brunskill. On the opportunities and risks of foundation models. *arXiv preprint arXiv:2108.07258*, 2021. 6
- [4] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, et al. An image is worth 16x16 words: Transformers for image recognition at scale. arXiv preprint arXiv:2010.11929, 2020. 4
- [5] Amirata Ghorbani and James Zou. Data shapley: Equitable valuation of data for machine learning. In *International*

- conference on machine learning, pages 2242–2251. PMLR, 2019. 6
- [6] Tzu-Ming Harry Hsu, Hang Qi, and Matthew Brown. Measuring the effects of non-identical data distribution for federated visual classification, 2019. 3
- [7] Neil Jethani, Mukund Sudarshan, Ian Covert, Su-In Lee, and Rajesh Ranganath. Fastshap: Real-time shapley value estimation, 2022. 8
- [8] Ruoxi Jia, David Dao, Boxin Wang, Frances Ann Hubis, Nick Hynes, Nezihe Merve Gürel, Bo Li, Ce Zhang, Dawn Song, and Costas J Spanos. Towards efficient data valuation based on the shapley value. In *The 22nd International Con*ference on Artificial Intelligence and Statistics, pages 1167– 1176. PMLR, 2019. 4
- [9] Georgios A Kaissis, Marcus R Makowski, Daniel Rückert, and Rickmer F Braren. Secure, privacy-preserving and federated machine learning in medical imaging. *Nature Machine Intelligence*, 2(6):305–311, 2020. 6
- [10] Pang Wei Koh and Percy Liang. Understanding black-box predictions via influence functions. In *International confer*ence on machine learning, pages 1885–1894. PMLR, 2017.
- [11] Bo Li, Peng Qi, Bo Liu, Shuai Di, Jingen Liu, Jiquan Pei, Jinfeng Yi, and Bowen Zhou. Trustworthy ai: From principles to practices, 2022. 5
- [12] Qinbin Li, Yiqun Diao, Quan Chen, and Bingsheng He. Federated learning on non-iid data silos: An experimental study. In 2022 IEEE 38th International Conference on Data Engineering (ICDE), pages 965–978. IEEE, 2022. 4
- [13] Weixin Liang, Girmaw Abebe Tadesse, Daniel Ho, L Fei-Fei, Matei Zaharia, Ce Zhang, and James Zou. Advances, challenges and opportunities in creating data for trustworthy ai. *Nature Machine Intelligence*, 4(8):669–677, 2022. 6
- [14] Brendan McMahan, Eider Moore, Daniel Ramage, Seth Hampson, and Blaise Aguera y Arcas. Communicationefficient learning of deep networks from decentralized data, 2017. 3
- [15] Irene Parrachino, Ariel Dinar, and Fioravante Patrone. Cooperative game theory and its application to natural, environmental, and water resource issues: 3. application to water resources. Application to Water Resources (November 2006). World Bank Policy Research Working Paper, (4074), 2006. 3
- [16] Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, Alban Desmaison, Andreas Kopf, Edward Yang, Zachary DeVito, Martin Raison, Alykhan Tejani, Sasank Chilamkurthy, Benoit Steiner, Lu Fang, Junjie Bai, and Soumith Chintala. Pytorch: An imperative style, high-performance deep learning library. In Advances in Neural Information Processing Systems 32, pages 8024–8035. Curran Associates, Inc., 2019. 4
- [17] Sashank Reddi, Zachary Charles, Manzil Zaheer, Zachary Garrett, Keith Rush, Jakub Konečný, Sanjiv Kumar, and H. Brendan McMahan. Adaptive federated optimization, 2021. 3
- [18] Adam Richardson, Aris Filos-Ratsikas, and Boi Faltings. Rewarding high-quality data via influence functions. arXiv preprint arXiv:1908.11598, 2019.

- [19] Nicola Rieke, Jonny Hancox, Wenqi Li, Fausto Milletari, Holger R Roth, Shadi Albarqouni, Spyridon Bakas, Mathieu N Galtier, Bennett A Landman, Klaus Maier-Hein, et al. The future of digital health with federated learning. NPJ digital medicine, 3(1):119, 2020. 6
- [20] Yunus Sarikaya and Ozgur Ercetin. Motivating workers in federated learning: A stackelberg game perspective. *IEEE Networking Letters*, 2(1):23–27, 2019.
- [21] Lloyd S Shapley. Notes on the n-person game—ii: The value of an n-person game. 1951. 3
- [22] Tianshu Song, Yongxin Tong, and Shuyue Wei. Profit allocation for federated learning. In 2019 IEEE International Conference on Big Data (Big Data), pages 2577–2586. IEEE, 2019. 2, 4
- [23] Xuezhen Tu, Kun Zhu, Nguyen Cong Luong, Dusit Niyato, Yang Zhang, and Juan Li. Incentive mechanisms for federated learning: From economic and game theoretic perspective, 2021. 2
- [24] Guan Wang, Charlie Xiaoqian Dang, and Ziye Zhou. Measure contribution of participants in federated learning. In 2019 IEEE international conference on big data (Big Data), pages 2597–2604. IEEE, 2019. 2
- [25] Tianhao Wang, Johannes Rausch, Ce Zhang, Ruoxi Jia, and Dawn Song. A principled approach to data valuation for federated learning, 2020. 2, 4
- [26] Dong Yin, Yudong Chen, Kannan Ramchandran, and Peter Bartlett. Byzantine-robust distributed learning: Towards optimal statistical rates, 2021. 3
- [27] Rongfei Zeng, Shixun Zhang, Jiaqi Wang, and Xiaowen Chu. Fmore: An incentive scheme of multi-dimensional auction for federated learning in mec. In 2020 IEEE 40th International Conference on Distributed Computing Systems (ICDCS). IEEE, November 2020. doi: 10.1109/icdcs47774. 2020.00094. 2
- [28] Jingfeng Zhang, Cheng Li, Antonio Robles-Kelly, and Mohan Kankanhalli. Hierarchically fair federated learning. arXiv preprint arXiv:2004.10386, 2020. 2