

Lattice physics approaches for neural networks

Giampiero Bardella^{1,3,*}, Simone Franchini^{1**,}, Pierpaolo Pani^{1,2,}, and Stefano Ferraina^{1,2,}

¹Department of Physiology and Pharmacology, Sapienza University of Rome, Italy

²Equally contributing co-senior authors

*Correspondence: giampiero.bardella@uniroma1.it

**Correspondence: simone.franchini@yahoo.it

³Lead contact

Abstract

Modern neuroscience has evolved into a frontier field that draws on numerous disciplines, resulting in the flourishing of novel conceptual frames primarily inspired by physics and complex systems science. Contributing in this direction, we recently introduced a mathematical framework to describe the spatiotemporal interactions of systems of neurons using lattice field theory, the reference paradigm for theoretical particle physics. In this note, we provide a concise summary of the basics of the theory, aiming to be intuitive to the interdisciplinary neuroscience community. We contextualize our methods, illustrating how to readily connect the parameters of our formulation to experimental variables using well-known renormalization procedures. This synopsis yields the key concepts needed to describe neural networks using lattice physics. Such classes of methods are attention-worthy in an era of blistering improvements in numerical computations, as they can facilitate relating the observation of neural activity to generative models underpinned by physical principles.

Keywords: neural networks; generative models; statistical physics; lattice field theory; entropy; neurophysiology; network inference; bayesian inference; free energy principle; active inference;

Introduction

Systems neuroscience aims to understand how the spatiotemporal interaction of aggregates of neurons leads to neural dynamics and, ultimately, to cognitive processes and behavior. The ever-increasing technological innovations in the design of high-resolution recording devices have given a dramatic boost to data gathering, and we can now simultaneously sample the activity of hundreds of neurons with outstanding temporal resolution¹⁻⁷. Yet, the immense number of observations still fails to provide conclusive evidence on the mechanisms that govern neural systems, the link between connectivity and dynamics, and the emergence of composite behavioral functions. To progress, neuroscience needs to start learning governing principles from data. To conquer this obstacle, a systematic and methodical integration of experiments, theory, and computational modeling is indispensable. Neuroscience is now where particle physics was before the introduction of the Standard Model. It is still common to heavily rely on heuristic analysis and modeling approaches that only partially account for the richness of the spatiotemporal repertoire of neural states. Despite the proposal of several landmark models⁸⁻²¹, we are still far from achieving a mechanistic understanding of the nervous system through deep physical principles²²⁻²⁴. In a recent paper²⁵, we introduced methods from theoretical particle physics and quantum field theory (QFT²⁶⁻⁵²) to treat systems of interacting binary variables, like the spiking activity of interacting neurons in the brain. The intuitive mathematical formalism⁴⁶ allows the explicit interpretation of neural interactions through universal laws, reducing the gap between abstraction and experiments thanks to the direct connection between model parameters and exper-

imental observables. Such a feature may facilitate our understanding of systems characterized by computational complexity, such as the brain at a fine-grained neuronal level, which requires approaches that allow for approximate solutions. Some of these approaches exploit a probabilistic perspective on brain computations based on methods such as Bayesian inference^{53–55} and fuzzy logic⁵⁶. Importantly, the brain’s fuzzy logical characteristic has already been suggested at the functional anatomical level, particularly in sensory systems (i.e., cortical columnar organization)⁵⁵. Indeed, cortical activity and neuronal features, such as receptive fields, have been shown to exhibit overlapping and gradual boundaries, thus displaying fuzzy properties⁵⁵. These fuzzy properties are also evident at the abstract level of cognitive processes, i.e., when considering the ability of the brain to “compute with words” in uncertain context.⁵⁷ Together, Bayesian and fuzzy logic aim to explain the high-level key features of the brain, including its operation through predictions in encoding incoming sensory information, its ability to elaborate motor plans for interacting with the environment, and its capacity to make decisions in uncertain situations. Importantly, in appropriate experimental settings, we can measure these predictions and decisions solely based on overt behavior. Using our physics-guided formalism on neural data would enable a new class of generative models of neural dynamics, providing additional basis for benchmarking some unifying brain theories^{53,55} relying on a Bayesian perspective, such as the free energy principle of Friston et al.^{54,58,59}.

Background

In computational neuroscience, two visions are currently dominant: manifold and circuit modeling. The first postulates that embedding the high-dimensional state space of neural dynamics into low-dimensional surfaces, i.e., manifolds, reveals neural computations, whereas the latter considers connectivity among neural units as a founding mechanism. In broad terms, we can surmise that neural manifolds provide a descriptive modeling of neural activity based on statistical interdependencies without links to causal mechanisms. That is because to define low-dimensional subspaces in empirical data, a set of numerical dimensionality reduction steps is required, which are most of the time arbitrary and not unique. An example is principal component analysis (PCA), which seeks low-dimensional projections that maximize experimental data variance. These methods have proven to be efficient not only for exploratory analysis and as denoising tools but also for providing satisfactory predictions of experimental variables in certain cases^{60–65}. However, they systematically yield contradictory conclusions that are not interpretable under comprehensive principles and several criticisms have recently arisen about the unreliability of these methods’ interpretive power^{66–68}. An example is the formal relationship that these methods can establish with physical quantities. The most suggestive one for neuroscientists is the correspondence between the set of possible configurations of a neural system and the physical notion of energy, which remains rickety, as in the case of the PCA-based “energy landscape”^{62,69,70}. On the other hand, circuit models, despite their ability to integrate causal assumptions through a wide range of realistic biophysical parameters (membrane potential, cell types, etc.), typically rely on specific tuning of model parameters to replicate observations. Although this class of model showed success in predicting experimental variables^{71–75}, performing specific computations⁷⁶ and replicating neural dynamics evolving on low-dimensional manifolds^{69,77}, the frequent shortcomings are flattened stimulus selectivity⁷⁸, uniform time evolution of reconstructed activity⁶⁹ and tremendous difficulties in scaling the analytical treatments for networks of arbitrary sizes^{79,80}. Moreover, even when resolving the problem of homogeneous stimulus tuning, accounting for activity modulated by multiple independent variables, the so-called mixed selectivity^{61,81}, the crafted connectivity of such models has a blurred link with predicted activity and real circuit mechanisms. Extensive discussions on the numerous

open problems of how connectivity leads to time-dependent activity can be found in the works of Barack and Krakauer⁸² and Langdon⁶⁹ and colleagues. Although the manifold and circuit modelling strategies are the most popular, their fragmented view falls short of formally reconciling with general physical principles⁵⁴. One of the most exhaustive ways of describing brain spatiotemporal dynamics is neural field theory^{20,21,25,54,58,83–96}. Usually, it models large-scale average population activity in the continuum limit, including approximated anatomical and physiological details into differential equations, with the Wilson-Cowan model⁹⁷ being probably the most popular example. As thoroughly discussed in a recent review on the topic⁹³, many types of approaches fall under this definition, some of which may overlap with those discussed above. However, in addition to the high number of parameters that are not always attributable to experimental variables, their main limitation is the lack of a consistent mathematical framework to link the various scales at which neural dynamics unfolds. One of the most successful ways to embed physical laws into neuroscience modeling has been by adapting methods from equilibrium statistical physics to real and artificial neural networks. Since the introduction of the Amari-Hopfield model^{12–17,19,95,98}, the most fruitful formalism comes from the physics of magnetic systems. In this language, the energy function parallelism is realized through the analogy with the energy of a spin system. As accurately described by Brinkman⁸⁰ and colleagues, extensions to time-dependent non-equilibrium dynamical systems have mostly involved the use of stochastic dynamics (in two equivalent forms, the Fokker-Planck equation^{99–102} and the Langevin equation^{103–108}), stochastic variations of the Ising model^{109,110} and semi-analytical studies based on bifurcation theory^{111,112}. The major weakness of these formulations is that exact solutions could become hard to obtain, as could a precise and simple mapping between theory, simulations and empirical data. Several authors^{20–25,54,58,84–96,113} have already argued that the most promising strategy to overcome all of these shortcomings is to adopt a different perspective, pursuing the formalism of QFT^{26–52}.

Preliminaries

Let us indulge in a few informal remarks on the Lagrangian description of a dynamical system, pivotal to our formulation. Except among physicists, the Lagrangian interpretation is less known compared to other approaches, such as Newtonian mechanics, even if it is more foundational because it considers only energy, generalized coordinates, symmetries and conservation laws. A Lagrangian treatment is particularly useful for complex systems with multiple degrees of freedom, providing a unified framework connecting almost every phenomenon in nature, from classical mechanics to electromagnetism and field equations in general relativity. It assumes the existence of a function, i.e., the "Lagrangian," canonically interpreted as the difference between the kinetic and potential energy at a given time. The balance between the kinetic and potential energies is accounted for by the time integral of the Lagrangian, a scalar function named *action*, which in the following we denote with \mathcal{A} . The most striking example of this concise representation is the action of the Standard Model of particle physics (Yang-Mills Theory¹¹⁴). The equations of motion are then recovered through a cardinal law of physics, the *least action* principle, which is an equivalent to Newton's law of motion. It posits that the path taken by a system between two states is such that \mathcal{A} is stationary. Crucially, \mathcal{A} portrays the system in a defined region of space and for all time periods, and the path can thus arise from any process, both at or out of equilibrium in the statistical mechanics sense. Hitherto, most of the founding models in neuroscience do not yet reconcile with the *least action* principle, and a systematic Lagrangian description of neural dynamics is surprisingly missing. Only indirect evidence has been given^{58,84}, e.g., the proof for the Dynamic Causal Modeling (DCM) of Fagerholm et al.⁵⁸. Reconsidering neural circuits in this light allows neuroscience to formally communicate with seemingly distant fields, borrowing their

theoretical schemes and numerical analysis techniques. Given that almost all fields of physics are compatible with this principle, why should neural circuits be an exception?

Fundamentals

Our derivation replaces continuous spacetime with a discrete lattice, transforming fields into variables defined on lattice sites at discrete time steps. More formally, we propose a lattice field theory^{20,21,25,36–46,84,94–96} (LFT), the reference computational approach used in QFTs to tackle numerical simulations in regimes where analytical techniques are not feasible. Many authors^{32–35} have agreed that expressing physical theories in these terms still guarantees the symmetries and conservation laws of continuous formulations. The lattice Lagrangian formalism itself has been studied by multiple authors^{115–120}. Here, we illustrate the formalism and the basic principles for binary activity, but the arguments can be readily extended to any real-valued signal so as to include the most common neurophysiological measures (Local Field Potentials - LFP -, Multi Unit Activity - MUA -, etc..). More formally, this means that our treatment can account for any Potts-like model with multi-spin interactions. Writing the action \mathcal{A} of a neural network using the LFT formalism requires the following simple considerations.

In computational neuroscience, the accepted view is that the elementary blocks of the neuronal code are electrical impulses called action potentials, or spikes. A neuron emits a spike when it reaches the threshold integration of the electrochemical inputs from other neurons. Hence, by assigning 0 to no spike and 1 to a spike, we can assume that the functional role of a neuron can be described by a binary variable²⁵ whose support is

$$\Gamma := \{0, 1\}. \quad (1)$$

Despite its simplicity, this reflects a vast range of complex biochemical interactions in a concise form. We then note that, being intrinsically discrete objects, a set of N neurons can be arbitrarily mapped²⁵ onto the ordered set of lattice vertices

$$V := \{1 \leq i \leq N\}. \quad (2)$$

If we record the activity of the N neurons for a time T , we can map the time blocks onto the vertex set

$$S := \{1 \leq \alpha \leq T\}. \quad (3)$$

The natural temporal ordering crucially fixes the map between time intervals and $\alpha \in S$. The preservation of time ordering is a key feature of our field theoretic approach and is reminiscent of the time-ordered product of field operators used in QFT²⁷. T can be appropriately discretized according to the minimum time τ between two computational operations of the neuron. It is convenient to choose the smallest possible value for τ , i.e., the typical duration of a spike: $\tau \approx 1ms$. In this way, since for neural computations, scales below this τ can be neglected, no temporal information is lost. Neurophysiologists may have noted that τ is related to the refractory period, which thus yields the minimum relevant time scale, a natural clock time for the system. Indeed, within a $\tau \approx 1ms$, the i -th neuron can be reasonably assumed to be either silent (0) or active (1), and its activity at time α expressed with a binary variable φ_i^α . The network activity can then be represented with a binary array Ω of N rows and T columns that we call the *kernel*:⁴⁶

$$\Omega := \{\varphi_i^\alpha \in \Gamma : \alpha \in S, i \in V\}. \quad (4)$$

In actual recordings during a neurophysiology experiment, Ω collects the temporal sequence of spikes of an arbitrary number of neurons aligned with the events or stimuli specific to the chosen

experimental paradigm included in T . During experiments, we handle multiple trials for the same stimulus presentation or the same behavioral condition. For a single trial, the kernel Ω simply contains the spike trains for the N neurons recorded. It is established that information encoding and transfer in neural circuits rely on correlations, with brain functions mediated by dynamic changes in the correlated firing of groups of neurons^{121–126}. Then, let us introduce the space correlation matrix

$$\Phi := \{\phi_{ij} \in [0, 1] : i, j \in V\}, \quad \phi_{ij} := \frac{1}{T} \sum_{\alpha \in S} \varphi_i^\alpha \varphi_j^\alpha \quad (5)$$

and the time correlation matrix

$$\Pi := \{p^{\alpha\beta} \in [0, 1] : \alpha, \beta \in S\}, \quad p^{\alpha\beta} := \frac{1}{N} \sum_{i \in V} \varphi_i^\alpha \varphi_i^\beta. \quad (6)$$

Φ contains the pairwise correlations among the N neurons within the whole epoch T , while Π instead encloses the temporal relationship of the joint occurrences of the ensemble's spikes. These are straightforwardly obtained from the kernel⁴⁶ through the relations

$$\Omega \Omega^\dagger / T = \Phi, \quad \Omega^\dagger \Omega / N = \Pi, \quad (7)$$

where \dagger indicates the transpose operation. Since the observable matrices can be arranged into a single composite matrix (as shown in the graphical abstract, Figure 1 and Figure 2), we will call the triplets Ω , Π , and Φ , the *hypermatrix*. Π gives a time-dependent measure of correlation at different lags, which enables the detection of time structures related to the stimulus presentation, the effect of shared inputs and the associated statistical fluctuations. Each entry represents a delayed interaction of the spike trains of the N neurons during the window T , which accounts for the dynamic adjustments of their correlated firing. Π is the generalization to N neurons of the traditional Joint Peristimulus Time Histogram matrix^{121–123} (JPSTH matrix), thus quantifying the cross-correlation as a function of time at the whole network level. The strength of this representation is that, as firstly shown by the seminal works of Gerstein, Aersten and Abeles^{18,121,122}, the analysis of the profile patterns in Π can reveal groups of neurons that form processing units, the so-called cell assemblies. Π exposes the sequence of coordinated spiking in which synchronization spreads with a fixed temporal delay from one set of neurons to the next in a temporally identifiable manner. Powerful and fully-automated methods now exist^{127–132} to reveal this type of correlated activity and trace it back to the responsible cell assemblies. This gives insights on the network information processing and on the possible types of functional connections between the recorded neurons, each of which produces characteristic signatures in the matrix. A sketched example is given in Figure 1. Finally, it is also essential to model another parameter, the input I , which is often unknown or not precisely measurable. For example, I could model the signal arriving from other brain regions to the observed network or the input noise to the same network. In the next section, we shall see how we can properly compute averages to obtain ensemble observables, and how \mathcal{A} can be defined using Ω , Π , Φ and I .

Modeling neural networks with the action

Neural dynamics is expected to follow some evolution influenced by the prior states, i.e., a dynamical process with memory that can be reasonably described by a quantum evolution^{20,21,25,54,58,84–96}. This may seem peculiar, but it is actually a harmless assumption because the classical (non-quantum) evolution of a system can always be retrieved as a sub-case of the quantum one^{26–31}. Essentially, we assume that the evolution in time of a system of neurons could be described by a discrete process of interacting binary fields, or

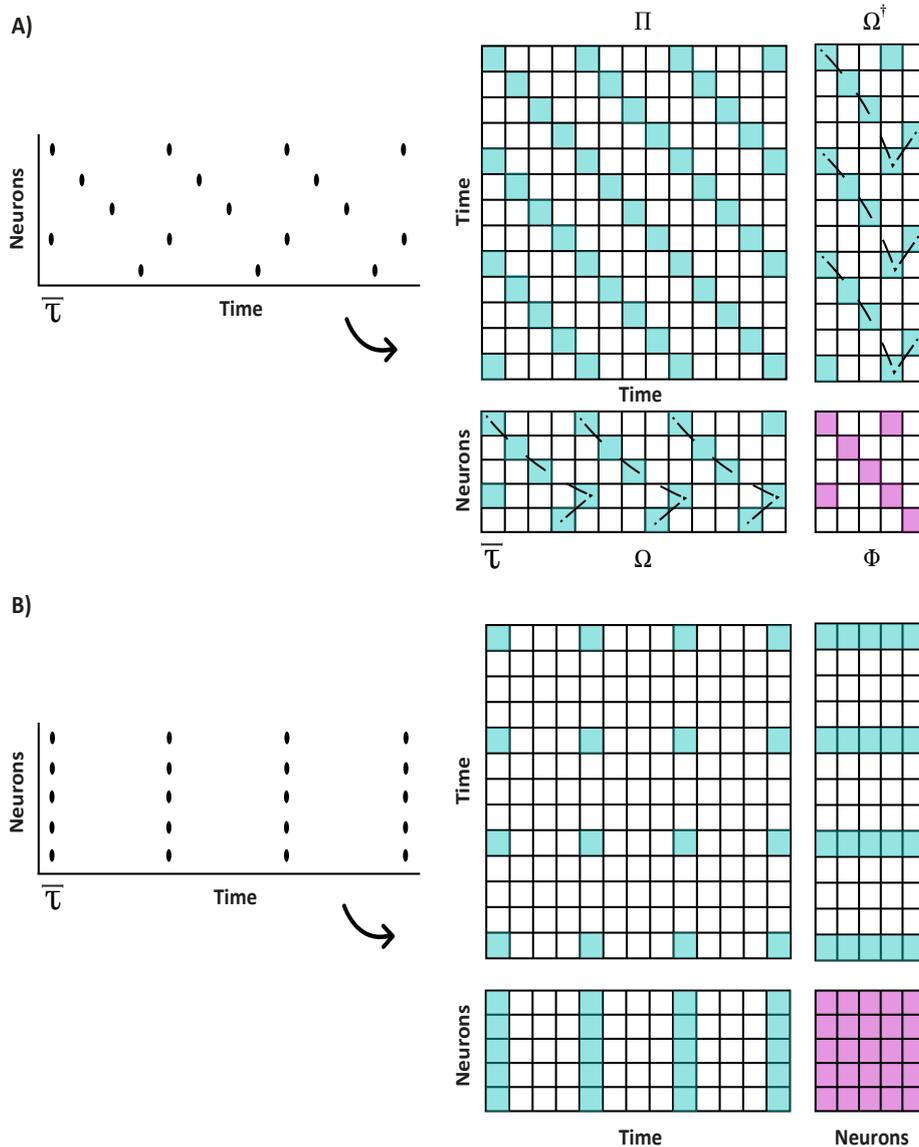


Figure 1: A sketch of the spike trains and the hypermatrix for a toy system of 5 neurons recorded for 13 time bins of length τ for two examples of spatiotemporal patterns. Colors are the same as in the graphical abstract: aquamarine for the kinetic contribution and magenta for the potential one. The elements on the main diagonal of Π represent the correlation of the neurons at the same time point (synchronous firing). A peak along the diagonal suggests that the neurons tend to fire together at the same times. Off-diagonal peaks instead indicate consistent lagged relationships between the periodic firings of the ensemble. If the network exhibit specific sequences of periodic firing patterns as in panel A (dashed lines in Ω and Ω^\dagger), this will be reflected as periodic structures along both the diagonal and off-diagonal elements of the Π matrix. One potential model proposed to explain this and other types of sequential synchronous firing is the synfire chain^{18,133} (see also next section). If groups of neurons fire together periodically in the same time bin (panel B), the Π matrix will exhibit multiple distinct periodic peaks that will appear not only on the main diagonal but also off-diagonal. The hypermatrix representation, comprising both the spatial and temporal correlation matrix, provides a compact and complete representation to infer the joint spatiotemporal interactions in neural networks.

qubits^{42-46,134}. The challenge of determining the temporal evolution of a system of qubits can be

remarkably simplified by treating it as a statistical mechanics problem on a lattice^{36–41}, which can then be tackled through a spectrum of powerful methods^{36–41,47–52} (for more references on the LFT and QFT techniques see the section Theoretical insights -TI- or Bardella et al. 2024²⁵). To model how φ_i^α changes over time, we can use the same language used for elementary particles, a lattice-based statistical mechanics^{36–46}. Therefore, following the assumptions of QFT^{26–52}, we postulate the action function^{26–31}

$$\mathcal{A} : \Gamma^{NT} \rightarrow \mathbb{R}. \quad (8)$$

Denoting the operation of averaging with respect to \mathcal{A} with angle brackets, the ensemble average of the generic observable \mathcal{O} (e.g., the trial-averaged Ω will be denoted as $\langle \Omega \rangle$) is obtained through a softmax average, which is equivalent to the Gibbs principle applied to \mathcal{A} ²⁸, i.e., the principle of *least action*²⁶,

$$\langle \mathcal{O} \rangle := \sum_{\Omega \in \Gamma^{NT}} \mathcal{O}(\Omega) \frac{\exp[-\lambda \mathcal{A}(\Omega)]}{\sum_{\Omega' \in \Gamma^{NT}} \exp[-\lambda \mathcal{A}(\Omega')]} \quad (9)$$

$\lambda \rightarrow \infty$ yields the classical behavior of the system and is thus identified with the ground state of \mathcal{A} ²⁵. In this limiting case, the system becomes conservative, in the sense there are no dissipative dynamics and the path pursued by the system is always the path of least action. This limiting (classical or conservative) case can be understood intuitively in terms of the scaling parameter λ , which effectively plays the role of a precision or inverse temperature. A simplified action \mathcal{A} can be written by combining Ω , Π , Φ and I into a single expression²⁵:

$$\mathcal{A}(\Omega|A, B, I) = \sum_{i \in V} \sum_{\alpha \in S} I_i^\alpha \varphi_i^\alpha + T \sum_{i \in V} \sum_{j \in V} A_{ij} \phi_{ij} + N \sum_{\alpha \in S} \sum_{\beta \in S} B^{\alpha\beta} p^{\alpha\beta}, \quad (10)$$

where A is the matrix of potential interactions and B is the matrix of kinetic interactions. The concise derivation of Equation 10 can be found in the TI section. The entire information about the system is thus coded in the three observables Ω , Φ and Π , the parameters of the theory A and B that control the fluctuations, and the boundary conditions I . This simplified action is expected to hold if the synaptic weights can be considered approximately stationary and the observed neurons share the same kinetic properties, e.g. when they approximately share the same firing dynamics if driven by the same input (see TI). We may appreciate the remarkable power of the LFT formulation—its comprehensive nature despite its simplicity. \mathcal{A} succinctly portrays the essentials about the system in a compact form without requiring intricate numerical manipulations. The quantities of the theory are directly mapped into easily accessible and straightforwardly interpretable experimental variables, which is a consistent advantage of this approach. While frequently employed in neuroscience research to analyze, model and discuss empirical findings, the temporal^{121–123} and spatial^{95,125,126,135} correlations among neurons have not been previously linked to one another through a physical interpretation. Instead, our LFT approach gives a rigorous yet intuitive understanding of how they contribute to the potential and kinetic energies of a neural system. Φ contributes to the former and Π to the latter, respectively. This provides an easy recipe to relate the spatial correlations to the observed dynamics and vice versa, describing their mutual influence in terms of a fundamental quantity, energy. The *least action* principle then allows to derive all the statistical features needed to determine the properties and functions of a neural network, enabling the formulation of neural interaction theories directly from experimental data (see also Section 3.5 of Bardella et al. 2024²⁵). In accordance with the triplets Ω , Π , and Φ , we will call the triplets A , B , and I , the *inverse hypermatrix*. We can also introduce the covariance matrices, which account for all the information that do not depend on the averages:

$$\langle \delta \Pi \rangle := \langle \Pi \rangle - \frac{\langle \Omega \rangle^\dagger \langle \Omega \rangle}{N}, \quad \langle \delta \Phi \rangle := \langle \Phi \rangle - \frac{\langle \Omega \rangle \langle \Omega \rangle^\dagger}{T}. \quad (11)$$

This converts (non-negative) second order matrices into covariance matrices that quantify coupling in terms of positive and negative covariance by removing the average before computing the correlations in Equations 5 and 6. The parameters A and B can be inferred from these matrices alone²⁵, which can also be used in combination with $\langle \Omega \rangle$ to reconstruct the input I (see next section).

Outlooks, implications and limits

Effective theories for neural recordings

So far, N includes all the neurons engaged in the neural computation we want to describe, including those that cannot be directly observed. Indeed, in a neurophysiology experiment, we typically have a limited spatial resolution, being able to measure only a fraction of N . To relate the microscopic theory of Equation 10 with the marginals on a sparse subset of neurons, we can resort to what in physics is known as an *effective* theory. Effective theories are simplified representations to treat otherwise prohibitive systems¹³⁶ at specific spatial scales or energy ranges while ignoring non-relevant variables. Various areas of physics, from subatomic particles to cosmological structures and network science¹³⁷, use effective theories to study how the parameters change when you "zoom in" or "zoom out" on the system, a process known as *renormalization*. Renormalization connects the features at different scales without needing to solve the full theory at all scales. One way of renormalizing is the so-called renormalization by decimation^{49,51}, in which the details of the system at small scales are simplified by integrating out most of the degrees of freedom, e.g., spins in magnetic systems, neurons in this context. Then we observe that the brain naturally has spatial symmetries. For example, the brain cortex exhibits highly symmetrical assemblies of neurons approximately organizing into horizontal layers of columnar groupings^{138–143}. The arrangement of layers and columns varies in thickness, cell type, and density across different parts of the cortex and for different species. Furthermore, the functional and morphological definitions of columns do not always overlap¹⁴⁴, and these structures do not crystallize in time and space, with dynamic changes occurring even on the scale of minutes and hours. Nonetheless, the columnar organization is the most accepted view for the structural and operational components of neural circuitry¹⁴⁵. The so-called minicolumns, on average $\sim 40 - 50\mu\text{m}$ in diameter^{138,142}, are deemed to be the basic mesoscale ones. In this paragraph, we refer to minicolumns, meaning vertically oriented and horizontally separated discrete neuronal assemblies^{144,145}. Hence, this does not necessarily overlap with the functional definition of a column as a cluster of cells sharing the same tuning properties or receptive field parameters. To show how to exploit such symmetries and apply renormalization, we consider recordings from the Utah array (typically 96 recording channels; Blackrock Microsystems, Salt Lake City), one of the most widely used multi-electrode interfaces. Since thousands of kernels are already available from 20 years of recording with Utah arrays across many species, including human patients¹⁴⁶, we hope to encourage the systematic and joint use of LFTs based on these datasets. Due to its planar geometry, its electrodes that penetrate around 1.5 mm into the cortex, and their pitch ($400\mu\text{m}$), the Utah array is able to record from neurons belonging to horizontally separated minicolumns sampled approximately from the same superficial cortical layer z at a distance sufficient to limit self-interaction terms (see Figure 2, panel A). Instead, a single shank multi-electrode array with contact points spread out vertically, such as Neuropixels⁴ or SiNAPS¹ probes, would sample across various layers of the same column. We name V_{xyz} a 3D volume of tissue containing all the neurons within an average height from the cortex surface z and a xy section in the horizontal plane (Figure 2, panel A). Here, renormalizing by decimation assumes that if any of the neurons in V_{xyz} emit a spike (are active), the entire lattice cell, and hence the

whole minicolumn, is activated. Considering the Utah array specifics, we can organize the xy plane into a sub-lattice \mathbb{L}'_2 at height z whose step is much greater than the diameter of the individual column, so that the activities recorded at different points belong to adequately spaced minicolumns²⁵. Using these very general steps, we can model any Utah array recording as a decimated lattice (Figure 2, panel B). The neural dynamics around each electrode tip are then given by an on/off field $\hat{\phi}_{x'y'}^\alpha$ that identifies the state of the observed minicolumn (see also TI). Therefore, theory is straightforwardly mapped into experimental observations with a decimated kernel

$$\hat{\Omega} := \{ \hat{\phi}_{x'y'}^\alpha \in \Gamma : x'y' \in \mathbb{L}'_2, \alpha \in S \}. \quad (12)$$

Cortical minicolumns are reduced to a system of $2 + \varepsilon$ dimensions that could model cortical structures and areas. Note that Equations 5 and 6 still hold, and for the decimated kernel $\hat{\Omega}$ they immediately give the experimental hypermatrix (Figure 2 panel D). Therefore, the LFT formalism^{36–46} reveals that empirical recordings are comparable to a renormalized field theory, with cortical layers behaving as the interacting fields of elementary particle theory. It is crucial to stress that the effective theory for a generic experimental recording will depend on the chosen renormalization scheme, individual features of the recording interface, the observed network (local circuit and/or area), and the experimental settings. Modeling and computing the correction for effective theories of neural interactions is precisely a component where expertise from nuclear physics could be useful in transferring knowledge to neuroscience. This would not only be a formal artifice, but it would also boost a new generation of models with the entry into neuroscience of established schemes for analyzing, simulating, renormalizing, and, in some cases, exactly solving such theories^{47–52,147}.

Learning neural interactions from data

Characterizing a neural network's collective response entails measuring average quantities such as mean spiking activity or correlations between neurons. Then, to infer the underlying interactions, one should determine the parameters of a chosen statistical models based on experimental observations. This is the so-called inverse problem¹⁵¹ and is a major task (for an excellent survey and references see Nguyen et al. 2017¹⁵²). A convenient approach is to incorporate into the model the minimum number of constraints possible on the network's statistical features. This class of models is known as *maximum entropy models*, and it encompasses various fields of research that have provided multiple strategies to address it and numerous algorithms to tackle model inversion¹⁵². To give a coarse-grain idea of these techniques, one of the most popular algorithms for finding parameters maximizes the model's average log-likelihood so that the moments of the resulting distribution match a set of specified values¹⁵³. A well-known application of maximum entropy models and their related inverse problems to neurobiology is thanks to Schneidman, Tkacik and colleagues^{95,154} who inferred spatial couplings of salamander retina neurons assuming an Ising model at equilibrium. Same approach followed by Tavoni, Cocco and colleagues on prefrontal recordings in rats^{131,155,156} However, such a family of models usually considers the distribution of neural activity regardless of its temporal order, constraining only the mean firing rate of the neurons and the pairwise spatial correlations. This means that, typically, only the potential interaction energy contribution is considered. However, a complete description of neural interactions should encompass not only the interaction among circuit's elements but also, and more importantly, its relationship to the observed dynamics. Both are comprised in Equation 10, which thus generalizes the maximum entropy model in that explicitly contains the time evolution of the system through a kinetic term. Indeed, as also detailed in the TI section, eq 10 decomposes the dependencies of the coupling into space and time, describing not only the influence that neurons located in distinct regions of space have on one another but also how

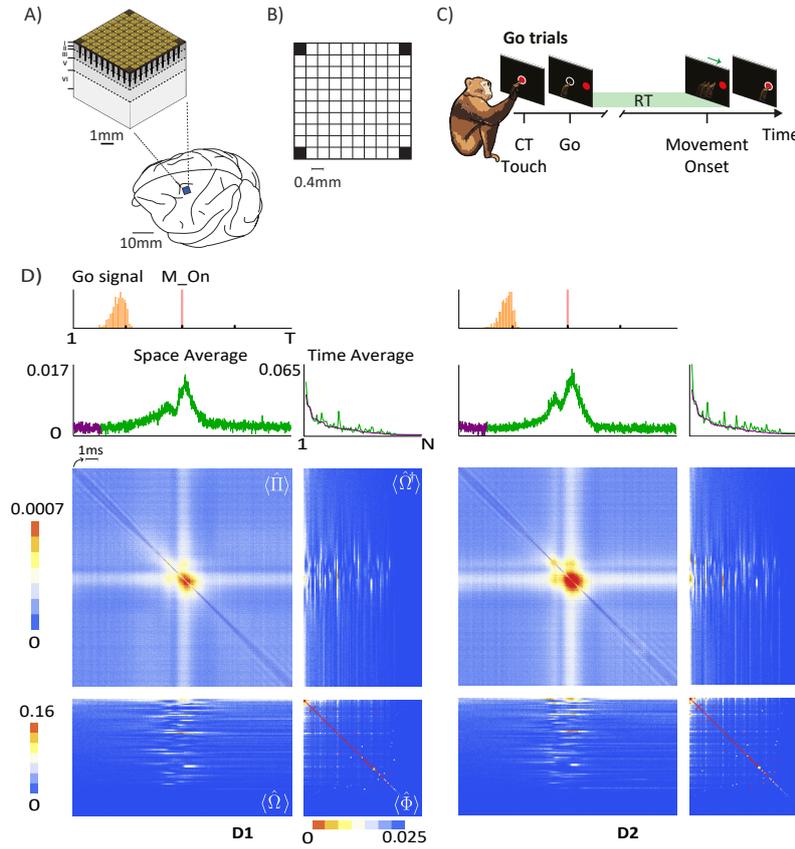


Figure 2: Example of application to experimental data. Here *in vivo* recordings from the dorsal premotor cortex (PMd) of non-human primates during a behavioral task (adapted from Bardella et al. 2024²⁵). **A) Cortical minicolumns sampling of the Utah array:** the listening volume of each electrode can be estimated to be approximately the distance between the electrodes ($\sim 400\mu m$)¹⁴⁸. In PMd, with around 1.5 mm penetration, the Utah 96 samples activity from around the inner Baillager band^{149,150}. **B) Decimated lattice** of the decimated kernel $\hat{\Omega}$ for Utah 96 interfaces. **C) Behavioral task** that required visually guided arm movements toward a peripheral target (Go trials) that could appear in two opposite directions (D1 or D2). Monkeys had to reach and hold the peripheral target to get the reward. CT: central target; Go: Go signal appearance; M_on: Movement onset. **D) Experimental hypermatrix** averaged over trials for the decimated kernel $\hat{\Omega}$ of Equation 12. Neural activity is aligned $[-1, +1]s$ ($T = 2s$) around the M_on to include the distributions of the stimuli (the Go signal, orange distribution and M_on, magenta). Here the I of Equation 10 represents the time markers for the stimuli presented during the task. Green traces above the $\langle \hat{\Pi} \rangle$ matrix are the time evolution of the spatially-averaged activity of the network (Space average). Green traces above $\langle \hat{\Omega}^\dagger \rangle$ are instead the time-average activity for each neuron i (Time average). Purple traces are the observables computed in the first 250 ms (“baseline”), which, as expected, are indistinguishable for both conditions. The kernels and $\langle \hat{\Phi} \rangle$ are sorted according to the activity in the first 250 ms of D1, before the appearance of any Go signal. Black ticks are every 500 ms.

they retain information about their past and how they are coupled over time. In Equation 10 the only constraint on the dynamics is that the state of the system at instant α depends only on the previous $\beta \leq \alpha - 1$ so that no retrocausality is allowed. Consequently, beyond the opportunity of directly estimating dynamics from experimental data, the generality of B has major implications for developing generative models based on Equation 10. For instance, one could simulate neural

347
348
349
350
351

time series according to a biologically plausible model (e.g., a Leaky Integrate and Fire - LIF -), estimate the distribution of theoretical couplings over simulations according to Equation 10 and compare them with those obtained from experimental data. Likewise, Equation 10 can be used to study the \mathcal{A} of model families with chosen connectivity and dynamics by constraining the matrices A and B . This would allow analyzing various known dynamical regimes (e.g., asynchronous, oscillatory, etc..) by classifying parameters as a function of \mathcal{A} . This may also be useful to gain knowledge about specific functionalities of neural circuits, for instance, how \mathcal{A} is altered by modifying the excitation/inhibition balance? What is the \mathcal{A} for an "optimal" choice of the parameters? What happens to \mathcal{A} when neuromodulation is altered? In other words, Equation 10 could be used to perform generative modeling consistent with the *least action* principle, accounting for a biologically and physically-inspired description simultaneously. One potential problem with this approach could be parameter degeneracy, i.e, diverse parameter sets produce the same network dynamics. However, strategies are being developed to curb this problem¹⁵⁷ and \mathcal{A} itself could be used as a metric to explore the phase space of different candidate models and score families of parameters in simulation studies. Similarly, in experimental studies, having the system's dynamics derived directly from observations and not imposed a priori can be of great advantage for inference methods. For example, some features of the dynamics can be extracted directly from the Π matrix, which could be used to restrict the space of the parameter distributions to infer. It would also be possible to use such features to simplify the construction of analytically solvable models to represent realistic circuitry. For instance, to compute the partition function associated to the \mathcal{A} of the synfire chain^{18,133}, the model proposed to explain the sequential spatio-temporal activation at the millisecond-scale of multiple spike patterns. Notably, very recent works^{158? -162} have shown how to exploit the power of deep learning to obtain the correspondence between modeling parameters, the statistics of the training data, and the representations artificial networks build of the processed information. The work of Merger et al.¹⁶¹ is of particular significance because it makes an explicit connection between the internal representation of a class of generative deep neural network models (i.e., the Invertible Neural Networks - INNs -) and the learned physical theory formulated in terms of \mathcal{A} . In their work, an explicit distribution for various types of data and the corresponding microscopic theories of interactions are extracted and interpreted from the parameters of the trained INNs in an unsupervised manner. This, beyond the broad spectrum of applications in neuroscience, also offers promising prospects for improving the interpretability of deep learning models¹⁶³. In this respect, our derivations significantly alleviate the computational burden in the case of experimentally recorded neural activity, given that they reduce the number of parameters needed to compute \mathcal{A} from T^2N^2 to $N^2 + T^2$ (see TI). From a neuroscience perspective, A in Equation 10 is the connectivity matrix, which can be constrained to have any topology or embody any assumptions about the degree of sparsity. For a general characterization of the dynamics, one can in principle entertain or estimate asymmetric coupling ($A_{ij} \neq A_{ji}$). It is essential to notice that asymmetric coupling of this sort breaks detailed balance and introduces solenoidal (zero divergence) dynamics¹⁶⁴. This affords the opportunity to model non-equilibrium steady-state solutions, especially in the setting of exogenous input. This becomes a central elements for a proper description of neural activity or, more generally, of biological time series that characteristically show solenoidal dynamics (e.g., oscillations, biorhythms, life cycles and, more generally, stochastic chaos). Our approach is very flexible in that, for instance, it would allow constraining A with adaptable sparsity specifications depending on the scale of analysis. In the case of micro-scale networks, this would comprise, for example, axons adjacencies or labeling of the recorded cell types. At the macroscale, constraints could come from the integration of imaging data or white matter tractography of various cortical areas. This corresponds to incorporating biologically informed connectivity priors¹⁶⁵ for empirical neural activity, which is becoming common practice for a variety of models in neuroscience¹⁶⁶. A well-known example is DCM which builds large-scale MRI effective connectivity models, scoring

the likelihood of various symmetry constraints on the network architecture. Correspondingly, our methods allow us to construct multiscale effective connectivity models with the additional constraint of empirical dynamics^{165,167–169}. Another example is integrating anatomical details (i.e., from tract-tracing or gene expression experiments) to build voxel-scale models of the mouse connectome¹⁷⁰. Therefore, our formulation enables a multiscale investigation of the interaction between the structural connectivity of a network, its intrinsic dynamics, and the emerging functional relationships among its units. Importantly, \mathcal{A} can be employed within a Bayesian inference framework, similarly to the negative variational free energy in the context of DCM, where it serves as lower bound approximation of the evidence of competing models^{54,59,165,167–169,171} as well as in the domains of predictive coding^{172,173} and active inference applied to neural circuits, where it is used to model how neurons dynamically update their internal states and synaptic weights to predict and infer the causes of their sensory inputs^{174–177}.

LFT and biohybrids networks

Recent progress in the growth, manipulation, and integration of biological brain tissue and bio-inspired electronics devices has opened up intriguing possibilities beyond the conventional use of studying the functioning of natural neural networks in living organisms. Brain organoids^{178–181} and neuromorphic systems^{3,182–184} are the most striking examples. Currently, there are efficient methods to develop synthetic networks and hybrid circuits that imitate biological systems and connect artificial and real brain networks. These circuits could be programmed using the binary LFT language. Indeed, neuromorphic chips use event-driven processing, meaning that computations are only performed when events (spikes) occur, leading to significant energy savings¹⁸⁵. The LFT language could then be used as an efficient paradigm for abstracting computations, performing simulations, and tuning the artificial synaptic weights of the chips based on the activity of the recorded cells during the design and test phase of neuromorphic devices^{186,187}. In addition, the potential application of transforming organoids and neuromorphic networks into functional neural circuits has been also recently discussed by Zheng and coworkers¹⁷⁹. This route seems the most viable practical implementation of utilizing natural (and possibly biohybrid) neurons for conducting physical LFT simulations, eventually realizing the concepts suggested by Halverson⁸⁹, but with real neurons.

Limitations

We conclude discussing some of the open challenges of this new framework. The effective theory, which would actually fit the experimental data, is connected to the microscopic theory (i.e., at the level of single neurons) through extensively studied "renormalization" procedures. However, the precise formulation and calculation of these procedures are still in the early stages and require more research for a comprehensive understanding. The first approximation we employ is the two-body truncation (see TI), which is deemed to be valid under the condition of small covariances. This approximation essentially involves applying a maximum entropy model to \mathcal{A} . Hence, it should be, at worst, equivalent to the usual "stationary" max entropy model described above. The second one is implementing additional stationary conditions truncation, which is applicable when the synaptic connections remain constant across the time scale of the empirically recorded brain activity and homogeneous firing dynamics of the neurons in the network. Reasonably, this can be assumed to be valid for the time scales of most neurophysiology experiment. Indeed, a comparison of recording sessions that are considerably distant in time might be a useful way to test this approximation. In the case of single-neuron activity, our approach describes the on-off state of the neurons over time. Therefore, the map between the couplings of Equation 10

and the actual synaptic anatomical structure, or that of the ion channels, is not trivial. However, 447
as discussed above, we argue that it should be possible to reconstruct the parameters of \mathcal{A} 448
from knowledge of the anatomical structures in the LFT formulation. It is still unclear to what 449
extent one can determine the anatomical structures only based on observable dynamics, even 450
if it is reasonable to expect an overlapping similarity for measures obtainable with a sufficient 451
amount of precision, such as the A matrix or the grand covariance (see Equation 16, TI). Gen- 452
erally speaking, this approach also suffers of the curse of inverse problems, which are, to some 453
extent, ill-posed. This is because an high number of parameters need to be determined from a 454
relatively small subset of observation, with an inverse operator needed to map the measurement 455
vector to the estimated "ground-truth", as for example, in the Magnetoencephalography (MEG) 456
or Electroencephalography (EEG) source localization problem, where statistical models try to 457
assign the true sources activation to the observed measurements. 458

Theoretical insights

459

The action of a neural network

460

We resume here the fundamentals of the theory. For a comprehensive treatment please refer to Bardella et al. 2024²⁵ and Franchini 2023⁴⁶. Following the principles of Statistical Field Theory^{28–31}, we postulate the analytic euclidean action function^{26–31} \mathcal{A} , that can be written as a Taylor's expansion as follows²⁵:

461

462

463

464

$$\begin{aligned} \mathcal{A}(\Omega|F,I) := & \sum_{i \in V} \sum_{\alpha \in S} I_i^\alpha \varphi_i^\alpha + \sum_{i \in V} \sum_{j \in V} \sum_{\alpha \in S} \sum_{\beta \in S} F_{ij}^{\alpha\beta} \varphi_i^\alpha \varphi_j^\beta + \\ & + \sum_{i \in V} \sum_{j \in V} \sum_{h \in V} \sum_{\alpha \in S} \sum_{\beta \in S} \sum_{\gamma \in S} F_{ijh}^{\alpha\beta\gamma} \varphi_i^\alpha \varphi_j^\beta \varphi_h^\gamma + \sum_{i \in V} \sum_{j \in V} \sum_{h \in V} \sum_{k \in V} \sum_{\alpha \in S} \sum_{\beta \in S} \sum_{\gamma \in S} \sum_{\delta \in S} F_{ijhk}^{\alpha\beta\gamma\delta} \varphi_i^\alpha \varphi_j^\beta \varphi_h^\gamma \varphi_k^\delta + \dots \end{aligned} \quad (13)$$

The terms are the one-, two-, three-, and four-vertex interactions, etc., while the tensors F collects the parameters of the theory. We postulate⁹⁵ that terms with more than two vertices can be neglected,

465

466

467

$$F_{ijh}^{\alpha\beta\gamma} = 0, \quad F_{ijhk}^{\alpha\beta\gamma\delta} = 0, \quad \dots \quad (14)$$

Therefore, the proposed action reduces to:

468

$$\mathcal{A}(\Omega|F,I) = \sum_{i \in V} \sum_{\alpha \in S} I_i^\alpha \varphi_i^\alpha + \sum_{i \in V} \sum_{j \in V} \sum_{\alpha \in S} \sum_{\beta \in S} F_{ij}^{\alpha\beta} \varphi_i^\alpha \varphi_j^\beta. \quad (15)$$

Notice that is formally equivalent to the max entropy model considered in the works of Schneidman and colleagues⁹⁵ but with a key difference: the same neuron at different times is considered as two different neurons. It is the action that ultimately makes them look the same evolving in time. We introduce the grand covariance (see also section 3 of Bardella et al. 2024²⁵),

469

470

471

472

$$\mathcal{C}_{ij}^{\alpha\beta} := \langle \varphi_i^\alpha \varphi_j^\beta \rangle_\mu - \langle \varphi_i^\alpha \rangle_\mu \langle \varphi_j^\beta \rangle_\mu \quad (16)$$

from which the couplings can be reconstructed via inference methods²⁵. We can further simplify the theory by dropping interaction terms where both indices are different, that we improperly call "non-relativistic" approximation because it interprets the columns of the kernel Ω as sequence of causally ordered isochronic surfaces²⁵, or Markov blankets¹⁸⁸:

473

474

475

476

$$\mathcal{A}(\Omega|A,B,I) := \sum_{i \in V} \sum_{\alpha \in S} I_i^\alpha \varphi_i^\alpha + \sum_{i \in V} \sum_{j \in V} \sum_{\alpha \in S} F_{ij}^{\alpha\alpha} \varphi_i^\alpha \varphi_j^\alpha + \sum_{\alpha \in S} \sum_{\beta \in S} \sum_{i \in V} F_{ii}^{\alpha\beta} \varphi_i^\alpha \varphi_i^\beta \quad (17)$$

Non relativistic is intended in the "non general" relativistic sense. Indeed, in Equation 129 of Bardella et al 2024²⁵ we showed how to reduce to the special relativistic Klein-Gordon Lagrangian as a special case. This approximation is already useful, as it can account for variable synapses and multiple neuron species with "only" $NT(N+T)$ parameters. We show a test of this specific step in Figure 21 of Bardella et al. 2024²⁵. Finally, we assume that the terms with $i \neq j$ are stationary in time and those with $\alpha \neq \beta$ are stationary among the considered neurons, i.e.²⁵

477

478

479

480

481

482

$$F_{ij}^{\alpha\alpha} = A_{ij}, \quad F_{ii}^{\alpha\beta} = B^{\alpha\beta}, \quad (18)$$

which is equivalent to assuming that the connections do not change at the considered time scale and that the observed neurons have all the same kinetic properties. This is reasonable for the scale of most behavioral neurophysiology experiments. Our approximation reduces the number of parameters that should be computed to reconstruct the action from T^2N^2 to $N^2 + T^2$,

483

484

485

486

significantly enhancing the computational tractability. 487

The action can be rewritten using the correlation matrices²⁵: 488

$$\mathcal{A}(\Omega|A,B,I) = \sum_{i \in V} \sum_{\alpha \in S} I_i^\alpha \varphi_i^\alpha + T \sum_{i \in V} \sum_{j \in V} A_{ij} \phi_{ij} + N \sum_{\alpha \in S} \sum_{\beta \in S} B^{\alpha\beta} p^{\alpha\beta} \quad (19)$$

The information is thus coded in the three observables $\langle \Omega \rangle$, $\langle \Phi \rangle$ and $\langle \Pi \rangle$, which form the hyper-matrix²⁵. Finally, we introduce the covariance matrices of eq. 11. The parameters A , B can be inferred from these matrices alone. The covariances can then also be used in combination with $\langle \Omega \rangle$ to reconstruct the input I ²⁵. As described in the main text, note that anatomical connections of any topology can be encoded in the interaction matrix A , potentially integrating any developments in the mapping of the cortex. 489
490
491
492
493
494

Renormalization 495

To link theory and experimental observations we apply a simple renormalization^{47,49} scheme based on Franchini 2023⁴⁶. For more formal details, please refer to section 3 and 4 of Franchini 2023⁴⁶ and section 4 of Bardella et al. 2024²⁵. Following the main text, let us indicate a cubic lattice with \mathbb{L}_3 and with z ($xyz \in \mathbb{L}_3$) the average height from the surface of the cortex at which a given cortical layer is located. Let xy be the position of the center of gravity of the cortical minicolumn section in the horizontal plane. To model the minicolumn layers, we will define a partition of the space \mathbb{R}^3 into volumes of equal size according to the lattice cells. To simplify, we will approximate the cortical minicolumns as square-based minicolumns. We remark that we use an euclidean reference frame to allow comparisons with existing histological, fMRI, and other structural data¹⁸⁹. However, note that the underlying Euclidean geometry does not, in principle, restrict the LFT parameters. Also, this may help highlight effects due to possible correlations with Euclidean topology¹⁹⁰. The layers of the minicolumns are thus represented by the lattice cells 496
497
498
499
500
501
502
503
504
505
506
507

$$U_{xyz} := U_x U_y U_z \subset \mathbb{R}^3 \quad (20)$$

Now, calling $v(i) \in \mathbb{R}^3$ the position of the i -th neuron (possibly of its cell body), we can group by the volume in which they are located 508
509

$$V_{xyz} := \{i \in V : v(i) \in U_{xyz}\}. \quad (21)$$

Each of these groups of neurons will have its own associated kernel 510

$$\Omega_{xyz} := \{\varphi_i^\alpha \in \{0, 1\} : i \in V_{xyz}, \alpha \in S\}. \quad (22)$$

Then, one could further group the neurons, first by index z , so as to form the cortical minicolumns. The vertices belonging to the minicolumn are 511
512

$$V_{xy} := \bigcup_{z \in \mathbb{L}} V_{xyz} \quad (23)$$

that is the set of neurons that constitutes the minicolumn at position xy . The kernel is 513

$$\Omega_{xy} := \{\Omega_{xyz} \in \{0, 1\}^{V_{xyz}} : z \in \mathbb{L}, \alpha \in S\} \quad (24)$$

and describes the activity of the single cortical minicolumn in xy . It is possible to observe this activity directly through some interfaces, like Neuropixels⁴ or SiNAPS¹ probes or deep multi-electrode shanks. The minicolumns are in the end grouped again to form the cortex structures and areas, 514
515
516
517

$$V := \bigcup_{xy \in \mathbb{L}_2} V_{xy} \quad (25)$$

and the original kernel can thus be expressed in terms of the minicolumns:

$$\Omega = \{\Omega_{xy}^\alpha \in \{0, 1\}^{V_{xy}} : xy \in \mathbb{L}_2, \alpha \in S\}, \quad (26)$$

so that it represents a two-dimensional lattice of cortical minicolumns, a system in $2+\varepsilon$ dimensions. For the above, we can consider the experimental kernel for a specific tubular layer

$$\Omega_z := \{\Omega_{xyz}^\alpha \in \{0, 1\}^{V_{xyz}} : xy \in \mathbb{L}_2, \alpha \in S\}. \quad (27)$$

The points are organized in a planar sub-lattice $x'y' \in \mathbb{L}'_2$ (of the observed cortical layer z) whose step is much greater than the diameter of the individual minicolumn, so that the activities recorded at the various points belong with high probability to different and well-spaced minicolumns. To model the spacing between the probing points, we apply a renormalization by decimation on Ω , and obtain the decimated activity kernel of eq. 12 of the main text

$$\hat{\Omega} := \{\hat{\phi}_{x'y'}^\alpha \in \{0, 1\} : x'y' \in \mathbb{L}'_2, \alpha \in S\}, \quad \hat{\phi}_{x'y'}^\alpha := \mathbb{I}(\Omega_{x'y'z}^\alpha \neq 0). \quad (28)$$

Considering potential corrections for systematic errors and approximations, such kernel is intended to model the sensor recording. According to our arguments, it should be comparable with a renormalized theory. Notice that here renormalization occurs only in space and the information coming from the digitalization of neuronal signals is largely preserved.

Resource availability

Lead contact

Requests for further information and resources should be directed to and will be fulfilled by the lead contact, Giampiero Bardella (giampiero.bardella@uniroma1.it).

Data and code availability

Any additional information required to reanalyze the data reported in this paper is available from the lead contact upon request.

Acknowledgments

This research was partially supported by Sapienza University of Rome via grant PH11715C823A9528 (to Stefano Ferraina) and RM12117A8AD27DB1 (to Pierpaolo Pani). We acknowledge a contribution from the Italian National Recovery and Resilience Plan (NRRP), M4C2, funded by the European Union–NextGenerationEU (Project IR0000011, CUP B51E22000150006, “EBRAINS–Italy” (to Stefano Ferraina). We thank Giancarlo La Camera (Stony Brook University), Danilo Benozzo (University of Pavia), Simone Scardapane (Sapienza - University of Rome), Indro Spinelli (Sapienza - University of Rome) and Diego Fasoli (University of Leeds) for constructive comments.

Author contributions

Conceptualization, G.B. and S.F. (Simone Franchini); methodology, G.B. and S.F.; writing—original draft, G.B.; writing—review & editing, G.B., S.F., P.P. and S.Fe. (Stefano Ferraina); funding acquisition, P.P. and S.Fe.; resources, P.P. and S.Fe.

Declaration of interest

550

The authors declare no competing interests

551

References

1. Angotzi, G. N., Boi, F., Lecomte, A., Miele, E., Malerba, M., Zucca, S., Casile, A., and Berdondini, L. (2019). SiNAPS: An implantable active pixel sensor CMOS-probe for simultaneous large-scale neural recordings. *Biosensors and Bioelectronics* 126, 355–364. doi:10.1016/J.BIOS.2018.10.032. 552-556
2. Musk, E. (2019). "An Integrated Brain-Machine Interface Platform With Thousands of Channels". *J Med Internet Res* 21, e16194. doi:10.2196/16194. 557-558
3. Obaid, A., Hanna, M. E., Wu, Y. W., Kollo, M., Racz, R., Angle, M. R., Müller, J., Brackbill, N., Wray, W., Franke, F., Chichilnisky, E. J., Hierlemann, A., Ding, J. B., Schaefer, A. T., and Melosh, N. A. (2020). Massively parallel microwire arrays integrated with CMOS chips for neural recording. *Science Advances* 6. doi:10.1126/SCIADV.AAY2789. 559-562
4. Steinmetz, N. A., Aydin, C., Lebedeva, A., Okun, M., Pachitariu, M., Bauza, M., Beau, M., Bhagat, J., Böhm, C., Broux, M., Chen, S., Colonell, J., Gardner, R. J., Karsh, B., Kloosterman, F., Kostadinov, D., Mora-Lopez, C., O'Callaghan, J., Park, J., Putzeys, J., Sauerbrei, B., van Daal, R. J., Vollan, A. Z., Wang, S., Welkenhuysen, M., Ye, Z., Dudman, J. T., Dutta, B., Hantman, A. W., Harris, K. D., Lee, A. K., Moser, E. I., O'Keefe, J., Renart, A., Svoboda, K., Häusser, M., Haesler, S., Carandini, M., and Harris, T. D. (2021). Neuropixels 2.0: A miniaturized high-density probe for stable, long-term brain recordings. *Science* (New York, N.Y.) 372. doi:10.1126/SCIENCE.ABF4588. 563-570
5. Normann, R. A., Maynard, E. M., Rousche, P. J., and Warren, D. J. (1999). A neural interface for a cortical vision prosthesis. *Vision Research* 39, 2577–2587. doi:10.1016/S0042-6989(99)00040-1. 571-573
6. Leber, M., Bhandari, R., Mize, J., Warren, D. J., Shandhi, M. M., Solzbacher, F., and Negi, S. (2017). Long term performance of porous platinum coated neural electrodes. *Biomedical Microdevices* 19. doi:10.1007/s10544-017-0201-4. 574-576
7. Ye, Z., Shelton, A. M., Shaker, J. R., Boussard, J., Colonell, J., Birman, D., Manavi, S., Chen, S., Windolf, C., Hurwitz, C., Namima, T., Pedraja, F., Weiss, S., Raducanu, B., Ness, T. V., Jia, X., Mastroberardino, G., Rossi, L. F., Carandini, M., Häusser, M., Einevoll, G. T., Laurent, G., Sawtell, N. B., Bair, W., Pasupathy, A., Lopez, C. M., Dutta, B., Paninski, L., Siegle, J. H., Koch, C., Olsen, S. R., Harris, T. D., and Steinmetz, N. A. (2024). Ultra-high density electrodes improve detection, yield, and cell type identification in neuronal recordings. *bioRxiv* (2023.08.23.554527). doi:10.1101/2023.08.23.554527. 577-583
8. Beurle, R. L. (1956). Properties of a mass of cells capable of regenerating pulses. *Philosophical transactions of the Royal Society of London. Series B, Biological sciences* 240, 55–94. doi:10.1098/RSTB.1956.0012. 584-586
9. Amari, S. I. (1972). Characteristics of Random Nets of Analog Neuron-Like Elements. *IEEE Transactions on Systems, Man and Cybernetics* 2, 643–657. doi:10.1109/TSMC.1972.4309193. 587-589
10. Wilson, H. R., and Cowan, J. D. (1972). Excitatory and Inhibitory Interactions in Localized Populations of Model Neurons. *Biophysical Journal* 12, 1–24. doi:10.1016/S0006-3495(72)86068-5. 590-592

11. Fischer, B. (1973). A neuron field theory: Mathematical approaches to the problem of large numbers of interacting nerve cells. *Bulletin of Mathematical Biology* 35, 345–357. doi:10.1016/S0092-8240(73)80034-5. 593
594
595
12. Amari, S. i. (1977). Dynamics of pattern formation in lateral-inhibition type neural fields. *Biological Cybernetics* 27, 77–87. doi:10.1007/BF00337259. 596
597
13. Hopfield, J. J. (1982). Neural networks and physical systems with emergent collective computational abilities. *Proceedings of the National Academy of Sciences of the United States of America* 79, 2554. doi:10.1073/PNAS.79.8.2554. 598
599
600
14. Amit, D. J., Gutfreund, H., and Sompolinsky, H. (1985). Storing Infinite Numbers of Patterns in a Spin-Glass Model of Neural Networks. *Physical Review Letters* 55, 1530. doi:10.1103/PhysRevLett.55.1530. 601
602
603
15. Amit, D. J., and Brunel, N. (1997). Model of global spontaneous activity and local structured activity during delay periods in the cerebral cortex. *Cerebral Cortex* 7, 237–252. doi:10.1093/CERCOR/7.3.237. 604
605
606
16. Toulouse, G., Dehaene, S., and Changeux, J. P. (1986). Spin glass model of learning by selection. *Proceedings of the National Academy of Sciences* 83, 1695–1698. doi:10.1073/pnas.83.6.1695. 607
608
609
17. Treves, A. (1991). Are spin-glass effects relevant to understanding realistic auto-associative networks? *Journal of Physics A: Mathematical and General* 24, 2645. doi:10.1088/0305-4470/24/11/029. 610
611
612
18. Abeles, M. *An Electrophysiological Study* vol. 9780199211. Springer Berlin, Heidelberg (1982). doi:10.1007/978-3-642-81708-3. 613
614
19. Abeles, M., Bergman, H., Gat, I., Meilijson, I., Seidemann, E., Tishby, N., and Vaadia, E. (1995). Cortical activity flips among quasi-stationary states. *Proceedings of the National Academy of Sciences* 92, 8616–8620. doi:10.1073/PNAS.92.19.8616. 615
616
617
20. Buice, M. A., and Cowan, J. D. (2007). Field-theoretic approach to fluctuation effects in neural networks. *Physical Review E - Statistical, Nonlinear, and Soft Matter Physics* 75, 051919. doi:10.1103/PHYSREVE.75.051919. 618
619
620
21. Buice, M. A., and Chow, C. C. (2013). Beyond mean field theory: statistical field theory for neural networks. *Journal of Statistical Mechanics: Theory and Experiment* 2013, P03003. doi:10.1088/1742-5468/2013/03/P03003. 621
622
623
22. Wigner, E. P. Remarks on the mind-body question. In: Good, I. J., ed. *The Scientist Speculates*. Heineman (1961):. 624
625
23. Weizsacker, C. F. v. (1984). *The Unity of Nature*. Springer, Dordrecht. doi:10.1007/978-94-009-7178-3_13. 626
627
24. Penrose, R. *Emperor's New Mind*. Oxford University Press UK (1999). 628
25. Bardella, G., Franchini, S., Pan, L., Balzan, R., Ramawat, S., Brunamonti, E., Pani, P., and Ferraina, S. (2024). Neural Activity in Quarks Language: Lattice Field Theory for a Network of Real Neurons. *Entropy* 2024, Vol. 26, Page 495 26, 495. doi:10.3390/E26060495. 629
630
631

26. Brown, L. M. Feynman's Thesis — A New Approach to Quantum Theory. WORLD SCIENTIFIC (2005). doi:10.1142/5852. 632
633
27. Lehmann, H., Symanzik, K., and Zimmermann, W. (1955). Zur Formulierung quantisierter Feldtheorien. *Il Nuovo Cimento* *1*, 205–225. doi:10.1007/BF02731765. 634
635
28. Guerra, F., Rosen, L., and Simon, B. (1975). The $P(\phi)_2$ Euclidean Quantum Field Theory as Classical Statistical Mechanics. *The Annals of Mathematics* *101*, 111. doi:10.2307/1970988. 636
637
638
29. Parisi, G., and WU, Y. (1981). Perturbation theory without gauge fixing. *Scientia Sinica* *24*, 483. 639
640
30. Damgaard, P. H., and Hüffel, H. (1987). Stochastic quantization. *Physics Reports* *152*, 227–398. doi:10.1016/0370-1573(87)90144-X. 641
642
31. Parisi, G. *Statistical Field Theory*. Redwood City, CA, USA,: Addison-Wesley (1989). 643
32. Lee, T. D. (1983). Can time be a discrete dynamical variable? *Physics Letters B* *122*, 217–220. doi:10.1016/0370-2693(83)90687-1. 644
645
33. Lee, T. D. (1987). Difference equations and conservation laws. *Journal of Statistical Physics* *46*, 843–860. doi:10.1007/BF01011145. 646
647
34. Rovelli, C., and Smolin, L. (1995). Discreteness of area and volume in quantum gravity. *Nuclear Physics B* *442*, 593–619. doi:10.1016/0550-3213(95)00150-Q. 648
649
35. Hooft, G. t. *The Cellular Automaton Interpretation of Quantum Mechanics* (2014). doi:10.1007/978-3-319-41285-6. 650
651
36. Wilson, K. G. (1974). Confinement of quarks. *Physical Review D* *10*, 2445. doi:10.1103/PhysRevD.10.2445. 652
653
37. Wiese, U.-J. (2009). *An introduction to lattice field theory*. 654
38. Gupta, S. *Introduction to Lattice Field Theory*. Tech. Rep. Asian School on Lattice Field Theory TIFR Mumbai, India (2011). 655
656
39. Zohar, E., and Burrello, M. (2015). Formulation of lattice gauge theories for quantum simulations. *Physical Review D - Particles, Fields, Gravitation and Cosmology* *91*, 054506. doi:10.1103/PHYSREVD.91.054506. 657
658
659
40. Parotto, P. (2018). Parametrized Equation of State for QCD from 3D Ising Model. *Proceedings of Science* *311*, 036. doi:10.22323/1.311.0036. 660
661
41. Magnifico, G., Felser, T., Silvi, P., and Montangero, S. (2021). Lattice quantum electrodynamics in (3+1)-dimensions at finite density with tensor networks. *Nature Communications* *12*. doi:10.1038/s41467-021-23646-3. 662
663
664
42. Gornitz, T., Graudenz, D., and v. Weizsacker, C. F. (1992). Quantum field theory of binary alternatives. *International Journal of Theoretical Physics* *31*, 1929–1959. doi:10.1007/BF00671965. 665
666
667
43. Peretto, P. (2004). Space-time generated from a set of binary units. *The European Physical Journal C - Particles and Fields* *2004* 35:4 35, 567–577. doi:10.1140/EPJC/S2004-01826-1. 668
669
670

44. Deutsch, D. (2004). Qubit Field Theory. arXiv. doi:10.48550/arXiv.quant-ph/0401024. 671
45. Singh, H. Exploring Quantum Field Theories with Qubit Lattice Models. Ph.D. thesis (2020). doi:10.161/21489. 672
673
46. Franchini, S. (2023). Replica Symmetry Breaking without replicas. *Annals of Physics* 450. doi:10.1016/j.aop.2023.169220. 674
675
47. Di Castro, C., and Jona-Lasinio, G. (1969). On the microscopic foundation of scaling laws. *Physics Letters A* 29, 322–323. doi:10.1016/0375-9601(69)90148-0. 676
677
48. Balian, R., Drouffe, J. M., and Itzykson, C. (1974). Gauge fields on a lattice. I. General outlook. *Physical Review D* 10, 3376. doi:10.1103/PhysRevD.10.3376. 678
679
49. Wilson, K. G. (1983). The renormalization group and critical phenomena. *Reviews of Modern Physics* 55, 583. doi:10.1103/RevModPhys.55.583. 680
681
50. Parisi, G., Petronzio, R., and Rosati, F. (2001). Renormalization group approach to spin glass systems. *European Physical Journal B* 21, 605–609. doi:10.1007/S100510170171. 682
683
51. Kadanoff, L. P. (2013). Relating theories via renormalization. *Studies in History and Philosophy of Science Part B: Studies in History and Philosophy of Modern Physics* 44, 22–39. doi:10.1016/J.SHPSB.2012.05.002. 684
685
686
52. Franchini, S. (2021). A simplified Parisi ansatz. *Communications in Theoretical Physics* 73, 055601. doi:10.1088/1572-9494/ABDE32. 687
688
53. Pouget, A., Beck, J. M., Ji Ma, W., and Latham, P. E. (2013). Probabilistic brains: knowns and unknowns. *Nature Neuroscience* 16, 1170–1178. doi:10.1038/nn.3495. 689
690
54. Friston, K. J. (2010). The free-energy principle: a unified brain theory? *Nature Reviews Neuroscience* 11, 127–138. doi:10.1038/nrn2787. 691
692
55. Gentili, P. L. (2021). Establishing a New Link between Fuzzy Logic, Neuroscience, and Quantum Mechanics through Bayesian Probability: Perspectives in Artificial Intelligence and Unconventional Computing. *Molecules* 2021, Vol. 26, Page 5987 26, 5987. doi:10.3390/MOLECULES26195987. 693
694
695
696
56. Zadeh, L. (1965). Fuzzy sets. *Information and Control* 8, 338–353. doi:https://doi.org/10.1016/S0019-9958(65)90241-X. 697
698
57. Zadeh, L. A. "Fuzzy Logic = Computing with Words" (3–23). Heidelberg: Physica-Verlag HD. ISBN 978-3-7908-1873-4 (1999):(3–23). doi:10.1007/978-3-7908-1873-4_1. 699
700
58. Fagerholm, E. D., Foulkes, W. M., Friston, K. J., Moran, R. J., and Leech, R. (2021). Rendering neuronal state equations compatible with the principle of stationary action. *Journal of Mathematical Neuroscience* 11, 1–15. doi:10.1186/S13408-021-00108-0. 701
702
703
59. Zeidman, P., Friston, K., and Parr, T. (2023). A primer on Variational Laplace (VL). *NeuroImage* 279, 120310. doi:10.1016/j.neuroimage.2023.120310. 704
705
60. Kobak, D., Brendel, W., Constantinidis, C., Feierstein, C. E., Kepecs, A., Mainen, Z. F., Qi, X. L., Romo, R., Uchida, N., and Machens, C. K. (2016). Demixed principal component analysis of neural population data. *eLife* 5. doi:10.7554/ELIFE.10989. 706
707
708

61. Murray, J. D., Bernacchia, A., Roy, N. A., Constantinidis, C., Romo, R., and Wang, X. J. (2017). Stable population coding for working memory coexists with heterogeneous neural dynamics in prefrontal cortex. *Proceedings of the National Academy of Sciences of the United States of America* *114*, 394–399. doi:10.1073/pnas.1619449114.
62. Gallego, J. A., Perich, M. G., Miller, L. E., and Solla, S. A. (2017). Neural Manifolds for the Control of Movement. *Neuron* *94*, 978–984. doi:10.1016/J.NEURON.2017.05.025.
63. Jazayeri, M., and Ostojic, S. (2021). Interpreting neural computations by examining intrinsic and embedding dimensionality of neural activity. *Current Opinion in Neurobiology* *70*, 113–120. doi:10.1016/J.CONB.2021.08.002.
64. Vyas, S., Golub, M. D., Sussillo, D., and Shenoy, K. V. (2020). Computation Through Neural Population Dynamics. *Annual review of neuroscience* *43*, 249–275. doi:10.1146/ANNUREV-NEURO-092619-094115.
65. Pani, P., Giamundo, M., Giarrocco, F., Mione, V., Fontana, R., Brunamonti, E., Mattia, M., and Ferraina, S. (2022). Neuronal population dynamics during motor plan cancellation in nonhuman primates. *Proceedings of the National Academy of Sciences of the United States of America* *119*, e2122395119. doi:10.1073/pnas.2122395119.
66. Lebedev, M. A., Ossadtchi, A., Mill, N. A., Urpí, N. A., Cervera, M. R., and Nicolelis, M. A. (2019). Analysis of neuronal ensemble activity reveals the pitfalls and shortcomings of rotation dynamics. *Scientific Reports* 2019 9:1 9, 1–14. doi:10.1038/s41598-019-54760-4.
67. Shinn, M. (2023). Phantom oscillations in principal component analysis. *Proceedings of the National Academy of Sciences of the United States of America* *120*, e2311420120. doi:10.1073/PNAS.2311420120.
68. Kuzmina, E., Kriukov, D., and Lebedev, M. (2024). Neuronal travelling waves explain rotational dynamics in experimental datasets and modelling. *Scientific Reports* 2024 14:1 14, 1–15. doi:10.1038/s41598-024-53907-2.
69. Langdon, C., Genkin, M., and Engel, T. A. (2023). A unifying perspective on neural manifolds and circuits for cognition. *Nature Reviews Neuroscience* 2023 24:6 24, 363–377. doi:10.1038/s41583-023-00693-x.
70. Wang, S., Falcone, R., Richmond, B., Averbeck, B. B., and Davidoff, L. M. (2023). Attractor dynamics reflect decision confidence in macaque prefrontal cortex. *Nature Neuroscience* 2023 26:11 26, 1970–1980. doi:10.1038/s41593-023-01445-x.
71. Mante, V., Sussillo, D., Shenoy, K. V., and Newsome, W. T. (2013). Context-dependent computation by recurrent dynamics in prefrontal cortex. *Nature* 2013 503:7474 503, 78–84. doi:10.1038/nature12742.
72. Wimmer, K., Nykamp, D. Q., Constantinidis, C., and Compte, A. (2014). Bump attractor dynamics in prefrontal cortex explains behavioral precision in spatial working memory. *Nature neuroscience* *17*, 431–439. doi:10.1038/NN.3645.
73. Sussillo, D., Churchland, M. M., Kaufman, M. T., and Shenoy, K. V. (2015). A neural network that finds a naturalistic solution for the production of muscle activity. *Nature neuroscience* *18*, 1025–1033. doi:10.1038/NN.4042.

74. Rajan, K., Harvey, C. D. D., and Tank, D. W. W. (2016). Recurrent Network Models of Sequence Generation and Memory. *Neuron* 90, 128–142. doi:10.1016/J.NEURON.2016.02.009. 749
750
751
75. Finkelstein, A., Fontolan, L., Economo, M. N., Li, N., Romani, S., and Svoboda, K. (2021). Attractor dynamics gate cortical information flow during decision-making. *Nature Neuroscience* 2021 24:6 24, 843–850. doi:10.1038/s41593-021-00840-6. 752
753
754
76. Mastrogiuseppe, F., and Ostojic, S. (2018). Linking Connectivity, Dynamics, and Computations in Low-Rank Recurrent Neural Networks. *Neuron* 99, 609–623. doi:10.1016/J.NEURON.2018.07.003. 755
756
757
77. Pollock, E., and Jazayeri, M. (2020). Engineering recurrent neural networks from task-relevant manifolds and dynamics. *PLOS Computational Biology* 16, e1008128. doi:10.1371/JOURNAL.PCBI.1008128. 758
759
760
78. Wang, X. J. (2002). Probabilistic Decision Making by Slow Reverberation in Cortical Circuits. *Neuron* 36, 955–968. doi:10.1016/S0896-6273(02)01092-9. 761
762
79. Fasoli, D., Cattani, A., and Panzeri, S. (2016). The Complexity of Dynamics in Small Neural Circuits. *PLOS Computational Biology* 12, e1004992. doi:10.1371/JOURNAL.PCBI.1004992. 763
764
765
80. Brinkman, B. A., Yan, H., Maffei, A., Park, I. M., Fontanini, A., Wang, J., and La Camera, G. (2022). Metastable dynamics of neural circuits and networks. *Applied Physics Reviews* 9, 11313. doi:10.1063/5.0062603/2835433. 766
767
768
81. Chaudhuri, R., Gerçek, B., Pandey, B., Peyrache, A., and Fiete, I. (2019). The intrinsic attractor manifold and population dynamics of a canonical cognitive circuit across waking and sleep. *Nature Neuroscience* 2019 22:9 22, 1512–1520. doi:10.1038/s41593-019-0460-x. 769
770
771
772
82. Barack, D. L., and Krakauer, J. W. (2021). Two views on the cognitive brain. *Nature Reviews Neuroscience* 2021 22:6 22, 359–371. doi:10.1038/s41583-021-00448-6. 773
774
83. Deco, G., Jirsa, V. K., Robinson, P. A., Breakspear, M., and Friston, K. (2008). The Dynamic Brain: From Spiking Neurons to Neural Masses and Cortical Fields. *PLOS Computational Biology* 4, e1000092. doi:10.1371/JOURNAL.PCBI.1000092. 775
776
777
84. Qiu, S., and Chow, C. (2014). Field theory for biophysical neural networks. arXiv:1411.1400. 778
779
85. Nanopoulos, D. (1995). Theory of Brain Function, Quantum Mechanics and Superstrings. arXiv:hep-ph/9505374. 780
781
86. Crisanti, A., and Sompolinsky, H. (2018). Path integral approach to random neural networks. *Phys. Rev. E* 98, 062120. doi:10.1103/PhysRevE.98.062120. 782
783
87. Helias, M., and Dahmen, D. Statistical Field Theory for Neural Networks. Springer International Publishing (2020). ISBN 9783030464448. doi:10.1007/978-3-030-46444-8. 784
785
88. Gosselin, P., Lotz, A., and Wambst, M. (2022). Statistical Field Theory and Networks of Spiking Neurons. arXiv:2009.14744. 786
787
89. Halverson, J. (2021). Building quantum field theories out of neurons. arXiv:2112.04527. 788

90. Summers, R. L. (2021). An Action Principle for Biological Systems. *Journal of Physics: Conference Series* 2090, 012109. doi:10.1088/1742-6596/2090/1/012109. 789
790
91. Swan, M., dos Santos, R. P., and Witte, F. (2022). Quantum Neurobiology. *Quantum Reports* 4, 107–126. doi:10.3390/quantum4010008. 791
792
92. Tiberi, L., Stapmanns, J., Kühn, T., Luu, T., Dahmen, D., and Helias, M. (2022). Gell-Mann-Low Criticality in Neural Networks. *Physical Review Letters* 128, 168301. doi:10.1103/PHYSREVLETT.128.168301. 793
794
795
93. Cook, B. J., Peterson, A. D. H., Woldman, W., and Terry, J. R. (2022). Neural Field Models: A mathematical overview and unifying framework. *Mathematical Neuroscience and Applications Volume 2*. doi:10.46298/mna.7284. 796
797
798
94. Peretto, P. (1984). Collective properties of neural networks: a statistical physics approach. *Biological cybernetics* 50, 51–62. doi:10.1007/BF00317939. 799
800
95. Schneidman, E., Berry, M. J., Segev, R., and Bialek, W. (2006). Weak pairwise correlations imply strongly correlated network states in a neural population. *Nature* 440, 1007–1012. doi:10.1038/nature04701. 801
802
803
96. Meshulam, L., and Bialek, W. (2024). Statistical mechanics for networks of real neurons. arXiv:2409.00412. 804
805
97. Wilson, H. R., and Cowan, J. D. (1973). A mathematical theory of the functional dynamics of cortical and thalamic nervous tissue. *Kybernetik* 13, 55–80. doi:10.1007/BF00288786. 806
807
98. Treves, A., and Amit, D. J. (1988). Metastable states in asymmetrically diluted Hopfield networks. *Journal of Physics A: Mathematical and General* 21, 3155. doi:10.1088/0305-4470/21/14/016. 808
809
810
99. Brunel, N., and Hakim, V. (1999). Fast Global Oscillations in Networks of Integrate-and-Fire Neurons with Low Firing Rates. *Neural Computation* 11, 1621–1671. doi:10.1162/089976699300016179. 811
812
813
100. Fusi, S., and Mattia, M. (1999). Collective Behavior of Networks with Linear (VLSI) Integrate-and-Fire Neurons. *Neural Computation* 11, 633–652. doi:10.1162/089976699300016601. 814
815
816
101. Vinci, G. V., Benzi, R., and Mattia, M. (2023). Self-consistent stochastic dynamics for finite-size networks of spiking neurons. *Phys. Rev. Lett.* 130, 097402. doi:10.1103/PhysRevLett.130.097402. 817
818
819
102. Vinci, G. V., and Mattia, M. (2024). Rosetta stone for the population dynamics of spiking neuron networks. *Phys. Rev. E* 110, 034303. doi:10.1103/PhysRevE.110.034303. 820
821
103. Yan, H., Zhao, L., Hu, L., Wang, X., Wang, E., and Wang, J. (2013). Nonequilibrium landscape theory of neural networks. *Proceedings of the National Academy of Sciences of the United States of America* 110, E4185–E4194. doi:10.1073/PNAS.1310692110. 822
823
824
104. Wang, J. (2015). Landscape and flux theory of non-equilibrium dynamical systems with application to biology. *Advances in Physics* 64, 1–137. doi:10.1080/00018732.2015.1037068. 825
826

105. Yan, H., and Wang, J. (2020). Non-equilibrium landscape and flux reveal the stability-flexibility-energy tradeoff in working memory. *PLOS Computational Biology* 16, e1008209. doi:10.1371/JOURNAL.PCBI.1008209. 827
828
829
106. Shi, Y. L., Steinmetz, N. A., Moore, T., Boahen, K., and Engel, T. A. (2022). Cortical state dynamics and selective attention define the spatial pattern of correlated variability in neocortex. *Nature Communications* 2022 13:1 13, 1–15. doi:10.1038/s41467-021-27724-4. 830
831
832
107. Genkin, M., Hughes, O., and Engel, T. A. (2021). Learning non-stationary Langevin dynamics from stochastic observations of latent trajectories. *Nature Communications* 2021 12:1 12, 1–9. doi:10.1038/s41467-021-26202-1. 833
834
835
108. Shi, Y. L., Zeraati, R., Levina, A., and Engel, T. A. (2023). Spatial and temporal correlations in neural networks with structured connectivity. *Physical Review Research* 5, 013005. doi:10.1103/PHYSRESEARCH.5.013005. 836
837
838
109. Tyrcha, J., Roudi, Y., Marsili, M., and Hertz, J. (2013). The effect of nonstationarity on models inferred from neural data. *Journal of Statistical Mechanics: Theory and Experiment* 2013, P03005. doi:10.1088/1742-5468/2013/03/P03005. 839
840
841
110. Aguilera, M., Moosavi, S. A., and Shimazaki, H. (2021). A unifying framework for mean-field theories of asymmetric kinetic Ising systems. *Nature Communications* 2021 12:1 12, 1–12. doi:10.1038/s41467-021-20890-5. 842
843
844
111. Haschke, R., and Steil, J. J. (2005). Input space bifurcation manifolds of recurrent neural networks. *Neurocomputing* 64, 25–38. doi:10.1016/J.NEUCOM.2004.11.030. 845
846
112. Fasoli, D., and Panzeri, S. (2019). Optimized brute-force algorithms for the bifurcation analysis of a binary neural network model. *Physical Review E* 99, 012316. doi:10.1103/PHYSREVE.99.012316. 847
848
849
113. Dick, M., van Meegen, A., and Helias, M. (2024). Linking network- and neuron-level correlations by renormalized field theory. *Phys. Rev. Res.* 6, 033264. doi:10.1103/PhysRevResearch.6.033264. 850
851
852
114. Chandra, A., Chevyrev, I., Hairer, M., and Shen, H. (2022). Stochastic quantisation of Yang-Mills-Higgs in 3D. *arXiv*. 853
854
115. D’Ambrosio, F. (2019). A Noether Theorem for discrete Covariant Mechanics. *arXiv:1902.08997*. 855
856
116. Grimmer, D. (2022). A Discrete Analog of General Covariance – Part 2: Despite what you’ve heard, a perfectly Lorentzian lattice theory. *arXiv:2205.07701*. 857
858
117. Crăciun, D., and Opreș, D. (1996). The helmholtz conditions for the difference equations systems. *Balkan Journal of Geometry and its Applications (BJGA)* 1, 21–30. 859
860
118. Bourdin, L., and Cresson, J. (2013). Helmholtz’s inverse problem of the discrete calculus of variations. *Journal of Difference Equations and Applications* 19, 1417–1436. doi:10.1080/10236198.2012.754435. 861
862
863
119. Gubbiotti, G. (2019). On the inverse problem of the discrete calculus of variations. *Journal of Physics A: Mathematical and Theoretical* 52, 305203. doi:10.1088/1751-8121/AB2919. 864
865

120. Gubbiotti, G. (2020). Lagrangians and integrability for additive fourth-order difference equations. *The European Physical Journal Plus* 2020 135:10 135, 1–30. doi:10.1140/EPJP/S13360-020-00858-Y. 866
867
868
121. Gerstein, G. L., and Perkel, D. H. (1969). Simultaneously recorded trains of action potentials: analysis and functional interpretation. *Science (New York, N.Y.)* 164, 828–830. doi:10.1126/SCIENCE.164.3881.828. 869
870
871
122. Aertsen, A. M., Gerstein, G. L., Habib, M. K., and Palm, G. (1989). Dynamics of neuronal firing correlation: modulation of "effective connectivity". <https://doi.org/10.1152/jn.1989.61.5.900> 61. doi:10.1152/JN.1989.61.5.900. 872
873
874
123. Vaadia, E., Haalman, I., Abeles, M., and Bergman, H. (1995). Dynamics of neuronal interactions in monkey cortex in relation to behavioural events. *Nature* 1995 373:6514 373, 515–518. doi:10.1038/373515a0. 875
876
877
124. Shadlen, M. N., and Newsome, W. T. (1998). The Variable Discharge of Cortical Neurons: Implications for Connectivity, Computation, and Information Coding. *Journal of Neuroscience* 18, 3870–3896. doi:10.1523/JNEUROSCI.18-10-03870.1998. 878
879
880
125. Panzeri, S., Schultz, S. R., Treves, A., and Rolls, E. T. (1999). Correlations and the encoding of information in the nervous system. *Proceedings of the Royal Society B: Biological Sciences* 266, 1001. doi:10.1098/RSPB.1999.0736. 881
882
883
126. Averbeck, B. B., Latham, P. E., and Pouget, A. (2006). Neural correlations, population coding and computation. *Nature Reviews Neuroscience* 2006 7:5 7, 358–366. doi:10.1038/nrn1888. 884
885
886
127. Schrader, S., Grün, S., Diesmann, M., and Gerstein, G. L. (2008). Detecting synfire chain activity using massively parallel spike train recording. *Journal of neurophysiology* 100, 2165–2176. doi:10.1152/JN.01245.2007. 887
888
889
128. Russo, E., and Durstewitz, D. (2017). Cell assemblies at multiple time scales with arbitrary lag constellations. *eLife* 6. doi:10.7554/ELIFE.19428. 890
891
129. Torre, E., Canova, C., Denker, M., Gerstein, G., Helias, M., and Grün, S. (2016). ASSET: Analysis of Sequences of Synchronous Events in Massively Parallel Spike Trains. *PLOS Computational Biology* 12, e1004939. doi:10.1371/JOURNAL.PCBI.1004939. 892
893
894
130. Quaglio, P., Rostami, V., Torre, E., and Grün, S. (2018). Methods for identification of spike patterns in massively parallel spike trains. *Biological Cybernetics* 112, 57–80. doi:10.1007/S00422-018-0755-0. 895
896
897
131. Tavoni, G., Ferrari, U., Battaglia, F. P., Cocco, S., and Monasson, R. (2017). Functional coupling networks inferred from prefrontal cortex activity show experience-related effective plasticity. *Network Neuroscience* 1, 275–301. doi:10.1162/NETN_a_00014. 898
899
900
132. Cocco, S., and Monasson, R. (2011). Adaptive cluster expansion for inferring boltzmann machines with noisy data. *Phys. Rev. Lett.* 106, 090601. doi:10.1103/PhysRevLett.106.090601. 901
902
903
133. Abeles, M., Hayon, G., and Lehmann, D. (2004). Modeling compositionality by dynamic binding of synfire chains. *Journal of computational neuroscience* 17, 179–201. doi:10.1023/B:JCNS.0000037682.18051.5f. 904
905
906

134. Fredkin, E., and Toffoli, T. Conservative logic vol. 21. Kluwer Academic Publishers-Plenum Publishers (1982). doi:10.1007/BF01857727. 907
908
135. Okun, M., Steinmetz, N. A., Cossell, L., Iacaruso, M. F., Ko, H., Barthó, P., Moore, T., Hofer, S. B., Mrcic-Flogel, T. D., Carandini, M., and Harris, K. D. (2015). Diverse coupling of neurons to populations in sensory cortex. *Nature* 2015 521:7553 521, 511–515. doi:10.1038/nature14273. 909
910
911
912
136. Wells, J. D. (2012). Effective Theories and Elementary Particle Masses. *SpringerBriefs in Physics Part F875*, 43–60. doi:10.1007/978-3-642-34892-1_4. 913
914
137. Villegas, P., Gili, T., Caldarelli, G., and Gabrielli, A. (2023). Laplacian renormalization group for heterogeneous networks. *Nature Physics* 2023 19:3 19, 445–450. doi:10.1038/s41567-022-01866-8. 915
916
917
138. Mountcastle, V. B. (1997). The columnar organization of the neocortex. *Brain* 120, 701–722. doi:10.1093/BRAIN/120.4.701. 918
919
139. Jones, E. G. (2000). Microcolumns in the cerebral cortex. *Proceedings of the National Academy of Sciences of the United States of America* 97, 5019–5021. doi:10.1073/PNAS.97.10.5019. 920
921
922
140. Buxhoeveden, D. P., Switala, A. E., Roy, E., Litaker, M., and Casanova, M. F. (2001). Morphological differences between minicolumns in human and nonhuman primate cortex. *American Journal of Physical Anthropology* 115, 361–371. doi:10.1002/AJPA.1092. 923
924
925
141. Buxhoeveden, D. P., and Casanova, M. F. (2002). The minicolumn hypothesis in neuroscience. *Brain* 125, 935–951. doi:10.1093/BRAIN/AWF110. 926
927
142. Cruz, L., Buldyrev, S. V., Peng, S., Roe, D. L., Urbanc, B., Stanley, H. E., and Rosene, D. L. (2005). A statistically based density map method for identification and quantification of regional differences in microcolumnarity in the monkey brain. *Journal of Neuroscience Methods* 141, 321–332. doi:10.1016/J.JNEUMETH.2004.09.005. 928
929
930
931
143. Lübke, J., and Feldmeyer, D. (2007). Excitatory signal flow and connectivity in a cortical column: focus on barrel cortex. *Brain structure & function* 212, 3–17. doi:10.1007/S00429-007-0144-2. 932
933
934
144. Horton, J. G., and Adams, D. L. (2005). The cortical column: a structure without a function. *Philosophical Transactions of the Royal Society B: Biological Sciences* 360, 837–862. doi:10.1098/RSTB.2005.1623. 935
936
937
145. Bastos, A. M., Usrey, W. M., Adams, R. A., Mangun, G. R., Fries, P., and Friston, K. J. (2012). Canonical Microcircuits for Predictive Coding. *Neuron* 76, 695–711. doi:10.1016/J.NEURON.2012.10.038. 938
939
940
146. Bougou, V., Vanhoyland, M., Bertrand, A., Paesschen, W. V., Op, H., Beeck, D., Janssen, P., and Theys, T. (2024). Neuronal tuning and population representations of shape and category in human visual cortex. *Nature Communications* 2024 15:1 15, 1–15. doi:10.1038/s41467-024-49078-3. 941
942
943
944
147. Efrati, E., Wang, Z., Kolan, A., and Kadanoff, L. P. (2014). Real-space renormalization in statistical mechanics. *Reviews of Modern Physics* 86, 647–667. doi:10.1103/RevModPhys.86.647. 945
946
947

148. Hill, S. *Cortical Columns, Models of*. Springer, New York, NY (2014). doi:10.1007/978-1-4614-7320-6_571-1. 948
949
149. Rapan, L., Froudust-Walsh, S., Niu, M., Xu, T., Funck, T., Zilles, K., and Palomero-Gallagher, N. (2021). Multimodal 3D atlas of the macaque monkey motor and premotor cortex. *NeuroImage* 226. doi:10.1016/j.neuroimage.2020.117574. 950
951
952
150. Opris, I., Hampson, R. E., Stanford, T. R., Gerhardt, G. A., and Deadwyler, S. A. (2011). Neural Activity in Frontal Cortical Cell Layers: Evidence for Columnar Sensorimotor Processing. *Journal of cognitive neuroscience* 23, 1507. doi:10.1162/JOCN.2010.21534. 953
954
955
151. Swendsen, R. H. (1984). Monte Carlo Calculation of Renormalized Coupling Parameters. *Physical Review Letters* 52, 1165. doi:10.1103/PhysRevLett.52.1165. 956
957
152. Nguyen, H. C., Zecchina, R., and Berg, J. (2017). Inverse statistical problems: from the inverse Ising problem to data science. <http://dx.doi.org/10.1080/00018732.2017.1341604> 66, 197–261. doi:10.1080/00018732.2017.1341604. 958
959
960
153. Berger, A. L., Della, P. V. J., and Della, P. S. A. (1996). A maximum entropy approach to natural language processing. *Computational Linguistics*. doi:10.5555/234285.234289. 961
962
154. Tkačik, G., Marre, O., Amodei, D., Schneidman, E., Bialek, W., and Berry, M. J. (2014). Searching for Collective Behavior in a Large Network of Sensory Neurons. *PLOS Computational Biology* 10, e1003408. doi:10.1371/JOURNAL.PCBI.1003408. 963
964
965
155. Tavoni, G., Cocco, S., and Monasson, R. (2016). Neural assemblies revealed by inferred connectivity-based models of prefrontal cortex recordings. *Journal of Computational Neuroscience* 41. doi:10.1007/s10827-016-0617-5. 966
967
968
156. Cocco, S., Monasson, R., Posani, L., and Tavoni, G. (2017). Functional networks from inverse modeling of neural population activity. *Current Opinion in Systems Biology* 3, 103–110. doi:<https://doi.org/10.1016/j.coisb.2017.04.017>. 969
970
971
157. Lederman, D., Patel, R., Itani, O., and Rotstein, H. G. (2022). Parameter estimation in the age of degeneracy and unidentifiability. *Mathematics* 10. doi:10.3390/math10020170. 972
973
158. Gonçalves, P. J., Lueckmann, J. M., Deistler, M., Nonnenmacher, M., Öcal, K., Bassetto, G., Chintaluri, C., Podlaski, W. F., Haddad, S. A., Vogels, T. P., Greenberg, D. S., and Macke, J. H. (2020). Training deep neural density estimators to identify mechanistic models of neural dynamics. *eLife* 9, 1–46. doi:10.7554/ELIFE.56261. 974
975
976
977
159. Gokmen, D. E., Ringel, Z., Huber, S. D., and Koch-Janusz, M. (2021). Statistical Physics through the Lens of Real-Space Mutual Information. *Physical Review Letters* 127, 240603. doi:10.1103/PHYSREVLETT.127.240603. 978
979
980
160. Fischer, K., René, A., Keup, C., Layer, M., Dahmen, D., and Helias, M. (2022). Decomposing neural networks as mappings of correlation functions. *Physical Review Research* 4, 043143. doi:10.1103/PHYSREVRESEARCH.4.043143. 981
982
983
161. Merger, C., René, A., Fischer, K., Bouss, P., Nestler, S., Dahmen, D., Honerkamp, C., and Helias, M. (2023). Learning Interacting Theories from Data. *Physical Review X* 13, 041033. doi:10.1103/PHYSREVVX.13.041033. 984
985
986
162. Song, B., Kwon, S. M., Zhang, Z., Hu, X., Qu, Q., and Shen, L. (2024). Solving inverse problems with latent diffusion models via hard data consistency. *arXiv:2307.08123*. 987
988

163. Ras, G., Xie, N., van Gerven, M., and Doran, D. (2022). Explainable Deep Learning: A Field Guide for the Uninitiated. *Journal of Artificial Intelligence Research* 73, 329–396. doi:10.1613/JAIR.1.13200. 989
990
991
164. Aguilera, M., Millidge, B., Tschantz, A., and Buckley, C. L. (2022). How particular is the physics of the free energy principle? *Physics of Life Reviews* 40, 24–50. doi:10.1016/j.plrev.2021.11.001. 992
993
994
165. Friston, K. J. (2011). Functional and effective connectivity: a review. *Brain connectivity* 1, 13–36. doi:10.1089/BRAIN.2011.0008. 995
996
166. Suárez, L. E., Markello, R. D., Betzel, R. F., and Misić, B. (2020). Linking Structure and Function in Macroscale Brain Networks. *Trends in Cognitive Sciences* 24, 302–315. doi:10.1016/J.TICS.2020.01.008. 997
998
999
167. Friston, K. J., Harrison, L., and Penny, W. (2003). Dynamic causal modelling. *NeuroImage* 19, 1273–1302. doi:10.1016/S1053-8119(03)00202-7. 1000
1001
168. Penny, W. D., Stephan, K. E., Mechelli, A., and Friston, K. J. (2004). Comparing dynamic causal models. *NeuroImage* 22, 1157–1172. doi:10.1016/J.NEUROIMAGE.2004.03.026. 1002
1003
169. Prando, G., Zorzi, M., Bertoldo, A., Corbetta, M., Zorzi, M., and Chiuso, A. (2020). Sparse DCM for whole-brain effective connectivity from resting-state fMRI data. *NeuroImage* 208, 116367. doi:10.1016/J.NEUROIMAGE.2019.116367. 1004
1005
1006
170. Knox, J. E., Harris, K. D., Graddis, N., Whitesell, J. D., Zeng, H., Harris, J. A., Shea-Brown, E., and Mihalas, S. (2018). High-resolution data-driven model of the mouse connectome. *Network Neuroscience* 3, 217–236. doi:10.1162/NETN_A_00066. 1007
1008
1009
171. Zeidman, P., Jafarian, A., Corbin, N., Seghier, M. L., Razi, A., Price, C. J., and Friston, K. J. (2019). A guide to group effective connectivity analysis, part 1: First level analysis with dcm for fmri. *NeuroImage* 200, 174–190. doi:10.1016/j.neuroimage.2019.06.031. 1010
1011
1012
172. Kawato, M. (1999). Internal models for motor control and trajectory planning. *Current Opinion in Neurobiology* 9, 718–727. doi:10.1016/S0959-4388(99)00028-8. 1013
1014
173. Rao, R. P., and Sejnowski, T. J. Predictive Coding, Cortical Feedback, and Spike-Timing Dependent Plasticity. In: *Probabilistic Models of the Brain: Perception and Neural Function*. The MIT Press. ISBN 9780262282079 (2002):doi:10.7551/mitpress/5583.003.0021. 1015
1016
1017
1018
174. Friston, K., Kilner, J., and Harrison, L. (2006). A free energy principle for the brain. *Journal of Physiology-Paris* 100, 70–87. doi:doi.org/10.1016/j.jphysparis.2006.10.001. 1019
1020
175. Parr, T., and Friston, K. (2017). Working memory, attention, and salience in active inference. *Scientific Reports* 7. doi:10.1038/s41598-017-15249-0. 1021
1022
176. Palacios, E., Isomura, T., Parr, T., and Friston, K. (2019). The emergence of synchrony in networks of mutually inferring neurons. *Scientific Reports* 9, 6412. doi:10.1038/s41598-019-42821-7. 1023
1024
1025
177. Gandolfi, D., Puglisi, F. M., Boiani, G. M., Pagnoni, G., Friston, K. J., D’Angelo, E., and Mapelli, J. (2022). Emergence of associative learning in a neuromorphic inference network. *Journal of Neural Engineering* 19, 036022. doi:10.1088/1741-2552/ac6ca7. 1026
1027
1028

178. Chiaradia, I., and Lancaster, M. A. (2020). Brain organoids for the study of human neurobiology at the interface of in vitro and in vivo. *Nature Neuroscience* 2020 23:12 23, 1496–1508. doi:10.1038/s41593-020-00730-3. 1029
1030
1031
179. Zheng, H., Feng, Y., Tang, J., and Ma, S. (2022). Interfacing brain organoids with precision medicine and machine learning. *Cell Reports Physical Science* 3, 100974. doi:10.1016/J.XCRP.2022.100974. 1032
1033
1034
180. Sharf, T., van der Molen, T., Glasauer, S. M., Guzman, E., Buccino, A. P., Luna, G., Cheng, Z., Audouard, M., Ranasinghe, K. G., Kudo, K., Nagarajan, S. S., Tovar, K. R., Petzold, L. R., Hierlemann, A., Hansma, P. K., and Kosik, K. S. (2022). Functional neuronal circuitry and oscillatory dynamics in human brain organoids. *Nature Communications* 2022 13:1 13, 1–20. doi:10.1038/s41467-022-32115-4. 1035
1036
1037
1038
1039
181. Friston, Karl (2023). The sentient organoid? *Frontiers in Science* 1. doi:10.3389/fsci.2023.1147911. 1040
1041
182. Vassanelli, S., and Mahmud, M. (2016). Trends and challenges in neuroengineering: Toward "intelligent" neuroprostheses through brain-"brain inspired systems" communication. *Frontiers in Neuroscience* 10, 187313. doi:10.3389/fnins.2016.00438. 1042
1043
1044
183. Buccelli, S., Bornat, Y., Colombi, I., Ambroise, M., Martines, L., Pasquale, V., Bisio, M., Tessadori, J., Nowak, P., Grassia, F., Aversa, A., Tedesco, M., Bonifazi, P., Difato, F., Mas-sobrio, P., Levi, T., and Chiappalone, M. (2019). A Neuromorphic Prosthesis to Restore Communication in Neuronal Networks. *iScience* 19, 402–414. doi:10.1016/J.ISCI.2019.07.046. 1045
1046
1047
1048
1049
184. George, Richard and Chiappalone, Michela and Giugliano, Michele and Levi, Timothée and Vassanelli, Stefano and Partzsch, Johannes and Mayr, Christian (2020). Plasticity and adaptation in neuromorphic biohybrid systems. *iScience* 23, 101589. doi:10.1016/j.isci.2020.101589. 1050
1051
1052
1053
185. Yao, M., Richter, O., Zhao, G., Qiao, N., Xing, Y., Wang, D., Hu, T., Fang, W., Demirci, T., Marchi, M. D., Deng, L., Yan, T., Nielsen, C., Sheik, S., Wu, C., Tian, Y., Xu, B., and Li, G. (2024). Spike-based dynamic computing with asynchronous sensing-computing neuromorphic chip. *Nature Communications* 15, 4464. doi:10.1038/S41467-024-47811-6. 1054
1055
1056
1057
186. Serb, A., Corna, A., George, R., Khiat, A., Rocchi, F., Reato, M., Maschietto, M., Mayr, C., Indiveri, G., Vassanelli, S., and Prodromakis, T. (2020). Memristive synapses connect brain and silicon spiking neurons. *Scientific reports* 10. doi:10.1038/S41598-020-58831-9. 1058
1059
1060
187. Keene, S. T., Lubrano, C., Kazemzadeh, S., Melianas, A., Tuchman, Y., Polino, G., Scognamiglio, P., Cinà, L., Salleo, A., van de Burgt, Y., and Santoro, F. (2020). A biohybrid synapse with neurotransmitter-mediated plasticity. *Nature Materials* 2020 19:9 19, 969–973. doi:10.1038/s41563-020-0703-y. 1061
1062
1063
1064
188. Friston, K. J., Fagerholm, E. D., Zarghami, T. S., Parr, T., Hipólito, I., Magrou, L., and Razi, A. (2021). Parcels and particles: Markov blankets in the brain. *Network Neuroscience* 5, 211–251. doi:10.1162/NETN-100175. 1065
1066
1067
189. van Hemmen, J. L., Schüz, A., and Aertsen, A. (2014). Structural aspects of biological cybernetics: Valentino Braitenberg, neuroanatomy, and brain function. *Biological cybernetics* 108, 517–525. doi:10.1007/S00422-014-0630-6. 1068
1069
1070

190. Buzsáki, G., Anastassiou, C. A., and Koch, C. (2012). The origin of extracellular fields and currents—EEG, ECoG, LFP and spikes. *Nature reviews. Neuroscience* *13*, 407–420. doi:10.1038/NRN3241.

1071

1072

1073